

Service Manual


CD Stereo System

Model No. **SA-MAX370GS**
SA-MAX770GS

Product Color: (K)...Black Type



The illustration shows SC-MAX770.

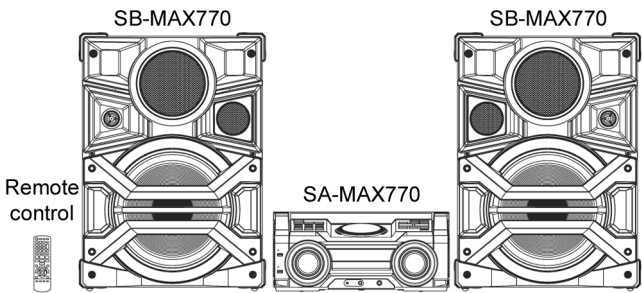

Notes: Please use this manual together with service manual
Model No.[SA-MAX370PUK, SA-MAX770PUK], Order no. (PSG1402009CE).
• Speaker system SB-MAX370GSK, Order No: PSG1404010AE (For SA-MAX370GS)
• Speaker system SB-MAX770GSK, Order No: PSG1403039AE (For SA-MAX770GS)

⚠ WARNING

This service information is designed for experienced repair technicians only and is not designed for use by the general public. It does not contain warnings or cautions to advise non-technical individuals of potential dangers in attempting to service a product. Products powered by electricity should be serviced or repaired only by experienced professional technicians. Any attempt to service or repair the product or products dealt with in this service information by anyone else could result in serious injury or death.

IMPORTANT SAFETY NOTICE

There are special components used in this equipment which are important for safety. These parts are marked by ⚠ in the Schematic Diagrams, Circuit Board Diagrams, Exploded Views and Replacement Parts List. It is essential that these critical parts should be replaced with manufacturer's specified parts to prevent shock, fire or other hazards. Do not modify the original design without permission of manufacturer.

TABLE OF CONTENTS

	PAGE		PAGE
1 Safety Precautions -----	3	2.1. Prevention of Electrostatic Discharge (ESD)	
1.1. General Guidelines-----	3	to Electrostatically Sensitive (ES) Devices -----	7
1.2. Before Repair and Adjustment-----	3	2.2. Precaution of Laser Diode-----	7
1.3. Protection Circuitry-----	4	2.3. General description about Lead Free Solder	
1.4. Caution For AC Cord -----	5	(PbF) -----	8
1.5. Caution For Fuse Replacement-----	6	2.4. Handling Precautions for Traverse Ass'y -----	8
1.6. Safety Parts Information -----	6	2.5. Grounding for electrostatic breakdown	
2 Warning -----	7	prevention-----	9

Panasonic®

© Panasonic Corporation 2014. All rights reserved.
Unauthorized copying and distribution is a violation of law.

3 Service Navigation	10
3.1. Service Information	10
3.2. Notes	10
4 Specifications	11
5 Block Diagram	13
5.1. System Control	13
5.2. Audio	17
5.3. Power Supply	19
6 Schematic Diagram	21
6.1. Schematic Diagram Notes	21
6.2. Main (I/O Expansion) Circuit	23
6.3. Main (Fan LED) Circuit	24
6.4. Main (DSP) Circuit	25
6.5. Main (Amp BTL) Circuit (1/2)	26
6.6. Main (Amp BTL) Circuit (1/2)	27
6.7. Main (MICON) Circuit (1/2)	28
6.8. Main (MICON) Circuit (2/2)	29
6.9. Main (Amp Single) Circuit (1/2)	30
6.10. Main (Amp Single) Circuit (2/2)	31
6.11. Main (FE) Circuit	32
6.12. Main (Karaoke) Circuit	33
6.13. Main (Digital-Power) Circuit (1/2)	34
6.14. Main (Digital-Power) Circuit (2/2)	35
6.15. Main (USB) Circuit	36
6.16. Main (AUX Tuner) Circuit	37
6.17. Illumination Left, Illumination Right, Button Right & USB Circuit	38
6.18. FL Display Circuit	39
6.19. Volume Jog & Multi Control Circuit	40
6.20. Button Left Circuit	41
6.21. Mic, Illumination Jog & CD Interface Circuit	42
6.22. SMPS Circuit (1/2)	43
6.23. SMPS Circuit (2/2)	44
7 Printed Circuit Board	45
7.1. Main P.C.B. (Side A)	45
7.2. Main P.C.B. (Side B)	46
7.3. Illumination Left, Illumination Right & FL Display P.C.B.	47
7.4. Button Left, Button Right, Mic & USB P.C.B.	48
7.5. Volume Jog, Illumination Jog & Multi Control P.C.B.	49
7.6. SMPS P.C.B.	50
8 Voltage and Waveform Measurement	51
8.1. Voltage Measurement	51
8.2. Waveform Chart	59
9 Exploded View and Replacement Parts List	61
9.1. Cabinet Parts Location 1	61
9.2. Cabinet Parts Location 2	62
9.3. Cabinet Parts Location 3	63
9.4. Packaging (SC-MAX370GSK)	64
9.5. Packaging (SC-MAX770GSK)	65
9.6. Mechanical Replacement Part List	67
9.7. Electrical Replacement Part List	69

1 Safety Precautions

1.1. General Guidelines

1. IMPORTANT SAFETY NOTICE

There are special components used in this equipment which are important for safety. These parts are marked by Δ in the Schematic Diagrams, Circuit Board Layout, Exploded Views and Replacement Parts List. It is essential that these critical parts should be replaced with manufacturer's specified parts to prevent X-RADIATION, shock, fire, or other hazards. Do not modify the original design without permission of manufacturer.

2. An Isolation Transformer should always be used during the servicing of AC Adaptor whose chassis is not isolated from the AC power line. Use a transformer of adequate power rating as this protects the technician from accidents resulting in personal injury from electrical shocks. It will also protect AC Adaptor from being damaged by accidental shorting that may occur during servicing.
3. When servicing, observe the original lead dress. If a short circuit is found, replace all parts which have been overheated or damaged by the short circuit.
4. After servicing, see to it that all the protective devices such as insulation barriers, insulation papers shields are properly installed.
5. After servicing, make the following leakage current checks to prevent the customer from being exposed to shock hazards.

1.1.1. Leakage Current Cold Check

1. Unplug the AC cord and connect a jumper between the two prongs on the plug.
2. Measure the resistance value, with an ohmmeter, between the jumpered AC plug and each exposed metallic cabinet part on the equipment such as screwheads, connectors, control shafts, etc. When the exposed metallic part has a return path to the chassis, the reading should be between $1M\Omega$ and $5.2M\Omega$.

When the exposed metal does not have a return path to the chassis, the reading must be ∞

1.1.2. Leakage Current Hot Check

1. Plug the AC cord directly into the AC outlet. Do not use an isolation transformer for this check.
2. Connect a $1.5k\Omega$, 10 watts resistor, in parallel with a $0.15\mu F$ capacitors, between each exposed metallic part on the set and a good earth ground such as a water pipe, as shown in Figure 1-1.
3. Use an AC voltmeter, with 1000 ohms/volt or more sensitivity, to measure the potential across the resistor.
4. Check each exposed metallic part, and measure the voltage at each point.
5. Reverse the AC plug in the AC outlet and repeat each of the above measurements.
6. The potential at any point should not exceed 0.75 volts RMS. A leakage current tester (Simpson Model 229 or equivalent) may be used to make the hot checks, leakage current must not exceed 1/2 milliamp. In case a measurement is outside of the limits specified, there is a possibility of a shock hazard, and the equipment should be repaired and rechecked before it is returned to the customer.

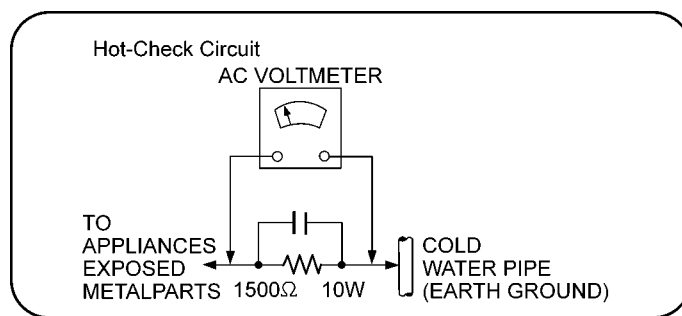


Figure 1-1

1.2. Before Repair and Adjustment

Disconnect AC power to discharge AC Capacitors (C1001, C1002, C1003, C1004, C1006, C1518) through a 10Ω , 10 W resistor to ground.

Caution:

DO NOT SHORT-CIRCUIT DIRECTLY (with a screwdriver blade, for instance), as this may destroy solid state devices.

After repairs are completed, restore power gradually using a variac, to avoid overcurrent.

Current consumption at AC 220~240 V, 50/60 Hz in FM Tuner at volume minimum should be $\sim 850mA$.

1.3. Protection Circuitry

The protection circuitry may have operated if either of the following conditions are noticed:

- No sound is heard when the power is turned on.
- Sound stops during a performance.

The function of this circuitry is to prevent circuitry damage if, for example, the positive and negative speaker connection wires are “shorted”, or if speaker systems with an impedance less than the indicated rated impedance of the amplifier are used.

If this occurs, follow the procedure outlines below:

1. Turn off the power.
2. Determine the cause of the problem and correct it.
3. Turn on the power once again after one minute.

Note:

When the protection circuitry functions, the unit will not operate unless the power is first turned off and then on again.

1.4. Caution For AC Cord

For your safety, please read the following text carefully.

This appliance is supplied with a moulded three pin mains plug for your safety and convenience.

A 5-ampere fuse is fitted in this plug.

Should the fuse need to be replaced please ensure that the replacement fuse has a rating of 5-ampere and that it is approved by ASTA or BSI to BS1362.

Check for the ASTA mark ⚡ or the BSI mark ⚡ on the body of the fuse.

If the plug contains a removable fuse cover you must ensure that it is refitted when the fuse is replaced.

If you lose the fuse cover the plug must not be used until a replacement cover is obtained.

A replacement fuse cover can be purchased from your local dealer.

CAUTION!

IF THE FITTED MOULDED PLUG IS UNSUITABLE FOR THE SOCKET OUTLET IN YOUR HOME THEN THE FUSE SHOULD BE REMOVED AND THE PLUG CUT OFF AND DISPOSED OF SAFELY.

THERE IS A DANGER OF SEVERE ELECTRICAL SHOCK IF THE CUT OFF PLUG IS INSERTED INTO ANY 13-AMPERE SOCKET.

If a new plug is to be fitted please observe the wiring code as stated below.

If in any doubt please consult a qualified electrician.

IMPORTANT

The wires in this mains lead are coloured in accordance with the following code:

Blue: Neutral, Brown: Live.

As these colours may not correspond with the coloured markings identifying the terminals in your plug, proceed as follows:

The wire which is coloured Blue must be connected to the terminal which is marked with the letter N or coloured Black or Blue.

The wire which is coloured Brown must be connected to the terminal which is marked with the letter L or coloured Brown or Red.

WARNING: DO NOT CONNECT EITHER WIRE TO THE EARTH TERMINAL WHICH IS MARKED WITH THE LETTER E, BY THE EARTH SYMBOL $\perp$ OR COLOURED GREEN OR GREEN/YELLOW.

THIS PLUG IS NOT WATERPROOF—KEEP DRY.

Before use


Remove the connector cover.

How to replace the fuse


The location of the fuse differ according to the type of AC mains plug (figures A and B). Confirm the AC mains plug fitted and follow the instructions below.

Illustrations may differ from actual AC mains plug.

1. Open the fuse cover with a screwdriver.

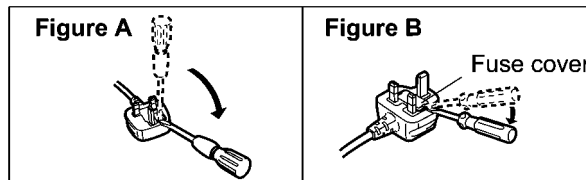

2. Replace the fuse and close or attach the fuse cover.

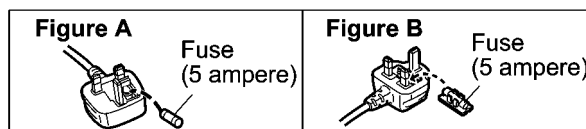

1.5. Caution For Fuse Replacement

CAUTION:

Replace with the same type fuse:
(Manufacturer: LITTELFUSE, Type: 215, F1001, T10AH, 250V)

Replace with the same type fuse:
(Manufacturer: Skygate Co., Ltd, Type: SCT, F1401, T500mA, 250V)

Replace with the same type fuse:
(Manufacturer: Skygate Co., Ltd, Type: SCT, F1501, T5A, 250V)

1.6. Safety Parts Information

Safety Parts List:

There are special components used in this equipment which are important for safety.

These parts are marked by  in the Schematic Diagrams, Exploded View & Replacement Parts List. It is essential that these critical parts should be replaced with manufacturer's specified parts to prevent shock, fire or other hazards. Do not modify the original design without permission of manufacturer.

Safety	Ref No.	Part No.	Part Name & Description	Remarks
	25	RGR0455C-A1	REAR PANEL	MAX770
	25	RGR0455F-A	REAR PANEL	MAX370
	40	RKM0744-K2	TOP CABINET	
	301	RAE1045Z-V	TRAVERSE ASS'Y	
	A2	K2CJ2YY00097	AC CORD	
	A2	K2CP2YY00071	AC CORD	
	A2	K2CQ2YY00127	AC CORD	
	A2	K2CT2YY00103	AC CORD	
	A3	VQT5F33	O/I BOOK (En/CN/Ru/Ur/Ar)	MAX770
	A3	VQT5F34	O/I BOOK (En/CN/Ru/Ur/Ar)	MAX370
	PCB13	REP5035B	SMPS P.C.B.	(RTL)
	DZ1001	D4EAY511A127	VARISTOR	(E.S.D)
	L1001	G0B183J00002	LINE FILTER	
	L1002	G0B183J00002	LINE FILTER	
	T1101	G0C400K00001	TRANSFORMER	
	T1203	G0C400K00001	TRANSFORMER	
	T1401	G4DYZ0000076	TRANSFORMER	
	T1501	G4DYA0000520	TRANSFORMER	
	T1502	G4DYA0000520	TRANSFORMER	
	Q1403	B3PBA0000579	PHOTO COUPLER	
	Q1404	B3PBA0000579	PHOTO COUPLER	
	Q1405	B3PBA0000579	PHOTO COUPLER	
	Q1505	B3PBA0000579	PHOTO COUPLER	
	F1001	K5D103BNA005	FUSE	
	F1401	K5G501YA0081	FUSE PROTECTOR	
	F1501	K5G502Y00006	FUSE PROTECTOR	
	P1001	K2AZYA000005	AC INLET	
	R1001	D0GF105JA048	1M 1/4W	
	R1002	D0GF105JA048	1M 1/4W	
	C1001	F0CAF224A105	0.22uF	
	C1002	F0CAF224A105	0.22uF	
	C1003	F1BAF221A013	220pF	
	C1004	F1BAF221A013	220pF	
	C1006	F0CAF104A105	0.1uF	
	C1518	F1BAF471A013	470pF	

2 Warning

2.1. Prevention of Electrostatic Discharge (ESD) to Electrostatically Sensitive (ES) Devices

Some semiconductor (solid state) devices can be damaged easily by static electricity. Such components commonly are called Electrostatically Sensitive (ES) Devices.

Examples of typical ES devices are IC (integrated circuits) and some field-effect transistors and semiconductor "chip" components.

The following techniques should be used to help reduce the incidence of component damage caused by electrostatic discharge (ESD).

1. Immediately before handling any semiconductor component or semiconductor-equipped assembly, drain off any ESD on your body by touching a known earth ground. Alternatively, obtain and wear a commercially available discharging ESD wrist strap, which should be removed for potential shock reasons prior to applying power to the unit under test.
2. After removing an electrical assembly equipped with ES devices, place the assembly on a conductive surface such as aluminum foil, to prevent electrostatic charge buildup or exposure of the assembly.
3. Use only a grounded-tip soldering iron to solder or unsolder ES devices.
4. Use only an anti-static solder removal device. Some solder removal devices not classified as "anti-static (ESD protected)" can generate electrical charge sufficient to damage ES devices.
5. Do not use freon-propelled chemicals. These can generate electrical charges sufficient to damage ES devices.
6. Do not remove a replacement ES device from its protective package until immediately before you are ready to install it. (Most replacement ES devices are packaged with leads electrically shorted together by conductive foam, aluminum foil or comparable conductive material).
7. Immediately before removing the protective material from the leads of a replacement ES device, touch the protective material to the chassis or circuit assembly into which the device will be installed.

CAUTION:

Be sure no power is applied to the chassis or circuit, and observe all other safety precautions.

8. Minimize bodily motions when handling unpackaged replacement ES devices. (Otherwise harmless motion such as the brushing together of your clothes fabric or the lifting of your foot from a carpeted floor can generate static electricity (ESD) sufficient to damage an ES device).

IMPORTANT SAFETY NOTICE

There are special components used in this equipment which are important for safety. These parts are marked by  in the Schematic Diagrams, Circuit Board Diagrams, Exploded Views and Replacement Parts List. It is essential that these critical parts should be replaced with manufacturer's specified parts to prevent shock, fire or other hazards. Do not modify the original design without permission of manufacturer.

2.2. Precaution of Laser Diode

CAUTION:

THIS PRODUCT UTILIZES A LASER.

USE OF CONTROLS OR ADJUSTMENTS OR PERFORMANCE OF PROCEDURES OTHER THAN THOSE SPECIFIED HEREIN MAY RESULT IN HAZARDOUS RADIATION EXPOSURE.

Caution:

This product utilizes a laser diode with the unit turned "on", invisible laser radiation is emitted from the pickup lens.

Wavelength: 790 nm (CD)

Maximum output radiation power from pickup: 100 μ W/VDE

Laser radiation from the pickup unit is safety level, but be sure the followings:

1. Do not disassemble the pickup unit, since radiation from exposed laser diode is dangerous.
2. Do not adjust the variable resistor on the pickup unit. It was already adjusted.
3. Do not look at the focus lens using optical instruments.
4. Recommend not to look at pickup lens for a long time.

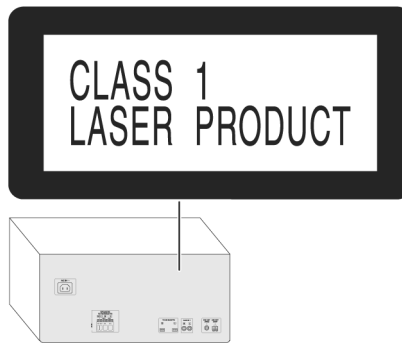


Figure 2-1

2.3. General description about Lead Free Solder (PbF)

The lead free solder has been used in the mounting process of all electrical components on the printed circuit boards used for this equipment in considering the globally environmental conservation.

The normal solder is the alloy of tin (Sn) and lead (Pb). On the other hand, the lead free solder is the alloy mainly consists of tin (Sn), silver (Ag) and Copper (Cu), and the melting point of the lead free solder is higher approx.30 degrees C (86°F) more than that of the normal solder.

Definition of PCB Lead Free Solder being used

The letter of "PbF" is printed either foil side or components side on the PCB using the lead free solder.
(See right figure)

PbF

Service caution for repair work using Lead Free Solder (PbF)

- The lead free solder has to be used when repairing the equipment for which the lead free solder is used.
(Definition: The letter of "PbF" is printed on the PCB using the lead free solder.)
- To put lead free solder, it should be well molten and mixed with the original lead free solder.
- Remove the remaining lead free solder on the PCB cleanly for soldering of the new IC.
- Since the melting point of the lead free solder is higher than that of the normal lead solder, it takes the longer time to melt the lead free solder.
- Use the soldering iron (more than 70W) equipped with the temperature control after setting the temperature at 350 ± 30 degrees C ($662 \pm 86^\circ\text{F}$).

Recommended Lead Free Solder (Service Parts Route.)

- The following 3 types of lead free solder are available through the service parts route.
RFKZ03D01K----- (0.3mm 100g Reel)
RFKZ06D01K----- (0.6mm 100g Reel)
RFKZ10D01K----- (1.0mm 100g Reel)

Note

* Ingredient: tin (Sn), 96.5%, silver (Ag) 3.0%, Copper (Cu) 0.5%, Cobalt (Co) / Germanium (Ge) 0.1 to 0.3%

2.4. Handling Precautions for Traverse Ass'y

The laser diode in the optical pickup unit may break down due to static electricity of clothes or human body. Special care must be taken avoid caution to electrostatic breakdown when servicing and handling the laser diode in the traverse unit.

2.4.1. Cautions to Be Taken in Handling the Optical Pickup Unit (OPU)

The laser diode in the optical pickup unit may be damaged due to electrostatic discharge generating from clothes or human body. Special care must be taken avoid caution to electrostatic discharge damage when servicing the laser diode.

1. Do not give a considerable shock to the optical pickup unit as it has an extremely high-precise structure.
2. To prevent the laser diode from the electrostatic discharge damage, the flexible cable of the optical pickup unit removed should be short-circuited with a short pin or a clip.
3. The flexible cable may be cut off if an excessive force is applied to it. Use caution when handling the flexible cable.
4. The antistatic FFC is connected to the new optical pickup unit. After replacing the optical pickup unit and connecting the flexi-

ble cable, cut off the antistatic FFC.

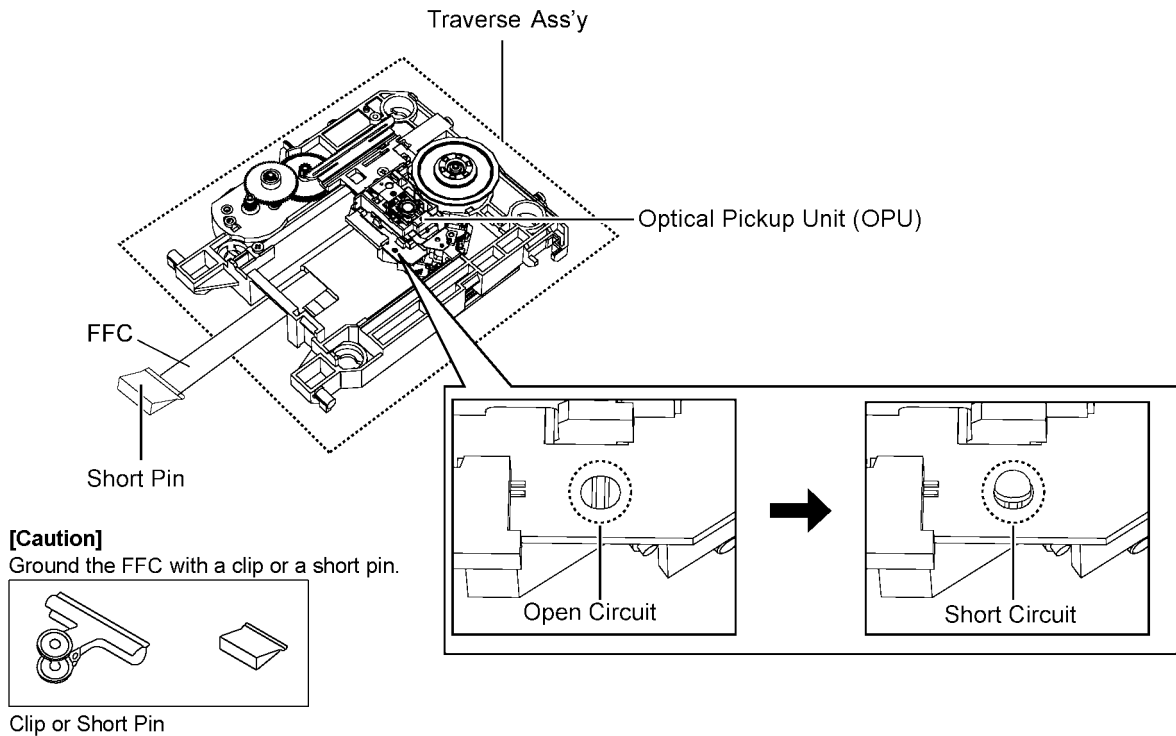


Figure 2-2

2.5. Grounding for electrostatic breakdown prevention

- As for parts that use optical pick-up (laser diode), the optical pick-up is destroyed by the static electricity of the working environment.
- Repair in the working environment that is grounded.

2.5.1. Worktable grounding

- Put a conductive material (sheet) or iron sheet on the area where the optical pickup is placed and ground the sheet.

2.5.2. Human body grounding

- Use the anti-static wrist strap to discharge the static electricity from your body Figure 2-3.

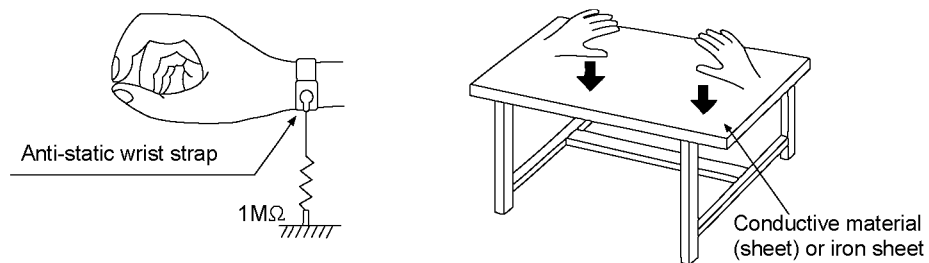


Figure 2-3

3 Service Navigation

3.1. Service Information

This service manual contains technical information which will allow service personnel's to understand and service this model. Please place orders using the parts list and not the drawing reference numbers.

If the circuit is changed or modified, this information will be followed by supplement service manual to be filed with original service manual.

3.2. Notes

1) This service manual does not contains the following information

This simplified service manual is base on SA-MAX370PUK, SA-MAX770PUK. Please refer to the original service manual, SA-MAX370PUK, SA-MAX770PUK (Order No. PSG1402009CE) for the below mention contents.

- Location of Controls and Components
- Service Mode
- Troubleshooting Guide
- Disassembly and Assembly Instructions
- Service Position
- Wiring Connection Diagram

2) This service manual contains include the following information

- Safety Precautions
- Warning
- Service Navigation
- Specifications
- Block Diagram
- Schematic Diagram
- Printed Circuit Board
- Appendix Information of Schematic Diagram
- Exploded View and Replacement Parts List

4 Specifications

■ Amplifier section

RMS output power (each channel) (SA-MAX370GS)

Front	300 W per channel (3 Ω), 1 kHz, 30% THD
Subwoofer (Mid-Low)	300 W per channel (3 Ω), 100 Hz, 30% THD
Subwoofer (Low)	650 W per channel (6 Ω), 100 Hz, 30% THD
Total RMS stereo mode power	2500 W

RMS output power (each channel) (SA-MAX770GS)

High	400+400 W per channel (3 Ω), 1 kHz, 30% THD
Mid-Low	400+400 W per channel (3 Ω), 1 kHz, 30% THD
Low	850+850 W per channel (5 Ω), 100 Hz, 30% THD
Total RMS stereo mode power	3300 W (30% THD)

■ Disc section

Disc played

8 cm	CD, CD-R/RW
12 cm	CD, CD-R/RW

Pick up

Wavelength	790 nm(CD)
	Laser Power CLASS 1

Audio output (disc)

Number of channels (SA-MAX370GS)	2.4 ch (FL, FR, SW)
Number of channels (SA-MAX770GS)	2 ch (FL, FR)
FL = Front left channel	
FR = Front right channel	
SW = Subwoofer channel	

Format	CD-DA, MP3
--------	------------

■ Tuner section

Frequency modulation (FM)

Preset Memory	30 stations
Frequency range	87.50 to 108.00 MHz (50 kHz step)
Antenna terminals	75 Ω (unbalanced)

Amplitude modulation (AM)

Preset Memory	15 stations
Frequency range	522 kHz to 1629 kHz (9 kHz step)
	520 kHz to 1630 kHz (10 kHz step)

■ Bluetooth® Section

Version	Bluetooth® 2.1 + EDR
Output	Class 2 (2.5 mW)

Communication Distance

Possible communication distance: Approximately 10 m *

Communication Method

2.4 GHz band FH-SS

Supported Profiles

A2DP/AVRCP/SPP

* Possible communication distance

Measurement environment: Temperature 25 °C/
Height 1.0 m

Measuring in "MODE 1"

■ Memory section

Memory size	2 GB
Media file format support	MP3
Memory record	
Bit rate	128 kbps

Memory recording speed	1x, 3x max (CD only)
From CD, MP3, USB recording file format	MP3 (*.mp3)

■ Terminals section

Microphone jack	Mono, Ø 6.3 mm (2 Systems)
-----------------	----------------------------

USB port

USB standard	USB 2.0 full speed
Media file format support	MP3 (*.mp3)
USB device file system	FAT12, FAT16, FAT32

USB ripping

Bit rate	128 kbps
USB recording speed	1x, 3x max (CD only)
Recording file format	MP3 (*.mp3)

AUX

Terminal	Stereo, Ø 3.5 mm connector Stereo, Pin jack
----------	--

■ General

Power supply	AC 220 V to 240 V, 50/60 Hz
Power consumption	330 W
Dimensions (W x H x D)	492 mm x 221 mm x 421 mm
Mass	7.1 kg
Operating temperature range	0 °C to +40 °C
Operating humidity range	35% to 80% RH (no condensation)
Power consumption in standby mode	0.3 W (approximate)

Note:

- Specifications are subject to change without notice.
Mass and dimension are appropriate
- Total harmonic distortion is measured by the digital spectrum analyzer.

■ System: SC-MAX370GSK

Main Unit: SA-MAX370GSK
Speaker System: SB-MAX370GSK


■ System: SC-MAX770GSK

Main Unit: SA-MAX770GSK
Speaker System: SB-MAX770GSK

5 Block Diagram

5.1. System Control


CD AUDIO INPUT SIGNAL LINE TUNER/AUX AUDIO INPUT SIGNAL LINE USB SIGNAL LINE

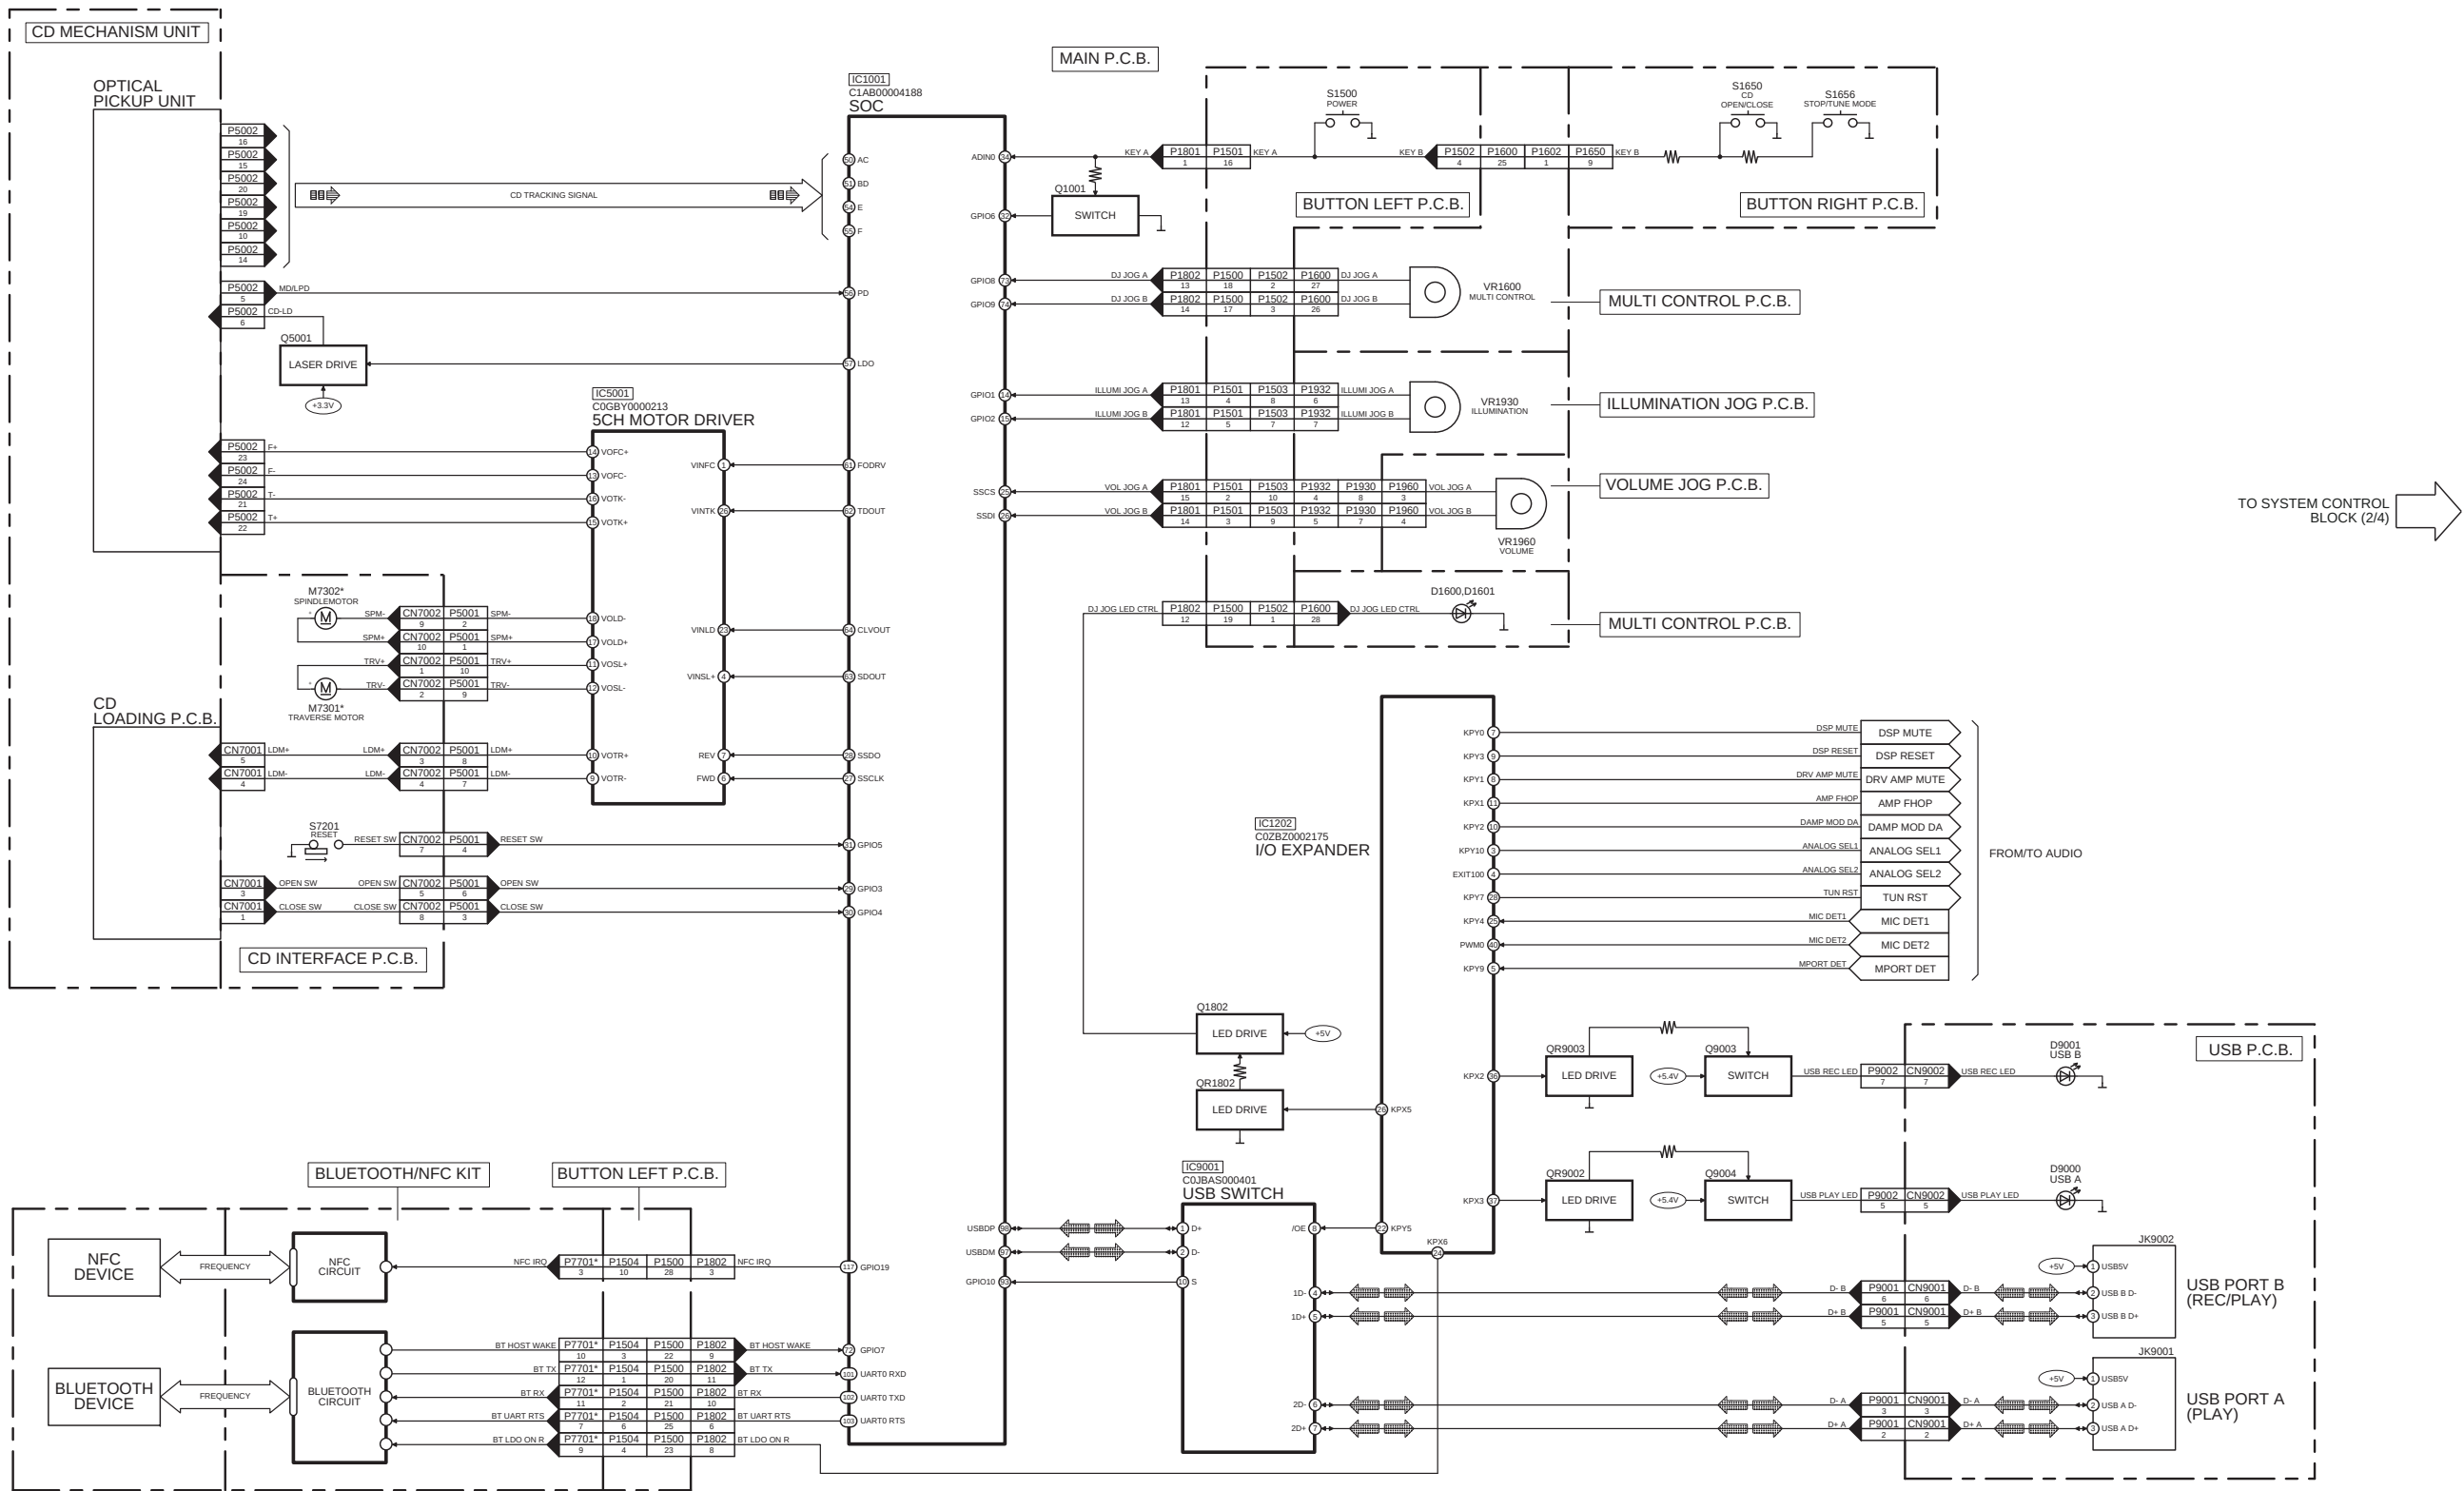

NOTE: “ * ” REF IS FOR INDICATION ONLY


SA-MAX370GS,SA-MAX770GS SYSTEM CONTROL (1/4) BLOCK DIAGRAM

 : CD AUDIO INPUT SIGNAL LINE
  : TUNER/AUX AUDIO INPUT SIGNAL LINE
  : USB SIGNAL LINE

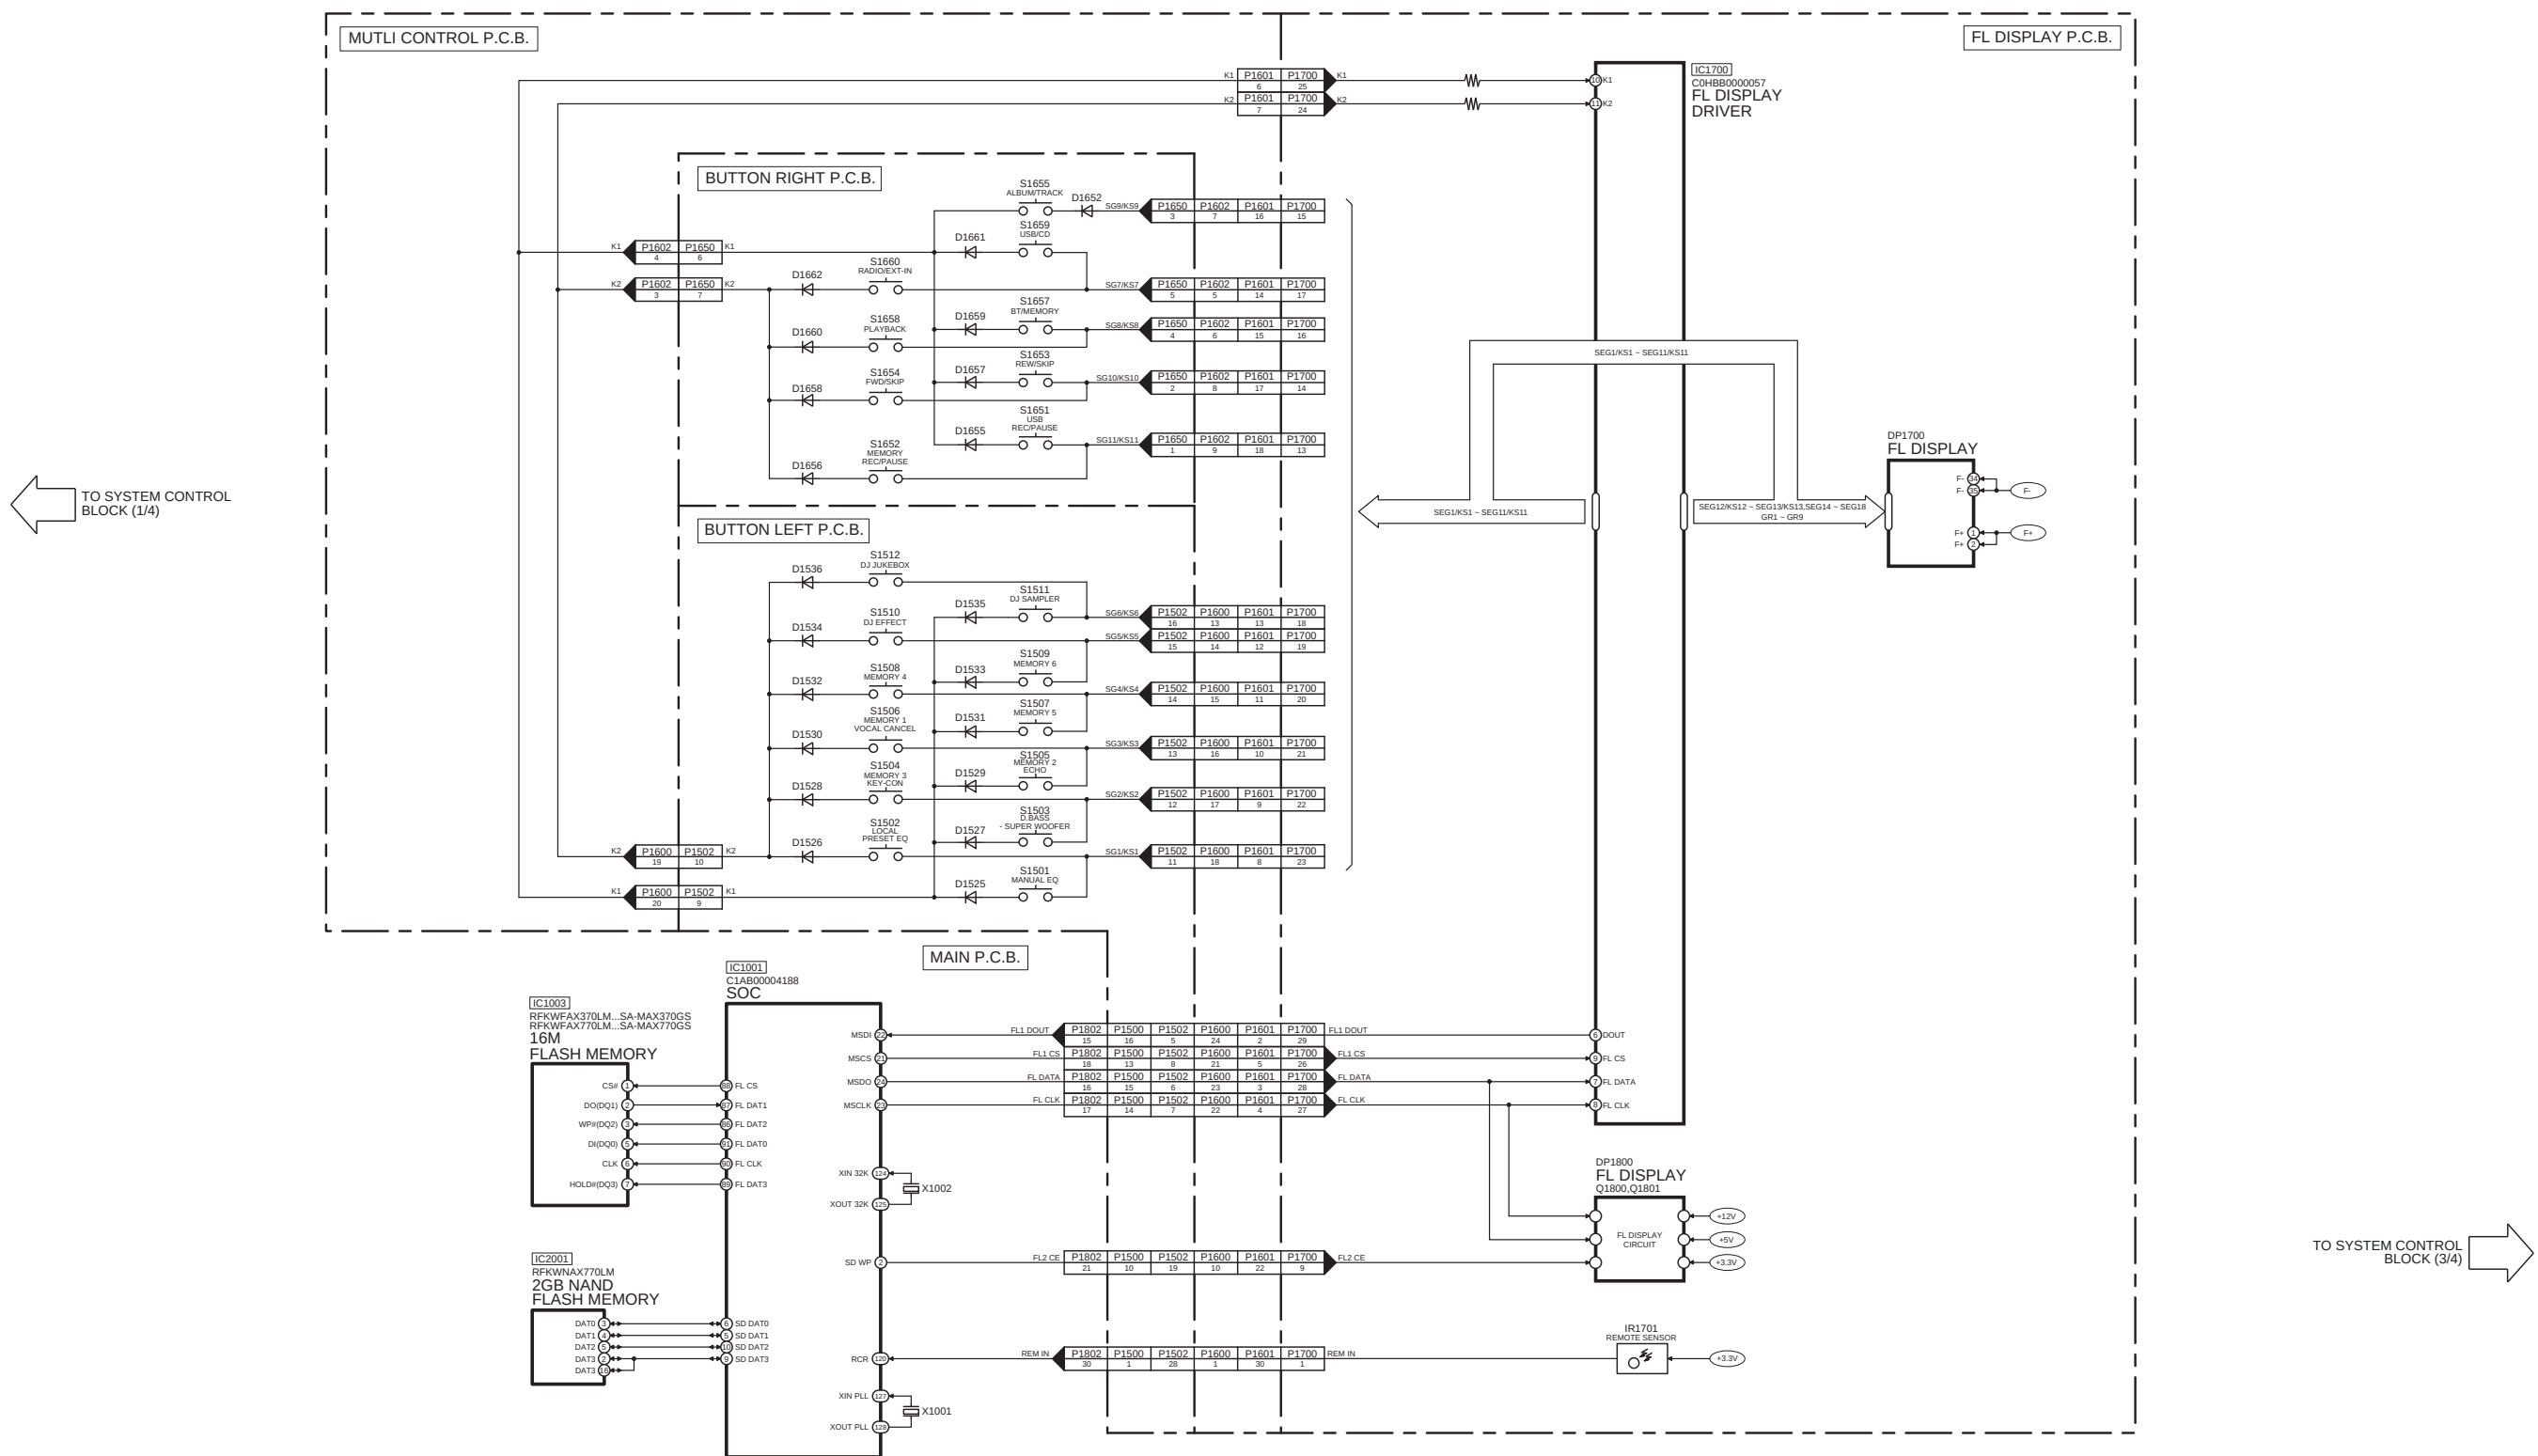


SA-MAX370GS,SA-MAX770GS SYSTEM CONTROL (2/4) BLOCK DIAGRAM

 : CD AUDIO INPUT SIGNAL LINE
  : TUNER/AUX AUDIO INPUT SIGNAL LINE
  : USB SIGNAL LINE

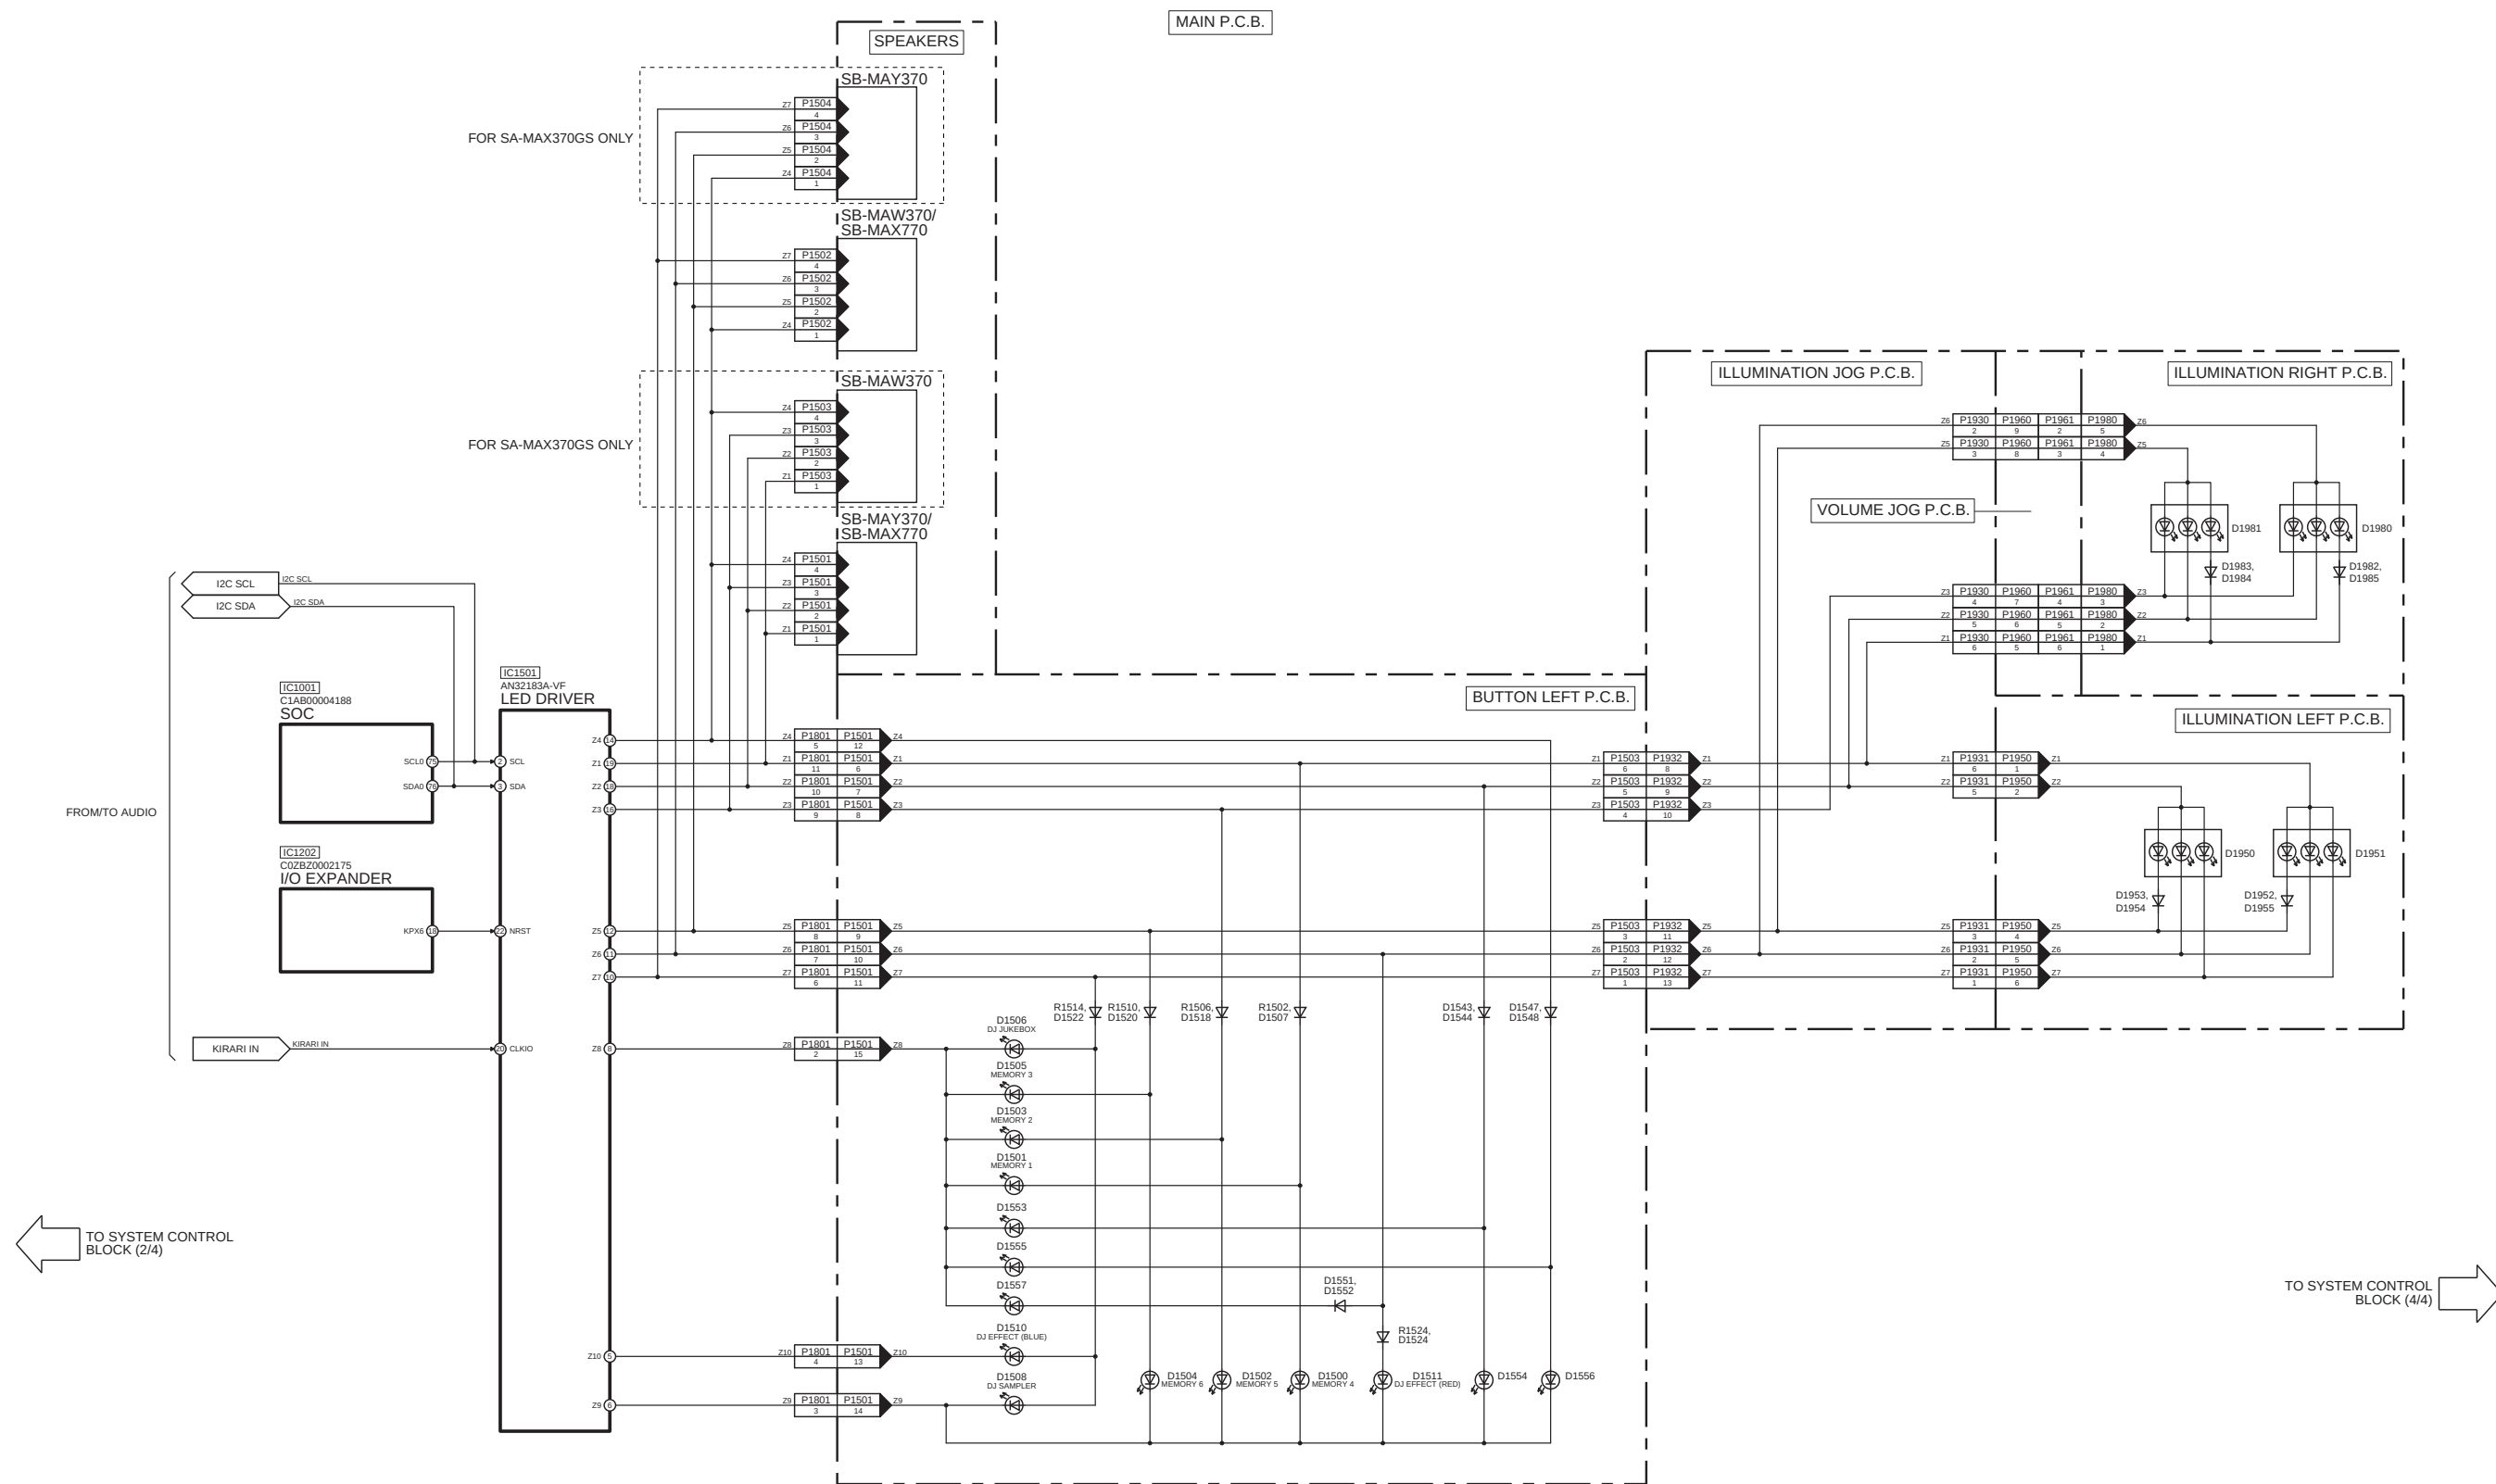


SA-MAX370GS,SA-MAX770GS SYSTEM CONTROL (3/4) BLOCK DIAGRAM

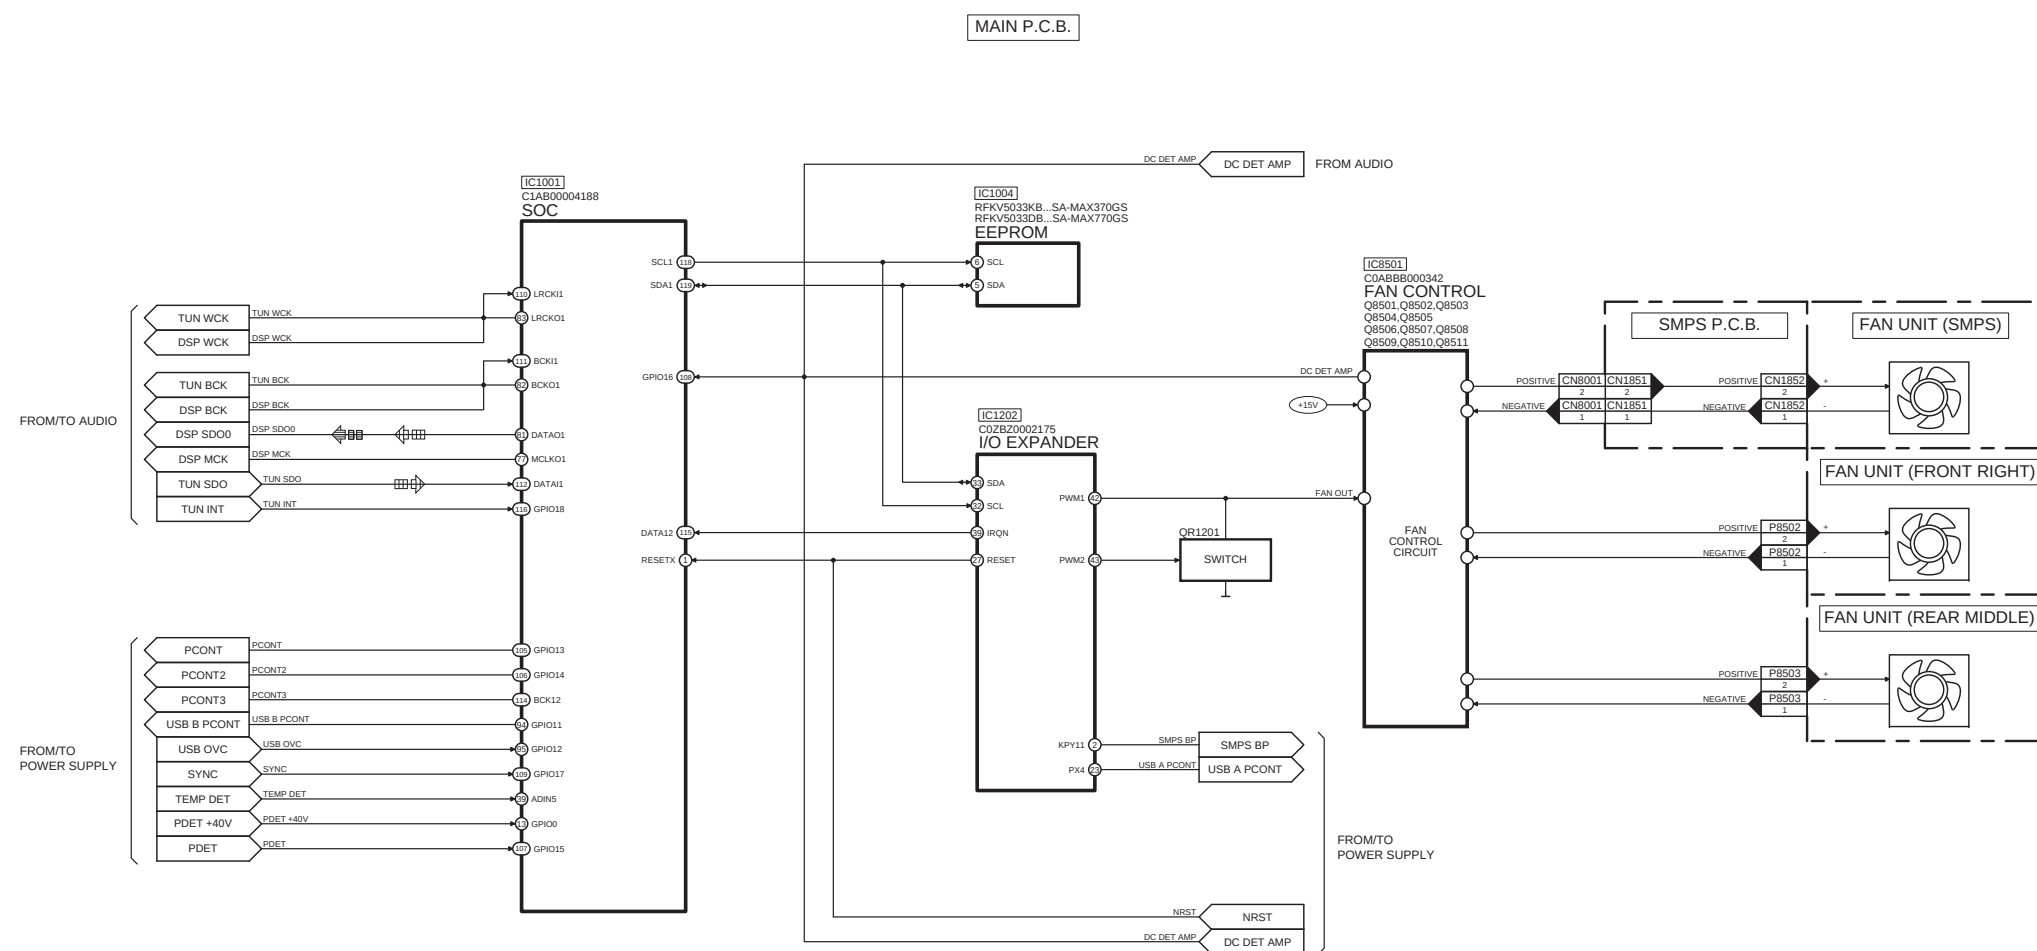

SA-MAX370GS,SA-MAX770GS SYSTEM CONTROL (4/4) BLOCK DIAGRAM


5.2. Audio

: CD AUDIO INPUT SIGNAL LINE
 : TUNER/AUX/MIC AUDIO INPUT SIGNAL LINE
 : AUDIO OUTPUT SIGNAL LINE
 : AM SIGNAL LINE
 : FM SIGNAL LINE

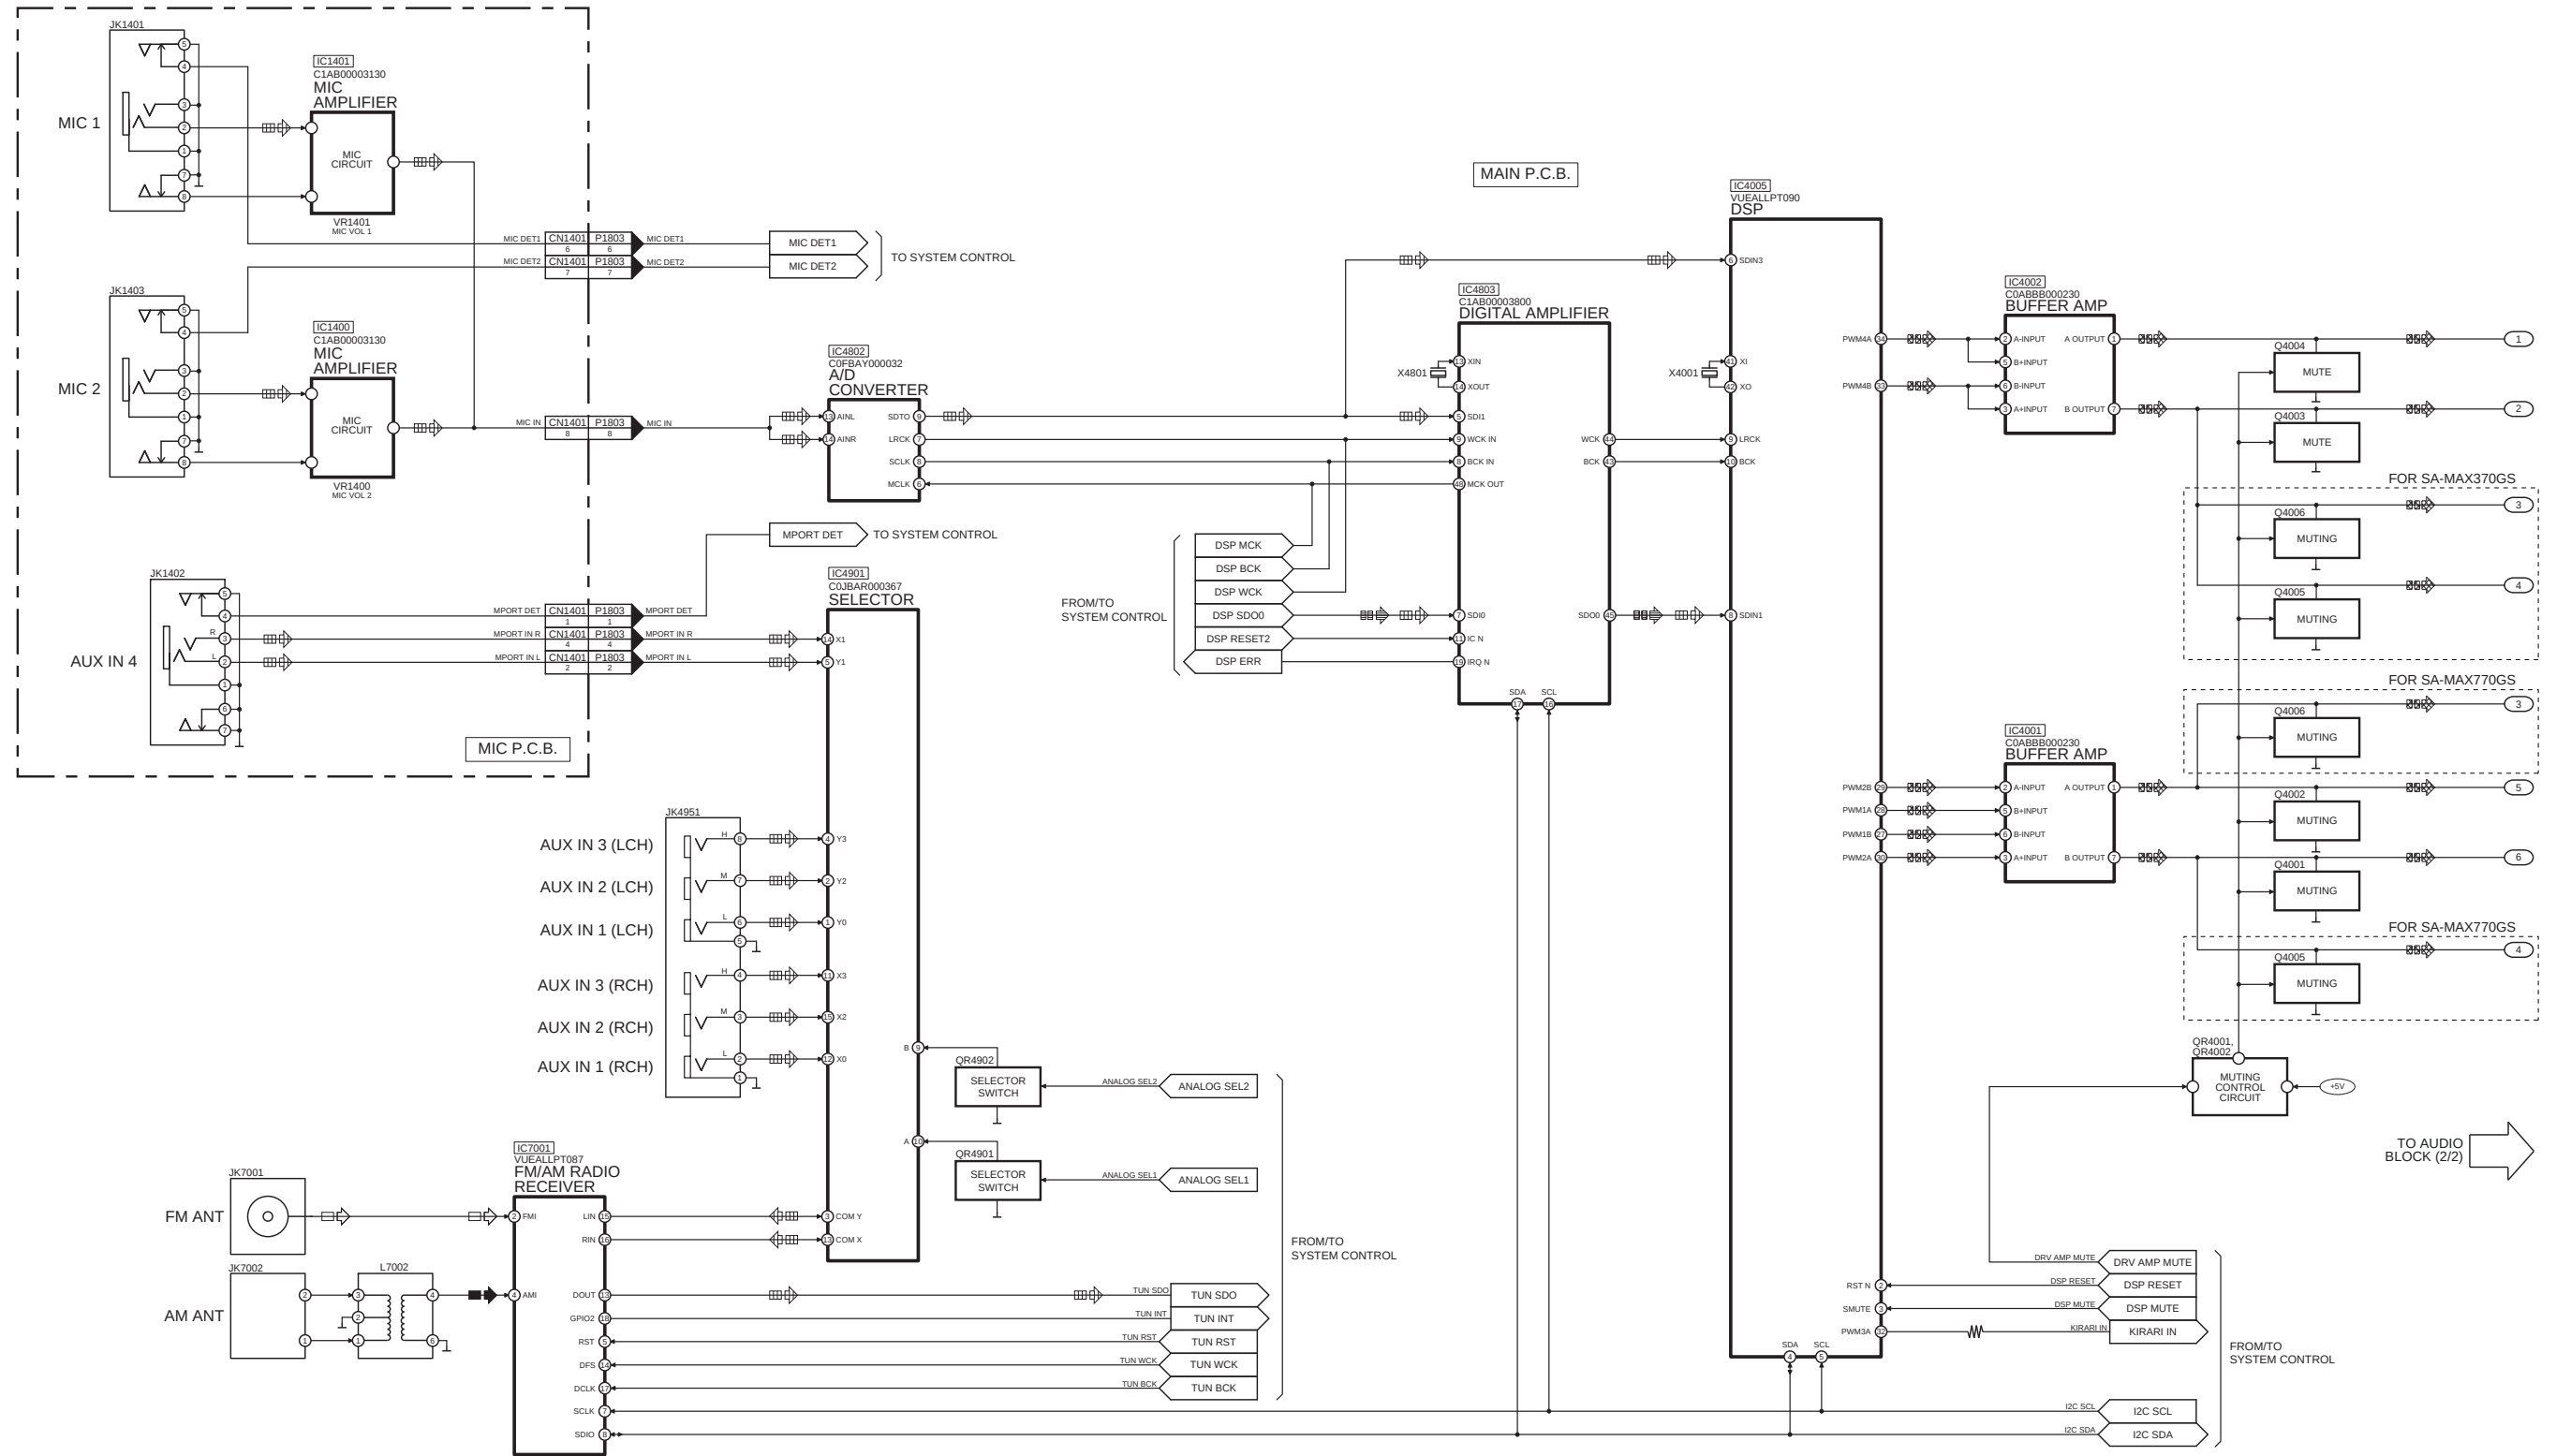


SA-MAX370GS, SA-MAX770GS AUDIO (1/2) BLOCK DIAGRAM

: CD AUDIO INPUT SIGNAL LINE
 : TUNER/AUX/MIC AUDIO INPUT SIGNAL LINE
 : AUDIO OUTPUT SIGNAL LINE
 : AM SIGNAL LINE
 : FM SIGNAL LINE

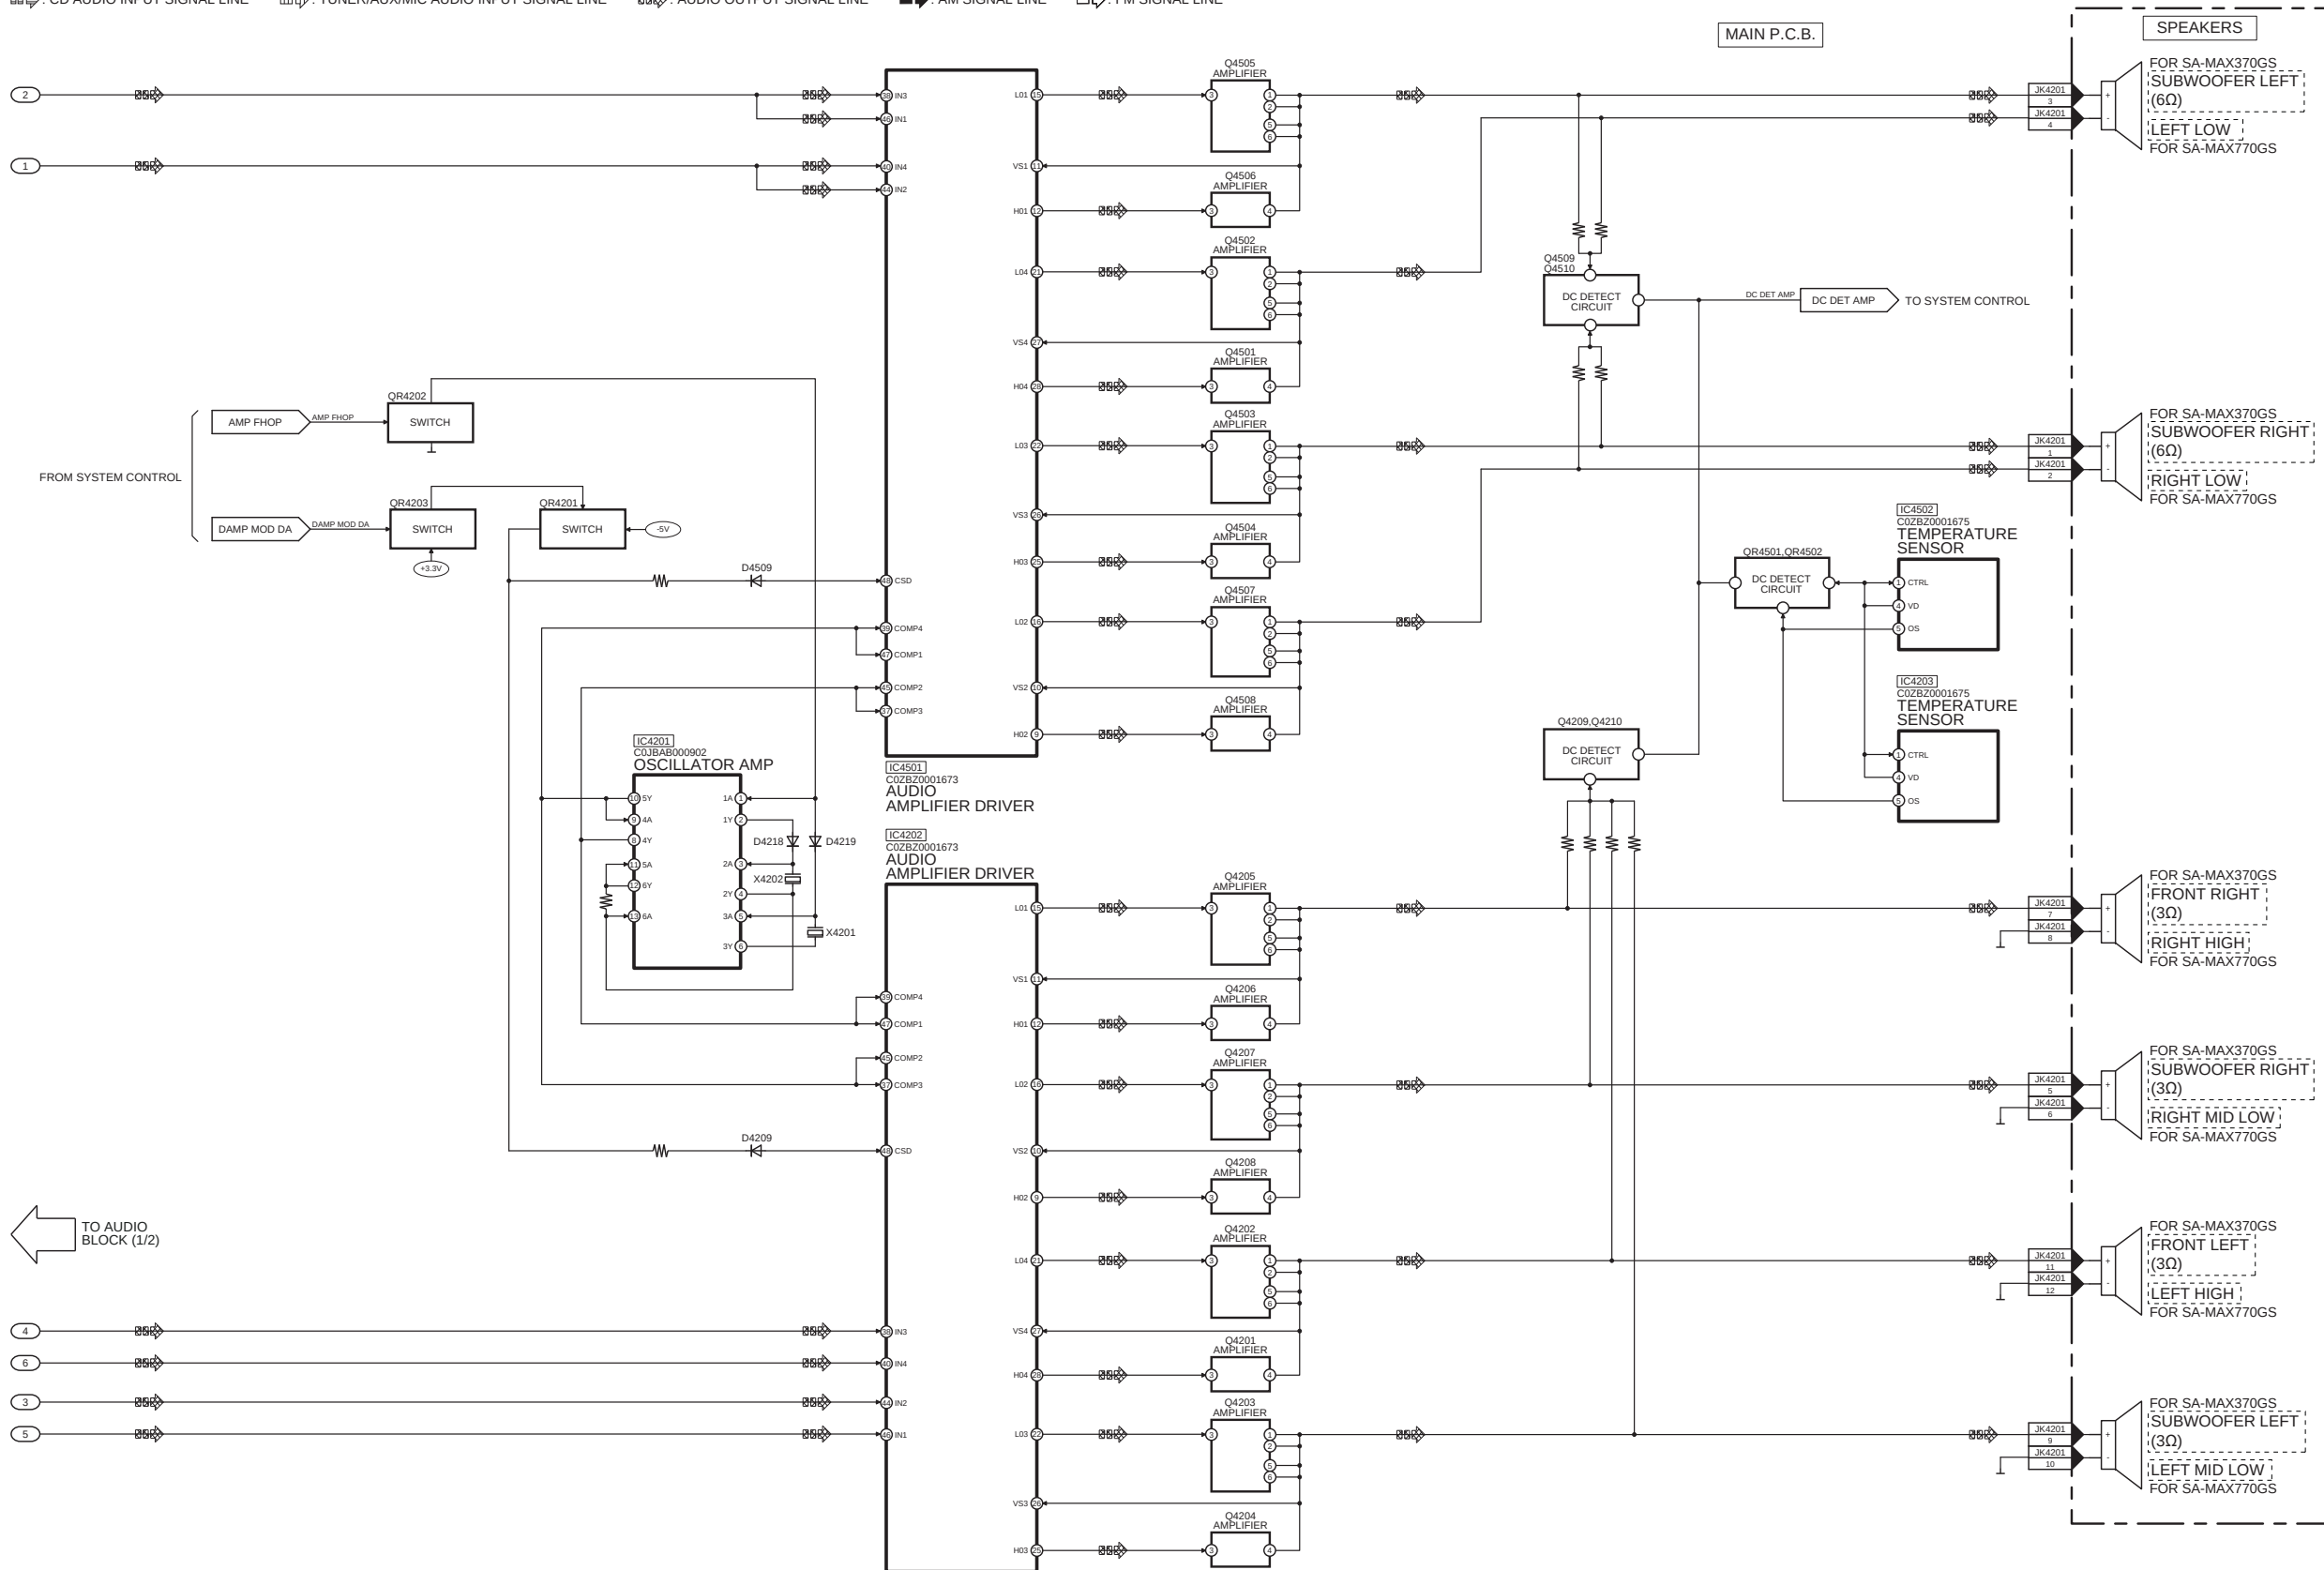


SA-MAX370GS,SA-MAX770GS AUDIO (2/2) BLOCK DIAGRAM

5.3. Power Supply

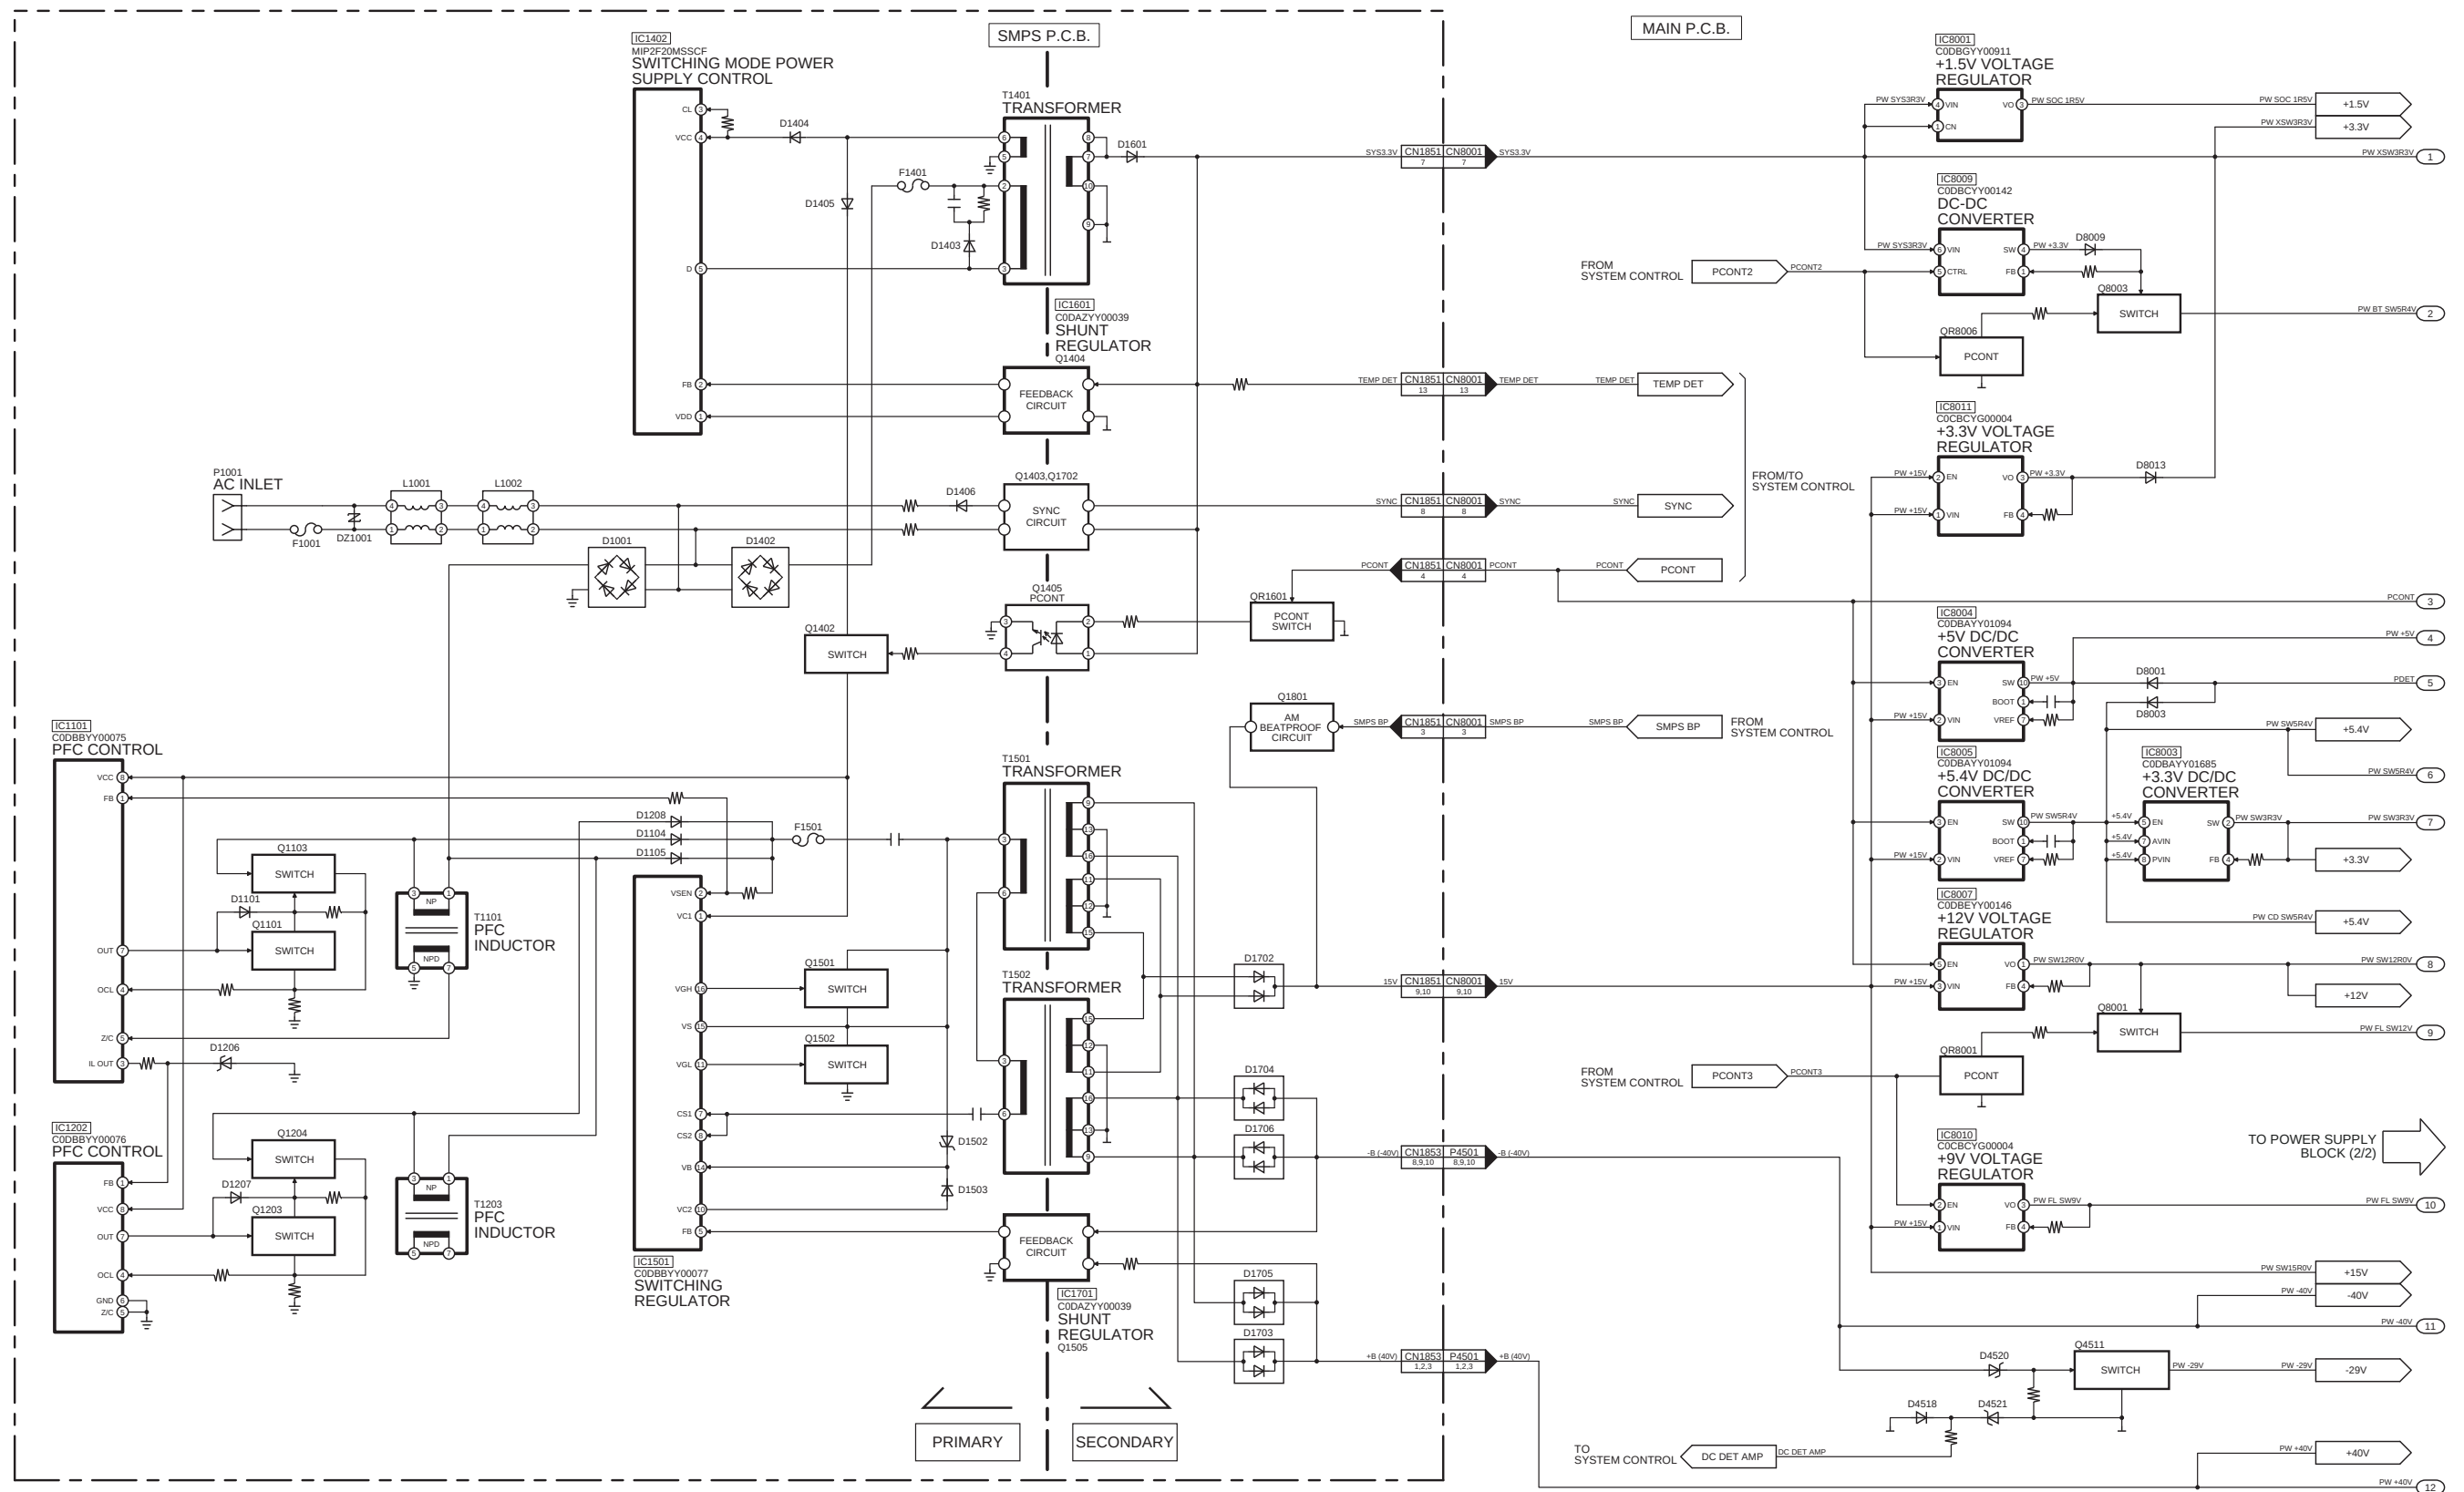

SA-MAX370GS, SA-MAX770GS POWER SUPPLY (1/2) BLOCK DIAGRAM

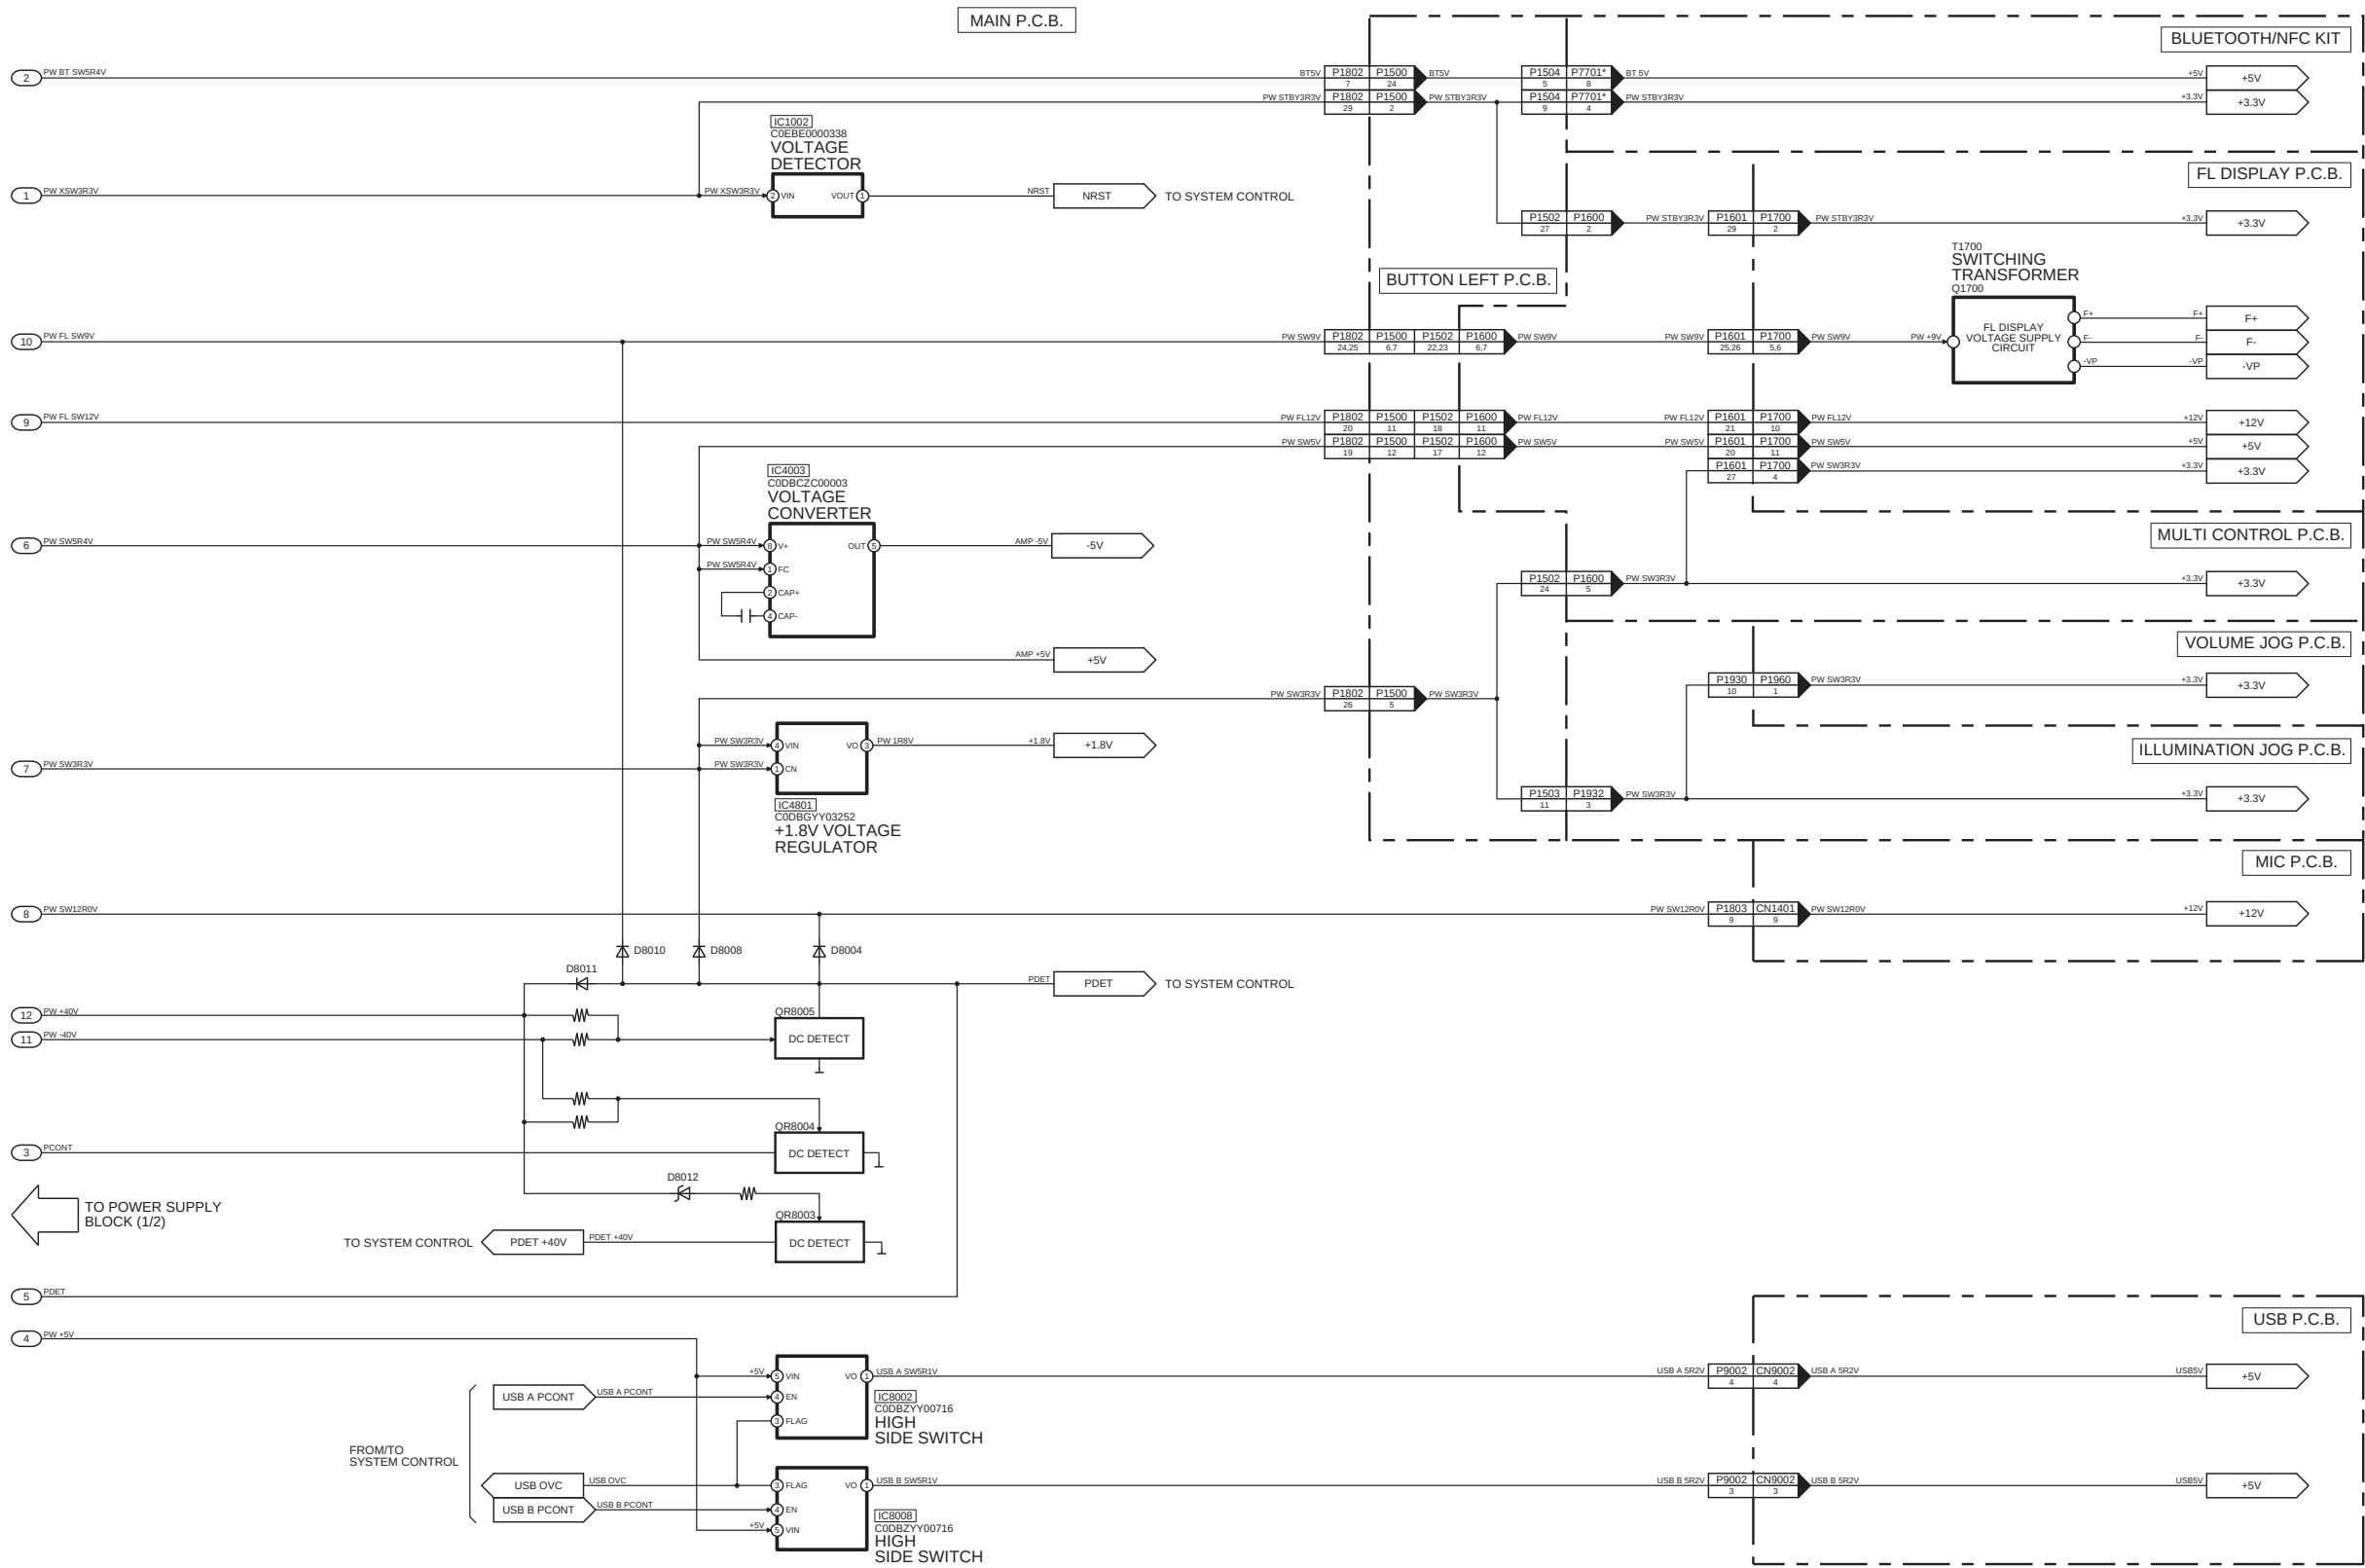

NOTE: “ * ” REF IS FOR INDICATION ONLY

SA-MAX370GS,SA-MAX770GS POWER SUPPLY (2/2) BLOCK DIAGRAM

6 Schematic Diagram

6.1. Schematic Diagram Notes

- This schematic diagram may be modified at any time with the development of new technology.

Notes:

S1500:	Power (⏻/⏻) switch.
S1501:	Manual EQ switch.
S1502:	Latin Preset EQ switch.
S1503:	D.BASS-Superwoofer switch.
S1504:	Memory 3 switch.
S1505:	Memory 2 switch.
S1506:	Memory 1 switch.
S1507:	Memory 5 switch.
S1508:	Memory 4 switch.
S1509:	Memory 6 switch.
S1510:	DJ-Effect switch.
S1511:	DJ-Sampler switch.
S1512:	DJ-Jukebox switch.
S1650:	Open/Close switch.
S1651:	USB Rec/Pause switch.
S1652:	Memory Rec/Pause switch.
S1653:	REW/Skip (⏮ / ⏮) switch.
S1654:	Forward/Skip (⏭ / ⏭) switch.
S1655:	Album/Track switch.
S1656:	Stop (■) /Tune switch.
S1657:	Bluetooth/Memory switch.
S1658:	Playback switch.
S1659:	USB/CD switch.
S1660:	Radio/EXT-IN switch.
S7201:	Reset switch.
VR1400:	Mic Jog.
VR1401:	Mic VR Jog.
VR1600:	Volume Jog.
VR1930:	Illumination Jog.
VR1960:	Volume Jog.

- Important safety notice:

Components identified by  mark have special characteristics important for safety.

Furthermore, special parts which have purposes of fire-retardant (resistors), high quality sound (capacitors), low-noise (resistors), etc are used.

When replacing any of components, be sure to use only manufacturer's specified parts shown in the parts list.

- In case of AC rated voltage Capacitors, the part no. and values will be indicated in the Schematic Diagram.

AC rated voltage capacitors:

C1001, C1002, C1003, C1004, C1006, C1518

- Resistor

Unit of resistance is OHM [Ω] (K=1,000, M=1,000,000).

- Capacitor

Unit of capacitance is μ F, unless otherwise noted. F=Farads, pF=pico-Farad.

- Coil

Unit of inductance is H, unless otherwise noted.

- *


REF IS FOR INDICATION ONLY.

- Voltage and signal line

	: +B signal line
	: -B signal line
	: CD Audio input signal line
	: Tuner/Music Port/AUX/Mic/Bluetooth Audio input signal line
	: Audio output signal line
	: USB signal line
	: AM signal line
	: FM signal line

CAUTION:

FOR CONTINUED PROTECTION AGAINST FIRE HAZARD, REPLACE ONLY WITH SAME TYPE F1001 T10AH 250V FUSE
TYPE F1401 T500mA 250V FUSE
TYPE F1501 T5A 250V FUSE



RISK OF FIRE-REPLACE FUSE AS MARKED.

FUSE CAUTION




These symbols located near the fuse indicates that the fuse used is a fast operating type. For continued protection against fire hazard, replace with the same type fuse. For rating, refer to the marking adjacent to the symbol.

6.2. Main (I/O Expansion) Circuit

SCHEMATIC DIAGRAM - 1

A MAIN (I/O EXPANSION) CIRCUIT

— : +B SIGNAL LINE  : AUX/MIC AUDIO INPUT SIGNAL LINE

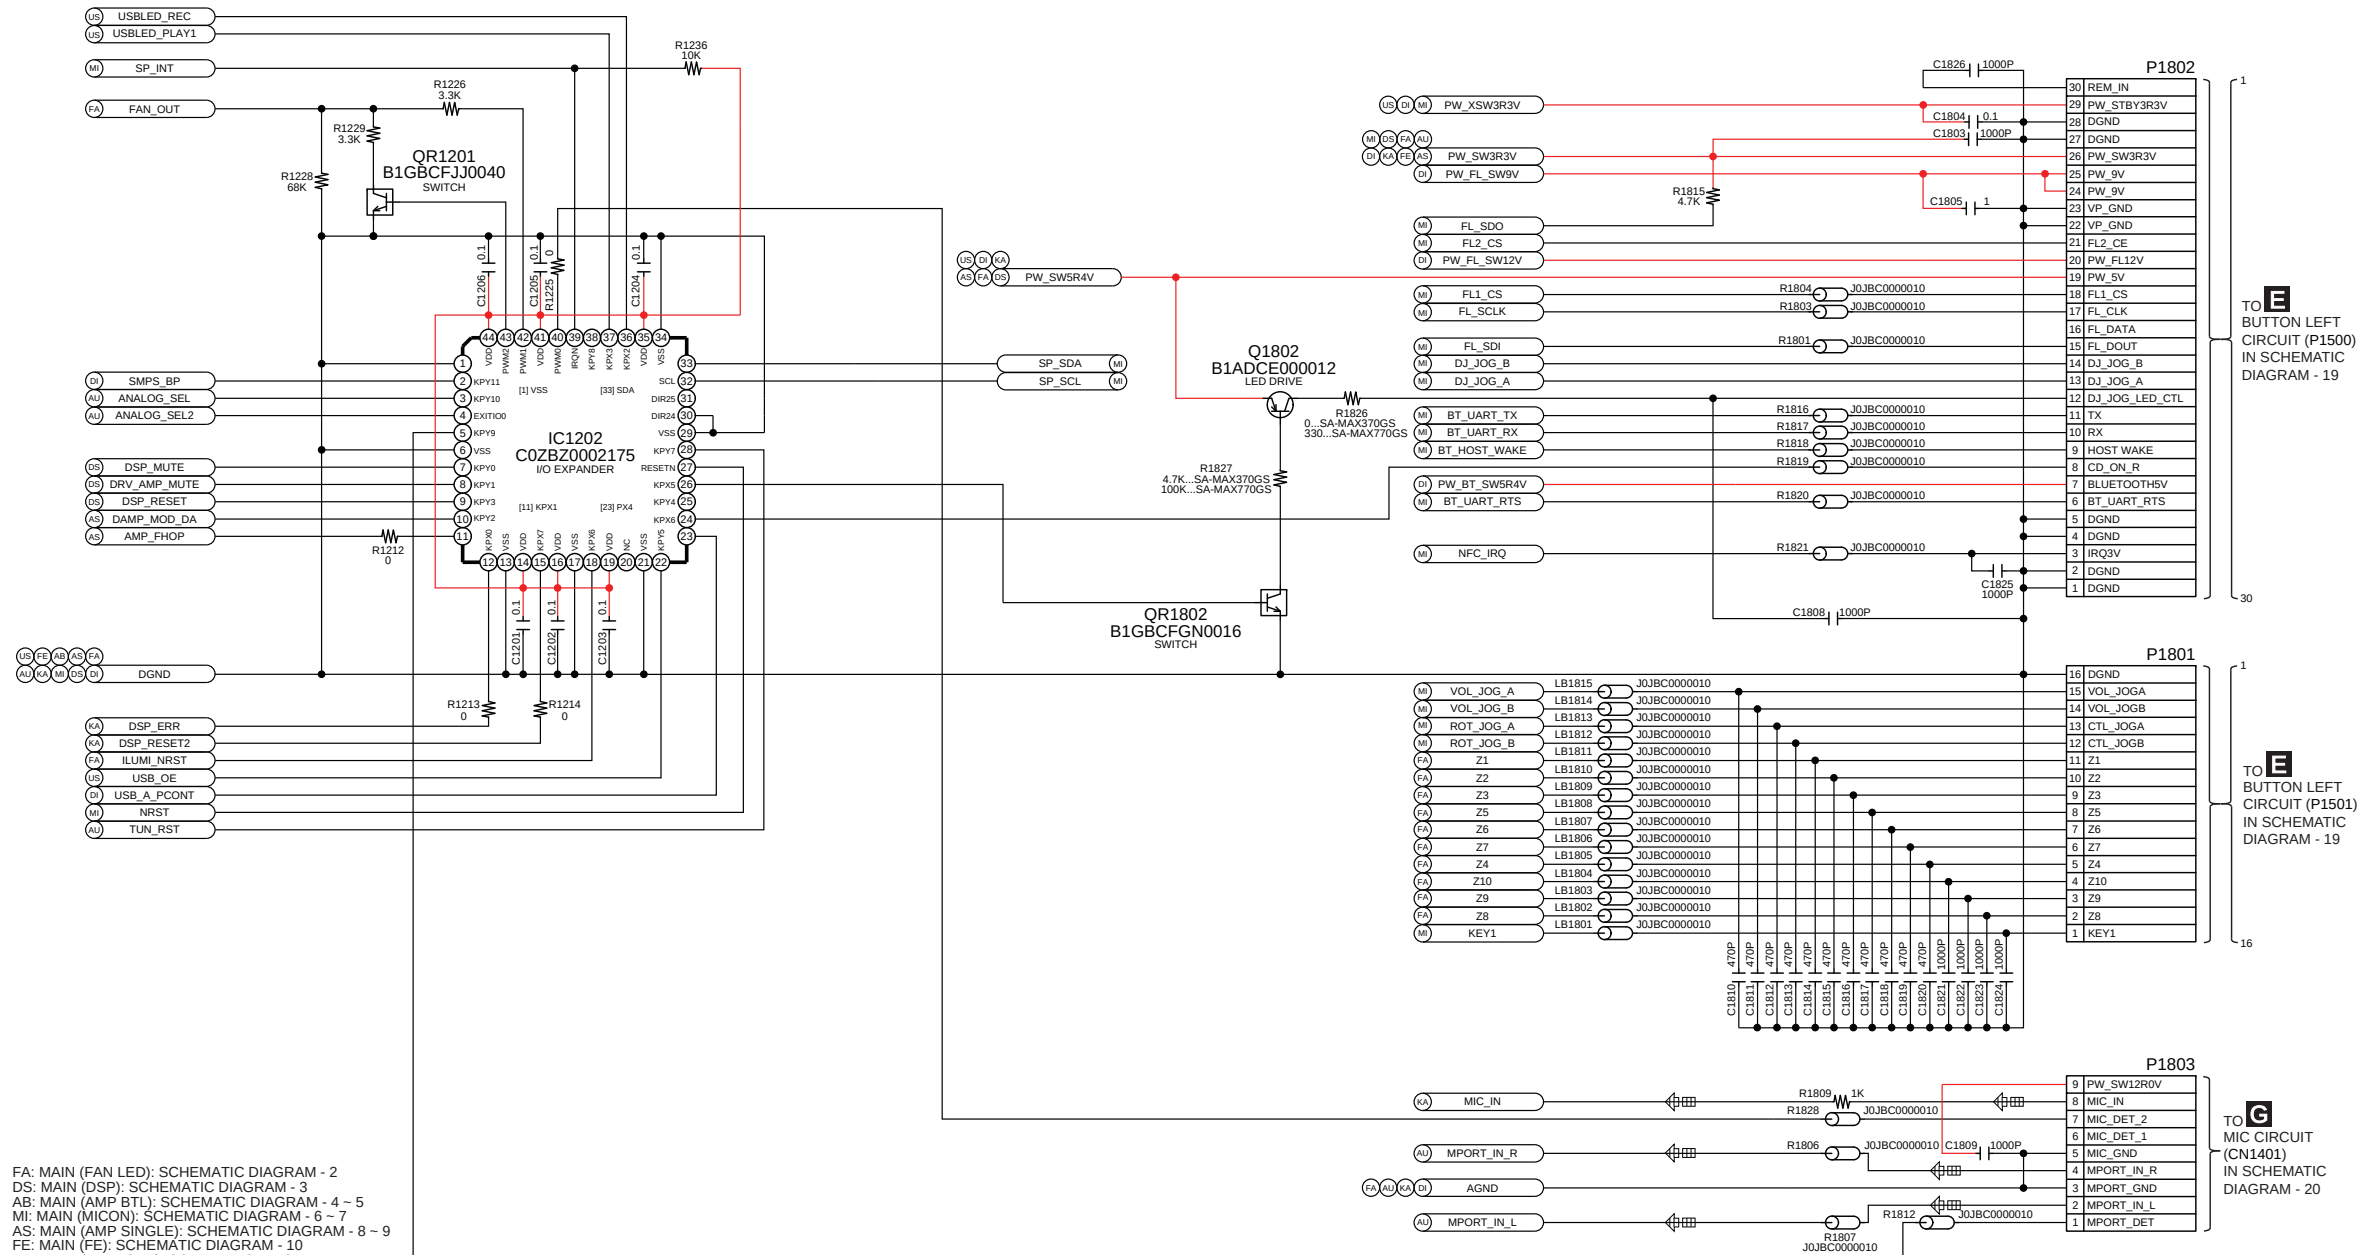


SA-MAX370GS,SA-MAX770GS MAIN (I/O EXPANSION) CIRCUIT

6.3. Main (Fan LED) Circuit

SCHEMATIC DIAGRAM - 2

A MAIN (FAN LED) CIRCUIT

— : +B SIGNAL LINE

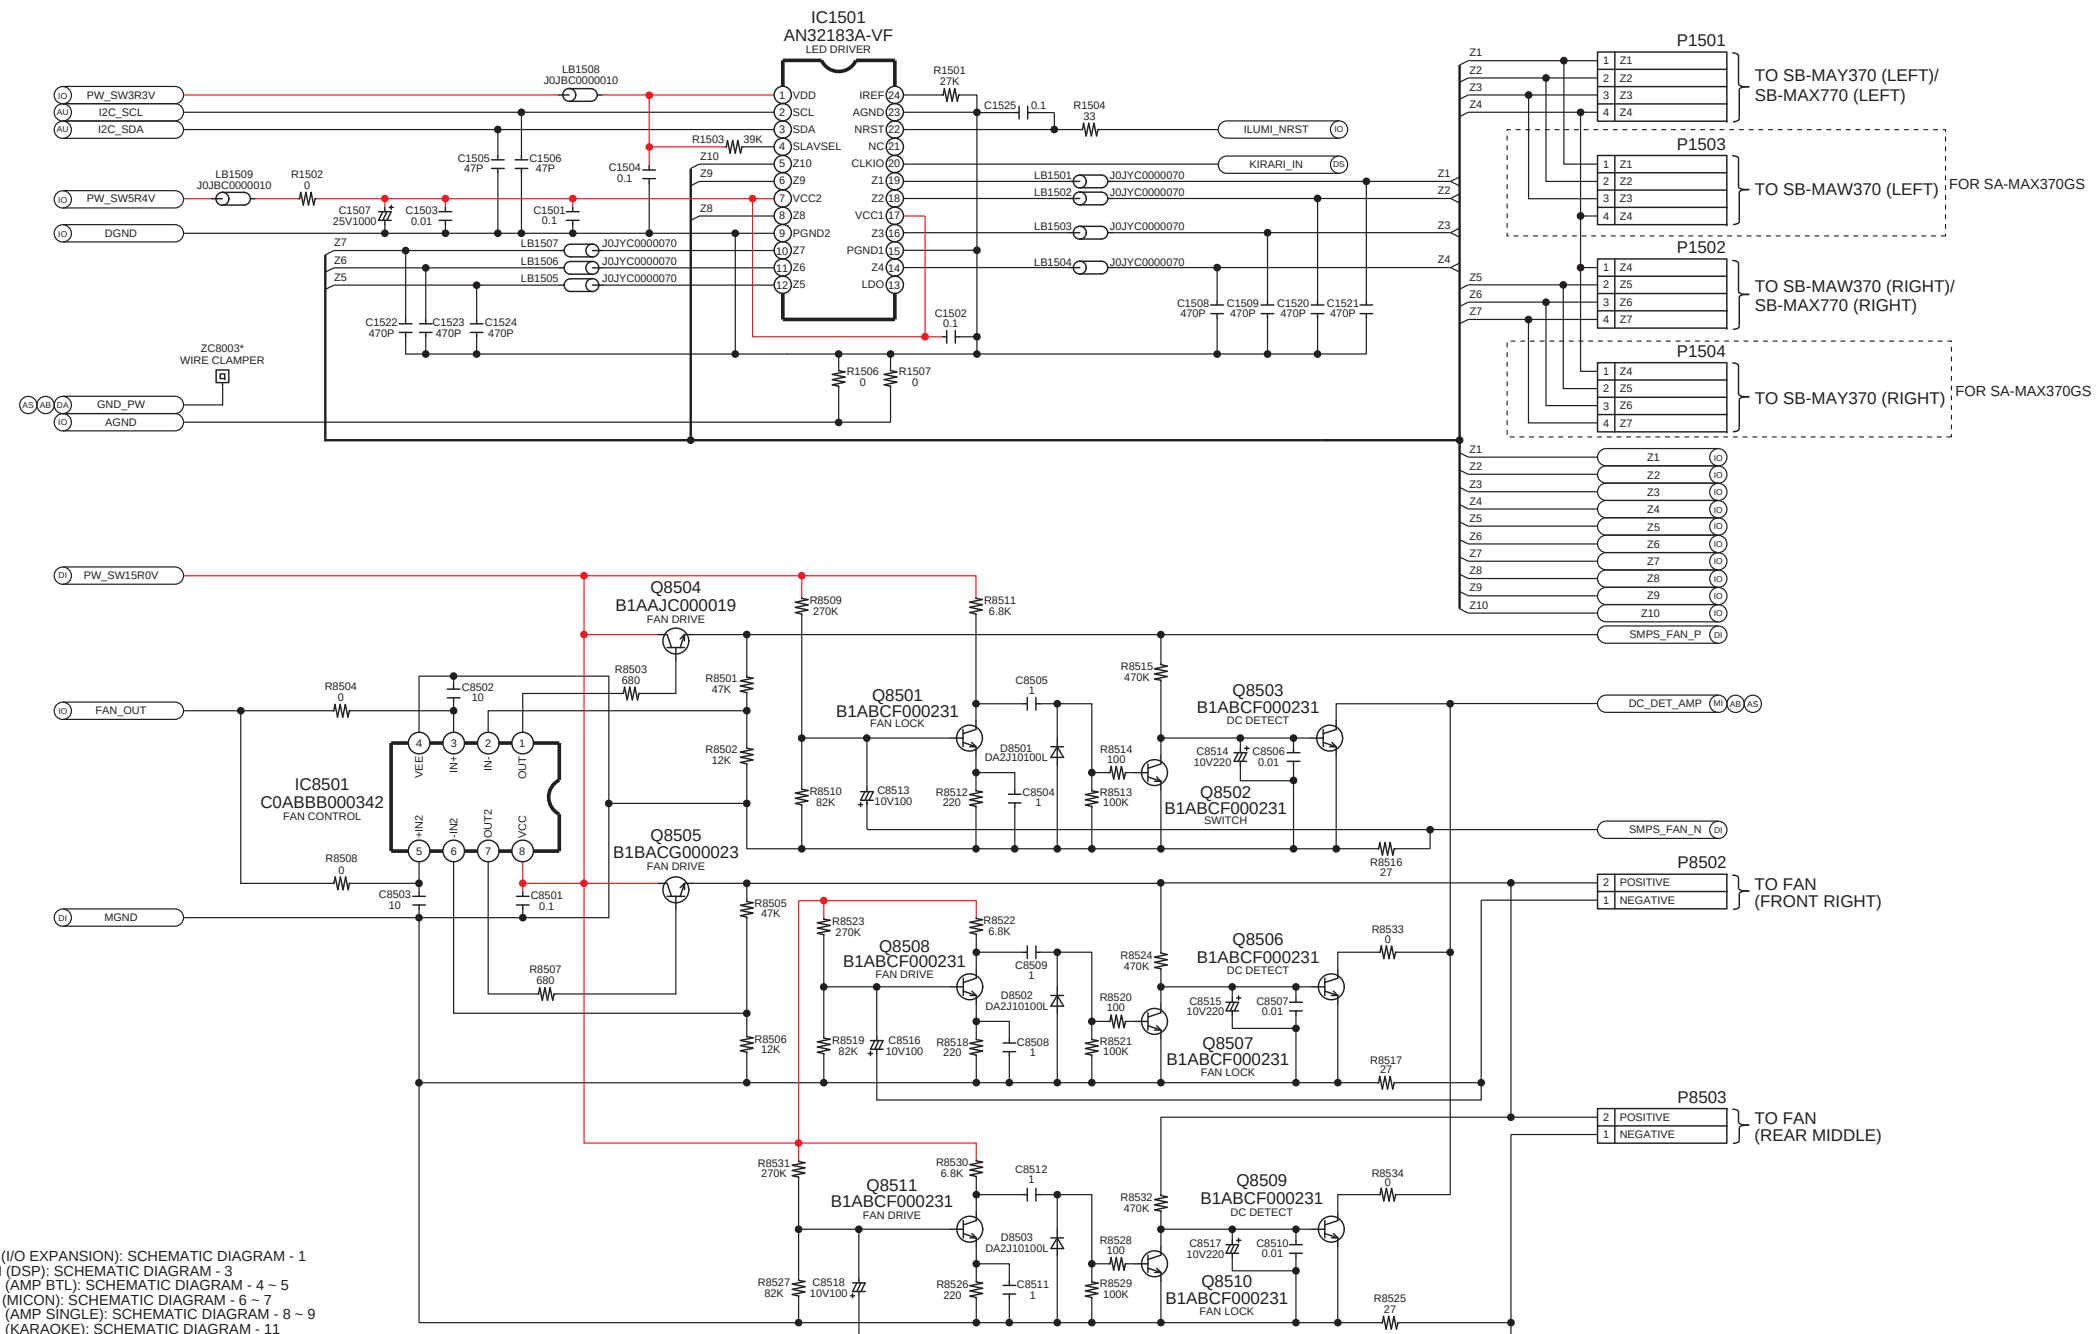

IO: MAIN (I/O EXPANSION): SCHEMATIC DIAGRAM - 1
DS: MAIN (DSP): SCHEMATIC DIAGRAM - 3
AB: MAIN (AMP BTL): SCHEMATIC DIAGRAM - 4 ~ 5
MI: MAIN (MICON): SCHEMATIC DIAGRAM - 6 ~ 7
AS: MAIN (AMP SINGLE): SCHEMATIC DIAGRAM - 8 ~ 9
KA: MAIN (KARAOKE): SCHEMATIC DIAGRAM - 11
DI: MAIN (DIGITAL-POWER): SCHEMATIC DIAGRAM - 12 ~ 13
AU: MAIN (AUX TUNER): SCHEMATIC DIAGRAM - 15


NOTE: " * " REF IS FOR INDICATION ONLY

SA-MAX370GS,SA-MAX770GS MAIN (FAN LED) CIRCUIT


6.4. Main (DSP) Circuit

SCHEMATIC DIAGRAM - 3

A MAIN (DSP) CIRCUIT

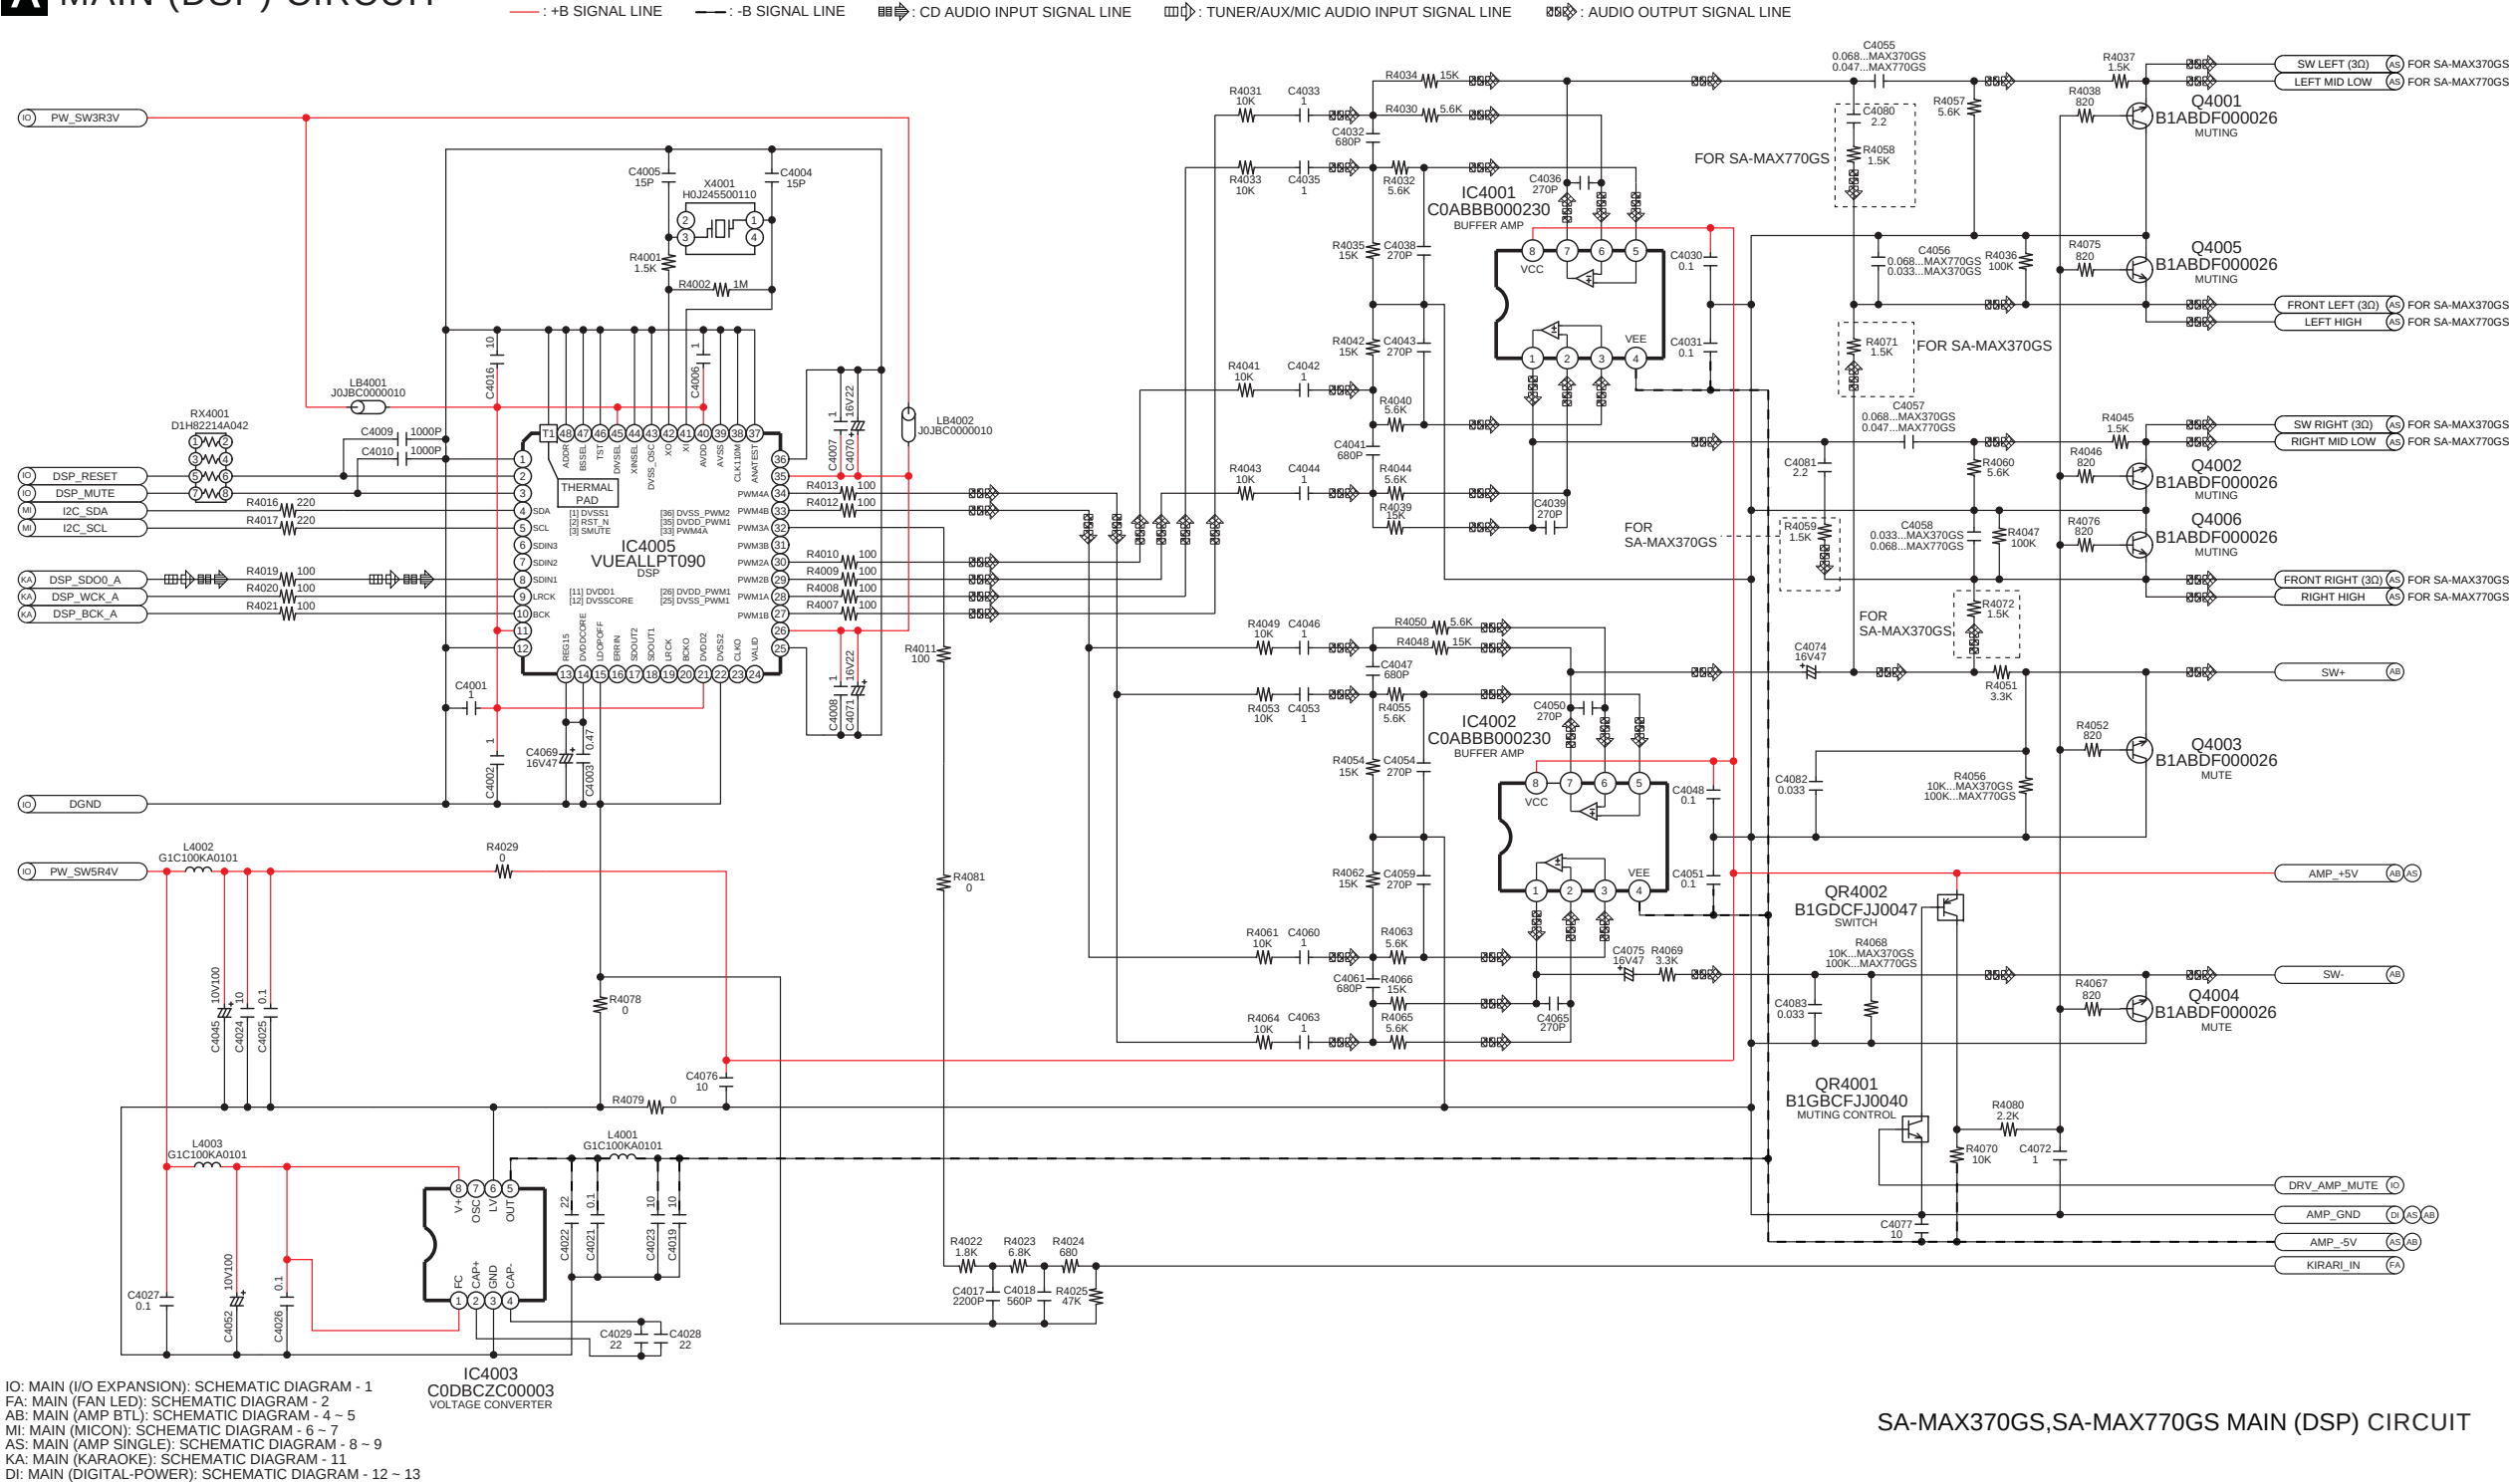


6.5. Main (Amp BTL) Circuit (1/2)

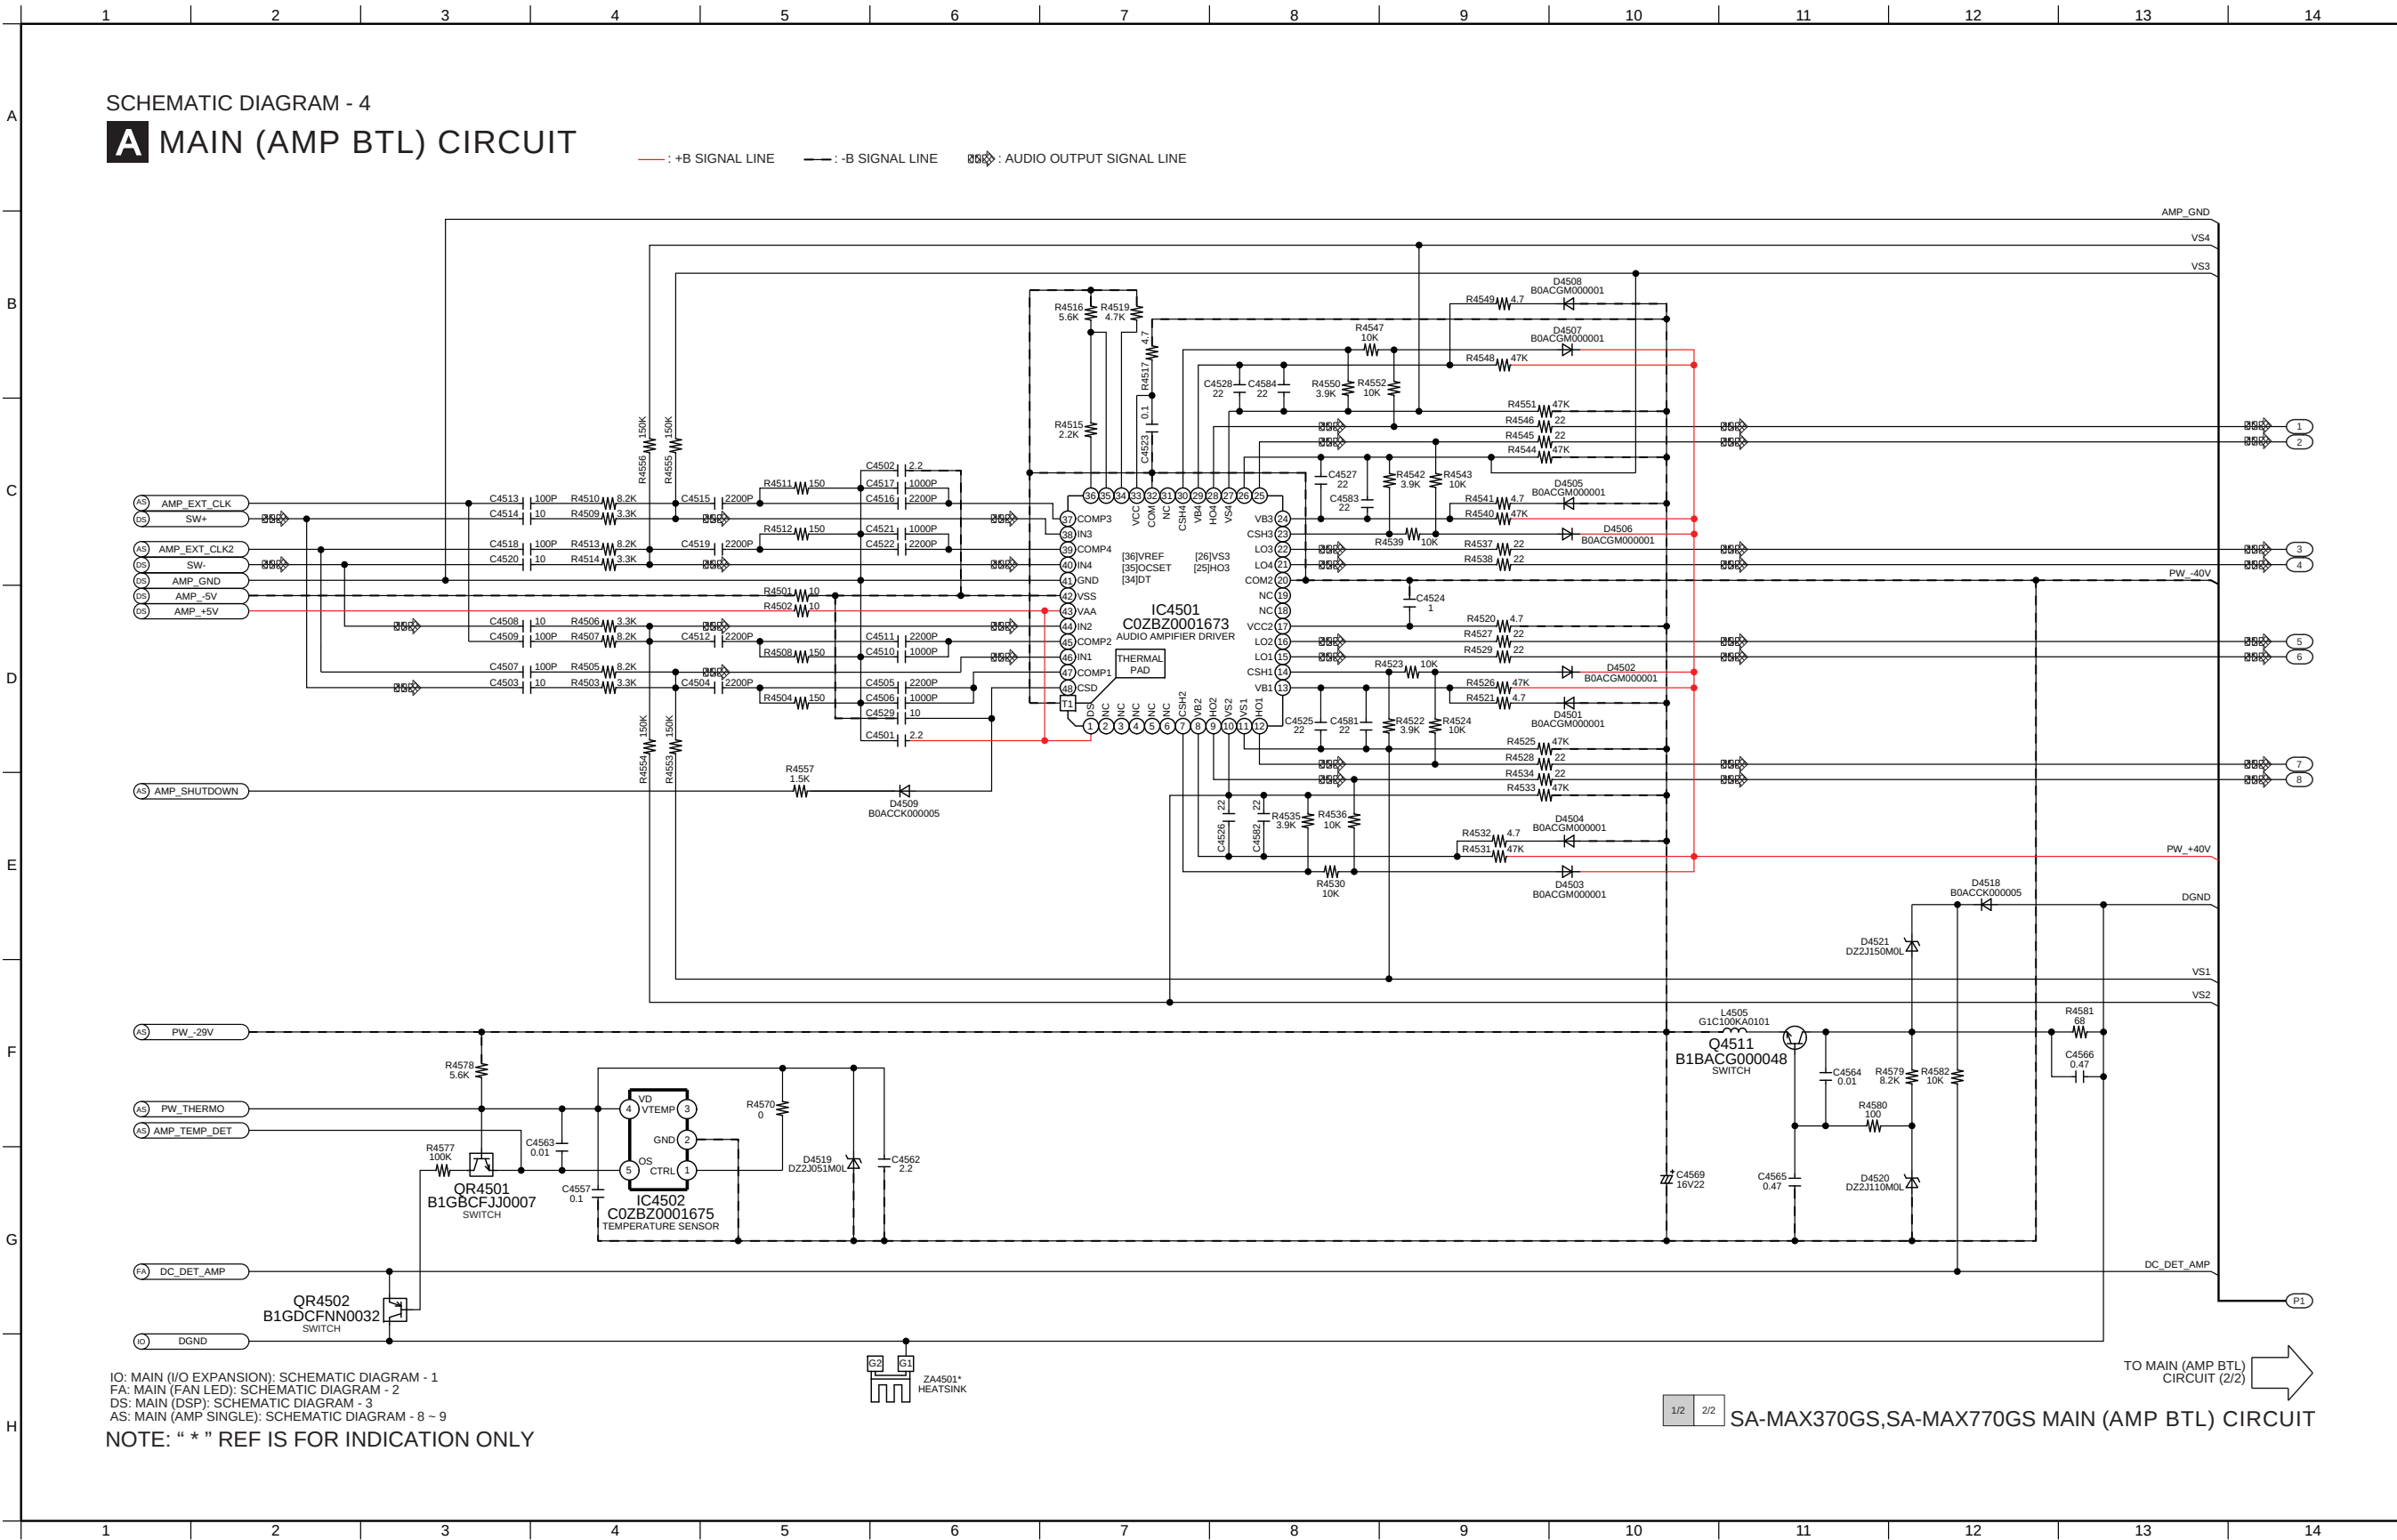

6.6. Main (Amp BTL) Circuit (2/2)

SCHEMATIC DIAGRAM - 5


A MAIN (AMP BTL) CIRCUIT

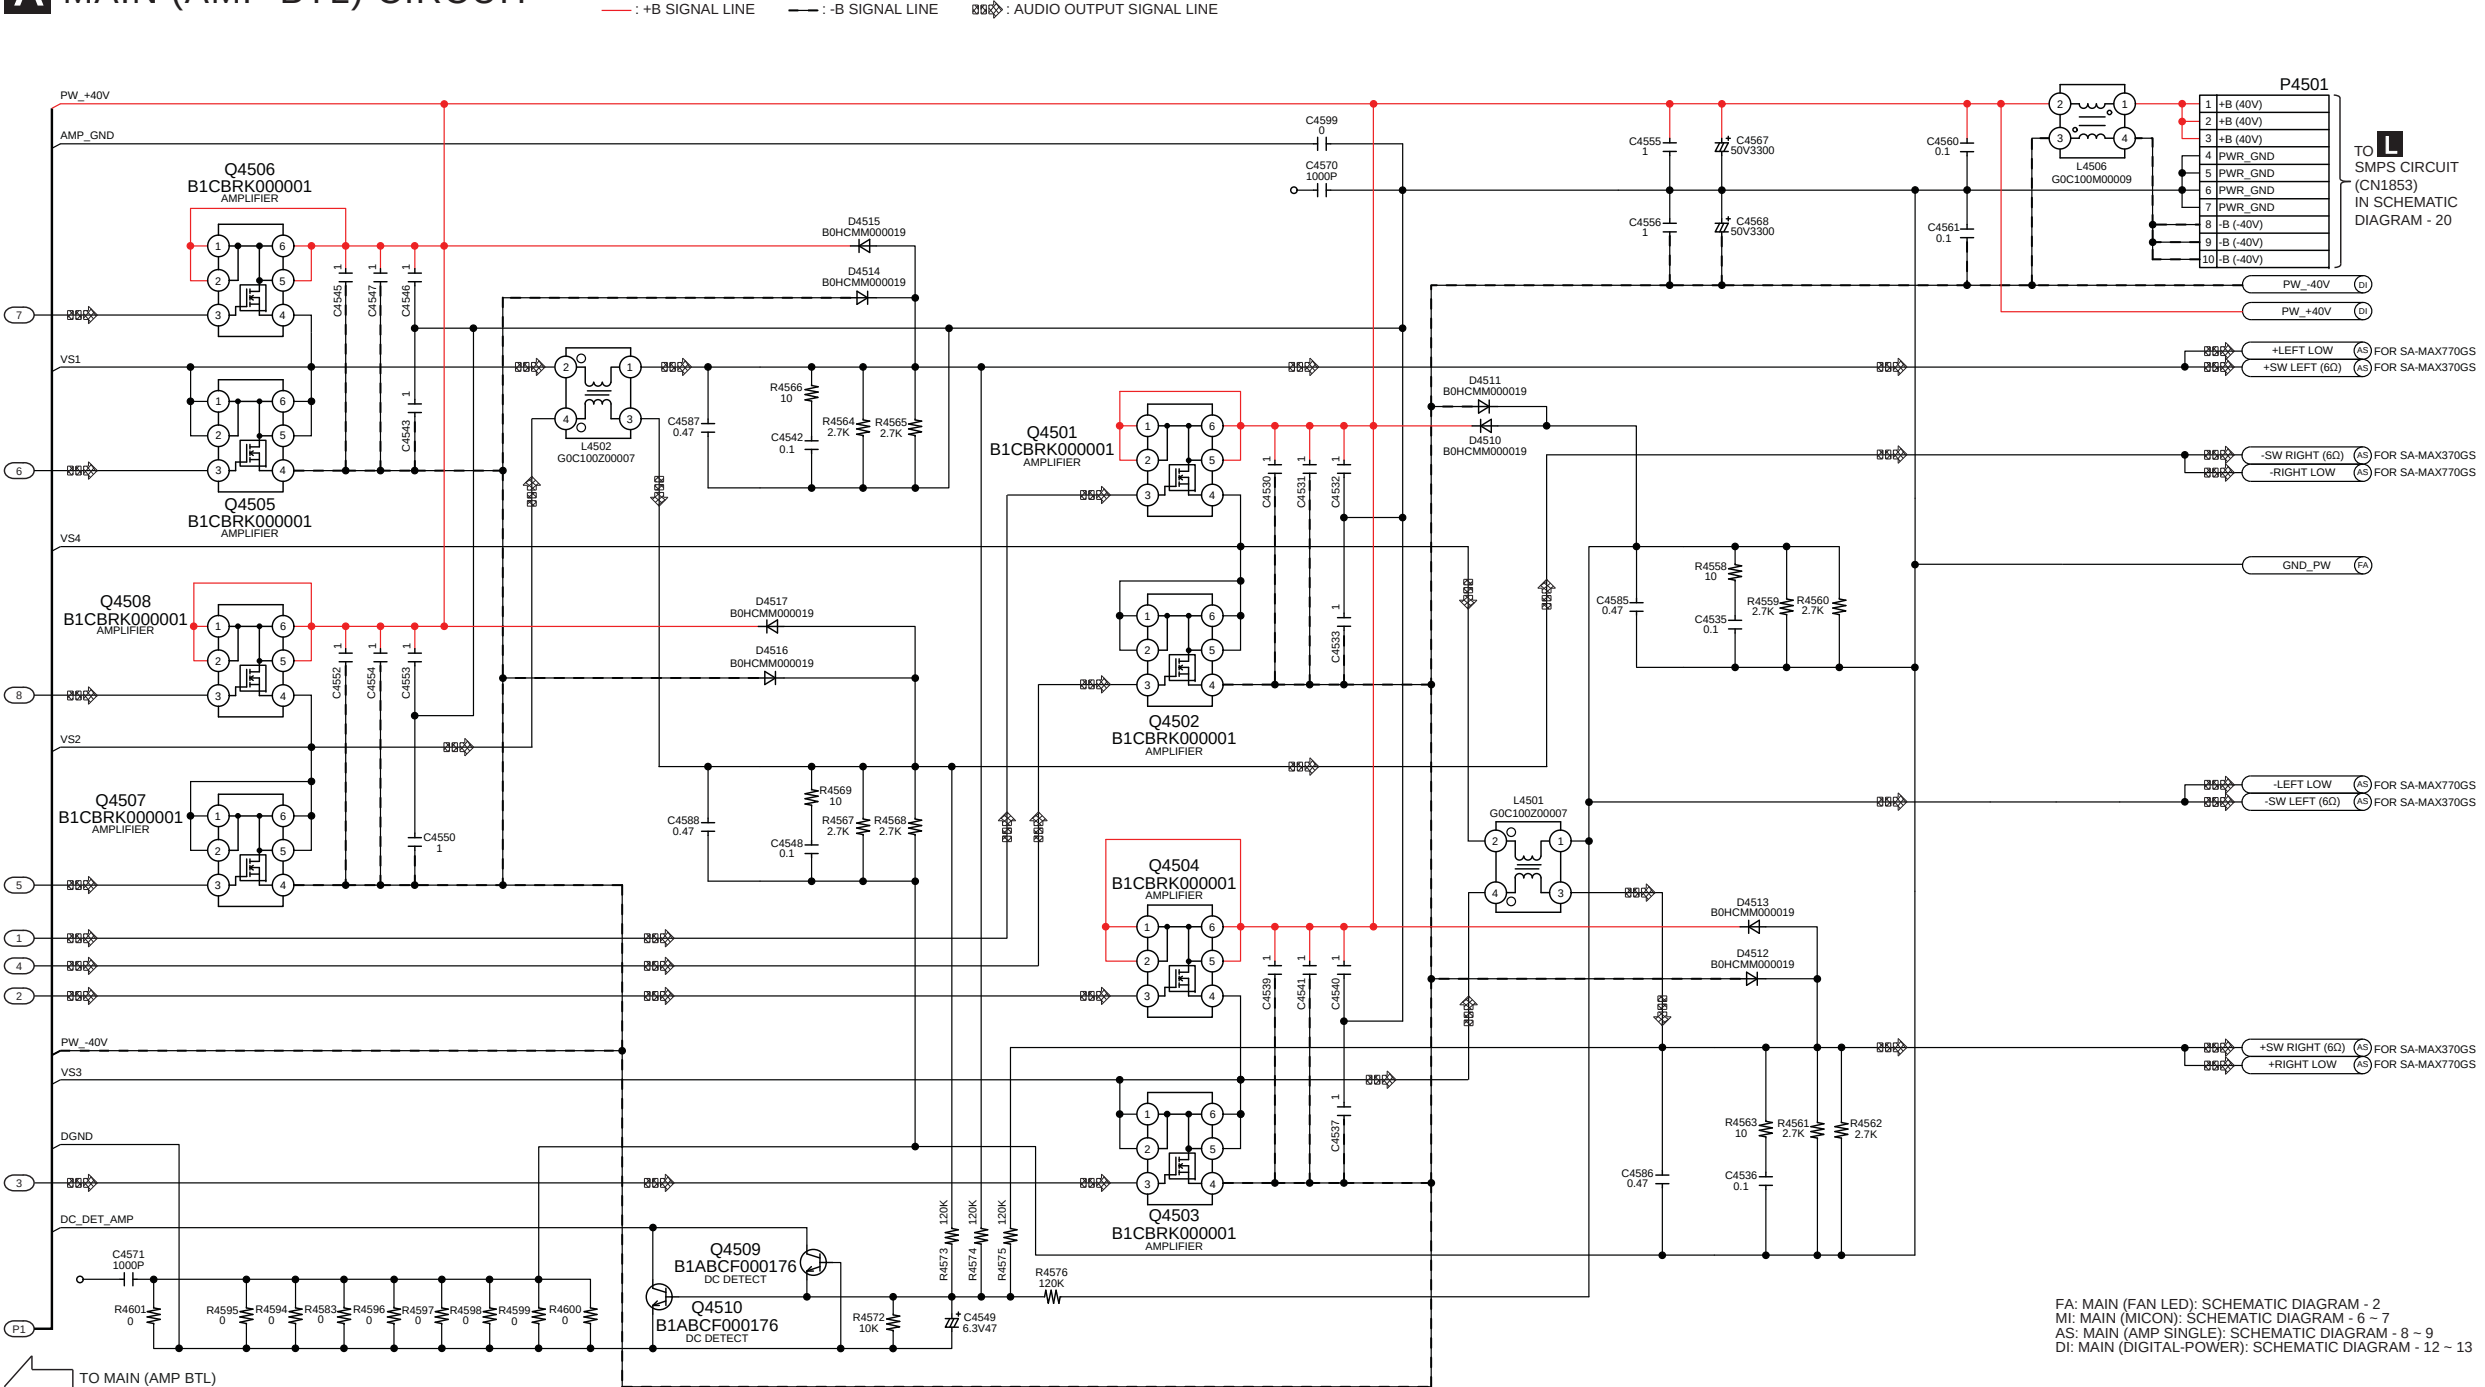

NOTE: " * " REF IS FOR INDICATION ONLY

1/2 2/2 SA-MAX370GS,SA-MAX770GS MAIN (AMP BTL) CIRCUIT


6.7. Main (MICON) Circuit (1/2)

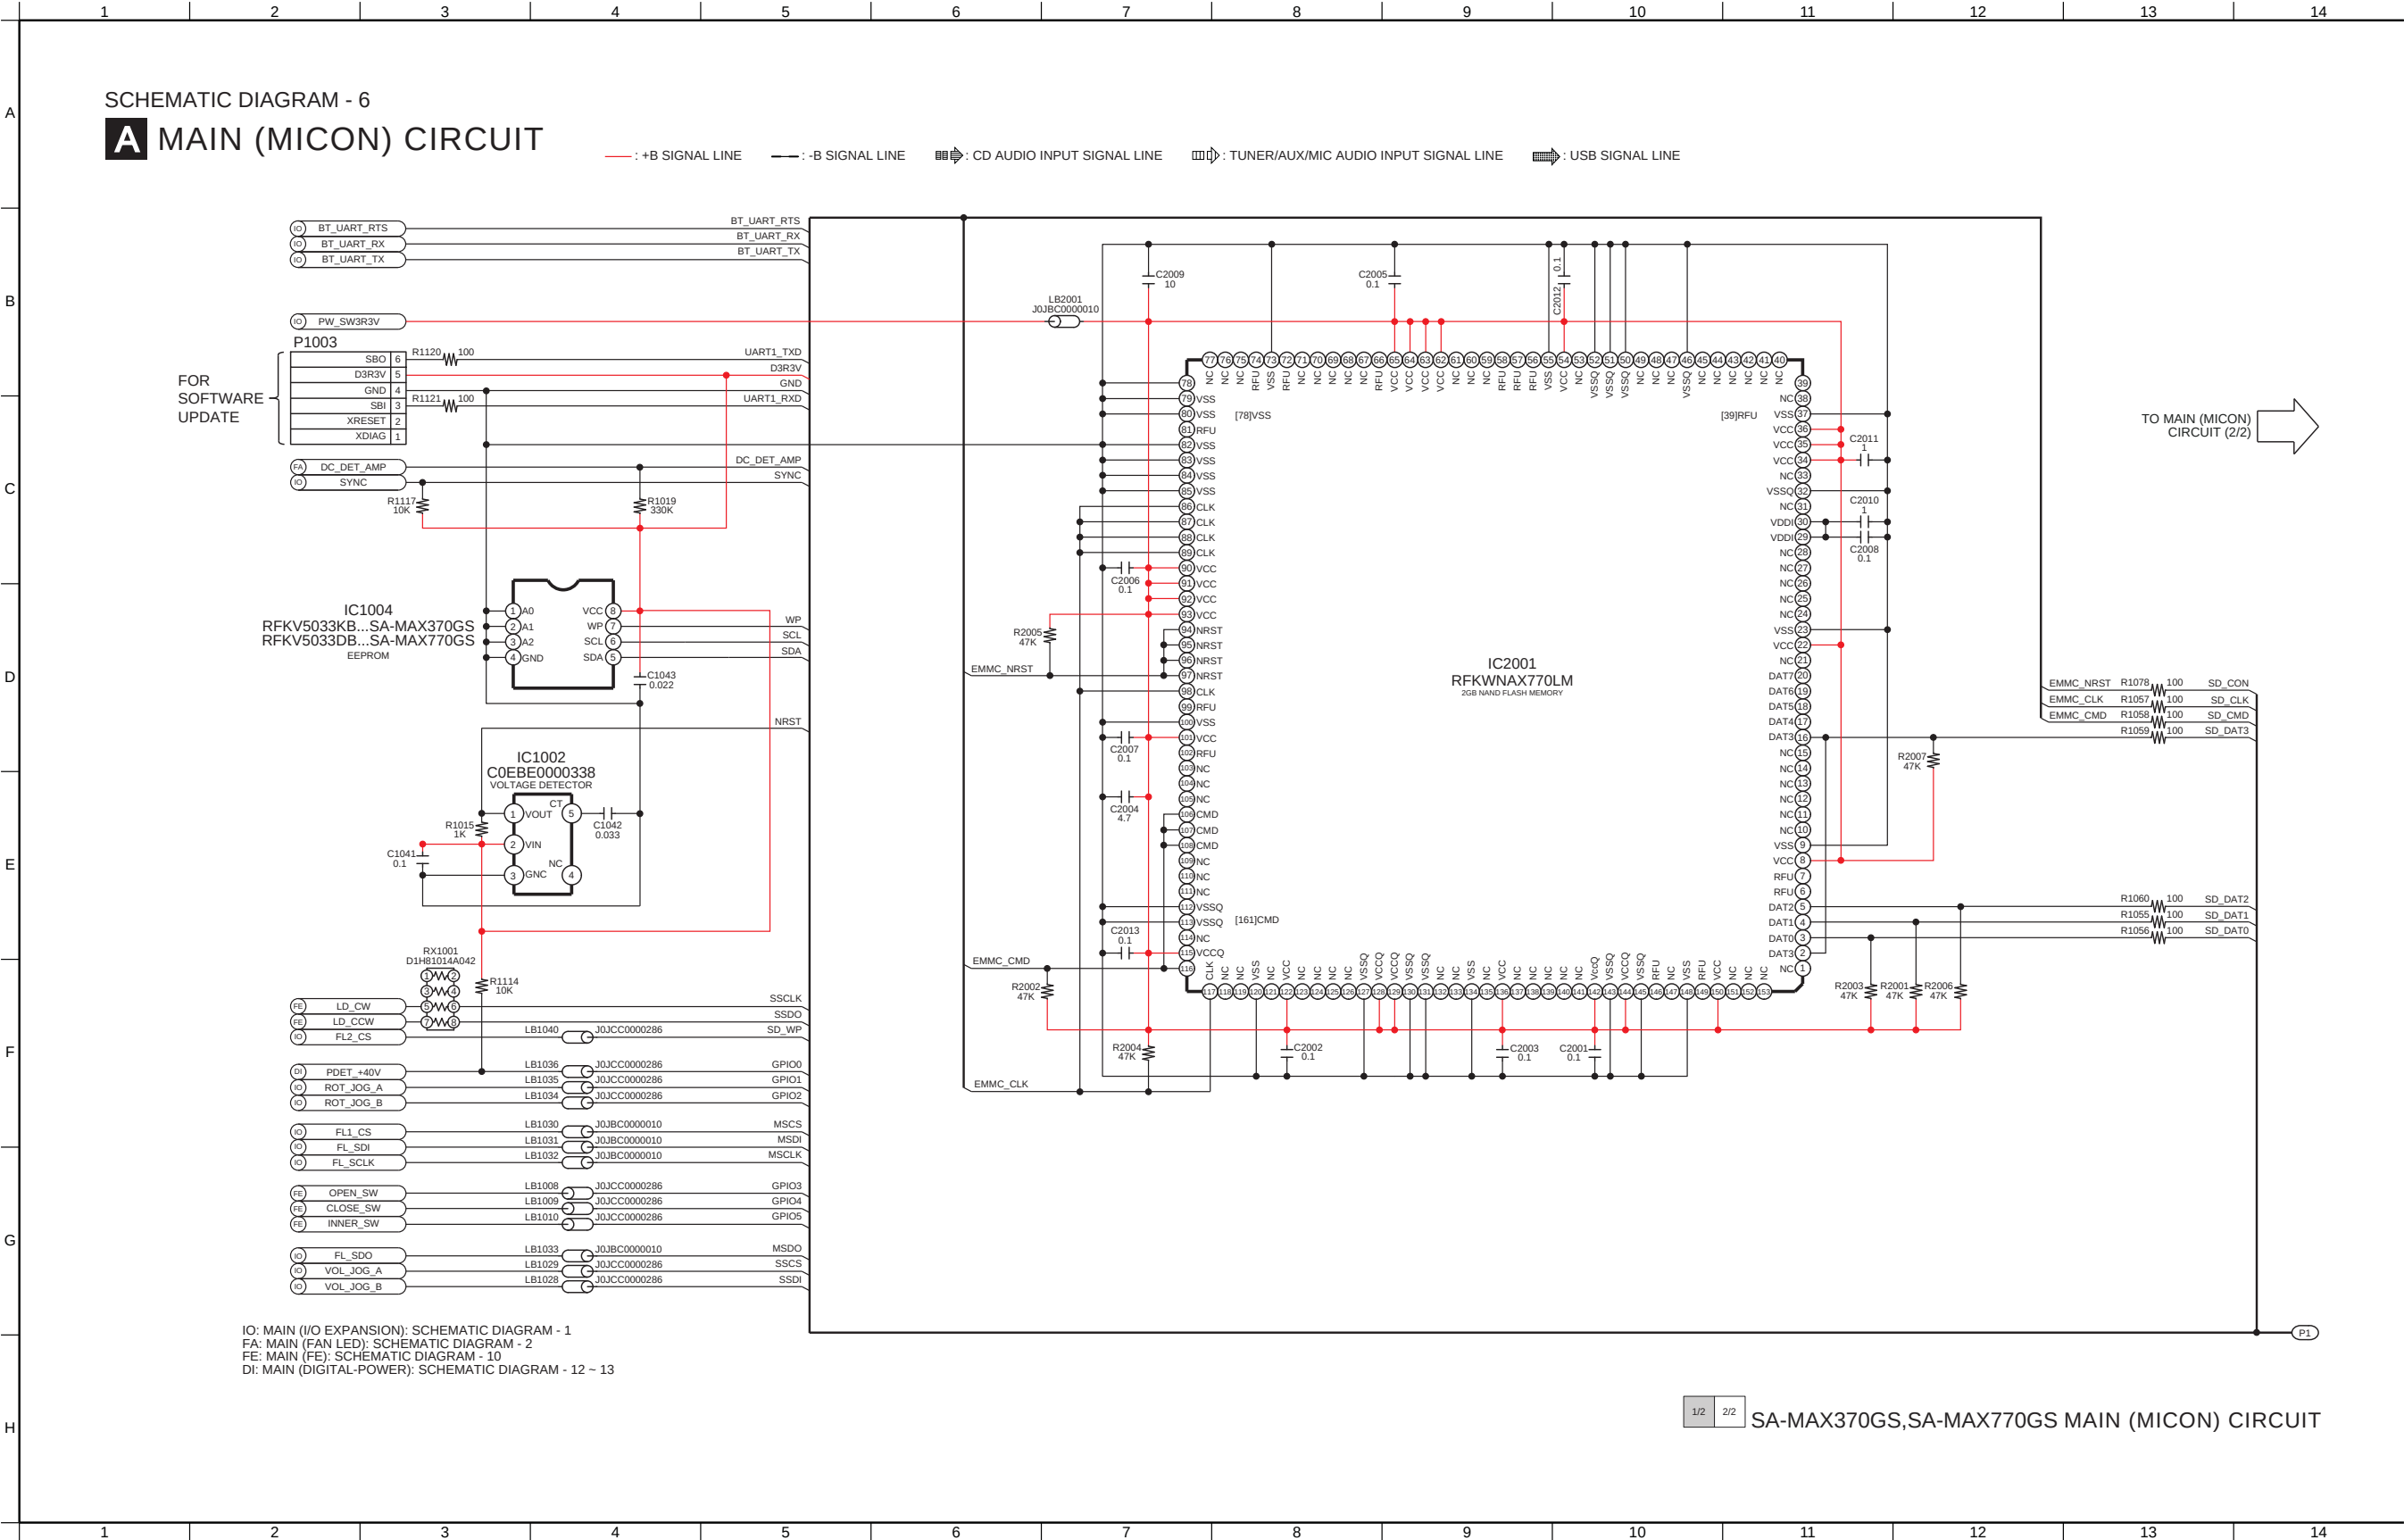


6.8. Main (MICON) Circuit (2/2)

SCHEMATIC DIAGRAM - 7

A MAIN (MICON) CIRCUIT

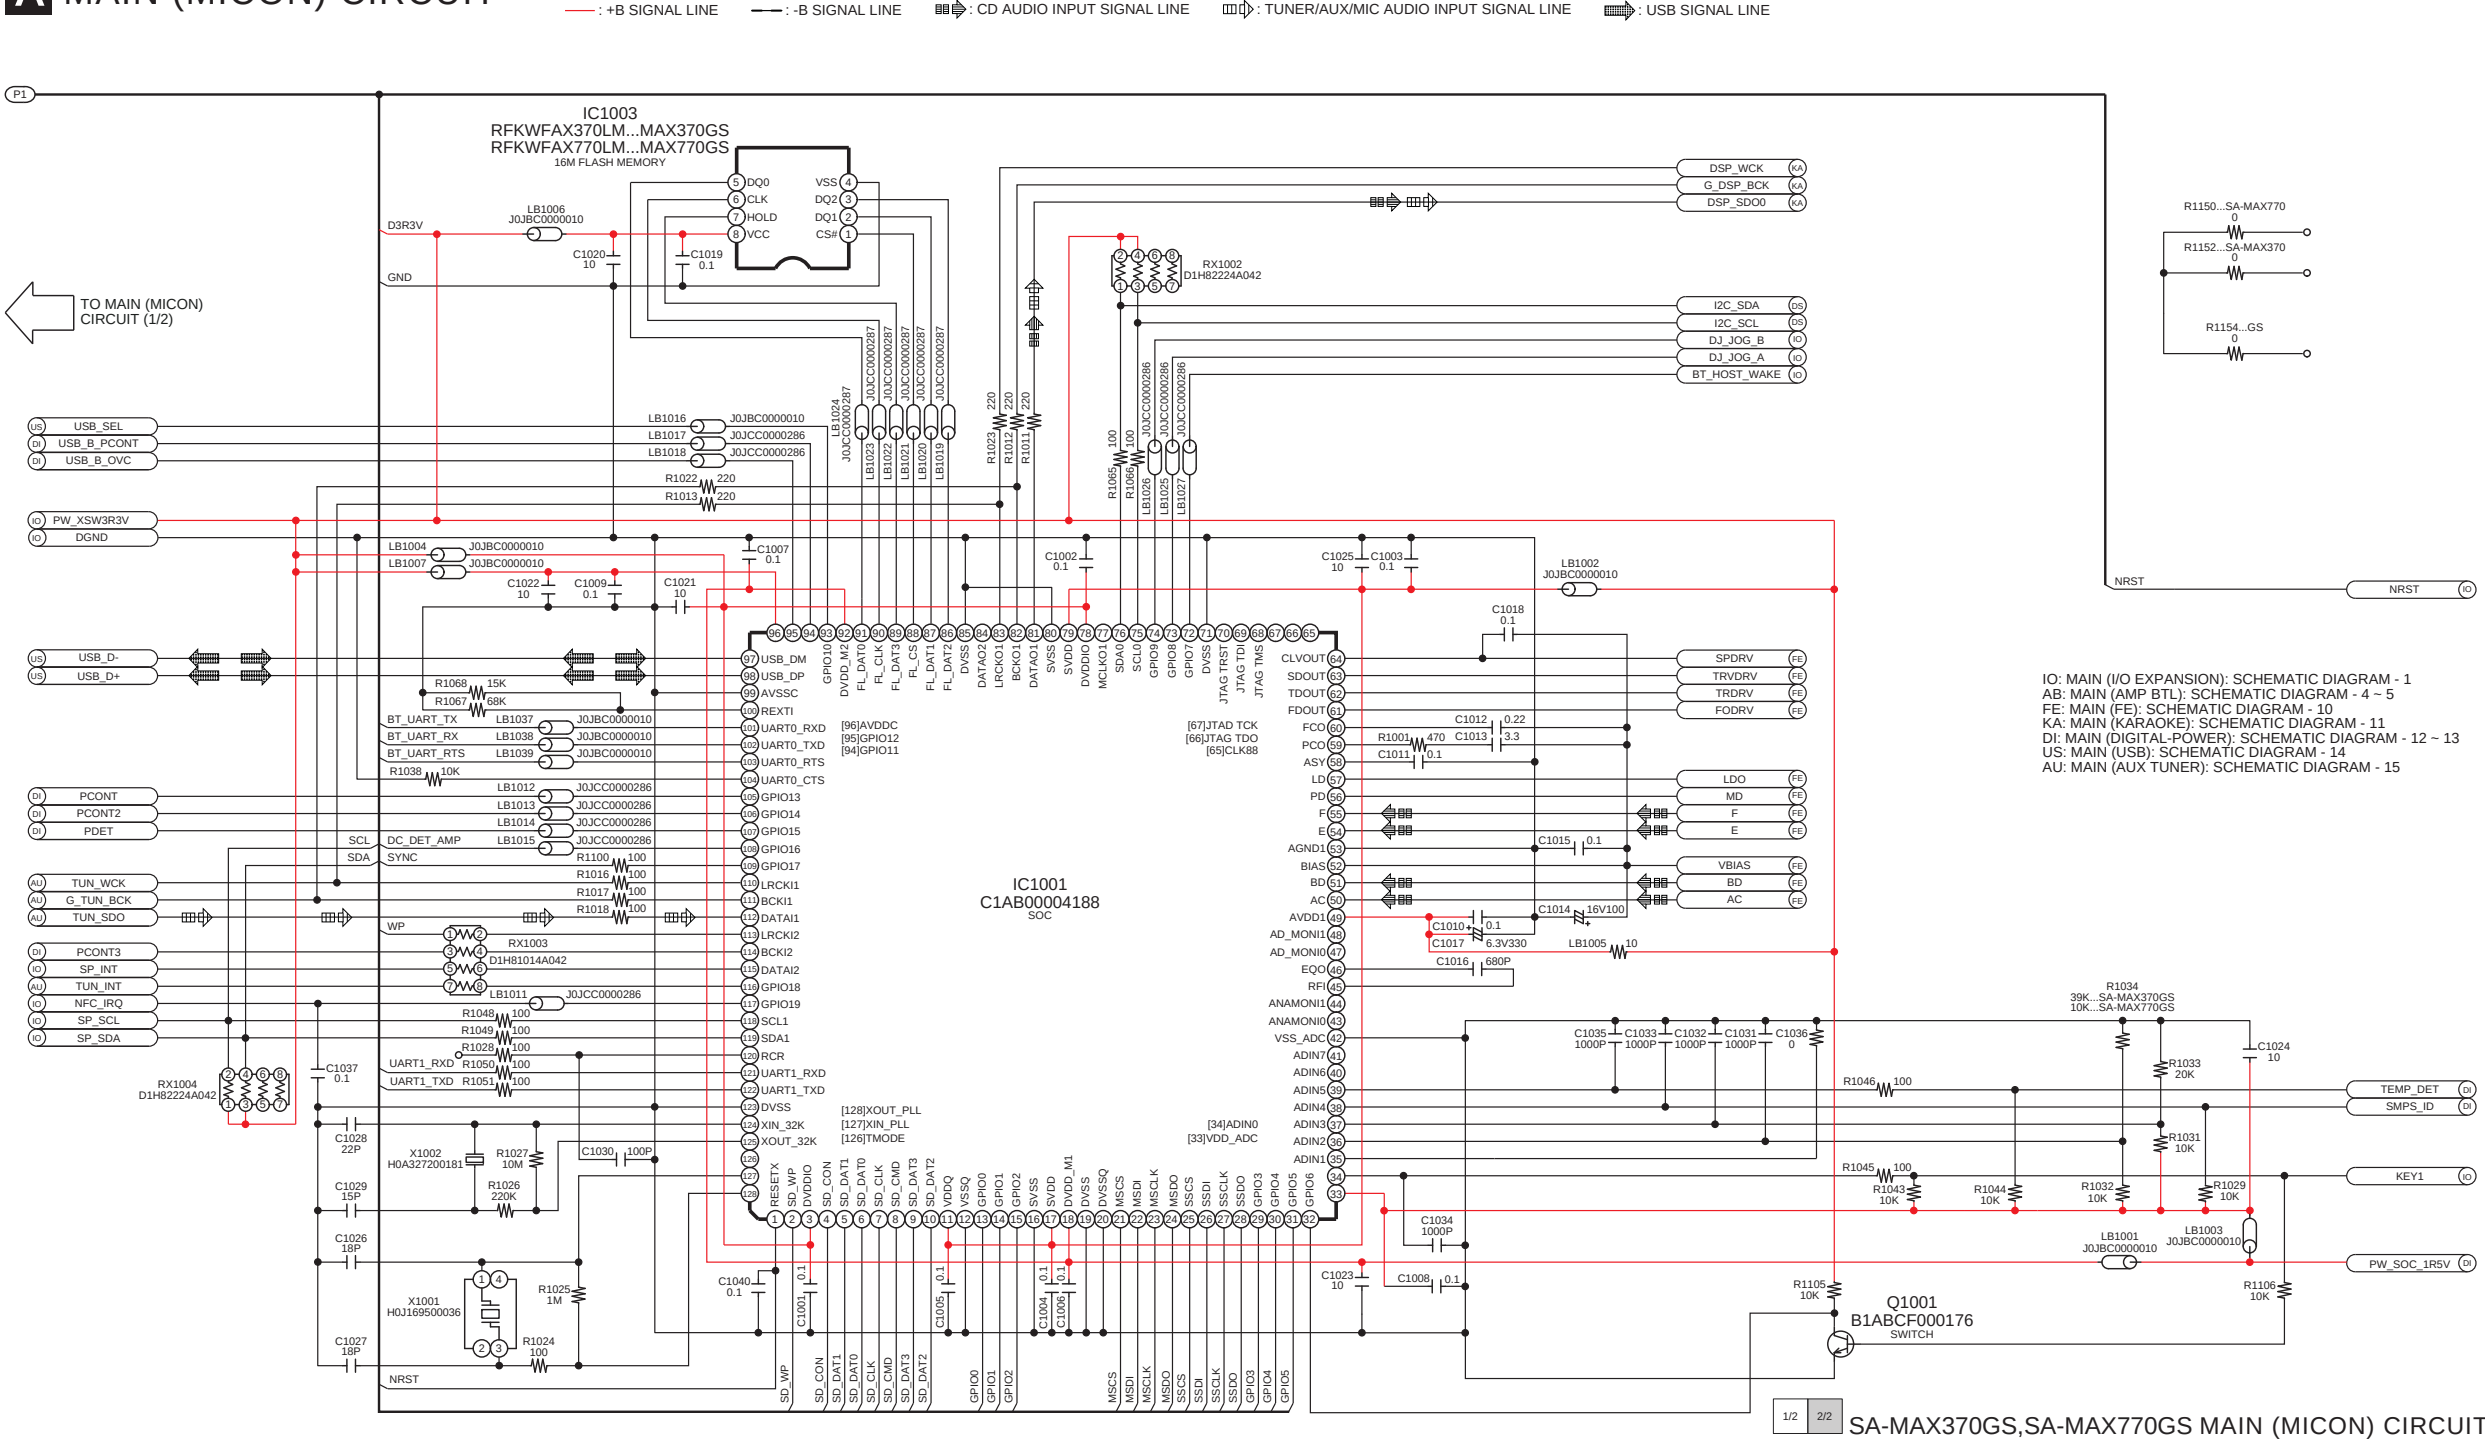


6.9. Main (Amp Single) Circuit (1/2)

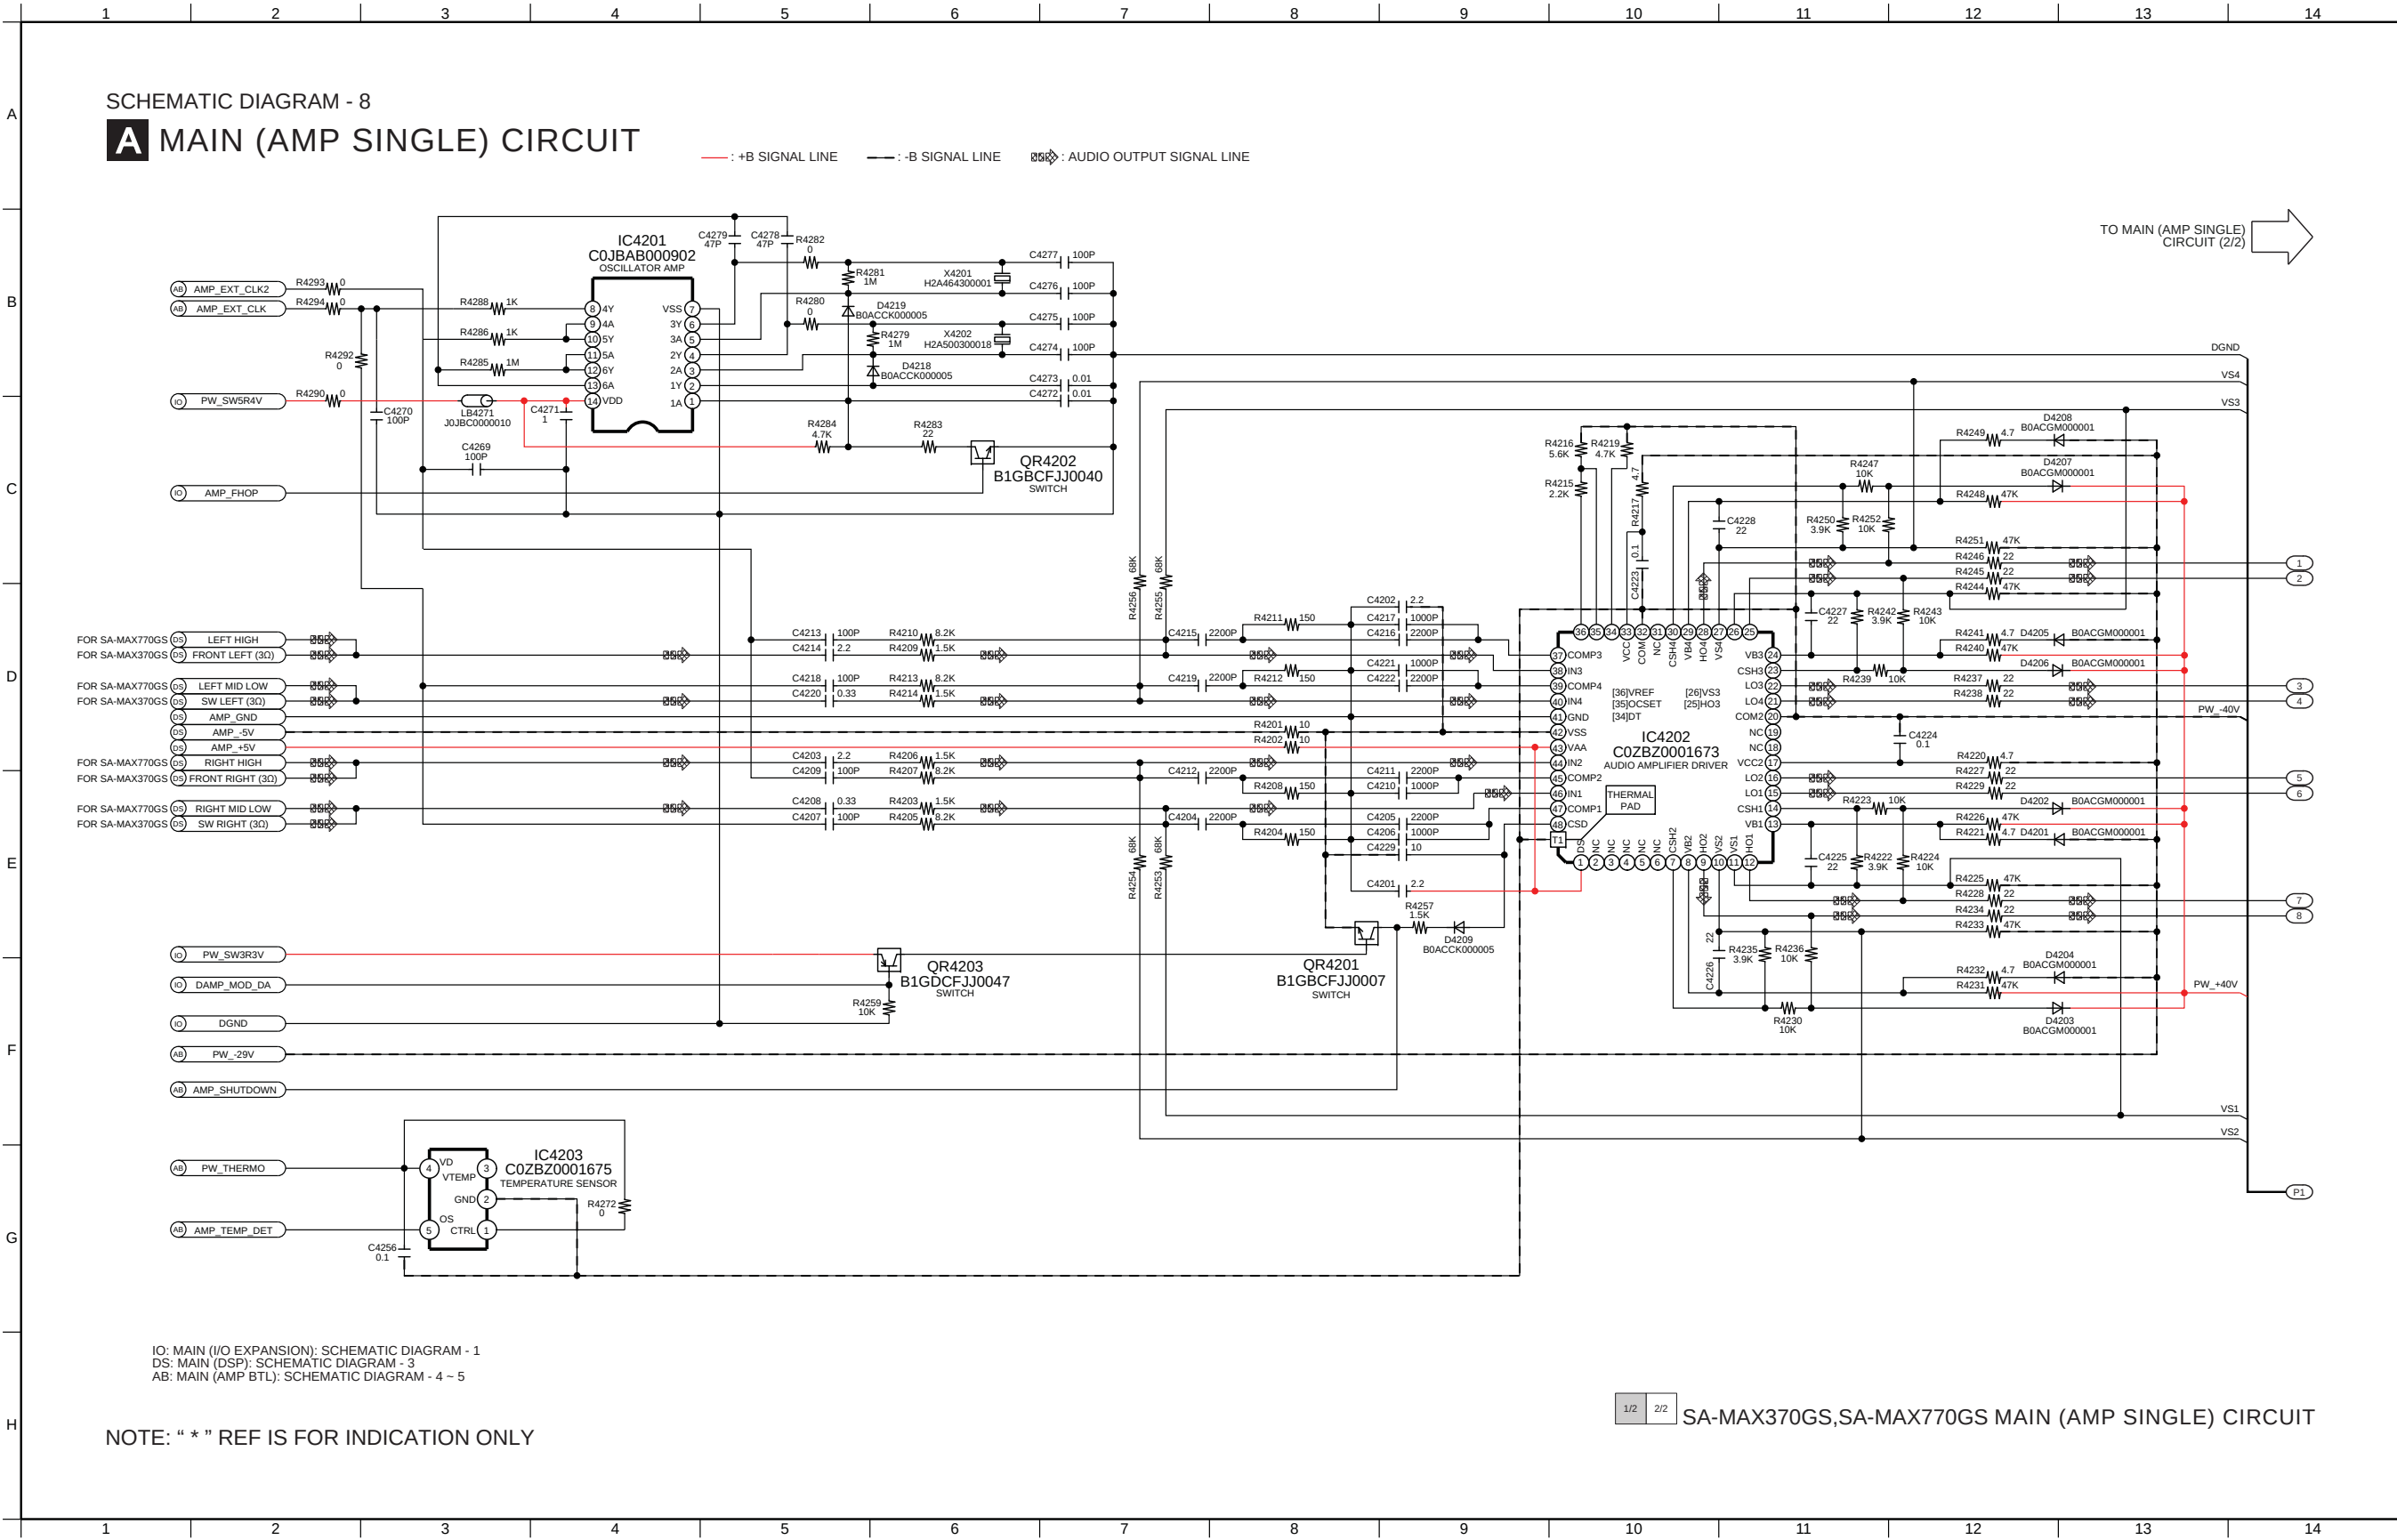

6.10. Main (Amp Single) Circuit (2/2)

SCHEMATIC DIAGRAM - 9

A MAIN (AMP SINGLE) CIRCUIT

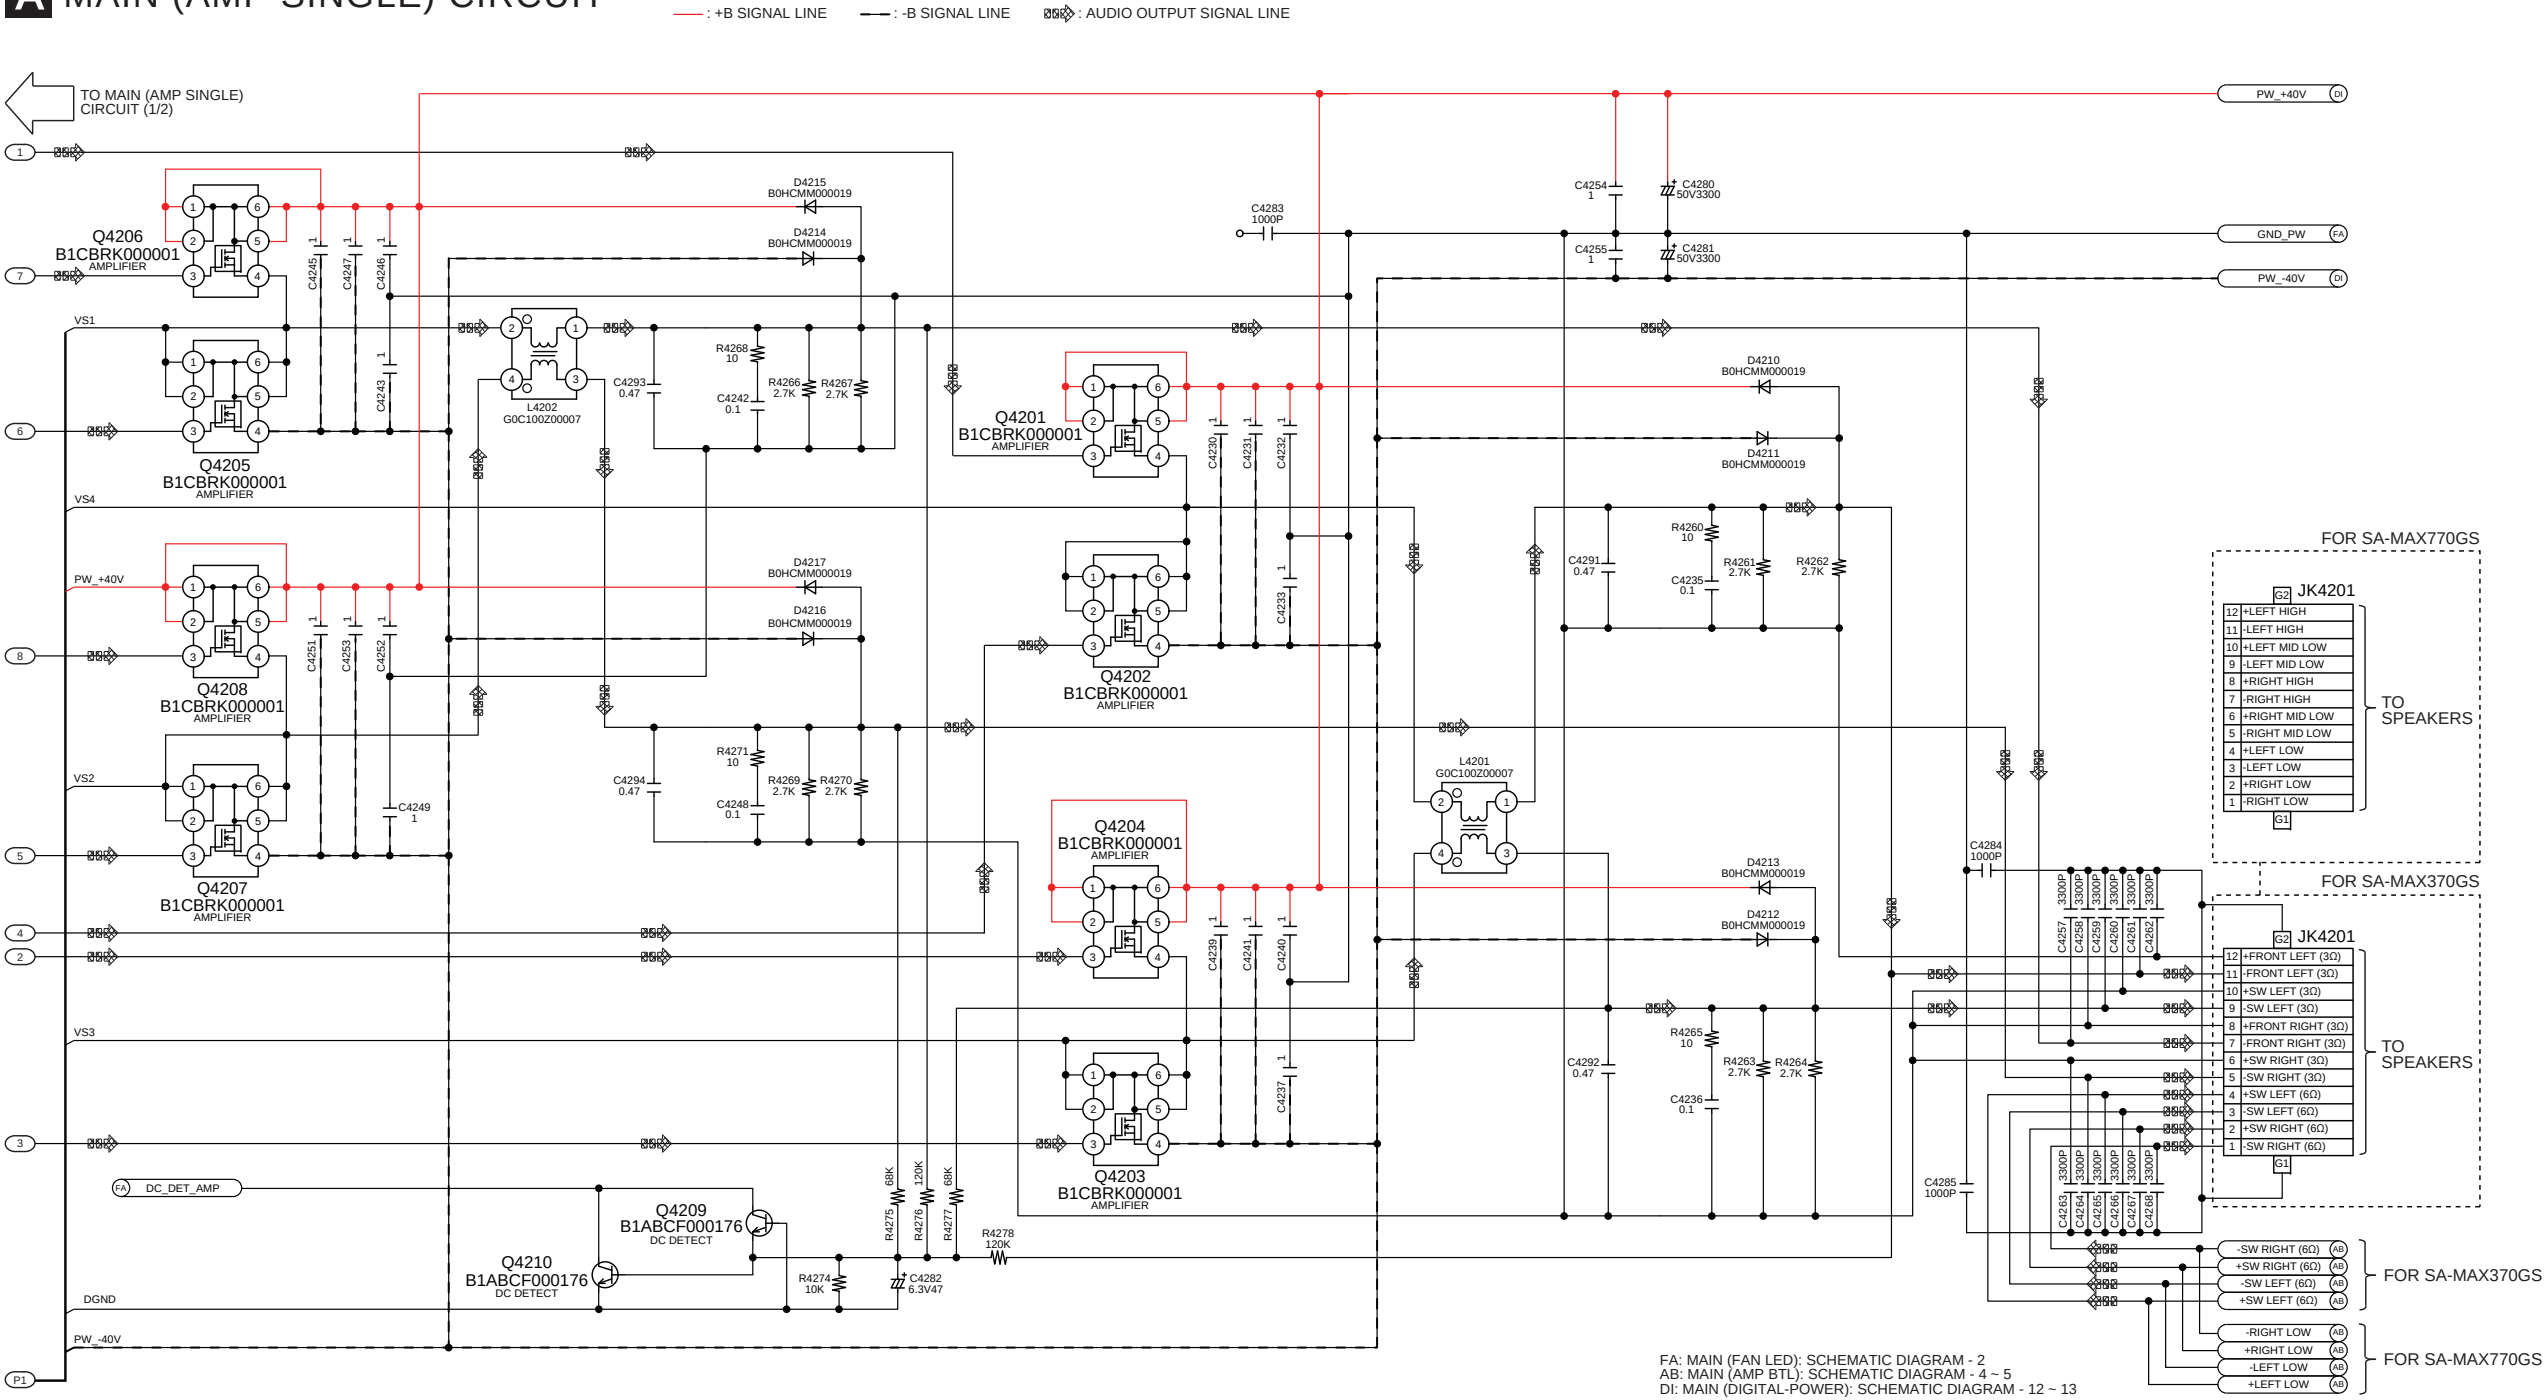


NOTE: " * " REF IS FOR INDICATION ONLY

6.12. Main (Karaoke) Circuit

SCHEMATIC DIAGRAM - 11

A MAIN (KARAOKE) CIRCUIT


—: +B SIGNAL LINE : CD AUDIO INPUT SIGNAL LINE : TUNER/AUX/MIC AUDIO INPUT SIGNAL LINE

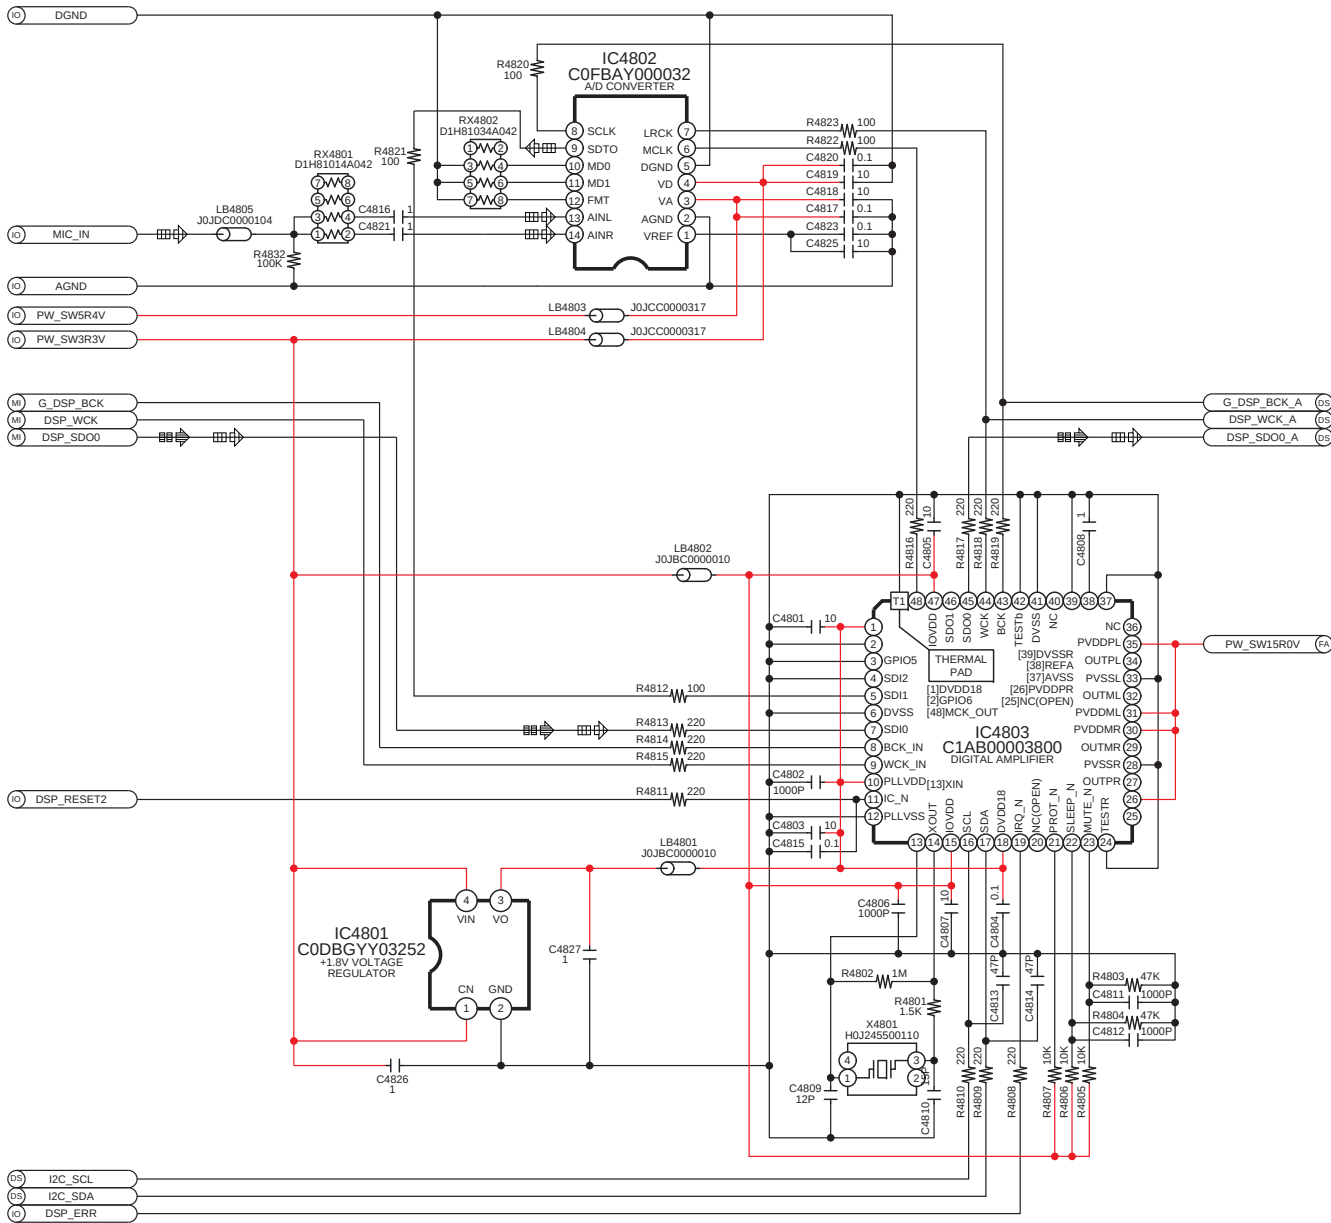

IO: MAIN (I/O EXPANSION): SCHEMATIC DIAGRAM - 1
FA: MAIN (FAN LED): SCHEMATIC DIAGRAM - 2
DS: MAIN (DSP): SCHEMATIC DIAGRAM - 3
MI: MAIN (MICON): SCHEMATIC DIAGRAM - 6 ~ 7

SA-MAX370GS,SA-MAX770GS MAIN (KARAOKE) CIRCUIT

6.13. Main (Digital-Power) Circuit (1/2)

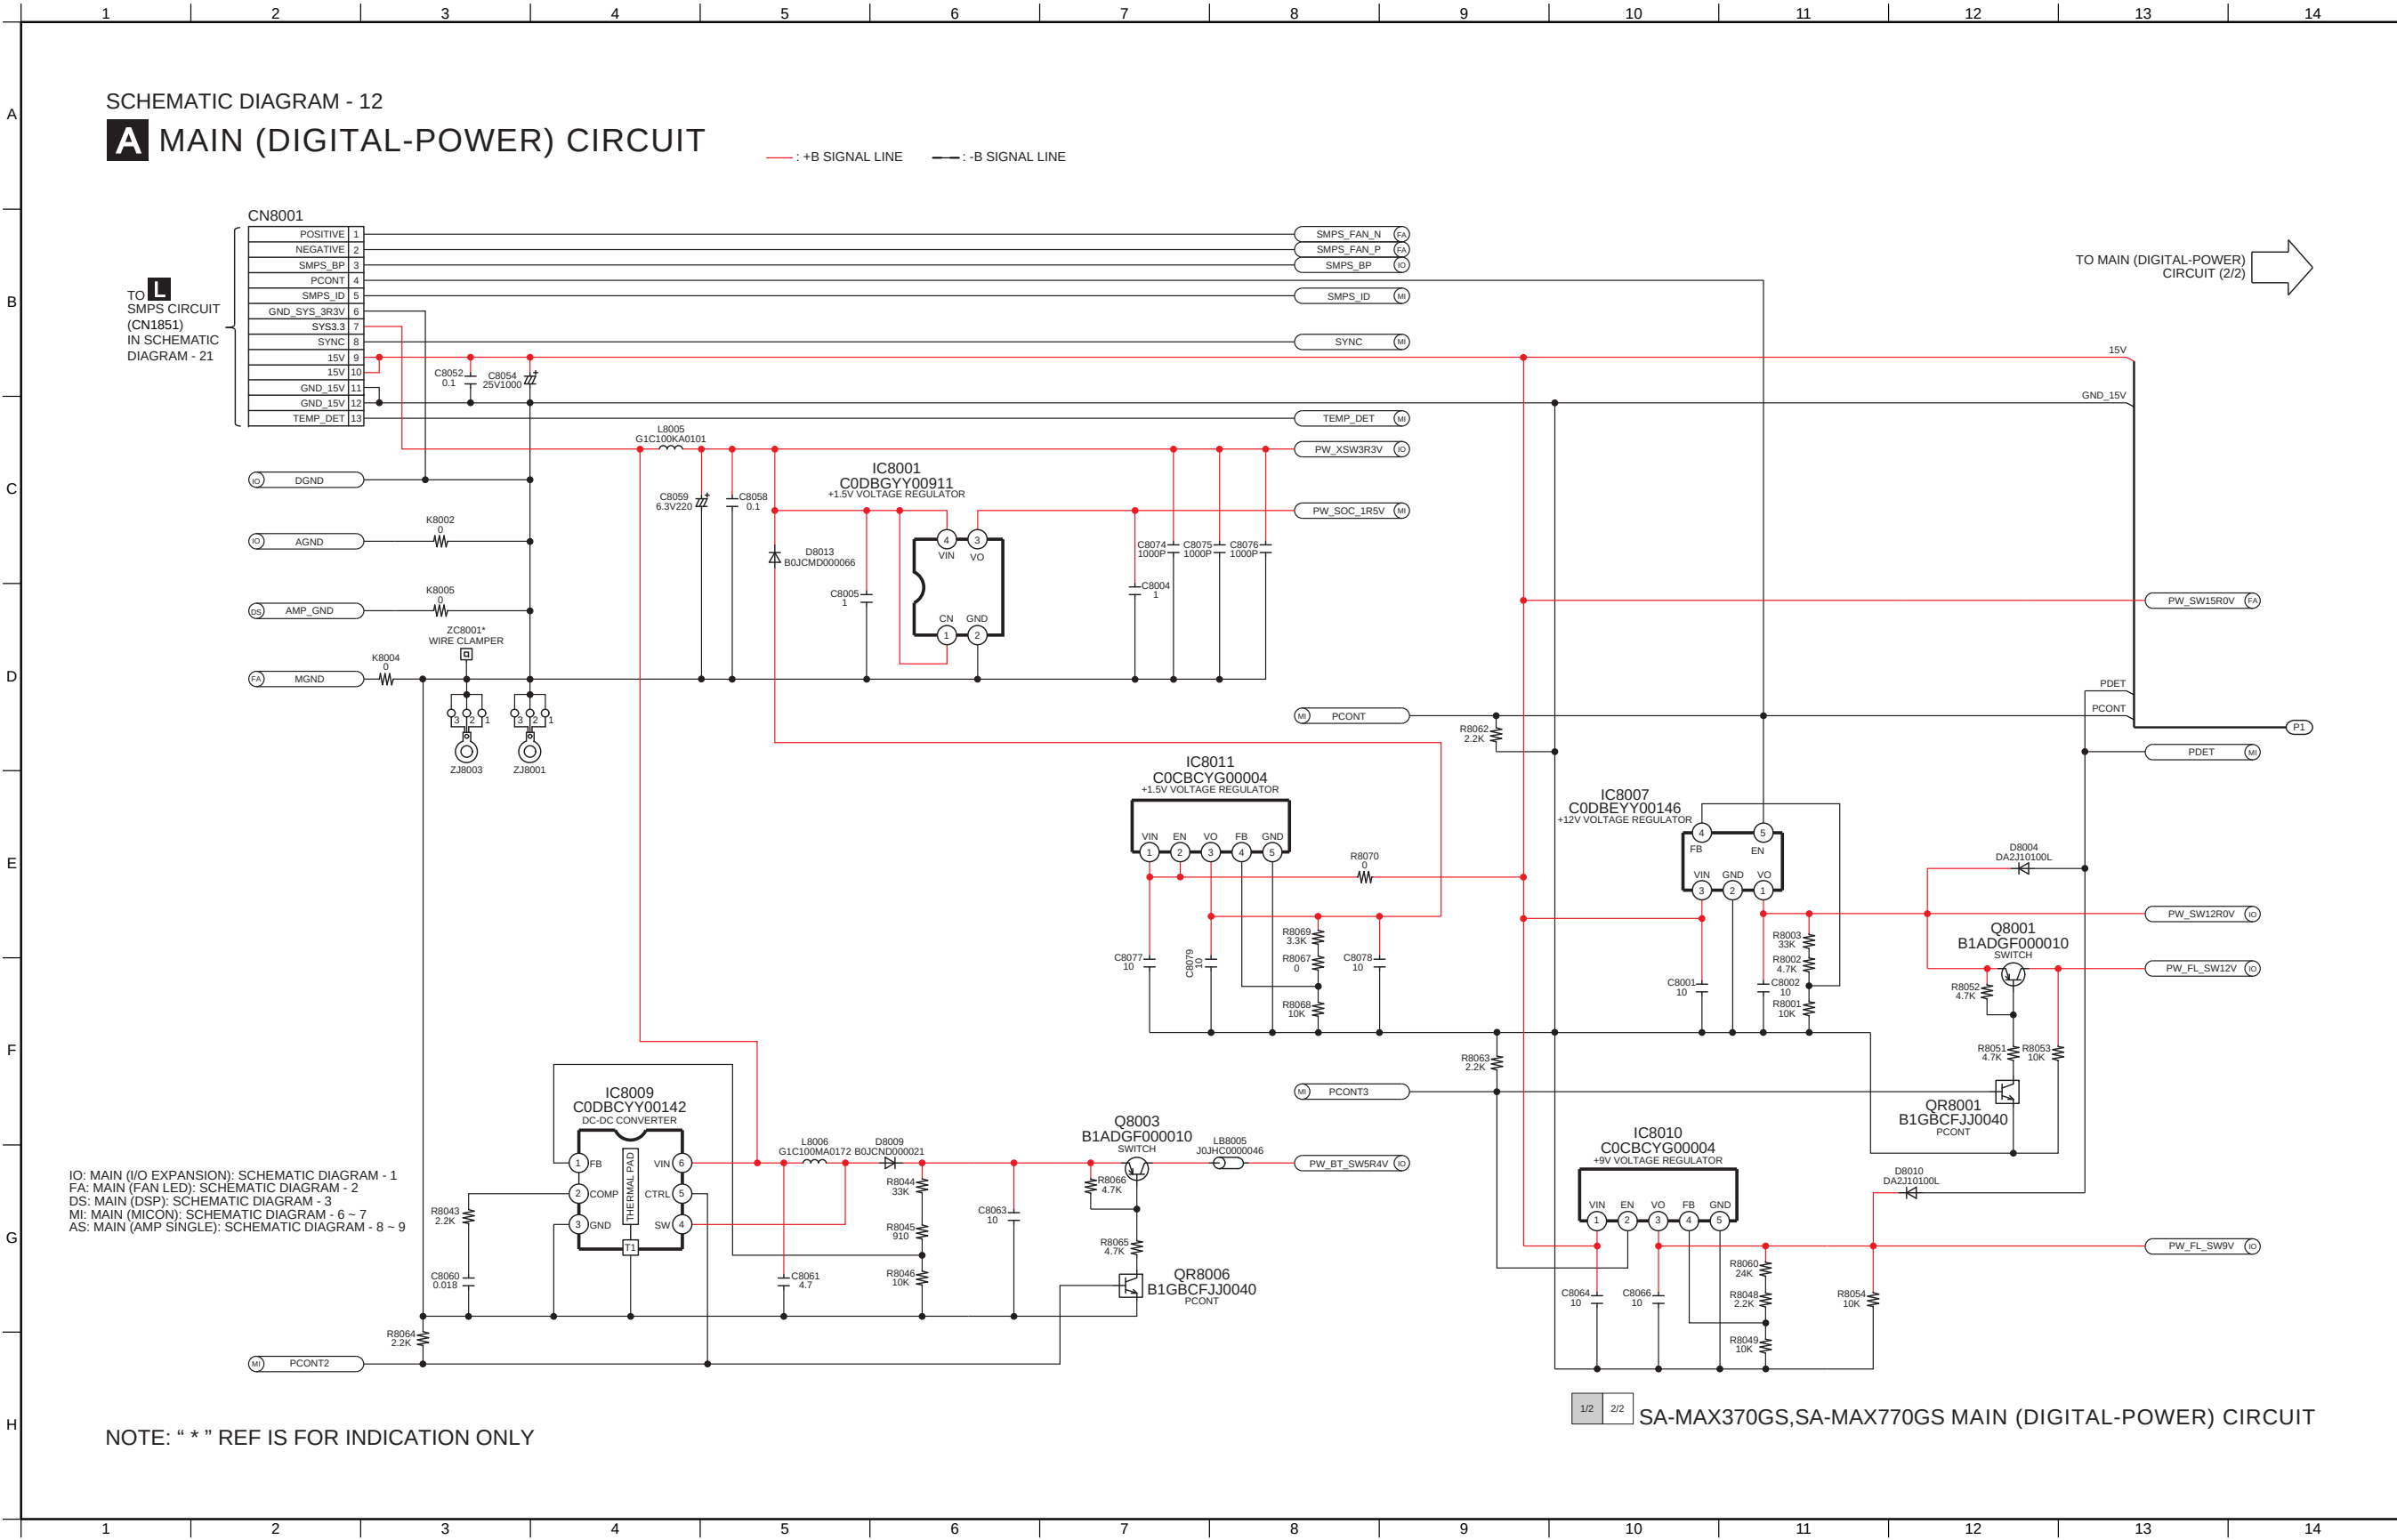


6.14. Main (Digital-Power) Circuit (2/2)

SCHEMATIC DIAGRAM - 13

A MAIN (DIGITAL-POWER) CIRCUIT

— : +B SIGNAL LINE — : -B SIGNAL LINE


TO MAIN (DIGITAL-POWER)
CIRCUIT (1/2)

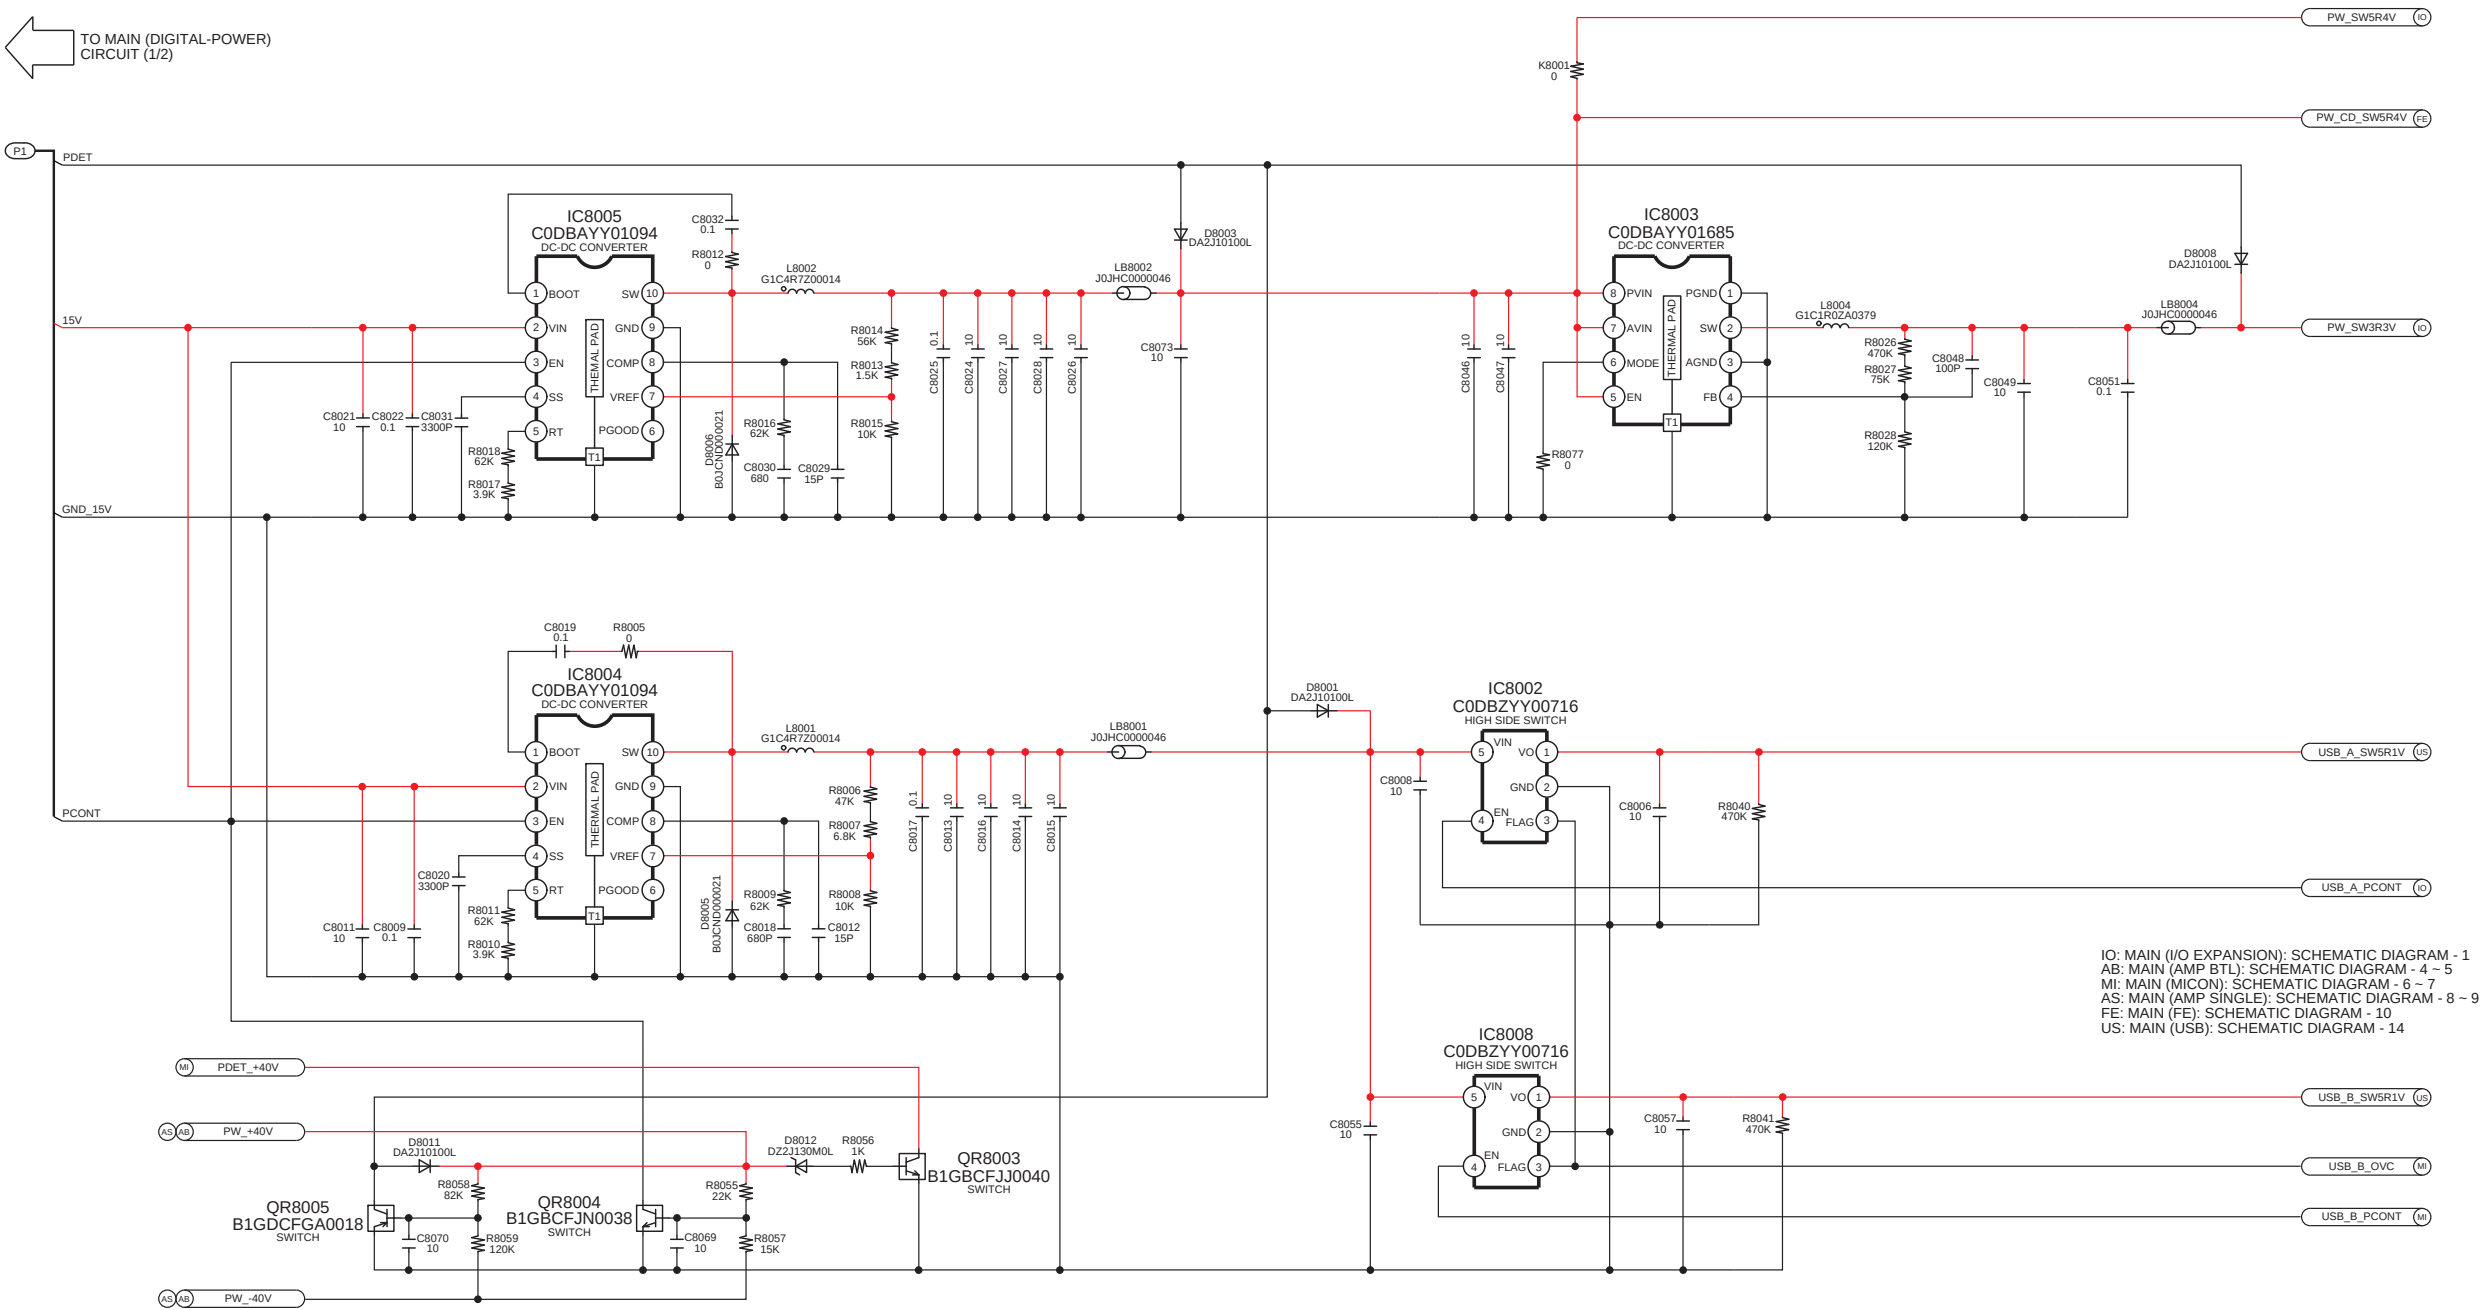


IO: MAIN (I/O EXPANSION): SCHEMATIC DIAGRAM - 1
AB: MAIN (AMP BTL): SCHEMATIC DIAGRAM - 4 ~ 5
MI: MAIN (MICON): SCHEMATIC DIAGRAM - 6 ~ 7
AS: MAIN (AMP SINGLE): SCHEMATIC DIAGRAM - 8 ~ 9
FE: MAIN (FE): SCHEMATIC DIAGRAM - 10
US: MAIN (USB): SCHEMATIC DIAGRAM - 14

1/2 2/2 SA-MAX370GS,SA-MAX770GS MAIN (DIGITAL-POWER) CIRCUIT

6.15. Main (USB) Circuit

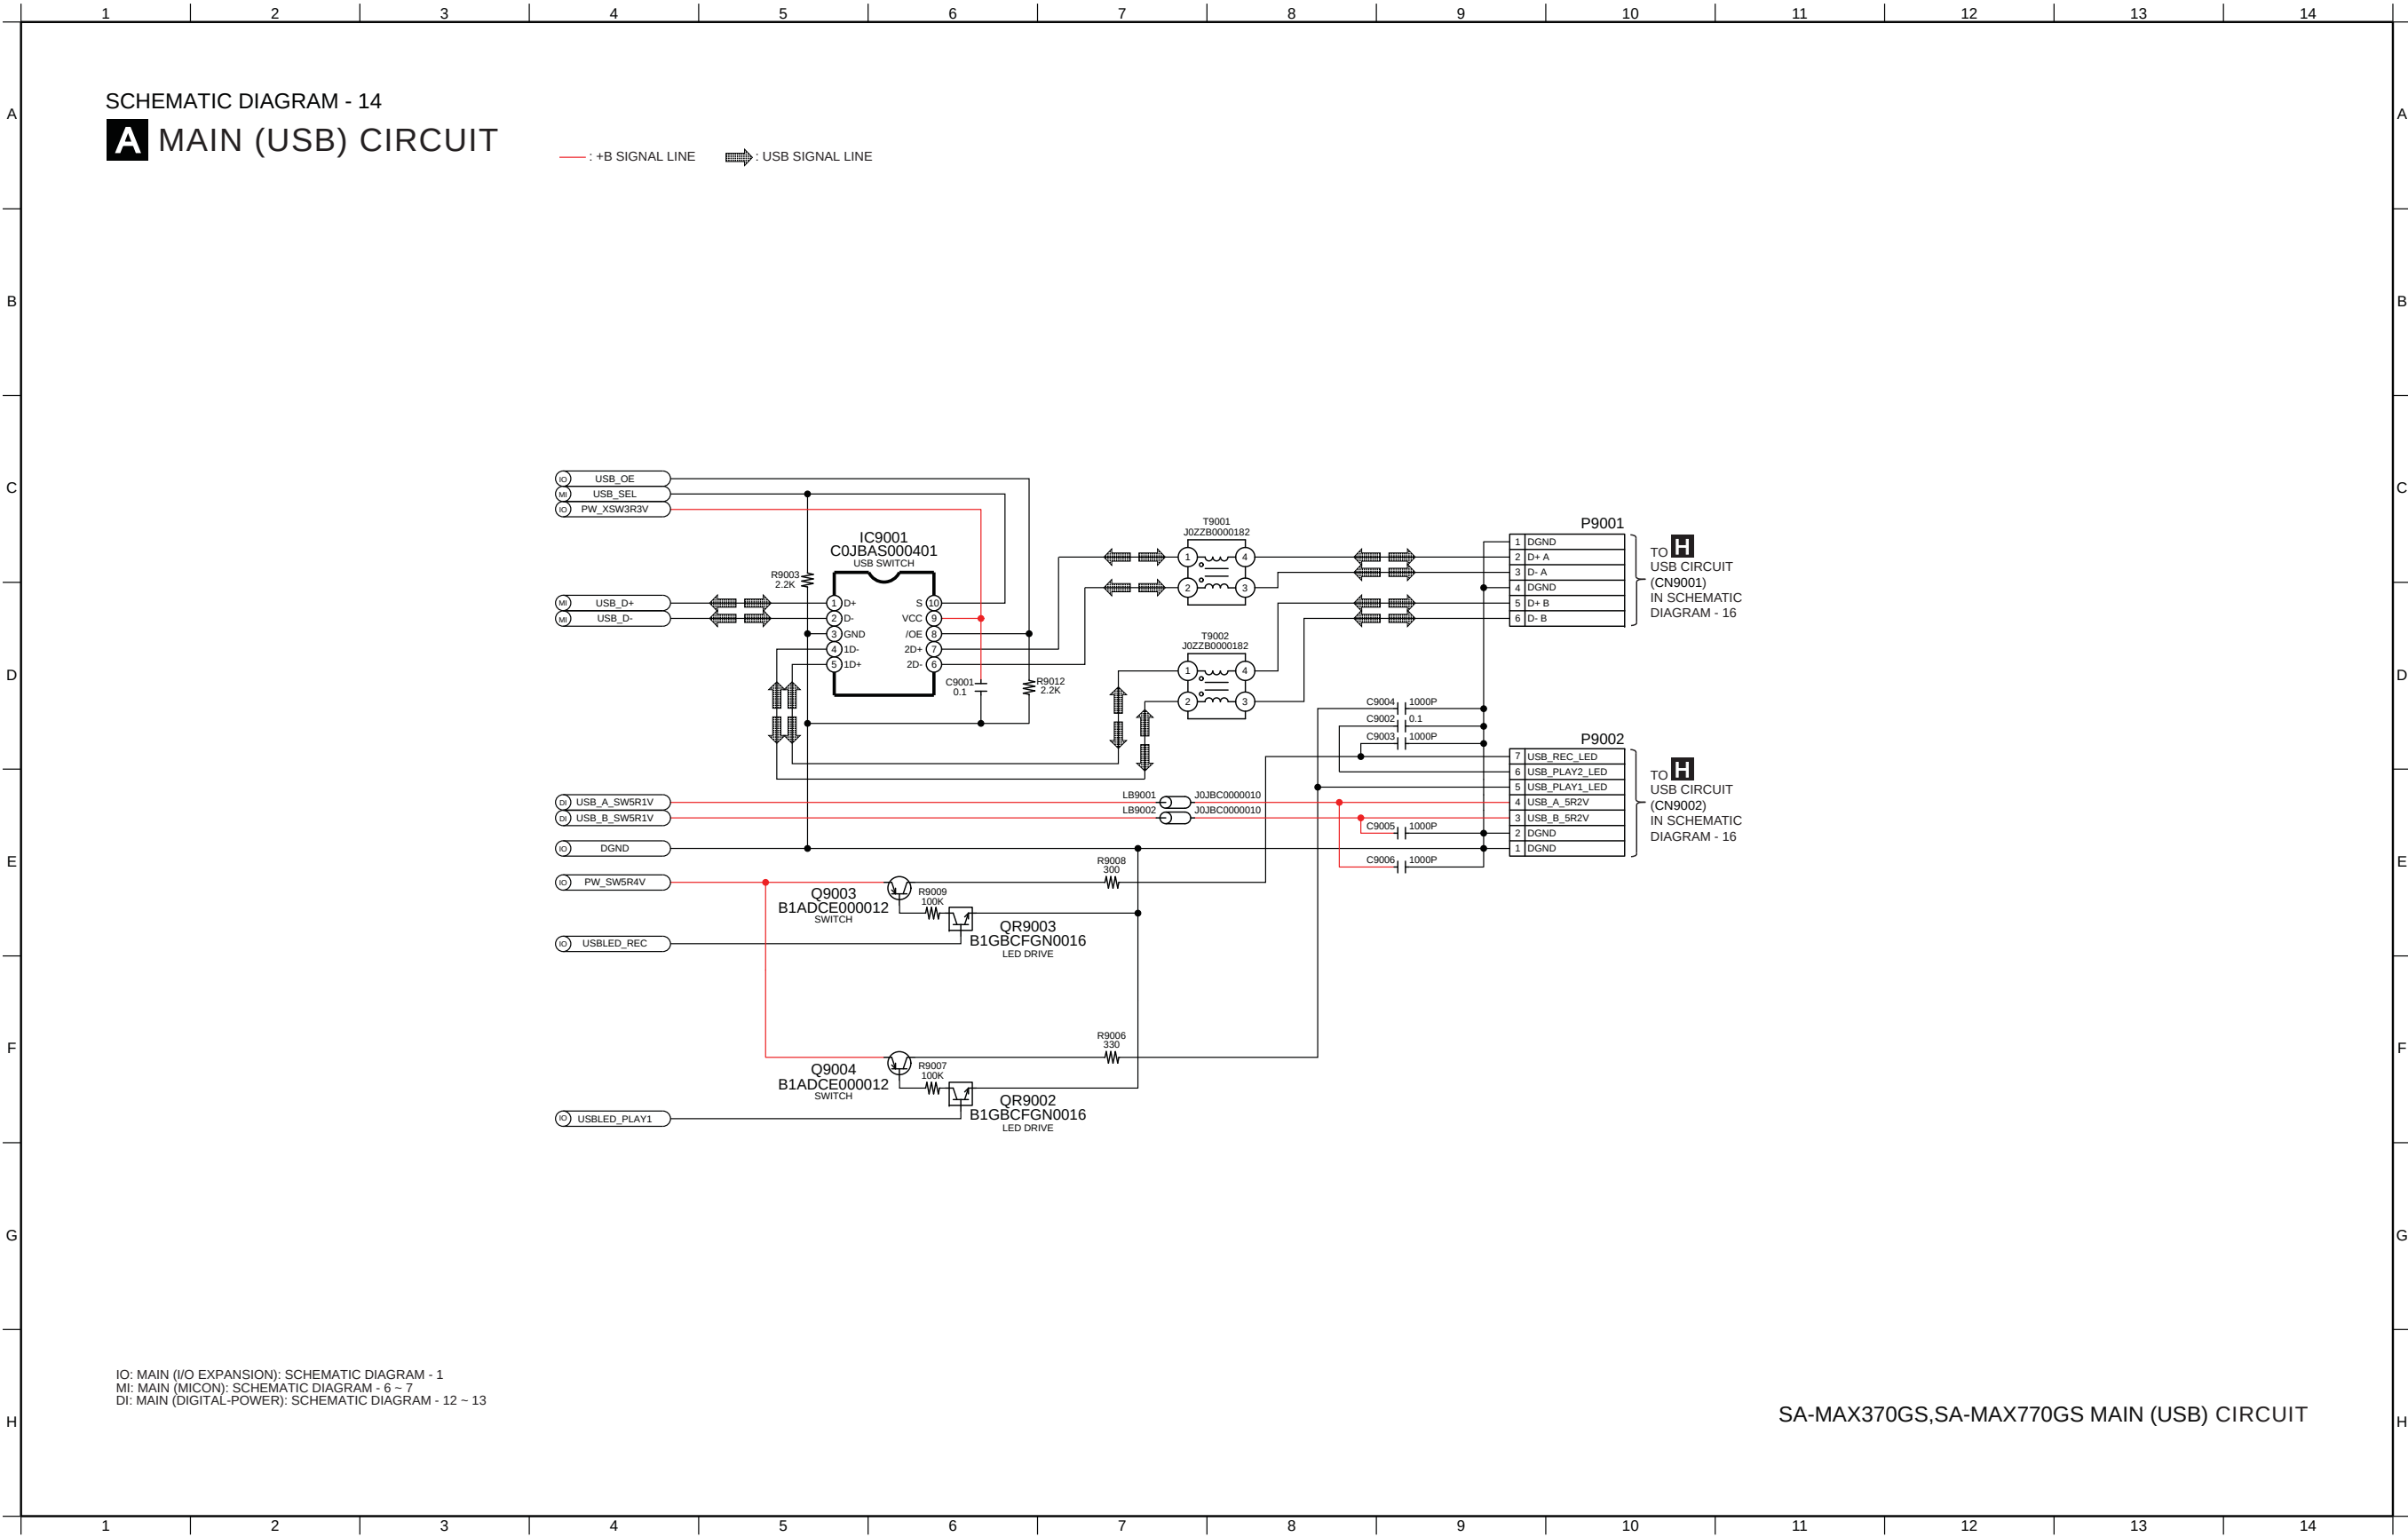


6.16. Main (AUX Tuner) Circuit

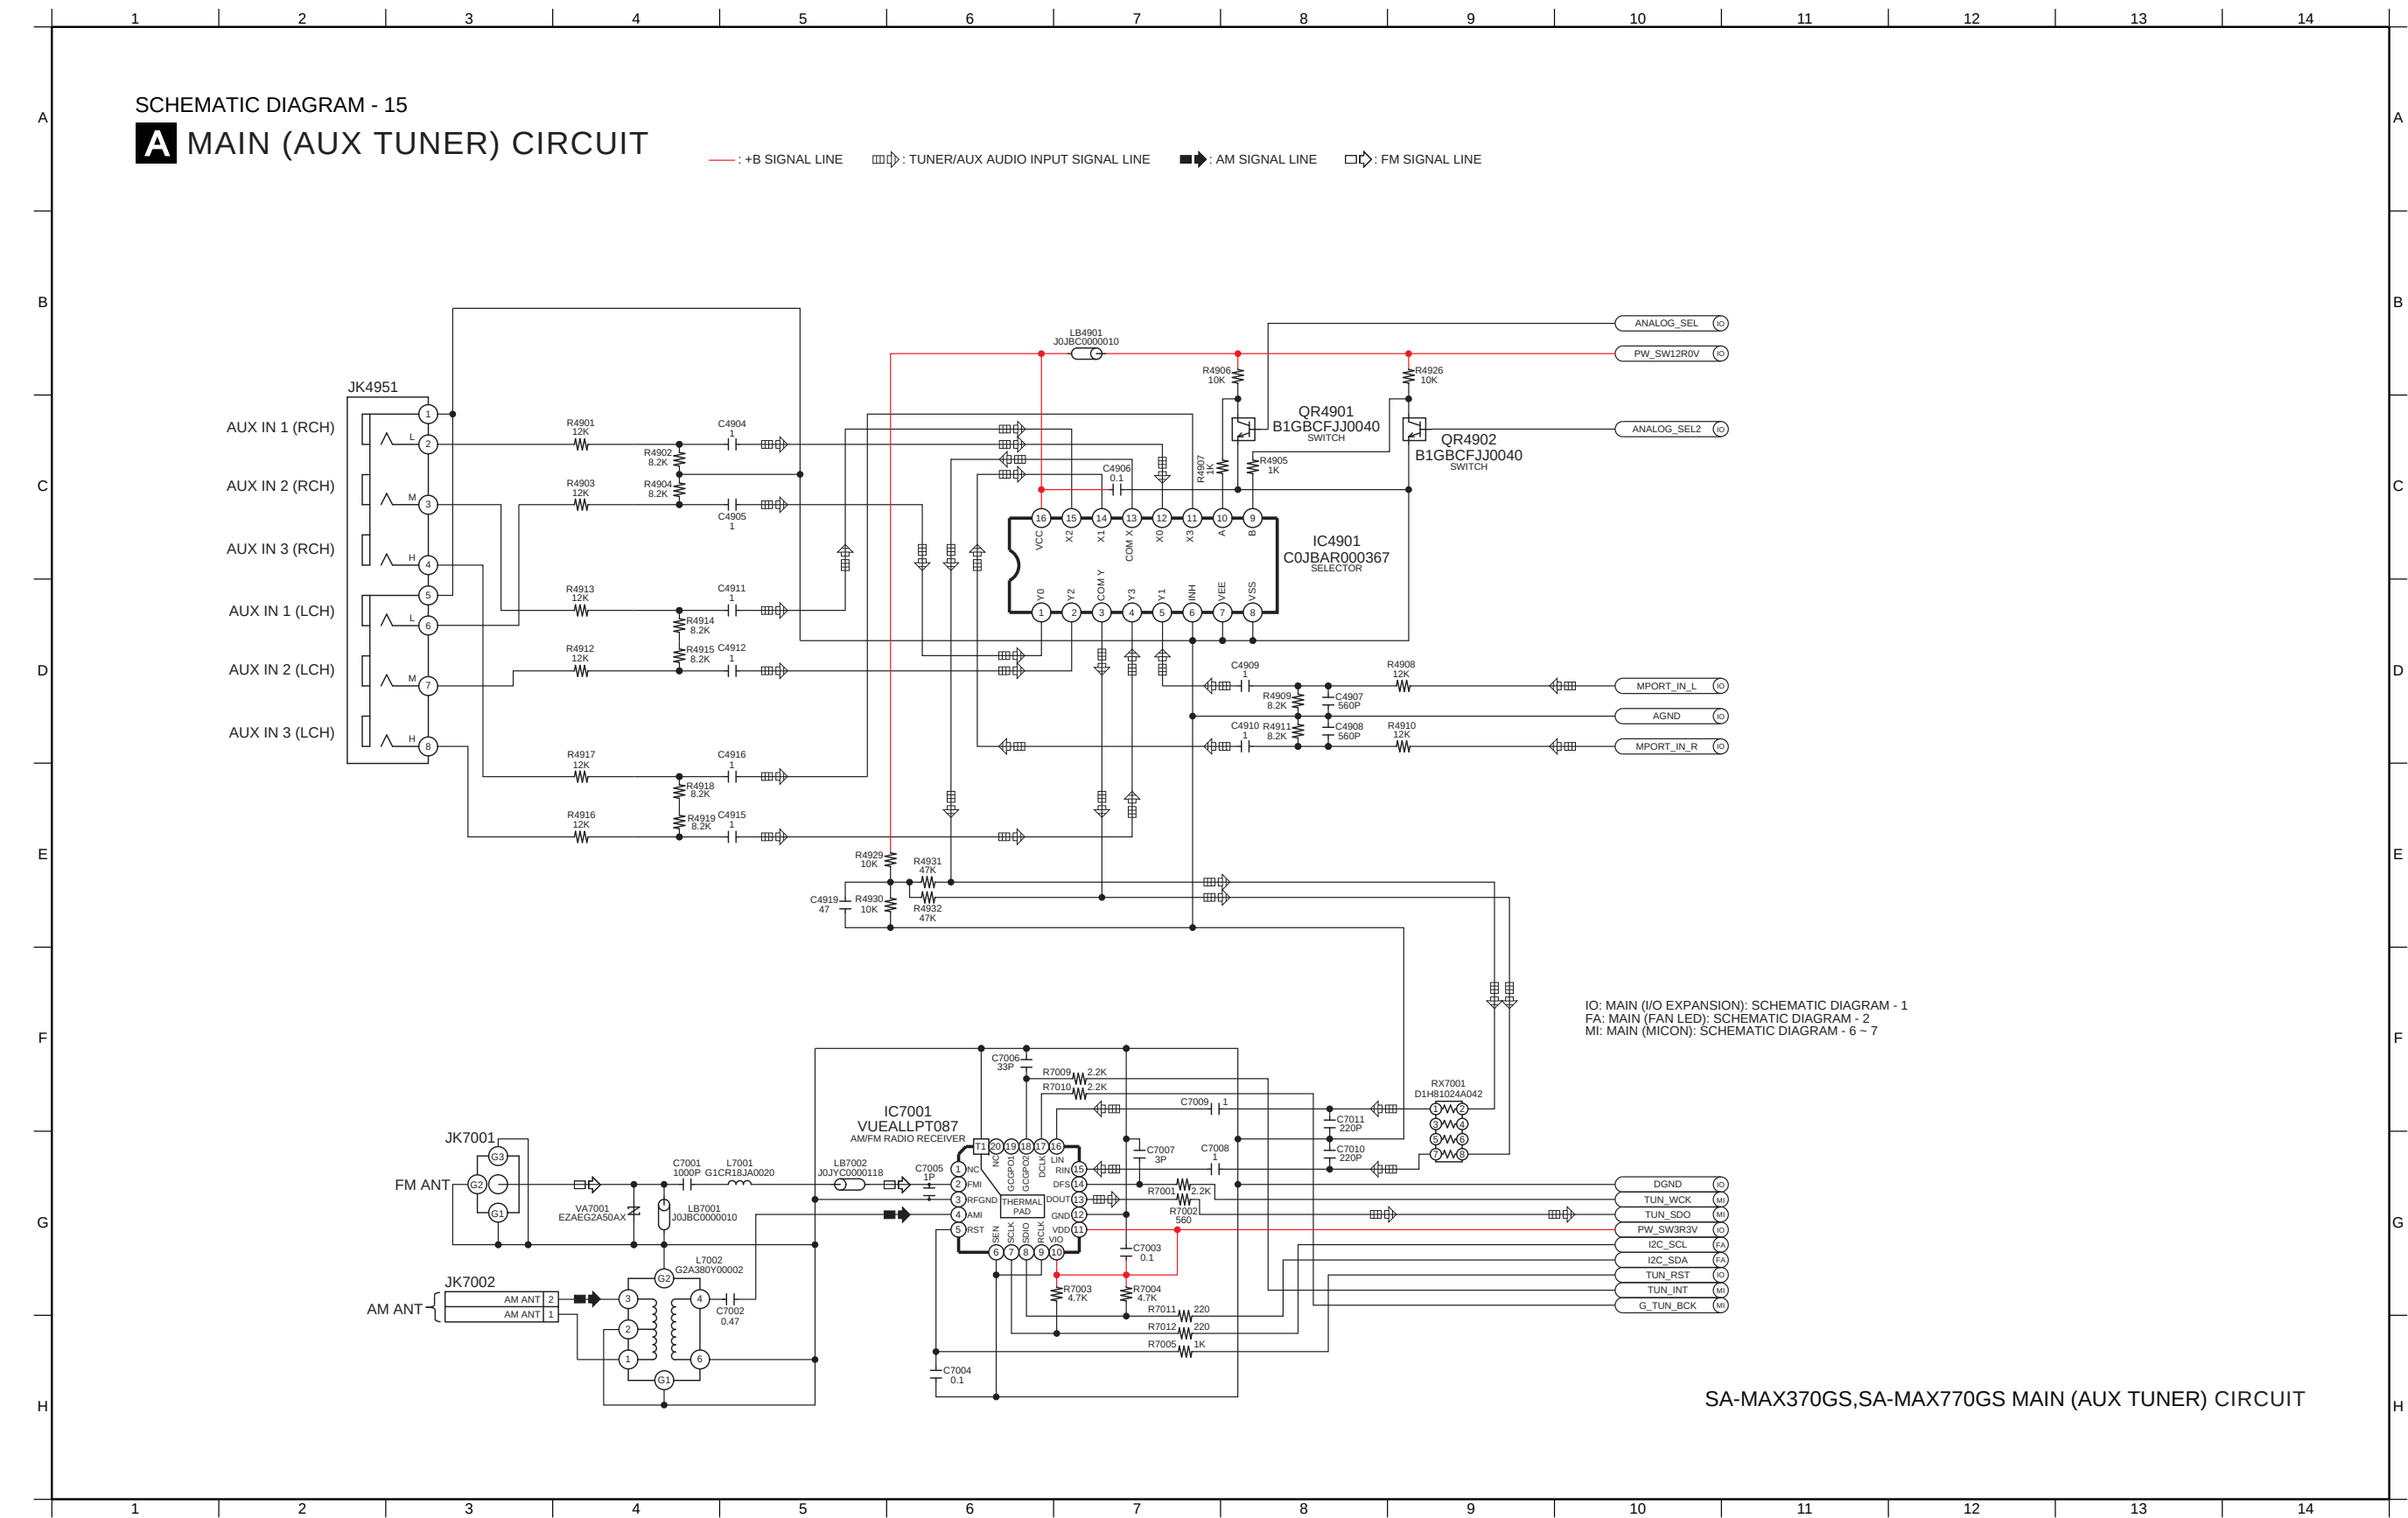


6.17. Illumination Left, Illumination Right, Button Right & USB Circuit

SCHEMATIC DIAGRAM - 16


B ILLUMINATION LEFT CIRCUIT

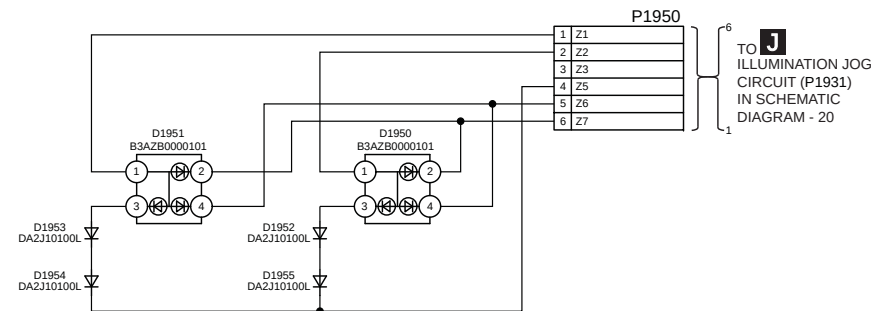


C ILLUMINATION RIGHT CIRCUIT

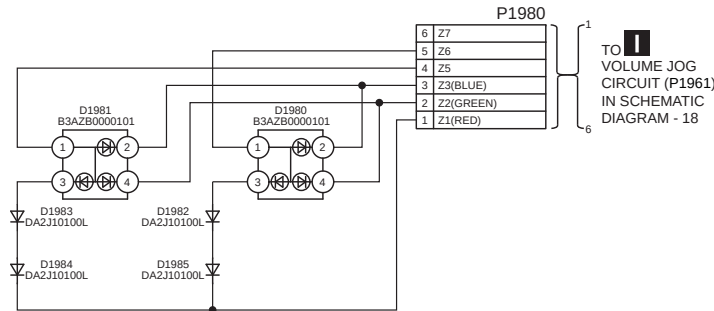

F BUTTON RIGHT CIRCUIT

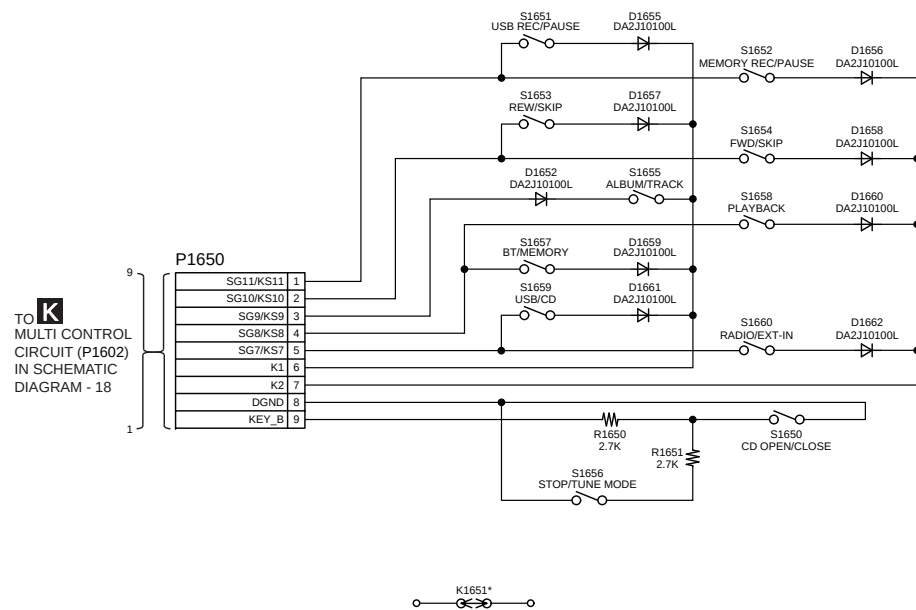

H USB CIRCUIT

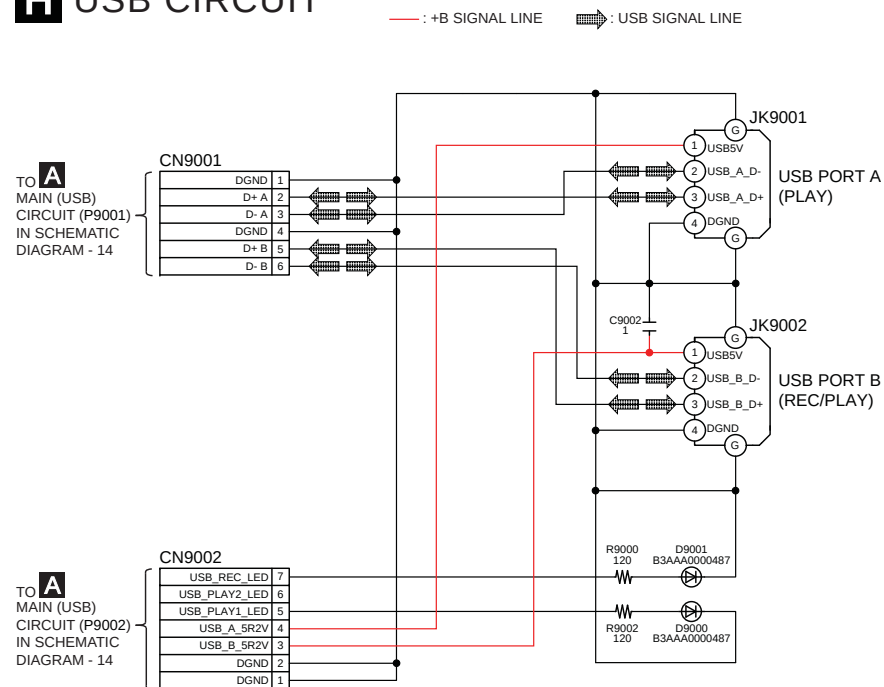

NOTE: " * " REF IS FOR INDICATION ONLY


SA-MAX370GS,SA-MAX770GS ILLUMINATION LEFT / ILLUMINATION RIGHT / BUTTON RIGHT / USB CIRCUIT

6.18. FL Display Circuit

SCHEMATIC DIAGRAM - 17


D FL DISPLAY CIRCUIT

— : +B SIGNAL LINE — : -B SIGNAL LINE

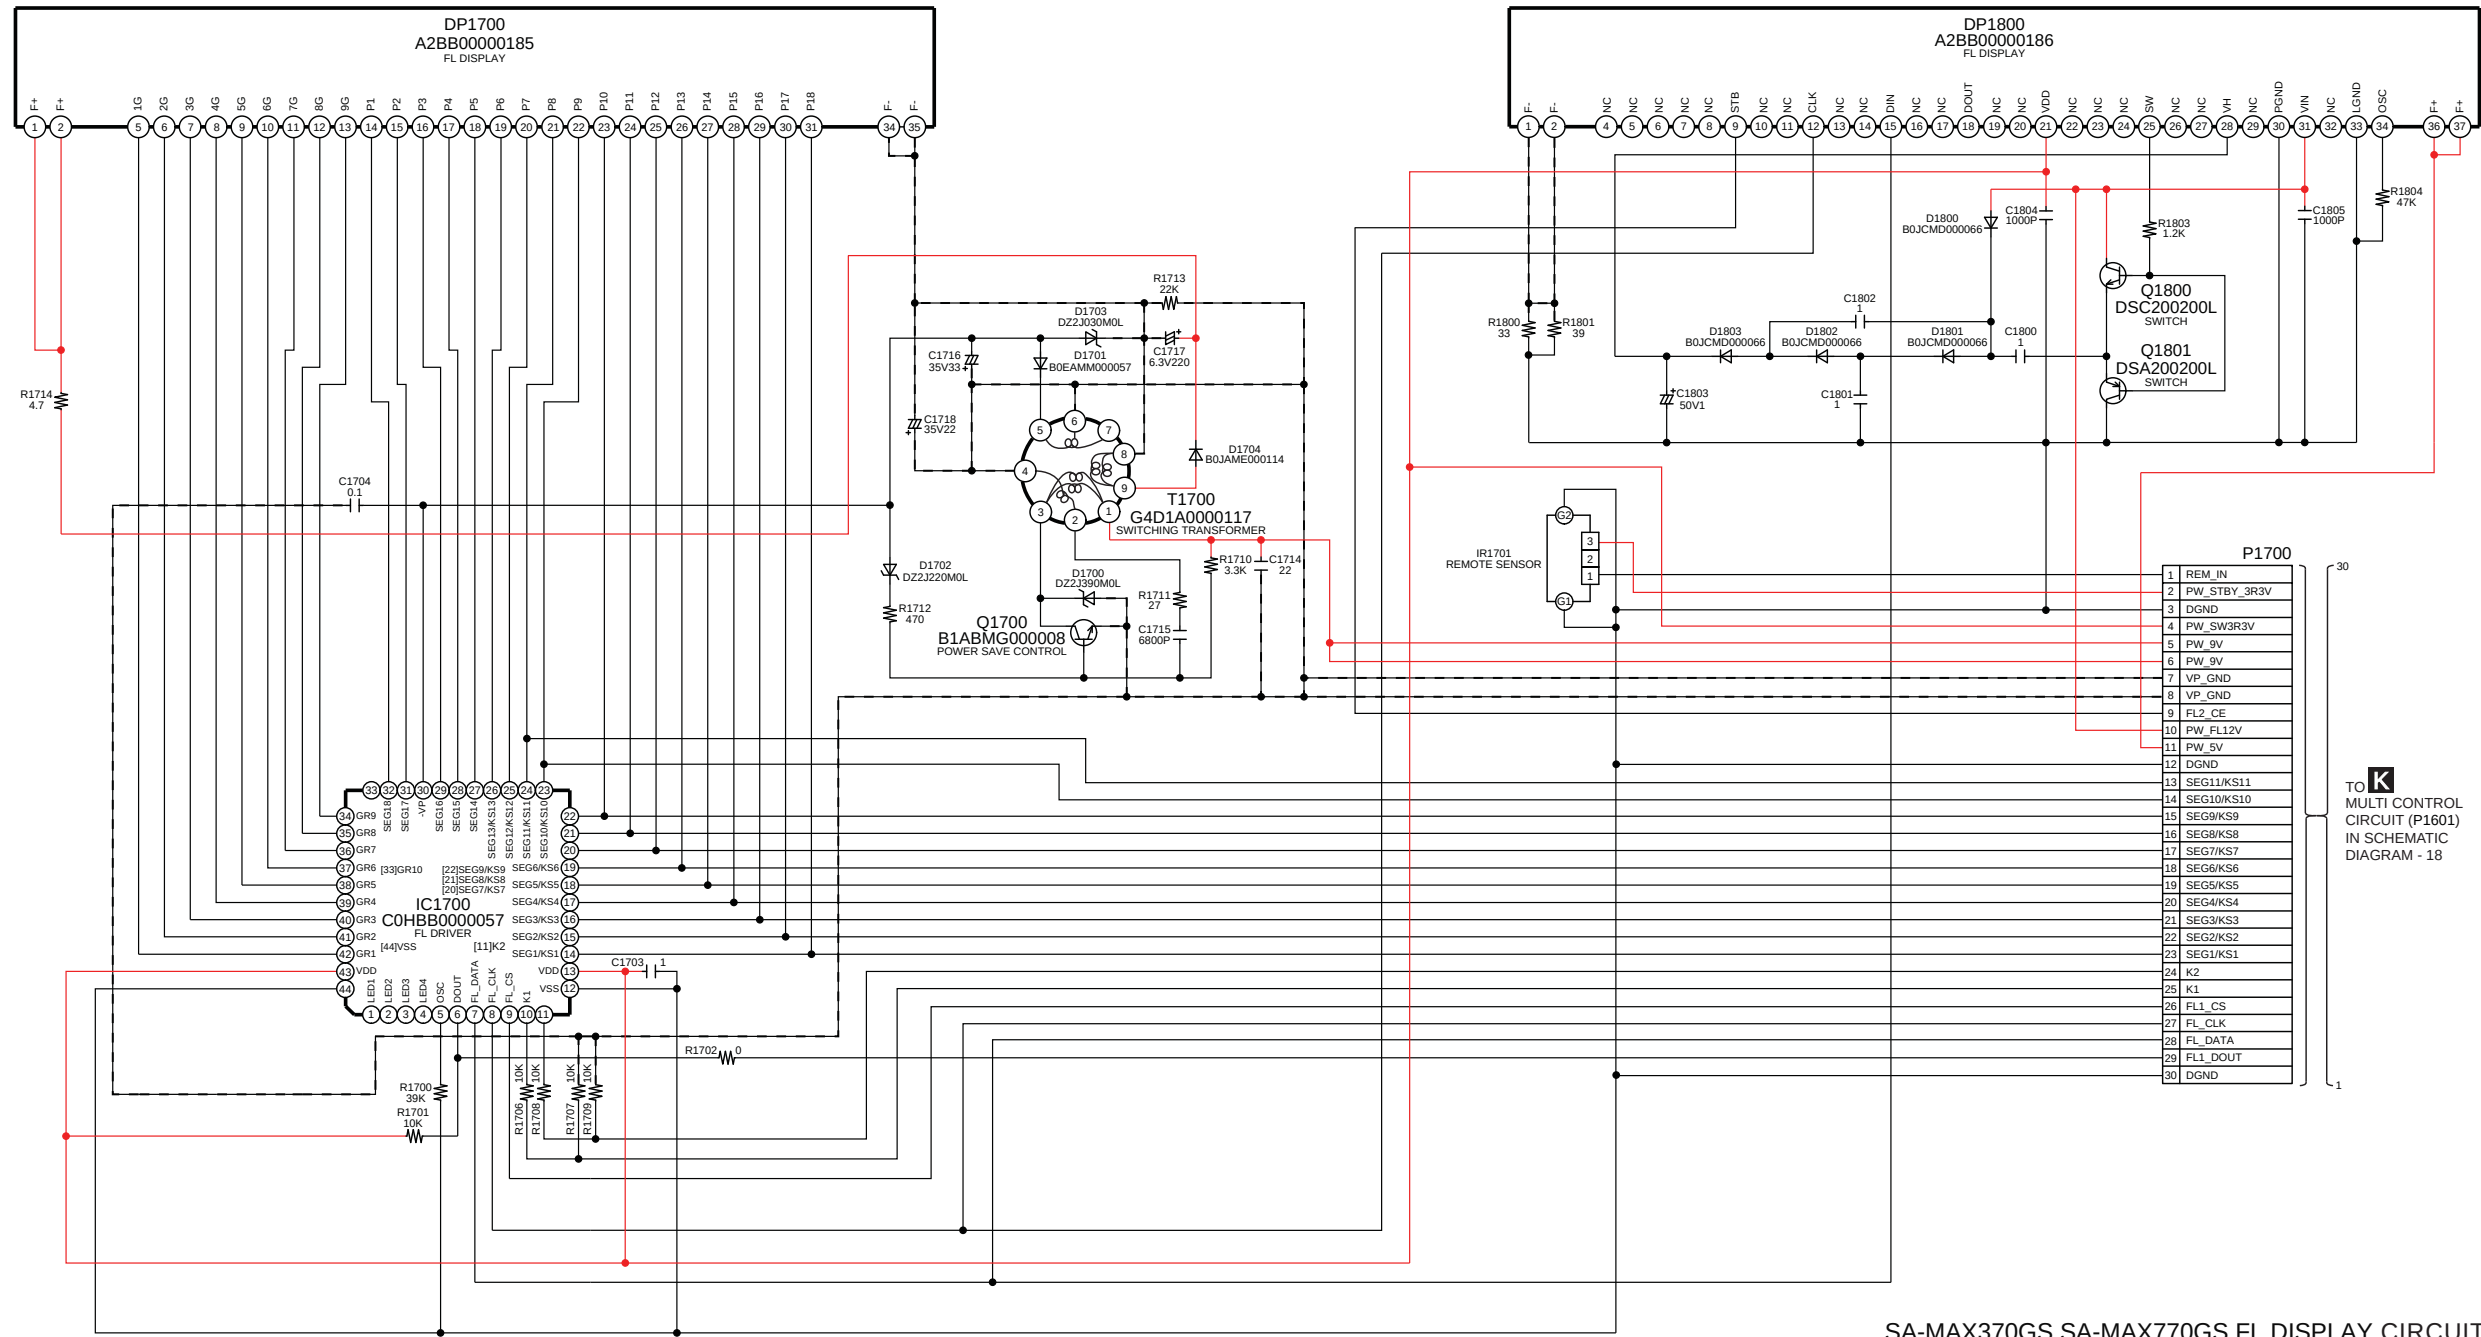


SA-MAX370GS,SA-MAX770GS FL DISPLAY CIRCUIT


6.19. Volume Jog & Multi Control Circuit

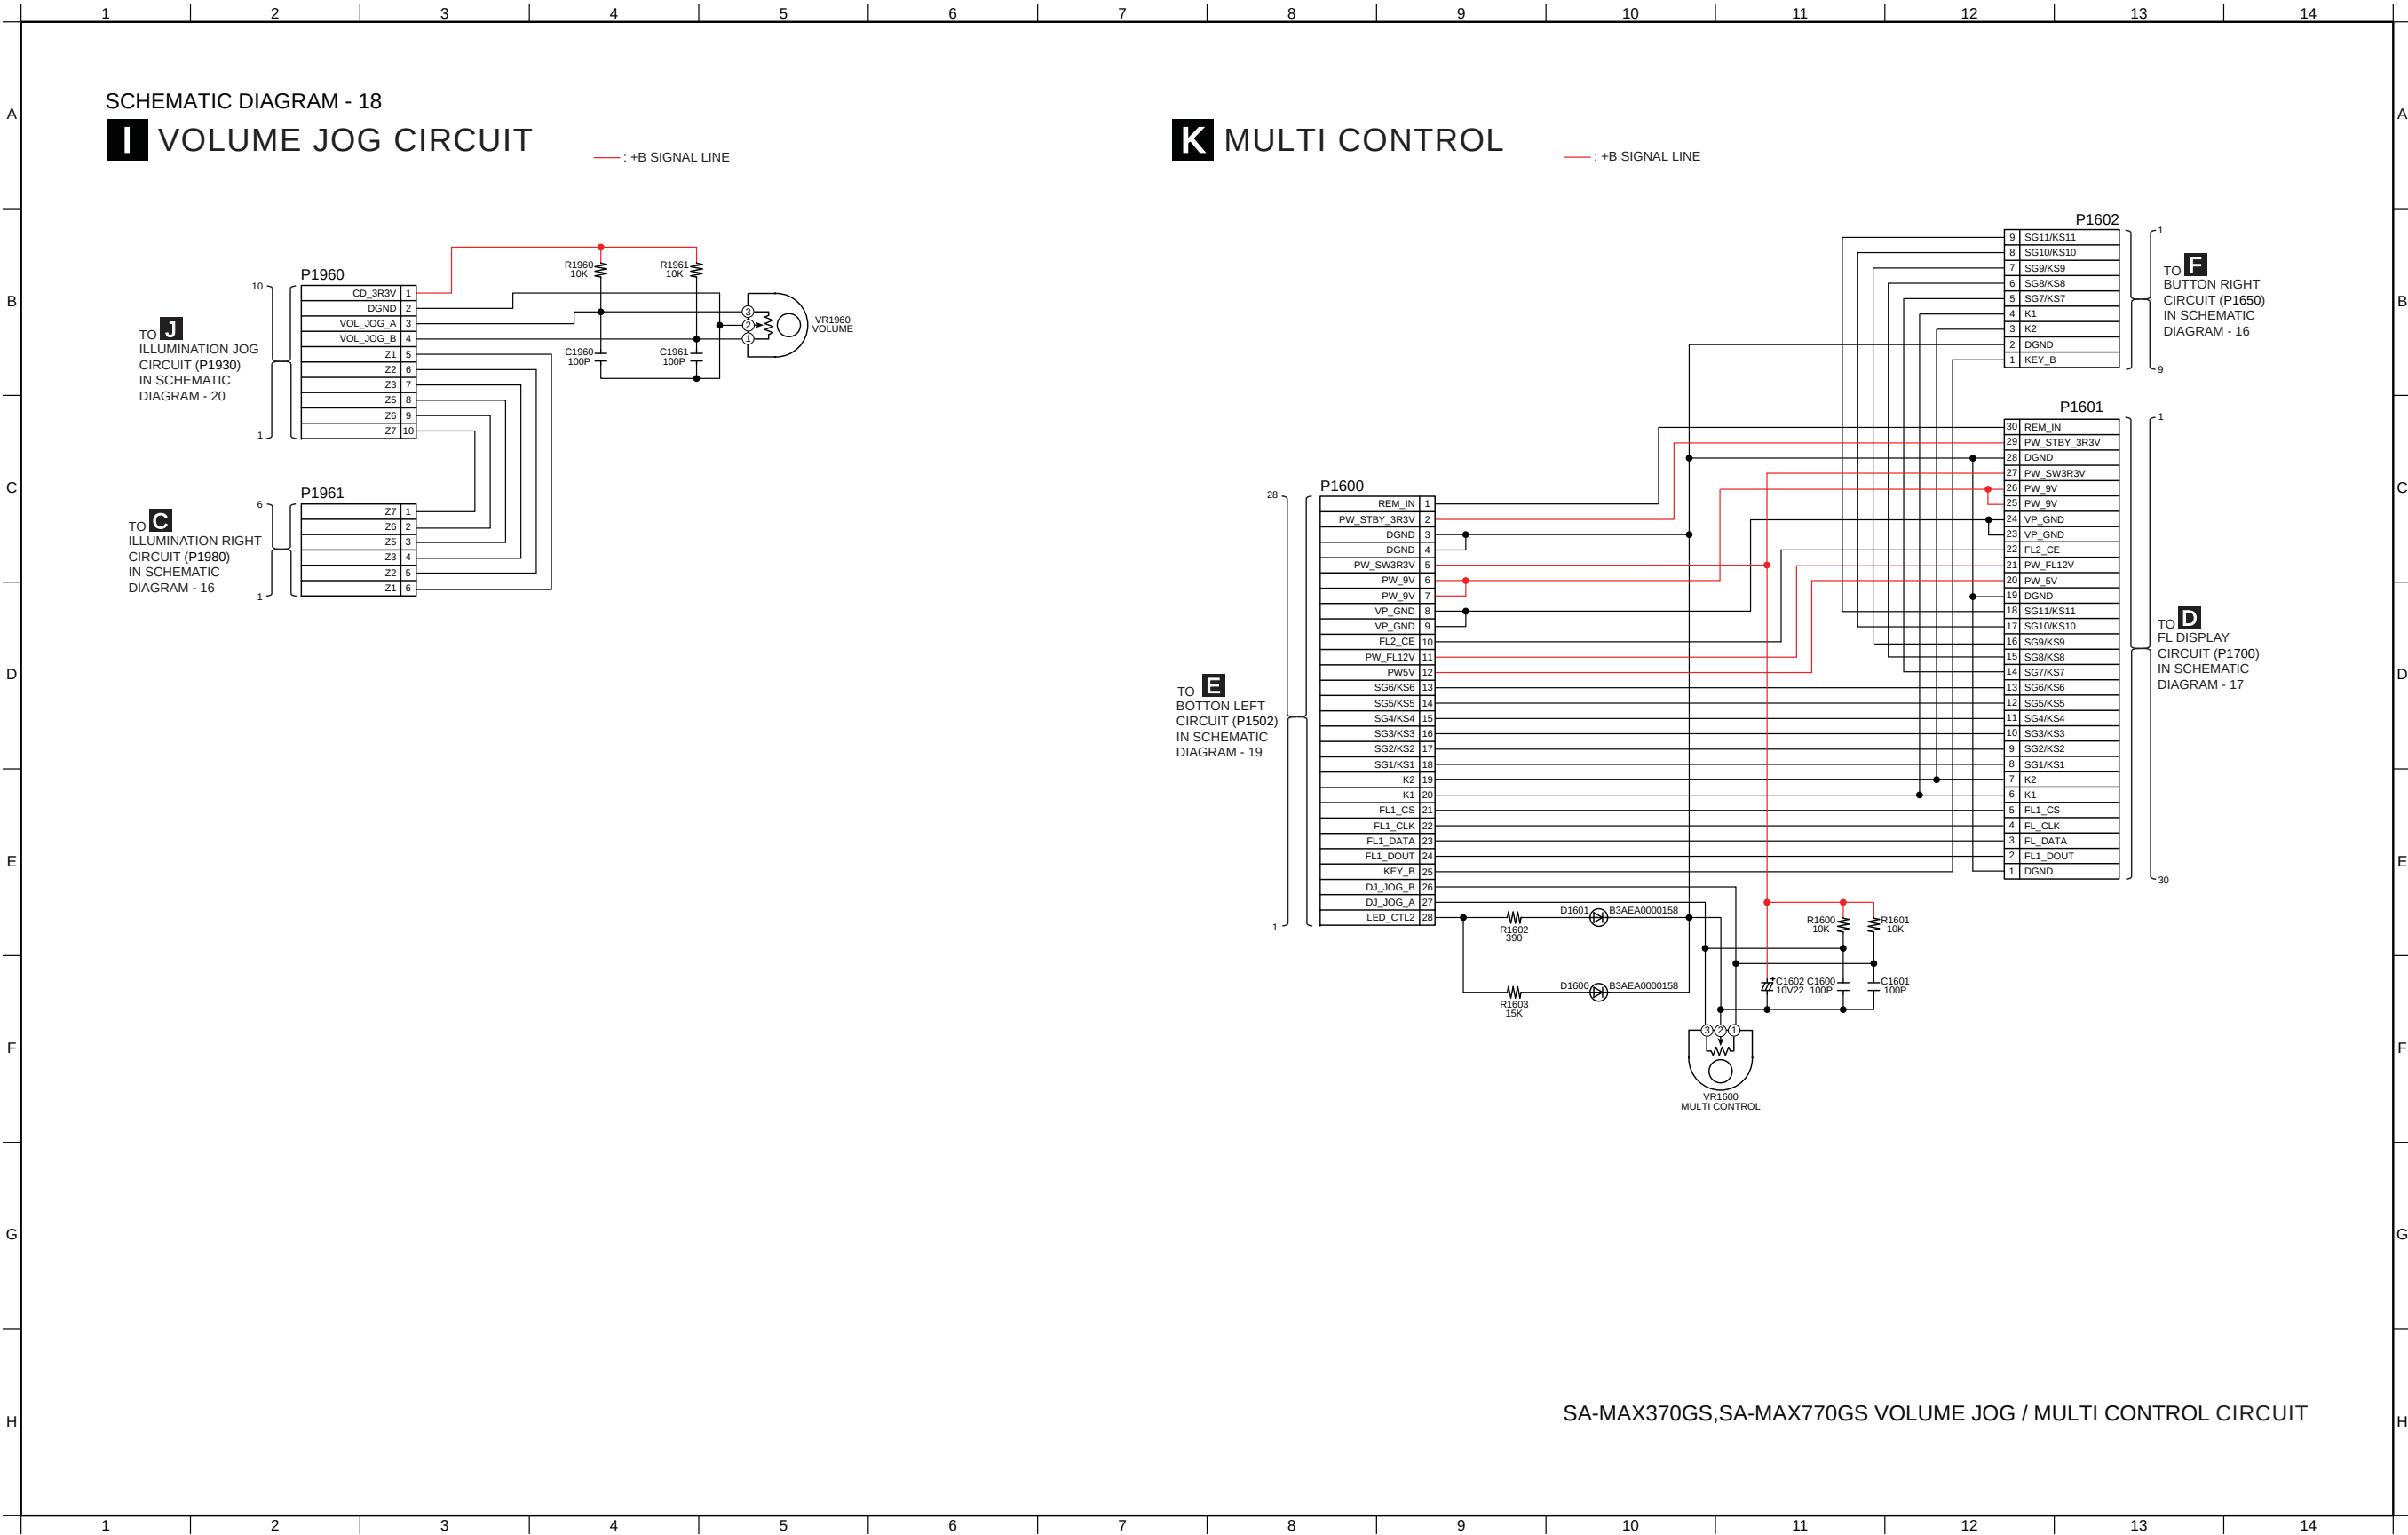


6.20. Button Left Circuit

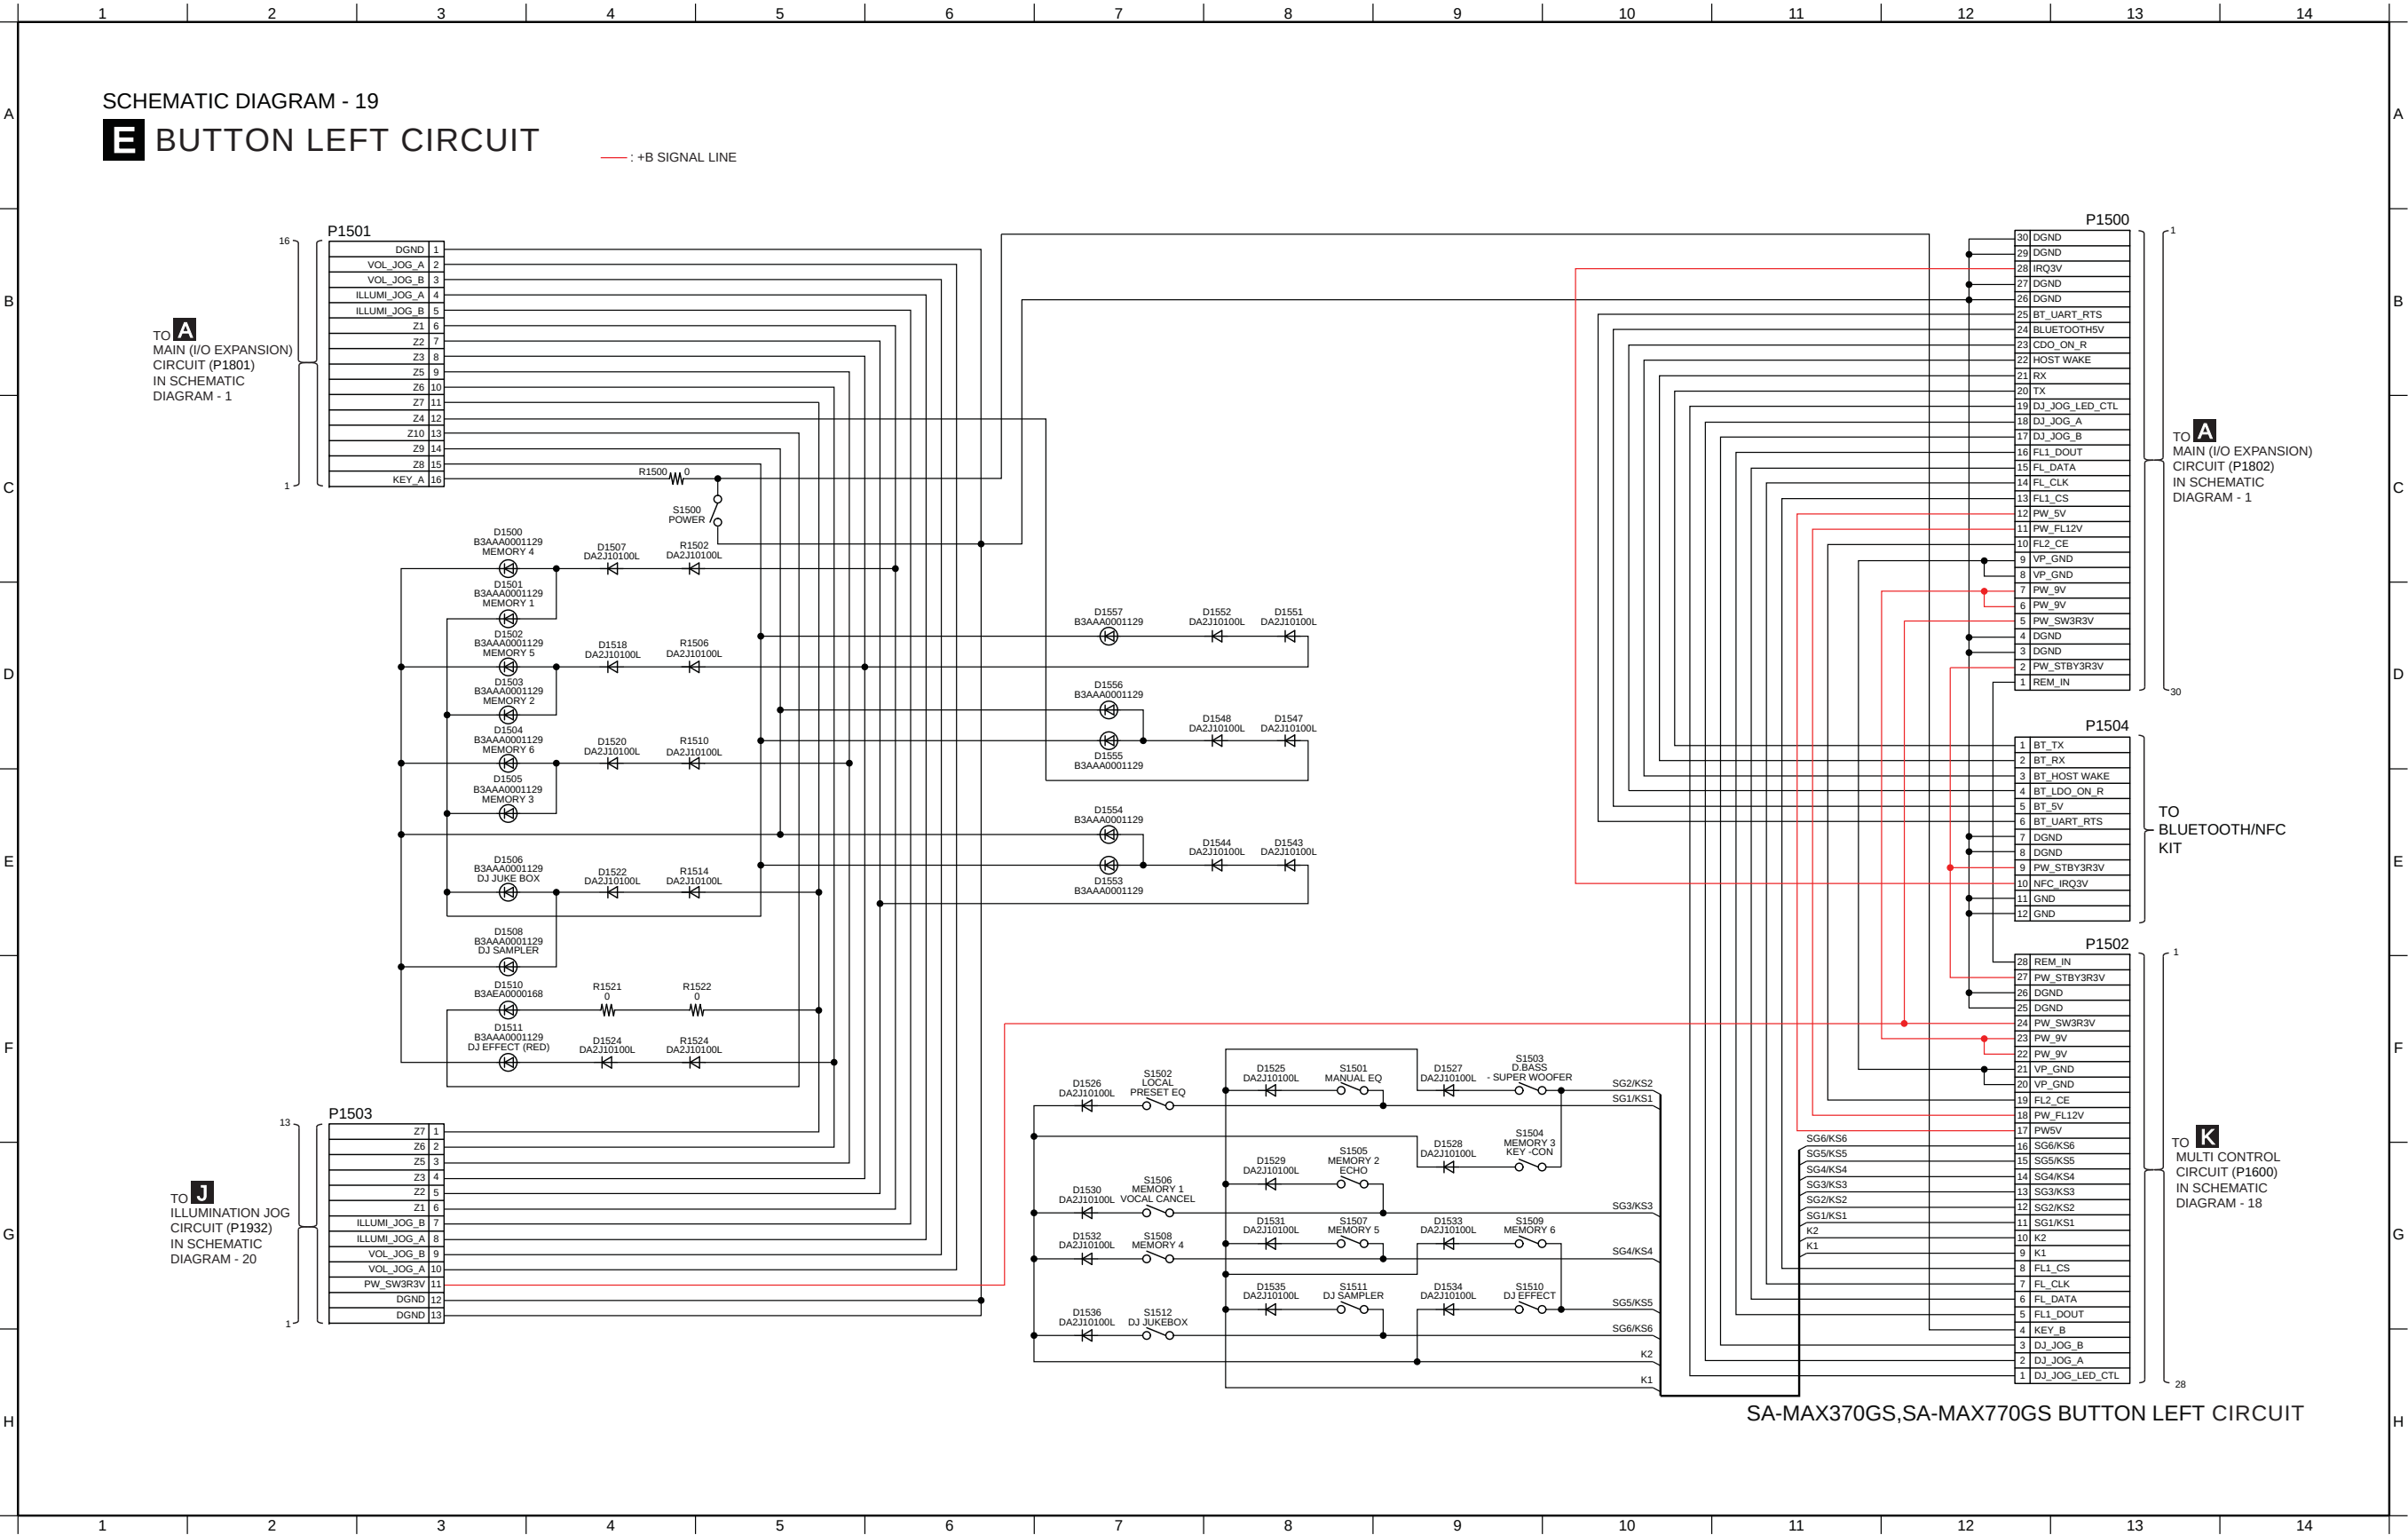

6.21. Mic, Illumination Jog & CD Interface Circuit

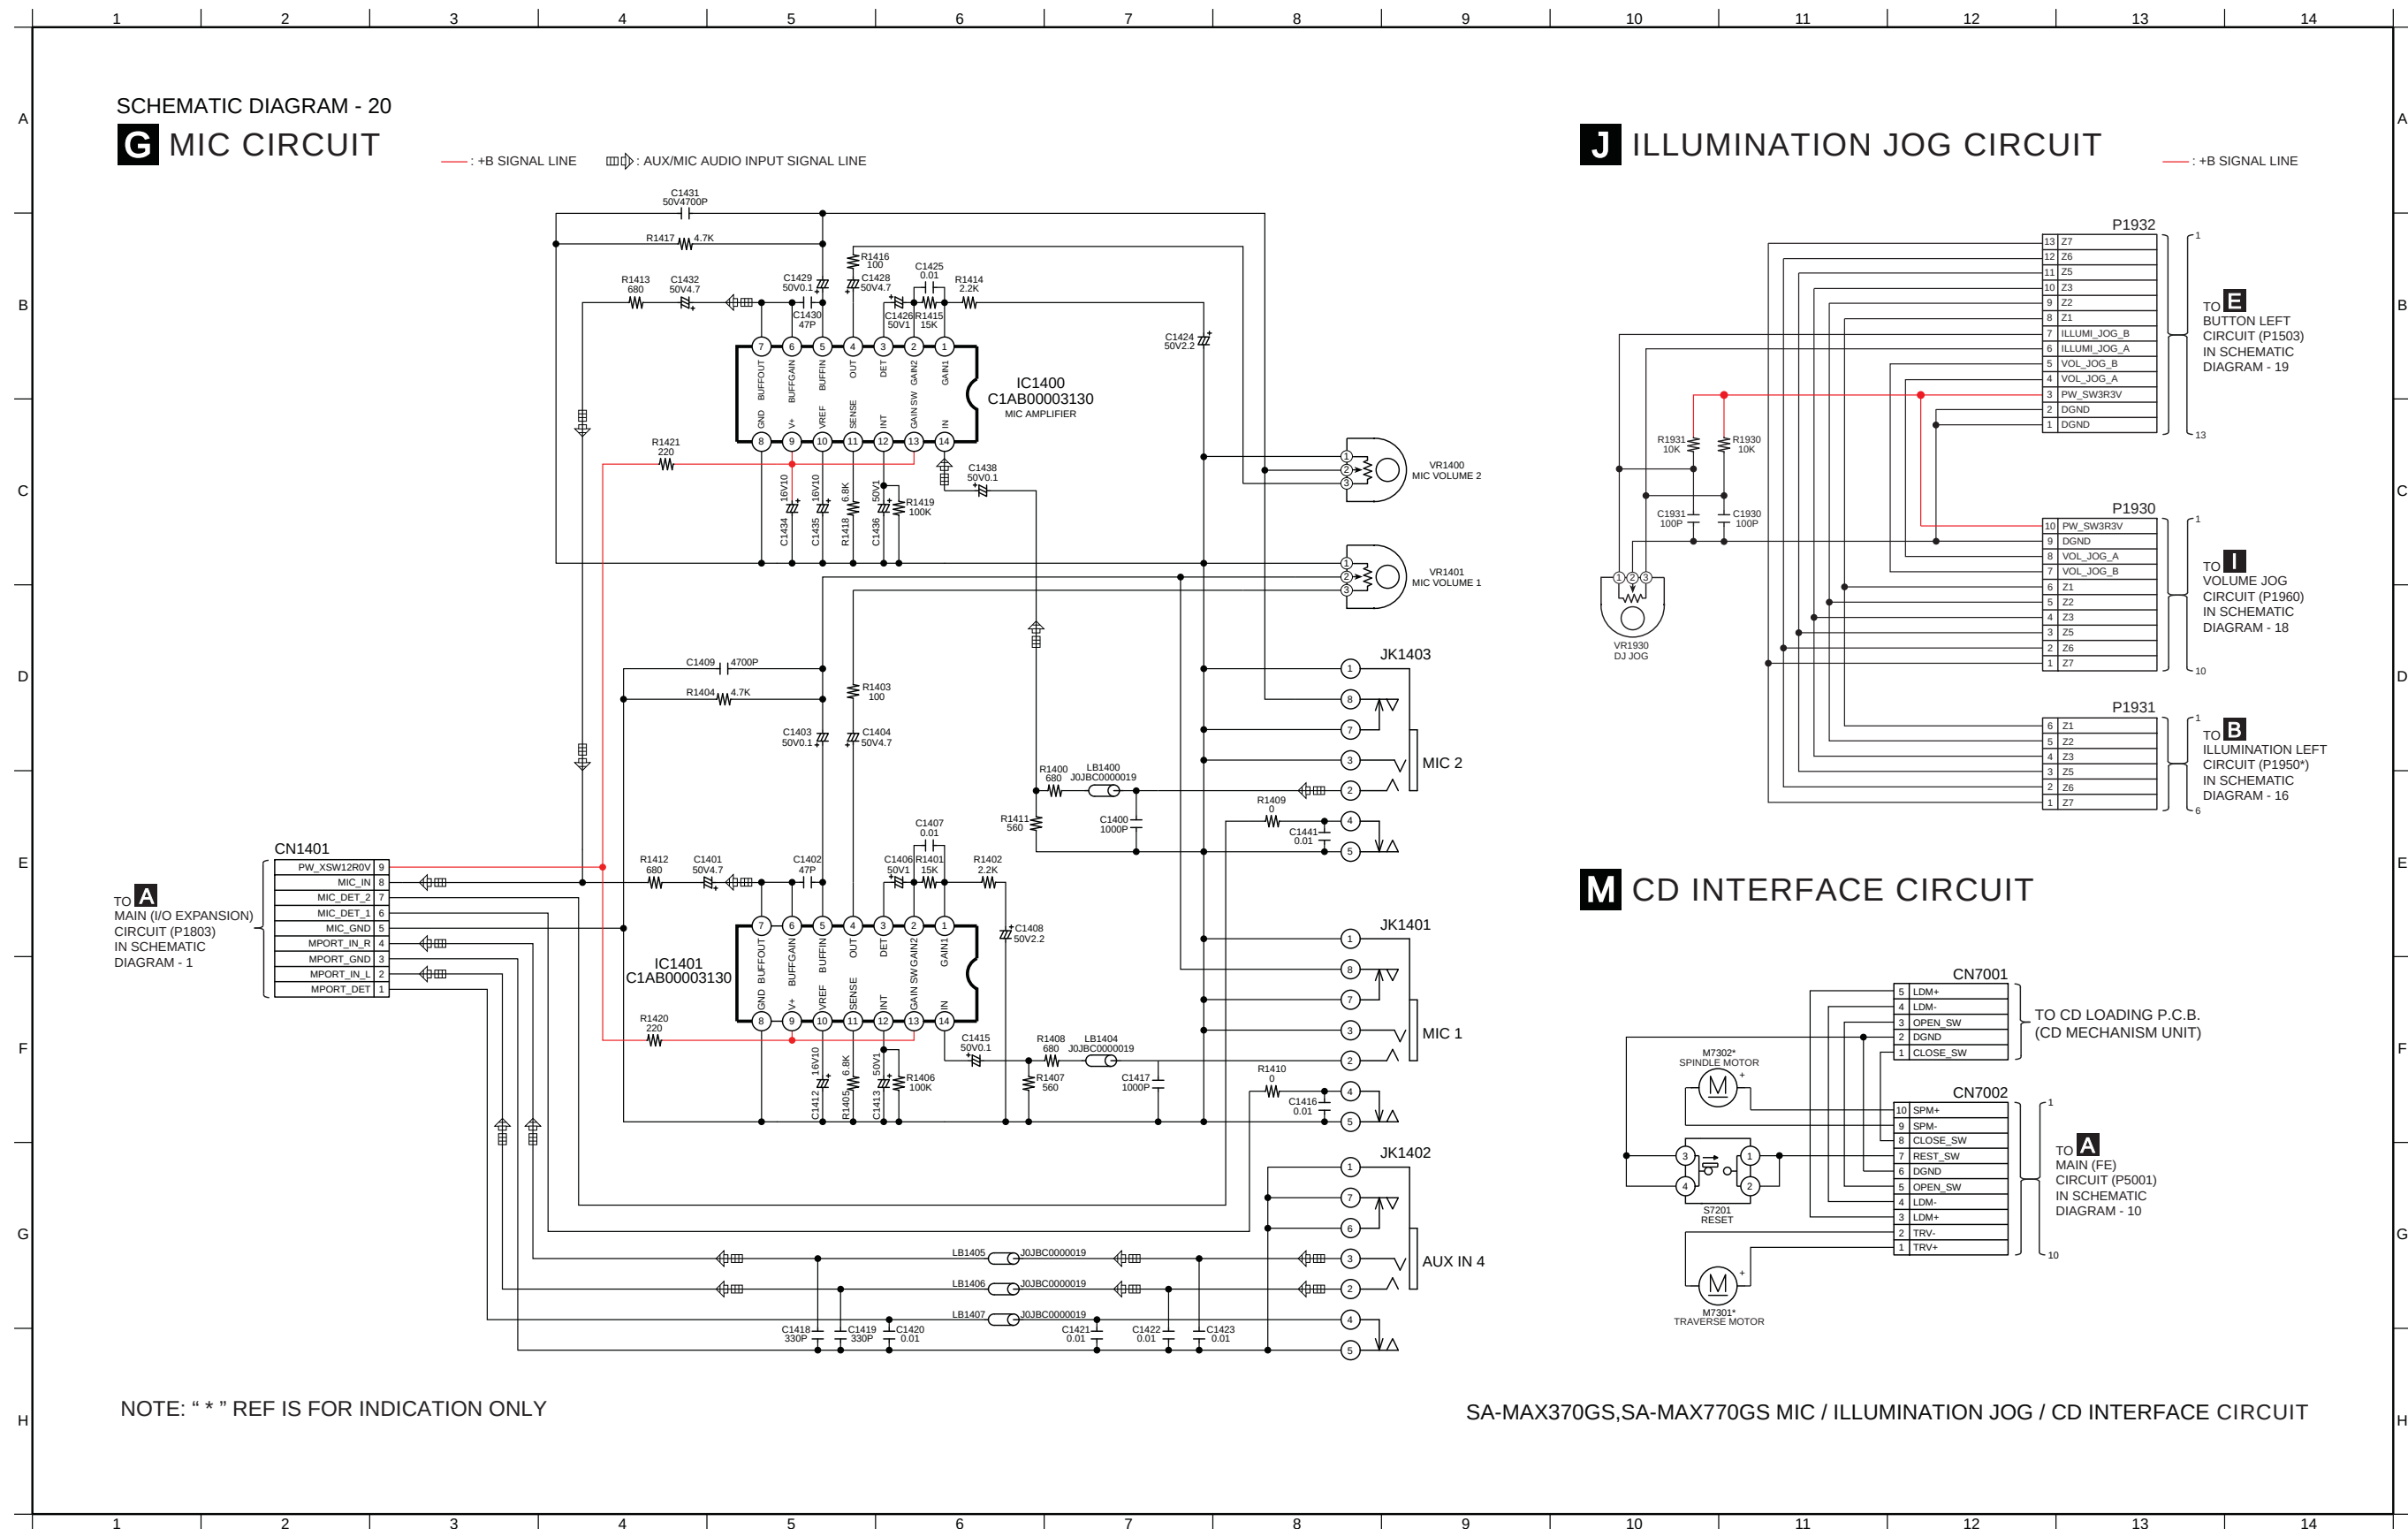

6.22. SMPS Circuit (1/2)

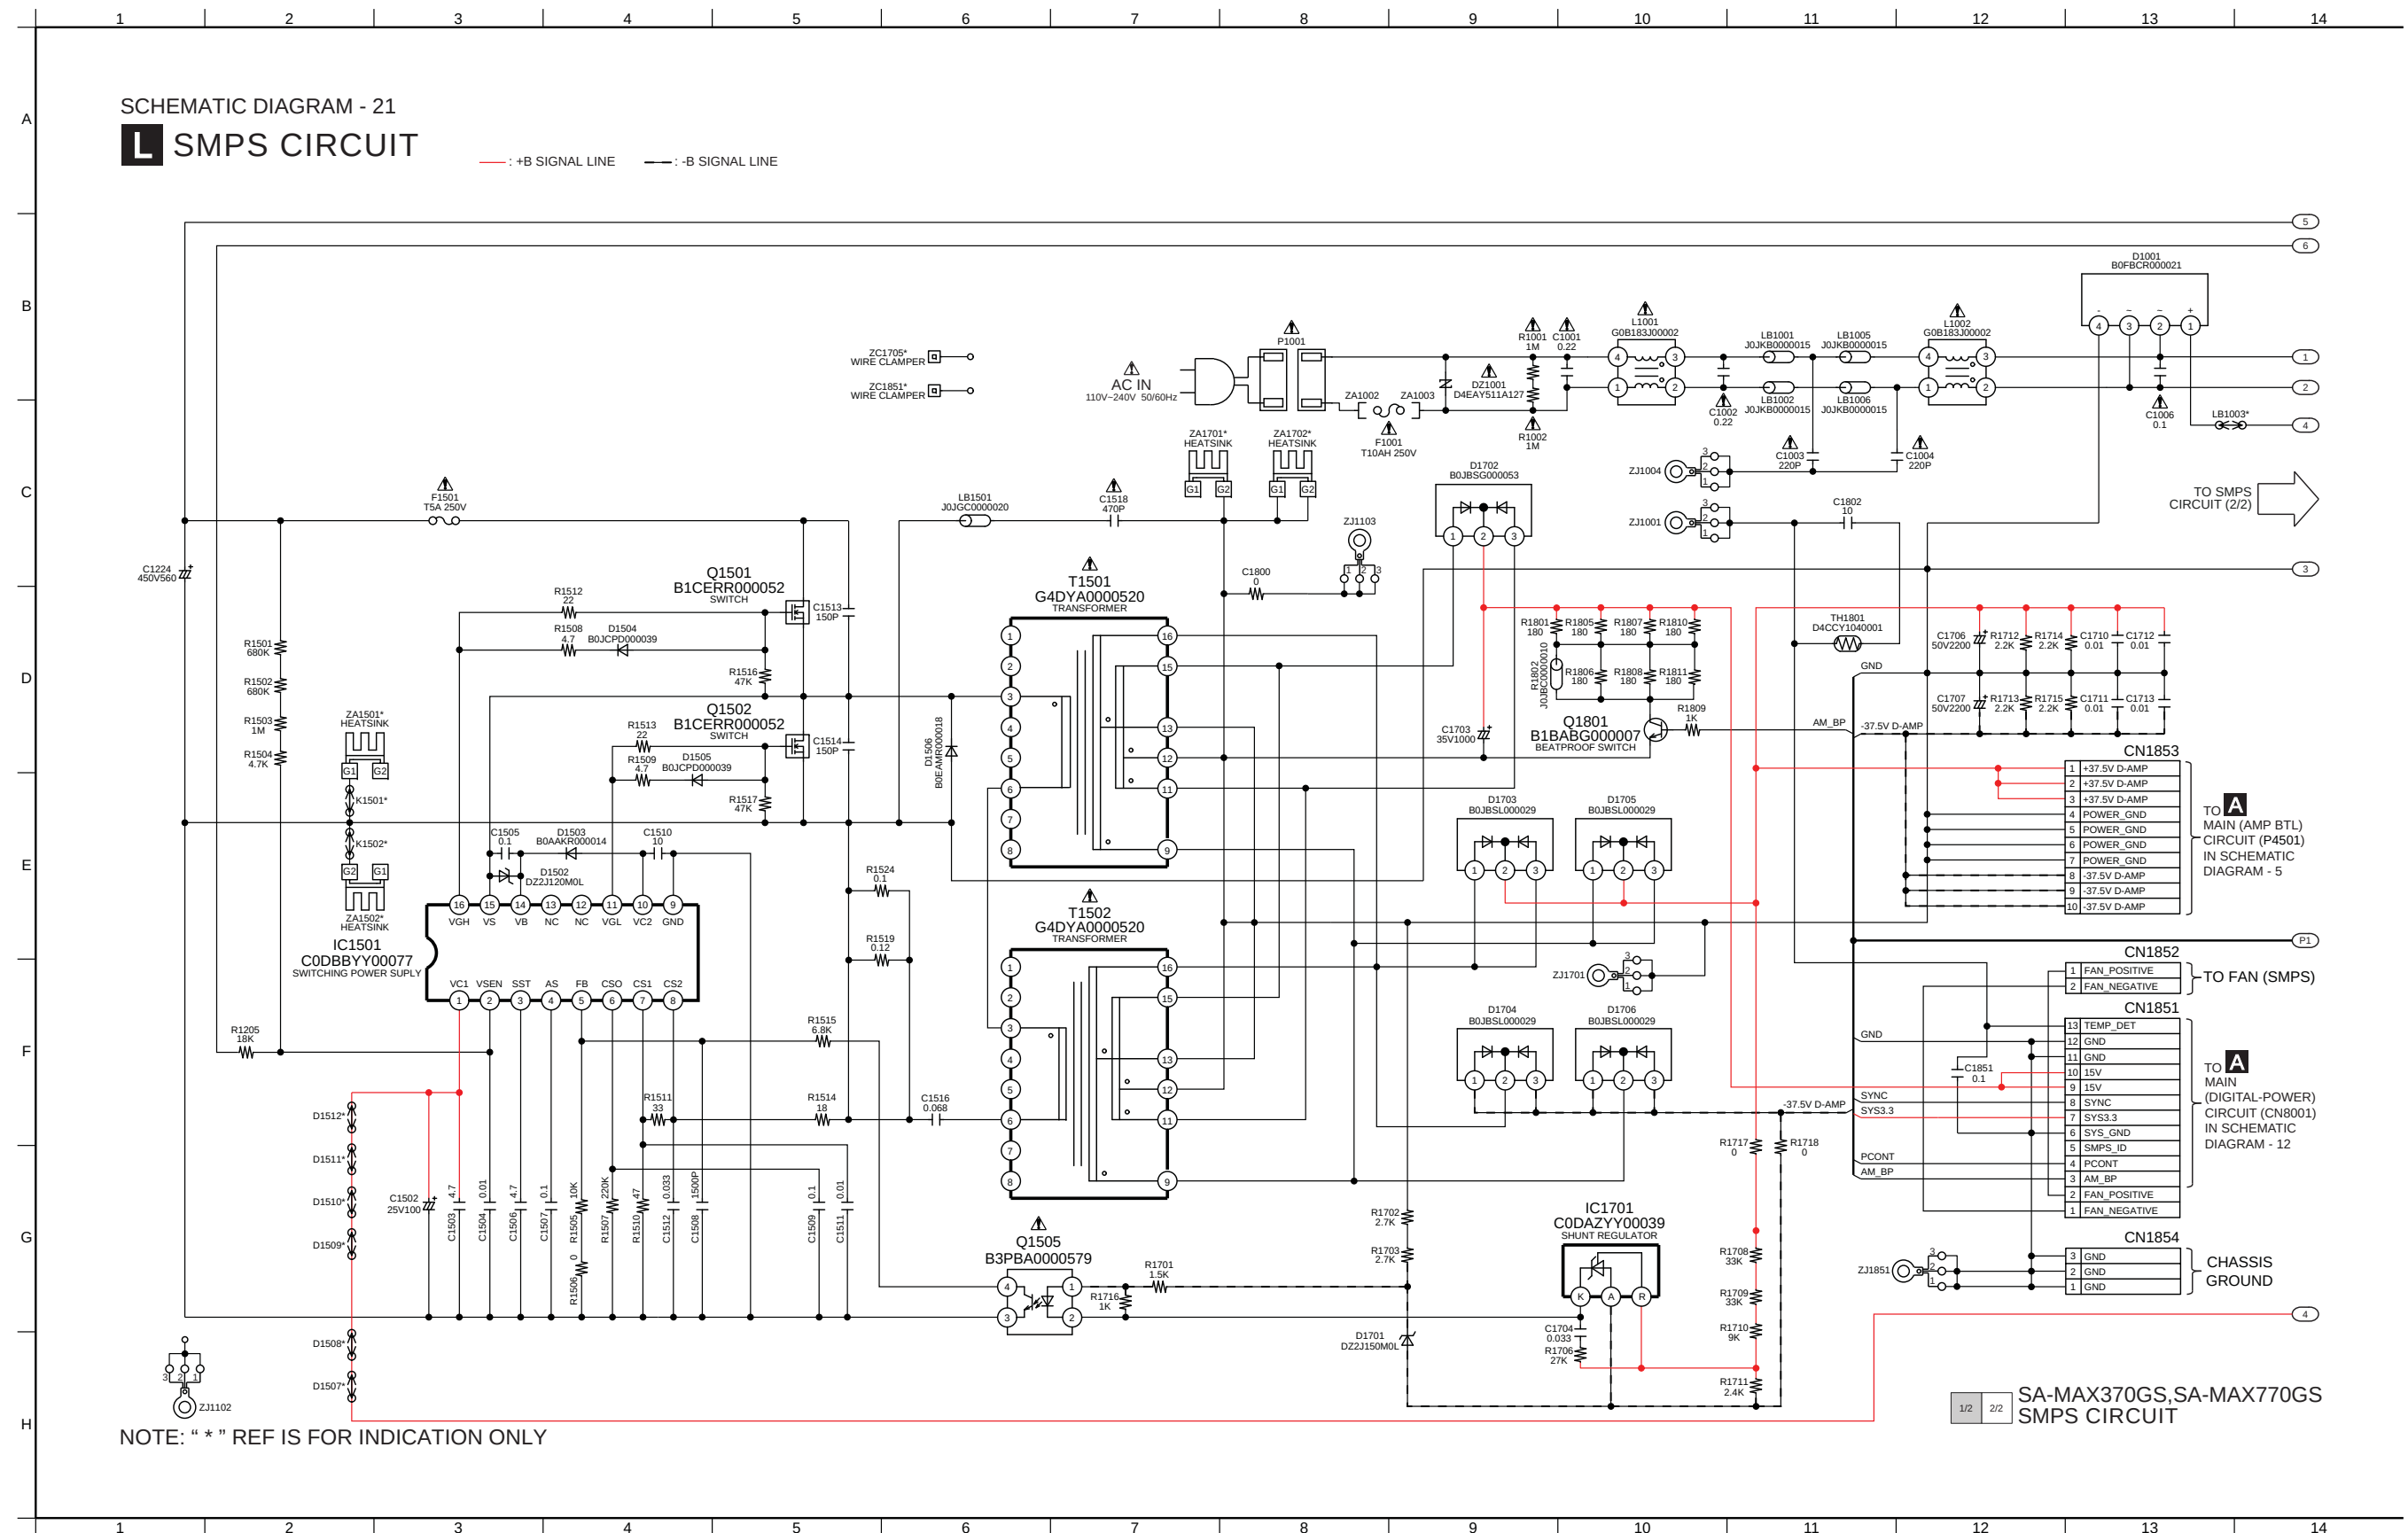


6.23. SMPS Circuit (2/2)

SCHEMATIC DIAGRAM - 22

SMPS CIRCUIT

— : +B SIGNAL LINE — : -B SIGNAL LINE

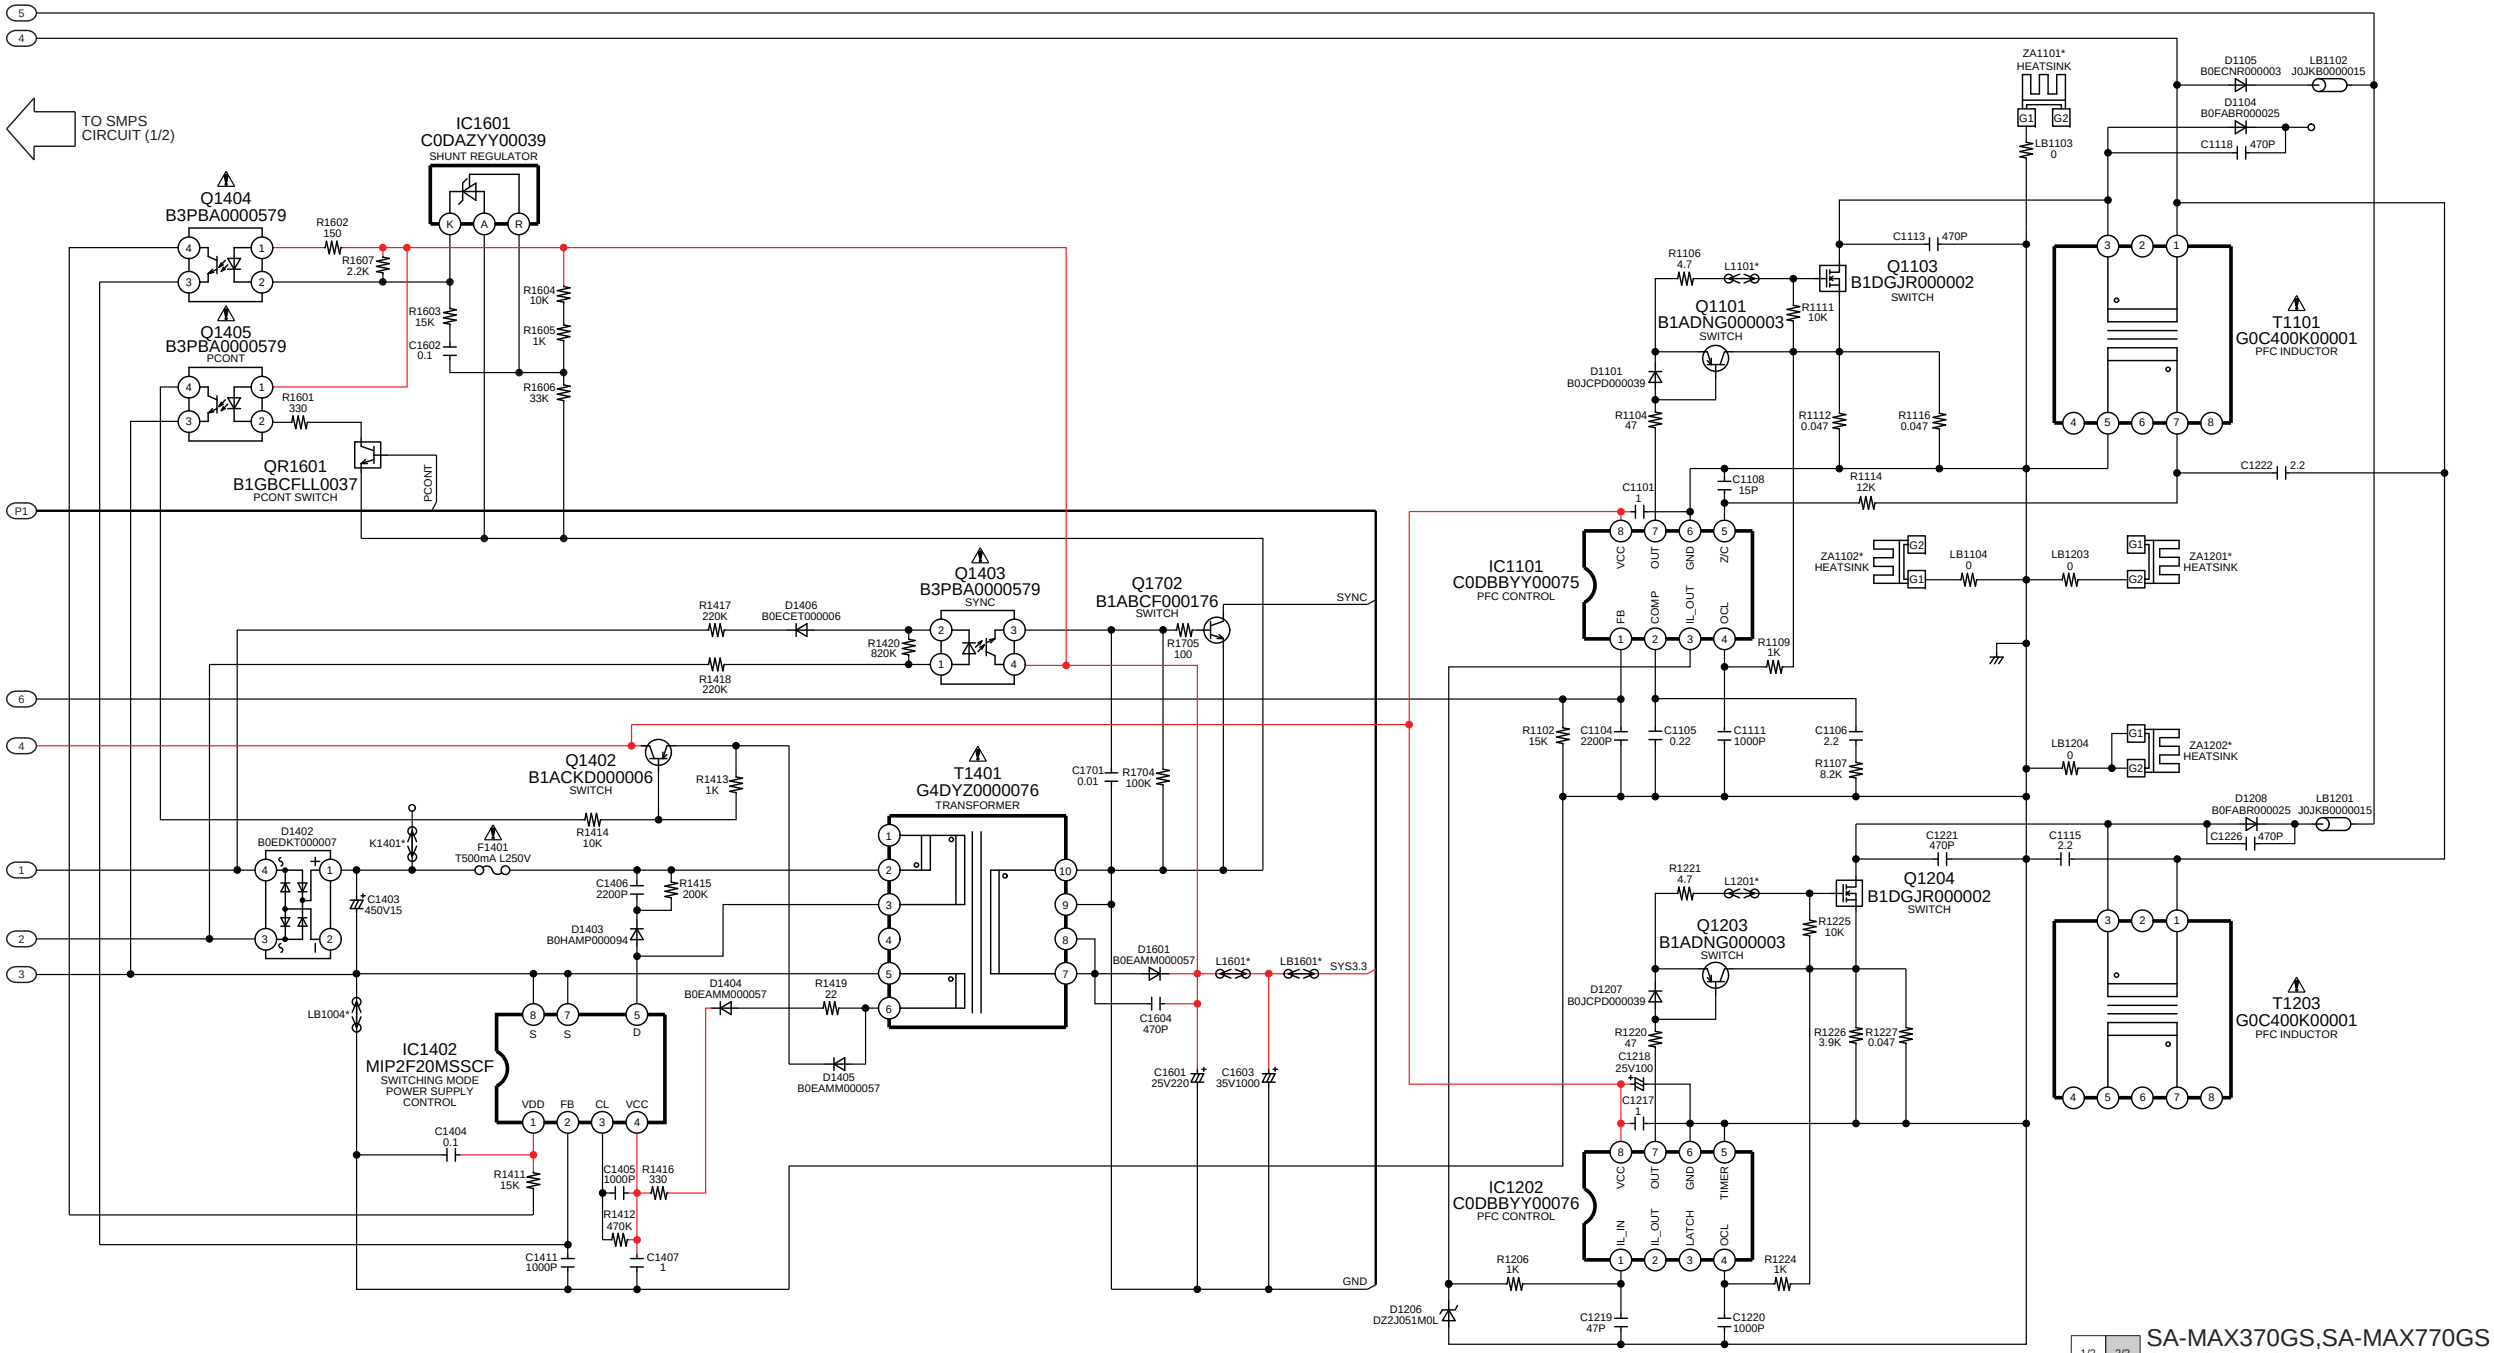


NOTE: " * " REF IS FOR INDICATION ONLY

1/2 2/2 SA-MAX370GS,SA-MAX770GS
SMPS CIRCUIT


7 Printed Circuit Board

7.1. Main P.C.B. (Side A)

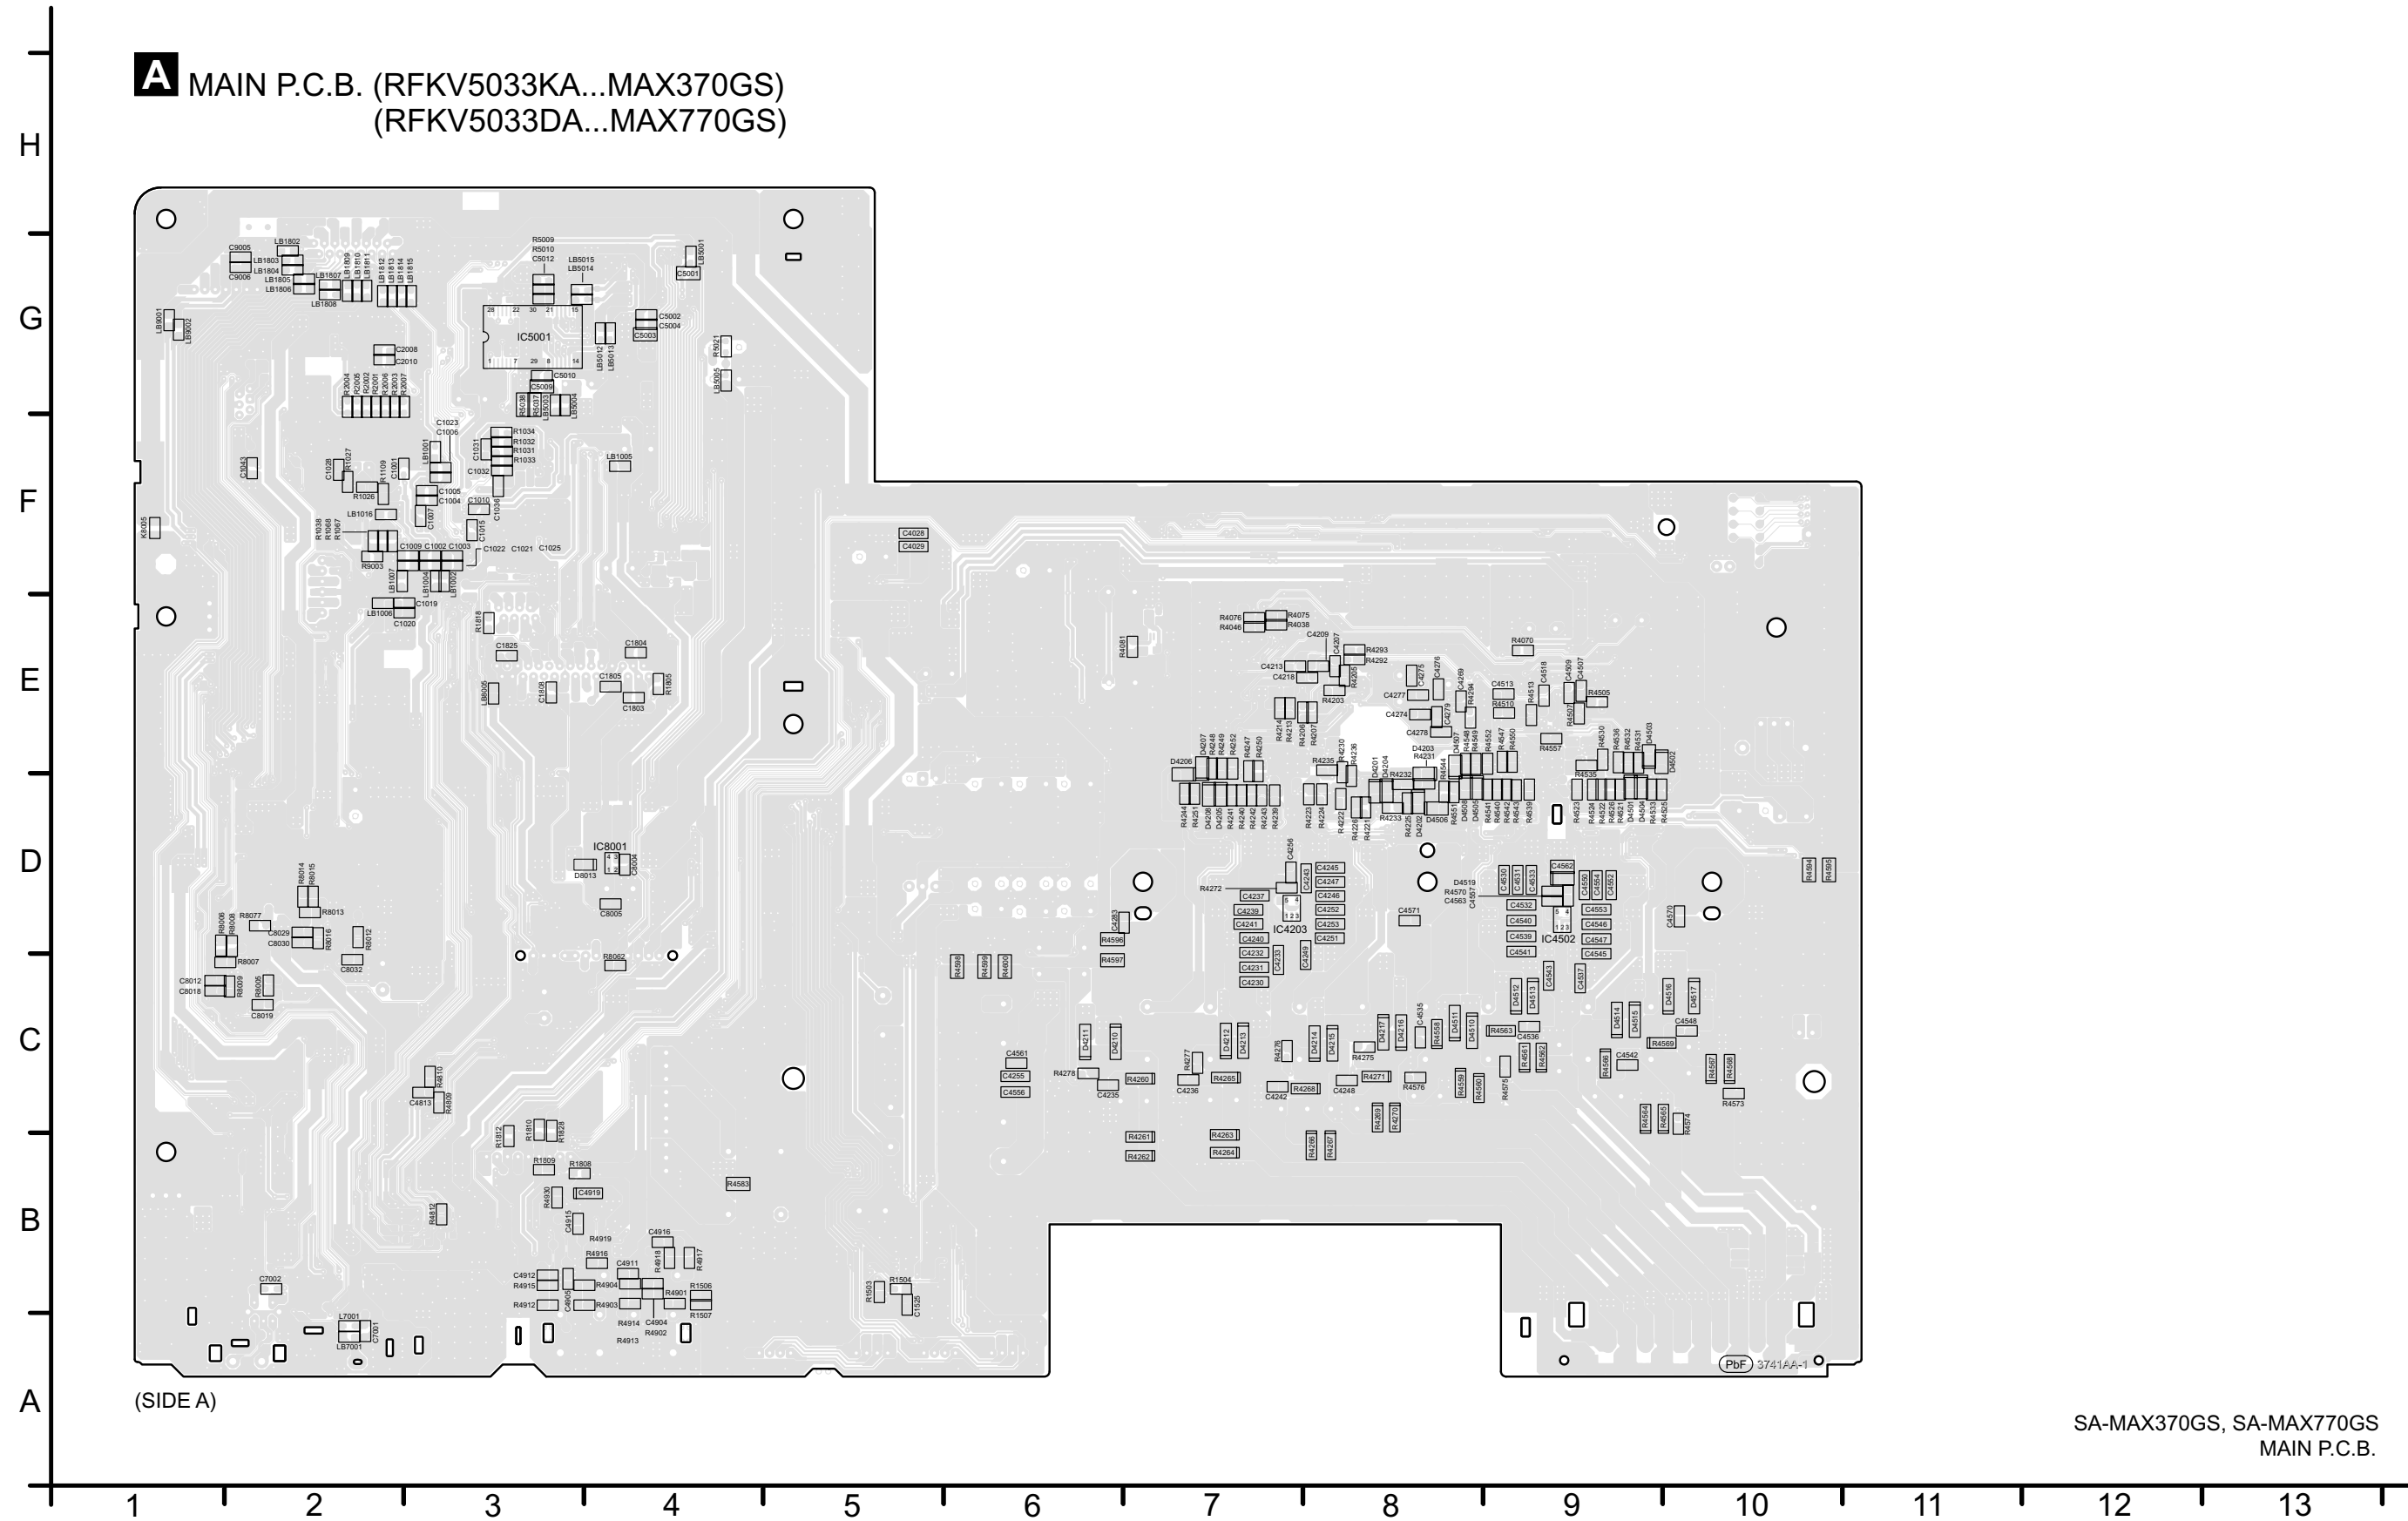

A vertical scale with labels A, B, C, D, E, F, G, H from bottom to top, corresponding to horizontal tick marks.

7.3. Illumination Left, Illumination Right & FL Display P.C.B.

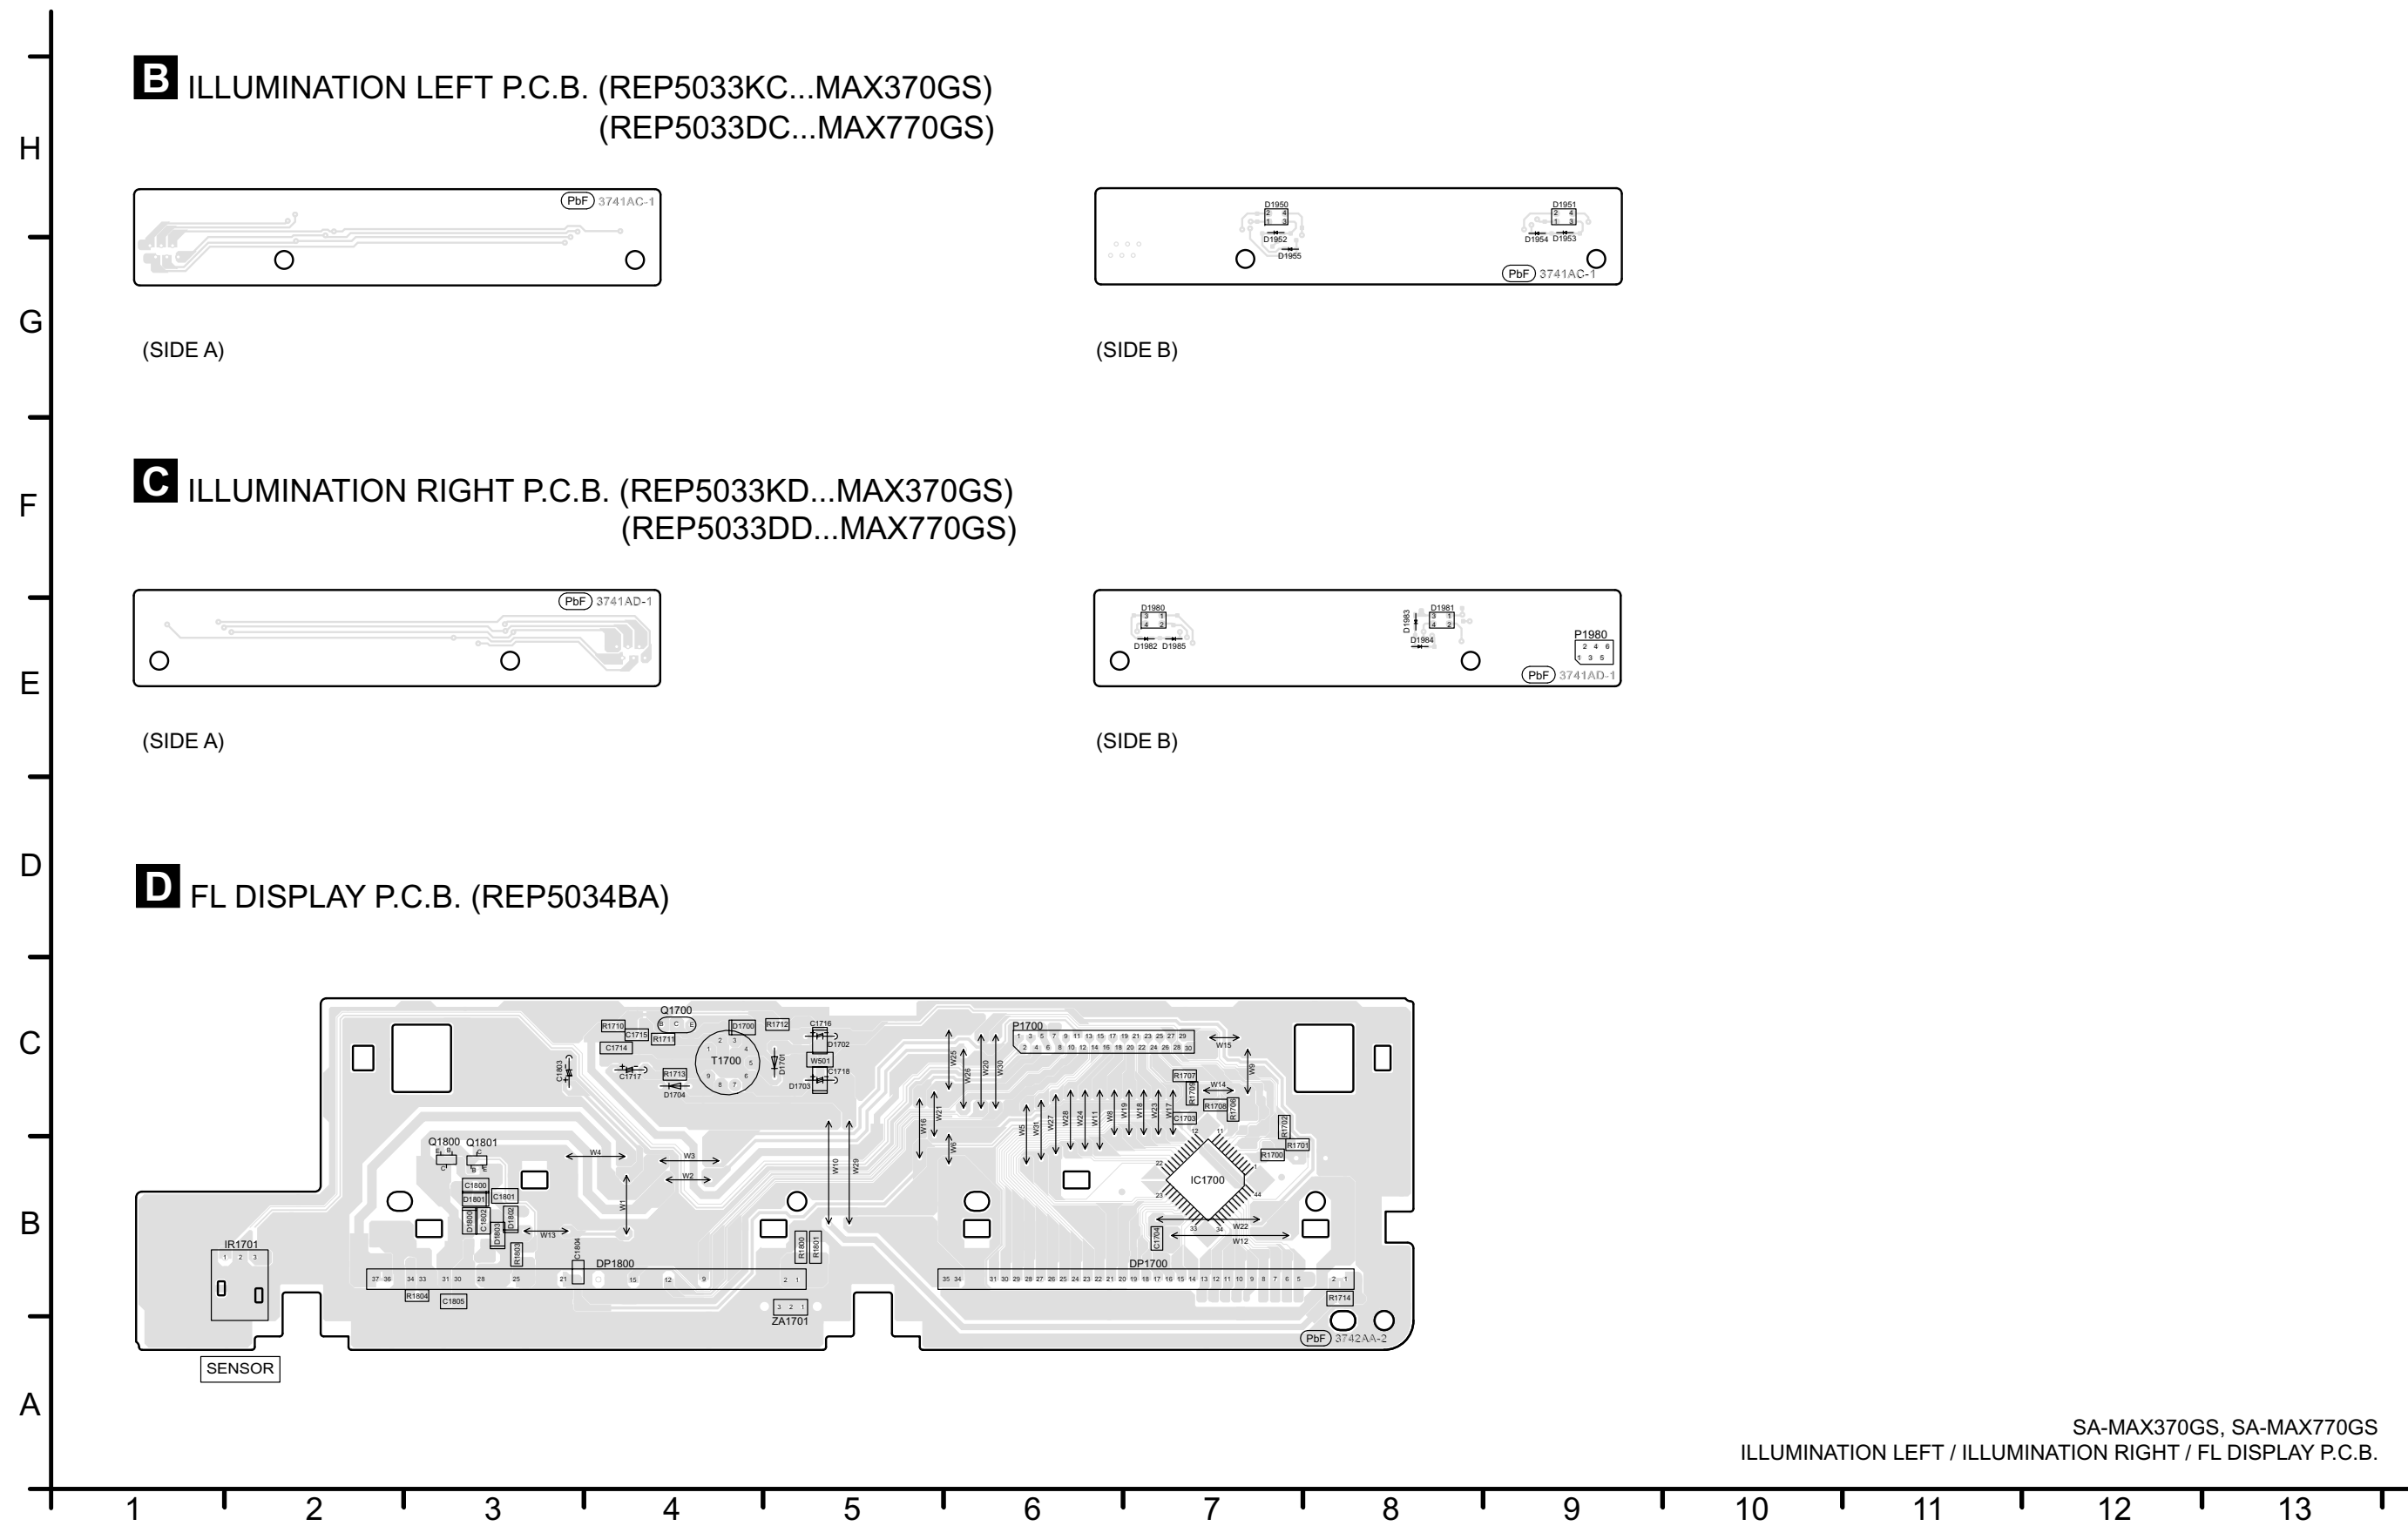

A vertical scale with labels A, B, C, D, E, F, G, H from bottom to top, corresponding to horizontal tick marks.


[illegible]

The diagram illustrates the internal layout of the Sony NW-A100 portable music player. Key components and their locations are as follows:

- S1650 (OPEN/CLOSE)**: Main processor, located at the top left.
- S1657 (BLUETOOTH MEMORY)**: Bluetooth memory, located at the bottom left.
- S1654 (EF)**: Battery, located at the top right.
- S1652 (MEMORY REC)**: Memory recording, located at the top right.
- S1651 (L256 REC)**: 256MB recording, located at the top right.
- S1653 (EBW)**: External battery, located at the top right.
- S1655 (ALBUM/TRACK)**: Album/track, located at the top right.
- S1656 (STOP/TUNE MODE)**: Stop/tune mode, located at the bottom center.
- S1658 (PLAY/BACK)**: Play/back, located at the bottom center.
- S1659 (USB CD)**: USB CD, located at the bottom center.
- S1660 (RADIO EXT-IN)**: Radio external input, located at the bottom center.
- P1650**: Earpiece, located at the bottom left.
- M1602**: Microphone, located at the bottom left.
- P1651, P1652, P1653, P1654, P1655, P1656, P1657, P1658, P1659, P1660**: Various connectors and ports, located around the perimeter of the device.
- K1651**: A small component, located at the bottom center.


The diagram also shows the location of the earpiece (E1601), microphone (M1602), and various connectors (P1650, P1651, P1652, P1653, P1654, P1655, P1656, P1657, P1658, P1659, P1660). The components are labeled with their part numbers and functions, and are connected by a network of lines representing the device's internal circuitry.

7.5. Volume Jog, Illumination Jog & Multi Control P.C.B.

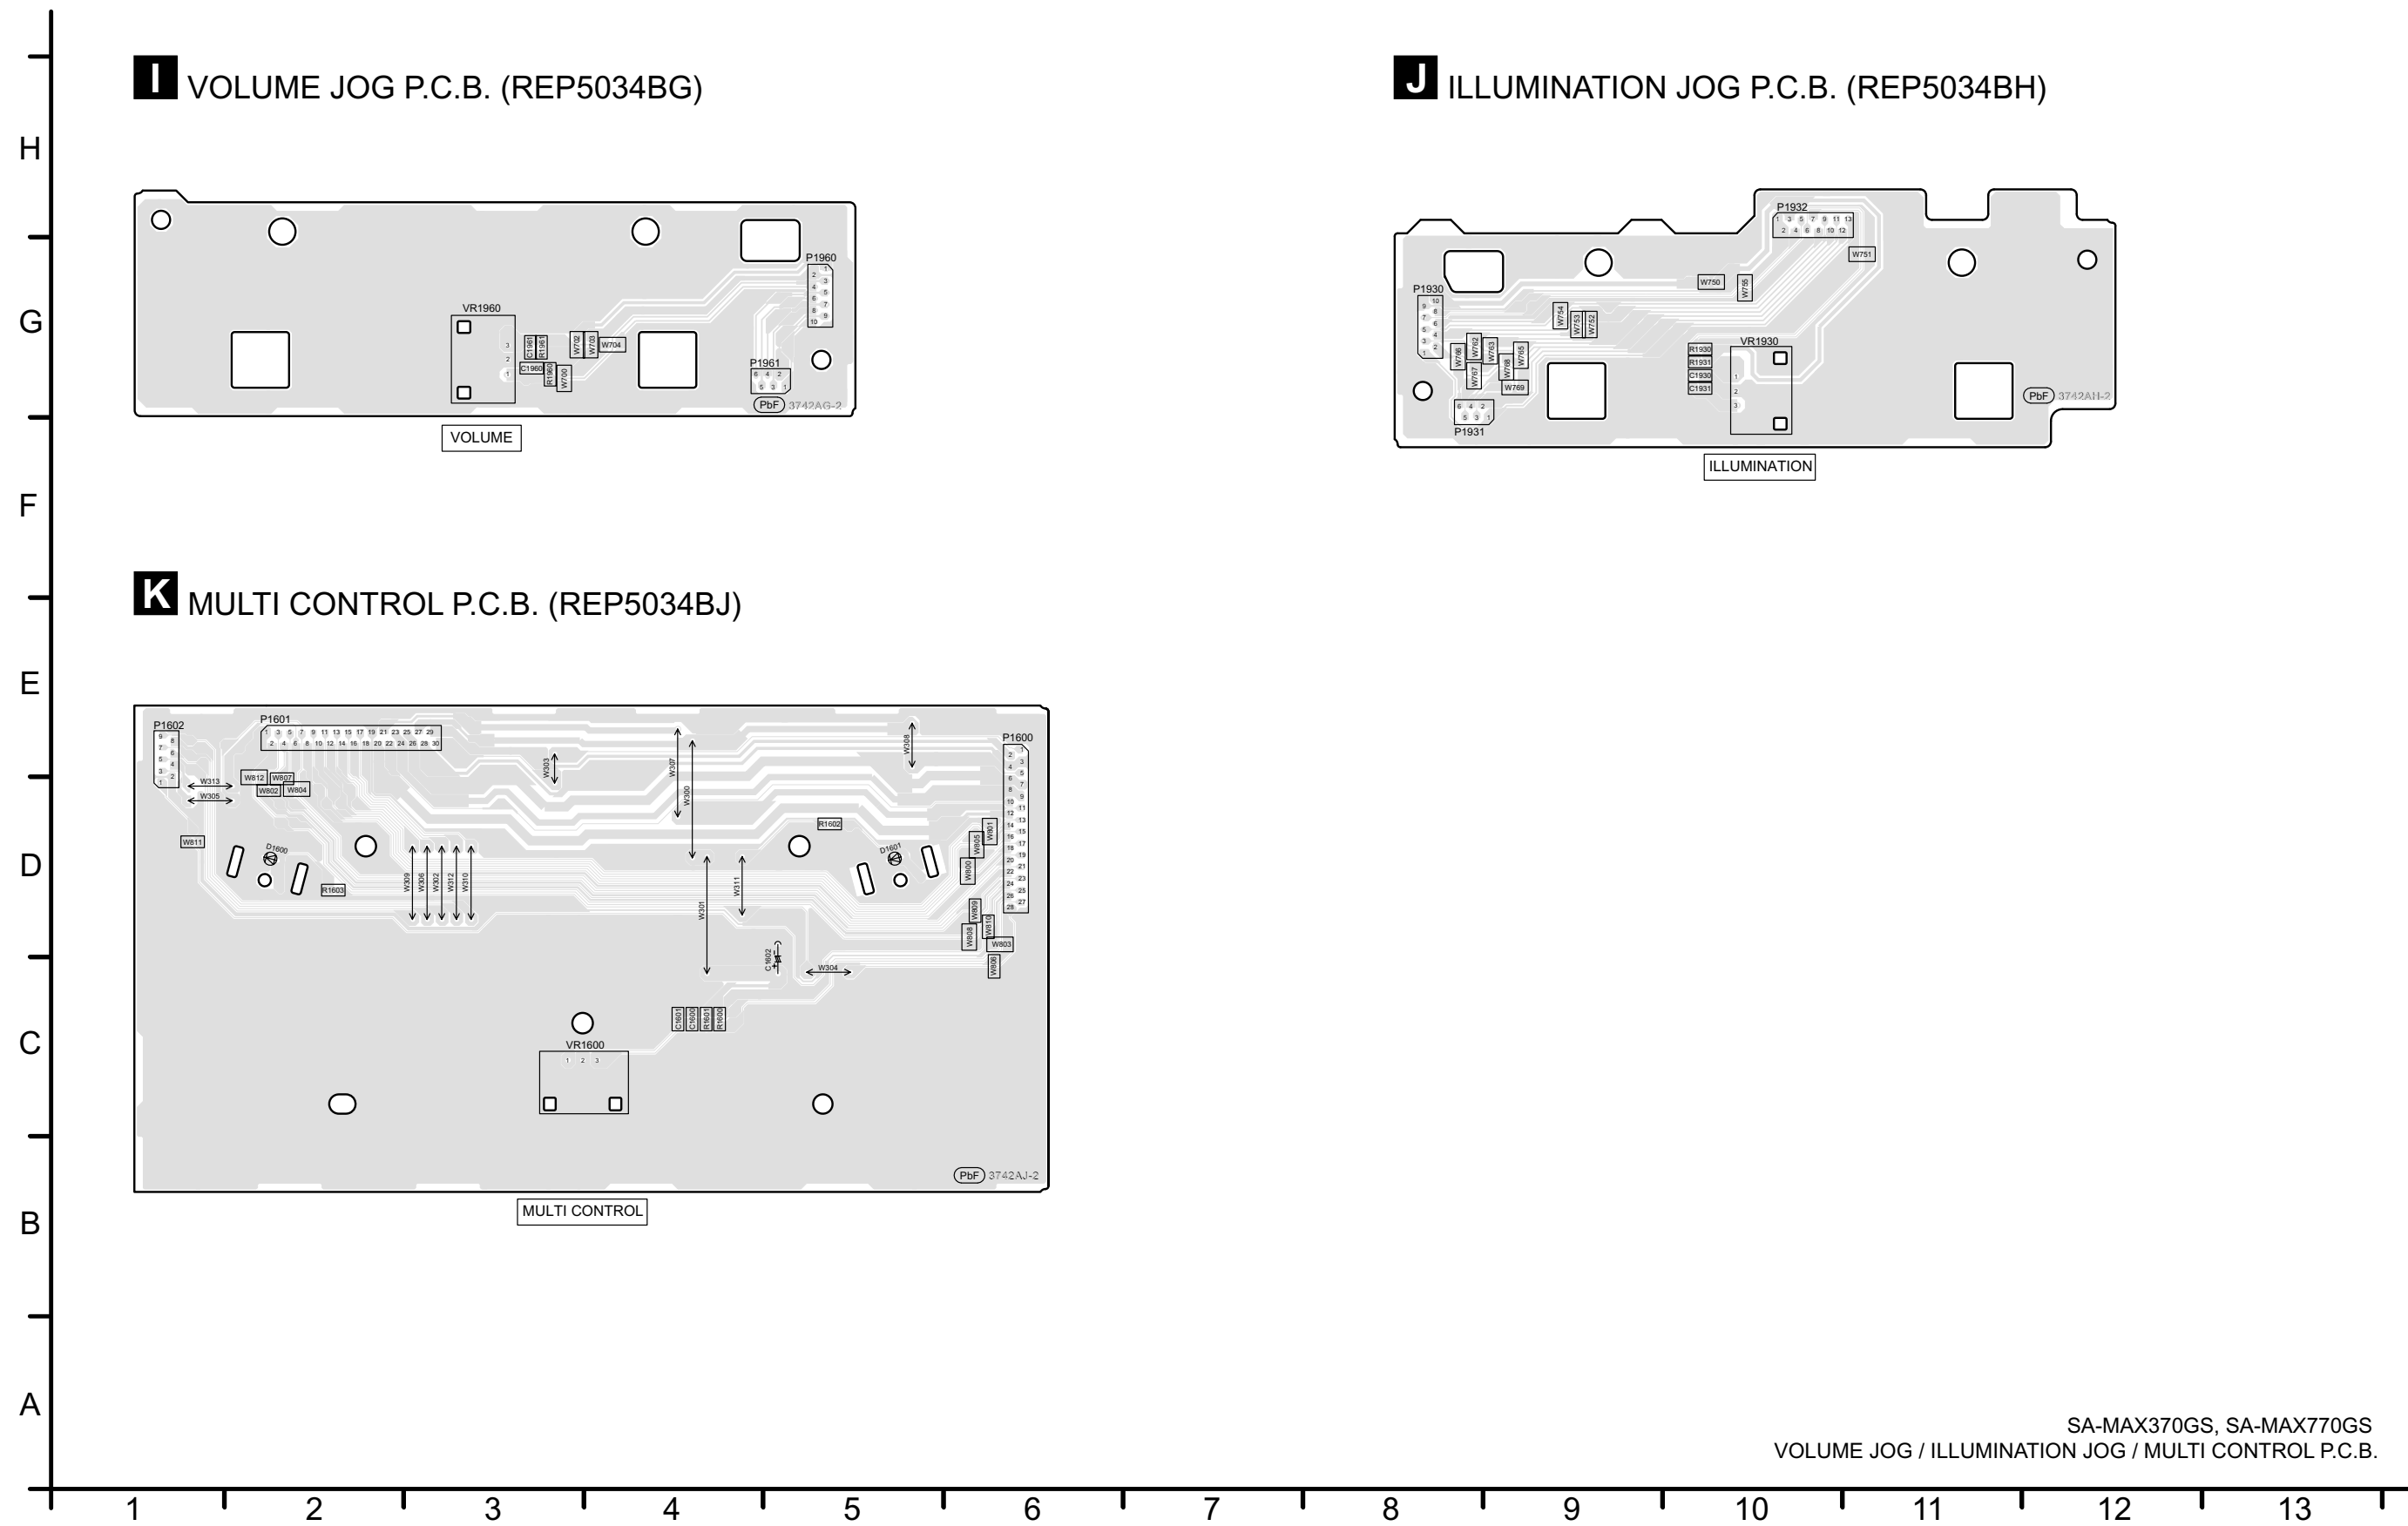

7.6. SMPS P.C.B.

SMPS P.C.B. (REP5035B)

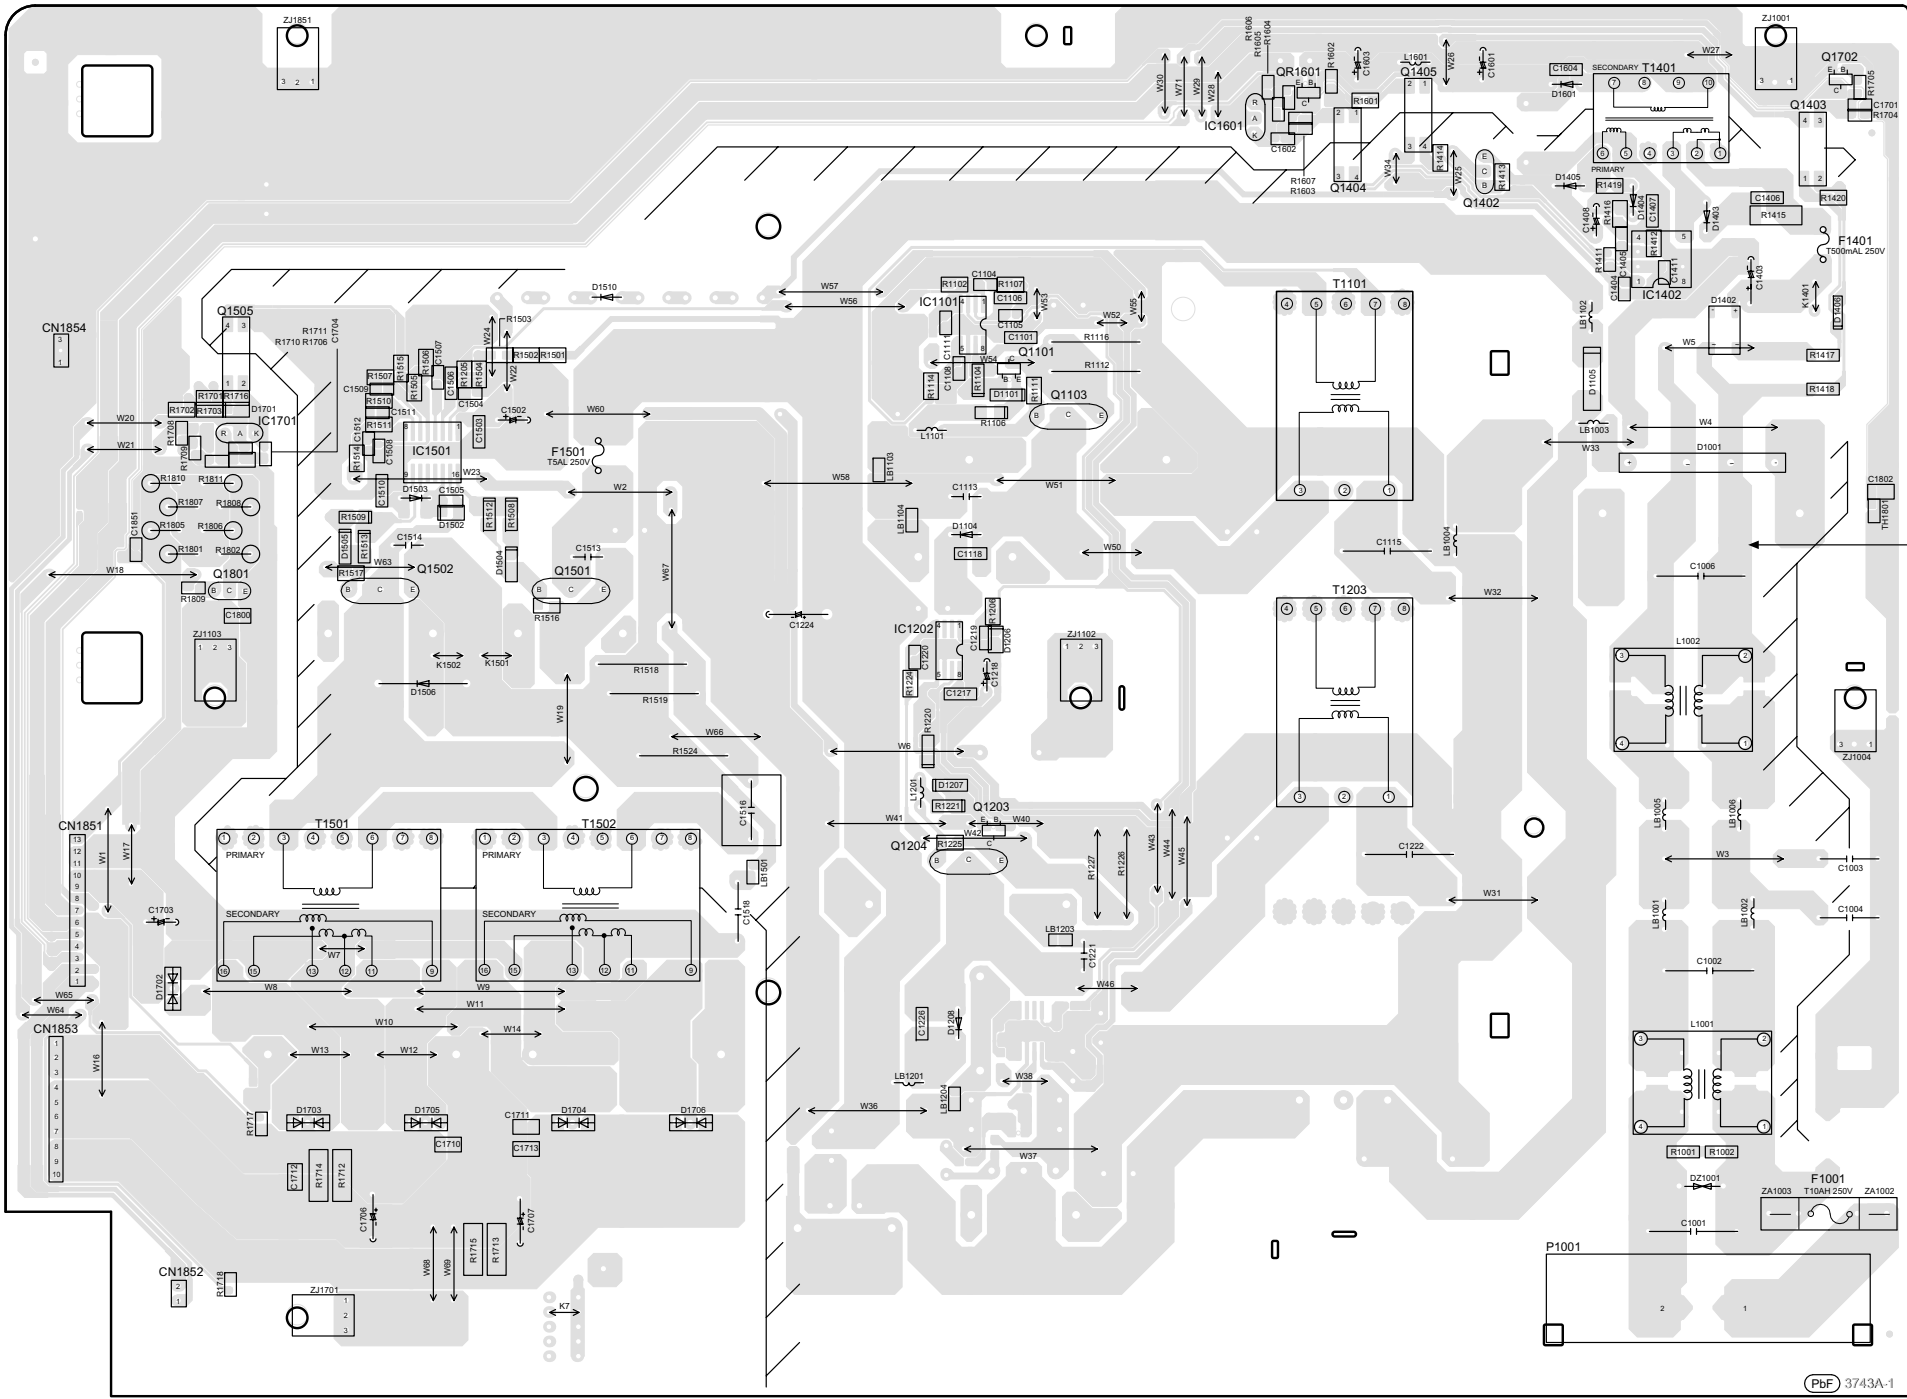

SA-MAX370GS, SA-MAX770GS
SMPS P.C.B.

8 Voltage and Waveform Measurement

8.1. Voltage Measurement

Note:

- Indication Voltage Values are in standard values for the unit measured by the DC electronic circuit tester (high-impedance) with the chassis taken as standard.
- Therefore, there may exist some errors in voltage values, depending on the internal impedance of the DC circuit tester.
- Circuit voltage and waveform described herein shall be regarded as reference information when probing defect point because it may differ from actual measuring value due to difference of Measuring instrument and its measuring condition and product itself.

8.1.1. Main P.C.B. (1/6)

REF NO.	IC1001																			
MODE	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20
PLAY	3.3	3	3.3	3.3	3.3	3.3	1.6	3.3	3.3	3.3	3.3	0	0	3.3	3.3	0	3.3	1.6	0	0
STANDBY	3.3	3	3.3	3.3	3.3	3.3	1.6	3.3	3.3	3.3	3.3	0	0	3.3	3.3	0	3.3	1.6	0	0

REF NO.	IC1001																			
MODE	21	22	23	24	25	26	27	28	29	30	31	32	33	34	35	36	37	38	39	40
PLAY	3	3.3	0.2	2.9	3.3	3.3	0	0	3.3	0	3.3	0	1.6	1.1	1	0.8	0.8	0.8	1.6	0.8
STANDBY	3	3.3	0.2	2.9	3.3	3.3	0	0	3.3	0	3.3	0	1.6	1.1	1	0.8	0.8	0.8	1.6	0.8

REF NO.	IC1001																			
MODE	41	42	43	44	45	46	47	48	49	50	51	52	53	54	55	56	57	58	59	60
PLAY	0.8	0	0	0	1.6	0.7	3.2	1.7	3.2	1.6	1.6	1.6	0	1.6	1.6	0	3.3	0	1.6	1.6
STANDBY	0.8	0	0	0	1.6	0.7	3.2	1.7	3.2	1.6	1.6	1.6	0	1.6	1.6	0	3.3	0	1.6	1.6

REF NO.	IC1001																			
MODE	61	62	63	64	65	66	67	68	69	70	71	72	73	74	75	76	77	78	79	80
PLAY	1.6	1.6	1.6	1.6	1.6	0	1.7	1.8	1.8	1.8	0	0	3.3	3.3	3.3	3.3	1.6	3.3	3.3	0
STANDBY	1.6	1.6	1.6	1.6	1.6	0	1.7	1.8	1.8	1.8	0	0	3.3	3.3	3.3	3.3	1.6	3.3	3.3	0

REF NO.	IC1001																			
MODE	81	82	83	84	85	86	87	88	89	90	91	92	93	94	95	96	97	98	99	100
PLAY	0.8	1.6	1.6	0.4	0	3.3	1.5	3.3	3.3	0	0	1.6	0	3.3	3.2	3.3	0.2	0.2	0	0.2
STANDBY	0.8	1.6	1.6	0.4	0	3.3	1.5	3.3	3.3	0	0	1.6	0	3.3	3.2	3.3	0.2	0.2	0	0.2

REF NO.	IC1001																			
MODE	101	102	103	104	105	106	107	108	109	110	111	112	113	114	115	116	117	118	119	120
PLAY	3.1	3.2	0	0.2	3.1	3.1	3.1	0	1.8	1.6	1.6	1.6	3.2	3.1	0	1.5	3.2	3.3	3.3	3.3
STANDBY	3.1	3.2	0	0.2	3.1	3.1	3.1	0	1.8	1.6	1.6	1.6	3.2	3.1	0	1.5	3.2	3.3	3.3	3.3

REF NO.	IC1001																			
MODE	121	122	123	124	125	126	127	128												
PLAY	1.6	3.2	0	1.1	1.5	1.5	1.4	1.5												
STANDBY	1.6	3.2	0	1.1	1.5	1.5	1.4	1.5												

REF NO.	IC1002																			
MODE	1	2	3	4	5															
PLAY	3.3	3.3	0	0	1.7															
STANDBY	3.3	3.3	0	0	1.7															

REF NO.	IC1202																			
MODE	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20
PLAY	0	0	0	0	3.3	0	3.3	0	3.3	3.2	0	3.2	0	3.3	0	3.3	0	3.3	3.3	0
STANDBY	0	0	0	0	3.3	0	3.3	0	3.3	3.2	0	3.2	0	3.3	0	3.3	0	3.3	3.3	0

REF NO.	IC1202																			
MODE	21	22	23	24	25	26	27	28	29	30	31	32	33	34	35	36	37	38	39	40
PLAY	0	0	0	3.3	3.2	3.2	3.3	3.3	0	0	3.2	3.3	3.3	0	3.3	0	0	0	0	3.2
STANDBY	0	0	0	3.3	3.2	3.2	3.3	3.3	0	0	3.2	3.3	3.3	0	3.3	0	0	0	0	3.2

SA-MAX370GS, SA-MAX770GS MAIN P.C.B.

8.1.2. Main P.C.B. (2/6)

REF NO.	IC1202																			
MODE	41	42	43	44																
PLAY	3.3	3.3	0	3.3																
STANDBY	3.3	3.3	0	3.3																
REF NO.	IC1501																			
MODE	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20
PLAY	3.3	3.3	3.3	3.3	3.1	2.3	5.2	2.5	0	1.6	2.6	1.5	2.9	1.2	0	2.7	5.2	2.3	1.1	1.3
STANDBY	3.3	3.3	3.3	3.3	3.1	2.3	5.2	2.5	0	1.6	2.6	1.5	2.9	1.2	0	2.7	5.2	2.3	1.1	1.3
REF NO.	IC1501																			
MODE	21	22	23	24																
PLAY	0	3.3	0	0.3																
STANDBY	0	3.3	0	0.3																
REF NO.	IC4001																			
MODE	1	2	3	4	5	6	7	8												
PLAY	0	0	0	-5	0	0	0	5.4												
STANDBY	0	0	0	-5	0	0	0	5.4												
REF NO.	IC4002																			
MODE	1	2	3	4	5	6	7	8												
PLAY	0	0	0	-5	0	0	0	5.4												
STANDBY	0	0	0	-5	0	0	0	5.4												
REF NO.	IC4003																			
MODE	1	2	3	4	5	6	7	8												
PLAY	5.4	2.7	0	-2.5	-5	0	3.1	5.4												
STANDBY	5.4	2.7	0	-2.5	-5	0	3.1	5.4												
REF NO.	IC4005																			
MODE	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20
PLAY	0	3.3	3.3	3.3	3.3	0.6	1.6	0.7	1.6	1.6	3.3	0	1.5	1.5	0	1.6	1.2	0	1.6	1.6
STANDBY	0	3.3	3.3	3.3	3.3	0.6	1.6	0.7	1.6	1.6	3.3	0	1.5	1.5	0	1.6	1.2	0	1.6	1.6
REF NO.	IC4005																			
MODE	21	22	23	24	25	26	27	28	29	30	31	32	33	34	35	36	37	38	39	40
PLAY	3.3	0	1.5	3.3	0	3.3	1.6	1.6	1.6	1.6	1.6	1.6	1.6	1.6	3.3	0	0	0	0	3.3
STANDBY	3.3	0	1.5	3.3	0	3.3	1.6	1.6	1.6	1.6	1.6	1.6	1.6	1.6	3.3	0	0	0	0	3.3
REF NO.	IC4005																			
MODE	41	42	43	44	45	46	47	48												
PLAY	1.4	1.5	0	0	3.3	0	0	0												
STANDBY	1.4	1.5	0	0	3.3	0	0	0												
REF NO.	IC4201																			
MODE	1	2	3	4	5	6	7	8	9	10	11	12	13	14						
PLAY	5.4	0	2.5	2.6	5	0	0	2.6	2.6	2.6	2.7	2.7	2.6	5.4						
STANDBY	5.4	0	2.5	2.6	5	0	0	2.6	2.6	2.6	2.7	2.7	2.6	5.4						

SA-MAX370GS, SA-MAX770GS MAIN P.C.B.

8.1.3. Main P.C.B. (3/6)

REF NO.	IC4202																			
MODE	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20
PLAY	5	0	0	0	0	0	-9.9	-1.3	-7.5	-11.5	-11.5	-7.5	-1.3	-9.9	-36.1	-36.1	-29.7	0	0	-40.1
STANDBY	5	0	0	0	0	0	-9.9	-1.3	-7.5	-11.5	-11.5	-7.5	-1.3	-9.9	-36.1	-36.1	-29.7	0	0	-40.1
REF NO.	IC4202																			
MODE	21	22	23	24	25	26	27	28	29	30	31	32	33	34	35	36	37	38	39	40
PLAY	-36.1	-36.1	-9.9	-1.3	-7.4	-11.5	-7.4	-7.4	-1.3	-9.7	0	-40.1	-29.6	-40.1	-36.4	-34.9	0.2	0	0.2	0
STANDBY	-36.1	-36.1	-9.9	-1.3	-7.4	-11.5	-7.4	-7.4	-1.3	-9.7	0	-40.1	-29.6	-40.1	-36.4	-34.9	0.2	0	0.2	0
REF NO.	IC4202																			
MODE	41	42	43	44	45	46	47	48												
PLAY	0	-4.6	5	0	0.2	0	5	5												
STANDBY	0	-4.6	5	0	0.2	0	5	5												
REF NO.	IC4203																			
MODE	1	2	3	4	5															
PLAY	-35	-40.1	-38.4	-35	-34.9															
STANDBY	-35	-40.1	-38.4	-35	-34.9															
REF NO.	IC4501																			
MODE	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20
PLAY	5	0	0	0	0	0	-0.9	-7	-10.8	-10.8	-7	-7	-0.9	-3.3	-0.5	-0.5	-0.5	0	0	-40.1
STANDBY	5	0	0	0	0	0	-0.9	-7	-10.8	-10.8	-7	-7	-0.9	-3.3	-0.5	-0.5	-0.5	0	0	-40.1
REF NO.	IC4501																			
MODE	21	22	23	24	25	26	27	28	29	30	31	32	33	34	35	36	37	38	39	40
PLAY	-0.4	-0.9	-2.8	-3.7	-7.5	-11.5	-11.5	-7.6	-1.5	-9.7	0	-40.1	-29.6	-40.1	-36.4	-34.9	0.2	0	0.2	0
STANDBY	-0.4	-0.9	-2.8	-3.7	-7.5	-11.5	-11.5	-7.6	-1.5	-9.7	0	-40.1	-29.6	-40.1	-36.4	-34.9	0.2	0	0.2	0
REF NO.	IC4501																			
MODE	41	42	43	44	45	46	47	48												
PLAY	0	-4.6	5	0	0.2	0	0.2	5												
STANDBY	0	-4.6	5	0	0.2	0	0.2	5												
REF NO.	IC4502																			
MODE	1	2	3	4	5															
PLAY	-35	-40.1	-38.3	-35	-34.9															
STANDBY	-35	-40.1	-38.3	-35	-34.9															
REF NO.	IC4801																			
MODE	1	2	3	4																
PLAY	3.3	0	1.8	3.3																
STANDBY	3.3	0	1.8	3.3																
REF NO.	IC4802																			
MODE	1	2	3	4	5	6	7	8	9	10	11	12	13	14						
PLAY	2.7	0	5.4	3.3	0	1.6	1.6	1.6	0.6	0	0	0	2.8	2.7						
STANDBY	2.7	0	5.4	3.3	0	1.6	1.6	1.6	0.6	0	0	0	2.8	2.7						
SA-MAX370GS, SA-MAX770GS MAIN P.C.B.																				

8.1.4. Main P.C.B. (4/6)

REF NO.	IC4803																			
MODE	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20
PLAY	1.8	0	0	0	1.2	0	0.8	1.6	1.6	1.8	3.3	0	1.6	1.7	3.3	3.2	3.2	1.8	3.3	1.5
STANDBY																				
REF NO.	IC4803																			
MODE	21	22	23	24	25	26	27	28	29	30	31	32	33	34	35	36	37	38	39	40
PLAY	3.3	2.7	2.7	0	1.6	15.8	2.9	0	2.9	15.8	15.8	3.3	0	3.3	15.8	3.3	0	3.3	0	1.6
STANDBY																				
REF NO.	IC4803																			
MODE	41	42	43	44	45	46	47	48												
PLAY	0	0	1.6	1.6	1.2	0	3.3	1.6												
STANDBY																				
REF NO.	IC4901																			
MODE	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16				
PLAY	0.1	1.7	5.9	5.9	0.3	0	0	0	11.9	11.9	5.9	0.3	5.9	0.3	0.6	11.9				
STANDBY	0.1	1.7	5.9	5.9	0.3	0	0	0	11.9	11.9	5.9	0.3	5.9	0.3	0.6	11.9				
REF NO.	IC5001																			
MODE	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20
PLAY	0	1.6	5.4	3	1.6	0	0	5.4	0	0	2.9	2.6	2.6	2.9	2.9	2.7	3.3	2.2	5.4	2.1
STANDBY	0	1.6	5.4	3	1.6	0	0	5.4	0	0	2.9	2.6	2.6	2.9	2.9	2.7	3.3	2.2	5.4	2.1
REF NO.	IC5001																			
MODE	21	22	23	24	25	26	27	28	29	30										
PLAY	1.5	0	1.8	5.4	5.4	1.6	1.6	3.3	0	0										
STANDBY	1.5	0	1.8	5.4	5.4	1.6	1.6	3.3	0	0										
REF NO.	IC7001																			
MODE	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20
PLAY	0	0.2	0	0	0	3.3	3.3	0	3.3	3.3	3.3	0	1.5	1.6	0.1	0.1	1.6	1.4	1.5	0
STANDBY	0	0.2	0	0	0	3.3	3.3	0	3.3	3.3	3.3	0	1.5	1.6	0.1	0.1	1.6	1.4	1.5	0
REF NO.	IC8001																			
MODE	1	2	3	4																
PLAY	3.3	0	1.6	3.3																
STANDBY	3.3	0	1.6	3.3																
REF NO.	IC8002																			
MODE	1	2	3	4	5															
PLAY	5.1	0	3.2	0	5.1															
STANDBY	5.1	0	3.2	0	5.1															
REF NO.	IC8003																			
MODE	1	2	3	4	5	6	7	8												
PLAY	0	3.3	0	0.6	5.4	0	5.4	5.4												
STANDBY	0	3.3	0	0.6	5.4	0	5.4	5.4												
REF NO.	IC8004																			
MODE	1	2	3	4	5	6	7	8	9	10										
PLAY	11.2	15.9	3.1	2.3	0.5	0	0.9	0.6	0	5.1										
STANDBY	11.2	15.9	3.1	2.3	0.5	0	0.9	0.6	0	5.1										

SA-MAX370GS, SA-MAX770GS MAIN P.C.B.

8.1.5. Main P.C.B. (5/6)

REF NO.	IC8005																			
MODE	1	2	3	4	5	6	7	8	9	10										
PLAY	11.5	15.9	3.1	2.5	0.5	0	0.8	0.6	0	5.4										
STANDBY	11.5	15.9	3.1	2.5	0.5	0	0.8	0.6	0	5.4										
REF NO.	IC8007																			
MODE	1	2	3	4	5															
PLAY	12	0	16	2.5	3.1															
STANDBY	12	0	16	2.5	3.1															
REF NO.	IC8008																			
MODE	1	2	3	4	5															
PLAY	5.1	0	3.2	3.3	5.1															
STANDBY	5.1	0	3.2	3.3	5.1															
REF NO.	IC8009																			
MODE	1	2	3	4	5	6														
PLAY	1.2	0.6	0	3.3	3.1	3.3														
STANDBY	1.2	0.6	0	3.3	3.1	3.3														
REF NO.	IC8010																			
MODE	1	2	3	4	5															
PLAY	15.9	2.9	9.6	2.6	0															
STANDBY	15.9	2.9	9.6	2.6	0															
REF NO.	IC8011																			
MODE	1	2	3	4	5															
PLAY	15.8	15.8	3.5	2.6	0															
STANDBY	15.8	15.8	3.5	2.6	0															
REF NO.	IC8501																			
MODE	1	2	3	4	5	6	7	8												
PLAY	14.8	2.9	3.1	0	3.1	2.9	14.8	16												
STANDBY	14.8	2.9	3.1	0	3.1	2.9	14.8	16												
REF NO.	IC9001																			
MODE	1	2	3	4	5	6	7	8	9	10										
PLAY	0	0	0	0	0	0	0	0	3.3	0										
STANDBY	0	0	0	0	0	0	0	0	3.3	0										
REF NO.	Q1001																			
MODE	E	C	B		E	C	B		E	C	B		E	C	B		E	C	B	
PLAY	0	0	0.6		5.4	5.3	4.7		0	0	-5		0	0	-5		0	0	-5	
STANDBY	0	0	0.6		5.4	5.3	4.7		0	0	-5		0	0	-5		0	0	-5	
REF NO.	Q4004																			
MODE	E	C	B		E	C	B		E	C	B		1	2	5	6				
PLAY	0	0	-5		0	0	-5		0	0	-5		40.1	40.1	40.1	40.1				
STANDBY	0	0	-5		0	0	-5		0	0	-5		40.1	40.1	40.1	40.1				
REF NO.	Q4202																			
MODE	1	2	5	6					1	2	5	6					1	2	5	6
PLAY	-10.8	-10.8	-10.8	-10.8					-10.8	-10.8	-10.8	-10.8					40.1	40.1	40.1	40.1
STANDBY	-10.8	-10.8	-10.8	-10.8					-10.8	-10.8	-10.8	-10.8					40.1	40.1	40.1	40.1
REF NO.	Q4205																			
MODE	1	2	5	6					1	2	5	6					1	2	5	6
PLAY	-10.8	-10.8	-10.8	-10.8					40.1	40.1	40.1	40.1					-10.8	-10.8	-10.8	-10.8
STANDBY	-10.8	-10.8	-10.8	-10.8					40.1	40.1	40.1	40.1					-10.8	-10.8	-10.8	-10.8

SA-MAX370GS, SA-MAX770GS MAIN P.C.B.

8.1.6. Main P.C.B. (6/6)

REF NO.	Q4208							Q4209					Q4210											
MODE	1	2	5	6				E	C	B			E	C	B									
PLAY	40.1	40.1	40.1	40.1				0	0	0			0	0	0									
STANDBY	40.1	40.1	40.1	40.1				0	0	0			0	0	0									
REF NO.	Q4501							Q4502							Q4503									
MODE	1	2	5	6				1	2	5	6				1	2	5	6						
PLAY	40.1	40.1	40.1	40.1				-10.8	-10.8	-10.8	-10.8				-10.8	-10.8	-10.8	-10.8						
STANDBY	40.1	40.1	40.1	40.1				-10.8	-10.8	-10.8	-10.8				-10.8	-10.8	-10.8	-10.8						
REF NO.	Q4504							Q4505							Q4506									
MODE	1	2	5	6				1	2	5	6				1	2	5	6						
PLAY	40.1	40.1	40.1	40.1				-10.8	-10.8	-10.8	-10.8				40.1	40.1	40.1	40.1						
STANDBY	40.1	40.1	40.1	40.1				-10.8	-10.8	-10.8	-10.8				40.1	40.1	40.1	40.1						
REF NO.	Q4507							Q4508							Q4509									
MODE	1	2	5	6				1	2	5	6				E	C	B							
PLAY	-10.8	-10.8	-10.8	-10.8				40.1	40.1	40.1	40.1				0	0	0							
STANDBY	-10.8	-10.8	-10.8	-10.8				40.1	40.1	40.1	40.1				0	0	0							
REF NO.	Q4510					Q4511					Q5001					Q8001					Q8003			
MODE	E	C	B		E	C	B			E	C	B			E	C	B			E	C	B		
PLAY	0	0	0		-29.7	-4.3	-29.1			2.9	1.9	2.2			12	11.9	11.2			5.4	5.4	4.8		
STANDBY	0	0	0		-29.7	-4.3	-29.1			2.9	1.9	2.2			12	11.9	11.2			5.4	5.4	4.8		
REF NO.	Q8501					Q8502					Q8503					Q8504					Q8505			
MODE	E	C	B		E	C	B			E	C	B			E	C	B			E	C	B		
PLAY	0.5	0.6	1.2		0	0.6	0			0	0	0.6			14.2	15.9	14.7			13.6	15.9	14.3		
STANDBY	0.5	0.6	1.2		0	0.6	0			0	0	0.6			14.2	15.9	14.7			13.6	15.9	14.3		
REF NO.	Q8506					Q8507					Q8508					Q8509					Q8510			
MODE	E	C	B		E	C	B			E	C	B			E	C	B			E	C	B		
PLAY	0	0	0		0	0	0.3			0.4	5.2	1			0	0	0.6			0	0.6	0		
STANDBY	0	0	0		0	0	0.3			0.4	5.2	1			0	0	0.6			0	0.6	0		
REF NO.	Q8511					Q9003					Q9004					QR1201					QR1802			
MODE	E	C	B		E	C	B			E	C	B			E	C	B			E	C	B		
PLAY	0.5	0.6	1.2		5.4	0	5			5.4	0	4.9			0	3.1	0			0	0	3.2		
STANDBY	0.5	0.6	1.2		5.4	0	5			5.4	0	4.9			0	3.1	0			0	0	3.2		
REF NO.	QR4001					QR4002					QR4201					QR4202					QR4203			
MODE	E	C	B		E	C	B			E	C	B			E	C	B			E	C	B		
PLAY	0	5.4	0		5.4	-5	5.4			-4.6	5.9	-4.6			0	5.4	0			3.3	-4.6	3.2		
STANDBY	0	5.4	0		5.4	-5	5.4			-4.6	5.9	-4.6			0	5.4	0			3.3	-4.6	3.2		
REF NO.	QR4501					QR4502					QR4901					QR4902					QR8001			
MODE	E	C	B		E	C	B			E	C	B			E	C	B			E	C	B		
PLAY	-35	0	-35		0	0	0			0	11.9	0			0	11.9	0			0	0.1	2.9		
STANDBY	-35	0	-35		0	0	0			0	11.9	0			0	11.9	0			0	0.1	2.9		
REF NO.	QR8003					QR8004					QR8005					QR8006					QR9002			
MODE	E	C	B		E	C	B			E	C	B			E	C	B			E	C	B		
PLAY	0	0	24.5		0	3.1	-6.6			0	3.2	7.5			0	0	3.1			0	4.8	0		
STANDBY	0	0	24.5		0	3.1	-6.6			0	3.2	7.5			0	0	3.1			0	4.8	0		
REF NO.	QR9003																							
MODE	E	C	B																					
PLAY	0	4.8	0																					
STANDBY	0	4.8	0																					

SA-MAX370GS, SA-MAX770GS MAIN P.C.B.

8.1.7. FL Display P.C.B.

REF NO.	IC1700																			
MODE	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20
PLAY	3.3	3.3	3.3	3.3	1.9	3.2	2.9	0.2	3	0	0	0	3.3	-21.9	-21.9	-21.9	-21.9	-21.8	-7.8	-17
STANDBY	3.3	3.3	3.3	3.3	1.9	3.2	2.9	0.2	3	0	0	0	3.3	-21.9	-21.9	-21.9	-21.9	-21.8	-7.8	-17

REF NO.	IC1700																			
MODE	21	22	23	24	25	26	27	28	29	30	31	32	33	34	35	36	37	38	39	40
PLAY	-21.8	-19.4	-17.1	-12.5	-14.9	-21.8	-19.4	-19.5	-10.2	-22.3	-12.7	-5.9	-22.1	-20	-19.9	-19.9	-19.9	-19.9	-19.9	-19.9
STANDBY	-21.8	-19.4	-17.1	-12.5	-14.9	-21.8	-19.4	-19.5	-10.2	-22.3	-12.7	-5.9	-22.1	-20	-19.9	-19.9	-19.9	-19.9	-19.9	-19.9

REF NO.	IC1700																			
MODE	41	42	43	44																
PLAY	-19.9	-20	3.3	0																
STANDBY	-19.9	-20	3.3	0																

REF NO.	Q1700				Q1800				Q1801										
MODE	E	C	B		E	C	B		E	C	B								
PLAY	0	9.4	0		6	11.9	6		6	0	3								
STANDBY	0	9.4	0		6	11.9	6		6	0	3								

SA-MAX370GS, SA-MAX770GS FL DISPLAY P.C.B.

8.1.8. Mic P.C.B.

REF NO.	IC1401																			
MODE	1	2	3	4	5	6	7	8	9	10	11	12	13	14						
PLAY	6	6	6	6	6	6	6	0	11.9	5.8	0.2	0	11.9	5.9						
STANDBY	6	6	6	6	6	6	6	0	11.9	5.8	0.2	0	11.9	5.9						

REF NO.	IC1402																			
MODE	1	2	3	4	5	6	7	8	9	10	11	12	13	14						
PLAY	6	6	6	6	6	6	6	0	11.9	5.8	0.2	0	11.9	5.9						
STANDBY	6	6	6	6	6	6	6	0	11.9	5.8	0.2	0	11.9	5.9						


SA-MAX370GS, SA-MAX770GS MIC P.C.B.

8.1.9. SMPS P.C.B.

REF NO.	IC1101																			
MODE	1	2	3	4	5	6	7	8												
PLAY	2.5	1.2	0.2	0	1.2	0	0.8	17.6												
STANDBY	2.5	1.2	0.2	0	1.2	0	0.8	17.6												
REF NO.	IC1202																			
MODE	1	2	3	4	5	6	7	8												
PLAY	0.2	0.1	0	0	0	0	0.3	17.6												
STANDBY	0.2	0.1	0	0	0	0	0.3	17.6												
REF NO.	IC1402																			
MODE	1	2	3	4	5	6	7	8												
PLAY	6	1	2.4	17.4	324	-	0	0												
STANDBY	6	1	2.4	17.4	324	-	0	0												
REF NO.	IC1501																			
MODE	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16				
PLAY	17.6	5.5	2.2	2.5	4.2	0.9	0	0	0	10.2	4.4	0	0	206.4	196.7	204.8				
STANDBY	17.6	5.5	2.2	2.5	4.2	0.9	0	0	0	10.2	4.4	0	0	206.4	196.7	204.8				
REF NO.	IC1601																			
MODE	K	A	R																	
PLAY	2.3	0	2.4																	
STANDBY	2.3	0	2.4																	
REF NO.	IC1701																			
MODE	K	A	R																	
PLAY	-28	-40.1	-36.9																	
STANDBY	-28	-40.1	-36.9																	
REF NO.	Q1101				Q1103				Q1203				Q1204				Q1402			
MODE	E	C	B		E	C	B		E	C	B		E	C	B		E	C	B	
PLAY	0.3	0	0.2		0	290	0.3		0.1	0	0		0	290	0.1		17.6	17.6	16.9	
STANDBY	0.3	0	0.2		0	290	0.3		0.1	0	0		0	290	0.1		17.6	17.6	16.9	
REF NO.	Q1501				Q1502				Q1702				QR1601							
MODE	E	C	B		E	C	B		E	C	B		E	C	B					
PLAY	196.8	400	204		0	196.8	4.2		0	1.7	0.3		0	0.1	3.1					
STANDBY	196.8	400	204		0	196.8	4.2		0	1.7	0.3		0	0.1	3.1					


SA-MAX370GS, SA-MAX770GS SMPS P.C.B.

8.2. Waveform Chart

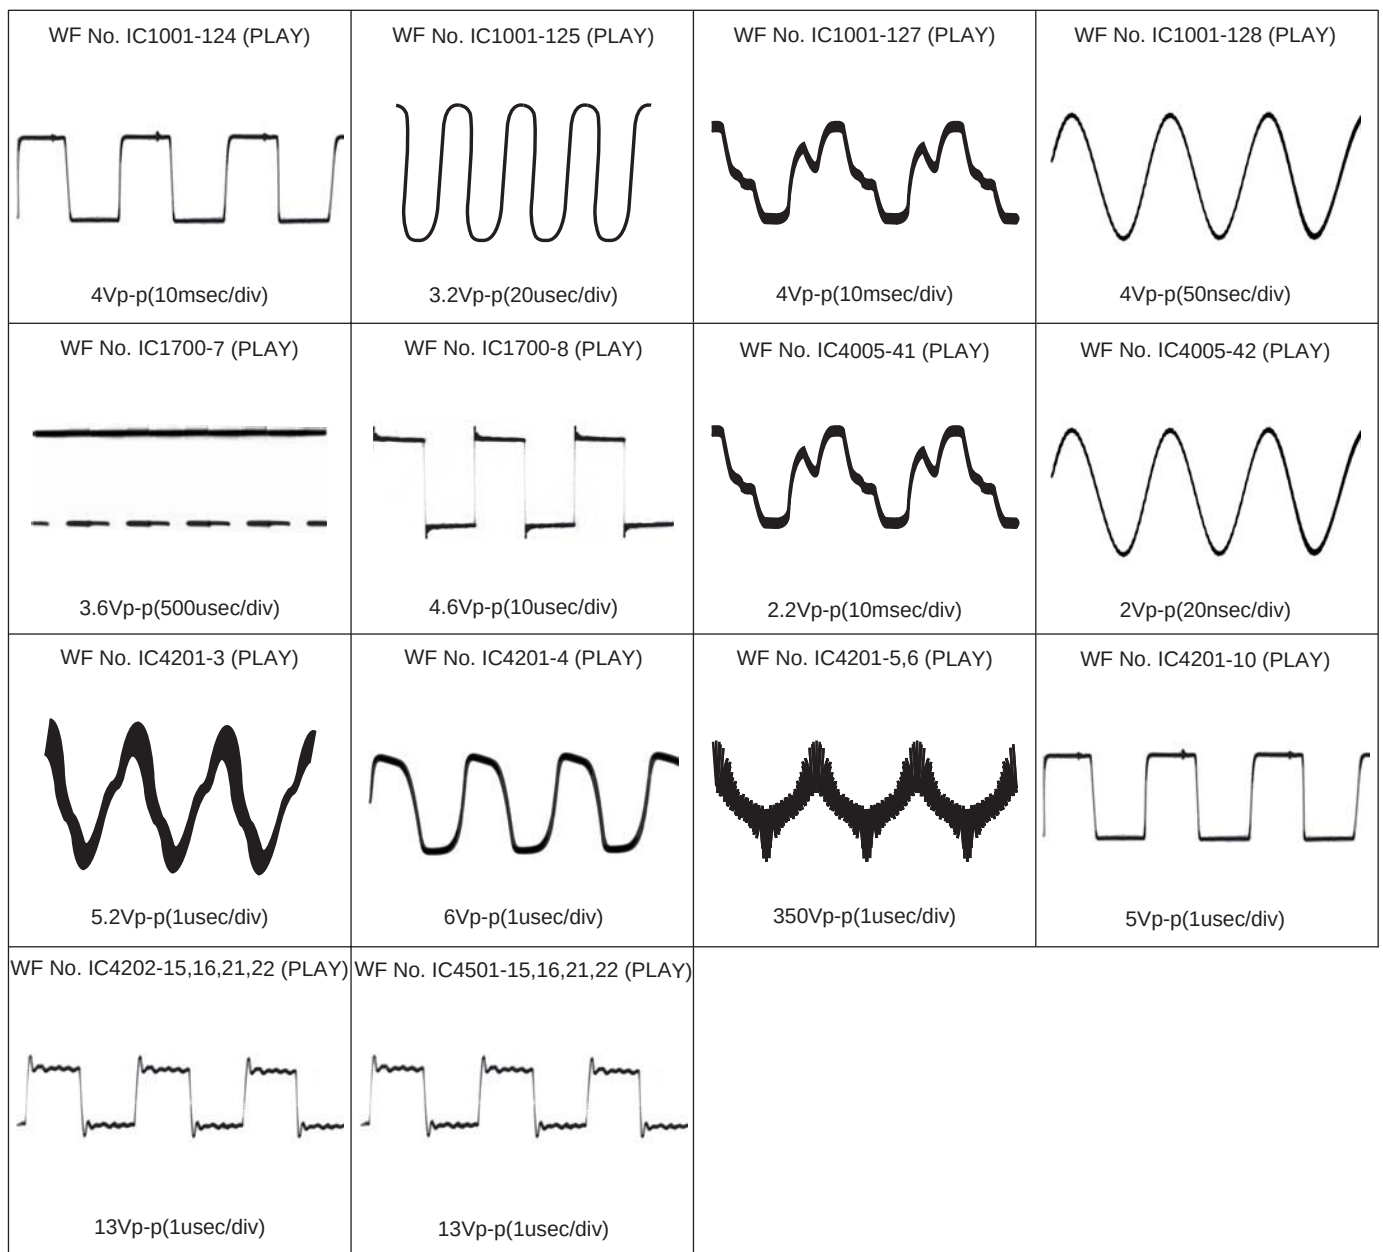


9 Exploded View and Replacement Parts List


9.1. Cabinet Parts Location 1

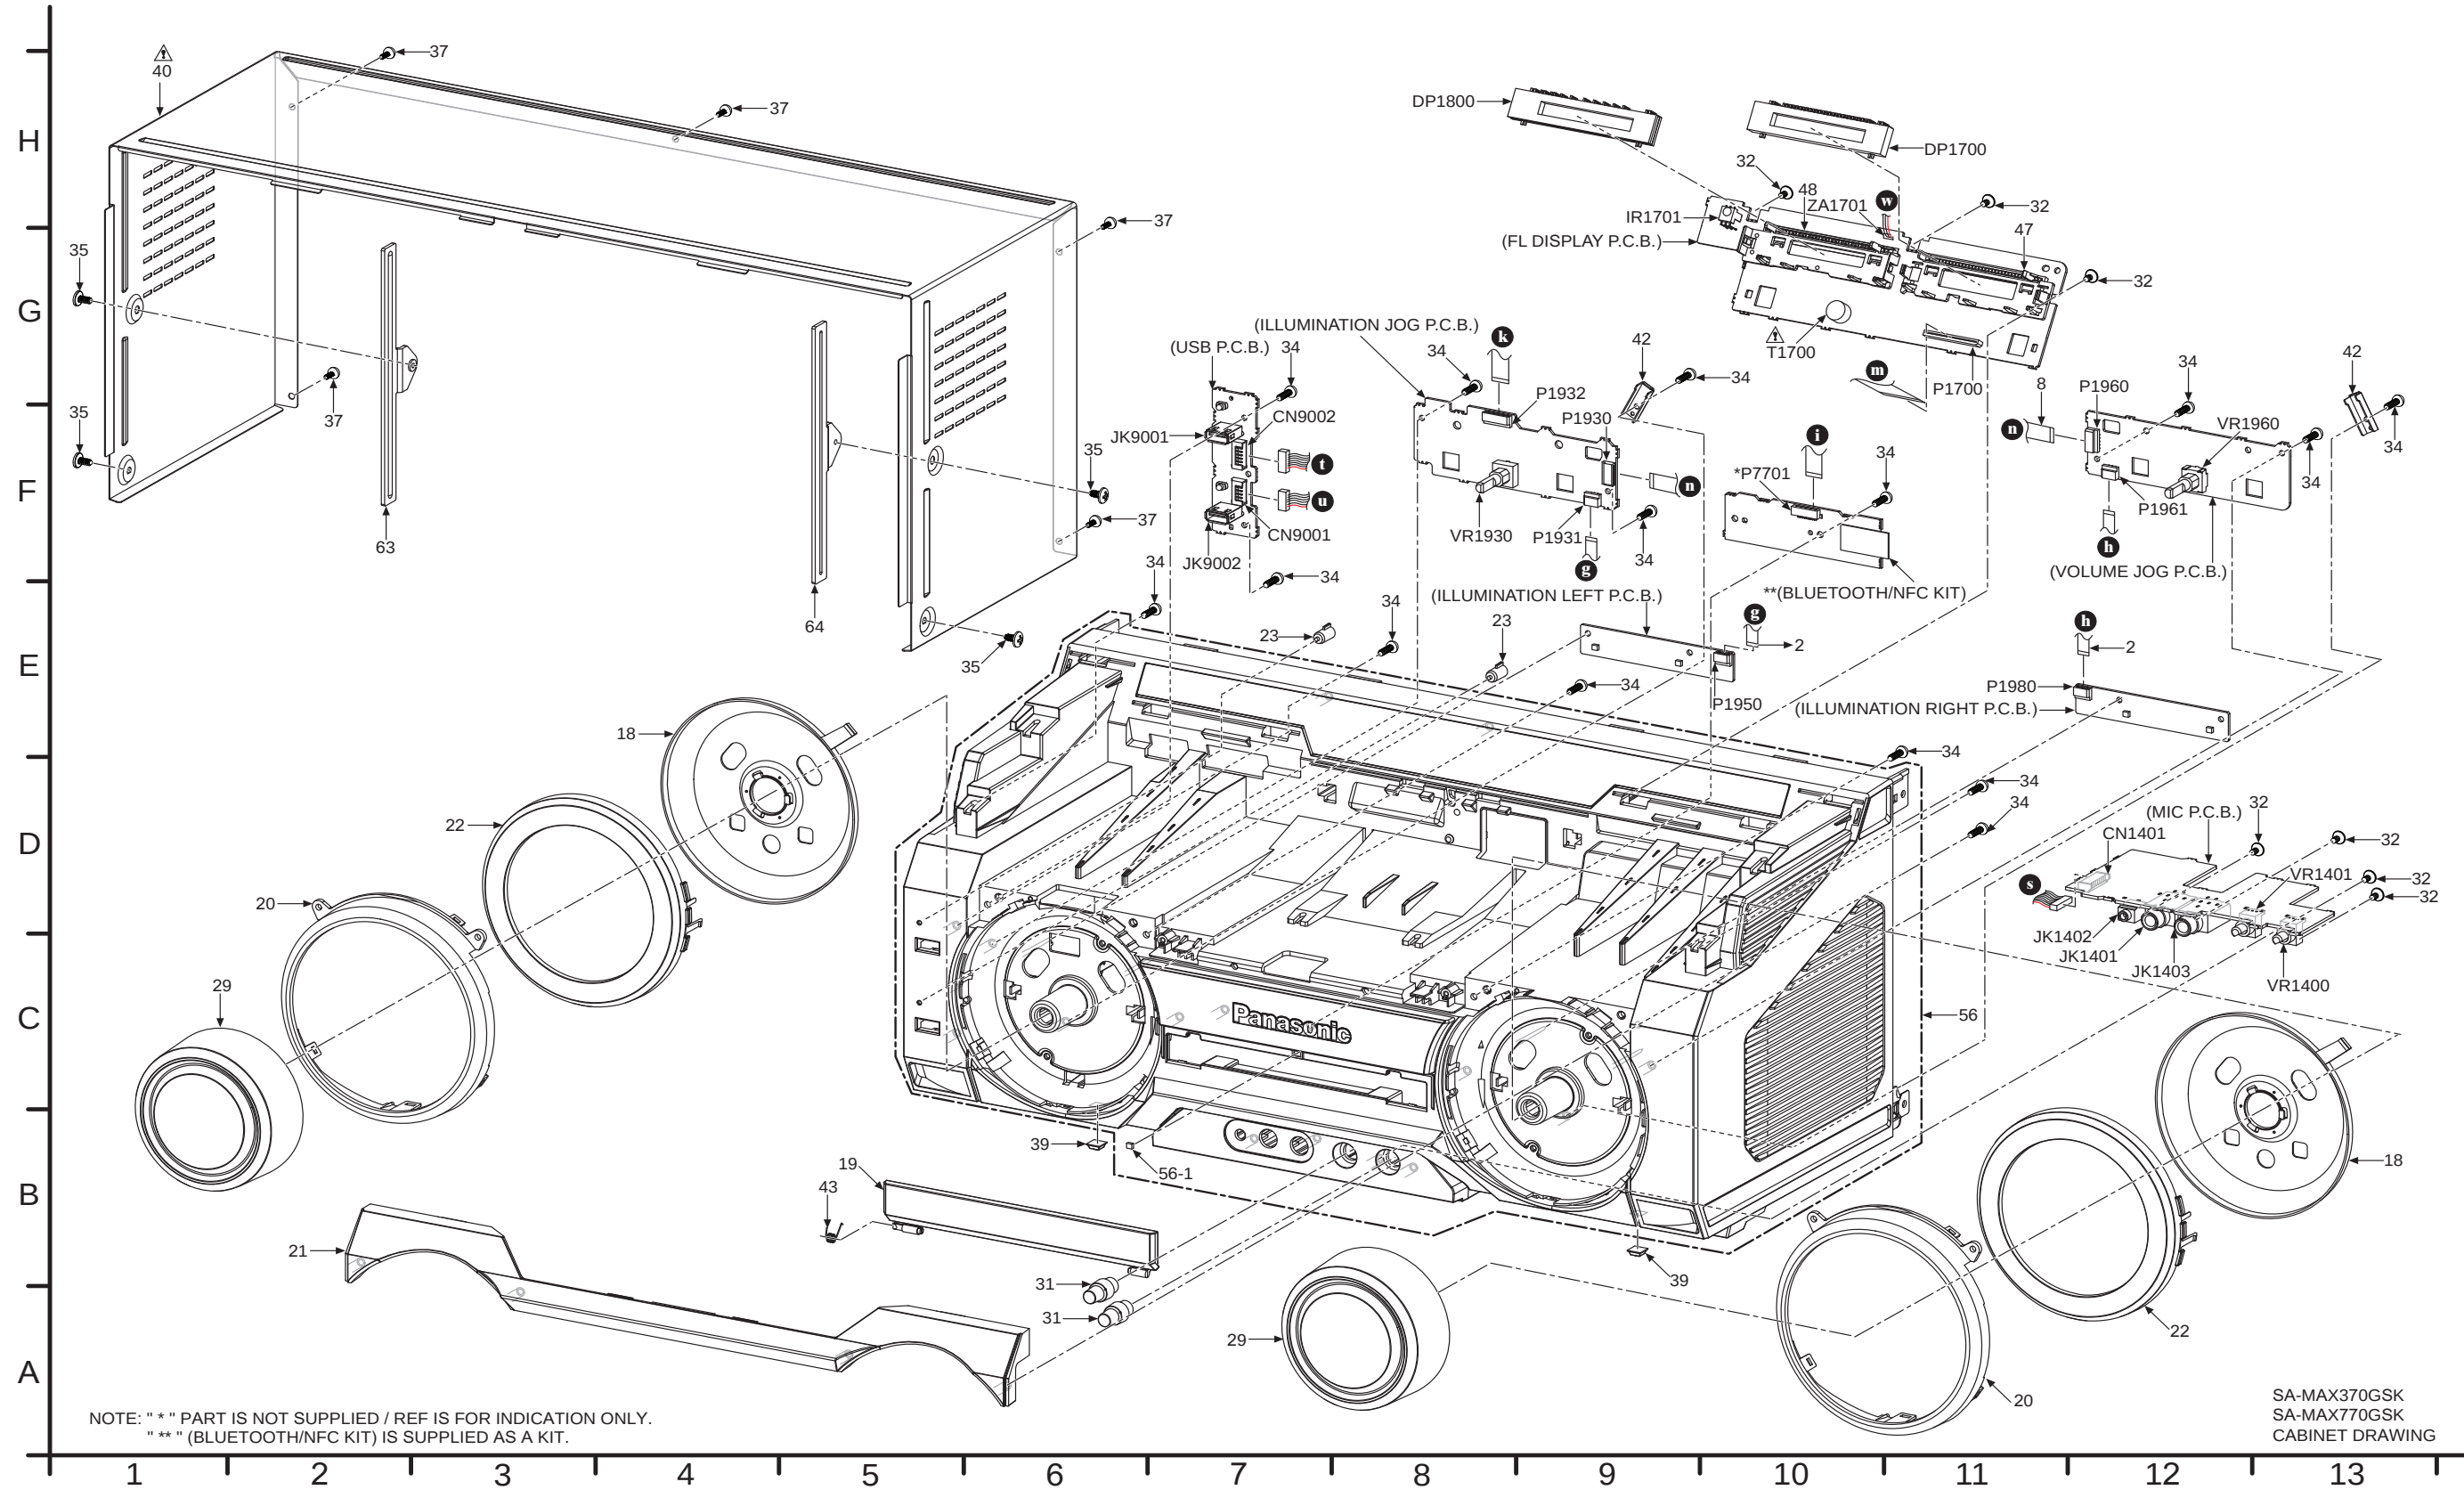


9.2. Cabinet Parts Location 2

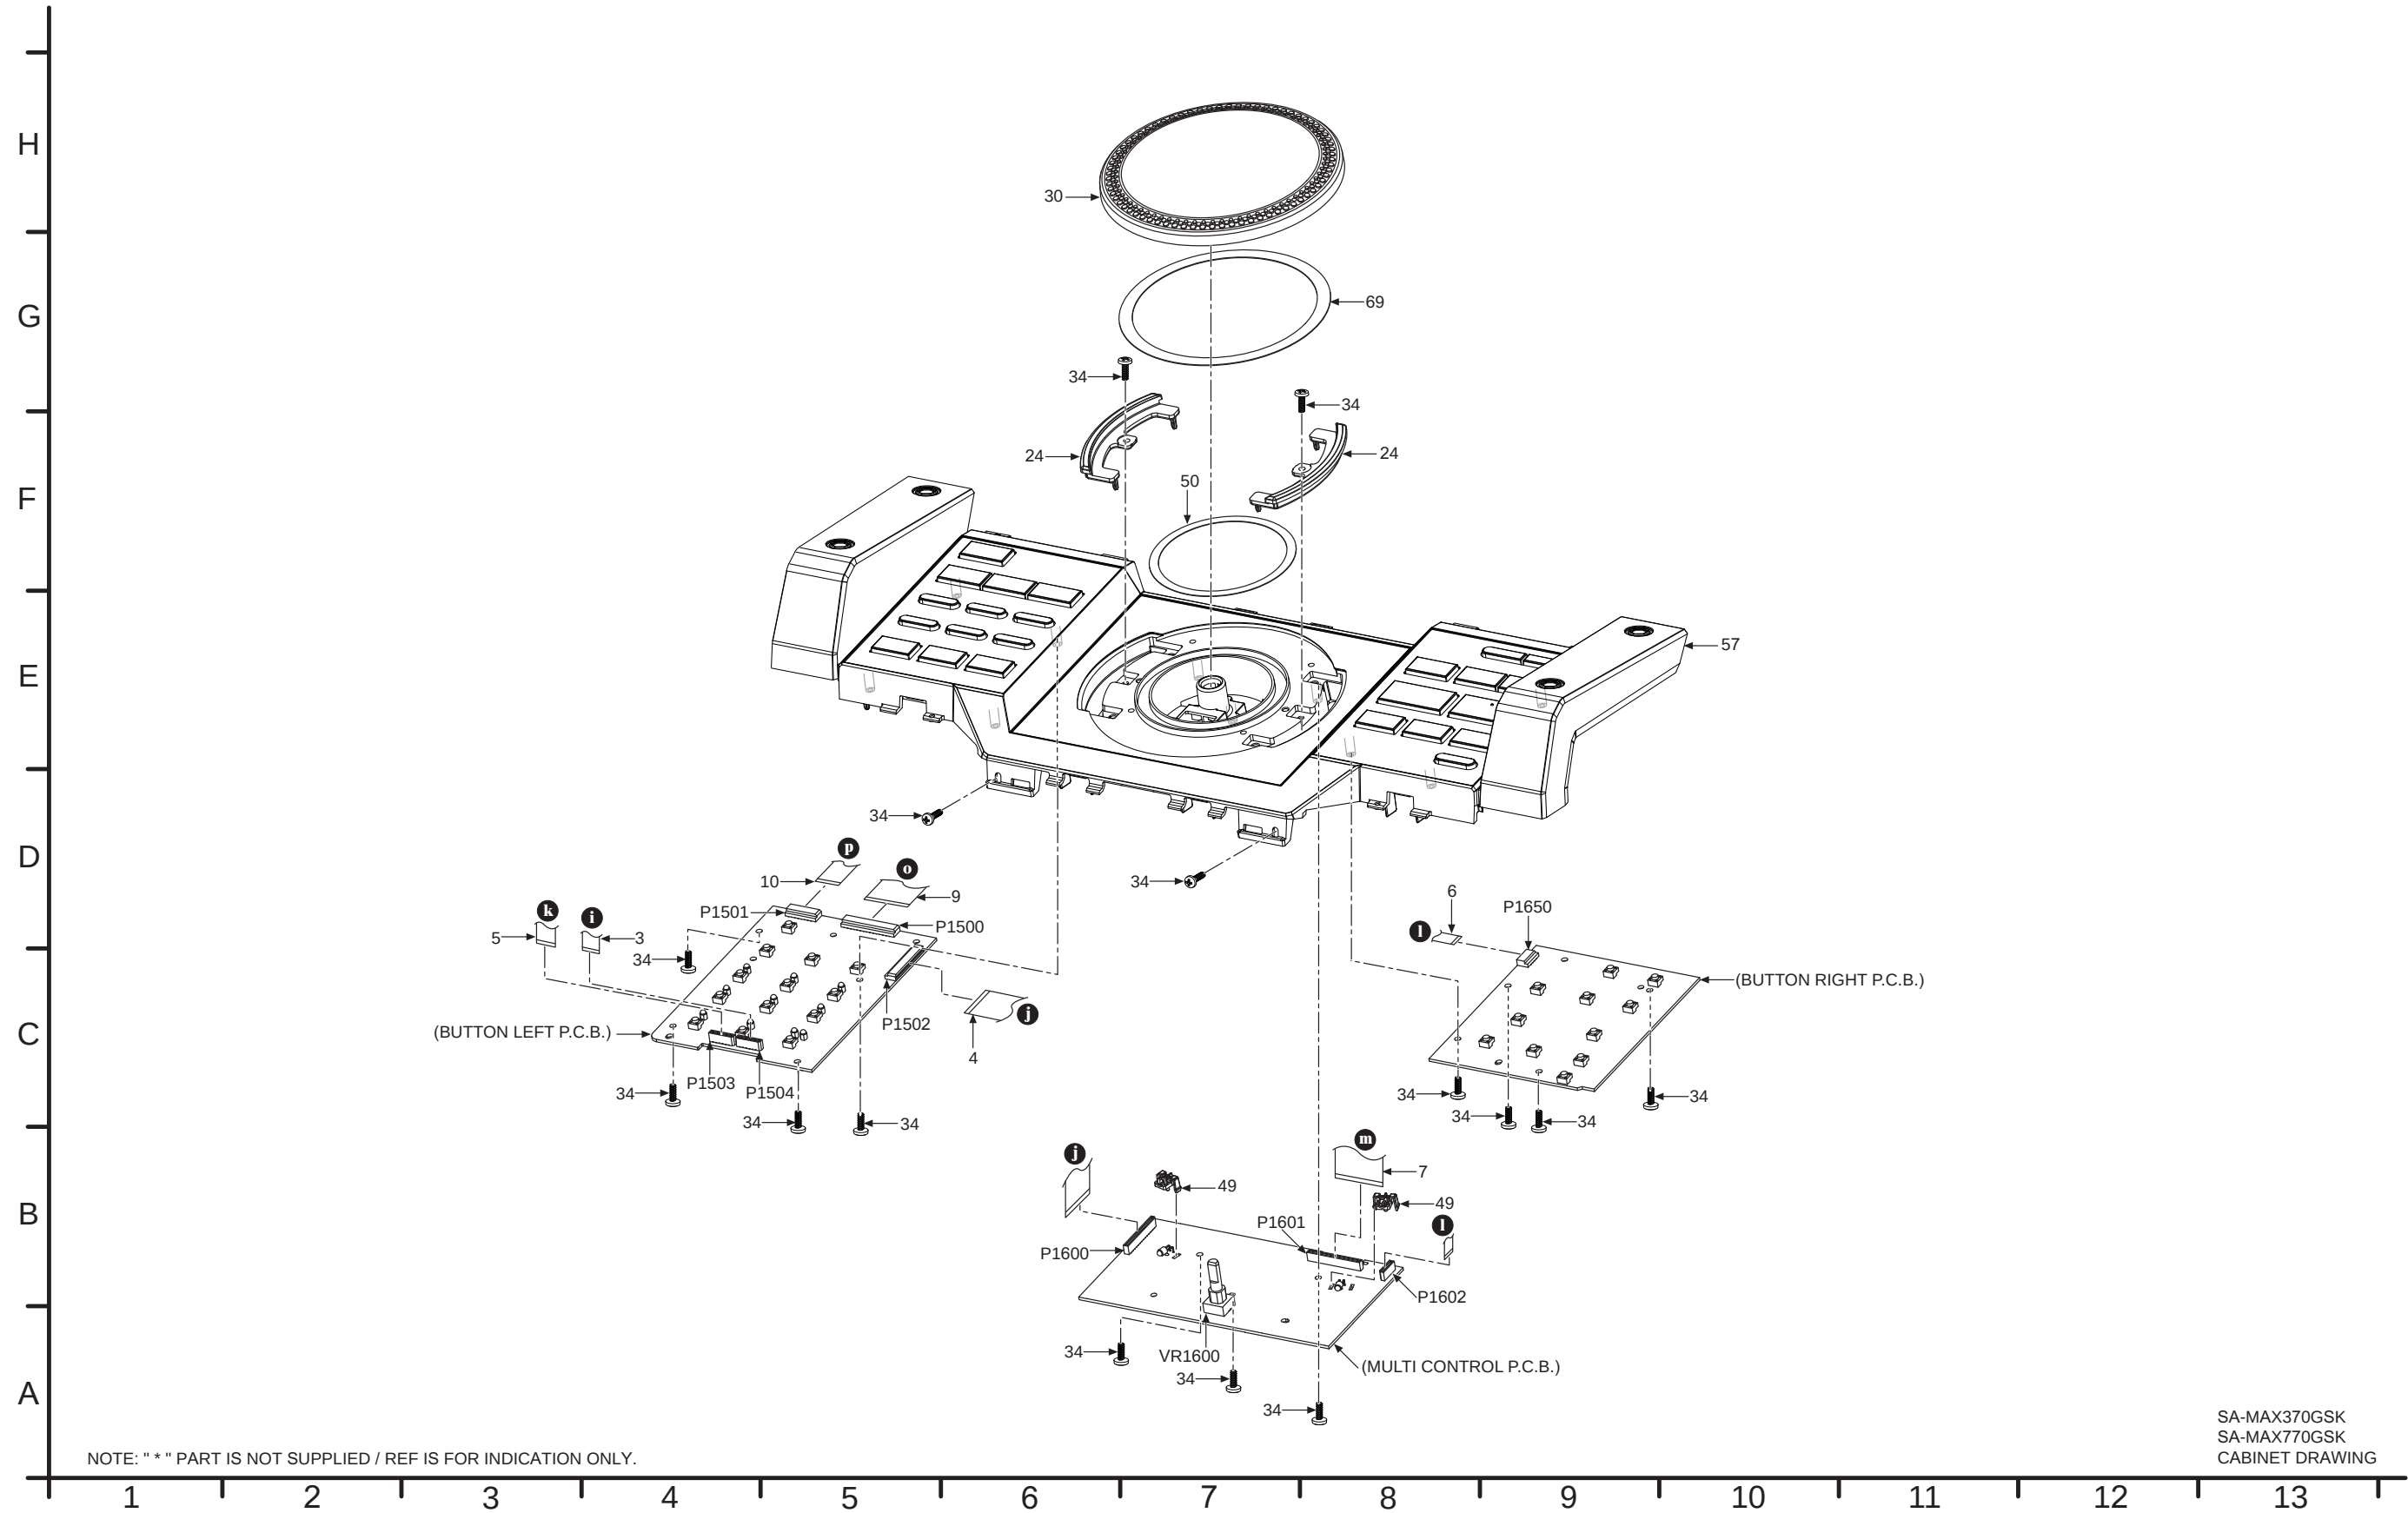


9.3. Cabinet Parts Location 3

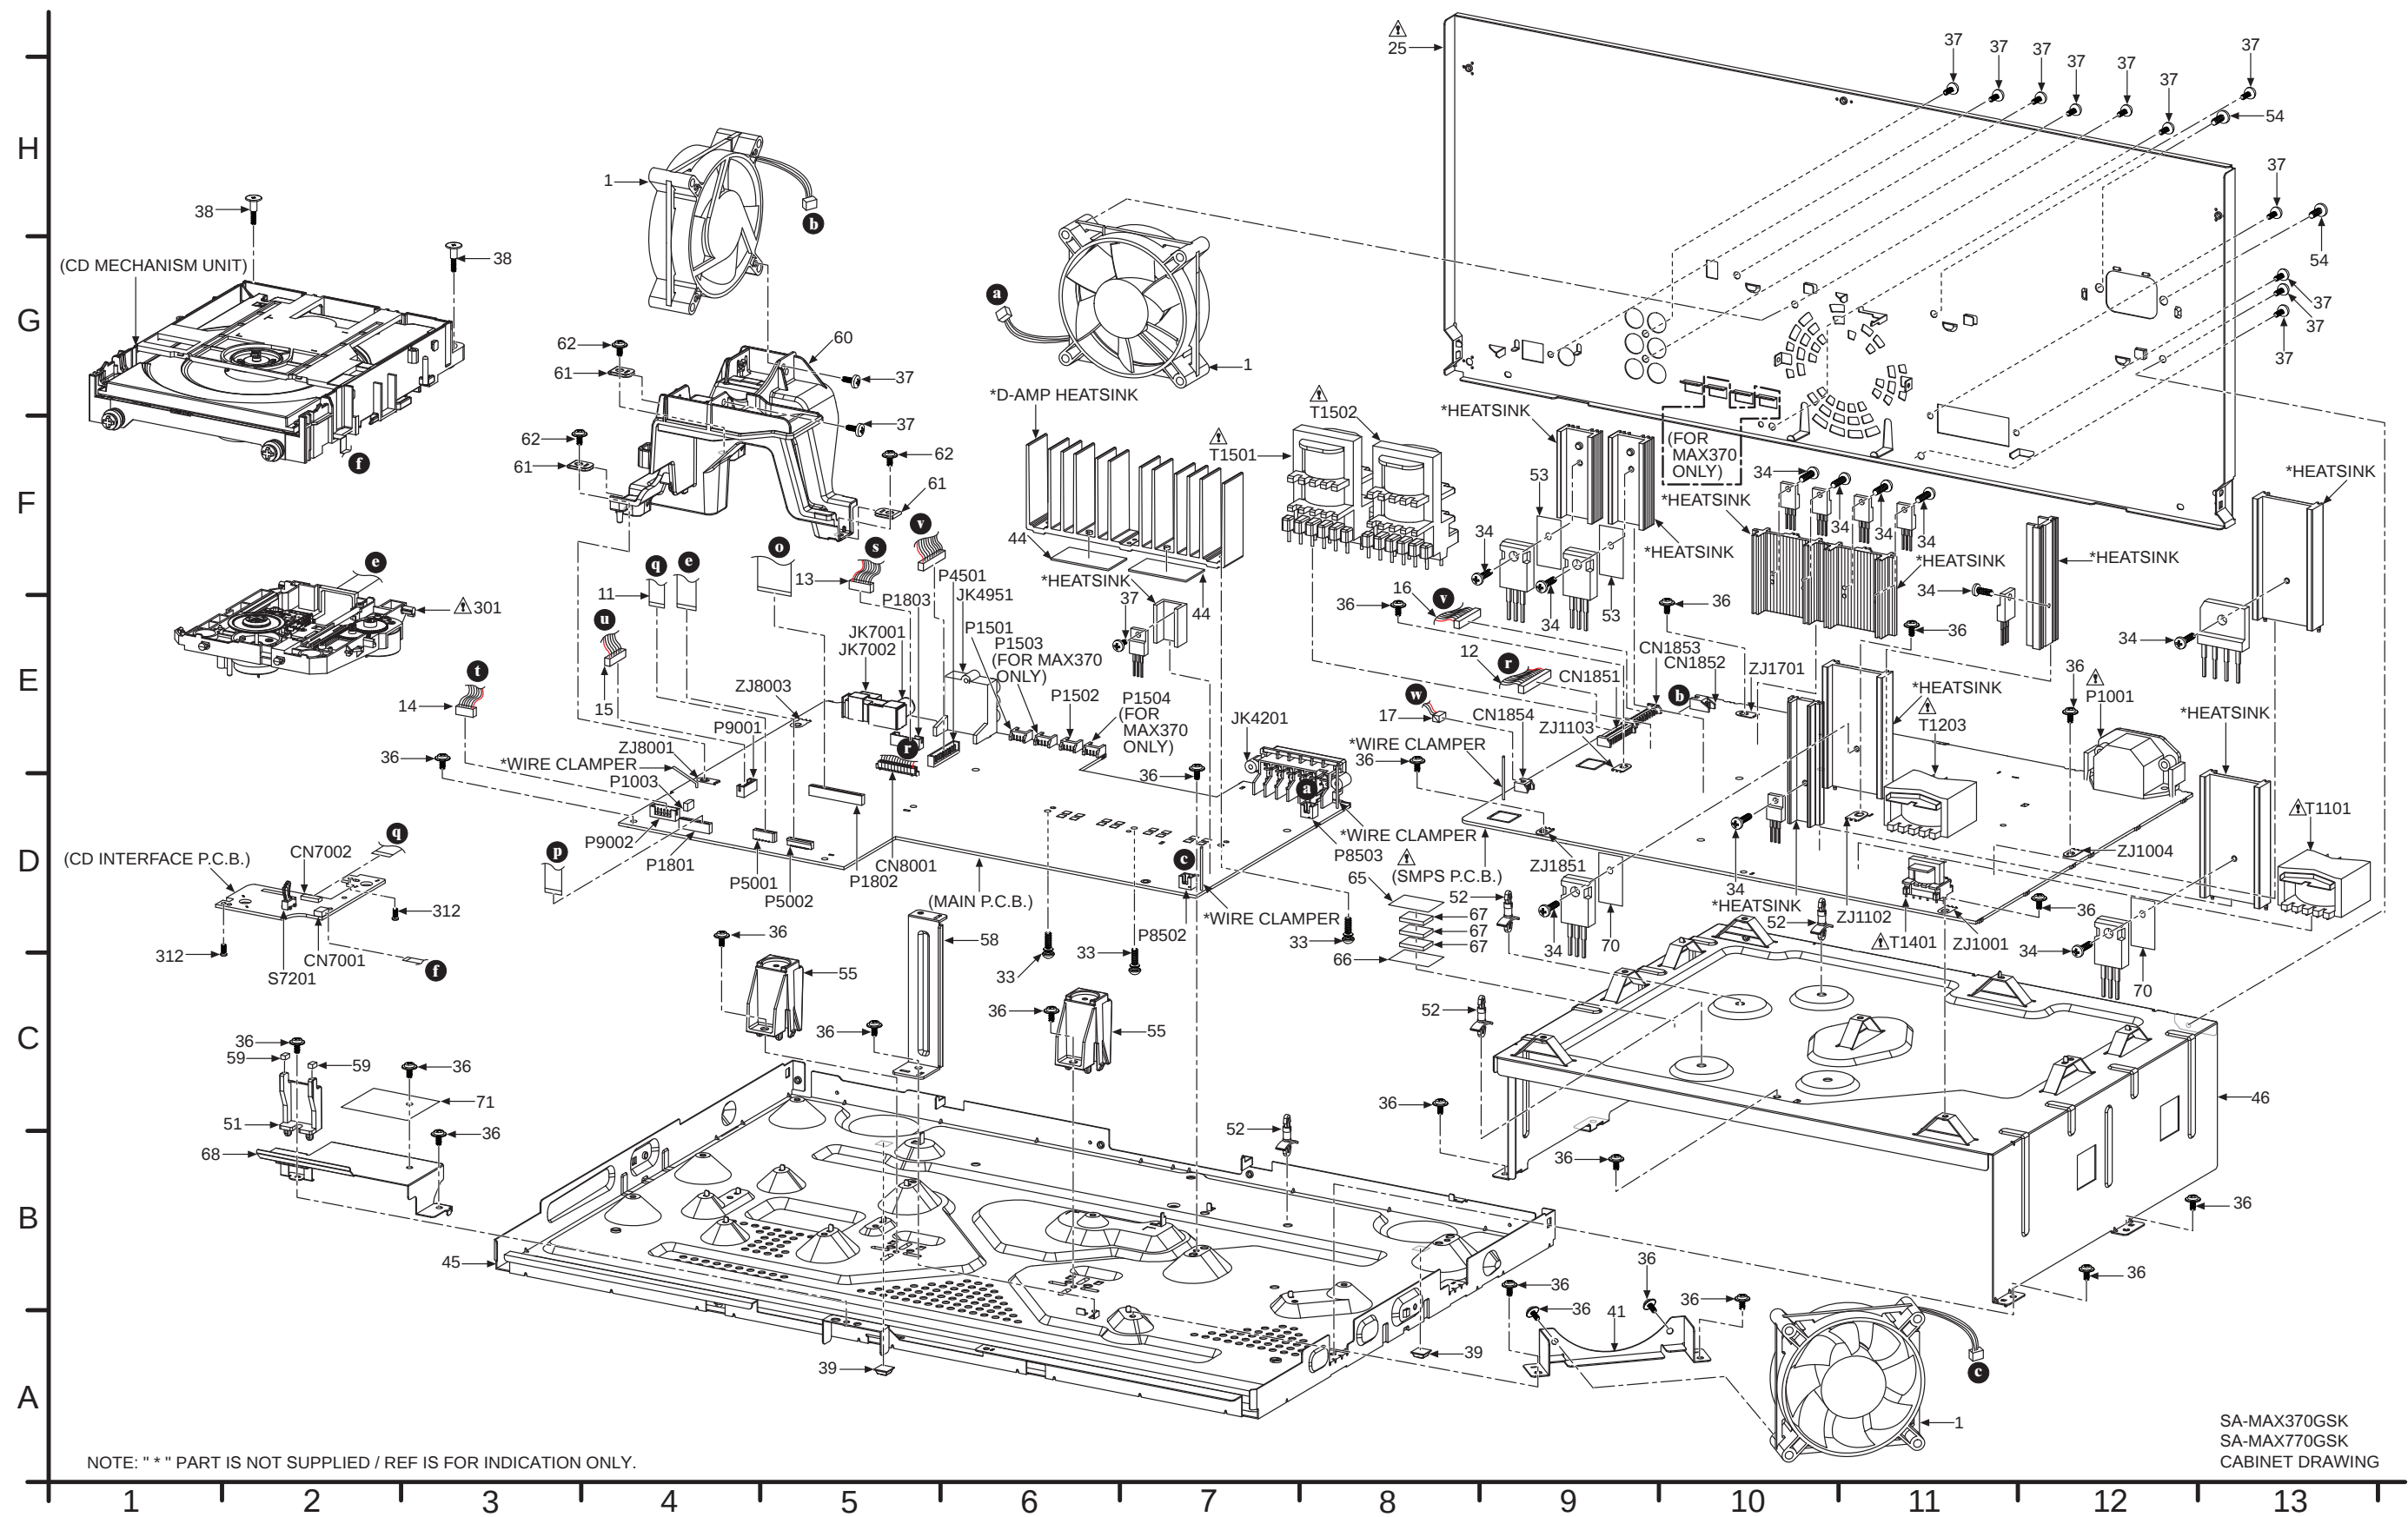

9.4. Packaging (SC-MAX370GSK)

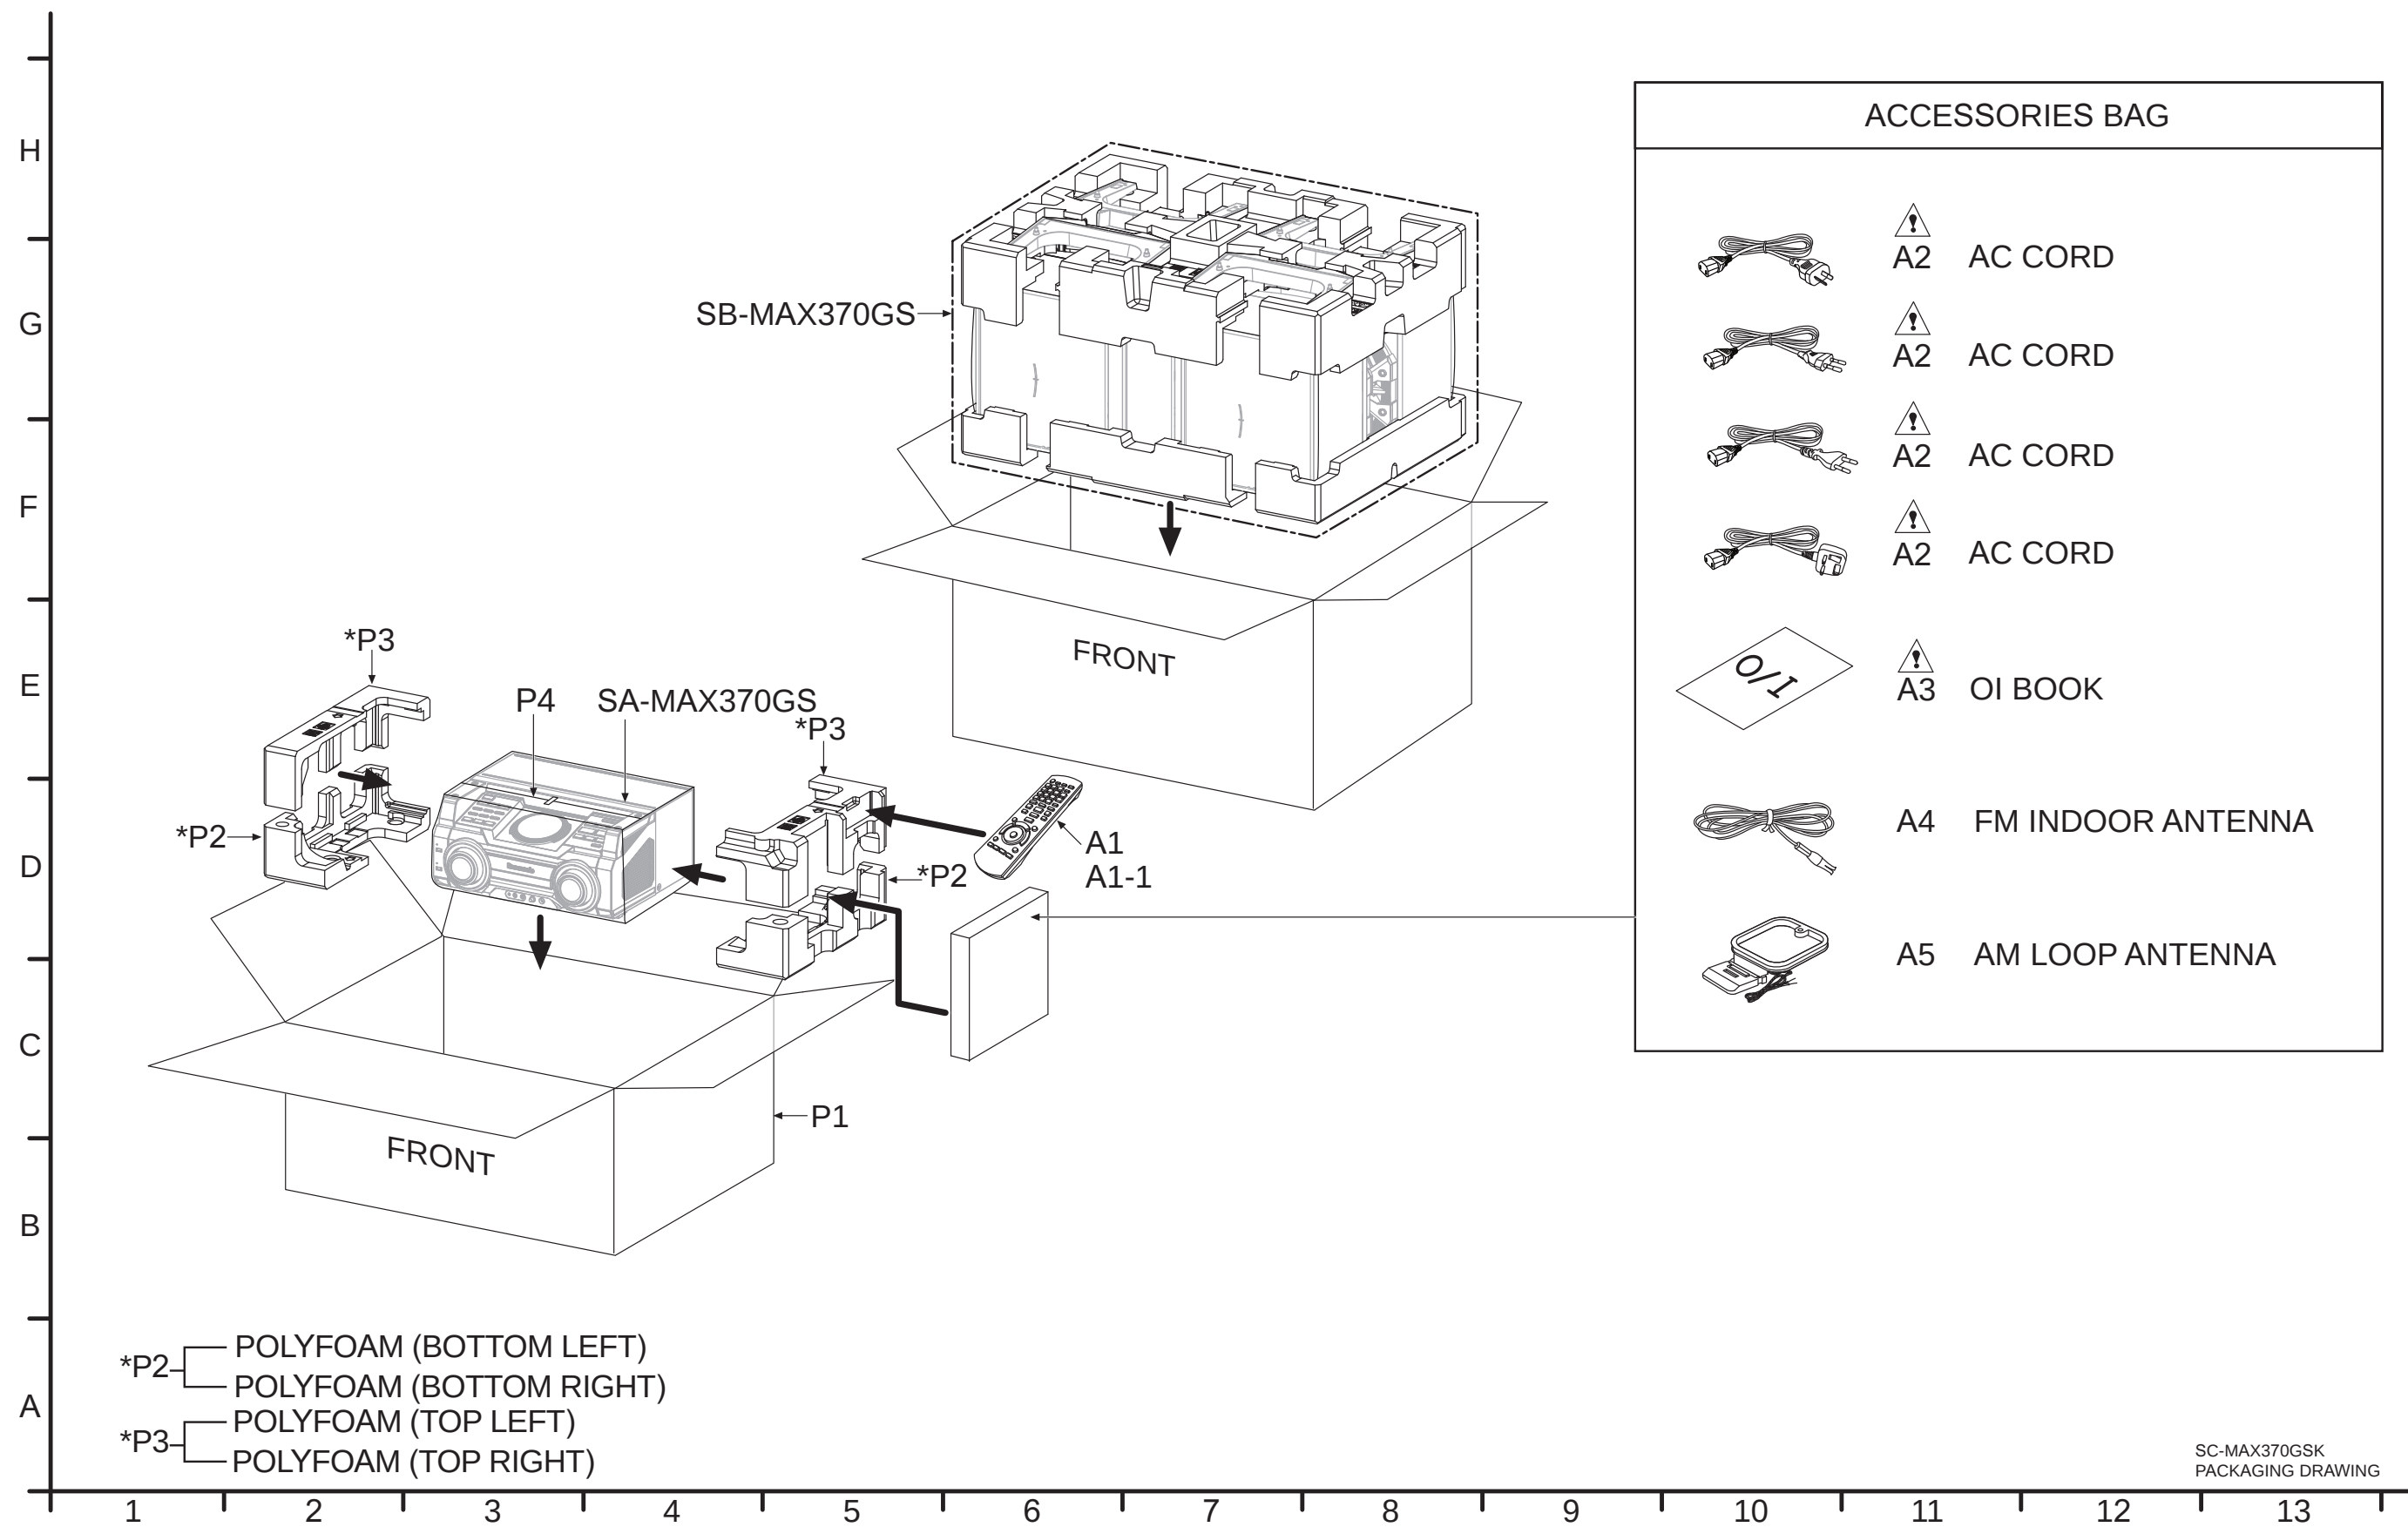

9.5. Packaging (SC-MAX770GSK)

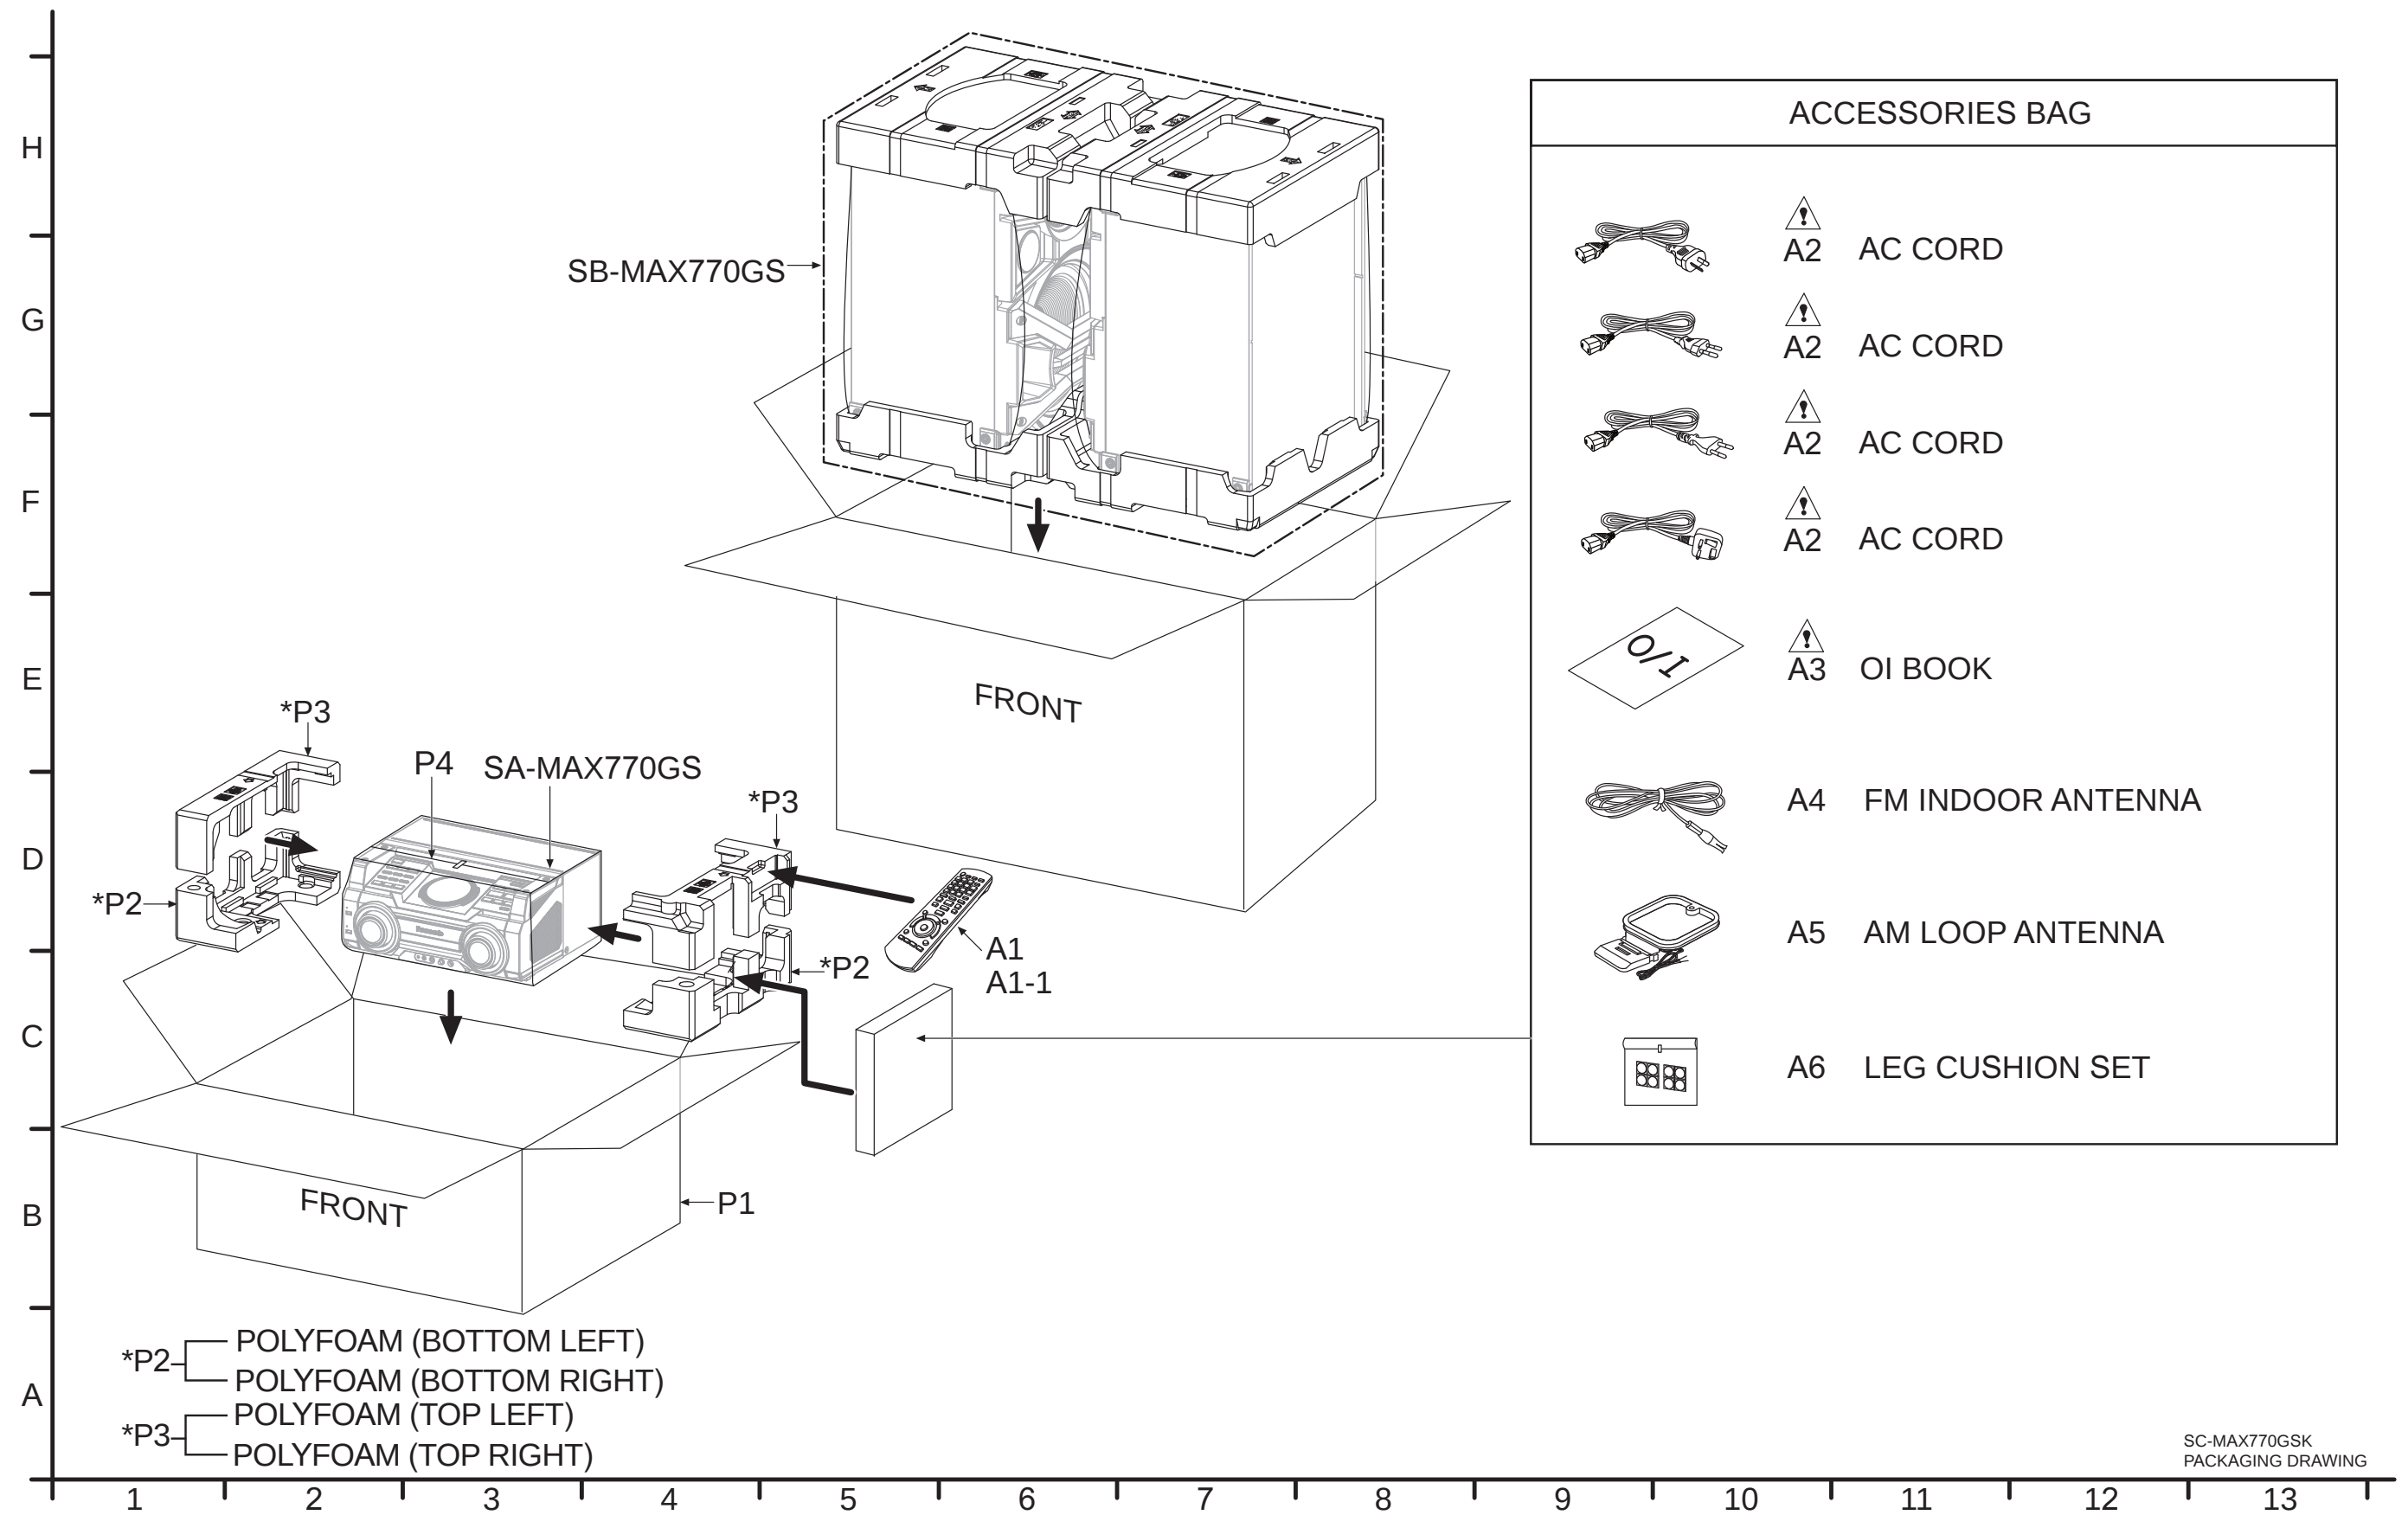

9.6. Mechanical Replacement Part List

Important Safety Notice

Components identified by ⚠ mark have special characteristics important for safety. When replacing any of these components, use only manufacturer's specified parts.

RTL (Retention Time Limited)

Note: The marking (RTL) indicates that the Retention Time is Limited for this item.

After the discontinuation of this assembly in production, the item will continue to be available for a specific period of time. The retention period of availability is dependant on the type of assembly, and in accordance with the laws governing part and product retention. After the end of this period, the assembly will no longer be available.

Note:

- When replacing any of these components, be sure to use only manufacturer's specified parts shown in the replacement part list.
- The parenthesized indications on the Remarks column specify the destination & product color (Refer to the cover page for the information).
- Parts without these indications shall be used for all areas.
- This product uses a laser diode. Refer to "Precaution of Laser Diode".
- All parts mentioned are supplied by PAVCJM unless indicated likewise.
- Reference for O/I book languages are as follows:

Ar:	Arabic	Du:	Dutch	It:	Italian	Sp:	Spanish
Cf:	Canadian French	En:	English	Ko:	Korean	Sw:	Swedish
Cz:	Czech	Fr:	French	Po:	Polish	Co:	Traditional Chinese
Da:	Danish	Ge:	German	Ru:	Russian	Cn:	Simplified Chinese
Pe:	Persian	Ur:	Ukraine	Pr:	Portuguese	Fi:	Finnish

Safety	Ref. No.	Part No.	Part Name & Description	Qty	Remarks
			CABINET AND CHASSIS		
	1	L6FALEPH0030	FAN UNIT	3	
	2	REE1760	6P FFC (ILLUMINATION LEFT-ILLUMINATION/ILLUMINATION RIGHT-VOLUME)	2	
	3	REE1887	12P FFC (BUTTON LEFT-BLUE TOOTH NFC)	1	
	4	REE1888	28P FFC (BUTTON LEFT-MULTI CONTROL)	1	
	5	REE1889	13P FFC (BUTTON LEFT-ILLUMINATION)	1	
	6	REE1890	9P FFC (MULTI CONTROL-BUTTON RIGHT)	1	
	7	REE1891	30P FFC (MULTI CONTROL-FL DISPLAY)	1	
	8	REE1894	10P FFC (VOLUME-ILLUMINATION)	1	
	9	REE1898	30P FFC (MAIN-BUTTON LEFT)	1	
	10	REE1899	16P FFC (MAIN-BUTTON LEFT)	1	

Safety	Ref. No.	Part No.	Part Name & Description	Qty	Remarks
	11	REE1900	10P FFC (MAIN-CD INTERFACE)	1	
	12	REX1678	13P WIRE (MAIN-SMPS)	1	
	13	REX1679	9P WIRE (MIC-MAIN)	1	
	14	REX1680	7P WIRE (MAIN-USB)	1	
	15	REX1681	6P WIRE (USB-MAIN)	1	
	16	REX1697	10P WIRE (MAIN-SMPS)	1	
	17	REX1712	3P WIRE (FL DISPLAY-SMPS)	1	
	18	RGC0043-W1	VOLUME LIGHT REFLECTOR	2	
	19	RGK2538-K	CD LID	1	
	20	RGK2539-K	VOLUME ORNAMENT	2	
	21	RGK2540-K	TOP ORNAMENT	1	
	22	RGL0786A-W	VOLUME LIGHT RING	2	
	23	RGL0787-W	USB REC LIGHT PIECE	2	
	24	RGL0799-Q	DJ LIGHTING RING	2	
⚠	25	RGR0455C-A1	REAR PANEL	1	MAX770
⚠	25	RGR0455F-A	REAR PANEL	1	MAX370
	29	RGW0446-S	VOLUME KNOB	2	
	30	RGW0448-K	DJ TABLE	1	
	31	RGW0450-K	MIC VOLUME KNOB	2	
	32	RHD26016-1L	SCREW	7	
	33	RHD26043-1	SCREW	3	
	34	RHD26046-L	SCREW	41	

Safety	Ref. No.	Part No.	Part Name & Description	Qty	Remarks
	35	RHD30007-K2J	SCREW	4	
	36	RHD30111-31	SCREW	22	
	37	RHD30119-S	SCREW	19	
	38	RHDX031008	SCREW	2	
	39	RKAX0042-K	LEG CUSHION	4	
⚠	40	RKM0744-K2	TOP CABINET	1	
	41	RMA2489	FAN ANGLE	1	
	42	RMA2491	PCB SUPPORT ANGLE	2	MAX770
	43	RMB0982	CD LID SPRING	1	
	44	RMG0982-H	RADIATION RUBBER	2	
	45	RMK0870-1	BOTTOM CHASSIS	1	
	46	RMK0871-1	INNER CHASSIS	1	
	47	RMN1000-1	FL HOLDER	1	
	48	RMN1049-1	FL HOLDER	1	
	49	RMN1077	LED HOLDER	2	
	50	RMQ2273	DJ SLIDER SHEET	1	
	51	RMQ2275	FRONT MECHA SUP-PORT	1	
	52	RMX0510	PCB SPACER	4	
	53	RMZ1430	SMPS IC INSULA-TOR SHEET	2	
	54	XTB4+10AFJ	SCREW	2	
	55	RMQX1088-J	MECHA HOLDER	2	
	56	RFKGMAX370GS	FRONT PANEL ASS'Y	1	MAX370
	56	RFKGMAX770GS	FRONT PANEL ASS'Y	1	MAX770
	56-1	RMGX0033A-K	CD LID CUSHION	1	
	57	RFKKMAX770GS	DJ CABINET ASS'Y	1	
	58	RMS0939	INNER CHASSIS SUPPORT	1	
	59	RMG1002-D	CUSHION	2	
	60	RMN1080-1	FAN HOLDER	1	
	61	RMA2502	EARTH PLATE	3	
	62	RHDX30005-J	SCREW	3	
	63	RMA2506-1	SIDE ANGLE L	1	
	64	RMA2507-1	SIDE ANGLE R	1	
	65	RMQ2344	INSULATION SHEET (TOP)	1	
	66	RMQ2345	INSULATION SHEET (BOTTOM)	1	
	69	RMQ2352	DJ SHEET	1	
	67	RSC1289	THERMAL PAD	3	
	68	RSC1293-1	MIC SHIELD PLATE	1	
	70	RMZ1495	SMPS IC INSULA-TOR SHEET	2	
	71	RMA2515	SILICON STEEL PLATE	1	
			TRAVERSE DECK		
⚠	301	RAE1045Z-V	TRAVERSE ASS'Y	1	
	312	XTN2+6GFJ	SCREW	2	
			PACKING MATERIALS		
	P1	RPG0K17	PACKING CASE	1	MAX370
	P1	RPG0K74	PACKING CASE	1	MAX770
	P2	RPN2650-1	POLYFOAM (BOT-TOM)	1	
	P3	RPN2651-1	POLYFOAM (TOP)	1	
	P4	RPH0317	MIRAMAT SHEET	1	
			ACCESSORIES		
	A1	N2QAYB000915	REMOTE CONTROL	1	
	A1-1	RKK-PM500EBK	R/C BATTERY COVER	1	
⚠	A2	K2CJ2YY00097	AC CORD	1	
⚠	A2	K2CP2YY00071	AC CORD	1	
⚠	A2	K2CQ2YY00127	AC CORD	1	
⚠	A2	K2CT2YY00103	AC CORD	1	

Safety	Ref. No.	Part No.	Part Name & Description	Qty	Remarks
⚠	A3	VQT5F33	O/I BOOK (En/CN/Ru/Ur/Ar)	1	MAX770
⚠	A3	VQT5F34	O/I BOOK (En/CN/Ru/Ur/Ar)	1	MAX370
	A4	RSAX0002	FM INDOOR ANTENNA	1	
	A5	N1DY000011	AM LOOP ANTENNA	1	
	A6	RYQ1201-K	LEG CUSHION SET	1	MAX770

9.7. Electrical Replacement Part List

Important Safety Notice

Components identified by $\triangle$ mark have special characteristics important for safety. When replacing any of these components, use only manufacturer's specified parts.

RTL (Retention Time Limited)

Note: The marking (RTL) indicates that the Retention Time is Limited for this item.

After the discontinuation of this assembly in production, the item will continue to be available for a specific period of time. The retention period of availability is dependant on the type of assembly, and in accordance with the laws governing part and product retention. After the end of this period, the assembly will no longer be available.

Note:

- When replacing any of these components, be sure to use only manufacturer's specified parts shown in the replacement part list.
- The parenthesized indications on the Remarks column specify the destination & product color (Refer to the cover page for the information).
- Parts without these indications shall be used for all areas.
- This product uses a laser diode. Refer to "Precaution of Laser Diode".
- Capacitor value are in microfarads (uF) unless specified otherwise, P=Pico-farads (pF), F=Farads.
- Resistance values are in ohms, unless specified otherwise, 1K=1000 (OHM).
- All parts mentioned are supplied by PAVCJM unless indicated likewise.
- Parts mentioned [SPG] in the Remarks column are supplied by JAPAN.

E.S.D. standards for Electrostatically Sensitive Devices, refer to "PREVENTION OF ELECTROSTATIC DISCHARGE (ESD) TO ELECTROSTATIC SENSITIVE (ES) DEVICES" section.

Safety	Ref. No.	Part No.	Part Name & Description	Qty	Remarks
			PRINTED CIRCUITS BOARDS		
	PCB1	RFKV5033KA	MAIN P.C.B.	1	(RTL) MAX370
	PCB1	RFKV5033DA	MAIN P.C.B.	1	(RTL) MAX770
	PCB2	RFKV5033KB	BLUETOOTH/NFC KIT	1	JIGS & ADJ (MAX370)
	PCB2	RFKV5033DB	BLUETOOTH/NFC KIT	1	JIGS & ADJ (MAX770)
	PCB3	REP5033KC	ILLUMINATION LEFT P.C.B.	1	(RTL) MAX370
	PCB3	REP5033DC	ILLUMINATION LEFT P.C.B.	1	(RTL) MAX770
	PCB4	REP5033KD	ILLUMINATION RIGHT P.C.B.	1	(RTL) MAX370
	PCB4	REP5033DD	ILLUMINATION RIGHT P.C.B.	1	(RTL) MAX770
	PCB5	REP5034BA	FL DISPLAY P.C.B.	1	(RTL)
	PCB6	REP5034BB	BUTTON LEFT P.C.B.	1	(RTL)
	PCB7	REP5034BC	BUTTON RIGHT P.C.B.	1	(RTL)
	PCB8	REP5034BD	MIC P.C.B.	1	(RTL)
	PCB9	REP5034BF	USB P.C.B.	1	(RTL)
	PCB10	REP5034BG	VOLUME P.C.B.	1	(RTL)
	PCB11	REP5034BH	ILLUMINATION JOG P.C.B.	1	(RTL)

Safety	Ref. No.	Part No.	Part Name & Description	Qty	Remarks
	PCB12	REP5034BJ	MULTI CONTROL P.C.B.	1	(RTL)
$\triangle$	PCB13	REP5035B	SMPS P.C.B.	1	(RTL)
	PCB14	REP4755A	CD INTERFACE P.C.B.	1	(RTL)
			INTEGRATED CIRCUITS		
	IC1001	C1AB00004188	IC	1	(E.S.D)
	IC1002	C0EBE0000338	IC	1	(E.S.D)
	IC1003	RFKWFX370LM	IC	1	(E.S.D), JIGS & ADJ (MAX370)
	IC1003	RFKWFX770LM	IC	1	(E.S.D), JIGS & ADJ (MAX770)
	IC1004	RFKV5033KB	IC	1	(E.S.D) (MAX370)
	IC1004	RFKV5033DB	IC	1	(E.S.D) (MAX770)
	IC1101	C0DBBY000075	IC	1	(E.S.D)
	IC1202	C0DBBY000076	IC	1	(E.S.D)
	IC1202	C0ZBZ0002175	IC	1	(E.S.D)
	IC1400	C1AB000003130	IC	1	(E.S.D)
	IC1401	C1AB000003130	IC	1	(E.S.D)
	IC1402	MIP2F20MSSCF	IC	1	(E.S.D)
	IC1501	AN32183A-VF	IC	1	(E.S.D)
	IC1501	C0DBBY000077	IC	1	(E.S.D)
	IC1601	C0DAZY000039	IC	1	(E.S.D)
	IC1700	C0HBB0000057	IC	1	(E.S.D)
	IC1701	C0DAZY000039	IC	1	(E.S.D)

Safety	Ref. No.	Part No.	Part Name & Description	Qty	Remarks
	IC2001	RFKWNAX770LM	IC	1	(E.S.D)
	IC4001	C0ABBB000230	IC	1	(E.S.D)
	IC4002	C0ABBB000230	IC	1	(E.S.D)
	IC4003	C0DBCZC00003	IC	1	(E.S.D)
	IC4005	VUEALLPT090	IC	1	(E.S.D)
	IC4201	C0JBAB000902	IC	1	(E.S.D)
	IC4202	C0ZBZ0001673	IC	1	(E.S.D)
	IC4203	C0ZBZ0001675	IC	1	(E.S.D)
	IC4501	C0ZBZ0001673	IC	1	(E.S.D)
	IC4502	C0ZBZ0001675	IC	1	(E.S.D)
	IC4801	C0DBGYY03252	IC	1	(E.S.D)
	IC4802	C0FBAY000032	IC	1	(E.S.D)
	IC4803	C1AB00003800	IC	1	(E.S.D)
	IC4901	C0JBAR000367	IC	1	(E.S.D)
	IC5001	C0GBY0000213	IC	1	(E.S.D)
	IC7001	VUEALLPT087	IC	1	(E.S.D)
	IC8001	C0DBGYY00911	IC	1	(E.S.D)
	IC8002	C0DBZYY00716	IC	1	(E.S.D)
	IC8003	C0DBAYY01685	IC	1	(E.S.D)
	IC8004	C0DBAYY01094	IC	1	(E.S.D)
	IC8005	C0DBAYY01094	IC	1	(E.S.D)
	IC8007	C0DBEYY00146	IC	1	(E.S.D)
	IC8008	C0DBZYY00716	IC	1	(E.S.D)
	IC8009	C0DBCYY00142	IC	1	(E.S.D)
	IC8010	C0CBCY000004	IC	1	(E.S.D)
	IC8011	C0CBCY000004	IC	1	(E.S.D)
	IC8501	C0ABBB000342	IC	1	(E.S.D)
	IC9001	C0JBAS000401	IC	1	(E.S.D)
			TRANSISTORS		
	Q1001	B1ABCF000176	TRANSISTOR	1	(E.S.D)
	Q1101	B1ADNG000003	TRANSISTOR	1	(E.S.D)
	Q1103	B1DGJR000002	TRANSISTOR	1	(E.S.D)
	Q1203	B1ADNG000003	TRANSISTOR	1	(E.S.D)
	Q1204	B1DGJR000002	TRANSISTOR	1	(E.S.D)
	Q1402	B1ACKD000006	TRANSISTOR	1	(E.S.D)
	Q1501	B1CERR000052	TRANSISTOR	1	(E.S.D)
	Q1502	B1CERR000052	TRANSISTOR	1	(E.S.D)
	Q1700	B1ABMG000008	TRANSISTOR	1	(E.S.D)
	Q1702	B1ABCF000176	TRANSISTOR	1	(E.S.D)
	Q1800	DSC200200L	TRANSISTOR	1	(E.S.D)
	Q1801	B1BAG0000007	TRANSISTOR	1	(E.S.D)
	Q1801	DSA200200L	TRANSISTOR	1	(E.S.D)
	Q1802	B1ADCE000012	TRANSISTOR	1	(E.S.D)
	Q4001	B1ABDF000026	TRANSISTOR	1	(E.S.D)
	Q4002	B1ABDF000026	TRANSISTOR	1	(E.S.D)
	Q4003	B1ABDF000026	TRANSISTOR	1	(E.S.D)
	Q4004	B1ABDF000026	TRANSISTOR	1	(E.S.D)
	Q4005	B1ABDF000026	TRANSISTOR	1	(E.S.D)
	Q4006	B1ABDF000026	TRANSISTOR	1	(E.S.D)
	Q4201	B1CBRK000001	TRANSISTOR	1	(E.S.D)
	Q4202	B1CBRK000001	TRANSISTOR	1	(E.S.D)
	Q4203	B1CBRK000001	TRANSISTOR	1	(E.S.D)
	Q4204	B1CBRK000001	TRANSISTOR	1	(E.S.D)
	Q4205	B1CBRK000001	TRANSISTOR	1	(E.S.D)
	Q4206	B1CBRK000001	TRANSISTOR	1	(E.S.D)
	Q4207	B1CBRK000001	TRANSISTOR	1	(E.S.D)
	Q4208	B1CBRK000001	TRANSISTOR	1	(E.S.D)
	Q4209	B1ABCF000176	TRANSISTOR	1	(E.S.D)
	Q4210	B1ABCF000176	TRANSISTOR	1	(E.S.D)
	Q4501	B1CBRK000001	TRANSISTOR	1	(E.S.D)
	Q4502	B1CBRK000001	TRANSISTOR	1	(E.S.D)
	Q4503	B1CBRK000001	TRANSISTOR	1	(E.S.D)
	Q4504	B1CBRK000001	TRANSISTOR	1	(E.S.D)
	Q4505	B1CBRK000001	TRANSISTOR	1	(E.S.D)
	Q4506	B1CBRK000001	TRANSISTOR	1	(E.S.D)
	Q4507	B1CBRK000001	TRANSISTOR	1	(E.S.D)
	Q4508	B1CBRK000001	TRANSISTOR	1	(E.S.D)
	Q4509	B1ABCF000176	TRANSISTOR	1	(E.S.D)
	Q4510	B1ABCF000176	TRANSISTOR	1	(E.S.D)
	Q4511	B1BACG000048	TRANSISTOR	1	(E.S.D)
	Q5001	B1ADCF000001	TRANSISTOR	1	(E.S.D)

Safety	Ref. No.	Part No.	Part Name & Description	Qty	Remarks
	Q8001	B1ADGF000010	TRANSISTOR	1	(E.S.D)
	Q8003	B1ADGF000010	TRANSISTOR	1	(E.S.D)
	Q8501	B1ABCF000231	TRANSISTOR	1	(E.S.D)
	Q8502	B1ABCF000231	TRANSISTOR	1	(E.S.D)
	Q8503	B1ABCF000231	TRANSISTOR	1	(E.S.D)
	Q8504	B1AAJC000019	TRANSISTOR	1	(E.S.D)
	Q8505	B1BACG000023	TRANSISTOR	1	(E.S.D)
	Q8506	B1ABCF000231	TRANSISTOR	1	(E.S.D)
	Q8507	B1ABCF000231	TRANSISTOR	1	(E.S.D)
	Q8508	B1ABCF000231	TRANSISTOR	1	(E.S.D)
	Q8509	B1ABCF000231	TRANSISTOR	1	(E.S.D)
	Q8510	B1ABCF000231	TRANSISTOR	1	(E.S.D)
	Q8511	B1ABCF000231	TRANSISTOR	1	(E.S.D)
	Q9003	B1ADCE000012	TRANSISTOR	1	(E.S.D)
	Q9004	B1ADCE000012	TRANSISTOR	1	(E.S.D)
	QR1201	B1GBCFJJ0040	TRANSISTOR	1	(E.S.D)
	QR1601	B1GBCFLL0037	TRANSISTOR	1	(E.S.D)
	QR1802	B1GBCFGN0016	TRANSISTOR	1	(E.S.D)
	QR4001	B1GBCFJJ0040	TRANSISTOR	1	(E.S.D)
	QR4002	B1GDCFJJ0047	TRANSISTOR	1	(E.S.D)
	QR4201	B1GBCFJJ0007	TRANSISTOR	1	(E.S.D)
	QR4202	B1GBCFJJ0040	TRANSISTOR	1	(E.S.D)
	QR4203	B1GDCFJJ0047	TRANSISTOR	1	(E.S.D)
	QR4501	B1GBCFJJ0007	TRANSISTOR	1	(E.S.D)
	QR4502	B1GDCFNN0032	TRANSISTOR	1	(E.S.D)
	QR4901	B1GBCFJJ0040	TRANSISTOR	1	(E.S.D)
	QR4902	B1GBCFJJ0040	TRANSISTOR	1	(E.S.D)
	QR8001	B1GBCFJJ0040	TRANSISTOR	1	(E.S.D)
	QR8003	B1GBCFJJ0040	TRANSISTOR	1	(E.S.D)
	QR8004	B1GBCFJN0038	TRANSISTOR	1	(E.S.D)
	QR8005	B1GDCFGA0018	TRANSISTOR	1	(E.S.D)
	QR8006	B1GBCFJJ0040	TRANSISTOR	1	(E.S.D)
	QR9002	B1GBCFGN0016	TRANSISTOR	1	(E.S.D)
	QR9003	B1GBCFGN0016	TRANSISTOR	1	(E.S.D)
			DIODES		
	D1001	B0FBCR000021	DIODE	1	(E.S.D)
	D1101	B0JCPD000039	DIODE	1	(E.S.D)
	D1104	B0FABR000025	DIODE	1	(E.S.D)
	D1105	B0ECNR000003	DIODE	1	(E.S.D)
	D1206	DZ2J051M0L	DIODE	1	(E.S.D)
	D1207	B0JCPD000039	DIODE	1	(E.S.D)
	D1208	B0FABR000025	DIODE	1	(E.S.D)
	D1402	B0EDKT000007	DIODE	1	(E.S.D)
	D1403	B0HAMP000094	DIODE	1	(E.S.D)
	D1404	B0EAMM000057	DIODE	1	(E.S.D)
	D1405	B0EAMM000057	DIODE	1	(E.S.D)
	D1406	B0ECET000006	DIODE	1	(E.S.D)
	D1500	B3AAA0001129	DIODE	1	(E.S.D)
	D1501	B3AAA0001129	DIODE	1	(E.S.D)
	D1502	B3AAA0001129	DIODE	1	(E.S.D)
	D1502	DZ2J120M0L	DIODE	1	(E.S.D)
	D1503	B0AAKR000014	DIODE	1	(E.S.D)
	D1503	B3AAA0001129	DIODE	1	(E.S.D)
	D1504	B0JCPD000039	DIODE	1	(E.S.D)
	D1504	B3AAA0001129	DIODE	1	(E.S.D)
	D1505	B0JCPD000039	DIODE	1	(E.S.D)
	D1505	B3AAA0001129	DIODE	1	(E.S.D)
	D1506	B0EAMR000018	DIODE	1	(E.S.D)
	D1506	B3AAA0001129	DIODE	1	(E.S.D)
	D1507	DA2J10100L	DIODE	1	(E.S.D)
	D1508	B3AAA0001129	DIODE	1	(E.S.D)
	D1510	B3AEA0000168	DIODE	1	(E.S.D)
	D1511	B3AAA0001129	DIODE	1	(E.S.D)
	D1518	DA2J10100L	DIODE	1	(E.S.D)
	D1520	DA2J10100L	DIODE	1	(E.S.D)
	D1522	DA2J10100L	DIODE	1	(E.S.D)
	D1524	DA2J10100L	DIODE	1	(E.S.D)
	D1525	DA2J10100L	DIODE	1	(E.S.D)
	D1526	DA2J10100L	DIODE	1	(E.S.D)
	D1527	DA2J10100L	DIODE	1	(E.S.D)
	D1528	DA2J10100L	DIODE	1	(E.S.D)

Safety	Ref. No.	Part No.	Part Name & Description	Qty	Remarks
	D1529	DA2J10100L	DIODE	1	(E.S.D)
	D1530	DA2J10100L	DIODE	1	(E.S.D)
	D1531	DA2J10100L	DIODE	1	(E.S.D)
	D1532	DA2J10100L	DIODE	1	(E.S.D)
	D1533	DA2J10100L	DIODE	1	(E.S.D)
	D1534	DA2J10100L	DIODE	1	(E.S.D)
	D1535	DA2J10100L	DIODE	1	(E.S.D)
	D1536	DA2J10100L	DIODE	1	(E.S.D)
	D1543	DA2J10100L	DIODE	1	(E.S.D)
	D1544	DA2J10100L	DIODE	1	(E.S.D)
	D1547	DA2J10100L	DIODE	1	(E.S.D)
	D1548	DA2J10100L	DIODE	1	(E.S.D)
	D1551	DA2J10100L	DIODE	1	(E.S.D)
	D1552	DA2J10100L	DIODE	1	(E.S.D)
	D1553	B3AAA0001129	DIODE	1	(E.S.D)
	D1554	B3AAA0001129	DIODE	1	(E.S.D)
	D1555	B3AAA0001129	DIODE	1	(E.S.D)
	D1556	B3AAA0001129	DIODE	1	(E.S.D)
	D1557	B3AAA0001129	DIODE	1	(E.S.D)
	D1600	B3AEA0000158	DIODE	1	(E.S.D)
	D1601	B0EAMM000057	DIODE	1	(E.S.D)
	D1601	B3AEA0000158	DIODE	1	(E.S.D)
	D1652	DA2J10100L	DIODE	1	(E.S.D)
	D1655	DA2J10100L	DIODE	1	(E.S.D)
	D1656	DA2J10100L	DIODE	1	(E.S.D)
	D1657	DA2J10100L	DIODE	1	(E.S.D)
	D1658	DA2J10100L	DIODE	1	(E.S.D)
	D1659	DA2J10100L	DIODE	1	(E.S.D)
	D1660	DA2J10100L	DIODE	1	(E.S.D)
	D1661	DA2J10100L	DIODE	1	(E.S.D)
	D1662	DA2J10100L	DIODE	1	(E.S.D)
	D1700	DZ2J390M0L	DIODE	1	(E.S.D)
	D1701	B0EAMM000057	DIODE	1	(E.S.D)
	D1701	DZ2J150M0L	DIODE	1	(E.S.D)
	D1702	B0JBSG000053	DIODE	1	(E.S.D)
	D1702	DZ2J220M0L	DIODE	1	(E.S.D)
	D1703	B0JBSL000029	DIODE	1	(E.S.D)
	D1703	DZ2J030M0L	DIODE	1	(E.S.D)
	D1704	B0JAME000114	DIODE	1	(E.S.D)
	D1704	B0JBSL000029	DIODE	1	(E.S.D)
	D1705	B0JBSL000029	DIODE	1	(E.S.D)
	D1706	B0JBSL000029	DIODE	1	(E.S.D)
	D1800	B0JCMD000066	DIODE	1	(E.S.D)
	D1801	B0JCMD000066	DIODE	1	(E.S.D)
	D1802	B0JCMD000066	DIODE	1	(E.S.D)
	D1803	B0JCMD000066	DIODE	1	(E.S.D)
	D1950	B3AZB0000101	DIODE	1	(E.S.D)
	D1951	B3AZB0000101	DIODE	1	(E.S.D)
	D1952	DA2J10100L	DIODE	1	(E.S.D)
	D1953	DA2J10100L	DIODE	1	(E.S.D)
	D1954	DA2J10100L	DIODE	1	(E.S.D)
	D1955	DA2J10100L	DIODE	1	(E.S.D)
	D1980	B3AZB0000101	DIODE	1	(E.S.D)
	D1981	B3AZB0000101	DIODE	1	(E.S.D)
	D1982	DA2J10100L	DIODE	1	(E.S.D)
	D1983	DA2J10100L	DIODE	1	(E.S.D)
	D1984	DA2J10100L	DIODE	1	(E.S.D)
	D1985	DA2J10100L	DIODE	1	(E.S.D)
	D4201	B0ACGM000001	DIODE	1	(E.S.D)
	D4202	B0ACGM000001	DIODE	1	(E.S.D)
	D4203	B0ACGM000001	DIODE	1	(E.S.D)
	D4204	B0ACGM000001	DIODE	1	(E.S.D)
	D4205	B0ACGM000001	DIODE	1	(E.S.D)
	D4206	B0ACGM000001	DIODE	1	(E.S.D)
	D4207	B0ACGM000001	DIODE	1	(E.S.D)
	D4208	B0ACGM000001	DIODE	1	(E.S.D)
	D4209	B0ACCK000005	DIODE	1	(E.S.D)
	D4210	B0HCMM000019	DIODE	1	(E.S.D)
	D4211	B0HCMM000019	DIODE	1	(E.S.D)
	D4212	B0HCMM000019	DIODE	1	(E.S.D)
	D4213	B0HCMM000019	DIODE	1	(E.S.D)
	D4214	B0HCMM000019	DIODE	1	(E.S.D)
	D4215	B0HCMM000019	DIODE	1	(E.S.D)

Safety	Ref. No.	Part No.	Part Name & Description	Qty	Remarks
	D4216	B0HCMM000019	DIODE	1	(E.S.D)
	D4217	B0HCMM000019	DIODE	1	(E.S.D)
	D4218	B0ACCK000005	DIODE	1	(E.S.D)
	D4219	B0ACCK000005	DIODE	1	(E.S.D)
	D4501	B0ACGM000001	DIODE	1	(E.S.D)
	D4502	B0ACGM000001	DIODE	1	(E.S.D)
	D4503	B0ACGM000001	DIODE	1	(E.S.D)
	D4504	B0ACGM000001	DIODE	1	(E.S.D)
	D4505	B0ACGM000001	DIODE	1	(E.S.D)
	D4506	B0ACGM000001	DIODE	1	(E.S.D)
	D4507	B0ACGM000001	DIODE	1	(E.S.D)
	D4508	B0ACGM000001	DIODE	1	(E.S.D)
	D4509	B0ACCK000005	DIODE	1	(E.S.D)
	D4510	B0HCMM000019	DIODE	1	(E.S.D)
	D4511	B0HCMM000019	DIODE	1	(E.S.D)
	D4512	B0HCMM000019	DIODE	1	(E.S.D)
	D4513	B0HCMM000019	DIODE	1	(E.S.D)
	D4514	B0HCMM000019	DIODE	1	(E.S.D)
	D4515	B0HCMM000019	DIODE	1	(E.S.D)
	D4516	B0HCMM000019	DIODE	1	(E.S.D)
	D4517	B0HCMM000019	DIODE	1	(E.S.D)
	D4518	B0ACCK000005	DIODE	1	(E.S.D)
	D4519	DZ2J051M0L	DIODE	1	(E.S.D)
	D4520	DZ2J110M0L	DIODE	1	(E.S.D)
	D4521	DZ2J150M0L	DIODE	1	(E.S.D)
	D5001	B0JCAE000001	DIODE	1	(E.S.D)
	D8001	DA2J10100L	DIODE	1	(E.S.D)
	D8003	DA2J10100L	DIODE	1	(E.S.D)
	D8004	DA2J10100L	DIODE	1	(E.S.D)
	D8005	B0JCND000021	DIODE	1	(E.S.D)
	D8006	B0JCND000021	DIODE	1	(E.S.D)
	D8008	DA2J10100L	DIODE	1	(E.S.D)
	D8009	B0JCND000021	DIODE	1	(E.S.D)
	D8010	DA2J10100L	DIODE	1	(E.S.D)
	D8011	DA2J10100L	DIODE	1	(E.S.D)
	D8012	DZ2J130M0L	DIODE	1	(E.S.D)
	D8013	B0JCND000066	DIODE	1	(E.S.D)
	D8501	DA2J10100L	DIODE	1	(E.S.D)
	D8502	DA2J10100L	DIODE	1	(E.S.D)
	D8503	DA2J10100L	DIODE	1	(E.S.D)
	D9000	B3AAA0000487	DIODE	1	(E.S.D)
	D9001	B3AAA0000487	DIODE	1	(E.S.D)
	R1502	DA2J10100L	DIODE	1	(E.S.D)
	R1506	DA2J10100L	DIODE	1	(E.S.D)
	R1510	DA2J10100L	DIODE	1	(E.S.D)
	R1514	DA2J10100L	DIODE	1	(E.S.D)
	R1524	DA2J10100L	DIODE	1	(E.S.D)
△	DZ1001	D4EAY511A127	VARISTOR	1	(E.S.D)
			VARIABLE RESISTORS		
	VR1400	EVUE27FK2B53	MIC JOG	1	
	VR1401	EVUE27FK2B53	MIC VR	1	
	VR1600	EVEKE2F3024B	VOLUME JOG	1	
	VR1930	EVEKE2F3024B	ILLUMINATION JOG	1	
	VR1960	EVEKE2F3024B	VOLUME JOG	1	
	VA7001	EZAE2A50AX	ESD SUPPRESSOR	1	
			SWITCHES		
	S1500	EVQ21405RJ	SW POWER	1	
	S1501	EVQ21405RJ	SW MANUAL EQ	1	
	S1502	EVQ21405RJ	SW LATIN PRESET EQ	1	
	S1503	EVQ21405RJ	SW D.BASS - SUPERWOOFER	1	
	S1504	EVQ21405RJ	SW MEMORY3	1	
	S1505	EVQ21405RJ	SW MEMORY2	1	
	S1506	EVQ21405RJ	SW MEMORY1	1	
	S1507	EVQ21405RJ	SW MEMORY5	1	
	S1508	EVQ21405RJ	SW MEMORY4	1	
	S1509	EVQ21405RJ	SW MEMORY6	1	
	S1510	EVQ21405RJ	SW DJ-EFFECT	1	

Safety	Ref. No.	Part No.	Part Name & Description	Qty	Remarks
	S1511	EVQ21405RJ	SW DJ-SAMPLER	1	
	S1512	EVQ21405RJ	SW DJ-JUKEBOX	1	
	S1650	EVQ21405RJ	SW OPEN/CLOSE	1	
	S1651	EVQ21405RJ	SW USB REC	1	
	S1652	EVQ21405RJ	SW MEMORY REC	1	
	S1653	EVQ21405RJ	SW REWIND/SKIP	1	
	S1654	EVQ21405RJ	SW FORWARD/SKIP	1	
	S1655	EVQ21405RJ	SW ALBUM/TRACK	1	
	S1656	EVQ21405RJ	SW STOP/TUNE MODE	1	
	S1657	EVQ21405RJ	SW BLUETOOTH MEMORY	1	
	S1658	EVQ21405RJ	SW PLAYBACK	1	
	S1659	EVQ21405RJ	SW USB CD	1	
	S1660	EVQ21405RJ	SW RADIO/EXT-IN	1	
	S7201	K0L1BA000158	SW RESET	1	
			CONNECTORS		
	CN1401	K1KA09BA0061	9P CONNECTOR	1	
	CN1851	K1KA13BA0062	13P CONNECTOR	1	
	CN1852	K1KA02BA0125	2P CONNECTOR	1	
	CN1853	K1KA10BA0056	10P CONNECTOR	1	
	CN1854	K1KA03BA0061	3P CONNECTOR	1	
	CN7001	K1MY05BA0539	5P CONNECTOR	1	
	CN7002	K1MY10BA0539	10P CONNECTOR	1	
	CN8001	K1ZZ00000834	CONNECTORS	1	
	CN9001	K1KA06BA0061	6P CONNECTOR	1	
	CN9002	K1KA07BA0061	7P CONNECTOR	1	
	P1003	K1MN06A00013	6P CONNECTOR	1	
	P1500	K1MN30B00046	30P CONNECTOR	1	
	P1501	K1KA04BA0061	4P CONNECTOR	1	
	P1501	K1MN16B00021	16P CONNECTOR	1	
	P1502	K1KA04BA0061	4P CONNECTOR	1	
	P1502	K1MN28B00019	28P CONNECTOR	1	
	P1503	K1KA04BA0061	4P CONNECTOR	1	MAX370
	P1503	K1KZ13A00001	13P CONNECTOR	1	
	P1504	K1KA04BA0061	4P CONNECTOR	1	MAX370
	P1504	K1MN12A00011	12P CONNECTOR	1	
	P1600	K1MN28B00019	28P CONNECTOR	1	
	P1601	K1MN30B00046	30P CONNECTOR	1	
	P1602	K1MN09B00038	9P CONNECTOR	1	
	P1650	K1MN09B00038	9P CONNECTOR	1	
	P1700	K1MN30A00019	30P CONNECTOR	1	
	P1801	K1MN16A00072	16P CONNECTOR	1	
	P1802	K1MN30A00019	30P CONNECTOR	1	
	P1803	K1KA09AA0193	9P CONNECTOR	1	
	P1930	K1MN10B00016	10P CONNECTOR	1	
	P1931	K1MN06B00015	6P CONNECTOR	1	
	P1932	K1MN13B00019	13P CONNECTOR	1	
	P1950	K1MN06B00015	6P CONNECTOR	1	
	P1960	K1MN10B00016	10P CONNECTOR	1	
	P1961	K1MN06B00015	6P CONNECTOR	1	
	P1980	K1MN06B00015	6P CONNECTOR	1	
	P4501	K1KA10AA0181	10P CONNECTOR	1	
	P5001	K1MN10AA0076	10P CONNECTOR	1	
	P5002	K1MY24A00001	24P CONNECTOR	1	
	P8502	K1KA02AA0186	2P CONNECTOR	1	
	P8503	K1KA02AA0186	2P CONNECTOR	1	
	P9001	K1KA06A00452	6P CONNECTOR	1	
	P9002	K1KA07AA0193	7P CONNECTOR	1	
			COILS AND INDUC-TORS		
⚠	L1001	G0B183J00002	LINE FILTER	1	
⚠	L1002	G0B183J00002	LINE FILTER	1	
	L4001	G1C100KA0101	INDUCTOR	1	
	L4002	G1C100KA0101	INDUCTOR	1	
	L4003	G1C100KA0101	INDUCTOR	1	
	L4201	G0C100Z00007	INDUCTOR	1	
	L4202	G0C100Z00007	INDUCTOR	1	
	L4501	G0C100Z00007	INDUCTOR	1	
	L4502	G0C100Z00007	INDUCTOR	1	

Safety	Ref. No.	Part No.	Part Name & Description	Qty	Remarks
	L4505	G1C100KA0101	INDUCTOR	1	
	L4506	G0C100M00009	INDUCTOR	1	
	L7001	G1CR18JA0020	INDUCTOR	1	
	L7002	G2A380Y00002	ANTENNA COIL	1	
	L8001	G1C4R7Z00014	INDUCTOR	1	
	L8002	G1C4R7Z00014	INDUCTOR	1	
	L8004	G1C1R0ZA0379	INDUCTOR	1	
	L8005	G1C100KA0101	INDUCTOR	1	
	L8006	G1C100MA0172	INDUCTOR	1	
	LB1001	J0JBC0000010	INDUCTOR	1	
	LB1001	J0JKB0000015	INDUCTOR	1	
	LB1002	J0JBC0000010	INDUCTOR	1	
	LB1002	J0JKB0000015	INDUCTOR	1	
	LB1003	J0JBC0000010	INDUCTOR	1	
	LB1004	J0JBC0000010	INDUCTOR	1	
	LB1005	J0JKB0000015	INDUCTOR	1	
	LB1006	J0JBC0000010	INDUCTOR	1	
	LB1006	J0JKB0000015	INDUCTOR	1	
	LB1007	J0JBC0000010	INDUCTOR	1	
	LB1008	J0JCC0000286	INDUCTOR	1	
	LB1009	J0JCC0000286	INDUCTOR	1	
	LB1010	J0JCC0000286	INDUCTOR	1	
	LB1011	J0JCC0000286	INDUCTOR	1	
	LB1012	J0JCC0000286	INDUCTOR	1	
	LB1013	J0JCC0000286	INDUCTOR	1	
	LB1014	J0JCC0000286	INDUCTOR	1	
	LB1015	J0JCC0000286	INDUCTOR	1	
	LB1016	J0JBC0000010	INDUCTOR	1	
	LB1017	J0JCC0000286	INDUCTOR	1	
	LB1018	J0JCC0000286	INDUCTOR	1	
	LB1019	J0JCC0000287	INDUCTOR	1	
	LB1020	J0JCC0000287	INDUCTOR	1	
	LB1021	J0JCC0000287	INDUCTOR	1	
	LB1022	J0JCC0000287	INDUCTOR	1	
	LB1023	J0JCC0000287	INDUCTOR	1	
	LB1024	J0JCC0000287	INDUCTOR	1	
	LB1025	J0JCC0000286	INDUCTOR	1	
	LB1026	J0JCC0000286	INDUCTOR	1	
	LB1027	J0JCC0000286	INDUCTOR	1	
	LB1028	J0JCC0000286	INDUCTOR	1	
	LB1029	J0JCC0000286	INDUCTOR	1	
	LB1030	J0JBC0000010	INDUCTOR	1	
	LB1031	J0JBC0000010	INDUCTOR	1	
	LB1032	J0JBC0000010	INDUCTOR	1	
	LB1033	J0JBC0000010	INDUCTOR	1	
	LB1034	J0JCC0000286	INDUCTOR	1	
	LB1035	J0JCC0000286	INDUCTOR	1	
	LB1036	J0JCC0000286	INDUCTOR	1	
	LB1037	J0JBC0000010	INDUCTOR	1	
	LB1038	J0JBC0000010	INDUCTOR	1	
	LB1039	J0JBC0000010	INDUCTOR	1	
	LB1040	J0JCC0000286	INDUCTOR	1	
	LB1102	J0JKB0000015	INDUCTOR	1	
	LB1201	J0JBC0000010	INDUCTOR	1	
	LB1400	J0JBC0000019	INDUCTOR	1	
	LB1404	J0JBC0000019	INDUCTOR	1	
	LB1405	J0JBC0000019	INDUCTOR	1	
	LB1406	J0JBC0000019	INDUCTOR	1	
	LB1407	J0JBC0000019	INDUCTOR	1	
	LB1501	J0JGC0000020	INDUCTOR	1	
	LB1501	J0JYC0000070	INDUCTOR	1	
	LB1502	J0JYC0000070	INDUCTOR	1	
	LB1503	J0JYC0000070	INDUCTOR	1	
	LB1504	J0JYC0000070	INDUCTOR	1	
	LB1505	J0JYC0000070	INDUCTOR	1	
	LB1506	J0JYC0000070	INDUCTOR	1	
	LB1507	J0JYC0000070	INDUCTOR	1	
	LB1508	J0JBC0000010	INDUCTOR	1	
	LB1509	J0JBC0000010	INDUCTOR	1	
	LB1801	J0JBC0000010	INDUCTOR	1	
	LB1802	J0JBC0000010	INDUCTOR	1	
	LB1803	J0JBC0000010	INDUCTOR	1	
	LB1804	J0JBC0000010	INDUCTOR	1	

Safety	Ref. No.	Part No.	Part Name & Description	Qty	Remarks
	LB1805	J0JBC0000010	INDUCTOR	1	
	LB1806	J0JBC0000010	INDUCTOR	1	
	LB1807	J0JBC0000010	INDUCTOR	1	
	LB1808	J0JBC0000010	INDUCTOR	1	
	LB1809	J0JBC0000010	INDUCTOR	1	
	LB1810	J0JBC0000010	INDUCTOR	1	
	LB1811	J0JBC0000010	INDUCTOR	1	
	LB1812	J0JBC0000010	INDUCTOR	1	
	LB1813	J0JBC0000010	INDUCTOR	1	
	LB1814	J0JBC0000010	INDUCTOR	1	
	LB1815	J0JBC0000010	INDUCTOR	1	
	LB2001	J0JBC0000010	INDUCTOR	1	
	LB4001	J0JBC0000010	INDUCTOR	1	
	LB4002	J0JBC0000010	INDUCTOR	1	
	LB4271	J0JBC0000010	INDUCTOR	1	
	LB4801	J0JBC0000010	INDUCTOR	1	
	LB4802	J0JBC0000010	INDUCTOR	1	
	LB4803	J0JCC0000317	INDUCTOR	1	
	LB4804	J0JCC0000317	INDUCTOR	1	
	LB4805	J0JDC0000104	INDUCTOR	1	
	LB4901	J0JBC0000010	INDUCTOR	1	
	LB5001	J0JBC0000010	INDUCTOR	1	
	LB5002	G1C100KA0101	INDUCTOR	1	
	LB5003	J0JHC0000045	INDUCTOR	1	
	LB5004	J0JHC0000045	INDUCTOR	1	
	LB5005	J0JBC0000010	INDUCTOR	1	
	LB5006	J0JBC0000010	INDUCTOR	1	
	LB5007	J0JBC0000010	INDUCTOR	1	
	LB5008	J0JBC0000010	INDUCTOR	1	
	LB5009	J0JBC0000010	INDUCTOR	1	
	LB5010	J0JBC0000010	INDUCTOR	1	
	LB5011	J0JBC0000010	INDUCTOR	1	
	LB5012	J0JBC0000010	INDUCTOR	1	
	LB5013	J0JBC0000010	INDUCTOR	1	
	LB5014	J0JBC0000010	INDUCTOR	1	
	LB5015	J0JBC0000010	INDUCTOR	1	
	LB5016	J0JBC0000010	INDUCTOR	1	
	LB7001	J0JBC0000010	INDUCTOR	1	
	LB7002	J0JYC0000118	INDUCTOR	1	
	LB8001	J0JHC0000046	INDUCTOR	1	
	LB8002	J0JHC0000046	INDUCTOR	1	
	LB8004	J0JHC0000046	INDUCTOR	1	
	LB8005	J0JHC0000046	INDUCTOR	1	
	LB9001	J0JGC0000070	INDUCTOR	1	
	LB9002	J0JGC0000070	INDUCTOR	1	
	R1801	J0JBC0000010	INDUCTOR	1	
	R1802	J0JBC0000010	INDUCTOR	1	
	R1803	J0JBC0000010	INDUCTOR	1	
	R1804	J0JBC0000010	INDUCTOR	1	
	R1805	J0JBC0000010	INDUCTOR	1	
	R1806	J0JBC0000010	INDUCTOR	1	
	R1807	J0JBC0000010	INDUCTOR	1	
	R1808	J0JBC0000010	INDUCTOR	1	
	R1810	J0JBC0000010	INDUCTOR	1	
	R1812	J0JBC0000010	INDUCTOR	1	
	R1816	J0JBC0000010	INDUCTOR	1	
	R1817	J0JBC0000010	INDUCTOR	1	
	R1818	J0JBC0000010	INDUCTOR	1	
	R1819	J0JBC0000010	INDUCTOR	1	
	R1820	J0JBC0000010	INDUCTOR	1	
	R1821	J0JBC0000010	INDUCTOR	1	
	R1828	J0JBC0000010	INDUCTOR	1	
			TRANSFORMERS		
△	T1101	G0C400K00001	TRANSFORMER	1	
△	T1203	G0C400K00001	TRANSFORMER	1	
△	T1401	G4DY20000076	TRANSFORMER	1	
△	T1501	G4DYA0000520	TRANSFORMER	1	
△	T1502	G4DYA0000520	TRANSFORMER	1	
△	T1700	G4D1A0000117	TRANSFORMER	1	
			FILTERS		

Safety	Ref. No.	Part No.	Part Name & Description	Qty	Remarks
	T9001	J0ZZB00000182	FILTER	1	
	T9002	J0ZZB00000182	FILTER	1	
			PHOTO COUPLERS		
△	Q1403	B3PBA0000579	PHOTO COUPLER	1	
△	Q1404	B3PBA0000579	PHOTO COUPLER	1	
△	Q1405	B3PBA0000579	PHOTO COUPLER	1	
△	Q1505	B3PBA0000579	PHOTO COUPLER	1	
			REMOTE SENSOR		
	IR1701	B3RAB0000109	REMOTE SENSOR	1	
			TERMINALS		
	ZJ1001	K4CZ01000027	TERMINAL	1	
	ZJ1004	K4CZ01000027	TERMINAL	1	
	ZJ1102	K4CZ01000027	TERMINAL	1	
	ZJ1103	K4CZ01000027	TERMINAL	1	
	ZJ1701	K4CZ01000027	TERMINAL	1	
	ZJ1851	K4CZ01000027	TERMINAL	1	
			EARTH PLATES		
	ZJ8001	K9ZZ00001279	EARTH PLATE	1	
	ZJ8003	K9ZZ00001279	EARTH PLATE	1	
			OSCILLATORS		
	X1001	H0J169500036	OSCILLATOR	1	
	X1002	H0A327200181	OSCILLATOR	1	
	X4001	H0J245500110	OSCILLATOR	1	
	X4201	H2A464300001	OSCILLATOR	1	
	X4202	H2A500300018	OSCILLATOR	1	
	X4801	H0J245500110	OSCILLATOR	1	
			FUSE HOLDERS		
	ZA1002	K3GE1ZZ00001	FUSE HOLDER	1	
	ZA1003	K3GE1ZZ00001	FUSE HOLDER	1	
			CABLE HOLDER		
	ZA1701	K1YF03000002	CABLE HOLDER	1	
			FUSE		
△	F1001	K5D103BNA005	FUSE	1	
			FUSE PROTECTORS		
△	F1401	K5G501YA0081	FUSE PROTECTOR	1	
△	F1501	K5G502Y00006	FUSE PROTECTOR	1	
			LCD DISPLAY		
	DP1700	A2BB00000185	LCD DISPLAY	1	
	DP1800	A2BB00000186	LCD DISPLAY	1	
			THERMISTOR		
	TH1801	D4CCY1040001	THERMISTOR	1	
			JACKS		
	JK1401	K2HB107B0001	JK MIC	1	
	JK1402	K2HC1YYB0033	JK AUX IN2	1	
	JK1403	K2HB107B0001	JK MIC VOL	1	
	JK4201	K4AZ12A00016	JK SPEAKERS	1	MAX370
	JK4201	K4AZ12A00017	JK SPEAKERS	1	MAX770

Safety	Ref. No.	Part No.	Part Name & Description	Qty	Remarks
	JK4951	K2HA208B0006	JK RCA PIN	1	
	JK7001	K4ZZ02000103	JK FM ANTENNA	1	
	JK7002	K4AC02B00042	JK AM ANTENNA	1	
	JK9001	K1FY104A0034	JK USB A	1	
	JK9002	K1FY104A0034	JK USB B	1	
⚠	P1001	K2AZYA000005	AC INLET	1	
			CHIP JUMPERS		
	K8001	D0GBR00JA008	0 1/10W	1	
	K8002	D0GDR00JA017	0 1/8W	1	
	K8004	D0GDR00JA017	0 1/8W	1	
	K8005	D0GDR00JA017	0 1/8W	1	
	LB1103	D0GBR00J0004	0 1/10W	1	
	LB1104	D0GBR00J0004	0 1/10W	1	
	LB1203	D0GBR00J0004	0 1/10W	1	
	LB1204	D0GBR00J0004	0 1/10W	1	
	W200	D0GDR00JA017	0 1/8W	1	
	W201	D0GDR00JA017	0 1/8W	1	
	W501	D0GDR00JA017	0 1/8W	1	
	W551	D0GDR00JA017	0 1/8W	1	
	W552	D0GDR00JA017	0 1/8W	1	
	W553	D0GBR00JA008	0 1/10W	1	
	W554	D0GDR00JA017	0 1/8W	1	
	W555	D0GDR00JA017	0 1/8W	1	
	W556	D0GDR00JA017	0 1/8W	1	
	W557	D0GDR00JA017	0 1/8W	1	
	W558	D0GBR00JA008	0 1/10W	1	
	W559	D0GBR00JA008	0 1/10W	1	
	W560	D0GDR00JA017	0 1/8W	1	
	W562	D0GDR00JA017	0 1/8W	1	
	W563	D0GBR00JA008	0 1/10W	1	
	W567	D0GDR00JA017	0 1/8W	1	
	W569	D0GBR00JA008	0 1/10W	1	
	W575	D0GDR00JA017	0 1/8W	1	
	W576	D0GDR00JA017	0 1/8W	1	
	W577	D0GDR00JA017	0 1/8W	1	
	W578	D0GBR00JA008	0 1/10W	1	
	W579	D0GDR00JA017	0 1/8W	1	
	W580	D0GDR00JA017	0 1/8W	1	
	W581	D0GDR00JA017	0 1/8W	1	
	W582	D0GDR00JA017	0 1/8W	1	
	W583	D0GDR00JA017	0 1/8W	1	
	W584	D0GDR00JA017	0 1/8W	1	
	W586	D0GDR00JA017	0 1/8W	1	
	W587	D0GDR00JA017	0 1/8W	1	
	W588	D0GDR00JA017	0 1/8W	1	
	W589	D0GDR00JA017	0 1/8W	1	
	W590	D0GBR00JA017	0 1/8W	1	
	W591	D0GBR00JA017	0 1/8W	1	
	W592	D0GBR00JA017	0 1/8W	1	
	W593	D0GBR00JA017	0 1/8W	1	
	W594	D0GBR00JA017	0 1/8W	1	
	W595	D0GDR00JA017	0 1/8W	1	
	W596	D0GDR00JA017	0 1/8W	1	
	W597	D0GDR00JA017	0 1/8W	1	
	W598	D0GDR00JA017	0 1/8W	1	
	W599	D0GDR00JA017	0 1/8W	1	
	W690	D0GBR00JA008	0 1/10W	1	
	W691	D0GBR00JA008	0 1/10W	1	
	W692	D0GBR00JA008	0 1/10W	1	
	W693	D0GBR00JA008	0 1/10W	1	
	W694	D0GBR00JA008	0 1/10W	1	
	W700	D0GDR00JA017	0 1/8W	1	
	W702	D0GDR00JA017	0 1/8W	1	
	W703	D0GDR00JA017	0 1/8W	1	
	W704	D0GDR00JA017	0 1/8W	1	
	W750	D0GDR00JA017	0 1/8W	1	
	W751	D0GDR00JA017	0 1/8W	1	
	W752	D0GDR00JA017	0 1/8W	1	
	W753	D0GDR00JA017	0 1/8W	1	
	W754	D0GDR00JA017	0 1/8W	1	
	W755	D0GDR00JA017	0 1/8W	1	

Safety	Ref. No.	Part No.	Part Name & Description	Qty	Remarks
	W762	D0GDR00JA017	0 1/8W	1	
	W763	D0GDR00JA017	0 1/8W	1	
	W765	D0GDR00JA017	0 1/8W	1	
	W766	D0GDR00JA017	0 1/8W	1	
	W767	D0GDR00JA017	0 1/8W	1	
	W768	D0GDR00JA017	0 1/8W	1	
	W769	D0GDR00JA017	0 1/8W	1	
	W800	D0GDR00JA017	0 1/8W	1	
	W801	D0GDR00JA017	0 1/8W	1	
	W802	D0GBR00JA008	0 1/10W	1	
	W803	D0GDR00JA017	0 1/8W	1	
	W804	D0GDR00JA017	0 1/8W	1	
	W805	D0GDR00JA017	0 1/8W	1	
	W806	D0GBR00JA008	0 1/10W	1	
	W807	D0GBR00JA008	0 1/10W	1	
	W808	D0GDR00JA017	0 1/8W	1	
	W809	D0GBR00JA008	0 1/10W	1	
	W810	D0GBR00JA008	0 1/10W	1	
	W811	D0GBR00JA008	0 1/10W	1	
	W812	D0GDR00JA017	0 1/8W	1	
			RESISTORS		
	LB1005	D0GB100JA008	10 1/10W	1	
	R1001	D0GB471JA008	470 1/10W	1	
⚠	R1001	D0GF105JA048	1M 1/4W	1	
⚠	R1002	D0GF105JA048	1M 1/4W	1	
	R1011	D0GB221JA007	220 1/10W	1	
	R1012	D0GB221JA007	220 1/10W	1	
	R1013	D0GB221JA007	220 1/10W	1	
	R1015	D0GB102JA008	1K 1/10W	1	
	R1016	D0GB101JA008	100 1/10W	1	
	R1017	D0GB101JA008	100 1/10W	1	
	R1018	D0GB101JA008	100 1/10W	1	
	R1019	D0GB334JA008	330K 1/10W	1	
	R1022	D0GB221JA007	220 1/10W	1	
	R1023	D0GB221JA007	220 1/10W	1	
	R1024	D0GB101JA008	100 1/10W	1	
	R1025	D0GB105JA008	1M 1/10W	1	
	R1026	D0GB224JA008	220K 1/10W	1	
	R1027	D0GB106JA008	10M 1/10W	1	
	R1028	D0GB101JA008	100 1/10W	1	
	R1029	D0GB103JA008	10K 1/10W	1	
	R1031	D0GB103JA008	10K 1/10W	1	
	R1032	D0GB103JA008	10K 1/10W	1	
	R1033	D0GB203JA008	20K 1/10W	1	
	R1034	D0GB103JA008	10K 1/10W	1	MAX770
	R1034	D0GB393JA008	39K 1/10W	1	MAX370
	R1038	D0GB103JA008	10K 1/10W	1	
	R1043	D0GB103JA008	10K 1/10W	1	
	R1044	D0GB103JA008	10K 1/10W	1	
	R1045	D0GB101JA008	100 1/10W	1	
	R1046	D0GB101JA008	100 1/10W	1	
	R1048	D0GB101JA008	100 1/10W	1	
	R1049	D0GB101JA008	100 1/10W	1	
	R1050	D0GB101JA008	100 1/10W	1	
	R1051	D0GB101JA008	100 1/10W	1	
	R1055	D0GA101JA023	100 1/16W	1	
	R1056	D0GA101JA023	100 1/16W	1	
	R1057	D0GA101JA023	100 1/16W	1	
	R1058	D0GA101JA023	100 1/16W	1	
	R1059	D0GA101JA023	100 1/16W	1	
	R1060	D0GA101JA023	100 1/16W	1	
	R1065	D0GB101JA008	100 1/10W	1	
	R1066	D0GB101JA008	100 1/10W	1	
	R1067	ERJ3RBD683V	68K 1/16W	1	
	R1068	ERJ3RBD153V	15K 1/16W	1	
	R1078	D0GA101JA023	100 1/16W	1	
	R1100	D0GB101JA008	100 1/10W	1	
	R1102	D0GD153JA052	15K 1/8W	1	
	R1104	ERJ14YJ470U	47 1/4W	1	
	R1105	D0GB103JA008	10K 1/10W	1	
	R1106	D0GB103JA008	10K 1/10W	1	

Safety	Ref. No.	Part No.	Part Name & Description	Qty	Remarks
	R1106	ERJ14YJ4R7U	4.7 1/4W	1	
	R1107	D0GD822JA052	8.2K 1/8W	1	
	R1109	D0GD102JA052	1K 1/8W	1	
	R1111	D0GD103JA052	10K 1/8W	1	
	R1112	ERX2LJ47MP	47M 2W	1	
	R1114	D0GB103JA008	10K 1/10W	1	
	R1114	D0GD123JA052	12K 1/8W	1	
	R1116	ERX2LJ47MP	47M 2W	1	
	R1117	D0GB103JA008	10K 1/10W	1	
	R1120	D0GB101JA008	100 1/10W	1	
	R1121	D0GB101JA008	100 1/10W	1	
	R1150	D0GBR00JA008	0 1/10W	1	MAX770
	R1152	D0GBR00JA008	0 1/10W	1	MAX370
	R1154	D0GBR00JA008	0 1/10W	1	
	R1205	D0GD183JA052	18K 1/8W	1	
	R1206	D0GD102JA052	1K 1/8W	1	
	R1212	D0GBR00JA008	0 1/10W	1	
	R1213	D0GBR00JA008	0 1/10W	1	
	R1214	D0GBR00JA008	0 1/10W	1	
	R1220	ERJ14YJ470U	47 1/4W	1	
	R1221	ERJ14YJ4R7U	4.7 1/4W	1	
	R1224	D0GD102JA052	1K 1/8W	1	
	R1225	D0GBR00JA008	0 1/10W	1	
	R1225	D0GD103JA052	10K 1/8W	1	
	R1226	D0HB392ZA002	3.9K 1/16W	1	
	R1226	ERX2LJ47MP	47M 2W	1	
	R1227	ERX2LJ47MP	47M 2W	1	
	R1228	D0GB683JA008	68K 1/10W	1	
	R1229	ERJ3RBD332V	3.3K 1/16W	1	
	R1236	D0GB103JA008	10K 1/10W	1	
	R1400	D0GB681JA065	680 1/10W	1	
	R1401	D0GB153JA065	15K 1/10W	1	
	R1402	D0GB222JA065	2.2K 1/10W	1	
	R1403	D0GB101JA065	100 1/10W	1	
	R1404	D0GB472JA065	4.7K 1/10W	1	
	R1405	D0GB682JA065	6.8K 1/10W	1	
	R1406	D0GB104JA065	100K 1/10W	1	
	R1407	D0GB561JA065	560 1/10W	1	
	R1408	D0GB681JA065	680 1/10W	1	
	R1409	D0GBR00J0004	0 1/10W	1	
	R1410	D0GBR00J0004	0 1/10W	1	
	R1411	D0GB153JA065	15K 1/10W	1	
	R1411	D0GB561JA065	560 1/10W	1	
	R1412	D0GB681JA065	680 1/10W	1	
	R1412	D0GD474JA052	470K 1/8W	1	
	R1413	D0GB681JA065	680 1/10W	1	
	R1413	D0GD102JA052	1K 1/8W	1	
	R1414	D0GB222JA065	2.2K 1/10W	1	
	R1414	D0GD103JA052	10K 1/8W	1	
	R1415	D0GB153JA065	15K 1/10W	1	
	R1415	D0GZ204JA012	200K 1W	1	
	R1416	D0GB101JA065	100 1/10W	1	
	R1416	D0GD331JA052	330 1/8W	1	
	R1417	D0GB472JA065	4.7K 1/10W	1	
	R1417	D0GF224JA048	220K 1/4W	1	
	R1418	D0GB682JA065	6.8K 1/10W	1	
	R1418	D0GF224JA048	220K 1/4W	1	
	R1419	D0GB104JA065	100K 1/10W	1	
	R1419	D0GD220JA052	22 1/8W	1	
	R1420	D0GB221JA065	220 1/10W	1	
	R1420	D0GD824JA052	820K 1/8W	1	
	R1421	D0GB221JA065	220 1/10W	1	
	R1500	D0GBR00J0004	0 1/10W	1	
	R1501	D0GB273JA008	27K 1/10W	1	
	R1501	D0GD684JA052	680K 1/8W	1	
	R1502	D0GB2R2JA007	2.2 1/10W	1	
	R1502	D0GD684JA052	680K 1/8W	1	
	R1503	D0GB393JA008	39K 1/10W	1	
	R1503	D0GD105JA052	1M 1/8W	1	
	R1504	D0GB330JA008	33 1/10W	1	
	R1504	D0GD472JA052	4.7K 1/8W	1	
	R1505	D0GD103JA052	10K 1/8W	1	
	R1506	D0GBR00JA008	0 1/10W	1	

Safety	Ref. No.	Part No.	Part Name & Description	Qty	Remarks
	R1506	D0GDR00J0004	0 1/8W	1	
	R1507	D0GBR00JA008	0 1/10W	1	
	R1507	D0GD224JA052	220K 1/8W	1	
	R1508	ERJ14YJ4R7U	4.7 1/4W	1	
	R1509	ERJ14YJ4R7U	4.7 1/4W	1	
	R1510	D0GD470JA052	47 1/8W	1	
	R1511	D0GD330JA052	33 1/8W	1	
	R1512	ERJ14YJ220U	22 1/4W	1	
	R1513	ERJ14YJ220U	22 1/4W	1	
	R1514	D0GD180JA052	18 1/8W	1	
	R1515	D0GD682JA052	6.8K 1/8W	1	
	R1516	D0GD473JA052	47K 1/8W	1	
	R1517	D0GD473JA052	47K 1/8W	1	
	R1518	ERX2SZJR12P	0.12 2W	1	
	R1519	ERX2SZJR12P	0.12 2W	1	
	R1521	D0GBR00J0004	0 1/10W	1	
	R1522	D0GBR00J0004	0 1/10W	1	
	R1524	ERX2SZJR10P	0.1 2W	1	
	R1600	D0GB103JA065	10K 1/10W	1	
	R1601	D0GB103JA065	10K 1/10W	1	
	R1601	D0GD331JA052	330 1/8W	1	
	R1602	D0GB151JA065	150 1/10W	1	
	R1602	D0GB750JA065	75 1/10W	1	
	R1603	D0GB153JA065	15K 1/10W	1	
	R1603	D0GB750JA065	75 1/10W	1	
	R1604	D1BB1002A074	10K 1/10W	1	
	R1605	D1BB1001A074	1K 1/10W	1	
	R1606	D1BB3302A074	33K 1/10W	1	
	R1607	D0GB222JA065	2.2K 1/10W	1	
	R1650	D0GB272JA065	2.7K 1/10W	1	
	R1651	D0GB272JA065	2.7K 1/10W	1	
	R1700	D0GB393JA065	39K 1/10W	1	
	R1701	D0GB103JA065	10K 1/10W	1	
	R1701	D0GD152JA052	1.5K 1/8W	1	
	R1702	D0GBR00J0004	0 1/10W	1	
	R1702	D0GD272JA052	2.7K 1/8W	1	
	R1703	D0GD272JA052	2.7K 1/8W	1	
	R1704	D0GB104JA065	100K 1/10W	1	
	R1705	D0GB101JA065	100 1/10W	1	
	R1706	D0GB103JA065	10K 1/10W	1	
	R1706	D0GD273JA052	27K 1/8W	1	
	R1707	D0GB103JA065	10K 1/10W	1	
	R1708	D0GB103JA065	10K 1/10W	1	
	R1708	D1BB3302A074	33K 1/10W	1	
	R1709	D0GB103JA065	10K 1/10W	1	
	R1709	D1BB3302A074	33K 1/10W	1	
	R1710	D0GB332JA065	3.3K 1/10W	1	
	R1710	D1BB9101A074	9.1K 1/10W	1	
	R1711	D0GB270JA065	27 1/10W	1	
	R1711	D1BB2401A074	2.4K 1/10W	1	
	R1712	D0GB471JA065	470 1/10W	1	
	R1712	D0GZ222JA012	2.2K 1W	1	
	R1713	D0GB223JA065	22K 1/10W	1	
	R1713	D0GZ222JA012	2.2K 1W	1	
	R1714	D0GD447JA017	4.7 1/8W	1	
	R1714	D0GZ222JA012	2.2K 1W	1	
	R1715	D0GZ222JA012	2.2K 1W	1	
	R1716	D0GD102JA052	1K 1/8W	1	
	R1717	D0GBR00J0004	0 1/10W	1	
	R1718	D0GBR00J0004	0 1/10W	1	
	R1800	D0GF330JA048	33 1/4W	1	
	R1801	D0GF390JA048	39 1/4W	1	
	R1801	ERG2SJ181E	180 2W	1	
	R1802	ERG2SJ181E	180 2W	1	
	R1803	D0GB122JA065	1.2K 1/10W	1	
	R1804	D0GB473JA065	47K 1/10W	1	
	R1805	ERG2SJ181E	180 2W	1	
	R1806	ERG2SJ181E	180 2W	1	
	R1807	ERG2SJ181E	180 2W	1	
	R1808	ERG2SJ181E	180 2W	1	
	R1809	D0GB102JA008	1K 1/10W	1	
	R1809	D0GB102JA065	1K 1/10W	1	
	R1810	ERG2SJ181E	180 2W	1	

Safety	Ref. No.	Part No.	Part Name & Description	Qty	Remarks
	R1811	ERG2SJ181E	180 2W	1	
	R1815	D0GB472JA008	4.7K 1/10W	1	
	R1826	D0GBR00J0004	0 1/10W	1	
	R1827	D0GB472JA065	4.7K 1/10W	1	
	R1930	D0GB103JA065	10K 1/10W	1	
	R1931	D0GB103JA065	10K 1/10W	1	
	R1960	D0GB103JA065	10K 1/10W	1	
	R1961	D0GB103JA065	10K 1/10W	1	
	R2001	D0GB473JA008	47K 1/10W	1	
	R2002	D0GB473JA008	47K 1/10W	1	
	R2003	D0GB473JA008	47K 1/10W	1	
	R2004	D0GB473JA008	47K 1/10W	1	
	R2005	D0GB473JA008	47K 1/10W	1	
	R2006	D0GB473JA008	47K 1/10W	1	
	R2007	D0GB473JA008	47K 1/10W	1	
	R4001	D0GB152JA008	1.5K 1/10W	1	
	R4002	D0GB105JA008	1M 1/10W	1	
	R4007	D0GB101JA008	100 1/10W	1	
	R4008	D0GB101JA008	100 1/10W	1	
	R4009	D0GB101JA008	100 1/10W	1	
	R4010	D0GB101JA008	100 1/10W	1	
	R4011	D0GB101JA008	100 1/10W	1	
	R4012	D0GB101JA008	100 1/10W	1	
	R4013	D0GB101JA008	100 1/10W	1	
	R4016	D0GB221JA007	220 1/10W	1	
	R4017	D0GB221JA007	220 1/10W	1	
	R4019	D0GB101JA008	100 1/10W	1	
	R4020	D0GB101JA008	100 1/10W	1	
	R4021	D0GB101JA008	100 1/10W	1	
	R4022	D0GB182JA008	1.8K 1/10W	1	
	R4023	D0GB682JA008	6.8K 1/10W	1	
	R4024	D0GB681JA008	680 1/10W	1	
	R4025	D0GB473JA008	47K 1/10W	1	
	R4029	D0GDR00JA017	0 1/8W	1	
	R4030	D0GB562JA008	5.6K 1/10W	1	
	R4031	D0GB103JA008	10K 1/10W	1	
	R4032	D0GB562JA008	5.6K 1/10W	1	
	R4033	D0GB103JA008	10K 1/10W	1	
	R4034	D0GB153JA008	15K 1/10W	1	
	R4035	D0GB153JA008	15K 1/10W	1	
	R4036	D0GB104JA008	100K 1/10W	1	
	R4037	D0GB152JA008	1.5K 1/10W	1	
	R4038	D0GB821JA008	820 1/10W	1	
	R4039	D0GB153JA008	15K 1/10W	1	
	R4040	D0GB562JA008	5.6K 1/10W	1	
	R4041	D0GB103JA008	10K 1/10W	1	
	R4042	D0GB153JA008	15K 1/10W	1	
	R4043	D0GB103JA008	10K 1/10W	1	
	R4044	D0GB562JA008	5.6K 1/10W	1	
	R4045	D0GB152JA008	1.5K 1/10W	1	
	R4046	D0GB821JA008	820 1/10W	1	
	R4047	D0GB104JA008	100K 1/10W	1	
	R4048	D0GB153JA008	15K 1/10W	1	
	R4049	D0GB103JA008	10K 1/10W	1	
	R4050	D0GB562JA008	5.6K 1/10W	1	
	R4051	D0GB332JA008	3.3K 1/10W	1	
	R4052	D0GB821JA008	820 1/10W	1	
	R4053	D0GB103JA008	10K 1/10W	1	
	R4054	D0GB153JA008	15K 1/10W	1	
	R4055	D0GB562JA008	5.6K 1/10W	1	
	R4056	D0GB103JA065	10K 1/10W	1	MAX370
	R4056	D0GB104JA008	100K 1/10W	1	MAX770
	R4057	D0GB562JA008	5.6K 1/10W	1	
	R4058	D0GB152JA008	1.5K 1/10W	1	MAX770
	R4059	D0GB152JA008	1.5K 1/10W	1	MAX770
	R4060	D0GB562JA008	5.6K 1/10W	1	
	R4061	D0GB103JA008	10K 1/10W	1	
	R4062	D0GB153JA008	15K 1/10W	1	
	R4063	D0GB562JA008	5.6K 1/10W	1	
	R4064	D0GB103JA008	10K 1/10W	1	
	R4065	D0GB562JA008	5.6K 1/10W	1	
	R4066	D0GB153JA008	15K 1/10W	1	
	R4067	D0GB821JA008	820 1/10W	1	

Safety	Ref. No.	Part No.	Part Name & Description	Qty	Remarks
	R4068	D0GB103JA065	10K 1/10W	1	MAX370
	R4068	D0GB104JA008	100K 1/10W	1	MAX770
	R4069	D0GB332JA008	3.3K 1/10W	1	
	R4070	D0GB103JA008	10K 1/10W	1	
	R4071	D0GB152JA065	1.5K 1/10W	1	MAX370
	R4072	D0GB152JA065	1.5K 1/10W	1	MAX370
	R4075	D0GB821JA008	820 1/10W	1	
	R4076	D0GB821JA008	820 1/10W	1	
	R4078	D0GDR00JA017	0 1/8W	1	
	R4079	D0GDR00JA017	0 1/8W	1	
	R4080	D0GB222JA008	2.2K 1/10W	1	
	R4081	D0GBR00J0004	0 1/10W	1	
	R4201	D0GB100JA008	10 1/10W	1	
	R4202	D0GB100JA008	10 1/10W	1	
	R4203	D0GB152JA008	1.5K 1/10W	1	
	R4204	D0GB151JA008	150 1/10W	1	
	R4205	D0GB822JA008	8.2K 1/10W	1	
	R4206	D0GB152JA008	1.5K 1/10W	1	
	R4207	D0GB822JA008	8.2K 1/10W	1	
	R4208	D0GB151JA008	150 1/10W	1	
	R4209	D0GB152JA008	1.5K 1/10W	1	
	R4210	D0GB822JA008	8.2K 1/10W	1	
	R4211	D0GB151JA008	150 1/10W	1	
	R4212	D0GB151JA008	150 1/10W	1	
	R4213	D0GB822JA008	8.2K 1/10W	1	
	R4214	D0GB152JA008	1.5K 1/10W	1	
	R4215	D0GB222JA008	2.2K 1/10W	1	
	R4216	D0GB562JA008	5.6K 1/10W	1	
	R4217	D0GB4R7JA008	4.7 1/10W	1	
	R4219	D0GB472JA008	4.7K 1/10W	1	
	R4220	D0GB4R7JA008	4.7 1/10W	1	
	R4221	D0GB4R7JA008	4.7 1/10W	1	
	R4222	D0GB392JA008	3.9K 1/10W	1	
	R4223	D0GB103JA008	10K 1/10W	1	
	R4224	D0GB103JA008	10K 1/10W	1	
	R4225	D0GB473JA008	47K 1/10W	1	
	R4226	D0GB473JA008	47K 1/10W	1	
	R4227	D0GB220JA008	22 1/10W	1	
	R4228	D0GB220JA008	22 1/10W	1	
	R4229	D0GB220JA008	22 1/10W	1	
	R4230	D0GB103JA008	10K 1/10W	1	
	R4231	D0GB473JA008	47K 1/10W	1	
	R4232	D0GB4R7JA008	4.7 1/10W	1	
	R4233	D0GB473JA008	47K 1/10W	1	
	R4234	D0GB220JA008	22 1/10W	1	
	R4235	D0GB392JA008	3.9K 1/10W	1	
	R4236	D0GB103JA008	10K 1/10W	1	
	R4237	D0GB220JA008	22 1/10W	1	
	R4238	D0GB220JA008	22 1/10W	1	
	R4239	D0GB103JA008	10K 1/10W	1	
	R4240	D0GB473JA008	47K 1/10W	1	
	R4241	D0GB4R7JA008	4.7 1/10W	1	
	R4242	D0GB392JA008	3.9K 1/10W	1	
	R4243	D0GB103JA008	10K 1/10W	1	
	R4244	D0GB473JA008	47K 1/10W	1	
	R4245	D0GB220JA008	22 1/10W	1	
	R4246	D0GB220JA008	22 1/10W	1	
	R4247	D0GB103JA008	10K 1/10W	1	
	R4248	D0GB473JA008	47K 1/10W	1	
	R4249	D0GB4R7JA008	4.7 1/10W	1	
	R4250	D0GB392JA008	3.9K 1/10W	1	
	R4251	D0GB473JA008	47K 1/10W	1	
	R4252	D0GB103JA008	10K 1/10W	1	
	R4253	D0GB683JA008	68K 1/10W	1	
	R4254	D0GB683JA008	68K 1/10W	1	
	R4255	D0GB683JA008	68K 1/10W	1	
	R4256	D0GB683JA008	68K 1/10W	1	
	R4257	D0GB152JA008	1.5K 1/10W	1	
	R4259	D0GB103JA008	10K 1/10W	1	
	R4260	ERJ14YJ100U	10 1/4W	1	
	R4261	ERJ14YJ272U	2.7K 1/4W	1	
	R4262	ERJ14YJ272U	2.7K 1/4W	1	
	R4263	ERJ14YJ272U	2.7K 1/4W	1	

Safety	Ref. No.	Part No.	Part Name & Description	Qty	Remarks
	R4264	ERJ14YJ272U	2.7K 1/4W	1	
	R4265	ERJ14YJ100U	10 1/4W	1	
	R4266	ERJ14YJ272U	2.7K 1/4W	1	
	R4267	ERJ14YJ272U	2.7K 1/4W	1	
	R4268	ERJ14YJ100U	10 1/4W	1	
	R4269	ERJ14YJ272U	2.7K 1/4W	1	
	R4270	ERJ14YJ272U	2.7K 1/4W	1	
	R4271	ERJ14YJ100U	10 1/4W	1	
	R4272	D0GBR00JA008	0 1/10W	1	
	R4274	D0GB103JA008	10K 1/10W	1	
	R4275	D0GB683JA008	68K 1/10W	1	
	R4276	D0GB124JA008	120K 1/10W	1	
	R4277	D0GB683JA008	68K 1/10W	1	
	R4278	D0GB124JA008	120K 1/10W	1	
	R4279	D0GB105JA008	1M 1/10W	1	
	R4280	D0GBR00JA008	0 1/10W	1	
	R4281	D0GB105JA008	1M 1/10W	1	
	R4282	D0GBR00JA008	0 1/10W	1	
	R4283	D0GB220JA008	22 1/10W	1	
	R4284	D0GB472JA008	4.7K 1/10W	1	
	R4285	D0GB105JA008	1M 1/10W	1	
	R4286	D0GB102JA008	1K 1/10W	1	
	R4288	D0GB102JA008	1K 1/10W	1	
	R4290	D0GDR00JA017	0 1/8W	1	
	R4292	D0GBR00JA008	0 1/10W	1	
	R4293	D0GBR00JA008	0 1/10W	1	
	R4294	D0GBR00JA008	0 1/10W	1	
	R4501	D0GB100JA008	10 1/10W	1	
	R4502	D0GB100JA008	10 1/10W	1	
	R4503	D0GB332JA008	3.3K 1/10W	1	
	R4504	D0GB151JA008	150 1/10W	1	
	R4505	D0GB822JA008	8.2K 1/10W	1	
	R4506	D0GB332JA008	3.3K 1/10W	1	
	R4507	D0GB822JA008	8.2K 1/10W	1	
	R4508	D0GB151JA008	150 1/10W	1	
	R4509	D0GB332JA008	3.3K 1/10W	1	
	R4510	D0GB822JA008	8.2K 1/10W	1	
	R4511	D0GB151JA008	150 1/10W	1	
	R4512	D0GB151JA008	150 1/10W	1	
	R4513	D0GB822JA008	8.2K 1/10W	1	
	R4514	D0GB332JA008	3.3K 1/10W	1	
	R4515	D0GB222JA008	2.2K 1/10W	1	
	R4516	D0GB562JA008	5.6K 1/10W	1	
	R4517	D0GB4R7JA008	4.7 1/10W	1	
	R4519	D0GB472JA008	4.7K 1/10W	1	
	R4520	D0GB4R7JA008	4.7 1/10W	1	
	R4521	D0GB4R7JA008	4.7 1/10W	1	
	R4522	D0GB392JA008	3.9K 1/10W	1	
	R4523	D0GB103JA008	10K 1/10W	1	
	R4524	D0GB103JA008	10K 1/10W	1	
	R4525	D0GB473JA008	47K 1/10W	1	
	R4526	D0GB473JA008	47K 1/10W	1	
	R4527	D0GB220JA008	22 1/10W	1	
	R4528	D0GB220JA008	22 1/10W	1	
	R4529	D0GB220JA008	22 1/10W	1	
	R4530	D0GB103JA008	10K 1/10W	1	
	R4531	D0GB473JA008	47K 1/10W	1	
	R4532	D0GB4R7JA008	4.7 1/10W	1	
	R4533	D0GB473JA008	47K 1/10W	1	
	R4534	D0GB220JA008	22 1/10W	1	
	R4535	D0GB392JA008	3.9K 1/10W	1	
	R4536	D0GB103JA008	10K 1/10W	1	
	R4537	D0GB220JA008	22 1/10W	1	
	R4538	D0GB220JA008	22 1/10W	1	
	R4539	D0GB103JA008	10K 1/10W	1	
	R4540	D0GB473JA008	47K 1/10W	1	
	R4541	D0GB4R7JA008	4.7 1/10W	1	
	R4542	D0GB392JA008	3.9K 1/10W	1	
	R4543	D0GB103JA008	10K 1/10W	1	
	R4544	D0GB473JA008	47K 1/10W	1	
	R4545	D0GB220JA008	22 1/10W	1	
	R4546	D0GB220JA008	22 1/10W	1	
	R4547	D0GB103JA008	10K 1/10W	1	

Safety	Ref. No.	Part No.	Part Name & Description	Qty	Remarks
	R4548	D0GB473JA008	47K 1/10W	1	
	R4549	D0GB4R7JA008	4.7 1/10W	1	
	R4550	D0GB392JA008	3.9K 1/10W	1	
	R4551	D0GB473JA008	47K 1/10W	1	
	R4552	D0GB103JA008	10K 1/10W	1	
	R4553	D0GB154JA008	150K 1/10W	1	
	R4554	D0GB154JA008	150K 1/10W	1	
	R4555	D0GB154JA008	150K 1/10W	1	
	R4556	D0GB154JA008	150K 1/10W	1	
	R4557	D0GB152JA008	1.5K 1/10W	1	
	R4558	ERJ14YJ100U	10 1/4W	1	
	R4559	ERJ14YJ272U	2.7K 1/4W	1	
	R4560	ERJ14YJ272U	2.7K 1/4W	1	
	R4561	ERJ14YJ272U	2.7K 1/4W	1	
	R4562	ERJ14YJ272U	2.7K 1/4W	1	
	R4563	ERJ14YJ100U	10 1/4W	1	
	R4564	ERJ14YJ272U	2.7K 1/4W	1	
	R4565	ERJ14YJ272U	2.7K 1/4W	1	
	R4566	ERJ14YJ100U	10 1/4W	1	
	R4567	ERJ14YJ272U	2.7K 1/4W	1	
	R4568	ERJ14YJ272U	2.7K 1/4W	1	
	R4569	ERJ14YJ100U	10 1/4W	1	
	R4570	D0GBR00JA008	0 1/10W	1	
	R4572	D0GB103JA008	10K 1/10W	1	
	R4573	D0GB124JA008	120K 1/10W	1	
	R4574	D0GB124JA008	120K 1/10W	1	
	R4575	D0GB124JA008	120K 1/10W	1	
	R4576	D0GB124JA008	120K 1/10W	1	
	R4577	D0GB104JA008	100K 1/10W	1	
	R4578	D0GB562JA008	5.6K 1/10W	1	
	R4579	D0GB822JA008	8.2K 1/10W	1	
	R4580	D0GB101JA008	100 1/10W	1	
	R4581	D0AF680JA039	68 1/4W	1	
	R4582	D0GB103JA008	10K 1/10W	1	
	R4583	D0GDR00JA017	0 1/8W	1	
	R4594	D0GDR00JA017	0 1/8W	1	
	R4595	D0GDR00JA017	0 1/8W	1	
	R4596	D0GDR00JA017	0 1/8W	1	
	R4597	D0GDR00JA017	0 1/8W	1	
	R4598	D0GDR00JA017	0 1/8W	1	
	R4599	D0GDR00JA017	0 1/8W	1	
	R4600	D0GDR00JA017	0 1/8W	1	
	R4601	D0GDR00JA017	0 1/8W	1	
	R4801	D0GB152JA008	1.5K 1/10W	1	
	R4802	D0GB105JA008	1M 1/10W	1	
	R4803	D0GB473JA008	47K 1/10W	1	
	R4804	D0GB473JA008	47K 1/10W	1	
	R4805	D0GB103JA008	10K 1/10W	1	
	R4806	D0GB103JA008	10K 1/10W	1	
	R4807	D0GB103JA008	10K 1/10W	1	
	R4808	D0GB221JA007	220 1/10W	1	
	R4809	D0GB221JA007	220 1/10W	1	
	R4810	D0GB221JA007	220 1/10W	1	
	R4811	D0GB221JA007	220 1/10W	1	
	R4812	D0GB101JA008	100 1/10W	1	
	R4813	D0GB221JA007	220 1/10W	1	
	R4814	D0GB221JA007	220 1/10W	1	
	R4815	D0GB221JA007	220 1/10W	1	
	R4816	D0GB221JA007	220 1/10W	1	
	R4817	D0GB221JA007	220 1/10W	1	
	R4818	D0GB221JA007	220 1/10W	1	
	R4819	D0GB221JA007	220 1/10W	1	
	R4820	D0GB101JA008	100 1/10W	1	
	R4821	D0GB101JA008	100 1/10W	1	
	R4822	D0GB101JA008	100 1/10W	1	
	R4823	D0GB101JA008	100 1/10W	1	
	R4832	D0GB104JA008	100K 1/10W	1	
	R4901	D0GB123JA065	12K 1/10W	1	
	R4902	D0GB822JA065	8.2K 1/10W	1	
	R4903	D0GB123JA065	12K 1/10W	1	
	R4904	D0GB822JA065	8.2K 1/10W	1	
	R4905	D0GB102JA008	1K 1/10W	1	
	R4906	D0GB103JA008	10K 1/10W	1	

Safety	Ref. No.	Part No.	Part Name & Description	Qty	Remarks
	R8045	ERJ3RBD911V	910 1/16W	1	
	R8046	ERJ3RBD103V	10K 1/16W	1	
	R8048	ERJ3RBD222V	2.2K 1/16W	1	
	R8049	ERJ3RBD103V	10K 1/16W	1	
	R8051	D0GB472JA008	4.7K 1/10W	1	
	R8052	D0GB472JA008	4.7K 1/10W	1	
	R8053	D0GB103JA008	10K 1/10W	1	
	R8054	D0GB103JA008	10K 1/10W	1	
	R8055	D0GD223JA017	22K 1/8W	1	
	R8056	D0GB102JA008	1K 1/10W	1	
	R8057	D0GD153JA017	15K 1/8W	1	
	R8058	D0GD823JA017	82K 1/8W	1	
	R8059	D0GD124JA017	120K 1/8W	1	
	R8060	ERJ3RBD243V	24K 1/16W	1	
	R8062	D0GB222JA008	2.2K 1/10W	1	
	R8063	D0GB222JA008	2.2K 1/10W	1	
	R8064	D0GB222JA008	2.2K 1/10W	1	
	R8065	D0GB472JA008	4.7K 1/10W	1	
	R8066	D0GB472JA008	4.7K 1/10W	1	
	R8067	D0GBR00J0004	0 1/10W	1	MAX770
	R8067	D0GBR00JA008	0 1/10W	1	MAX370
	R8068	ERJ3RBD103V	10K 1/16W	1	
	R8069	ERJ3RBD332V	3.3K 1/16W	1	
	R8070	D0DR00JA017	0 1/8W	1	
	R8077	D0GBR00J0004	0 1/10W	1	
	R8501	D0GB473JA008	47K 1/10W	1	
	R8502	D0GB123JA008	12K 1/10W	1	
	R8503	D0GB681JA008	680 1/10W	1	
	R8504	D0GBR00JA008	0 1/10W	1	
	R8505	D0GB473JA008	47K 1/10W	1	
	R8506	D0GB123JA008	12K 1/10W	1	
	R8507	D0GB681JA008	680 1/10W	1	
	R8508	D0GBR00JA008	0 1/10W	1	
	R8509	D0GB274JA007	270K 1/10W	1	
	R8510	D0GB823JA008	82K 1/10W	1	
	R8511	D0GB682JA008	6.8K 1/10W	1	
	R8512	D0GB221JA007	220 1/10W	1	
	R8513	D0GB104JA008	100K 1/10W	1	
	R8514	D0GB101JA008	100 1/10W	1	
	R8515	D0GB474JA008	470K 1/10W	1	
	R8516	D0AF270JA039	27 1/4W	1	
	R8517	D0AF270JA039	27 1/4W	1	
	R8518	D0GB221JA007	220 1/10W	1	
	R8519	D0GB823JA008	82K 1/10W	1	
	R8520	D0GB101JA008	100 1/10W	1	
	R8521	D0GB104JA008	100K 1/10W	1	
	R8522	D0GB682JA008	6.8K 1/10W	1	
	R8523	D0GB274JA007	270K 1/10W	1	
	R8524	D0GB474JA008	470K 1/10W	1	
	R8525	D0AF270JA039	27 1/4W	1	
	R8526	D0GB221JA007	220 1/10W	1	
	R8527	D0GB823JA008	82K 1/10W	1	
	R8528	D0GB101JA008	100 1/10W	1	
	R8529	D0GB104JA008	100K 1/10W	1	
	R8530	D0GB682JA008	6.8K 1/10W	1	
	R8531	D0GB274JA007	270K 1/10W	1	
	R8532	D0GB474JA008	470K 1/10W	1	
	R8533	D0GBR00JA008	0 1/10W	1	
	R8534	D0GBR00JA008	0 1/10W	1	
	R9000	D0GB121JA065	120 1/10W	1	
	R9002	D0GB121JA065	120 1/10W	1	
	R9003	D0GB222JA065	2.2K 1/10W	1	
	R9006	D0GB331JA008	330 1/10W	1	
	R9007	D0GB104JA008	100K 1/10W	1	
	R9008	ERJ3GEYJ301V	300 1/10W	1	
	R9009	D0GB104JA008	100K 1/10W	1	
	R9012	D0GB222JA065	2.2K 1/10W	1	
			RESISTOR NET- WORKS		
	RX1001	D1H81014A042	RESISTOR NETWORK	1	
	RX1002	D1H82224A042	RESISTOR NETWORK	1	

Safety	Ref. No.	Part No.	Part Name & Description	Qty	Remarks
	RX1003	D1H81014A042	RESISTOR NETWORK	1	
	RX1004	D1H82224A042	RESISTOR NETWORK	1	
	RX4001	D1H82214A042	RESISTOR NETWORK	1	
	RX4801	D1H81014A042	RESISTOR NETWORK	1	
	RX4802	D1H81034A042	RESISTOR NETWORK	1	
	RX5001	D1H81034A042	RESISTOR NETWORK	1	
	RX7001	D1H81024A042	RESISTOR NETWORK	1	
			CAPACITORS		
⚠	C1001	F0CAF224A105	0.22uF	1	
	C1001	F1H1H104A783	0.1uF 50V	1	
⚠	C1002	F0CAF224A105	0.22uF	1	
	C1002	F1H1H104A783	0.1uF 50V	1	
⚠	C1003	F1BAF221A013	220pF	1	
	C1003	F1H1H104A783	0.1uF 50V	1	
⚠	C1004	F1BAF221A013	220pF	1	
	C1004	F1H1H104A783	0.1uF 50V	1	
	C1005	F1H1H104A783	0.1uF 50V	1	
⚠	C1006	F0CAF104A105	0.1uF	1	
	C1006	F1H1H104A783	0.1uF 50V	1	
	C1007	F1H1H104A783	0.1uF 50V	1	
	C1008	F1H1H104A783	0.1uF 50V	1	
	C1009	F1H1H104A783	0.1uF 50V	1	
	C1010	F1H1H104A783	0.1uF 50V	1	
	C1011	F1H1H104A783	0.1uF 50V	1	
	C1012	F1H1C2240011	0.22uF 16V	1	
	C1013	F1H0J335A005	3.3uF 6.3V	1	
	C1014	F2A1C101A243	100uF 16V	1	
	C1015	F1H1H104A783	0.1uF 50V	1	
	C1016	F1H1H681A831	680pF 50V	1	
	C1017	F2A0J331A183	330uF 6.3V	1	
	C1018	F1H1H104A783	0.1uF 50V	1	
	C1019	F1H1H104A783	0.1uF 50V	1	
	C1020	F1H0J1060006	10uF 6.3V	1	
	C1021	F1H0J1060006	10uF 6.3V	1	
	C1022	F1H0J1060006	10uF 6.3V	1	
	C1023	F1H0J1060006	10uF 6.3V	1	
	C1024	F1H0J1060006	10uF 6.3V	1	
	C1025	F1H0J1060006	10uF 6.3V	1	
	C1026	F1H1H1800004	18pF 50V	1	
	C1027	F1H1H1800004	18pF 50V	1	
	C1028	F1H1H2200008	22pF 50V	1	
	C1029	F1H1H1500009	15pF 50V	1	
	C1030	F1H1H1010005	100pF 50V	1	
	C1031	F1H1H102A831	1000pF 50V	1	
	C1032	F1H1H102A831	1000pF 50V	1	
	C1033	F1H1H102A831	1000pF 50V	1	
	C1034	F1H1H102A831	1000pF 50V	1	
	C1035	F1H1H102A831	1000pF 50V	1	
	C1036	DOGBR00J0004	0 1/10W	1	
	C1037	F1H1H104A783	0.1uF 50V	1	
	C1040	F1H1H104A783	0.1uF 50V	1	
	C1041	F1H1H104A783	0.1uF 50V	1	
	C1042	F1H1A334A036	0.33uF 10V	1	
	C1043	F1H1H223A219	0.022uF 50V	1	
	C1101	F1K1H105A251	1uF 50V	1	
	C1104	F1H1H222A219	2200pF 50V	1	
	C1105	F1H1C2240011	0.22uF 16V	1	
	C1106	F1K1C225A069	2.2uF 16V	1	
	C1108	F1H1H1500009	15pF 50V	1	
	C1111	F1H1H102A219	1000pF 50V	1	
	C1113	F1B3D471A132	470pF 2000V	1	
⚠	C1115	F0CZZ225A172	2.2uF	1	
	C1118	F1K2J471A014	470pF 630V	1	
	C1201	F1H1C104A041	0.1uF 16V	1	
	C1202	F1H1C104A041	0.1uF 16V	1	
	C1203	F1H1C104A041	0.1uF 16V	1	
	C1204	F1H1C104A041	0.1uF 16V	1	
	C1205	F1H1C104A041	0.1uF 16V	1	
	C1206	F1H1C104A041	0.1uF 16V	1	
	C1217	F1K1H105A251	1uF 50V	1	
	C1218	F2A1E1010120	100uF 25V	1	

Safety	Ref. No.	Part No.	Part Name & Description	Qty	Remarks
	C1219	F1H1H4700006	47pF 50V	1	
	C1220	F1H1H102A219	1000pF 50V	1	
	C1221	F1B3D471A132	470pF 2000V	1	
	C1222	F0CZZ225A172	2.2uF	1	
	C1224	F2B2W561A137	560uF 450V	1	
	C1226	F1K2J471A014	470pF 630V	1	
	C1400	F1H1H102B047	1000pF 50V	1	
	C1401	F2A1H4R7A213	4.7uF 50V	1	
	C1402	F1H1H470B052	47pF 50V	1	
	C1403	F2A1HR10A015	0.1uF 50V	1	
	C1403	F2A2W150A189	15uF 450V	1	
	C1404	F1H1H104B047	0.1uF 50V	1	
	C1404	F2A1H4R7A218	4.7uF 50V	1	
	C1405	F1H1H102B047	1000pF 50V	1	
	C1406	F1K2J2220002	2200pF 630V	1	
	C1406	F2A1H1R0A213	1uF 50V	1	
	C1407	F1H1H103B047	0.01uF 50V	1	
	C1407	F1K1H105A251	1uF 50V	1	
	C1408	F2A1E221B422	220uF 25V	1	
	C1408	F2A1H2R2A234	2.2uF 50V	1	
	C1409	F1H1H472A219	4700pF 50V	1	
	C1411	F1H1H102A219	1000pF 50V	1	
	C1411	F2A1C100A207	10uF 16V	1	
	C1412	F2A1C100A234	10uF 16V	1	
	C1413	F2A1H1R0A213	1uF 50V	1	
	C1415	F2A1HR10A015	0.1uF 50V	1	
	C1416	F1H1H103B047	0.01uF 50V	1	
	C1417	F1H1H102B047	1000pF 50V	1	
	C1418	F1H1H331B052	330pF 50V	1	
	C1419	F1H1H331B052	330pF 50V	1	
	C1420	F1H1H103B047	0.01uF 50V	1	
	C1421	F1H1H103B047	0.01uF 50V	1	
	C1422	F1H1H103B047	0.01uF 50V	1	
	C1423	F1H1H103B047	0.01uF 50V	1	
	C1424	F2A1H2R2A234	2.2uF 50V	1	
	C1425	F1H1H103B047	0.01uF 50V	1	
	C1426	F2A1H1R0A213	1uF 50V	1	
	C1428	F2A1H4R7A218	4.7uF 50V	1	
	C1429	F2A1HR10A015	0.1uF 50V	1	
	C1430	F1H1H470B052	47pF 50V	1	
	C1431	F1H1H472A219	4700pF 50V	1	
	C1432	F2A1H4R7A213	4.7uF 50V	1	
	C1434	F2A1C100A207	10uF 16V	1	
	C1435	F2A1C100A234	10uF 16V	1	
	C1436	F2A1H1R0A213	1uF 50V	1	
	C1438	F2A1HR10A015	0.1uF 50V	1	
	C1441	F1H1H103B047	0.01uF 50V	1	
	C1501	F1H1H104B047	0.1uF 50V	1	
	C1502	F1H1H104B047	0.1uF 50V	1	
	C1502	F2A1E1010120	100uF 25V	1	
	C1503	F1H1H103B047	0.01uF 50V	1	
	C1503	F1K1E4750002	4.7uF 25V	1	
	C1504	F1H1H103A219	0.01uF 50V	1	
	C1504	F1H1H104B047	0.1uF 50V	1	
	C1505	F1H1H104A913	0.1uF 50V	1	
	C1505	F1H1H470B052	47pF 50V	1	
	C1506	F1H1H470B052	47pF 50V	1	
	C1506	F1K1C4750023	4.7uF 16V	1	
	C1507	F1H1H104A913	0.1uF 50V	1	
	C1507	F2A1E102B396	1000uF 25V	1	
	C1508	F1H1H152A219	1500pF 50V	1	
	C1508	F1H1H471B052	470pF 50V	1	
	C1509	F1H1H104B047	0.1uF 50V	1	
	C1509	F1H1H471B052	470pF 50V	1	
	C1510	F1K1C1060001	10uF 16V	1	
	C1511	F1H1H103A219	0.01uF 50V	1	
	C1512	F1H1H333B047	0.033uF 50V	1	
	C1513	F1B3D151A132	150pF 2000V	1	
	C1514	F1B3D151A132	150pF 2000V	1	
	C1516	F0C2K683A053	0.068uF 800V	1	
⚠	C1518	F1BAF471A013	470pF	1	
	C1520	F1H1H471B052	470pF 50V	1	
	C1521	F1H1H471B052	470pF 50V	1	

Safety	Ref. No.	Part No.	Part Name & Description	Qty	Remarks
	C1522	F1H1H471B052	470pF 50V	1	
	C1523	F1H1H471B052	470pF 50V	1	
	C1524	F1H1H471B052	470pF 50V	1	
	C1525	F1H1H104B047	0.1uF 50V	1	
	C1600	F1H1H101B052	100pF 50V	1	
	C1601	F1H1H101B052	100pF 50V	1	
	C1601	F2A1E221B422	220uF 25V	1	
	C1602	F1H1H104B047	0.1uF 50V	1	
	C1602	F2A1A220A011	22uF 10V	1	
	C1603	F2A1V102B750	1000uF 35V	1	
	C1604	F1K2J471A014	470pF 630V	1	
	C1701	F1H1H103B047	0.01uF 50V	1	
	C1703	F1H1A105A036	1uF 10V	1	
	C1703	F2A1V102B750	1000uF 35V	1	
	C1704	F1H1H104A783	0.1uF 50V	1	
	C1704	F1H1H333B047	0.033uF 50V	1	
	C1706	F2A1H2220055	2200uF 50V	1	
	C1707	F2A1H2220055	2200uF 50V	1	
	C1710	F1J2E1030004	0.01uF 250V	1	
	C1711	F1J2E1030004	0.01uF 250V	1	
	C1712	F1J2E1030004	0.01uF 250V	1	
	C1713	F1J2E1030004	0.01uF 250V	1	
	C1714	F1K1C2260001	22uF 16V	1	
	C1715	F1H1H682B047	6800pF 50V	1	
	C1716	F2A1V330A379	33uF 35V	1	
	C1717	F2A0J221A245	220uF 6.3V	1	
	C1718	F2A1V220A184	22uF 35V	1	
	C1800	D0GDR00J0004	0 1/8W	1	
	C1800	F1J1E105A171	1uF 25V	1	
	C1801	F1J1V1050001	1uF 35V	1	
	C1802	F1J1A106A043	10uF 10V	1	
	C1802	F1J1E105A171	1uF 25V	1	
	C1803	F1H1H102B047	1000pF 50V	1	
	C1803	F2A1H1R0A013	1uF 50V	1	
	C1804	F1H1H102B047	1000pF 50V	1	
	C1804	F1H1H104A913	0.1uF 50V	1	
	C1805	F1H1H102B047	1000pF 50V	1	
	C1805	F1J1E105A171	1uF 25V	1	
	C1808	F1H1H102B047	1000pF 50V	1	
	C1809	F1H1H102B047	1000pF 50V	1	
	C1810	F1H1H471B052	470pF 50V	1	
	C1811	F1H1H471B052	470pF 50V	1	
	C1812	F1H1H471B052	470pF 50V	1	
	C1813	F1H1H471B052	470pF 50V	1	
	C1814	F1H1H471B052	470pF 50V	1	
	C1815	F1H1H471B052	470pF 50V	1	
	C1816	F1H1H471B052	470pF 50V	1	
	C1817	F1H1H471B052	470pF 50V	1	
	C1818	F1H1H471B052	470pF 50V	1	
	C1819	F1H1H471B052	470pF 50V	1	
	C1820	F1H1H471B052	470pF 50V	1	
	C1821	F1H1H102B047	1000pF 50V	1	
	C1822	F1H1H102B047	1000pF 50V	1	
	C1823	F1H1H102B047	1000pF 50V	1	
	C1824	F1H1H102B047	1000pF 50V	1	
	C1825	F1H1H102B047	1000pF 50V	1	
	C1826	F1H1H102B047	1000pF 50V	1	
	C1851	F1H1H104B047	0.1uF 50V	1	
	C1930	F1H1H101B052	100pF 50V	1	
	C1931	F1H1H101B052	100pF 50V	1	
	C1960	F1H1H101B052	100pF 50V	1	
	C1961	F1H1H101B052	100pF 50V	1	
	C2001	F1H1H104A783	0.1uF 50V	1	
	C2002	F1H1H104A783	0.1uF 50V	1	
	C2003	F1H1H104A783	0.1uF 50V	1	
	C2004	F1H0J475A013	4.7uF 6.3V	1	
	C2005	F1H1H104A783	0.1uF 50V	1	
	C2006	F1H1H104A783	0.1uF 50V	1	
	C2007	F1H1H104A783	0.1uF 50V	1	
	C2008	F1H1H104A783	0.1uF 50V	1	
	C2009	F1H0J1060006	10uF 6.3V	1	
	C2010	F1H1A105A028	1uF 10V	1	
	C2011	F1H1A105A028	1uF 10V	1	

Safety	Ref. No.	Part No.	Part Name & Description	Qty	Remarks
	C2012	F1H1H104A783	0.1uF 50V	1	
	C2013	F1H1H104A783	0.1uF 50V	1	
	C4001	F1H0J1050012	1uF 6.3V	1	
	C4002	F1H0J1050012	1uF 6.3V	1	
	C4003	F1H1C474A140	0.47uF 16V	1	
	C4004	F1H1H1500009	15pF 50V	1	
	C4005	F1H1H1500009	15pF 50V	1	
	C4006	F1H0J1050012	1uF 6.3V	1	
	C4007	F1H0J1050012	1uF 6.3V	1	
	C4008	F1H0J1050012	1uF 6.3V	1	
	C4009	F1H1H102A831	1000pF 50V	1	
	C4010	F1H1H102A831	1000pF 50V	1	
	C4016	F1H0J1060006	10uF 6.3V	1	
	C4017	F1H1H222B047	2200pF 50V	1	
	C4018	F1H1H561B052	560pF 50V	1	
	C4019	F1J1C1060001	10uF 16V	1	
	C4021	F1H1H104A783	0.1uF 50V	1	
	C4022	F1K1C226A121	22uF 16V	1	
	C4023	F1J1C1060001	10uF 16V	1	
	C4024	F1J1C1060001	10uF 16V	1	
	C4025	F1H1H104A783	0.1uF 50V	1	
	C4026	F1H1H104A783	0.1uF 50V	1	
	C4027	F1H1H104A783	0.1uF 50V	1	
	C4028	F1K1C226A121	22uF 16V	1	
	C4029	F1K1C226A121	22uF 16V	1	
	C4030	F1H1H104A783	0.1uF 50V	1	
	C4031	F1H1H104A783	0.1uF 50V	1	
	C4032	F1H1H681A831	680pF 50V	1	
	C4033	F1H1E105A116	1uF 25V	1	
	C4035	F1H1E105A116	1uF 25V	1	
	C4036	F1H1H271A824	270pF 50V	1	
	C4038	F1H1H271A824	270pF 50V	1	
	C4039	F1H1H271A824	270pF 50V	1	
	C4041	F1H1H681A831	680pF 50V	1	
	C4042	F1H1E105A116	1uF 25V	1	
	C4043	F1H1H271A824	270pF 50V	1	
	C4044	F1H1E105A116	1uF 25V	1	
	C4045	F2A1A101A211	100uF 10V	1	
	C4046	F1H1E105A116	1uF 25V	1	
	C4047	F1H1H681A831	680pF 50V	1	
	C4048	F1H1H104A783	0.1uF 50V	1	
	C4050	F1H1H271A824	270pF 50V	1	
	C4051	F1H1H104A783	0.1uF 50V	1	
	C4052	F2A1A101A211	100uF 10V	1	
	C4053	F1H1E105A116	1uF 25V	1	
	C4054	F1H1H271A824	270pF 50V	1	
	C4055	F1H1C683A087	0.068uF 16V	1	MAX370
	C4055	F1H1H473B047	0.047uF 50V	1	MAX770
	C4056	F1H1C683A087	0.068uF 16V	1	MAX770
	C4056	F1H1H333B047	0.033uF 50V	1	MAX370
	C4057	F1H1C683A087	0.068uF 16V	1	MAX370
	C4057	F1H1H473B047	0.047uF 50V	1	MAX770
	C4058	F1H1C683A087	0.068uF 16V	1	MAX770
	C4058	F1H1H333B047	0.033uF 50V	1	MAX370
	C4059	F1H1H271A824	270pF 50V	1	
	C4060	F1H1E105A116	1uF 25V	1	
	C4061	F1H1H681A831	680pF 50V	1	
	C4063	F1H1E105A116	1uF 25V	1	
	C4065	F1H1H271A824	270pF 50V	1	
	C4069	F2A1C470A722	47uF 16V	1	
	C4070	F2A1C220A243	22uF 16V	1	
	C4071	F2A1C220A243	22uF 16V	1	
	C4072	F1H1E105A116	1uF 25V	1	
	C4074	F2A1C4700091	47uF 16V	1	
	C4075	F2A1C4700091	47uF 16V	1	
	C4076	F1J1C1060001	10uF 16V	1	
	C4077	F1J1C1060001	10uF 16V	1	
	C4080	F1J1H225A928	2.2uF 50V	1	MAX770
	C4081	F1J1H225A928	2.2uF 50V	1	MAX770
	C4082	F1H1H333B047	0.033uF 50V	1	
	C4083	F1H1H333B047	0.033uF 50V	1	
	C4201	F1H0J225A020	2.2uF 6.3V	1	
	C4202	F1H0J225A020	2.2uF 6.3V	1	

Safety	Ref. No.	Part No.	Part Name & Description	Qty	Remarks
	C4203	F1J1C225A063	2.2uF 16V	1	
	C4204	F1H1H222A831	2200pF 50V	1	
	C4205	F1H1H222A831	2200pF 50V	1	
	C4206	F1H1H102A831	1000pF 50V	1	
	C4207	F1H1H1010005	100pF 50V	1	
	C4208	F1J1C334A091	0.33uF 16V	1	
	C4209	F1H1H1010005	100pF 50V	1	
	C4210	F1H1H102A831	1000pF 50V	1	
	C4211	F1H1H222A831	2200pF 50V	1	
	C4212	F1H1H222A831	2200pF 50V	1	
	C4213	F1H1H1010005	100pF 50V	1	
	C4214	F1J1C225A063	2.2uF 16V	1	
	C4215	F1H1H222A831	2200pF 50V	1	
	C4216	F1H1H222A831	2200pF 50V	1	
	C4217	F1H1H102A831	1000pF 50V	1	
	C4218	F1H1H1010005	100pF 50V	1	
	C4219	F1H1H222A831	2200pF 50V	1	
	C4220	F1J1C334A091	0.33uF 16V	1	
	C4221	F1H1H102A831	1000pF 50V	1	
	C4222	F1H1H222A831	2200pF 50V	1	
	C4223	F1H1H104A783	0.1uF 50V	1	
	C4224	F1J1H105A832	1uF 50V	1	
	C4225	F1K1C226A121	22uF 16V	1	
	C4226	F1K1C226A121	22uF 16V	1	
	C4227	F1K1C226A121	22uF 16V	1	
	C4228	F1K1C226A121	22uF 16V	1	
	C4229	F1J1C1060001	10uF 16V	1	
	C4230	F1K2A105A006	1uF 100V	1	
	C4231	F1K2A105A006	1uF 100V	1	
	C4232	F1K1H105A138	1uF 50V	1	
	C4233	F1K1H105A138	1uF 50V	1	
	C4235	F1H1H104A783	0.1uF 50V	1	
	C4236	F1H1H104A783	0.1uF 50V	1	
	C4237	F1K1H105A138	1uF 50V	1	
	C4239	F1K2A105A006	1uF 100V	1	
	C4240	F1K1H105A138	1uF 50V	1	
	C4241	F1K2A105A006	1uF 100V	1	
	C4242	F1H1H104A783	0.1uF 50V	1	
	C4243	F1K1H105A138	1uF 50V	1	
	C4245	F1K2A105A006	1uF 100V	1	
	C4246	F1K1H105A138	1uF 50V	1	
	C4247	F1K2A105A006	1uF 100V	1	
	C4248	F1H1H104A783	0.1uF 50V	1	
	C4249	F1K1H105A138	1uF 50V	1	
	C4251	F1K2A105A006	1uF 100V	1	
	C4252	F1K1H105A138	1uF 50V	1	
	C4253	F1K2A105A006	1uF 100V	1	
	C4254	F1K1H105A138	1uF 50V	1	
	C4255	F1K1H105A138	1uF 50V	1	
	C4256	F1H1H104A783	0.1uF 50V	1	
	C4257	F1H1H332A219	3300pF 50V	1	
	C4258	F1H1H332A219	3300pF 50V	1	
	C4259	F1H1H332A219	3300pF 50V	1	
	C4260	F1H1H332A219	3300pF 50V	1	
	C4261	F1H1H332A219	3300pF 50V	1	
	C4262	F1H1H332A219	3300pF 50V	1	
	C4263	F1H1H332A219	3300pF 50V	1	
	C4264	F1H1H332A219	3300pF 50V	1	
	C4265	F1H1H332A219	3300pF 50V	1	
	C4266	F1H1H332A219	3300pF 50V	1	
	C4267	F1H1H332A219	3300pF 50V	1	
	C4268	F1H1H332A219	3300pF 50V	1	
	C4269	F1H1H1010005	100pF 50V	1	
	C4270	F1H1H1010005	100pF 50V	1	
	C4271	F1H1E105A116	1uF 25V	1	
	C4272	F1H1H103A219	0.01uF 50V	1	
	C4273	F1H1H103A219	0.01uF 50V	1	
	C4274	F1H1H1010005	100pF 50V	1	
	C4275	F1H1H1010005	100pF 50V	1	
	C4276	F1H1H1010005	100pF 50V	1	
	C4277	F1H1H1010005	100pF 50V	1	
	C4278	F1H1H4700006	47pF 50V	1	
	C4279	F1H1H4700006	47pF 50V	1	

Safety	Ref. No.	Part No.	Part Name & Description	Qty	Remarks
	C4280	F2A1H332A201	3300uF 50V	1	
	C4281	F2A1H332A201	3300uF 50V	1	
	C4282	F2A0J470A245	47uF 6.3V	1	
	C4283	F1H1H102A831	1000pF 50V	1	
	C4284	F1H1H102A831	1000pF 50V	1	
	C4285	F1H1H102A831	1000pF 50V	1	
	C4291	ECQV1H474JL3	0.47uF 50V	1	
	C4292	ECQV1H474JL3	0.47uF 50V	1	
	C4293	ECQV1H474JL3	0.47uF 50V	1	
	C4294	ECQV1H474JL3	0.47uF 50V	1	
	C4501	F1H0J225A020	2.2uF 6.3V	1	
	C4502	F1H0J225A020	2.2uF 6.3V	1	
	C4503	F1J1C1060001	10uF 16V	1	
	C4504	F1H1H222A831	2200pF 50V	1	
	C4505	F1H1H222A831	2200pF 50V	1	
	C4506	F1H1H102A831	1000pF 50V	1	
	C4507	F1H1H1010005	100pF 50V	1	
	C4508	F1J1C1060001	10uF 16V	1	
	C4509	F1H1H1010005	100pF 50V	1	
	C4510	F1H1H102A831	1000pF 50V	1	
	C4511	F1H1H222A831	2200pF 50V	1	
	C4512	F1H1H222A831	2200pF 50V	1	
	C4513	F1H1H1010005	100pF 50V	1	
	C4514	F1J1C1060001	10uF 16V	1	
	C4515	F1H1H222A831	2200pF 50V	1	
	C4516	F1H1H222A831	2200pF 50V	1	
	C4517	F1H1H102A831	1000pF 50V	1	
	C4518	F1H1H1010005	100pF 50V	1	
	C4519	F1H1H222A831	2200pF 50V	1	
	C4520	F1J1C1060001	10uF 16V	1	
	C4521	F1H1H102A831	1000pF 50V	1	
	C4522	F1H1H222A831	2200pF 50V	1	
	C4523	F1H1H104A783	0.1uF 50V	1	
	C4524	F1J1H105A832	1uF 50V	1	
	C4525	F1K1C226A121	22uF 16V	1	
	C4526	F1K1C226A121	22uF 16V	1	
	C4527	F1K1C226A121	22uF 16V	1	
	C4528	F1K1C226A121	22uF 16V	1	
	C4529	F1J1C1060001	10uF 16V	1	
	C4530	F1K2A105A006	1uF 100V	1	
	C4531	F1K2A105A006	1uF 100V	1	
	C4532	F1K1H105A138	1uF 50V	1	
	C4533	F1K1H105A138	1uF 50V	1	
	C4535	F1H1H104A783	0.1uF 50V	1	
	C4536	F1H1H104A783	0.1uF 50V	1	
	C4537	F1K1H105A138	1uF 50V	1	
	C4539	F1K2A105A006	1uF 100V	1	
	C4540	F1K1H105A138	1uF 50V	1	
	C4541	F1K2A105A006	1uF 100V	1	
	C4542	F1H1H104A783	0.1uF 50V	1	
	C4543	F1K1H105A138	1uF 50V	1	
	C4545	F1K2A105A006	1uF 100V	1	
	C4546	F1K1H105A138	1uF 50V	1	
	C4547	F1K2A105A006	1uF 100V	1	
	C4548	F1H1H104A783	0.1uF 50V	1	
	C4549	F2A0J470A245	47uF 6.3V	1	
	C4550	F1K1H105A138	1uF 50V	1	
	C4552	F1K2A105A006	1uF 100V	1	
	C4553	F1K1H105A138	1uF 50V	1	
	C4554	F1K2A105A006	1uF 100V	1	
	C4555	F1K1H105A138	1uF 50V	1	
	C4556	F1K1H105A138	1uF 50V	1	
	C4557	F1H1H104A783	0.1uF 50V	1	
	C4560	F1H1H104A783	0.1uF 50V	1	
	C4561	F1H1H104A783	0.1uF 50V	1	
	C4562	F1J1H225A928	2.2uF 50V	1	
	C4563	F1H1H103A219	0.01uF 50V	1	
	C4564	F1H1H103A219	0.01uF 50V	1	
	C4565	F1J1H474A757	0.47uF 50V	1	
	C4566	F1J1H474A757	0.47uF 50V	1	
	C4567	F2A1H332A201	3300uF 50V	1	
	C4568	F2A1H332A201	3300uF 50V	1	
	C4569	F2A1C220A243	22uF 16V	1	

Safety	Ref. No.	Part No.	Part Name & Description	Qty	Remarks
	C4570	F1H1H102A831	1000pF 50V	1	
	C4571	F1H1H102A831	1000pF 50V	1	
	C4581	F1K1C226A121	22uF 16V	1	
	C4582	F1K1C226A121	22uF 16V	1	
	C4583	F1K1C226A121	22uF 16V	1	
	C4584	F1K1C226A121	22uF 16V	1	
	C4585	ECQV1H474JL3	0.47uF 50V	1	
	C4586	ECQV1H474JL3	0.47uF 50V	1	
	C4587	ECQV1H474JL3	0.47uF 50V	1	
	C4588	ECQV1H474JL3	0.47uF 50V	1	
	C4599	D0GBR00J0004	0 1/10W	1	
	C4801	F1H0J1060006	10uF 6.3V	1	
	C4802	F1H1H102A219	1000pF 50V	1	
	C4803	F1H0J1060006	10uF 6.3V	1	
	C4804	F1H1C104A041	0.1uF 16V	1	
	C4805	F1H0J1060006	10uF 6.3V	1	
	C4806	F1H1H102A219	1000pF 50V	1	
	C4807	F1H0J1060006	10uF 6.3V	1	
	C4808	F1H1A105A028	1uF 10V	1	
	C4809	F1H1H1200004	12pF 50V	1	
	C4810	F1H1H1500009	15pF 50V	1	
	C4811	F1H1H102A219	1000pF 50V	1	
	C4812	F1H1H102A219	1000pF 50V	1	
	C4813	F1H1H4700006	47pF 50V	1	
	C4814	F1H1H4700006	47pF 50V	1	
	C4815	F1H1C104A041	0.1uF 16V	1	
	C4816	F1H1A105A028	1uF 10V	1	
	C4817	F1H1C104A041	0.1uF 16V	1	
	C4818	F1H0J1060006	10uF 6.3V	1	
	C4819	F1H0J1060006	10uF 6.3V	1	
	C4820	F1H1C104A041	0.1uF 16V	1	
	C4821	F1H1A105A028	1uF 10V	1	
	C4823	F1H1C104A041	0.1uF 16V	1	
	C4825	F1H0J1060006	10uF 6.3V	1	
	C4826	F1H1A105A028	1uF 10V	1	
	C4827	F1H1A105A028	1uF 10V	1	
	C4904	F1H1A105A028	1uF 10V	1	
	C4905	F1H1A105A028	1uF 10V	1	
	C4906	F1H1C104A041	0.1uF 16V	1	
	C4907	F1H1H561A219	560pF 50V	1	
	C4908	F1H1H561A219	560pF 50V	1	
	C4909	F1H1A105A028	1uF 10V	1	
	C4910	F1H1A105A028	1uF 10V	1	
	C4911	F1H1A105A028	1uF 10V	1	
	C4912	F1H1A105A028	1uF 10V	1	
	C4915	F1H1A105A028	1uF 10V	1	
	C4916	F1H1A105A028	1uF 10V	1	
	C4919	F1L1C476A098	47uF 16V	1	
	C5001	F1J1A106A043	10uF 10V	1	
	C5002	F1H1H103A219	0.01uF 50V	1	
	C5003	F1J1A106A043	10uF 10V	1	
	C5004	F1H1H104B047	0.1uF 50V	1	
	C5007	F1H1H222B047	2200pF 50V	1	
	C5008	F1H1H222B047	2200pF 50V	1	
	C5009	F1J1A106A043	10uF 10V	1	
	C5010	F1H1H103B047	0.01uF 50V	1	
	C5011	F1H1H104B047	0.1uF 50V	1	
	C5012	F1H1H102B047	1000pF 50V	1	
	C5013	F1H1H100B051	10pF 50V	1	
	C5014	F1H1H100B051	10pF 50V	1	
	C5015	F1H1H100B051	10pF 50V	1	
	C5016	F1H1H100B051	10pF 50V	1	
	C5018	F1H1H103B047	0.01uF 50V	1	
	C5019	F2A1E102B396	1000uF 25V	1	
	C5020	F2A1A101A211	100uF 10V	1	
	C5021	F2A1A101A211	100uF 10V	1	
	C5022	F1H1H680B052	68pF 50V	1	
	C5023	F1H1H101B052	100pF 50V	1	
	C5024	F1H1H101B052	100pF 50V	1	
	C5025	F1H1H102B047	1000pF 50V	1	
	C5026	F1H1H102B047	1000pF 50V	1	
	C5027	F1H1H101B052	100pF 50V	1	
	C5028	F1H1H102B047	1000pF 50V	1	

Safety	Ref. No.	Part No.	Part Name & Description	Qty	Remarks
	C5029	F1H1H101B052	100pF 50V	1	
	C5030	F1H1H101B052	100pF 50V	1	
	C5031	F1H1H101B052	100pF 50V	1	
	C7001	F1H1H102A219	1000pF 50V	1	
	C7002	F1H1A474A025	0.47uF 10V	1	
	C7003	F1G1C104A077	0.1uF 16V	1	
	C7004	F1G1C104A077	0.1uF 16V	1	
	C7005	F1G1H1R0A794	1pF 50V	1	
	C7006	F1H1H330B052	33pF 50V	1	
	C7007	F1H1H3R0B050	3pF 50V	1	
	C7008	F1H1A105A028	1uF 10V	1	
	C7009	F1H1A105A028	1uF 10V	1	
	C7010	F1H1H221A219	220pF 50V	1	
	C7011	F1H1H221A219	220pF 50V	1	
	C8001	F1K1E1060001	10uF 25V	1	
	C8002	F1J1C1060001	10uF 16V	1	
	C8004	F1H1A105A028	1uF 10V	1	
	C8005	F1H1A105A028	1uF 10V	1	
	C8006	F1J0J106A014	10uF 6.3V	1	
	C8008	F1J0J106A014	10uF 6.3V	1	
	C8009	F1H1H104A783	0.1uF 50V	1	
	C8011	F1K1E1060008	10uF 25V	1	
	C8012	F1H1H1500009	15pF 50V	1	
	C8013	F1J0J106A014	10uF 6.3V	1	
	C8014	F1J0J106A014	10uF 6.3V	1	
	C8015	F1J0J106A014	10uF 6.3V	1	
	C8016	F1J0J106A014	10uF 6.3V	1	
	C8017	F1H1C104A071	0.1uF 16V	1	
	C8018	F1H1H6810005	680pF 50V	1	
	C8019	F1H1H104A783	0.1uF 50V	1	
	C8020	F1H1H332A219	3300pF 50V	1	
	C8021	F1K1E1060008	10uF 25V	1	
	C8022	F1H1H104A783	0.1uF 50V	1	
	C8024	F1J0J106A014	10uF 6.3V	1	
	C8025	F1H1C104A071	0.1uF 16V	1	
	C8026	F1J0J106A014	10uF 6.3V	1	
	C8027	F1J0J106A014	10uF 6.3V	1	
	C8028	F1J0J106A014	10uF 6.3V	1	
	C8029	F1H1H1500009	15pF 50V	1	
	C8030	F1H1H6810005	680pF 50V	1	
	C8031	F1H1H332A219	3300pF 50V	1	
	C8032	F1H1H104A783	0.1uF 50V	1	
	C8046	F1J0J106A014	10uF 6.3V	1	
	C8047	F1J0J106A014	10uF 6.3V	1	
	C8048	F1H1H1010005	100pF 50V	1	
	C8049	F1J0J106A014	10uF 6.3V	1	
	C8051	F1H1H104A783	0.1uF 50V	1	
	C8052	F1H1H104A783	0.1uF 50V	1	
	C8054	F2A1E102B396	1000uF 25V	1	
	C8055	F1J0J106A014	10uF 6.3V	1	
	C8057	F1J0J106A014	10uF 6.3V	1	
	C8058	F1H1H104A783	0.1uF 50V	1	
	C8059	F2A0J221B034	220uF 6.3V	1	
	C8060	F1H1H183A219	0.018uF 50V	1	
	C8061	F1H1A4750001	4.7uF 10V	1	
	C8063	F1J0J106A014	10uF 6.3V	1	
	C8064	F1K1E1060001	10uF 25V	1	
	C8066	F1J1C1060001	10uF 16V	1	
	C8069	F1J1A106A043	10uF 10V	1	
	C8070	F1J1A106A043	10uF 10V	1	
	C8073	F1J0J106A014	10uF 6.3V	1	
	C8074	F1H1H102B047	1000pF 50V	1	
	C8075	F1H1H102B047	1000pF 50V	1	
	C8076	F1H1H102B047	1000pF 50V	1	
	C8077	F1K1E1060008	10uF 25V	1	
	C8078	F1J1C1060001	10uF 16V	1	
	C8079	F1J1C1060001	10uF 16V	1	
	C8501	F1H1H104B047	0.1uF 50V	1	
	C8502	F1H0J1060006	10uF 6.3V	1	
	C8503	F1H0J1060006	10uF 6.3V	1	
	C8504	F1H1E105A116	1uF 25V	1	
	C8505	F1H1E105A116	1uF 25V	1	
	C8506	F1H1H103B047	0.01uF 50V	1	

Safety	Ref. No.	Part No.	Part Name & Description	Qty	Remarks
	C8507	F1H1H103B047	0.01uF 50V	1	
	C8508	F1H1E105A116	1uF 25V	1	
	C8509	F1H1E105A116	1uF 25V	1	
	C8510	F1H1H103B047	0.01uF 50V	1	
	C8511	F1H1E105A116	1uF 25V	1	
	C8512	F1H1E105A116	1uF 25V	1	
	C8513	F2A1A101A211	100uF 10V	1	
	C8514	F2A1A221A211	220uF 10V	1	
	C8515	F2A1A221A211	220uF 10V	1	
	C8516	F2A1A101A211	100uF 10V	1	
	C8517	F2A1A221A211	220uF 10V	1	
	C8518	F2A1A101A211	100uF 10V	1	
	C9001	F1H1C104A041	0.1uF 16V	1	
	C9002	F1H1C104A041	0.1uF 16V	1	
	C9002	F1H1H102A831	1000pF 50V	1	
	C9003	F1H1H102A831	1000pF 50V	1	
	C9004	F1H1H102A831	1000pF 50V	1	
	C9005	F1H1H102A831	1000pF 50V	1	
	C9006	F1H1H102A831	1000pF 50V	1	

MMH1403