


Service Manual

DVD Player



Model No. **DVD-S54E**
DVD-S54EB
DVD-S54EG

DL4.5R Mechanism Series

Color

(S).....Silver Type (E/EG only)

(K).....Black Type

Specifications

Power supply:	AC 230 V, 50 Hz (DVD-S54E/EG) AC 230 V-240 V, 50 Hz (DVD-S54EB)
Power consumption:	9 W
Power consumption in standby mode:	approx. 1 W
Dimensions (W × D × H):	430 mm × 231 mm × 43 mm (excluding protrusions) 430 mm × 239 mm × 43 mm (including protrusions)
Mass:	approx. 2.0 kg
Signal system:	PAL 625/50, PAL 525/60, NTSC
Operating temperature range:	+ 5 to + 35 °C
Operating humidity range:	5 to 90 % RH (no condensation)

Discs played [8 cm or 12 cm]:

- (1) DVD (DVD-Video, DivX^{*6,7})
- (2) DVD-RAM (DVD-VR, JPEG^{*4,7}, MP3^{*2,7}, MPEG4^{*5,7}, DivX^{*6,7})
- (3) DVD-R (DVD-Video, DivX^{*6,7}, MP3^{*2,7}, JPEG^{*4,7}, MPEG4^{*5,7}, DVD-VR)
- (4) DVD-R DL (DVD-Video)
- (5) DVD-RW (DVD-Video, MPEG4^{*5,7}, DivX^{*6,7}, MP3^{*2,7}, JPEG^{*4,7}, DVD-VR)
- (6) +R/+RW (Video)
- (7) +R DL (Video)
- (8) CD, CD-R / RW (CD (CD-DA), Video CD, SVCD^{*1}, MP3^{*2,7}, WMA^{*3,7}, JPEG^{*4,7}, MPEG4^{*5,7}, DivX^{*6,7})

*1 Conforming to IEC62107

*2 MPEG-1 Layer 3, MPEG-2 Layer 3

- *3 Windows Media Audio Ver. 9.0 L3
Not compatible with Multiple Bit Rate (MBR)
- *4 Exif Ver 2.1 JPEG Baseline files
Picture resolution: between 160×120 and 6144 × 4096 pixels (Sub sampling is 4:2:2 or 4:2:0)
- *5 MPEG4 data recorded with the Panasonic SD multi cameras or DVD video recorders Conforming to SD VIDEO specifications (ASF standard) / MPEG4 (Simple Profile) video system / G.726 audio system.
- *6 Official DivX[®] Certified product.
Plays all versions of DivX[®] video (including DivX[®] 6) with standard playback of DivX[®] media files.
DivX, DivX Certified, and associated logos are trademarks of DivX, Inc. and are used under license.
- *7 The total combined maximum number of recognizable audio, picture and video contents and groups: 4000 audio, picture and video contents and 256 groups.

Video output:

Output level:	1 Vp-p (75 Ω)
Output terminal:	Pin jack (1 system)/AV

S-video output:

Y output level:	1 Vp-p (75 Ω)
C output level:	NTSC: 0.286 Vp-p (75 Ω) PAL: 0.300 Vp-p (75 Ω)
Output terminal:	S terminal (1 system)/AV

Component video output:

	[NTSC: 525 (480) p / 525 (480) i] [PAL: 625 (576) p / 625 (576) i]
Y output level:	1 Vp-p (75 Ω)
P _B output level:	0.7 Vp-p (75 Ω)
P _R output level:	0.7 Vp-p (75 Ω)

Panasonic[®]

© 2008 Matsushita Electric Industrial CO., Ltd. All rights reserved. Unauthorized copying and distribution is a violation of law.

Output terminal:

Pin jack (Y: green, P_B: blue, P_R: red) (1 system)

RGB video output:

R output level:	0.7 Vp-p (75 Ω)
G output level:	0.7 Vp-p (75 Ω)
B output level:	0.7 Vp-p (75 Ω)
Output terminal:	AV

Audio output:

Output level:	2 Vrms (1 kHz, 0 dB)
Output terminal:	Pin jack/AV
Number of terminals:	2 channel: 1 system

Audio performance:

- (1) Frequency response:
 - DVD (linear audio): 4 Hz to 22 kHz (48 kHz sampling)
 - 4 Hz to 44 kHz (96 kHz sampling)
 - CD-Audio: 4 Hz to 20 kHz
- (2) S/N ratio: 115 dB
- (3) Dynamic range: 100 dB
- (4) Total harmonic distortion: 0.003 %

Digital audio output:

Coaxial digital output:	Pin jack
-------------------------	----------

HDMI AV output:

Type A Connector (19Pin)

Pickup

Wave length:	653 nm/790 nm
Laser power:	CLASS 1/CLASS 1M

Solder:

This model uses lead free solder (PbF).

Note:

Specifications are subject to change without notice.

Mass and dimensions are approximate.

Manufactured under license from Dolby Laboratories. Dolby and the double-D symbol are trademarks of Dolby Laboratories.
"DTS" is a registered trademark of DTS, Inc. and "DTS 2.0 + Digital Out" is a trademark of DTS, Inc.
This product incorporates copyright protection technology that is protected by U.S. patents and other intellectual property rights. Use of this copyright protection technology must be authorized by Macrovision, and is intended for home and other limited viewing uses only unless otherwise authorized by Macrovision. Reverse engineering or disassembly is prohibited.
U.S. Patent Nos. 6,836,549; 6,381,747; 7,050,698; 6,516,132; and 5,583,936.
This product is licensed under the MPEG-4 Visual patent portfolio license for the personal and non-commercial use of a consumer for (i) encoding video in compliance with the MPEG-4 Visual Standard ("MPEG-4 Video") and/or (ii) decoding MPEG-4 Video that was encoded by a consumer engaged in a personal and non-commercial activity and/or was obtained from a video provider licensed by MPEG LA to provide MPEG-4 Video. No license is granted or shall be implied for any other use. Additional information including that relating to promotional, internal and commercial uses and licensing may be obtained from MPEG LA, LLC. See http://www.mpegla.com .
Windows Media, and the Windows logo are trademarks, or registered trademarks of Microsoft Corporation in the United States and/or other countries.
This product is protected by certain intellectual property rights of Microsoft Corporation and third parties. Use or distribution of such technology outside of this product is prohibited without a license from Microsoft or an authorized Microsoft subsidiary and third parties.
WMA is a compression format developed by Microsoft Corporation. It achieves the same sound quality as MP3 with a file size that is smaller than that of MP3.
Official DivX® Certified product. Plays all versions of DivX® video (including DivX®6) with standard playback of DivX® media files. DivX, DivX Certified, and associated logos are trademarks of DivX, Inc. and are used under license.
HDMI, the HDMI logo and High-Definition Multimedia Interface are trademarks or registered trademarks of HDMI Licensing LLC.
HDAVI Control™ is a trademark of Matsushita Electric Industrial Co., Ltd.

WARNING

This service information is designed for experienced repair technicians only and is not designed for use by the general public. It does not contain warnings or cautions to advise non-technical individuals of potential dangers in attempting to service a product. Products powered by electricity should be serviced or repaired only by experienced professional technicians. Any attempt to service or repair the product or products dealt with in this service information by anyone else could result in serious injury or death.

CONTENTS

	Page		Page
1 IMPORTANT SERVICE INFORMATION	4	7.3. Top Panel	12
1.1. Notes	4	7.4. Front Panel	12
1.2. About DivX	4	7.5. Remote Control Receiver P.C.B.	12
1.3. Manual for Customer	6	7.6. Rear panel	12
2 SAFETY PRECAUTIONS	7	7.7. Module P.C.B.	12
2.1. GENERAL GUIDELINES	7	7.8. Mechanism Unit	13
3 PREVENTION OF ELECTRO STATIC DISCHARGE (ESD) TO		7.9. Mother P.C.B. and Power SW P.C.B.	13
ELECTROSTATICALLY SENSITIVE (ES) DEVICES	7	7.10. Service Position	14
4 PRECAUTION OF LASER DIODE	8	8 ASSEMBLING AND DISASSEMBLING THE MECHANISM UNIT	
5 SERVICE CAUTION BASED ON LEGAL RESTRICTIONS	9		15
5.1. General description about Lead Free Solder (PbF)	9	8.1. Disassembly Procedure	15
6 PREVENTION OF STATIC ELECTRICITY DISCHARGE	10	8.2. Traverse Unit	15
6.1. Grounding for electrostatic breakdown prevention	10	8.3. Tray	16
6.2. Handling Precautions for Traverse Unit (Optical Pickup)	10	8.4. Loading section	17
7 DISASSEMBLING THE CASING AND CHECKING P.C.B.S	11	8.5. Loading motor P.C.B.	18
7.1. Disassembly Procedure	11	8.6. TRV Unit	19
7.2. Casing Parts and P.C.B. Positions	11	9 SELF-DIAGNOSIS FUNCTION AND SERVICE MODES	22

9.1. Optical Pickup Breakdown Diagnosis	22	15 INTERCONNECTION SCHEMATIC DIAGRAM & SCHEMATIC	
9.2. Service Mode Table 1	23	DIAGRAM NOTES	43
9.3. DVD Self Diagnostic Function-Error Code	24	15.1. INTERCONNECTION SCHEMATIC DIAGRAM	43
9.4. Last Error Code saved during NO PLAY	24	15.2. SCHEMATIC DIAGRAM NOTES	44
9.5. Service mode table 2	25	16 SCHEMATIC DIAGRAM	45
9.6. Sales demonstration lock function	27	16.1. POWER SUPPLY SECTION (MOTHER P.C.B. (1 / 2))	
9.7. Handling After Completing Repairs	27	SCHEMATIC DIAGRAM	45
10 SERVICE PRECAUTIONS	28	16.2. FRONT & AV OUT SECTION (MOTHER P.C.B. (2 / 2))	
10.1. Recovery after the DVD player is repaired.	28	SCHEMATIC DIAGRAM	46
10.2. Firmware version-up of the DVD player	28	16.3. MODULE SCHEMATIC DIAGRAM	49
11 ADJUSTMENT PROCEDURES	29	16.4. HDMI SCHEMATIC DIAGRAM	52
11.1. Service Tools and Equipment	29	17 PRINT CIRCUIT BOARD	53
11.2. Important points in electrical adjustment	29	17.1. MOTHER P.C.B.	53
11.3. Storing and Handling Test Discs	29	17.2. MOTHER P.C.B. ADDRESS INFORMATION	54
12 ABBREVIATIONS	30	17.3. MODULE P.C.B. (1/2)	55
13 VOLTAGE CHART	32	17.4. MODULE P.C.B. (2/2)	56
13.1. MOTHER P.C.B.	32	17.5. MODULE P.C.B. ADDRESS INFORMATION	57
13.2. MODULE P.C.B.	33	18 EXPLODED VIEWS	59
14 BLOCK DIAGRAM	35	18.1. CASING PARTS & MECHANISM SECTION EXPLODED	
14.1. OVERALL BLOCK DIAGRAM	35	VIEW	59
14.2. POWER SUPPLY BLOCK DIAGRAM	36	18.2. MECHANISM SECTION EXPLODED VIEW	60
14.3. SERVO BLOCK DIAGRAM	37	18.3. PACKING & ACCESSORIES SECTION EXPLODED	
14.4. VIDEO BLOCK DIAGRAM	38	VIEW	61
14.5. AUDIO BLOCK DIAGRAM	41	19 REPLACEMENT PARTS LIST	62

1 IMPORTANT SERVICE INFORMATION

1.1. Notes

When you replace FlashROM or exchange MODULE P.C.B., you have to take “Manual for customer” to the customer with unit. (also in the case of unit exchange)

Please take and use “Manual for customer” from below.

1. Come with MODULE P.C.B. or FlashROM (Service part).
2. Make a photocopy section 1.3. “Manual for customer” on this service manual.

“Manual for customer” has important information for “DivX Video-on-Demand Service” user.

Please don't forget take it to the customer with unit!

1.2. About DivX

1.2.1. DivX


A video compression format developed by DivXNetworks, Inc. that compresses video files without any considerable loss of video quality.

1.2.2. About DivX Video-on-Demand Content

DivX Video-on-Demand (VOD) content is encrypted for copyright protection. In order to play DivX VOD content on this unit, you first need to register the unit.

Follow the on line instructions for purchasing DivX VOD content to enter the unit's registration code and register the unit. For more information about DivX VOD, visit www.divx.com/vod.

Display the unit's registration code

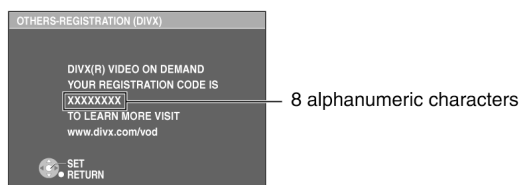

- We recommend that you make a note of this code for future reference.
- After playing DivX VOD content for the first time, another registration code is then displayed in “REGISTRATION”. Do not use this registration code to purchase DivX VOD content. If you use this code to purchase DivX VOD content, and then play the content on this unit, you will no longer be able to play any content that you purchased using the previous code.
- If you purchase DivX VOD content using a registration code different from this unit's code, you will not be able to play this content. (“AUTHORIZATION ERROR” is displayed.)

Regarding DivX content that can only be played a set number of times

Some DivX VOD content can only be played a set number of times. When you play this content, the remaining number of plays is displayed. You cannot play this content when the number of remaining plays is zero. (“RENTAL EXPIRED” is displayed.)

When playing this content

- The number of remaining plays is reduced by one if
 - you press [⏏] or [SETUP].
 - you press [■]. (Press [■] to stop play.)
 - you press [◀▶] or [◀▶▶] etc. and arrive at another content or the start of the content being played.
- Resume function does not work.

1.2.3. About DivX subtitles text display

You can display subtitles text recorded onto the DivX video disc on this unit. This function has no relation to the subtitles specified in DivX standard specifications and has no clear standard. Depending on the methods used to create the file, the following functions may not work.

Displaying subtitles text During play, press [SUBTITLE] to select “TEXT ON”.

- DivX video files that do not display “TEXT ON” do not contain subtitles text.
Subtitles text cannot be displayed.
- If the subtitles text are not displayed correctly, try changing the language settings.

Subtitles text language settings

1. During play, press [SETUP].
2. Press [▲ ▼] to select “DISC” and press [OK].
3. Press [▲ ▼] to select “SUBTITLE TEXT” and press [OK].
4. Press [▲ ▼] to select “LATIN1”, “LATIN2”, “CYRILLIC” or “TURKISH” then press [OK].
 - The initial setting is “LATIN2”.

To exit the screen, press [SETUP].

Types of subtitles text file that can be displayed

Subtitles text that satisfy the following conditions can be displayed on this unit.

- File format: MicroDVD, SubRip, or TMLayer
- File extension: “.SRT”, “.srt”, “.SUB”, “.sub”, “.TXT”, or “.txt”
- File name: No more than 44 characters excluding the file extension
- The DivX video file and subtitles text file are inside the same folder, and the file names are the same except for the file extensions.
- If there are more than one subtitles text files inside the same folder, they are displayed in the following order of priority: “.srt”, “.sub”, “.txt”.

Limitations of this unit

- In the following situations, the subtitles cannot be displayed as recorded. Furthermore, depending on the methods used to create the file or the state of the recording, only parts of the subtitles may be displayed, or the subtitles may not be displayed at all.
 - When special text or characters are included in the subtitles text.
 - When the file size is larger than 256KB.
 - When characters with styling specified are included in the subtitle data.
Codes that specify the character style within files are displayed as subtitle characters.
 - When data with a different format exists within the subtitle data.
- If the file name of the DivX video file is not displayed correctly on the menu screen (the file name is displayed as “_”), the subtitles text may not be displayed correctly.
- The subtitles text cannot be displayed when search and other such operations are being performed.
- The subtitles text cannot be displayed when Quick OSD and other such menu screens are being displayed.

1.3. Manual for Customer

Warning for Customers Who Use the DivX Video-on-Demand content.

1. The registration code has been changed for the repair of the product or the product exchange.
2. Obtain and register a new registration code, otherwise you will no longer be able to play DivX Video-on-Demand content.
3. Follow the procedure on the DivX Video-on-Demand web site to register at <http://vod.divx.com/>.

* If you do not use the DivX Video-on-Demand content, please ignore this warning.

2 SAFETY PRECAUTIONS

2.1. GENERAL GUIDELINES

1. When servicing, observe the original lead dress. If a short circuit is found, replace all parts which have been overheated or damaged by the short circuit.
2. After servicing, see to it that all the protective devices such as insulation barriers, insulation papers shields are properly installed.
3. After servicing, make the following leakage current checks to prevent the customer from being exposed to shock hazards.

2.1.1. LEAKAGE CURRENT COLD CHECK

1. Unplug the AC cord and connect a jumper between the two prongs on the plug.
2. Measure the resistance value, with an ohmmeter, between the jumpered AC plug and each exposed metallic cabinet part on the equipment such as screwheads, connectors, control shafts, etc. When the exposed metallic part has a return path to the chassis, the reading should be between $1M\Omega$ and $5.2M\Omega$.
When the exposed metal does not have a return path to the chassis, the reading must be ∞ .

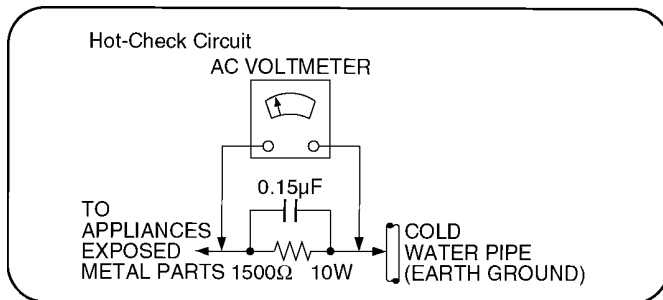


Figure 1

2.1.2. LEAKAGE CURRENT HOT CHECK (See Figure 1.)

1. Plug the AC cord directly into the AC outlet. Do not use an isolation transformer for this check.
2. Connect a 1.5kΩ, 10 watts resistor, in parallel with a 0.15µF capacitors, between each exposed metallic part on the set and a good earth ground such as a water pipe, as shown in Figure 1.
3. Use an AC voltmeter, with 1000 ohms/volt or more sensitivity, to measure the potential across the resistor.
4. Check each exposed metallic part, and measure the voltage at each point.
5. Reverse the AC plug in the AC outlet and repeat each of the above measurements.
6. The potential at any point should not exceed 0.75 volts RMS. A leakage current tester (Simpson Model 229 or equivalent) may be used to make the hot checks, leakage current must not exceed 1/2 milliamp. In case a measurement is outside of the limits specified, there is a possibility of a shock hazard, and the equipment should be repaired and rechecked before it is returned to the customer.

3 PREVENTION OF ELECTRO STATIC DISCHARGE (ESD) TO ELECTROSTATICALLY SENSITIVE (ES) DEVICES

Some semiconductor (solid state) devices can be damaged easily by static electricity. Such components commonly are called Electrostatically Sensitive (ES) Devices. Examples of typical ES devices are integrated circuits and some field-effect transistors and semiconductor "chip" components. The following techniques should be used to help reduce the incidence of component damage caused by electro static discharge (ESD).

1. Immediately before handling any semiconductor component or semiconductor-equipped assembly, drain off any ESD on your body by touching a known earth ground. Alternatively, obtain and wear a commercially available discharging ESD wrist strap, which should be removed for potential shock reasons prior to applying power to the unit under test.
2. After removing an electrical assembly equipped with ES devices, place the assembly on a conductive surface such as aluminum foil, to prevent electrostatic charge buildup or exposure of the assembly.
3. Use only a grounded-tip soldering iron to solder or unsolder ES devices.
4. Use only an anti-static solder removal device. Some solder removal devices not classified as "anti-static (ESD protected)" can generate electrical charge sufficient to damage ES devices.
5. Do not use freon-propelled chemicals. These can generate electrical charges sufficient to damage ES devices.
6. Do not remove a replacement ES device from its protective package until immediately before you are ready to install it. (Most replacement ES devices are packaged with leads electrically shorted together by conductive foam, aluminum foil or comparable conductive material).
7. Immediately before removing the protective material from the leads of a replacement ES device, touch the protective material to the chassis or circuit assembly into which the device will be installed.

Caution

Be sure no power is applied to the chassis or circuit, and observe all other safety precautions.

8. Minimize bodily motions when handling unpackaged replacement ES devices. (Otherwise harmless motion such as the brushing together of your clothes fabric or the lifting of your foot from a carpeted floor can generate static electricity (ESD) sufficient to damage an ES device).

4 PRECAUTION OF LASER DIODE

CAUTION:

This product utilizes a laser diode with the unit turned “on”, invisible laser radiation is emitted from the pickup lens.



Wave length: 653 nm/790 nm

Maximum output radiation power from pickup: 100 μ W/VDE

W/VDE

Laser radiation from the pickup lens is safety level, but be sure the followings:

1. Do not disassemble the optical pickup unit, since radiation from exposed laser diode is dangerous.
2. Do not adjust the variable resistor on the pickup unit. It was already adjusted.
3. Do not look at the focus lens using optical instruments.
4. Recommend not to look at pickup lens for a long time.

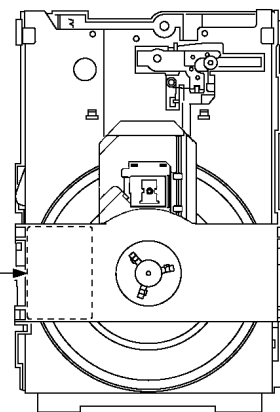

CAUTION!

THIS PRODUCT UTILIZES A LASER.

USE OF CONTROLS OR ADJUSTMENTS OR PERFORMANCE OF PROCEDURES OTHER THAN THOSE SPECIFIED HEREIN MAY RESULT IN HAZARDOUS RADIATION EXPOSURE.

5 SERVICE CAUTION BASED ON LEGAL RESTRICTIONS

5.1. General description about Lead Free Solder (PbF)

The lead free solder has been used in the mounting process of all electrical components on the printed circuit boards used for this equipment in considering the globally environmental conservation.

The normal solder is the alloy of tin (Sn) and lead (Pb). On the other hand, the lead free solder is the alloy mainly consists of tin (Sn), silver (Ag) and Copper (Cu), and the melting point of the lead free solder is higher approx. 30°C (86°F) more than that of the normal solder.

Definition of PCB Lead Free Solder being used

The letter of "PbF" is printed either foil side or components side on the PCB using the lead free solder. (See right figure)	PbF
--	-----

Service caution for repair work using Lead Free Solder (PbF)

- The lead free solder has to be used when repairing the equipment for which the lead free solder is used. (Definition: The letter of "PbF" is printed on the PCB using the lead free solder.)
- To put lead free solder, it should be well molten and mixed with the original lead free solder.
- Remove the remaining lead free solder on the PCB cleanly for soldering of the new IC.
- Since the melting point of the lead free solder is higher than that of the normal lead solder, it takes the longer time to melt the lead free solder.
- Use the soldering iron (more than 70W) equipped with the temperature control after setting the temperature at 350±30°C (662±86°F).

Recommended Lead Free Solder (Service Parts Route.)

The following 3 types of lead free solder are available through the service parts route.

- RFKZ03D01K----- (0.3mm 100g Reel)
- RFKZ06D01K----- (0.6mm 100g Reel)
- RFKZ10D01K----- (1.0mm 100g Reel)

Note

- * Ingredient: tin (Sn) 96.5%, silver (Ag) 3.0%, Copper (Cu) 0.5%, Cobalt (Co) / Germanium (Ge) 0.1 to 0.3%

6 PREVENTION OF STATIC ELECTRICITY DISCHARGE

The laser diode in the traverse unit (optical pickup) may break down due to static electricity of clothes or human body. Use due caution to electrostatic breakdown when servicing and handling the laser diode.

6.1. Grounding for electrostatic breakdown prevention


Some devices such as the DVD player use the optical pickup (laser diode) and the optical pickup will be damaged by static electricity in the working environment. Proceed servicing works under the working environment where grounding works is completed.

6.1.1. Worktable grounding

1. Put a conductive material (sheet) or iron sheet on the area where the optical pickup is placed, and ground the sheet.

6.1.2. Human body grounding

1. Use the anti-static wrist strap to discharge the static electricity from your body.

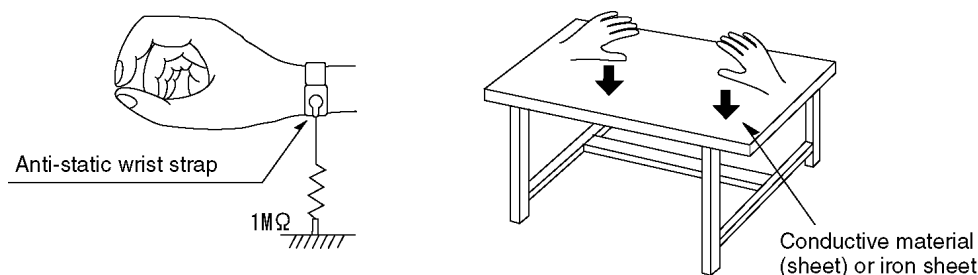

6.1.3. Handling of optical pickup


1. To keep the good quality of the optical pickup maintenance parts during transportation and before installation, the both ends of the laser diode are short-circuited. After replacing the parts with new ones, remove the short circuit according to the correct procedure. (See this Service Manual.)
2. Do not use a tester to check the laser diode for the optical pickup. Failure to do so will damage the laser diode due to the power supply in the tester.

6.2. Handling Precautions for Traverse Unit (Optical Pickup)


1. Do not give a considerable shock to the traverse unit (optical pickup) as it has an extremely high-precise structure.
2. When replacing the optical pickup, install the flexible cable and cut its short land with a nipper. See the optical pickup replacement procedure in this Service Manual. Before replacing the traverse unit, remove the short pin for preventing static electricity and install a new unit. Connect the connector as short times as possible.
3. The flexible cable may be cut off if an excessive force is applied to it. Use caution when handling the cable.
4. The half-fixed resistor for laser power adjustment can not be adjusted. Do not turn the resistor.

7 DISASSEMBLING THE CASING AND CHECKING P.C.B.S

7.1. Disassembly Procedure


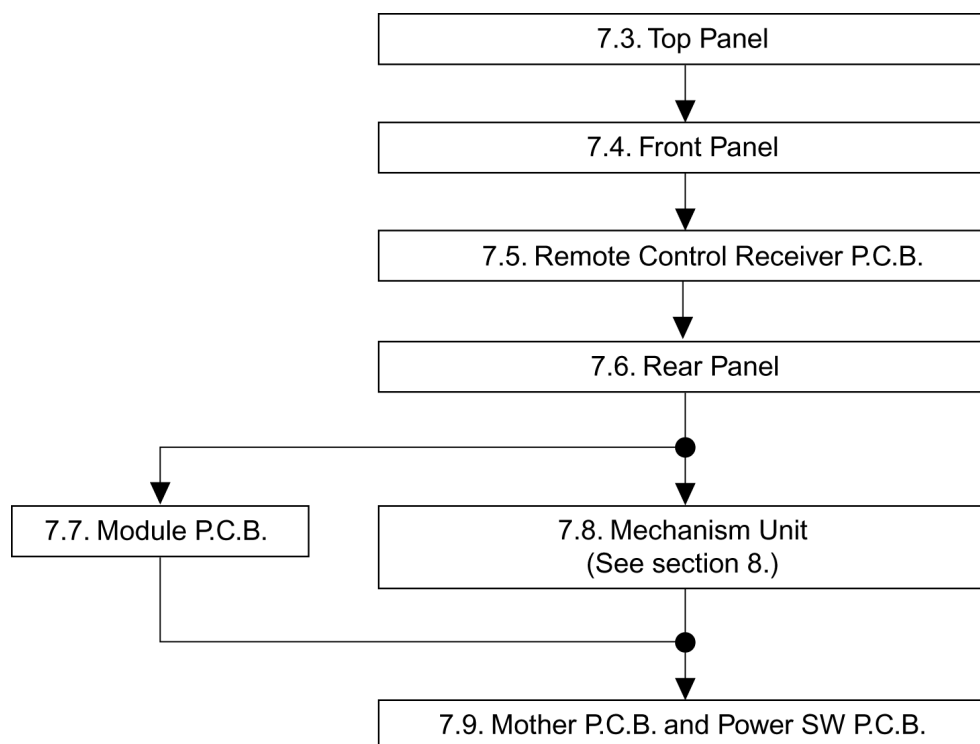


7.2. Casing Parts and P.C.B. Positions

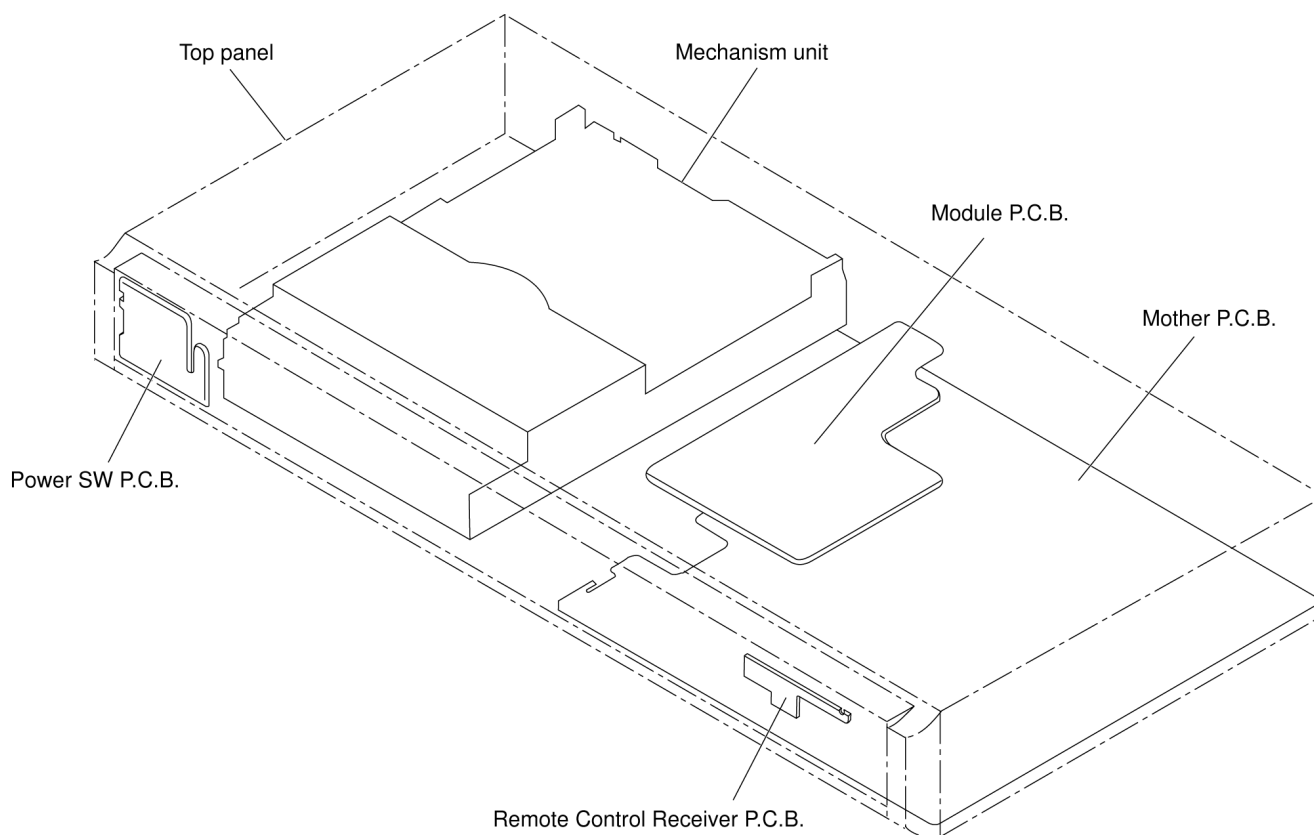


7.3. Top Panel

1. Unscrew the screws.

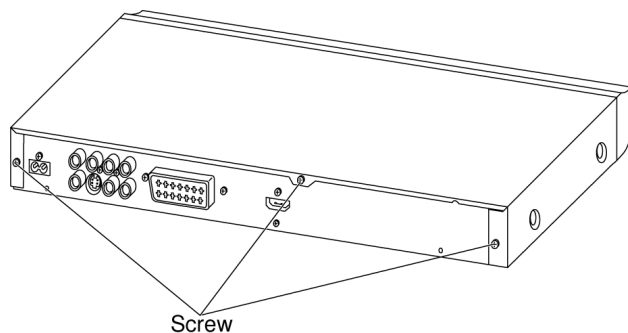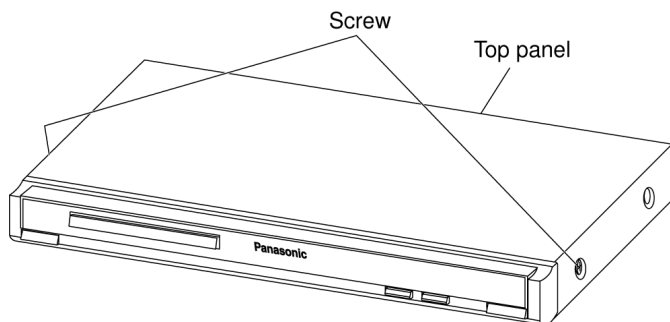


7.4. Front Panel


1. Unscrew the screw.
2. Remove the connector.

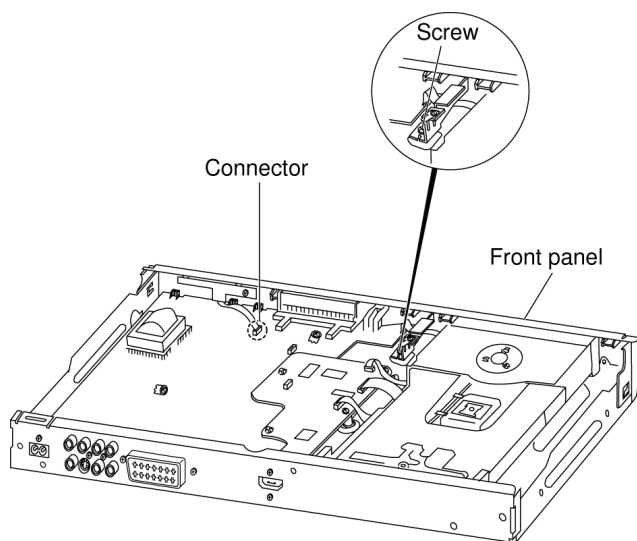

3. Release the tabs.

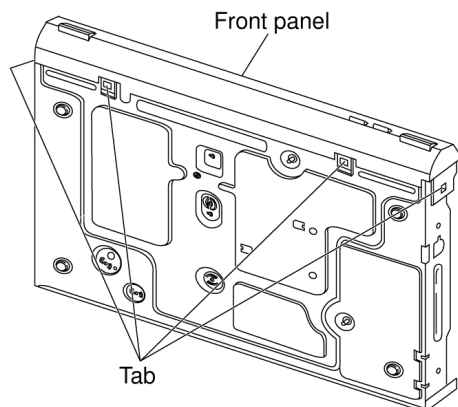


4. Unscrew the screws.

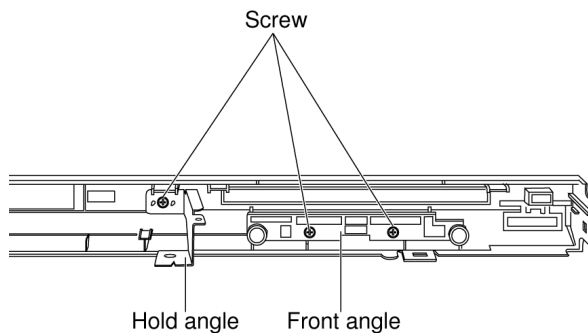


7.5. Remote Control Receiver P.C.B.

1. Unscrew the screw.

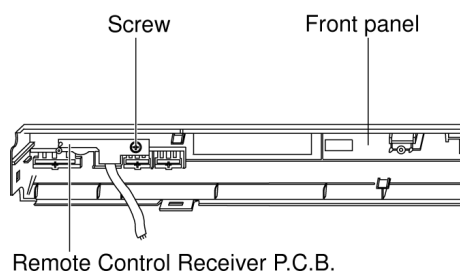


7.6. Rear panel

1. Unscrew the screws.
2. Release the tabs.

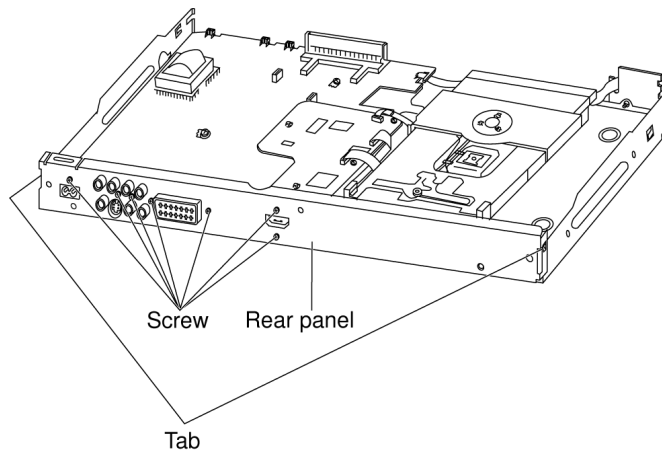


7.7. Module P.C.B.

1. Remove the connectors.
2. Unscrew the screws.
3. Press each tab with the nipper to module P.C.B. vertically.

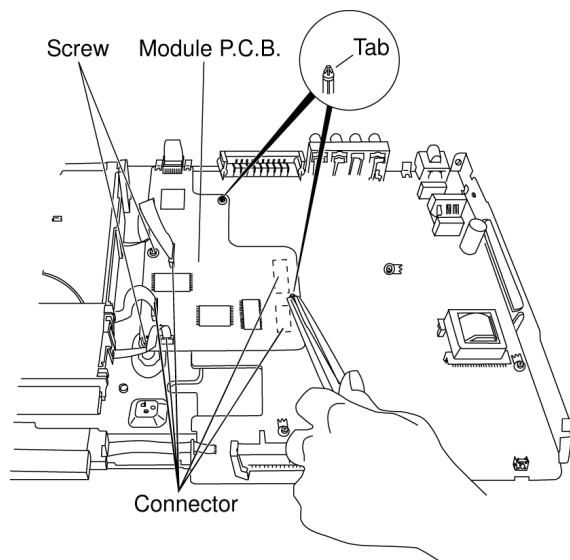


7.8. Mechanism Unit

1. Unscrew the screws.

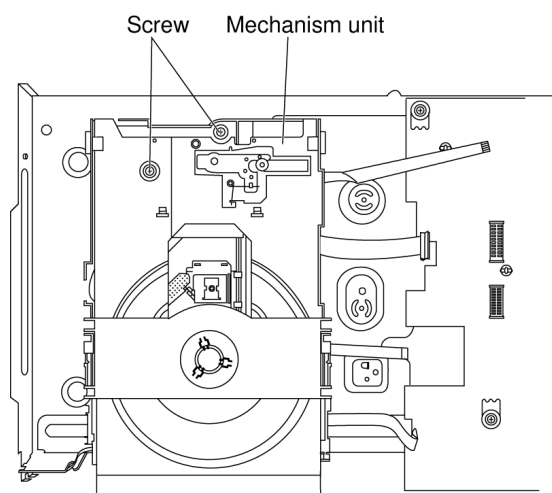


2. Release the tabs.

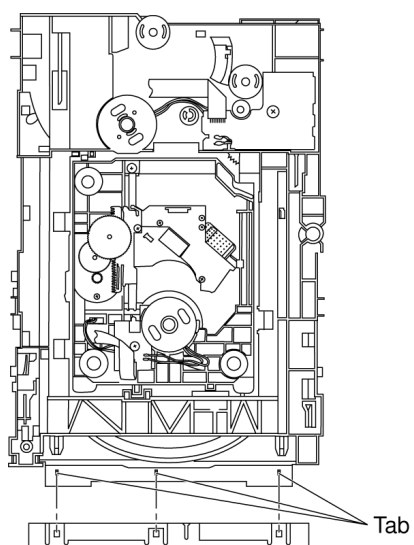

7.9. Mother P.C.B. and Power SW P.C.B.

1. Unscrew the screws.

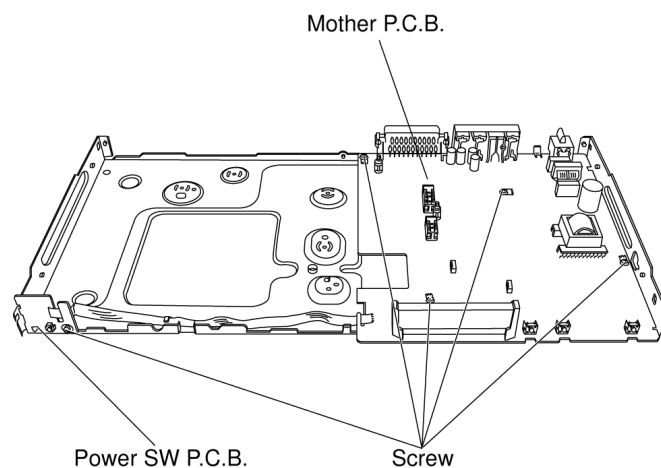


7.10. Service Position


Caution:

Put an insulation material between Module P.C.B. and Mother P.C.B..

7.10.1. Servicing position of the Module P.C.B.

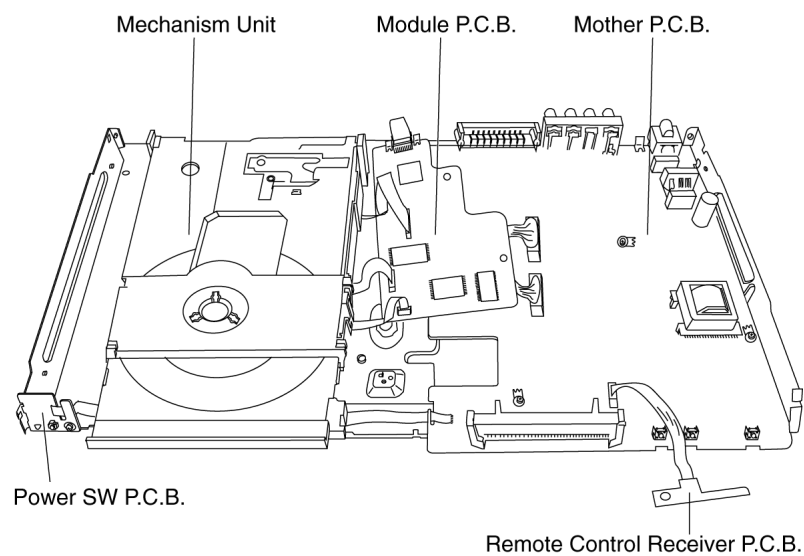

7.10.2. Servicing position of the Mother P.C.B.

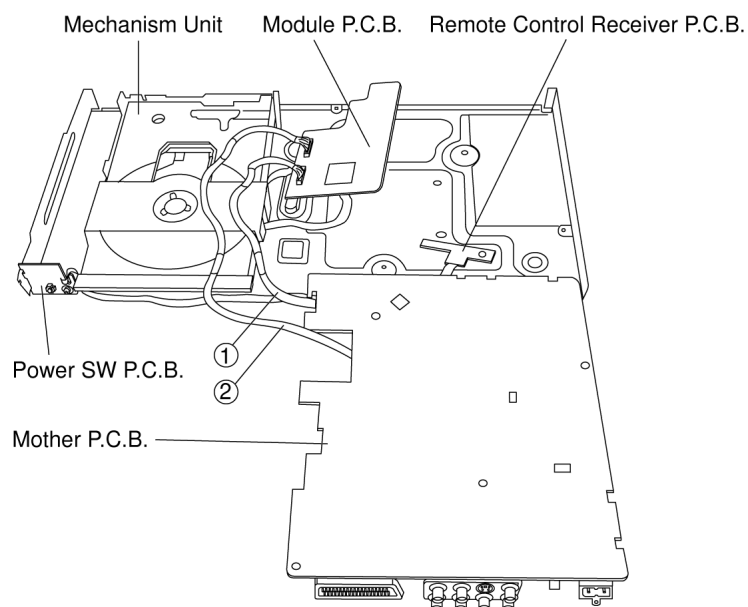


7.10.3. List of the Extension Cables

①	VUC8026	14pins	PS8101(Module P.C.B.) — FP3501(Mother P.C.B.)
②	RFKZ0106	20pins	PS8301(Module P.C.B.) — FP3502(Mother P.C.B.)


8 ASSEMBLING AND DISASSEMBLING THE MECHANISM UNIT

8.1. Disassembly Procedure

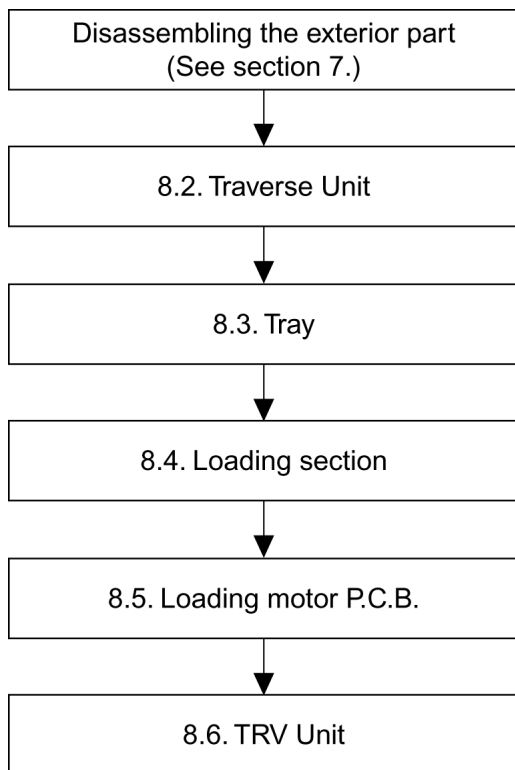


8.2. Traverse Unit

1. Slide the lever (A) in the arrow direction (to the opposite side) till it stops.
2. Slide the lever (A) further by bending the tab at the right side of the lever A in the right direction. (The right groove opens and the boss becomes seen.)
3. Open the lever (B) to left. (The 2 grooves at the left side open.)

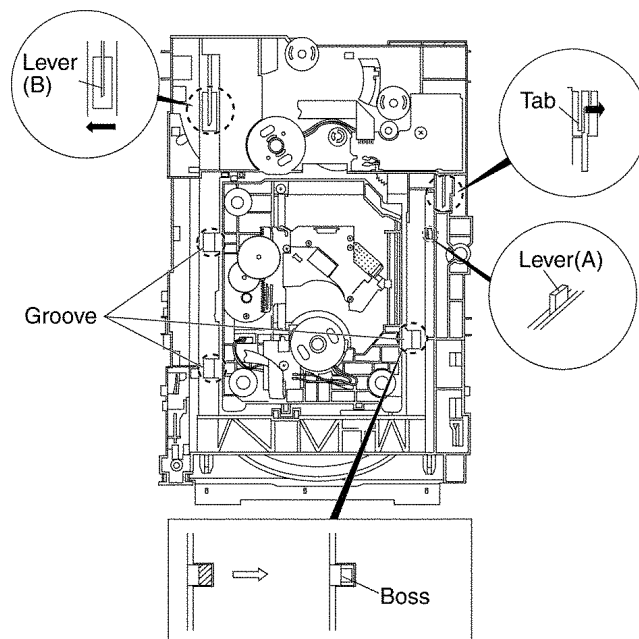


4. Remove the traverse unit.

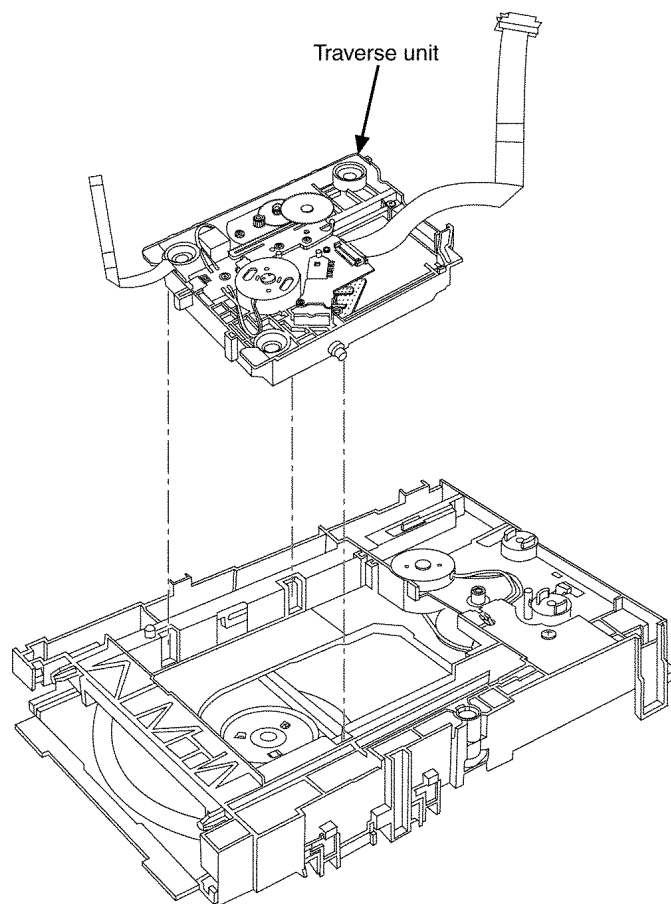


8.3. Tray

1. Slide the guide tray unit while pressing the stopper in the arrow direction, and remove the guide tray unit.

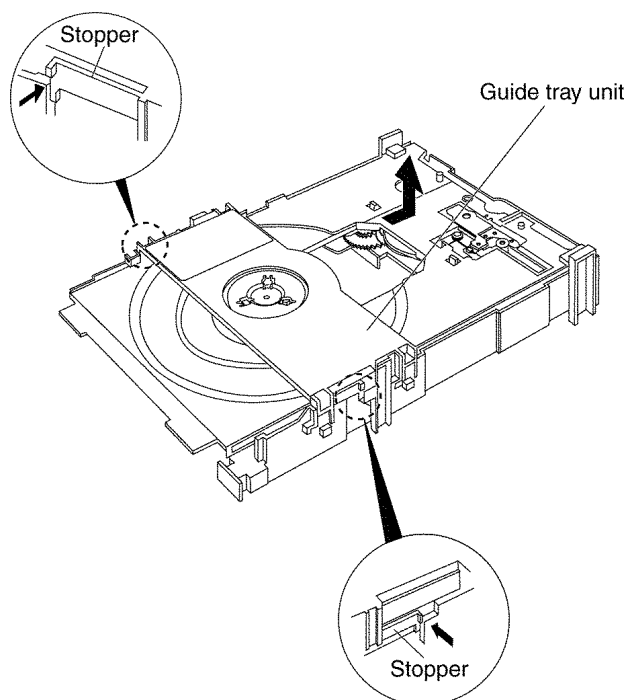


2. Raise the loading unit.



3. Slide the lever in the arrow direction till it stops and pull the tray out.

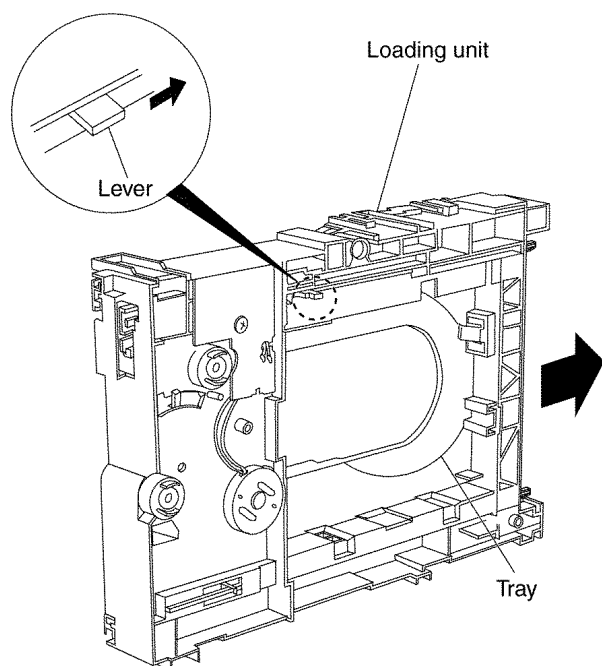

4. Spread the tabs at the both sides and pull the tray out. (The tray slides a little forward and stops.)

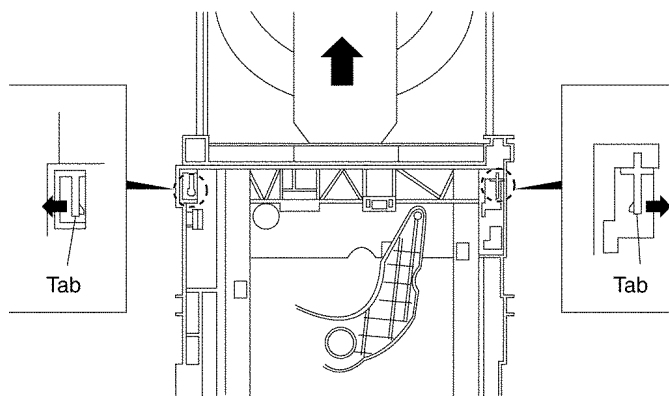


5. Remove the drive arm concave phase from the tray slider and tray.

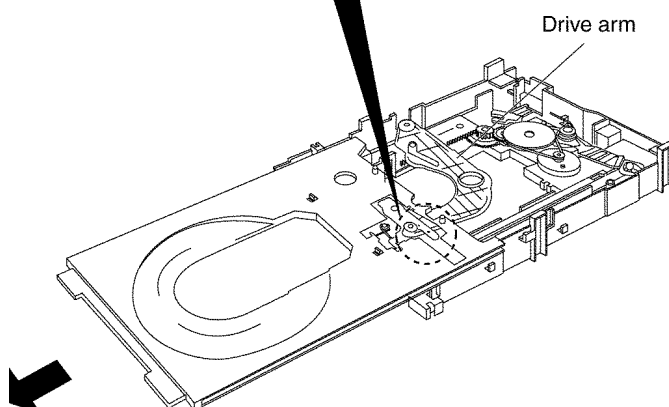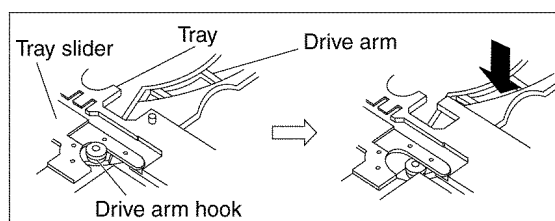

<Assembling the tray unit>


1. Insert a part of the tray into the unit sliding over the groove on the mechanical chassis unit.
2. Insert the tray to the point before the tab of the mechanical chassis unit.

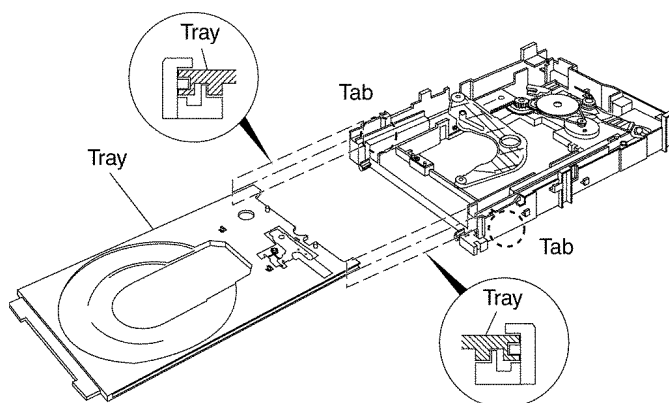

3. Hook the drive arm concave phase over the tray and the tray slider.


4. Press in the tray.

5. Make sure that the tray and the drive arm move smoothly.

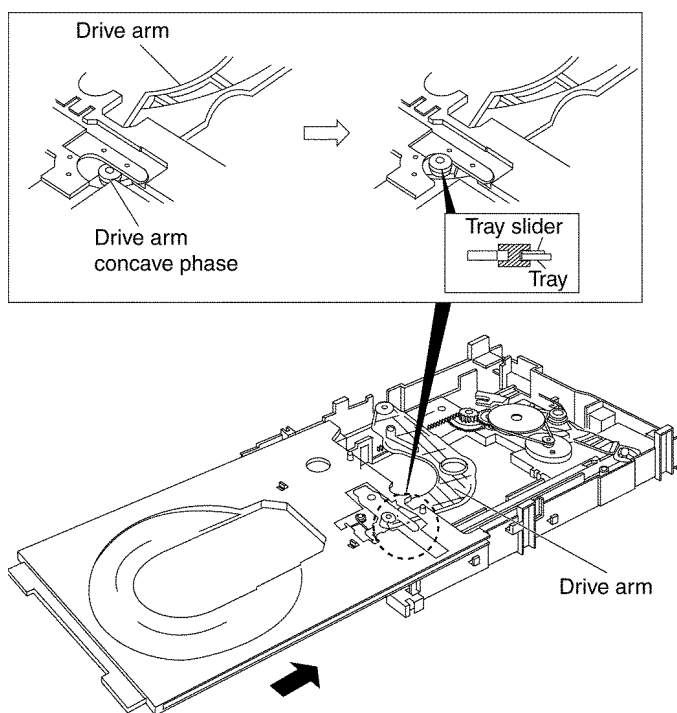


8.4. Loading section

1. Spread the tabs at the both sides and push out the drive arm shaft.

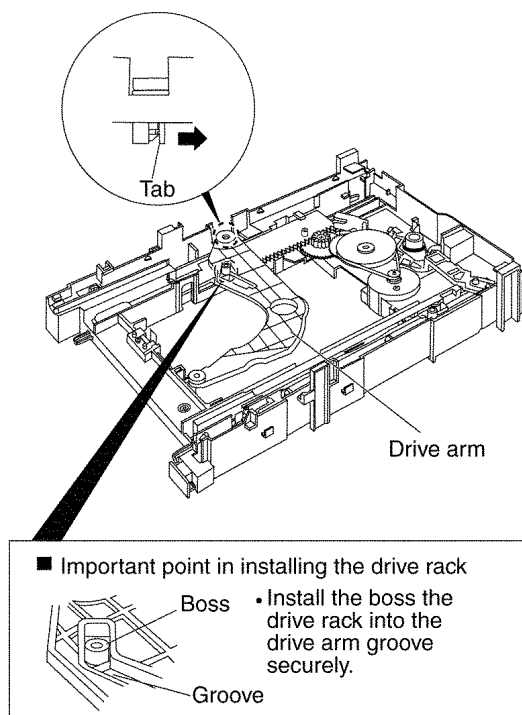

2. Hook the lock lever spring on the lock lever projection part temporarily.


3. Unlock the tab and remove the lock lever.

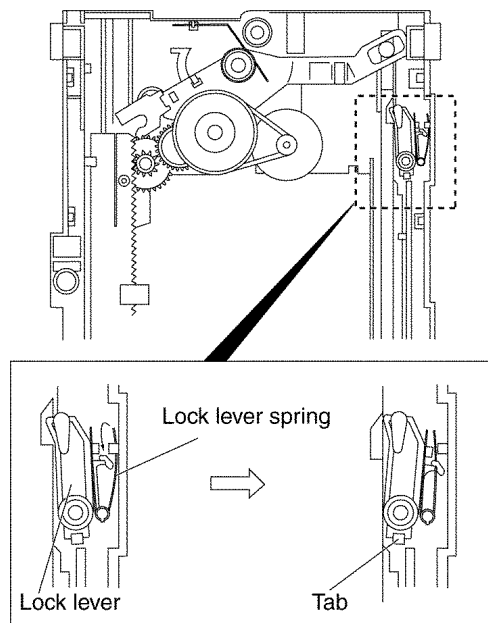

4. Remove the belt.

5. Unlock the tab and remove the pulley.

6. Remove the relay gear.

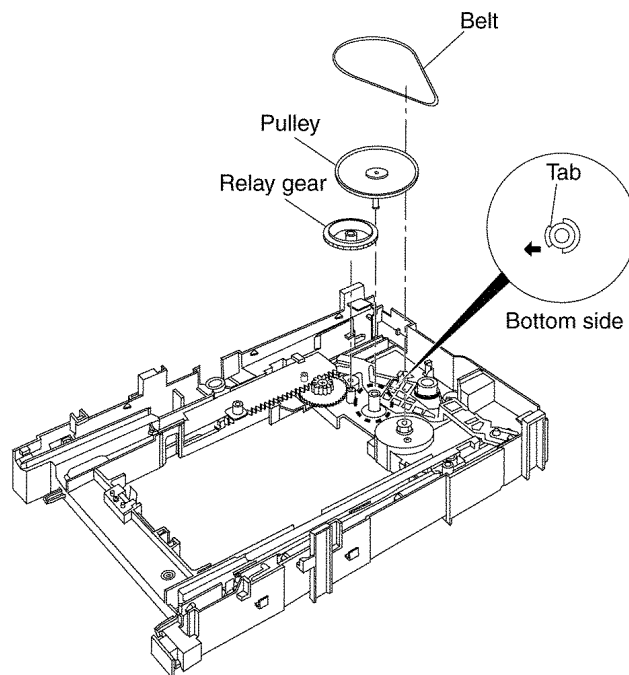


7. Turn the change lever in the arrow direction till it stops.

8. Hook the change lever spring on the change lever project part temporarily.

Change lever spring


Change lever

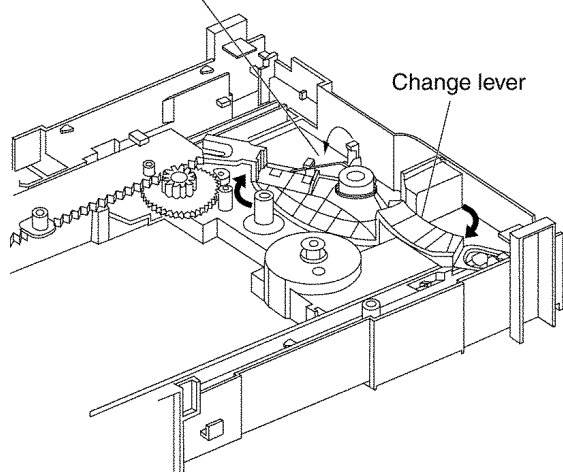

8.5. Loading motor P.C.B.


1. Unscrew the screws.

Screw

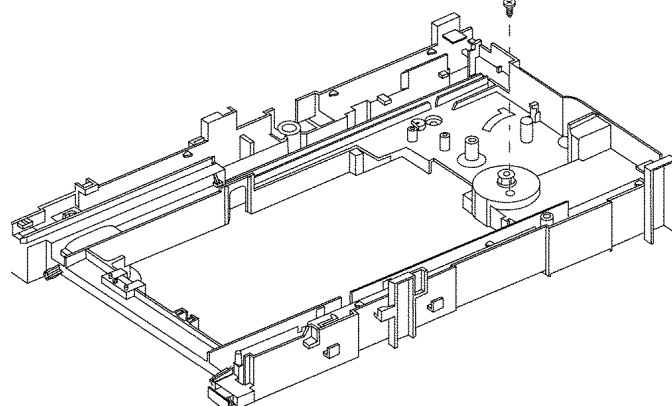

9. Pull the lever (B) in the bottom side to your side and remove the change lever.

Change lever

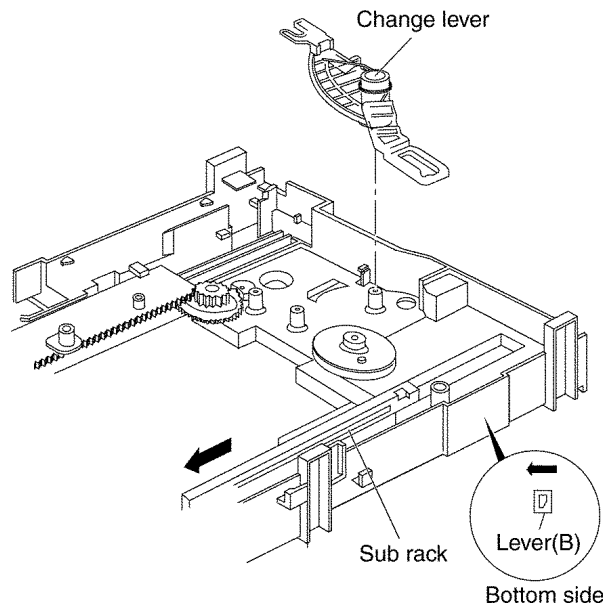

Sub rack

Lever(B)


Bottom side

10. Remove the drive rack, the sub rack and the drive gear.

Drive rack

Drive gear

Sub rack

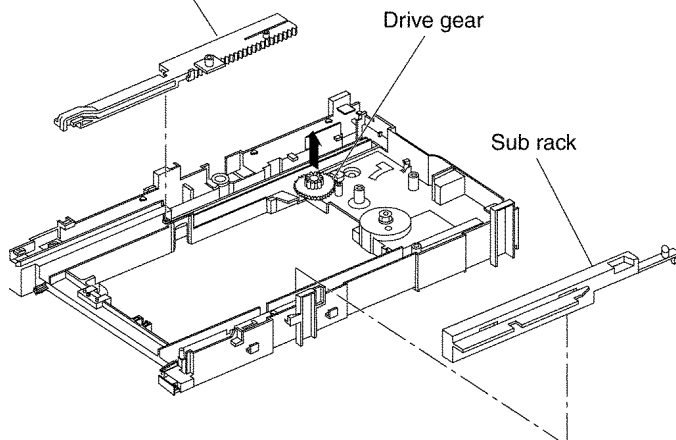


8.6. TRV Unit

8.6.1. Cautions to Be Taken in Handling the TRV Unit

The laser diode in the TRV unit may be damaged due to electrostatic discharge generating from clothes or human body. Use due caution to electrostatic discharge damage when servicing the laser diode.

1. Do not give a considerable shock to the TRV unit as it has an extremely high-precise structure.
2. To prevent the laser diode from the electrostatic discharge damage, the Intermediate FFC of the TRV unit removed from the P.C.B. should be short-circuited with a short pin or a clip.
3. The Intermediate FFC may be cut off if an excessive force is applied to it. Use caution when handling the Intermediate FFC.

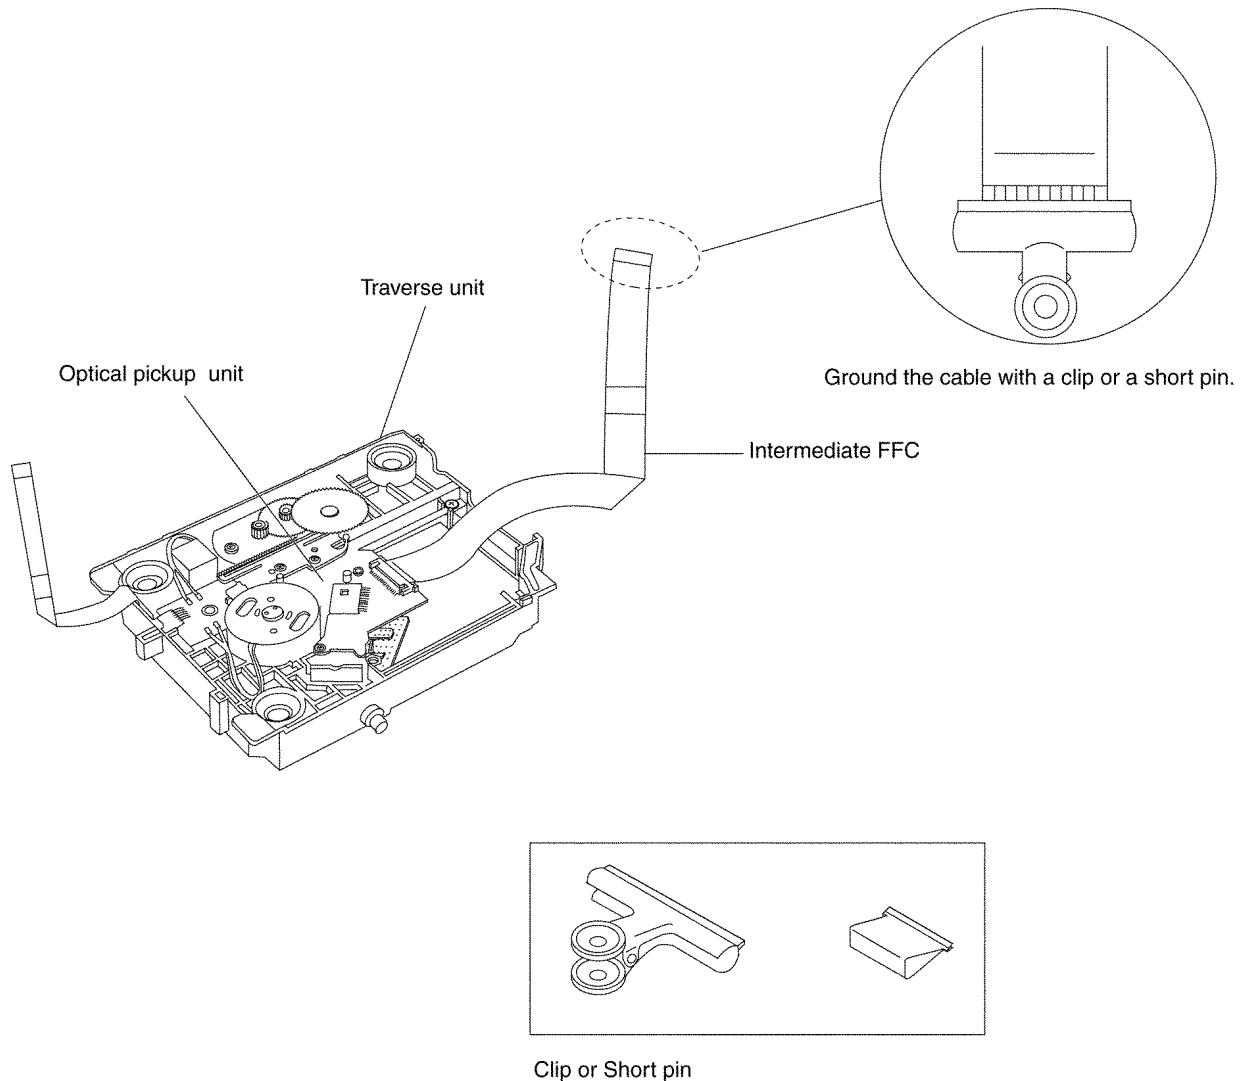

8.6.2. Procedure for Disassembling the TRV Unit



Notice

1. This section aims to focus on the disassembling methods of some parts in the case that no damage is occurred to optical pickup units.
2. When the optical pickup unit is defective, the overall traverse unit needs replacement.
3. Please note that appropriate actions needs to be taken to prevent static damage.



Caution

Insert the short pin into the FFC of the optical pickup unit.
(See "Caution to be taken in handling the TRV Unit")

1. Before changing 26P FFC, please weld the short-circuit solder. (refer to Fig. A)

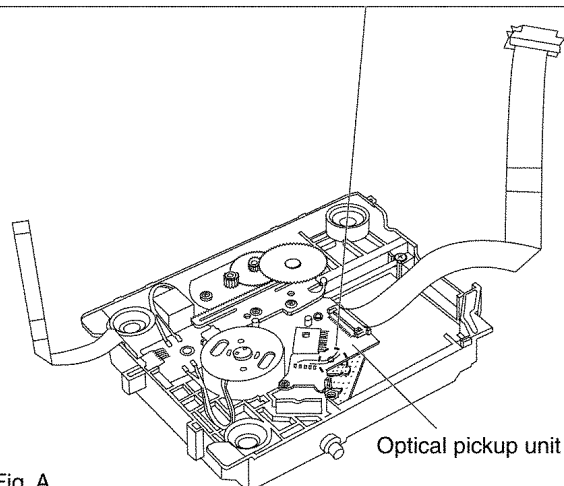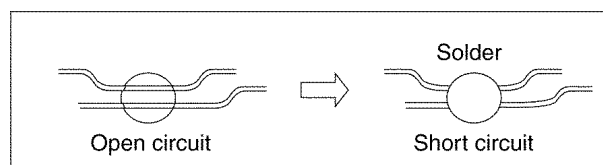


2. Remove the connector, take out the 26P FFC.

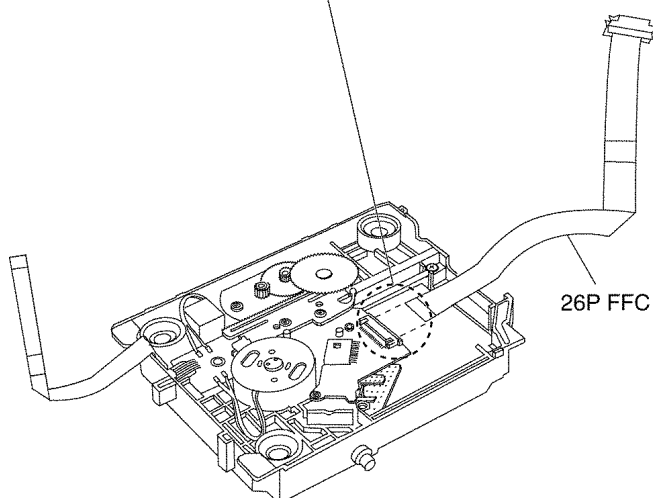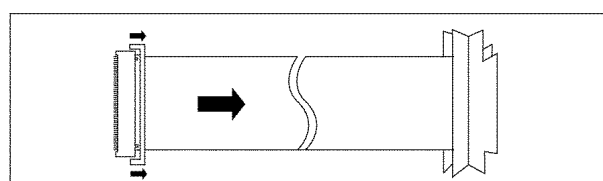

After changing the 26P FFC, please remove the solder.
(refer to Fig. B)


3. Push the tabs on the back and remove the TRV Gear B and A.

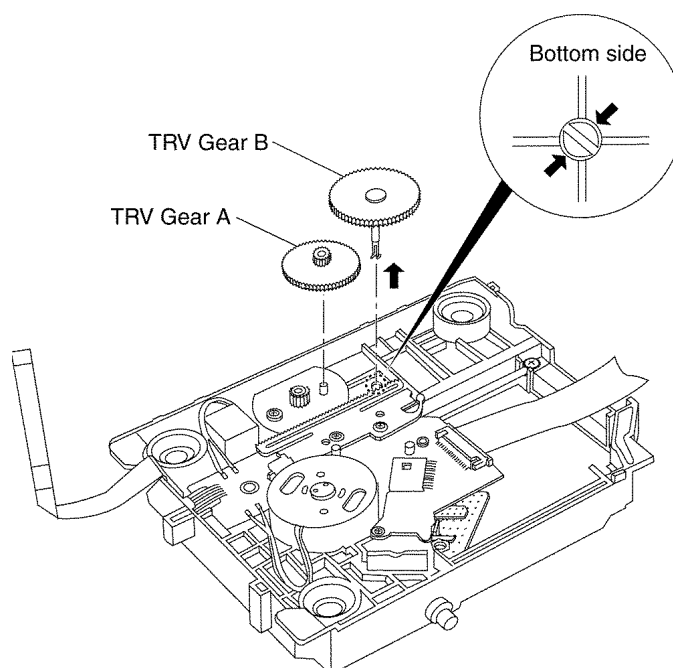


4. Unscrew the screws.
5. Remove the drive rack.

Caution


Do not disassemble drive rack fixing screws repeatedly,
otherwise the screws may hard to tighten and affect the
accuracy of optical pickups consequently.

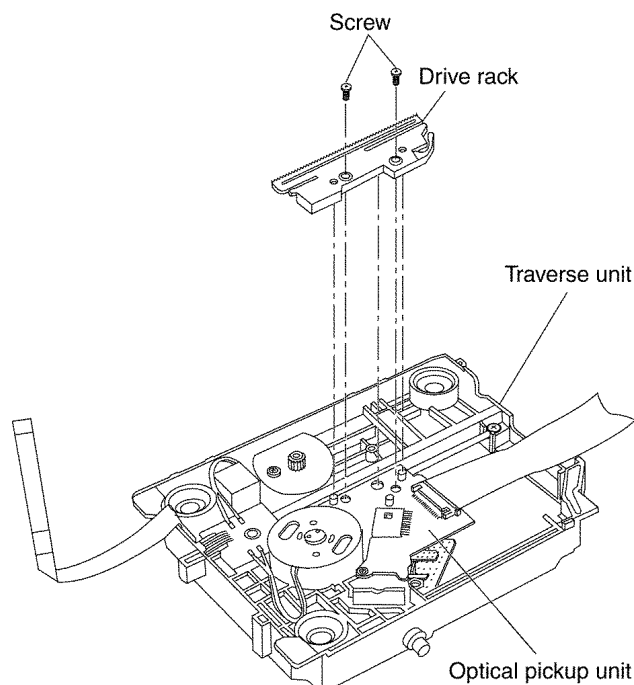

6. Remove the solders of the SP motor and the TRV motor.

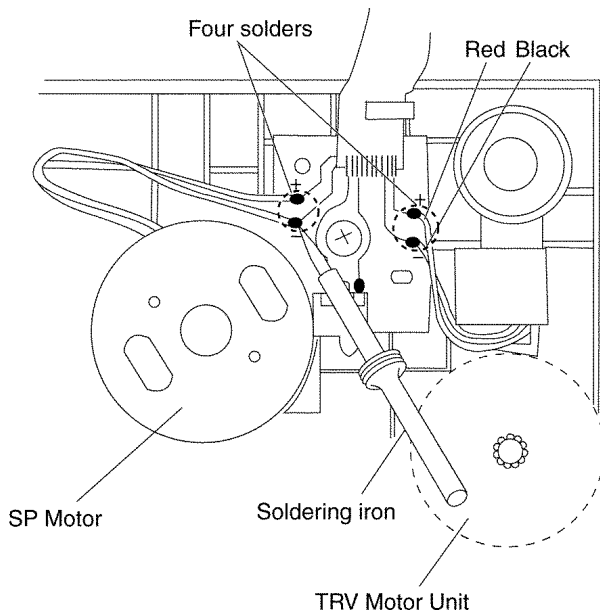

7. Unscrew the screws, then remove the TRV Motor and TRV SW P.C.B. Unit.

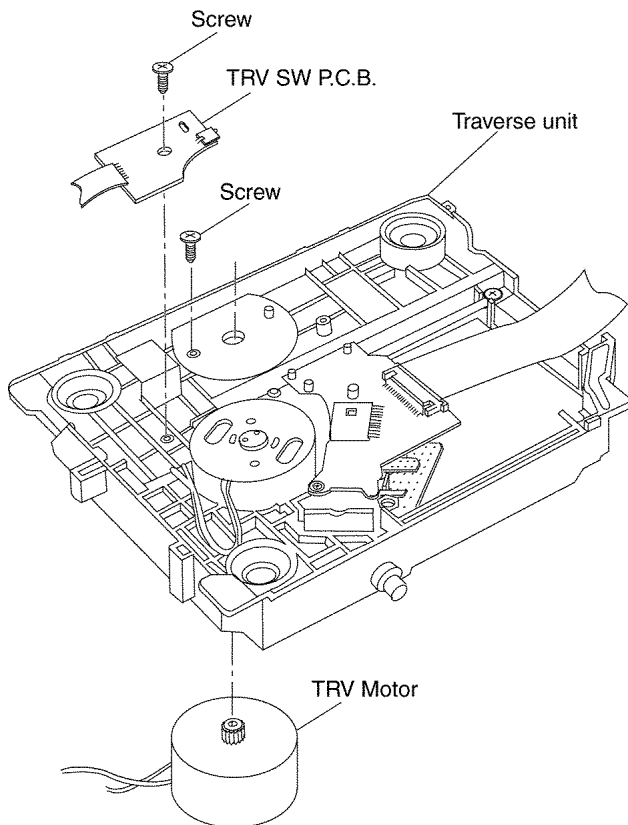

<Assembling the TRV unit>

1. After replacing the TRV Unit and connecting the 26P FFC, remove the solder on the optical pickup unit.


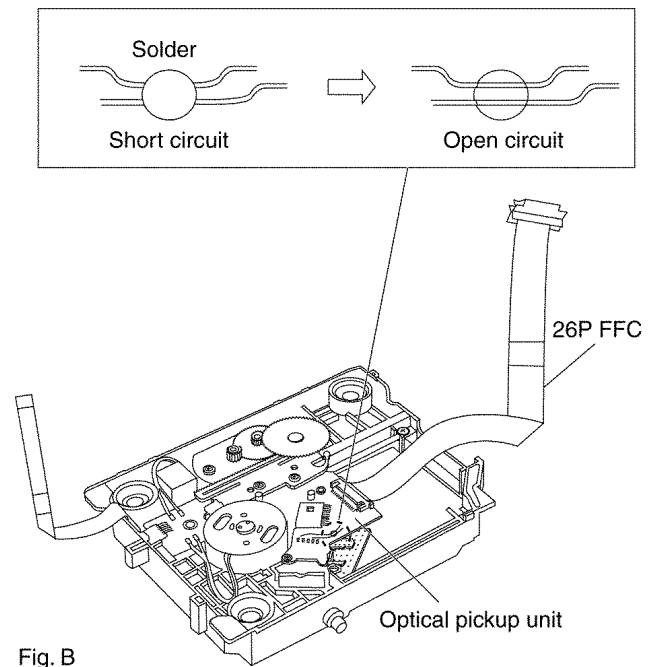


Fig. B

Caution

- a. Do not give a considerable shock to the optical pickup unit as it has an extremely high-precise structure.
 - b. Do not touch the lens in the optical pickup unit.
2. The FFC is fixed as shown below.

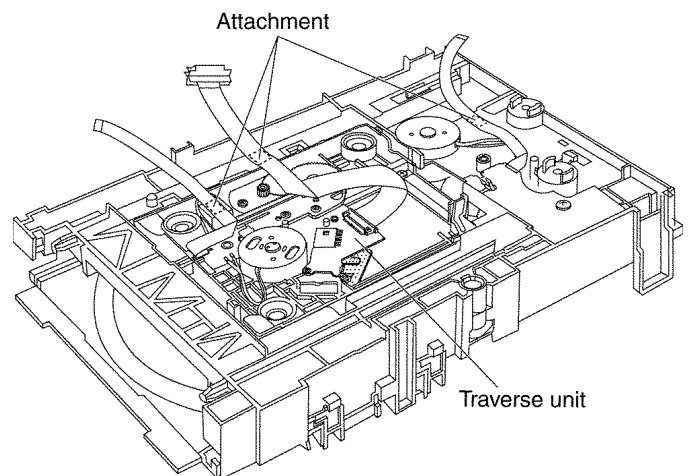


9 SELF-DIAGNOSIS FUNCTION AND SERVICE MODES

9.1. Optical Pickup Breakdown Diagnosis

The optical pickup self-diagnosis function has been included in this unit. When repairing, use the following procedure for effective Self-diagnosis. Be sure to use the self-diagnosis function before replacing the TRV Unit when "NO DISC" is displayed. As a guideline, you should replace the TRV Unit when the value of the laser drive current is more than 60.

Note:

Press the power button to turn on the power, and check the value within three minutes before the unit warms up. (Otherwise, the result will be incorrect.)

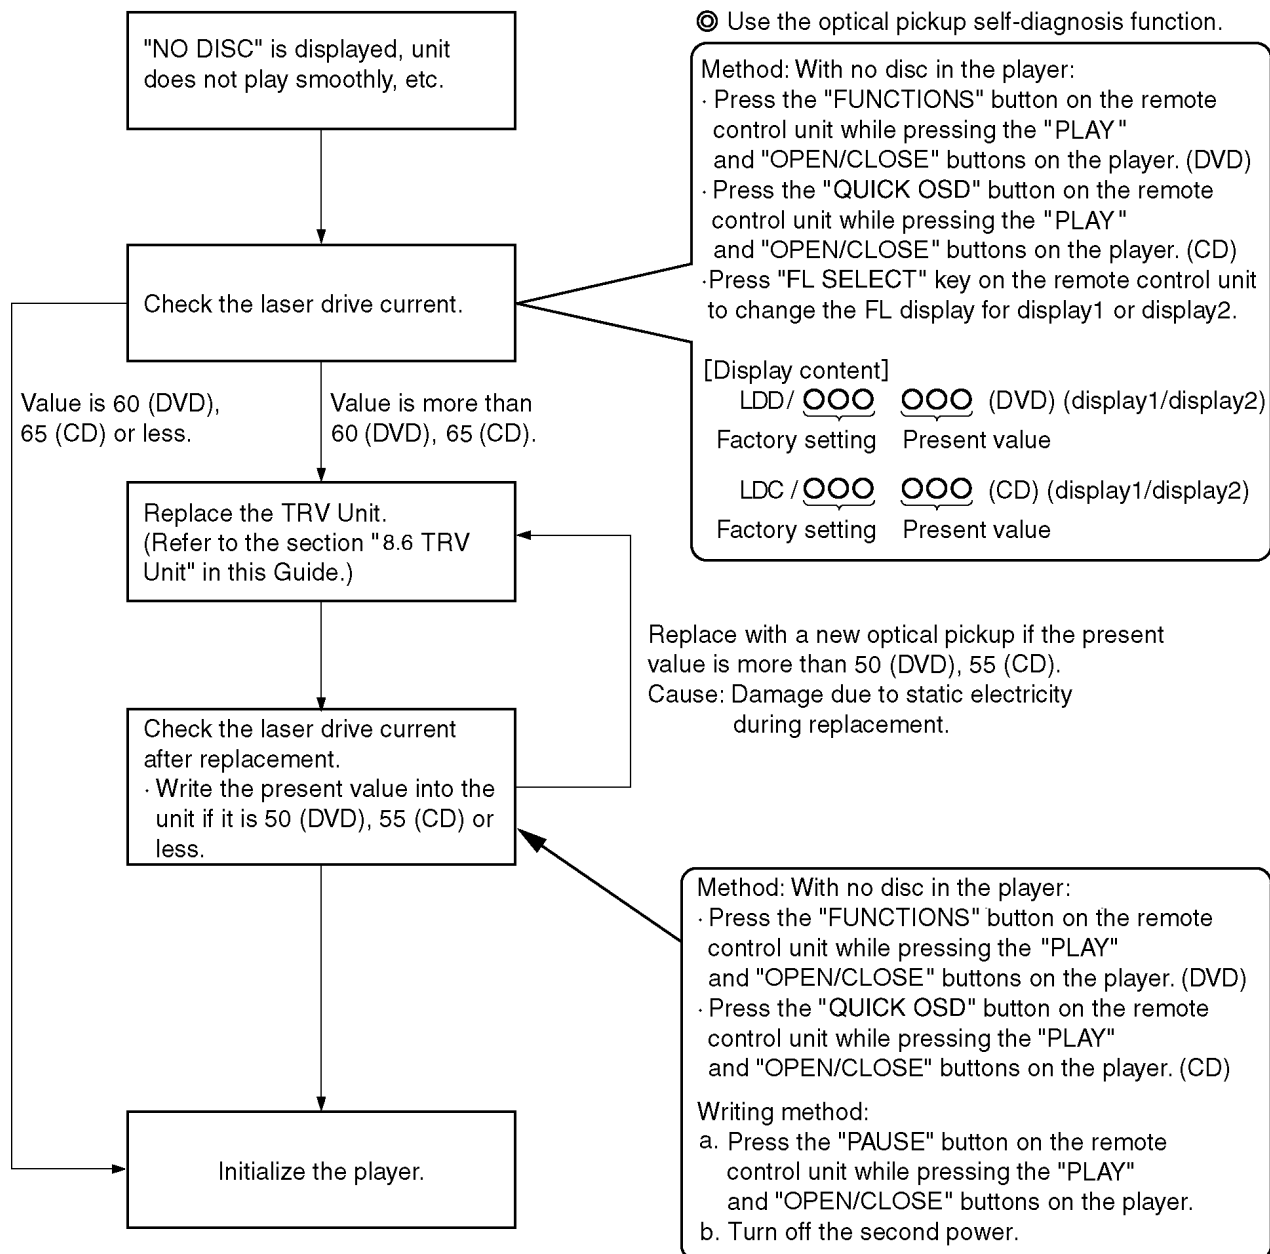

9.2. Service Mode Table 1

The service modes can be activated by pressing various button combination on the player and remote control unit. please carry out your operation based on the remote control supplied with Panasonic DVD player of previous models.

Player buttons	Remote control unit buttons	Application	Note
PLAY + OPEN/CLOSE	0	Displaying the UHF display F_ _ _	Refer to section 9.3. Self-Diagnosis Function (UHF Display).
	5	Jitter check, tilt adjustment *Display shows J_xxx/yyy_zz "yyy" and "zz" shown to the right have nothing to do with the jitter value. "yyy" is the error counter, while "zz" is the focus drive value.	
	6	Checking the region numbers and broadcast system	
	7	Checking the program version	Check the IC8651 FLASH ROM program.
	9	Lighting Confirmation Function of Display Tube	
	FUNCTIONS	Checking the laser drive current	Refer to section 9.1. Optical Pickup Replacement Procedure.
	PAUSE	Writing the laser drive current value after replacing the optical pickup (do not use for anything other than optical pickup replacement)	
STOP+PLAY	POWER	Initializing the DVD player (restoring factory preset settings)	Refer to section 9.5. Initializing the DVD player.

9.3. DVD Self Diagnostic Function-Error Code

Error Code	Error Content	Additional error explanation	Defect 1	Defect 2	Defect 3	Defect 4
U11	Focus error	Focus coil, FE singal error	TRV Unit	DV5.0 (IC8001)		
U70-2	HDMI/DVI EDID reading error	Occurs when connection is HDMI/DVI and EDID data for the picture receiver cannot be read.				
U70-3	HDMI/DVI authentication error	Occurs when connection is HDMI/DVI and authentication of the picture receiver (using HDCP) failed.				
U70-4	HDMI/DVI SRM revoke error	When it was connected in HDMI/DVI, a television set occurs in the case of machinery done revoke of.				
U70-5	HDMI/DVI SRM disk falsification check error	When SRM data of a disk to play when it is connected in HDMI/DVI are injustice (a verify error), it occurs.				
H01	Tray loading error	LD motor error , DV5.0 (IC8001) error	LD Motor	IC8251		
H02	Spindle servo error	(Spindle servo , DV5.0 (IC8001) SP motor , CLV servo error)	LD Motor	DV5.0 (IC8001)		
H03	Traverse servo error	Traverse servo , DV5.0 (IC8001) , TRV motor error	TRV Motor	DV5.0 (IC8001)		
H04	Tracking servo error	Tracking coil , DV5.0 (IC8001) error	TRV Unit	DV5.0 (IC8001)		
H05	Seek error	TRV Motor , IC8251 error	TRV Motor	IC8251		
H07	Spindle motor drive error	SP motor current error , IC8251 error	TRV Unit	IC8251		
F894	EEPROM falsification	When failing in the access to EEPROM	EEPROM (IC8611)	Serial communication on line		
F897	initialize is not completed	Initialize completion check for factory preset setting failure prevention				
F899	Communication specification between Panecon does not agree with Syscon.	A combination of a firmware / article number of Syscon and Panecon to use is wrong.				
F740	When HDMI device key writing failes	I ² C error occurred while writing to Device Key in Tx.				
F750	When the HDMI Device Key was wrong	Occurs when the wrong Device Key is written into Tx.				

Note:

An error code will be canceled if a power supply is turned OFF.

*1 : When FLASHROM or Module P.C.B. is replaced, be sure to write the present value into the player as the initial setting of laser drive current . (Refer to section 9.5 initial setting of laser drive current .)





Writing method : Press the "PAUSE" button on the remote control unit while pressing the "PLAY" and "OPEN/CLOSE" buttons on the player.




9.4. Last Error Code saved during NO PLAY

Error code	Error Content	Condition	Available buttons
F0C0	DVD: Cannot playback because it is not DVD Video / Audio / VR	The DVD-ROM/-R/-RW/+R/+RW is not MP3/JPEG/DVD-Video format	POWER, OPEN/CLOSE
F0C1	DVD: Prohibited by the restricted region code	The region code of DVD is not right .	POWER, OPEN/CLOSE
F0C2	DVD: PAL restricted playback	When put the DVD-PAL disc into the NTSC only player	POWER, OPEN/CLOSE
F0C3	DVD: Parental lock setting prohibits the playback of the entire title	"LOCK ALL" of the DISC-RATINGS has been chosen.	POWER, OPEN/CLOSE

9.5. Service mode table 2

Press various button combinations on the player and remote control unit can activate the service modes. Please carry out your operation based on the remote control supplied with Panasonic DVD player of previous models.

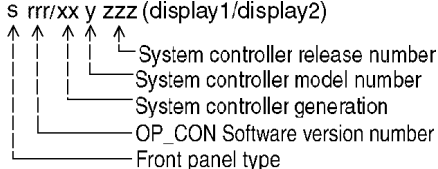Item	Player mode and button combination	Function	FL Display	Cancellation method
Jitter Display	In PLAY mode, press PLAY and OPEN/CLOSE buttons on the player, and "5" button on the remote control unit. (Press "FLSELECT" key on the remote control unit to change the FL display for Display1 or Display2.)	Display the JIT value when the monitor fails to output. Measurement is repeatedly done in the cycle of one second. Read error counter starts from zero upon mode setting. When the target block data failed to be read out, the counter advances by one increment. When the failure is caused by minor error, it may be corrected when retried to enable successful reading. In this case, the counter advances by one. When the error persists even after retry, the counter may jump by two or more.	 J xxx/yyy zz (display1/display2) Jitter rate is shown in decimal notation to one place of decimal. Focus drive value is shown in hexadecimal notation. "J 078 005 AF" Jit rate = 7.8% Read error counter = 5 Focus drive value = 0xAF	Press STOP or OPEN/CLOSE button
Region display	In STOP (no disc) or PLAY mode, press PLAY and OPEN/CLOSE buttons on the player, and "6" button on the remote control unit.	Region display and unit setting	 x y y zz Model setting information N: NTSC/6: PAL60 N: noPAL/ P: PAL Region No.	Cancelled automatically 5 seconds later.
Version Display	In STOP (no disc) or PLAY mode, press PLAY and OPEN/CLOSE buttons on the player, and "7" button on the remote control unit. (Press "FL SELECT" key on the remote control unit to change the FL display for Display1 or Display2.)	Version display	 s rrr/xx y zzz (display1/display2) System controller release number System controller model number System controller generation OP_CON Software version number Front panel type *When checking this item, connect the main unit and the TV, and then carry out checking by viewing the display content.	Cancelled automatically 5 seconds later.
Lighting of FL display tube	In any mode, press PLAY and OPEN/CLOSE buttons on the player and "9" button on the remote control unit.	Lighting of FL display tube	Lighting of all FL display tube	Repeat the same operation.
Error code Display	In any mode, press PLAY and OPEN/CLOSE buttons on the player, and "0" button on the remote control unit. *With pointing of cursor up and down on display, the panel controller switches serial number of history and sends out the command accordingly.	Error code check The latest error code stored in FLASHROM is displayed.	error code (play_err) is expressed in the following convention. Error code = 0 x DAXX is expressed: nn UXX (/nn UXX) Error code = 0 x DBXX is expressed: nn HXX (/nn HXX) Error code = 0 x DXXX is expressed: nn FXXX (/nn FXX) "nn" denotes the serial number of history. (01~20) "xx" denotes the error code.	Cancelled automatically 5 seconds later.
Initial setting of laser drive current	In STOP (no disc) mode, press PLAY and OPEN/CLOSE buttons on the player, and PAUSE button on the remote control unit. (Press "FL SELECT" key on the remote control unit to change the FL display for Display1 or Display2.)	Initial setting of laser drive current Initial current value for each of DVD laser and CD laser is separately saved in FLASHROM.	 LDO/034 032 (display1/display2) CD laser current measurement DVD laser current measurement Laser current measurement mode The value denotes the current in decimal notation. The above example shows the initial current is 34 mA for DVD and 32 mA for CD respectively when the laser is switched ON.	Cancelled automatically 5 seconds later.

Item	Player mode and button combination	Function	FL Display	Cancellation method
DVD laser drive current measurement	In STOP (no disc) mode, press PLAY and OPEN/CLOSE buttons on the player, and FUNCTIONS button on the remote control unit. (Press "FL SELECT" key on the remote control unit to change the FL display for Display1 or Display2.)	DVD laser drive current measurement DVD laser drive current is measured and the result is displayed together with the initial value stored in FLASHROM. Because the initial current value is necessary when displaying, an error may occur if no value stored.	LDD/034 032 (display1/display2)  DVD Measured current DVD Initial current stored in FLASHROM DVD laser current measurement mode The value denotes the current in decimal notation. The above example shows the initial current is 34 mA and the measured value is 32 mA when the DVD laser is switched ON.	Cancelled automatically 5 seconds later.
CD laser drive current measurement	In STOP (no disc) mode, press PLAY and OPEN/CLOSE buttons on the player, and "QUICK OSD" button on the remote control unit. (Press "FL SELECT" button on the remote control unit to change the FL display for Display 1 or Display 2.)	CD laser drive current measurement CD laser drive current is measured and the result is displayed together with the initial value stored in FLASHROM.	LDC/028 026 (display1/display2)  CD Measured current CD Initial current stored in FLASHROM CD laser current measurement mode	Cancelled automatically 5 seconds later.
User Initialization	In STOP (no disc) mode, press STOP, PLAY and POWER buttons on the player for 3 seconds or longer.	User Initialization User settings are cancelled and player is initialized to factory setting.	INI	
All reset	When initialization by the user is performed and "INI" is displayed, press STOP, PLAY and OPEN/CLOSE buttons on the player.	User settings are cancelled and player is initialized to factory setting. The setting resistances reference value and unit information spreaded globally of the OP_CON unit are stored in FLASHROM. Note: the operation timer of the laser and spindle motor is not initialized.	RESET	
Timer 1	In STOP (no disc) mode, press PLAY and OPEN/CLOSE buttons on the player, and "1" button on the remote control unit. (Press "FL SELECT" key on the remote control unit to change the FL display for Display1 or Display2.)	Laser operation timer is measured separately for DVD laser and CD laser.	T1 1234/5678 (display1/display2)  CD laser drive time DVD laser drive time Time is shown in 4 digits of decimal notation in a unit of 10 hours. "0000" will follow "9999".	Cancelled automatically 5 seconds later.
Timer 1 reset	While displaying Timer 1 data, press PLAY and OPEN/CLOSE buttons on the player, and "2" button on the remote control unit. (Press "FL SELECT" key on the remote control unit to change the FL display for Display1 or Display2.)	Laser operation timer is reset.	T1_0000/0000 (display1/display2)	Cancelled automatically 5 seconds later.
Timer 2	In STOP (no disc) mode, press PLAY and OPEN/CLOSE buttons on the player, and "3" button on the remote control unit. (Press "FL SELECT" key on the remote control unit to change the FL display for Display1 or Display2.)	Spindle motor operation timer	T2_1234/5 (display1/display2) Time is shown in 5 digits of decimal notation in a unit of 1 hour. "00000" will follow "99999".	Cancelled automatically 5 seconds later.
Timer 2 reset	While displaying Timer 2 data, press PLAY and OPEN/CLOSE buttons on the player, and "8" button on the remote control unit. (Press "FL SELECT" key on the remote control unit to change the FL display for Display1 or Display2.)	Spindle motor operation timer is reset.	T2_0000/0 (display1/display2)	Cancelled automatically 5 seconds later.
Dealer's lock ON/OFF shift function	In PLAY mode, press STOP button on the player, and POWER button on the remote control unit for one minute or longer.	When dealer's lock is on, it prohibits switching off of the secondary power and tray opening. When the lock is switched, its ON/OFF status is stored in FLASHROM.	"LOC" sign appears when dealer's lock is switched on, and when POWER button or OPEN/CLOSE button is pressed. "UNLOC" sign appears when dealer's lock is switched off.	Repeat the same operation.

9.6. Sales demonstration lock function

This function prevents discs from being lost when the unit is used for sales demonstrations by disabling the disc eject function. "LOC" is displayed on the unit, and ordinary operation is disabled.

9.6.1. Setting

The sales demonstration lock is set by simultaneously pressing STOP button on the player and POWER button on the remote control unit for 1 second or longer.

9.6.2. Cancellation

The lock can be cancelled by the same procedure as used in setting. ("UNLOC" is displayed on cancellation. Disconnecting the power cable from power outlet does not cancel the lock.)

9.7. Handling After Completing Repairs

Use the following procedure after completing repairs.

9.7.1. Method

Confirm that the power is turned on:

1. Press the "OPEN/CLOSE" button to close the tray.
2. Press the "POWER" button to turn off the power.
3. Disconnect the power plug from the outlet.

9.7.2. Precautions

Do not disconnect the power plug from the outlet with the tray still open, then close the tray manually.

10 SERVICE PRECAUTIONS

10.1. Recovery after the DVD player is repaired.

- The DVD player requires no recovery process after it is repaired; therefore, there is no necessity of using recovery disc.

10.2. Firmware version-up of the DVD player

- The firmware of the DVD player may be renewed to improve the quality including operationability and playability to the substandard discs.

Make sure to observe the following rules when performing version-up.

Note:

When FROM or module P.C.B. is replaced, carry out the process of firmware version-up.

- The latest firmware required for version-up can be downloaded from TSN-WEB [Support Information from NWBG-PAVC].

When it is finished, use burning software to make up a version-up disc in the form of CD-R.

Note:

Do not modify the file name of downloaded data at random; keep the original file names for disc burning.

Make sure to select normal format instead of image format.

If you may not be able to complete a downloading from the TSN-WEB page, please obtain the file through your local Panasonic Service Organization.

- Updating firmware
 1. Load the version-up disc that is supplied to the player and run it.
 2. Firmware version of the player is automatically checked. Appropriate message appears whenever necessary.
 3. Using remote controller's "OK" button or player's "OPEN/CLOSE" button, select whether version updating is to be done or not according to the message appearing on the screen.
 4. a. If "OK" is pushed, version updating is performed.
b. If "OPEN/CLOSE" is pushed, version updating is cancelled.
 5. a. When updating is finished, the player will restart. Remove the disc after the tray has opened automatically.
b. Remove the disc.
 6. a. Write the present value into the player as the initial setting of laser drive current. (Refer to section 9.5 initial setting of laser drive current.)
 7. Turn off the power.

Note:

If the AC power supply is shut out during version-up due to a power failure, the version-up is improperly carried out.

In such a case, replace the FROM and carry out the version-up again.

11 ADJUSTMENT PROCEDURES

11.1. Service Tools and Equipment

Application	Name	Number
Inspection	Extension cable (module P.C.B. to mother P.C.B.)	VUC8026
	Extension cable (module P.C.B. to mother P.C.B.)	RFKZ0106
Others	Hanarl	VFK1784
	Grease	RFKXPG641
	Drysurf	RFKXGUD24
Confirmation	CD test disc	PVCD-K06 or any other commercially available disc
	VCD test disc	PVCD-K06 or any other commercially available disc
	DVD test disc	DVDT-S15 or DVDT-S01

11.2. Important points in electrical adjustment

- Follow the adjustment procedures described in this Manual.

11.3. Storing and Handling Test Discs

- Surface precision is vital for DVD test discs. Be sure to store and handle them carefully.
1. Do not place discs directly onto the workbench, etc., after use.
 2. Handle discs carefully in order to maintain their flatness. Place them into their case after use and store them vertically. Store discs in a cool place where they are not exposed to direct sunlight or air from air conditioners.
 3. Accurate adjustment will not be possible if the disc is warped when placed on a surface made of glass, etc. If this happens, use a new test disc to make optical adjustments.
 4. If adjustment is done using a warped disc, the adjustment will be incorrect and some discs will not be playable.

12 ABBREVIATIONS

INITIAL/LOGO		ABBREVIATIONS
A	A0-UP	ADDRESS
	ACLK	AUDIO CLOCK
	AD0-UP	ADDRESS BUS
	ADATA	AUDIO PES PACKET DATA
	ALE	ADDRESS LATCH ENABLE
	AMUTE	AUDIO MUTE
	AREQ	AUDIO PES PACKET REQUEST
	ARF	AUDIO RF
	ASI	SERVO AMP INVERTED INPUT
	ASO	SERVO AMPOUTPUT
	ASYN	AUDIO WORD DISTINCTION SYNC
B	BCK	BIT CLOCK (PCM)
	BCKIN	BIT CLOCK INPUT
	BDO	BLACK DROP OUT
	BLKCK	SUB CODE BLOCK CLOCK
	BOTTOM	CAP. FOR BOTTOM HOLD
	BYP	BYPATH
C	BYTCK	BYTE CLOCK
	CAV	CONSTANT ANGULAR VELOCITY
	CBDO	CAP. BLACK DROP OUT
	CD	COMPACT DISC
	CDSCCK	CD SERIAL DATA CLOCK
	CDSRDATA	CD SERIAL DATA
	CDRF	CD RF (EFM) SIGNAL
	CDV	COMPACT DISC-VIDEO
	CHNDATA	CHANNEL DATA
	CKSL	SYSTEM CLOCKSELECT
	CLV	CONSTANT LINEAR VELOCITY
	COFTR	CAP. OFF TRACK
	CPA	CPU ADDRESS
	CPCS	CPU CHIP SELECT
	CPDT	CPU DATA
	CPUADR	CPU ADDRESS LATCH
	CPUADT	CPU ADDRESS DATA BUS
	CPUIRQ	CPU INTERRUPT REQUEST
	CPRD	CPU READ ENABLE
	CPWR	CPU WRITE ENABLE
	CS	CHIPSELECT
	CSYN	COMPOSITE SYNC IN
	CSYNOUT	COMPOSITE SYNC OUT
D	DACCK	D/A CONVERTER CLOCK
	DEEMP	DEEMPHASIS BIT ON/OFF
	DEMPH	DEEMPHASIS SWITCHING
	DIG0-UP	FL DIGIT OUTPUT
	DIN	DATA INPUT
	DMSRCK	DM SERIAL DATA READ CLOCK
	DMUTE	DIGITAL MUTE CONTROL
	DO	DROP OUT
	DOUT0-UP	DATAOUTPUT
	DRF	DATA SLICE RF (BIAS)
	DRPOUT	DROP OUT SIGNAL
	DREQ	DATA REQUEST
	DRESP	DATA RESPONSE
	DSC	DIGITAL SERVO CONTROLLER
	DSL	DATA SLICE LOOP FILTER
	DVD	DIGITAL VIDEO DISC

INITIAL/LOGO		ABBREVIATIONS
E	EC	ERROR TORQUE CONTROL
	ECR	ERROR TORQUE CONTROL
	ENCSEL	REFERENCE
	ETMCLK	ENCODER SELECT
	ETSCLK	EXTERNAL M CLOCK (81MHz/40.5MHz)
F	FBAL	EXTERNAL S CLOCK (54MHz)
	FCLK	FOCUS BALANCE
	FE	FRAME CLOCK
	FFI	FOCUS ERROR
	FEO	FOCUS ERROR AMP INVERTED INPUT
	FG	FOCUS ERROR AMP OUTPUT
	FSC	FREQUENCY GENERATOR
	FSCK	FREQUENCY SUB CARRIER
G	GND	FS (384 OVER SAMPLING) CLOCK
		COMMON GROUNDING (EARTH)
H	HA0-UP	HOST ADDRESS
	HD0-UP	HOST DATA
	HINT	HOST INTERRUPT
	HRXW	HOST READ/WRITE
I	IECOUT	IEC958 FORMAT DATA OUTPUT
	IPFRAG	INTERPOLATION FLAG
	IREF	I (CURRENT) REFERENCE
	ISEL	INTERFACE MODE SELECT
L	LDON	LASER DIODE CONTROL
	LPC	LASER POWER CONTROL
	LRCK	L CH/R CH DISTINCTION CLOCK
M	MA0-UP	MEMORY ADDRESS
	MCK	MEMORY CLOCK
	MCKI	MEMORY CLOCK INPUT
	MCLK	MEMORY SERIAL COMMAND CLOCK
	MDATA	MEMORY SERIAL COMMAND DATA
	MDQ0-UP	MEMORY DATA INPUT/OUTPUT
	MDQM	MEMORY DATA I/O MASK
	MLD	MEMORYSERIAL COMMAND LOAD
	MPEG	MOVING PICTURE EXPERTS GROUP
O	ODC	OPTICAL DISC CONTROLLER
	OFTR	OFF TRACKING
	OSCI	OSCILLATOR INPUT
	OSCO	OSCILLATOR OUTPUT
	OSD	ON SCREEN DISPLAY
P	P1-UP	PORT
	PCD	CD TRACKING PHASE DIFFERENCE
	PCK	PLL CLOCK
	PDVD	DVD TRACKING PHASE DIFFERENCE
	PEAK	CAP. FOR PEAK HOLD
	PLLCLK	CHANNEL PLL CLOCK
	PLLOK	PLL LOCK
	PWMCTL	PWM OUTPUT CONTROL
	PWMDA	PULSE WAVE MOTOR DRIVEA
	PWMOA, B	PULSE WAVE MOTOR OUT A, B

INITIAL/LOGO		ABBREVIATIONS
R	RE	READ ENABLE
	RFENV	RF ENVELOPE
	RFO	RF PHASE DIFFERENCE OUTPUT
	RS	(CD-ROM) REGISTER SELECT
	RSEL	RF POLARITY SELECT
	RST	RESET
	RSV	RESERVE
S	SBI0, 1	SERIAL DATA INPUT
	SBO0	SERIAL DATA OUTPUT
	SBT0, 1	SERIAL CLOCK
	SCK	SERIAL DATA CLOCK
	SCKR	AUDIO SERIAL CLOCK RECEIVER
	SCL	SERIAL CLOCK
	SCLK	SERIAL CLOCK
	SDA	SERIAL DATA
	SEG0-UP	FL SEGMENT OUTPUT
	SELCLK	SELECTCLOCK
	SEN	SERIAL PORT ENABLE
	SIN1, 2	SERIAL DATA IN
	SOUT1, 2	SERIAL DATA OUT
	SPDI	SERIAL PORT DATA INPUT
	SPDO	SERIAL PORT DATA OUTPUT
	SPEN	SERIAL PORT R/W ENABLE
	SPRCLK	SERIAL PORT READ CLOCK
	SPWCLK	SERIAL PORT WRITE CLOCK
	SQCK	SUB CODE Q CLOCK
	SQCX	SUBCODE Q DATA READ CLOCK
	SRDATA	SERIAL DATA
	SRMADR	SRAM ADDRESS BUS
	SRMDT0-7	SRAM DATA BUS 0-7
	SS	START/STOP
	STAT	STATUS
	STCLK	STREAM DATA CLOCK
	STD0-UP	STREAM DATA
	STENABLE	STREAM DATA INPUT ENABLE
	STSEL	STREAM DATA POLARITY SELECT
	STVALID	STREAM DATAVALIDITY
	SUBC	SUB CODE SERIAL
	SBCK	SUB CODE CLOCK
	SUBQ	SUB CODE Q DATA
	SYSCLK	SYSTEM CLOCK
T	TE	TRACKING ERROR
	TIBAL	BALANCE CONTROL
	TID	BALANCE OUTPUT 1
	TIN	BALANCE INPUT
	TIP	BALANCE INPUT
	TIS	BALANCE OUTPUT 2
	TPSN	OP AMP INPUT
	TPSO	OP AMP OUTPUT
	TPSP	OP AMP INVERTED INPUT
	TRCRS	TRACK CROSSIGNAL
	TRON	TRACKING ON
	TRSON	TRAVERSE SERVO ON

INITIAL/LOGO		ABBREVIATIONS
V	VBLANK	V BLANKING
	VCC	COLLECTOR POWER SUPPLY VOLTAGE
	VCDCONT	VIDEO CD CONTROL (TRACKING BALANCE)
	VDD	DRAIN POWER SUPPLY VOLTAGE
	VFB	VIDEO FEED BACK
	VREF	VOLTAGE REFERENCE
	VSS	SOURCE POWER SUPPLYVOLTAGE
W	WAIT	BUS CYCLE WAIT
	WDCK	WORD CLOCK
	WEH	WRITE ENABLE HIGH
	WSR	WORD SELECT RECEIVER
X	X	X' TAL
	XALE	X ADDRESS LATCH ENABLE
	XAREQ	X AUDIO DATA REQUEST
	XCDROM	X CD ROM CHIP SELECT
	XCS	X CHIP SELECT
	XCSYNC	X COMPOSITE SYNC
	XDS	X DATA STROBE
	XHSYNCO	X HORIZONTAL SYNC OUTPUT
	XHINT	XH INTERRUPTREQUEST
	XI	X' TAL OSCILLATOR INPUT
	XINT	X INTERRUPT
	XMW	X MEMORY WRITE ENABLE
	XO	X' TAL OSCILLATOR OUTPUT
	XRE	X READ ENABLE
	XSRMCE	X SRAM CHIP ENABLE
	XSRMOE	X SRAM OUTPUT ENABLE
	XSRMWE	X SRAM WRITE ENABLE
	XVCS	X V-DEC CHIPSELECT
	XVDS	X V-DEC CONTROL BUS STROBE
	XVSYNCO	X VERTICAL SYNC OUTPUT

13 VOLTAGE CHART

Note:

- Circuit voltage and waveform described herein shall be regarded as reference information when probing defect point, because it may differ from an actual measuring value due to difference of measuring instrument and its measuring condition and product itself.

13.1. MOTHER P.C.B.

Ref No.	IC1021									IC1101					IC1151								
MODE	1	2	3	4	5	7	8		1	2	3		1	2	3	4							
PLAY	0	0	0	0	0	0	0		3.2	2.5	0		11.9	9	0	3.2							
STOP	0	0	0	0	-3.3	0	0		3.1	2.5	0		12.8	9	0	3.2							
Ref No.	IC1195						IC3501																
MODE	1	2	3	4	5		1	2	3	4	5	6	7	8	9	10	11	12	13	14			
PLAY	5.1	0	5.1	3.3	3.3		4.9	2.3	2.5	1.7	2.6	1.7	0	2.3	2.3	0	2.3	2.3	1.7	1.7			
STOP	5.1	0	5.1	3.3	3.3		4.9	2.3	2.5	1.7	2.6	1.7	0	2.3	2.3	0	2.3	2.3	1.7	1.7			
Ref No.	IC3501			IC3502						IC3802													
MODE	15	16		1	2	3	4	5	6		1	2	3	4	5	6							
PLAY	1.7	2.3		0	2	4.8	2	0	2		0	0	4.9	2.5	0	2.5							
STOP	1.7	2.3		0	2	4.9	2.4	0	1.9		0	2.5	5	2.5	0	2.5							
Ref No.	IC3811																						
MODE	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20			
PLAY	4.9	0	0	2.2	4.9	3.8	0	1.6	2.2	4.9	0	0	0	0	0	4.9	2.3	2.2	0	3.3			
STOP	5	0	0	2.2	5	0.5	0	1.5	2.2	4.9	0.2	0	0.5	0	0.7	5	4.9	4.9	0	3.3			
Ref No.	IC3811																						
MODE	21	22	23	24	25	26	27	28	29	30	31	32											
PLAY	3.3	0	4.9	4.8	0	1.3	1.6	0	1.4	1.4	0	2.2											
STOP	3.3	0	4.9	4.9	0	1.3	1.6	0	1.4	1.4	0	2.2											
Ref No.	IC4301									IC6001													
MODE	1	2	3	4	5	6	7	8		1	2	3	4	5	6	7	8	9	10	11			
PLAY	2.6	2.5	2.5	-9.4	2.5	2.5	2.6	12.7		0	0	0	3.3	3.3	3.3	3.3	3.3	1.6	0	0			
STOP	2.6	2.5	2.5	-9.4	2.5	2.5	2.6	13.5		0	0	1.1	3.3	3.3	3.3	3.3	3.3	1.6	1.5	0			
Ref No.	IC6001																						
MODE	12	13	14	15	16	17	18	19	20	21	22	23	24	25	26	27	28	29	30	31			
PLAY	0	3.3	0	0	0	1.6	3.3	3.3	0	3.3	0	0.8	3.3	0	0	0	3.3	3.3	3.3	-0.4			
STOP	0	3.3	0	3.3	0.1	0.1	0	3.3	0	3.1	0	1.3	3.3	0	0	0	3.2	3.3	3.3	-0.8			
Ref No.	IC6001																						
MODE	32	33	34	35	36	37	38	39	40	41	42	43	44	45	46	47	48	49	50	51			
PLAY	0	0	0	-0.4	3.2	-6.7	-6.6	-6.5	-6.5	-9.3	-9.3	-6.1	-6.1	-9.3	-6.1	-6.1	-9.3	-3	-9.4	-9.4			
STOP	-1.4	-2.2	0	0	3.2	-6.6	-6.5	-6.5	-6.5	-6.1	-6.1	-6.1	-6.1	-6	-9.3	-6	-9.3	-3	-9.3	-6.1			
Ref No.	IC6001												IC6201										
MODE	52	53	54	55	56	57	58	59	60	61	62	63	64		1	2	3	4	5	6			
PLAY	-6.2	-9.4	-9.4	-9.4	-9.4	-9.4	3.1	2.7	2.9	3.3	0	3.3	3.3		0	0	0	0	3.3	3.3			
STOP	-9.3	-9.3	-6.1	-9.3	-9.3	-9.4	3.1	2.7	2.9	3.2	0	3.3	3.3		0	0	0	0	3.3	3.3			
Ref No.	IC6201			IC6211						Q1051													
MODE	7	8		1	2	3	4	5	6	7	8		1	2	3	4							
PLAY	0	3.3		0	0	1.3	0	12.7	0	0	12.7		5.1	4.1	0	0							
STOP	0	3.3		3.9	0	1.3	0	13.5	0	0	13.5		5.1	4.1	0	0							
Ref No.	Q1115						Q3801						Q3821										
MODE	1	2	3	4	5	6		B	C	E		1	2	3	4	5	6						
PLAY	5	5	0	5.1	5	5		12.8	12	12.7		4.9	5	4.9	0	0	0						
STOP	5.1	5.1	0	5.1	5.1	5.1		13.5	12.8	13.4		5	4.9	4.9	0	0	0						
Ref No.	Q3851				Q3852				Q4302				Q4422				Q4423						
MODE	B	C	E		B	C	E		B	C	E		B	C	E		B	C	E				
PLAY	0	0	5.9		0	0	-5.9		4.1	0	0		0	0	-5.9		0	0	-5.8				
STOP	0	0	0.7		0	0	0.7		0	0	0		0	0	0.7		0	0	0.7				
Ref No.	Q4751				Q6061				Q6062				Q6085				Q6211						
MODE	B	C	E		B	C	E		B	C	E		B	C	E		B	C	E				
PLAY	5	1.8	2.5		3.3	0	0		0	0	0.6		-6	-6.1	-5.4		4.2	3.5	3.5				
STOP	5.1	1.9	2.5		3.3	0	0		0	0	0.6		-6	-6.1	-5.3		3.2	3.5	3.5				
Ref No.	Q6212				QR1115				QR3501				QR3502				QR3821						
MODE	B	C	E		B	C	E		B	C	E		B	C	E		B	C	E				
PLAY	4.2	0	0		0	0	3.2		0	0	3.2		2.6	0	0		12.6	0	0				
STOP	3.5	0	0		0	0	3.2		0	0	3.3		0	0	0		13.4	0	0				
Ref No.	QR3822				QR3823				QR4302				QR4306										
MODE	B	C	E		B	C	E		B	C	E		B	C	E								
PLAY	0	0	4.9		12	12	0		-5.9	0	0		0	0	4.1								
STOP	0	0	5		12.8	12.8	0		2.3	2.4	0		2.6	0	0								

13.2. MODULE P.C.B.

Ref No.	IC3901																			
MODE	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20
PLAY	0	0	0	0	1.2	1	0	2.8	3.3	0	0	0	3.3	0	0	0	3.3	0	0	0
STOP	0	0	0	0	1.2	0.8	0	2.8	3.3	0	0	0	3.3	0	0	3.3	3.3	0	0	0
Ref No.	IC3901																			
MODE	21	22	23	24	25	26	27	28	29	30	31	32	33	34	35	36	37	38	39	40
PLAY	3.3	0	0	0	3.3	1.2	0	3.3	0	0	0	0	1.5	3.3	0.9	0.9	0.9	0.9	0	3.3
STOP	3.3	0	0	0	3.3	1.2	0	3.3	0	0	0	0	1.5	3.3	0	0.8	0.8	0.8	0	3.3
Ref No.	IC3901																			
MODE	41	42	43	44	45	46	47	48	49	50	51	52	53	54	55	56	57	58	59	60
PLAY	1.6	1.2	1.6	0	1.6	0	1.2	0	0	0	0	0	0	0	1.2	0	0	0	0	0
STOP	1.6	1.2	1.6	0	1.6	0	1.2	0	0	0	0	3.3	0	0	1.2	0	0	0	0	0
Ref No.	IC3901																			
MODE	61	62	63	64	65	66	67	68	69	70	71	72	73	74	75	76	77	78	79	80
PLAY	0	0	0	0	0	0	0	0	0	3.3	0	0	0	0	1.2	0	0	0	0	0
STOP	0	0	0	0	0	0	0	0	0	3.3	0	0	0	0	1.2	0	0	0	0	0
Ref No.	IC3901																			
MODE	81	82	83	84	85	86	87	88	89	90	91	92	93	94	95	96	97	98	99	100
PLAY	0	0	0	3.3	1.2	0	1	0.8	1.7	1.2	0	2.1	0.9	0.5	1.9	0	0	0	0	3.3
STOP	0	0	0	3.3	1.2	0	1	0.8	1.6	1.2	0	2.1	0.9	0.5	1.9	0	0	0	0	3.3
Ref No.	IC3901																			
MODE	101	102	103	104	105	106	107	108	109	110	111	112	113	114	115	116	117	118	119	120
PLAY	0	1.2	1.2	0	0	0	0	0	3.3	0	1.4	0	3.2	3.2	3.3	1.2	1.5	0	0	3.3
STOP	0	1.2	0	0	0	3.3	3.3	3.3	1.2	0	1.4	0	3.2	3.2	3.3	1.2	1.5	0	0	3.3
Ref No.	IC3901										IC3952									
MODE	121	122	123	124	125	126	127	128		1	2	3	4	5						
PLAY	3.3	0	1.2	3.3	0	1	0	0		1.3	0	8.3	9	5						
STOP	3.3	0	1.2	3.3	0	0.9	0	0		1.3	0	8.3	9	5						
Ref No.	IC8001																			
MODE	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20
PLAY	0	0	0	0	0	0	0	0	0.9	0.8	1.6	1.2	2.1	0.9	0	3.3	0	0	0	1.2
STOP	0	0	0	0	0	3.3	0	0	0.9	0.8	1.6	1.2	2	0.9	0	3.3	0.5	0	0	1.2
Ref No.	IC8001																			
MODE	21	22	23	24	25	26	27	28	29	30	31	32	33	34	35	36	37	38	39	40
PLAY	0	0	3.3	3.3	3.3	3.3	0	0	3.3	0	3.3	0	3.3	0	0	3.3	3.3	0	0	0
STOP	1.2	1.6	2	1.7	1.7	1.6	2.3	1.3	2.5	2.7	0.6	3.3	0	3.3	0.7	1.6	2.4	0.9	2.1	2.4
Ref No.	IC8001																			
MODE	41	42	43	44	45	46	47	48	49	50	51	52	53	54	55	56				
PLAY	3.3	3.3	0	1.2	0	0	3.3	0	3.3	0	0	3.3	0	3.3	2.9	3.3	3.3	3.3	0	0
STOP	0	2.6	2.4	0	0	0	3.2	0	0	0	0	3.3	3.1	2.7	2.9	3.3	3.3	0	0	0
Ref No.	IC8001																			
MODE	61	62	63	64	65	66	67	68	69	70	71	72	73	74	75	76	77	78	79	80
PLAY	1.4	0	0	0.9	0	1.9	0	0	3.3	3.3	0	3.3	3.3	0	0	0	3.3	3.3	3.3	0
STOP	1.6	0	0	0	0	0	0	0	3.3	3.2	0	3.3	0	0	0	0	3.3	3.3	0	3.2
Ref No.	IC8001																			
MODE	81	82	83	84	85	86	87	88	89	90	91	92	93	94	95	96	97	98	99	100
PLAY	0	0	0	3.2	0.8	2.3	0	1.8	0	0.2	1.7	3.2	0.9	0.9	1.8	1.8	1.6	1.6	1.6	1.6
STOP	0	0	0	1.2	3.2	0.9	2.3	0	1.8	0	0	1.7	3.2	1.2	1.2	1.8	1.8	1.6	1.6	1.6
Ref No.	IC8001																			
MODE	101	102	103	104	105	106	107	108	109	110	111	112	113	114	115	116	117	118	119	120
PLAY	0	0	0.2	0	0.2	2.2	3.2	0	2.2	1.6	1.6	2.4	2.5	2.5	2.4	2.5	2.4	2.4	2.4	2.4
STOP	1.6	0	0	0	0	0	3.2	0	2.2	1.6	2.2	2.2	2.2	2.2	2.2	2.2	2.2	2.2	2.2	2.2
Ref No.	IC8001																			
MODE	121	122	123	124	125	126	127	128	129	130	131	132	133	134	135	136	137	138	139	140
PLAY	2.4	0	1.9	1.6	0	0	1.6	1.7	3.3	0.8	0.9	0.4	3.3	2.3	1	1	0	0.4	0.9	0
STOP	1.9	1.6	1.6	1.6	0	1.6	1.6	3.3	0.8	0	0.4	0	0	1	0	2.3	0	0	0.8	0
Ref No.	IC8001																			
MODE	141	142	143	144	145	146	147	148	149	150	151	152	153	154	155	156	157	158	159	160
PLAY	0	3.3	0	0	0	0	3.2	0	1.6	1.7	0	1.6	0	3.3	1.5	1.5	0	1.2	2.9	3.1
STOP	0	3.3	0	0	0	0.1	3.3	0	1.6	1.6	0	1.6	0	3.3	1.5	1.5	0	1.2	0	3.2
Ref No.	IC8001																			
MODE	161	162	163	164	165	166	167	168	169	170	171	172	173	174	175	176	177	178	179	180
PLAY	2.9	1	1	1	0	3.3	3.3	3.3	3.3	3.3	3.3	3.3	0	3.3	3.3	3.3	3.3	3.3	1	1
STOP	2.9	2.9	3.1	3	0	3.3	2.9	0	3.2	3	0	3.2	0	3.3	2.9	0	3.1	2.9	2.9	2.9
Ref No.	IC8001																			
MODE	181	182	183	184	185	186	187	188	189	190	191	192	193	194	195	196	197	198	199	200
PLAY	3.3	0	1.5	3.3	1.5	0	1.2	3	3.3	3	3.3	0	0	0	3.3	1.4	0	0	1.5	0
STOP	3.2	0	1.5	3.3	1.5	0	1.2	3	3.3	3	3.3	0	0	0	0	3.3	0	0	0	0
Ref No.	IC8001																			
MODE	201	202	203	204	205	206	207	208	209	210	211	212	213	214	215	216				
PLAY	0	1.7	0.3	0	3.3	1.3	0.4	1.5	1.5	0	1.2	3.3	2.7	2.7	0	0				
STOP	0	1.8	0	0	3.3	1.3	0	1.1	1.5	0	1.2	3.3	3.3	0	0	0				
Ref No.	IC8051																			
MODE	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20
PLAY	3.3	3.2	3.3	2.9	2.9	0	3.2	3	3.3	3.2	3	0	0.9	3.3	1	3.3	3	3.3	3	0
STOP	3.3	3.3	3.3	3.3	3.3	0	3.3	3.2	3.3	3.3	3.3	0	3.3	3.3	3.3	3.3	3.3	3.3	3.3	0
Ref No.	IC8051																			
MODE	21	22	23	24	25	26	27	28	29	30	31	32	33	34	35	36	37	38	39	40
PLAY	0	0	0	0	0	1.5	3.3	0	1.1	1.3	1.8	0	0	0	0	0	3.3	1.4	1	0
STOP	0	0	0	0	0	0	3.3	0	0	0	0	0	0	0	0	0	3.3	1.4	3.3	0
Ref No.	IC8051																			
MODE	41	42	43	44	45	46	47	48	49	50	51	52	53	54						
PLAY	0	0.9	3.3	0.9	0.9	0	0.9	0.9	3.3	0.9	0.9	0	0.9	0						
STOP	0	3.3	3.3	3.3	3.3	0	3.3	3.3	3.3	3.3	0	0	0	0						


Ref No.	IC8251																			
MODE	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20
PLAY	3.3	3.3	1.7	3.5	1.2	1.6	1.6	4.8	4.8	4.8	4.7	9	4.1	5.4	2.6	2.3	2.5	2.4	5	1.6
STOP	0	0	0	3.6	1.2	0.1	0	4.8	4.8	4.8	4.8	9	3.5	3.5	2.5	2.5	2.5	2.5	5.1	0.1
Ref No.	IC8251										IC8420									
MODE	21	22	23	24	25	26	27	28	29	30		1	2	3	4	5	6	7	8	9
PLAY	0	2.2	2.2	0	1.6	1.2	1.9	0	0	0		0	0	3.3	3.3	0	0	1.6	1.6	0
STOP	0.1	0.7	0.7	0.1	0.1	1.2	1.8	0	0	0		0	3.3	3.3	3.3	1.5	0	1.6	1.6	0
Ref No.	IC8420										IC8601					IC8606				
MODE	10	11	12	13	14	15	16		1	2	3	4		1	2	3	4	5		
PLAY	0	5	0	2.5	0	2.4	0		3.3	1.2	0	0		3.3	3.3	0	0	0		
STOP	0	5	0	2.5	2.4	2.4	0		3.2	1.2	0	0		3.3	3.3	0	0	0		
Ref No.	IC8611										IC8651									
MODE	1	2	3	4	5	6	7	8		1	2	3	4	5	6	7	8	9	10	11
PLAY	0	0	0	0	3.2	0	0	3.3		1.6	1.7	1.7	1.6	1.6	1.7	1.7	1.6	3.2	3.2	3.3
STOP	0	0	0	0	3.2	3.2	0	3.3		3.3	0	3.3	3.3	3.3	3.3	3.3	3.3	3.3	0	3.3
Ref No.	IC8651																			
MODE	12	13	14	15	16	17	18	19	20	21	22	23	24	25	26	27	28	29	30	31
PLAY	3.3	3.3	3.3	0	3.3	2.2	1.7	1.7	1.6	1.7	1.7	0.2	0.3	3.3	3.2	0	3.3	3.2	0	3.2
STOP	3.2	3.3	3.3	0	0	3.3	3.3	3.3	0	0	3.3	3.3	3.3	3.3	3.3	0	3.3	0	3.3	0
Ref No.	IC8651																			
MODE	32	33	34	35	36	37	38	39	40	41	42	43	44	45	46	47	48			
PLAY	3.2	0	0	3.2	3.2	3.3	0	3.2	3.2	0	3.2	3.2	0	3.2	0	3.3	0			
STOP	3.3	0	3.3	3.3	3.3	0	3.3	3.3	3.3	3.3	0	3.3	3.3	3.3	0	0	0			
Ref No.	IC8701										IC8901									
MODE	1	2	3	4	5		1	2	3	4	5									
PLAY	0	1.5	0	1.3	3.3		3.3	3.3	0	3.3	3.3									
STOP	0	1.5	0	1.3	3.3		3.2	3.2	0	3.3	3.3									
Ref No.	IC9001																			
MODE	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20
PLAY	0	2.6	0	2.9	0	2.9	1.6	1.6	1.6	0	3.3	0	0	1.7	1.6	1.6	1.6	3.3	3.3	0
STOP	0	2.5	0	2.9	0	2.9	2.9	0	0	0	3.3	3.3	0	3.3	3.3	0	3.3	3.3	3.3	3.3
Ref No.	IC9002																			
MODE	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20
PLAY	0	0	2.4	1.4	2	1.4	1.6	0	1.9	0	3.3	1.6	1.7	1.7	1.6	1.6	1.7	1.7	1.6	2.6
STOP	0	3.3	3.3	3.3	3.3	3.3	3.3	0	0	0	3.3	3.3	3.3	3.3	3.3	3.3	3.3	0	3.3	3.3
Ref No.	Q3901					Q3902					Q3903					Q8111				
MODE	B	C	E			B	C	E			B	C	E			B	C	E		
PLAY	3.8	0	0			5	3.3	3.3			5	3.3	3.3			3.5	5	5		
STOP	6.4	0	-0.8			5	3.3	3.3			5	3.3	3.3			3.5	5	5.1		
Ref No.	Q8262					Q8263					Q8532					Q8533				
MODE	B	C	E			B	C	E			B	C	E			B	C	E		
PLAY	1.2	2.5	1.8			1.8	1.8	5			0	0	0.7			0.2	0	0		
STOP	1.2	2.5	1.8			1.8	1.8	5			0	0	0.7			0	0	0		
Ref No.	Q8552					Q8561					Q8562					Q8631				
MODE	B	C	E			B	C	E			B	C	E			B	C	E		
PLAY	0	0	5			3.5	1.6	2.2			1.8	4.1	3.5			0	0	3.3		
STOP	0	5	0			5	0	0			0	5	5			0	0	3.3		
Ref No.	QR8111										QR8420									
MODE	1	2	3	4	5	6		B	C	E										
PLAY	0	0	0.6	0	0	5		0	0	0										
STOP	0	0	0.6	0	0	5.1		0	0	3.2										

14 BLOCK DIAGRAM

Note:


Circuit voltage and waveform described herein shall be regarded as reference information when probing defect point, because it may differ from an actual measuring value due to difference of measuring instrument and its measuring condition and product itself.

14.1. OVERALL BLOCK DIAGRAM

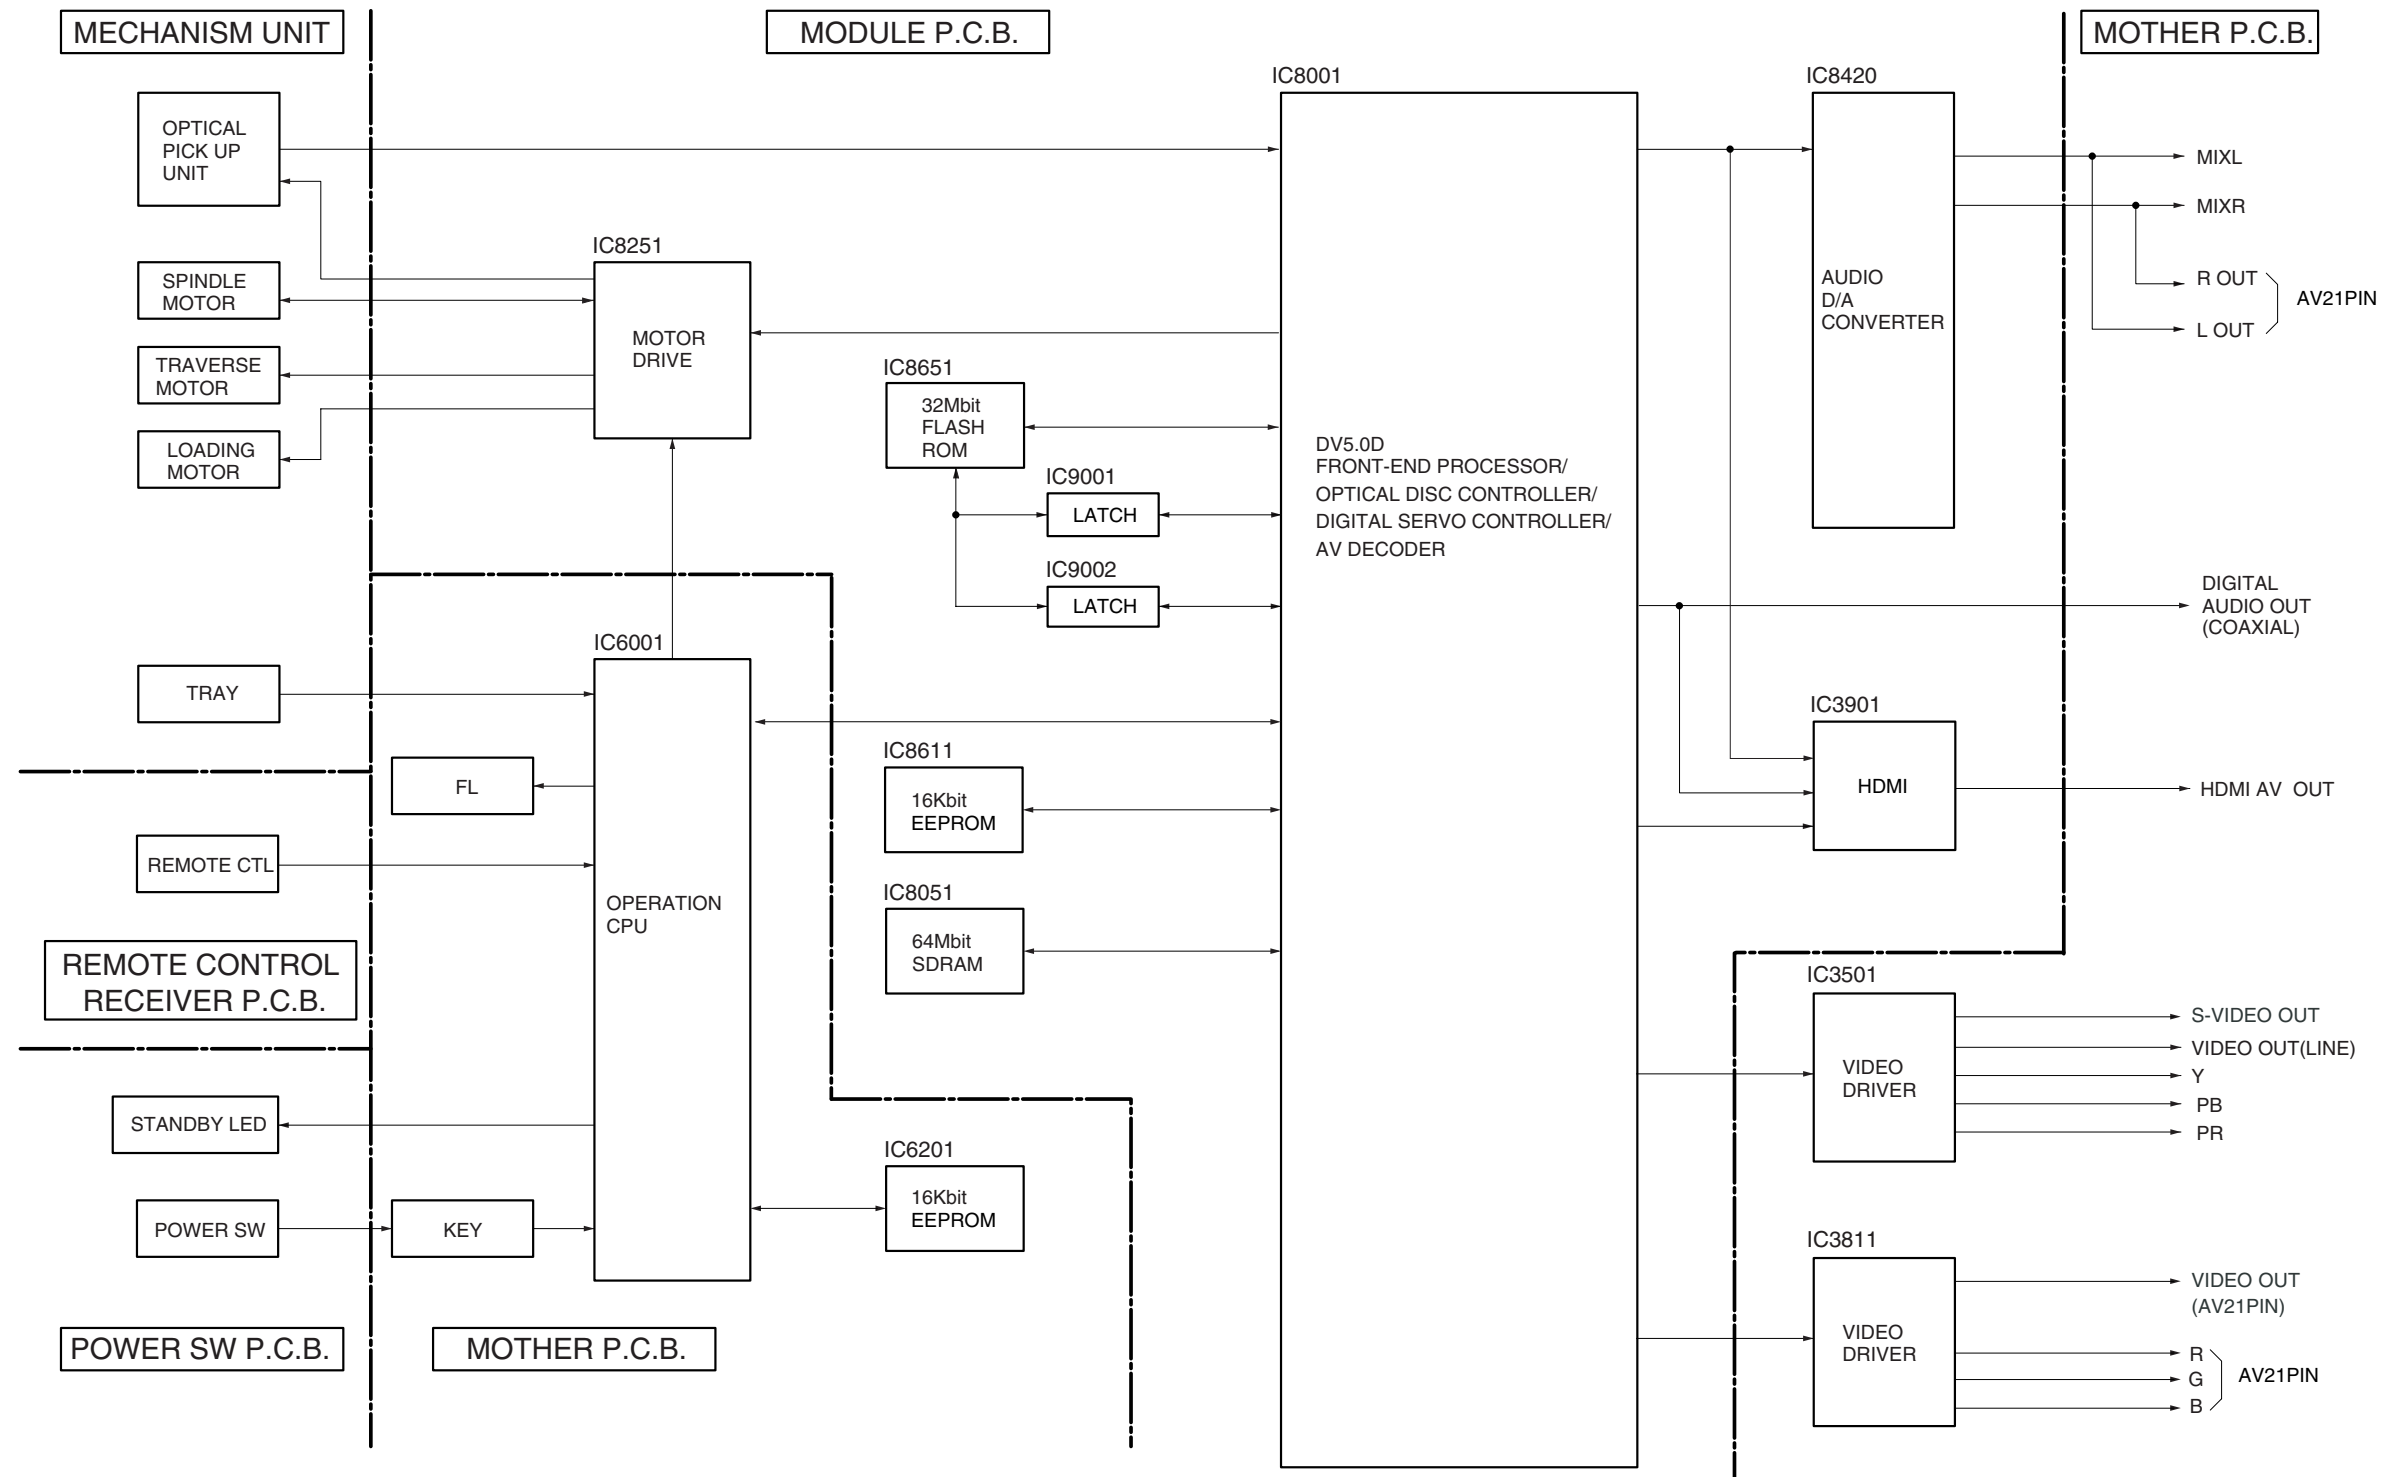


DVD-S54E/EB/EG
OVERALL BLOCK DIAGRAM

14.2. POWER SUPPLY BLOCK DIAGRAM

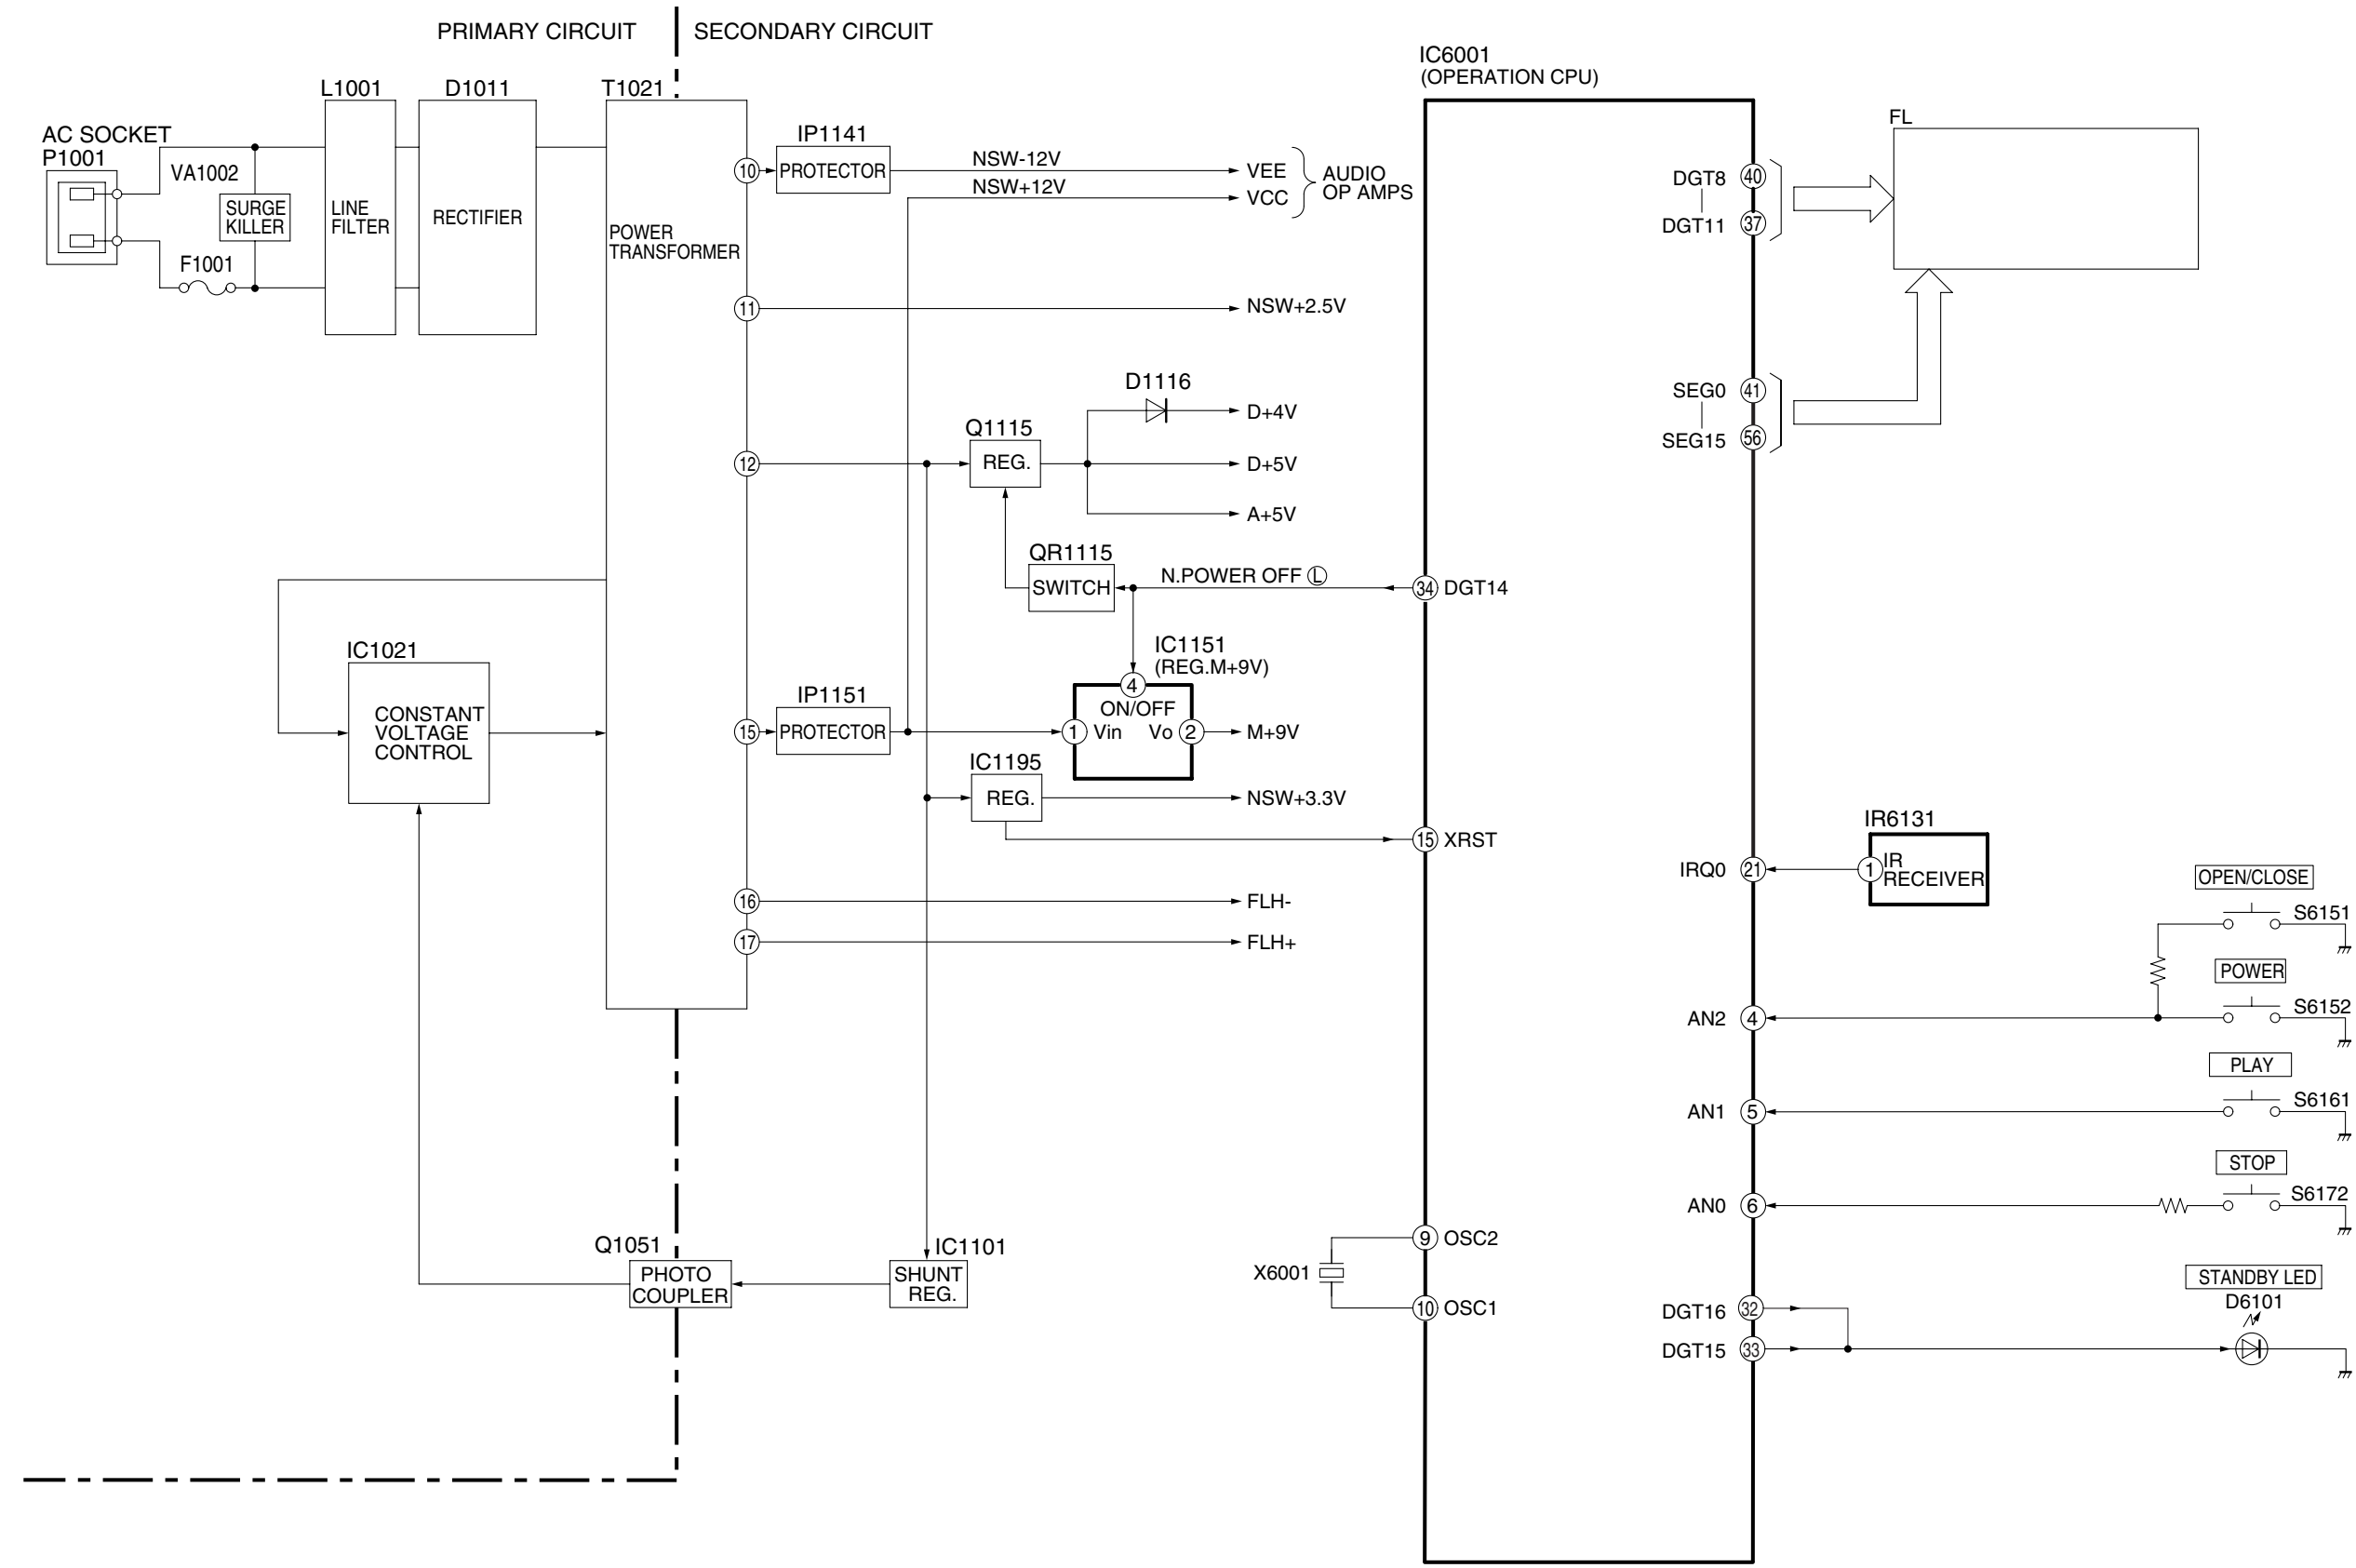



DVD-S54E/EB/EG
POWER SUPPLY BLOCK DIAGRAM

14.3. SERVO BLOCK DIAGRAM

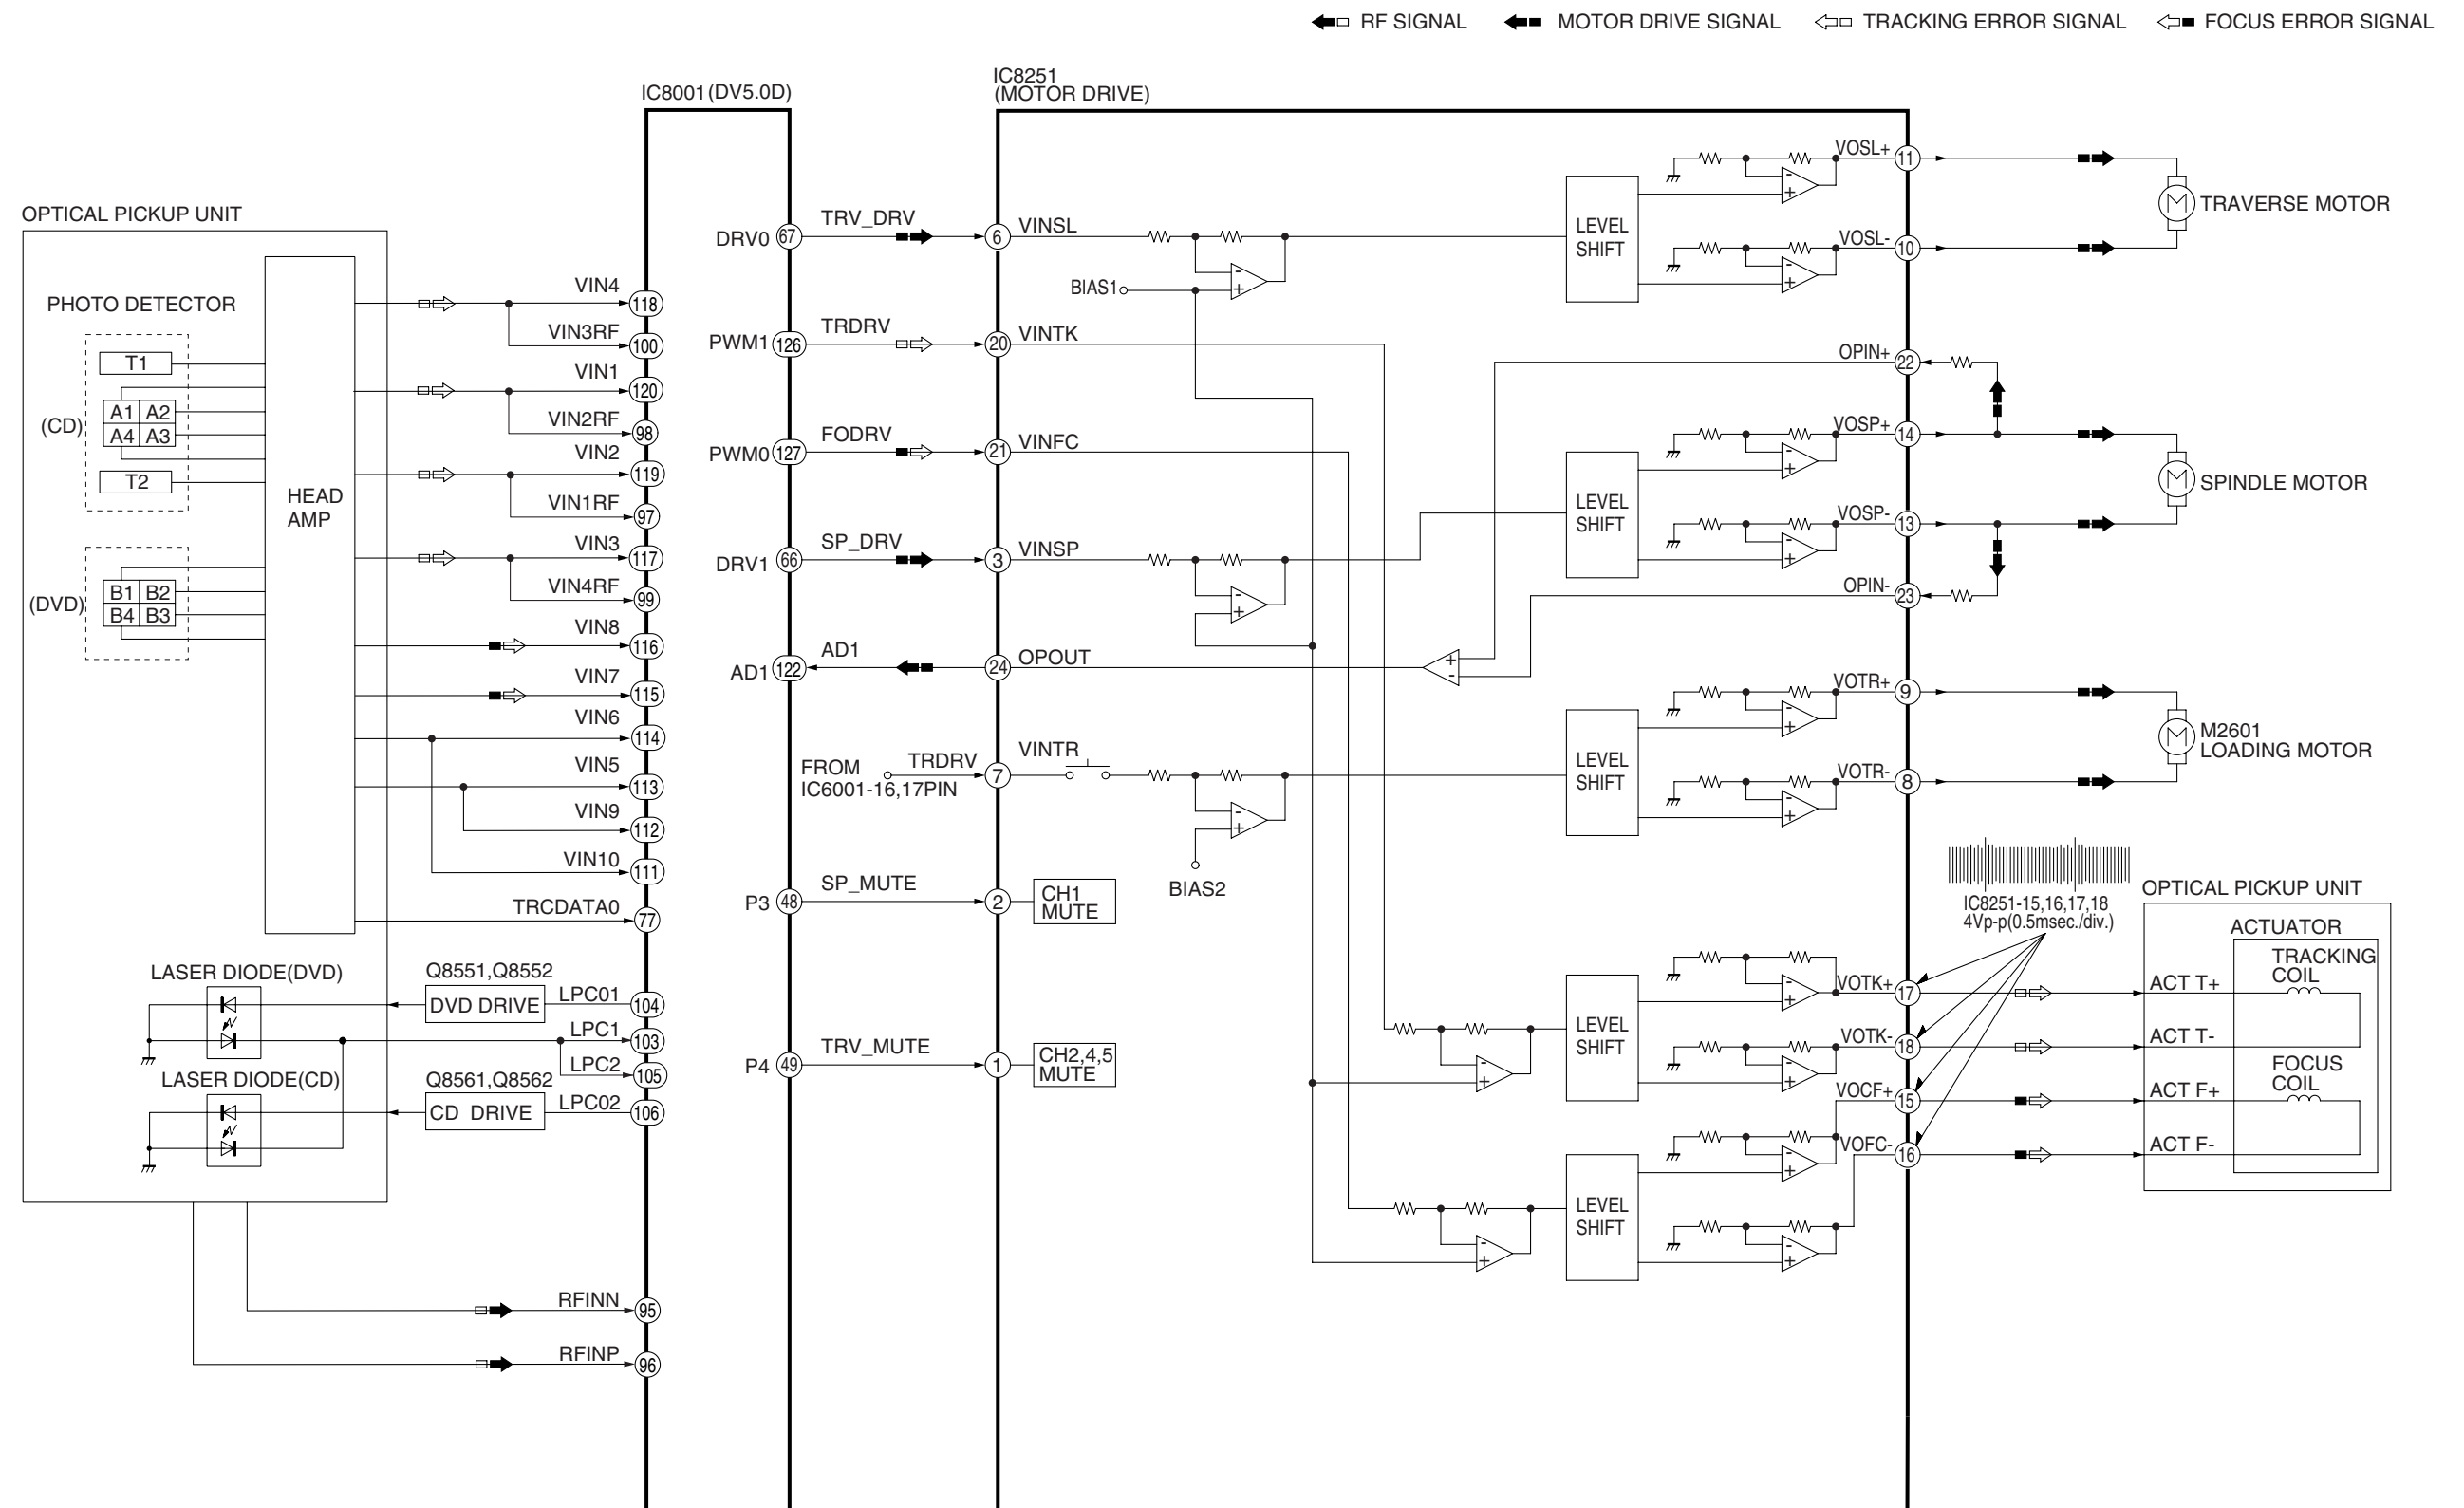
DVD-S54E/EB/EG
SERVO BLOCK DIAGRAM

14.4. VIDEO BLOCK DIAGRAM

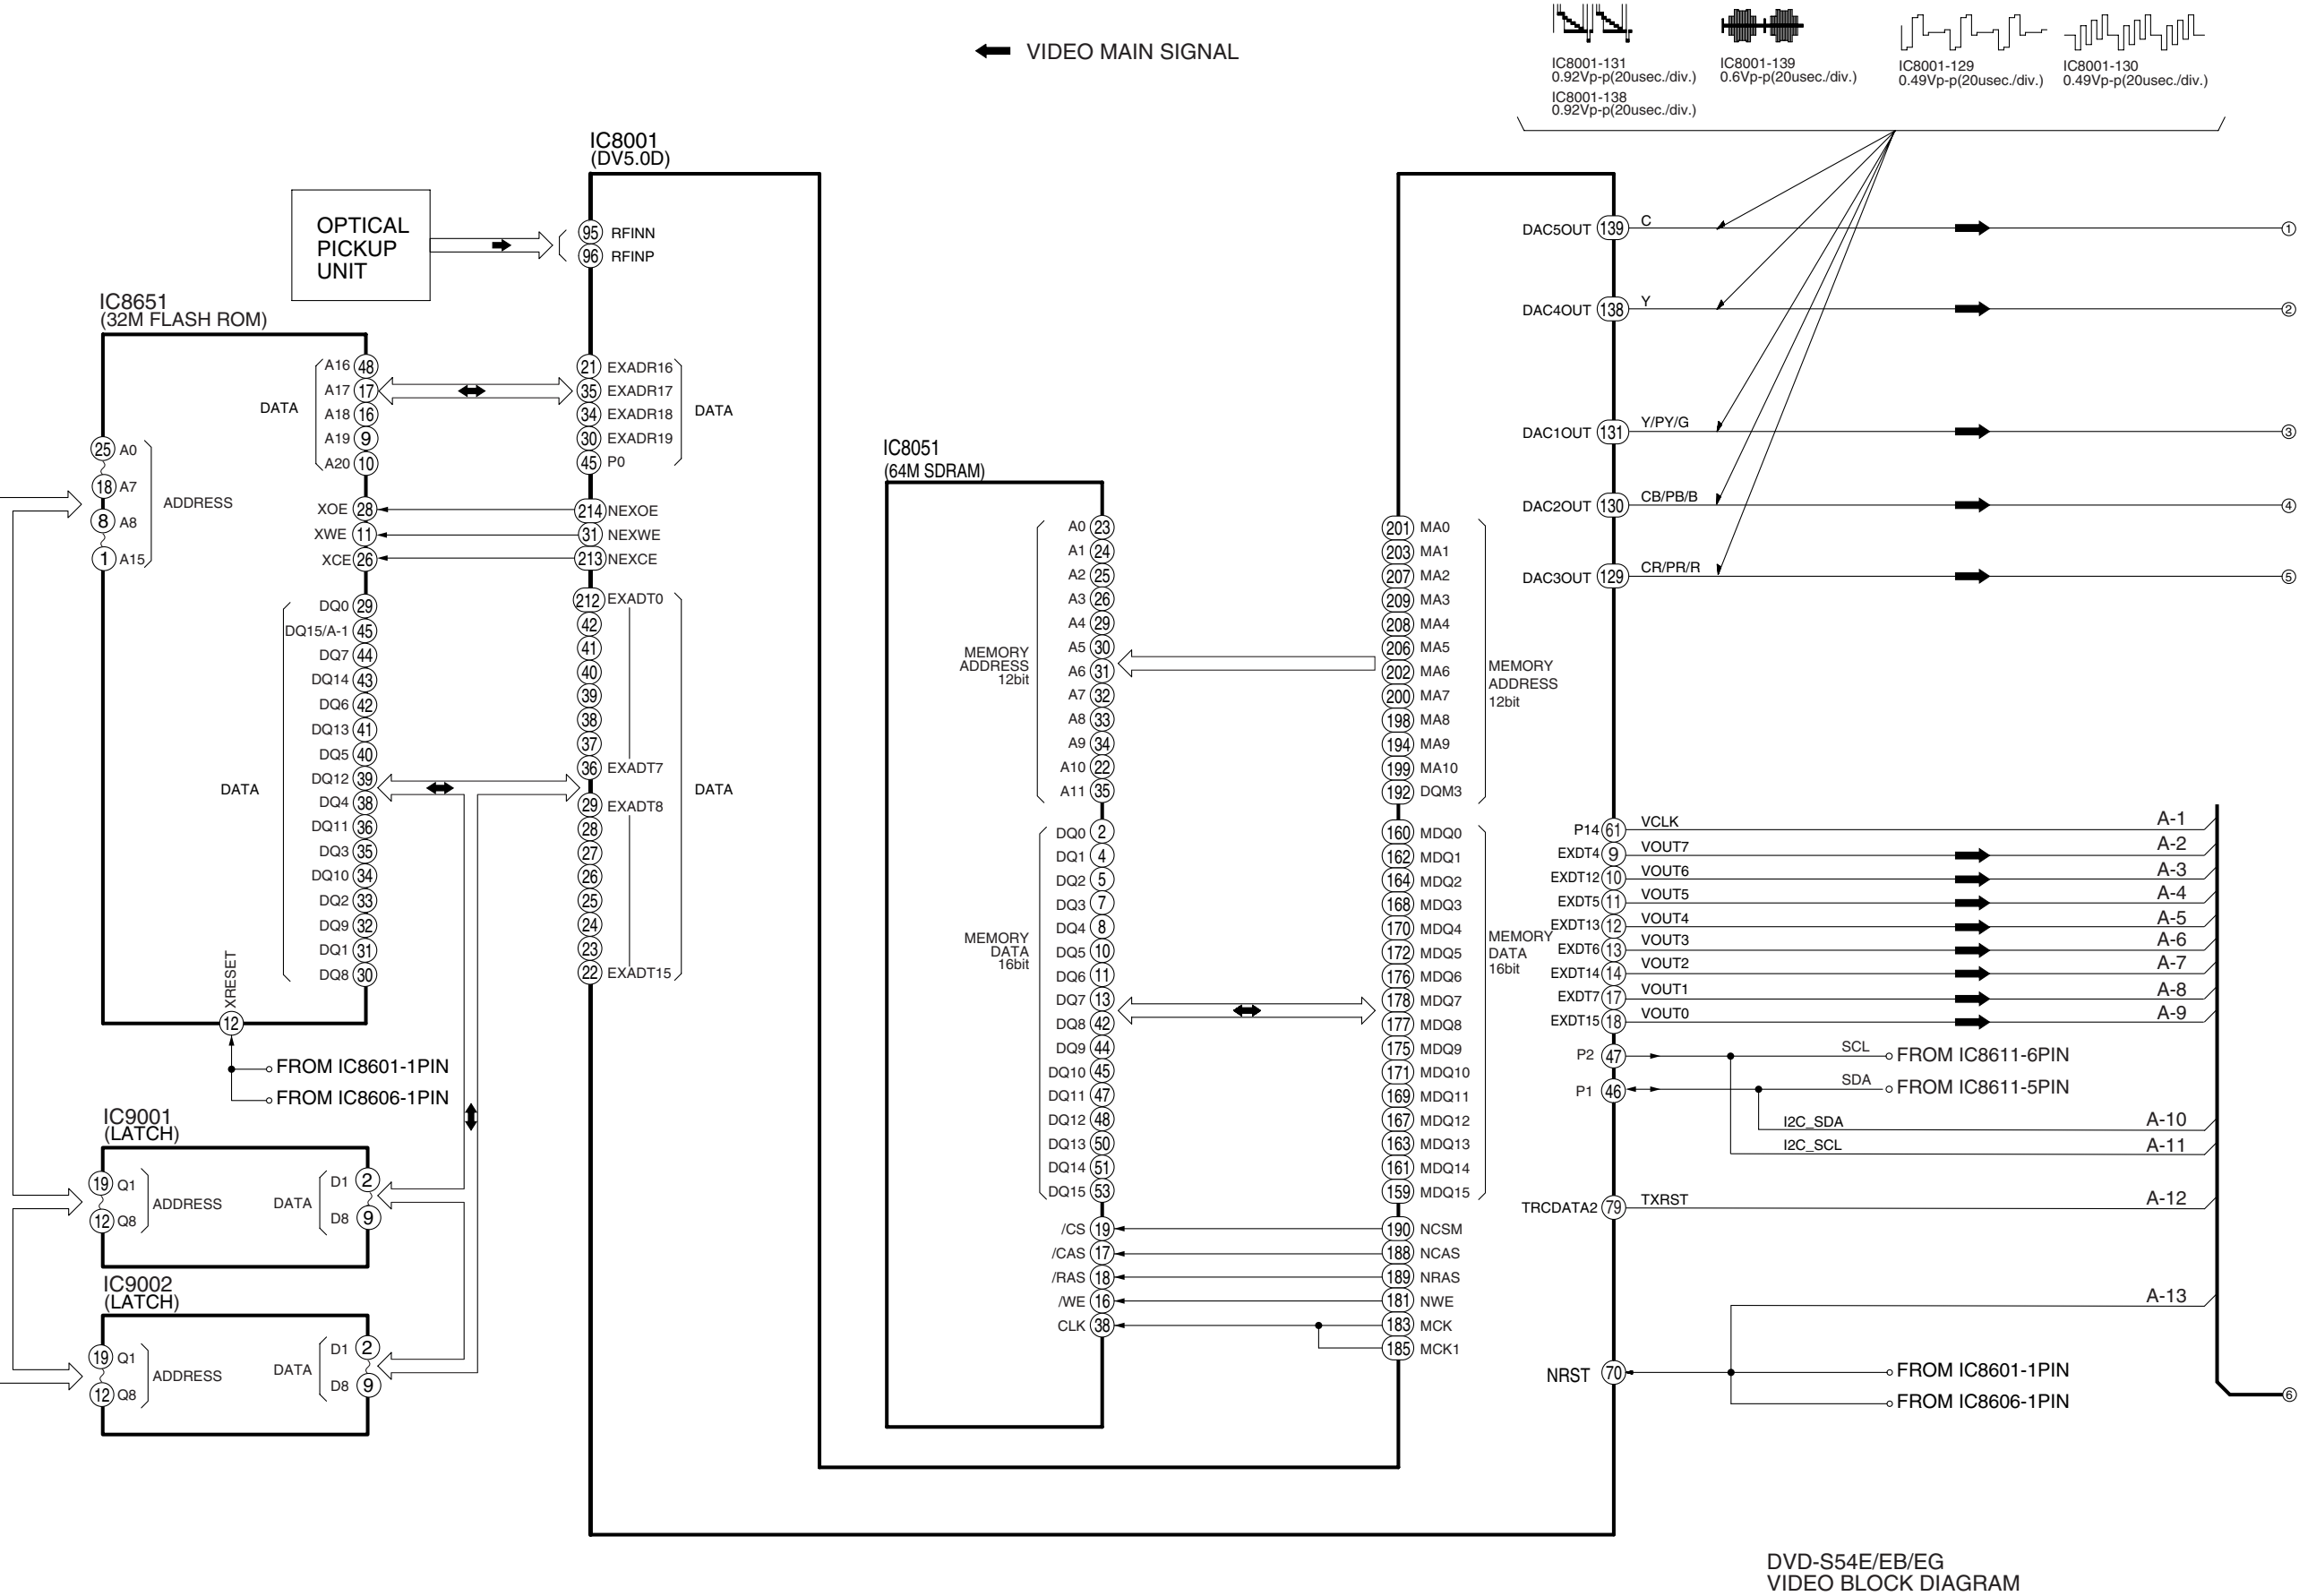

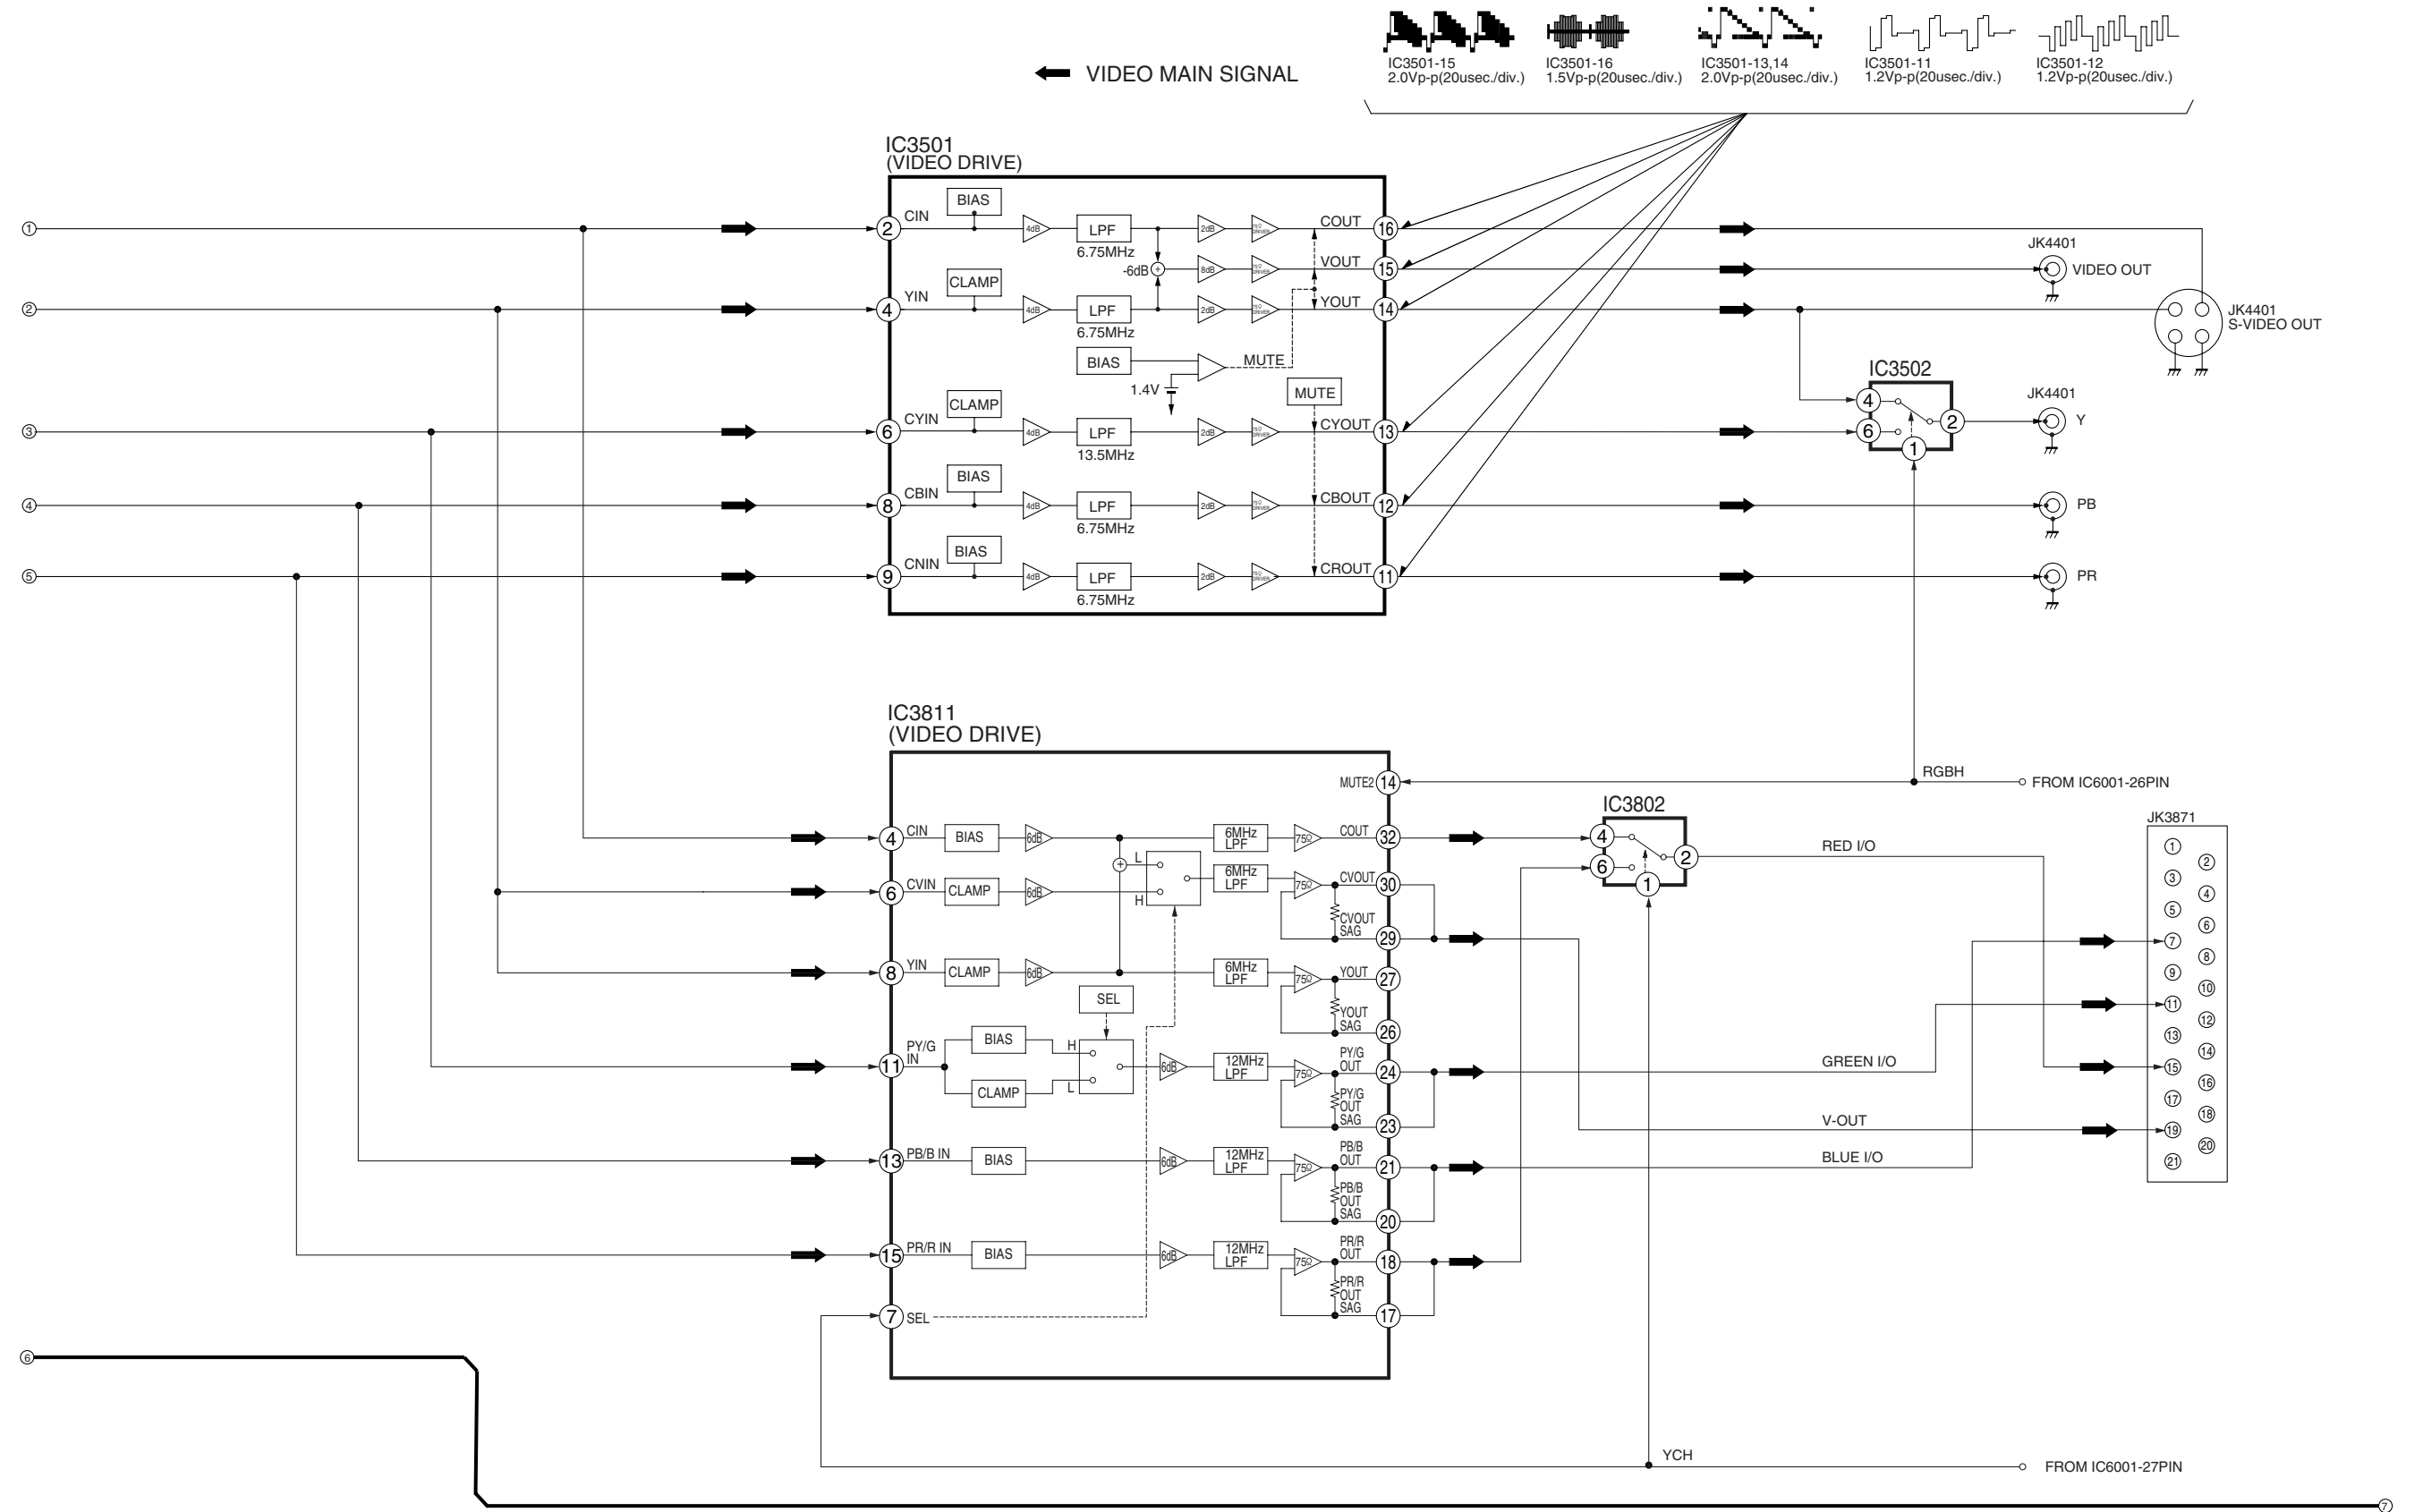


DVD-S54E/EB/EG
VIDEO BLOCK DIAGRAM

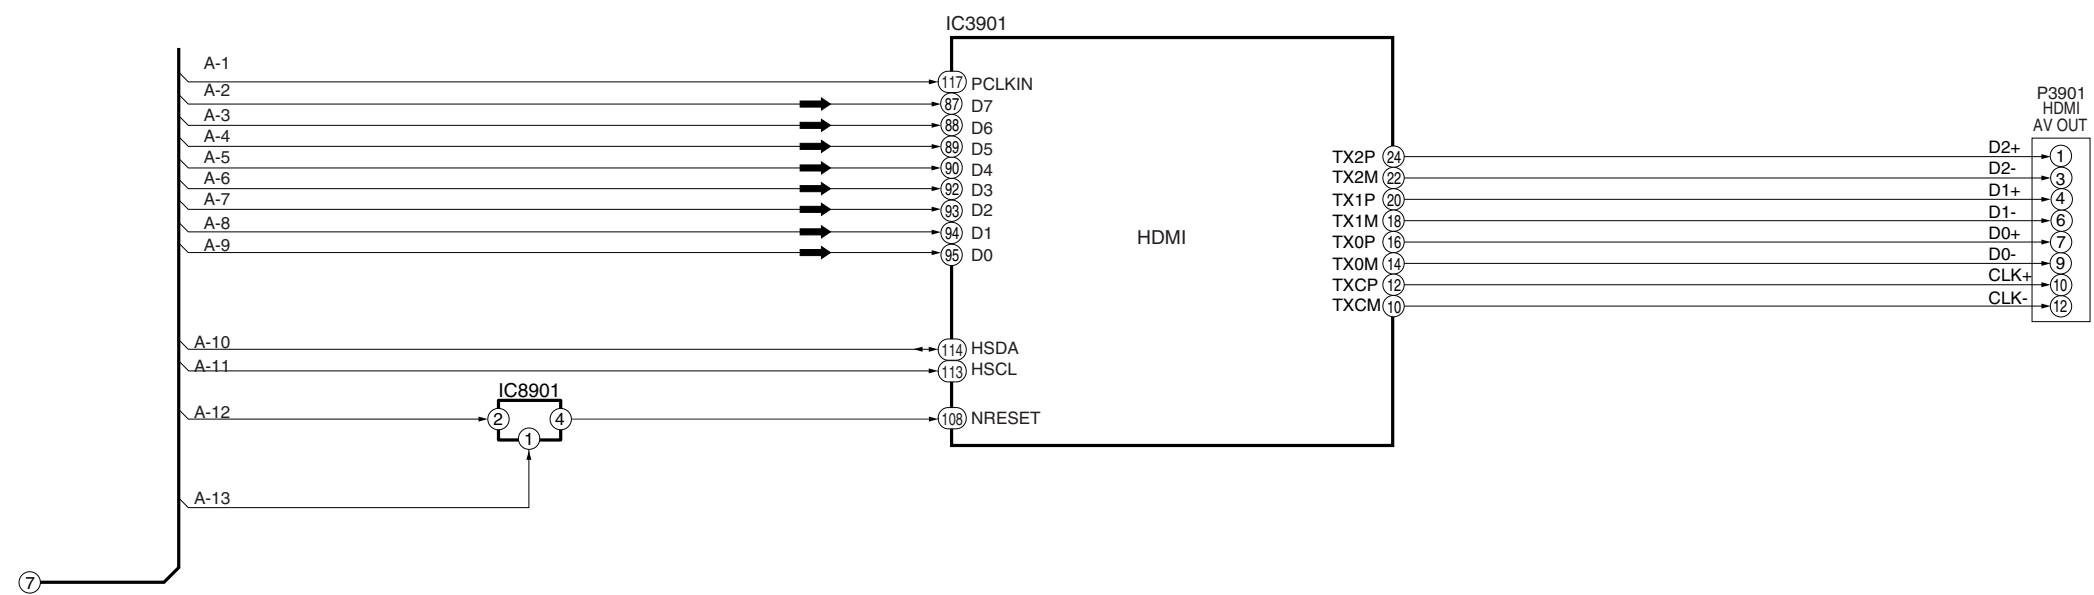


DVD-S54E/EB/EG
VIDEO BLOCK DIAGRAM

14.5. AUDIO BLOCK DIAGRAM

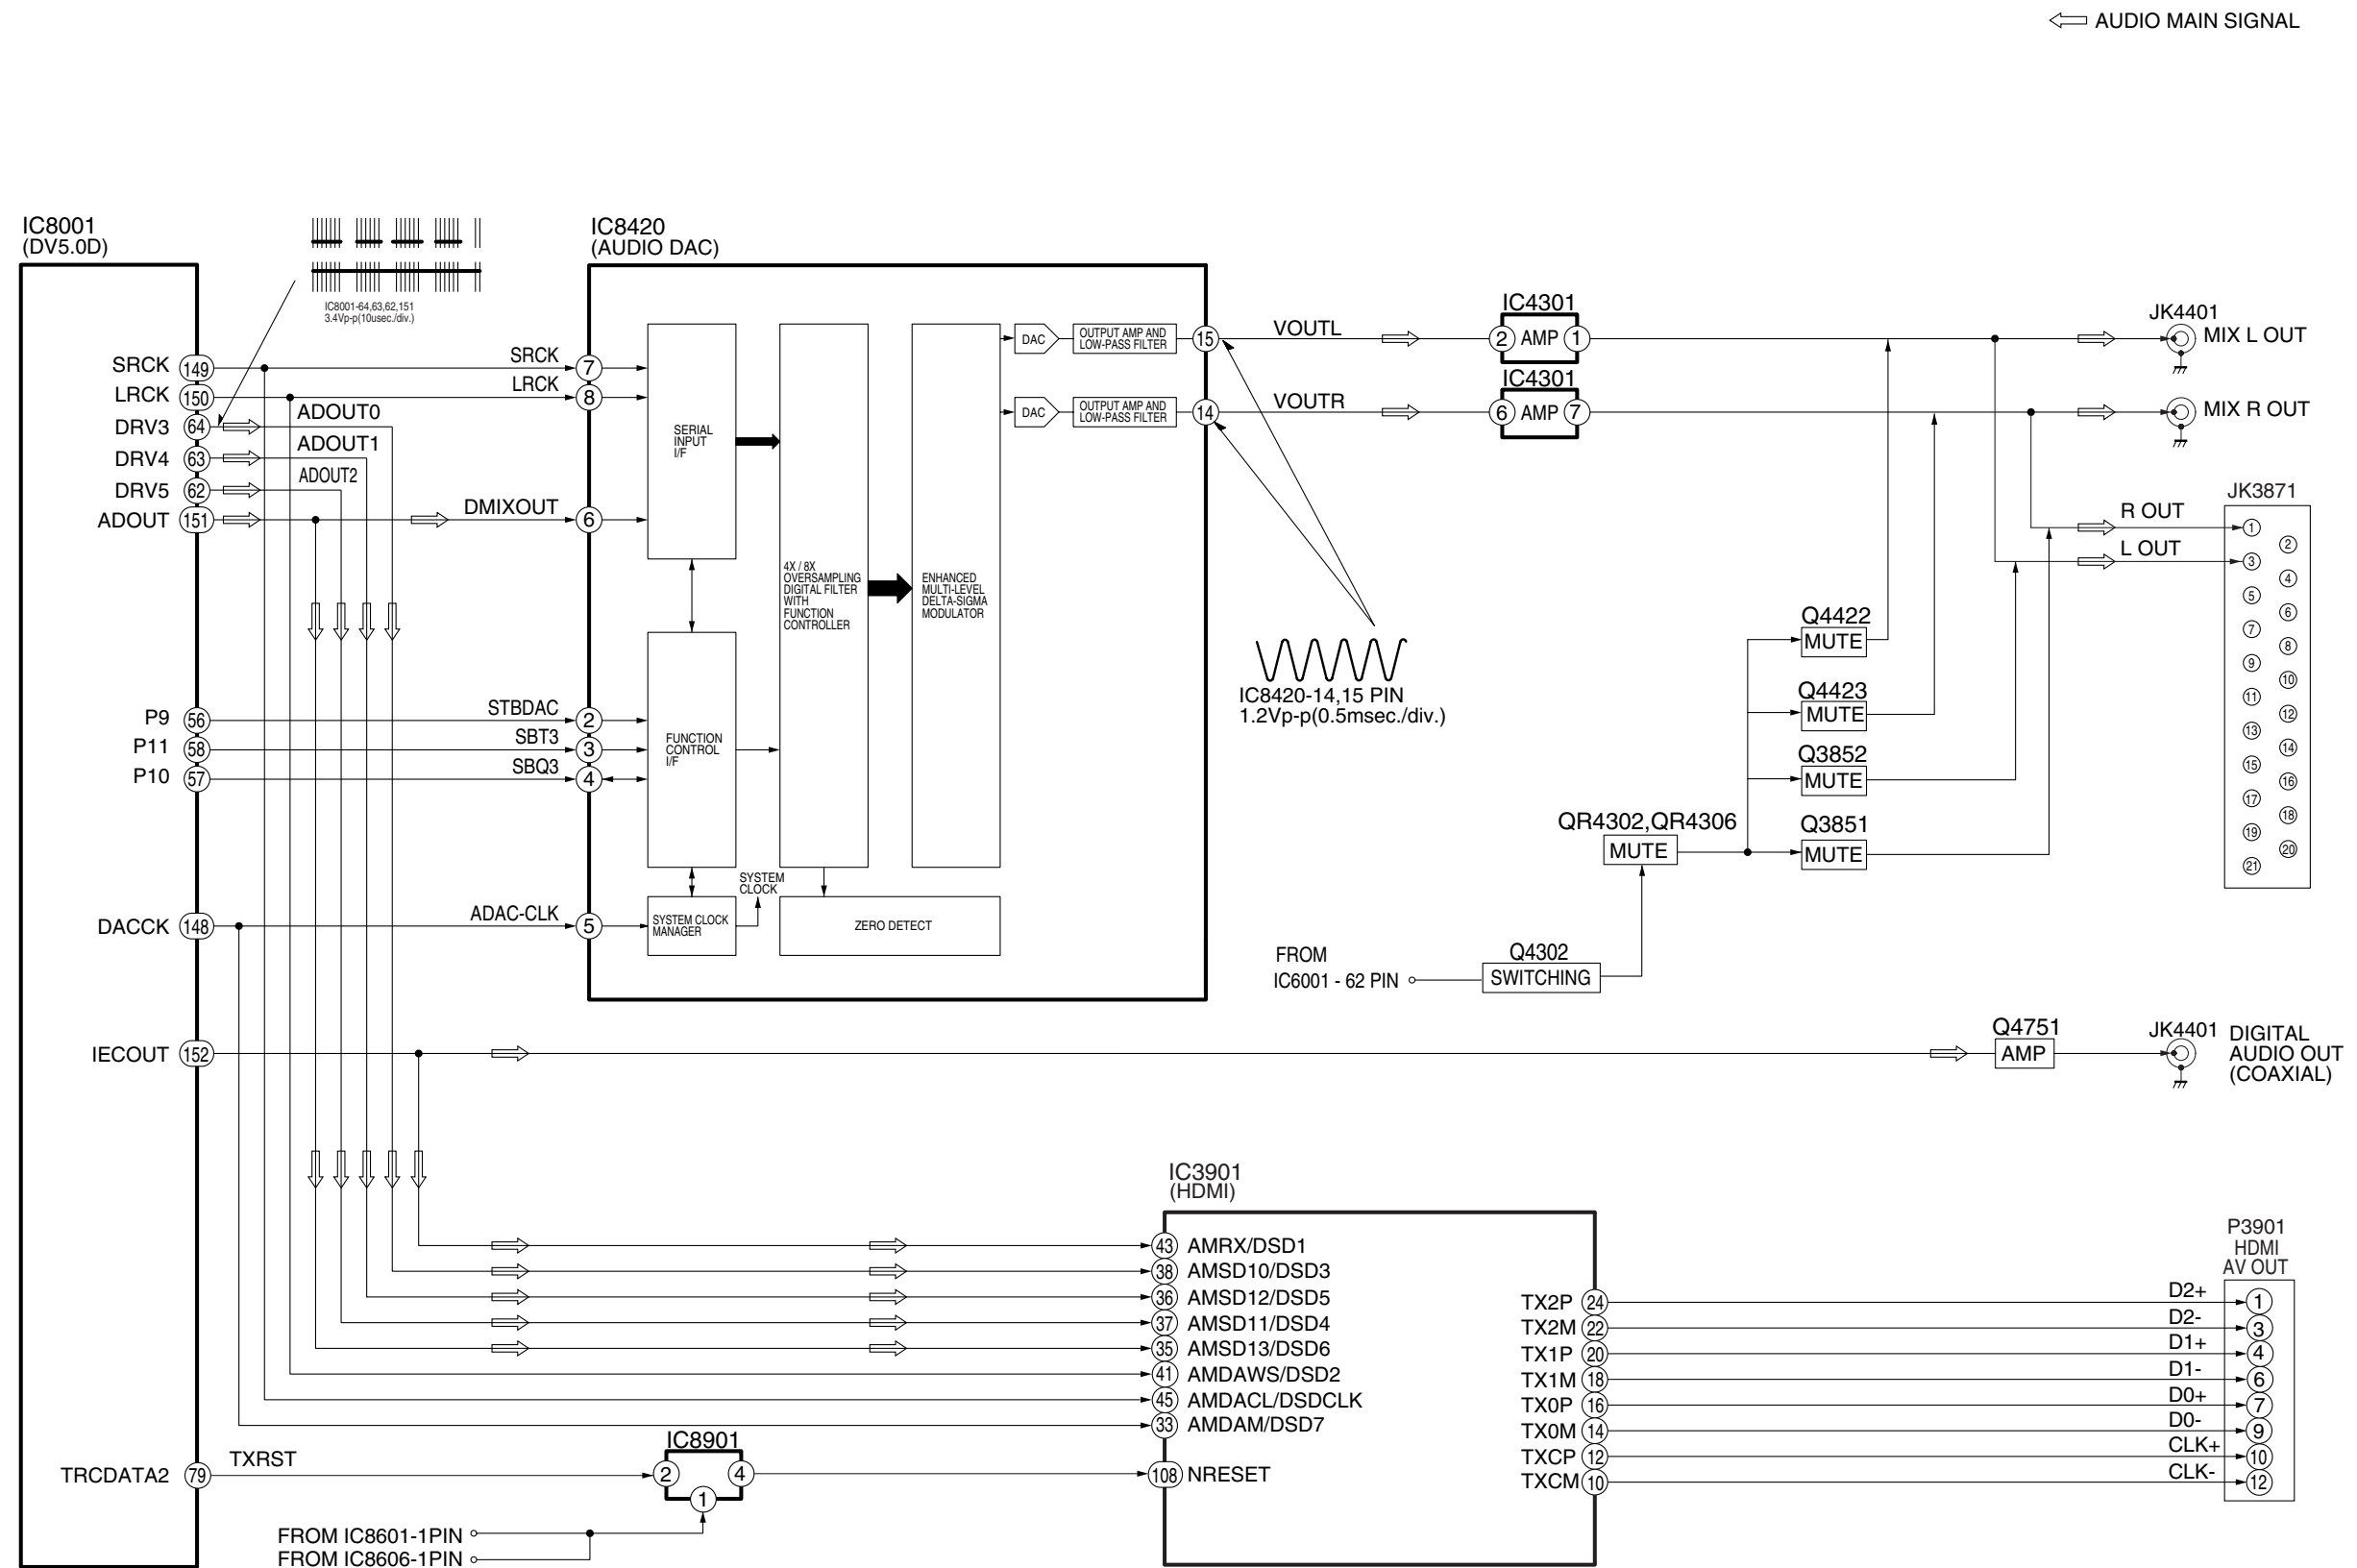DVD-S54E/EB/EG
AUDIO BLOCK DIAGRAM

15 INTERCONNECTION SCHEMATIC DIAGRAM & SCHEMATIC DIAGRAM NOTES

15.1. INTERCONNECTION SCHEMATIC DIAGRAM

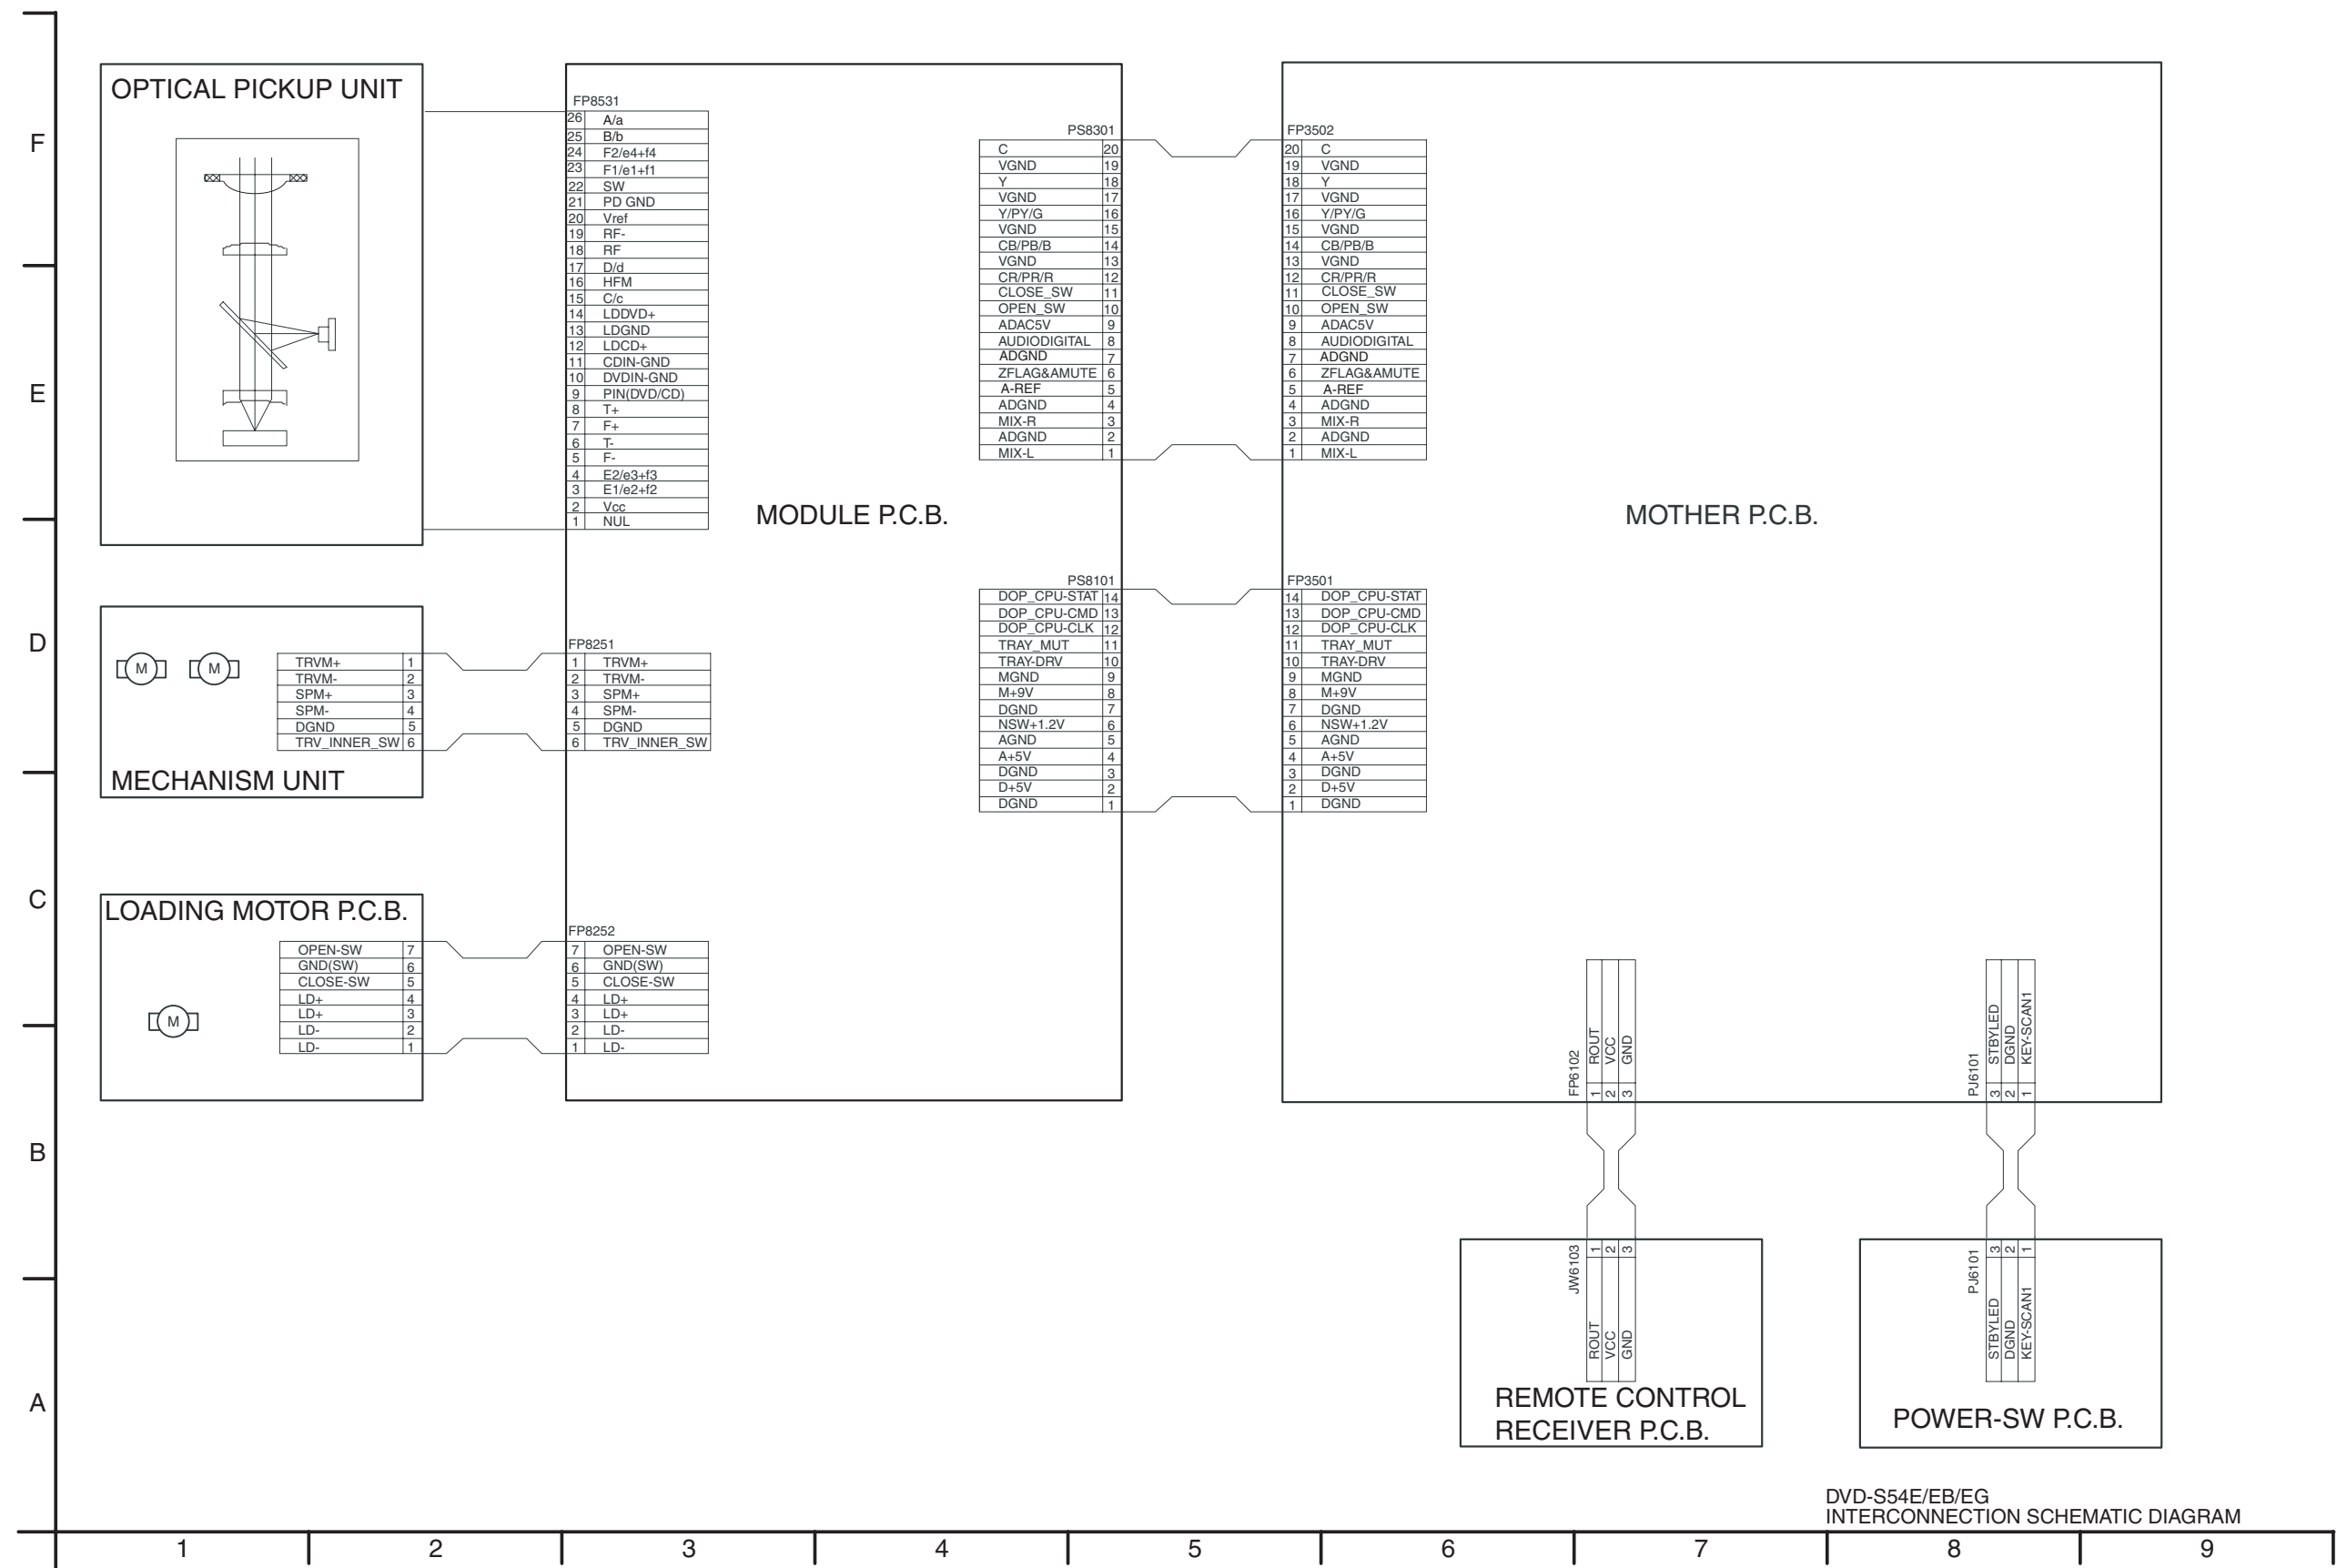

15.2. SCHEMATIC DIAGRAM NOTES

This schematic diagram may be modified at any time with the development of new technology.

Important safety notice:

Components identified by △ mark have special characteristics important for safety.

Furthermore, special parts which have purpose of fire-retardant (resistors), high-quality sound (capacitors), low-noise (resistors), etc. are used. When replacing any of components, be sure to use only manufacture’s specified parts shown in the parts list.

Important safety notice:

There are special components used in this equipment which are important for safety.

These parts are marked by △ in the schematic diagrams. It is essential that these critical parts should be replaced with manufacturer's specified parts to prevent shock, fire, or other hazards. Do not modify the original design without permission of manufacturer.

Caution!

IC and LSI are sensitive to static electricity.

Secondary trouble can be prevented by taking care during repair.

Cover the parts boxes made of plastics with aluminum foil.


Ground the soldering iron.

Put a conductive mat on the work table.


Do not touch the legs of IC or LSI with the fingers directly.

16 SCHEMATIC DIAGRAM

16.1. POWER SUPPLY SECTION (MOTHER P.C.B. (1 / 2)) SCHEMATIC DIAGRAM

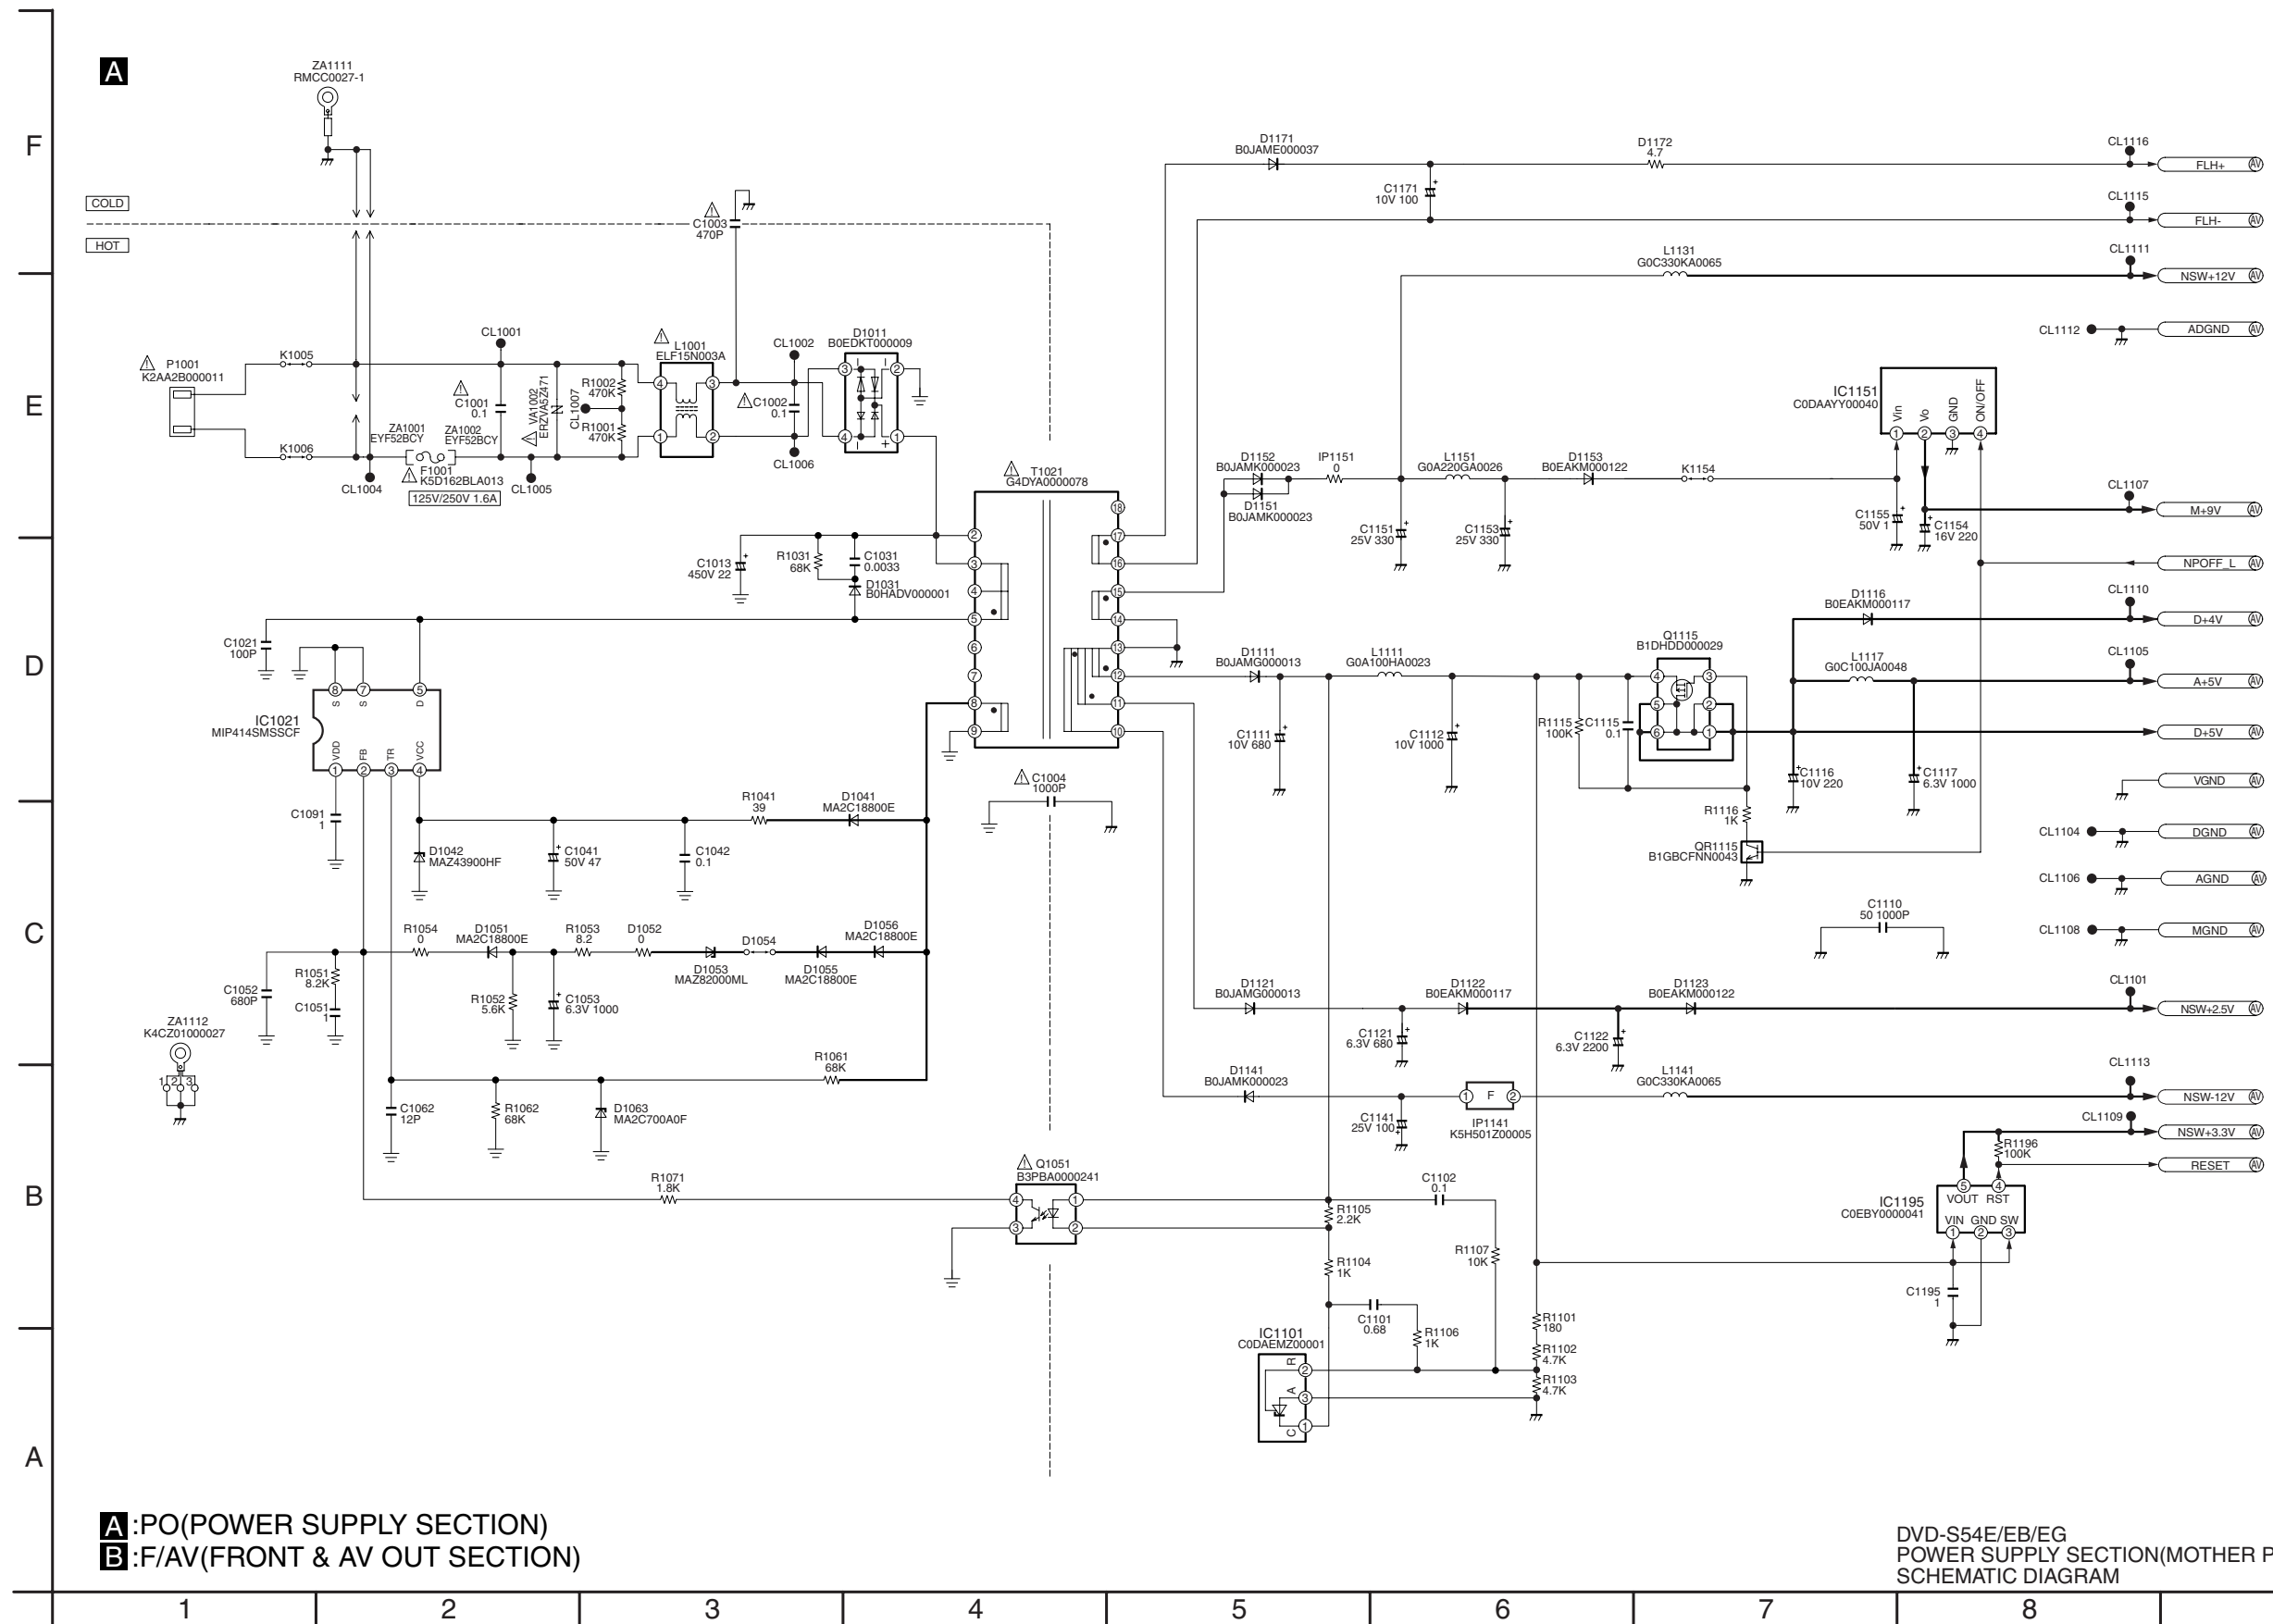


16.2. FRONT & AV OUT SECTION (MOTHER P.C.B. (2 / 2)) SCHEMATIC DIAGRAM

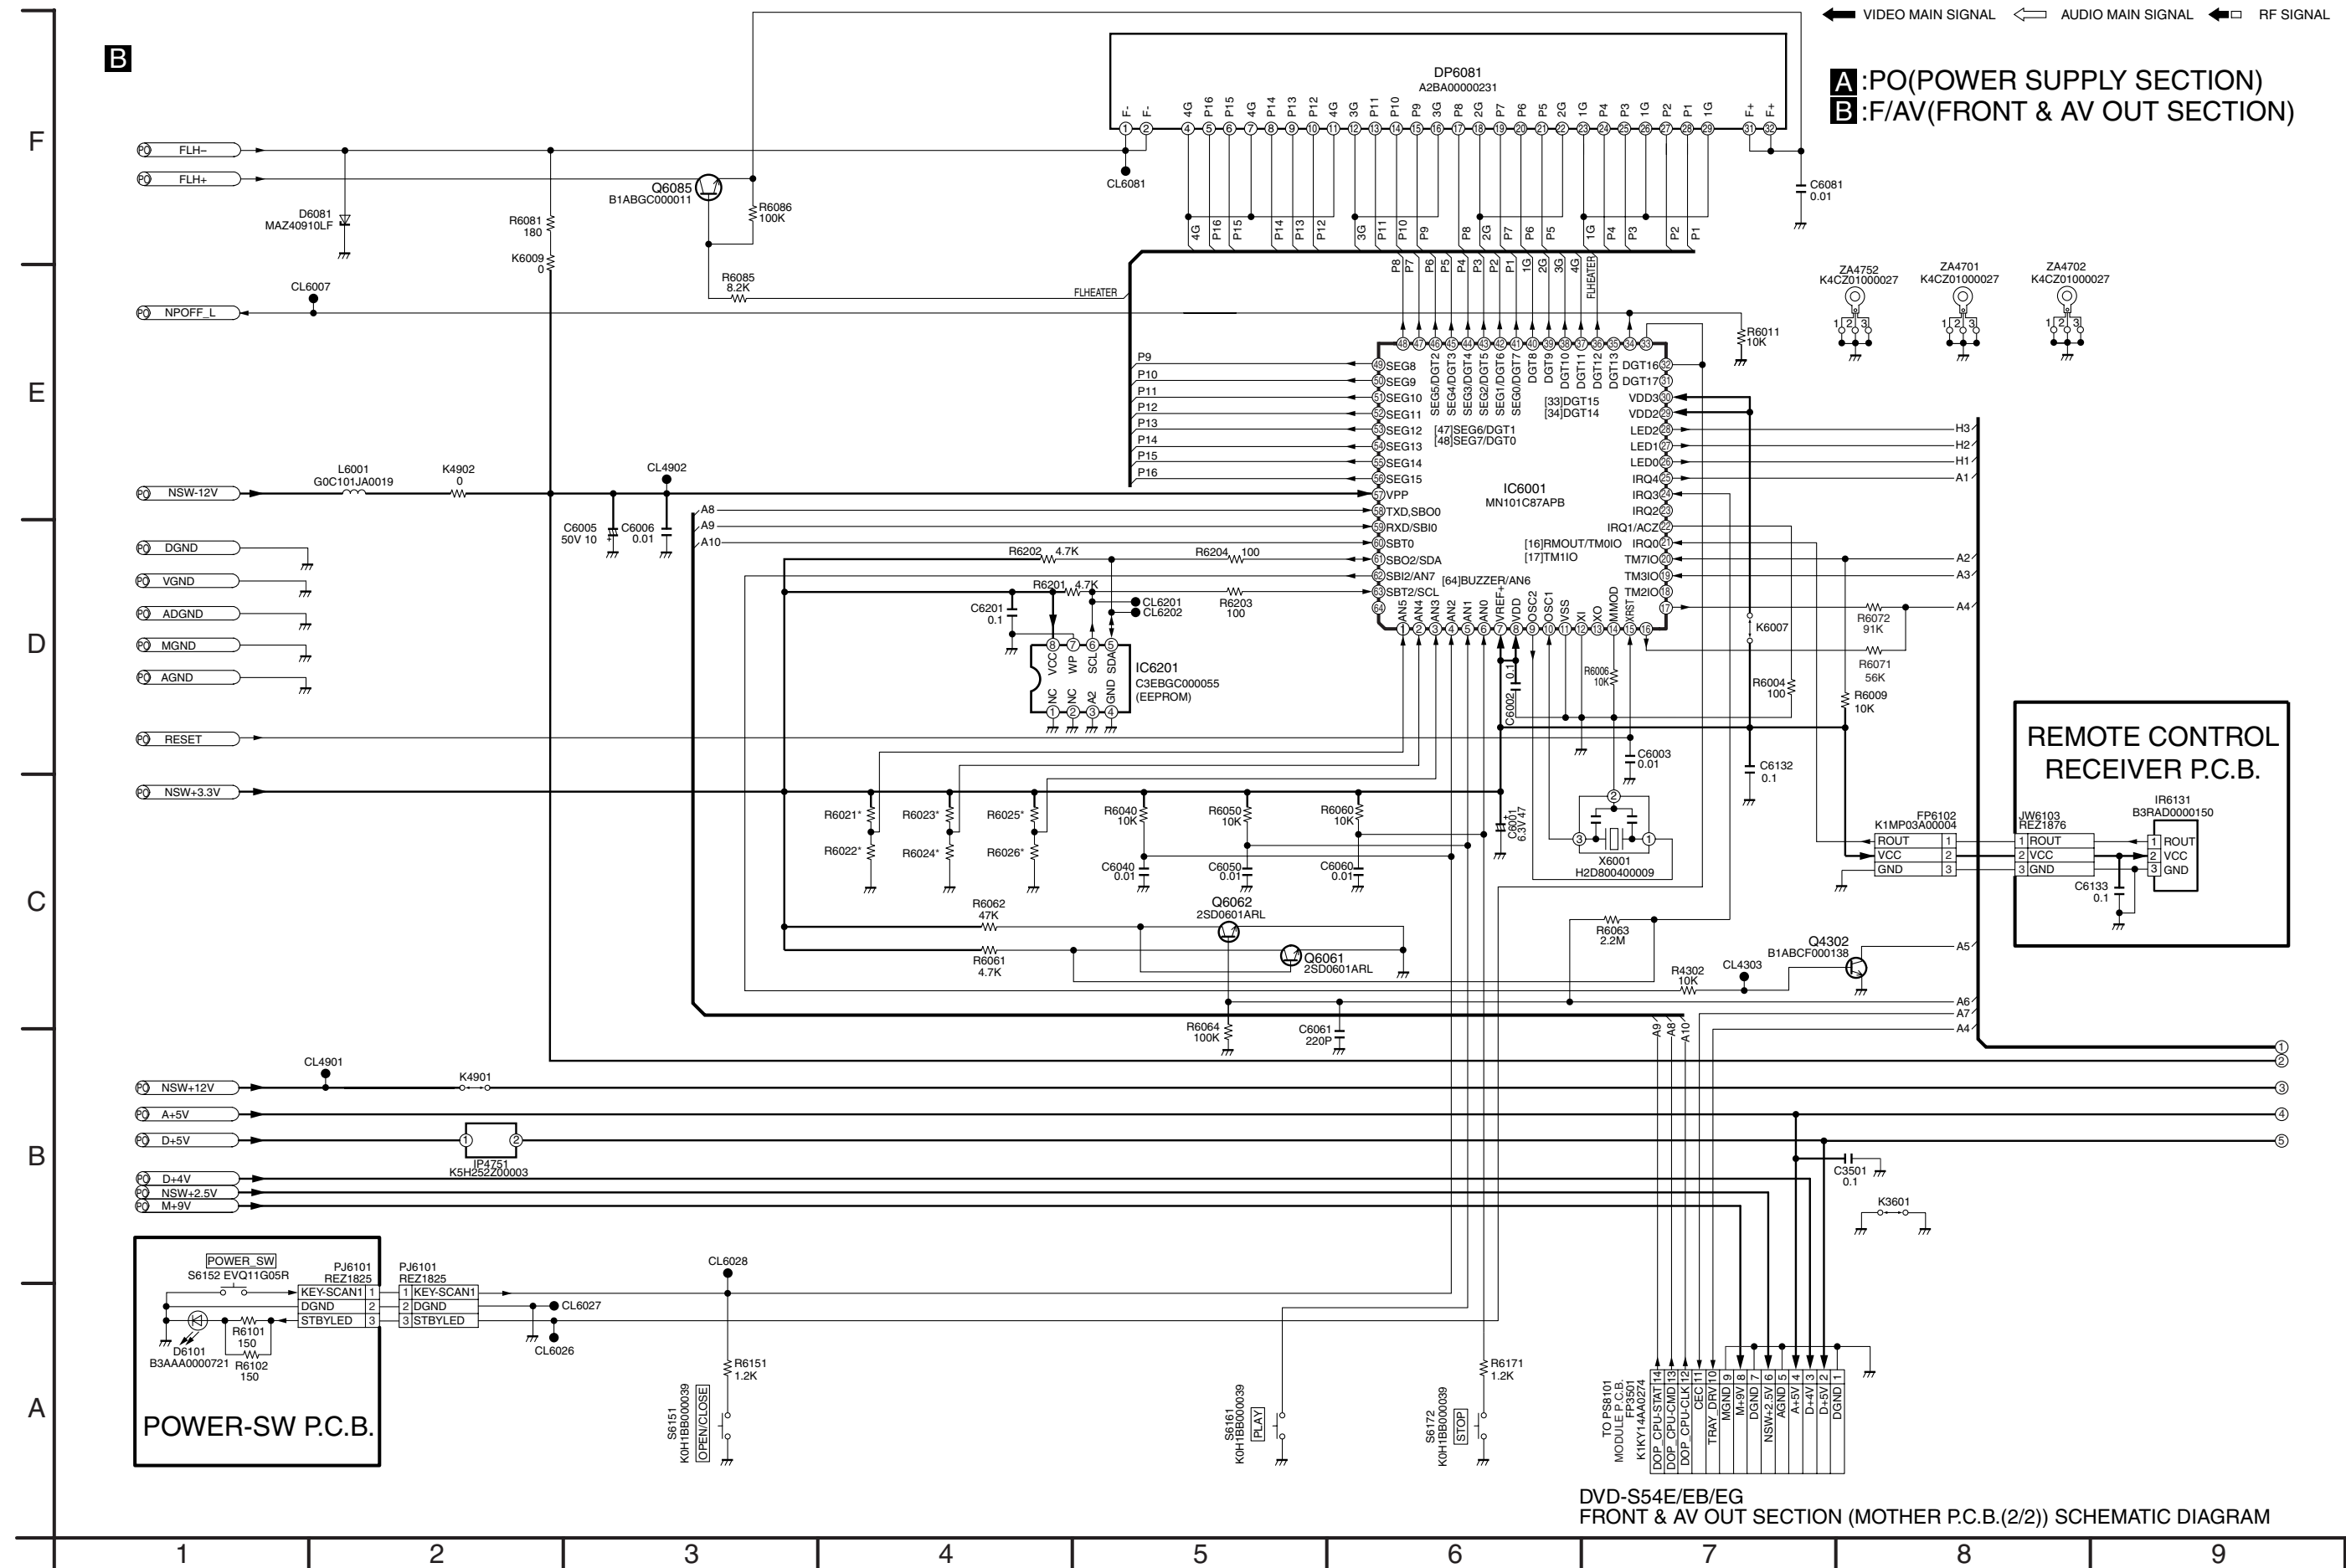


VIDEO MAIN SIGNAL AUDIO MAIN SIGNAL RF SIGNAL

B

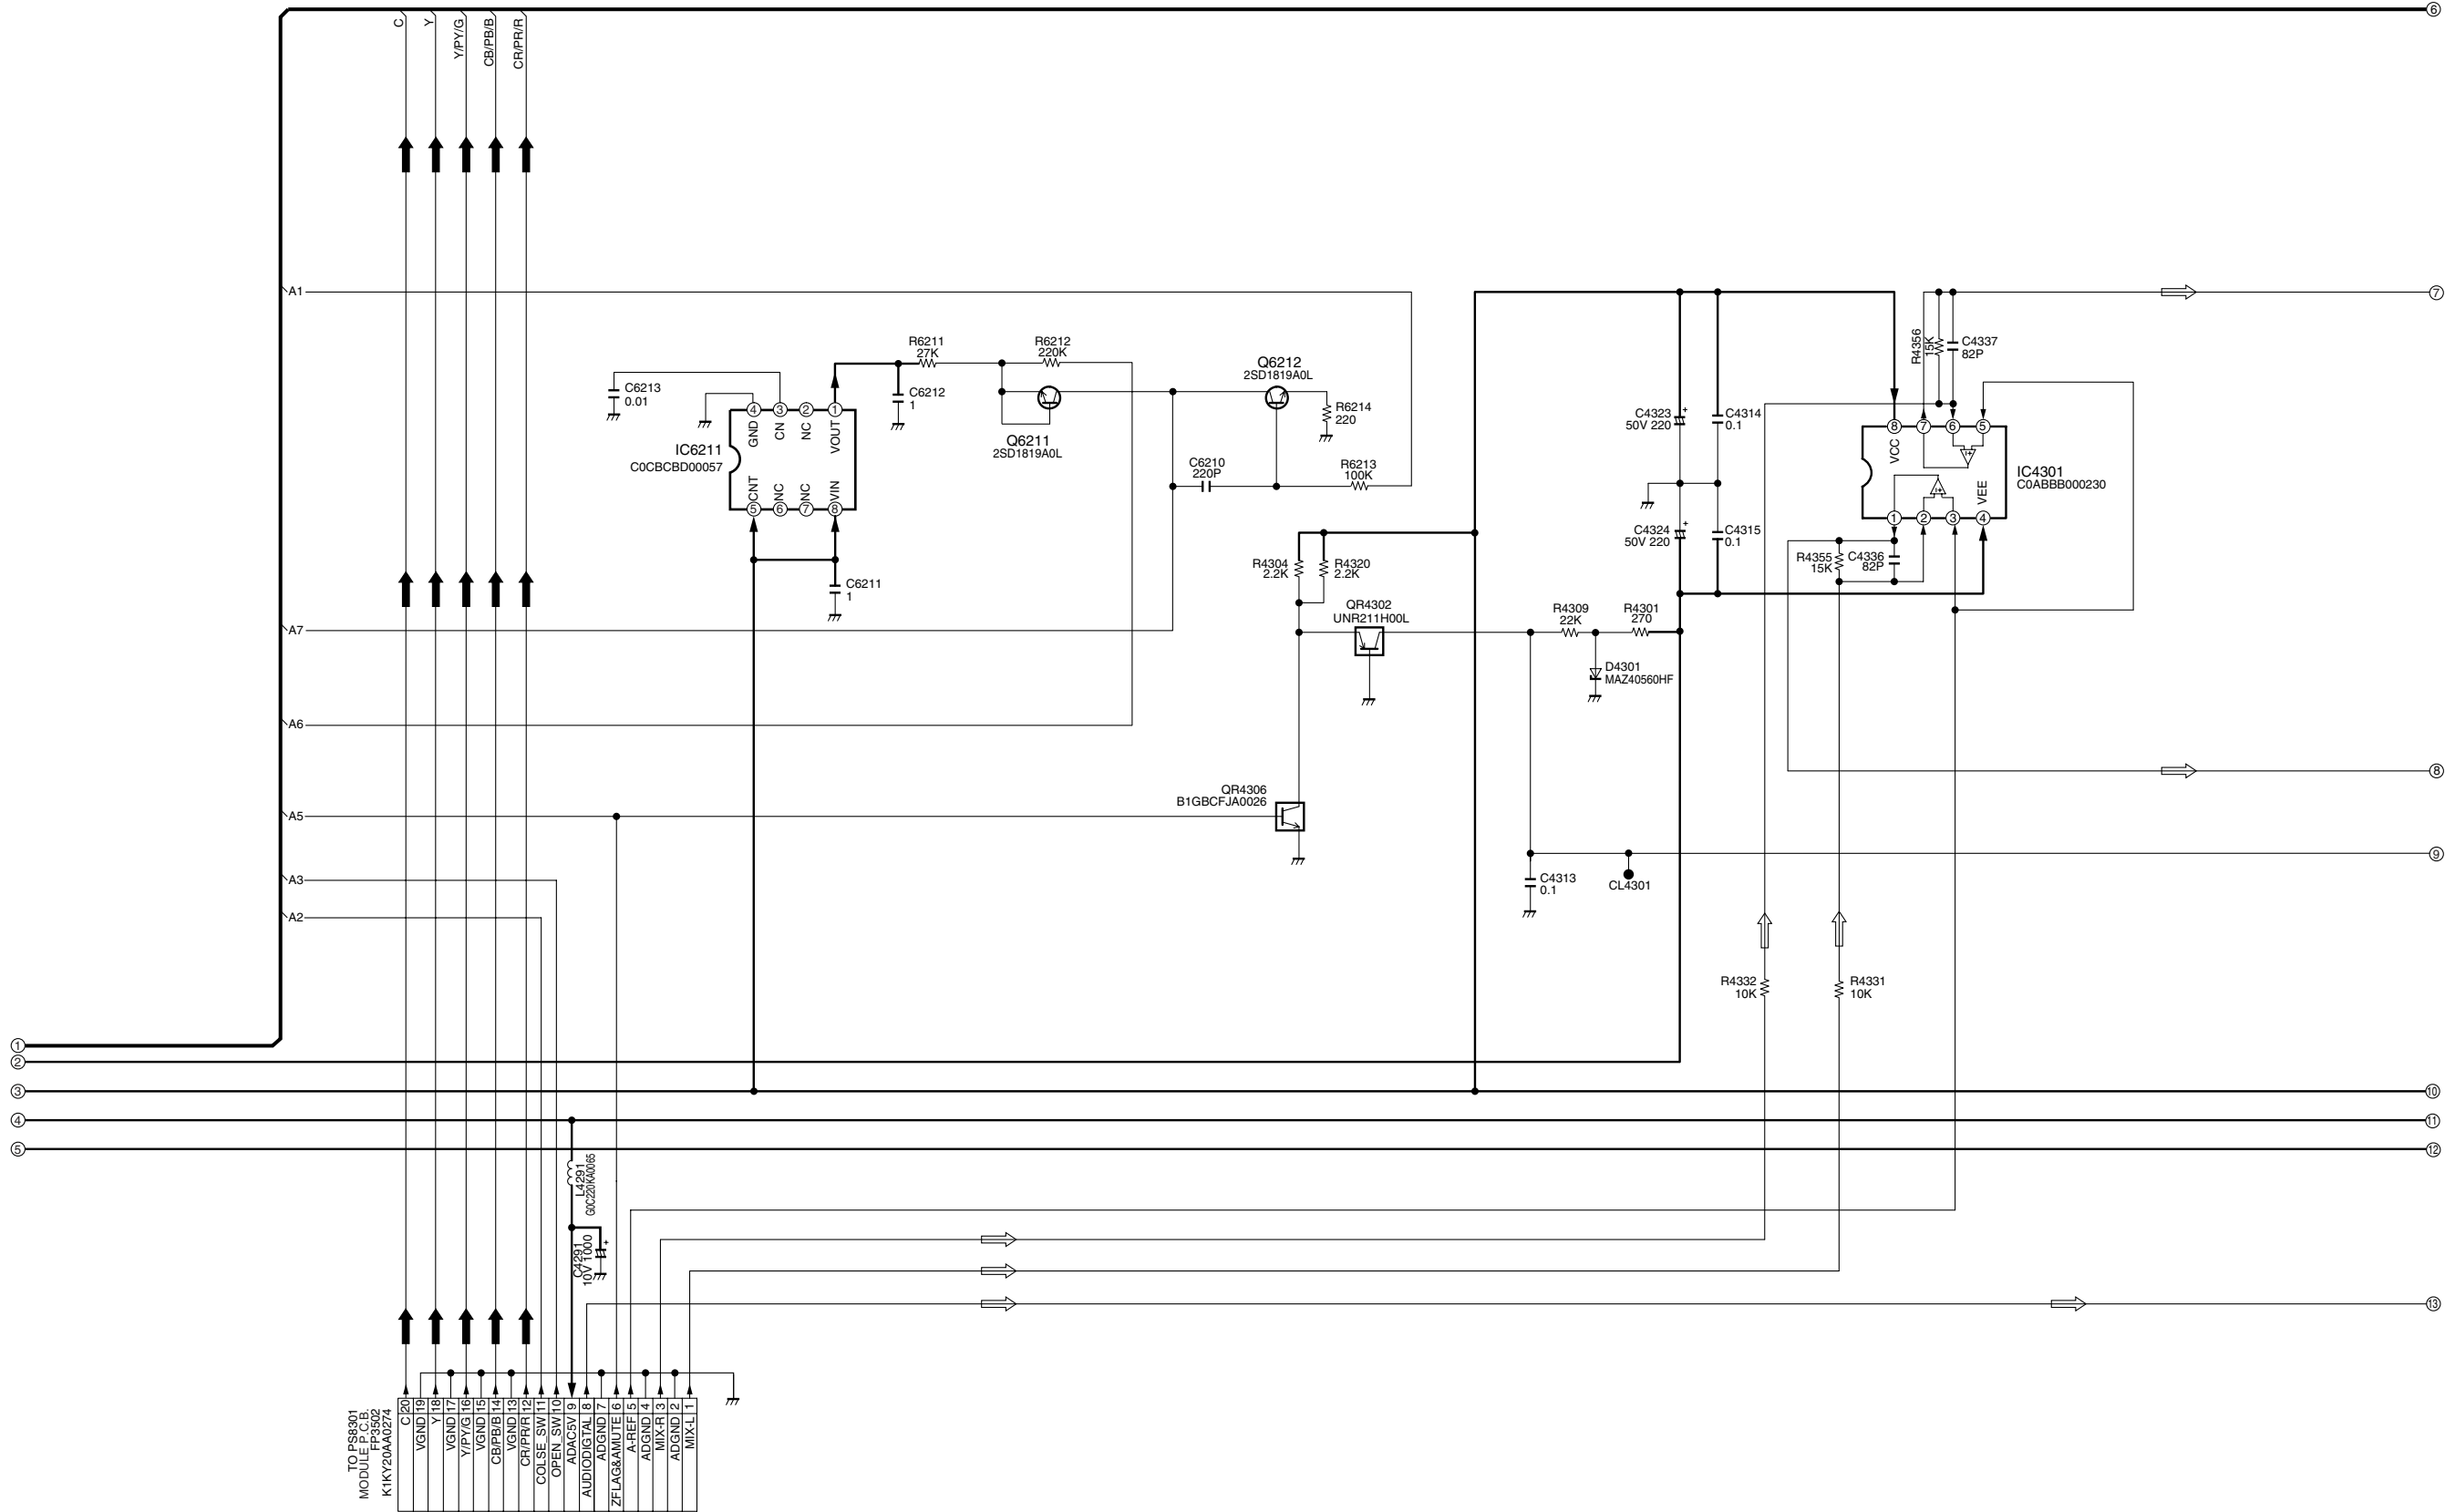


DVD-S54E/EB/EG
FRONT & AV OUT SECTION (MOTHER P.C.B.(2/2)) SCHEMATIC DIAGRAM

16.3. MODULE SCHEMATIC DIAGRAM

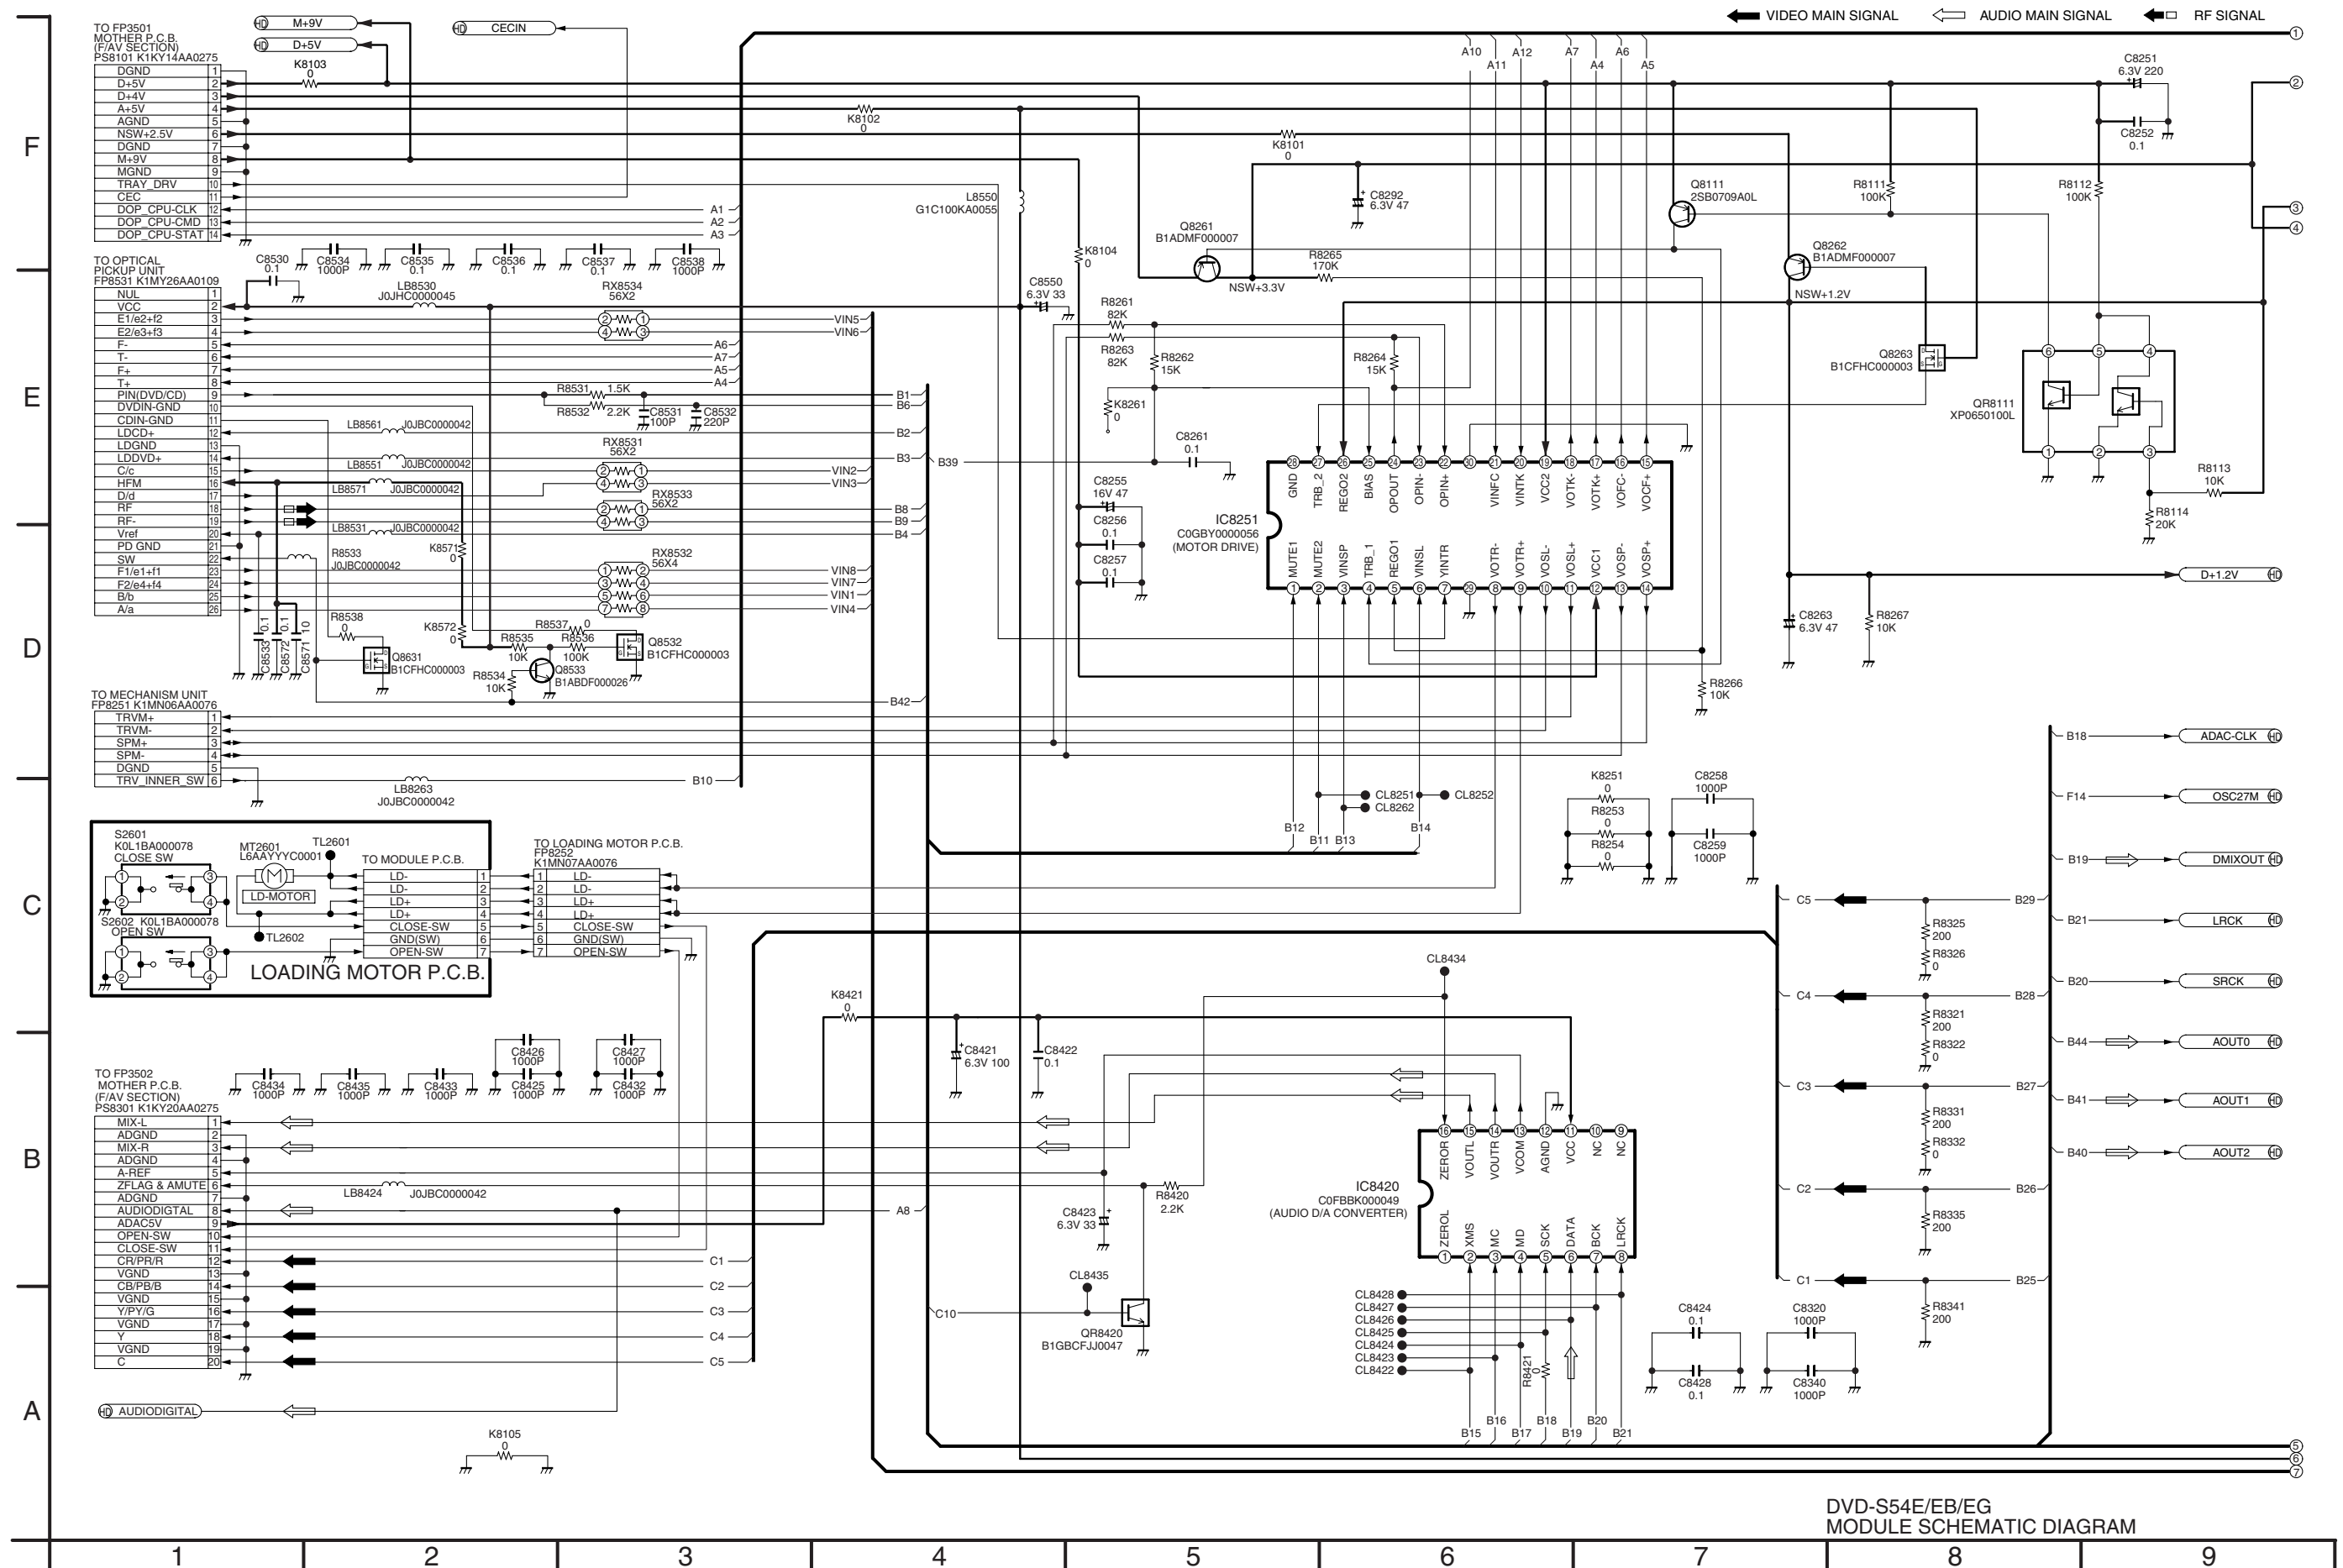




16.4. HDMI SCHEMATIC DIAGRAM

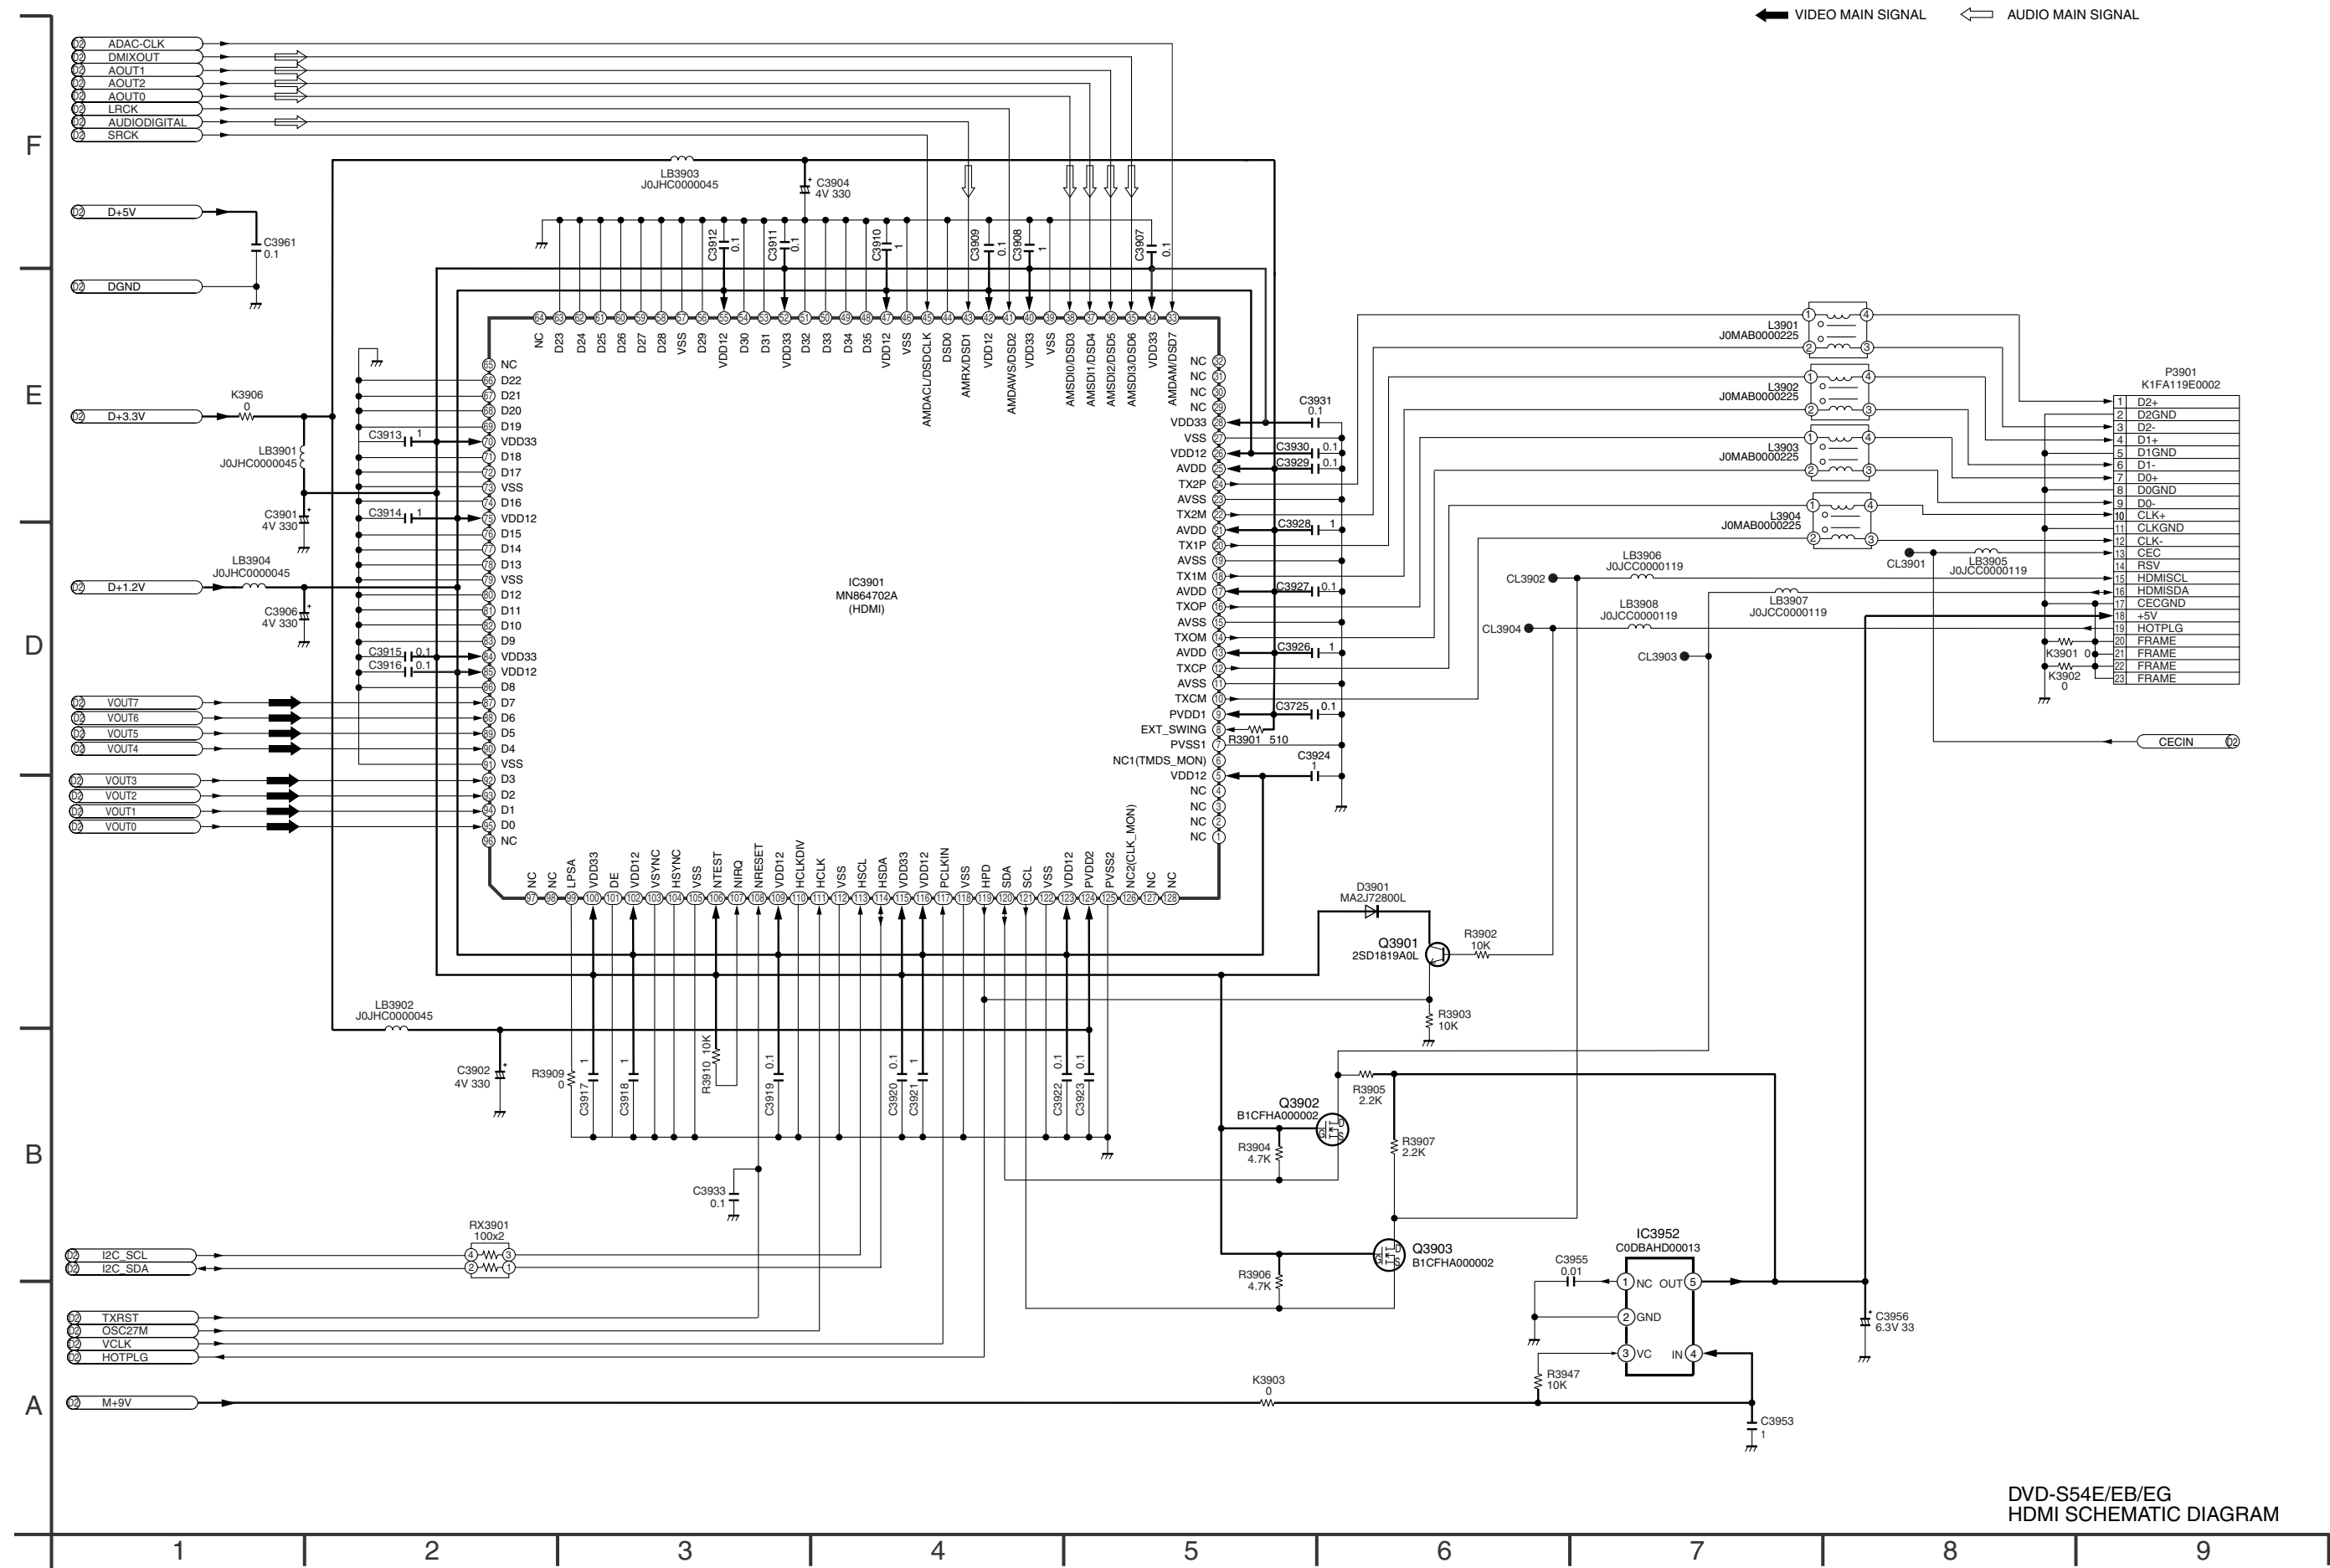

17 PRINT CIRCUIT BOARD

17.1. MOTHER P.C.B.

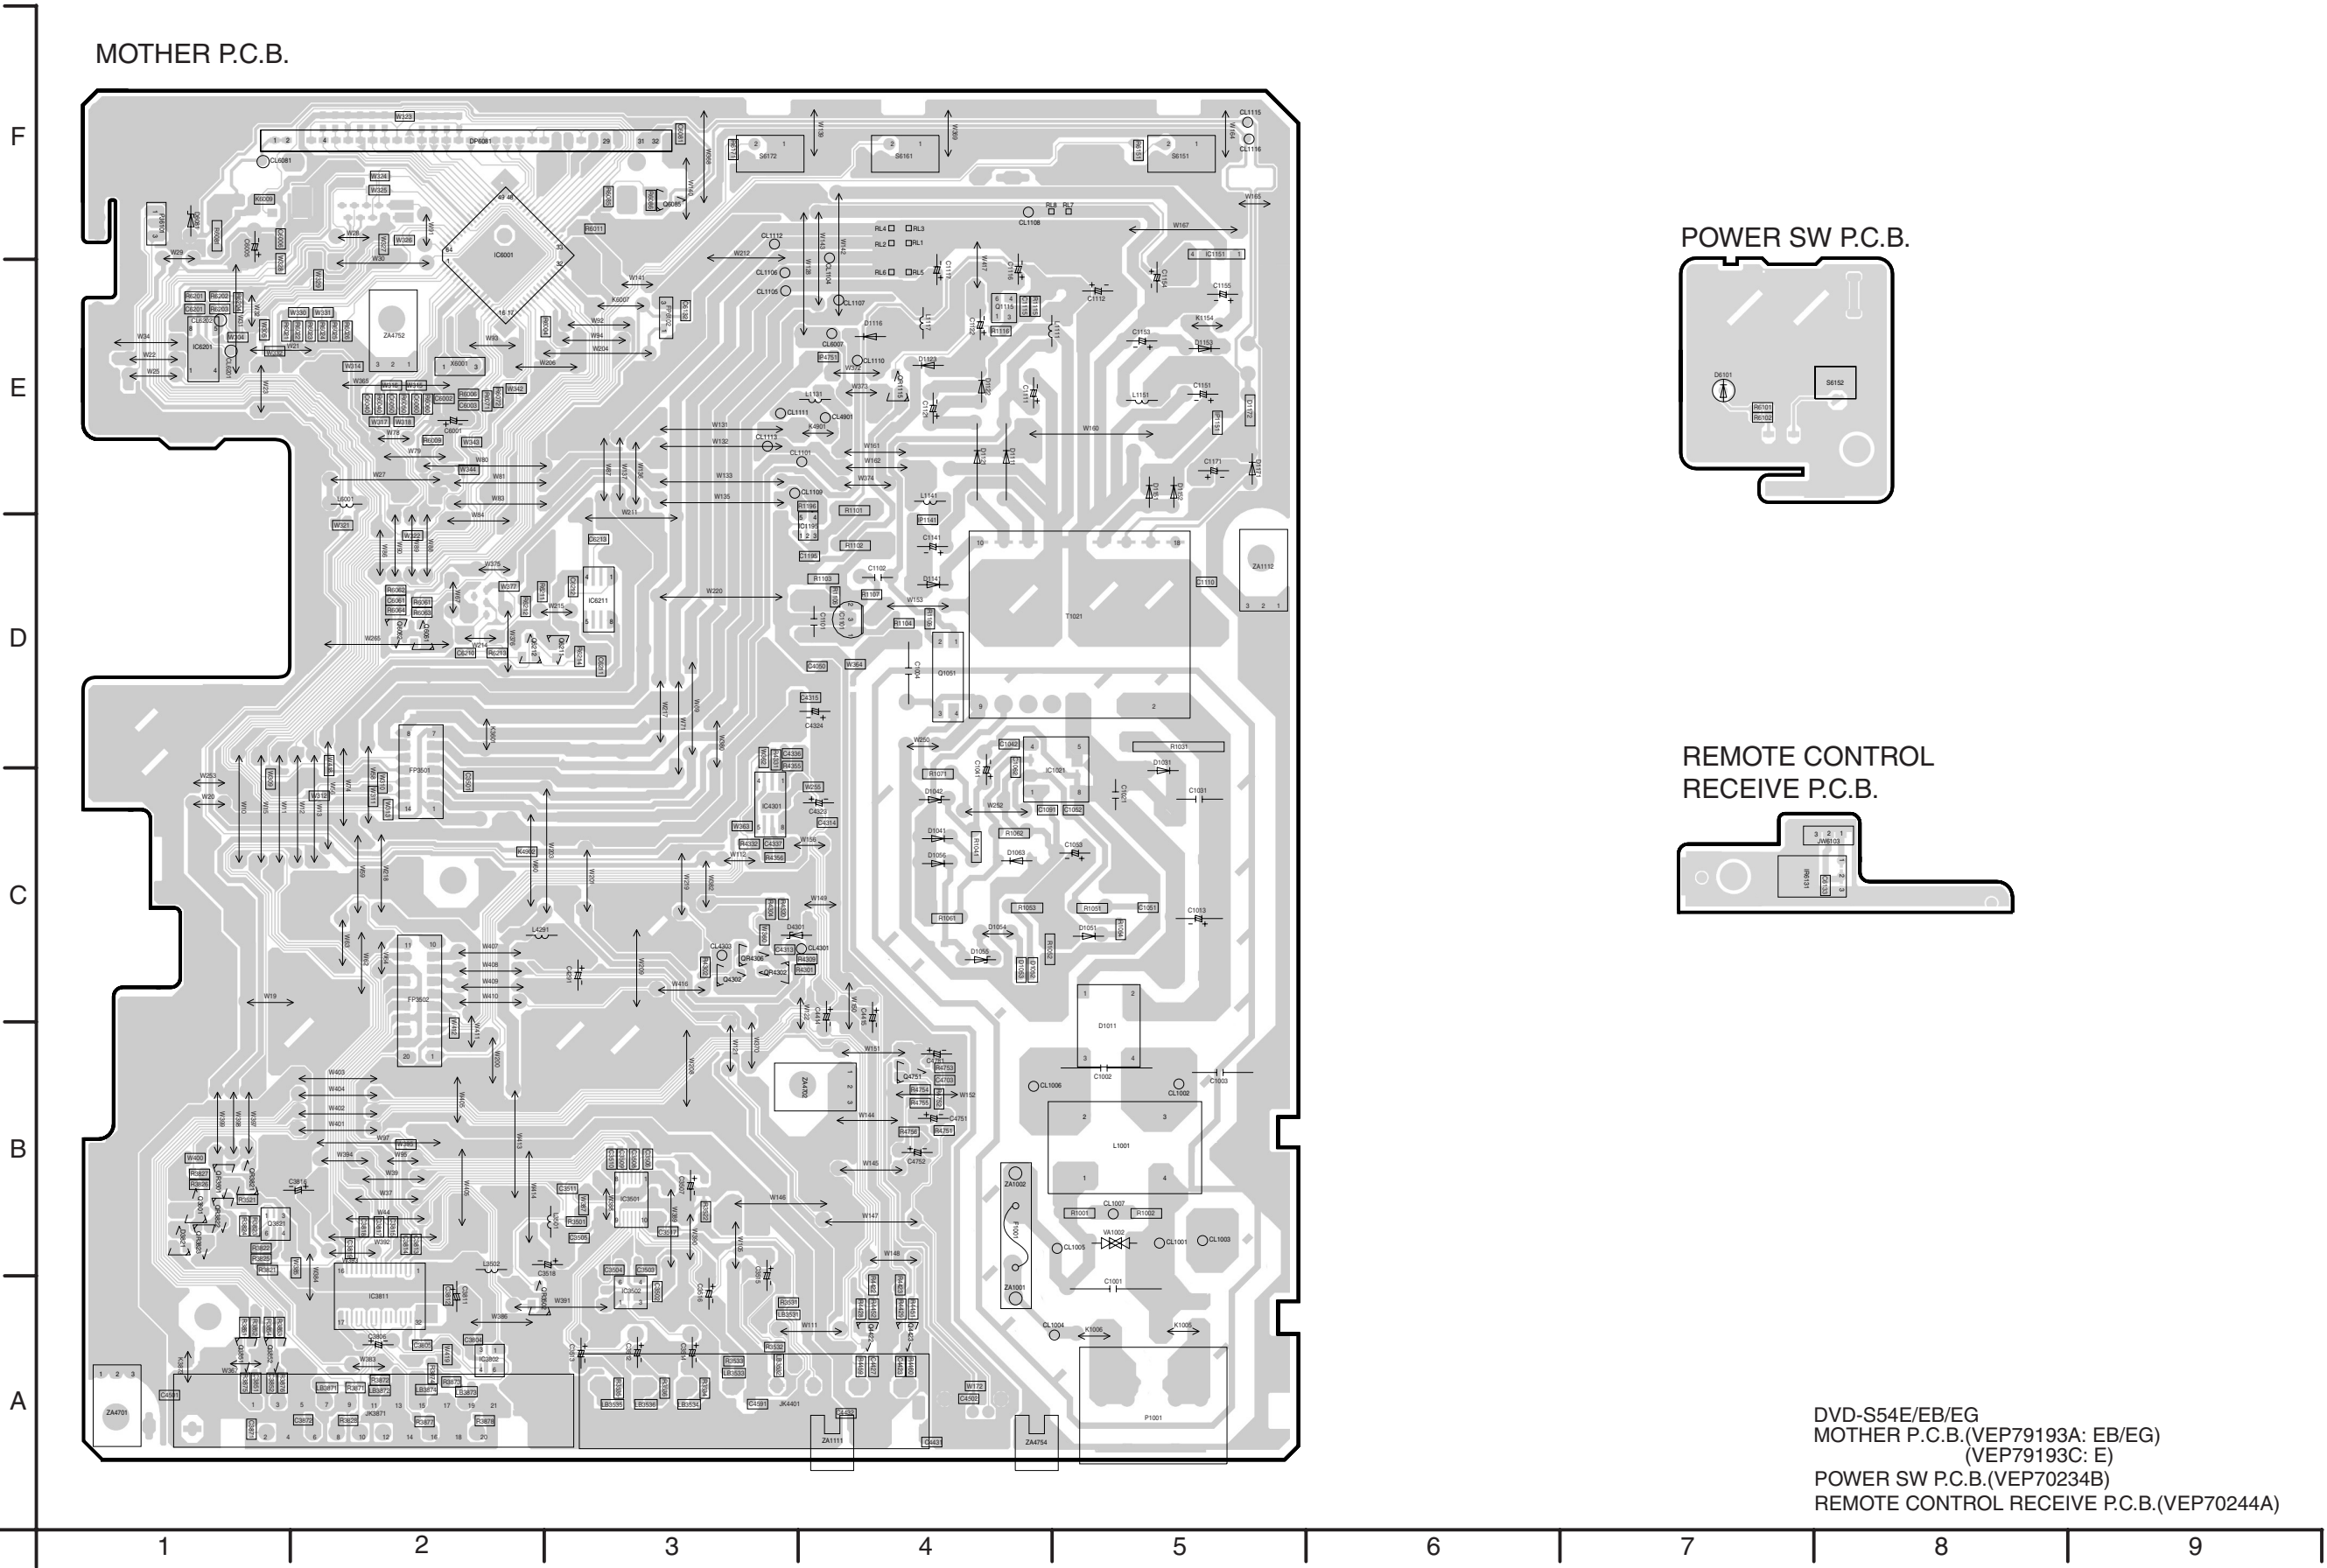


17.2. MOTHER P.C.B. ADDRESS INFORMATION


MOTHER P.C.B.			
Transistor		CL1006	B-4
Q1051	D-4	CL1007	B-5
Q1115	E-4	CL1101	E-3
Q3801	B-1	CL1104	E-4
Q3821	B-1	CL1105	E-3
Q3851	A-1	CL1106	E-3
Q3852	A-1	CL1107	E-4
Q4302	C-3	CL1108	F-4
Q4422	A-4	CL1109	D-3
Q4423	A-4	CL1110	E-3
Q4751	B-4	CL1111	E-3
Q6061	D-2	CL1112	E-3
Q6062	D-2	CL1113	E-3
Q6085	F-2	CL1115	F-5
Q6211	D-3	CL1116	F-5
Q6212	D-2	CL4301	C-3
Transistor-resistor		CL4303	C-3
QR1115	E-4	CL4901	E-4
QR3501	B-1	CL6007	E-4
QR3502	A-2	CL6201	E-1
QR3821	B-1	CL6202	E-1
QR3822	B-1	CL6081	F-1
QR3823	B-1	RL1	E-4
QR4302	C-3	RL2	E-4
QR4306	C-3	RL3	F-4
Integrated Circuit		RL4	F-4
IC1021	C-4	RL5	E-4
IC1101	D-4	RL6	E-4
IC1151	E-5	RL7	F-4
IC1195	D-4	RL8	F-4
IC3501	B-3	Connector	
IC3502	A-3	FP3501	D-2
IC3802	A-2	FP3502	C-2
IC3811	A-2	FP6102	E-3
IC4301	C-2	JK3871	A-2
IC6001	F-2	JK4401	A-3
IC6201	E-1	JW6103	C-8
IC6211	D-3	P1001	A-5
Test Point		PJ6101	F-1
CL1001	B-5	Transformer	
CL1002	B-5	T1021	D-4
CL1003	B-5		
CL1004	A-4		
CL1005	B-4		

ADDRESS INFORMATION

17.3. MODULE P.C.B. (1/2)

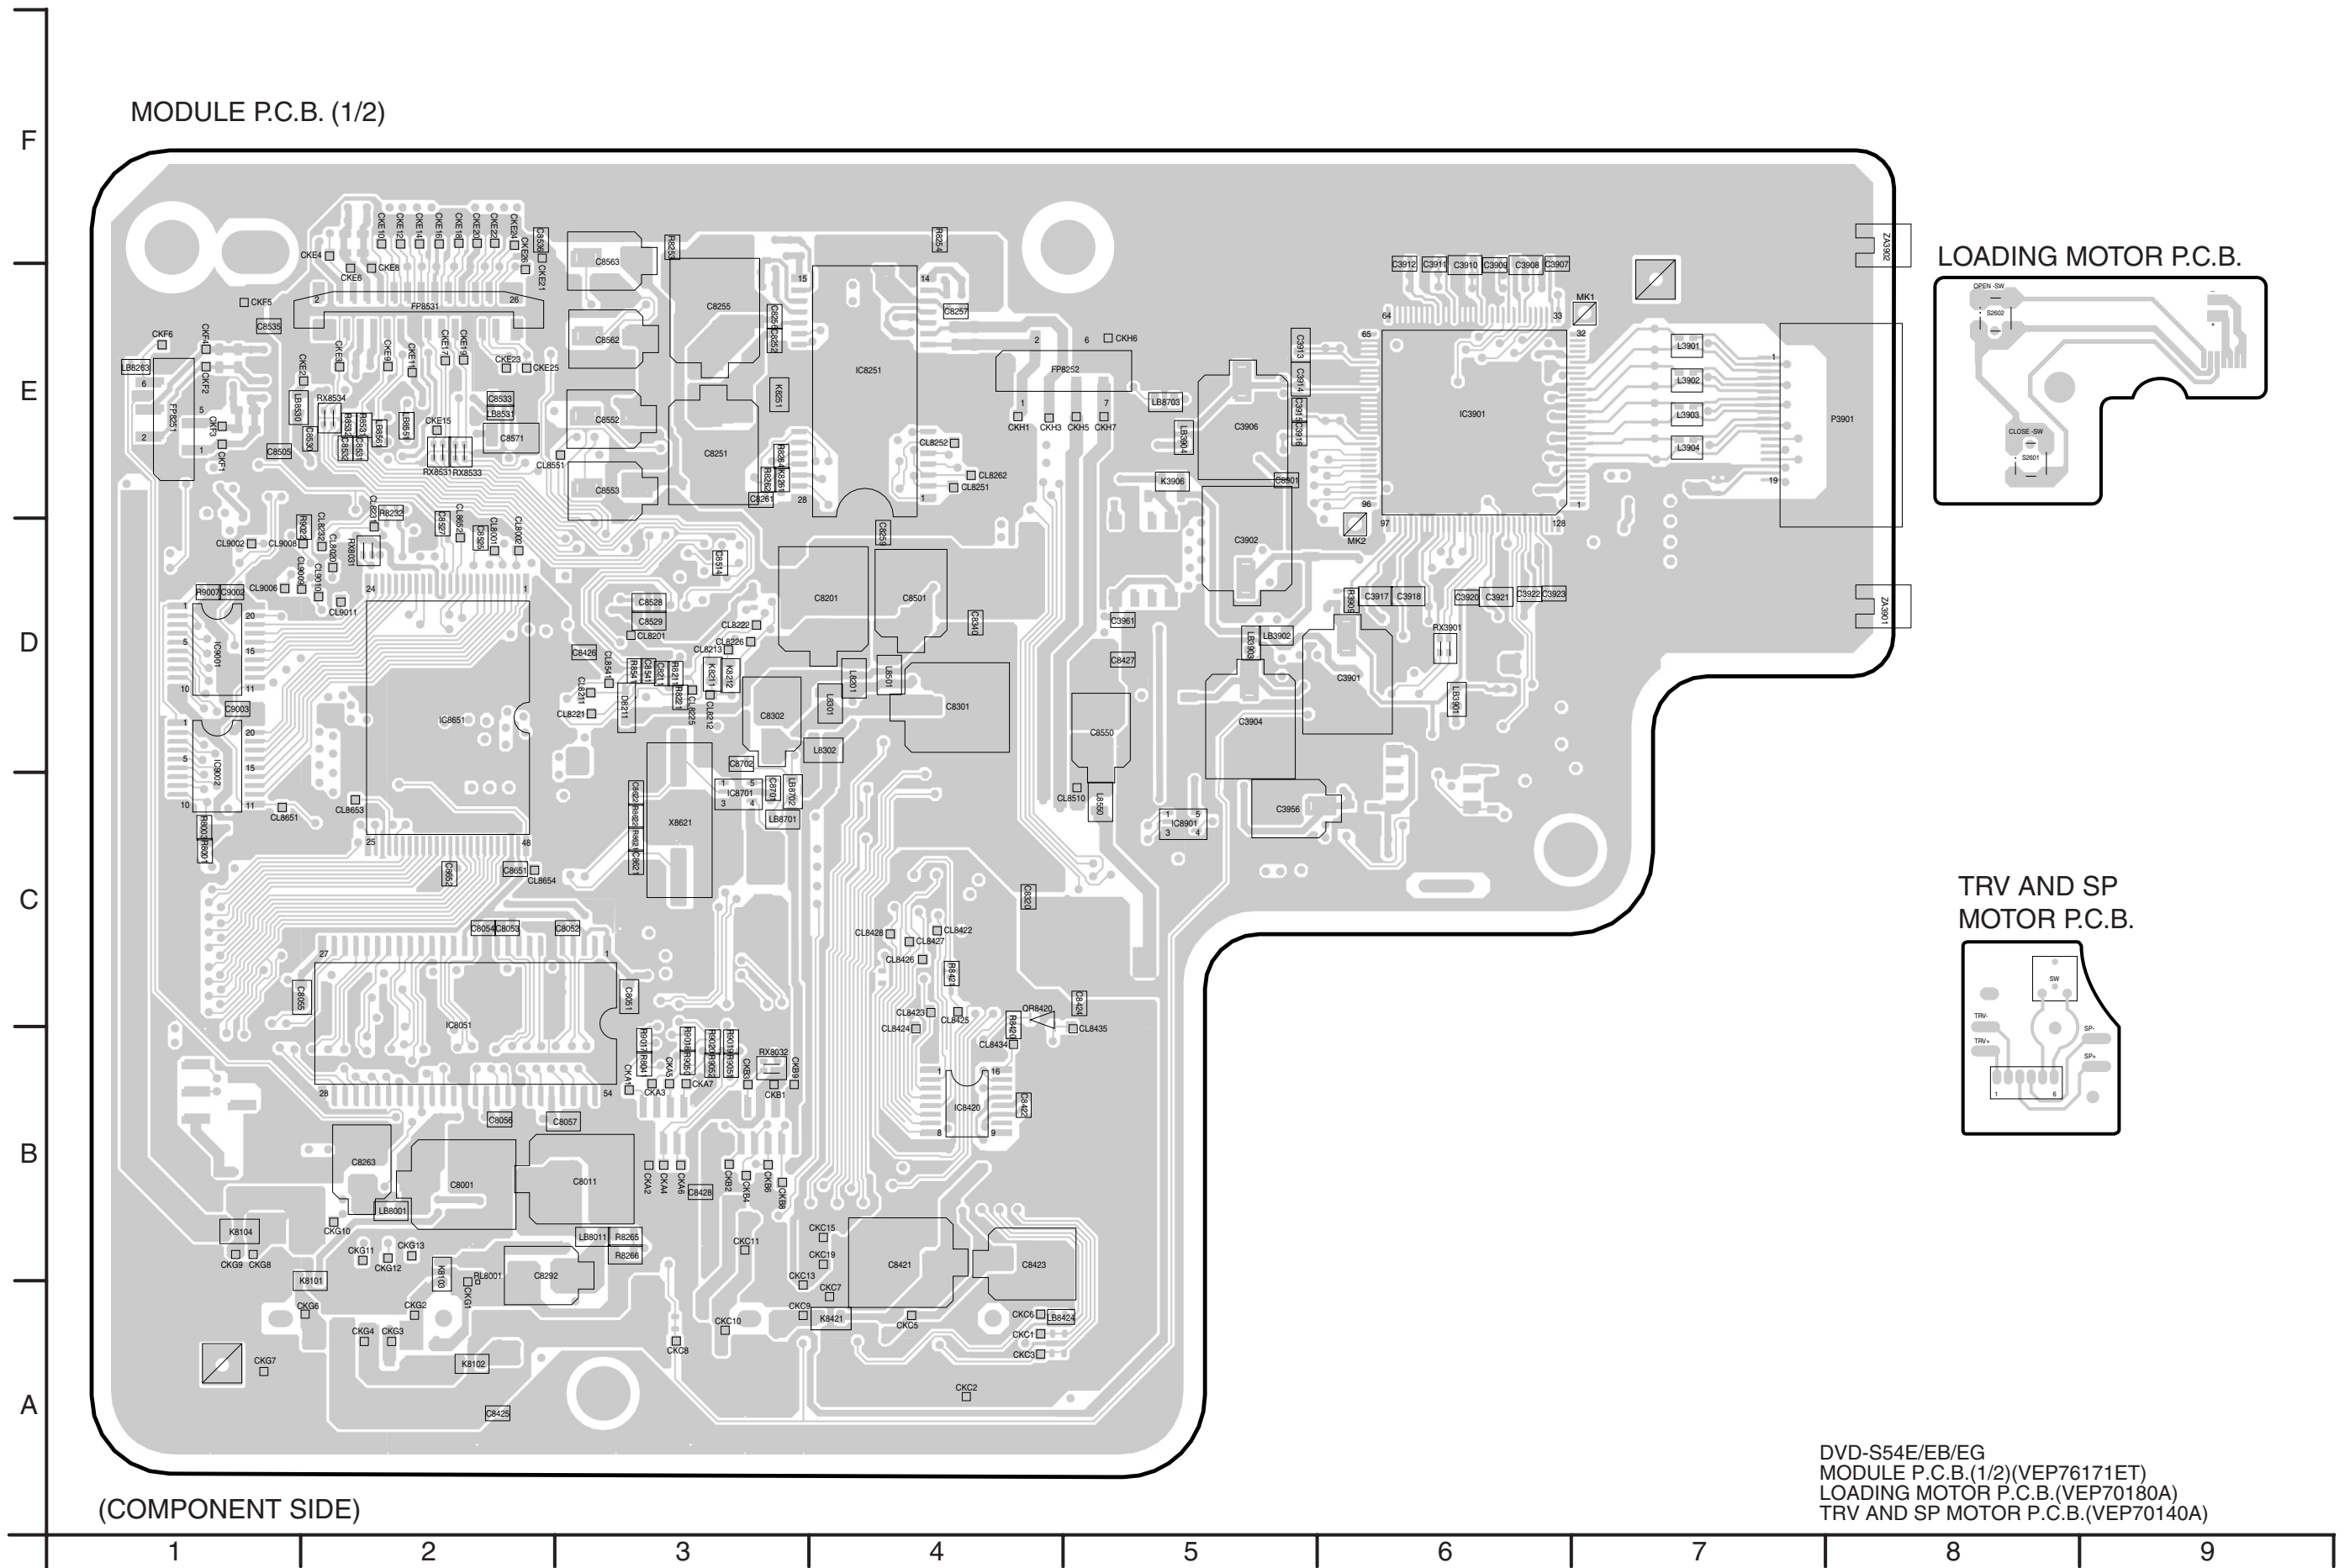

17.4. MODULE P.C.B. (2/2)

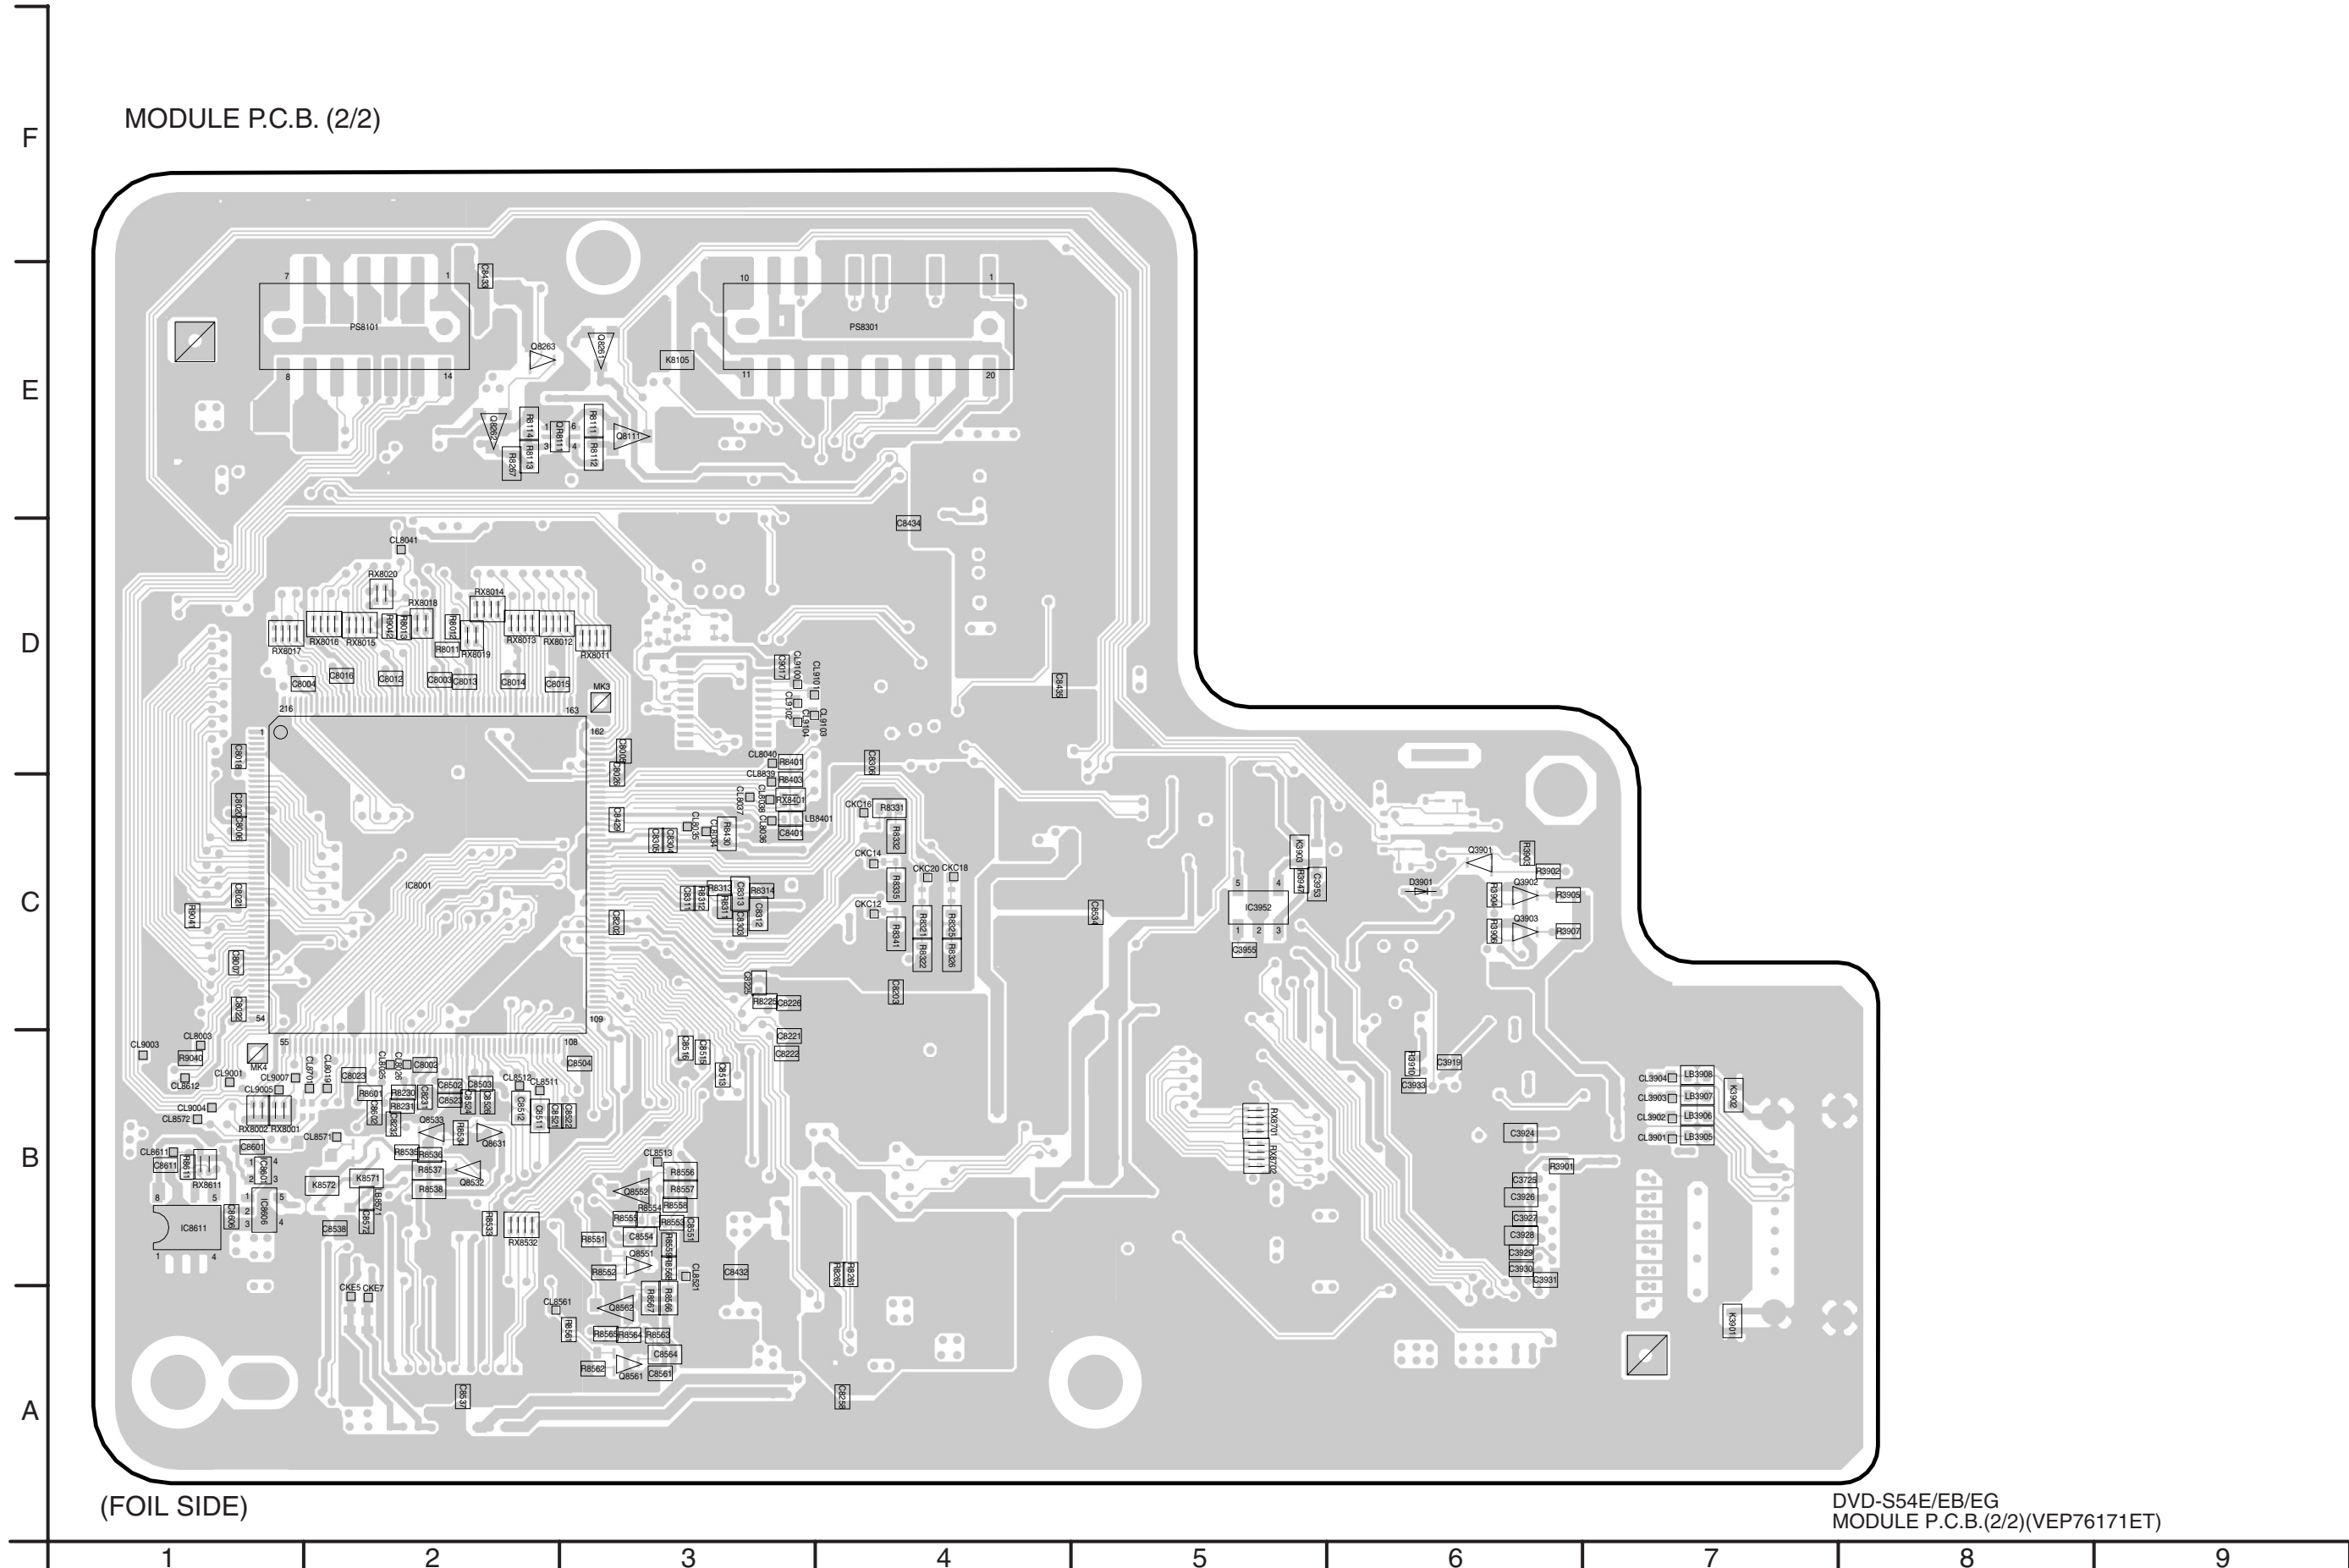

17.5. MODULE P.C.B. ADDRESS INFORMATION


MODULE P.C.B.								
Transistor			CKA4	B-3	C	CKE9	E-2	C
Q3901	C-6	F	CKA5	B-3	C	CKE10	F-2	C
Q3902	C-6	F	CKA6	B-3	C	CKE11	E-2	C
Q3903	C-6	F	CKA7	B-3	C	CKE12	F-2	C
Q8111	E-3	F	CKB1	B-3	C	CKE14	F-2	C
Q8261	E-3	F	CKB2	B-3	C	CKE15	E-2	C
Q8262	E-2	F	CKB3	B-3	C	CKE16	F-2	C
Q8263	E-2	F	CKB4	B-3	C	CKE17	E-2	C
Q8532	B-2	F	CKB6	B-3	C	CKE18	F-2	C
Q8533	B-2	F	CKB8	B-3	C	CKE19	E-2	C
Q8551	B-3	F	CKB9	B-3	C	CKE20	F-2	C
Q8552	B-3	F	CKC1	A-4	C	CKE21	E-2	C
Q8561	A-3	F	CKC2	A-4	C	CKE22	F-2	C
Q8562	A-3	F	CKC3	A-4	C	CKE23	E-2	C
Q8631	B-2	F	CKC5	A-4	C	CKE24	F-2	C
Transistor-resistor			CKC6	A-4	C	CKE25	E-2	C
QR8111	E-2	F	CKC7	A-4	C	CKE26	E-2	C
QR8420	C-4	C	CKC8	A-3	C	CKF1	E-1	C
Integrated Circuit			CKC9	A-3	C	CKF2	E-1	C
IC3901	E-6	C	CKC10	A-3	C	CKF3	E-1	C
IC3952	C-5	F	CKC11	B-3	C	CKF4	E-1	C
IC8001	C-2	F	CKC12	C-4	F	CKF5	E-1	C
IC8051	B-2	C	CKC13	A-3	C	CKF6	E-1	C
IC8251	E-4	C	CKC14	C-4	F	CKG1	A-2	C
IC8420	B-4	C	CKC15	B-4	C	CKG2	A-2	C
IC8601	B-1	F	CKC16	C-4	F	CKG3	A-2	C
IC8606	B-1	F	CKC18	C-4	F	CKG4	A-2	C
IC8611	B-1	F	CKC19	B-4	C	CKG6	A-1	C
IC8651	D-2	C	CKC20	C-4	F	CKG7	A-1	C
IC8701	C-3	C	CKE2	E-2	C	CKG8	B-1	C
IC8901	C-5	C	CKE3	E-2	C	CKG9	B-1	C
IC9001	D-1	C	CKE4	E-2	C	CKG10	B-2	C
IC9002	D-1	C	CKE5	A-2	F	CKG11	B-2	C
Test Point			CKE6	E-2	C	CKG12	B-2	C
CKA1	B-3	C	CKE7	A-2	F	CKG13	B-2	C
CKA2	B-3	C	CKE8	E-2	C	CKH1	E-4	C
CKA3	B-3	C						
CKA4	B-3	C						

ADDRESS INFORMATION
 C.....COMPONENT SIDE
 F.....FOIL SIDE


MODULE P.C.B.								
Test Point			CL8423	C-4	C	CL9101	D-3	F
CKH3	E-4	C	CL8424	B-4	C	CL9102	D-3	F
CKH5	E-4	C	CL8425	C-4	C	CL9103	D-3	F
CKH6	E-5	C	CL8426	C-4	C	CL9104	D-3	F
CKH7	E-5	C	CL8427	C-4	C	RL8001	A-2	C
CL3901	B-7	F	CL8428	C-4	C	Connector		
CL3902	B-7	F	CL8434	B-4	C	FP8251	E-1	C
CL3903	B-7	F	CL8435	B-4	C	FP8252	E-4	C
CL3904	B-7	F	CL8510	D-5	C	FP8531	E-2	C
CL8001	D-2	C	CL8511	B-2	F	P3901	E-7	C
CL8002	D-2	C	CL8512	B-2	F	PS8101	E-2	F
CL8003	B-1	F	CL8513	B-3	F	PS8301	E-4	F
CL8019	B-2	F	CL8521	B-3	F			
CL8020	D-2	C	CL8541	D-2	C			
CL8025	B-2	F	CL8551	E-2	C			
CL8026	B-2	F	CL8561	A-2	F			
CL8034	C-3	F	CL8571	B-2	F			
CL8035	C-3	F	CL8572	B-1	F			
CL8036	C-3	F	CL8611	B-1	F			
CL8037	C-3	F	CL8612	B-1	F			
CL8038	C-3	F	CL8651	C-1	C			
CL8039	C-3	F	CL8652	D-2	C			
CL8040	D-3	F	CL8653	C-2	C			
CL8041	D-2	F	CL8654	C-2	C			
CL8201	D-3	C	CL8701	B-1	F			
CL8211	D-3	C	CL9001	B-1	F			
CL8212	D-3	C	CL9002	D-1	C			
CL8213	D-3	C	CL9003	B-1	F			
CL8221	D-3	C	CL9004	B-1	F			
CL8222	D-3	C	CL9005	B-1	F			
CL8225	D-3	C	CL9006	D-1	C			
CL8226	D-3	C	CL9007	B-1	F			
CL8231	D-2	C	CL9008	D-1	C			
CL8232	D-1	C	CL9009	D-1	C			
CL8251	E-4	C	CL9010	D-1	C			
CL8252	E-4	C	CL9011	D-2	C			
CL8262	E-4	C	CL9100	D-3	F			
CL8422	C-2	C						

18 EXPLODED VIEWS


18.1. CASING PARTS & MECHANISM SECTION EXPLODED VIEW

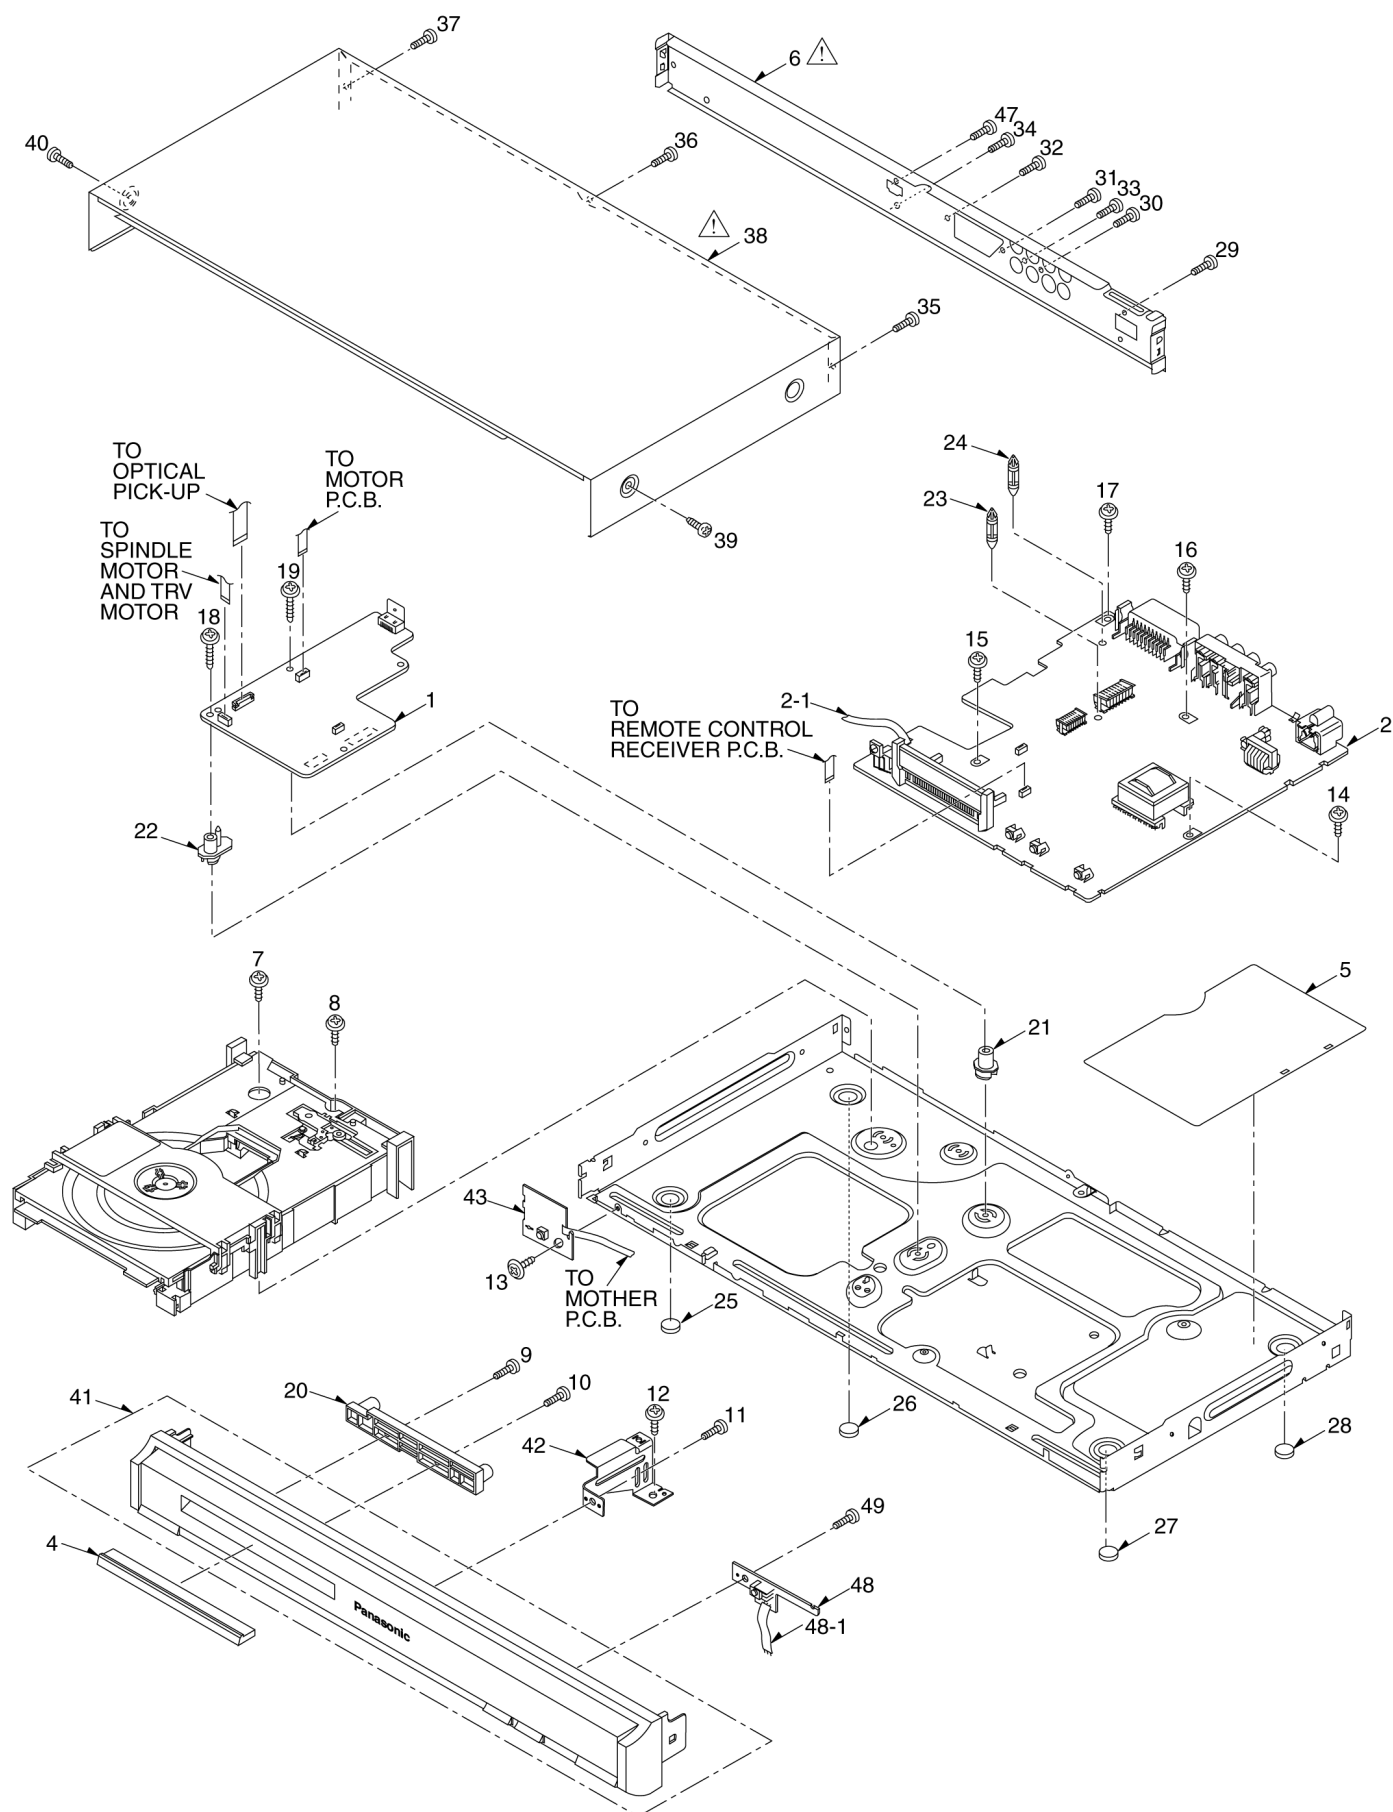

18.2. MECHANISM SECTION EXPLODED VIEW

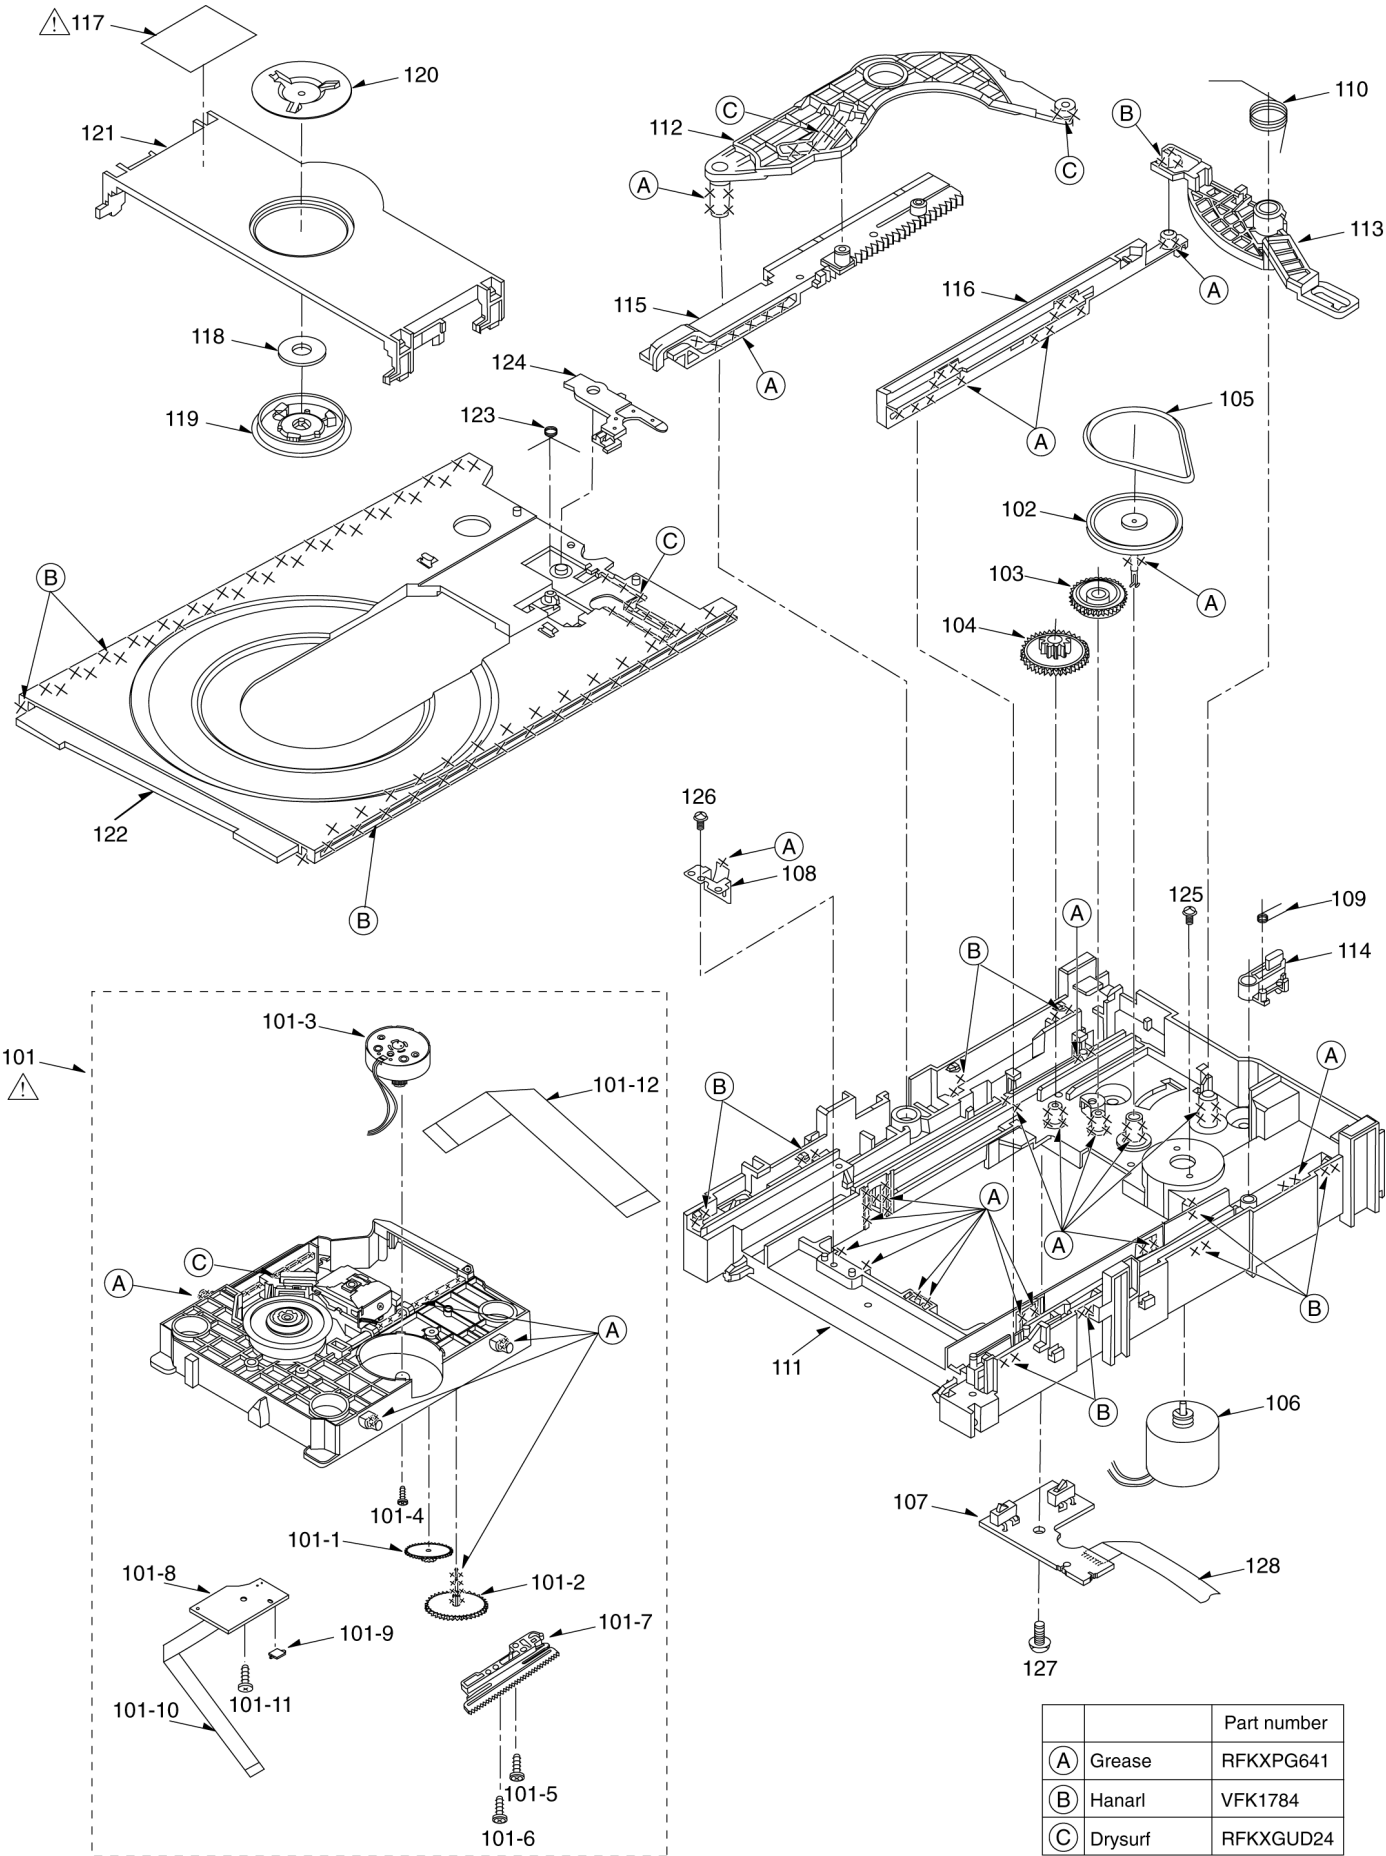

18.3. PACKING & ACCESSORIES SECTION EXPLODED VIEW

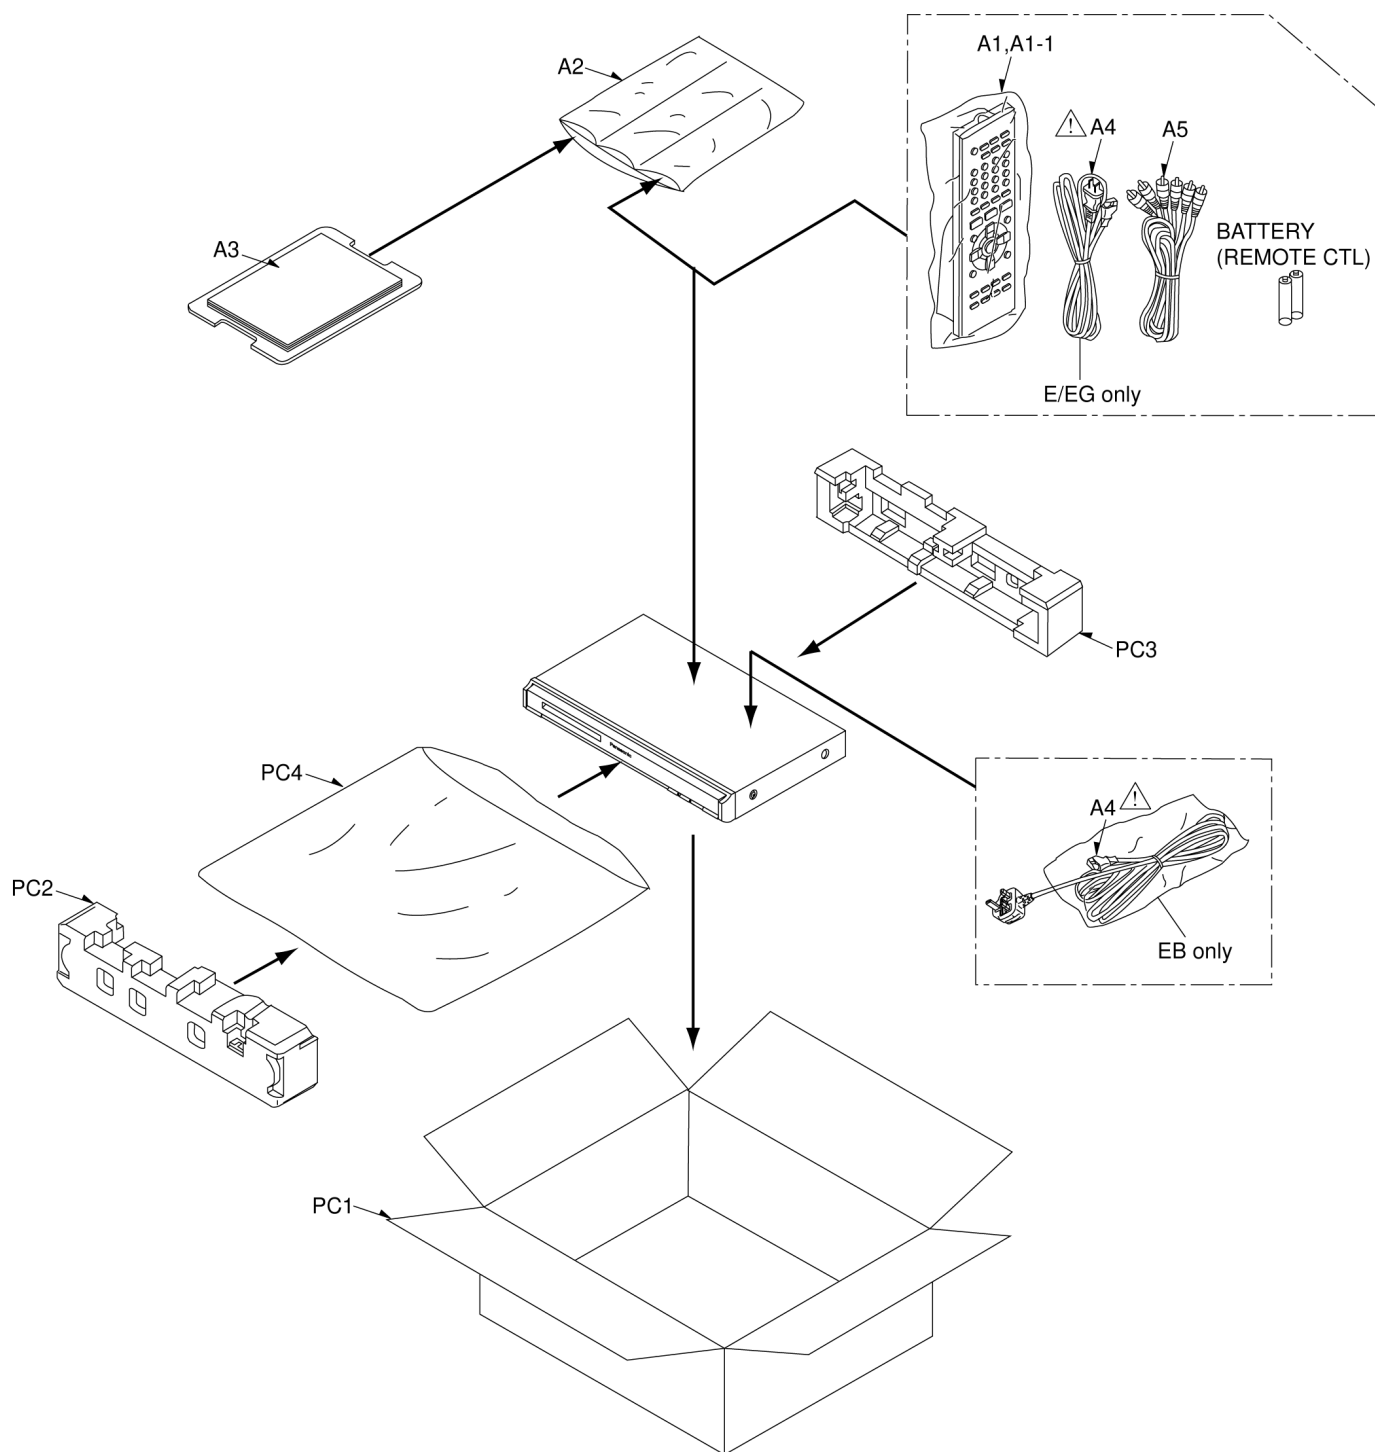

19 REPLACEMENT PARTS LIST

Notes:

*Important safety notice:

Components identified by $\triangle$ mark have special characteristics important for safety.

Furthermore, special parts which have purposes of fire-retardant (resistors), high-quality sound (capacitors), low-noise (resistors), etc. are used.

When replacing any of components, be sure to use only manufacture's specified parts shown in the parts list.

*Warning: This product uses a laser diode. Refer to caution statements.

*Capacity values are in microfarads (μ F) unless specified otherwise, P=Pico-farads (pF), F=Farads (F).

*Resistance values are in ohms, unless specified otherwise, 1K=1,000 (OHM), 1M=1,000k (OHM).

*The marking (RTL) indicates the retention time is limited for this item. After the discontinuation of this assembly in production, it will no longer be available.

*“(IA)-(ID)”, marks in Remarks indicate languages of instruction manuals. [(IA):Polish/Hungarian/Czech, (IB):English, (IC):German/Italian/French, (ID):Spanish/Dutch/Swedish/Danish]

*All parts except parts mentioned [SPG] in the Remarks column are supplied by PAVCSG.

*Parts mentioned [SPG] are supplied by PAVC-CSG.

Ref. No.	Part No.	Part Name & Description	Pcs	Remarks
1	VEP76171ET	MODULE P.C.B.	1	(RTL)
2	VEP79193C	MOTHER P.C.B.	1	(RTL) E
2	VEP79193A	MOTHER P.C.B.	1	(RTL) EB/EG
2-1	REZ1825	CABLE (3P)	1	
4	RGKC0086A-A	TRAY TOP	1	
5	RGQC0064	INSULATION SHEET	1	
6	RGRC0026B-F	REAR PANEL	1	E/EG $\triangle$
6	RGRC0026B-G	REAR PANEL	1	EB $\triangle$
7	RHD30101-1	SCREW	1	
8	RHD30101-1	SCREW	1	
9	RHD26046	SCREW	1	
10	RHD26046	SCREW	1	
11	RHD26046	SCREW	1	
12	RHD30111-3	SCREW	1	
13	RHD30111-3	SCREW	1	
14	RHD30111-3	SCREW	1	
15	RHD30111-3	SCREW	1	
16	RHD30111-3	SCREW	1	
17	RHD30111-3	SCREW	1	
18	RHDC0023	SCREW	1	
19	RHDC0023	SCREW	1	
20	RGQC0065-1J	FRONT ANGLE	1	
21	RMNC0016	PCB SUPPORT (A)	1	
22	RMNC0017	PCB SUPPORT (B)	1	
23	RMNC0019	PCB SUPPORT	1	
24	RMNC0019	PCB SUPPORT	1	
25	RKA0130-K	FOOT RUBBER	1	
26	RKA0130-K	FOOT RUBBER	1	
27	RKA0130-K	FOOT RUBBER	1	
28	RKA0130-K	FOOT RUBBER	1	
29	RHD30119-L	SCREW	1	
30	RHD30119-L	SCREW	1	
31	RHD30119-L	SCREW	1	
32	RHD30119-L	SCREW	1	
33	RHD30119-L	SCREW	1	

Ref. No.	Part No.	Part Name & Description	Pcs	Remarks
34	RHD30119-L	SCREW	1	
35	RHD30119-L	SCREW	1	
36	RHD30119-L	SCREW	1	
37	RHD30119-L	SCREW	1	
38	RKMC0014-S1	TOP PANEL	1	E/EG (S) $\triangle$
38	RKMC0014-K1	TOP PANEL	1	E/EB/EG (K) $\triangle$
39	RHD30007-1SJ	SCREW	1	E/EG (S)
39	RHD30007-K2	SCREW	1	E/EB/EG (K)
40	RHD30007-1SJ	SCREW	1	E/EG (S)
40	RHD30007-K2	SCREW	1	E/EB/EG (K)
41	RFKGDVDS54AS	FRONT PANEL ASS'Y	1	E/EG (S)
41	RFKGDVDS54AK	FRONT PANEL ASS'Y	1	E/EB/EG (K)
42	RMAC0024	HOLD ANGLE	1	
43	VEP70234B	SW P.C.B.	1	
47	XSN3+4FJ	SCREW	1	
48	VEP70244A	REMOTE CONTROL RECEIVER P.C.B.	1	
48-1	REZ1876	CABLE (3P)	1	
49	RHD26046	SCREW	1	
101	RXQC0009	TRV UNIT ASS'Y	1	
101-1	RDGC0002	TRV GEAR A	1	
101-2	RDGC0003	TRV GEAR B	1	
101-3	RXQ1397	TRAVERSE MOTOR ASS'Y	1	
101-4	XQN17+C28FJ	SCREW	1	
101-5	RHDC0026	SCREW	1	
101-6	RHDC0026	SCREW	1	
101-7	RMMC0004	OPU DRIVE RACK	1	
101-8	VEP70140A	TRV-SW PCB	1	
101-9	ESE22MH24	SWITCH	1	
101-10	REZC0080	6P FFC	1	
101-11	VHD1224-1	SCREW	1	
101-12	REZC0081	Pickup FFC(26P)	1	
102	RDG0597	PULLEY GEAR	1	
103	RDG0548	RELAY GEAR	1	
104	RDG0549	DRIVE GEAR	1	
105	RDV0070	BELT	1	
106	REM0129	LOADING MOTOR ASS'Y	1	
107	VEP70180A	MOTOR P.C.B.	1	(RTL)
108	RMC0387	SUPPORT SPRING	1	
109	RME0351	LOCK LEVER SPRING	1	
110	RMEC0350	CHANGE LEVER SPRING	1	
111	RMK0616-1	MECHA CHASSIS ASS'Y	1	
112	RML0680-1	DRIVE ARM	1	
113	RML0628	CHANGE LEVER	1	
114	RML0629	LOCK LEVER	1	
115	RMM0283	DRIVE RACK	1	
116	RMM0284	SUB RACK	1	
117	RQLCA0581	LASER CAUTION LABEL	1	
118	JSMC0048	MAGNET	1	
119	RMR1685-X	CLAMPER	1	
120	RMA1890	MAGNET HOLDER	1	
121	RMR1686-K1	CLAMP PLATE	1	
122	RGQ0417-K	TRAY	1	
123	RME0353-1	TRAY SLIDER SPRING	1	
124	RML0631	TRAY SLIDER	1	
125	XQN17+C25FJ	SCREW	1	
126	XTB26+6GFJ	SCREW	1	
127	XTN2+6GFJ	SCREW	1	
128	REZC0062	MOTOR FFC	1	
A1	EUR7631300	REMOTE CONTROL ASS'Y	1	
A1-1	UR76EC3103A	BATTERY COVER	1	
A2	RPFC0042	POLYETHYLENE BAG (F.B.)	1	
A3	RQTC0157-E	OPERATING INSTRUCTIONS	1	(IA) E

Ref. No.	Part No.	Part Name & Description	Pcs	Remarks
A3	RQTC0156-B	OPERATING INSTRUCTIONS	1	(IB) EB
A3	RQTC0154-D	OPERATING INSTRUCTIONS	1	(IC) EG
A3	RQTC0155-H	OPERATING INSTRUCTIONS	1	(ID) EG
A4	K2CT3CA00004	AC CORD	1	EB △
A4	K2CQ2CA00006	AC CORD	1	E/EG △
A5	K2KA6BA00004	AV CORD	1	△
C1001	F0CAF104A024	0.1U	1	△
C1002	F0CAF104A024	0.1U	1	△
C1003	ECKMNA471MBV	470P	1	△
C1004	ECKMNA102MEV	1000P	1	△
C1013	F2A2W220A116	450V 22U	1	
C1021	F1A3A101A039	1000V 100P	1	
C1031	F1B3A332A008	1000V 0.0033U	1	
C1041	F2A1H470A157	50V 47U	1	
C1042	ECJ1VF1H104Z	50V 0.1U	1	
C1051	ECJ1VB1C105K	16V 1U	1	
C1052	F1H1H681A799	50V 680P	1	
C1053	F2A0J102A247	6.3V 1000U	1	
C1062	ECJ1VC1H120J	50V 12P	1	
C1091	ECJ1VB1C105K	16V 1U	1	
C1101	ECQV1H684JL2	50V 0.68U	1	
C1102	ECQB1H104JF4	50V 0.1U	1	
C1110	F1H1H102A798	50V 1000P	1	
C1111	F2A1A681A539	10V 680U	1	
C1112	F2A1A102A206	10V 1000U	1	
C1115	ECJ1VF1C104Z	16V 0.1U	1	
C1116	F2A1A221A501	10V 220U	1	
C1117	F2A0J102A247	6.3V 1000U	1	
C1121	F2A0J681A550	6.3V 680U	1	
C1122	F2A0J222A522	6.3V 2200U	1	
C1141	F2A1E1010067	25V 100U	1	
C1151	F2A1E3310051	25V 330U	1	
C1153	F2A1E331A205	25V 330U	1	
C1154	F2A1C221A236	16V 220U	1	
C1155	F2A1H1R0A099	50V 1U	1	
C1171	F2A1A1010072	10V 100U	1	
C1195	ECJ1VB1A105K	10V 1U	1	
C3501	F1H1C104A090	16V 0.1U	1	
C3502	F1H1H103A798	50V 0.01U	1	
C3503	ECJ1VB1C105K	16V 1U	1	
C3504	ECJ1VB1C105K	16V 1U	1	
C3505	F1H1C104A065	16V 0.1U	1	
C3506	F1H1H103A798	50V 0.01U	1	
C3507	F2A0J220A245	6.3V 22U	1	
C3508	ECJ1VB0J105K	6.3V 1U	1	
C3509	ECJ1VB0J105K	6.3V 1U	1	
C3510	ECJ1VB0J105K	6.3V 1U	1	
C3511	ECJ1VB0J105K	6.3V 1U	1	
C3512	F2A0J102A247	6.3V 1000U	1	
C3513	F2A0J102A247	6.3V 1000U	1	
C3514	F2A0J102A247	6.3V 1000U	1	
C3515	F2A0J102A247	6.3V 1000U	1	
C3516	F2A0J102A247	6.3V 1000U	1	
C3517	F1H1C104A065	16V 0.1U	1	
C3518	F2A0J470A245	6.3V 47U	1	
C3725	F1G1A104A014	10V 0.1U	1	
C3804	F1H1H103A798	50V 0.01U	1	
C3805	F1H1H103A798	50V 0.01U	1	
C3806	F2A0J470A245	6.3V 47U	1	
C3811	F2A0J470A245	6.3V 47U	1	
C3812	F1H1C104A091	16V 0.1U	1	
C3813	F1H1H103A798	50V 0.01U	1	
C3814	ECJ1VB1C105K	16V 1U	1	
C3815	ECJ1VB1C105K	16V 1U	1	
C3816	F2A0J220A245	6.3V 22U	1	
C3817	ECJ1VB1C105K	16V 1U	1	
C3818	ECJ1VB1C105K	16V 1U	1	
C3819	ECJ1VB1C105K	16V 1U	1	
C3851	ECJ1VC1H102J	50V 1000P	1	
C3852	ECJ1VC1H102J	50V 1000P	1	

Ref. No.	Part No.	Part Name & Description	Pcs	Remarks
C3871	F1H1H101A799	50V 100P	1	
C3872	F1H1H101A799	50V 100P	1	
C3901	F2G0G331A012	4V 330U	1	
C3902	F2G0G331A012	4V 330U	1	
C3904	F2G0G331A012	4V 330U	1	
C3906	F2G0G331A012	4V 330U	1	
C3907	F1G1A104A014	10V 0.1U	1	
C3908	ECJ1VB0J105K	6.3V 1U	1	
C3909	F1G1A104A014	10V 0.1U	1	
C3910	ECJ1VB0J105K	6.3V 1U	1	
C3911	F1G1A104A014	10V 0.1U	1	
C3912	F1G1A104A014	10V 0.1U	1	
C3913	ECJ1VB0J105K	6.3V 1U	1	
C3914	ECJ1VB0J105K	6.3V 1U	1	
C3915	F1G1A104A014	10V 0.1U	1	
C3916	F1G1A104A014	10V 0.1U	1	
C3917	ECJ1VB0J105K	6.3V 1U	1	
C3918	ECJ1VB0J105K	6.3V 1U	1	
C3919	F1G1A104A014	10V 0.1U	1	
C3920	F1G1A104A014	10V 0.1U	1	
C3921	ECJ1VB0J105K	6.3V 1U	1	
C3922	F1G1A104A014	10V 0.1U	1	
C3923	F1G1A104A014	10V 0.1U	1	
C3924	ECJ1VB0J105K	6.3V 1U	1	
C3926	ECJ1VB0J105K	6.3V 1U	1	
C3927	F1G1A104A014	10V 0.1U	1	
C3928	ECJ1VB0J105K	6.3V 1U	1	
C3929	F1G1A104A014	10V 0.1U	1	
C3930	F1G1A104A014	10V 0.1U	1	
C3931	F1G1A104A014	10V 0.1U	1	
C3933	F1G1A104A014	10V 0.1U	1	
C3953	ECJ1VB0J105K	6.3V 1U	1	
C3955	ECJ0EB1C103K	16V 0.01U	1	
C3956	EEE0JA330WR	16V 0.01U	1	
C3961	F1G1A104A014	10V 0.1U	1	
C4050	F1H1C104A090	16V 0.1U	1	
C4291	F2A1A102A206	10V 1000U	1	
C4313	F1H1C104A090	16V 0.1U	1	
C4314	F1H1C104A090	16V 0.1U	1	
C4315	F1H1C104A090	16V 0.1U	1	
C4323	F2A1H221A236	50V 220U	1	
C4324	F2A1H221A236	50V 220U	1	
C4336	F1H1H820A799	50V 82P	1	
C4337	F1H1H820A799	50V 82P	1	
C4414	F2A1E470A205	25V 47U	1	
C4415	F2A1E470A205	25V 47U	1	
C4423	ECJ1VC1H102J	50V 1000P	1	
C4427	ECJ1VC1H102J	50V 1000P	1	
C4431	F1H1C104A090	16V 0.1U	1	
C4432	F1H1C104A065	16V 0.1U	1	
C4501	F1H1H102A798	50V 1000P	1	
C4502	F1H1C104A065	16V 0.1U	1	
C4591	F1H1C104A090	16V 0.1U	1	
C4703	F1H1C104A065	16V 0.1U	1	
C4751	F2A1E470A205	25V 47U	1	
C4752	F2A1E470A205	25V 47U	1	
C4781	F2A0J470A599	6.3V 47U	1	
C6001	F2A0J101A245	6.3V 47U	1	
C6002	F1H1C104A065	16V 0.1U	1	
C6003	F1H1H103A798	50V 0.01U	1	
C6005	F2A1H100A236	50V 100U	1	
C6006	F1H1H103A798	50V 0.01U	1	
C6040	ECJ1VF1H103Z	50V 0.01U	1	
C6050	ECJ1VF1H103Z	50V 0.01U	1	
C6060	ECJ1VF1H103Z	50V 0.01U	1	
C6061	ECJ1VB1H221K	50V 220P	1	
C6081	F1H1H103A798	50V 0.01U	1	
C6132	F1H1C104A065	16V 0.1U	1	
C6133	F1H1C104A065	16V 0.1U	1	
C6201	F1H1C104A065	16V 0.1U	1	
C6210	F1H1H221A799	50V 220P	1	
C6211	ECJ1VB0J105K	6.3V 1U	1	
C6212	ECJ1VB0J105K	6.3V 1U	1	

Ref. No.	Part No.	Part Name & Description	Pcs	Remarks
C6213	F1H1C103A091	16V 0.01U	1	
C8001	F2G0G331A012	4V 330U	1	
C8002	F1G1C104A042	16V 0.1U	1	
C8003	F1G1C104A042	16V 0.1U	1	
C8004	F1G1C104A042	16V 0.1U	1	
C8005	F1G1C104A042	16V 0.1U	1	
C8006	F1G1C104A042	16V 0.1U	1	
C8007	F1G1C104A042	16V 0.1U	1	
C8011	F2G0J101A066	6.3V 100U	1	
C8012	F1G1C104A042	16V 0.1U	1	
C8013	F1G1C104A042	16V 0.1U	1	
C8014	F1G1C104A042	16V 0.1U	1	
C8015	F1G1C104A042	16V 0.1U	1	
C8016	F1G1C104A042	16V 0.1U	1	
C8018	F1G1C104A042	16V 0.1U	1	
C8020	F1G1C104A042	16V 0.1U	1	
C8021	F1G1C104A042	16V 0.1U	1	
C8022	F1G1C104A042	16V 0.1U	1	
C8023	F1G1C104A042	16V 0.1U	1	
C8026	F1G1C104A042	16V 0.1U	1	
C8051	ECJ1VB0J105K	6.3V 1U	1	
C8052	F1G1C104A042	16V 0.1U	1	
C8053	F1G1C104A042	16V 0.1U	1	
C8054	ECJ0EC1H221J	50V 220P	1	
C8055	ECJ1VB0J105K	6.3V 1U	1	
C8056	ECJ0EB1E222K	25V 2200P	1	
C8057	ECJ1VB0J105K	6.3V 1U	1	
C8201	F2G0J101A066	6.3V 100U	1	
C8202	F1G1C104A042	16V 0.1U	1	
C8203	F1G1C104A042	16V 0.1U	1	
C8211	ECJ0EB1E122K	25V 1200P	1	
C8221	ECJ0EB1E102K	25V 1000P	1	
C8222	ECJ0EB1E331K	25V 330P	1	
C8225	ECJ0EB1E102K	25V 1000P	1	
C8226	ECJ0EB1H391K	50V 390P	1	
C8231	ECJ0EB1A683K	10V 0.068U	1	
C8232	ECJ0EB1A683K	10V 0.068U	1	
C8251	F2G0J221A065	6.3V 220U	1	
C8252	F1G1C104A042	16V 0.1U	1	
C8255	F2G1C470A076	16V 47U	1	
C8256	ECJ0EF1C104Z	16V 0.1U	1	
C8257	ECJ0EF1C104Z	16V 0.1U	1	
C8258	ECJ0EB1E102K	25V 1000P	1	
C8259	ECJ0EB1E102K	25V 1000P	1	
C8261	F1G1C104A042	16V 0.1U	1	
C8263	F2G0J470A031	6.3V 47U	1	
C8292	F2G0J470A031	6.3V 47U	1	
C8301	F2G0J221A031	6.3V 220U	1	
C8302	F2G0J330A031	6.3V 33U	1	
C8303	F1G1C104A042	16V 0.1U	1	
C8304	F1G1C104A042	16V 0.1U	1	
C8305	F1G1C104A042	16V 0.1U	1	
C8306	F1G1C104A042	16V 0.1U	1	
C8311	F1G1C104A042	16V 0.1U	1	
C8312	ECJ1VB0J105K	6.3V 1U	1	
C8313	ECJ1VB0J105K	6.3V 1U	1	
C8320	ECJ0EB1E102K	25V 1000P	1	
C8340	ECJ0EB1E102K	25V 1000P	1	
C8401	F1G1H150A542	50V 15P	1	
C8421	F2G0J101A083	6.3V 100U	1	
C8422	F1G1C104A042	16V 0.1U	1	
C8423	F2G0J330A083	6.3V 33U	1	
C8424	F1G1C104A042	16V 0.1U	1	
C8425	ECJ0EB1E102K	25V 1000P	1	
C8426	ECJ0EB1E102K	25V 1000P	1	
C8427	ECJ0EB1E102K	25V 1000P	1	
C8428	F1G1C104A042	16V 0.1U	1	
C8429	F1G1C104A042	16V 0.1U	1	
C8432	ECJ0EB1E102K	25V 1000P	1	
C8433	ECJ0EB1E102K	25V 1000P	1	
C8434	ECJ0EB1E102K	25V 1000P	1	
C8435	ECJ0EB1E102K	25V 1000P	1	
C8501	F2G0J101A031	6.3V 100U	1	

Ref. No.	Part No.	Part Name & Description	Pcs	Remarks
C8502	F1G1C104A042	16V 0.1U	1	
C8503	F1G1C104A042	16V 0.1U	1	
C8504	F1G1C104A042	16V 0.1U	1	
C8505	F1G1C104A042	16V 0.1U	1	
C8511	ECJ1VB0J105K	6.3V 1U	1	
C8512	ECJ1VB0J105K	6.3V 1U	1	
C8513	F1G1A104A014	10V 0.1U	1	
C8514	F1G1A104A014	10V 0.1U	1	
C8515	F1G1A104A014	10V 0.1U	1	
C8516	F1G1A104A014	10V 0.1U	1	
C8521	F1G1A104A014	10V 0.1U	1	
C8522	F1G1A104A014	10V 0.1U	1	
C8523	F1G1C104A042	16V 0.1U	1	
C8524	F1G1C104A042	16V 0.1U	1	
C8525	F1G1C562A040	16V 0.0056U	1	
C8526	F1G1C183A004	16V 0.018U	1	
C8527	ECJ0EB1A333K	10V 0.033U	1	
C8528	ECJ1VB0J105K	6.3V 1U	1	
C8529	ECJ1VB0J105K	6.3V 1U	1	
C8530	F1G1C104A042	16V 0.1U	1	
C8531	F1G1H1010005	50V 100P	1	
C8532	ECJ0EC1H221J	50V 220P	1	
C8533	F1G1C104A042	16V 0.1U	1	
C8534	ECJ0EB1E102K	25V 1000P	1	
C8535	F1G1C104A042	16V 0.1U	1	
C8536	F1G1C104A042	16V 0.1U	1	
C8537	F1G1C104A042	16V 0.1U	1	
C8538	ECJ0EB1E102K	25V 1000P	1	
C8541	ECJ0EB1E472K	25V 4700P	1	
C8550	F2G0J330A031	6.3V 33U	1	
C8551	F1G1C104A042	16V 0.1U	1	
C8552	F2G1C100A072	16V 10U	1	
C8553	F2G0J470A031	6.3V 47U	1	
C8554	ECJ1VB0J105K	6.3V 1U	1	
C8561	F1G1C104A042	16V 0.1U	1	
C8562	F2G1C100A072	16V 10U	1	
C8563	F2G0J470A031	6.3V 47U	1	
C8564	ECJ1VB0J105K	6.3V 1U	1	
C8571	F1K1A1060017	10V 10U	1	
C8572	F1G1C104A042	16V 0.1U	1	
C8601	F1G1C104A042	16V 0.1U	1	
C8602	ECJ0EB1C153K	16V 0.015U	1	
C8606	F1G1C104A042	16V 0.1U	1	
C8611	F1G1C104A042	16V 0.1U	1	
C8621	F1G1H180A542	50V 18P	1	
C8622	F1G1H150A542	50V 15P	1	
C8651	F1G1C104A042	16V 0.1U	1	
C8652	F1G1C104A042	16V 0.1U	1	
C8701	F1G1C104A042	16V 0.1U	1	
C8702	F1G1H200A451	50V 20U	1	
C8901	F1G1C104A042	16V 0.1U	1	
C9002	F1G1C104A042	16V 0.1U	1	
C9003	F1G1C104A042	16V 0.1U	1	
C9017	F1G1C104A042	16V 0.1U	1	
D1011	B0EDKT000009	DIODE	1	
D1031	B0HADV000001	DIODE	1	
D1041	MA2C18800E	DIODE	1	
D1042	MAZ43900HF	DIODE	1	
D1051	MA2C18800E	DIODE	1	
D1052	ERJ3GEY0R00V	1/10W 0	1	
D1053	MAZ82000ML	DIODE	1	
D1055	MA2C18800E	DIODE	1	
D1056	MA2C18800E	DIODE	1	
D1063	MA2C700A0F	DIODE	1	
D1111	B0JAMG000013	DIODE	1	
D1116	B0EAKM000117	DIODE	1	
D1121	B0JAMG000013	DIODE	1	
D1122	B0EAKM000117	DIODE	1	
D1123	B0EAKM000122	DIODE	1	
D1141	B0JAMK000023	DIODE	1	
D1151	B0JAMK000023	DIODE	1	
D1152	B0JAMK000023	DIODE	1	

Ref. No.	Part No.	Part Name & Description	Pcs	Remarks
D1153	B0EAKM000122	DIODE	1	
D1171	B0JAME000037	DIODE	1	
D1172	EROS2THF4R70	1/4W 4.7	1	
D3821	MA3X152A0L	DIODE	1	
D3901	MA2J72800L	DIODE	1	
D4301	MAZ40560HF	DIODE	1	
D6081	MAZ40910LF	ZENER DIODE	1	
D6101	B3AAA0000721	DIODE	1	
D8211	MA2J11100L	DIODE	1	
DP6081	A2BA00000231	FL DISPLAY SCREEN	1	
F1001	K5D162BLA013	FUSE	1	△
FP3501	K1KY14AA0274	14P	1	
FP3502	K1KY20AA0274	20P	1	
FP6102	K1MP03A00004	JACK	1	
FP8251	K1MN06AA0076	JACK	1	
FP8252	K1MN07AA0076	JACK	1	
FP8531	K1MY26AA0109	JACK	1	
IC1021	MIP414SMSSCF	IC	1	
IC1101	C0DAEMZ00001	IC	1	
IC1151	C0DAAYY00040	IC	1	
IC1195	C0EBY0000041	IC	1	
IC3501	C9ZB00000498	IC	1	
IC3502	C1AB00001935	IC	1	
IC3802	C1AB00001731	IC	1	
IC3811	C9ZB00000461	IC	1	
IC3901	MN864702A	IC	1	
IC3952	C0DBAHD00013	IC	1	
IC4301	C0ABBB000230	IC	1	
IC6001	MN101C87APB	IC	1	
IC6201	C3EBGC000055	IC (EEPROM)	1	
IC6211	C0CBCBD00057	IC	1	
IC8001	MN2DS0018DP	IC	1	
IC8051	C3ABPG000150	IC	1	
IC8251	C0GBY0000056	IC	1	
IC8420	C0FBBK000049	IC	1	
IC8601	C0EBA0000039	IC	1	
IC8606	C0EBE0000456	RESET IC	1	
IC8611	RFKWDAC015AA	IC (EEPROM)	1	
IC8651	RFKWSS31B32T	IC	1	[SPG]
IC8701	C0JBAB000614	IC	1	
IC8901	C0JBAA000344	IC	1	
IC9001	C0JBAH000074	IC	1	
IC9002	C0JBAH000074	IC	1	
IP1141	K5H501Z00005	IC PROTECTOR	1	
IP1151	ERJ6GEY0R00V	1/10W 0	1	
IP4751	K5H252Z00003	IC PROTECTOR	1	
IR6131	B3RAD0000150	REMOTE RECEIVING IC	1	
JK3871	K1FB121B0016	JACK, AV	1	
JK4401	K2YZ19000001	JACK, AUDIO VIDEO OUT	1	
K3901	ERJ3GEY0R00V	1/10W 0	1	
K3902	ERJ3GEY0R00V	1/10W 0	1	
K3903	ERJ3GEY0R00V	1/10W 0	1	
K3906	ERJ3GEY0R00V	1/10W 0	1	
K4902	ERJ3GEY0R00V	1/10W 0	1	
K6009	ERJ3GEY0R00V	1/10W 0	1	
K8101	ERJ3GEY0R00V	1/10W 0	1	
K8102	ERJ3GEY0R00V	1/10W 0	1	
K8103	ERJ3GEY0R00V	1/10W 0	1	
K8104	ERJ6GEY0R00V	1/10W 0	1	
K8105	ERJ3GEY0R00V	1/10W 0	1	
K8211	J0JHC0000045	COIL	1	
K8212	J0JHC0000045	COIL	1	
K8251	ERJ3GEY0R00V	1/10W 0	1	
K8261	ERJ2GE0R00X	1/16W 0	1	
K8421	ERJ3GEY0R00V	1/10W 0	1	

Ref. No.	Part No.	Part Name & Description	Pcs	Remarks
K8571	ERJ3GEY0R00V	1/10W 0	1	
K8572	ERJ3GEY0R00V	1/10W 0	1	
L1001	ELF15N003A	NOISE FILTER	1	△
L1111	G0A100HA0023	COIL 10UH	1	
L1117	G0C100JA0048	COIL 10UH	1	
L1131	G0C330KA0065	COIL 33UH	1	
L1141	G0C330KA0065	COIL 33UH	1	
L1151	G0A220GA0026	COIL 22UH	1	
L3501	G0C220JA0019	COIL 22UH	1	
L3502	G0C220JA0019	COIL 22UH	1	
L3901	J0MAB0000225	COIL	1	
L3902	J0MAB0000225	COIL	1	
L3903	J0MAB0000225	COIL	1	
L3904	J0MAB0000225	COIL	1	
L4291	G0C220KA0065	COIL	1	
L6001	G0C101JA0019	COIL 100UH	1	
L8201	G1C100K00019	100UH	1	
L8301	G1C100K00019	100UH	1	
L8302	G1C100K00019	100UH	1	
L8501	G1C100K00019	100UH	1	
L8550	G1C100KA0055	CHIP INDUCTOR 10UH	1	
LB3531	J0JBC0000015	COIL	1	
LB3532	J0JBC0000015	COIL	1	
LB3533	J0JBC0000015	COIL	1	
LB3534	J0JCC0000186	COIL	1	
LB3535	J0JBC0000015	COIL	1	
LB3536	J0JBC0000015	COIL	1	
LB3871	J0JBC0000015	COIL	1	
LB3872	J0JBC0000015	COIL	1	
LB3873	J0JBC0000015	COIL	1	
LB3874	J0JBC0000015	COIL	1	
LB3901	J0JHC0000045	COIL	1	
LB3902	J0JHC0000045	COIL	1	
LB3903	J0JHC0000045	COIL	1	
LB3904	J0JHC0000045	COIL	1	
LB3905	J0JCC0000119	COIL	1	
LB3906	J0JCC0000119	COIL	1	
LB3907	J0JCC0000119	COIL	1	
LB3908	J0JCC0000119	COIL	1	
LB8001	J0JHC0000045	COIL	1	
LB8011	J0JHC0000045	COIL	1	
LB8263	J0JBC0000042	COIL	1	
LB8401	J0JBC0000042	COIL	1	
LB8424	J0JBC0000042	COIL	1	
LB8530	J0JHC0000045	COIL	1	
LB8531	J0JBC0000042	COIL	1	
LB8551	J0JBC0000042	COIL	1	
LB8561	J0JBC0000042	COIL	1	
LB8571	J0JBC0000042	COIL	1	
LB8701	J0JBC0000015	COIL	1	
LB8702	J0JCC0000119	COIL	1	
LB8703	J0JCC0000119	COIL	1	
P1001	K2AA2B000011	AC JACK	1	△
P3901	K1FA119E0002	HDMI JACK	1	
PC1	RP6C0586	PACKING CASE	1	E (S)
PC1	RP6C0587	PACKING CASE	1	E (K)
PC1	RP6C0588	PACKING CASE	1	EB
PC1	RP6C0584	PACKING CASE	1	EG (S)
PC1	RP6C0585	PACKING CASE	1	EG (K)
PC2	RPNC0152A-J	CUSHION (A)	1	
PC3	RPNC0152B-J	CUSHION (B)	1	
PC4	RPFC0071-B	POLYETHYLENE BAG	1	
PS8101	K1KY14AA0275	CONNECTOR (14P)	1	
PS8301	K1KY20AA0275	CONNECTOR (20P)	1	
Q1051	B3PBA0000241	TRANSISTOR	1	△
Q1115	B1DHD000029	TRANSISTOR	1	
Q3801	B1ABCF000138	TRANSISTOR	1	
Q3821	XN0460100L	TRANSISTOR	1	

Ref. No.	Part No.	Part Name & Description	Pcs	Remarks
Q3851	B1ABCF000138	TRANSISTOR	1	
Q3852	B1ABCF000138	TRANSISTOR	1	
Q3901	2SD1819A0L	TRANSISTOR	1	
Q3902	B1CFHA000002	TRANSISTOR	1	
Q3903	B1CFHA000002	TRANSISTOR	1	
Q4302	B1ABCF000138	TRANSISTOR	1	
Q4422	B1ABCF000138	TRANSISTOR	1	
Q4423	B1ABCF000138	TRANSISTOR	1	
Q4751	B1ABCF000138	TRANSISTOR	1	
Q6061	2SD0601ARL	TRANSISTOR	1	
Q6062	2SD0601ARL	TRANSISTOR	1	
Q6085	B1ABGC000011	TRANSISTOR	1	
Q6211	2SD1819A0L	TRANSISTOR	1	
Q6212	2SD1819A0L	TRANSISTOR	1	
Q8111	2SB0709A0L	TRANSISTOR	1	
Q8261	B1ADMF000007	TRANSISTOR	1	
Q8262	B1ADMF000007	TRANSISTOR	1	
Q8263	B1CFHC000003	TRANSISTOR	1	
Q8532	B1CFHC000003	TRANSISTOR	1	
Q8533	B1ABDF000026	TRANSISTOR	1	
Q8551	B1ABDF000018	TRANSISTOR	1	
Q8552	2SB09700RL	TRANSISTOR	1	
Q8561	B1ABDF000018	TRANSISTOR	1	
Q8562	2SB09700RL	TRANSISTOR	1	
Q8631	B1CFHC000003	TRANSISTOR	1	
QR1115	B1GBCFNN0043	TRANSISTOR	1	
QR3501	B1GBCFLL0035	TRANSISTOR	1	
QR3502	B1GBCFLL0035	TRANSISTOR	1	
QR3821	B1GBCFLL0035	TRANSISTOR	1	
QR3822	B1GBCFLL0035	TRANSISTOR	1	
QR3823	B1GDCFJJ0046	TRANSISTOR	1	
QR4302	UNR211H00L	TRANSISTOR	1	
QR4306	B1GBCFJA0026	TRANSISTOR	1	
QR8111	XP0650100L	TRANSISTOR	1	
QR8420	B1GBCFJJ0047	TRANSISTOR	1	
R1001	ERDS2FJ474T	1/4W 470K	1	
R1002	ERDS2FJ474T	1/4W 470K	1	
R1031	ERG2SJ683P	2W 68K	1	
R1041	ERDS2TJ390T	1/4W 39	1	
R1051	ERDS2TJ822T	1/4W 8.2K	1	
R1052	ERDS2TJ562T	1/4W 5.6K	1	
R1053	ERDS2TJ8R2T	1/4W 8.2	1	
R1054	ERJ3GEY0R00V	1/10W 0	1	
R1061	ERDS2TJ683T	1/4W 68K	1	
R1062	ERDS2TJ683T	1/4W 68K	1	
R1071	ERDS2TJ182T	1/4W 1.8K	1	
R1101	ERDS2TJ181T	1/4W 180	1	
R1102	D1AA4701A006	1/4W 4.7K	1	
R1103	D1AA4701A006	1/4W 4.7K	1	
R1104	ERJ6GEYJ102V	1/10W 1K	1	
R1105	ERJ3GEYJ222V	1/10W 2.2K	1	
R1106	ERJ3GEYJ102V	1/10W 1K	1	
R1107	ERJ3GEYJ103V	1/10W 10K	1	
R1115	ERJ3GEYJ104V	1/10W 100K	1	
R1116	ERJ3GEYJ102V	1/10W 1K	1	
R1196	ERJ3GEYJ104V	1/10W 100K	1	
R3501	ERJ3GEYJ223V	1/10W 22K	1	
R3521	ERJ3GEYJ223V	1/10W 22K	1	
R3522	ERJ3GEYJ103V	1/10W 10K	1	
R3531	ERJ3GEYJ750V	1/10W 75	1	
R3532	ERJ3GEYF750V	1/10W 75	1	
R3533	ERJ3GEYF750V	1/10W 75	1	
R3534	ERJ3GEYF750V	1/10W 75	1	
R3535	ERJ3GEYJ750V	1/10W 75	1	
R3536	ERJ3GEYJ750V	1/10W 75	1	
R3821	ERJ3GEYJ223V	1/10W 22K	1	
R3822	ERJ3GEYJ223V	1/10W 22K	1	
R3823	ERJ3GEYJ472V	1/10W 4.7K	1	
R3824	ERJ3GEYJ223V	1/10W 22K	1	
R3825	ERJ3GEYJ472V	1/10W 4.7K	1	
R3826	ERJ3GEYJ183V	1/10W 18K	1	

Ref. No.	Part No.	Part Name & Description	Pcs	Remarks
R3827	ERJ3GEYJ223V	1/10W 22K	1	
R3828	ERJ3GEYJ471V	1/10W 470	1	
R3851	ERJ3GEYJ681V	1/10W 680	1	
R3852	ERJ3GEYJ821V	1/10W 820	1	
R3853	ERJ3GEYJ821V	1/10W 820	1	
R3854	ERJ3GEYJ681V	1/10W 680	1	
R3871	ERJ3GEYF750V	1/10W 75	1	
R3872	ERJ3GEYF750V	1/10W 75	1	
R3873	ERJ3GEYF750V	1/10W 75	1	
R3874	ERJ3GEYF750V	1/10W 75	1	
R3875	ERJ3GEYJ221V	1/10W 220	1	
R3876	ERJ3GEYJ221V	1/10W 220	1	
R3877	ERJ3GEYJ750V	1/10W 75	1	
R3878	ERJ3GEYJ750V	1/10W 75	1	
R3901	ERJ2GEJ511X	1/16W 510	1	
R3902	ERJ2GEJ103X	1/16W 10K	1	
R3903	ERJ2GEJ103X	1/16W 10K	1	
R3904	ERJ2GEJ472X	1/16W 4.7K	1	
R3905	ERJ2GEJ222X	1/16W 2.2K	1	
R3906	ERJ2GEJ472X	1/16W 4.7K	1	
R3907	ERJ2GEJ222X	1/16W 2.2K	1	
R3909	ERJ2GE0R00X	1/16W 0	1	
R3910	ERJ2GEJ103X	1/16W 10K	1	
R3947	ERJ2GEJ103X	1/16W 10K	1	
R4301	ERJ6GEYJ271V	1/10W 270	1	
R4302	ERJ3GEYJ103V	1/10W 10K	1	
R4304	ERJ3GEYJ222V	1/10W 2.2K	1	
R4309	ERJ3GEYJ223V	1/10W 22K	1	
R4320	ERJ3GEYJ222V	1/10W 2.2K	1	
R4331	D0HB103ZA002	1/10W 10K	1	
R4332	D0HB103ZA002	1/10W 10K	1	
R4355	D0HB153ZA002	1/10W 15K	1	
R4356	D0HB153ZA002	1/10W 15K	1	
R4422	ERJ3GEYJ473V	1/10W 47K	1	
R4423	ERJ3GEYJ473V	1/10W 47K	1	
R4428	ERJ3GEYJ681V	1/10W 680	1	
R4429	ERJ3GEYJ681V	1/10W 680	1	
R4451	ERJ3GEYJ821V	1/10W 820	1	
R4452	ERJ3GEYJ821V	1/10W 820	1	
R4459	ERJ3GEYJ221V	1/10W 220	1	
R4460	ERJ3GEYJ221V	1/10W 220	1	
R4751	ERJ3GEYJ102V	1/10W 1K	1	
R4752	ERJ3GEYJ102V	1/10W 1K	1	
R4753	ERJ3GEYJ102V	1/10W 1K	1	
R4754	ERJ3GEYJ221V	1/10W 220	1	
R4755	ERJ3GEYJ750V	1/10W 75	1	
R4756	ERJ3GEYJ103V	1/10W 10K	1	
R6004	ERJ3GEYJ101V	1/10W 100	1	
R6006	ERJ3GEYJ103V	1/10W 10K	1	
R6009	ERJ3GEYJ103V	1/10W 10K	1	
R6011	ERJ3GEYJ103V	1/10W 10K	1	
R6021	ERJ3GEYJ103V	1/10W 10K	1	
R6022	ERJ3GEY0R00V	1/10W 0	1	
R6023	ERJ3GEYJ103V	1/10W 10K	1	
R6024	ERJ3GEY0R00V	1/10W 0	1	
R6025	ERJ3GEYJ103V	1/10W 10K	1	
R6026	ERJ3GEYJ822V	1/10W 8.2K	1	E
R6026	ERJ3GEYJ472V	1/10W 4.7K	1	EB/EG
R6040	ERJ3GEYJ103V	1/10W 10K	1	
R6050	ERJ3GEYJ103V	1/10W 10K	1	
R6060	ERJ3GEYJ103V	1/10W 10K	1	
R6061	ERJ3GEYJ472V	1/10W 4.7K	1	
R6062	ERJ3GEYJ473V	1/10W 47K	1	
R6063	ERJ3GEYJ225V	1/10W 2.2M	1	
R6064	ERJ3GEYJ104V	1/10W 100K	1	
R6071	ERJ3GEYJ563V	1/10W 56K	1	
R6072	ERJ3GEYJ913V	1/10W 91K	1	
R6081	ERDS2TJ181T	1/4W 180	1	
R6085	ERJ3GEYJ822V	1/10W 8.2K	1	
R6086	ERJ3GEYJ104V	1/10W 100K	1	
R6101	ERJ3GEYJ151V	1/10W 150	1	
R6102	ERJ3GEYJ151V	1/10W 150	1	
R6151	ERJ3GEYJ122V	1/10W 1.2K	1	

Ref. No.	Part No.	Part Name & Description	Pcs	Remarks
R6171	ERJ3GEYJ122V	1/10W 1.2K	1	
R6201	ERJ3GEYJ472V	1/10W 4.7K	1	
R6202	ERJ3GEYJ472V	1/10W 4.7K	1	
R6203	ERJ3GEYJ101V	1/10W 100	1	
R6204	ERJ3GEYJ101V	1/10W 100	1	
R6211	ERJ3GEYJ273V	1/10W 27K	1	
R6212	ERJ3GEYJ224V	1/10W 220K	1	
R6213	ERJ3GEYJ104V	1/10W 100K	1	
R6214	ERJ3GEYJ221V	1/10W 220	1	
R8001	ERJ2GEJ103X	1/16W 10K	1	
R8003	ERJ2GEJ103X	1/16W 10K	1	
R8011	ERJ2GEJ220X	1/16W 22	1	
R8012	ERJ2GEJ220X	1/16W 22	1	
R8013	ERJ2GEJ220X	1/16W 22	1	
R8041	ERJ2GEJ330X	1/16W 33	1	
R8111	ERJ3GEYJ104V	1/10W 100K	1	
R8112	ERJ3GEYJ104V	1/10W 100K	1	
R8113	ERJ3GEYJ103V	1/10W 10K	1	
R8114	ERJ3GEYJ203V	1/10W 20K	1	
R8211	ERJ2GEJ103X	1/16W 10K	1	
R8221	ERJ2GEJ223X	1/16W 22K	1	
R8225	ERJ2GEJ273X	1/16W 27K	1	
R8230	ERJ2GEJ222X	1/16W 2.2K	1	
R8231	ERJ2GEJ123X	1/16W 12K	1	
R8232	ERJ2GEJ123X	1/16W 12K	1	
R8253	ERJ2GE0R00X	1/16W 0	1	
R8254	ERJ2GE0R00X	1/16W 0	1	
R8261	ERJ2GEJ823X	1/16W 82K	1	
R8262	ERJ2GEJ153X	1/16W 15K	1	
R8263	ERJ2GEJ823X	1/16W 82K	1	
R8264	ERJ2GEJ153X	1/16W 15K	1	
R8265	ERJ3RBD1742V	1/16W 170K	1	
R8266	ERJ3RBD103V	1/16W 10K	1	
R8267	ERJ3RBD103V	1/16W 10K	1	
R8311	ERJ2RHD242X	1/16W 2.4K	1	
R8312	ERJ2RHD102X	1/16W 1K	1	
R8313	ERJ2RHD273X	1/16W 27K	1	
R8314	ERJ2RHD222X	1/16W 2.2K	1	
R8321	ERJ3RBD201V	1/16W 200	1	
R8322	ERJ3GEY0R00V	1/10W 0	1	
R8325	ERJ3RBD201V	1/16W 200	1	
R8326	ERJ3GEY0R00V	1/10W 0	1	
R8331	ERJ3RBD201V	1/16W 200	1	
R8332	ERJ3GEY0R00V	1/10W 0	1	
R8335	ERJ3RBD201V	1/16W 200	1	
R8341	ERJ3RBD201V	1/16W 200	1	
R8401	ERJ2GEJ101X	1/16W 100	1	
R8403	ERJ2GEJ101X	1/16W 100	1	
R8420	ERJ2GEJ222X	1/16W 2.2K	1	
R8421	ERJ2GE0R00X	1/16W 0	1	
R8430	ERJ3GEYJ102V	1/10W 1K	1	
R8531	ERJ2GEJ152X	1/16W 1.5K	1	
R8532	ERJ2GEJ222X	1/16W 2.2K	1	
R8533	J0JBC0000042	COIL	1	
R8534	ERJ2GEJ103X	1/16W 10K	1	
R8535	ERJ2GEJ103X	1/16W 10K	1	
R8536	ERJ2GEJ104X	1/16W 100K	1	
R8537	ERJ3GEY0R00V	1/10W 0	1	
R8538	ERJ3GEY0R00V	1/10W 0	1	
R8541	ERJ2GEJ153X	1/16W 15K	1	
R8551	ERJ2GE0R00X	1/16W 0	1	
R8552	ERJ2GEJ102X	1/16W 1K	1	
R8553	ERJ2GEJ102X	1/16W 1K	1	
R8554	ERJ2GEJ680X	1/16W 68	1	
R8555	ERJ2GEJ2R2X	1/16W 2.2	1	
R8556	ERJ3GEYJ560V	1/10W 56	1	
R8557	ERJ3GEYJ510V	1/10W 51	1	
R8558	ERJ2GEJ473X	1/16W 47K	1	
R8559	ERJ2GEJ153X	1/16W 15K	1	
R8561	ERJ2GE0R00X	1/16W 0	1	
R8562	ERJ2GEJ102X	1/16W 1K	1	
R8563	ERJ2GEJ102X	1/16W 1K	1	
R8564	ERJ2GEJ220X	1/16W 22	1	

Ref. No.	Part No.	Part Name & Description	Pcs	Remarks
R8565	ERJ2GEJ2R2X	1/16W 2.2	1	
R8566	ERJ3GEYJ560V	1/10W 56	1	
R8567	ERJ3GEYJ510V	1/10W 51	1	
R8568	ERJ2GEJ473X	1/16W 47K	1	
R8601	ERJ2GEJ104X	1/16W 100K	1	
R8611	ERJ2GEJ101X	1/16W 100	1	
R8621	ERJ2GEJ105X	1/16W 1M	1	
R8622	ERJ2RHD821X	1/16W 820	1	
R9007	ERJ2GEJ103X	1/16W 10K	1	
R9017	ERJ2GE0R00X	1/16W 0	1	
R9018	ERJ2GE0R00X	1/16W 0	1	
R9019	ERJ2GE0R00X	1/16W 0	1	
R9020	ERJ2GE0R00X	1/16W 0	1	
R9022	ERJ2GEJ103X	1/16W 10K	1	
R9040	ERJ2GEJ103X	1/16W 10K	1	
R9041	ERJ2GEJ103X	1/16W 10K	1	
R9042	ERJ2GEJ103X	1/16W 10K	1	
R9050	ERJ2GEJ103X	1/16W 10K	1	
R9051	ERJ2GEJ103X	1/16W 10K	1	
R9052	ERJ2GEJ103X	1/16W 10K	1	
RX3901	D1H410120001	RESISTOR-RESISTOR	1	
RX8001	D1H410320002	RESISTOR-RESISTOR	1	
RX8002	D1H410320002	RESISTOR-RESISTOR	1	
RX8011	D1H88204A024	RESISTOR-RESISTOR	1	
RX8012	D1H88204A024	RESISTOR-RESISTOR	1	
RX8013	D1H88204A024	RESISTOR-RESISTOR	1	
RX8014	D1H88204A024	RESISTOR-RESISTOR	1	
RX8015	D1H88204A024	RESISTOR-RESISTOR	1	
RX8016	D1H88204A024	RESISTOR-RESISTOR	1	
RX8017	D1H88204A024	RESISTOR-RESISTOR	1	
RX8018	D1H422020001	RESISTOR-RESISTOR	1	
RX8019	D1H422020001	RESISTOR-RESISTOR	1	
RX8020	D1H422020001	RESISTOR-RESISTOR	1	
RX8031	D1H447220001	RESISTOR-RESISTOR	1	
RX8032	D1H447220001	RESISTOR-RESISTOR	1	
RX8401	D1H410120001	RESISTOR-RESISTOR	1	
RX8531	D1H456020001	RESISTOR-RESISTOR	1	
RX8532	D1H85604A024	RESISTOR-RESISTOR	1	
RX8533	D1H456020001	RESISTOR-RESISTOR	1	
RX8534	D1H456020001	RESISTOR-RESISTOR	1	
RX8611	D1H447220001	RESISTOR-RESISTOR	1	
RX8701	D1H84714A024	RESISTOR-RESISTOR	1	
RX8702	D1H84714A024	RESISTOR-RESISTOR	1	
S2601	K0L1BA000078	SWITCH	1	
S2602	K0L1BA000078	SWITCH	1	
S6151	K0H1BB000039	SWITCH	1	
S6152	EVQ11G05R	SWITCH	1	
S6161	K0H1BB000039	SWITCH	1	
S6172	K0H1BB000039	SWITCH	1	
T1021	G4DYA0000078	TRANSFORMER	1	△
VA1002	ERZVA5Z471	TRANSIENT/SURGE ABSORBER	1	△
W172	ERJ6GEY0R00V	1/10W 0	1	
W255	ERJ3GEY0R00V	1/10W 0	1	
W304	ERJ3GEY0R00V	1/10W 0	1	
W305	ERJ6GEY0R00V	1/10W 0	1	
W309	ERJ6GEY0R00V	1/10W 0	1	
W310	ERJ3GEY0R00V	1/10W 0	1	
W311	ERJ3GEY0R00V	1/10W 0	1	
W312	ERJ6GEY0R00V	1/10W 0	1	
W313	ERJ3GEY0R00V	1/10W 0	1	
W314	ERJ6GEY0R00V	1/10W 0	1	
W315	ERJ3GEY0R00V	1/10W 0	1	
W316	ERJ3GEY0R00V	1/10W 0	1	
W317	ERJ3GEY0R00V	1/10W 0	1	
W318	ERJ3GEY0R00V	1/10W 0	1	
W321	ERJ3GEY0R00V	1/10W 0	1	
W322	ERJ3GEY0R00V	1/10W 0	1	

Ref. No.	Part No.	Part Name & Description	Pcs	Remarks
W323	ERJ3GEY0R00V	1/10W 0	1	
W324	ERJ3GEY0R00V	1/10W 0	1	
W325	ERJ6GEY0R00V	1/10W 0	1	
W326	ERJ3GEY0R00V	1/10W 0	1	
W327	ERJ6GEY0R00V	1/10W 0	1	
W328	ERJ3GEY0R00V	1/10W 0	1	
W329	ERJ3GEY0R00V	1/10W 0	1	
W330	ERJ3GEY0R00V	1/10W 0	1	
W331	ERJ3GEY0R00V	1/10W 0	1	
W332	ERJ6GEY0R00V	1/10W 0	1	
W342	ERJ6GEY0R00V	1/10W 0	1	
W343	ERJ6GEY0R00V	1/10W 0	1	
W344	ERJ3GEY0R00V	1/10W 0	1	
W360	ERJ3GEY0R00V	1/10W 0	1	
W362	ERJ6GEY0R00V	1/10W 0	1	
W363	ERJ3GEY0R00V	1/10W 0	1	
W364	ERJ3GEY0R00V	1/10W 0	1	
W377	ERJ3GEY0R00V	1/10W 0	1	
W385	ERJ6GEY0R00V	1/10W 0	1	
W387	ERJ3GEY0R00V	1/10W 0	1	
W395	ERJ3GEY0R00V	1/10W 0	1	
W400	ERJ3GEY0R00V	1/10W 0	1	
W412	ERJ3GEY0R00V	1/10W 0	1	
W418	ERJ3GEY0R00V	1/10W 0	1	
W419	ERJ3GEY0R00V	1/10W 0	1	
X6001	H2D800400009	CERAMIC OSCILLATOR	1	
X8621	H0J270500080	CRYSTAL OSCILLATOR	1	
ZA1001	EYF52BCY	FUSE HOLDER	1	
ZA1002	EYF52BCY	FUSE HOLDER	1	
ZA1111	RMCC0027-1	EARTH SPRING	1	
ZA1112	K4CZ01000027	TERMINAL	1	
ZA4701	K4CZ01000027	TERMINAL	1	
ZA4702	K4CZ01000027	TERMINAL	1	
ZA4752	K4CZ01000027	TERMINAL	1	
ZA4754	RMCC0001-1	EARTH SPRING	1	