
ORDER NO. ITD0810090CE

Service Manual

Plasma Television

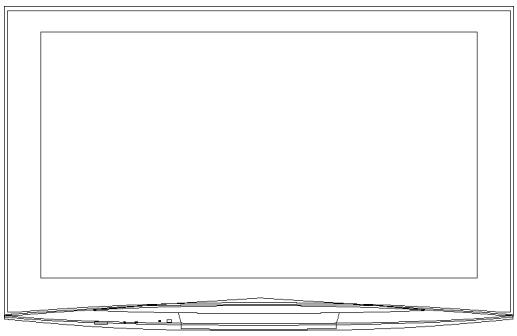

Model No. **TH-65PY850D**
TH-65PY850H
TH-65PY850M
TH-65PY850MR
TH-65PY850MS

GPF11DA Chassis

⚠ WARNING

This service information is designed for experienced repair technicians only and is not designed for use by the general public.
It does not contain warnings or cautions to advise non-technical individuals of potential dangers in attempting to service a product.
Products powered by electricity should be serviced or repaired only by experienced professional technicians. Any attempt to service or repair the product or products dealt with in this service information by anyone else could result in serious injury or death.

IMPORTANT SAFETY NOTICE

There are special components used in this equipment which are important for safety. These parts are marked by ⚠ in the Schematic Diagrams, Circuit Board Diagrams, Exploded Views and Replacement Parts List. It is essential that these critical parts should be replaced with manufacturer's specified parts to prevent shock, fire or other hazards. Do not modify the original design without permission of manufacturer.

Panasonic®

© Panasonic Corporation 2008.
Unauthorized copying and distribution is a violation of law.

1 Safety Precautions

1.1. General Guidelines

1. When servicing, observe the original lead dress. If a short circuit is found, replace all parts which have been overheated or damaged by the short circuit.
2. After servicing, see to it that all the protective devices such as insulation barriers, insulation papers shields are properly installed.
3. After servicing, make the following leakage current checks to prevent the customer from being exposed to shock hazards.
4. When servicing, observe the original lead dress. If a short circuit is found, replace all parts which have been overheated or damaged by the short circuit.
5. After servicing, see to it that all the protective devices such as insulation barriers, insulation papers shields are properly installed.
6. After servicing, make the following leakage current checks to prevent the customer from being exposed to shock hazards.

1.2. Touch-Current Check

1. Plug the AC cord directly into the AC outlet. Do not use an isolation transformer for this check.
2. Connect a measuring network for touch currents between each exposed metallic part on the set and a good earth ground such as a water pipe, as shown in Figure 1.
3. Use Leakage Current Tester (Simpson 228 or equivalent) to measure the potential across the measuring network.
4. Check each exposed metallic part, and measure the voltage at each point.
5. Reserve the AC plug in the AC outlet and repeat each of the above measure.
6. The potential at any point (TOUGH CURRENT) expressed as voltage U_1 and U_2, does not exceed the following values:

   For a. c.: U_1 = 35 V (peak) and U_2 = 0.35 V (peak);


   For d. c.: U_1 = 1.0 V,

   Note:

   The limit value of U_2 = 0.35 V (peak) for a. c. and U_1 = 1.0 V for d. c. correspond to the values 0.7 mA (peak) a. c. and 2.0 mA d. c.

   The limit value U_1 = 35 V (peak) for a. c. correspond to the value 70 mA (peak) a. c. for frequencies greater than 100 kHz.
7. In case a measurement is out of the limits specified, there is a possibility of a shock hazard, and the equipment should be repaired and rechecked before it is returned to the customer.

Measuring network for TOUCH CURRENTS

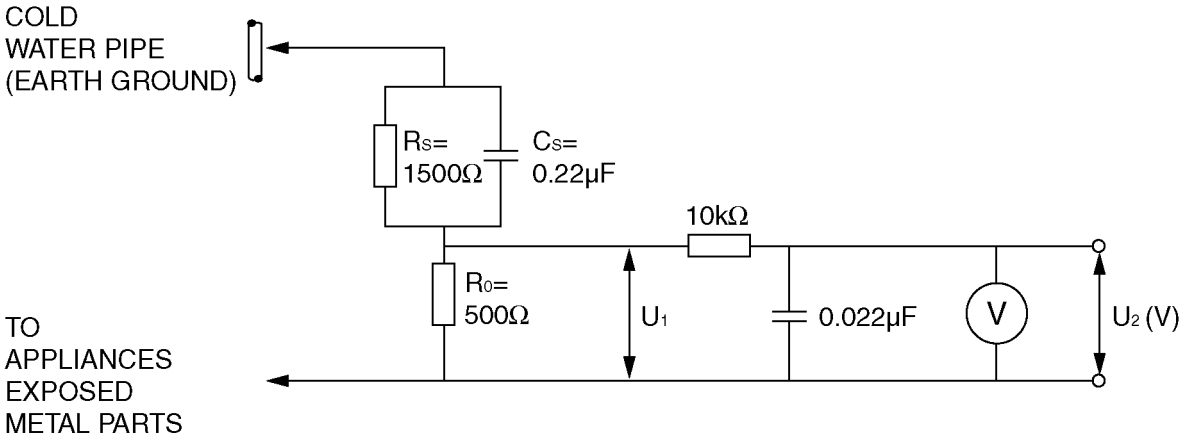

Resistance values in ohms (Ω)

V: Voltmeter or oscilloscope
(r.m.s. or peak reading)

Input resistance: ≥ 1 MΩ
Input capacitance: ≤ 200 pF
Frequency range: 15 Hz to 1 MHz and d.c. respectively

NOTE - Appropriate measures should be taken to obtain the correct value in case of non-sinusoidal waveforms.

Figure 1

2 Warning

2.1. Prevention of Electrostatic Discharge (ESD) to Electrostatically Sensitive (ES) Devices

Some semiconductor (solid state) devices can be damaged easily by static electricity. Such components commonly are called Electrostatically Sensitive (ES) Devices. Examples of typical ES devices are integrated circuits and some field-effect transistors and semiconductor [chip] components. The following techniques should be used to help reduce the incidence of component damage caused by electrostatic discharge (ESD).

1. Immediately before handling any semiconductor component or semiconductor-equipped assembly, drain off any ESD on your body by touching a known earth ground. Alternatively, obtain and wear a commercially available discharging ESD wrist strap, which should be removed for potential shock reasons prior to applying power to the unit under test.
2. After removing an electrical assembly equipped with ES devices, place the assembly on a conductive surface such as aluminum foil, to prevent electrostatic charge buildup or exposure of the assembly.
3. Use only a grounded-tip soldering iron to solder or unsolder ES devices.
4. Use only an anti-static solder removal device. Some solder removal devices not classified as [anti-static (ESD protected)] can generate electrical charge sufficient to damage ES devices.
5. Do not use freon-propelled chemicals. These can generate electrical charges sufficient to damage ES devices.
6. Do not remove a replacement ES device from its protective package until immediately before you are ready to install it. (Most replacement ES devices are packaged with leads electrically shorted together by conductive foam, aluminum foil or comparable conductive material).
7. Immediately before removing the protective material from the leads of a replacement ES device, touch the protective material to the chassis or circuit assembly into which the device will be installed.

   Caution

   Be sure no power is applied to the chassis or circuit, and observe all other safety precautions.
8. Minimize bodily motions when handling unpackaged replacement ES devices. (Otherwise ham less motion such as the brushing together of your clothes fabric or the lifting of your foot from a carpeted floor can generate static electricity (ESD) sufficient to damage an ES device).

2.2. About lead free solder (PbF)


Note: Lead is listed as (Pb) in the periodic table of elements.
In the information below, Pb will refer to Lead solder, and PbF will refer to Lead Free Solder.
The Lead Free Solder used in our manufacturing process and discussed below is (Sn+Ag+Cu).
That is Tin (Sn), Silver (Ag) and Copper (Cu) although other types are available.

This model uses Pb Free solder in it's manufacture due to environmental conservation issues. For service and repair work, we'd suggest the use of Pb free solder as well, although Pb solder may be used.

PCBs manufactured using lead free solder will have the PbF within a leaf Symbol **PbF** stamped on the back of PCB.


Caution

- Pb free solder has a higher melting point than standard solder. Typically the melting point is 50 ~ 70 °F (30~40 °C) higher. Please use a high temperature soldering iron and set it to 700 ± 20 °F (370 ± 10 °C).
- Pb free solder will tend to splash when heated too high (about 1100 °F or 600 °C).
  If you must use Pb solder, please completely remove all of the Pb free solder on the pins or solder area before applying Pb solder. If this is not practical, be sure to heat the Pb free solder until it melts, before applying Pb solder.
- After applying PbF solder to double layered boards, please check the component side for excess solder which may flow onto the opposite side. (see figure below)

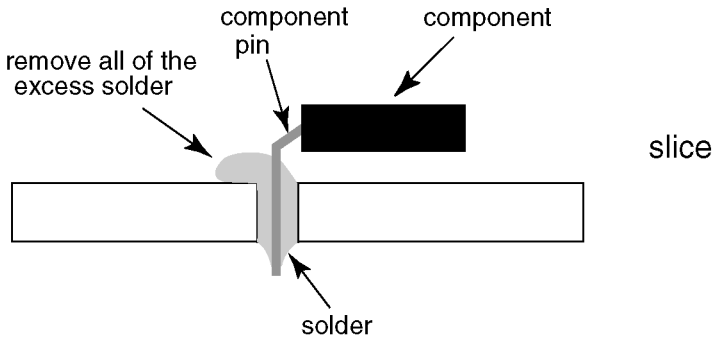


Suggested Pb free solder


There are several kinds of Pb free solder available for purchase. This product uses Sn+Ag+Cu (tin, silver, copper) solder. However, Sn+Cu (tin, copper), Sn+Zn+Bi (tin, zinc, bismuth) solder can also be used.

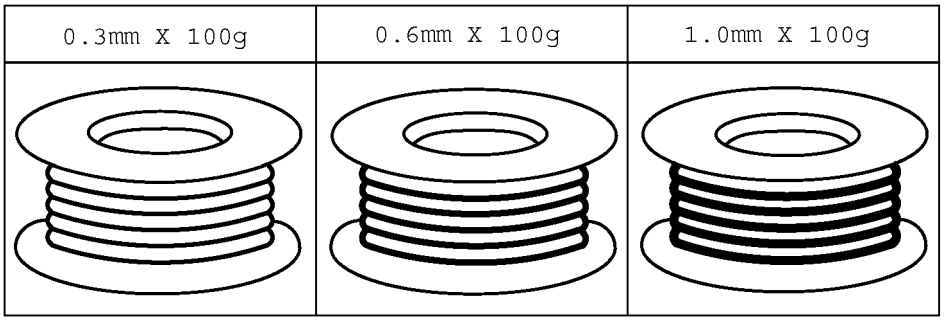

3 Service Navigation

3.1. Service Hint

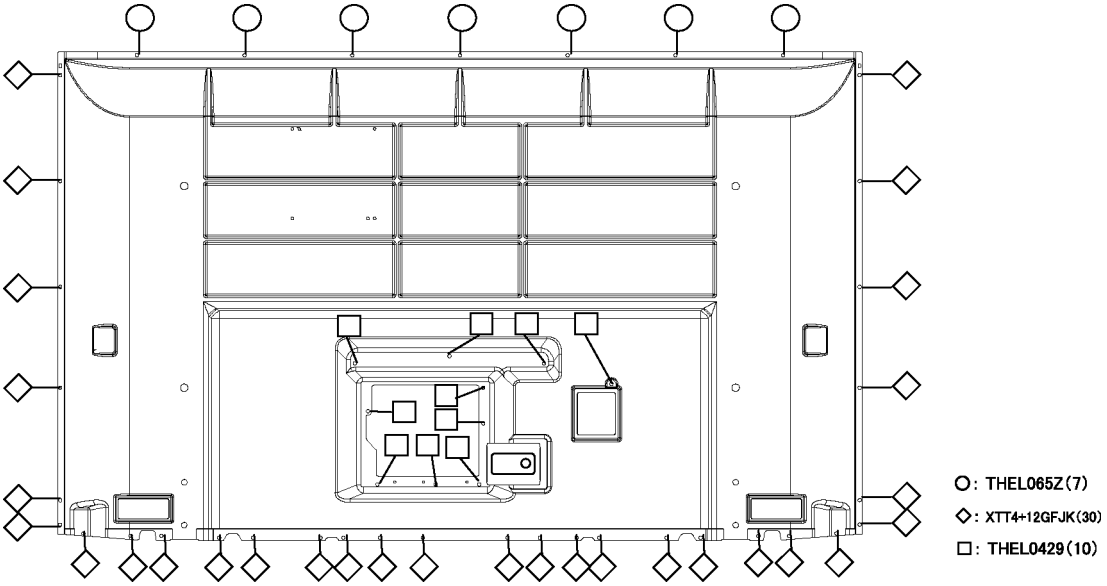

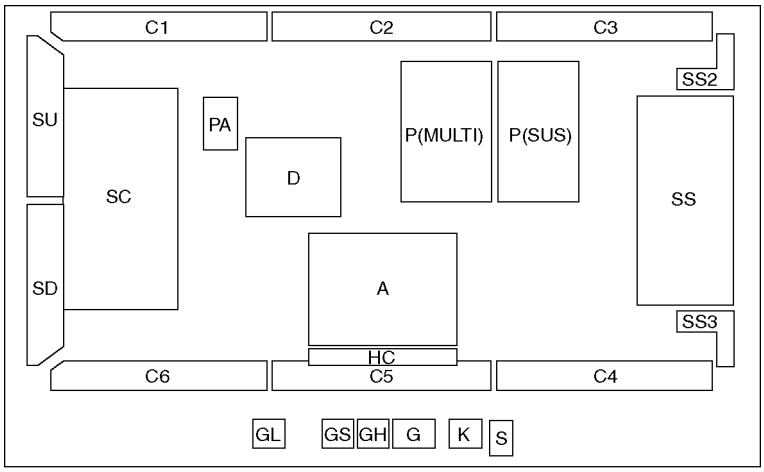

Board Name	Function	Board Name	Function
P	Power Supply	C1	Data Driver (Upper Right)
A	DC-DC Converter Speaker out, Sound Processor AV Terminal, AV Switch, Ethernet LAN Digital Signal Processor, Micom, HDMI Interface Peaks PRO, GC6	C2	Data Driver (Upper Center)
		C3	Data Driver (Upper Left)
		C4	Data Driver (Lower Left)
		C5	Data Driver (Lower Center)
		C6	Data Driver (Lower Right)
D	Format Converter, Plasma AI, Sub-Field Processor	SC	Scan Drive
K	Remote receiver, Power LED	SU	Scan out (Upper)
S	Power Switch	SD	Scan out (Lower)
GS	SD Card Slot	SS	Sustain Drive
GL	SD Blue LED	SS2	Sustain connector (Upper)
GH	HDMI4 in	SS3	Sustain connector (Lower)
G	Front Terminal, Key Switch	PA	Fan control
HC	PC in, Audio out		

3.2. Applicable signals

COMPONENT (Y, P_B/C_B ,P_R/C_R)**, HDMI**

* Mark: Applicable input signal

Signal name	COMPONENT	HDMI
525 (480) / 60i	*	*
525 (480) / 60p	*	*
625 (576) / 50i	*	*
625 (576) / 50p	*	*
750 (720) / 60p	*	*
750 (720) / 50p	*	*
1,125 (1,080) / 60i	*	*
1,125 (1,080) / 50i	*	*
1,125 (1,080) / 60p		*
1,125 (1,080) / 50p		*
1,125 (1,080) / 24p		*

PC (D-sub 15P)

Signal name	Horizontal frequency (kHz)	Vertical frequency (Hz)
640 × 400 @70 Hz	31.47	70.07
640 × 480 @60 Hz	31.47	59.94
640 × 480 @75 Hz	37.50	75.00
800 × 600 @60 Hz	37.88	60.32
800 × 600 @75 Hz	46.88	75.00
800 × 600 @85 Hz	53.67	85.06
852 × 480 @60 Hz	31.44	59.89
1,024 × 768 @60 Hz	48.36	60.00
1,024 × 768 @70 Hz	56.48	70.07
1,024 × 768 @75 Hz	60.02	75.03
1,024 × 768 @85 Hz	68.68	85.00
1,280 × 1,024 @60 Hz	63.98	60.02
1,366 × 768 @60 Hz	48.39	60.04
Macintosh13” (640 × 480)	35.00	66.67
Macintosh16” (832 × 624)	49.73	74.55
Macintosh21” (1,152 × 870)	68.68	75.06

Note

- Signals other than above may not be displayed properly.
- The above signals are reformatted for optimal viewing on your display.
- Applicable input signal for PC is basically compatible to VESA standard timing.
- PC signal is magnified or compressed for display, so that it may not be possible to show fine detail with sufficient clarity.

4 Specifications

Power Source AC 220 - 240 V, 50/60 Hz (D/H/M/MR)
AC 110 - 240 V, 50/60 Hz (MS)

Power Consumption
- **Average use** 725W
- **Standby condition** 0.4 W

Plasma Display panel
- **Aspect Ratio** 16:9
- **Visible screen size** 165 cm (diagonal)
  1,434 mm (W) × 807 mm (H)
- **Number of pixels** 2,073,600 (1,920 (W) × 1,080 (H))

Sound
- **Speaker** Woofer (ϕ 80mm) × 2pcs, Tweeter (23mm × 100mm) × 2pcs
- **Audio Output** 31 W (15.5 W + 15.5 W), 10% THD
- **Headphones** M3 (3.5 mm) stereo mini Jack × 1

PC signals VGA, SVGA, XGA, SXGA
Horizontal scanning frequency 31 - 69 kHz
Vertical scanning frequency 59 - 86 Hz

Receiving Systems / Band name

17 Systems		Function
1	PAL B, G, H	Reception of broadcast transmissions and Playback from Video Cassette Tape Recorders
2	PAL I	
3	PAL D, K	
4	SECAM B, G	
5	SECAM D, K	
6	SECAM K1	
7	NTSC M (NTSC 3.58/4.5 MHz)	

17 Systems		Function
8	NTSC 4.43/5.5 MHz	Playback from Special VCR's or DVD
9	NTSC 4.43/6.0 MHz	
10	NTSC 4.43/6.5 MHz	
11	NTSC 3.58/5.5 MHz	
12	NTSC 3.58/6.0 MHz	
13	NTSC 3.58/6.5 MHz	
14	SECAM I	
15	PAL 60 Hz/5.5 MHz	Playback from Special Disc Players and Special VCR's or DVD
16	PAL 60 Hz/6.0 MHz	
17	PAL 60 Hz/6.5 MHz	

Receiving Channels (Regular TV)

VHF BAND	**UHF BAND**
2-12 (PAL/SECAM B, K1)	21-69 (PAL G, H, I/SECAM G, K, K1)
0-12 (PAL B AUST.)	28-69 (PAL B AUST.)
1-9 (PAL B N.Z.)	13-57 (PAL D, K)
1-12 (PAL/SECAM D)	13-62 (NTSC M Japan)
1-12 (NTSC M Japan)	14-69 (NTSC M USA)
2-13 (NTSC M USA)	

CATV
S1-S20 (OSCAR)
1-125 (USA CATV)
C13-C49 (JAPAN)
S21-S41 (HYPER)
Z1-Z37 (CHINA)
5A, 9A (AUST.)

Aerial - Rear VHF/UHF

Operating Conditions

Temperature:	0 °C - 40 °C
Humidity:	20 % - 80 % RH (non-condensing)

Connection Terminals

AV1 Input		
AUDIO L - R	RCA PIN Type × 2	0.5 V[rms]
VIDEO	RCA PIN Type × 1	1.0 V[p-p] (75 Ω)
COMPONENT	Y	1.0 V[p-p] (including synchronization)
	P_B/C_B, P_R/C_R	±0.35 V[p-p]
AV2 Input		
AUDIO L - R	RCA PIN Type × 2	0.5 V[rms]
VIDEO	RCA PIN Type × 1	1.0 V[p-p] (75 Ω)
COMPONENT	Y	1.0 V[p-p] (including synchronization)
	P_B/C_B, P_R/C_R	±0.35 V[p-p]
AV3 Input		
AUDIO L - R	RCA PIN Type × 2	0.5 V[rms]
VIDEO	RCA PIN Type × 1	1.0 V[p-p] (75 Ω)
S VIDEO	Mini DIN 4-pin	Y:1.0 V[p-p] (75 Ω) C:0.286 V[p-p] (75 Ω)
AV4 Input		
AUDIO L - R	RCA PIN Type × 2	0.5 V[rms]
VIDEO	RCA PIN Type × 1	1.0 V[p-p] (75 Ω)
S VIDEO	Mini DIN 4-pin	Y:1.0 V[p-p] (75 Ω) C:0.286 V[p-p] (75 Ω)

Monitor Output		
AUDIO L - R	RCA PIN Type × 2	0.5 V [rms] (high impedance)
VIDEO	RCA PIN Type × 1	1.0 V[p-p] (75 Ω)
Others		
HDMI 1-4 Input	TYPE A Connectors	This TV supports “HDAVI Control 3” function.
PC Input	HIGH-DENSITY D-SUB 15PIN	R, G, B/ 0.7 V [p-p] (75 Ω) HD, VD/TTL Level 2.0 - 5.0 V [p-p] (high impedance)
DIGITAL AUDIO OUT	PCM / Dolby Digital, Fiber optic	
Card slot	SD Card slot × 1	
Dimensions (W × H × D)	1,599 mm × 993 mm × 109 mm	
Mass	73.0 kg Net	


Note

• Design and Specifications are subject to change without notice. Mass and Dimensions shown are approximate.

5 Service Mode

5.1. How to enter into Service Mode

While pressing [VOLUME (-)] button of the main unit, press [0] button of the remote control three times within 2 seconds.

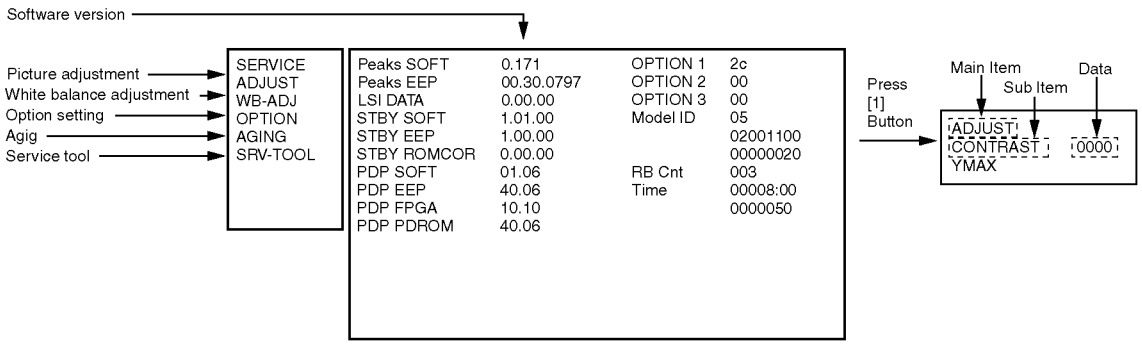

5.1.1. Key command

[1] button...Main items Selection in forward direction
[2] button...Main items Selection in reverse direction
[3] button...Sub items Selection in forward direction
[4] button...Sub items Selection in reverse direction
[RED] button...All Sub items Selection in forward direction
[GREEN] button...All Sub items Selection in reverse direction
[VOL] button...Value of sub items change in forward direction (+), in reverse direction (-)

5.1.2. Contents of adjustment mode

- Value is shown as a hexadecimal number.
- Preset value differs depending on models.
- After entering the adjustment mode, take note of the value in each item before starting adjustment.

Main item	Sub item	Sample data	Remark
ADJUST	CONTRAST	000	
	COLOR	2B	
	TINT	00	
	Video-Gain2	0	
	SUB-BRT	800	
	H-POS	0	
	H-AMP	0	
	V-POS	0	
	V-AMP	0	
WB-ADJ	R-CUT	80	
	G-CUT	80	
	B-CUT	80	
	R-DRV	CC	
	G-DRV	FC	
	B-DRV	BC	
	ALL-CUT	80	
	ALL-DRV	FC	
OPTION	Panel-Type	65FHD	Factory Preset
	Boot	ROM	
	STBY-SET	00	
	EMERGENCY	ON	
	Y/C Delay		
	OPT 1	000101100	
	OPT 2	00000000	
	OPT 3	00000000	
AGING	RGBW		
	All white (COUNTER)		
	All white		
	All red		
	All green		
	All blue		
	ON/OFF		
	Diagonal lamp W		
	Diagonal lamp R		
	Diagonal lamp G		
	Diagonal lamp B		
	1% WINDOW		
	COLOR BAR		
	A B zone/checkerd 4 trio		
	SCROLL BAR		
	2dot width border		
SRV-TOOL			see next

Destinations	D/H/M/MR/MT	MS
OPTION1	98	98
OPTION2	e2	e2
OPTION3	6f	ef


5.1.3. How to exit

Switch off the power with the [POWER] button on the main unit or the [POWER] button on the remote control.

5.2. Service tool mode

5.2.1. How to access

1. Select [SRV-TOOL] in Service Mode.
2. Press [OK] button on the remote control.

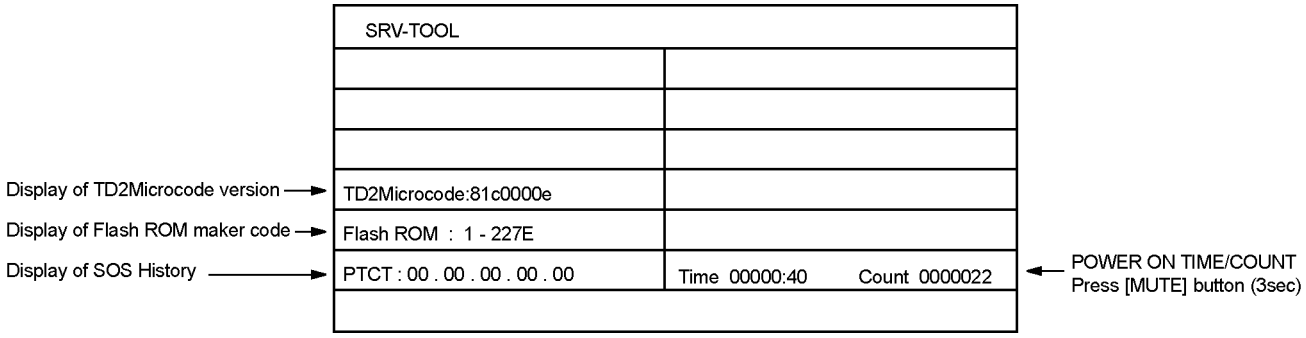

5.2.2. Display of SOS History

SOS History (Number of LED blinking) indication.
From left side; Last SOS, before Last, three occurrence before, 2nd occurrence after shipment, 1st occurrence after shipment.
This indication except 2nd and 1st occurrence after shipment will be cleared by [Self-check indication and forced to factory shipment setting].

5.2.3. POWER ON TIME/COUNT

To display TIME/COUNT menu, highlight position, then press MUTE for 3sec.
Time : Cumulative power on time, indicated hour : minute by decimal
Count : Number of ON times by decimal
Note : This indication will not be cleared by either of the self-check or any command.

5.2.4. Exit

1. Disconnect the AC cord from wall outlet or switch off the power with the [POWER] button on the main unit.


5.3. Hotel mode

1. Purpose
   Restrict a function for hotels.

Access command to the Hotel mode setup menu

In order to display the Hotel mode setup menu, please enter the following command **(within 2 second)**.
[TV] : Vol. [Down] + [REMOTE] : AV (3 times)

Then, the Hotel mode setup menu is displayed.

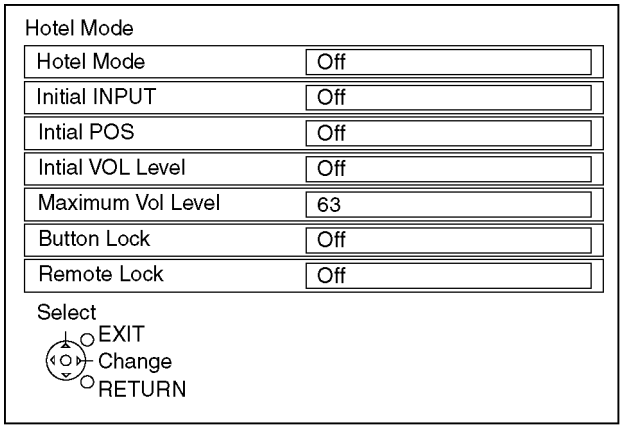

2. To exit the Hotel mode setup menu
   Disconnect AC power cord from wall outlet or switch off the power with the [POWER] button on the main unit.
3. Explain the Hotel mode setup menu

item	Function
Hotel Mode	Select hotel mode ON/OFF
Initial INPUT	Select input signal modes. Set the input, when each time power is switched on. Selection : Off/Analogue/DVB/AV1/AV2/AV3/AV4/COMPONENT/PC/HDMI1/HDMI2/HDMI3/HDMI4 • Off: give priority to a last memory. However, Euro model is compulsorily set to TV. • AVnS/AVnC: only Euro model selectable • PC: selectable with VGA option
Initial POS	Select programme number. Selection : Off/0 to 99 • Off: give priority to a last memory
Initial VOL level	Adjust the volume when each time power is switched on. Selection/Range : Off/0 to 63 • Off: give priority to a last memory
Maximum VOL level	Adjust maximum volume. Range : 0 to 63
Button lock	Select local key conditions. Selection : Off/SETUP/MENU/All • Off: altogether valid • SETUP: only F-key is invalid (Tuning guide(menu) can not be selected.) • MENU: only F-key is invalid (only Volume/Mute can be selected.) • ALL: altogether invalid.
Remote lock	Select remote control key conditions. Selection : Off/SETUP/MENU • Off: altogether valid • SETUP: only Setup menu is invalid • MENU: Picture/Sound/Setup menu are invalid

6 Troubleshooting Guide

Use the self-check function to test the unit.

1. Checking the IIC bus lines
2. Power LED Blinking timing

6.1. Check of the IIC bus lines

6.1.1. How to access


Self-check indication only:

Produce TV reception screen, and while pressing [VOLUME (-)] button on the main unit, press [OK] button on the remote control for more than 3 seconds.

Self-check indication and forced to factory shipment setting:

Produce TV reception screen, and while pressing [VOLUME (-)] button on the main unit, press [MENU] button on the remote control for more than 3 seconds.

6.1.2. Screen display

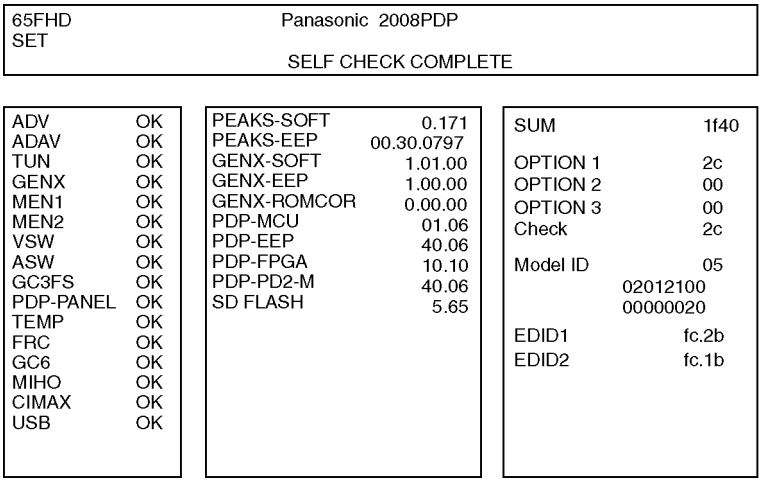

6.1.3. Check Point

Confirm the following parts if NG was displayed.






Display	Ref. No.	Description	P.C.B.
ADV	IC4510	AD/HDMI	A-Board
ADAV	IC2106	Sound Processor	A-Board
TUN	TU8301	Tuner	A-Board
GENX	IC1100	GenX (STB MCU)	A-Board
MEM1	IC1101	EEPROM (GenX)	A-Board
MEM2	IC8601	EEPROM (Peaks)	A-Board
VSW	IC3007	Video Switch	A-Board
ASW	IC3009	Audio Switch	A-Board
GC3FS	IC4001	Global core 3 sub	A-Board
PDP-PANEL	IC9003	MICOM	D-Board
TEMP	IC4800	Temp Sensor	A-Board
FRC	IC2604	Frame rate coverter	A-Board
GC6	IC5100	Global core 6	A-Board
MIHO	IC4200	MIHO	A-Board
CIMAX	IC8402	CIMAX	A-Board
USB	IC8620	USB	A-Board

6.1.4. Exit

Disconnect the AC cord from wall outlet or switch off the power with the [POWER] button on the main unit.

6.2. Power LED Blinking timing chart

1. Subject
   Information of LED Flashing timing chart.
2. Contents
   When an abnormality has occurred the unit, the protection circuit operates and reset to the stand by mode. At this time, the defective block can be identified by the number of blinks of the Power LED on the front panel of the unit.

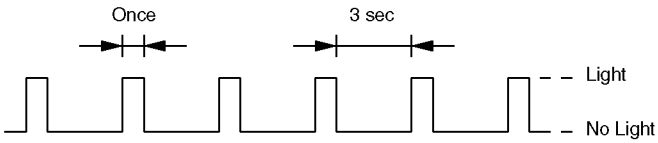
Blinking Times	Blinking timing	Contents	Check point
1		No particular check point	-
		Panel Status	-
		STB 5V SENSE Time out	A-Board
2		15V SOS	D-Board
3		3.3V SOS	A-Board
4		Power SOS	P-Board
5		5V SOS	D-Board
6		Driver SOS1 (SC Energy recovery circuit)	SU-Board SD-Board SC-Board
7		Driver SOS2 (SC floating voltage area)	SU-Board SD-Board SC-Board
8		Driver SOS3 (SS Energy recovery circuit)	SS-Board SS2-Board SS3-Board
9		Communication Error between Panel-MPU and STB-MPU	A-Board D-Board
10		Sub 5V SOS Main 3.3V SOS DTV 9V SOS Tuner Power SOS	A-Board
11		Fan SOS	PA-Board
12		Sound SOS	A-Board
13		Communication Error with IC8001 (Pesks PRO)	A-Board

6.3. No Power


First check point

There are following 2 states of No Power indication by power LED.


1. No lit
2. Red is lit then turns red blinking a few seconds later. (See 6.2.)

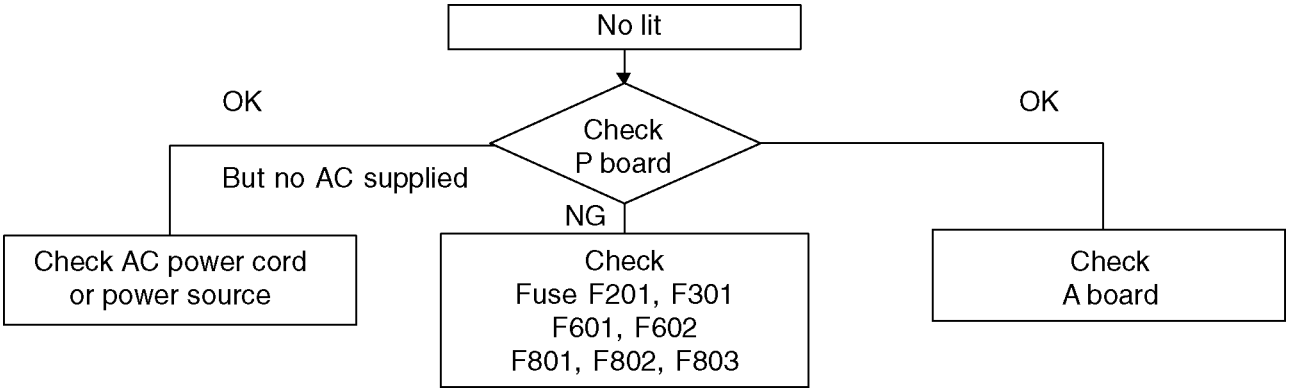

6.4. No Picture

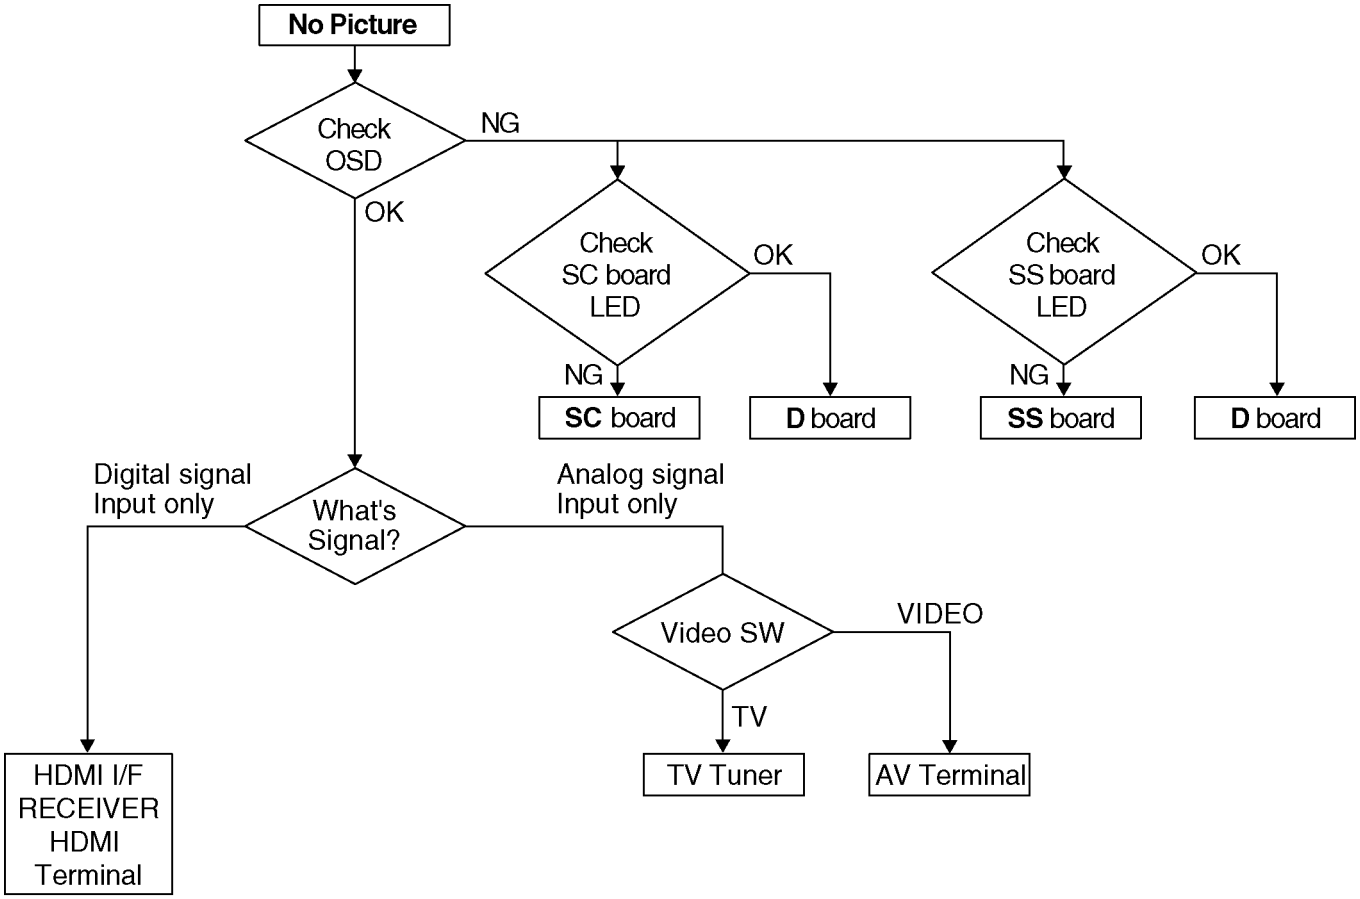

Drive circuits LED indicator

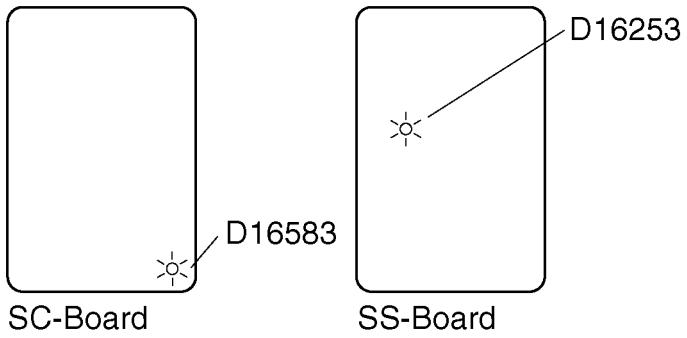

6.5. Local screen failure

Plasma display may have local area failure on the screen. Fig-1 is the possible defect P.C.B. for each local area.

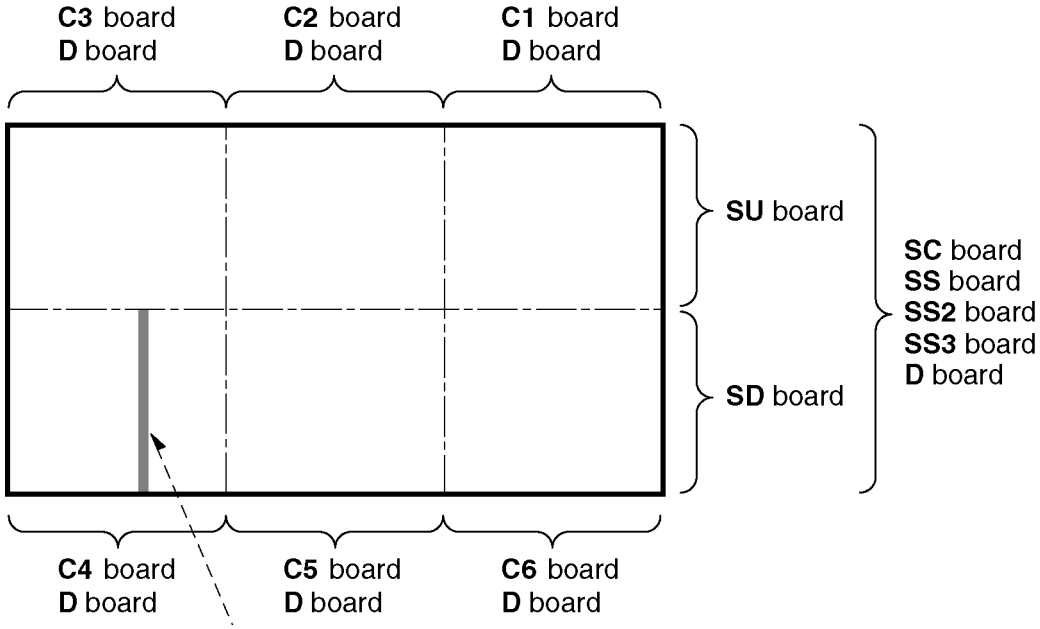


Fig-1

7 Disassembly and Assembly Instructions

7.1. Remove the Back cover


1. See Service Hint (Section 3)

7.2. Remove the P-Board


Caution:

To remove P.C.B. wait 1 minute after power was off for discharge from electrolysis capacitors.


1. Unlock the cable clampers to free the cable.
2. Disconnect the connectors (P2, P6, P7, P9, P11, P12 and P25).
3. Remove the screws (×8 ➡) and remove the P-Board unit.

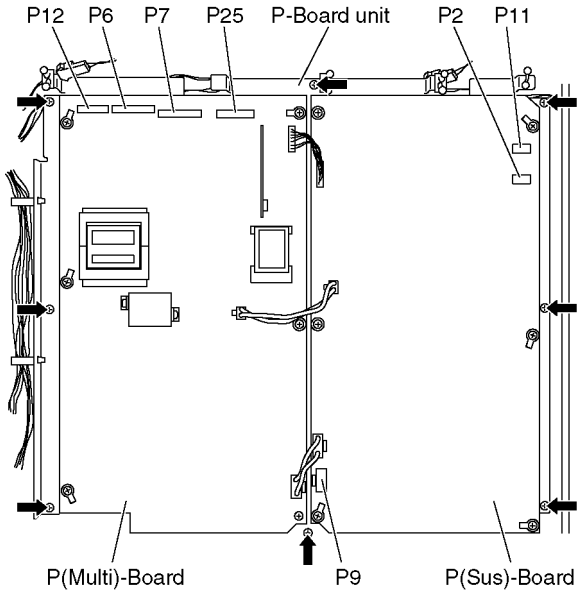


4. Remove the screws (×34 ➡) on the back side.

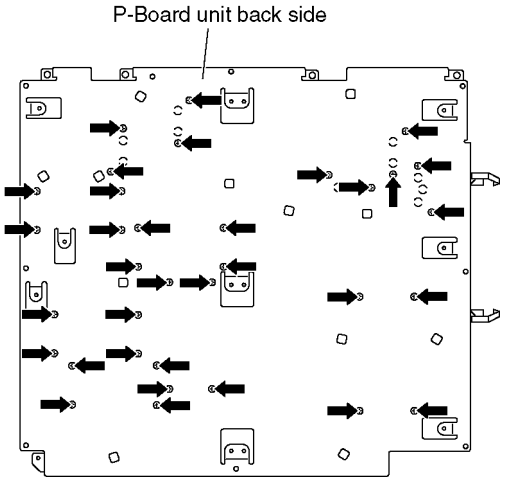

5. Disconnect the connectors (P51-P52, P53-P54 and P55-P56).
6. Remove the screws (×12 ➡).

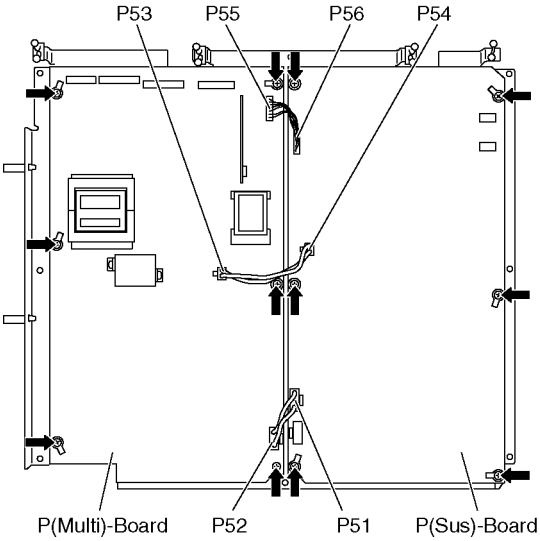


7. Remove the molding props (×6 ➡).
8. Remove the P(Multi)-Board.
9. Remove the molding props (×6 ⇨).
10. Remove the P(Sus)-Board.

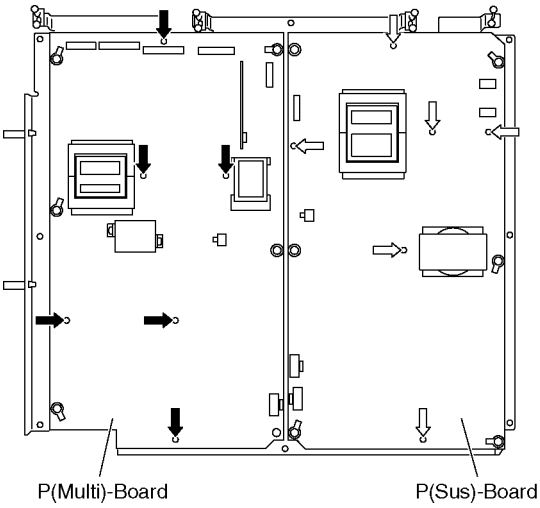

Note:


When assembling the P(Multi)-Board and the P(Sus)-Board, the position of each hole of the insulation sheets(A, B, C, D) is set to the position of each hole of the P(Multi)-Board and the P(Sus)-Board and then assemble them. (➡ marks indicate setting positions.)

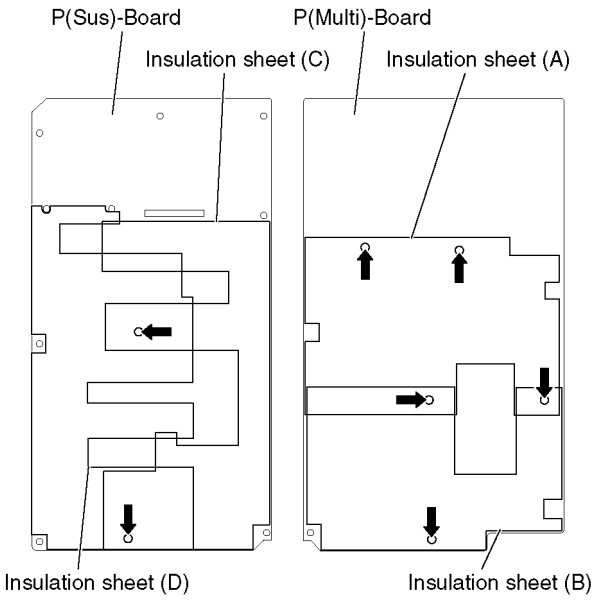

P-Board backside


7.3. Remove the Rear Terminal cover

1. Remove the screws (×2 ➡, ×3 ⇨, ×1 ⇨).
2. Remove the Rear Terminal cover.

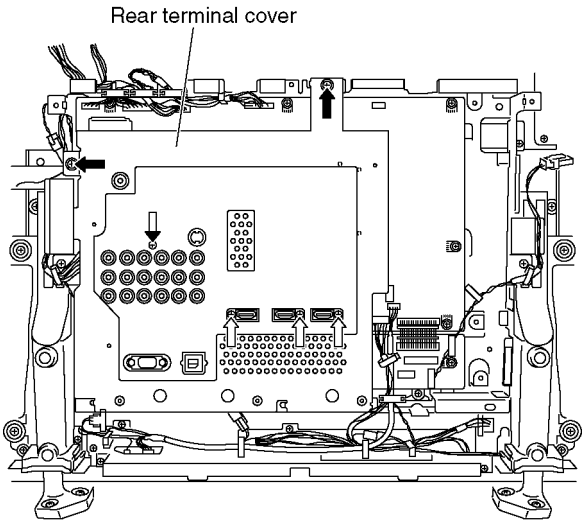


7.4. Remove the tuner unit

1. Unlock the cable clampers to free the cable.
2. Disconnect the connectors (A1, A3, A5, A6, A7, A8, A9, A11, A51, A53, H11 and H12).
3. Remove the screws (×4 ➡) and remove the tuner unit.

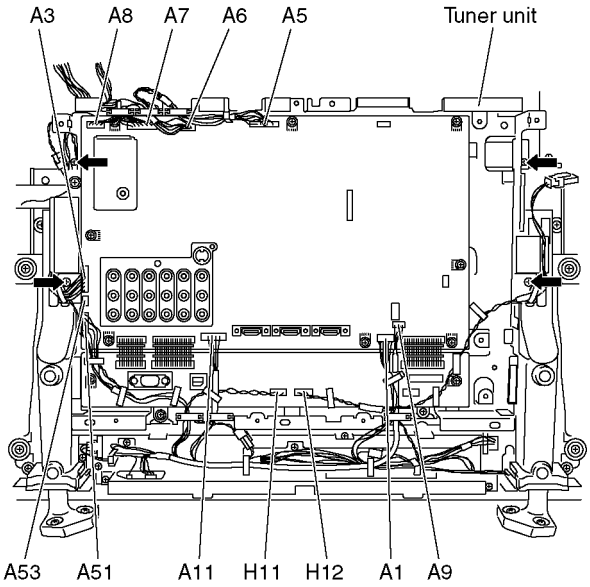


7.5. Remove the A-Board

1. Remove the tuner unit. (See section 7.4.)
2. Remove the bridge connector (A12, A13 and A14).
3. Remove the screws (×8 ➡) and remove the A-Board.

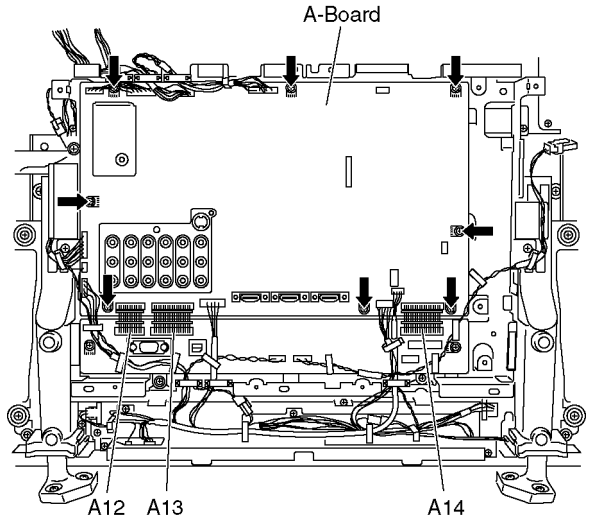


7.6. Remove the HC-Board


1. Remove the tuner unit. (See section 7.4.)
2. Disconnect the bridge connectors (A12, A13 and A14).
3. Remove the screws (×2 ➡) and remove the HC-Board.

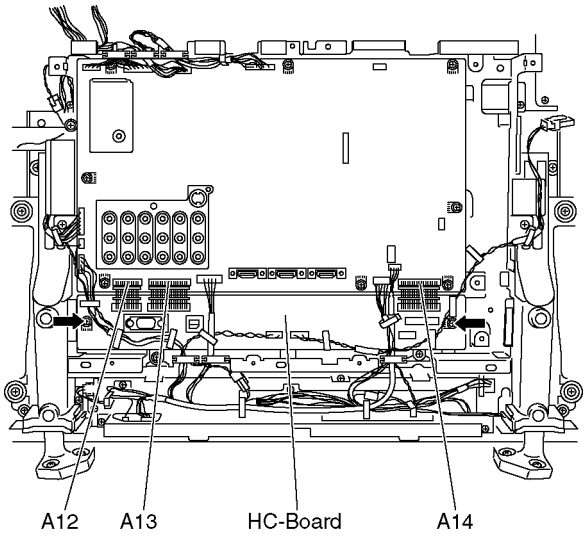

7.7. Remove the Speaker box assy (L, R)


1. Unlock the cable clampers to free the cable.
2. Disconnect the relay connectors.
3. Remove the screws (×4 ➡) and remove the Speaker box assy (L, R).

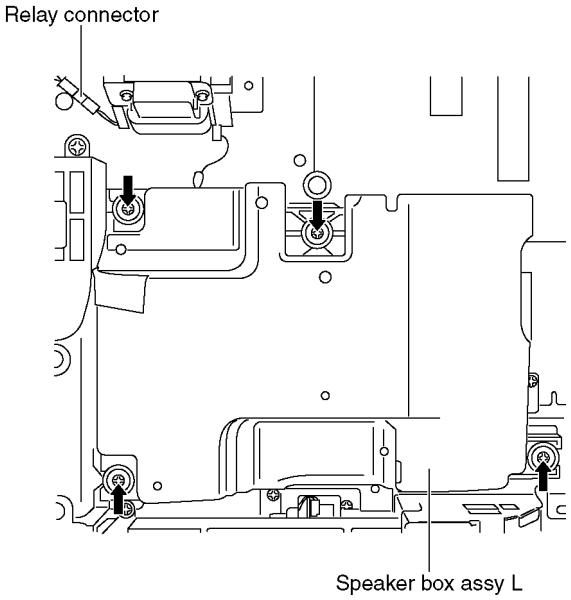

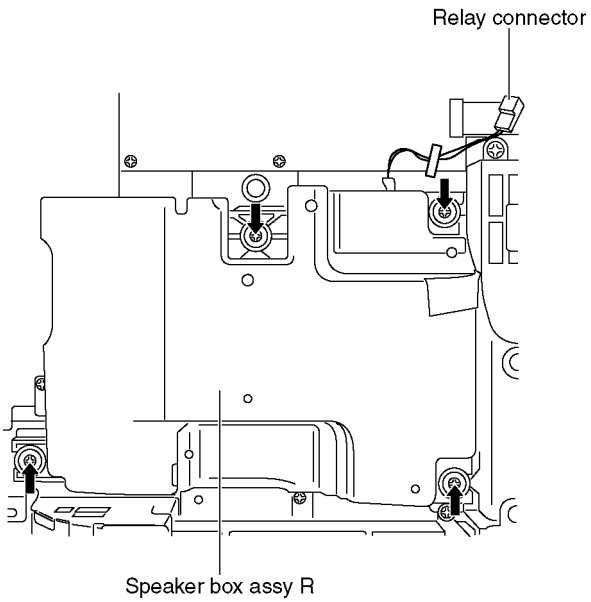


7.8. Remove the FFC Shield Metal (A) and remove the Core Holder (A)

1. Unlock the cable clamper to free the cable.
2. Remove the screws (×4 ➡) and remove the FFC Shield Metal (A).
3. Remove the screws (×3 ⇨) and remove the Core Holder (A).

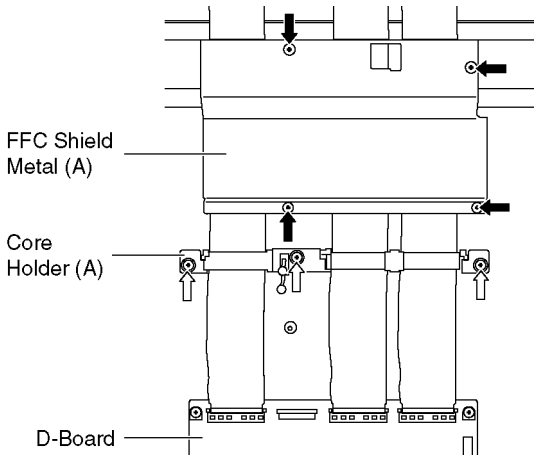


7.9. Remove the FFC Shield Metal (B) and remove the Core Holder (B)

1. Remove the screws (×2 ⇨) and remove the A-Board unit support metal.
2. Remove the screws (×4 ➡) and remove the FFC Shield Metal (B).
3. Remove the screws (×4 ⇨) and remove the Core Holder (B).

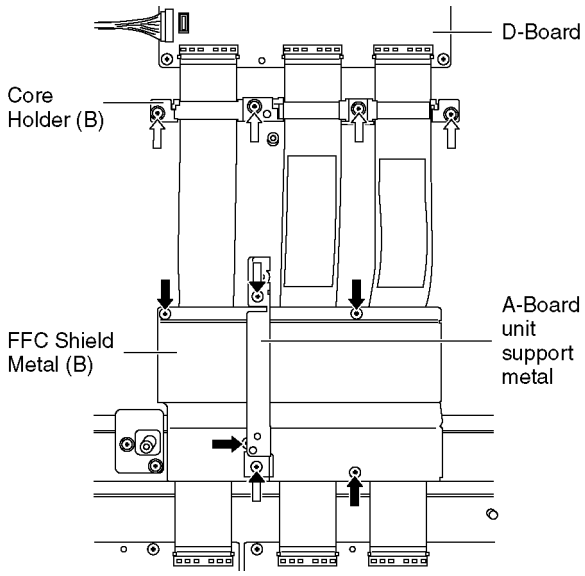


7.10. Remove the D-Board

1. Remove the Tuner unit. (See section 7.4.)
2. Disconnect the connectors (D3, D5 and D25).
3. Disconnect the flexible cables (D20, D31, D32, D33, D34, D35 and D36).
4. Remove the screws (×4 ➡) and remove the D-Board.

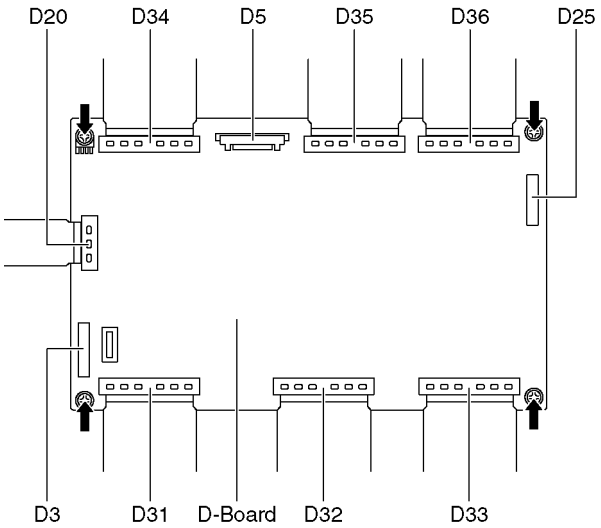


7.11. Remove the PA-Board

1. Disconnect the connectors (PA5, PA6, PA8, PA33, PA35, PA36 and PA37).
2. Remove the screws (×2 ➡).
3. Remove the PA-Board.

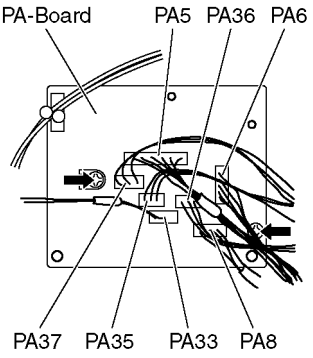


7.12. Remove the SU-Board

1. Remove the flexible cables (SU1B, SU2B, SU3B, SU4B and SU5B).
2. Disconnect the flexible cable (SU11-SD11) and disconnect bridge connector (SU41-SC41).
3. Remove the screws (×3 ➡, ×3 ⇨) and remove the SU-Board.

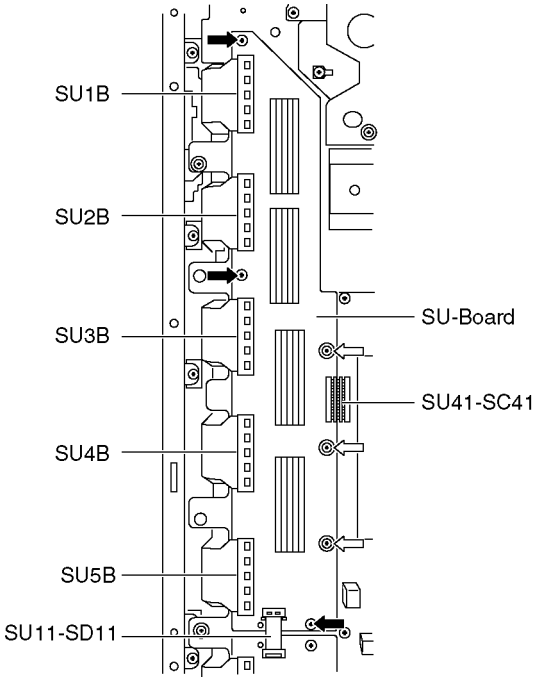


7.13. Remove the SD-Board

1. Disconnect the flexible cables (SD1B, SD2B, SD3B, SD4B and SD5B).
2. Disconnect the flexible cable (SD11-SU11) and disconnect bridge connectors (SD42-SC42 and SD46-SC46).
3. Remove the screws (×3 ➡, ×3 ⇨) and remove the SD-Board.

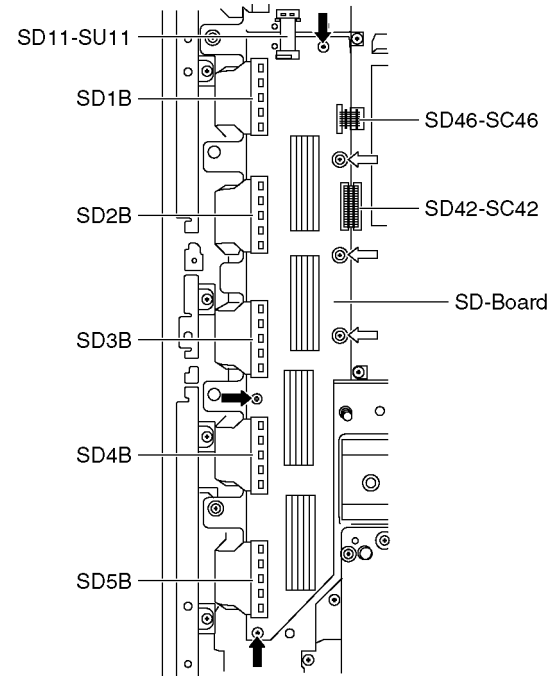


7.14. Remove the SC-Board

1. Remove the SU-Board and SD-Board. (See section 7.12. and 7.13.)
2. Disconnect the connectors (SC2 and SC20).
3. Remove the screws (×8 ➡) and remove the SC-Board.

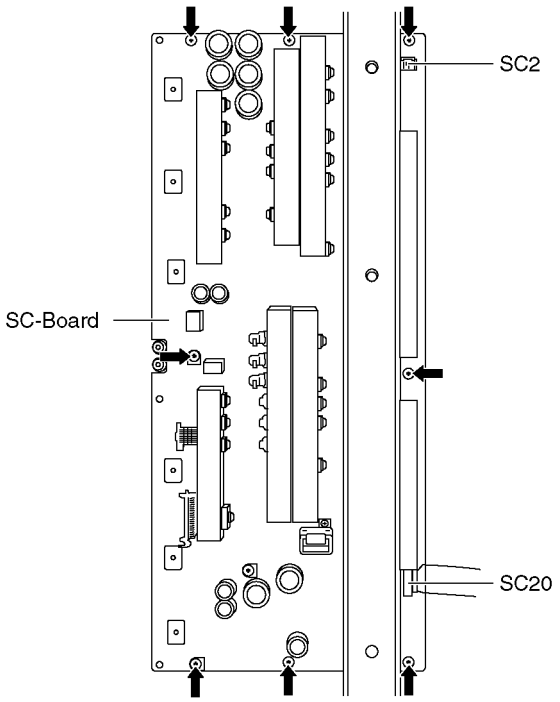


7.15. Remove the SS2-Board

1. Unlock the cable clampers to free the cable.
2. Disconnect the connector (SS32) and disconnect the flexible cables (SS51 and SS52).
3. Disconnect the bridge connector (SS02-SS21).
4. Remove the screws (×5 ➡) and remove the SS2-Board.

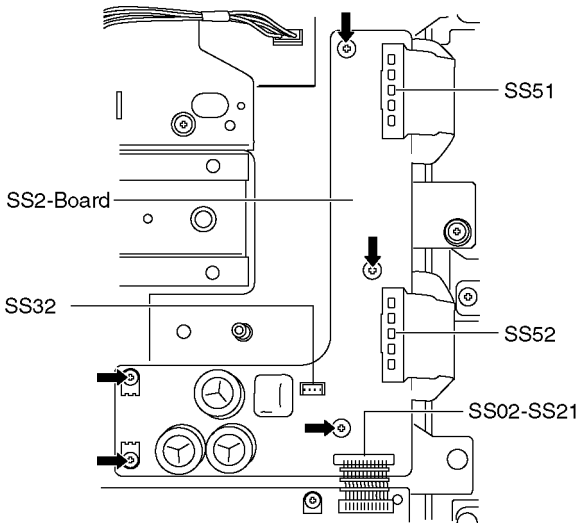


7.16. Remove the SS3-Board

1. Unlock the cable clampers to free the cable.
2. Disconnect the connector (SS35) and disconnect the flexible cables (SS57 and SS58).
3. Disconnect the bridge connector (SS03-SS22).
4. Remove the screws (×5 ➡) and remove the SS3-Board.

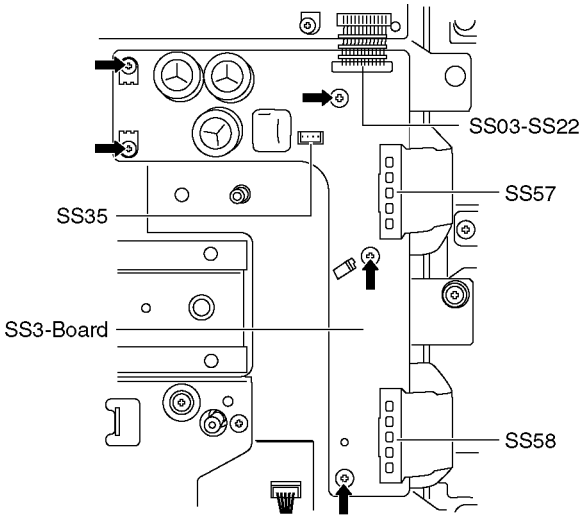


7.17. Remove the SS-Board

1. Unlock the cable clampers to free the cable.
2. Disconnect the connectors (SS11, SS12, SS33 and SS34).
3. Disconnect the flexible cables (SS53, SS54, SS55 and SS56).
4. Disconnect the bridge connectors (SS21-SS02 and SS22-SS03).
5. Remove the screws (×6 ➡) and remove the SS-Board.

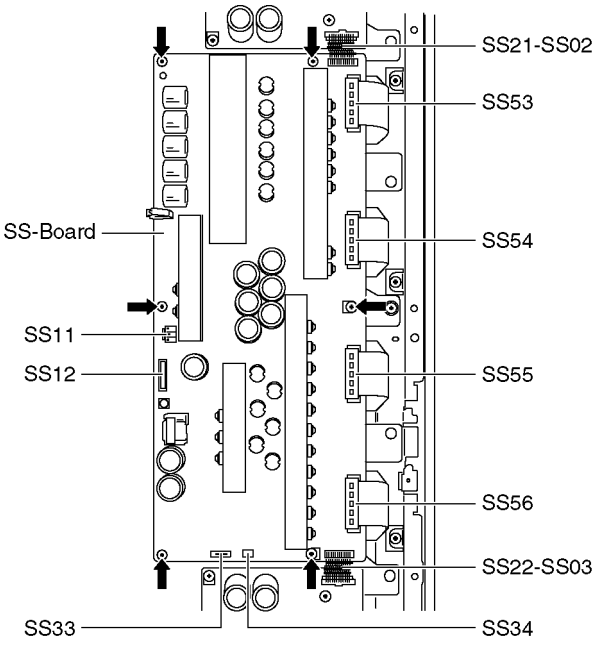


7.18. Remove the Vertical Bar (L, R) and the V-Bar fixing metal (A, B, C, D)

1. Remove the plasma panel section from the servicing stand and lay on a flat surface such as a table (covered), with the plasma panel surface facing downward.
   Spread a soft cloth or similar on the table for protection, so the panel surface is not scratched.
2. Remove the screws (×2 ➡each) and remove the Vertical Bars (L, R).
3. Remove the screws (×2 ⇨each) and remove the V-Bar fixing metal (A, B, C, D).

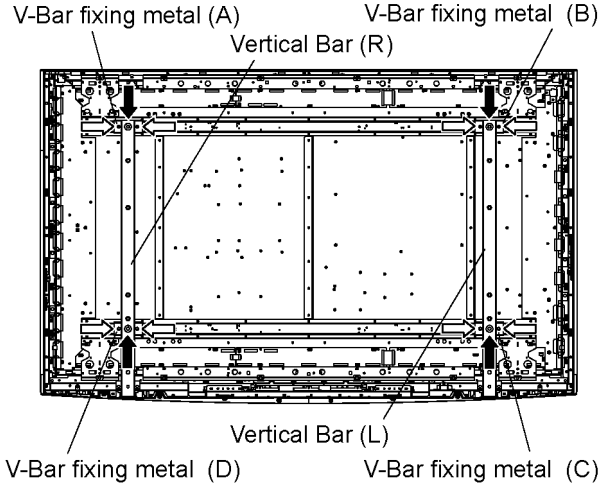


7.19. Remove the Fan unit (R) and Fan

1. Disconnect the relay coupler.
2. Remove the screws (×4 ➡) and remove the Fan unit (R).

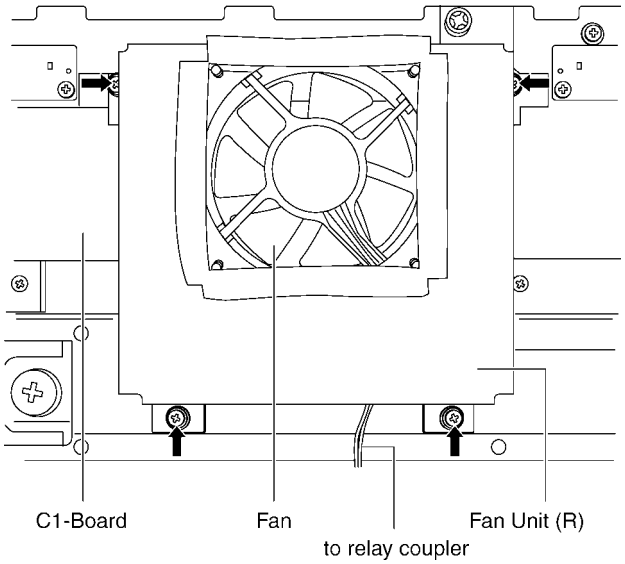


3. Remove the screws (×4 ⇨) and remove the Fan.

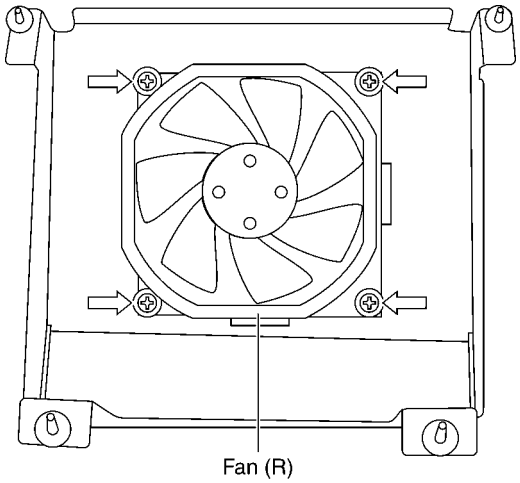


7.20. Remove the Fan unit (L) and Fans

1. Disconnect the relay couplers.
2. Remove the screws (×4 ➡) and remove the Fan unit (L).

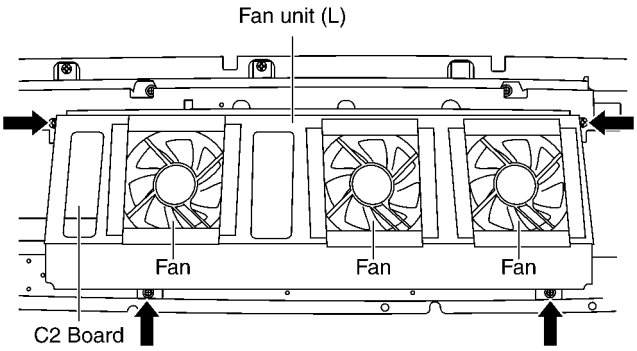


3. Remove the screws (×12 ⇨) and remove the Fans (×3).

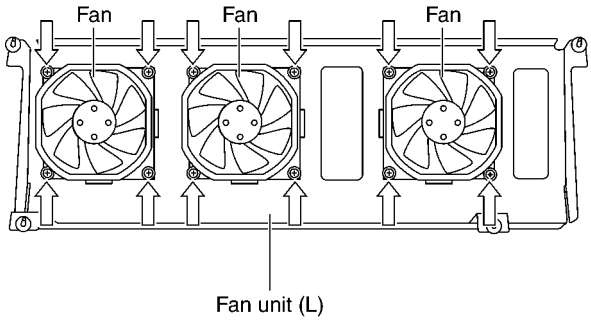


7.21. Remove the Cabinet-fixing metal (A) (Upper)

1. Remove the screws (×4 ➡ each).
2. Remove the Cabinet-fixing metal (A).

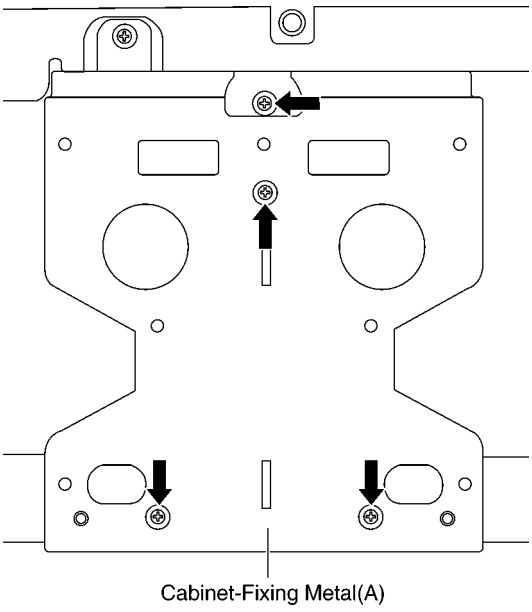


7.22. Remove the Support metal (L)

1. Remove the screws (×3 ➡, ×1 ⇨).
2. Remove the support metal (L).

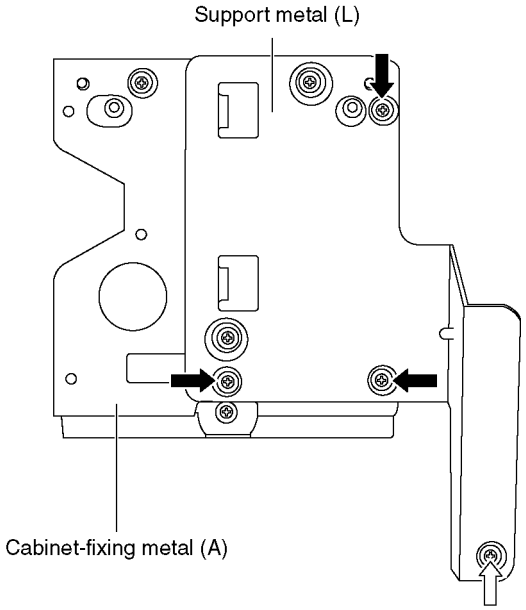


7.23. Remove the Support metal (R)

1. Remove the screws (×3 ➡, ×1 ⇨).
2. Remove the support metal (R).

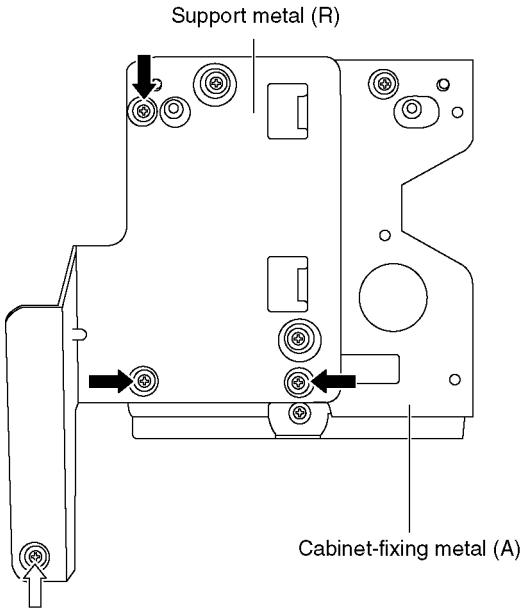


7.24. Remove the Cabinet-fixing metal (A) (Lower)

1. Remove the support metal (L, R). (See section 7.22. and 7.23.)
2. Remove the screws (×4 ➡ each).
3. Remove the Cabinet-fixing metal (A).

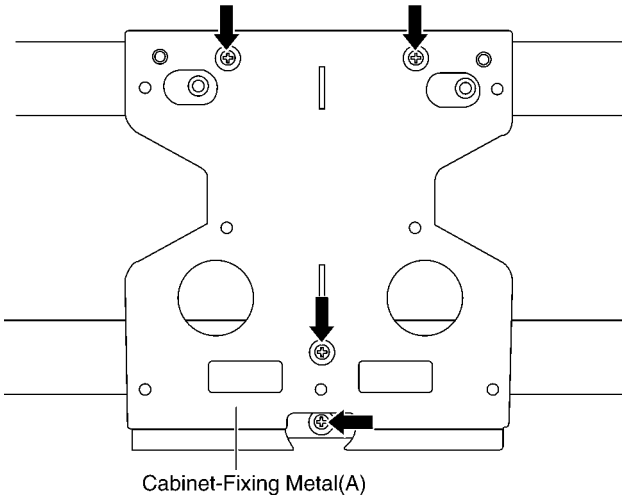


7.25. Remove the Plasma panel section from the Cabinet assy (glass)


1. Remove the Speaker box assy (L, R). (See section 7.7.)
2. Remove the Fan unit (R) and (L). (See section 7.19., 7.20.)
3. Remove the Cabinet-fixing metal (A). (See section 7.21. and 7.24.)
4. Remove the Cabinet assy and the plasma panel fastening screws (×6 ➡, ×8 ⇨).

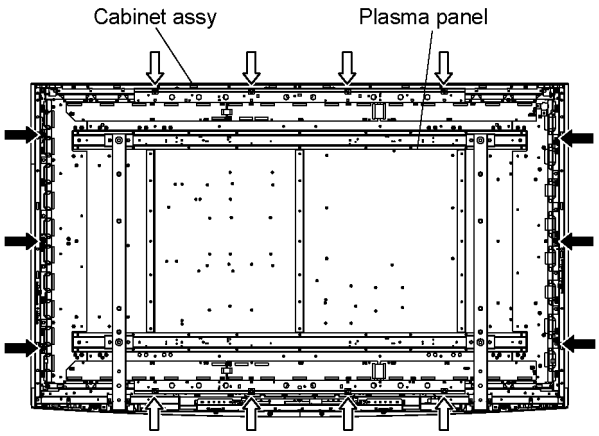


5. For leaving the plasma panel from the front frame, pull the bottom of the front frame forward, lift, and remove.

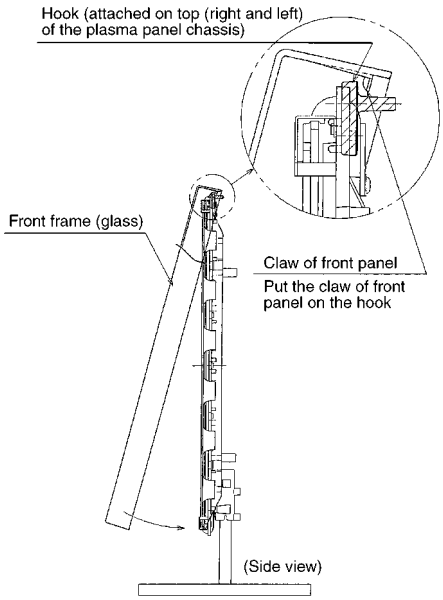


6. Remove the spacers and spacer rings (×6 ➡).

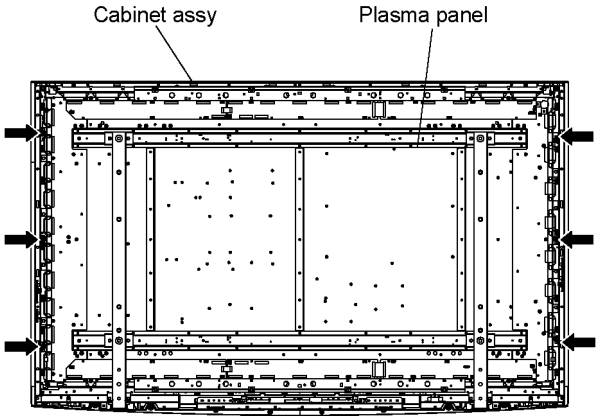

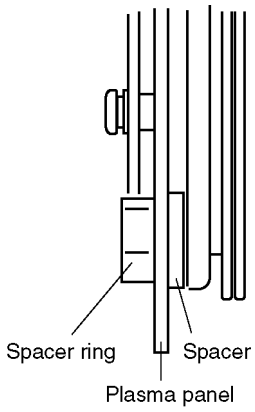


7.26. Remove the Cabinet-fixing metal (B) (Upper)

1. Remove the cabinet assy (glass). (See section 7.25.)
2. Remove the screws (×6 ➡).
3. Remove the Cabinet-fixing metal (B).

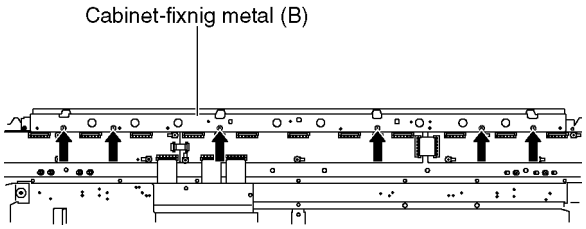


7.27. Remove the C1-Board

1. Remove the Fan unit (R). (See section 7.19.)
2. Remove the Cabinet-fixing metal (A) and (B). (See section 7.21. and 7.26.)
3. Remove the flexible cables holder fastening screws (×10 ⇨).
4. Disconnect the flexible cables (CA1, CA2, CA3, CA4 and CA5).
5. Disconnect the flexible cables (C10 and C11).
6. Remove the screws (×5 ➡) and remove the C1-Board.

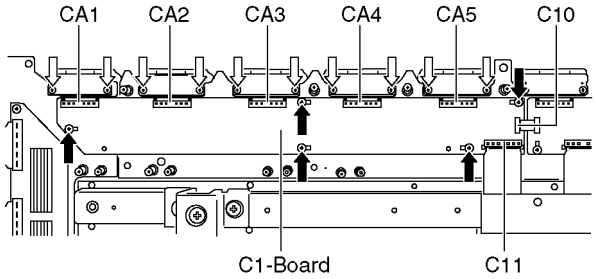


7.28. Remove the C2-Board

1. Remove the Fan unit (L). (See section 7.20.)
2. Remove the Cabinet-fixing metal (A) and (B). (See section 7.21. and 7.26.)
3. Remove the flexible cables holder fastening screws (×10 ⇨).
4. Disconnect the flexible cables (CA6, CA7, CA8, CA9, and CA10).
5. Disconnect the flexible cables (C20, C21, C22 and C23).
6. Remove the screws (×5 ➡) and remove the C2-Board.

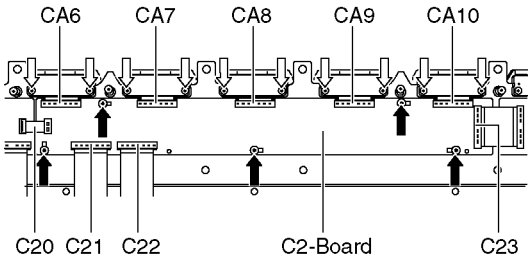


7.29. Remove the C3-Board

1. Remove the Fan unit (L). (See section 7.20.)
2. Remove the Cabinet-fixing metal (A) and (B). (See section 7.21. and 7.26.)
3. Remove the flexible cables holder fastening screws (×10 ⇨).
4. Disconnect the flexible cables (CA11, CA12, CA13, CA14 and CA15).
5. Disconnect the flexible cable (C33).
6. Disconnect the connector (C32).
7. Remove the screws (×5 ➡) and remove the C3-Board.

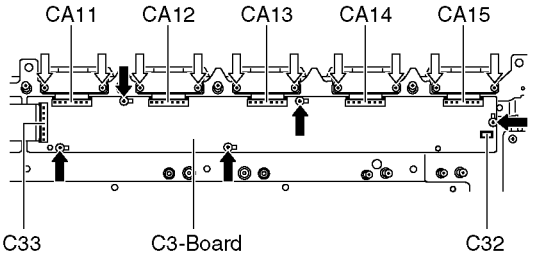


7.30. Remove the Cabinet-fixing metal (B) (Lower)

1. Remove the Cabinet assy (glass). (See section 7.25.)
2. Remove the screws (×4 ➡).
3. Remove the Cabinet-fixing metal (B).

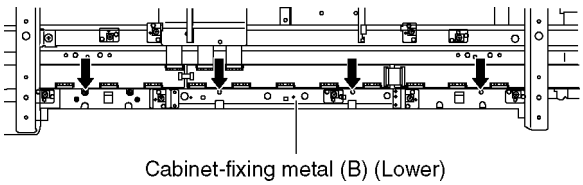


7.31. Remove the C4-Board

1. Remove the Cabinet-fixing metal (B). (See section 7.30.)
2. Remove the Vertical Bar (L). (See section 7.18.)
3. Remove the flexible cables holder fastening screws (×10 ⇨).
4. Disconnect the flexible cables (CB11, CB12, CB13, CB14 and CB15).
5. Disconnect the flexible cable (C41).
6. Disconnect the connector (C45).
7. Remove the screws (×5 ➡) and remove the C4-Board.

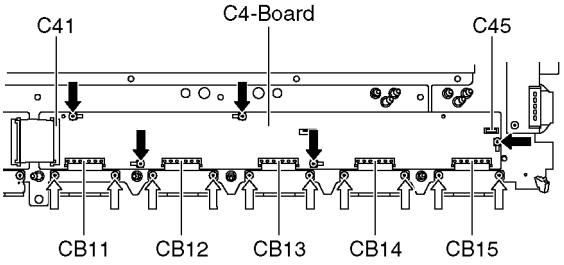


7.32. Remove the C5-Board

1. Remove the Tuner unit. (See section 7.4.)
2. Remove the Cabinet-fixing metal (B). (See section 7.30.)
3. Remove the flexible cables holder fastening screws (×10 ⇨).
4. Disconnect the flexible cables (CB6, CB7, CB8, CB9 and CB10).
5. Disconnect the flexible cables (C50, C51, C52 and C53).
6. Remove the screws (×5 ➡) and remove the C5-Board.

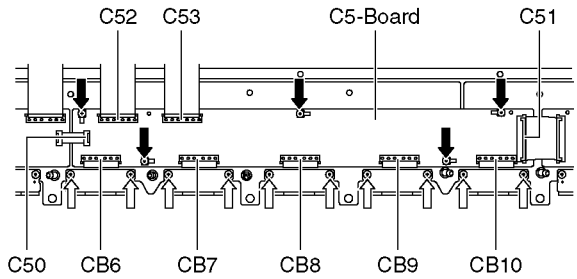


7.33. Remove the C6-Board

1. Remove the Cabinet-fixing metal (B). (See section 7.30.)
2. Remove the Vertical Bar (R). (See section 7.18.)
3. Remove the flexible cables holder fastening screws (×10 ⇨).
4. Disconnect the flexible cables (CB1, CB2, CB3, CB4 and CB5).
5. Disconnect the flexible cables (C60 and C61).
6. Remove the screws (×5 ➡) and remove the C6-Board.

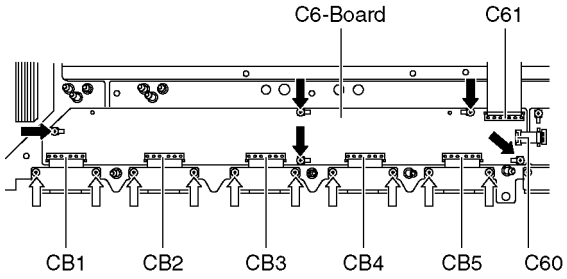


7.34. Remove the Speaker (Squawker)

1. Remove the screws (×4 ➡) and remove the Bottom support metal.

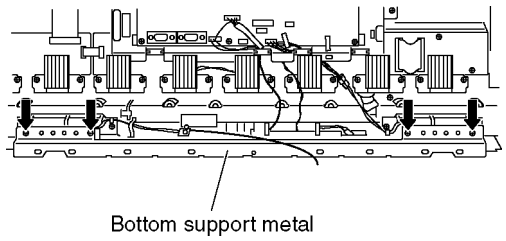


2. Disconnect the relay connectors.
3. Remove the screws (×2 ➡ each).
4. Remove the Speaker (Squawker/L, Squawker/R).

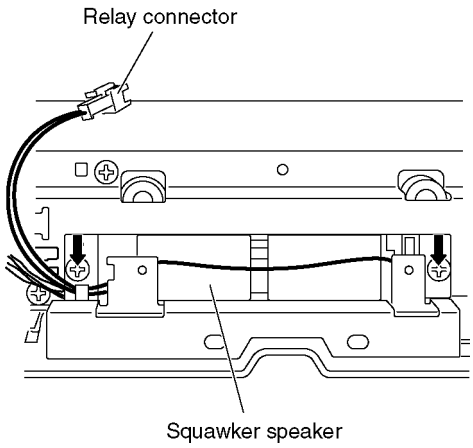


7.35. Remove the Front bracket

1. Remove the Bottom support metal. (See section 7.34.)
2. Unlock the cable clampers to free the cable.
3. Disconnect the connectors (GS02, GS09 and GH11).
4. Disconnect the connector (A51). (See section 7.4.)
5. Remove the screws (×3 ➡, ×2 ⇨) and remove the Front bracket.

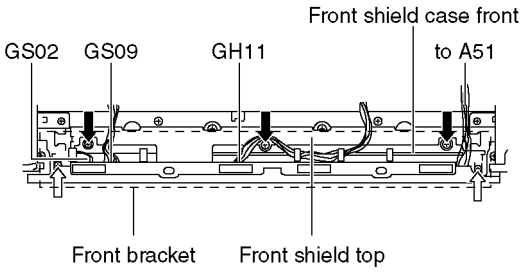


7.36. Remove the G-Board, GS-Board and GH-Board


1. Remove the Front bracket. (See section 7.35.)
2. Remove the screws (×5 ➡).

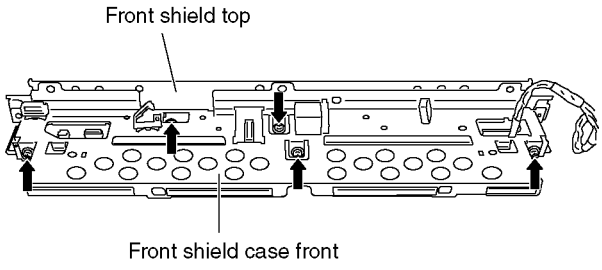

3. Remove the screws (×4 ⇨).
4. Remove the Front shield case front and the Front shield top.

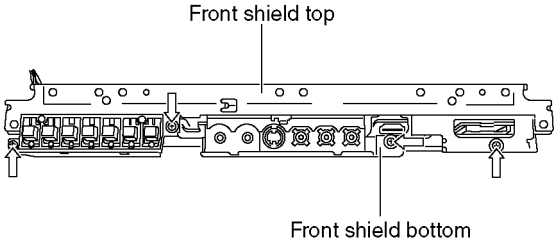


5. Remove the GH-Board.
6. Remove the screws (×2 ➡) and remove the GS-Board.
7. Remove the screws (×3 ⇨).
8. Disconnect the connector (G51) and remove the G-Board.

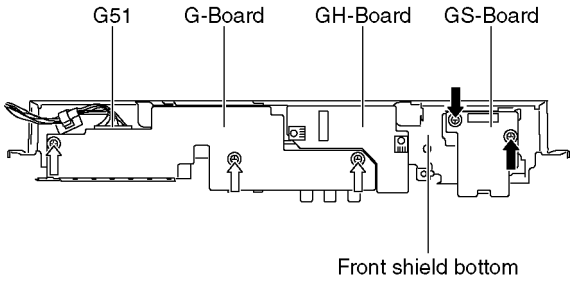


7.37. Remove the K-Board and S-Board


1. Remove the Cabinet assy. (See section 7.25.)
2. Remove the Speaker (Squawker /L). (See section 7.34.)
3. Remove the screws (×5 ➡) and remove the Bottom shield L.

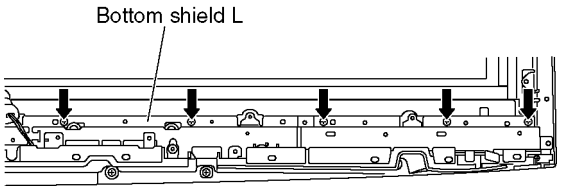


4. Disconnect the connector (S1).
5. Remove the screws (×2 ➡) and remove the S-Board unit.

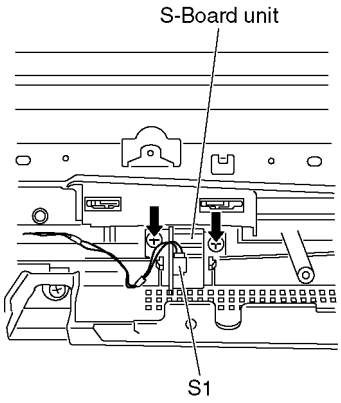

6. Remove the screw (×1 ➡) and remove the S-Board.

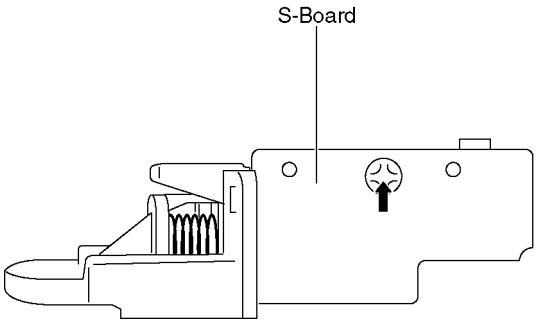


7. Remove the screws (×2 ➡).
8. Remove the K-Board and disconnect the connector (K1).

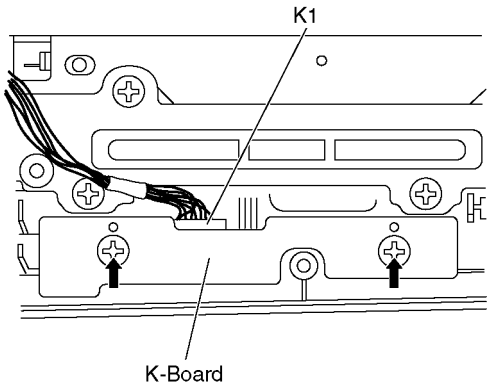


7.38. Remove the GL-Board


1. Remove the Cabinet assy. (See section 7.25.)
2. Remove the Speaker (Squawker /R). (See section 7.34.)
3. Remove the Bottom shield L. (See section 7.37.)
4. Remove the screws (×5 ➡) and remove the Bottom shield R.

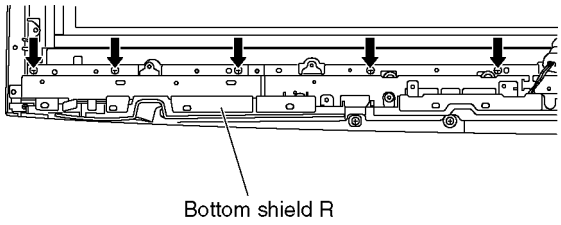

5. Remove the screws (×8 ➡) and remove the Bottom plate.

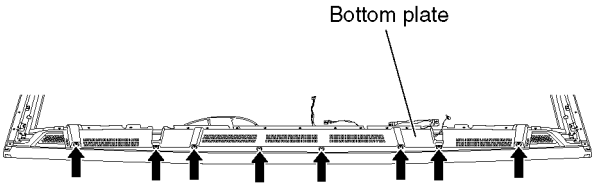

6. Remove the screws (×2 ➡) and remove the GL-Board and disconnect the connector (GL02).

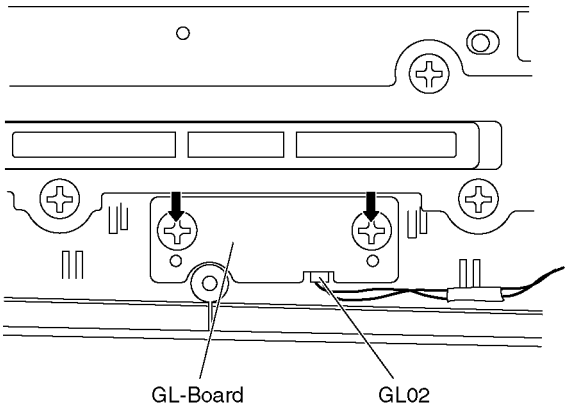

7.39. Replace the plasma panel (finished)

1. Place the new plasma panel (finished) on the flat surface of the table (covered by a soft cloth), with the plasma panel surface facing downward.
2. Attach the C1, C2, C3,C4,C5-Board and the C6-Board, connect the flexible cables (×30) from the Plasma panel to the C1, C2, C3,C4,C5-Board and the C6-Board, and fit the flexible cable holders.
3. Attach the Hooks (left, right) and fit the Vertical Bar (L, R) and the V-Bar fixing metal (A, B, C, D) to the new plasma panel.
4. Place the plasma panel section on the servicing stand.
5. Attach the cabinet assy and each P.C.Board and so on, to the new plasma panel.
   *** When fitting the cabinet assy, be careful not to allow any debris, dust or handling residue to remain**

   between the front glass and plasma panel.

8 Measurements and Adjustments

8.1. Adjustment Procedure

8.1.1. Driver Set-up

8.1.1.1. Item / Preparation

1. Input a white signal to plasma video input.
2. Set the picture controls as follows.
   Picture menu : Dynamic
   PNR : OFF
   Aspect : 16:9

Caution

1. First perform Vsus adjustment.
2. Confirmation of Vscn voltage should be performed after confirmation of Vad adjustment.
   When Vad= -120V, Voltage of Vscn is 25V ±4V.


8.1.1.2. Adjustments

Adjust driver section voltages referring the panel data on the panel data label.
Check or adjust the following voltages with the multimeter.

Name	Test Point	Voltage	Volume	Remarks
Vsus	TPVSUS (SS)	Vsus ± 2V	VR251 (P)	*
Ve	TPVE (SS)	Ve ± 1V	VR16000 (SS)	*
Vset	TPVSET (SC)	325V ± 10V	Fixed	
Vad	TPVAD (SC)	-120V ± 1V	VR16600 (SC)	
Vscn	TPVSCN (SC)	Vad+145V ± 4V	Fixed	
Vda	TPVDA (SS)	72V + 1V, -2V	Fixed	

*See the Panel label.

Panel Label information

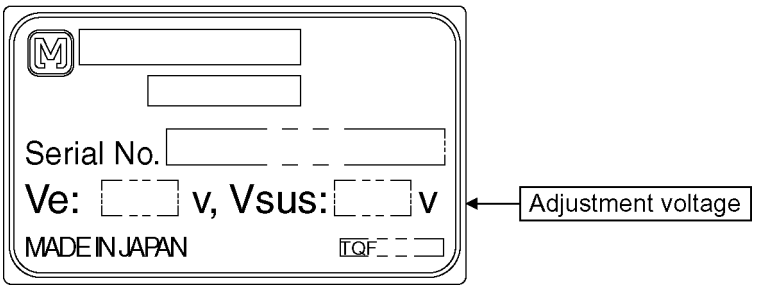


8.1.2. Initialization Pulse Adjust

1. Input the White signal to plasma video input.
2. Set the picture controls as follows.
   Picture menu : Dynamic
   PNR : OFF
   Aspect : 16:9
3. Connect Oscilloscope to TPSC1 (SC).
   Check the voltage (T2) at 100 us period on the down slop.

	Test point	Volume	Level
T2	TPSC1 (SC)	VR16602 (SC)	250 V ± 10 V

TPSC1

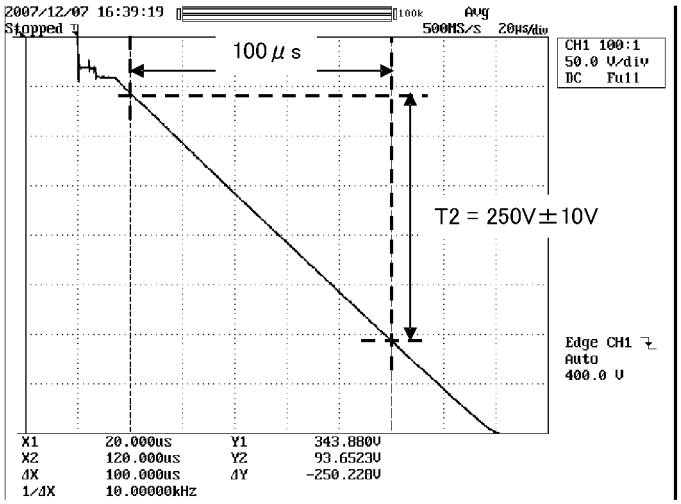

8.1.3. P.C.B. (Printed Circuit Board) exchange

8.1.3.1. Caution

1. To remove P.C.B. , wait 1 minute after power was off for discharge from electrolysis capacitors.

8.1.3.2. Quick adjustment after P.C.B. exchange

Adjust the following voltages with the multimeter.


P.C.B.	Name	Test Point	Voltage	Volume	Remarks
P Board	Vsus	TPVSUS (SS)	Vsus ± 2V	VR251 (P)	*
SC Board	Vad	TPVAD (SC)	-120V ± 1V	VR16600 (SC)	
SS Board	Ve	TPVE (SS)	Ve ± 1V	VR16000 (SS)	*

*See the Panel label.


Caution:

Absolutely do not reduce Vsus below Ve not to damage the P.C.B.

8.1.4. Adjustment Volume Location

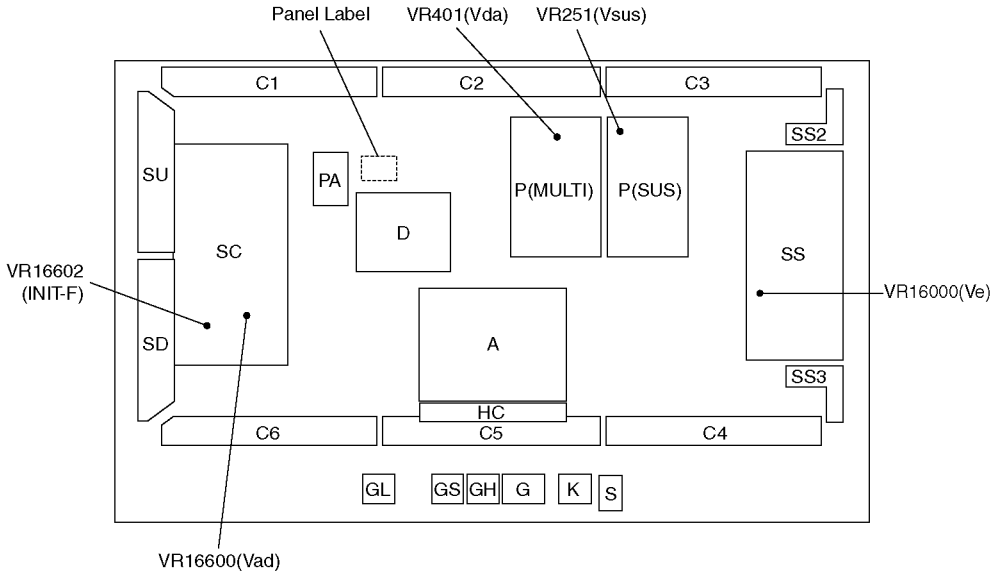


8.1.5. Test Point Location

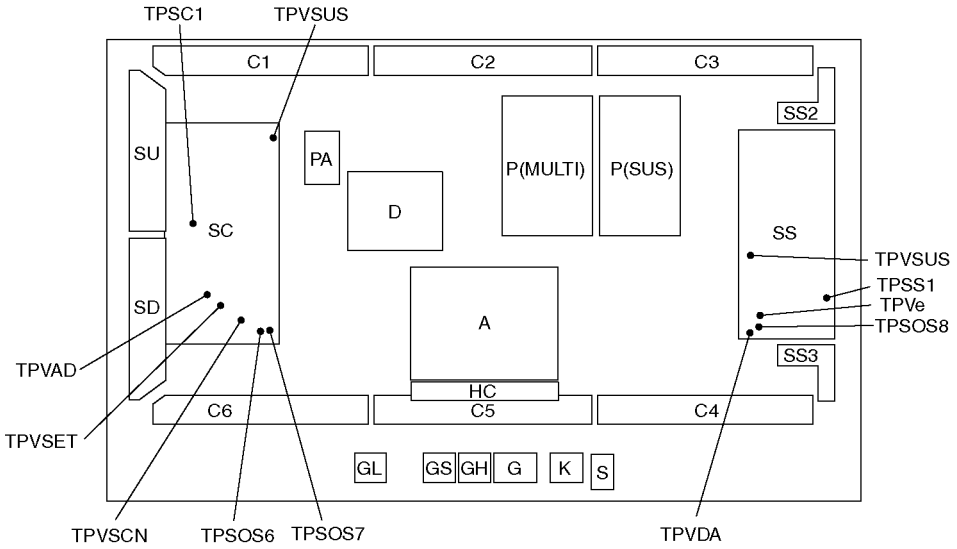

9 Block Diagram


9.1. Block Diagram (1/7)

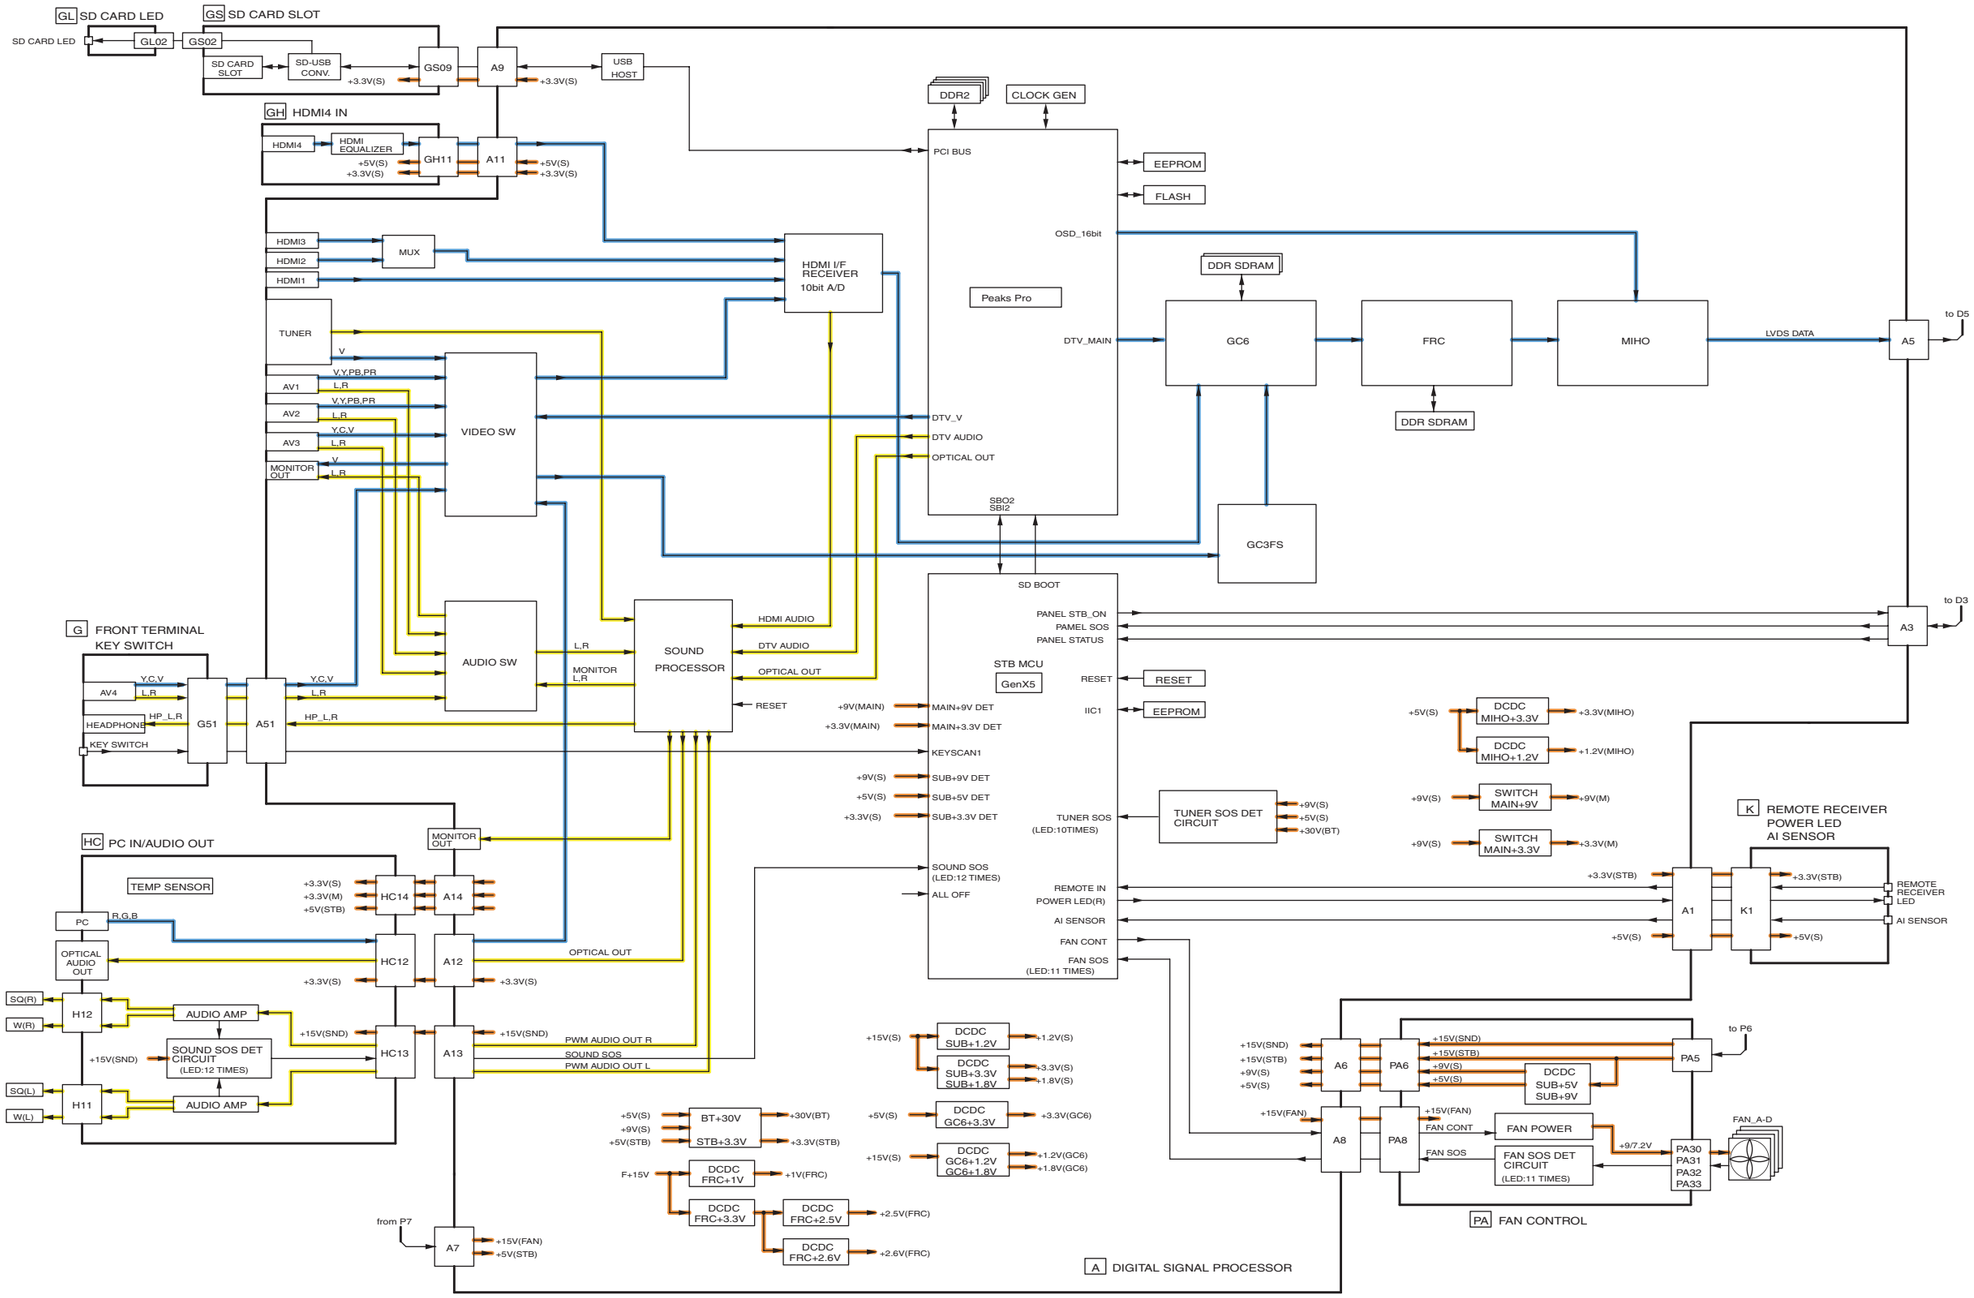

TH-65PY850D/H/M/MR/MS
Block (1/7) Diagram

TH-65PY850D/H/M/MR/MS
Block (1/7) Diagram


9.2. Block Diagram (2/7)

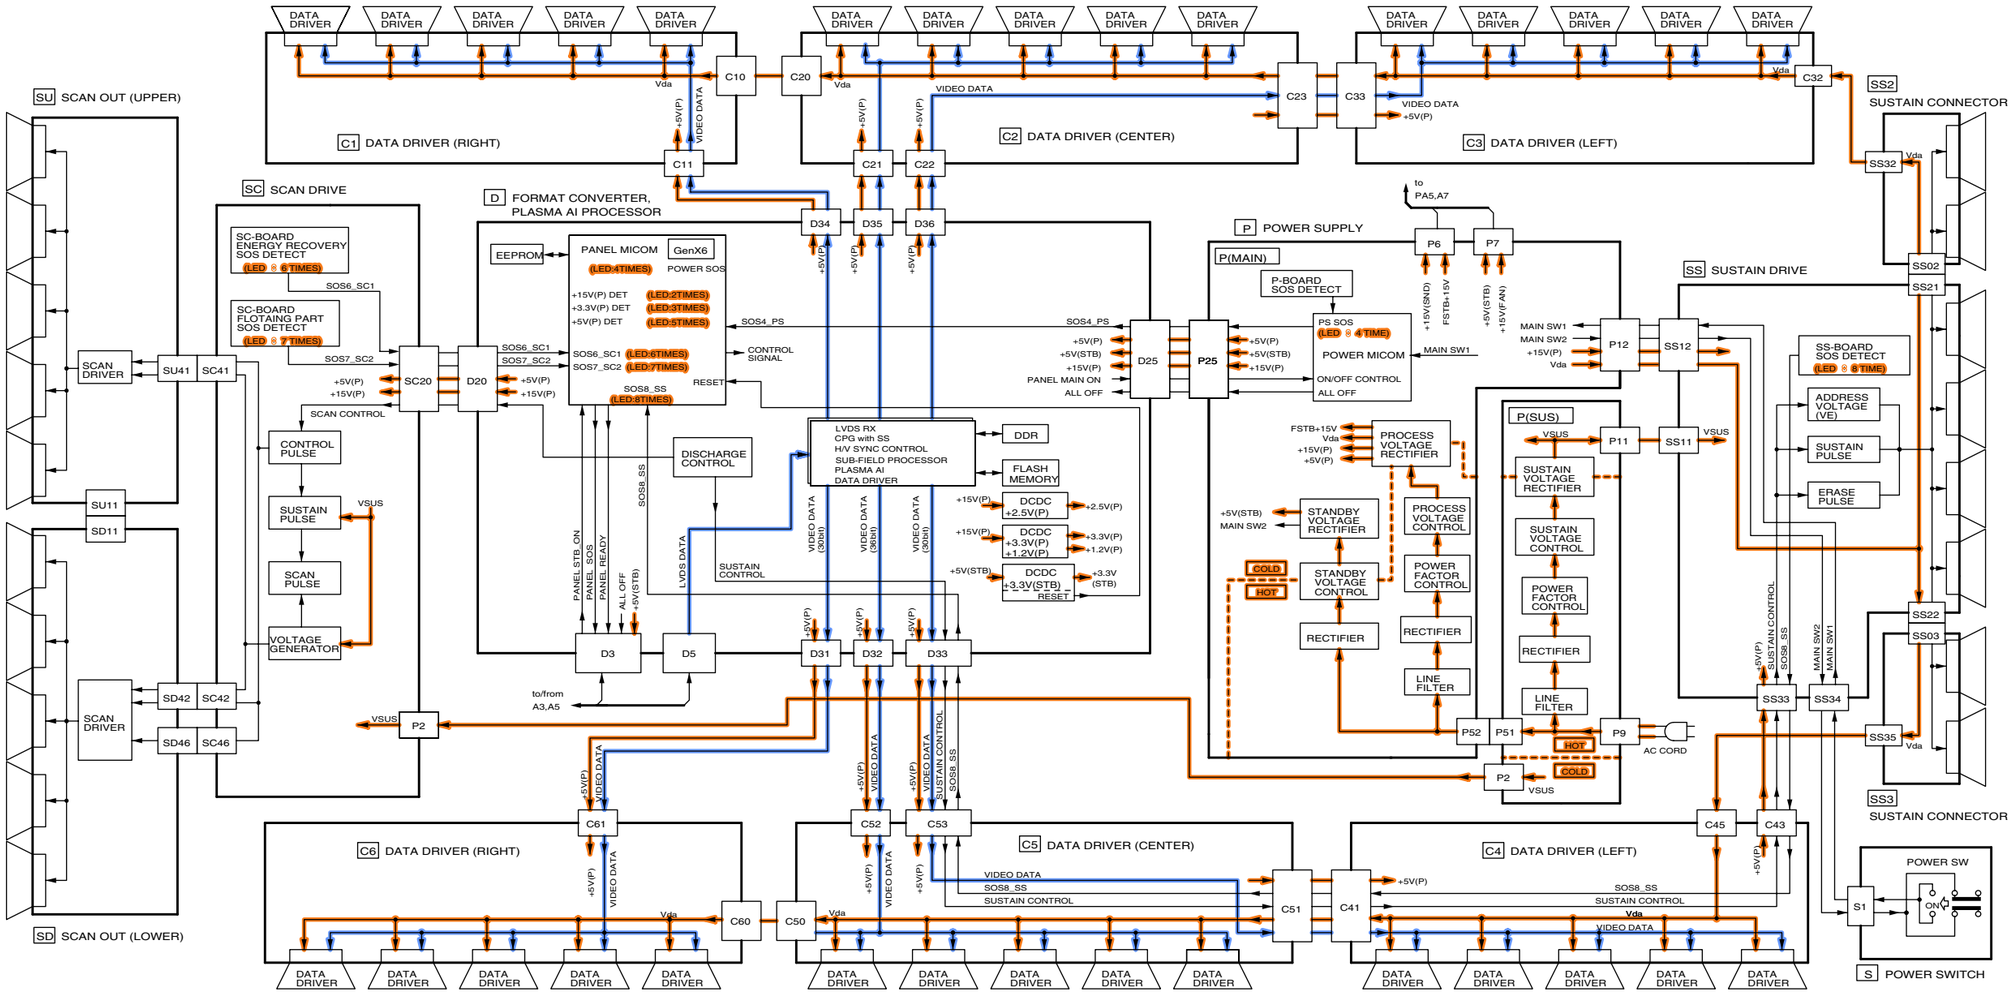

TH-65PY850D/H/M/MR/MS
Block (2/7) Diagram

TH-65PY850D/H/M/MR/MS
Block (2/7) Diagram


9.3. Block Diagram (3/7)

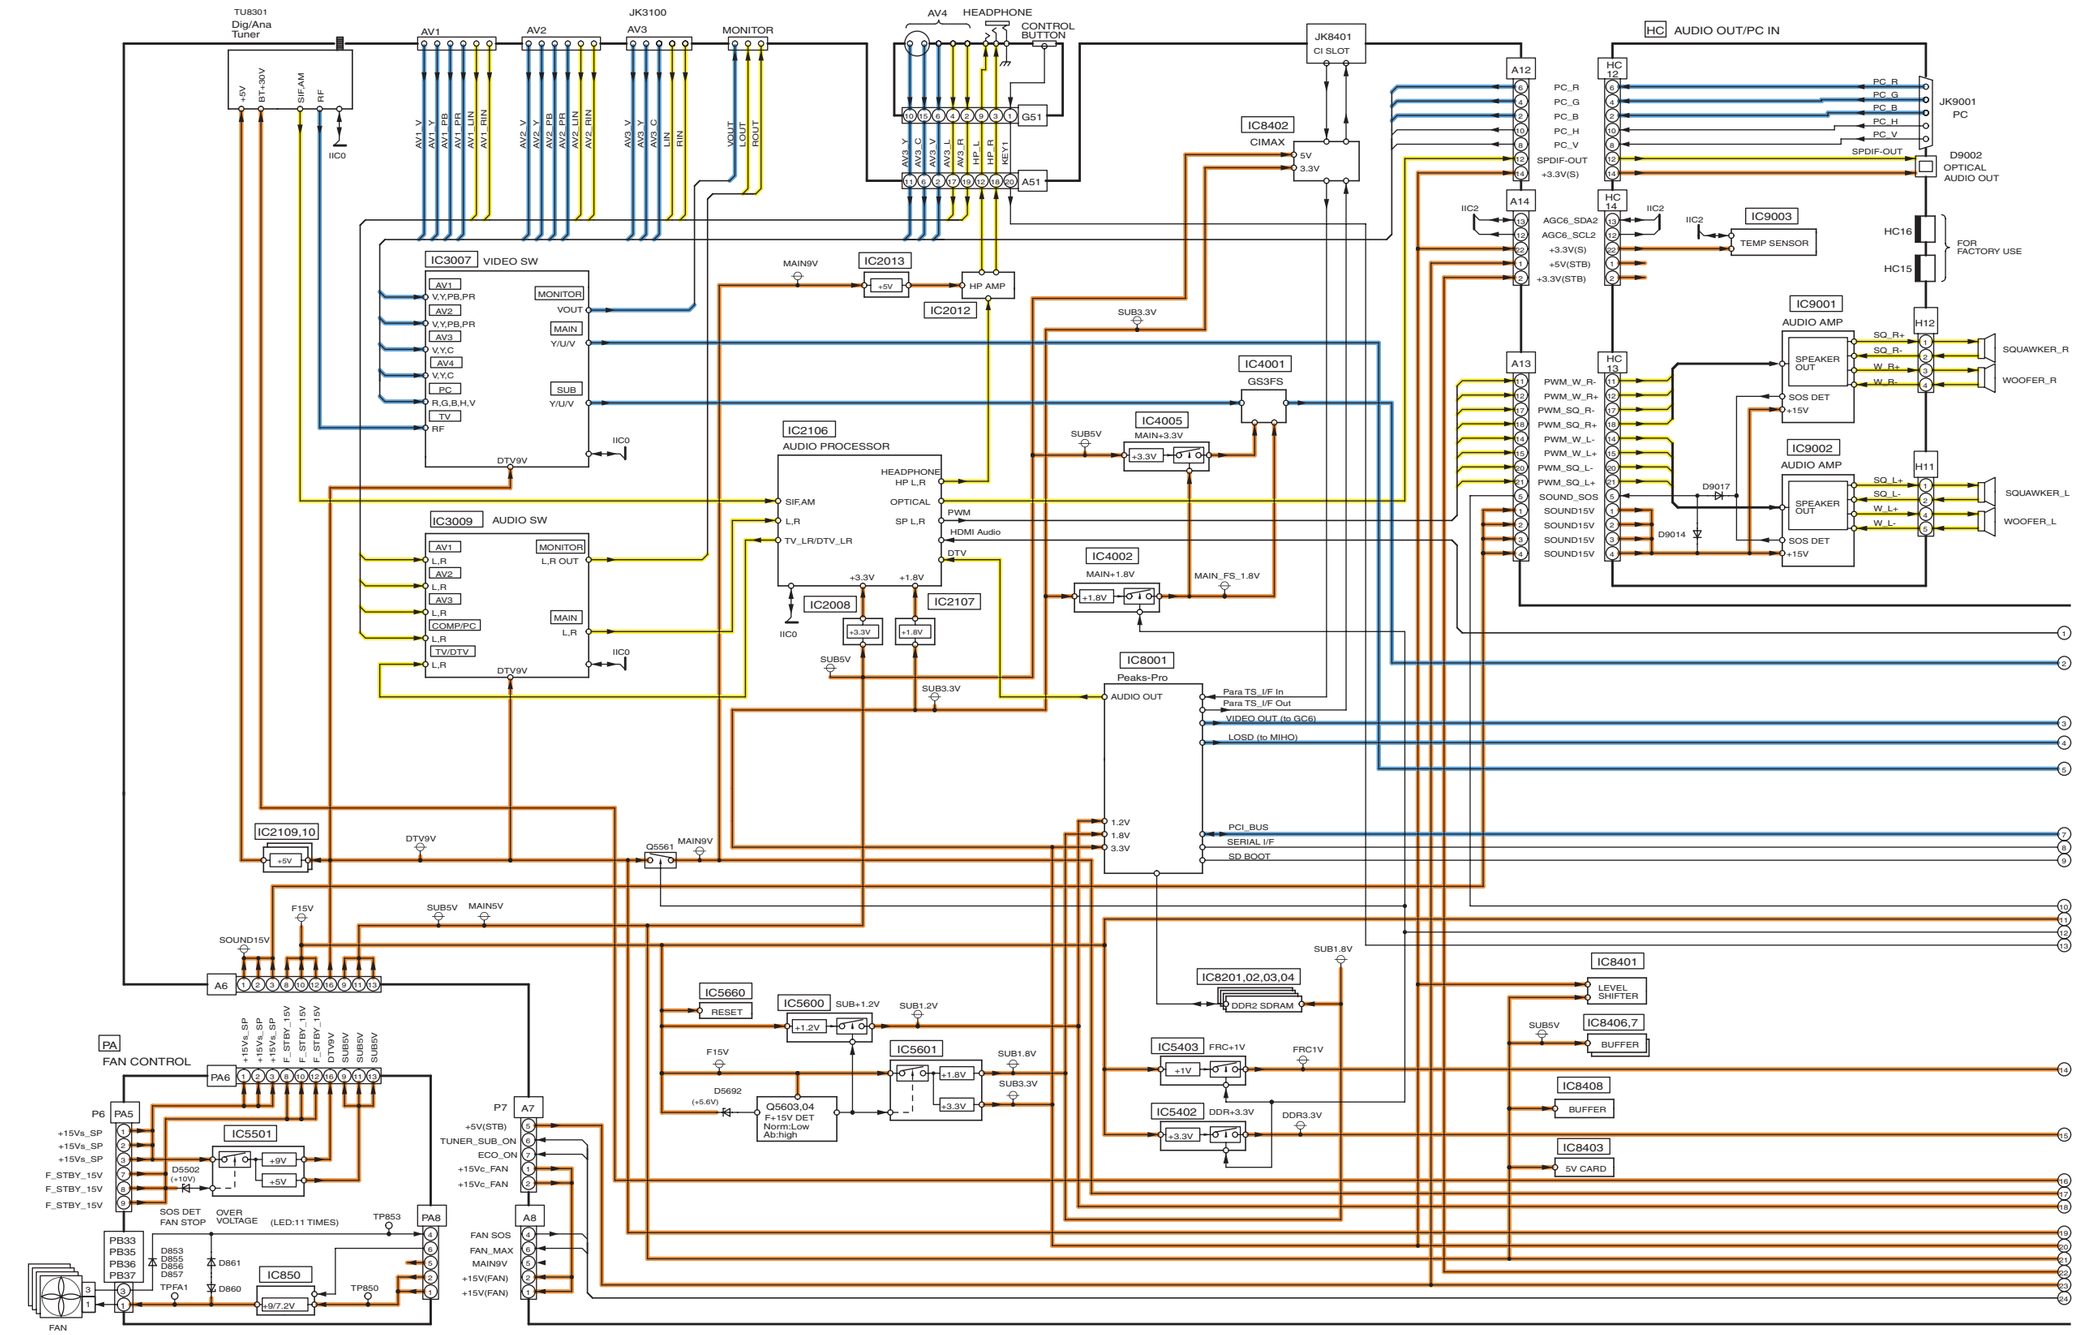


TH-65PY850D/H/M/MR/MS
Block (3/7) Diagram

TH-65PY850D/H/M/MR/MS
Block (3/7) Diagram

9.4. Block Diagram (4/7)

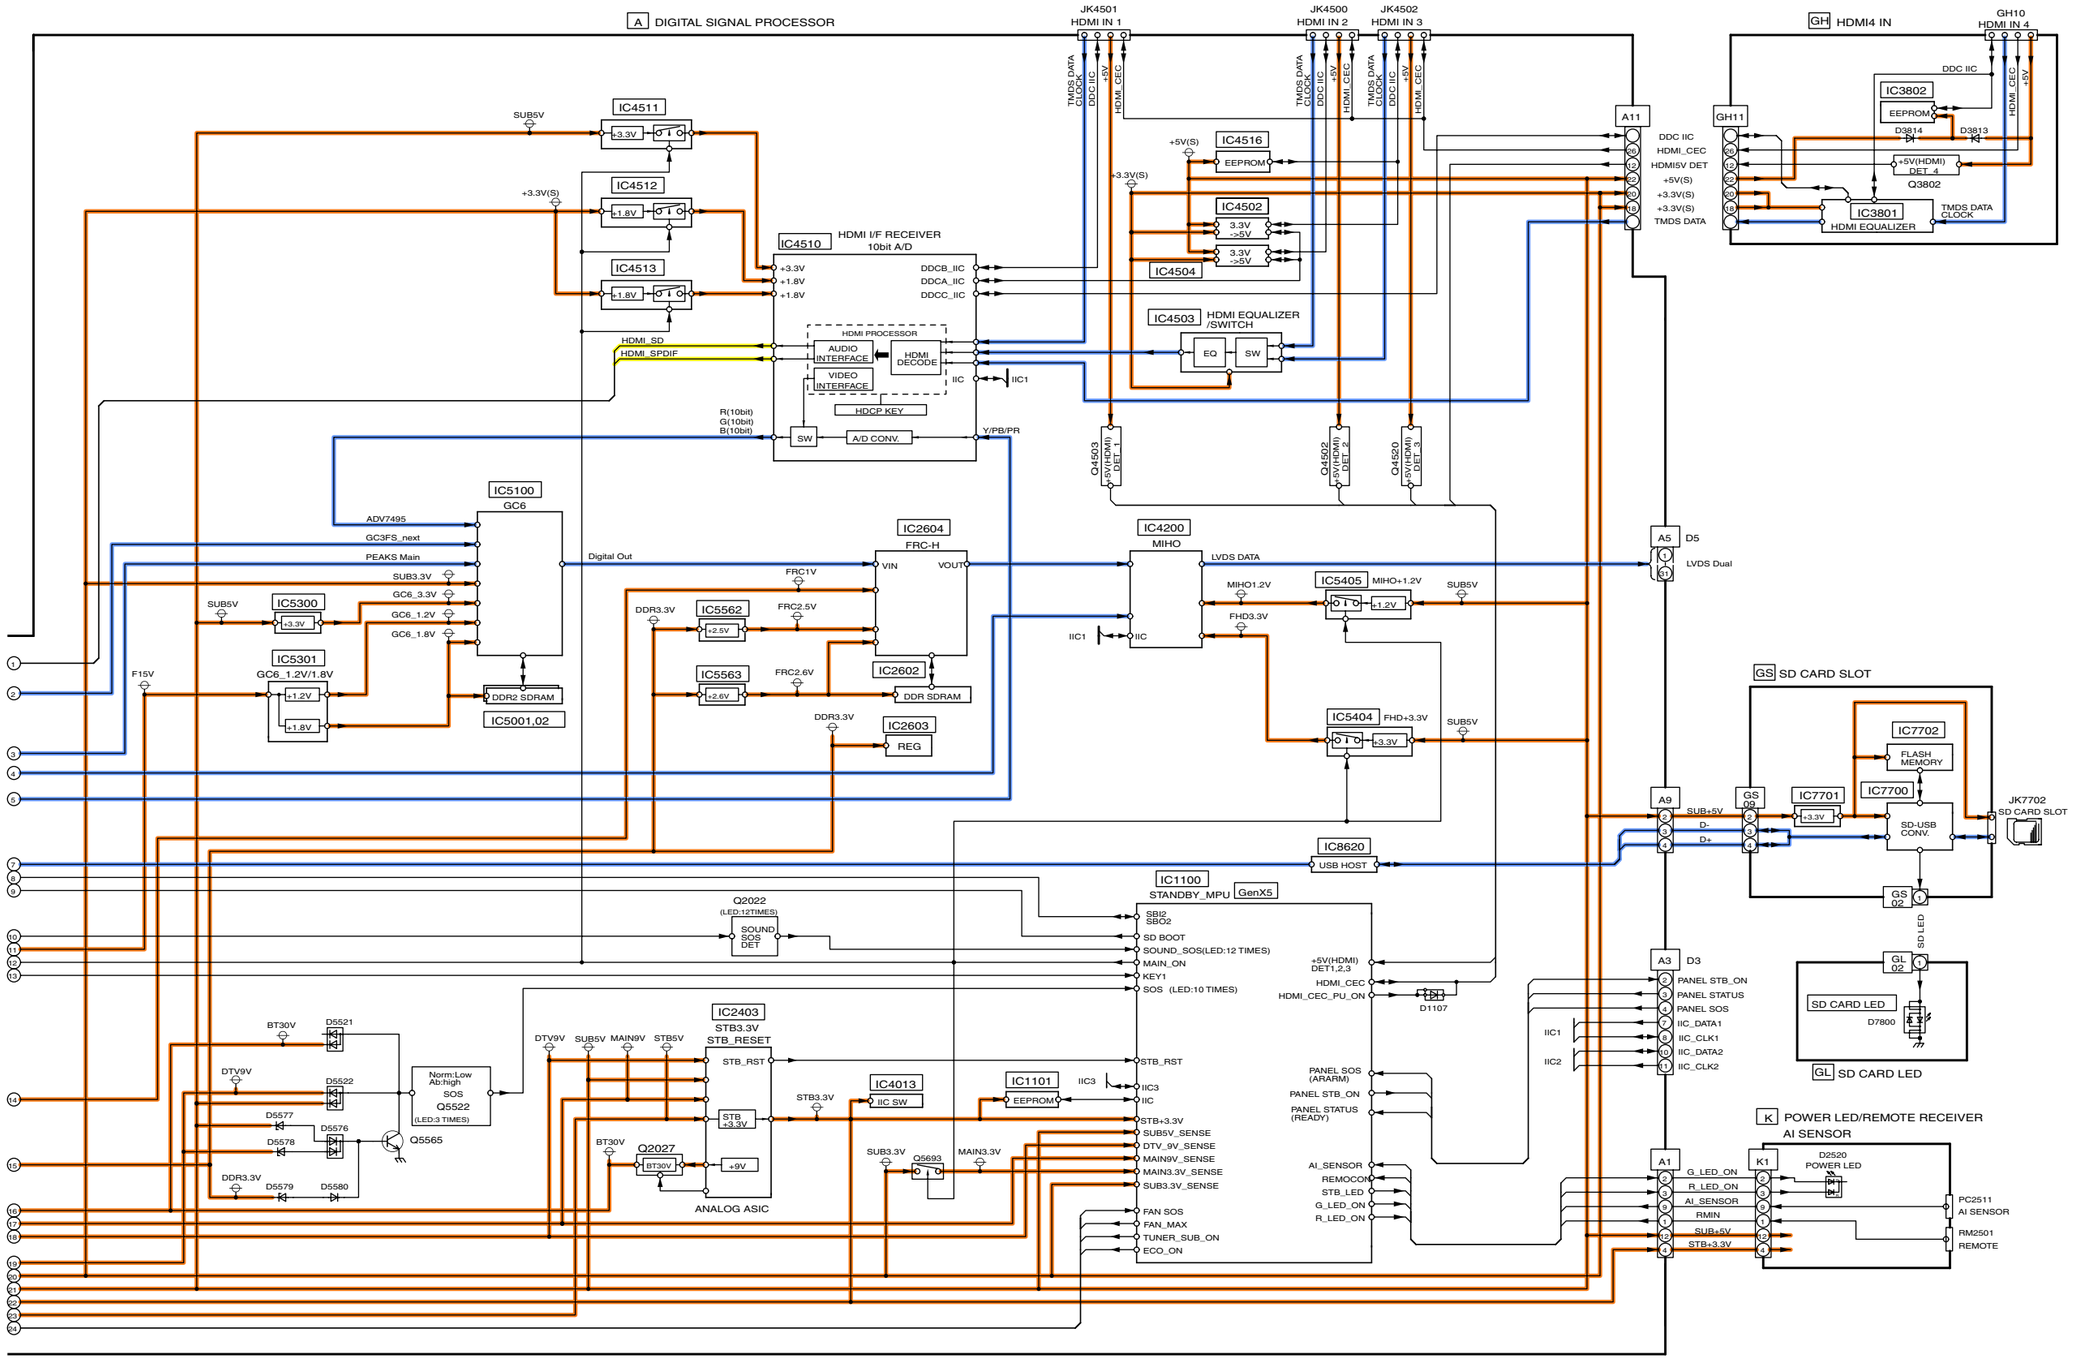


9.5. Block Diagram (5/7)

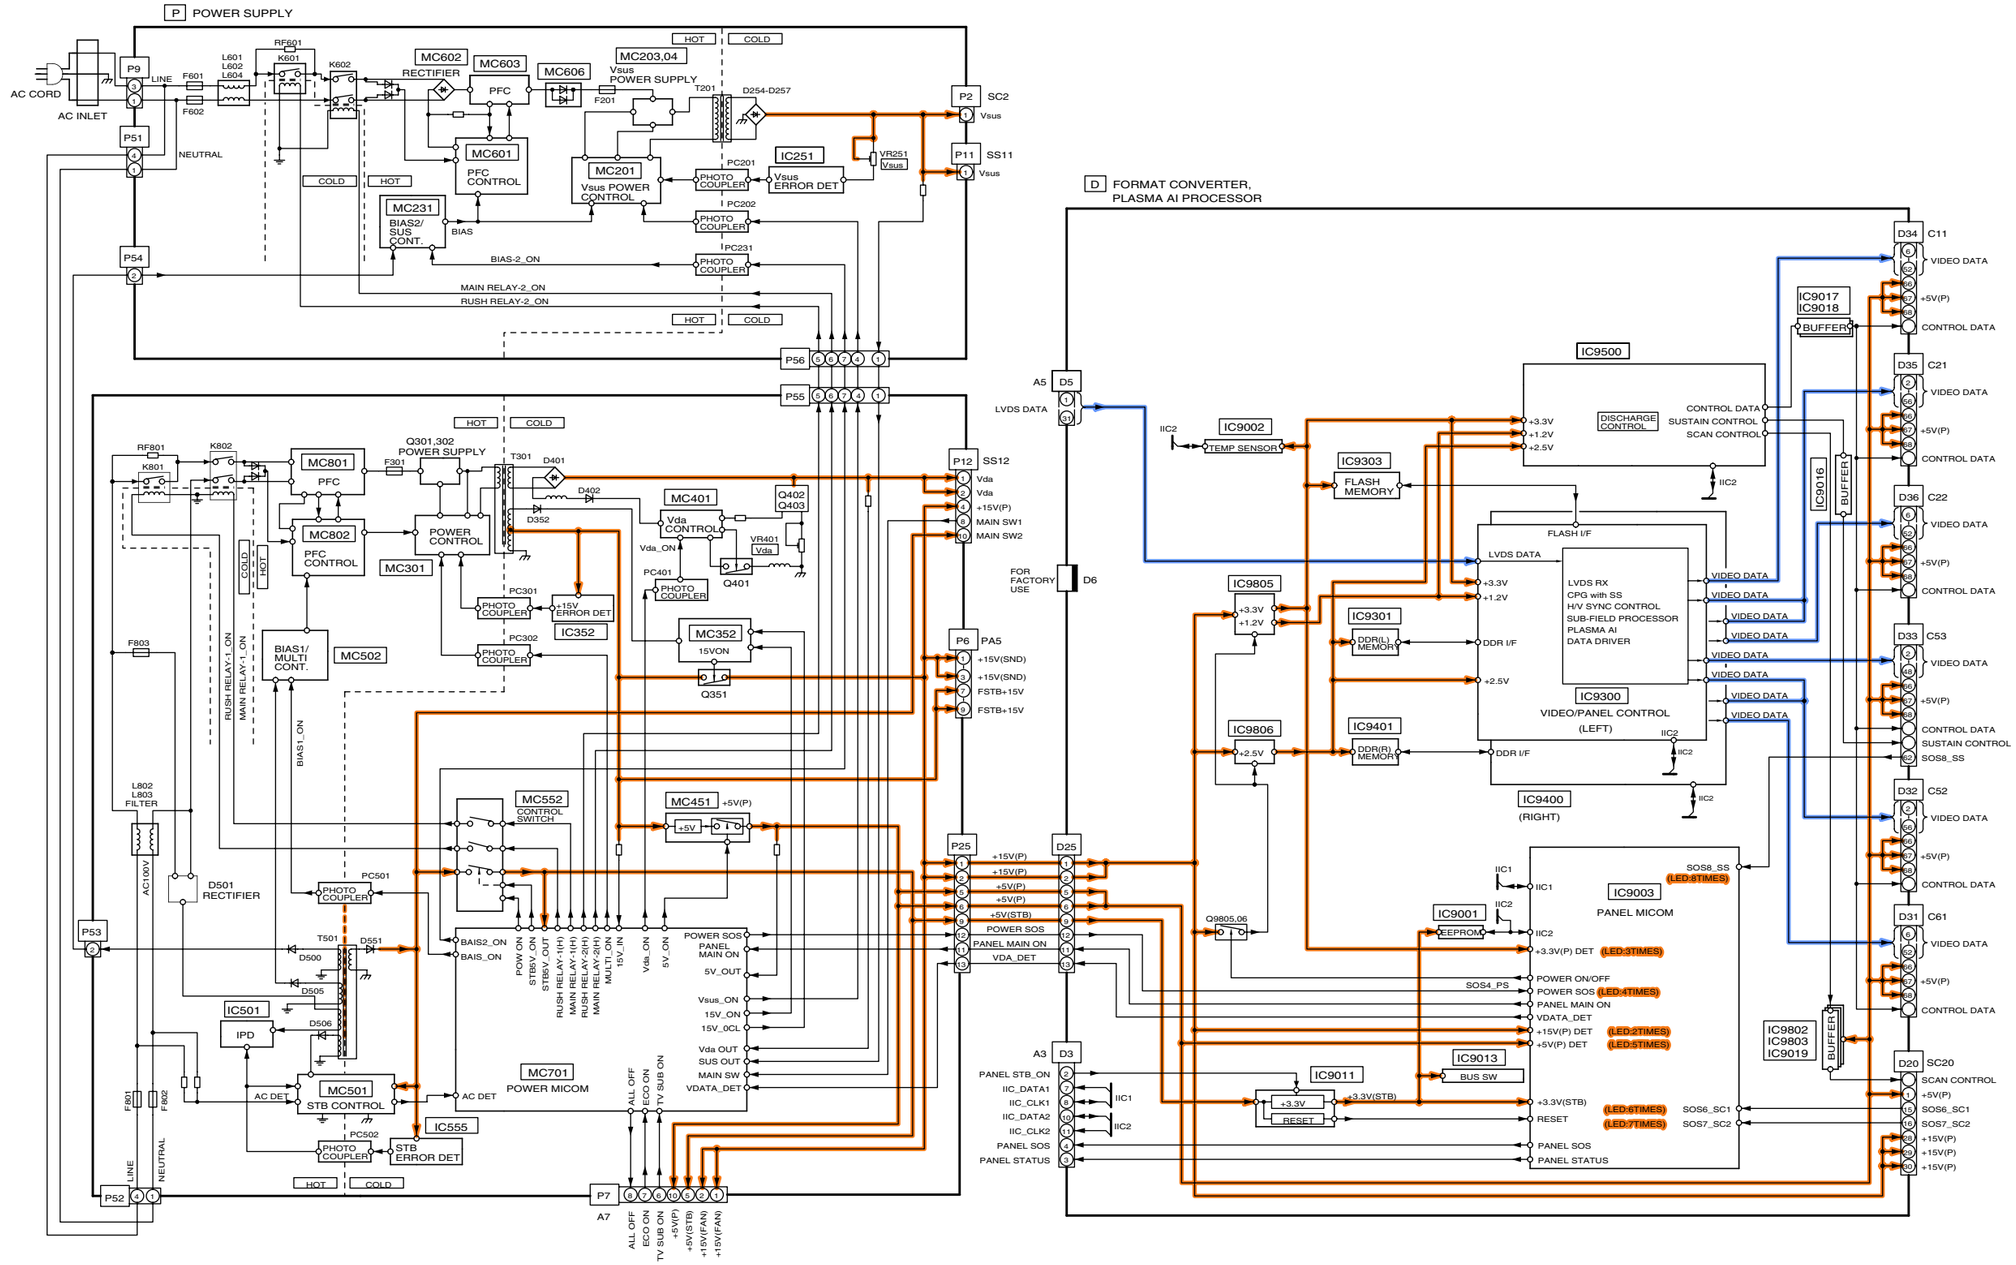

TH-65PY850D/H/M/MR/MS
Block (5/7) Diagram

TH-65PY850D/H/M/MR/MS
Block (5/7) Diagram


9.6. Block Diagram (6/7)

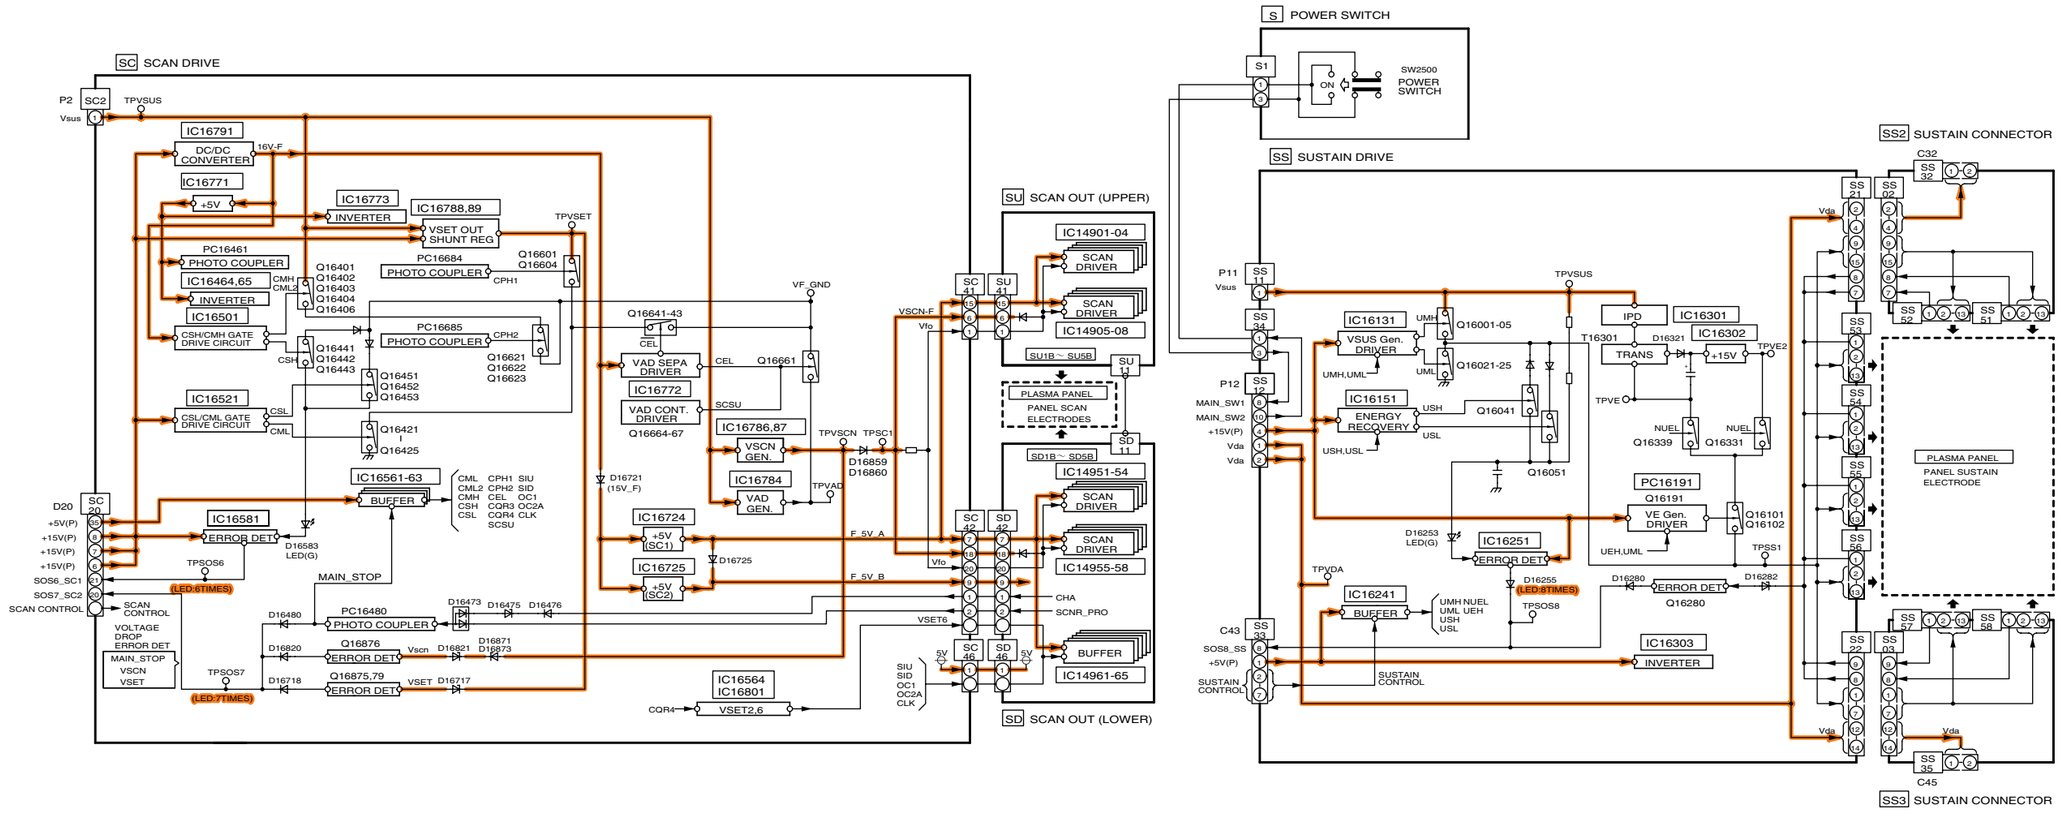

TH-65PY850D/H/M/MR/MS
Block (6/7) Diagram

TH-65PY850D/H/M/MR/MS
Block (6/7) Diagram

9.7. Block Diagram (7/7)

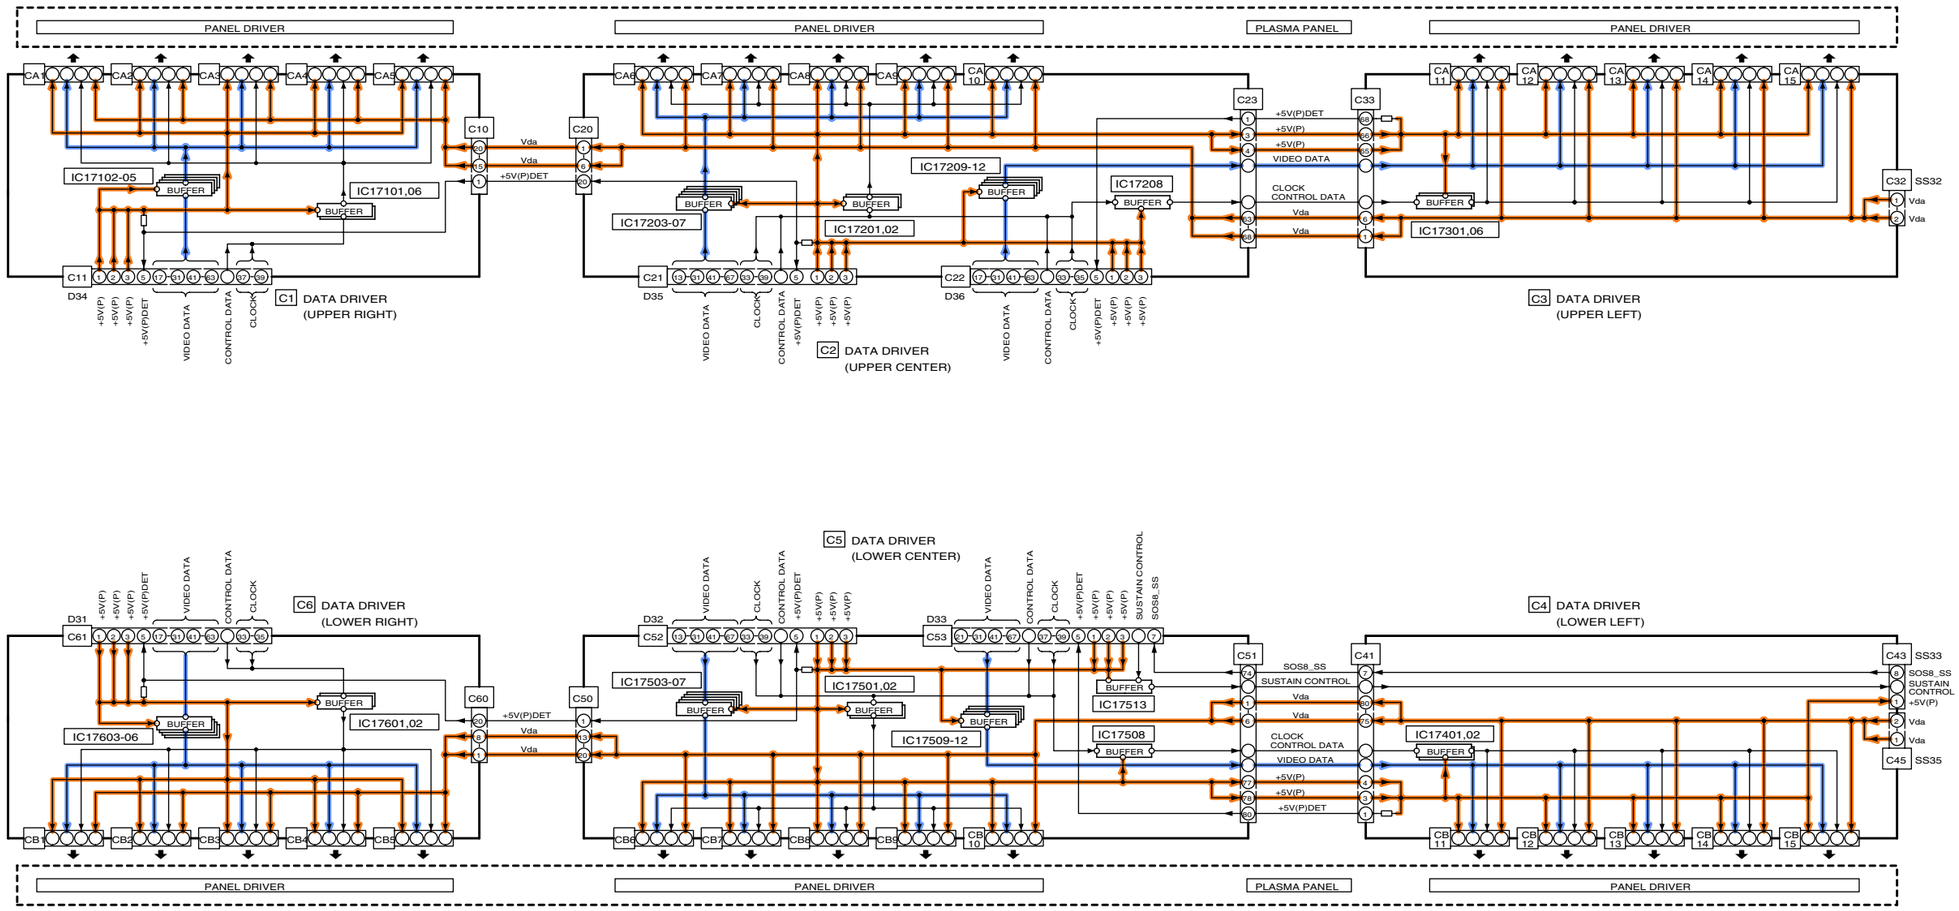


10 Wiring Connection Diagram

10.1. Caution statement.

Caution:


Please confirm that all flexible cables are assembled correctly.
Also make sure that they are locked in the connectors.
Verify by giving the flexible cables a very slight pull.

10.2. Wiring (1)

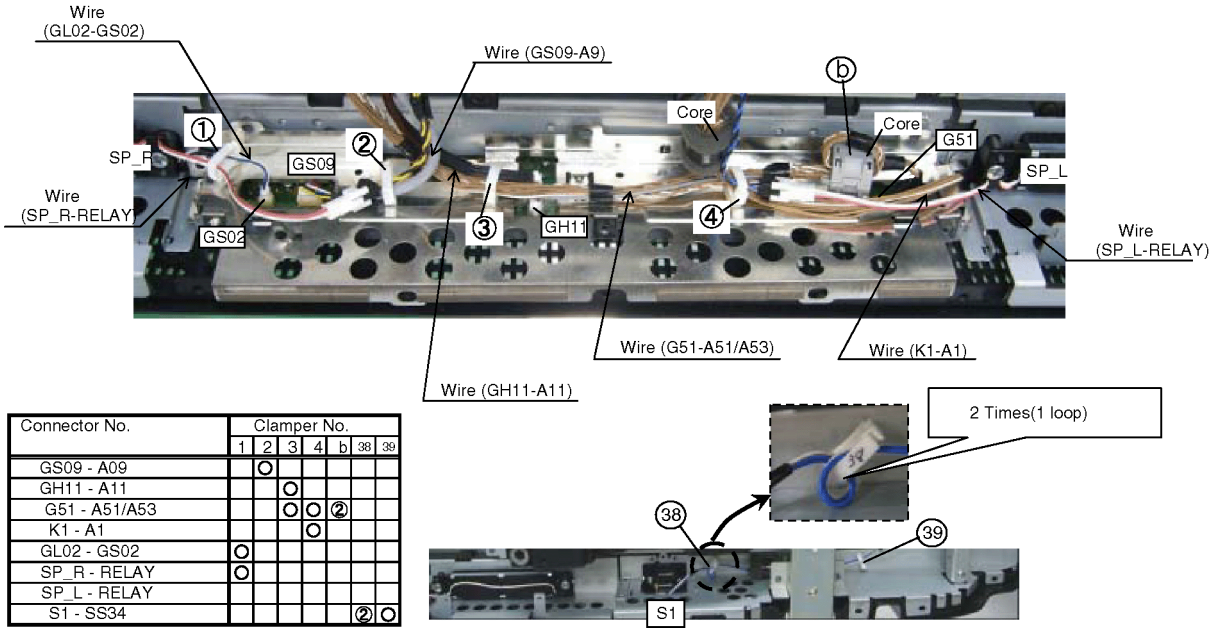


Connector No.	Clamper No.						
	1	2	3	4	b	38	39
GS09 - A09		○					
GH11 - A11			○				
G51 - A51/A53			○	○	②		
K1 - A1				○			
GL02 - GS02	○						
SP_R - RELAY	○						
SP_L - RELAY							
S1 - SS34						②	○

10.3. Wiring (2)

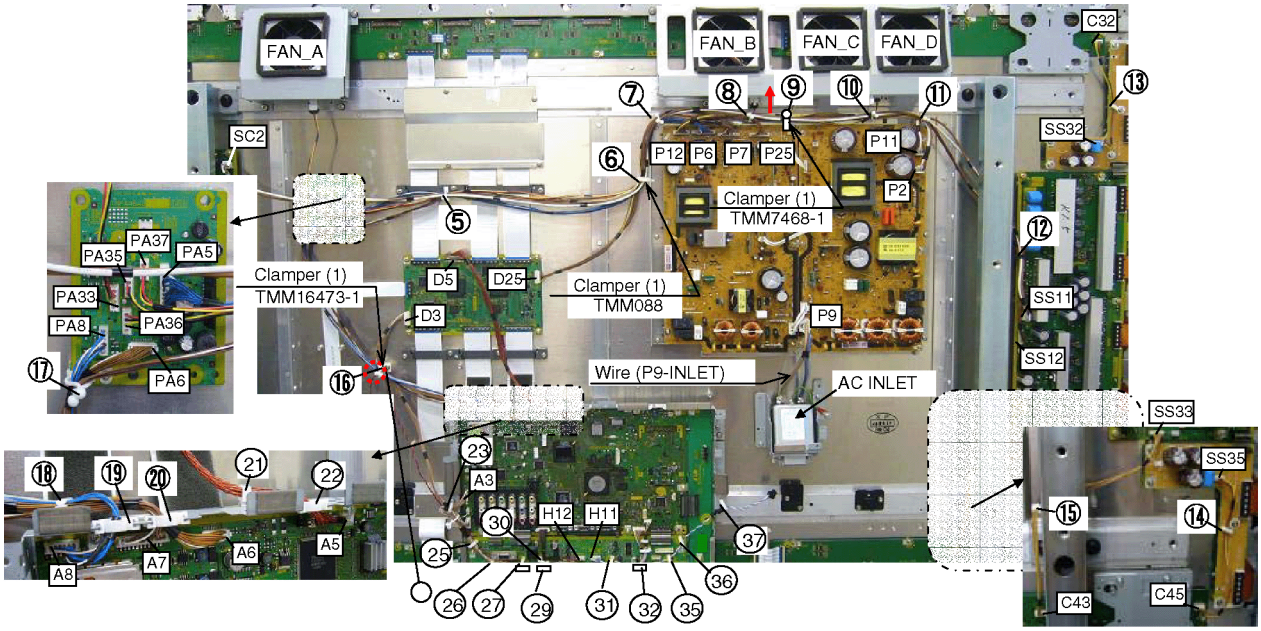



Connector No.	Clamper No.																																	
	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20	21	22	23	25	26	27	29	30	31	32	35	36	37						
SC2 - P2	O	O	O	O	O	O	O																												
P11 - SS11							O	O																											
P12 - SS12				O	O	O	O	O																											
P6 - PA5	O	O	O																																
P7 - A7	O	O	O									O	O	O		O																			
D25 - P25		O	O	O																															
D3 - A3												O							O															
D5 - A5																	O	O																	
PA6 - A6												O	O	O		O																			
PA8 - A8												O	O	O	O																				
PA33 - FAN_A																																			
PA35 - FAN_B	O	O	O	O																															
PA37 - FAN_C	O	O	O	O	O																														
PA36 - FAN_D	O	O	O	O	O	O																													
P9 - AC INLET																																			
SS32 - C32									O																										
SS33 - C43											O																								
SS35 - C45										O																									
H11 - RELAY(SQ_L)																									O	O									
H11 - RELAY(WF_L)																											O	O	O						
H12 - RELAY(SQ_R)																							O	O											
H12 - RELAY(WF_R)													O						O	O	O	O		O											

10.4. Wiring (3)

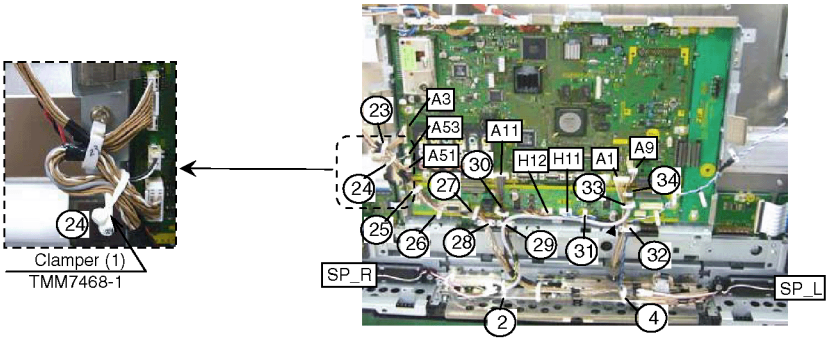

Connector No.	Clamper No.																							
	2	4	23	24	25	26	27	28	29	30	31	32	33	34										
G51 - A51		○	○	⊖	○	○	○	○																
G51 - A53		○	○	⊖	○	○	○	○																
GH11 - A11									○	○														
K1 - A1		○										○	○											
GS09 - A9	○								○		○		○	○										
H11 - RELAY(SQ_L)		○									○	○												
H11 - RELAY(WF_L)											○													
H12 - RELAY(SQ_R)	○								○	○														
H12 - RELAY(WF_R)			○	○	○	○	○			○														
D3 - A3			○																					

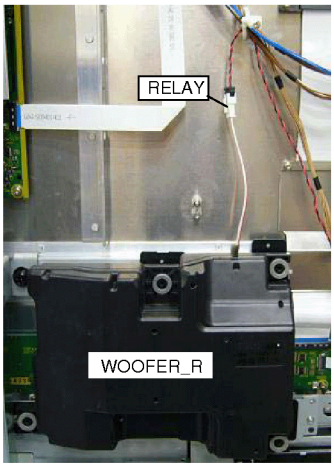

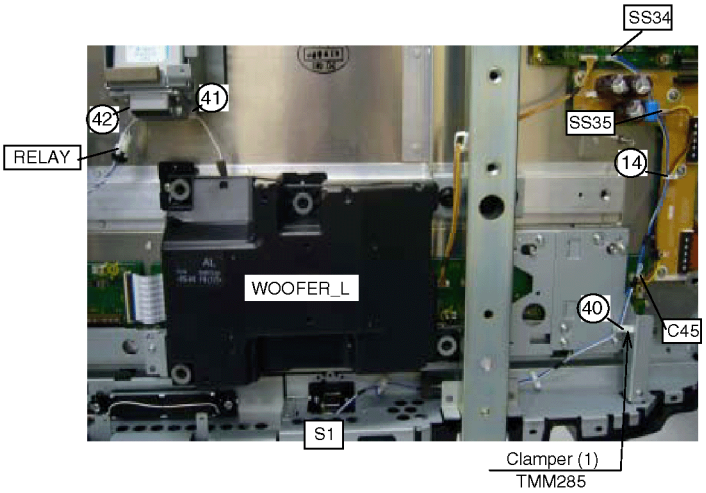

Connector No.	Clamper No.					
	14	40	41	42		
S1 - SS34	○	○				
H11 - WOOFER(L)			○	○		
H12 - WOOFER(R)						
SS35 - C45	○					

11 Schematic Diagram

11.1. Schematic Diagram Note

Notes:


1. **Resistor**
   Unit of resistance is OHM [Ω] (K=1,000, M=1,000,000).
2. **Capacitor**
   Unit of capacitance is μF, unless otherwise noted.
3. Coil
   Unit of inductance is H, unless otherwise noted.
4. Test Point
   ⚲ : Test Point position
5. Earth Symbol
   ⏚ : Chassis Earth (Cold) ⏚ : Line Earth (Hot)
6. Voltage Measurement
   Voltage is measured by a DC voltmeter.
   Conditions of the measurement are the following:
   Power Source ..... AC220-240V, 50/60Hz (D/H/M/MR)
   AC110-240V, 50/60Hz (MS)
   Receiving Signal ..... Colour Bar signal (RF)
   All customer's controls ..... Maximum positions
7. When arrow mark (↗) is found, connection is easily found from the direction of arrow.
8. Indicates the major signal flow. : Video ➡ Audio ⇨
9. This schematic diagram is the latest at the time of printing and subject to change without notice.

Remarks:


1. The Power Circuit contains a circuit area which uses a separate power supply to isolate the earth connection.
   The circuit is defined by HOT and COLD indications in the schematic diagram. Take the follwing precautions.
   All circuits, except the Power Circuit, are cold.
   Precautions
   a. Do not touch the hot part or the hot and cold parts at the same time or you may be shocked.
   b. Do not short- circuit the hot and cold circuits or a fuse may blow and parts may break.
   c. Do not connect an instrument, such as an oscilloscope, to the hot and cold circuits simultaneously or a fuse may blow.
   Connect the earth of instruments to the earth connection of the circuit being measured.
   d. Make sure to disconnect the power plug before removing the chassis.

TH-65PY850D/H/M/MR/MS
Schematic Diagram Notes

11.2. P(SUS)-Board Schematic Diagram

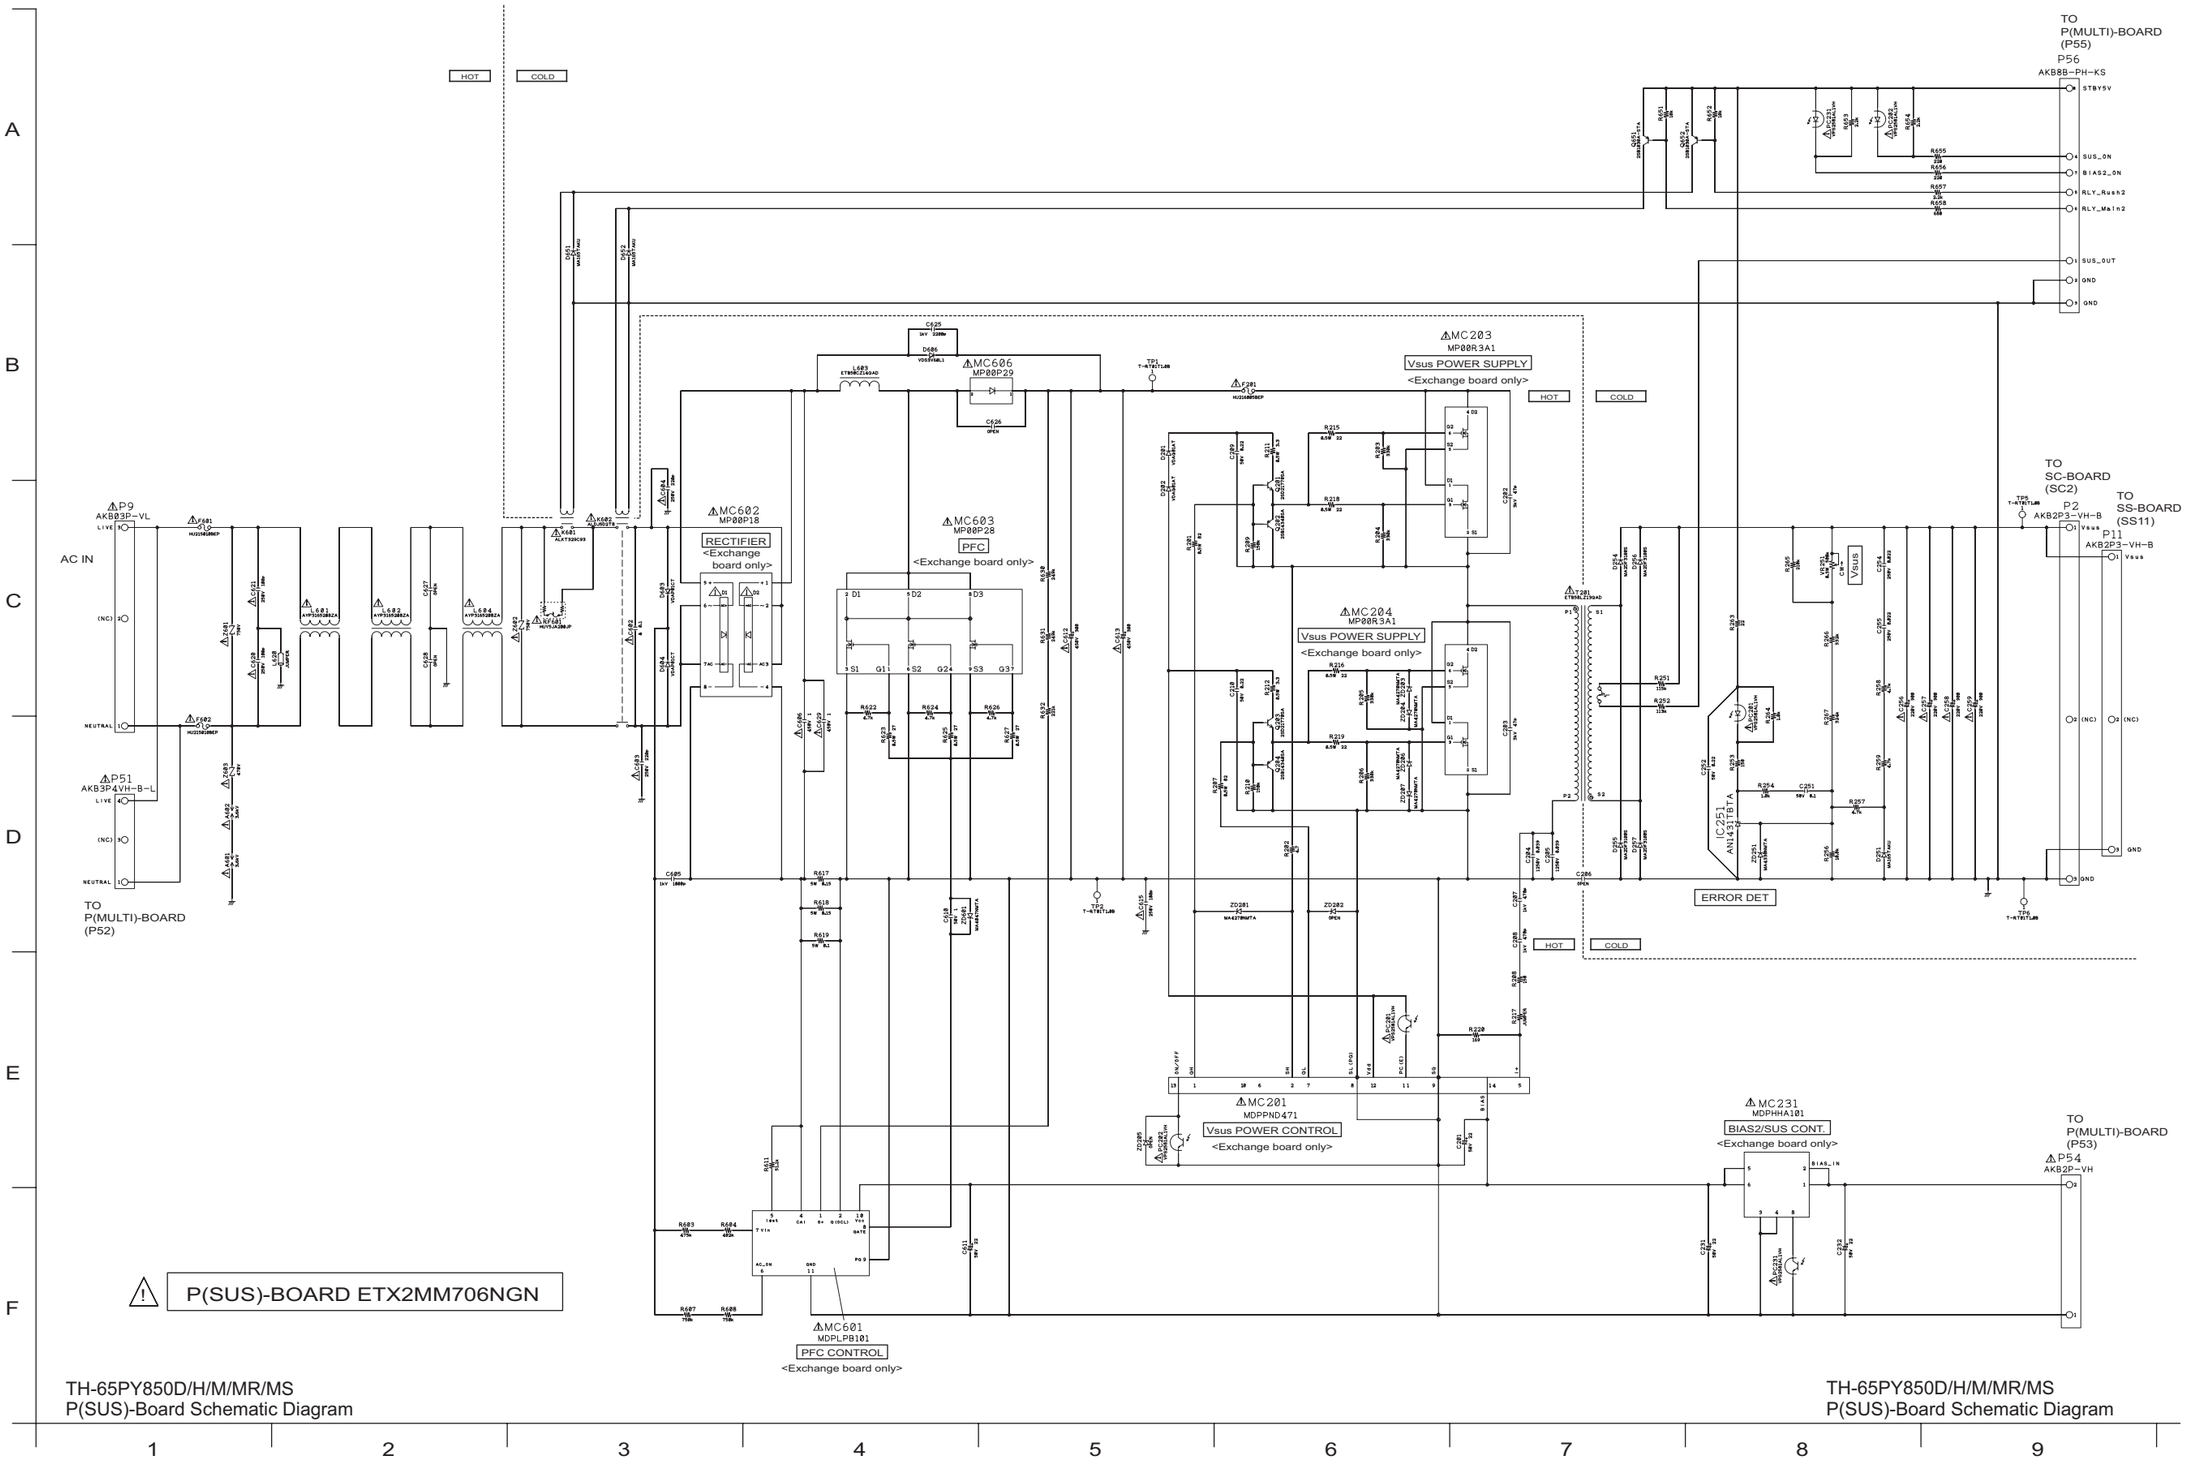


11.3. P(MULTI)-Board Schematic Diagram

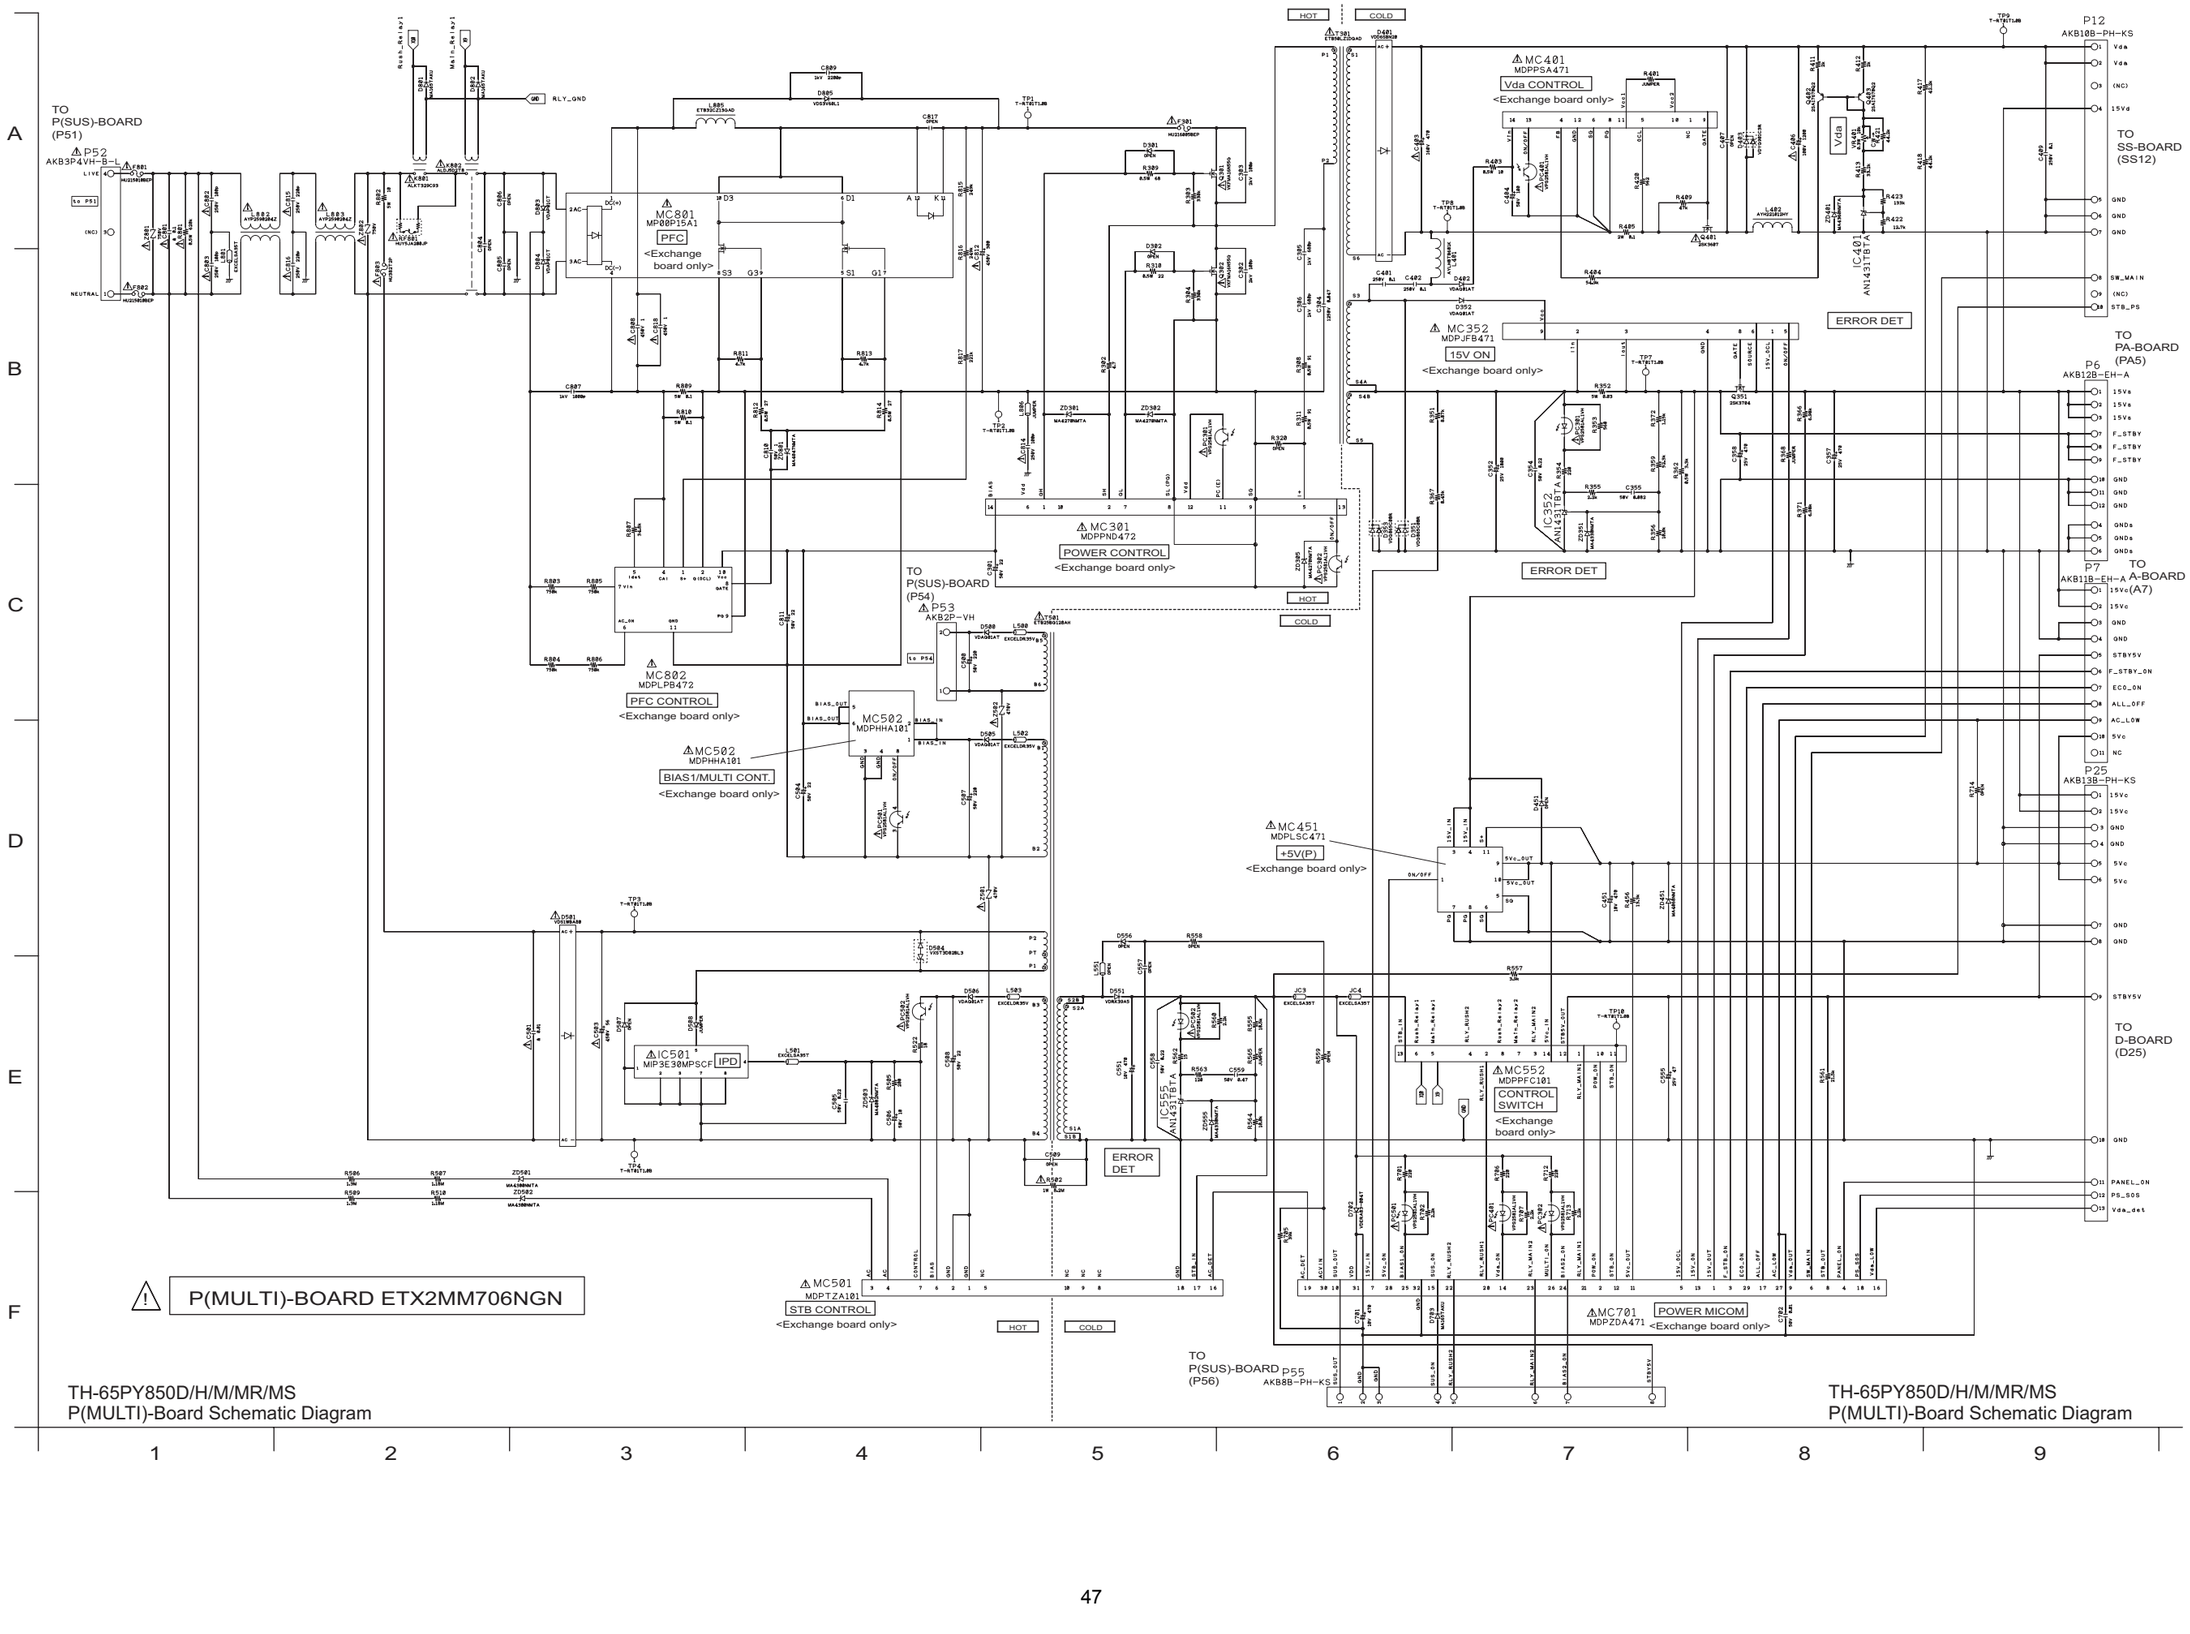


TH-65PY850D/H/M/MR/MS
P(MULTI)-Board Schematic Diagram

11.4. PA-Board Schematic Diagram

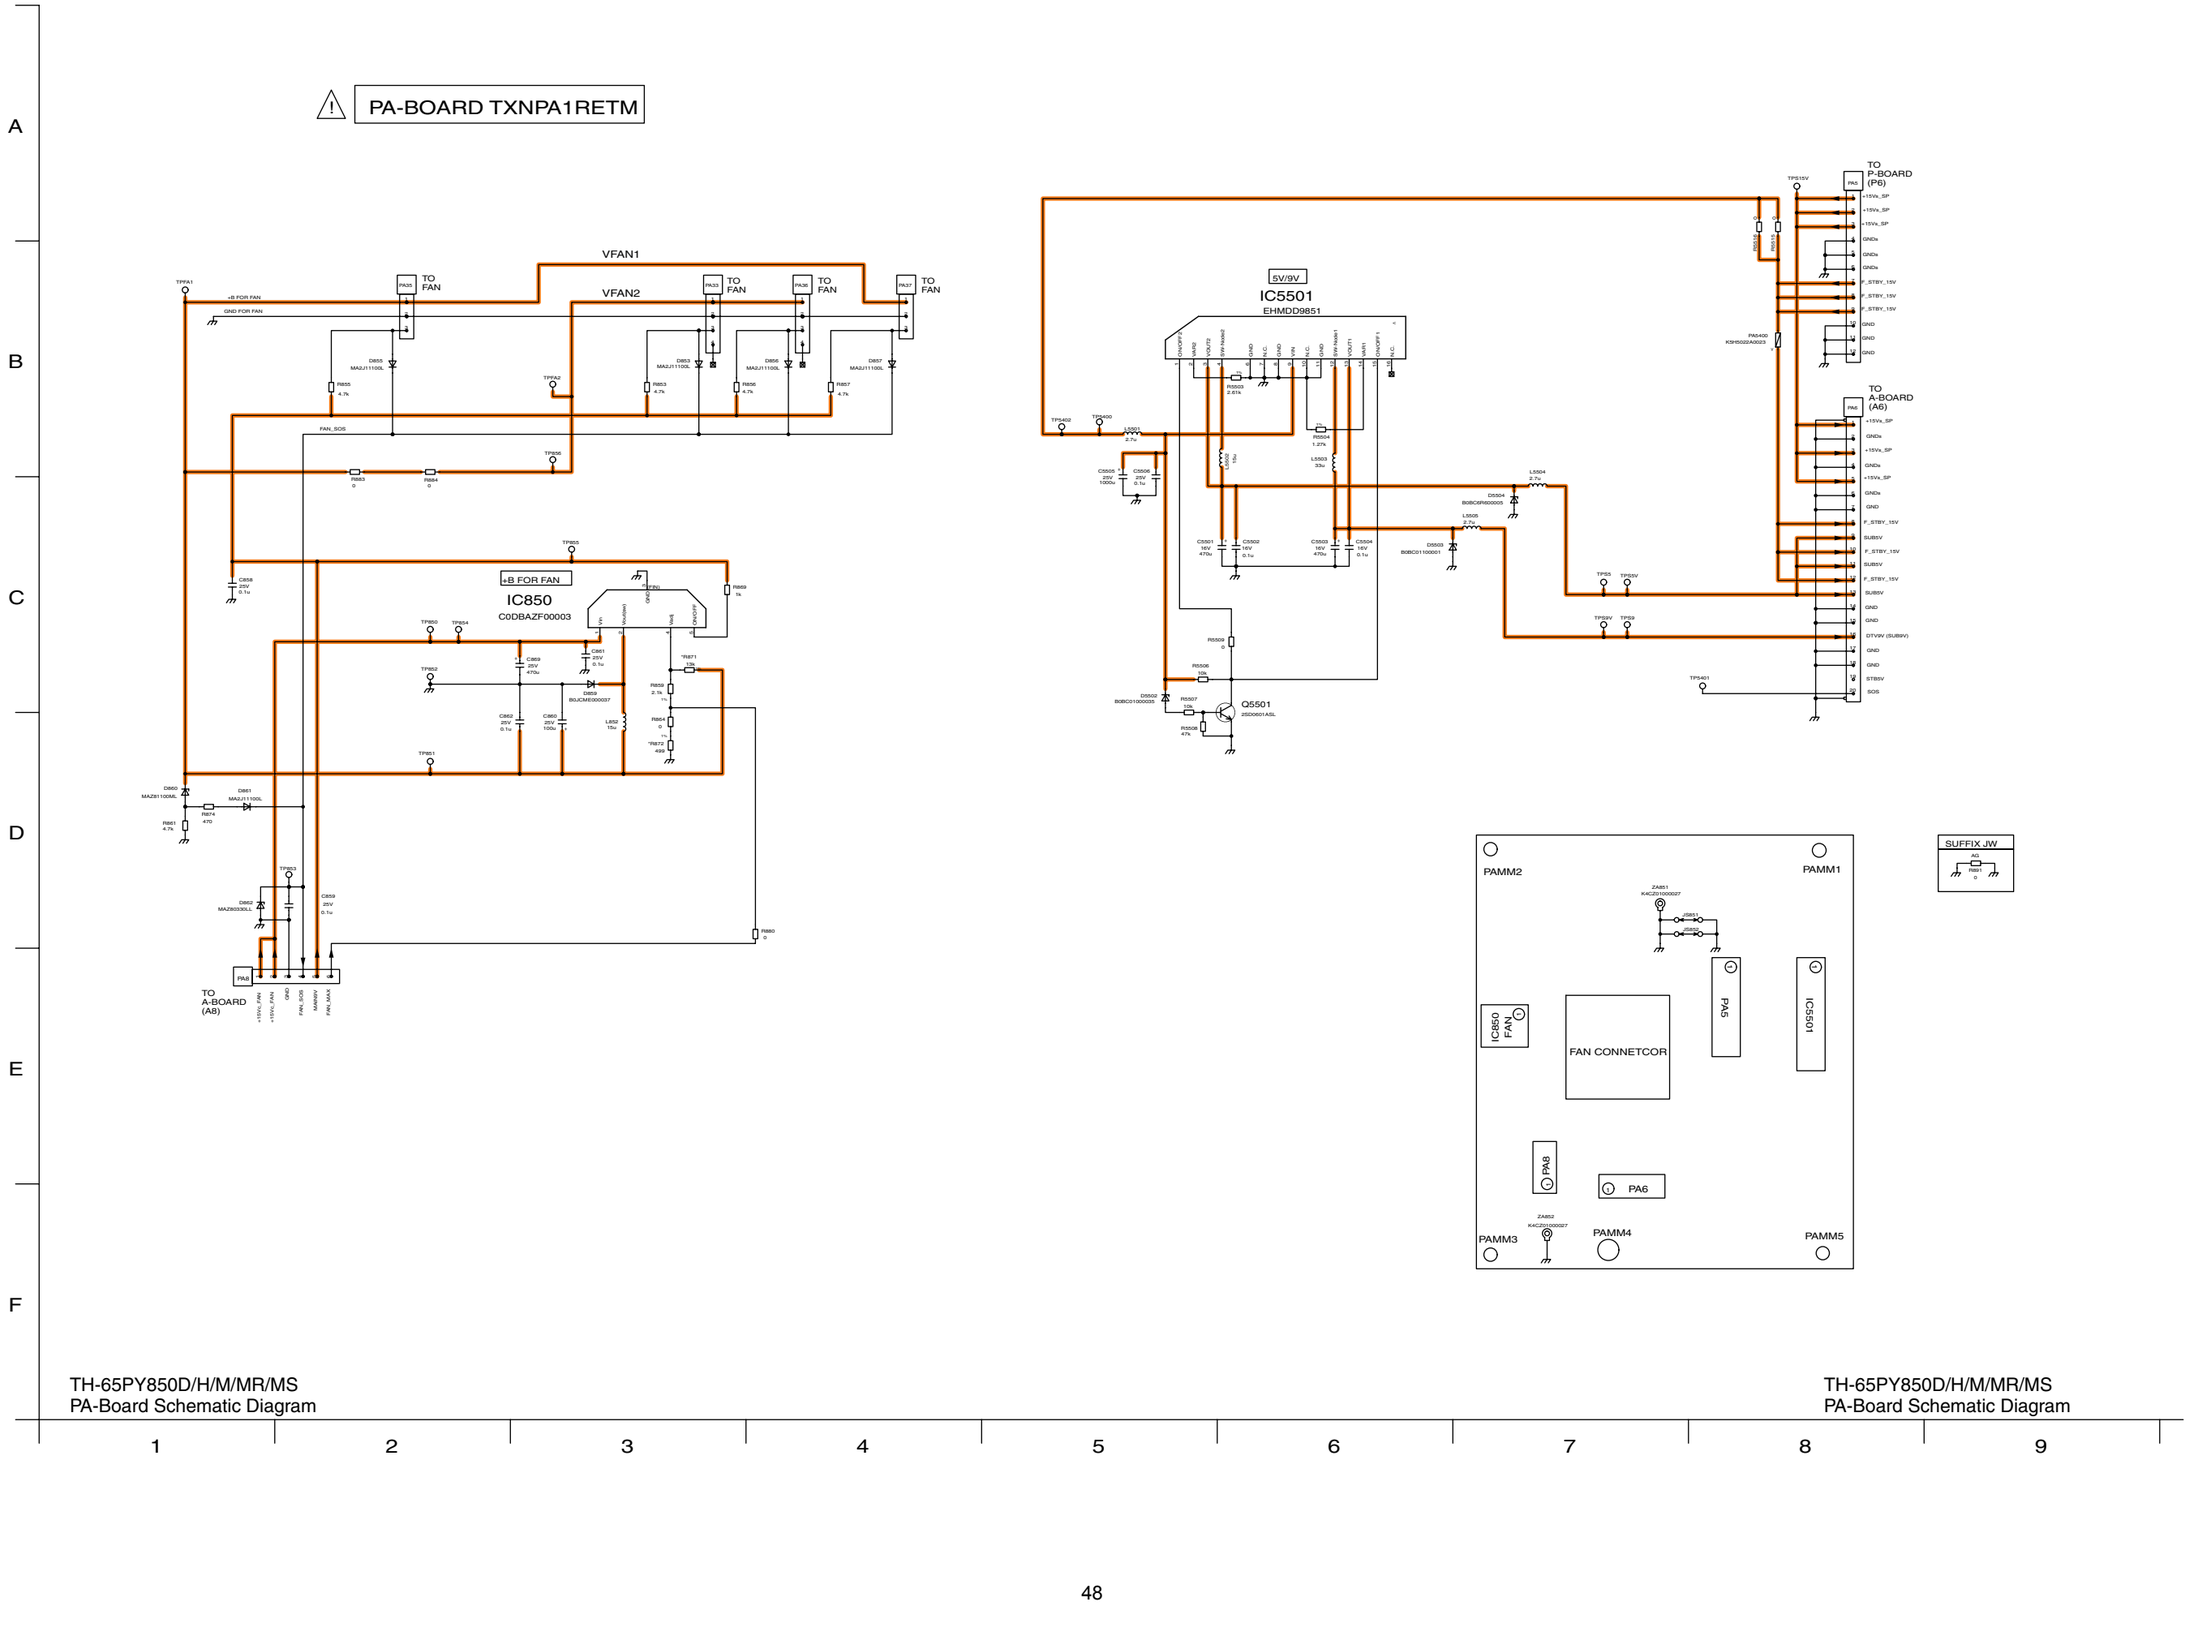


TH-65PY850D/H/M/MR/MS
PA-Board Schematic Diagram

11.5. A-Board (1/20) Schematic Diagram

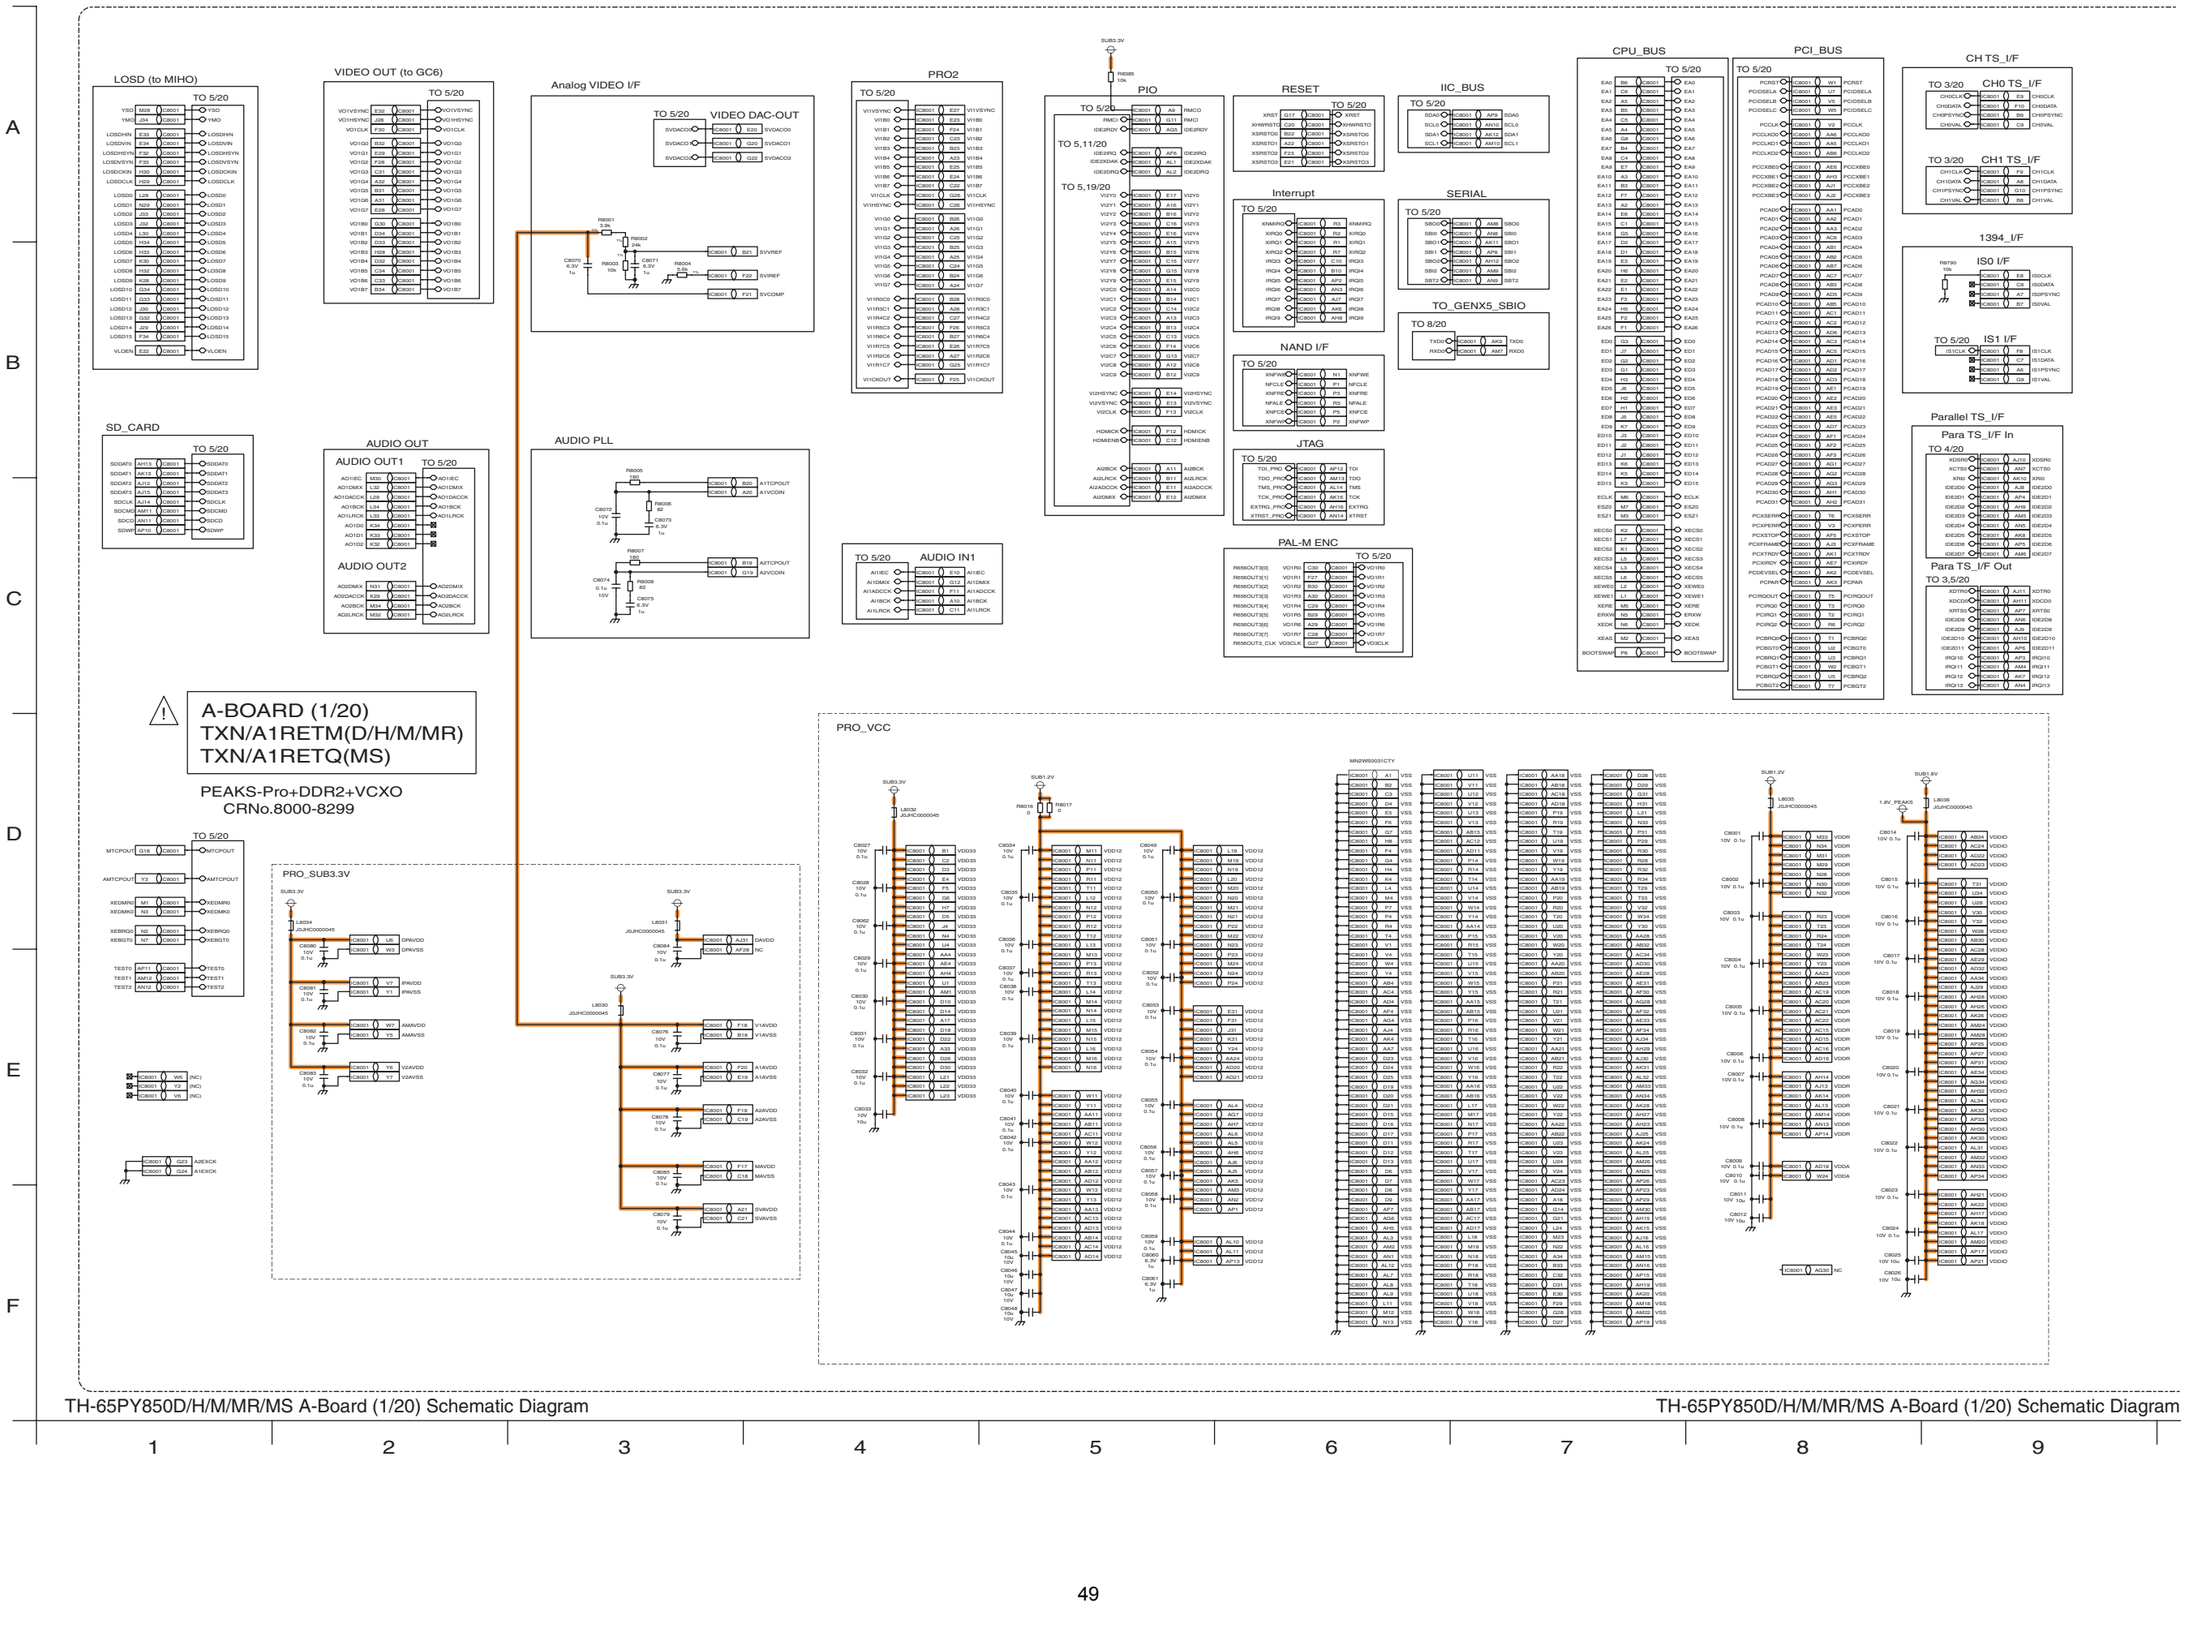

TH-65PY850D/H/M/MR/MS A-Board (1/20) Schematic Diagram

11.6. A-Board (2/20) Schematic Diagram

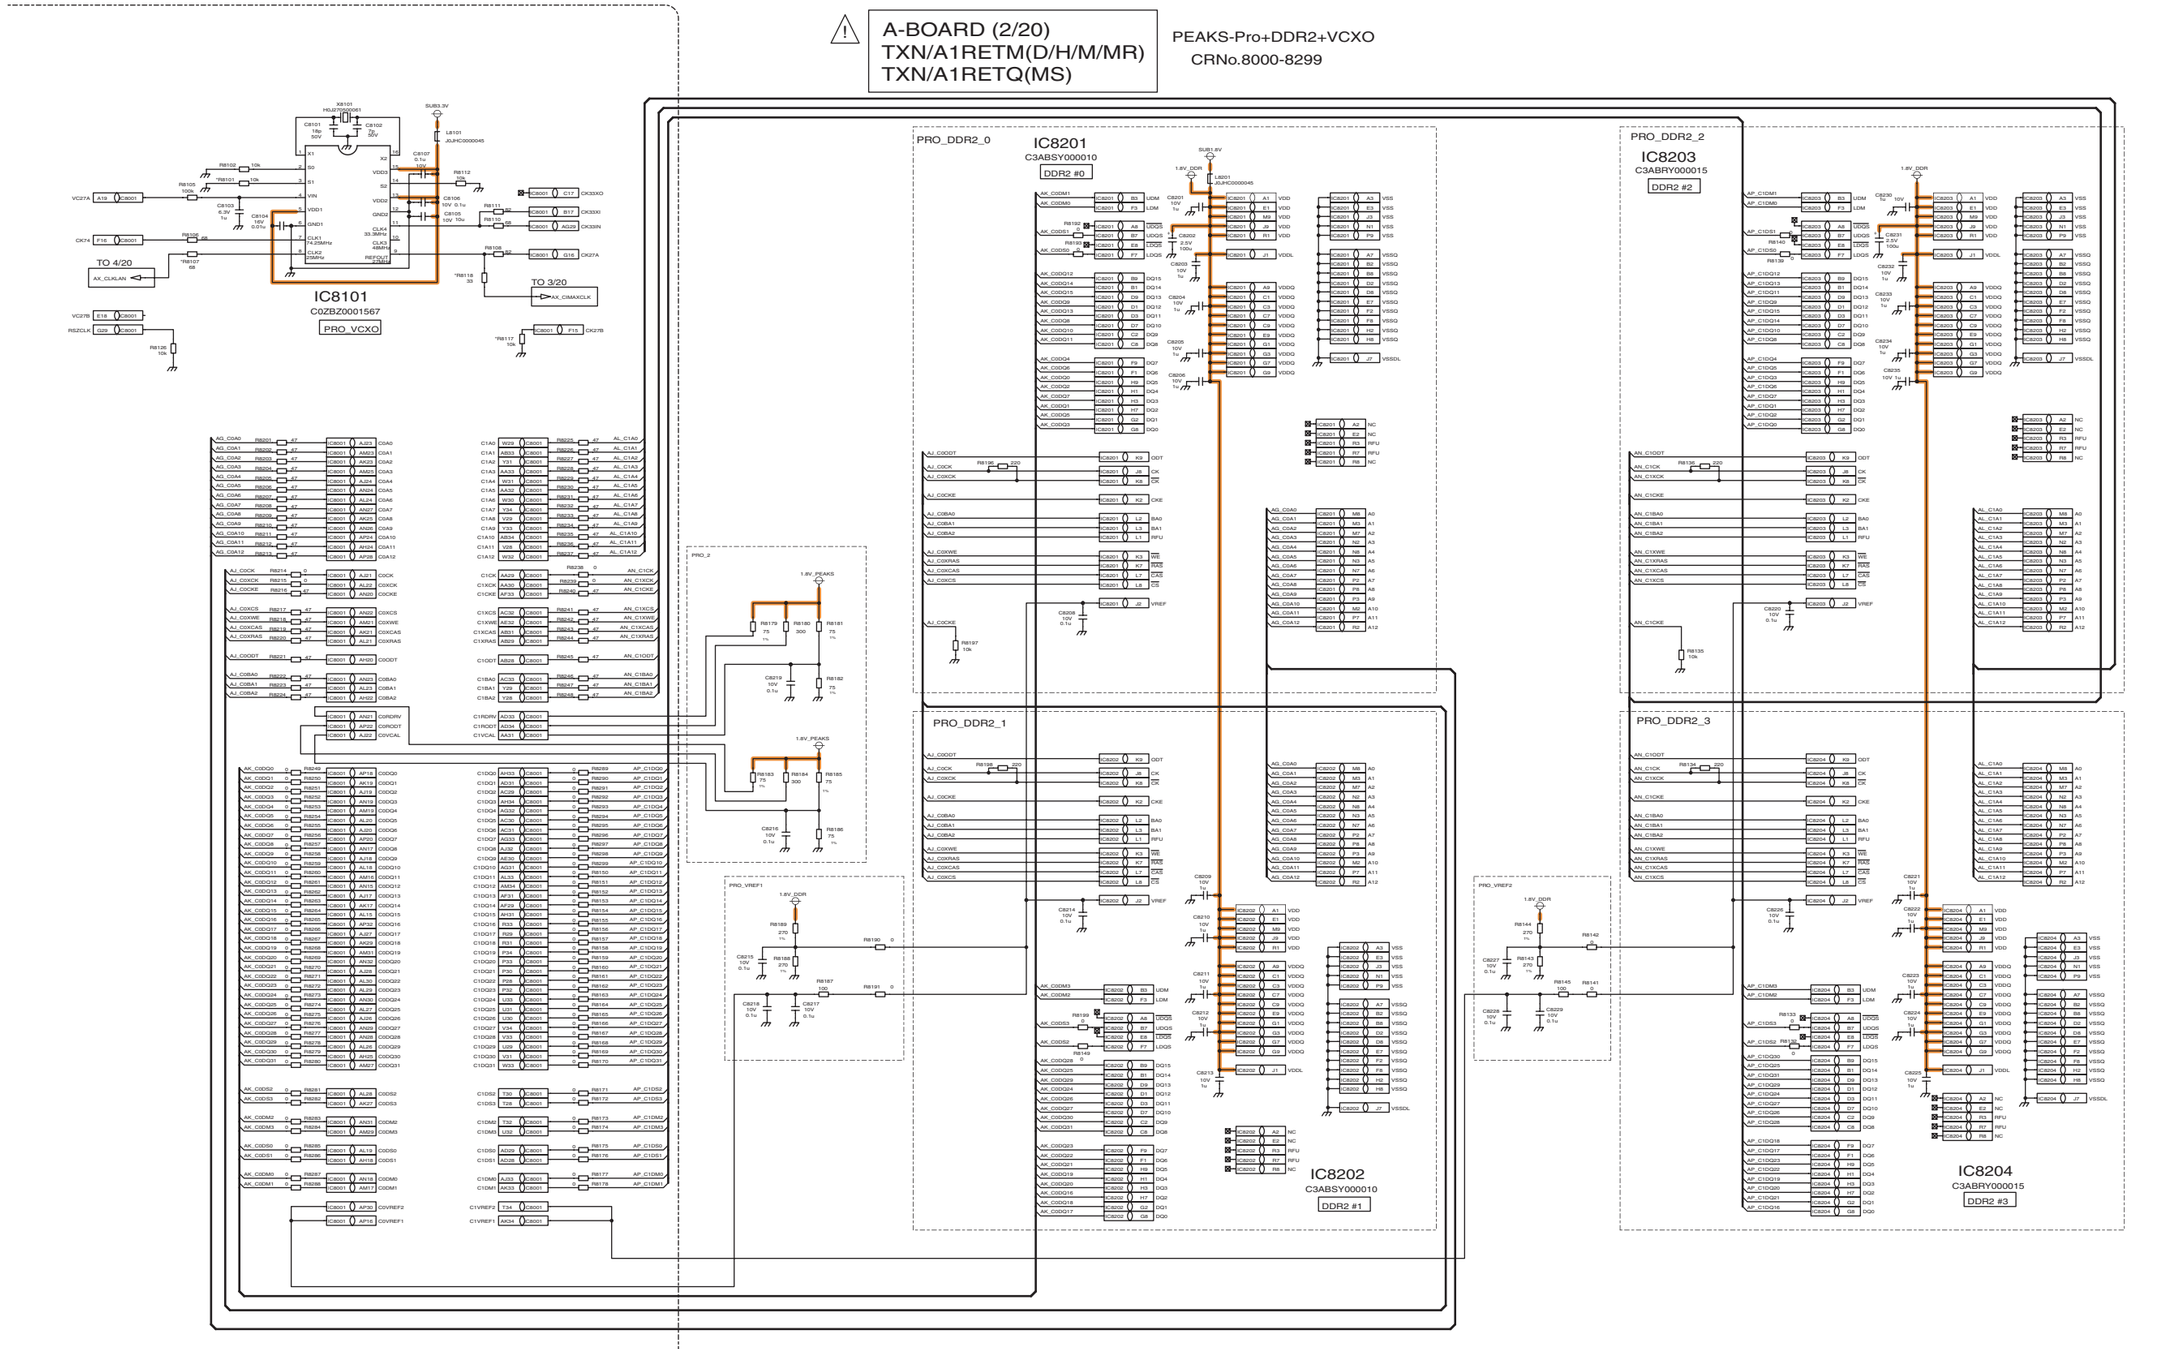

TH-65PY850D/H/M/MR/MS A-Board (2/20) Schematic Diagram


TH-65PY850D/H/M/MR/MS
A-Board (2/20) Schematic Diagram


10 11 12 13 14 15 16 17 18

11.7. A-Board (3/20) Schematic Diagram


A-BOARD (3/20)
TXN/A1RETM(D/H/M/MR)
TXN/A1RETQ(MS)

DTV
CRNo.8300-8999

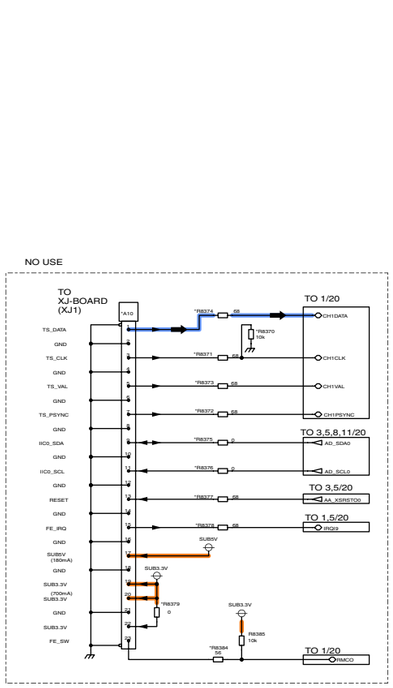

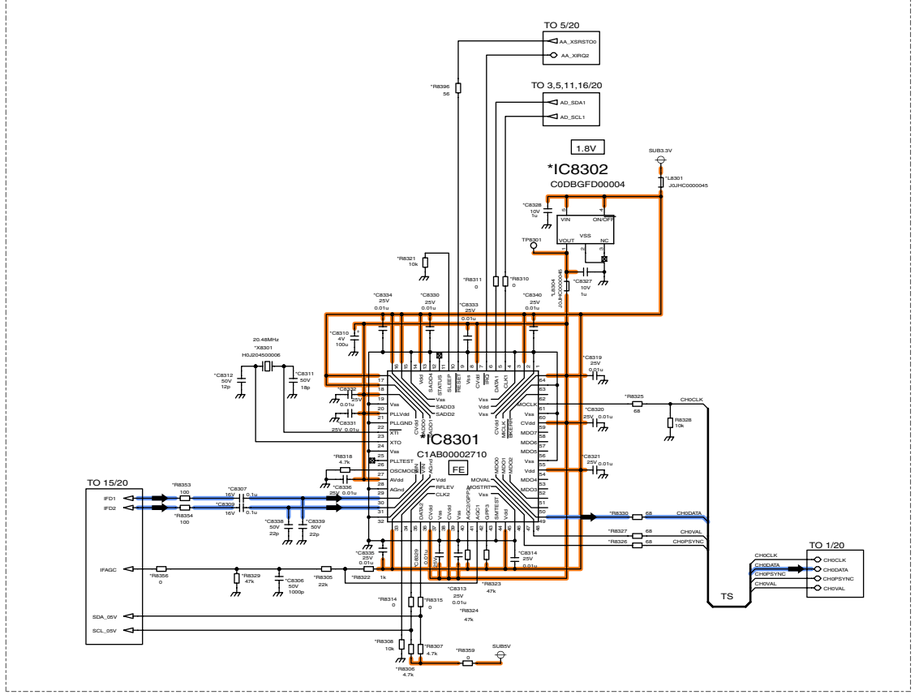

11.8. A-Board (4/20) Schematic Diagram

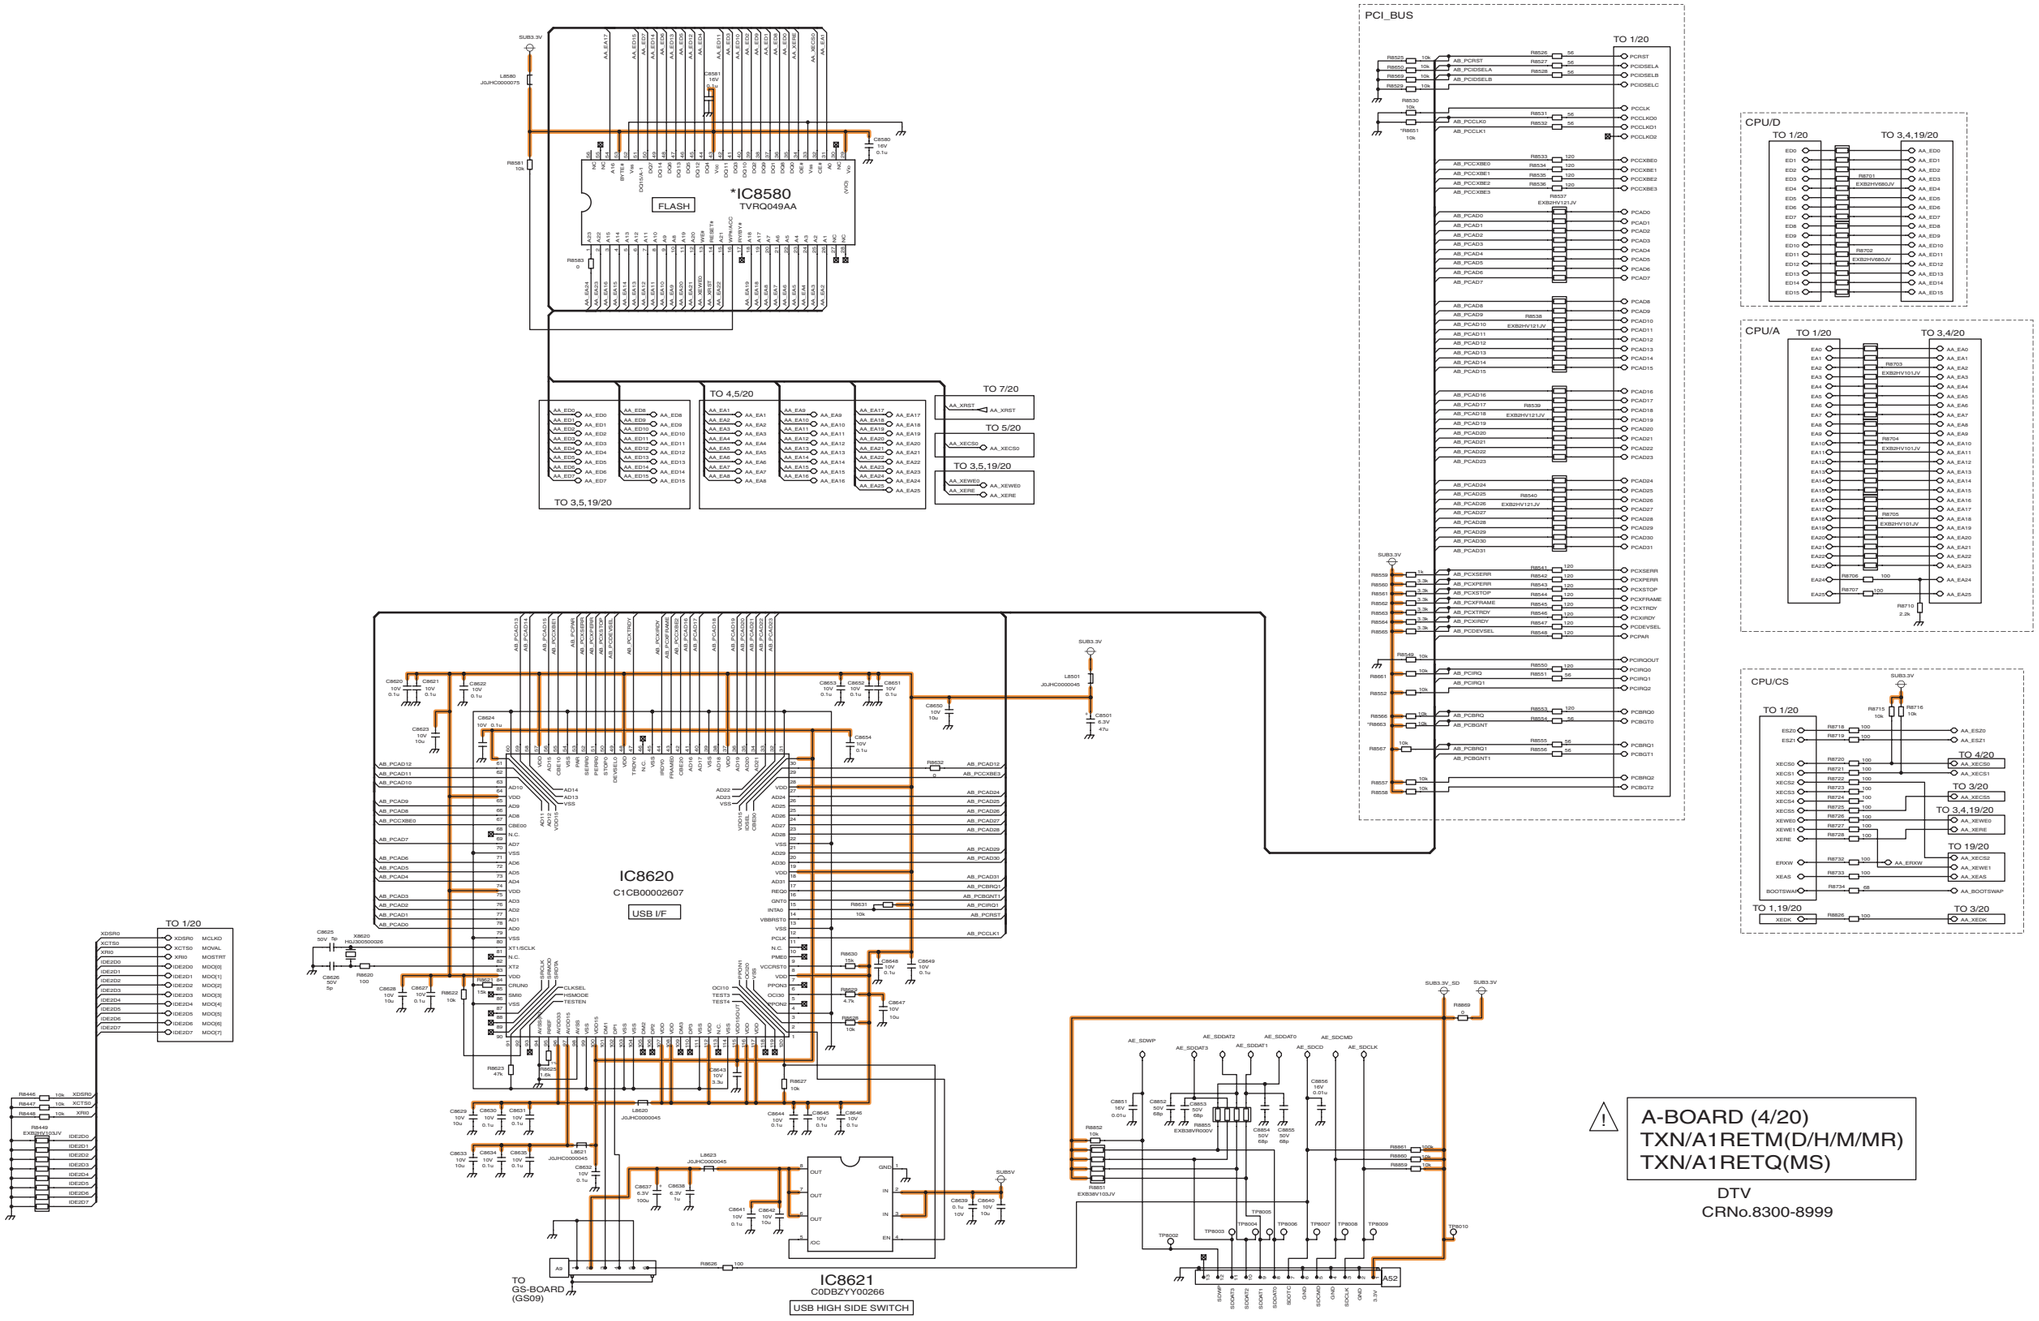


TH-65PY850D/H/M/MR/MS
A-Board (4/20) Schematic Diagram

TH-65PY850D/H/M/MR/MS
A-Board (4/20) Schematic Diagram

28 29 30 31 32 33 34 35 36


11.9. A-Board (5/20) Schematic Diagram

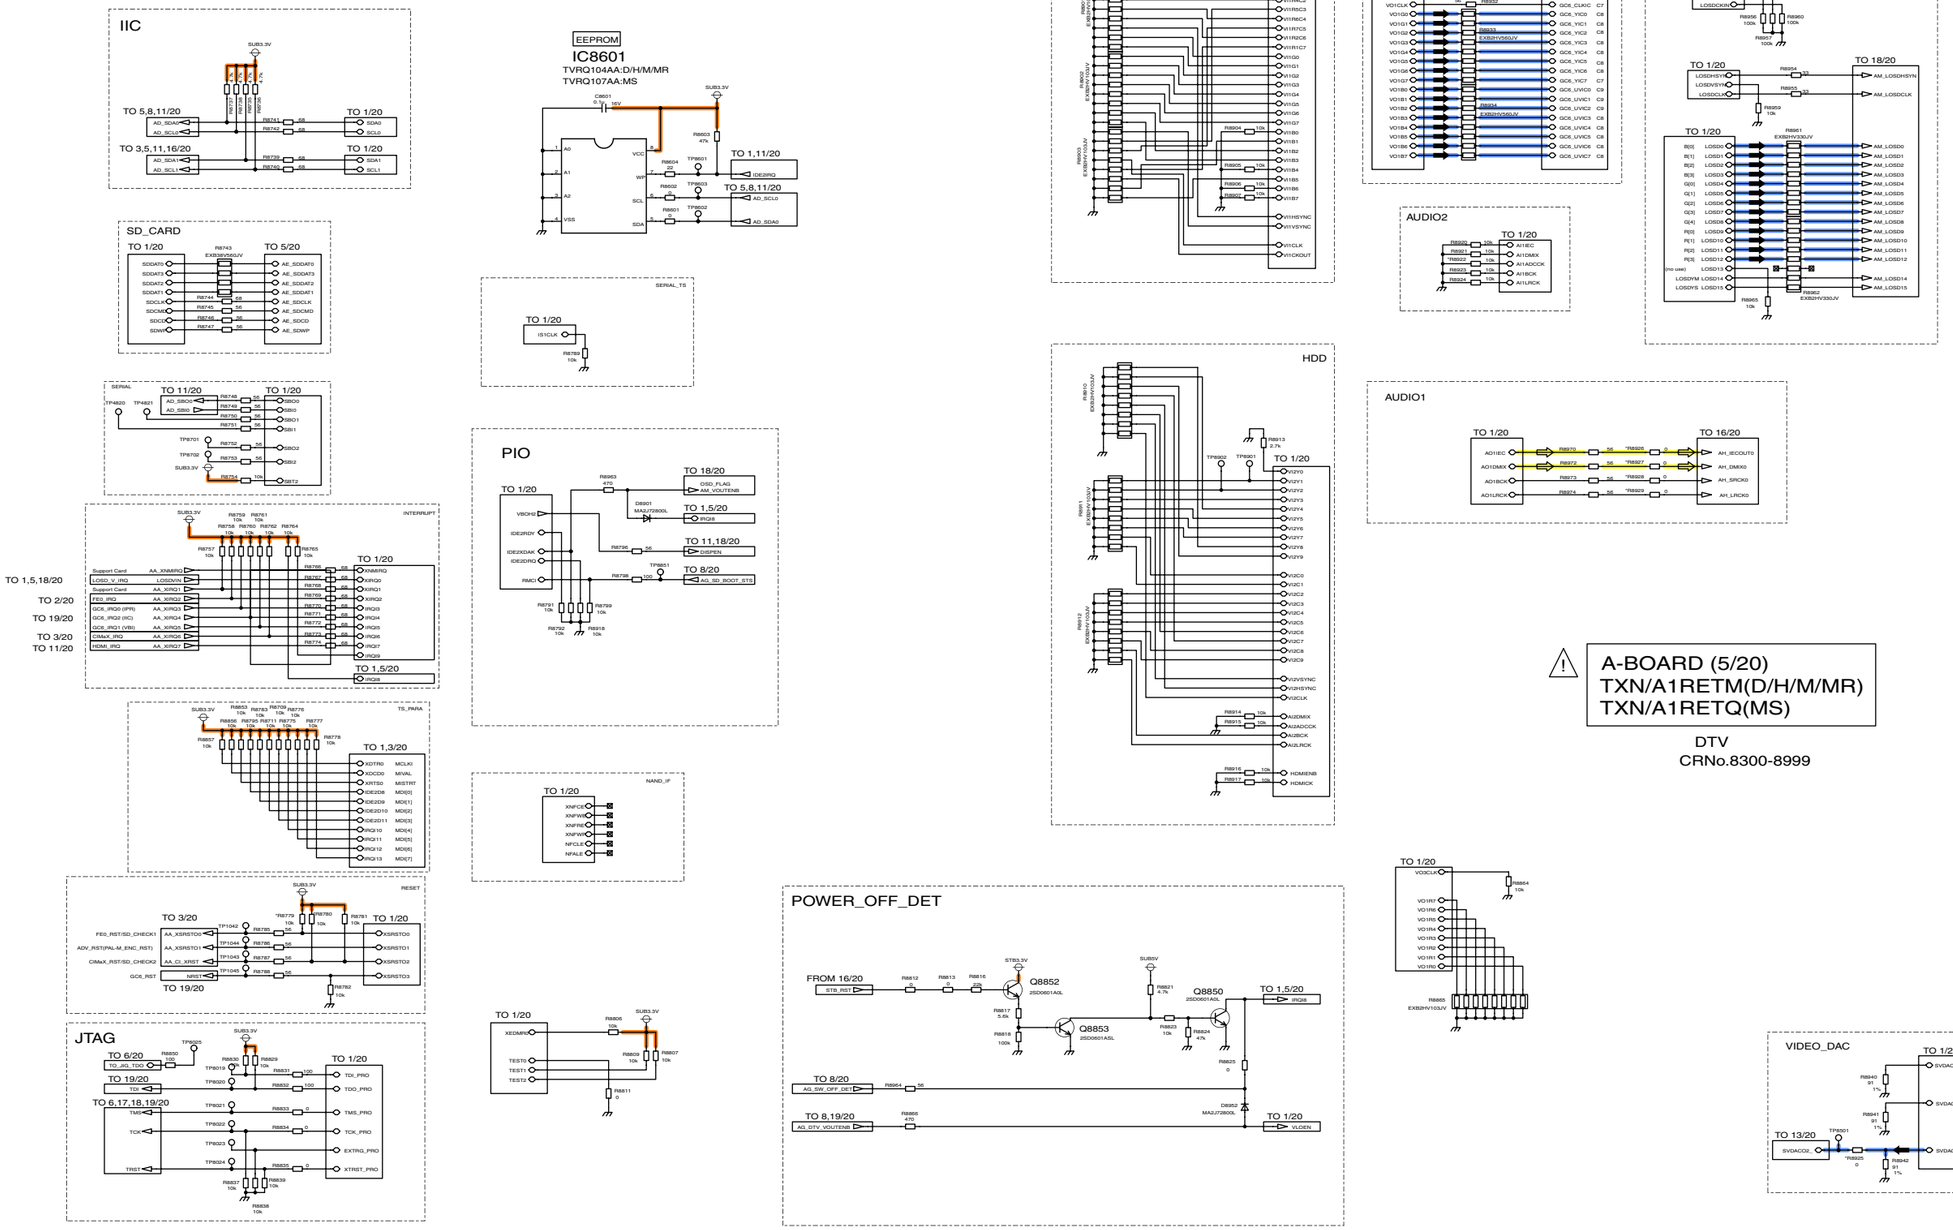

TH-65PY850D/H/M/MR/MS
A-Board (5/20) Schematic Diagram

TH-65PY850D/H/M/MR/MS
A-Board (5/20) Schematic Diagram

11.10. A-Board (6/20) Schematic Diagram

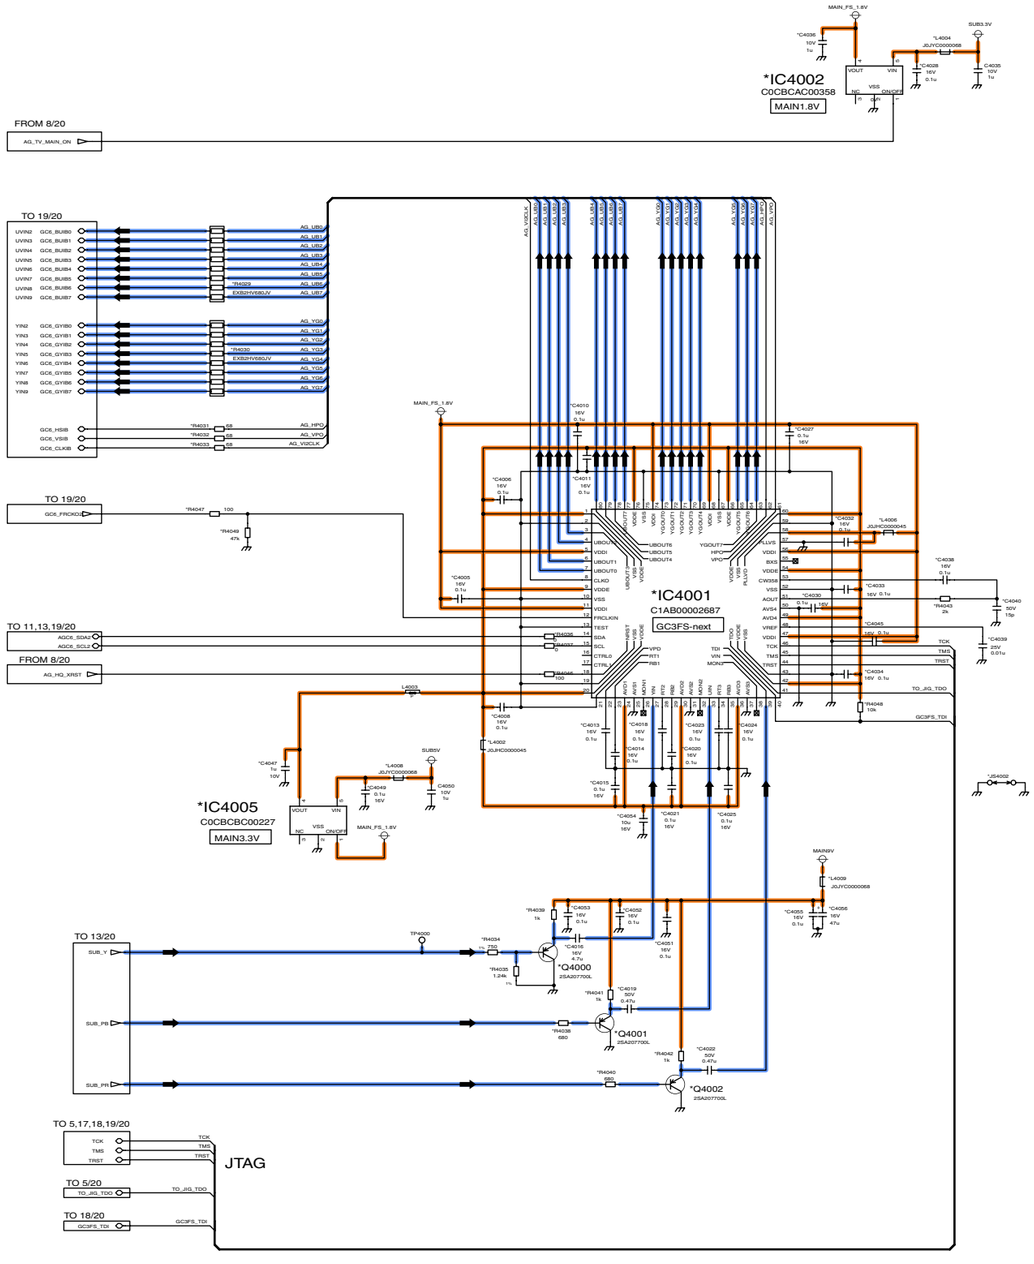


A-BOARD (6/20)
TXN/A1RETM(D/H/M/MR)
TXN/A1RETQ(MS)

GC3FS-next
CRNo.4000-4199


11.11. A-Board (7/20) Schematic Diagram


A-BOARD (7/20)
TXN/A1RETM(D/H/M/MR)
TXN/A1RETQ(MS)


POWER SUPPLY
CRNo.5600-5749

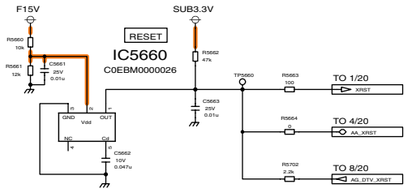





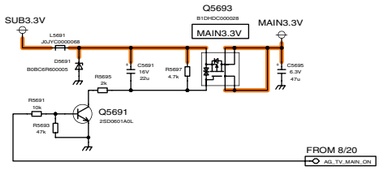


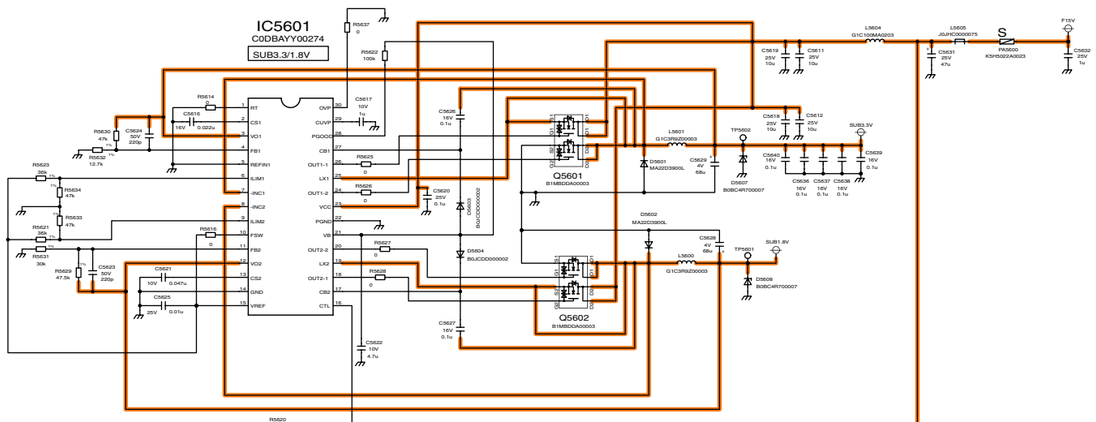




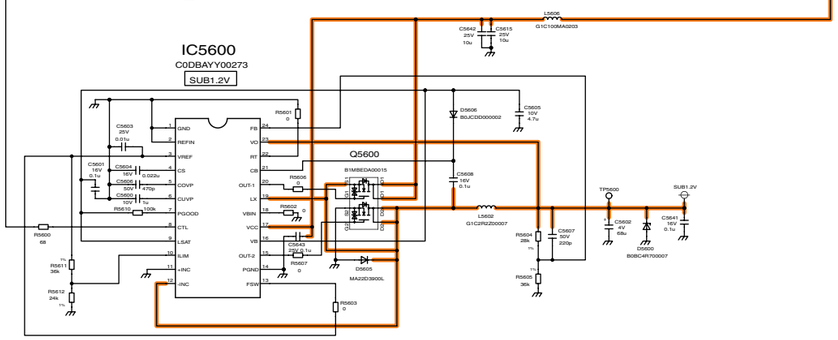



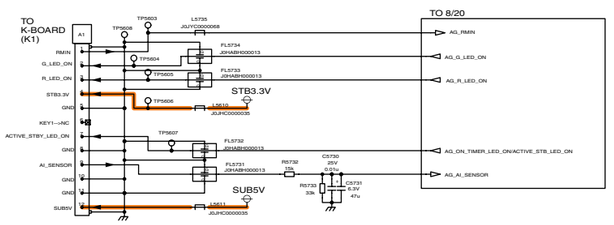

11.12. A-Board (8/20) Schematic Diagram

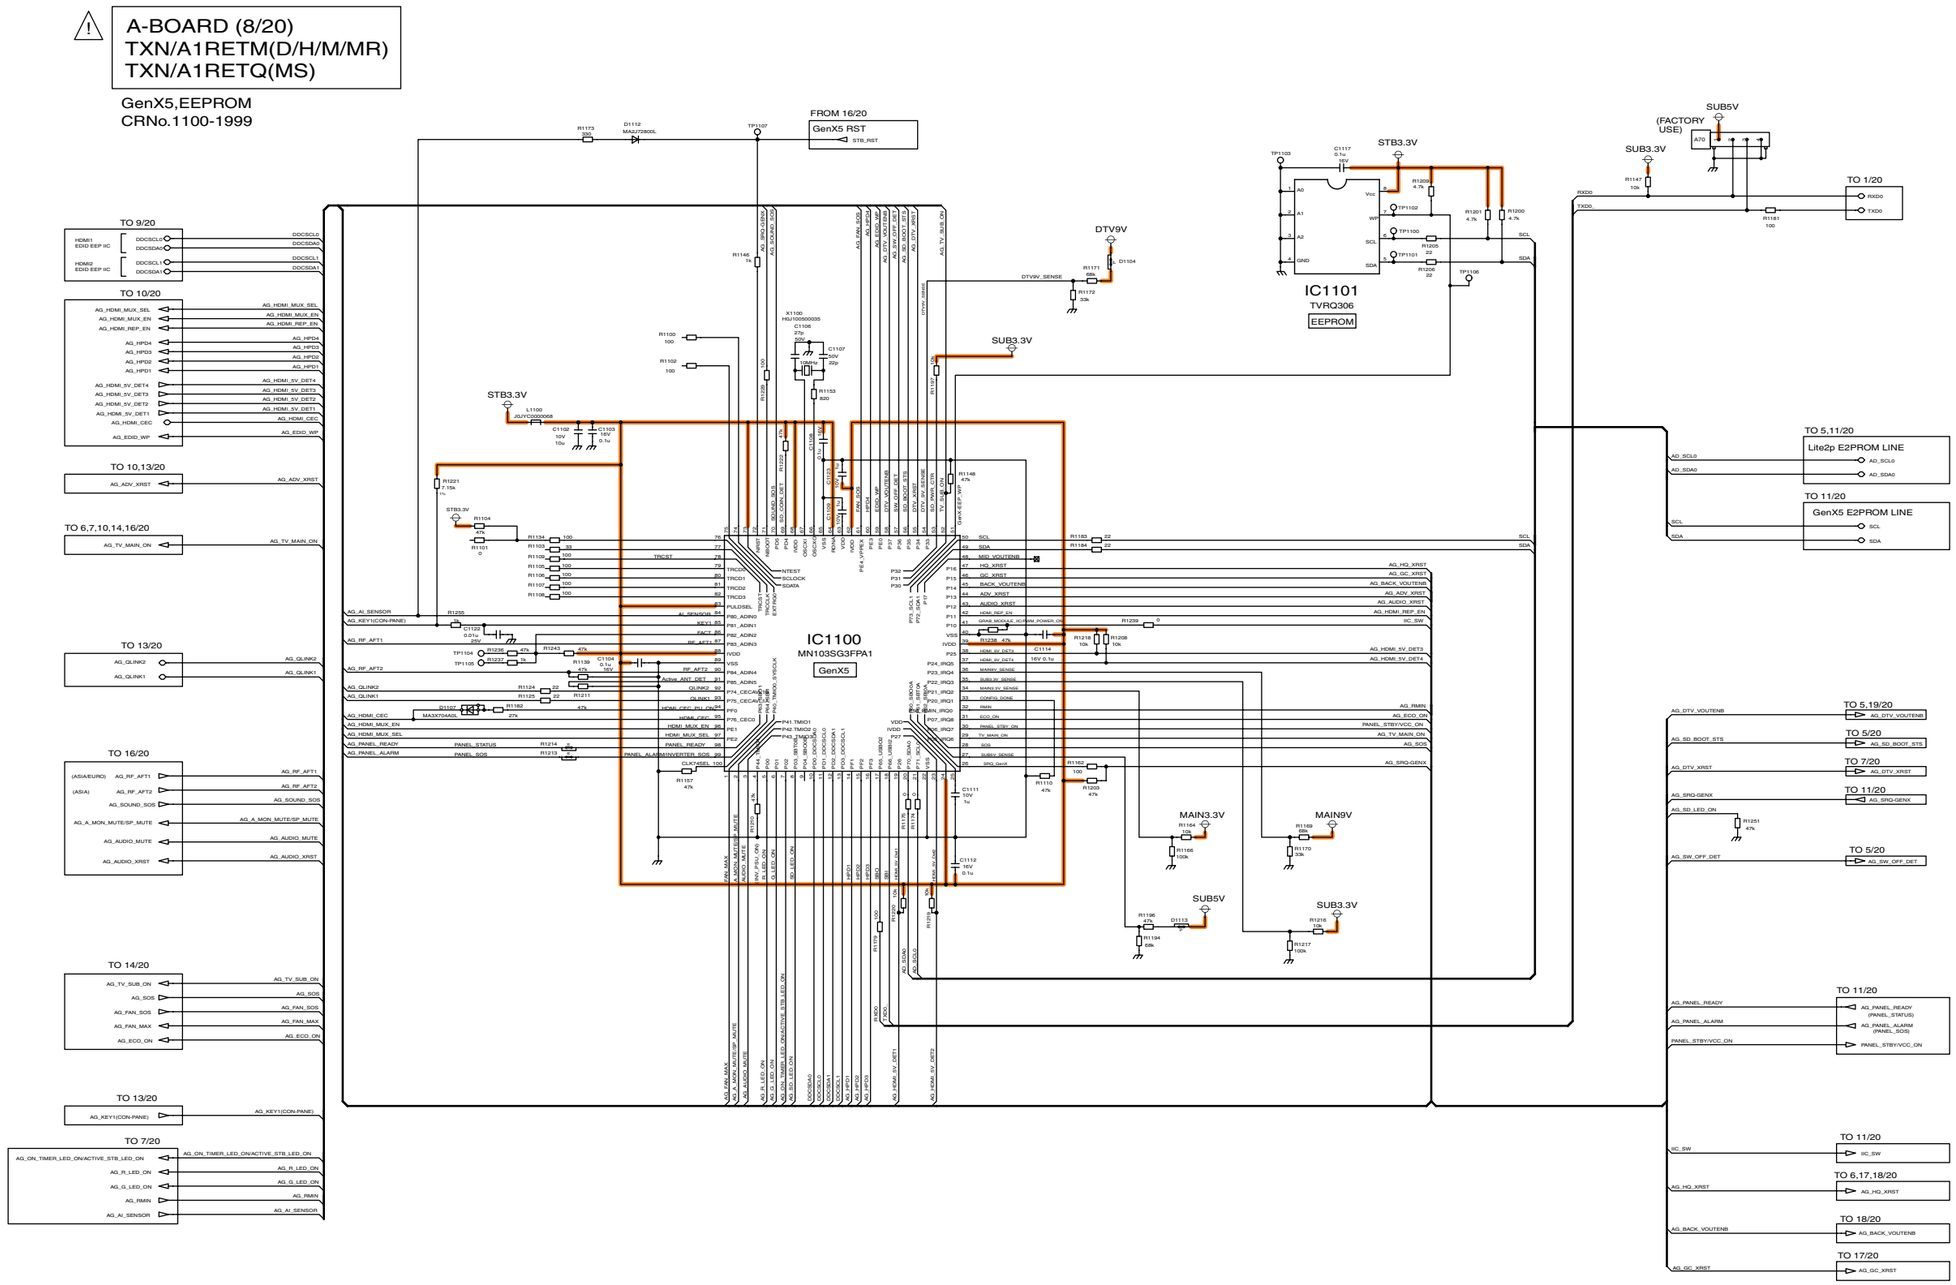


TH-65PY850D/H/M/MR/MS
A-Board (8/20) Schematic Diagram

TH-65PY850D/H/M/MR/MS
A-Board (8/20) Schematic Diagram

64 65 66 67 68 69 70 71 72

11.13. A-Board (9/20) Schematic Diagram

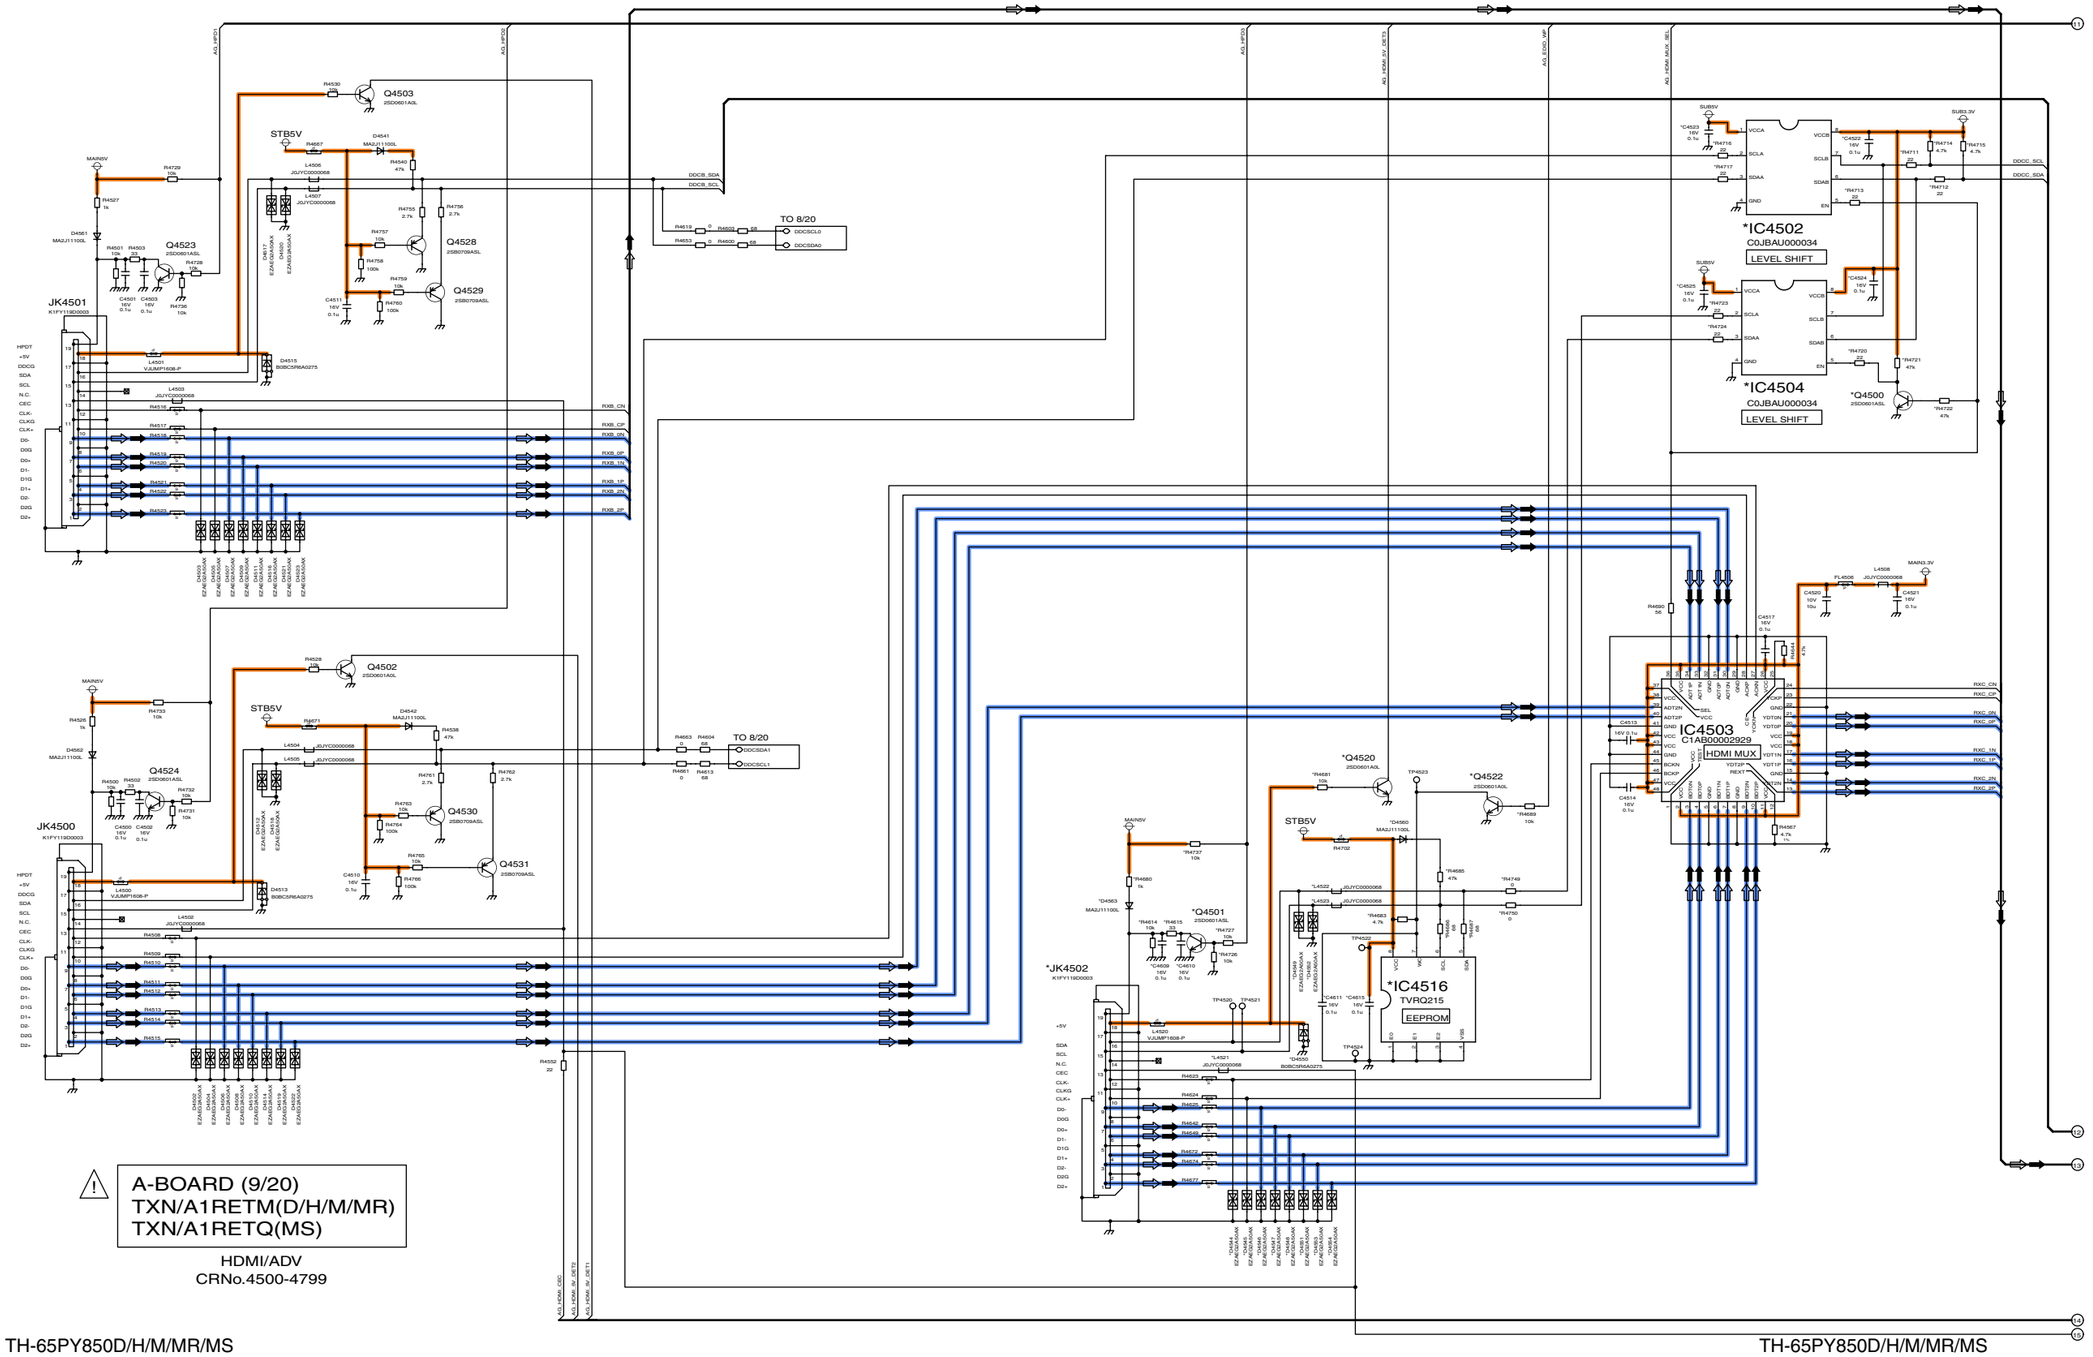


TH-65PY850D/H/M/MR/MS
A-Board (9/20) Schematic Diagram

TH-65PY850D/H/M/MR/MS
A-Board (9/20) Schematic Diagram


73 74 75 76 77 78 79 80 81

11.14. A-Board (10/20) Schematic Diagram

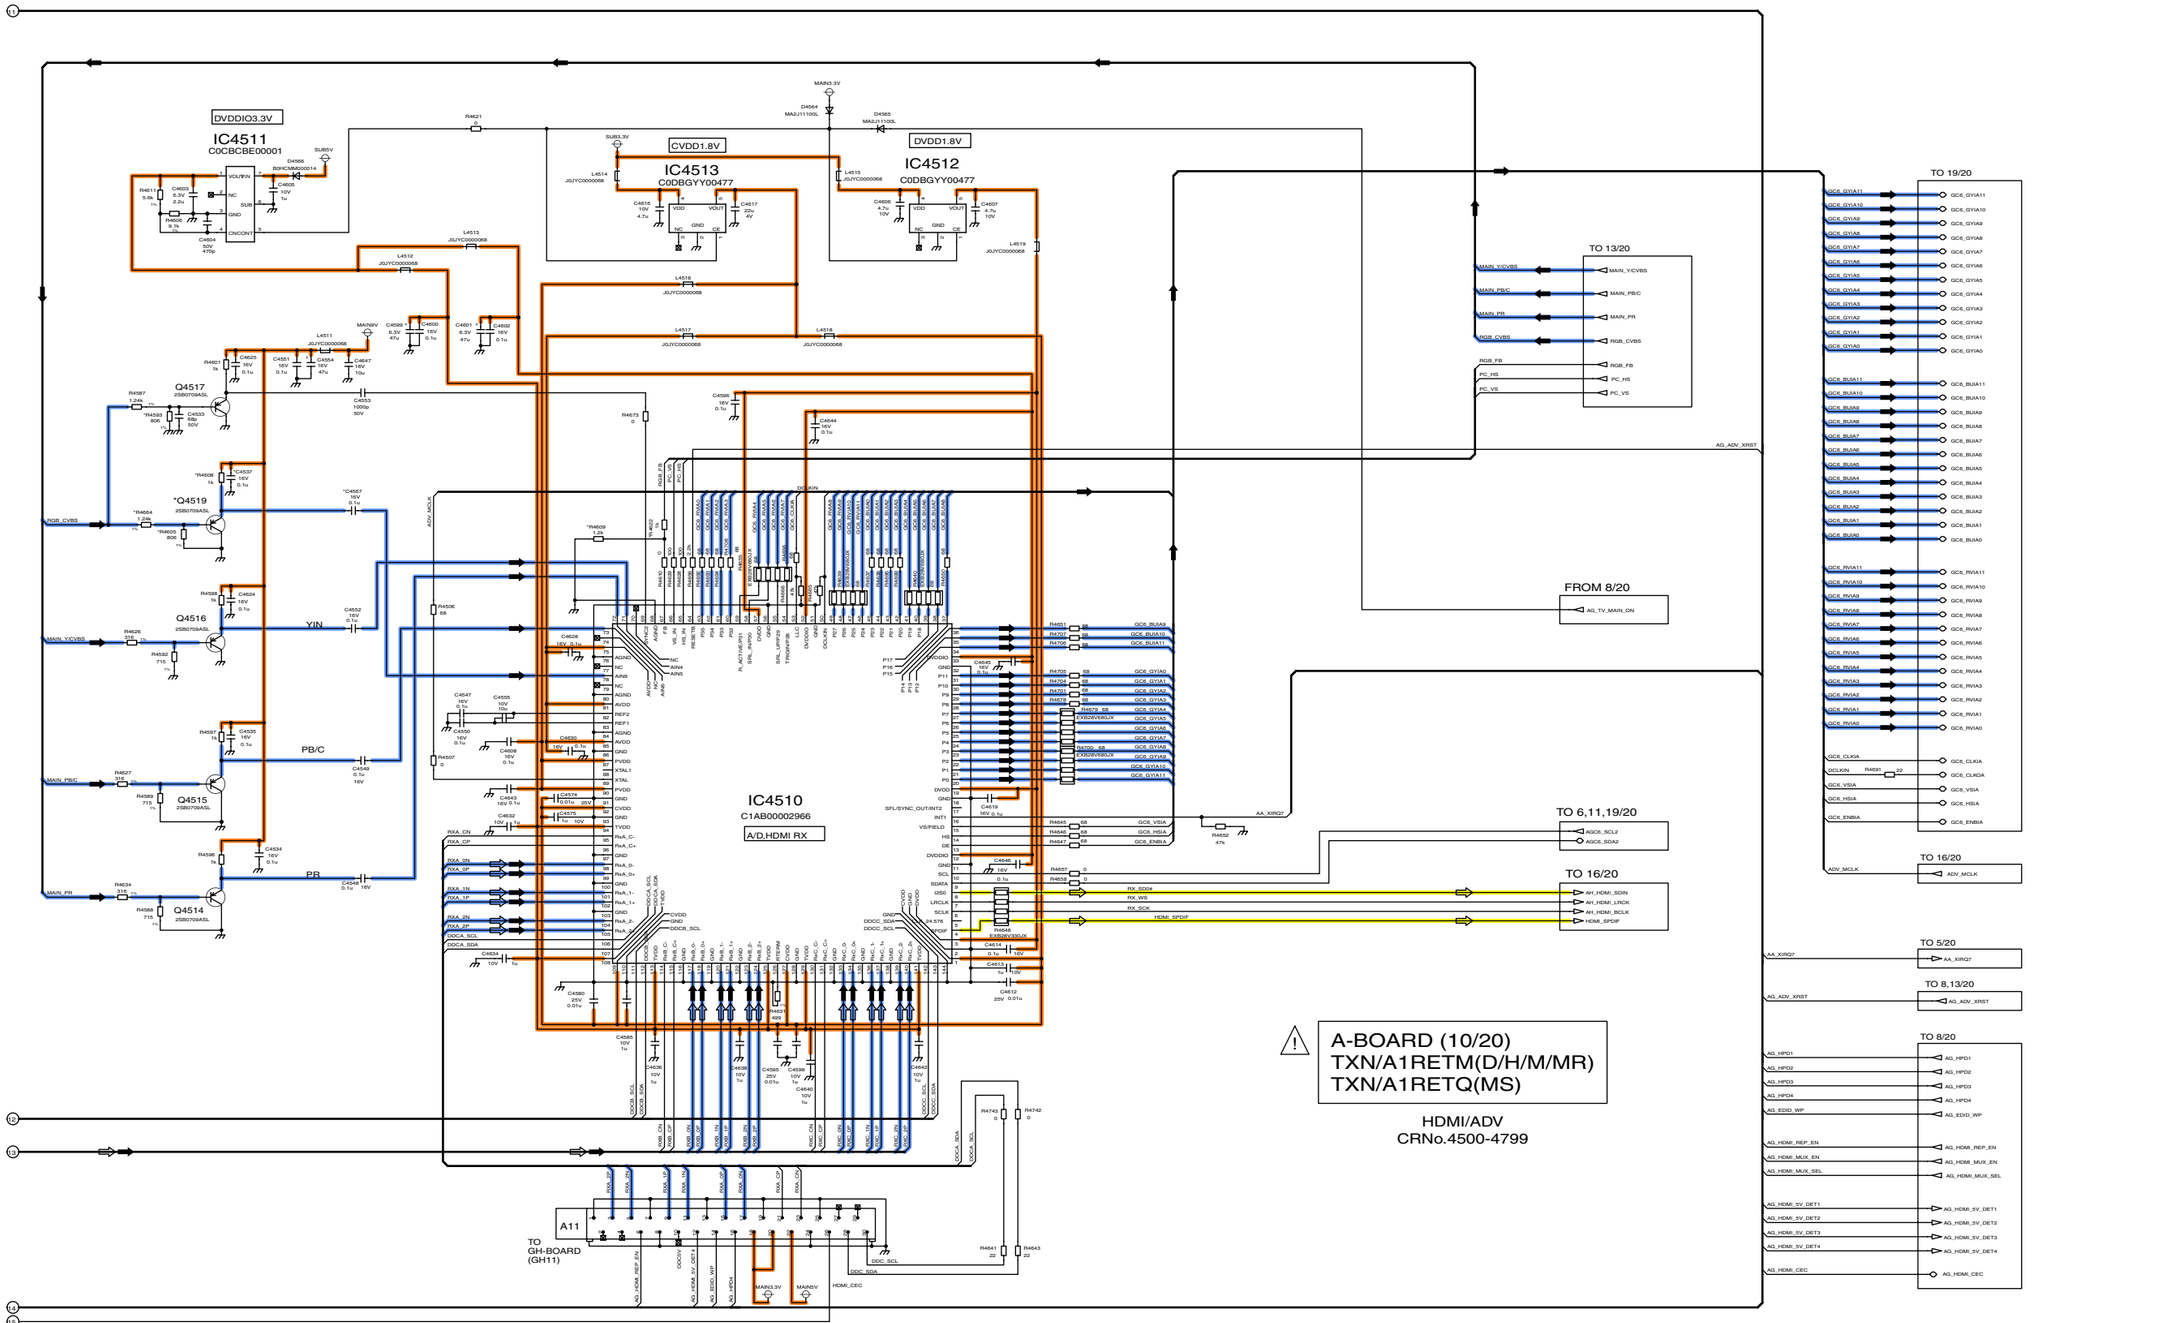

TH-65PY850D/H/M/MR/MS
A-Board (10/20) Schematic Diagram

11.15. A-Board (11/20) Schematic Diagram

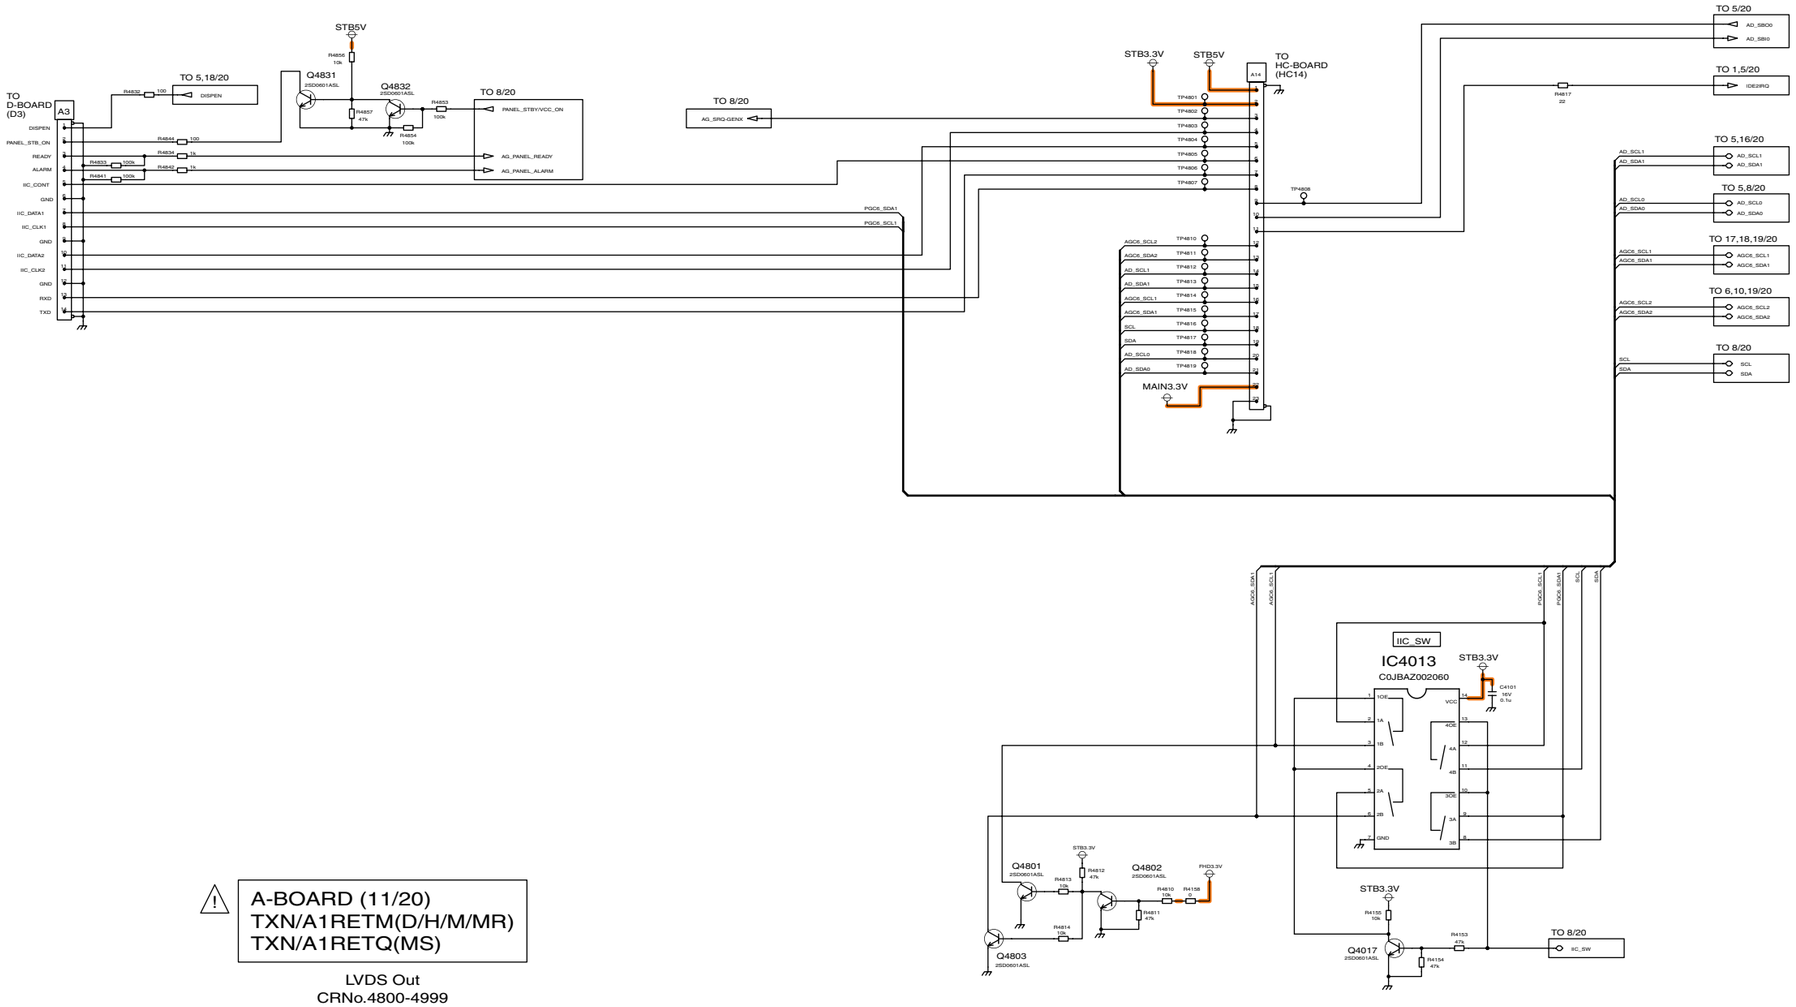


A-BOARD (11/20)
TXN/A1RETM(D/H/M/MR)
TXN/A1RETQ(MS)

LVDS Out
CRNo.4800-4999

TH-65PY850D/H/M/MR/MS
A-Board (11/20) Schematic Diagram

11.16. A-Board (12/20) Schematic Diagram

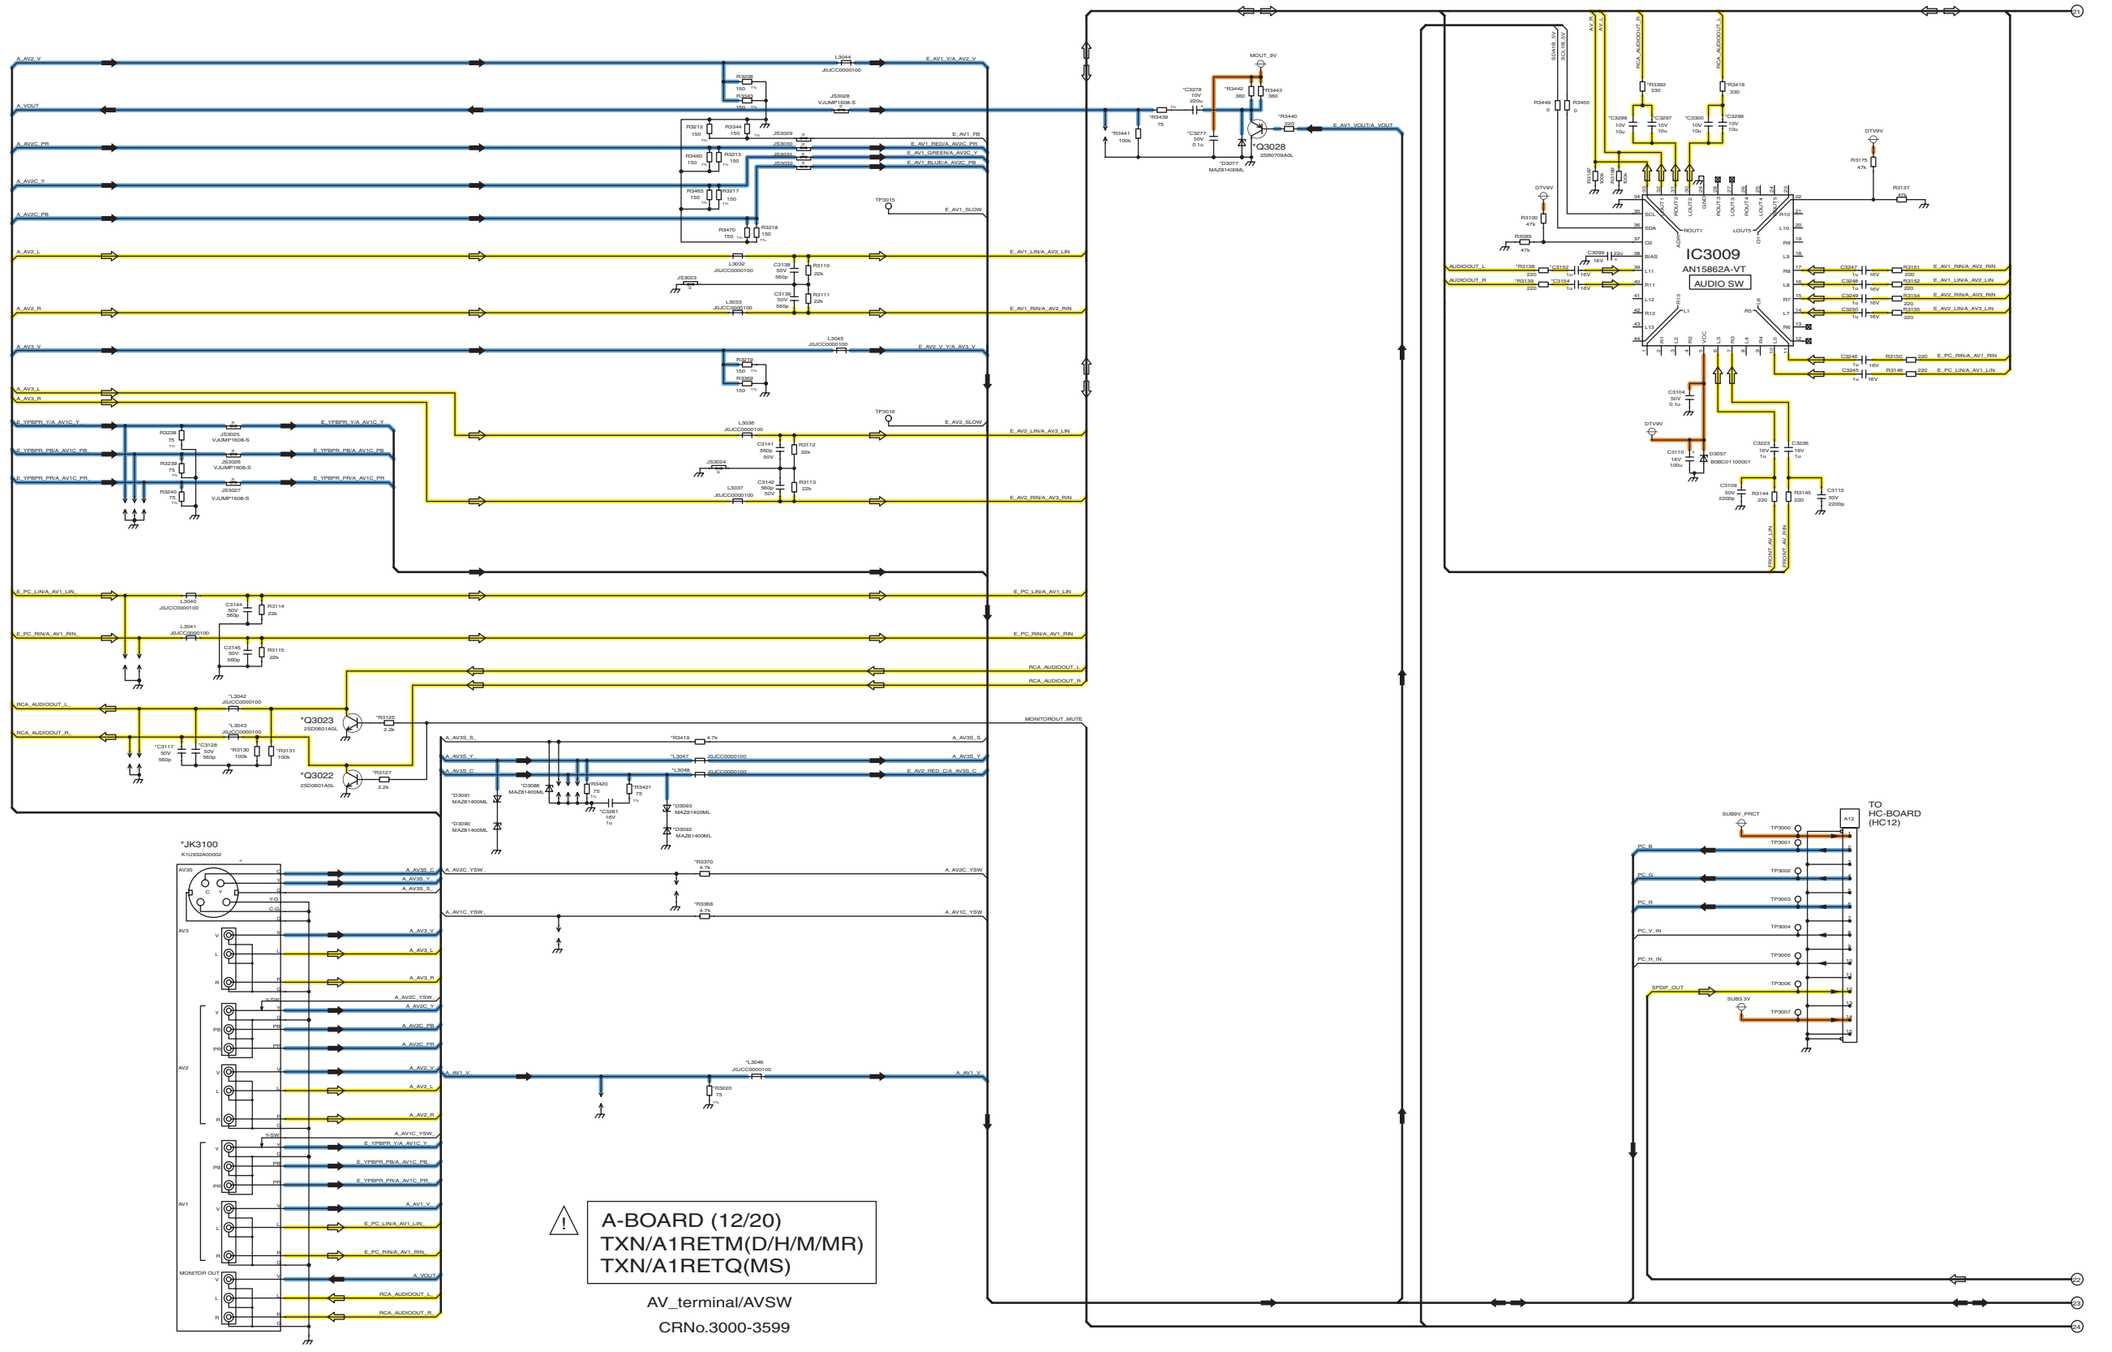


TH-65PY850D/H/M/MR/MS
A-Board (12/20) Schematic Diagram


TH-65PY850D/H/M/MR/MS
A-Board (12/20) Schematic Diagram

100 101 102 103 104 105 106 107 108

11.17. A-Board (13/20) Schematic Diagram

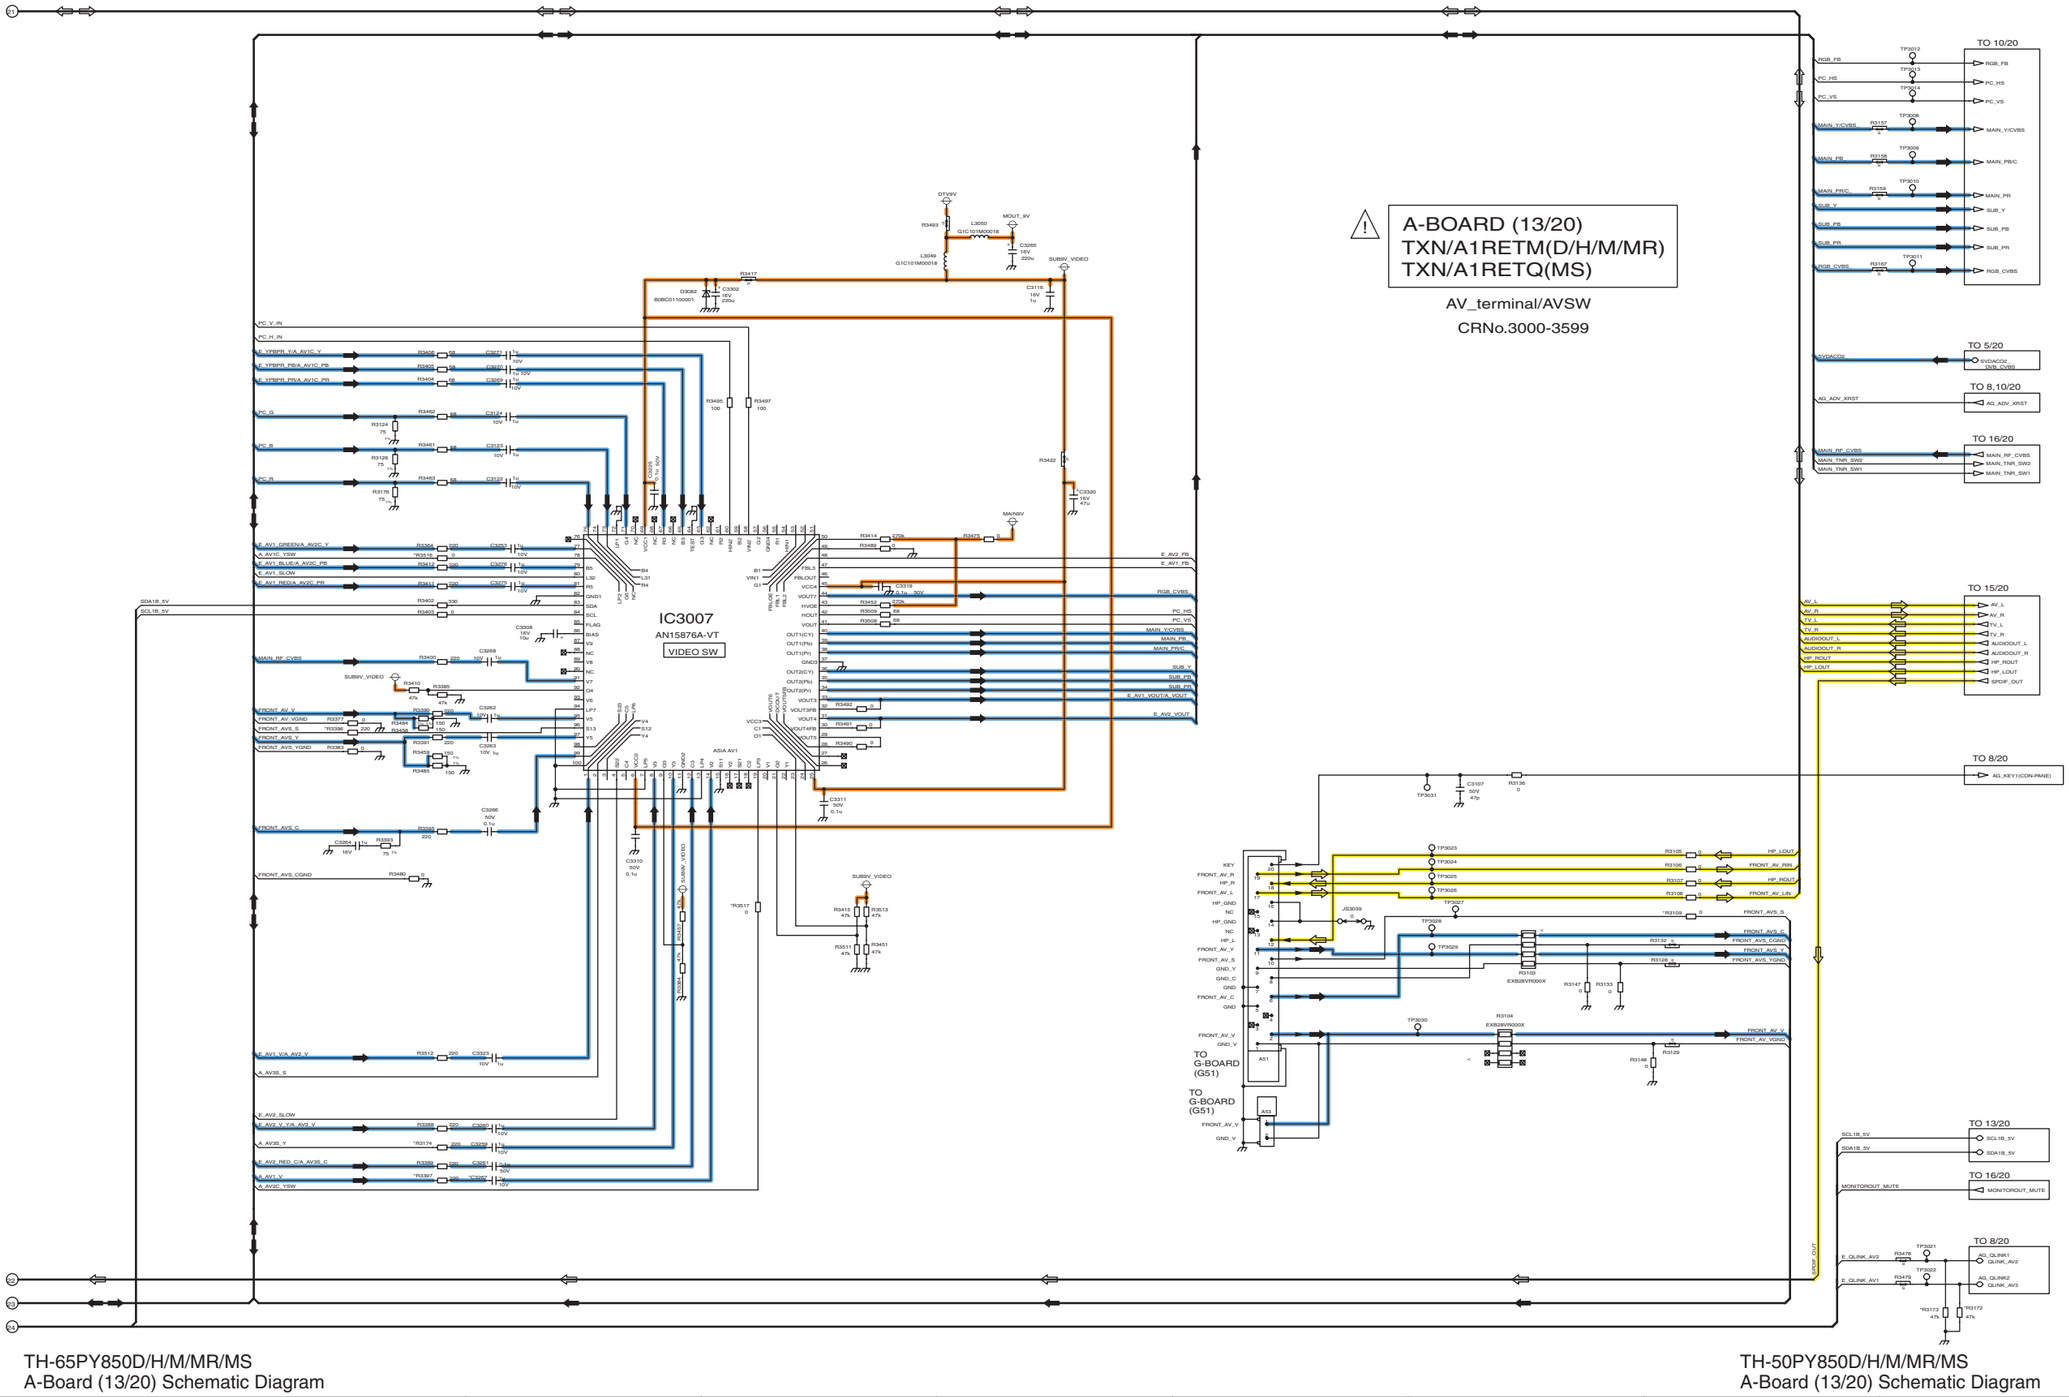

11.18. A-Board (14/20) Schematic Diagram

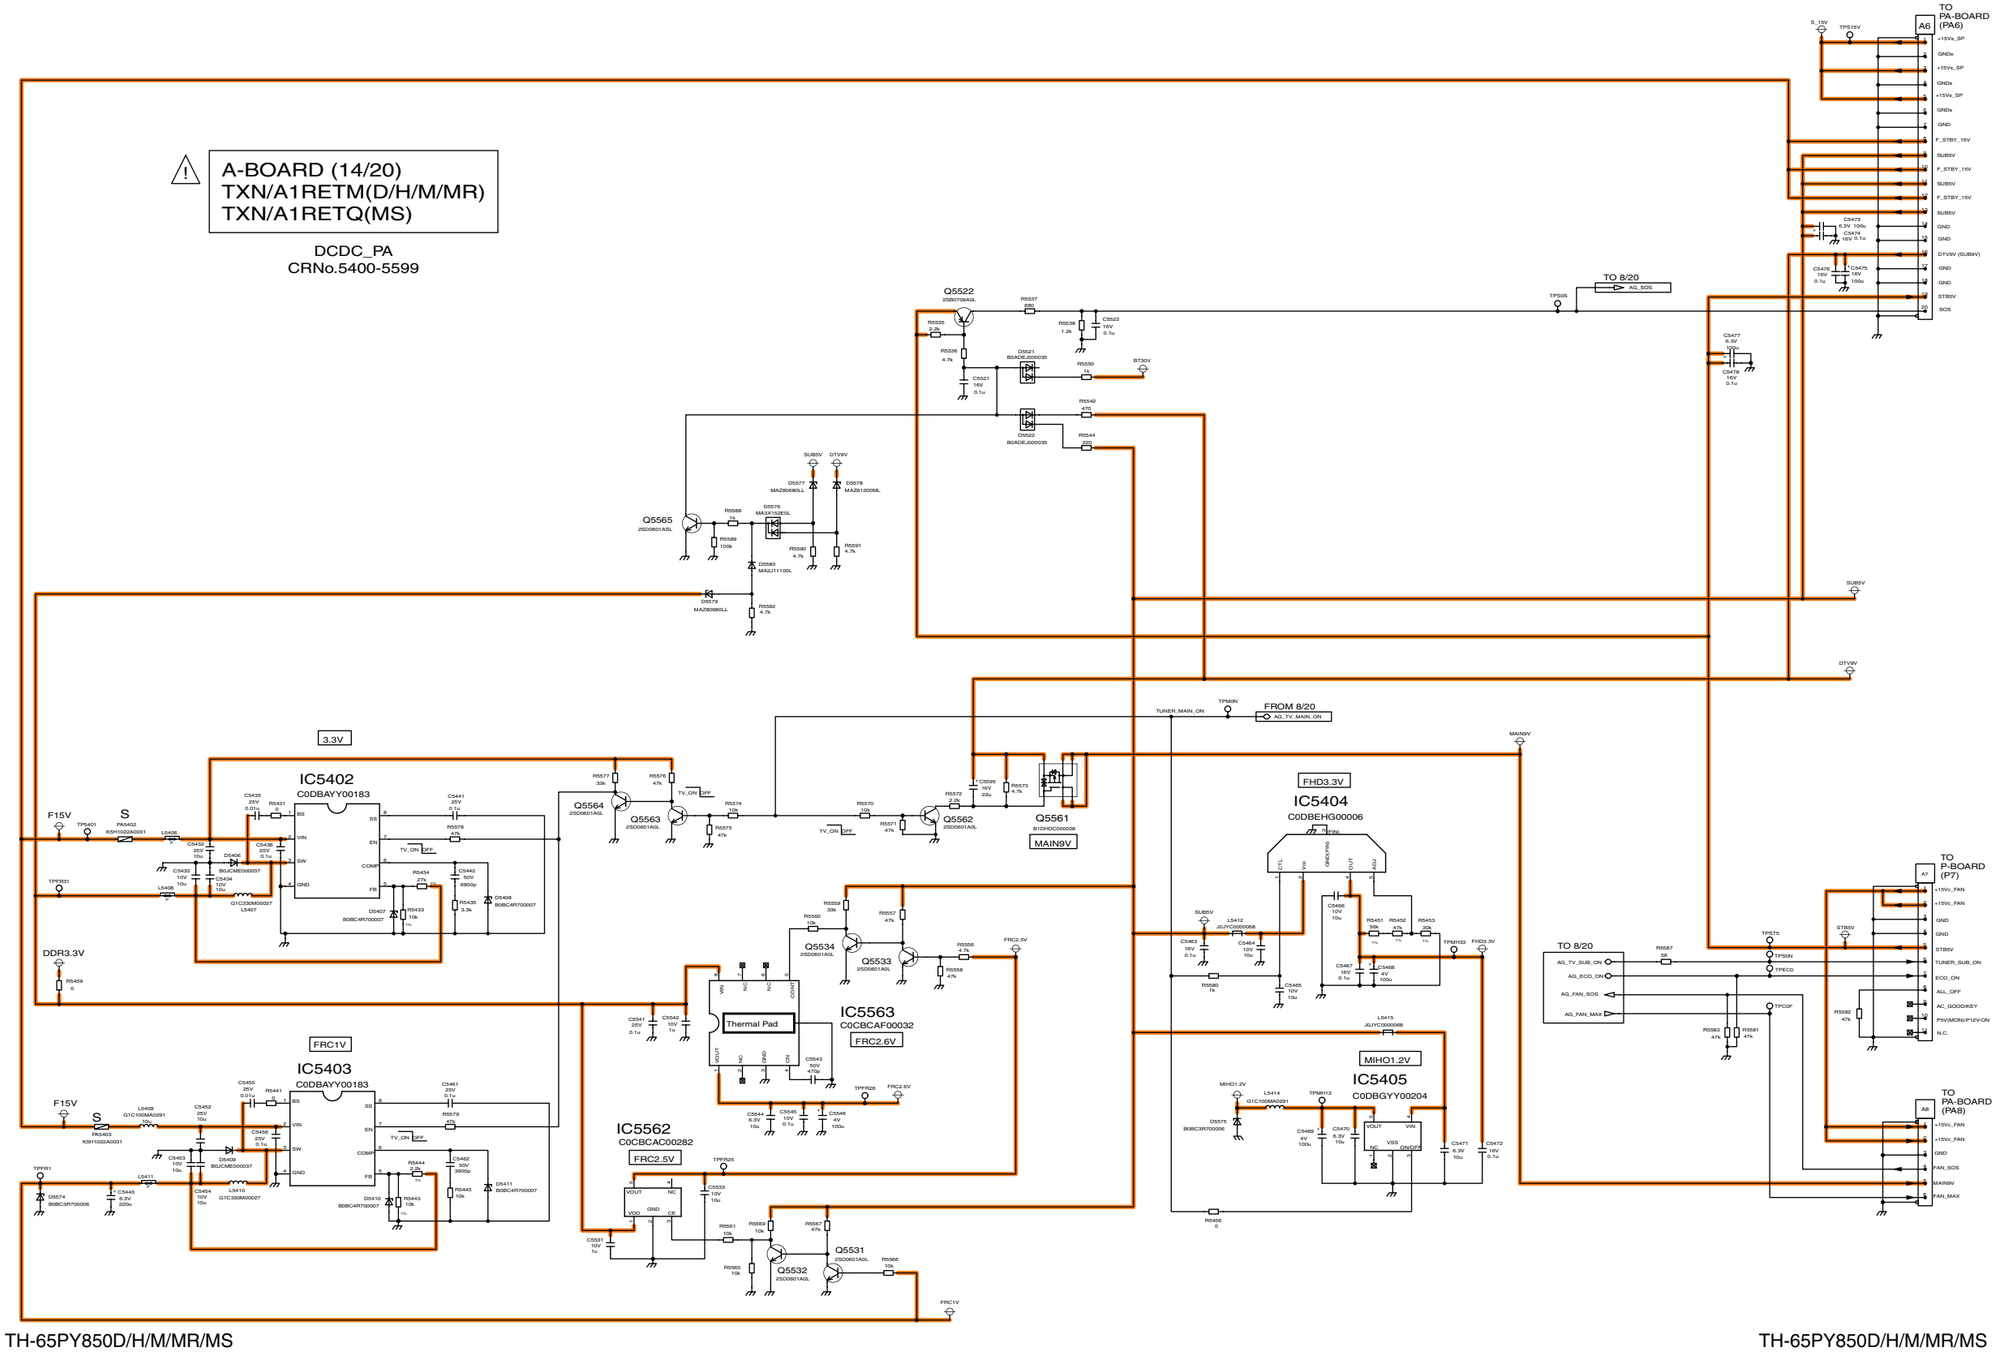


TH-65PY850D/H/M/MR/MS
A-Board (14/20) Schematic Diagram

TH-65PY850D/H/M/MR/MS
A-Board (14/20) Schematic Diagram


118 119 120 121 122 123 124 125 126

11.19. A-Board (15/20) Schematic Diagram

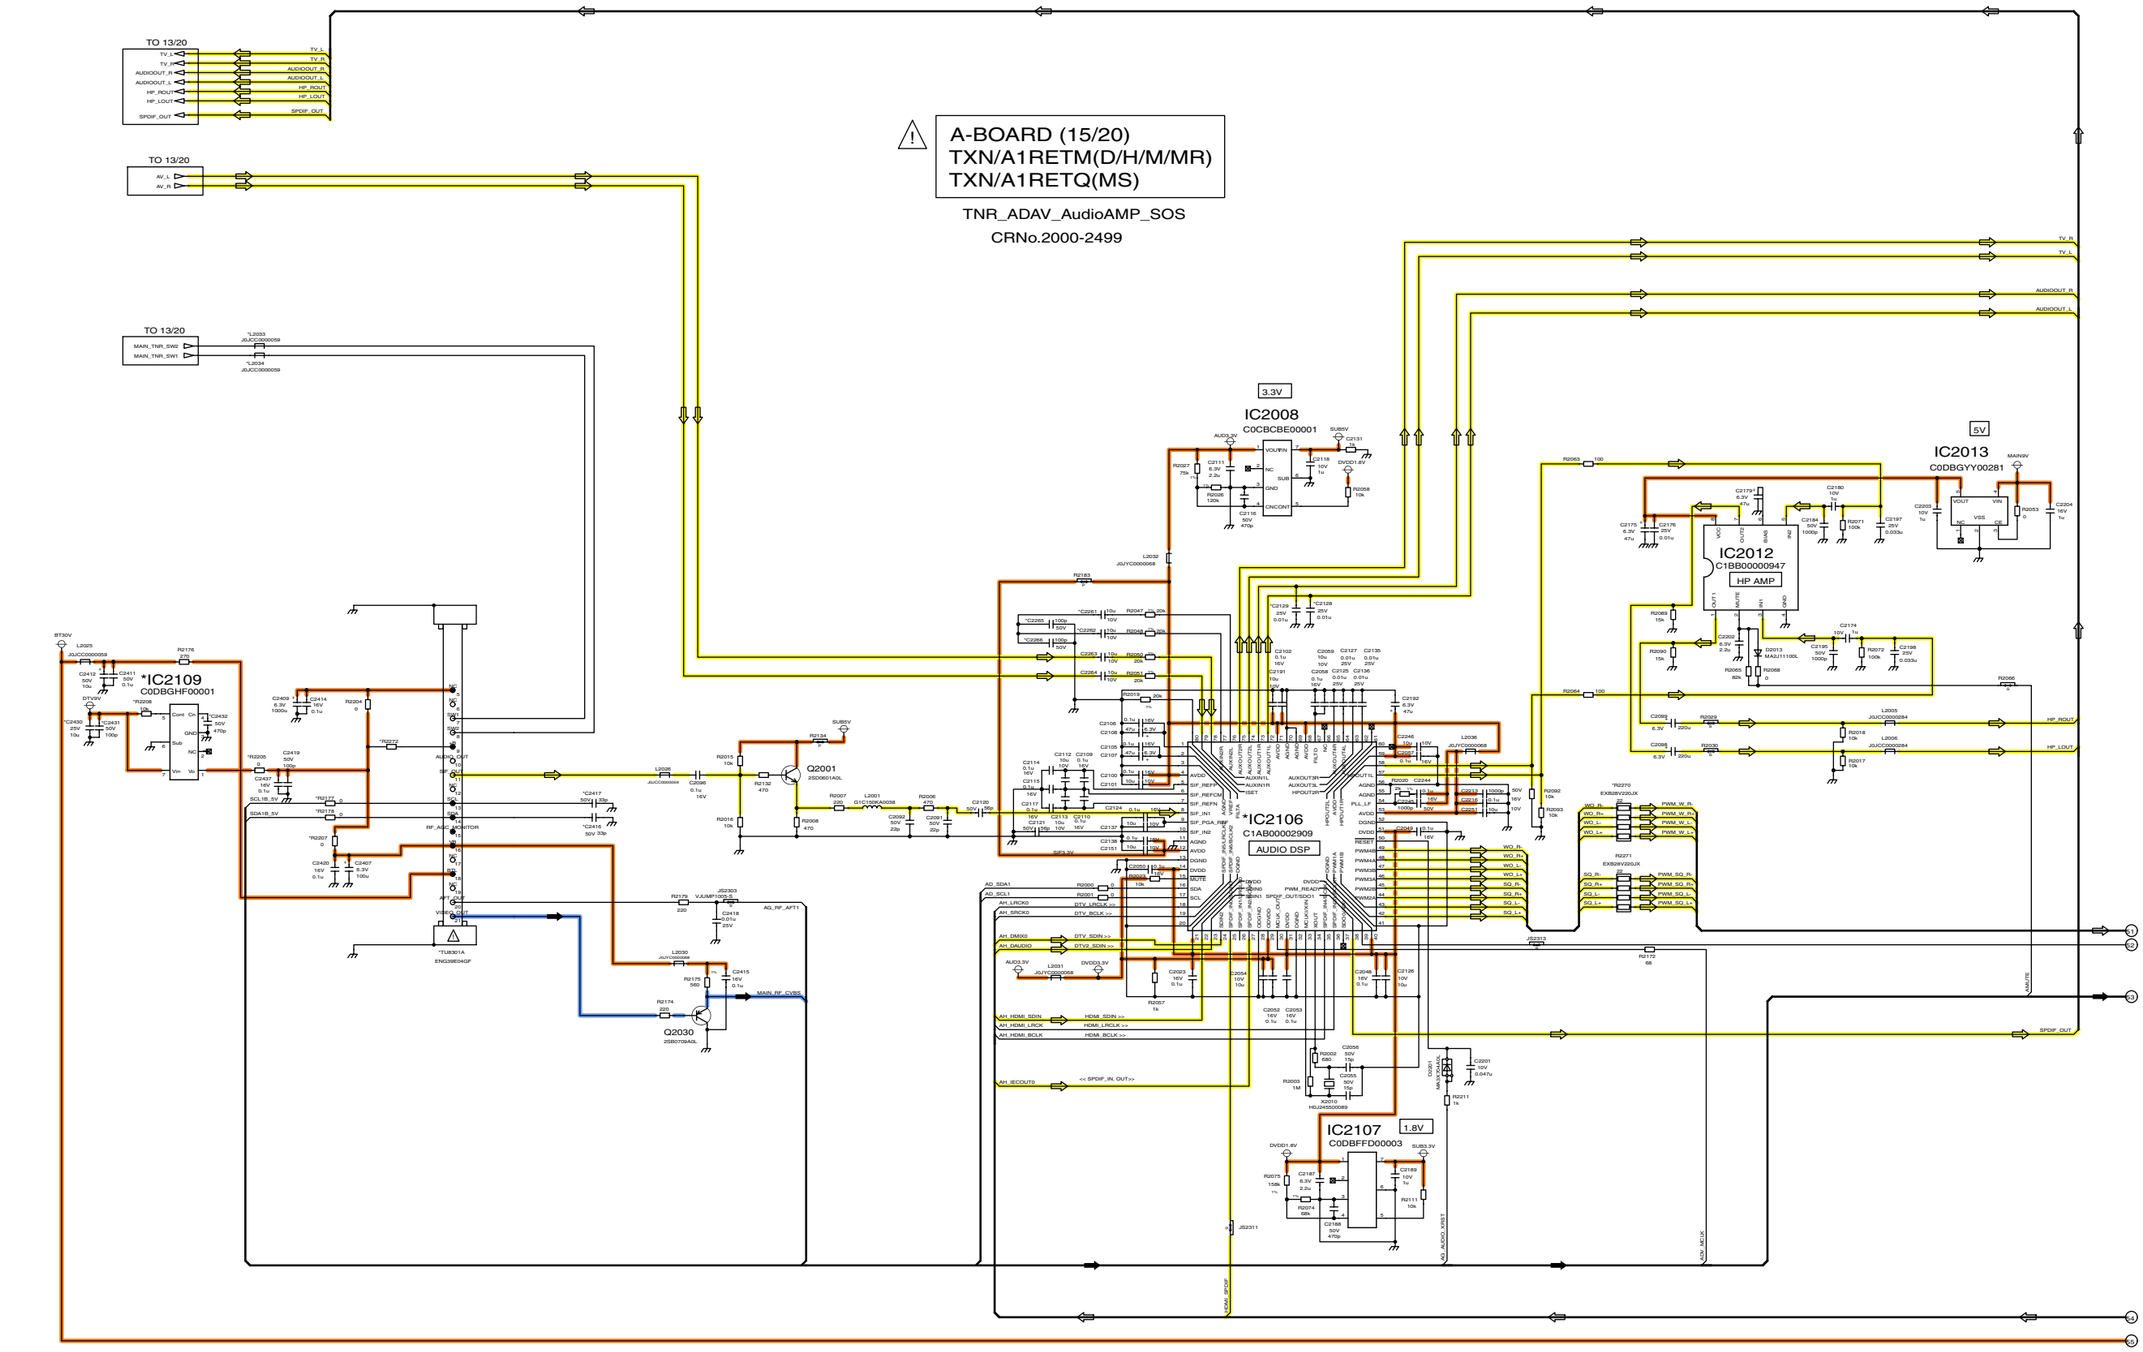

127 128 129 130 131 132 133 134 135

11.20. A-Board (16/20) Schematic Diagram

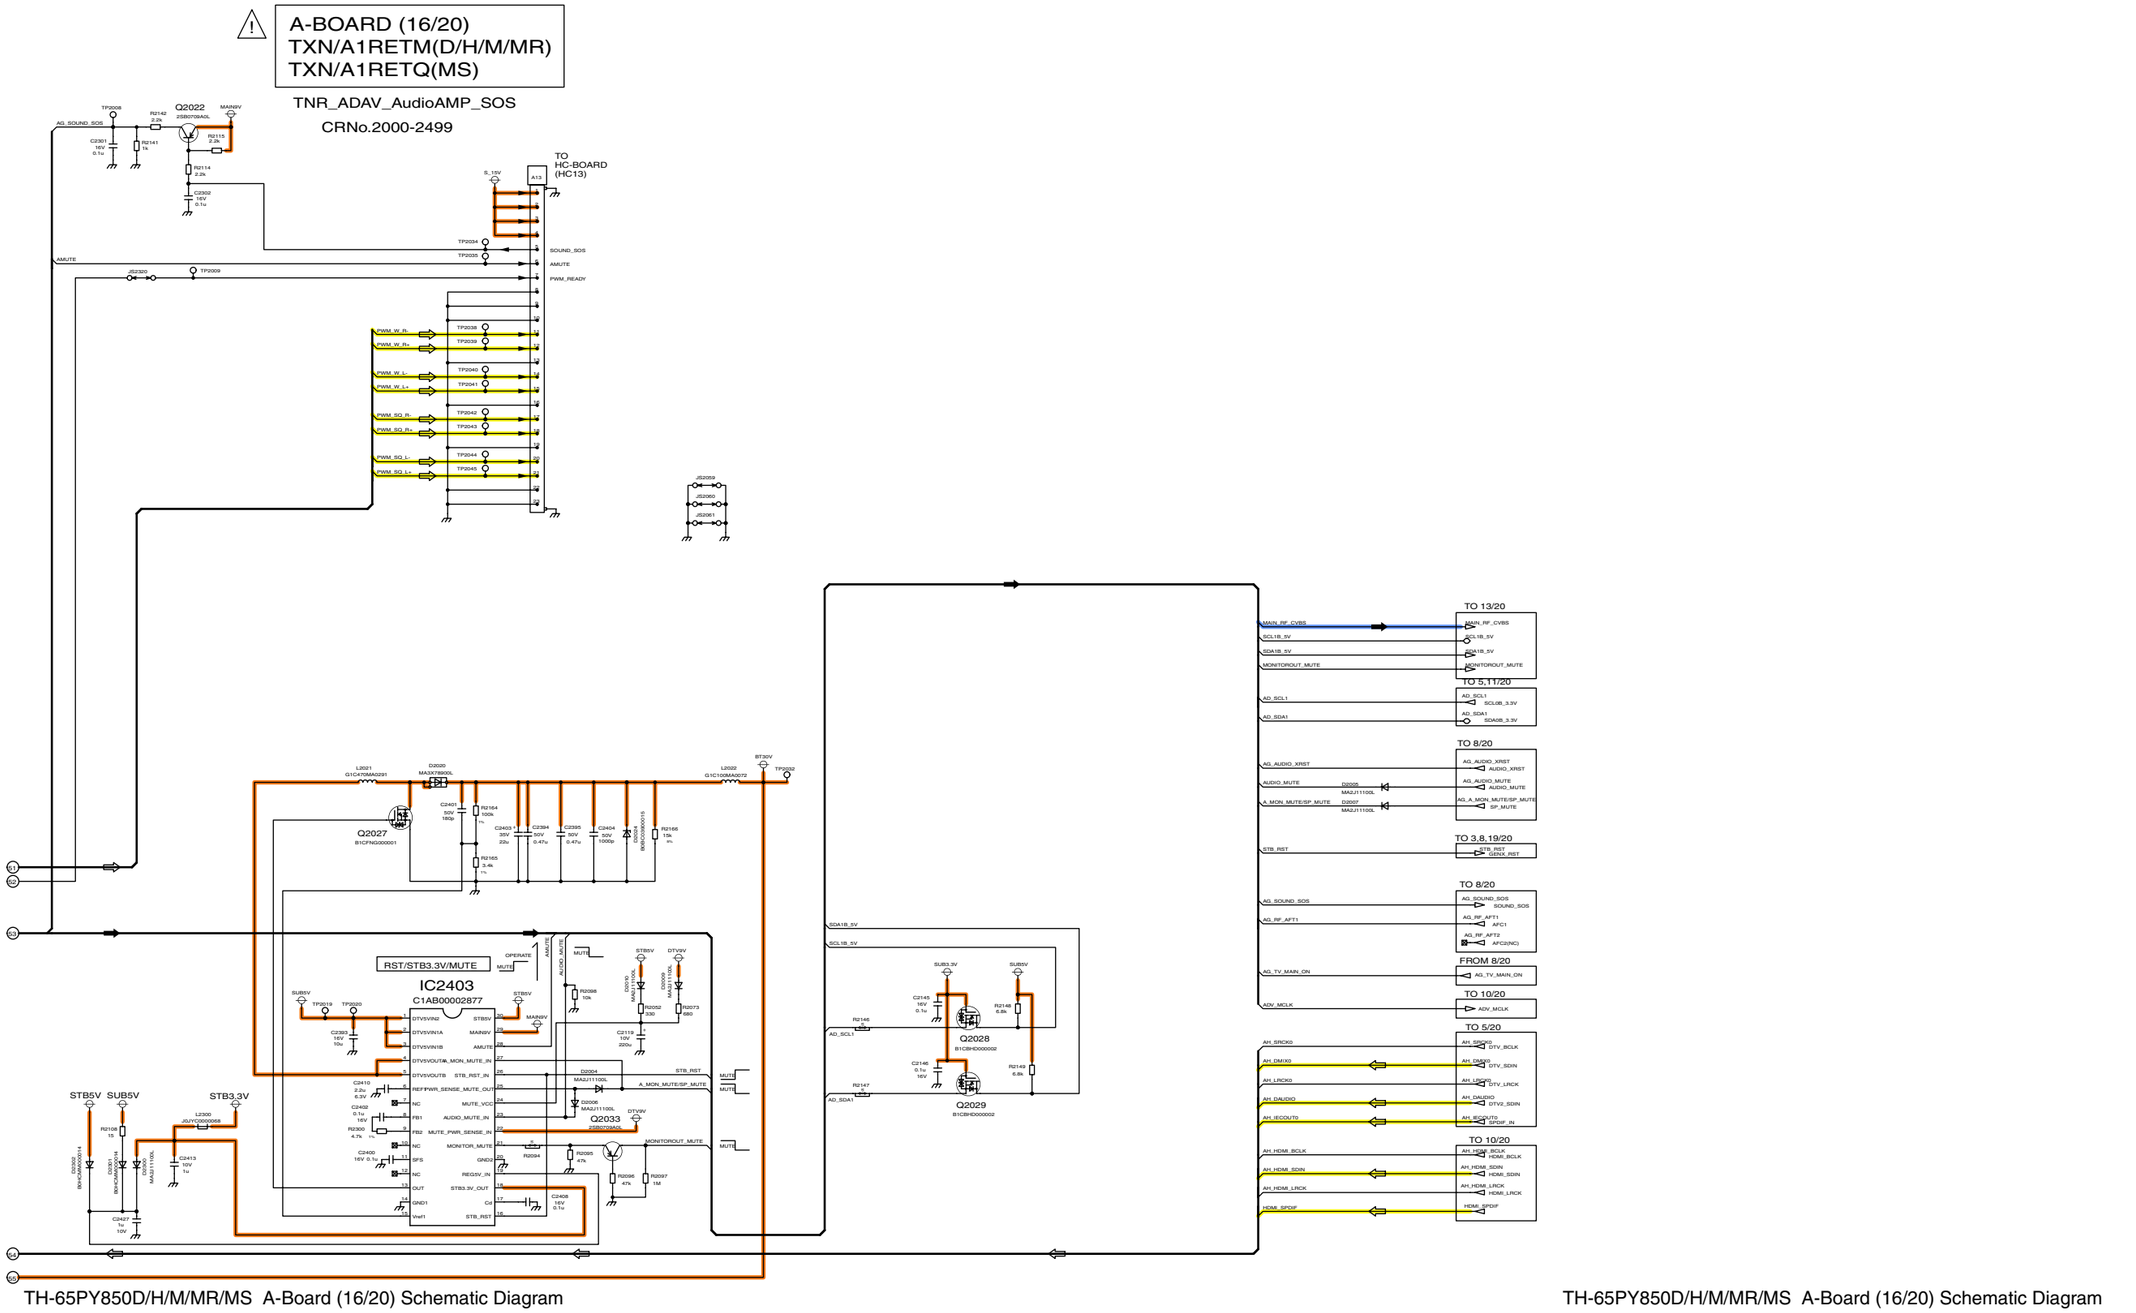


TH-65PY850D/H/M/MR/MS A-Board (16/20) Schematic Diagram


TH-65PY850D/H/M/MR/MS A-Board (16/20) Schematic Diagram

136 137 138 139 140 141 142 143 144


11.21. A-Board (17/20) Schematic Diagram

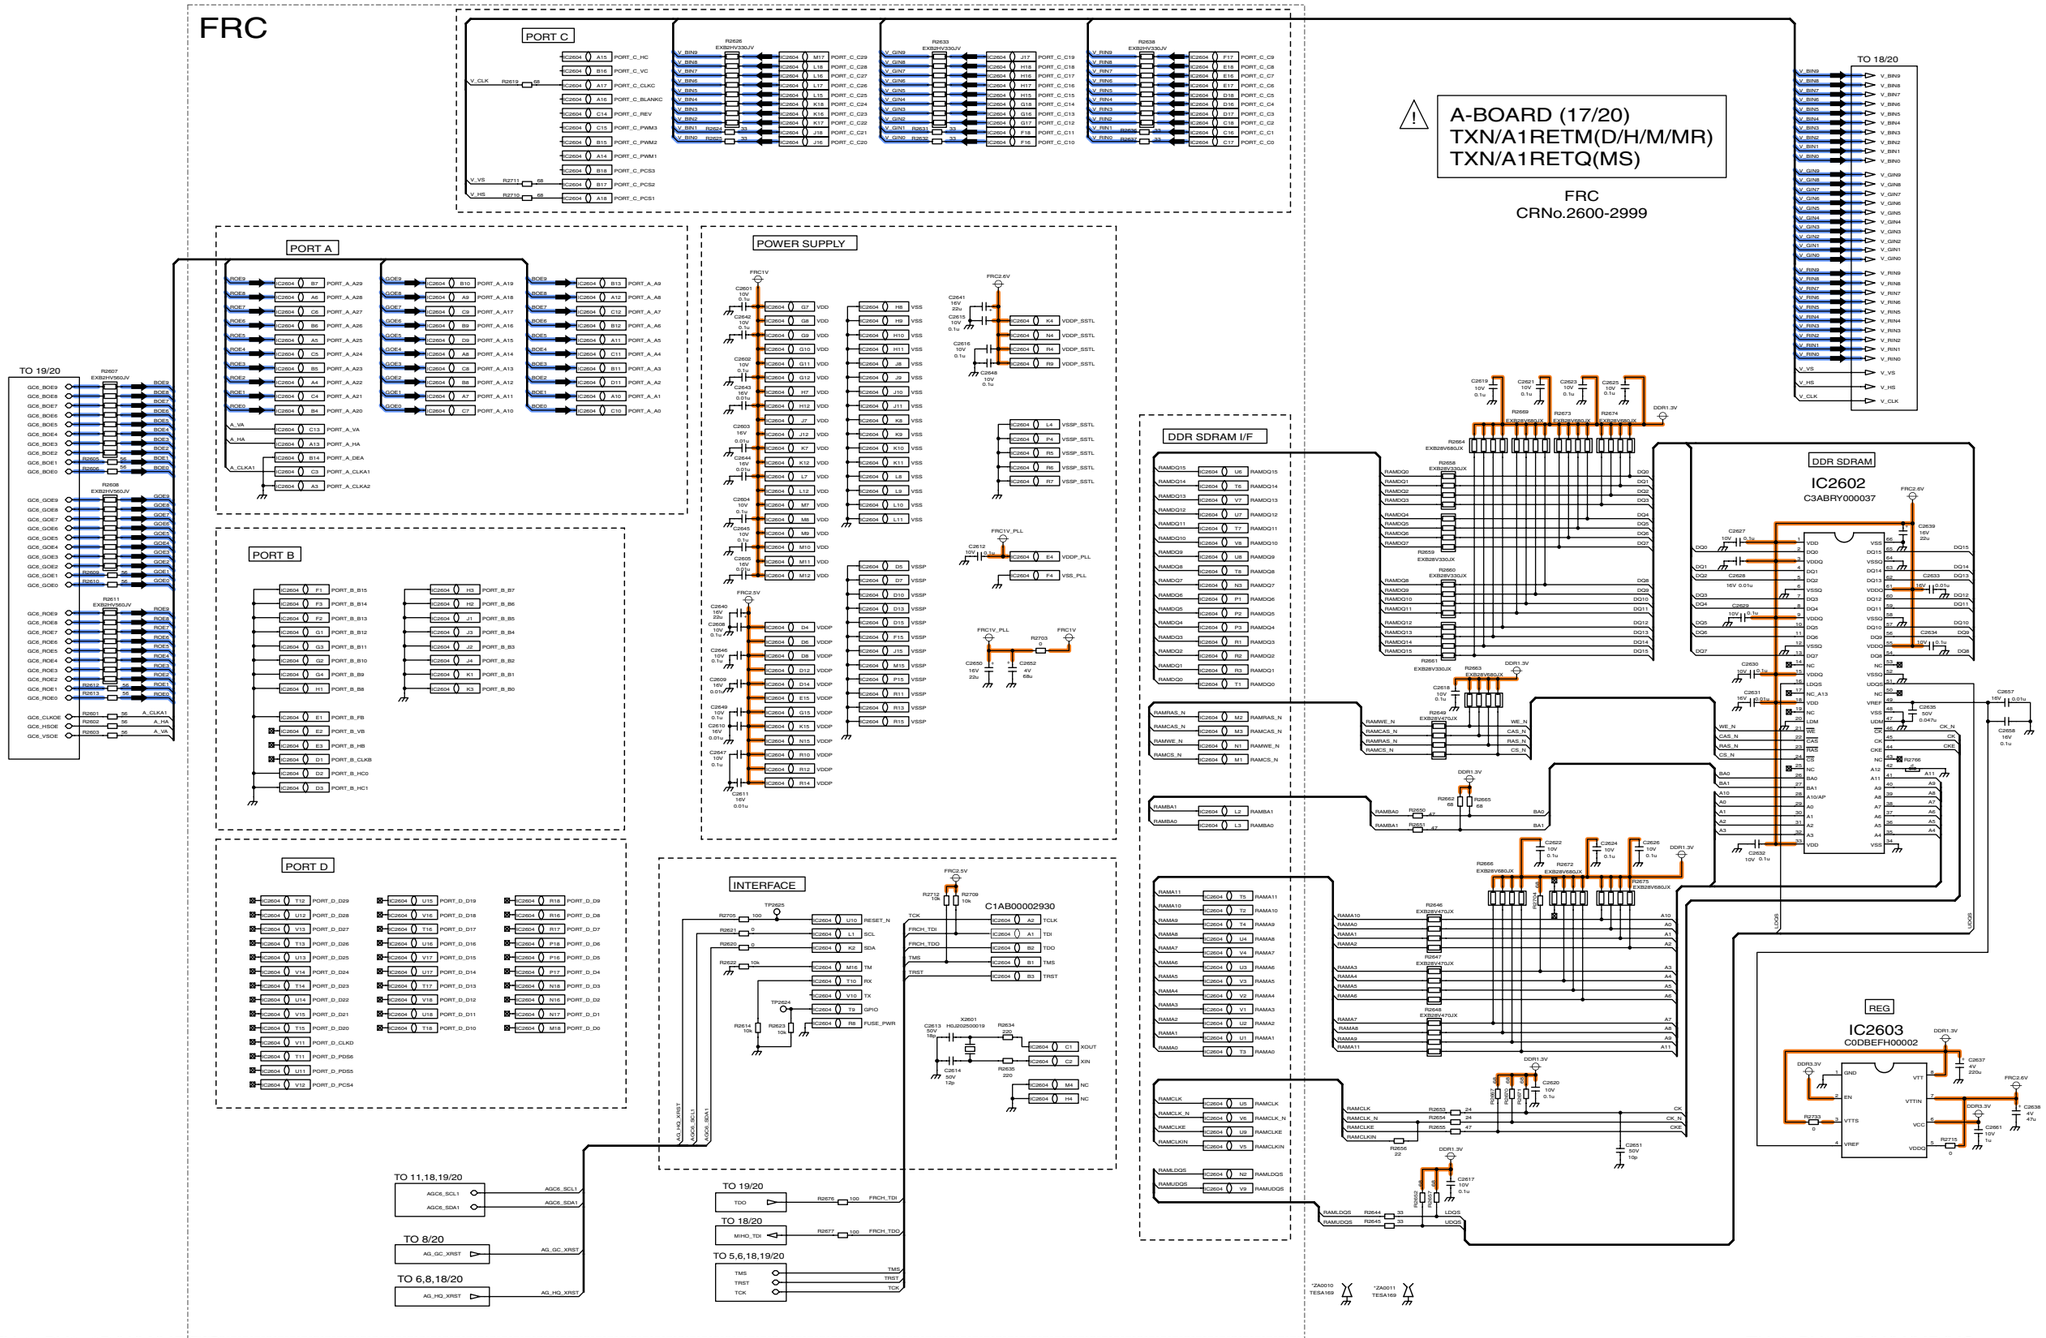


11.22. A-Board (18/20) Schematic Diagram

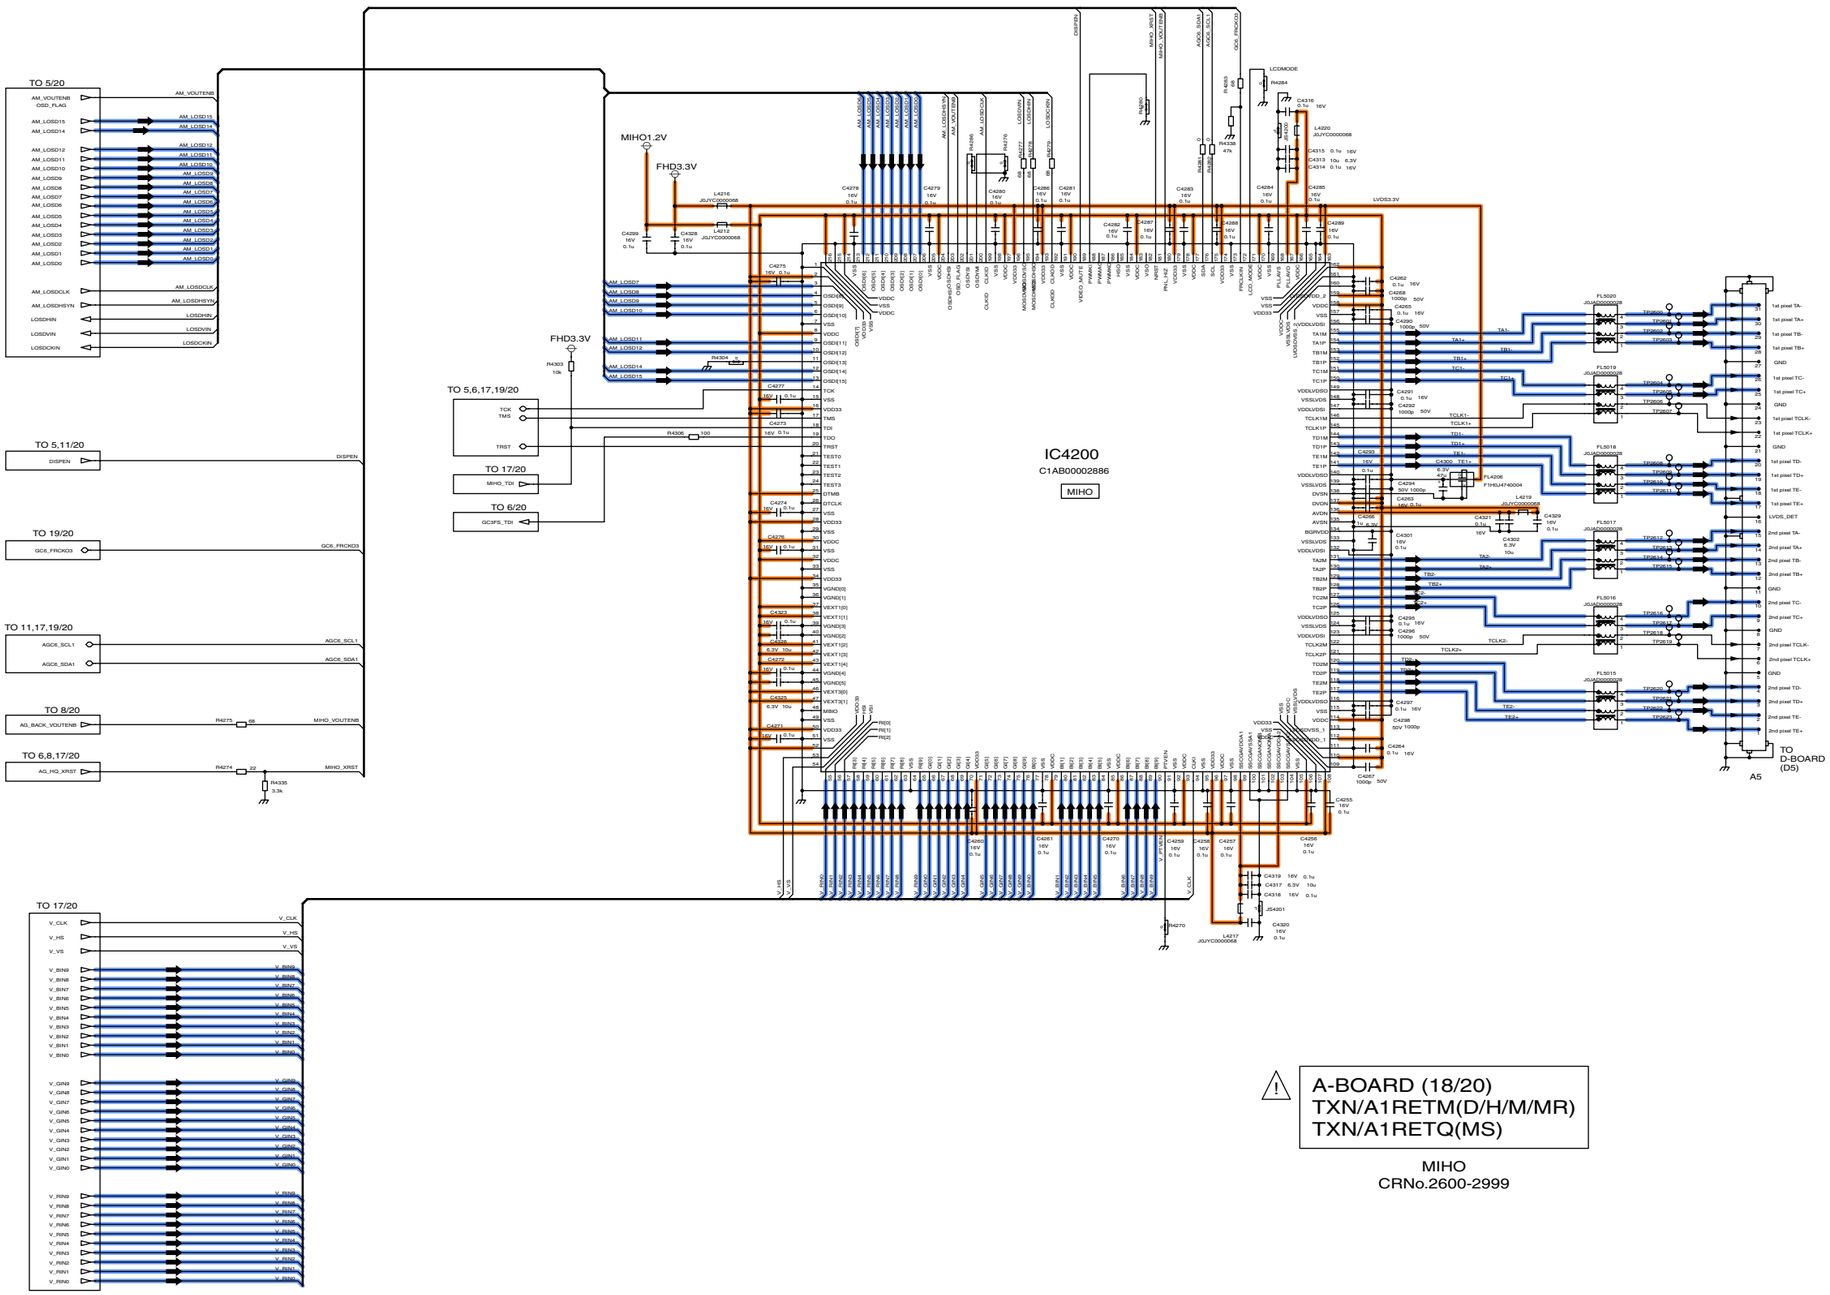



11.23. A-Board (19/20) Schematic Diagram

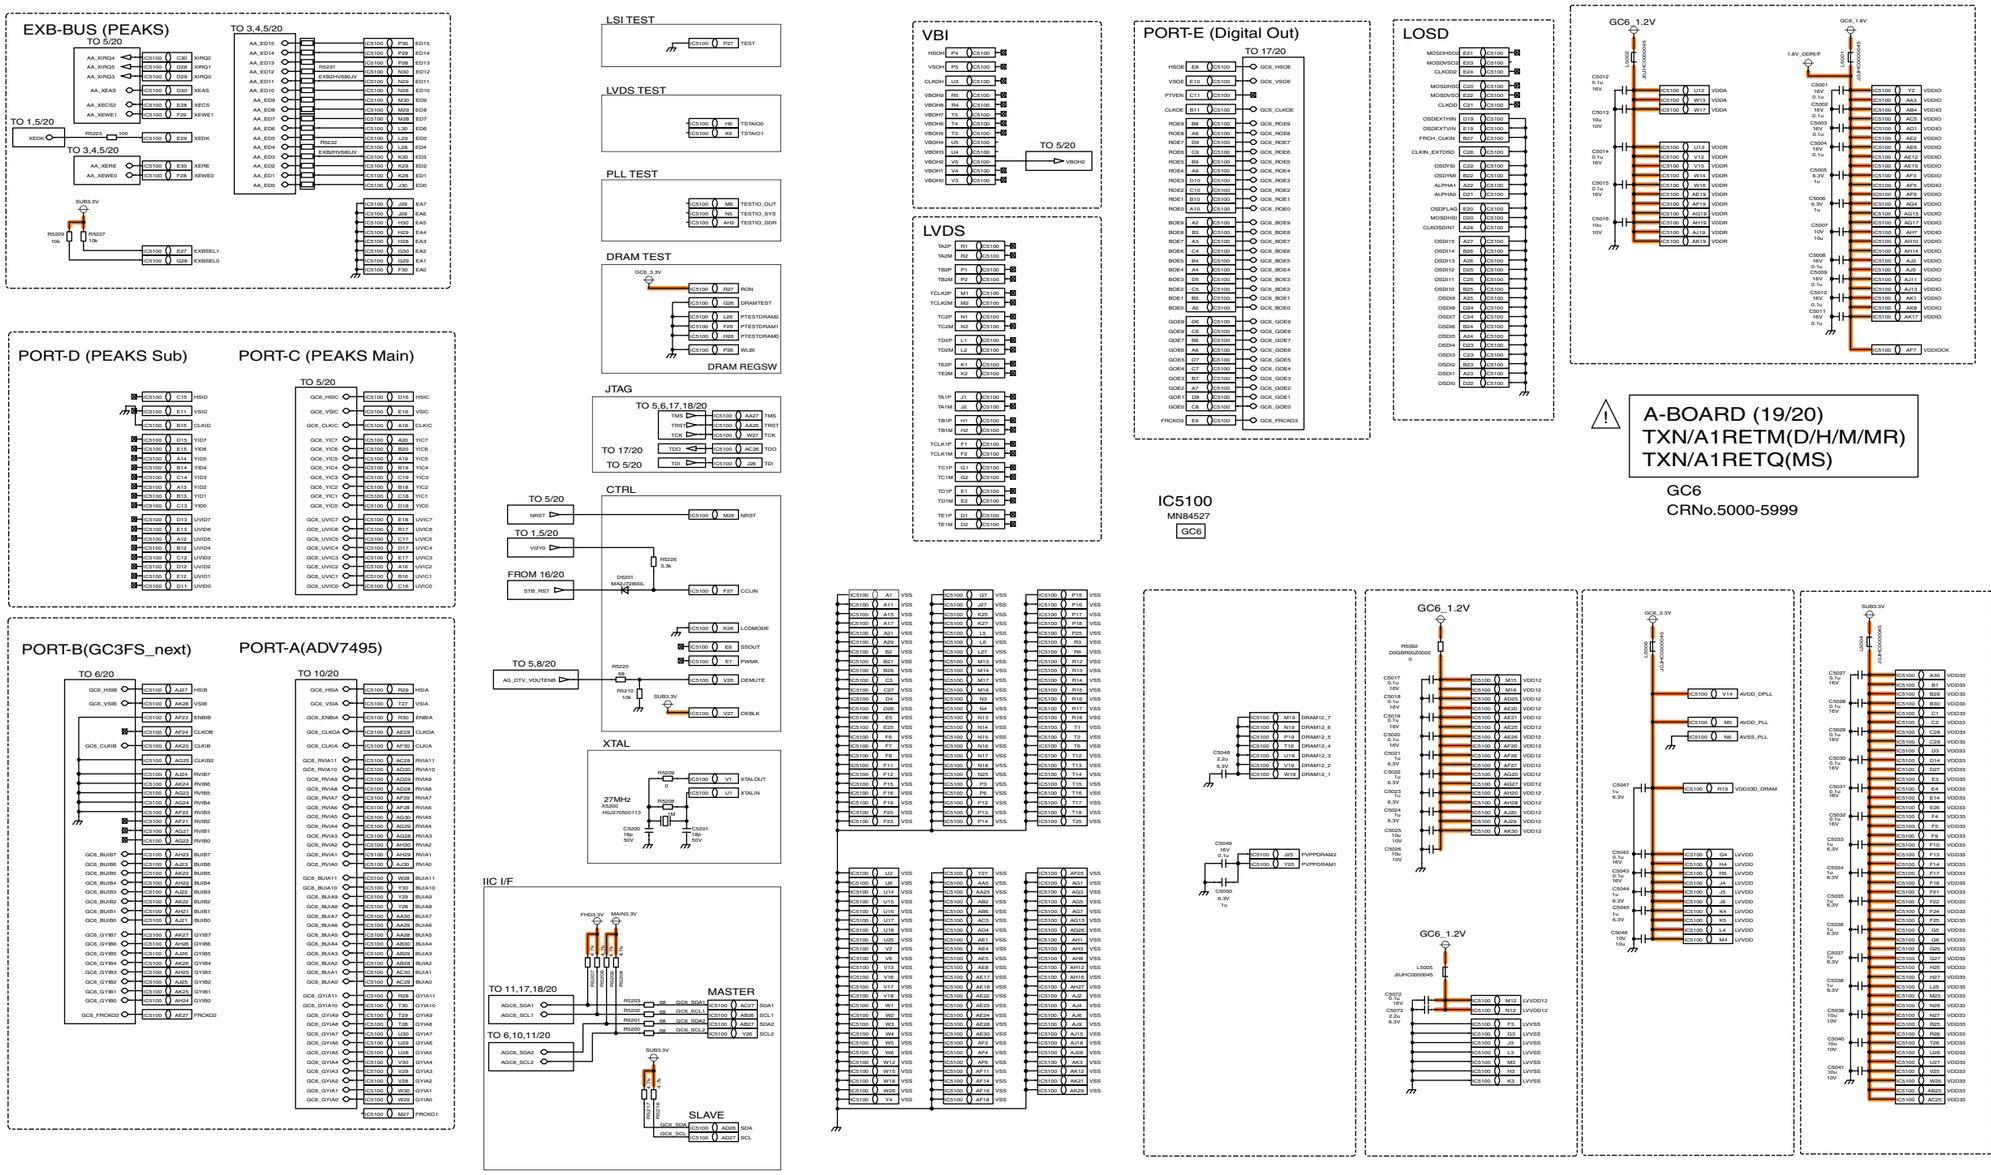


11.24. A-Board (20/20) Schematic Diagram

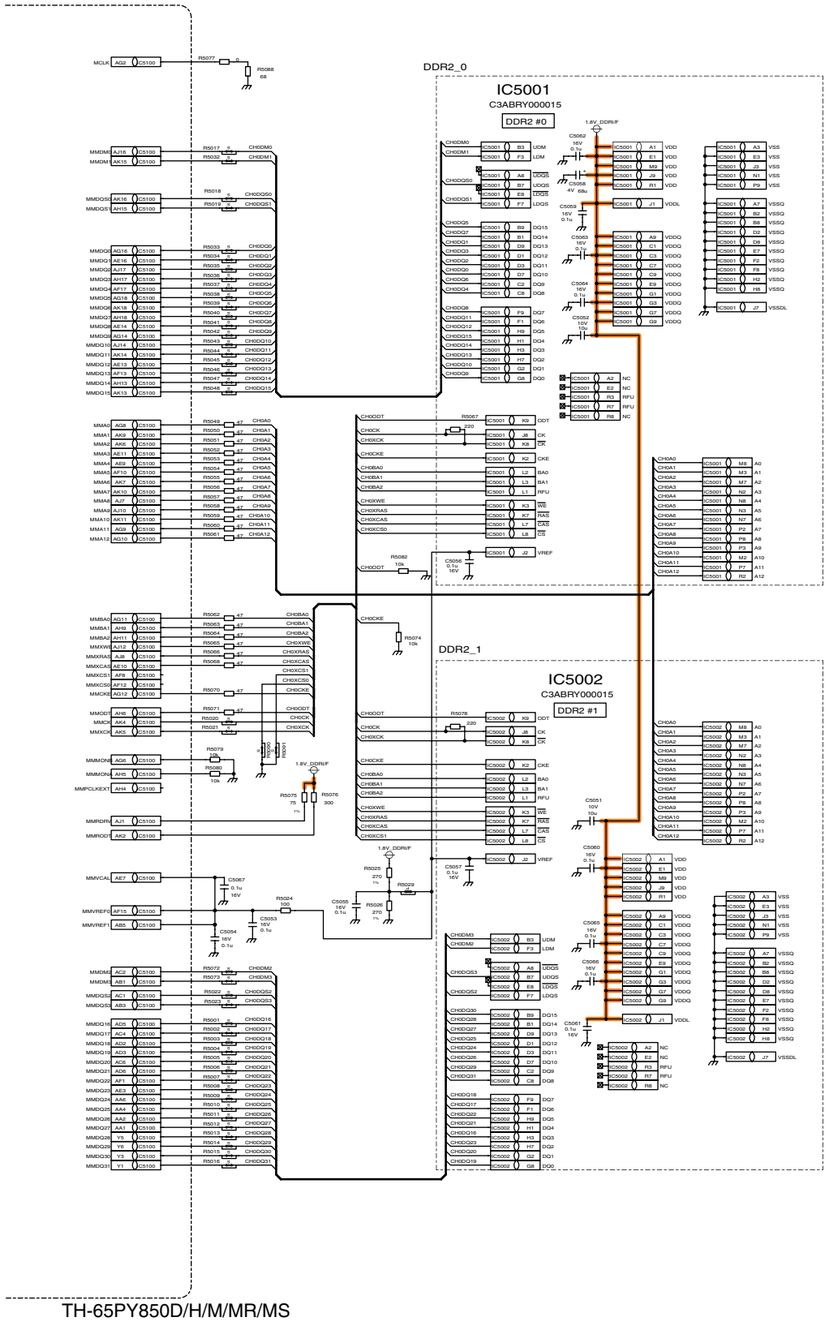

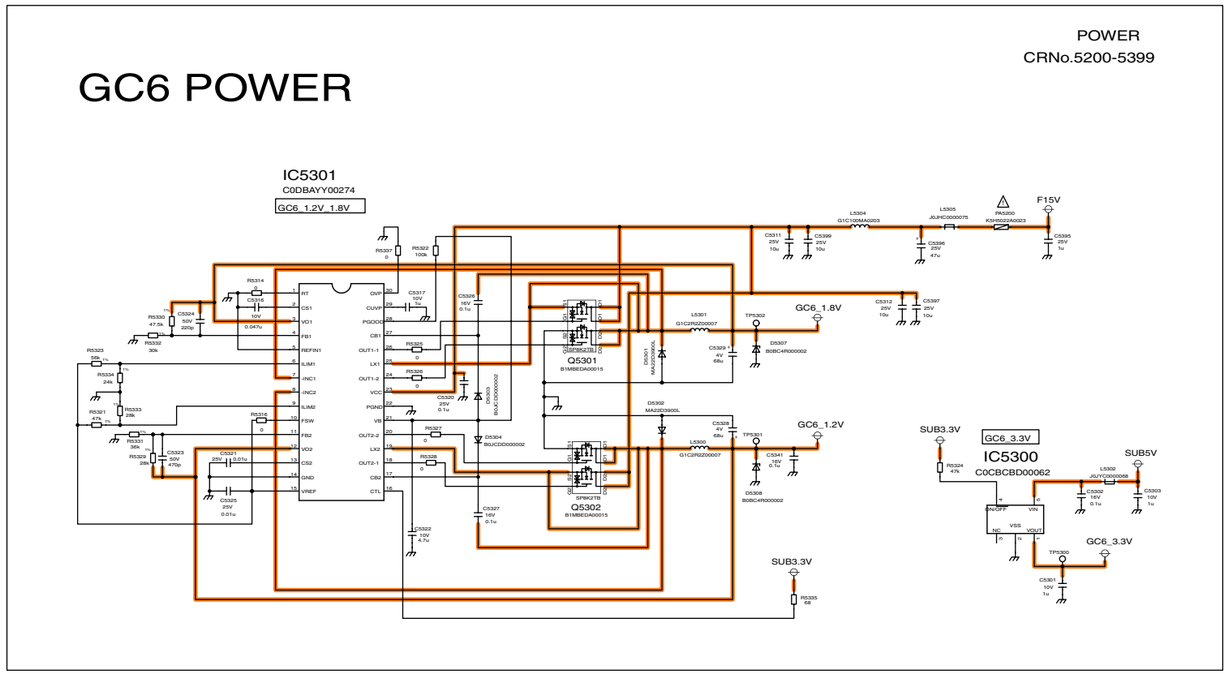

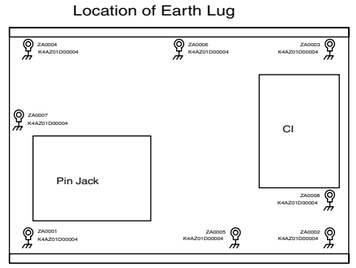



⚠ A-BOARD (20/20)
TXN/A1RETM(D/H/M/MR)
TXN/A1RETQ(MS)

GC6
CRNo.5000-5999


TH-65PY850D/H/M/MR/MS
A-Board (20/20) Schematic Diagram

TH-65PY850D/H/M/MR/MS
A-Board (20/20) Schematic Diagram


172 173 174 175 176 177 178 179 180

11.25. D-Board (1/7) Schematic Diagram

D-BOARD TZTNP01RATM (1/7)

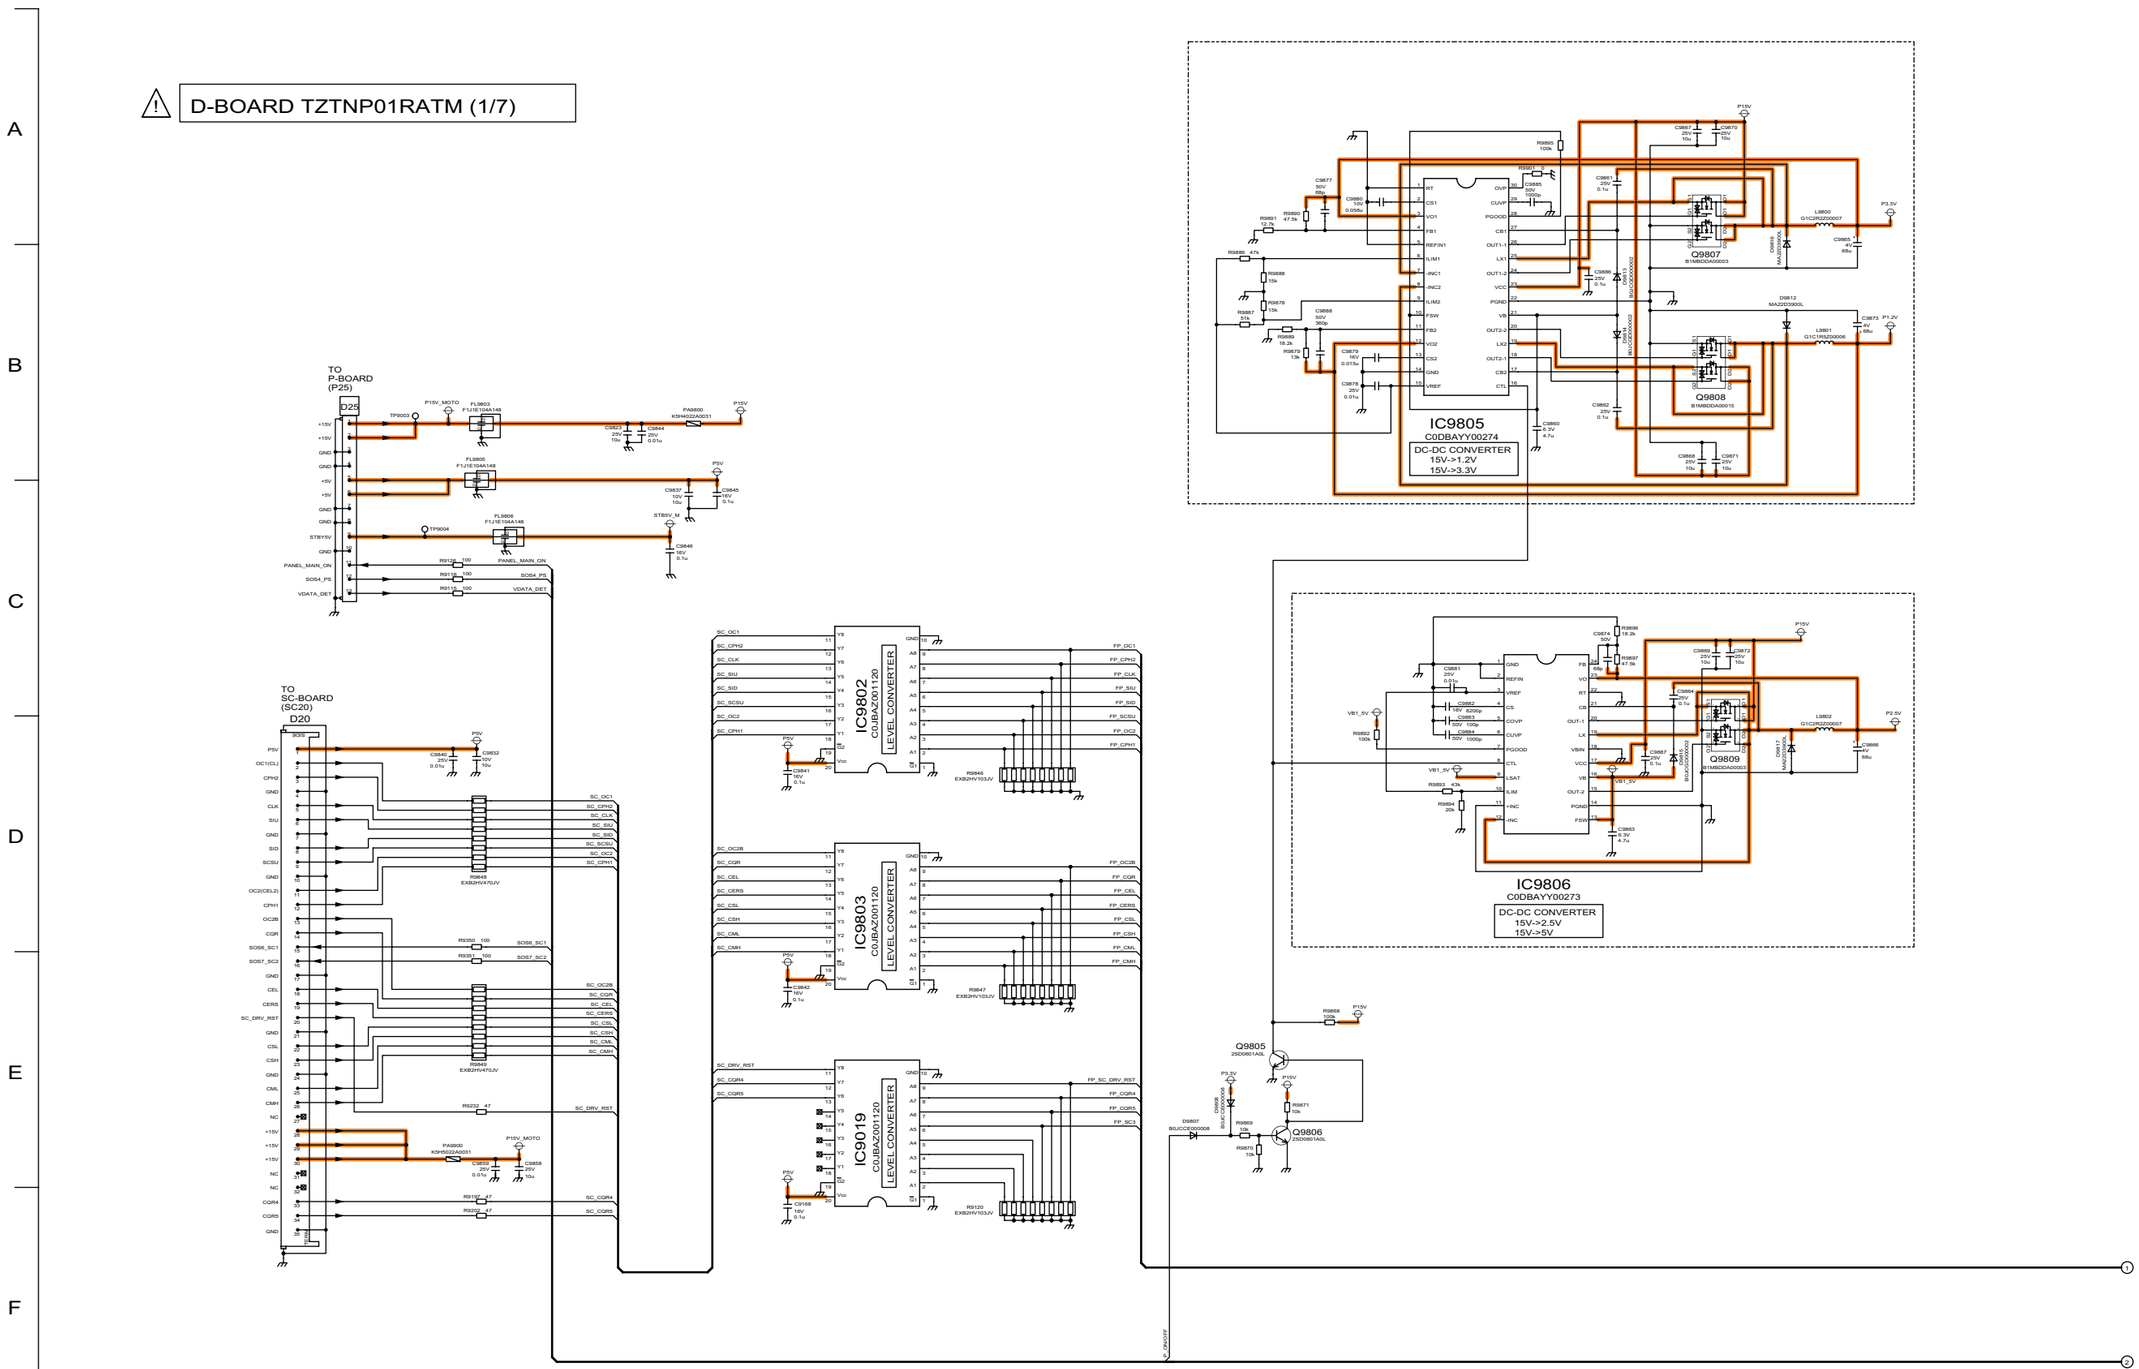

11.26. D-Board (2/7) Schematic Diagram

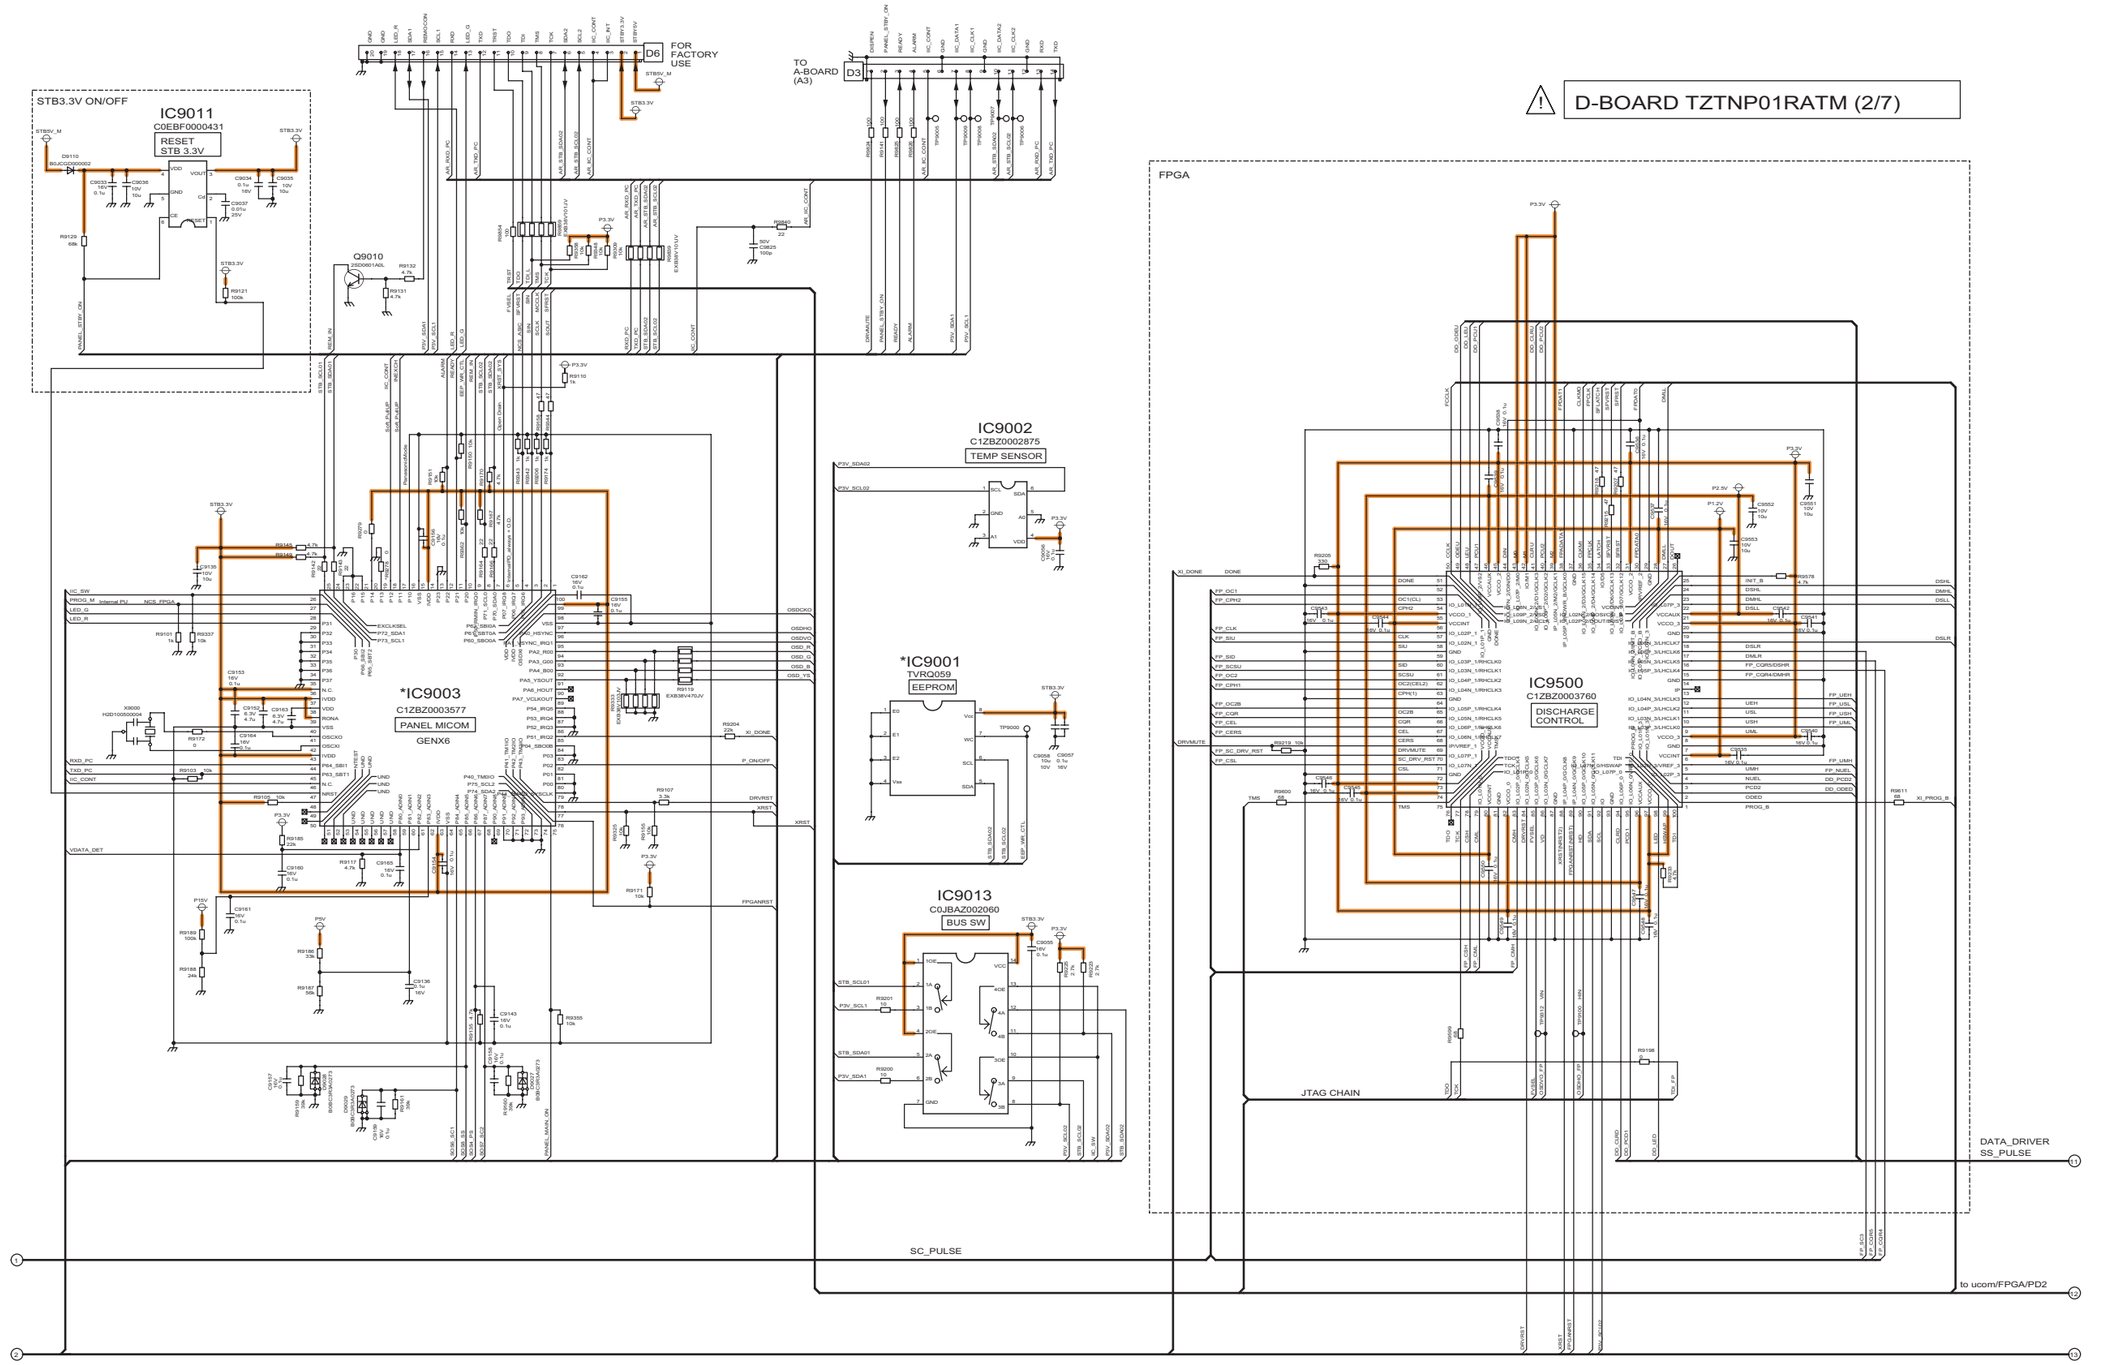


TH-65PY850D/H/M/MR/MS
D-Board (2/7) Schematic Diagram

TH-65PY850D/H/M/MR/MS
D-Board (2/7) Schematic Diagram

10 11 12 13 14 15 16 17 18

11.27. D-Board (3/7) Schematic Diagram

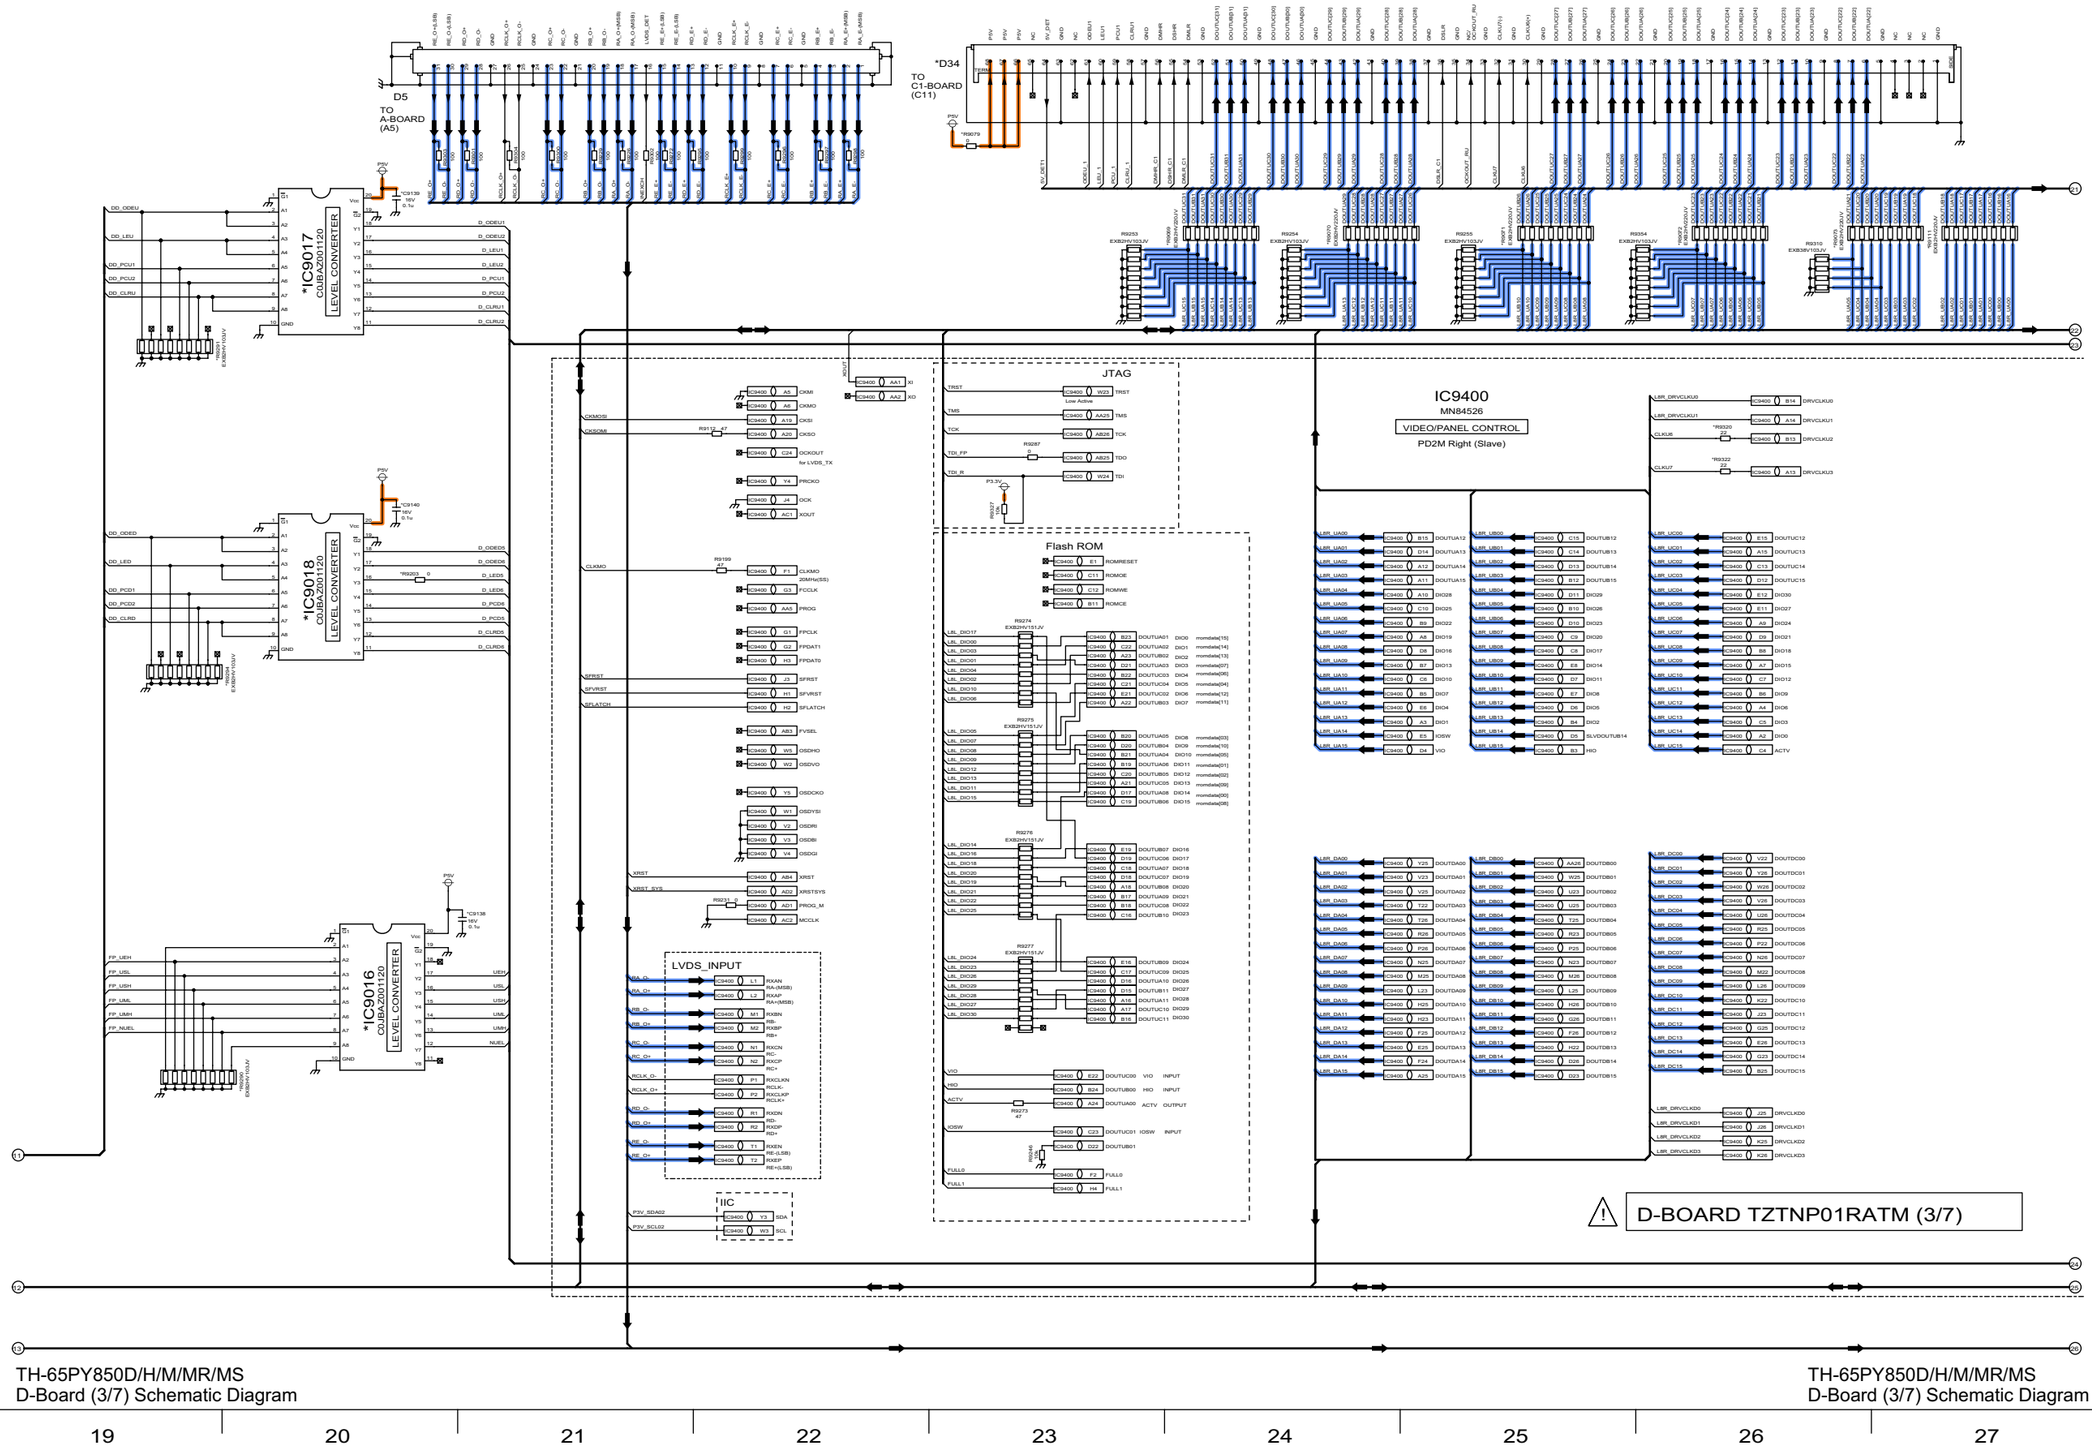


TH-65PY850D/H/M/MR/MS
D-Board (3/7) Schematic Diagram


TH-65PY850D/H/M/MR/MS
D-Board (3/7) Schematic Diagram


19 20 21 22 23 24 25 26 27


11.28. D-Board (4/7) Schematic Diagram

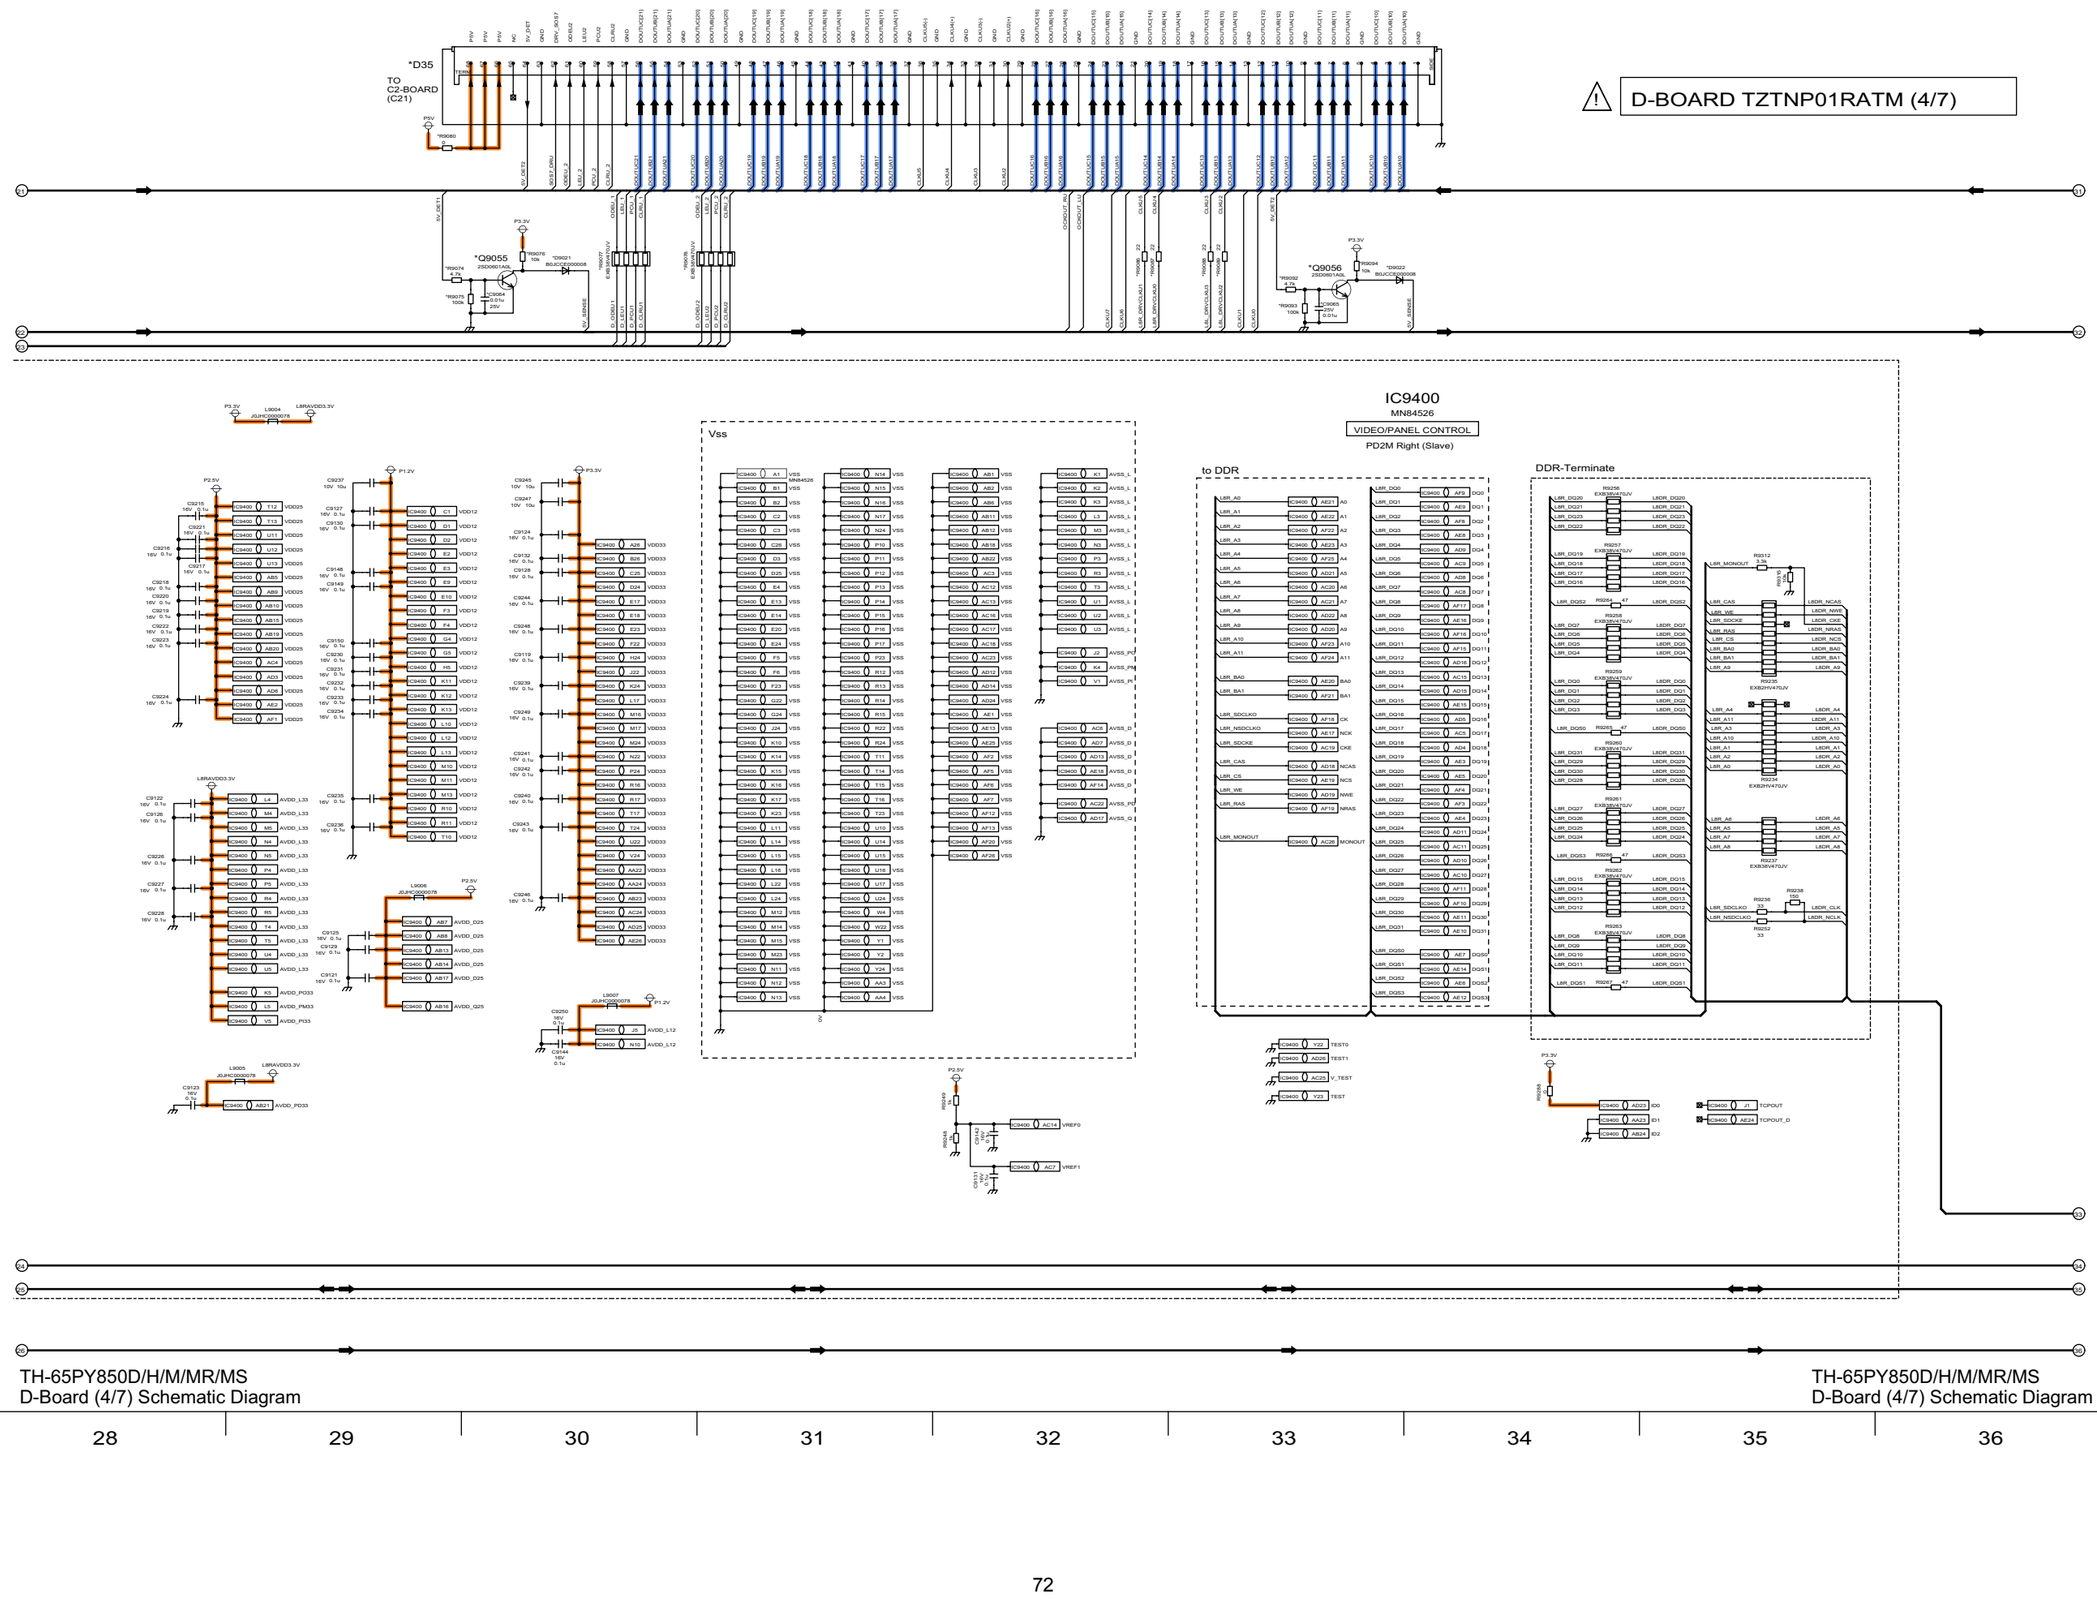


11.29. D-Board (5/7) Schematic Diagram

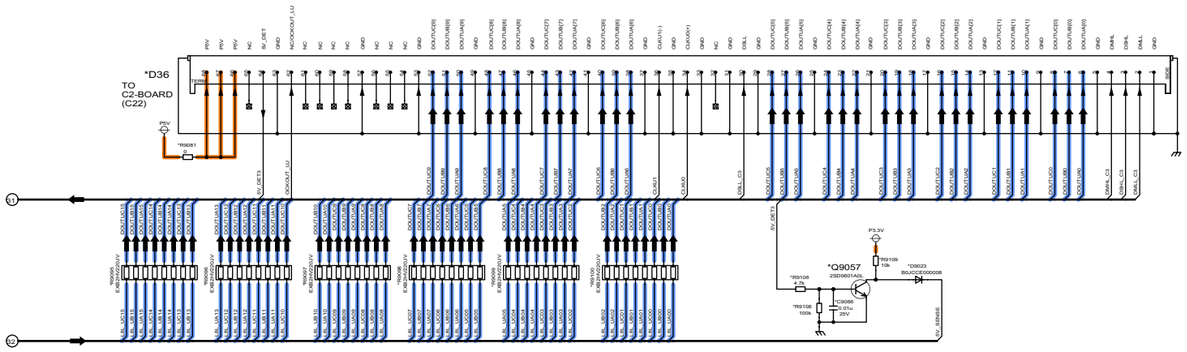

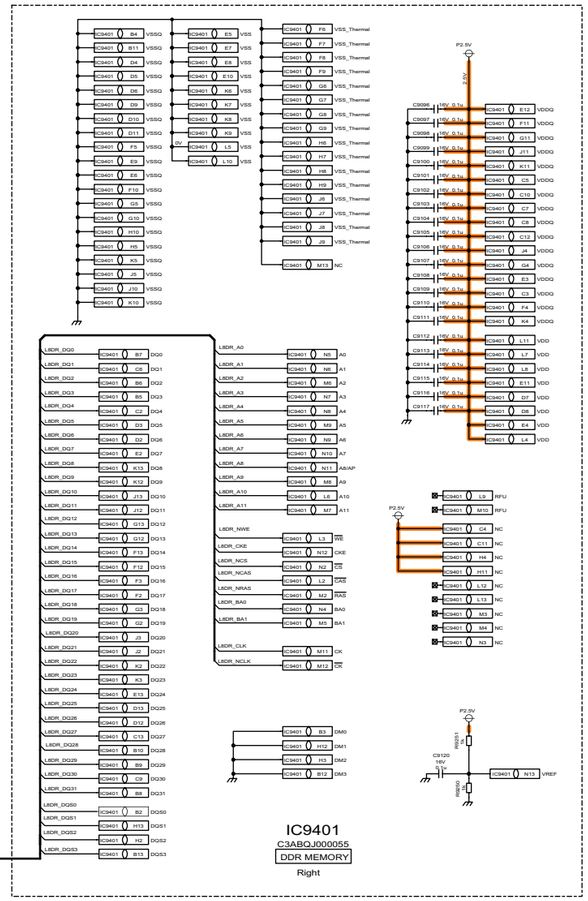

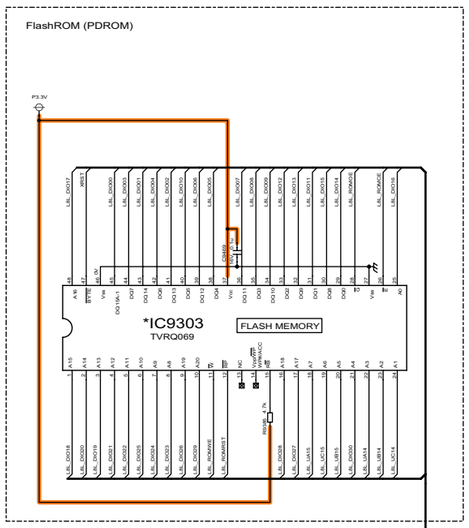

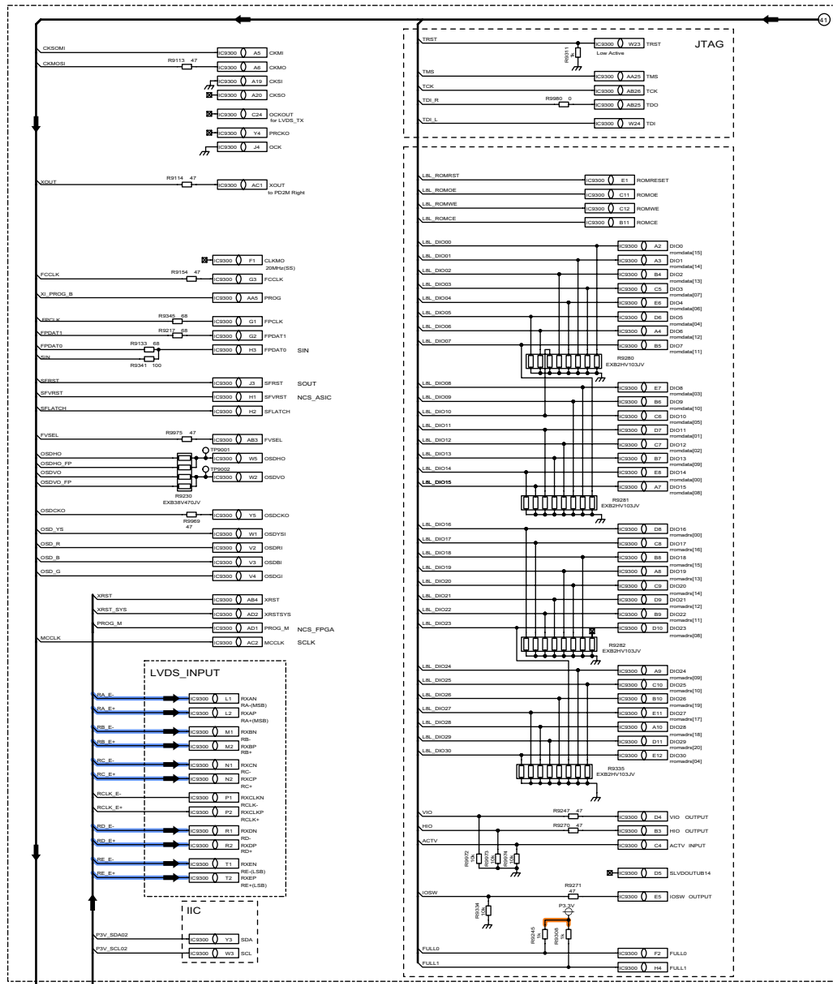


TH-65PY850D/H/M/MR/MS
D-Board (5/7) Schematic Diagram

TH-65PY850D/H/M/MR/MS
D-Board (5/7) Schematic Diagram


D-BOARD TZTNP01RATM (5/7)

11.30. D-Board (6/7) Schematic Diagram

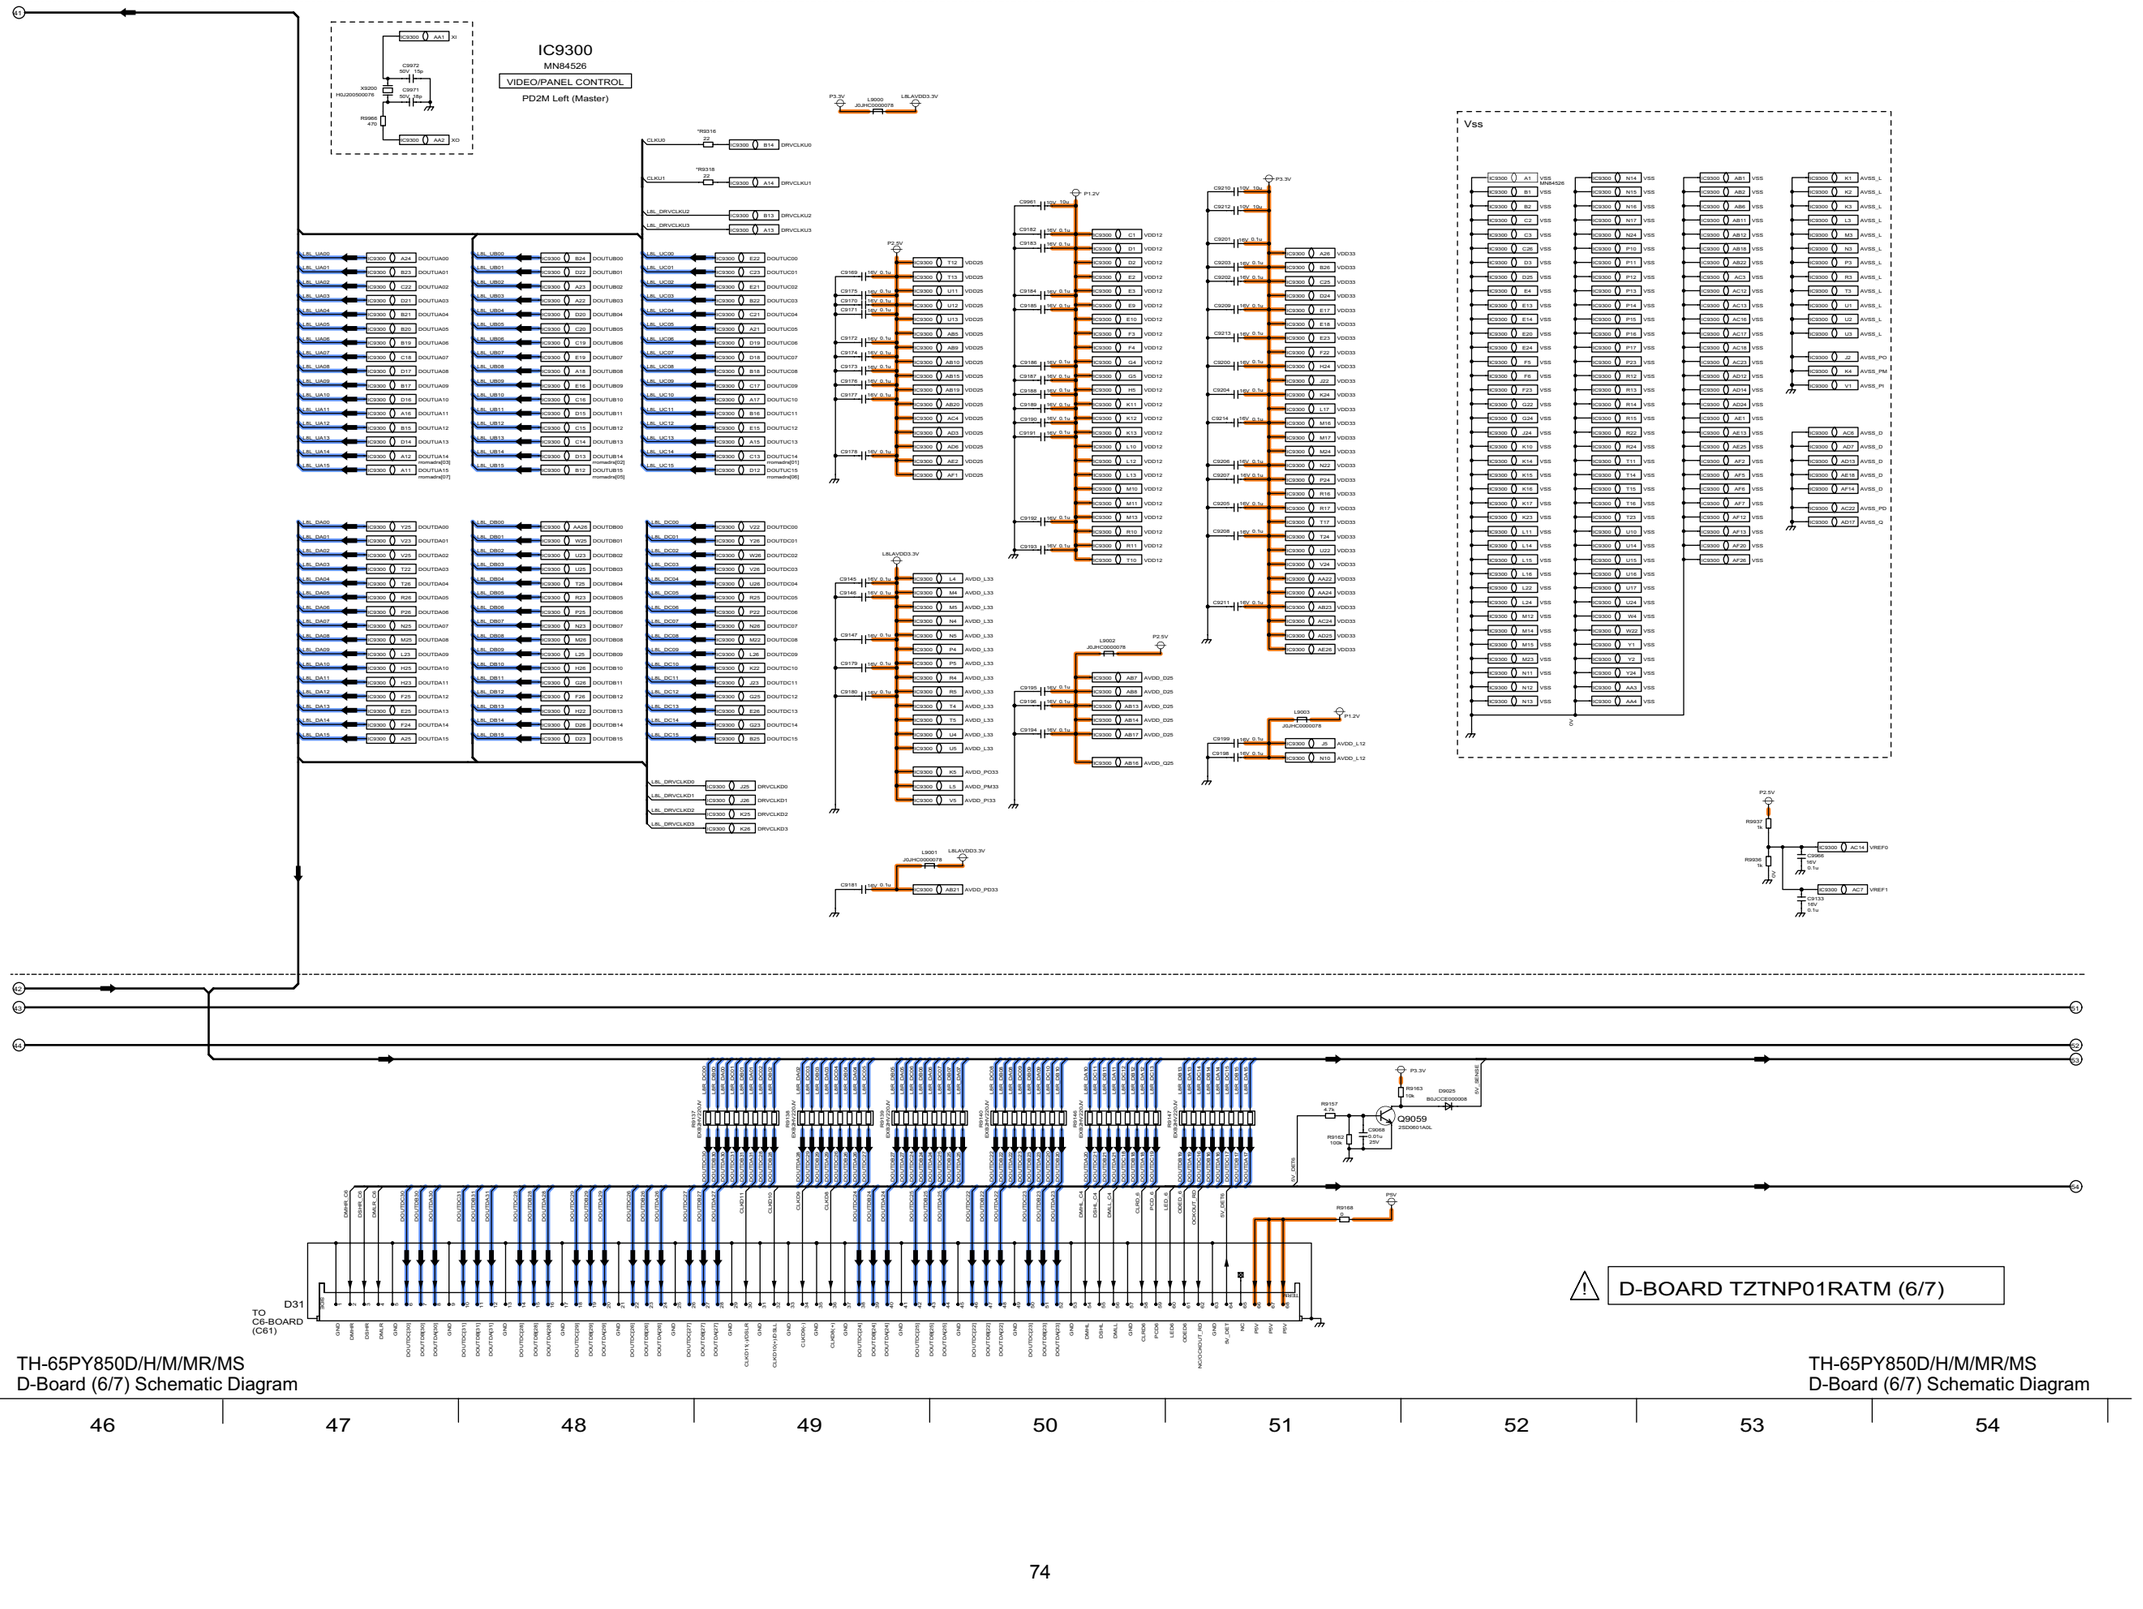

11.31. D-Board (7/7) Schematic Diagram

D-BOARD TZTNP01RATM (7/7)

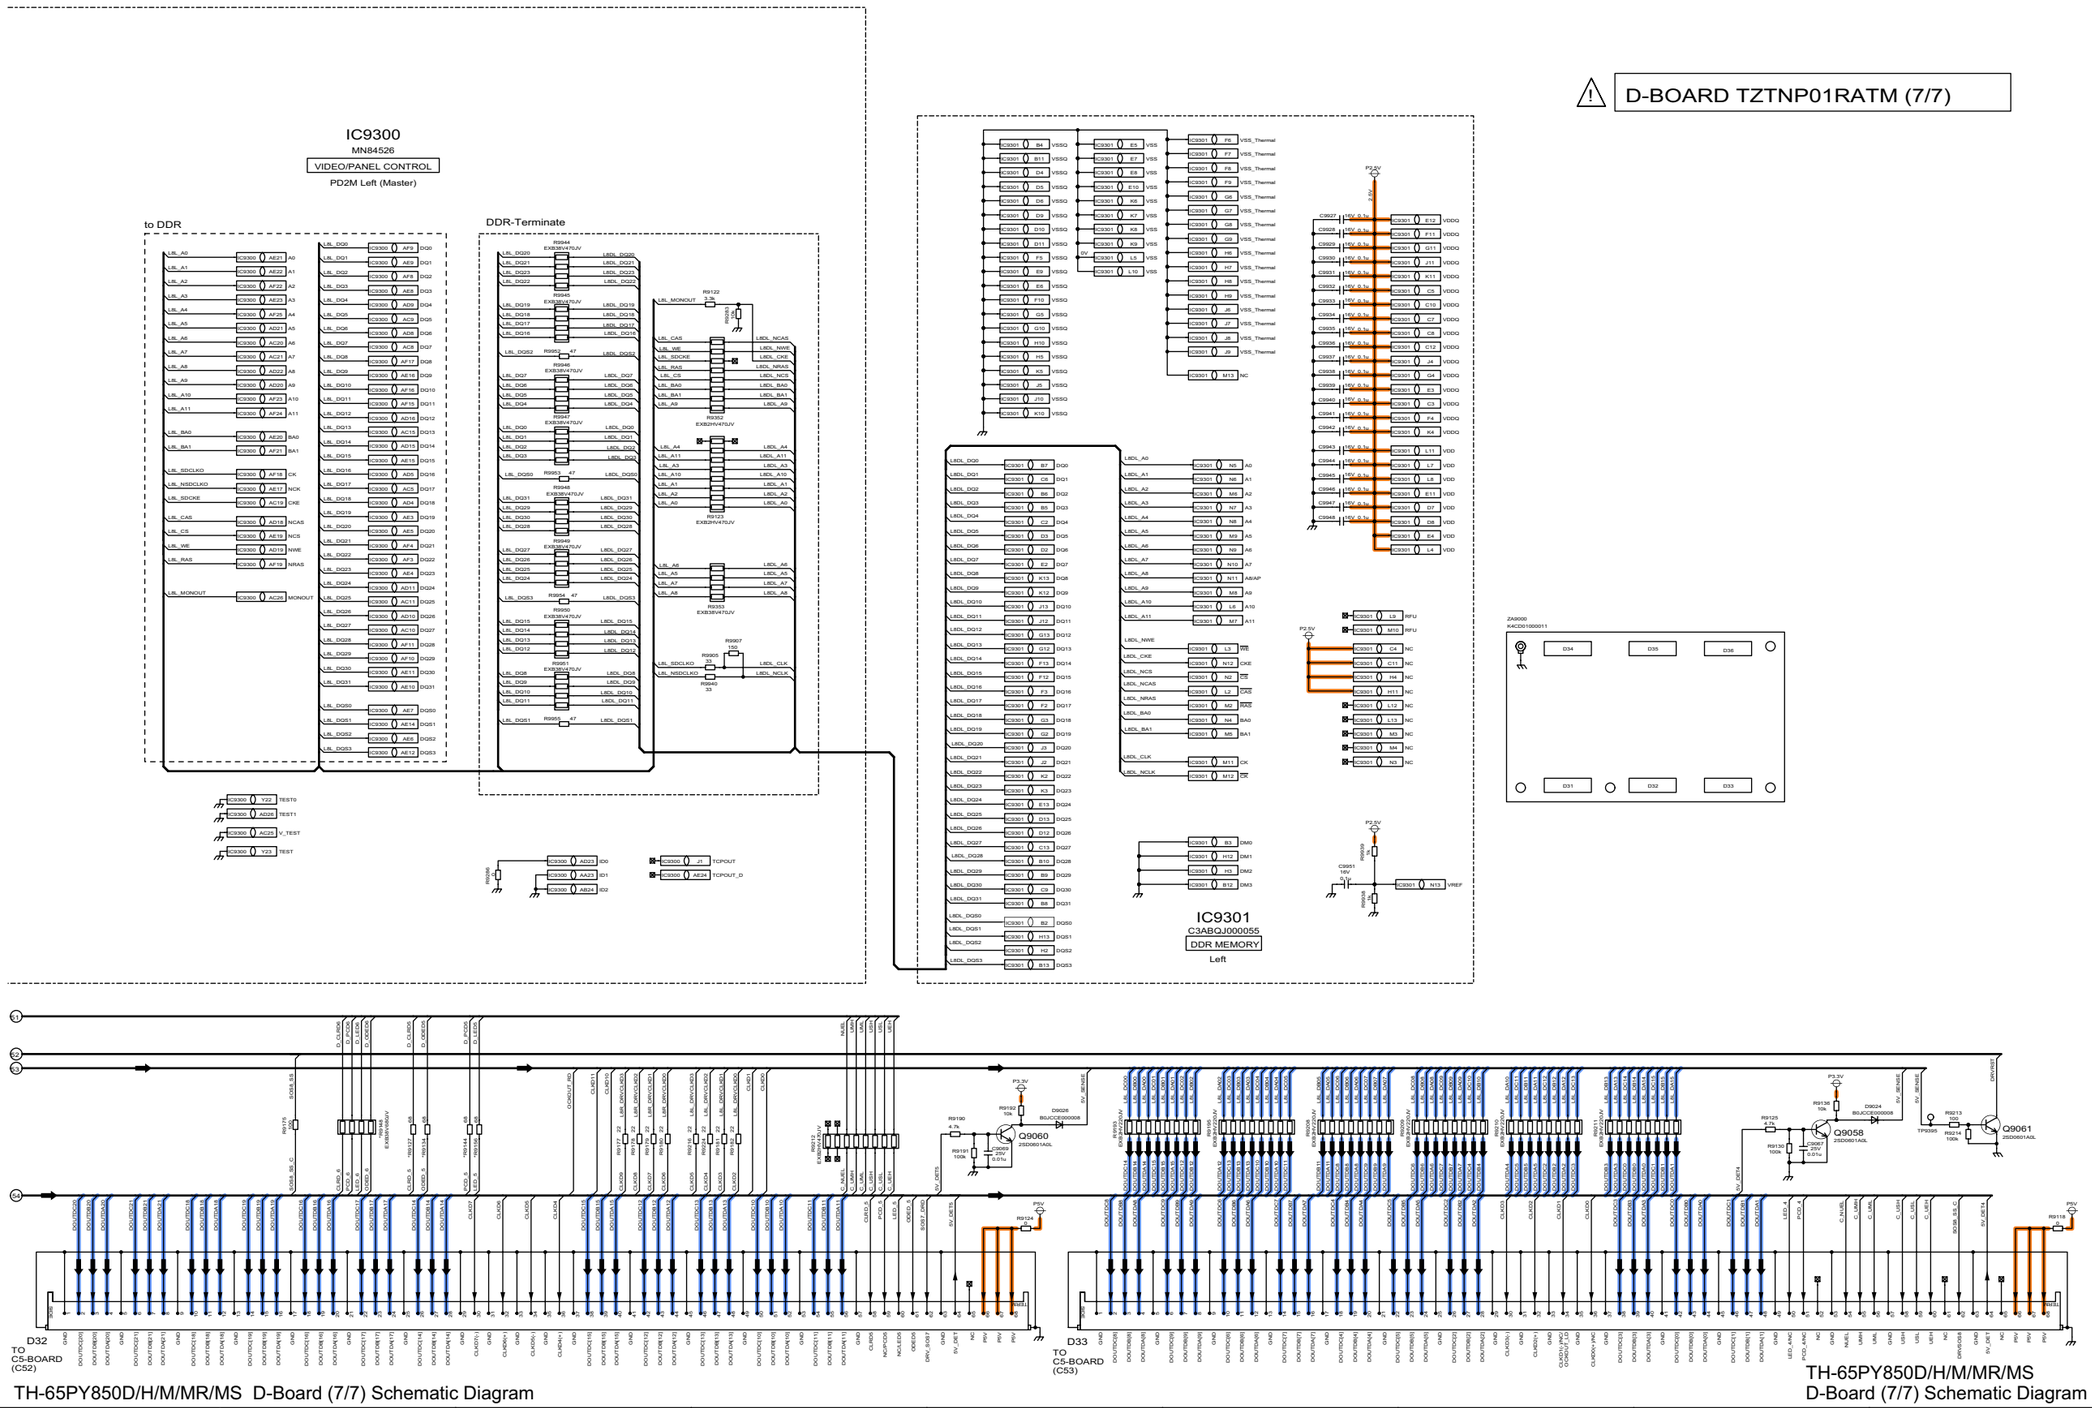


TH-65PY850D/H/M/MR/MS D-Board (7/7) Schematic Diagram

TH-65PY850D/H/M/MR/MS
D-Board (7/7) Schematic Diagram

55 56 57 58 59 60 61 62 63


11.32. C1-Board (1/3) Schematic Diagram

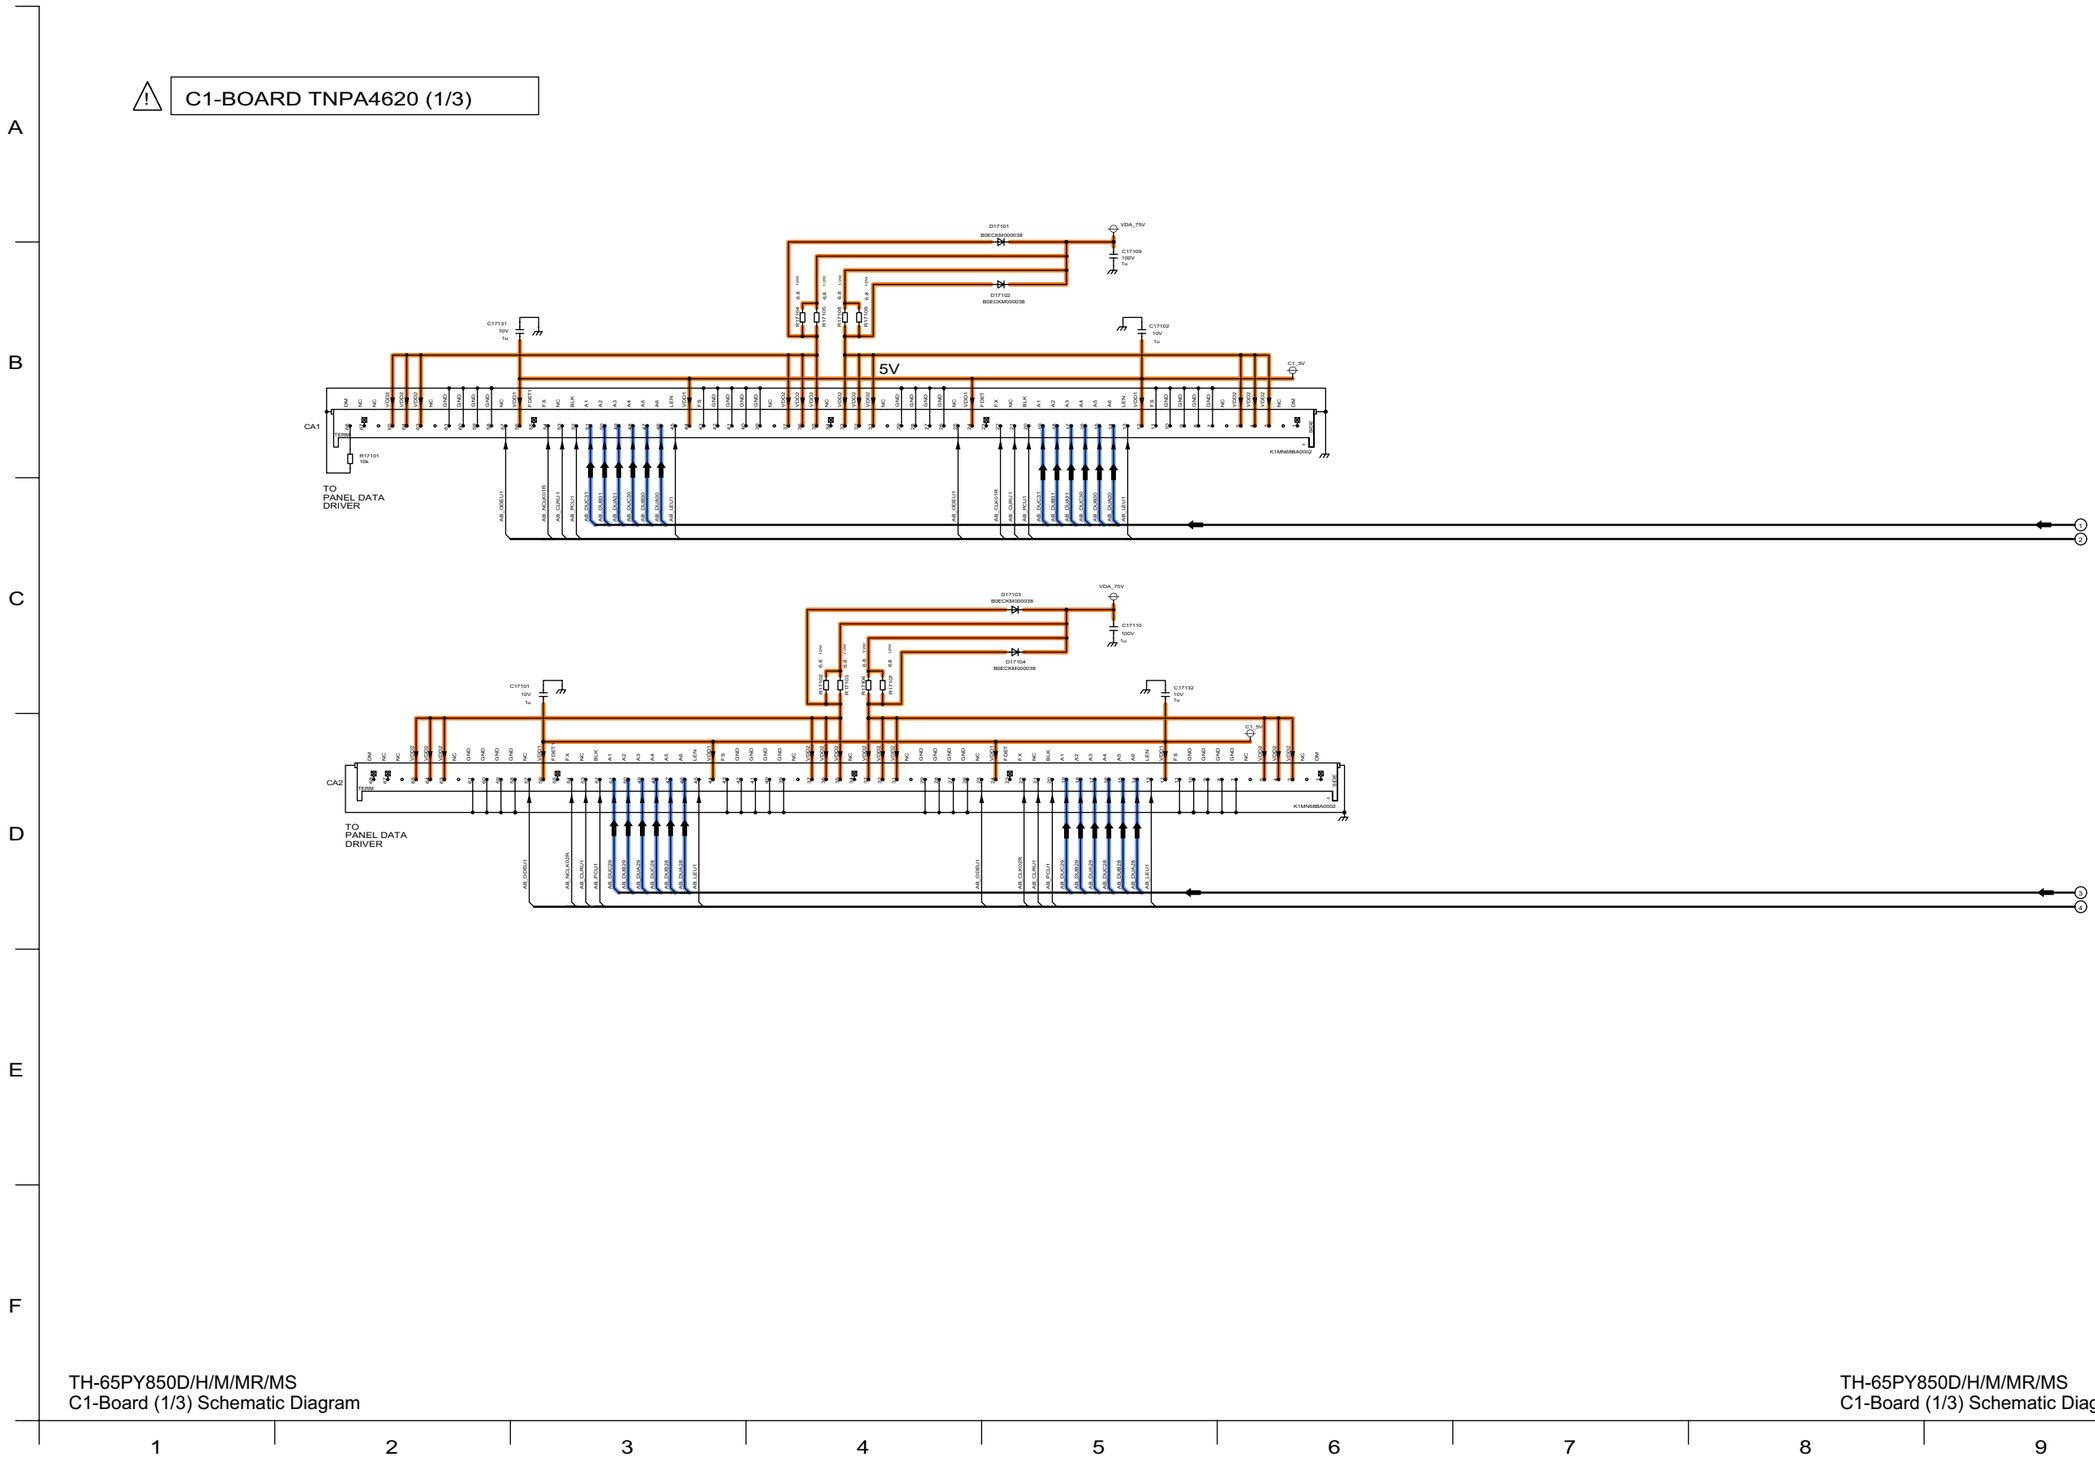

TH-65PY850D/H/M/MR/MS
C1-Board (1/3) Schematic Diagram

11.33. C1-Board (2/3) Schematic Diagram

⚠ C1-BOARD TNPA4620 (2/3)

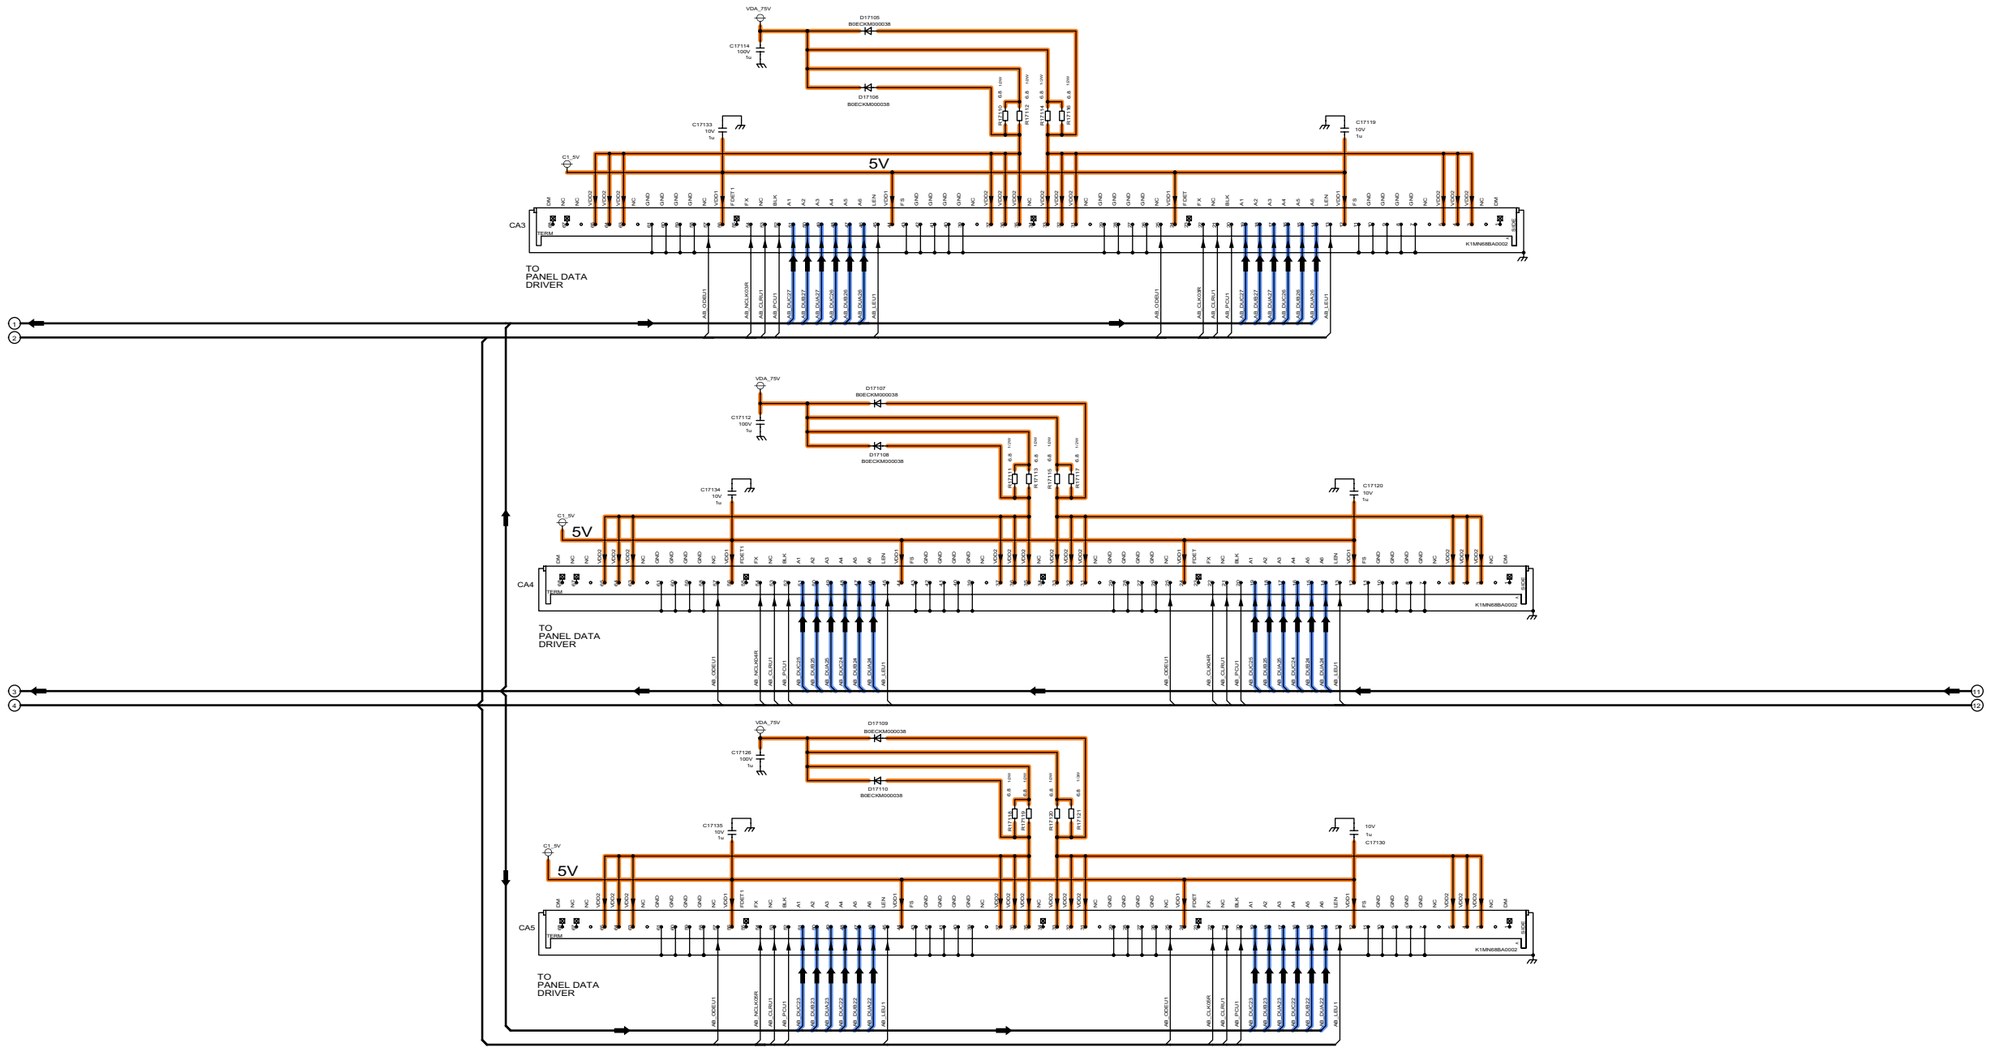


TH-65PY850D/H/M/MR/MS
C1-Board (2/3) Schematic Diagram

10 11 12 13 14 15 16 17 18


11.34. C1-Board (3/3) Schematic Diagram

⚠ C1-BOARD TNPA4620 (3/3)

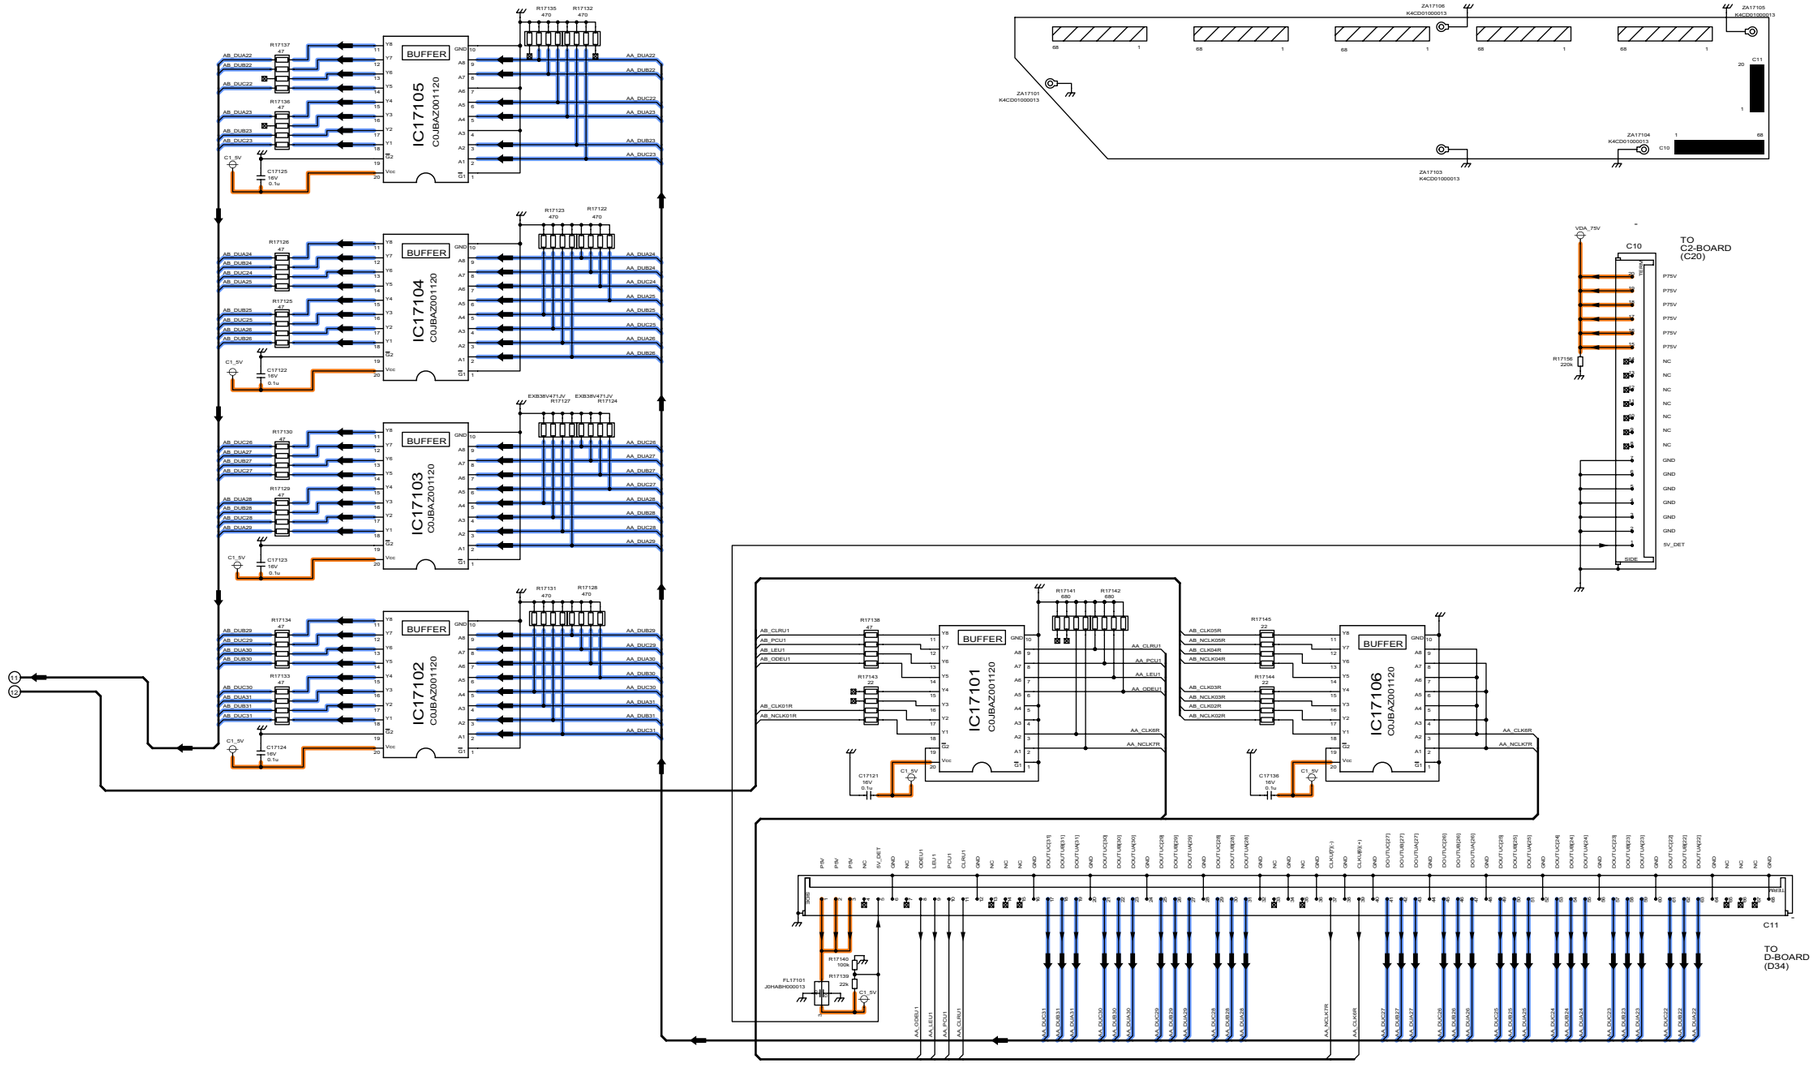


11.35. C2-Board (1/3) Schematic Diagram

C2-BOARD TNPA4621 (1/3)

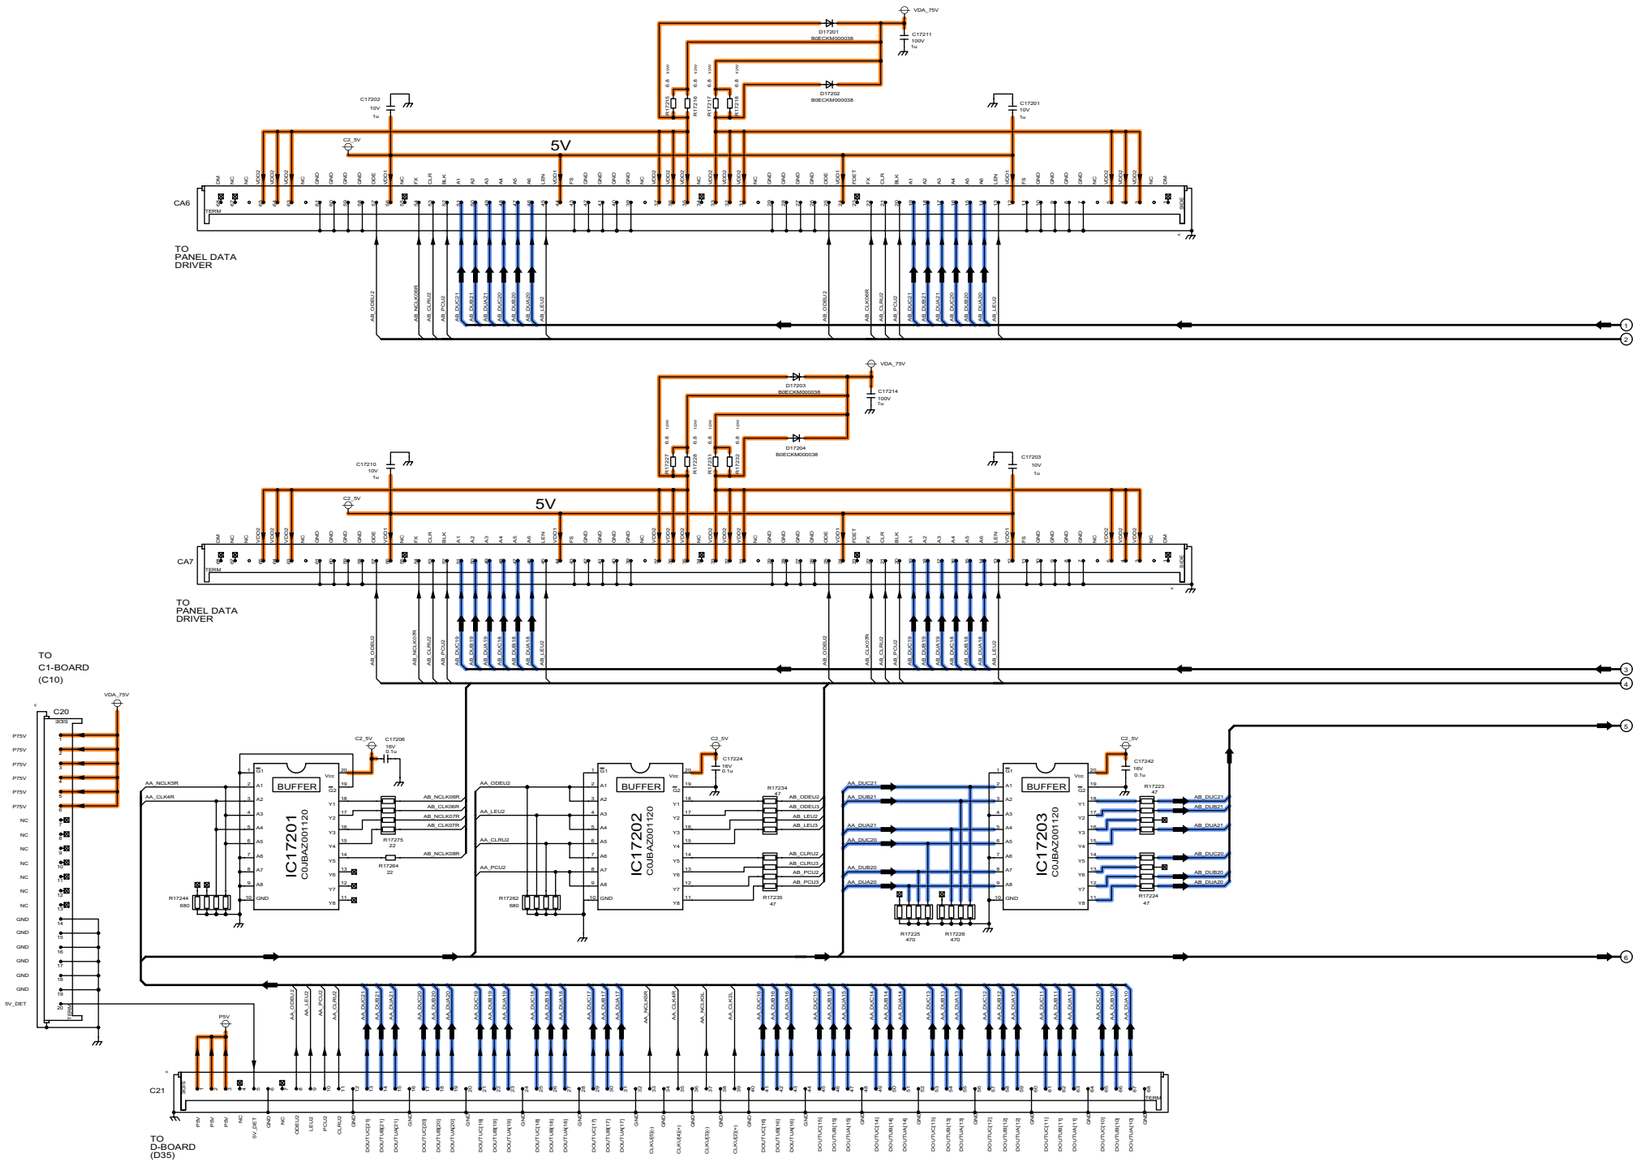


11.36. C2-Board (2/3) Schematic Diagram

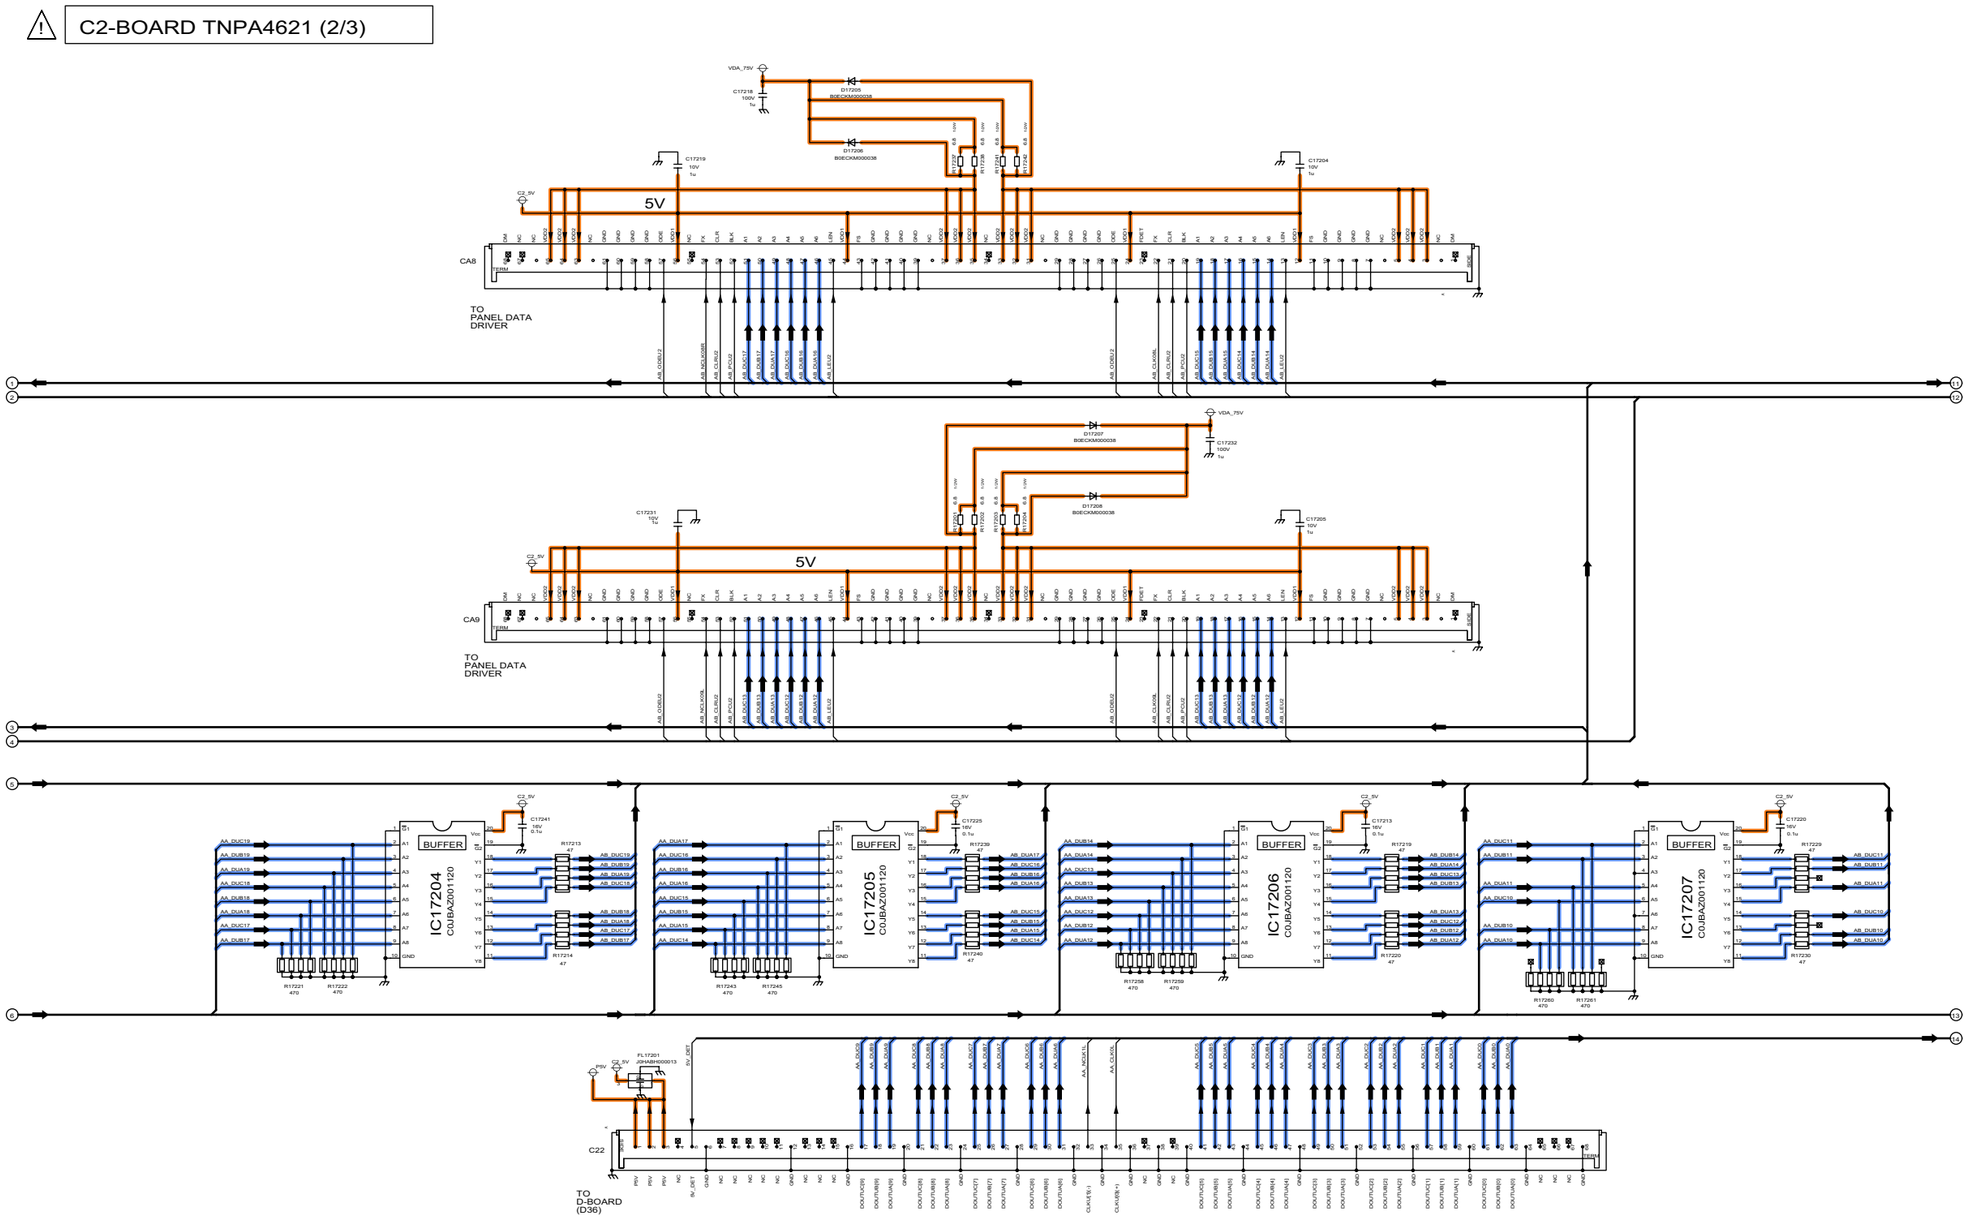


TH-65PY850D/H/M/MR/MS
C2-Board (2/3) Schematic Diagram

11.37. C2-Board (3/3) Schematic Diagram

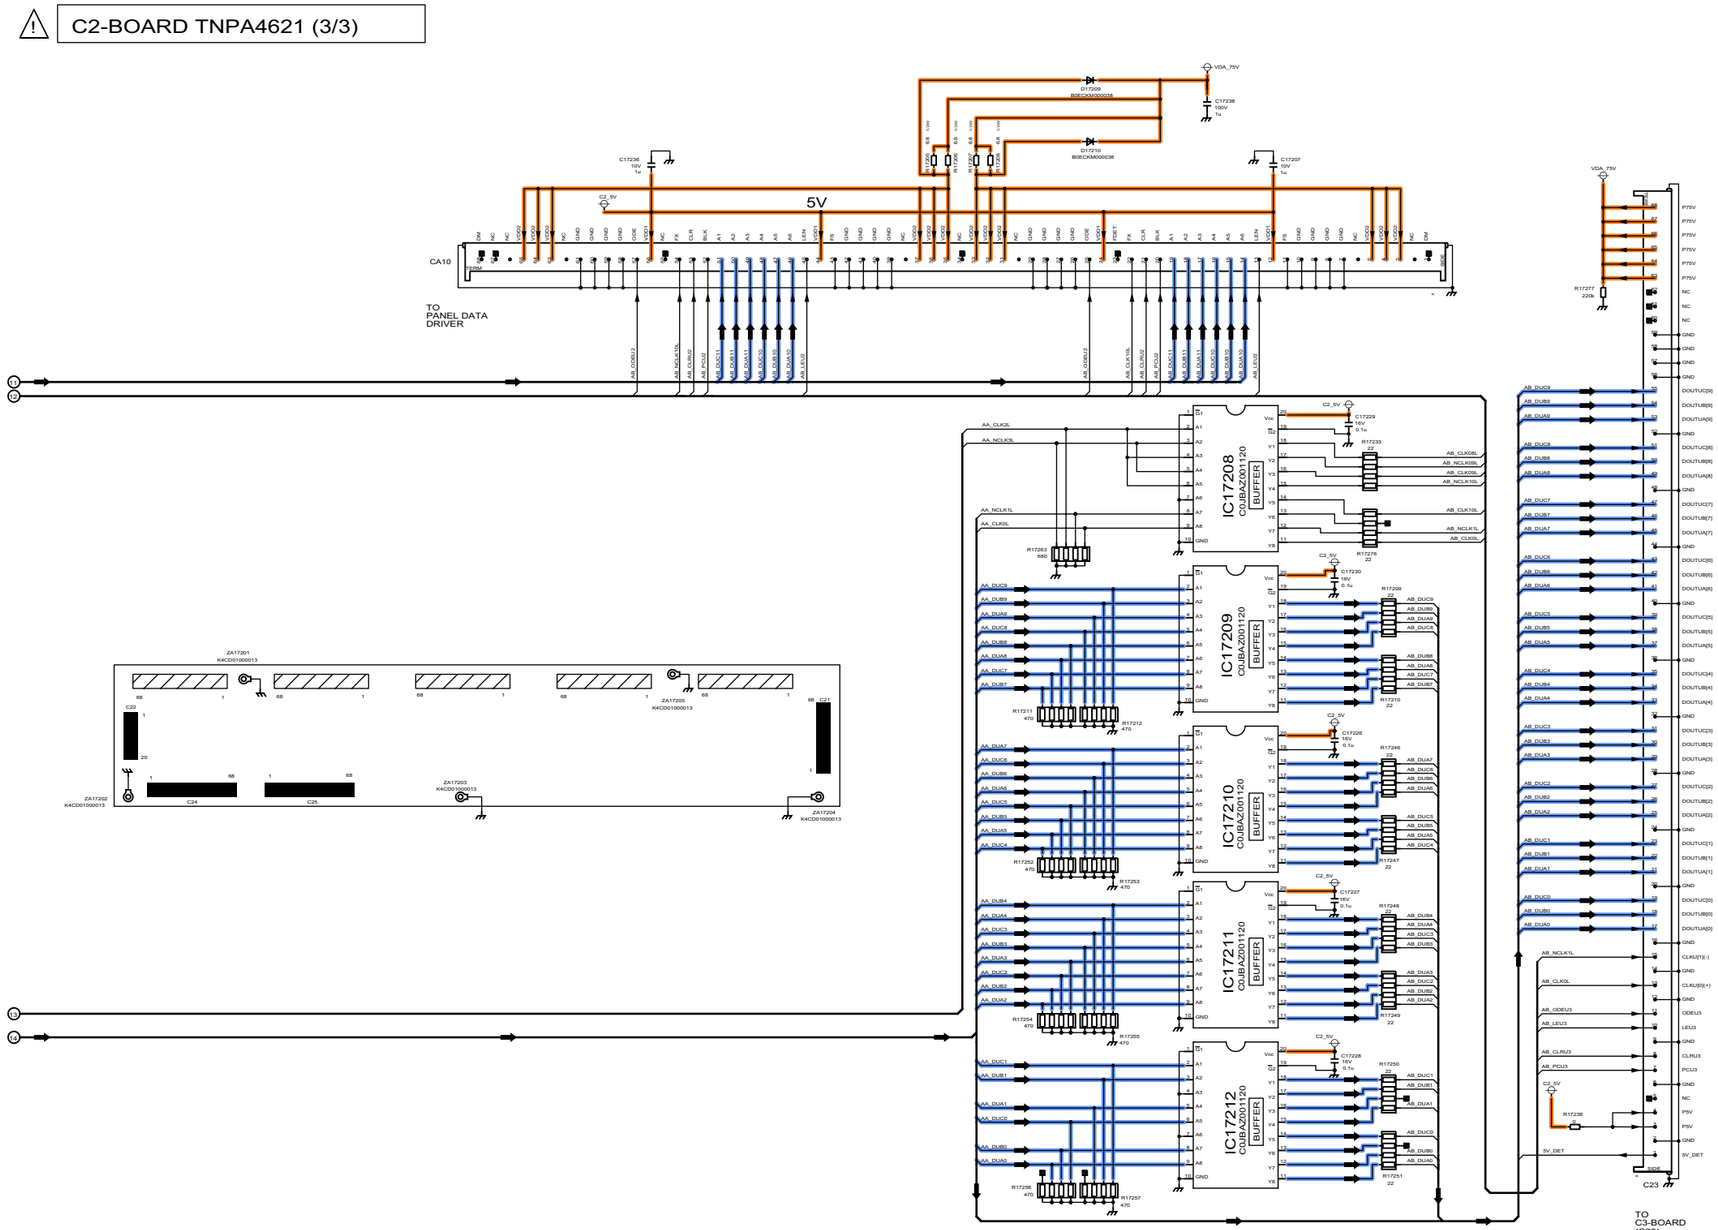

TH-65PY850D/H/M/MR/MS
C2-Board (3/3) Schematic Diagram


11.38. C3-Board (1/2) Schematic Diagram

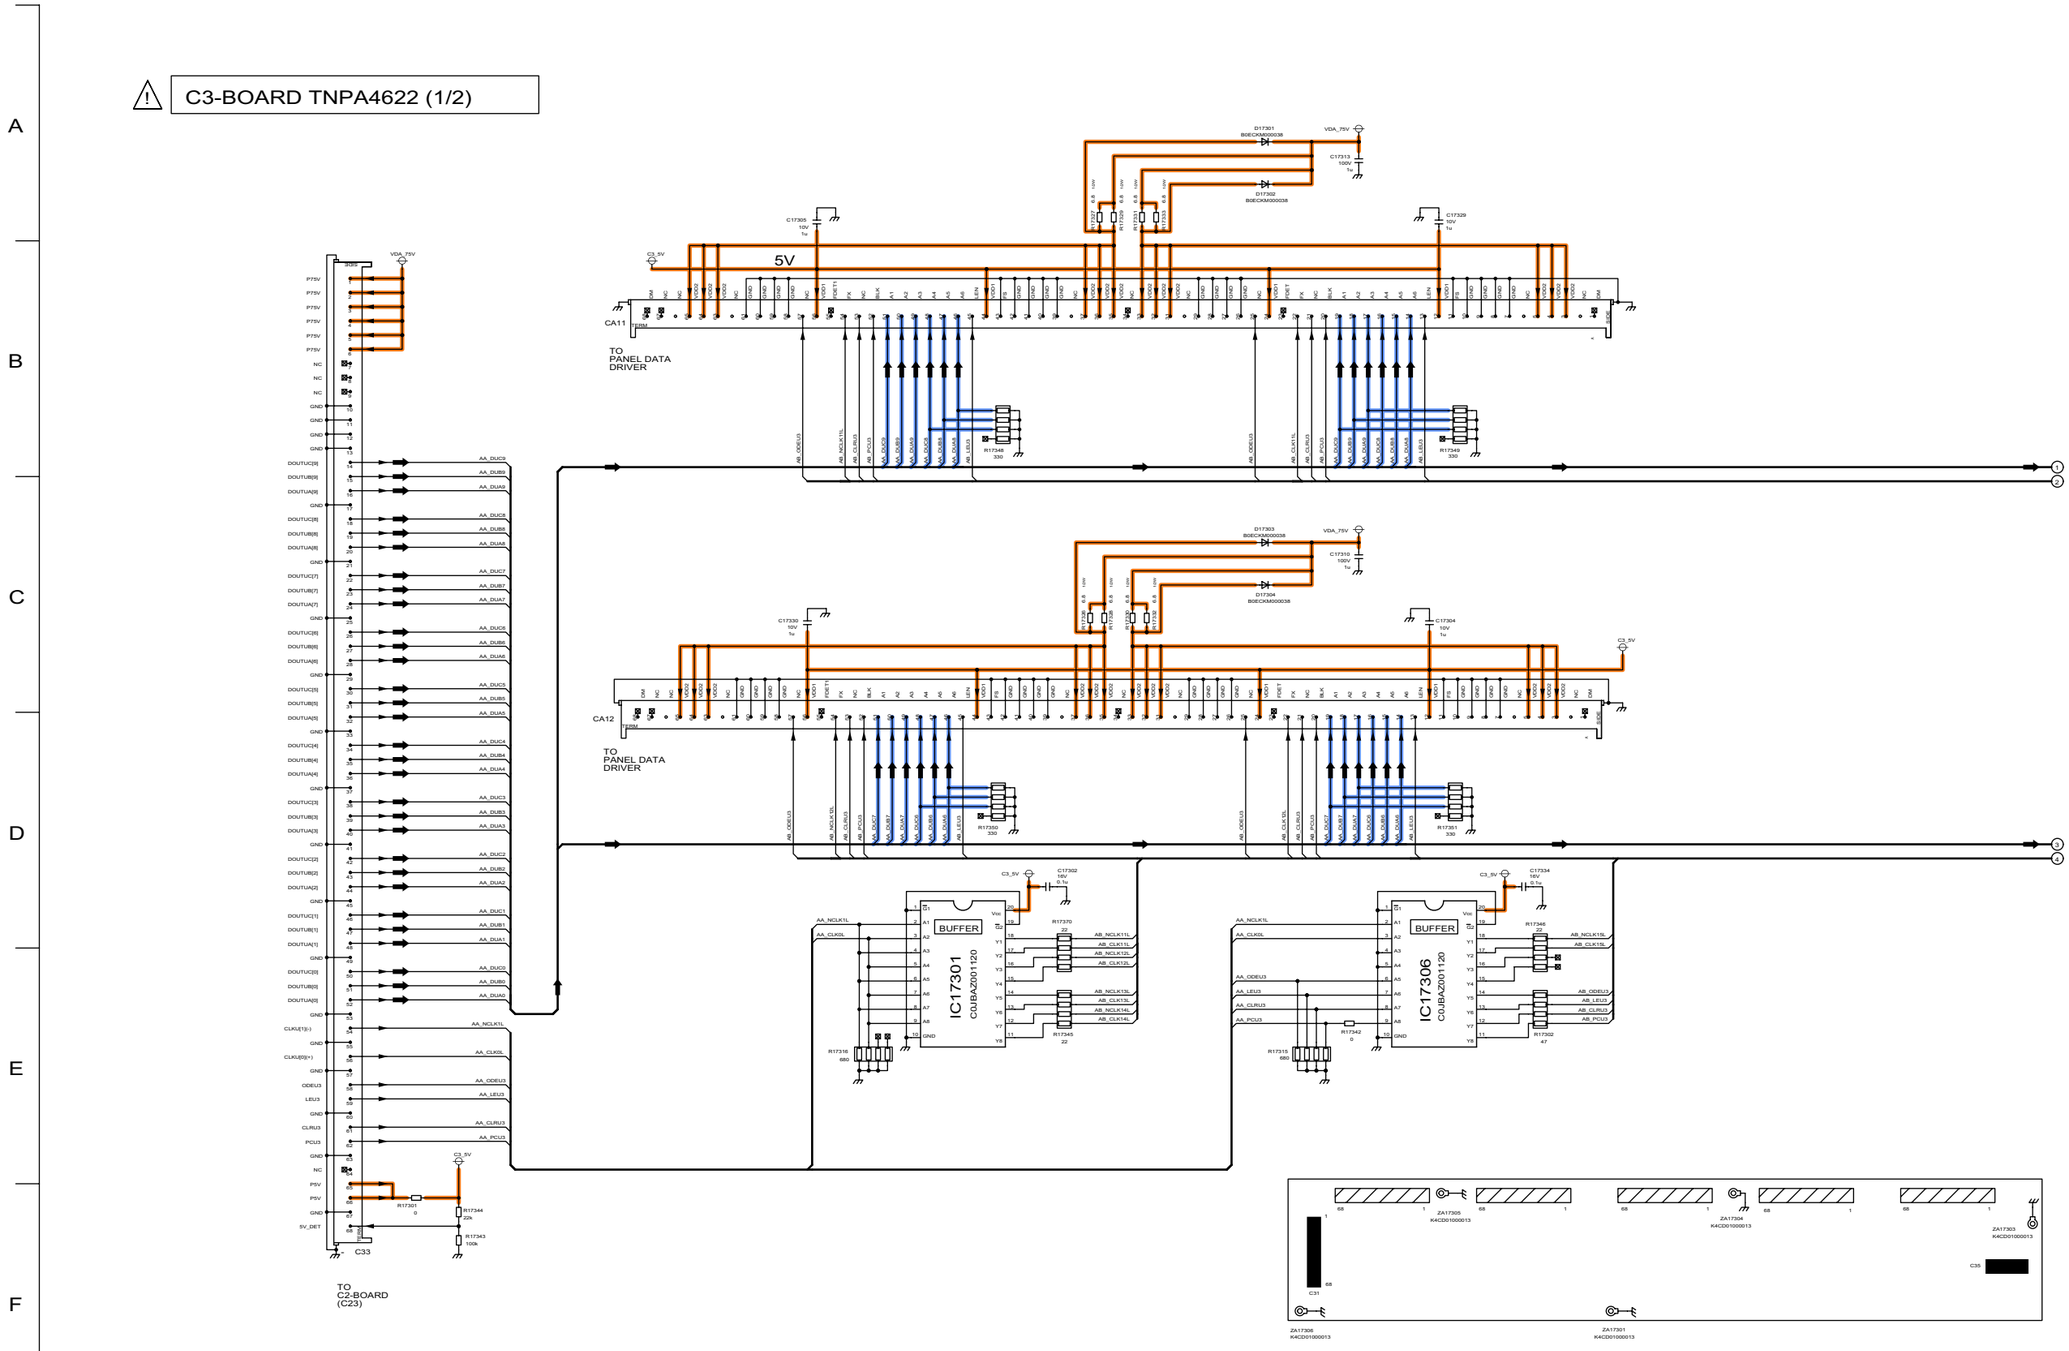

TH-65PY850D/H/M/MR/MS
C3-Board (1/2) Schematic Diagram


TH-65PY850D/H/M/MR/MS
C3-Board (1/2) Schematic Diagram

11.39. C3-Board (2/2) Schematic Diagram

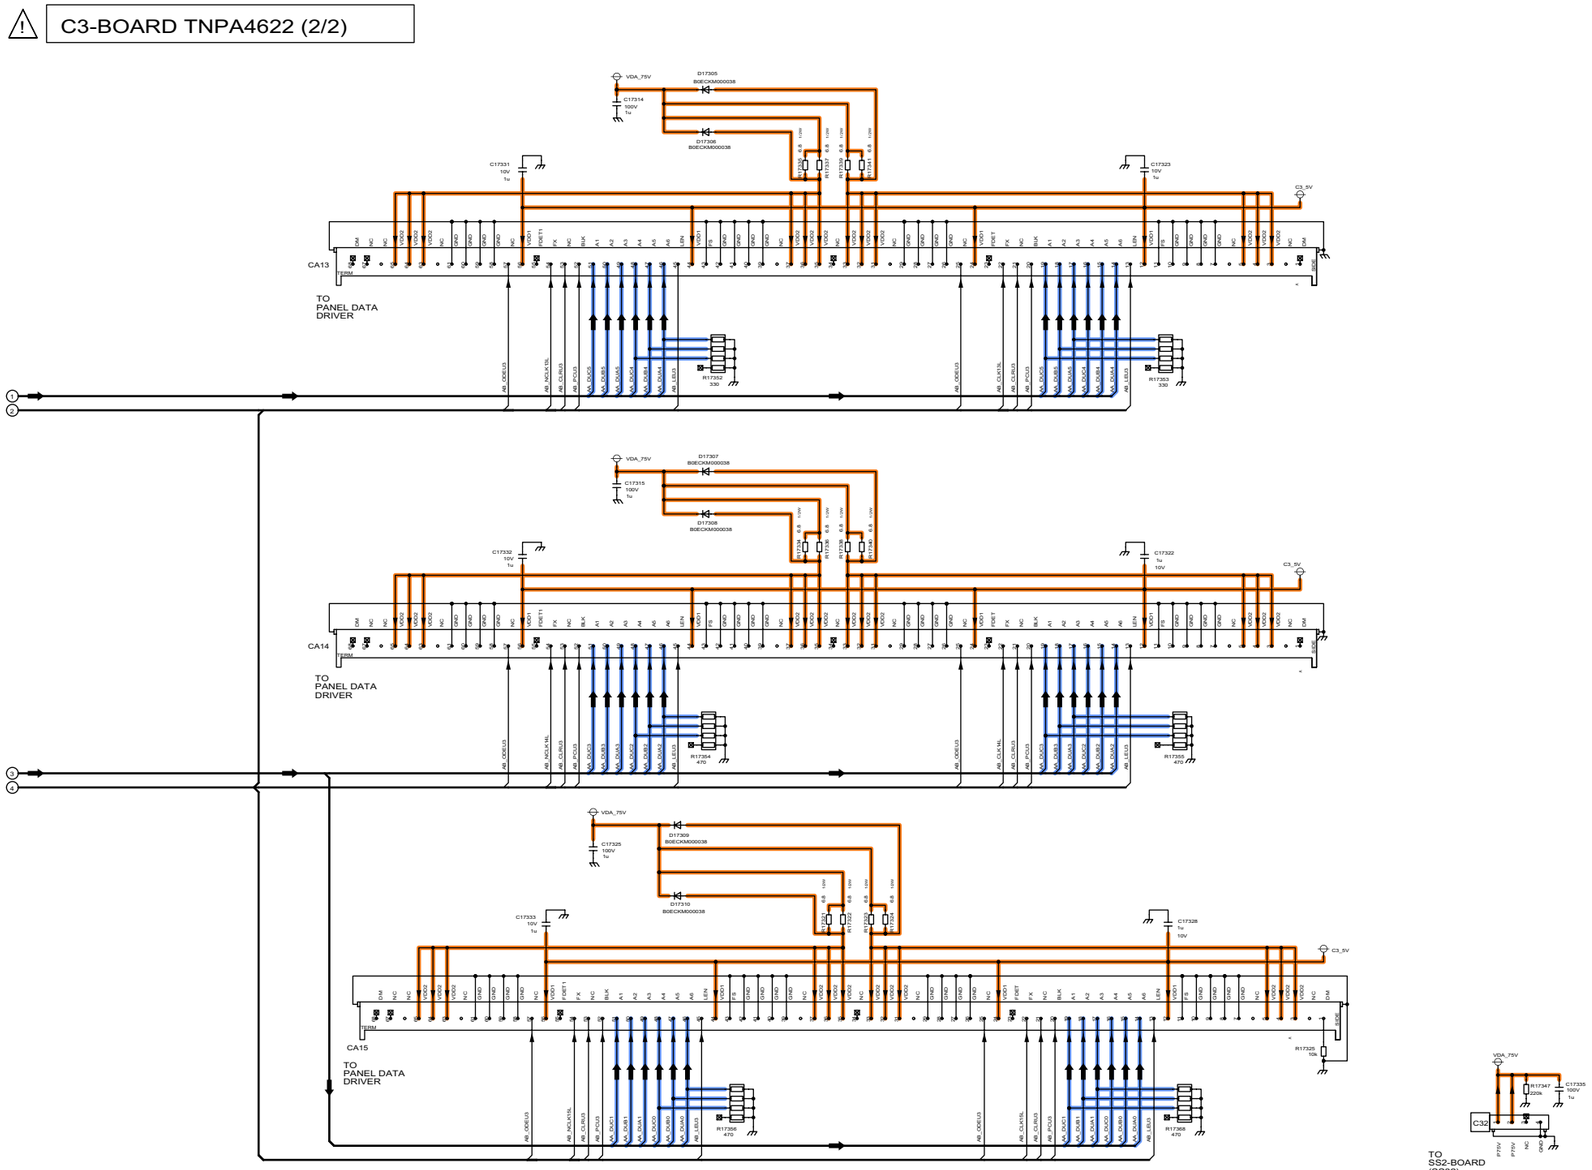

TH-65PY850D/H/M/MR/MS
C3-Board (2/2) Schematic Diagram

11.40. C4-Board (1/2) Schematic Diagram

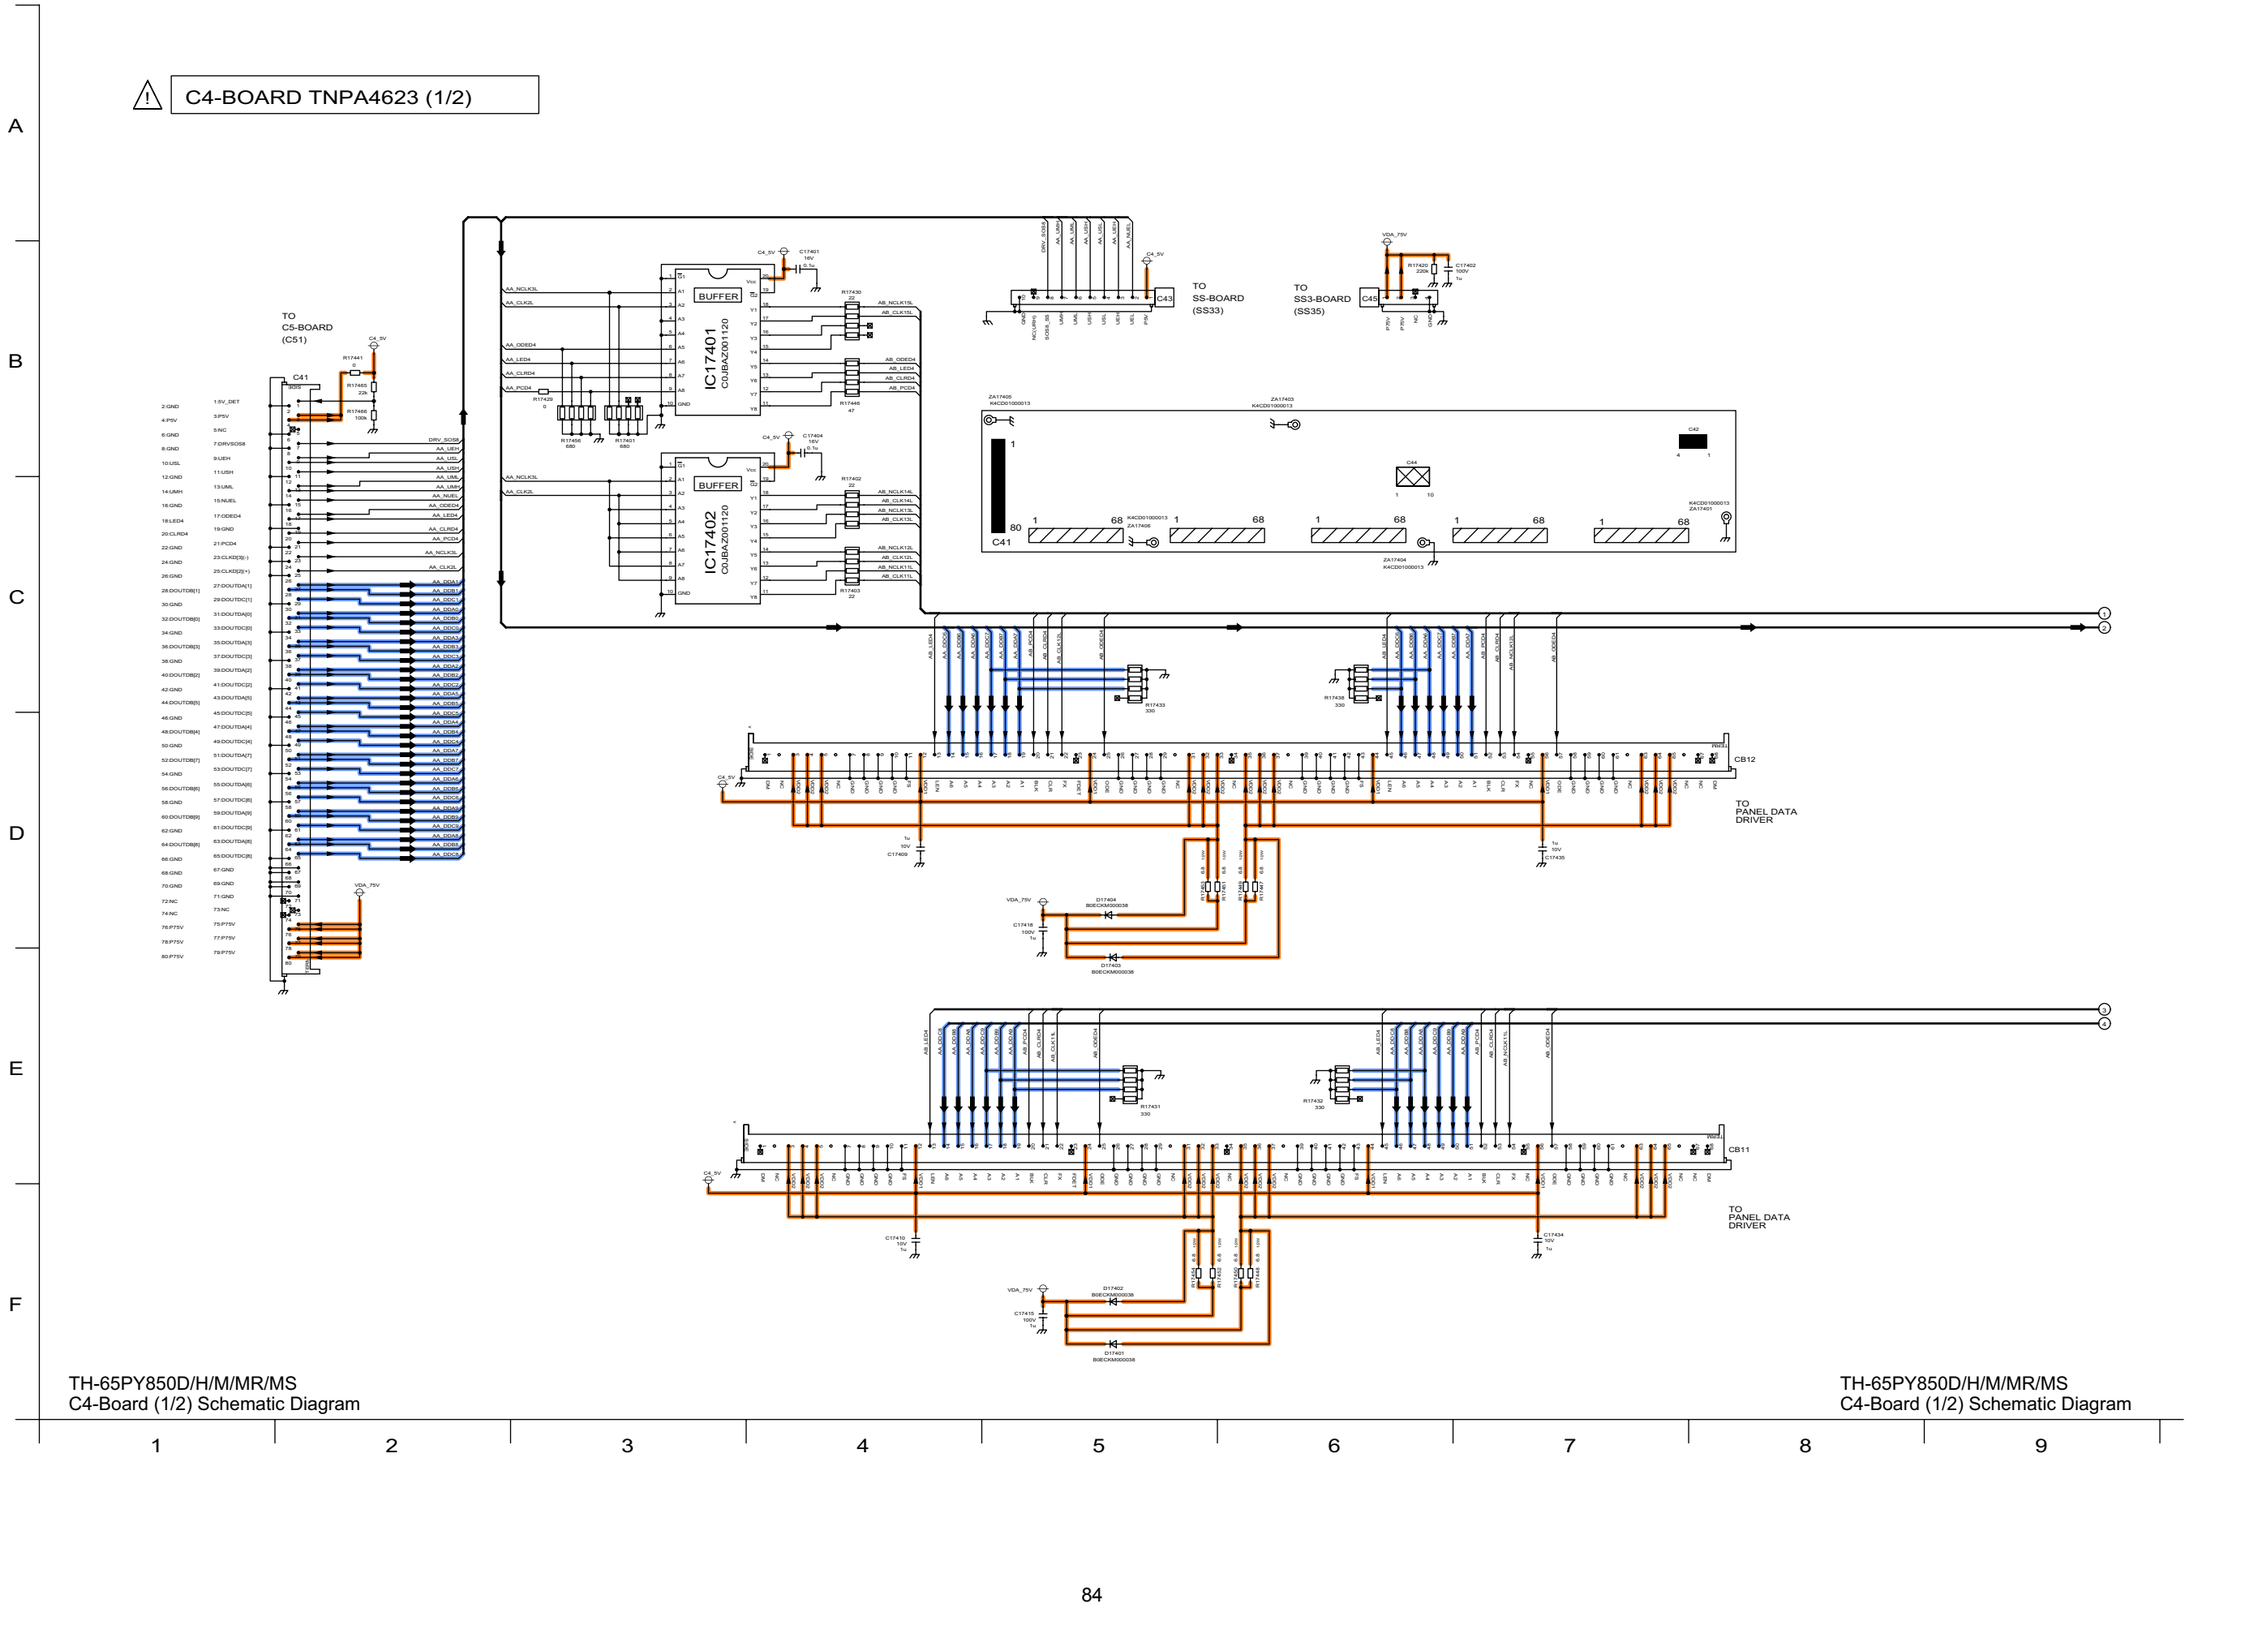


TH-65PY850D/H/M/MR/MS
C4-Board (1/2) Schematic Diagram

TH-65PY850D/H/M/MR/MS
C4-Board (1/2) Schematic Diagram

11.41. C4-Board (2/2) Schematic Diagram

⚠ C4-BOARD TNPA4623 (2/2)

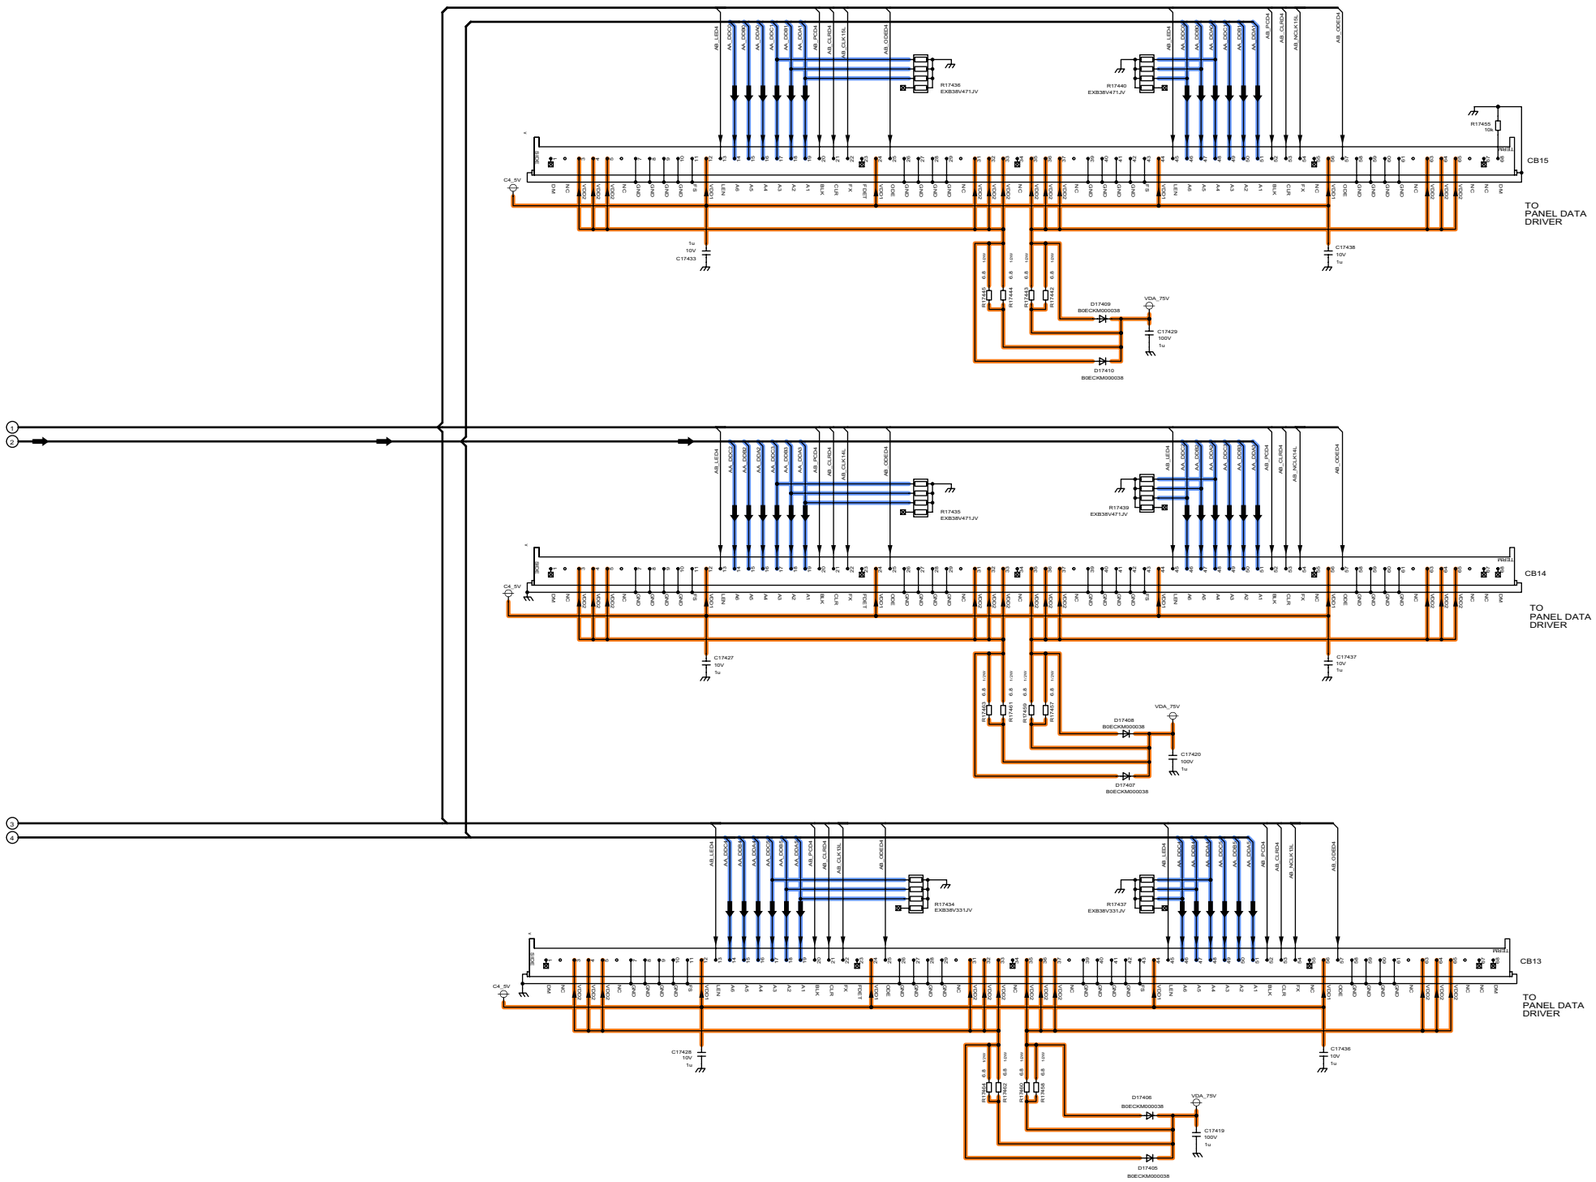


TH-65PY850D/H/M/MR/MS
C4-Board (2/2) Schematic Diagram

TH-65PY850D/H/M/MR/MS
C4-Board (2/2) Schematic Diagram


10 11 12 13 14 15 16 17 18

11.42. C5-Board (1/3) Schematic Diagram

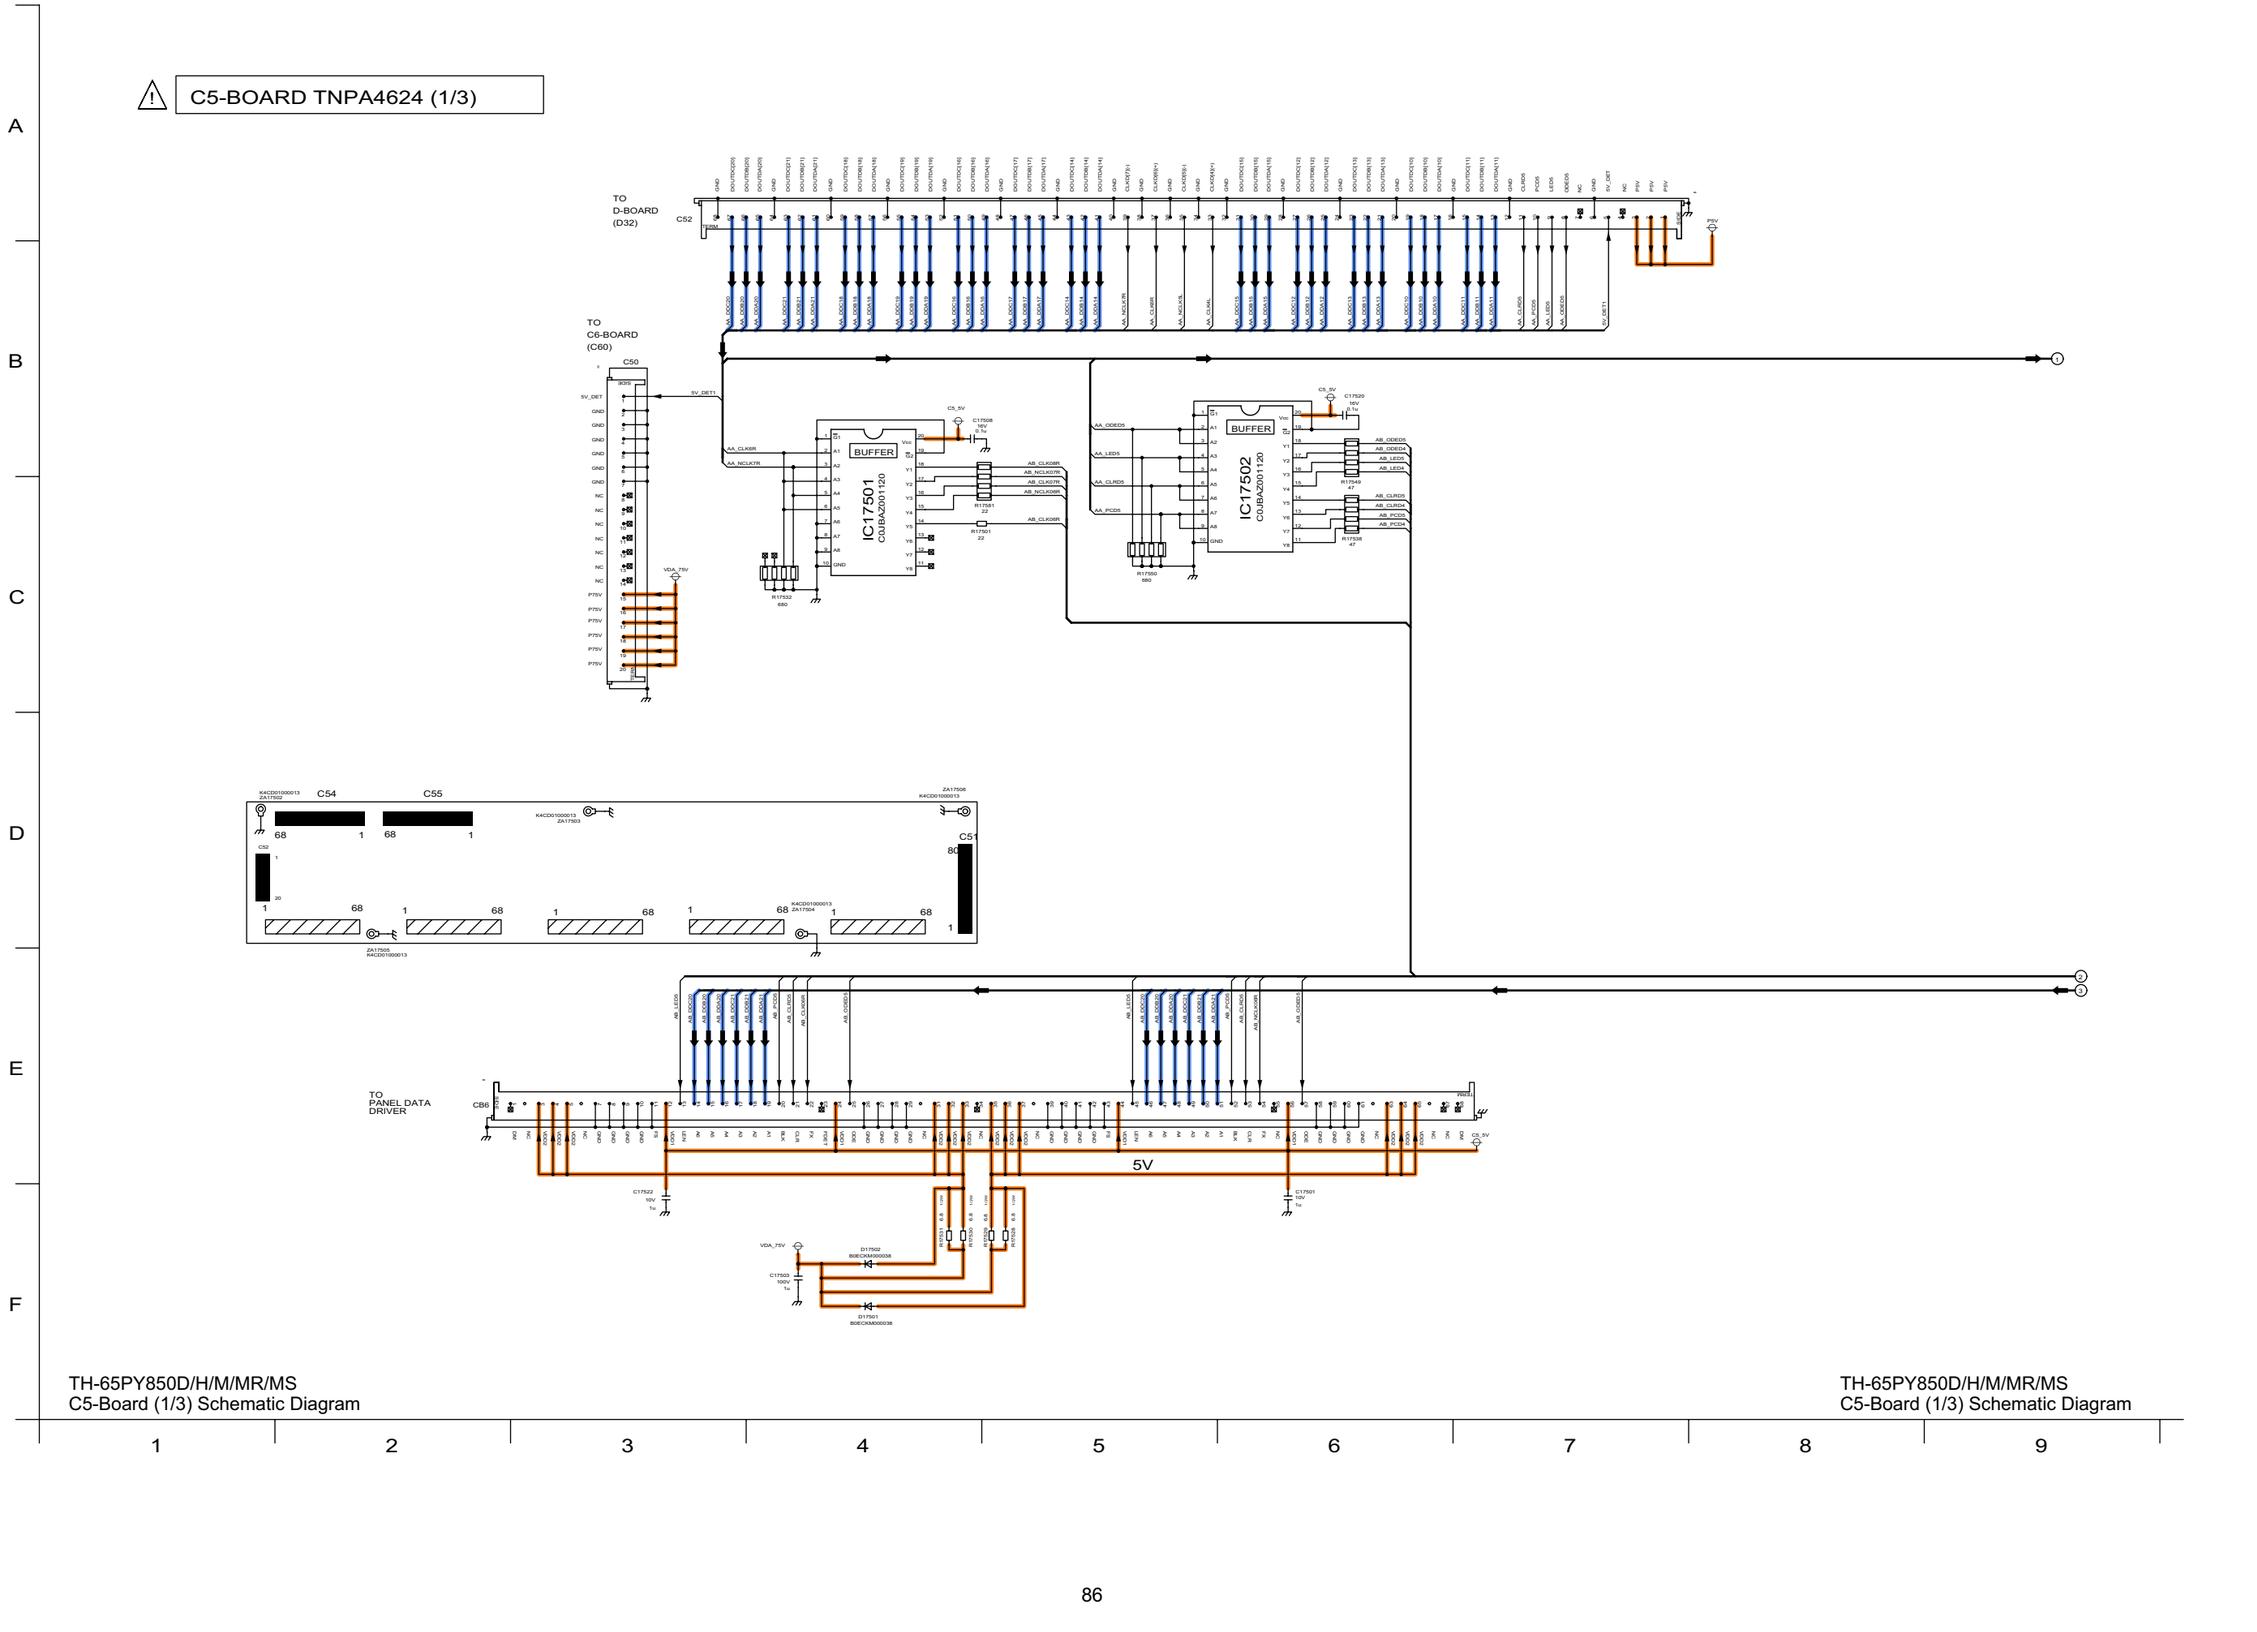


11.43. C5-Board (2/3) Schematic Diagram

⚠ C5-BOARD TNPA4624 (2/3)

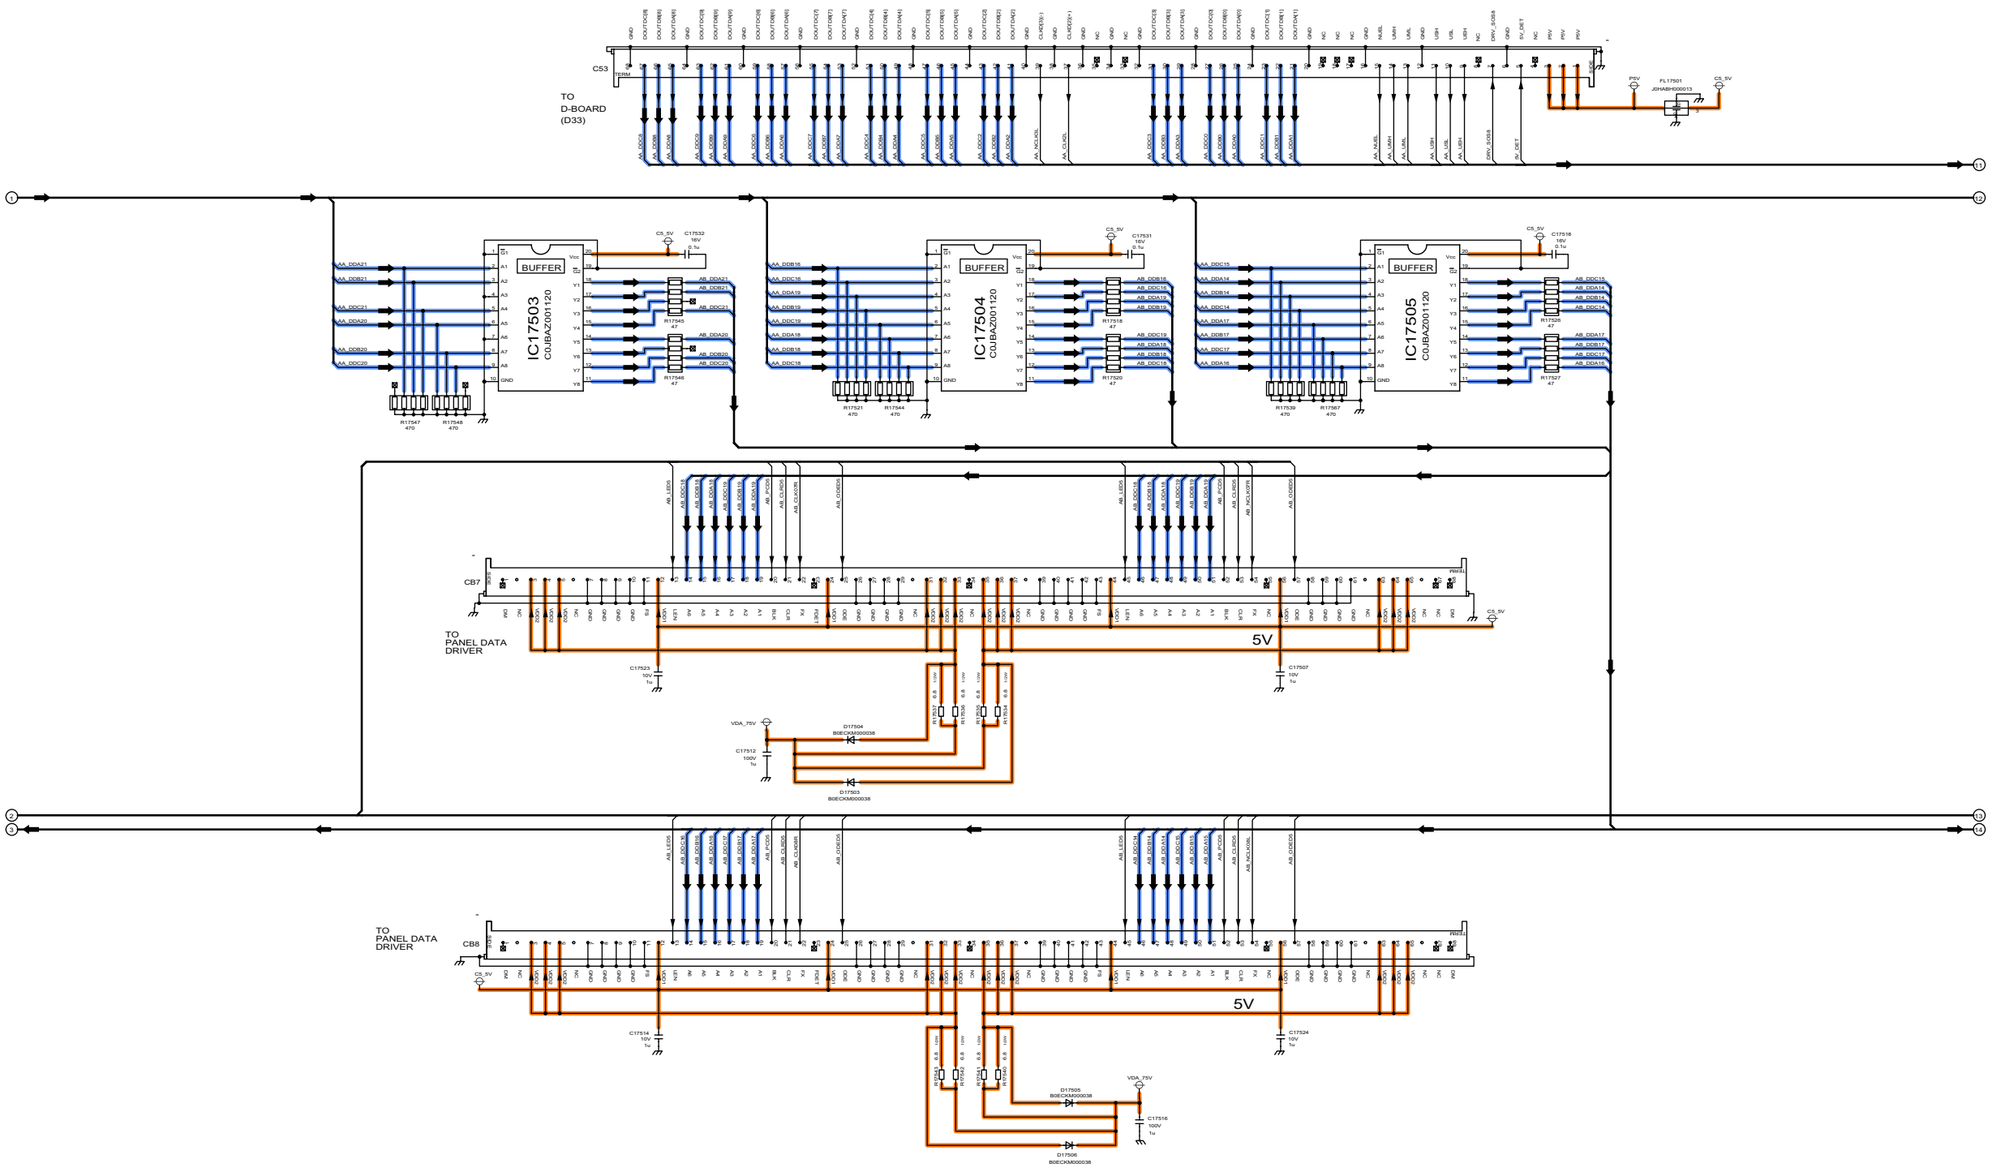


11.44. C5-Board (3/3) Schematic Diagram

C5-BOARD TNPA4624 (3/3)

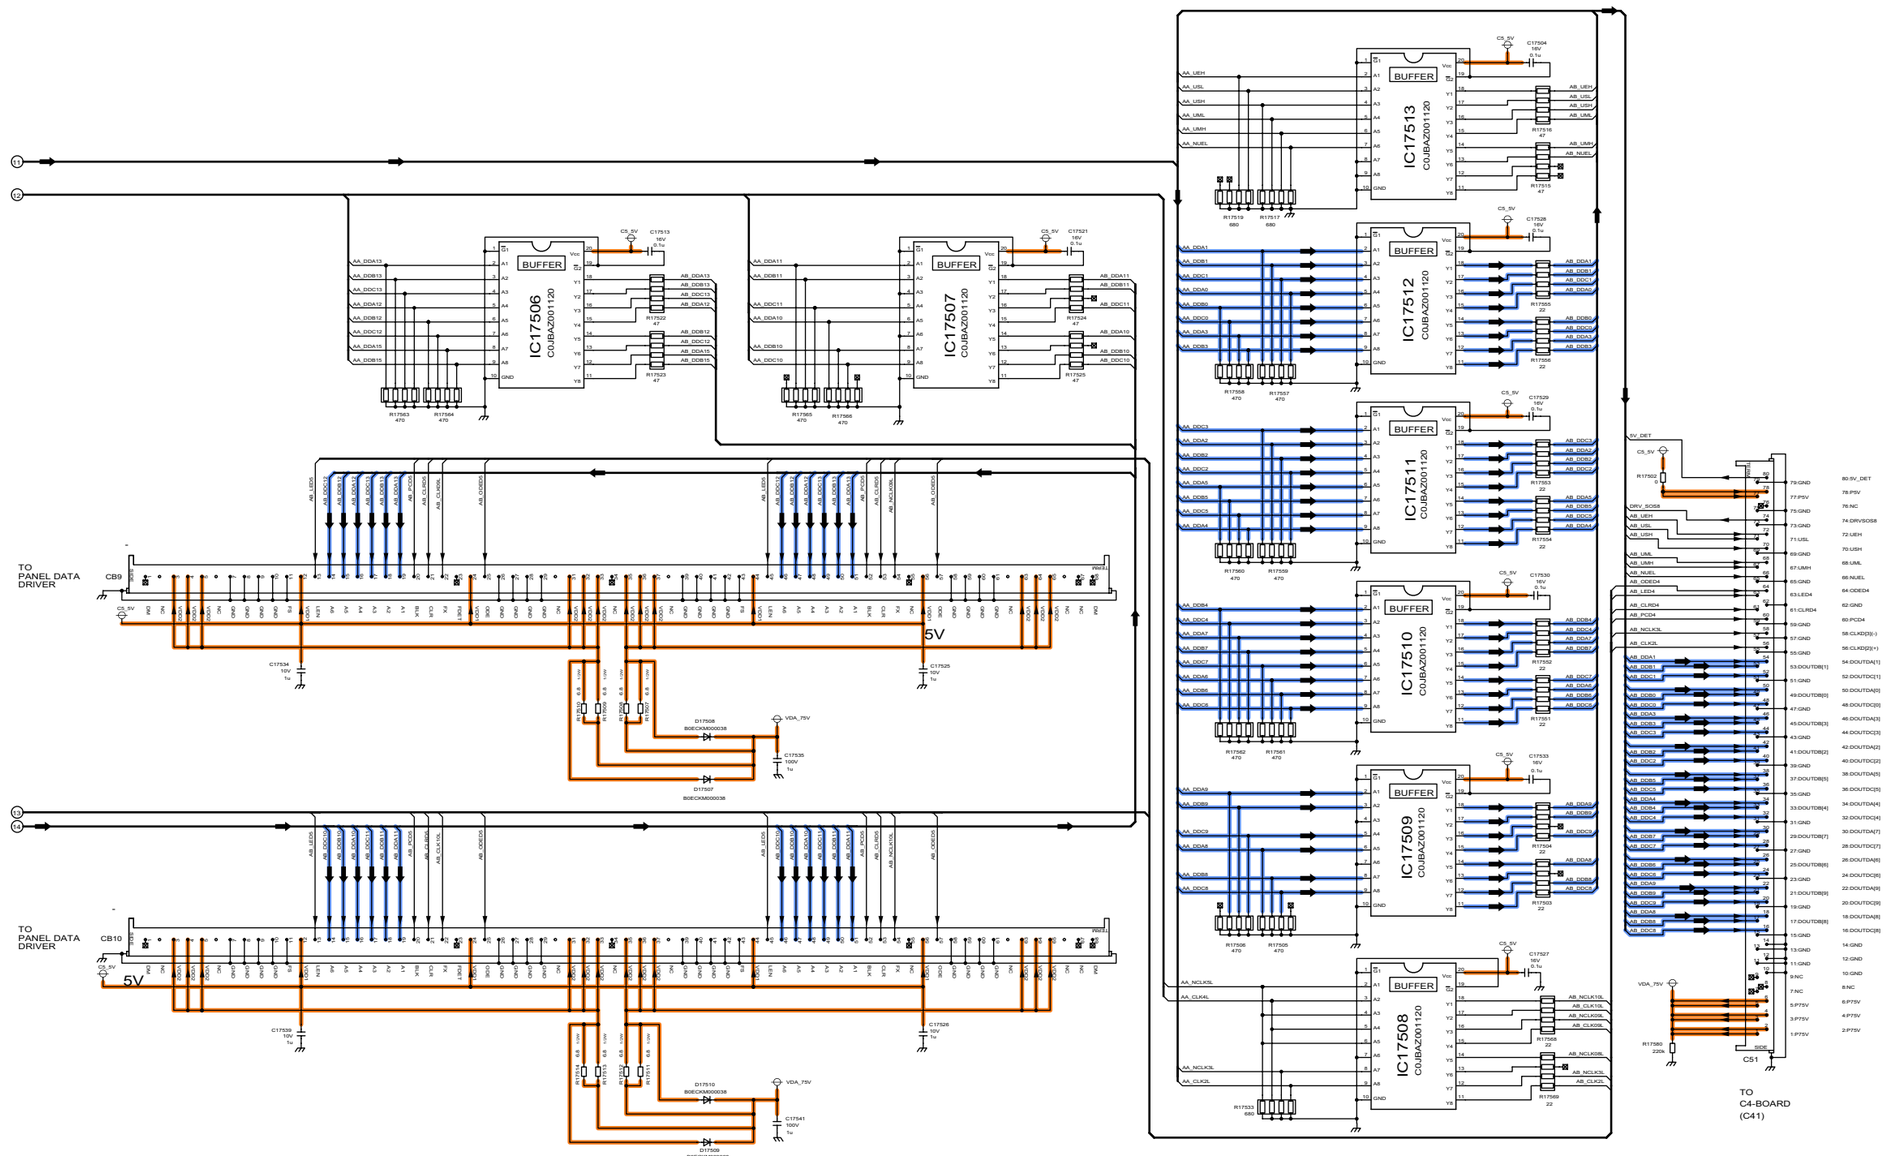


11.45. C6-Board (1/2) Schematic Diagram

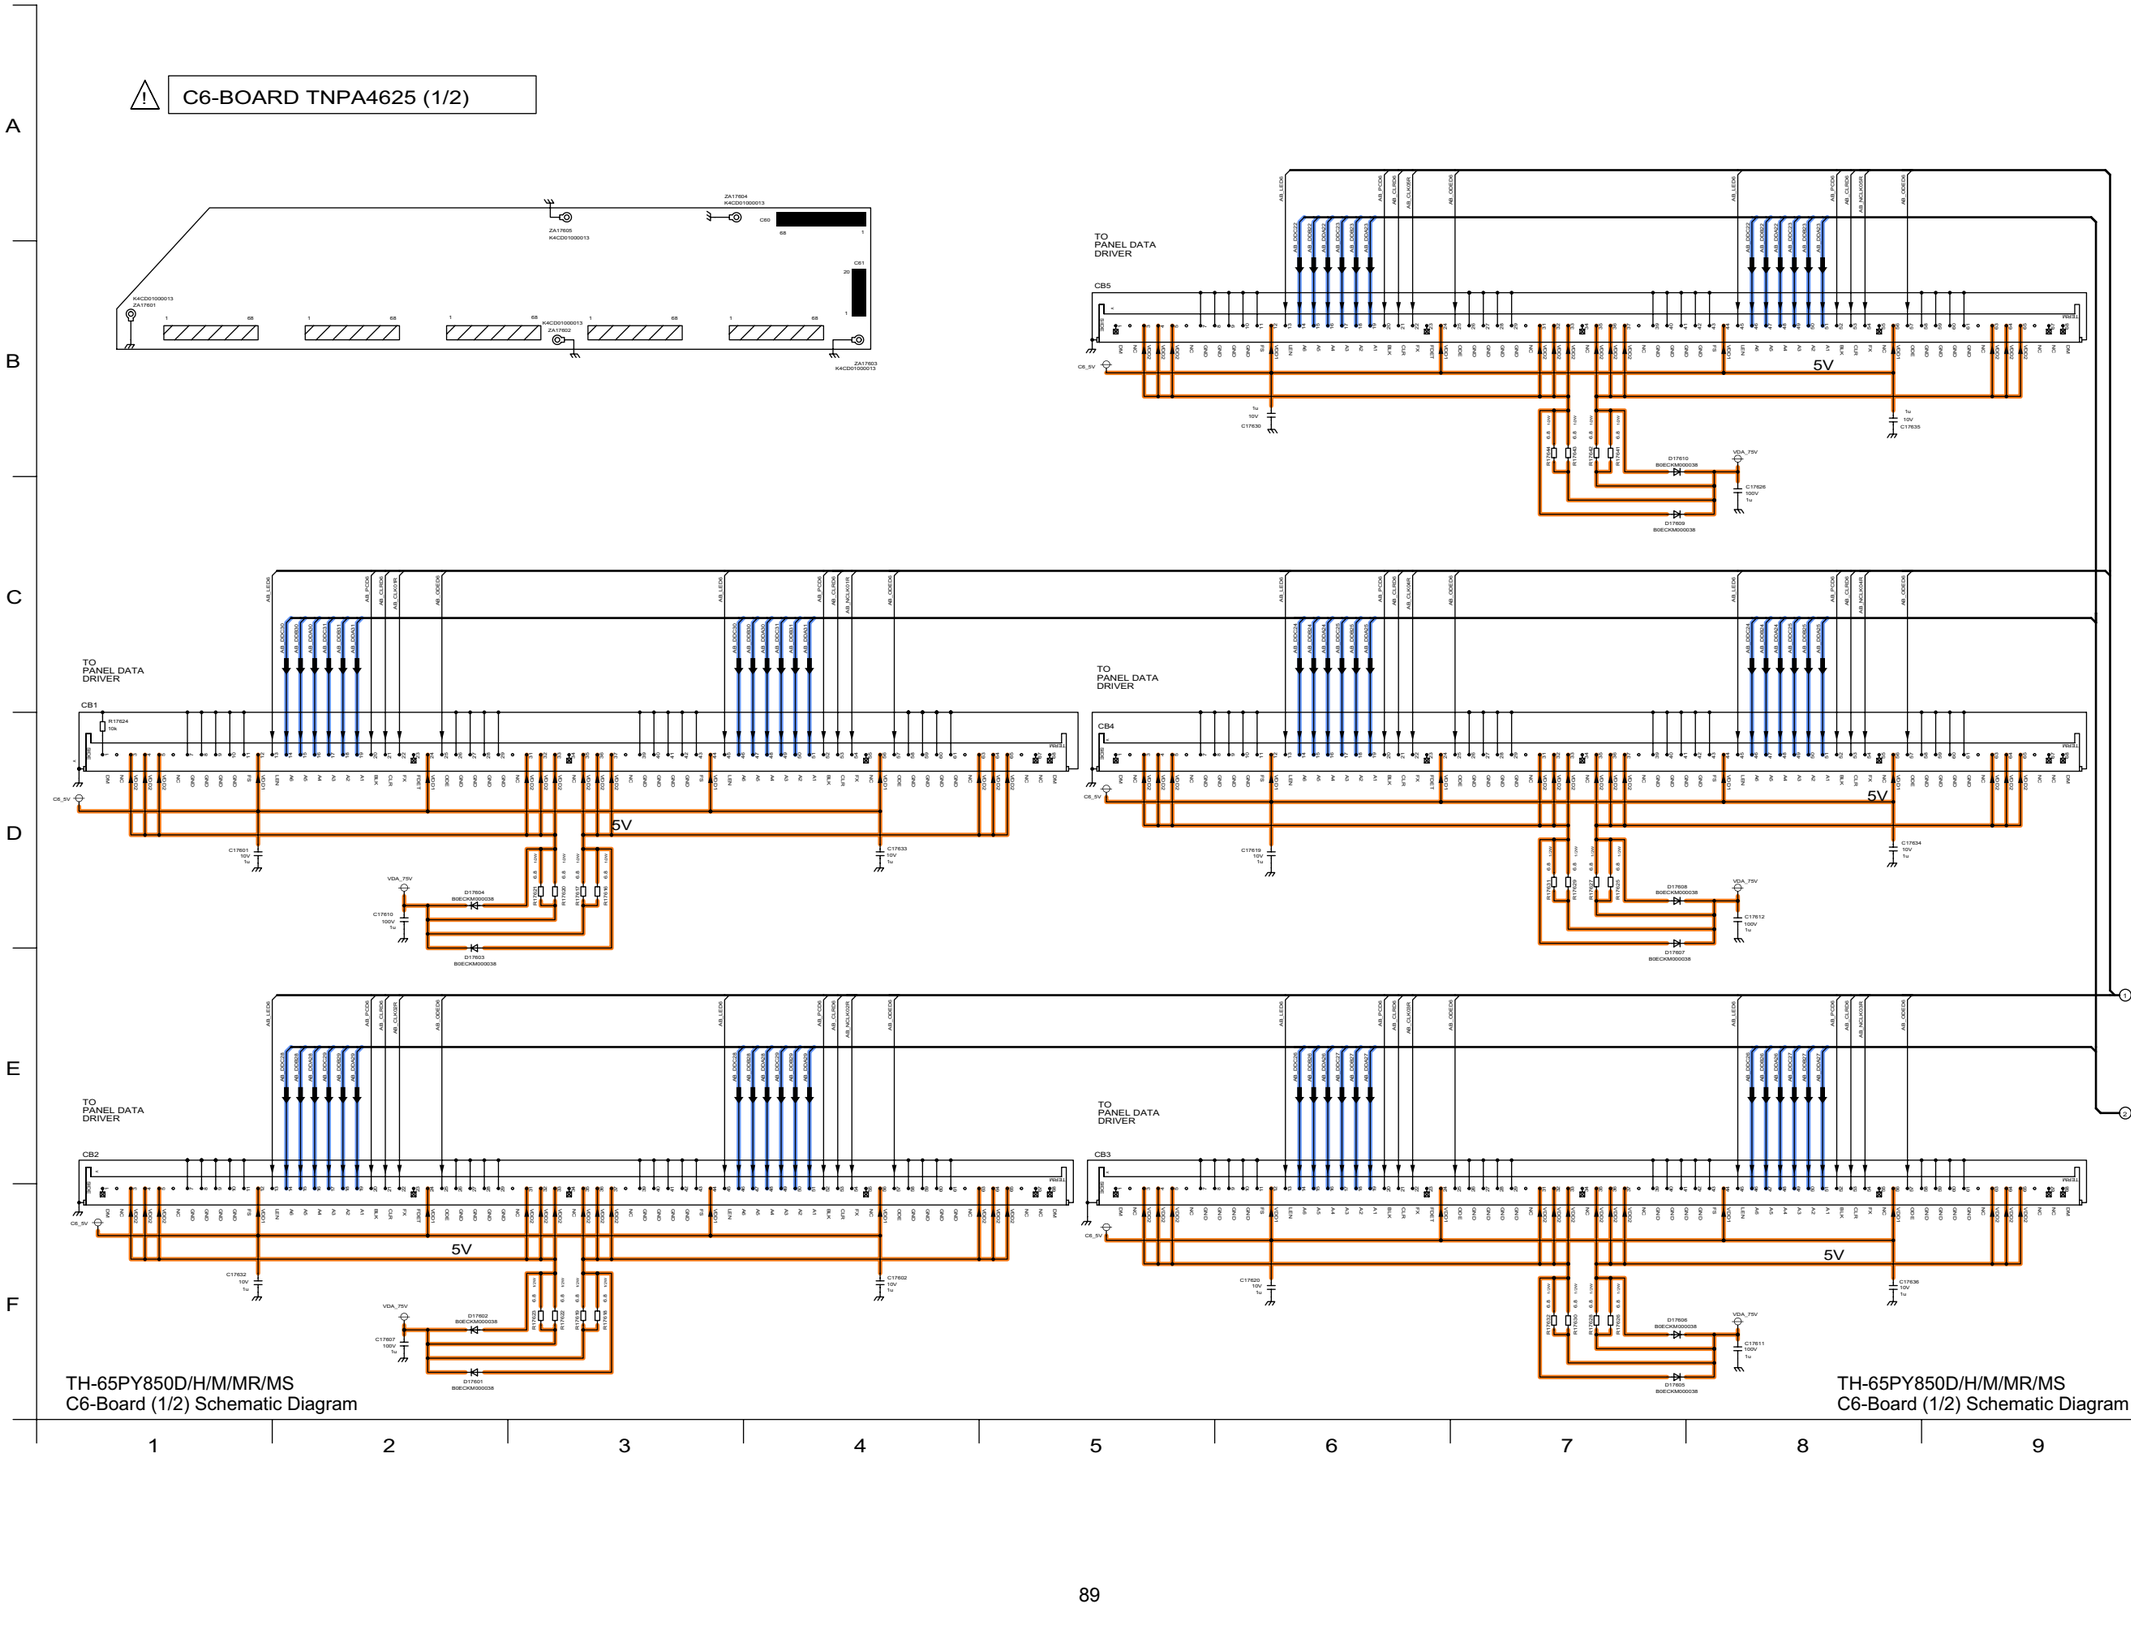

11.46. C6-Board (2/2) Schematic Diagram

C6-BOARD TNPA4625 (2/2)

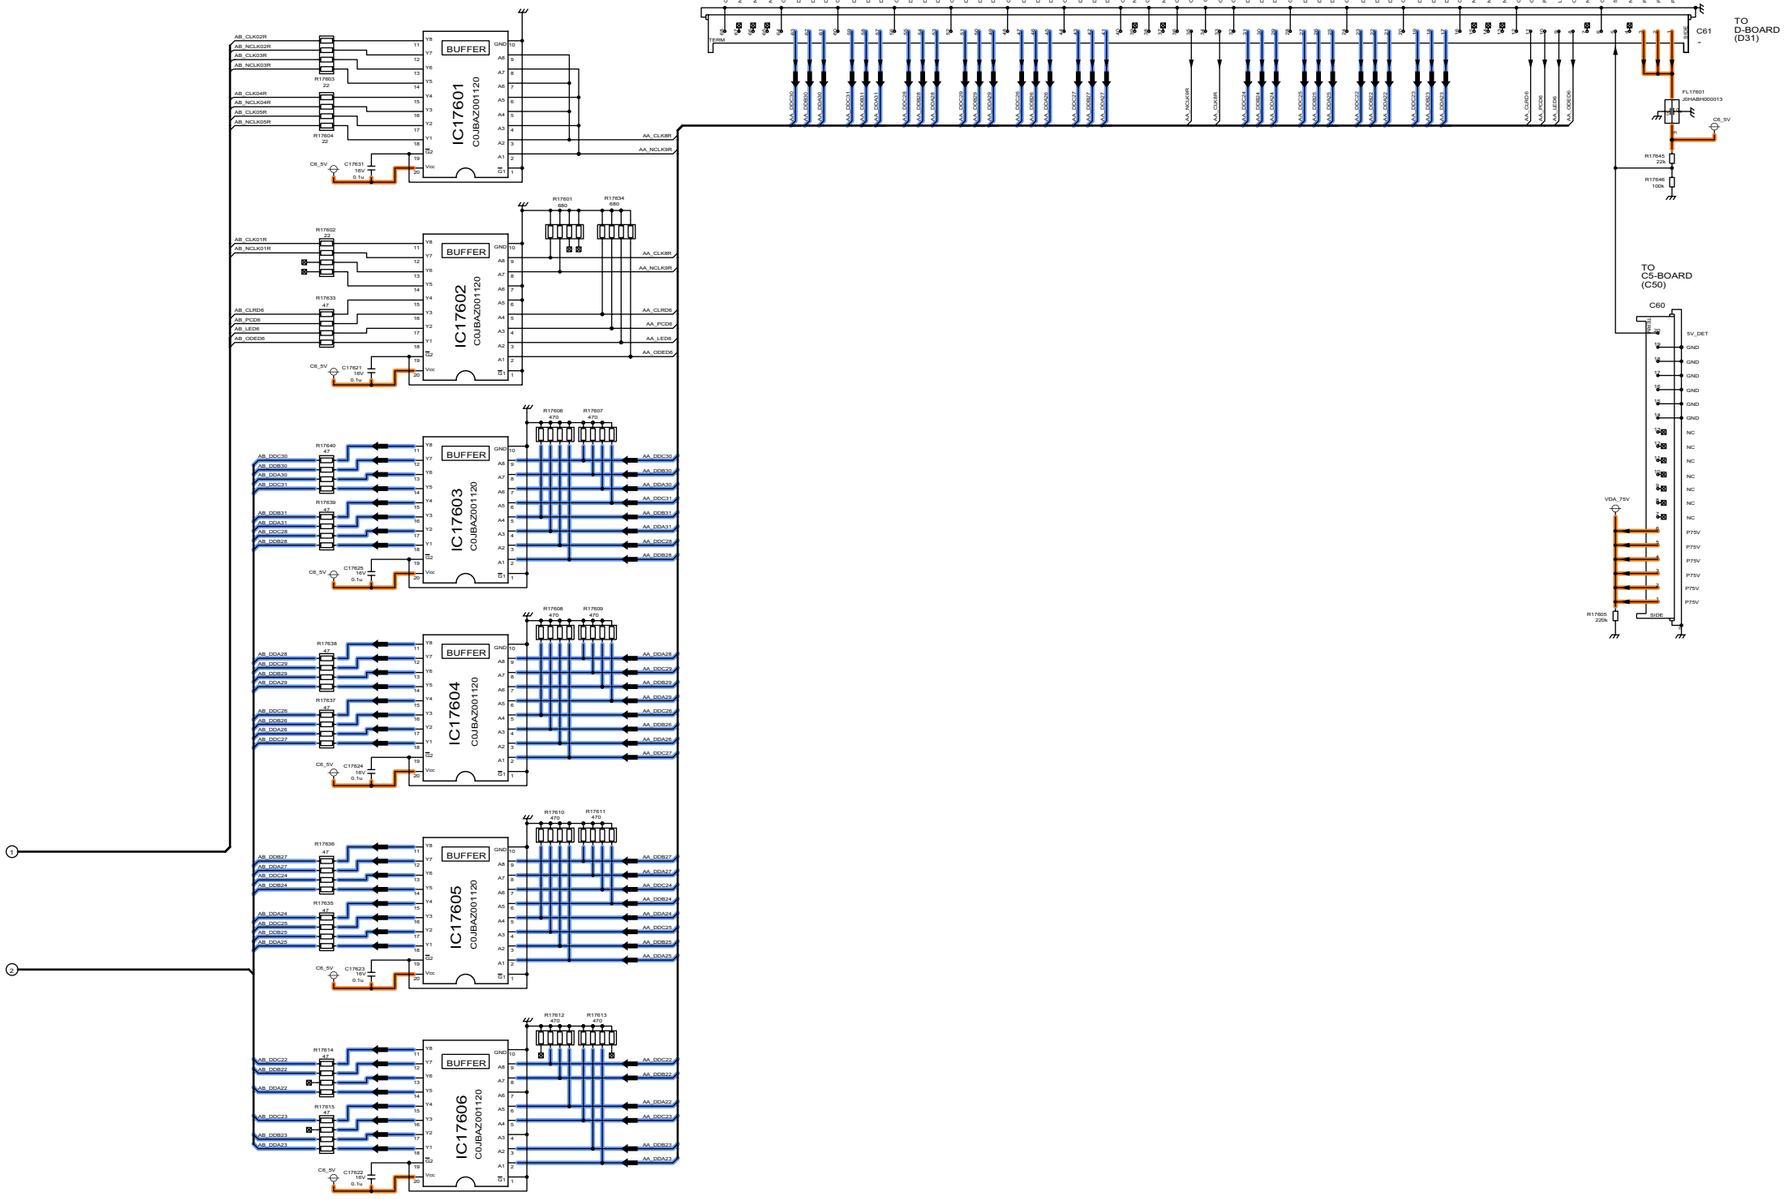


TH-65PY850D/H/M/MR/MS
C6-Board (2/2) Schematic Diagram


TH-65PY850D/H/M/MR/MS
C6-Board (2/2) Schematic Diagram

10 11 12 13 14 15 16 17 18

11.47. SC-Board (1/3) Schematic Diagram

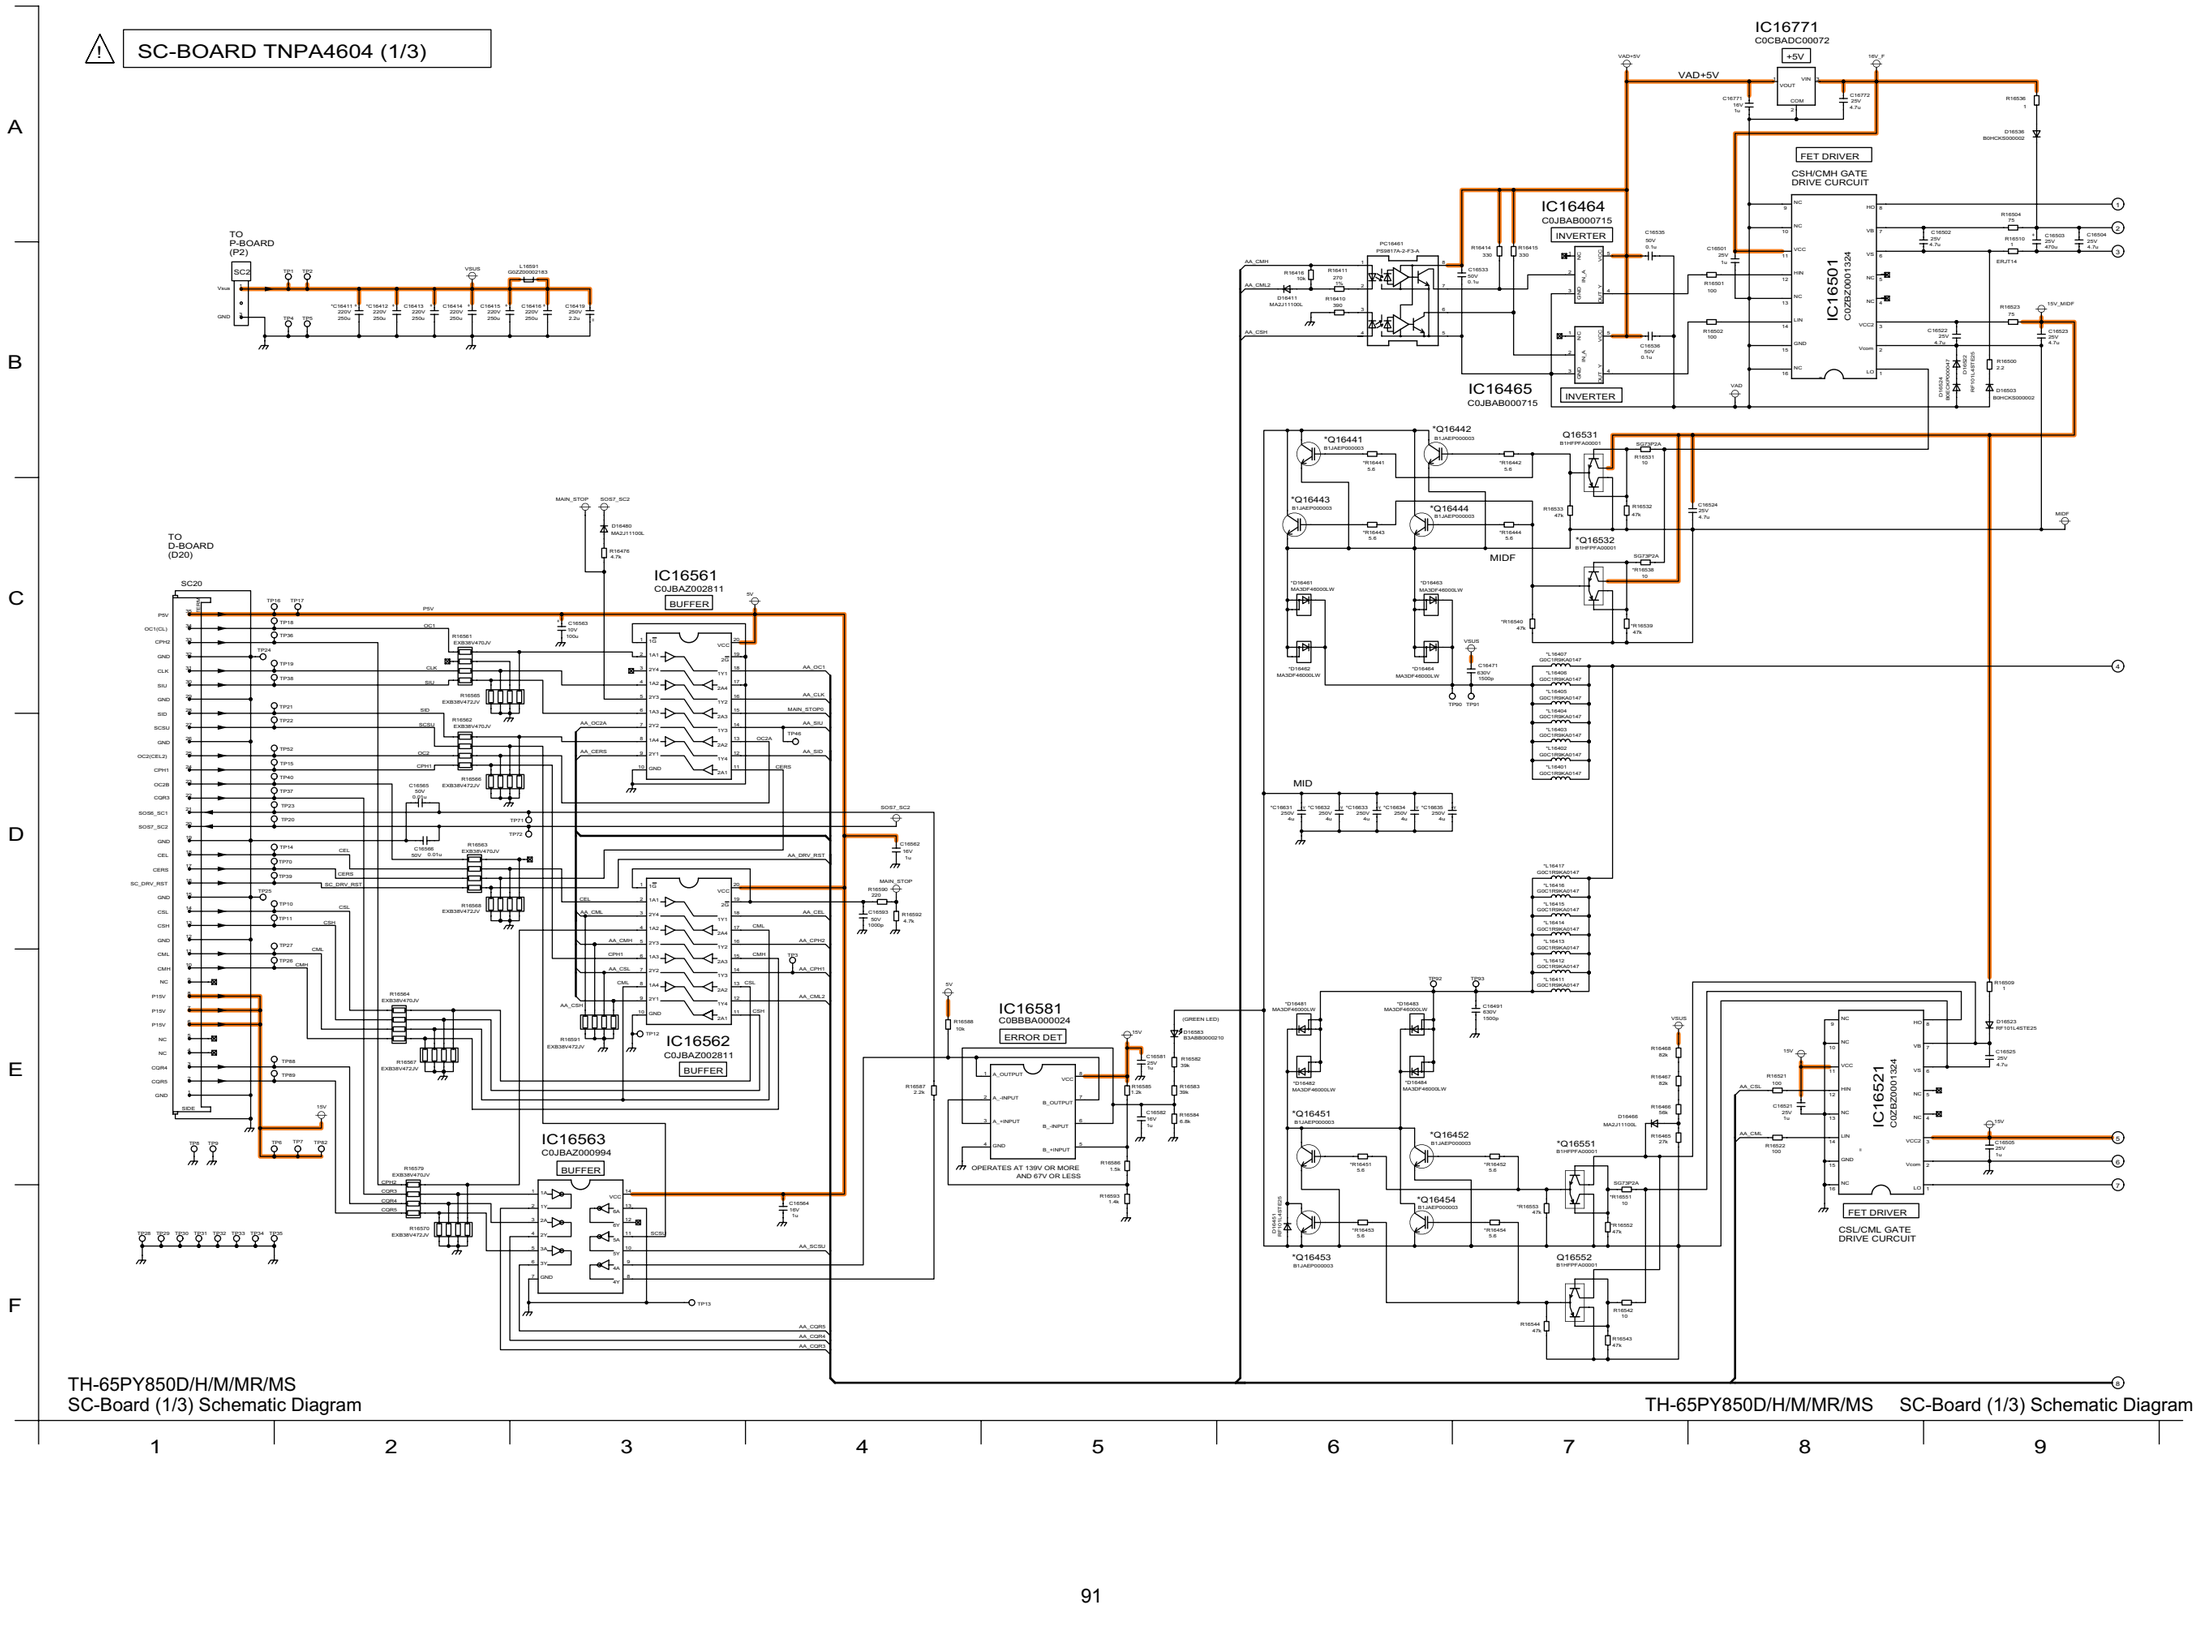


11.48. SC-Board (2/3) Schematic Diagram

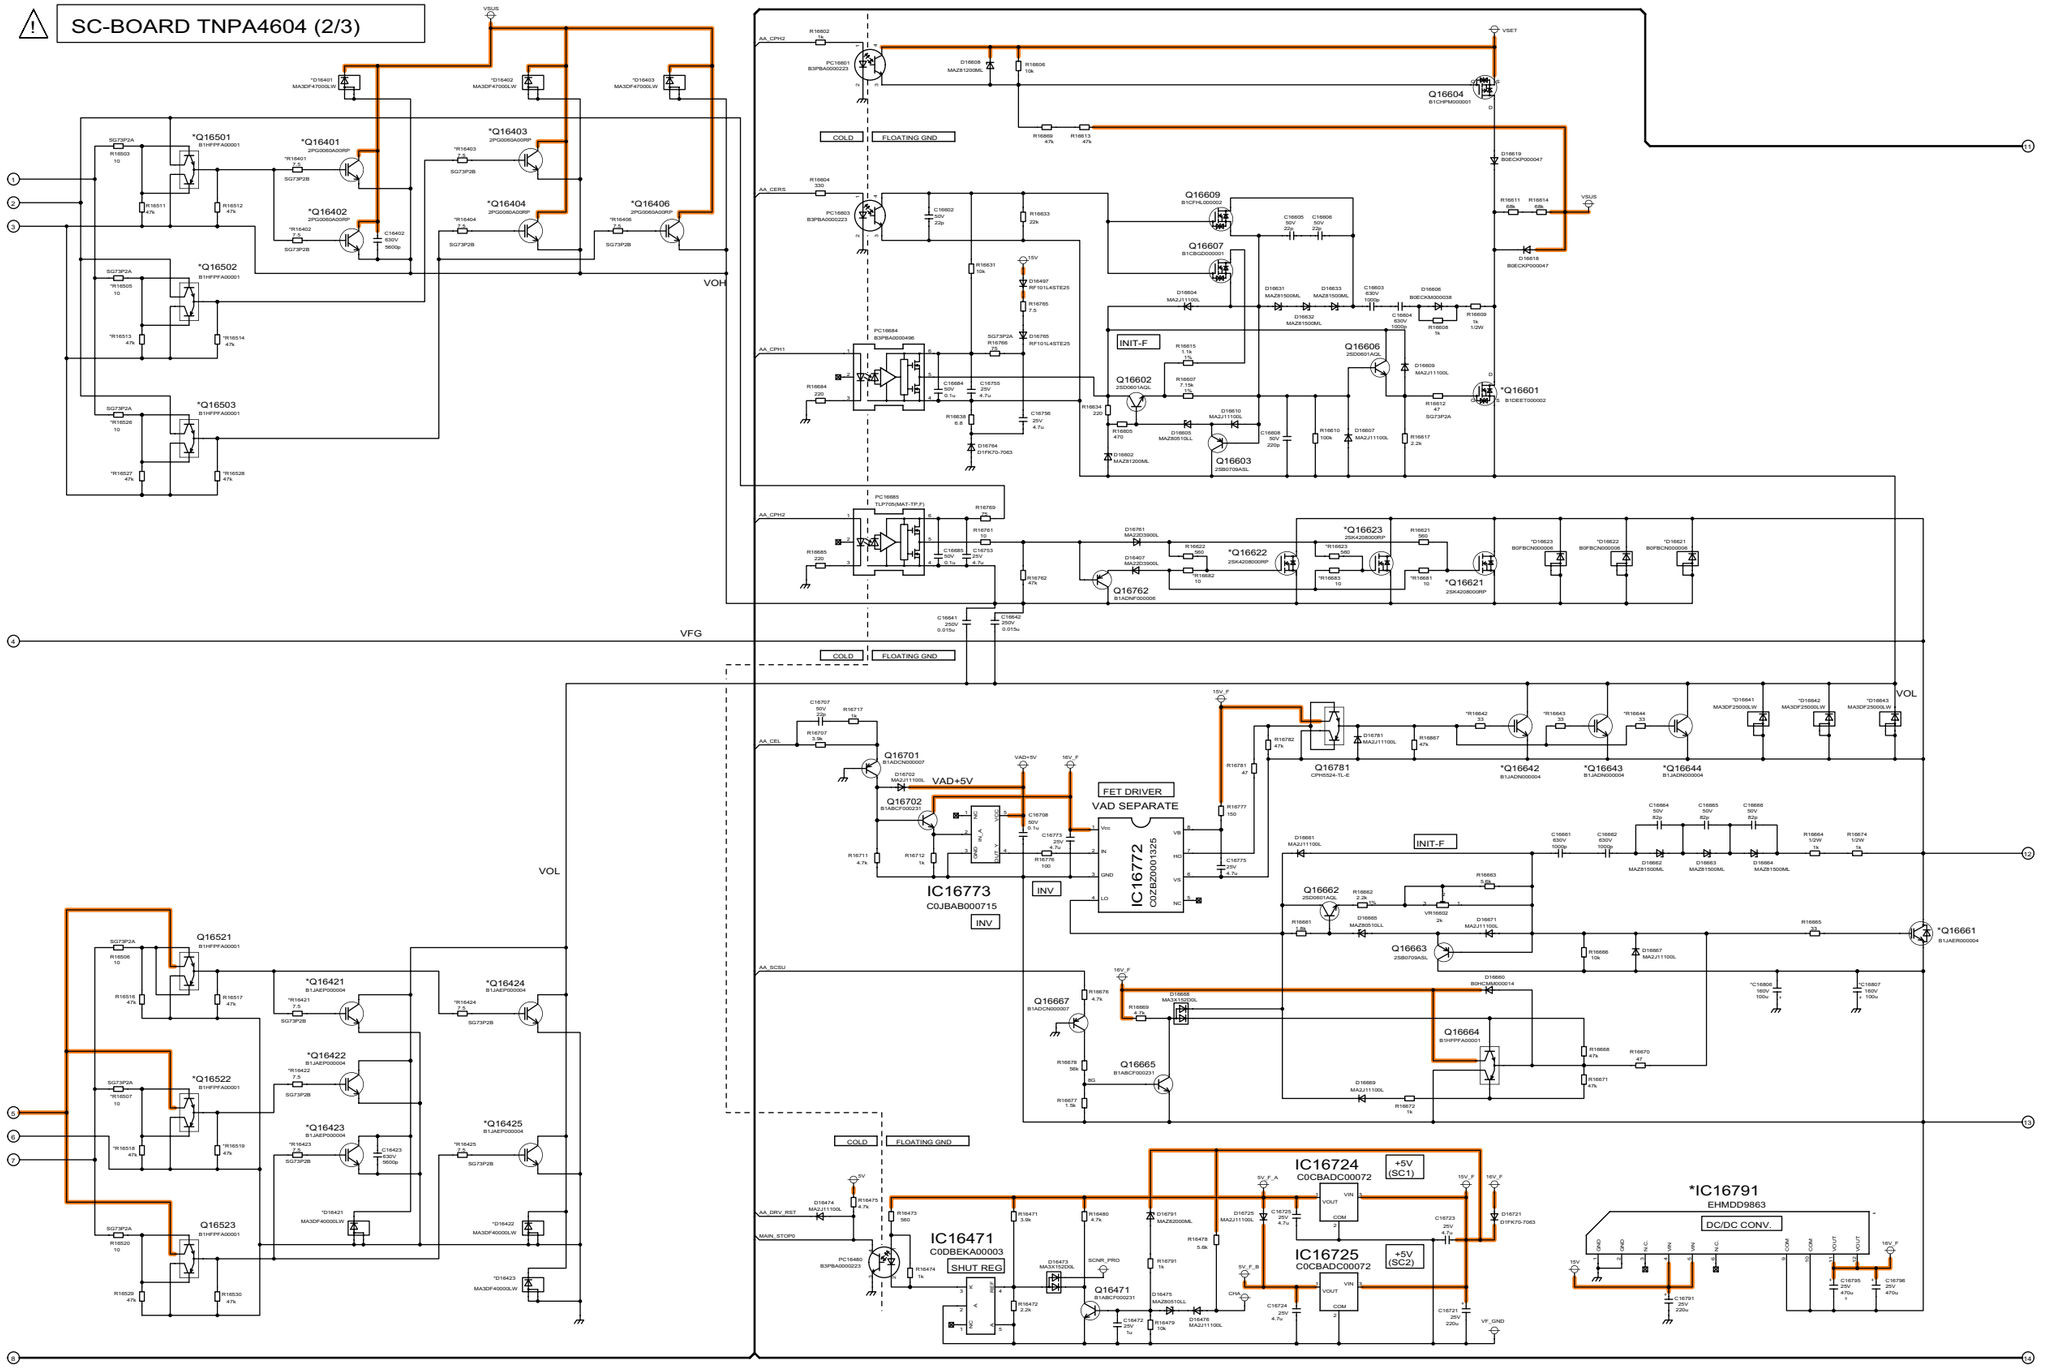


11.49. SC-Board (3/3) Schematic Diagram

⚠ SC-BOARD TNPA4604 (3/3)

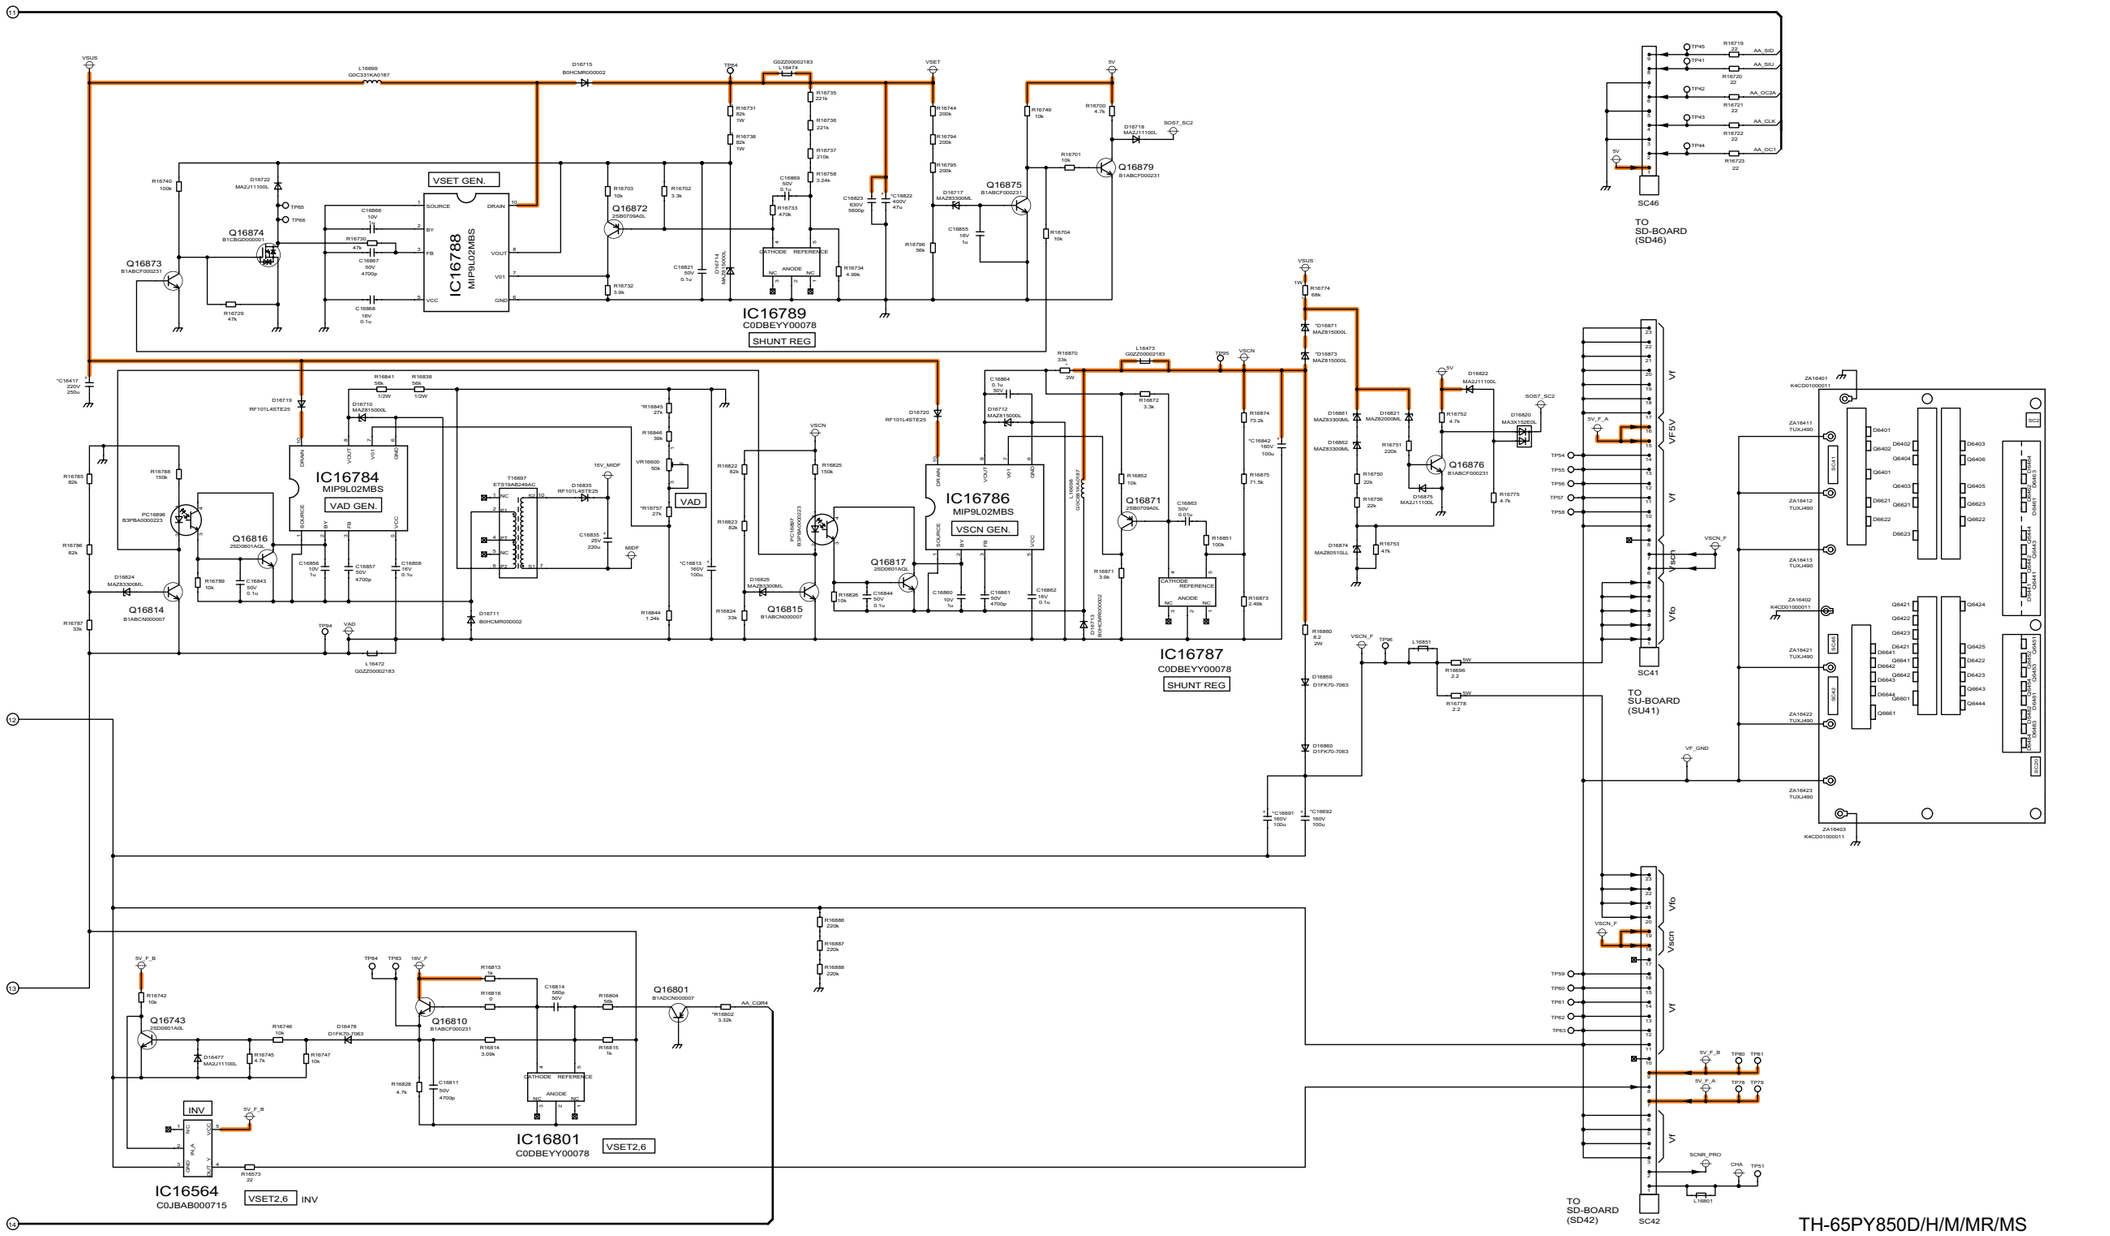


11.50. SU-Board (1/3) Schematic Diagram

SU-BOARD TNPA4608 (1/3)

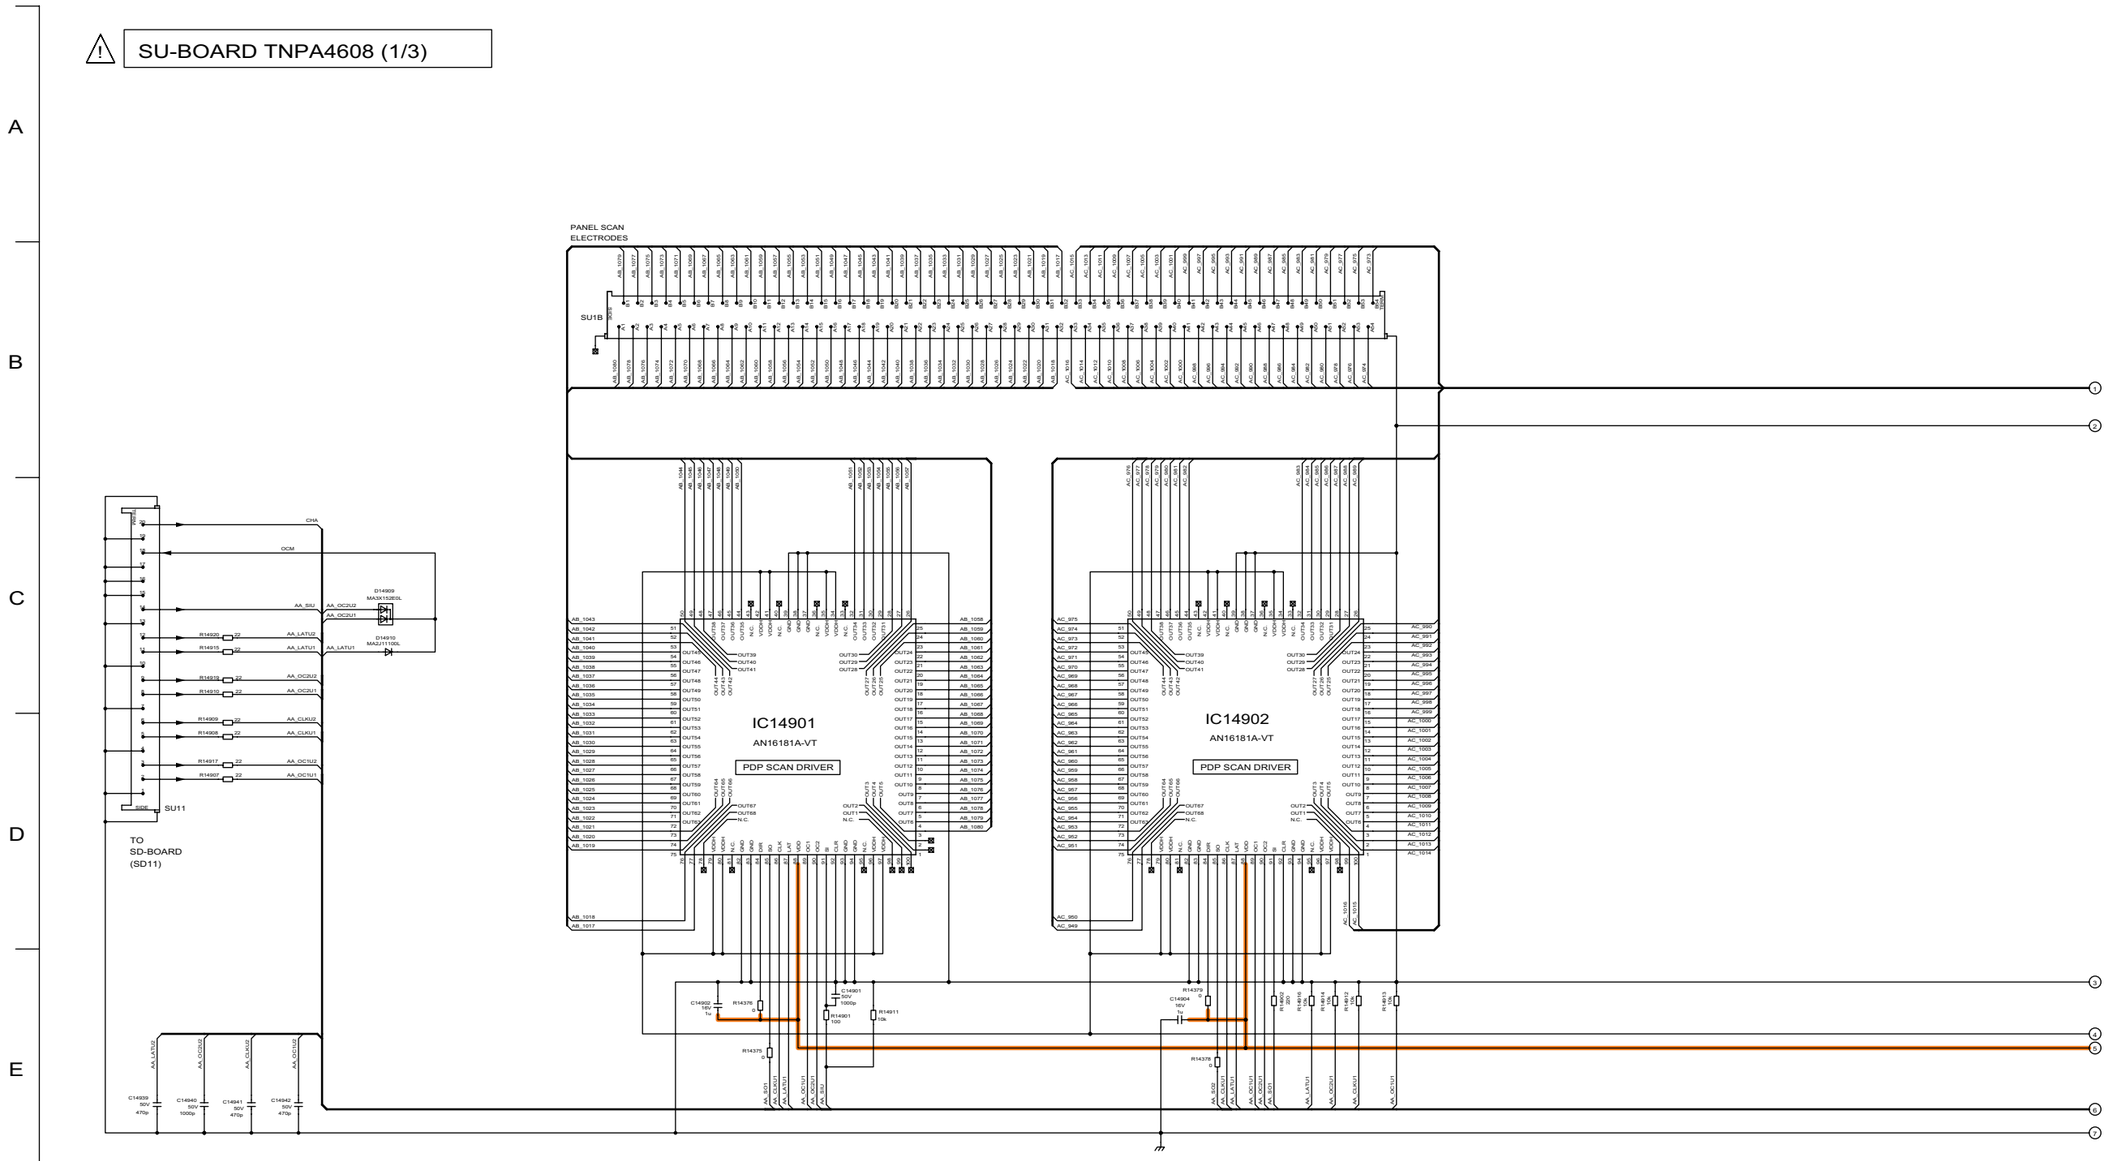

11.51. SU-Board (2/3) Schematic Diagram

⚠ SU-BOARD TNPA4608 (2/3)

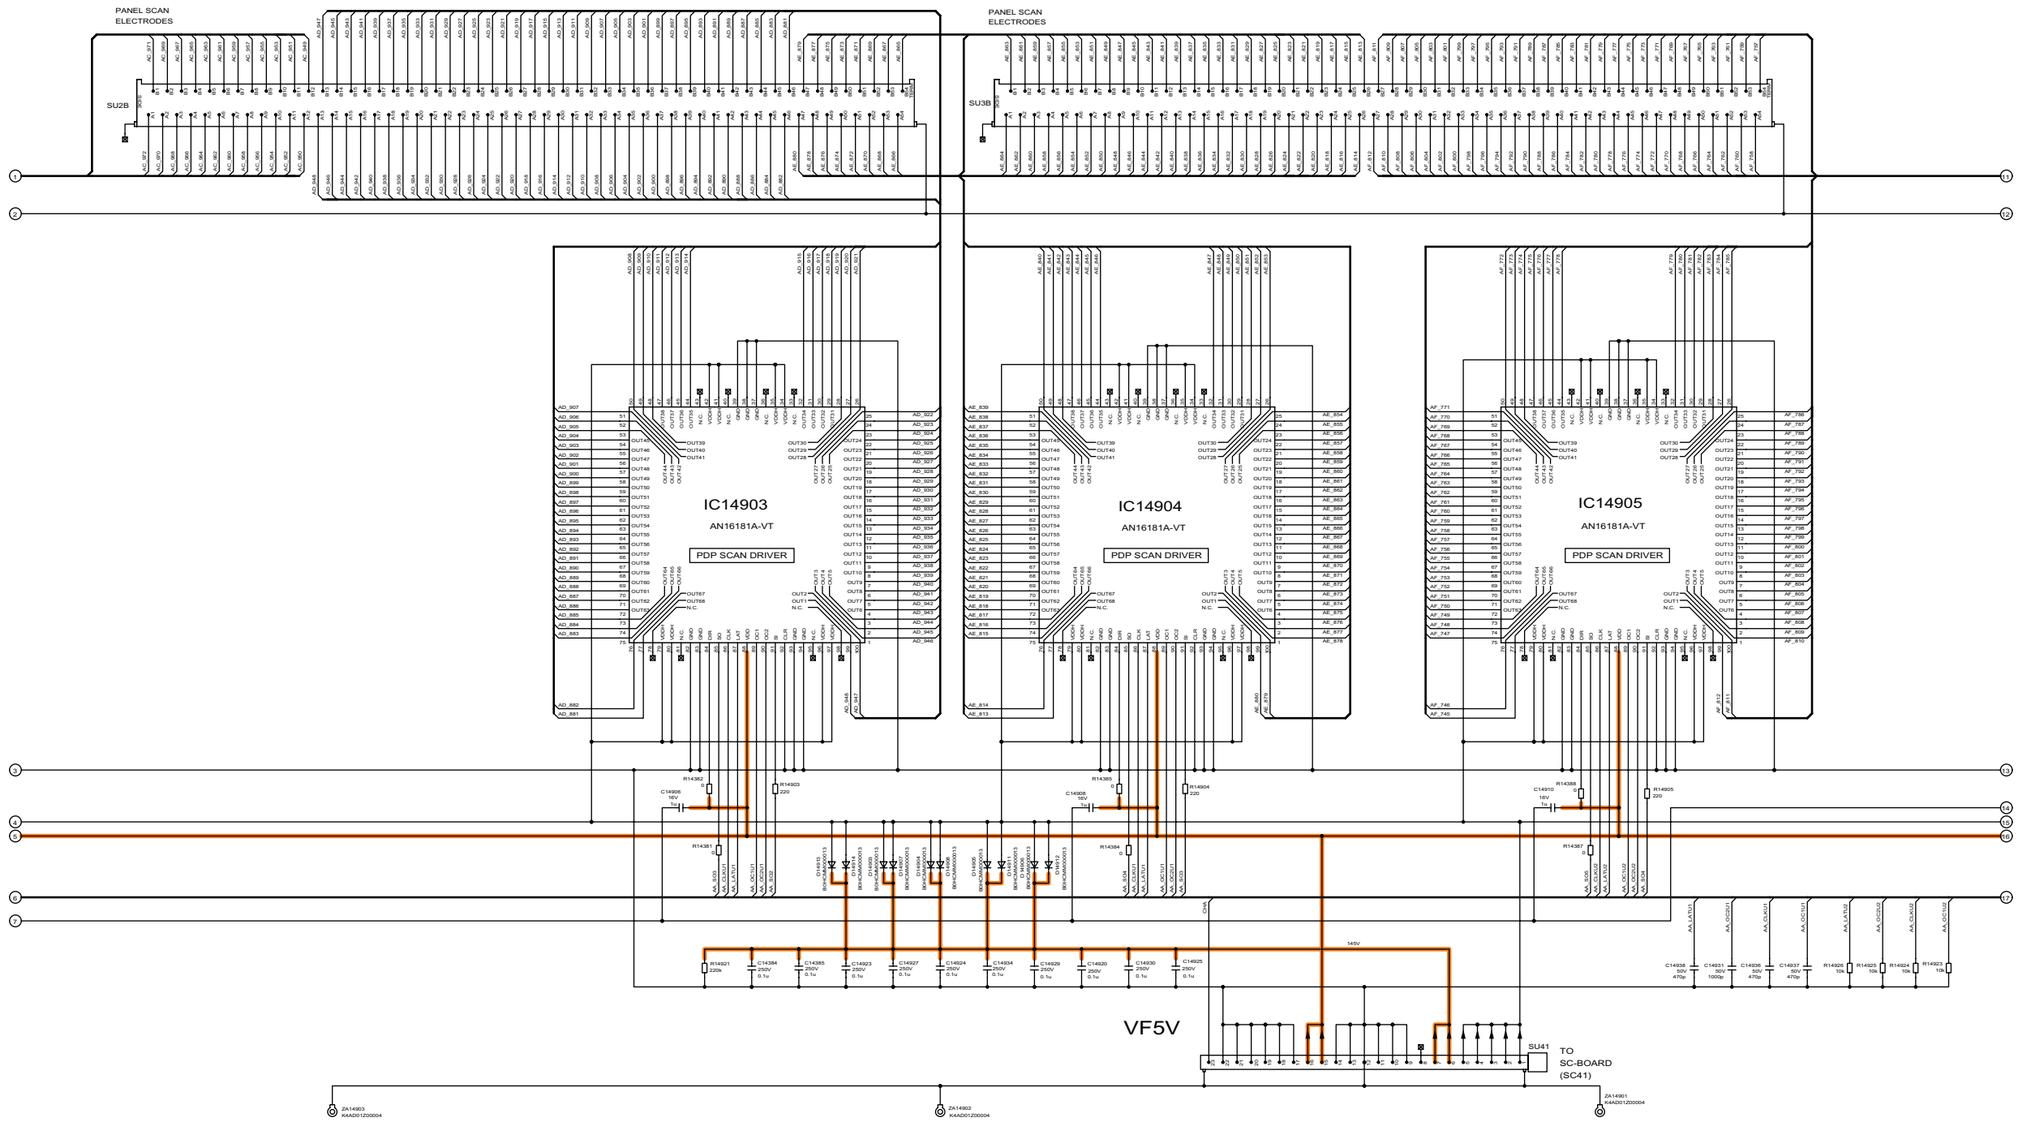


TH-65PY850D/H/M/MR/MS
SU-Board (2/3) Schematic Diagram

TH-65PY850D/H/M/MR/MS
SU-Board (2/3) Schematic Diagram


10 11 12 13 14 15 16 17 18

11.52. SU-Board (3/3) Schematic Diagram

⚠ SU-BOARD TNPA4608 (3/3)

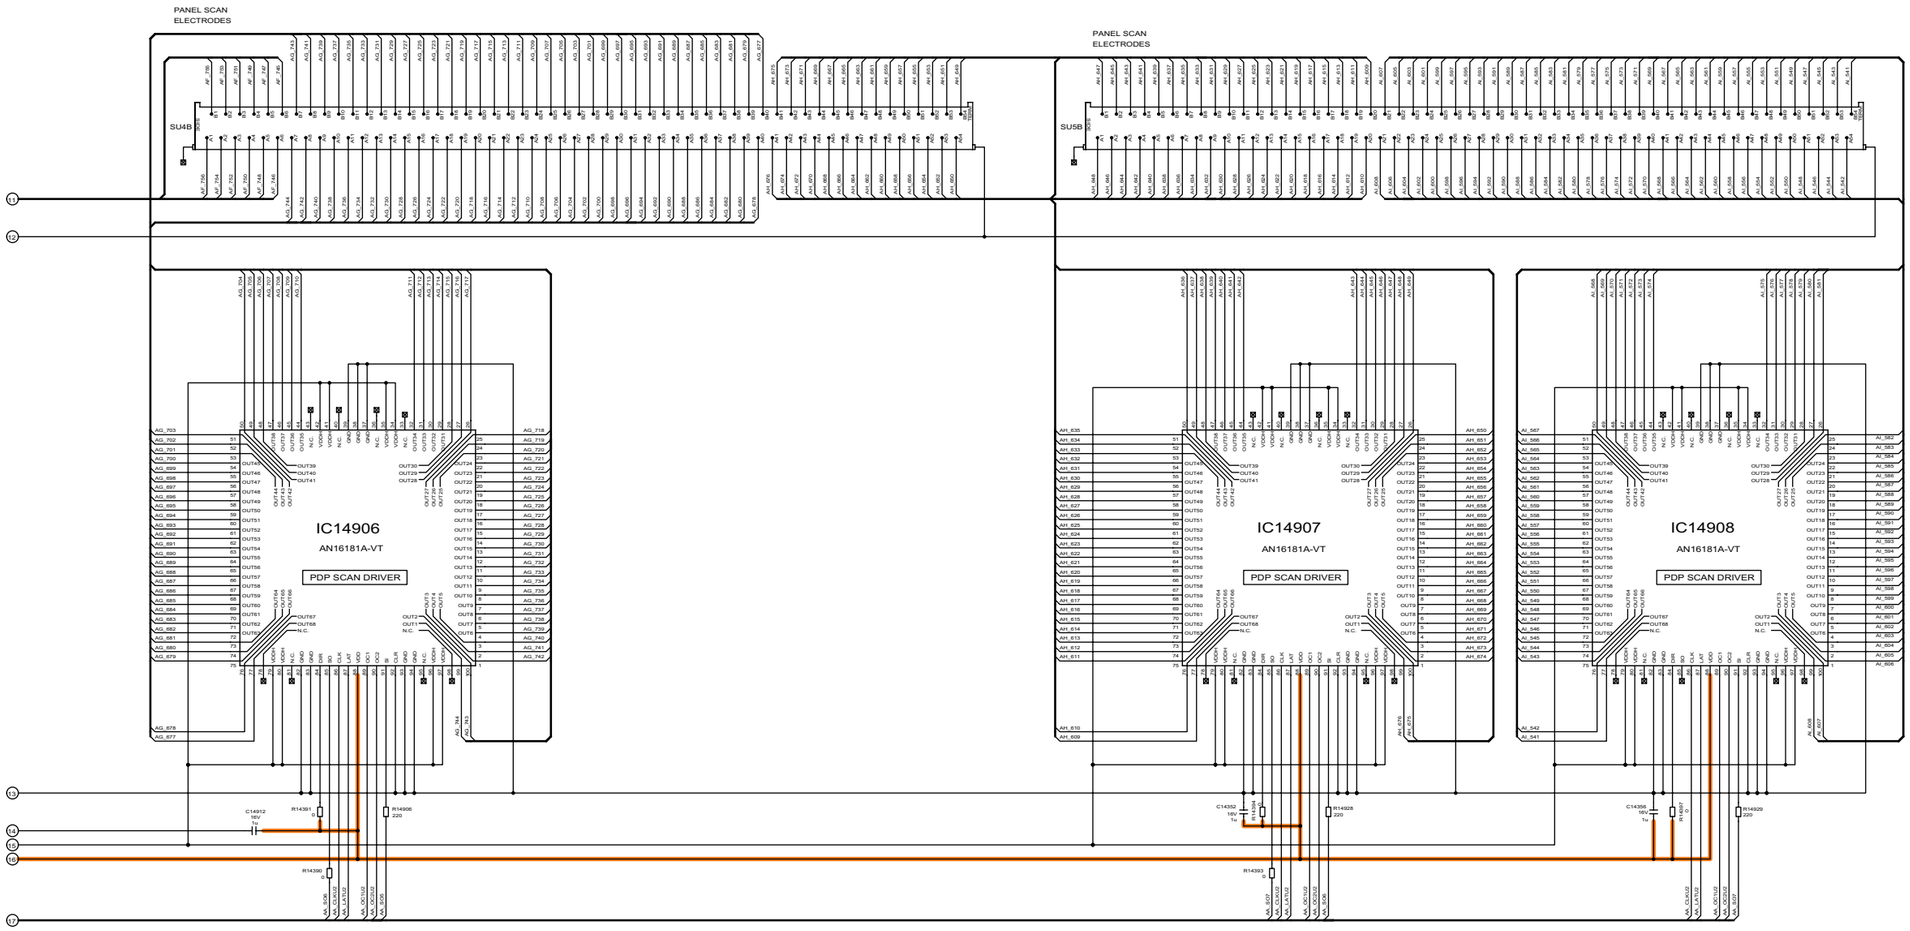


11.53. SD-Board (1/3) Schematic Diagram

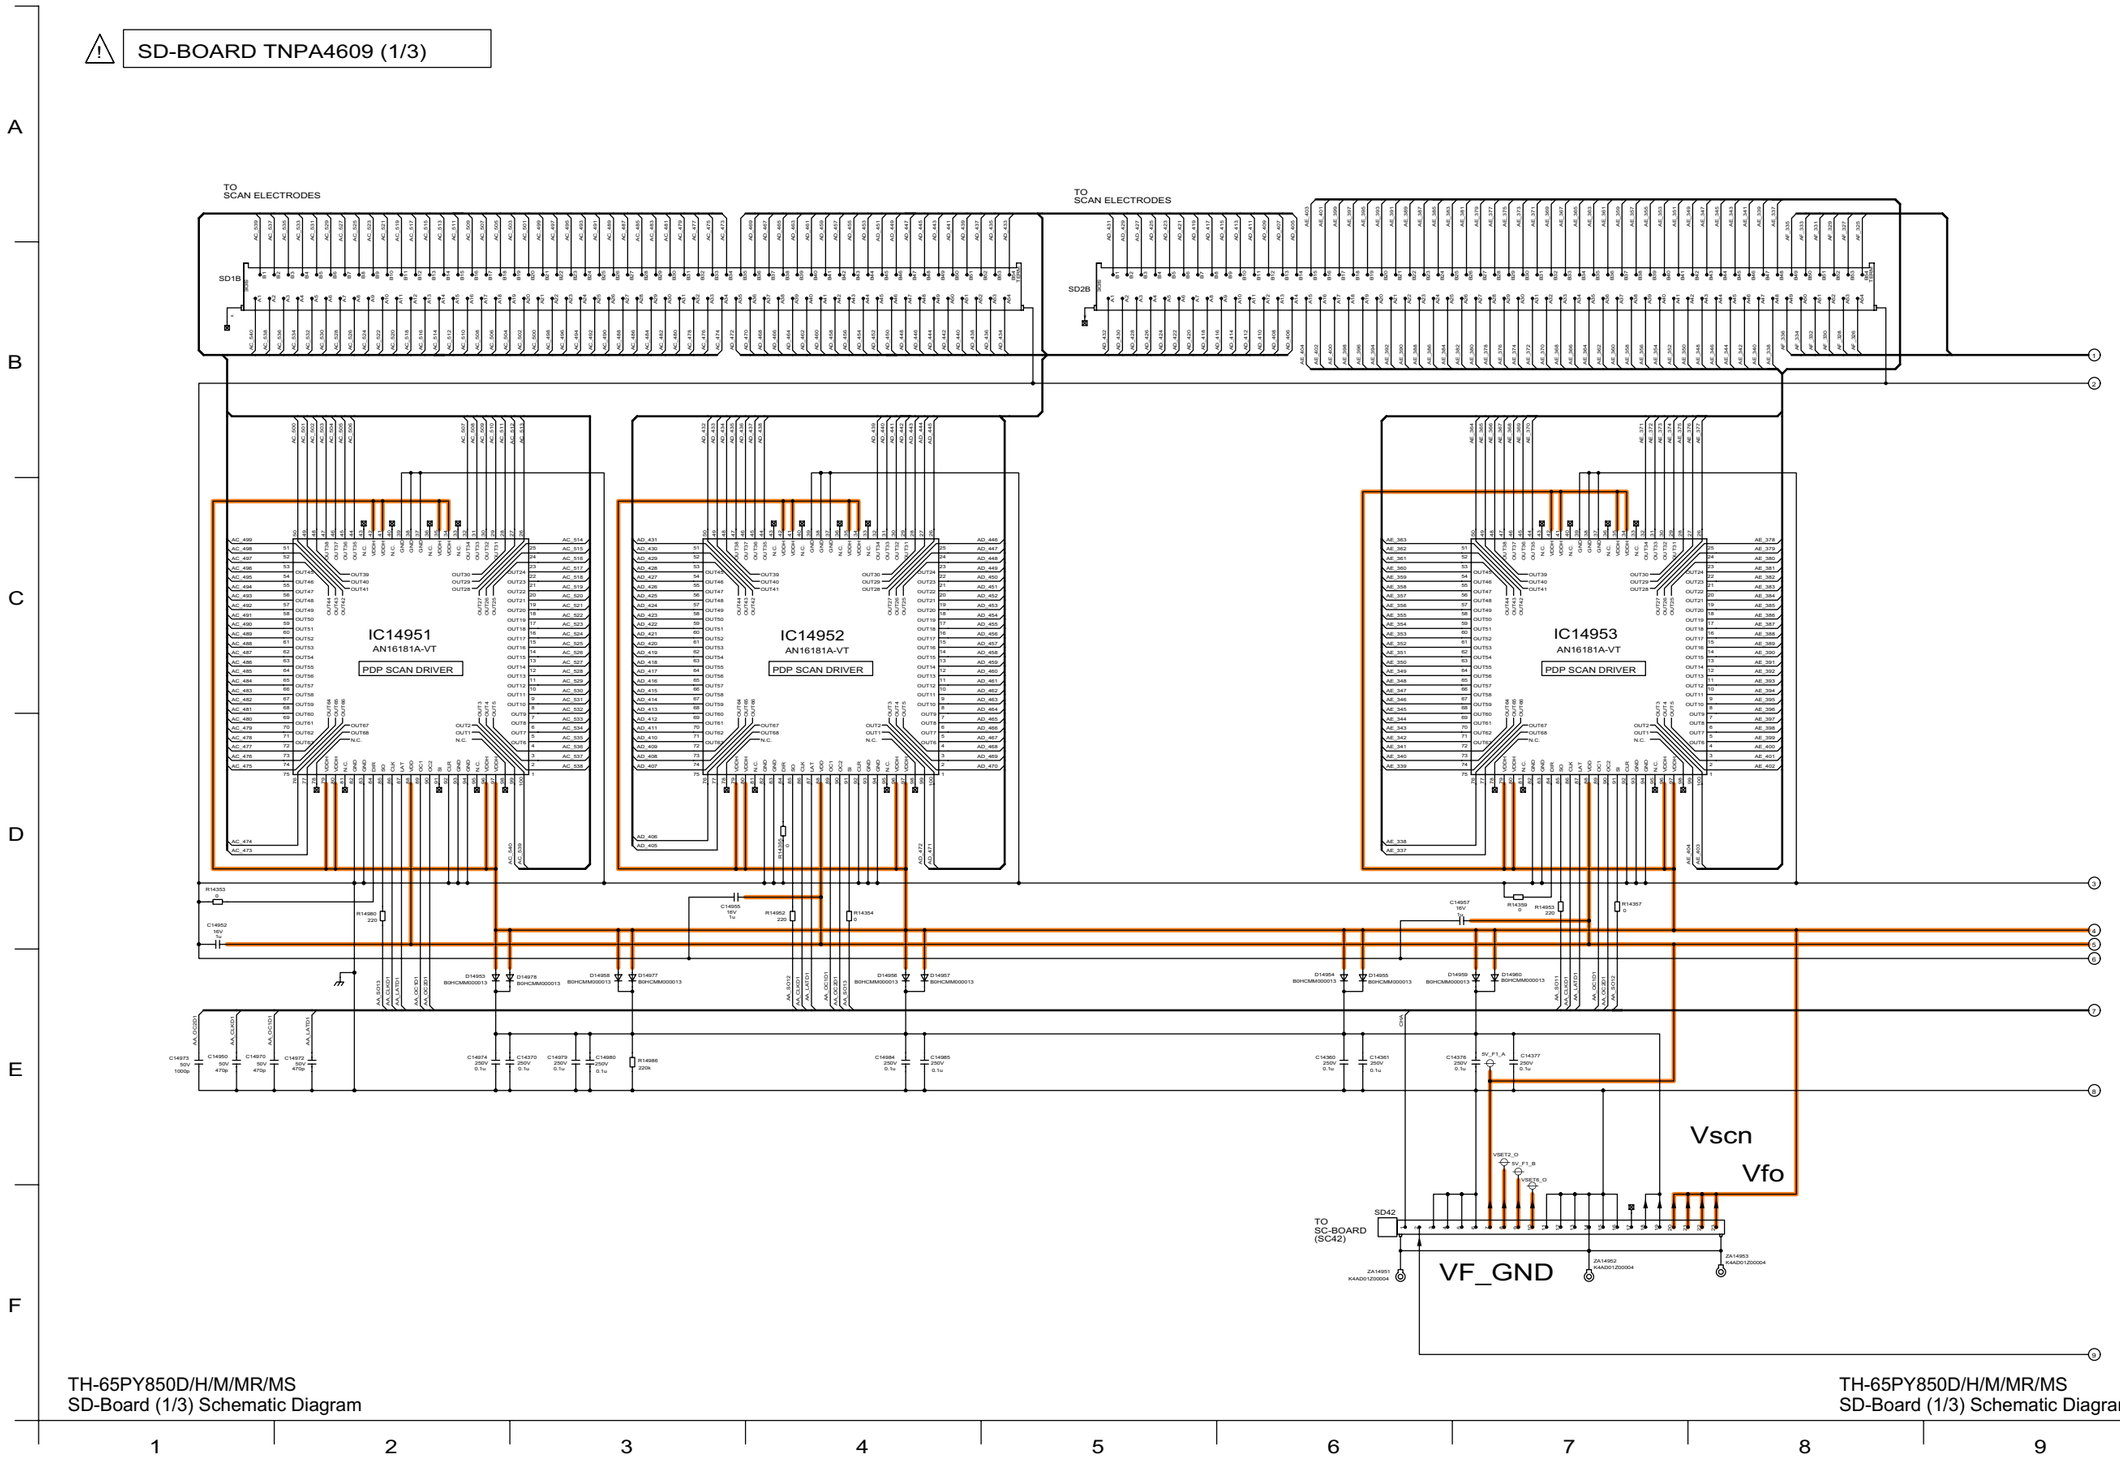


11.54. SD-Board (2/3) Schematic Diagram

⚠ SD-BOARD TNPA4609 (2/3)

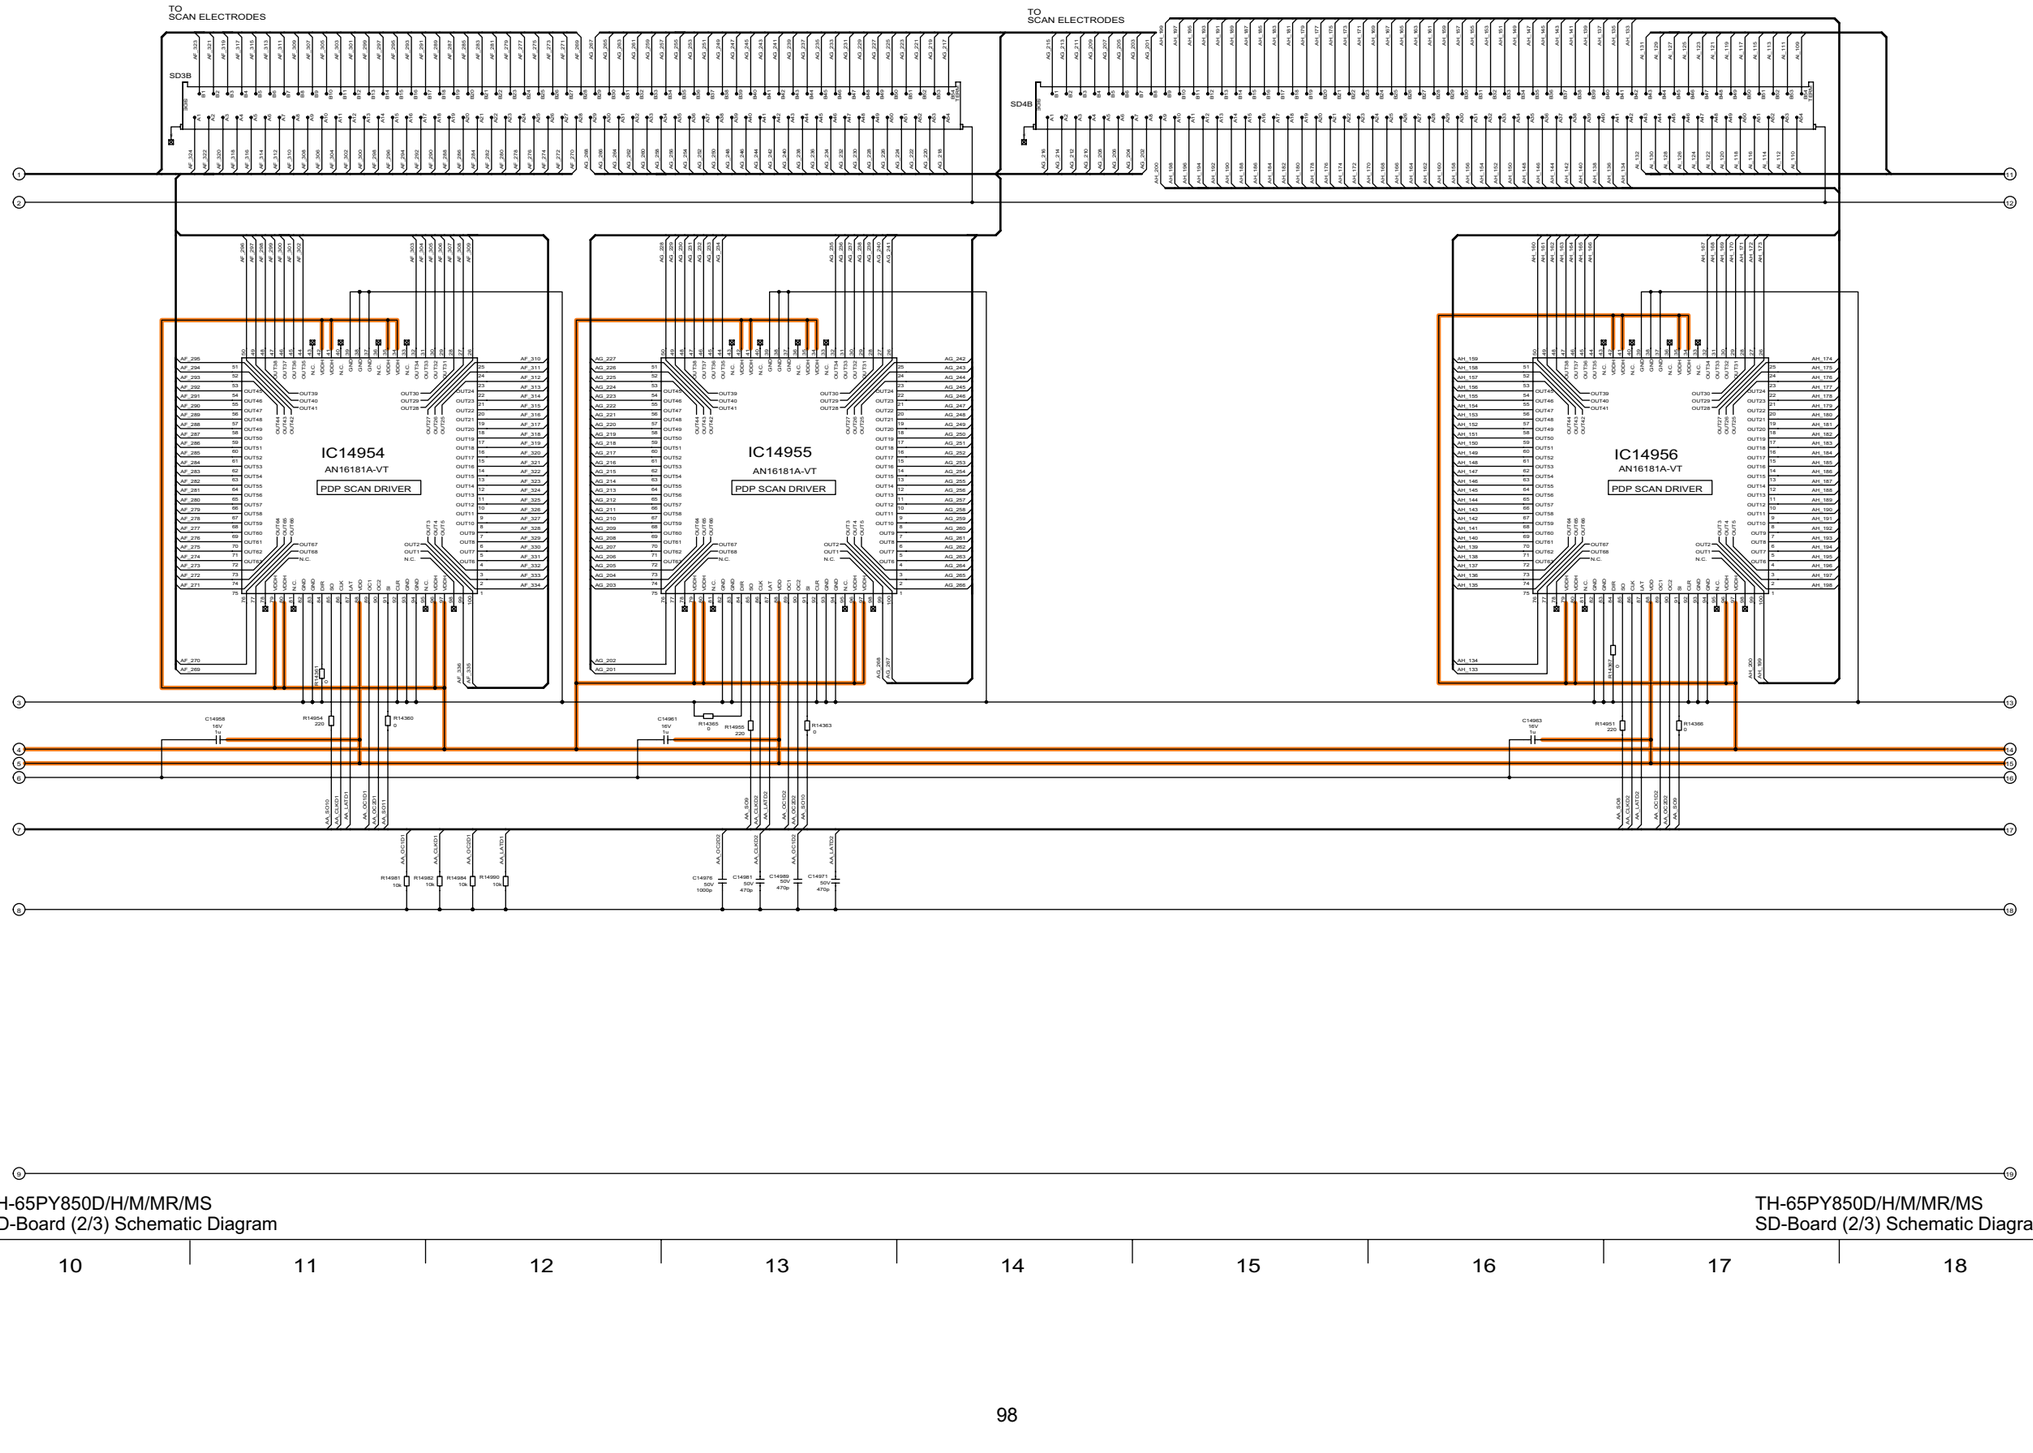

11.55. SD-Board (3/3) Schematic Diagram

⚠ SD-BOARD TNPA4609 (3/3)

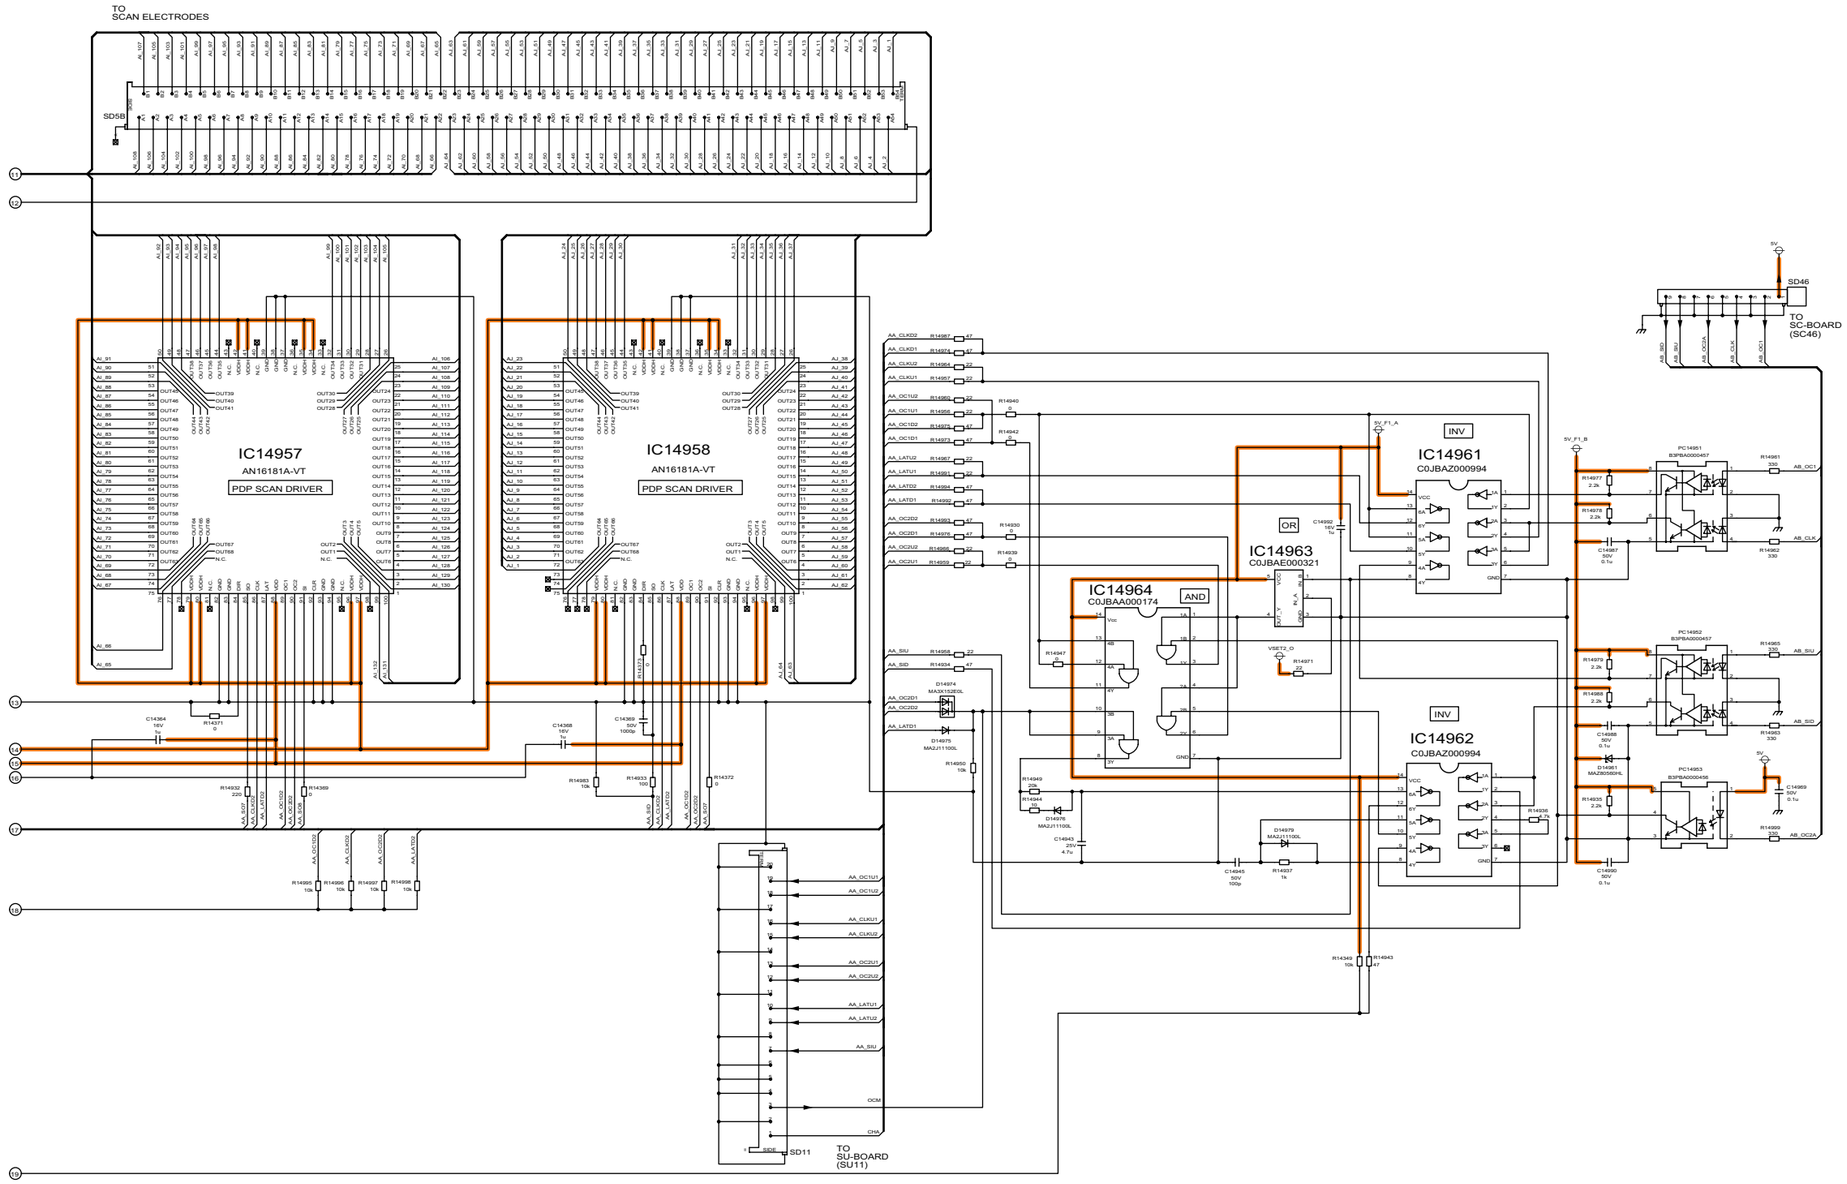


TH-65PY850D/H/M/MR/MS
SD-Board (3/3) Schematic Diagram

TH-65PY850D/H/M/MR/MS
SD-Board (3/3) Schematic Diagram


19 20 21 22 23 24 25 26 27

11.56. SS-Board (1/2) and S-Board Schematic Diagram

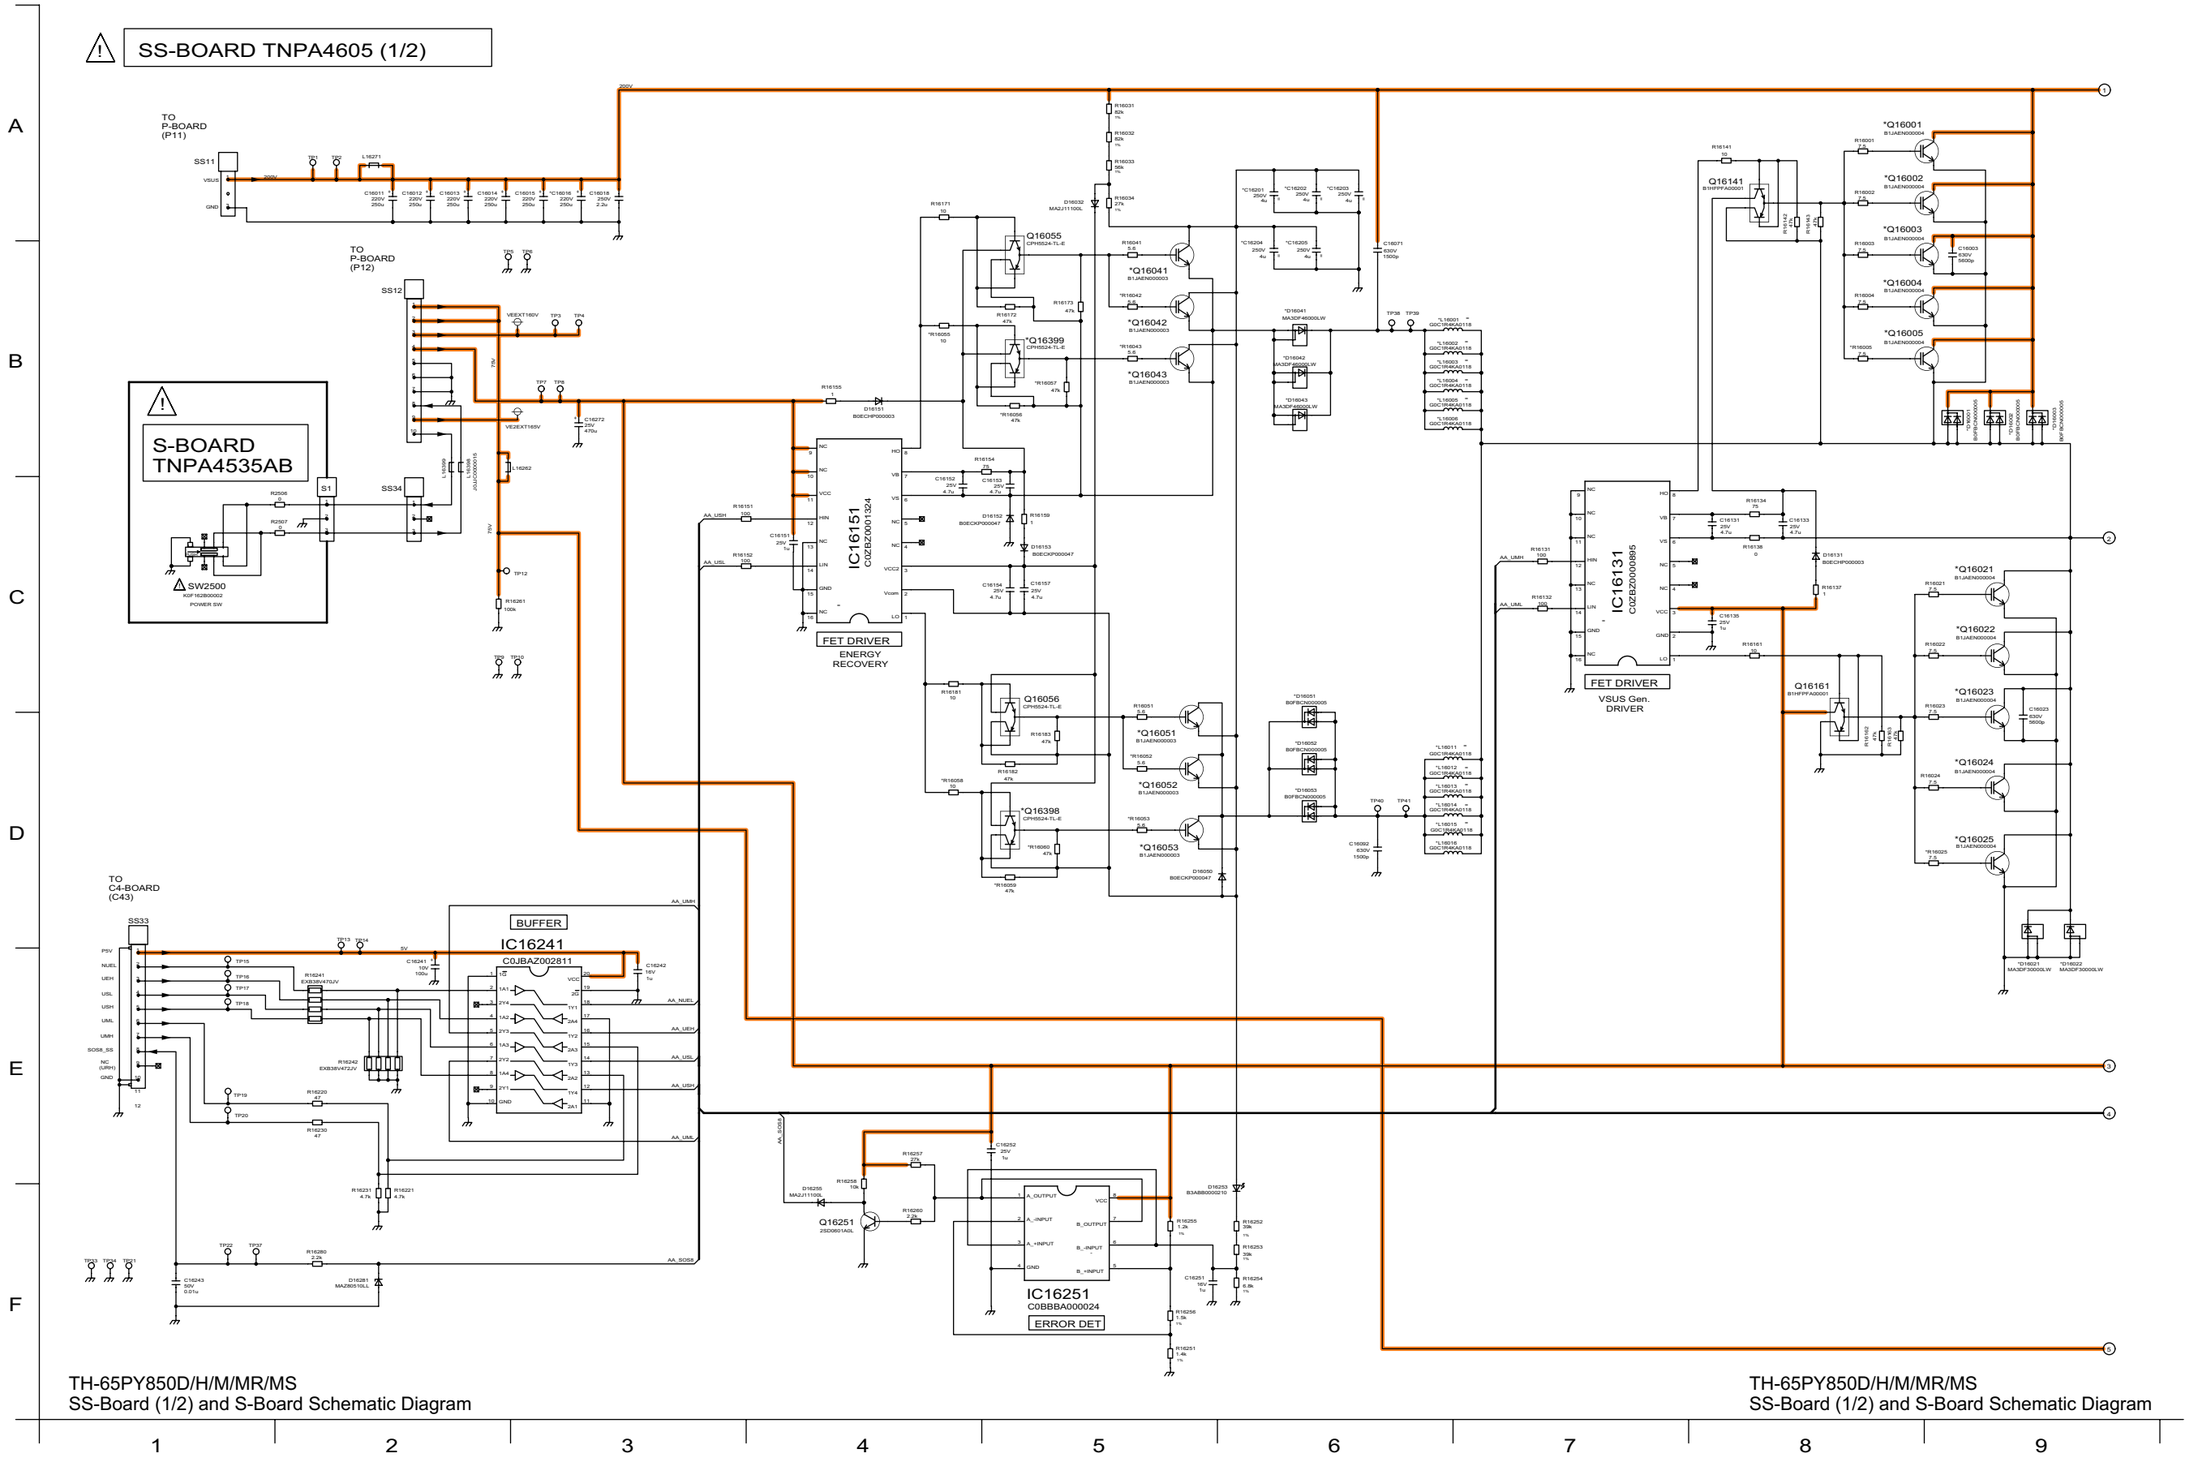

TH-65PY850D/H/M/MR/MS
SS-Board (1/2) and S-Board Schematic Diagram

11.57. SS-Board (2/2), SS2-Board and SS3-Board Schematic Diagram

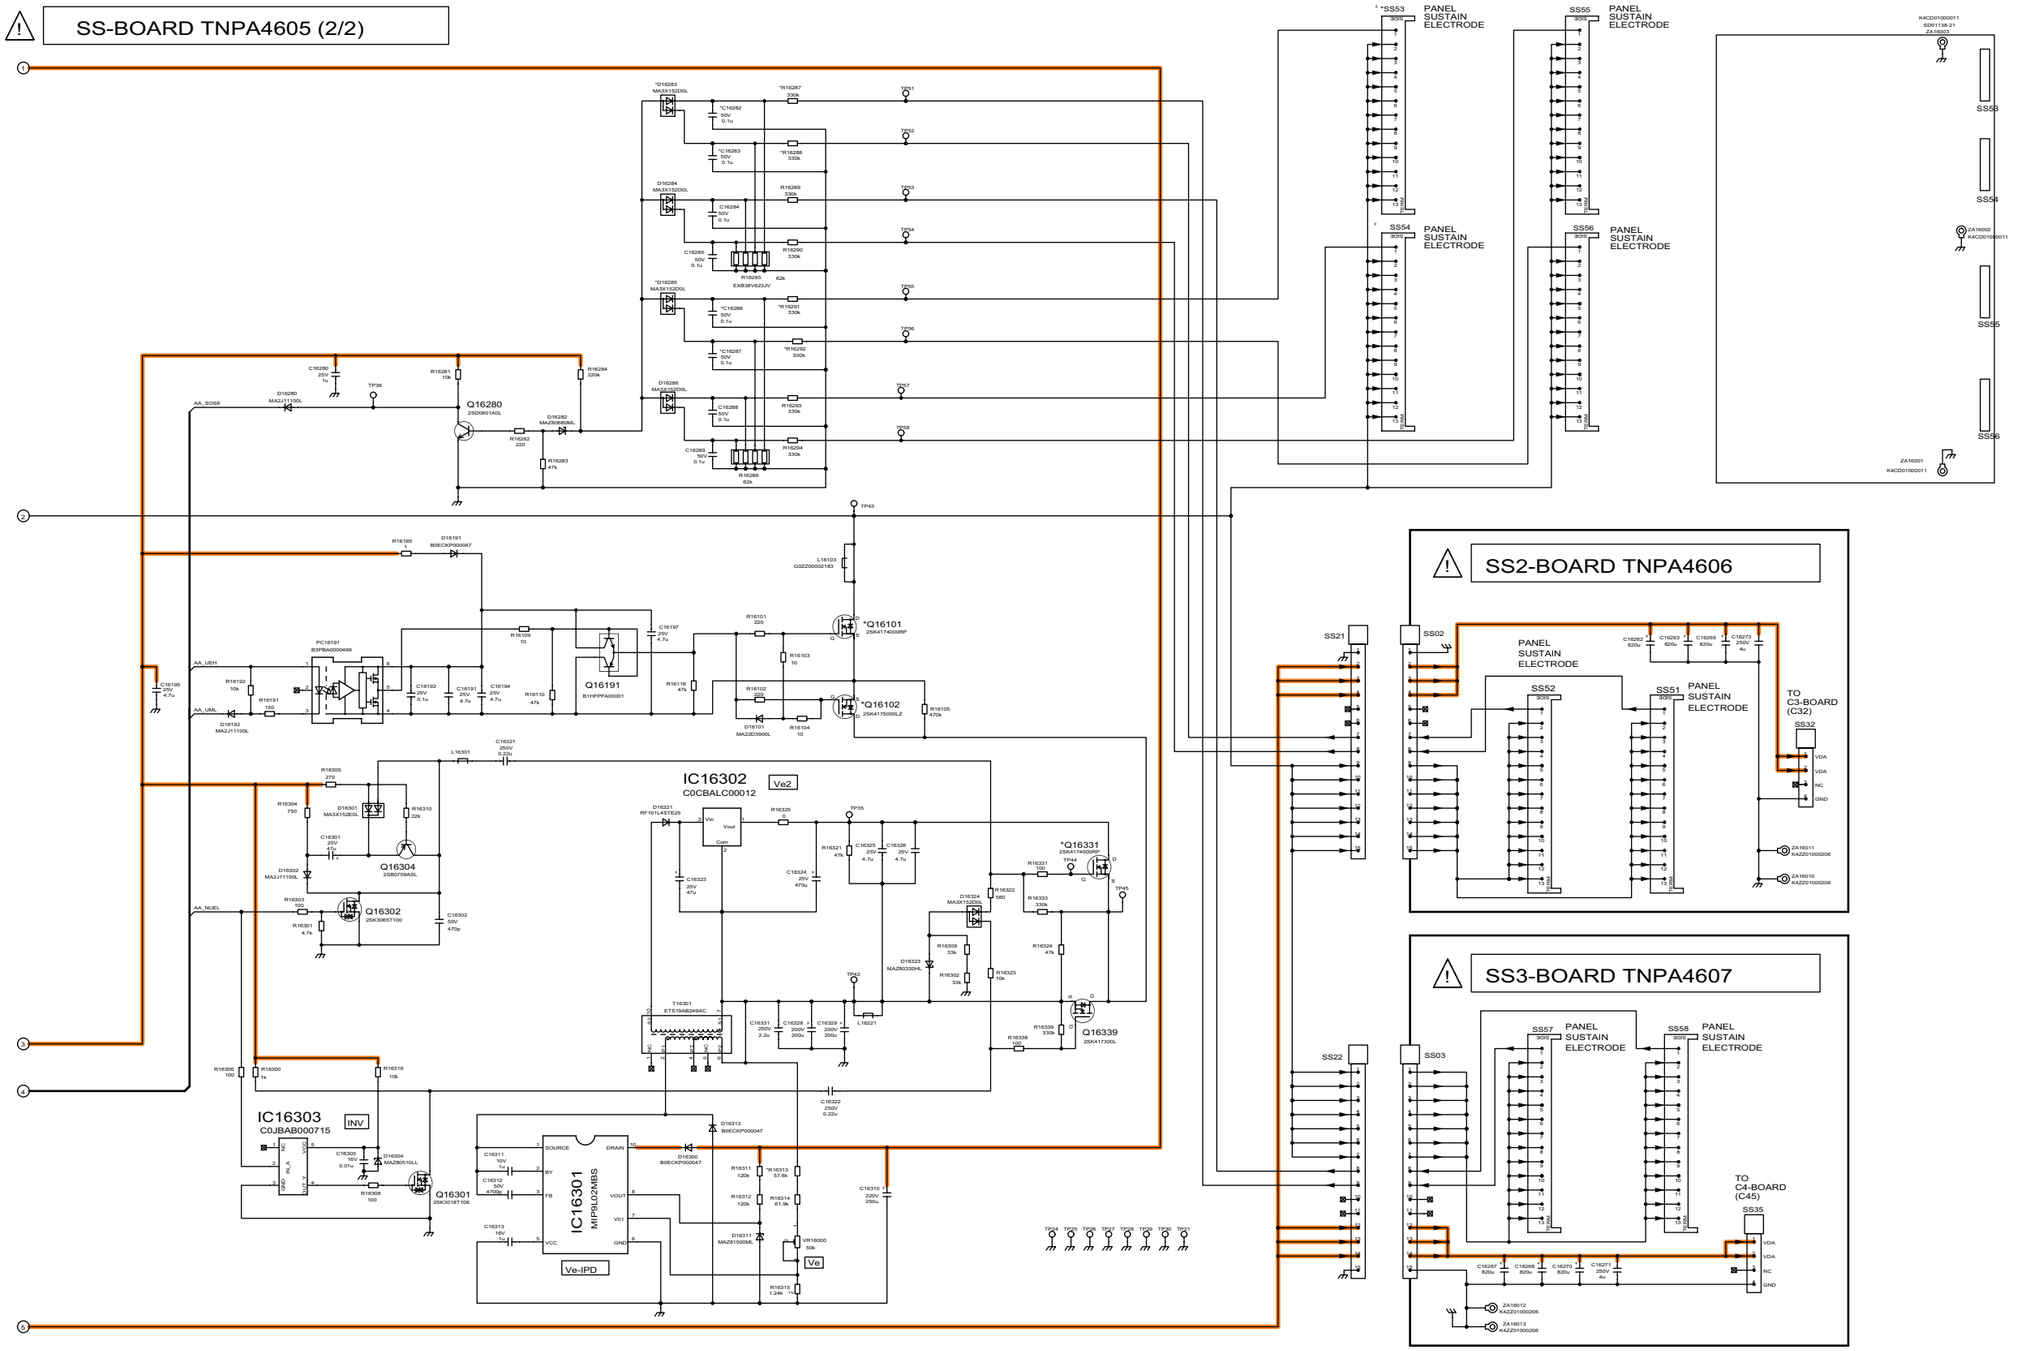



TH-65PY850D/H/M/MR/MS
SS-Board (2/2), SS2-Board and SS3-Board Schematic Diagram

TH-65PY850D/H/M/MR/MS
SS-Board (2/2), SS2-Board and SS3-Board Schematic Diagram


10 11 12 13 14 15 16 17 18

11.58. G and K-Board Schematic Diagram

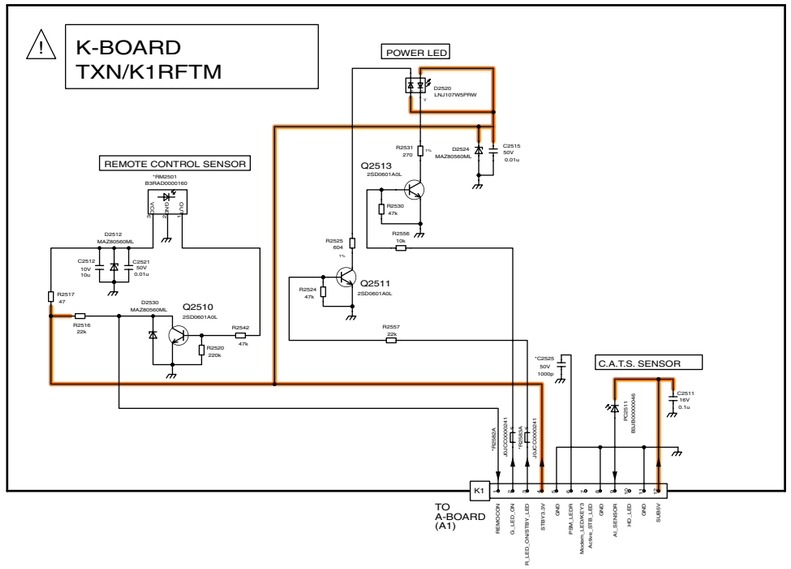


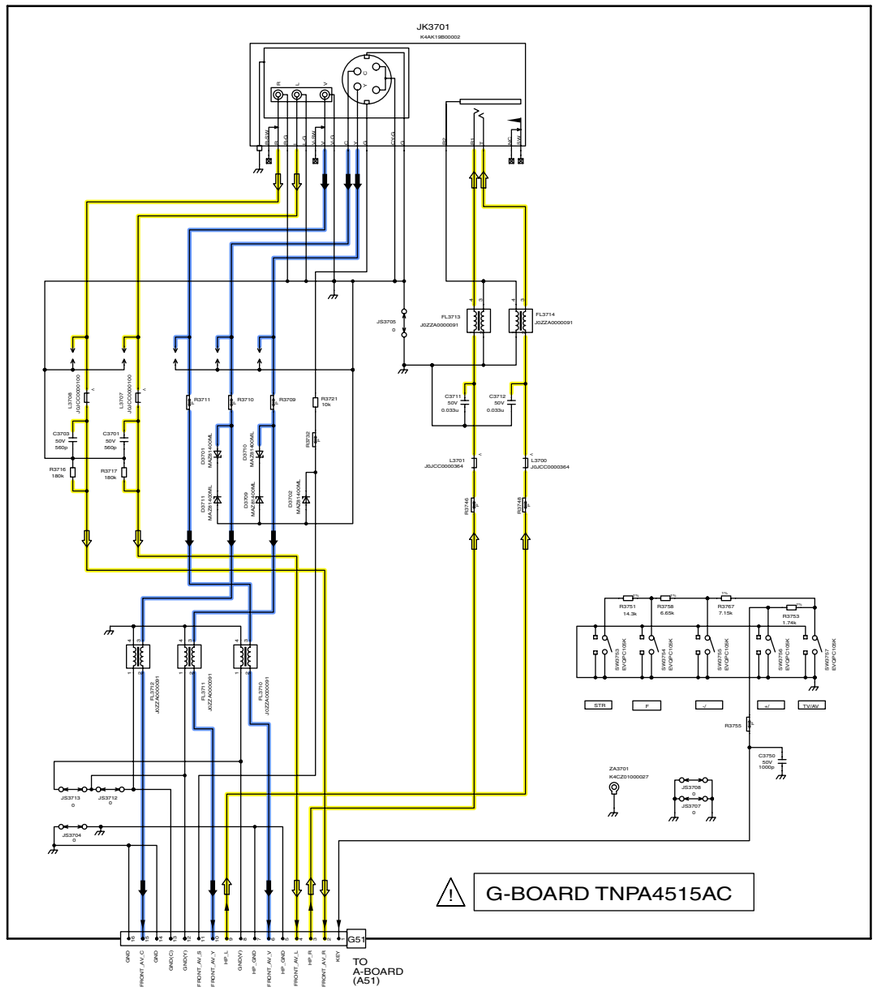

11.59. GL and GS-Board Schematic Diagram

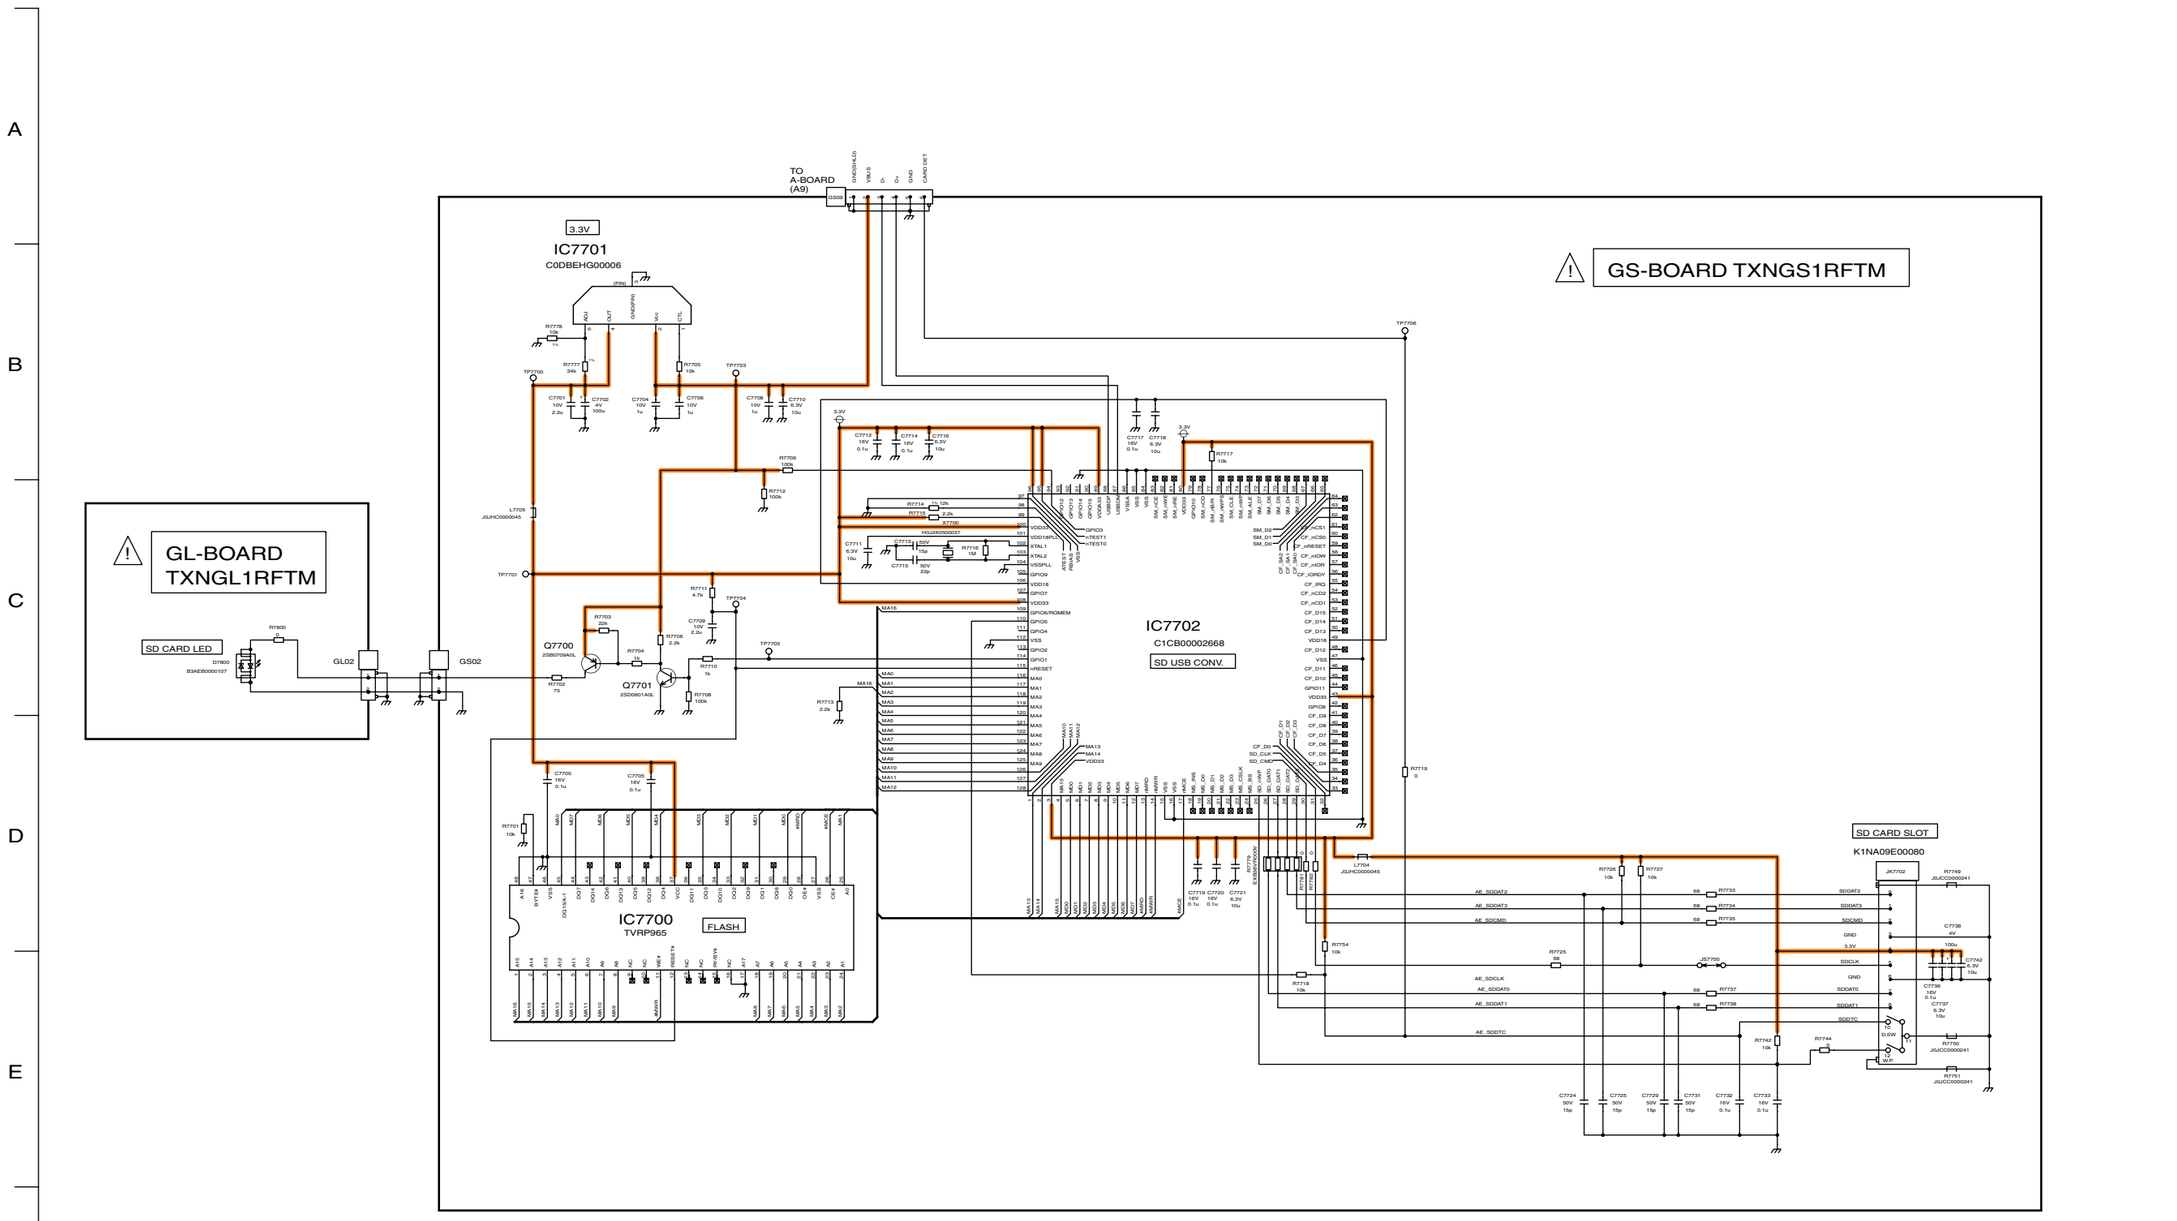


11.60. HC-Board Schematic Diagram

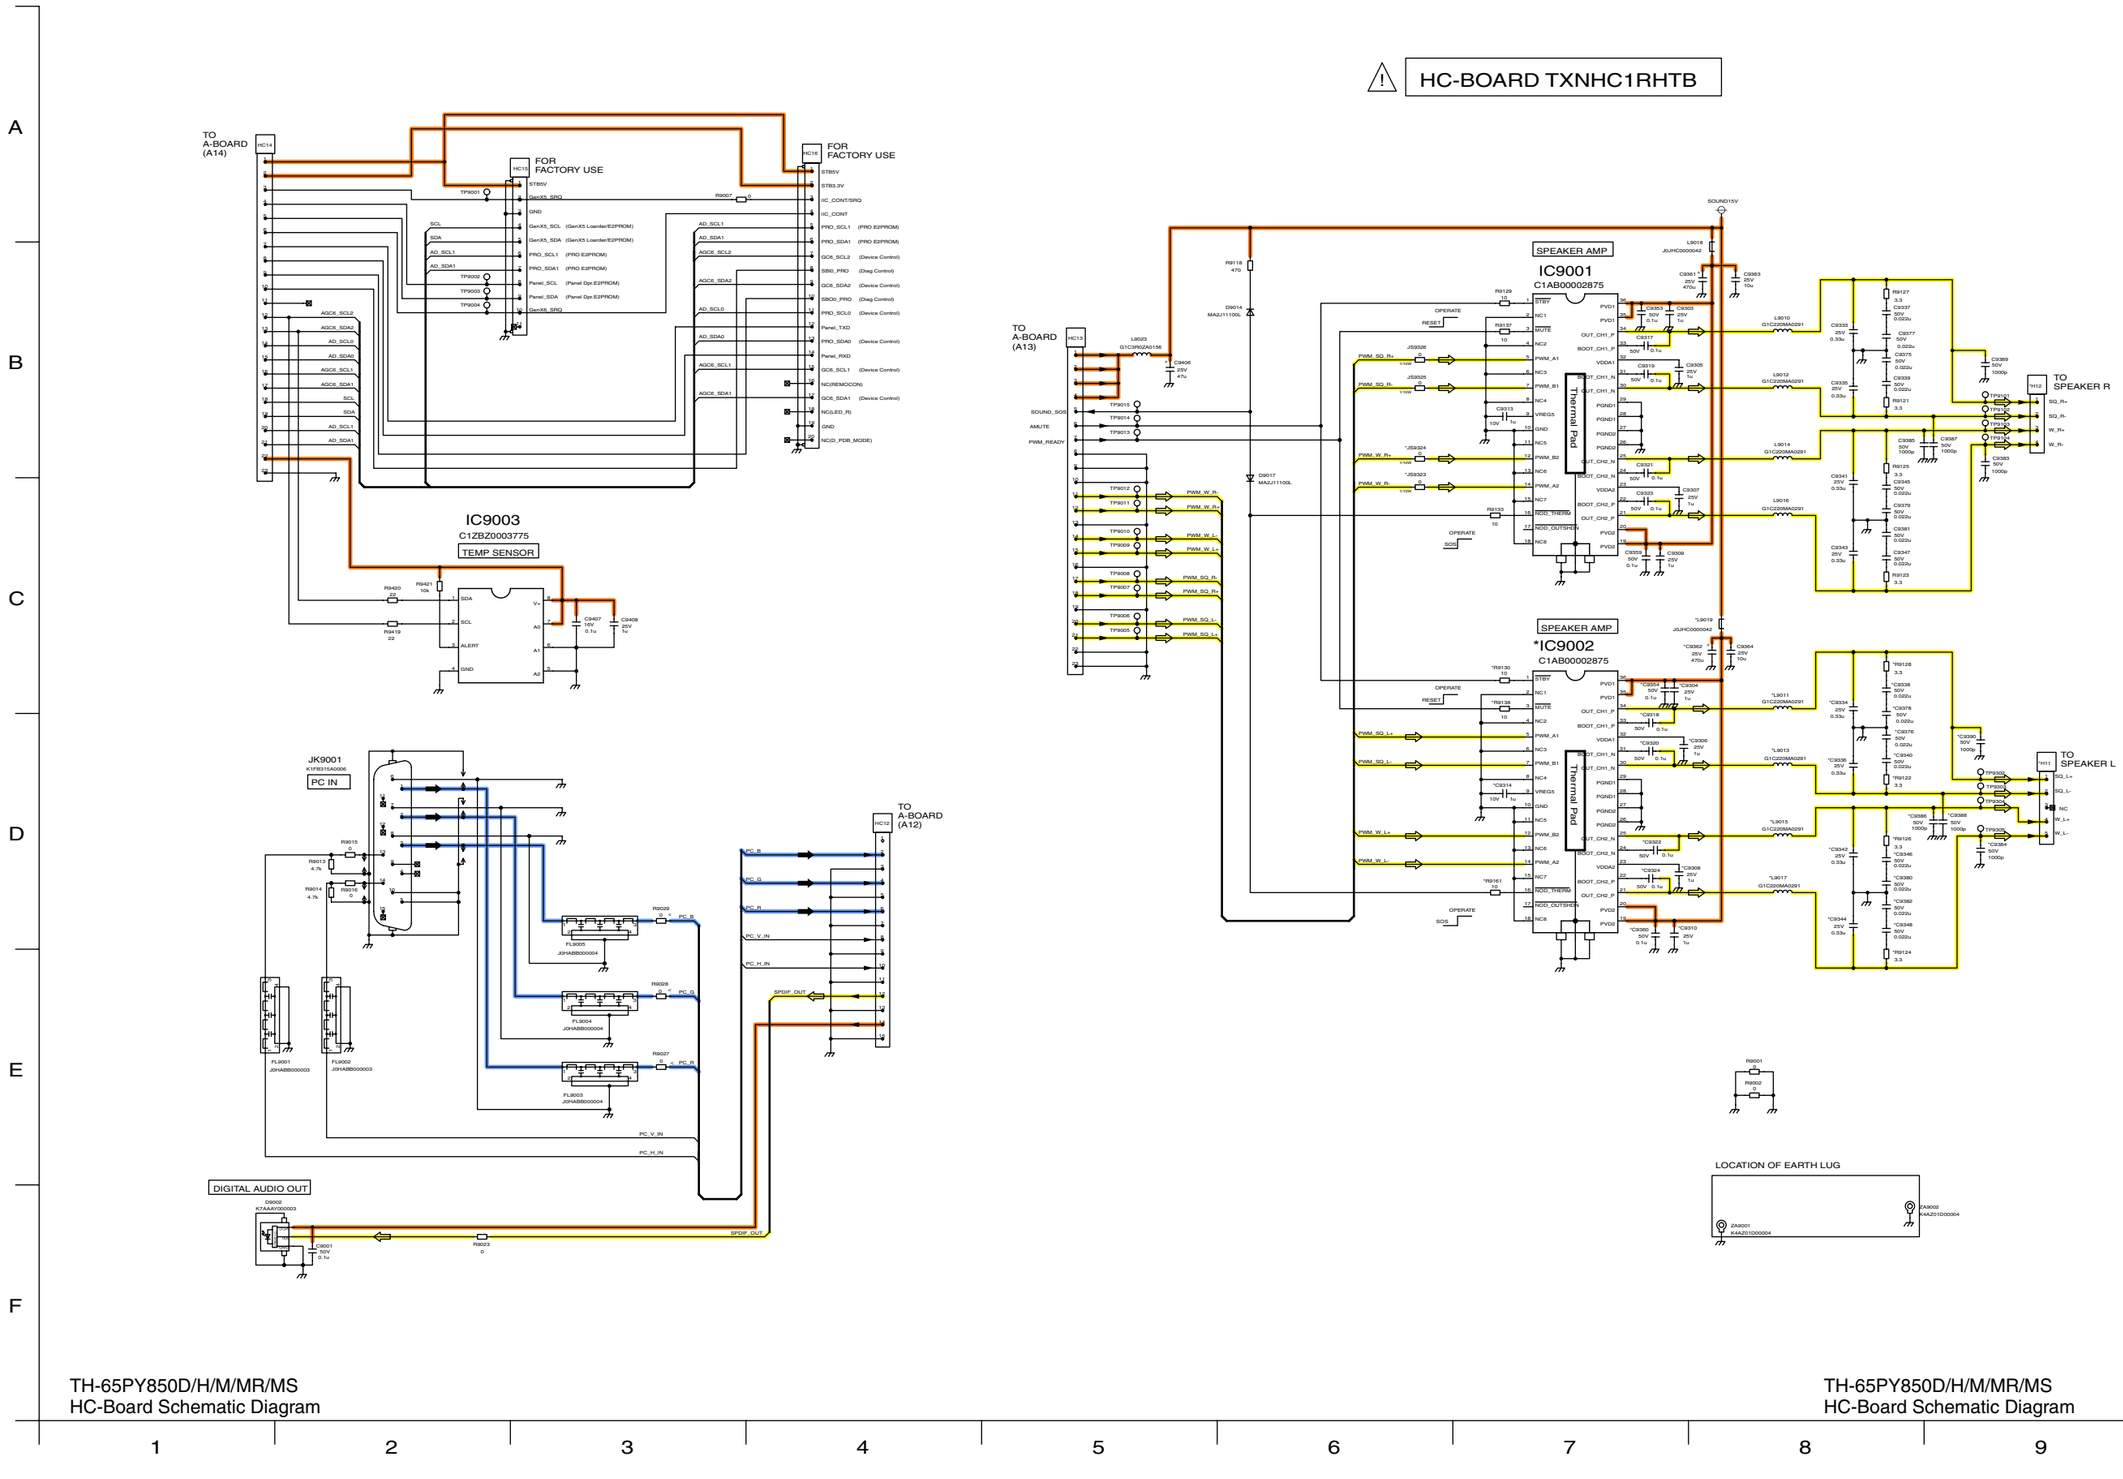

TH-65PY850D/H/M/MR/MS
HC-Board Schematic Diagram

11.61. GH-Board Schematic Diagram

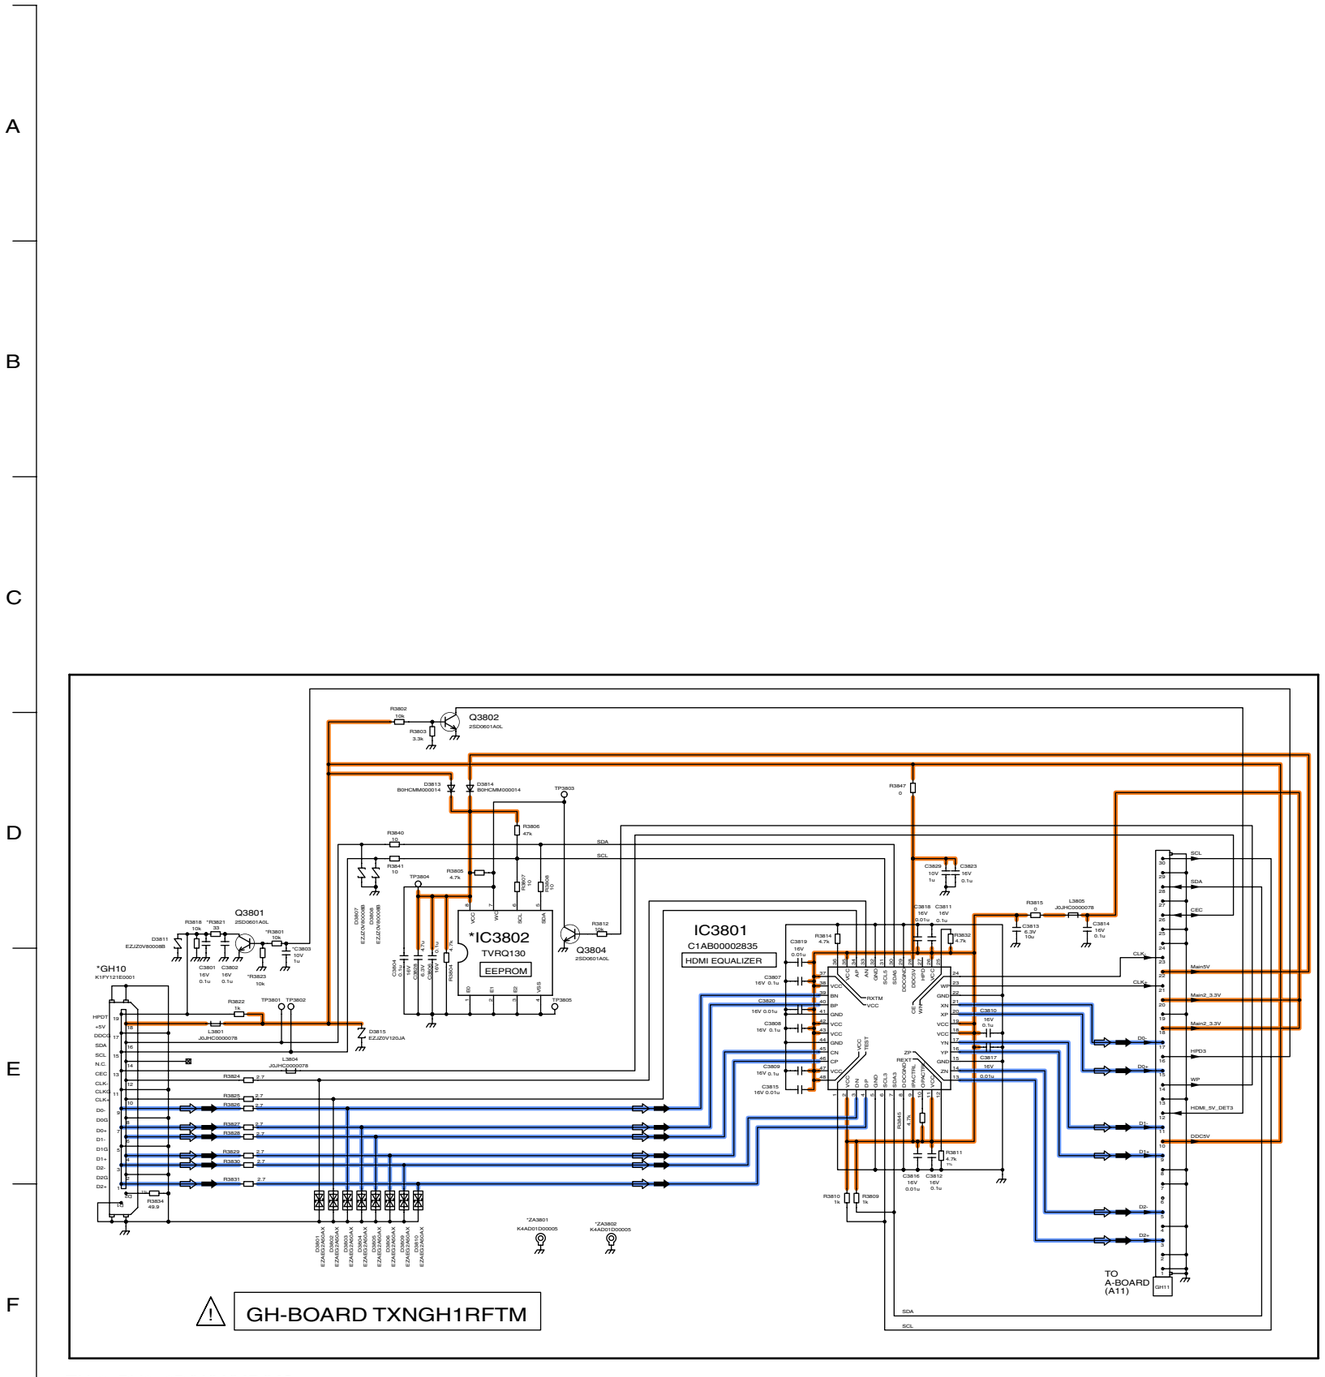


TH-65PY850D/H/M/MR/MS
GH-Board Schematic Diagram

TH-65PY850D/H/M/MR/MS
GH-Board Schematic Diagram


12 Printed Circuit Board


12.1. P(SUS)-Board

P(SUS)-BOARD ETX2MM706NGN (FOIL SIDE)

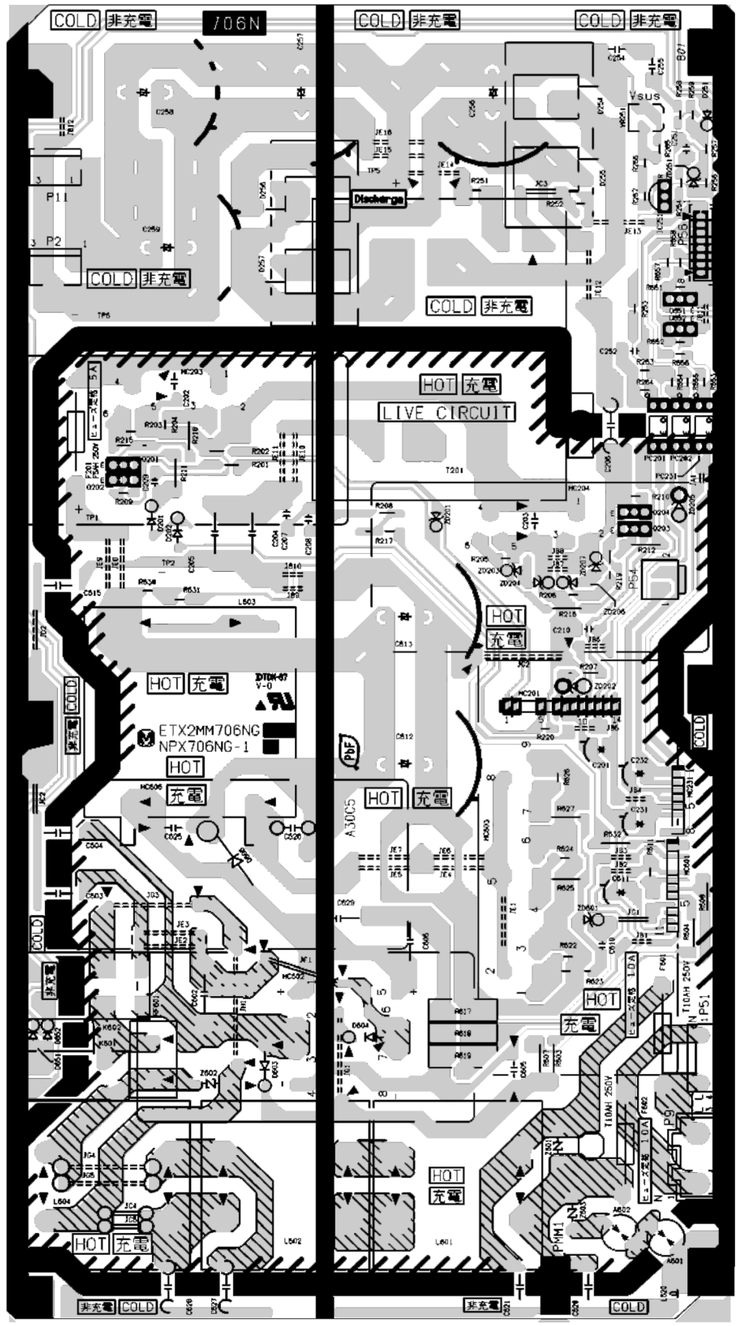

P(SUS)-BOARD ETX2MM706NGN (COMPONET SIDE)

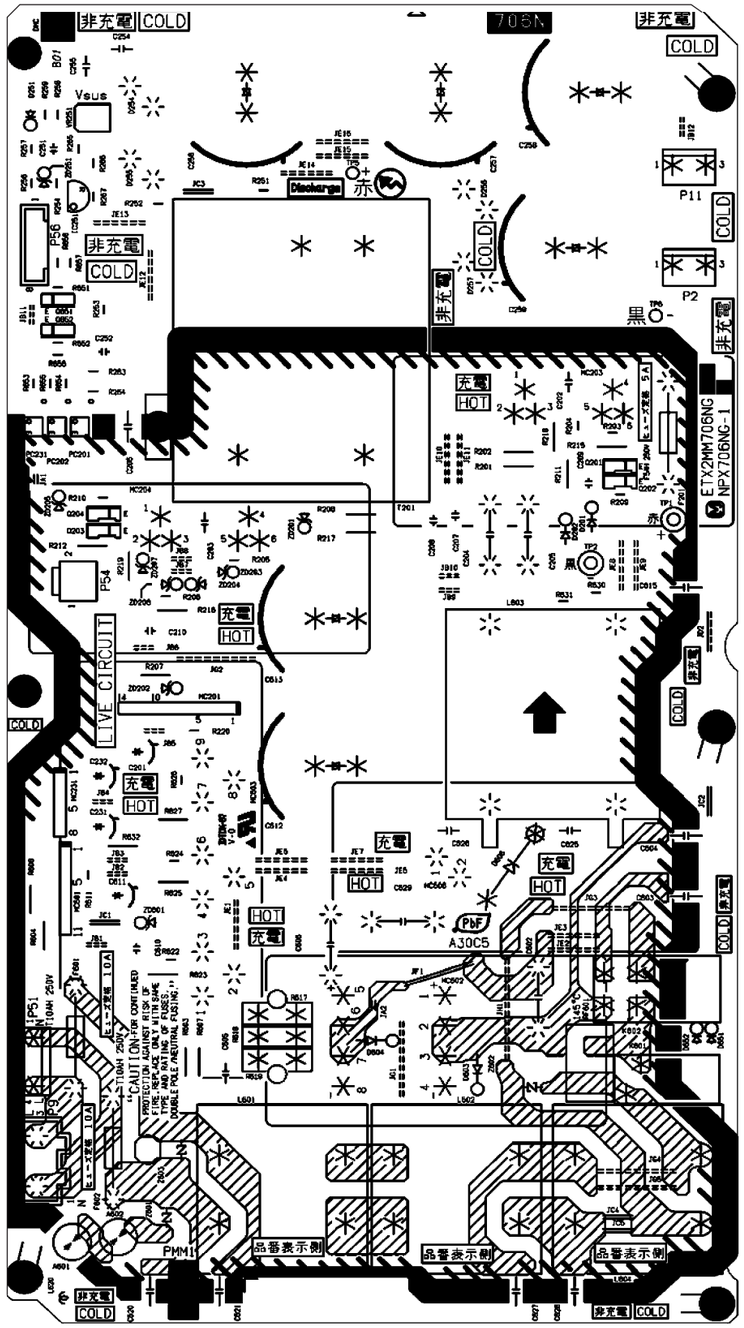

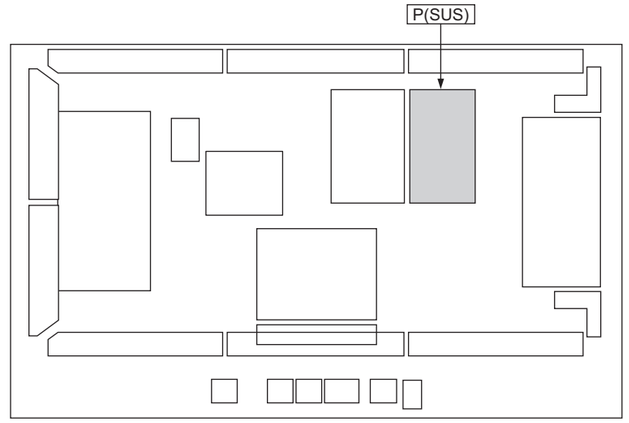

Parts Location

P(SUS)-BOARD (FOIL SIDE)			
IC		**TRANSISTOR**	
IC251	C-5	Q201	A-4
		Q202	A-4
MODULE		Q203	C-4
		Q204	C-4
MC201	C-3	Q651	C-5
MC203	A-5	Q652	C-5
MC204	C-4		
MC231	D-3	**TEST POINT**	
MC601	D-3		
MC602	B-2	TP1	A-4
MC603	C-3	TP2	A-4
MC606	A-3	TP5	B-6
		TP6	A-5
PHOTO COUPLER			
		VOLUME	
PC201	C-4		
PC202	C-4	VR251	C-6
PC231	C-4		


P(SUS)-BOARD (COMPONENT SIDE)			
IC		**TRANSISTOR**	
IC251	D-5	Q201	F-4
		Q202	G-4
MODULE		Q203	D-4
		Q204	D-4
MC201	E-3	Q651	D-5
MC203	F-5	Q652	D-5
MC204	D-4		
MC231	D-3	**TEST POINT**	
MC601	D-3		
MC602	F-2	TP1	G-4
MC603	E-3	TP2	F-4
MC606	F-3	TP5	E-6
		TP6	G-5
PHOTO COUPLER			
		VOLUME	
PC201	D-4		
PC202	D-4	VR251	D-6
PC231	D-4		


TH-65PY850D/H/M/MR/MS
P(SUS)-BOARD ETX2MM706NGN

TH-65PY850D/H/M/MR/MS
P(SUS)-BOARD ETX2MM706NGN

12.2. P(MULTI)-Board

P(MULTI)-BOARD ETX2MM706NGN (FOIL SIDE)

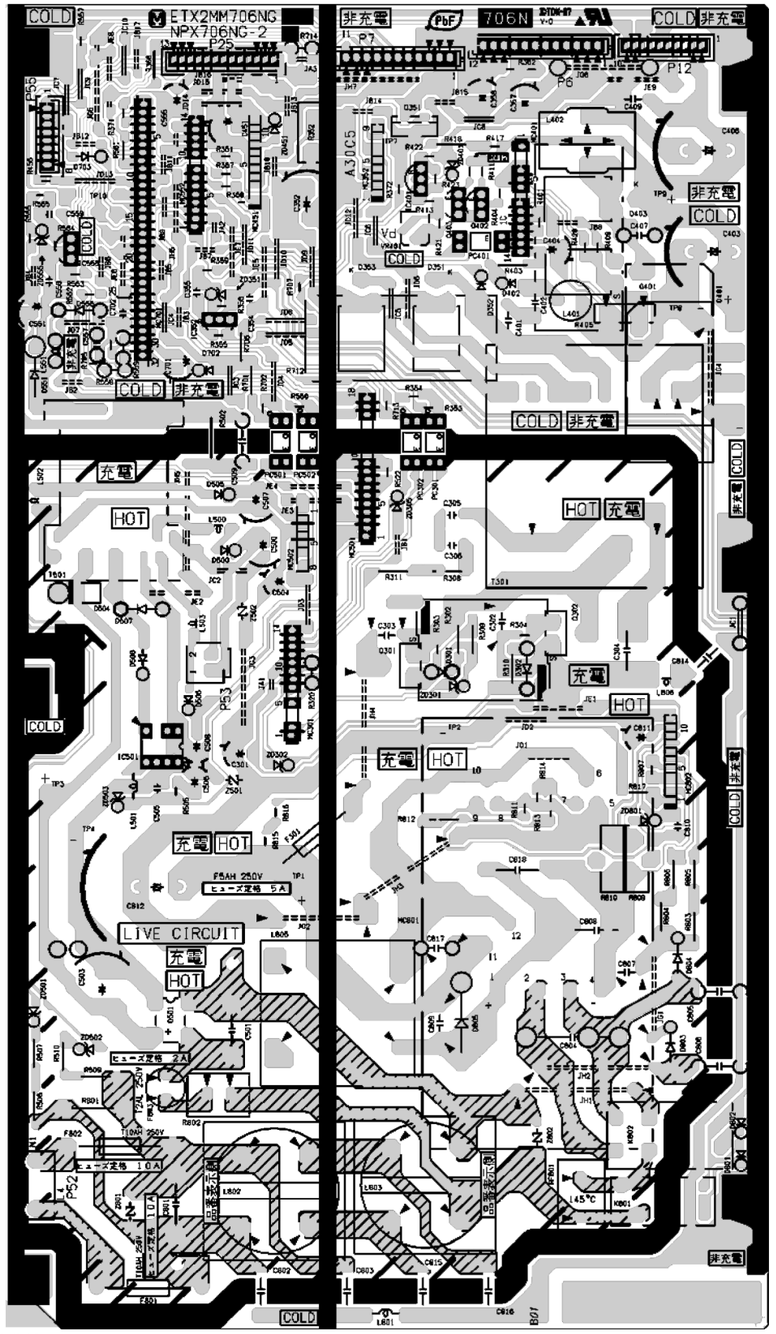


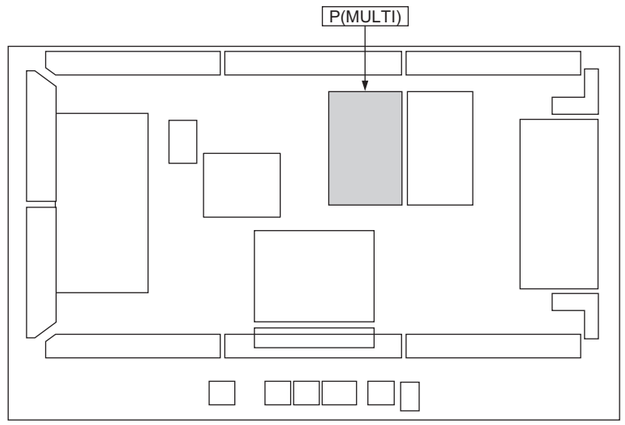


Parts Location

P(MULTI)-BOARD (FOIL SIDE)			
IC		**TRANSISTOR**	
IC352	B-5	Q301	C-4
IC401	C-6	Q302	D-4
IC501	B-3	Q351	C-6
IC555	B-5	Q401	D-5
		Q402	C-5
MODULE		Q403	C-5
MC301	C-3	**TEST POINT**	
MC352	C-6	TP1	C-3
MC401	D-6	TP2	C-3
MC451	C-5	TP3	B-3
MC501	C-4	TP4	B-3
MC502	C-4	TP7	C-6
MC552	B-6	TP8	D-5
MC701	B-5	TP9	D-6
MC801	C-2	TP10	B-6
MC802	D-3		
PHOTO COUPLER		**VOLUME**	
PC301	C-4	VR401	C-5
PC302	C-4		
PC401	C-5		
PC501	C-4		
PC502	C-4		

P(MULTI)-BOARD ETX2MM706NGN (COMPONET SIDE)

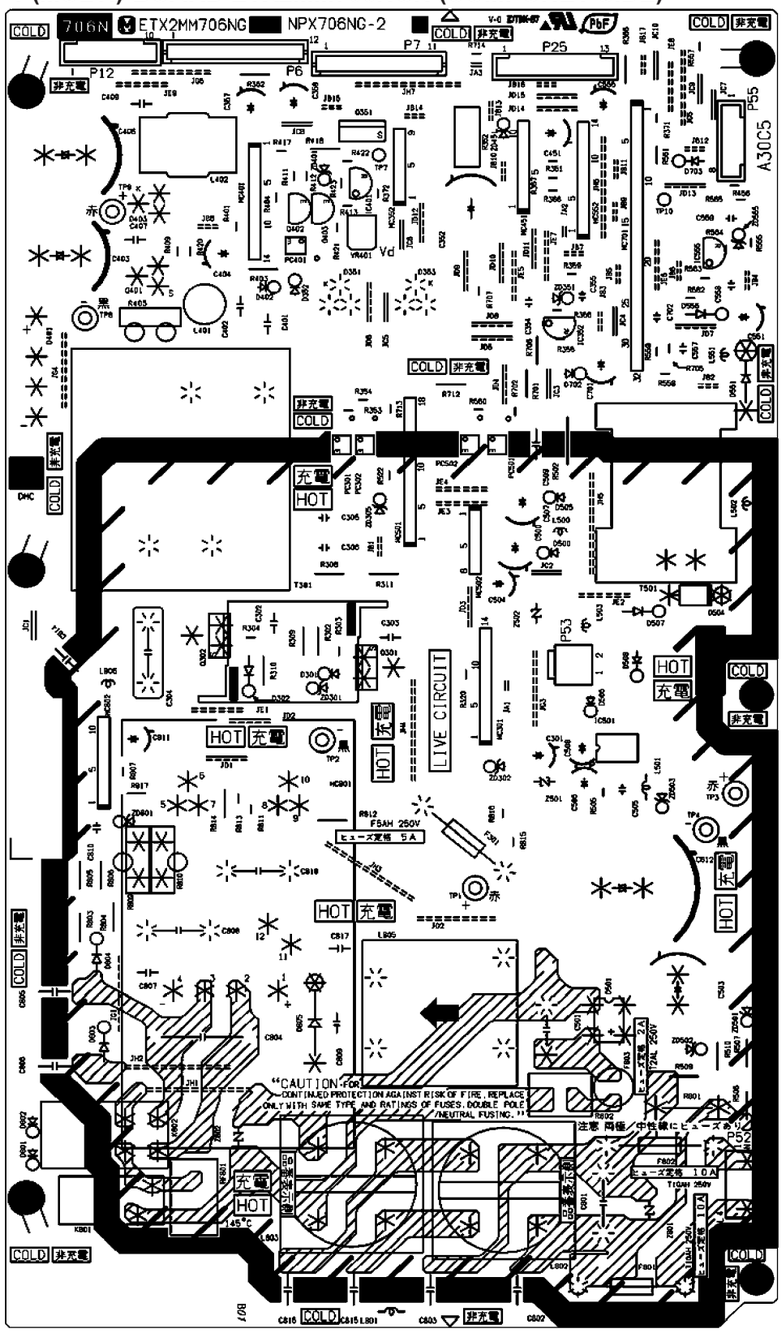

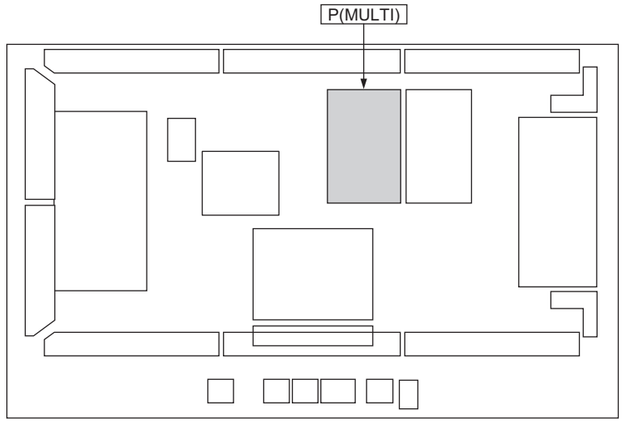


Parts Location


P(MULTI)-BOARD (COMPONENT SIDE)			
IC		**TRANSISTOR**	
IC352	D-5	Q301	C-4
IC401	C-6	Q302	B-4
IC501	D-3	Q351	C-6
IC555	D-5	Q401	B-5
		Q402	C-5
		Q403	C-5
MODULE			
MC301	D-3	**TEST POINT**	
MC352	C-5	TP1	C-3
MC401	B-6	TP2	C-3
MC451	D-5	TP3	D-3
MC501	C-4	TP4	D-3
MC502	C-4	TP7	C-6
MC552	D-5	TP8	B-5
MC701	D-5	TP9	B-6
MC801	C-3	TP10	D-5
MC802	B-3		
PHOTO COUPLER		**VOLUME**	
PC301	C-4	VR401	C-5
PC302	C-4		
PC401	C-5		
PC501	D-4		
PC502	C-4		


12.3. GH and HC-Board

GH-BOARD (FOIL SIDE)
TXNGH1RFTM

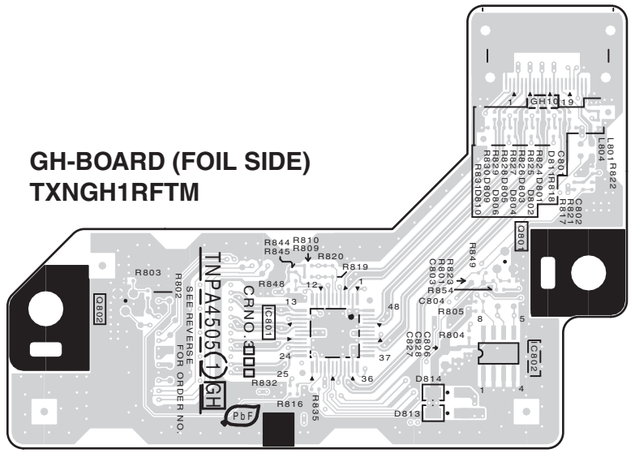


GH-BOARD (COMPONENT SIDE)
TXNGH1RFTM

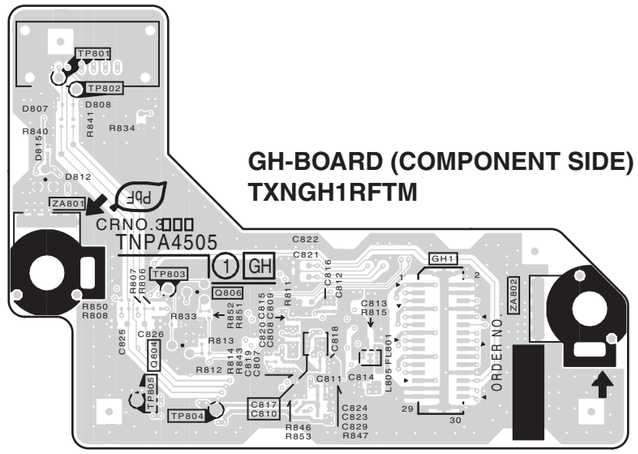


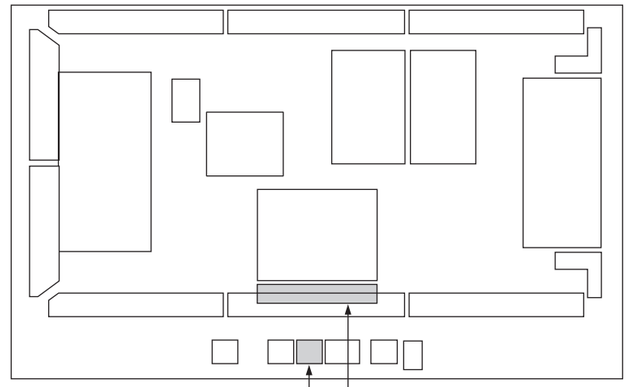

HC-BOARD (FOIL SIDE)
TXNHC1RHTB

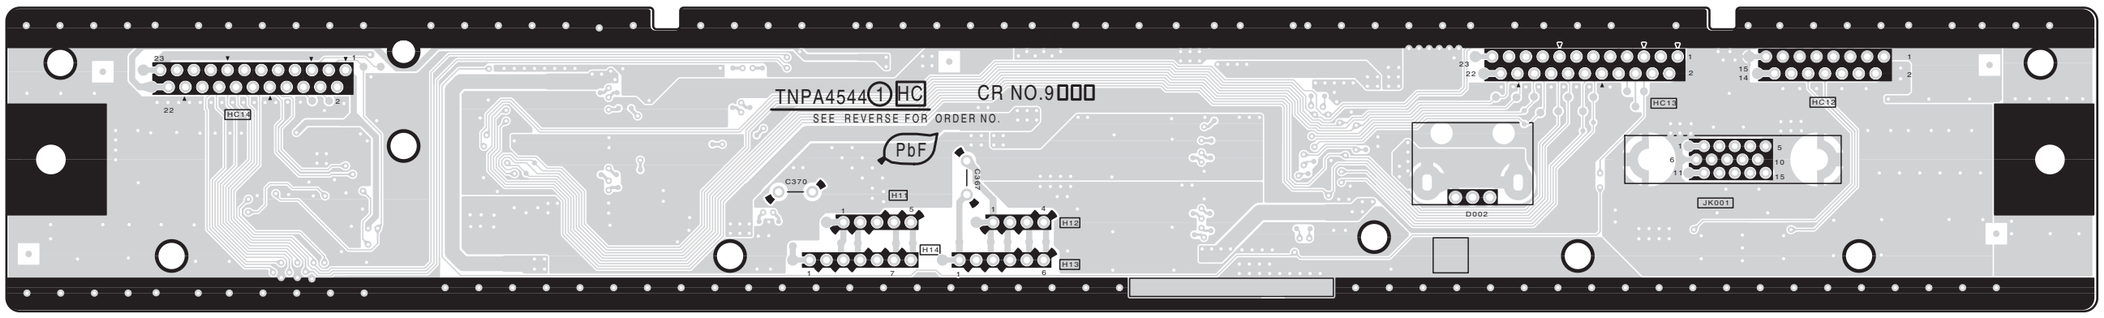

HC-BOARD (COMPONENT SIDE)
TXNHC1RHTB

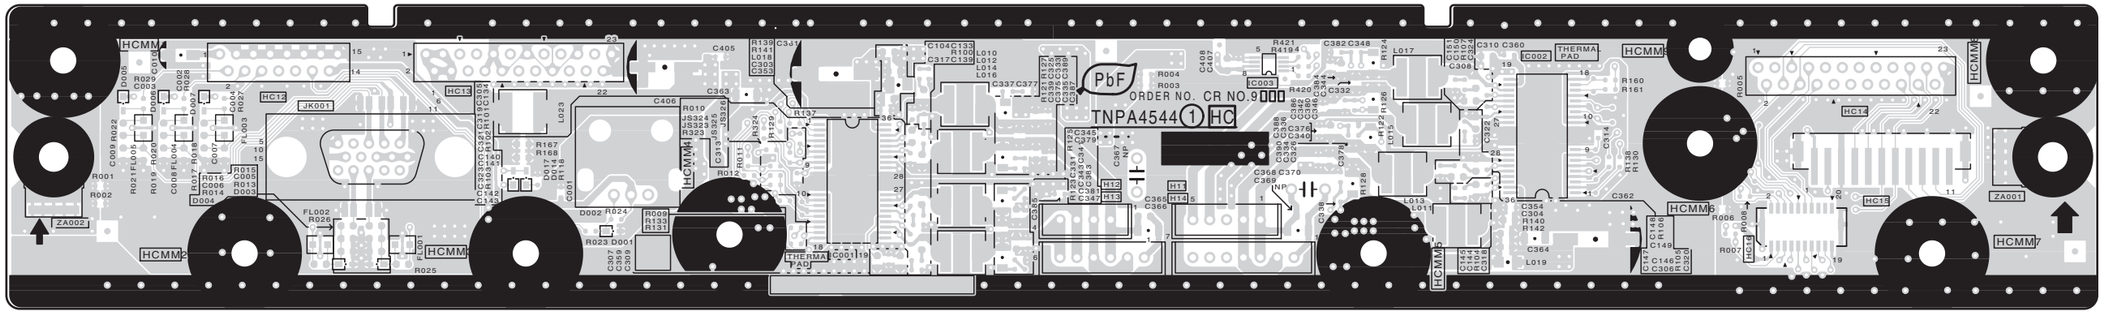



TH-65PY850D/H/M/MR/MS
GH-BOARD TXNGH1RFTM
HC-BOARD TXNHC1RHTB

TH-65PY850D/H/M/MR/MS
GH-BOARD TXNGH1RFTM
HC-BOARD TXNHC1RHTB


12.4. G, GL and GS-Board

G-BOARD (FOIL SIDE)
TNPA4515AC

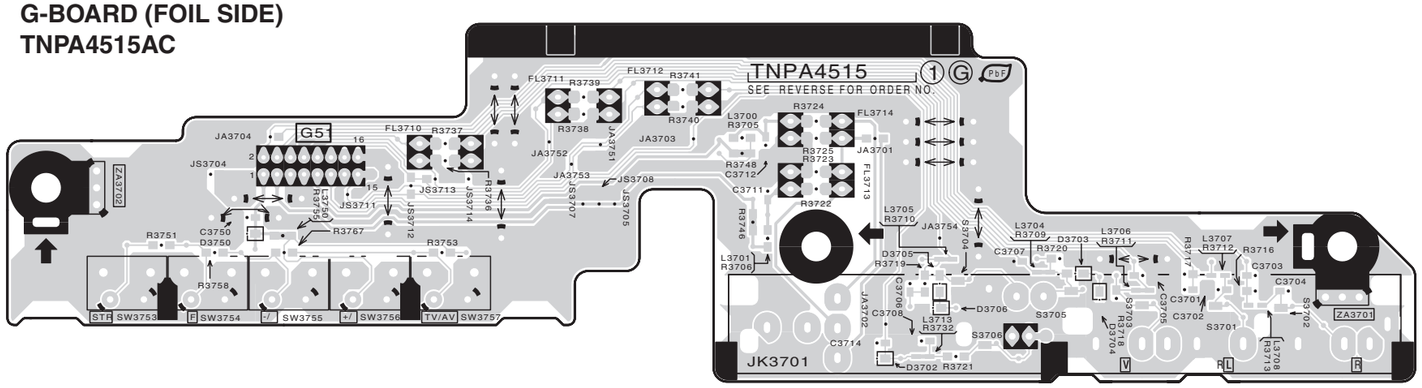


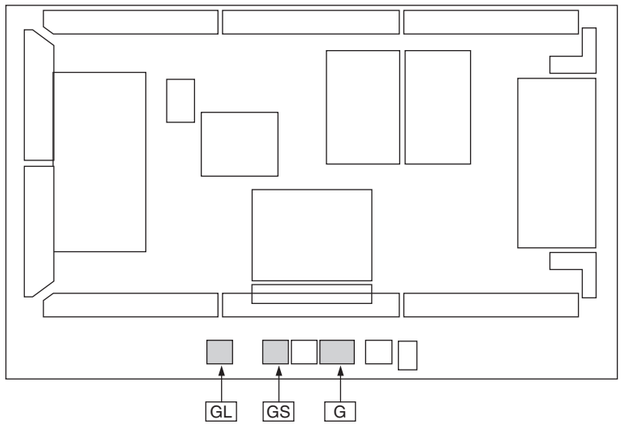


G-BOARD (COMPONENT SIDE)
TNPA4515AC

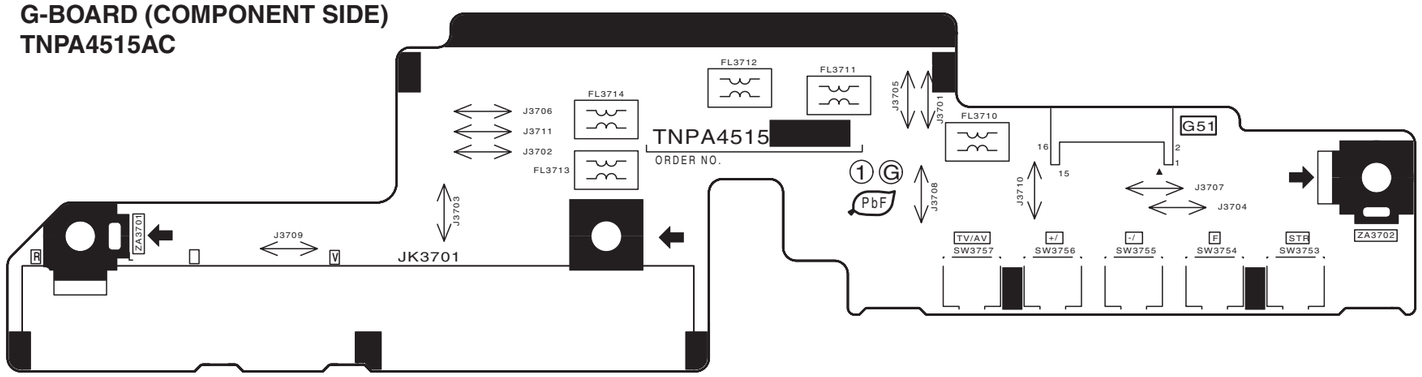


GL-BOARD (FOIL SIDE)
TXNGL1RFTM

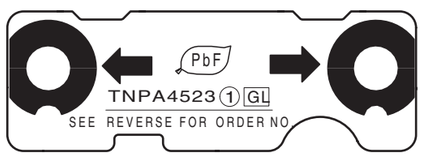


GL-BOARD (COMPONENT SIDE)
TXNGL1RFTM

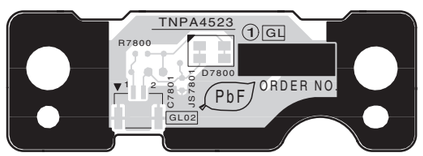

GS-BOARD (FOIL SIDE)
TXNGS1RFTM

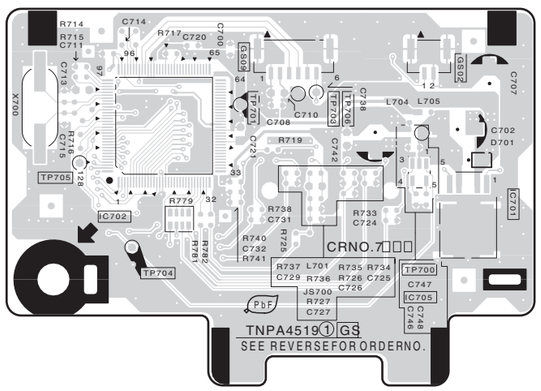

GS-BOARD (COMPONENT SIDE)
TXNGS1RFTM

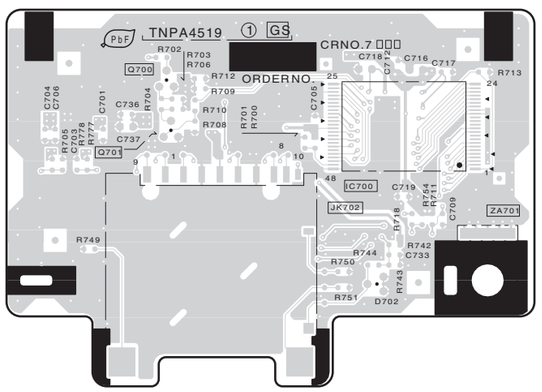


TH-65PY850D/H/M/MR/MS
G-BOARD TNPA4515AC
GL-BOARD TXNGL1RFTM
GS-BOARD TXNGS1RFTM

TH-65PY850D/H/M/MR/MS
G-BOARD TNPA4515AC
GL-BOARD TXNGL1RFTM
GS-BOARD TXNGS1RFTM


12.5. K, PA and S-Board

PA-BOARD (FOIL SIDE)
TXNPA1RETM

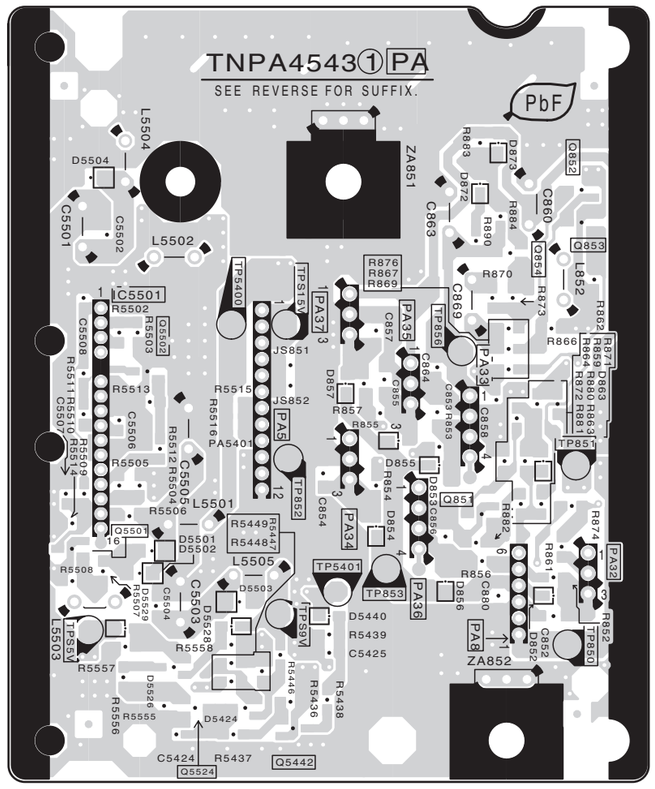

12.6. A-Board

A-BOARD (FOIL SIDE)
TXN/A1RETM(D/H/M/MR) TXN/A1RETQ(MS)

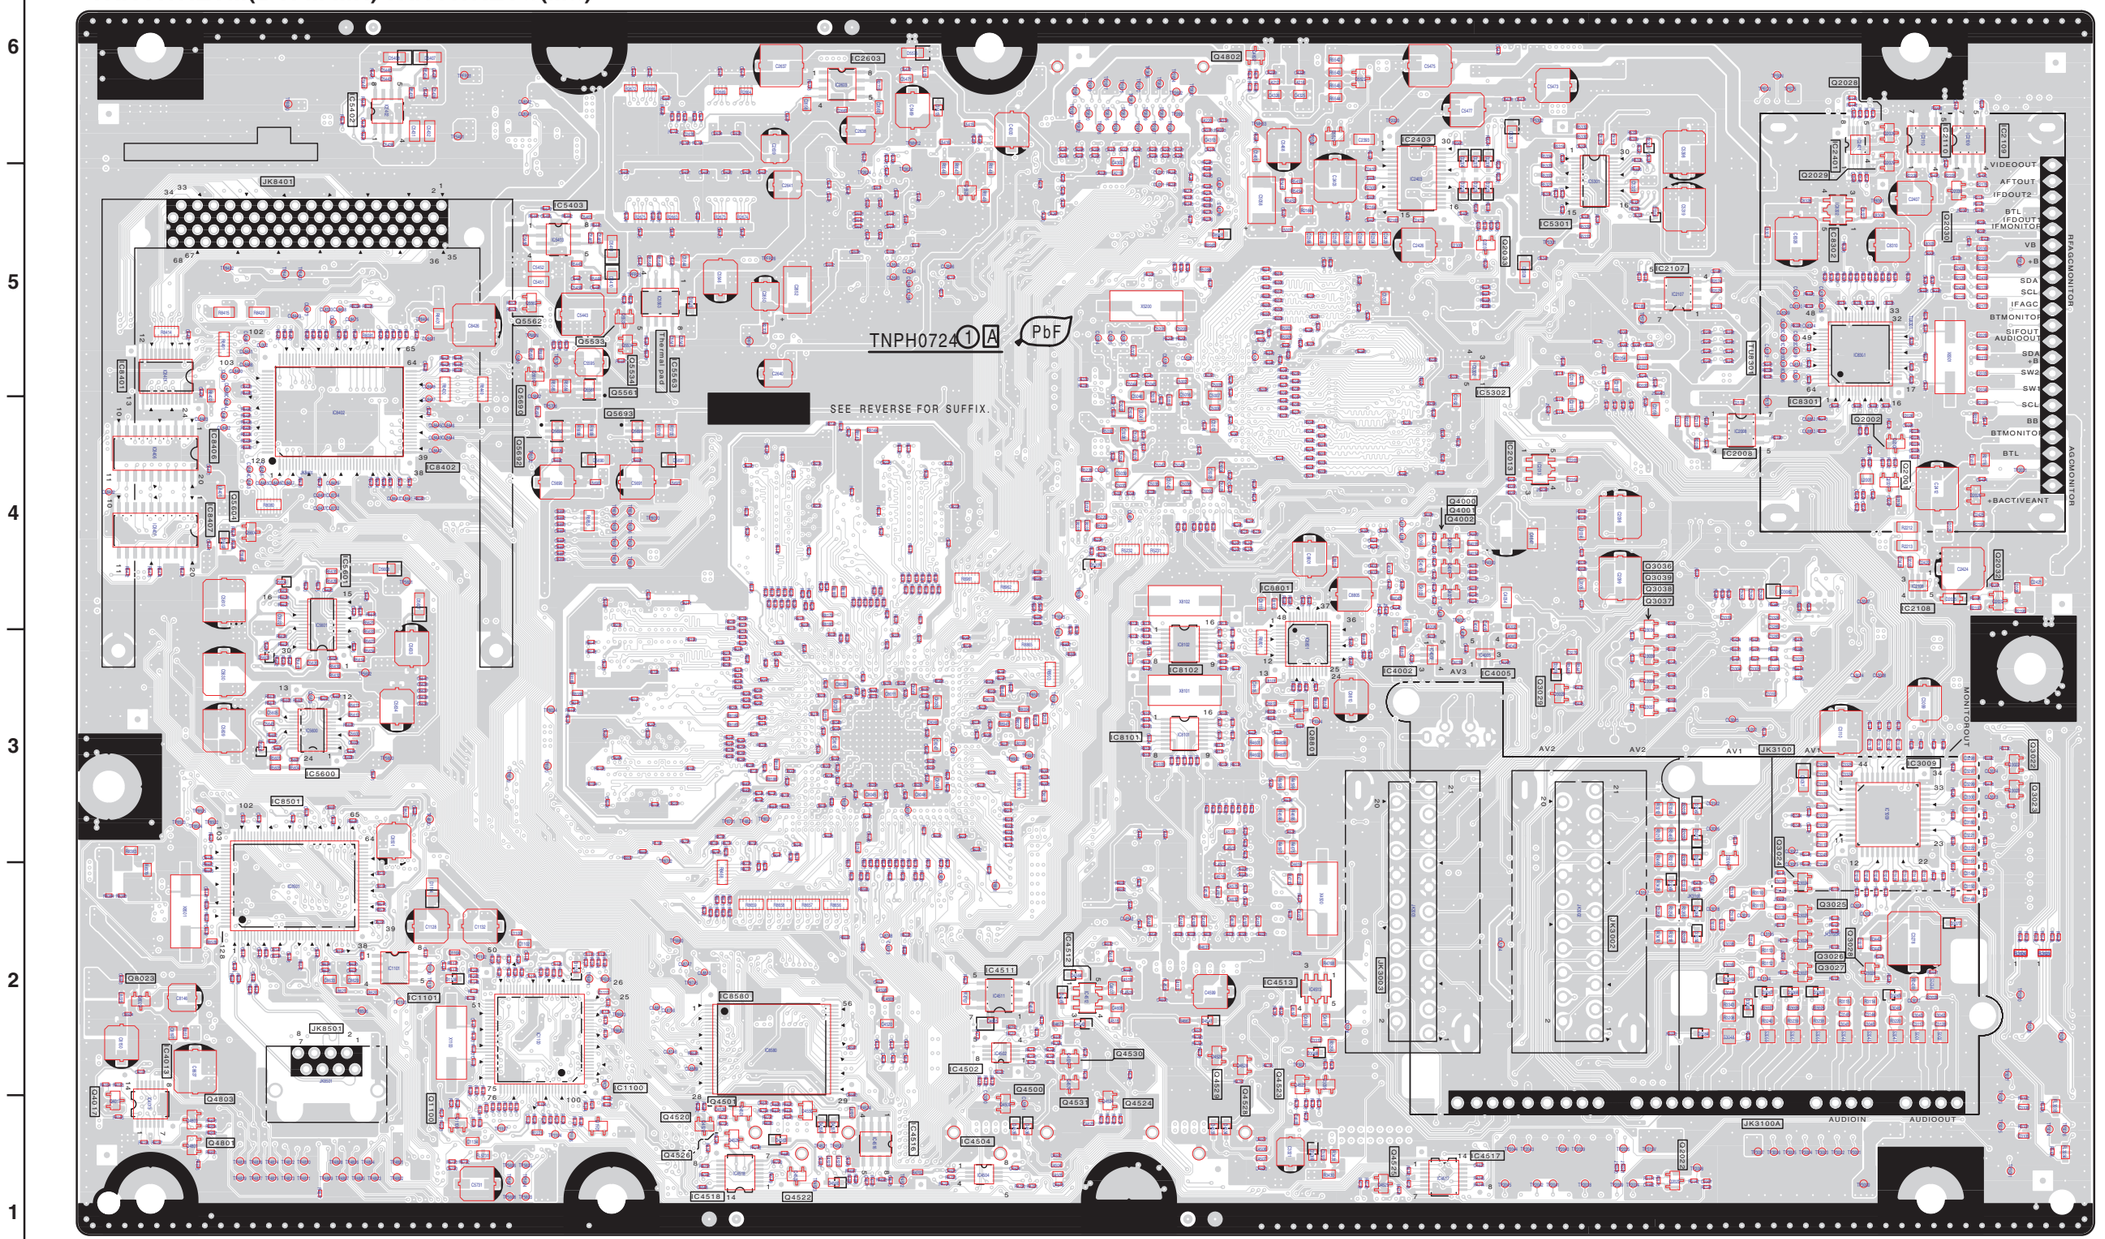


TH-65PY850D/H/M/MR
A-BOARD TXN/A1RETM

TH-65PY850MS
A-BOARD TXN/A1RETQ

TH-65PY850D/H/M/MR
A-BOARD TXN/A1RETM

TH-65PY850MS
A-BOARD TXN/A1RETQ

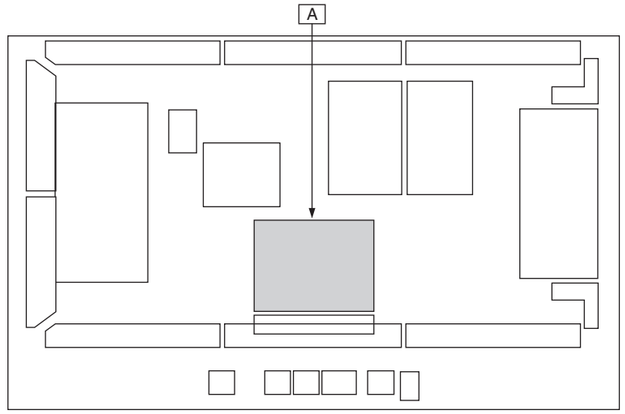

Parts Location

A-BOARD (FOIL SIDE)

IC		TRANSISTOR		TEST POINT	
IC1100	C-2	Q1100	B-1	TP1042	E-3
IC1101	B-2	Q2001	I-4	TP1043	E-3
IC2008	H-4	Q2002	H-4	TP1044	F-3
IC2013	G-4	Q2022	H-1	TP1045	E-4
IC2107	H-5	Q2028	H-6	TP1100	B-2
IC2108	I-4	Q2029	H-5	TP1101	B-2
IC2109	I-6	Q2030	I-5	TP1102	B-2
IC2110	I-6	Q2032	I-4	TP1103	B-2
IC2401	H-6	Q2033	G-5	TP1104	C-1
IC2403	F-6	Q3022	I-3	TP1105	C-1
IC2603	D-6	Q3023	I-3	TP1107	C-1
IC3009	I-2	Q3024	H-3	TP2008	H-1
IC4002	F-3	Q3025	H-2	TP2009	G-1
IC4005	G-3	Q3026	H-2	TP2020	F-6
IC4013	A-2	Q3027	H-2	TP2030	I-5
IC4502	E-2	Q3028	H-2	TP2031	I-4
IC4504	E-1	Q3029	G-3	TP2032	F-6
IC4511	E-2	Q3036	H-4	TP2034	G-1
IC4512	E-2	Q3037	H-4	TP2035	G-1
IC4513	F-2	Q3038	H-4	TP2038	G-1
IC4516	D-1	Q3039	H-4	TP2039	G-1
IC4517	G-1	Q4000	G-4	TP2040	G-1
IC4518	C-1	Q4001	G-4	TP2041	G-1
IC5301	G-5	Q4002	G-4	TP2042	G-1
IC5302	G-5	Q4017	A-1	TP2043	G-1
IC5402	B-6	Q4500	E-2	TP2044	G-1
IC5403	C-5	Q4501	C-1	TP2045	G-1
IC5563	C-5	Q4520	C-1	TP2600	F-6
IC5600	B-3	Q4522	D-1	TP2601	E-6
IC5601	B-4	Q4523	F-2	TP2602	E-6
IC8101	E-3	Q4524	E-1	TP2603	E-6
IC8102	E-3	Q4525	F-1	TP2604	E-6
IC8301	H-5	Q4526	C-1	TP2605	E-6
IC8302	H-5	Q4528	F-1	TP2606	E-6
IC8401	A-5	Q4529	F-2	TP2607	E-6
IC8402	B-4	Q4530	E-2	TP2608	E-6
IC8406	A-4	Q4531	E-1	TP2609	E-6
IC8407	A-4	Q4801	A-1	TP2610	E-6
IC8501	B-3	Q4802	F-6	TP2611	E-6
IC8580	C-2	Q4803	A-1	TP2612	E-6
IC8801	F-4	Q5533	C-5	TP2613	E-6
		Q5534	C-5	TP2614	E-6
		Q5561	C-5	TP2615	E-6
		Q5562	C-5	TP2616	E-6
		Q5604	A-4	TP2617	E-6
		Q5690	C-4	TP2618	E-6
		Q5692	C-4	TP2619	E-6
		Q5693	C-4	TP2620	E-6
		Q8023	A-2	TP2621	E-6
		Q8801	F-3	TP2622	E-6
				TP2623	E-6
TP2624	D-5	TP5600	B-3	TPC0F	C-2
TP2625	D-5	TP5601	B-4	TPEC0	H-6
TP3000	H-1	TP5602	B-3	TPFR1	D-5
TP3001	H-1	TP5603	C-1	TPFR25	C-5
TP3002	H-1	TP5604	C-1	TPFR26	D-5
TP3003	H-1	TP5605	C-1	TPFR31	B-6
TP3004	H-1	TP5606	C-1	TPM0N	C-5
TP3005	H-1	TP5607	C-1	TPMH12	D-6
TP3006	H-1	TP5608	C-1	TPMH33	F-6
TP3007	H-1	TP5660	C-2	TPS0N	H-6
TP3021	F-2	TP5700	C-5	TPS0S	C-2
TP3022	H-2	TP5701	H-4	TPS15V	G-1
TP3023	I-1	TP5705	G-5	TPST5	H-6
TP3024	I-1	TP5706	C-4		
TP3025	I-1	TP8002	C-4		
TP3026	I-1	TP8003	C-4		
TP3027	I-2	TP8004	C-4		
TP3028	I-2	TP8005	C-4		
TP3029	I-2	TP8006	C-4		
TP3030	I-2	TP8007	C-4		
TP3031	I-1	TP8008	C-4		
TP4000	G-4	TP8009	C-4		
TP4520	D-1	TP8010	C-4		
TP4521	D-1	TP8019	C-3		
TP4522	D-1	TP8020	C-3		
TP4523	D-1	TP8021	D-3		
TP4524	D-1	TP8022	C-4		
TP4801	B-1	TP8023	D-3		
TP4802	B-1	TP8024	C-3		
TP4803	B-1	TP8025	G-4		
TP4804	B-1	TP8301	H-5		
TP4805	B-1	TP8401	B-5		
TP4806	B-1	TP8402	A-5		
TP4807	B-1	TP8403	B-5		
TP4808	B-1	TP8404	B-5		
TP4809	B-1	TP8501	E-3		
TP4810	B-1	TP8502	A-3		
TP4811	B-1	TP8503	A-3		
TP4812	B-1	TP8504	A-3		
TP4813	B-1	TP8505	A-3		
TP4814	B-1	TP8506	B-2		
TP4815	B-1	TP8601	C-2		
TP4816	A-1	TP8602	C-2		
TP4817	A-1	TP8603	C-2		
TP4818	A-1	TP8701	D-3		
TP4819	A-1	TP8702	C-3		
TP4820	B-3	TP8745	C-2		
TP4821	D-3	TP8851	E-2		
TP5300	E-4	TP8901	E-3		
TP5301	G-5	TP8902	E-3		
TP5302	G-6	TP8960	B-6		
TP5401	B-6				


Parts Location

A-BOARD (COMPONENT SIDE)

IC		TRANSISTOR		TEST POINT	
IC1103	H-2	Q2027	D-5	TP1106	H-2
IC2010	C-4	Q4502	E-2	TP2019	D-6
IC2012	C-4	Q4503	D-2		
IC2106	C-4	Q4514	D-2		
IC2602	G-6	Q4515	D-2		
IC2604	F-5	Q4516	D-2		
IC3007	B-3	Q4517	E-3		
IC4001	D-4	Q4519	E-3		
IC4200	E-5	Q4527	F-1		
IC4503	F-2	Q4831	A-3		
IC4510	E-2	Q4832	A-3		
IC4514	D-2	Q5301	C-6		
IC4515	E-2	Q5302	C-5		
IC5001	D-4	Q5522	G-2		
IC5002	D-5	Q5531	G-4		
IC5100	E-4	Q5532	G-4		
IC5300	E-4	Q5563	H-6		
IC5404	D-5	Q5564	H-6		
IC5405	E-6	Q5565	D-6		
IC5562	G-5	Q5600	I-3		
IC5660	G-1	Q5601	I-3		
IC8001	F-3	Q5602	I-4		
IC8201	G-3	Q5603	H-4		
IC8202	G-3	Q5691	G-4		
IC8203	F-4	Q8401	H-5		
IC8204	F-4	Q8402	H-5		
IC8403	H-5	Q8802	D-3		
IC8408	H-5	Q8850	H-2		
IC8502	I-3	Q8851	H-1		
IC8601	G-2	Q8852	G-2		
IC8620	H-2	Q8853	G-2		
IC8621	I-2				
IC8950	I-6				
IC8970	C-5				

TH-65PY850D/H/M/MR/MS
A-BOARD PARTS LOCATION

A-BOARD (COMPONENT SIDE)
TXN/A1RETM(D/H/M/MR) TXN/A1RETQ(MS)

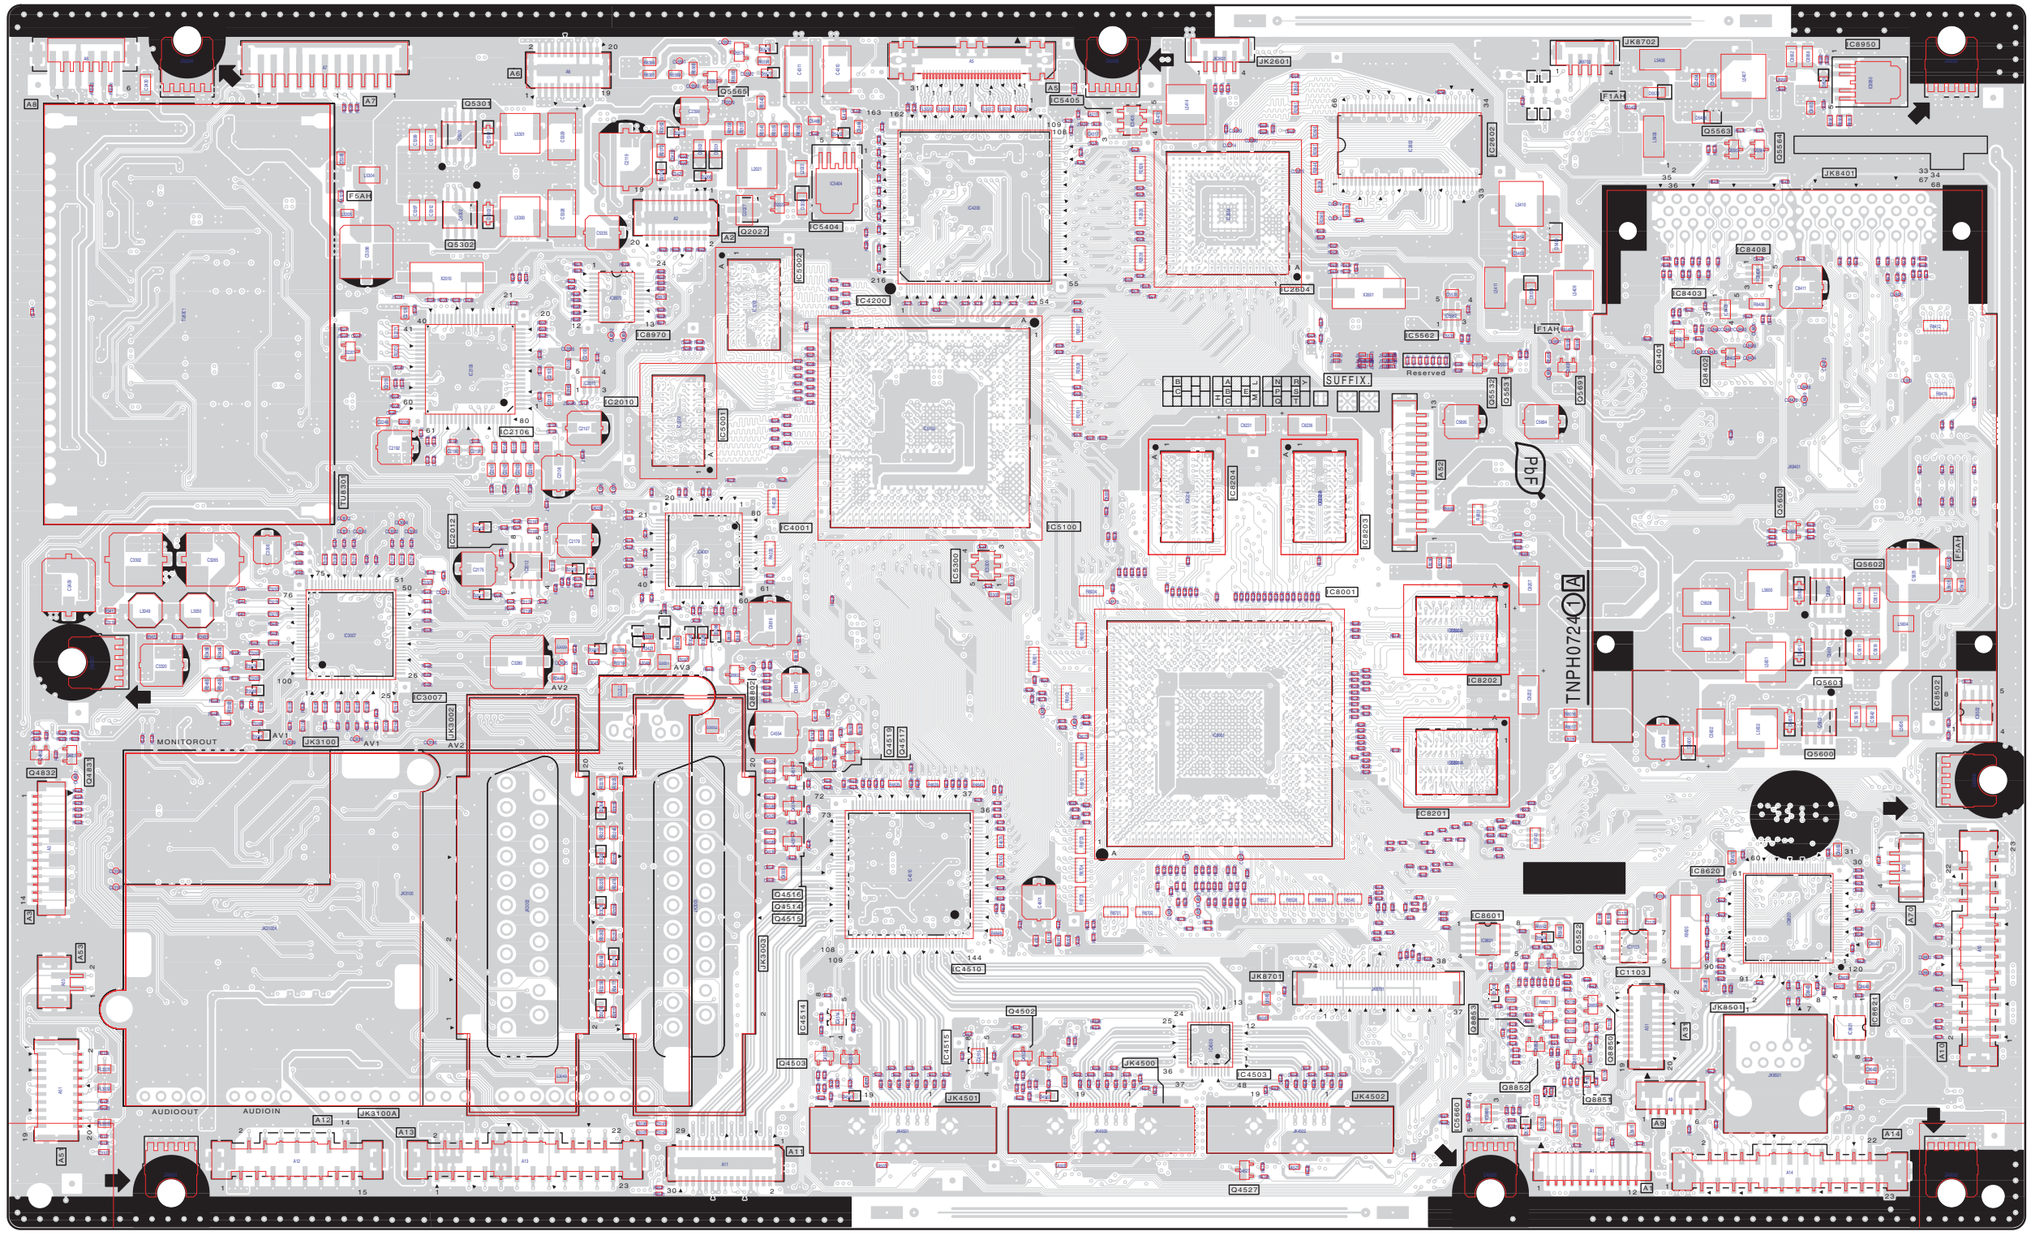


TH-65PY850D/H/M/MR
A-BOARD TXN/A1RETM

TH-65PY850MS
A-BOARD TXN/A1RETQ


TH-65PY850D/H/M/MR
A-BOARD TXN/A1RETM

TH-65PY850MS
A-BOARD TXN/A1RETQ

12.7. D-Board

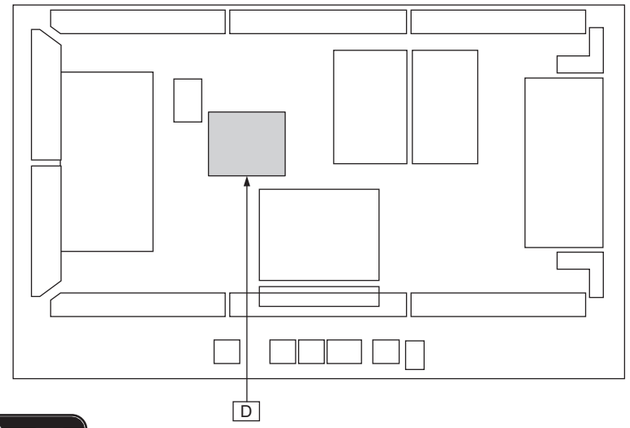


D-BOARD (FOIL SIDE)
TZTNP01RATM

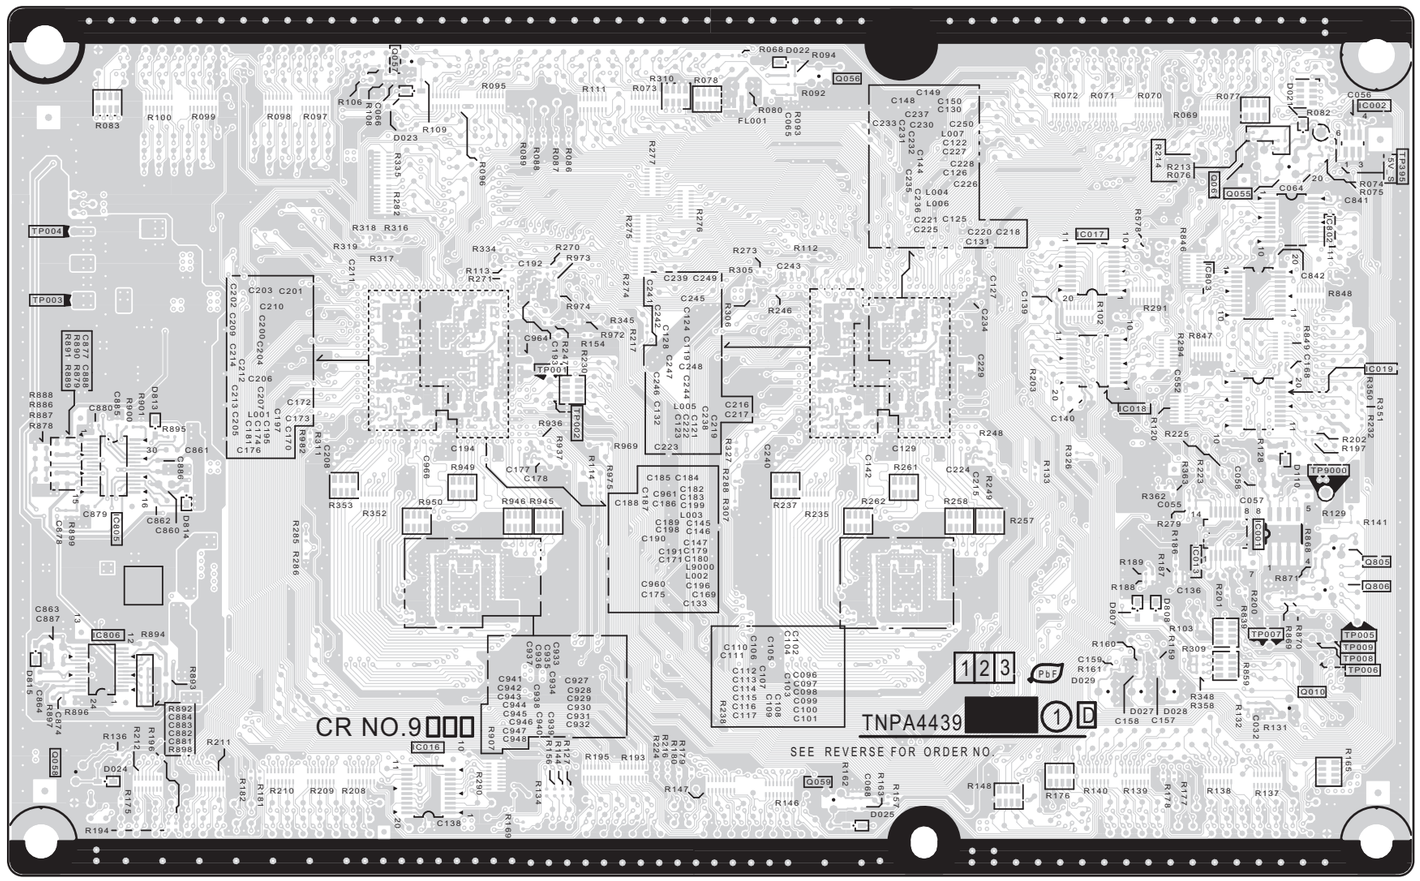


Parts Location

D-BOARD (FOIL SIDE)			
IC		**TEST POINT**	
IC9001	F-2	TP9000	F-3
IC9002	F-4	TP9001	C-3
IC9013	F-2	TP9002	C-3
IC9016	C-2	TP9003	A-3
IC9017	E-3	TP9004	A-4
IC9018	E-3	TP9005	F-2
IC9019	F-3	TP9006	F-2
IC9802	F-4	TP9007	F-2
IC9803	F-3	TP9008	F-2
IC9805	A-2	TP9009	F-2
IC9806	A-2	TP9395	G-4
TRANSISTOR			
Q9010	F-2		
Q9055	F-4		
Q9056	D-4		
Q9057	B-4		
Q9058	A-1		
Q9059	D-1		
Q9061	F-4		
Q9805	F-2		
Q9806	F-2		

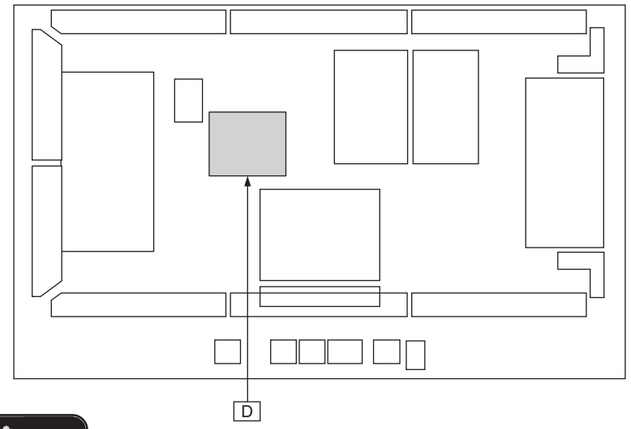

D-BOARD (COMPONENT SIDE)
TZTNP01RATM

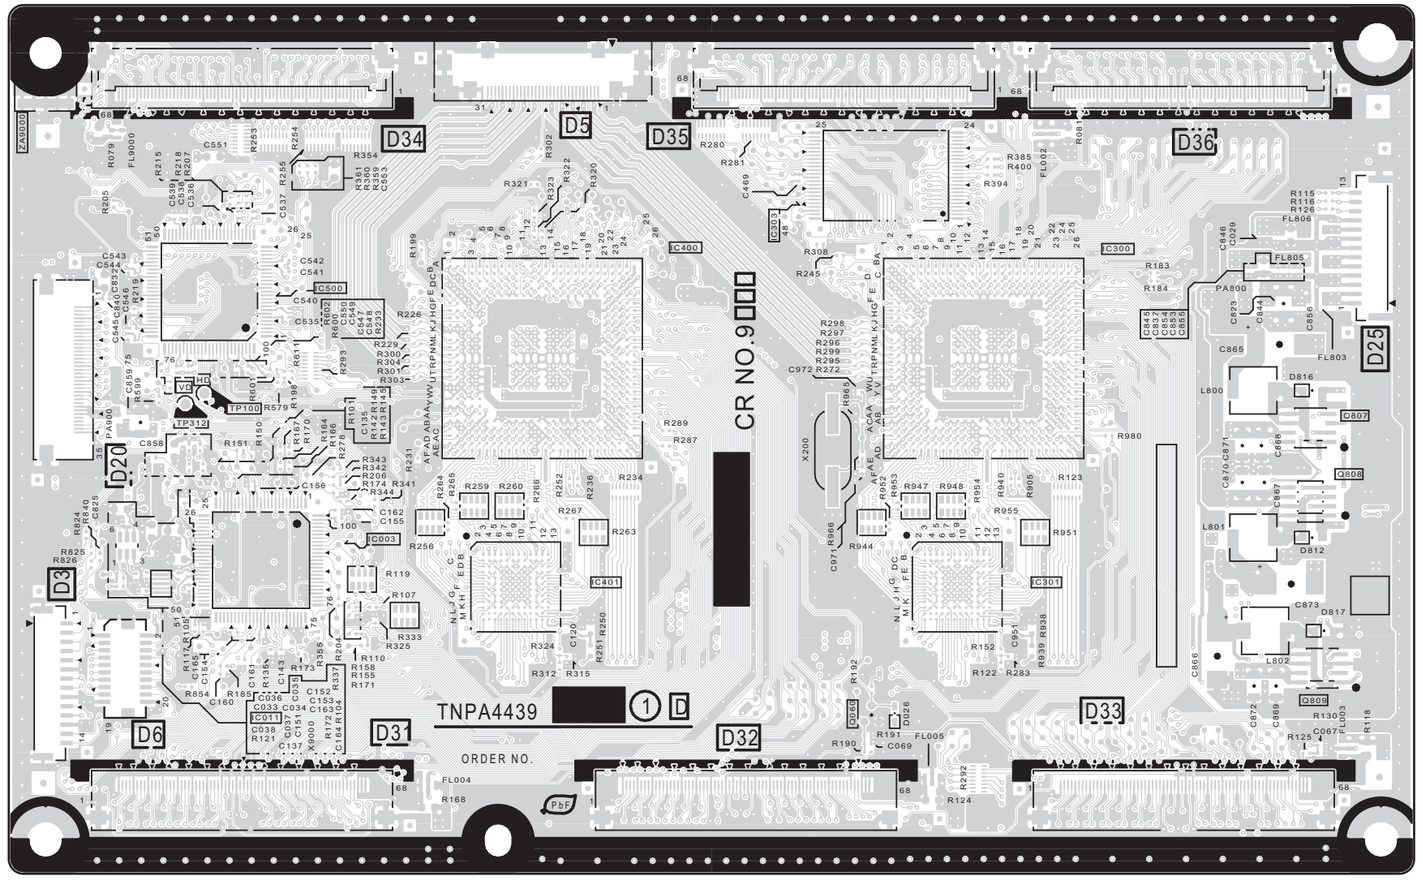


Parts Location

D-BOARD (COMPONENT SIDE)			
IC		**TRANSISTOR**	
IC9003	B-2	Q9060	D-2
IC9011	B-2	Q9807	F-3
IC9300	E-3	Q9808	F-3
IC9301	E-2	Q9809	F-2
IC9303	D-4		
IC9400	C-3	**TEST POINT**	
IC9401	C-2	TP9100	B-3
IC9500	B-3	TP9312	A-3


12.8. C1-Board

Parts Location


C1-BOARD	
IC	
IC17101	I-2
IC17102	E-2
IC17103	F-2
IC17104	G-2
IC17105	H-2
IC17106	I-1

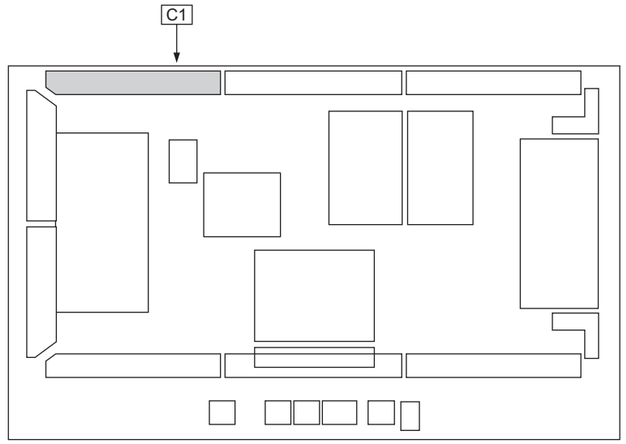

C1-BOARD (FOIL SIDE) TNPA4620

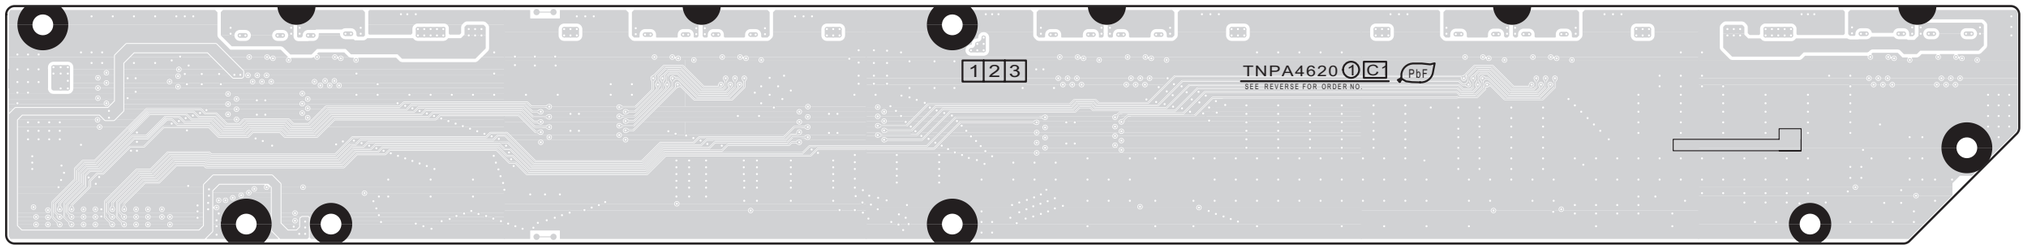

C1-BOARD (COMPONENT SIDE) TNPA4620

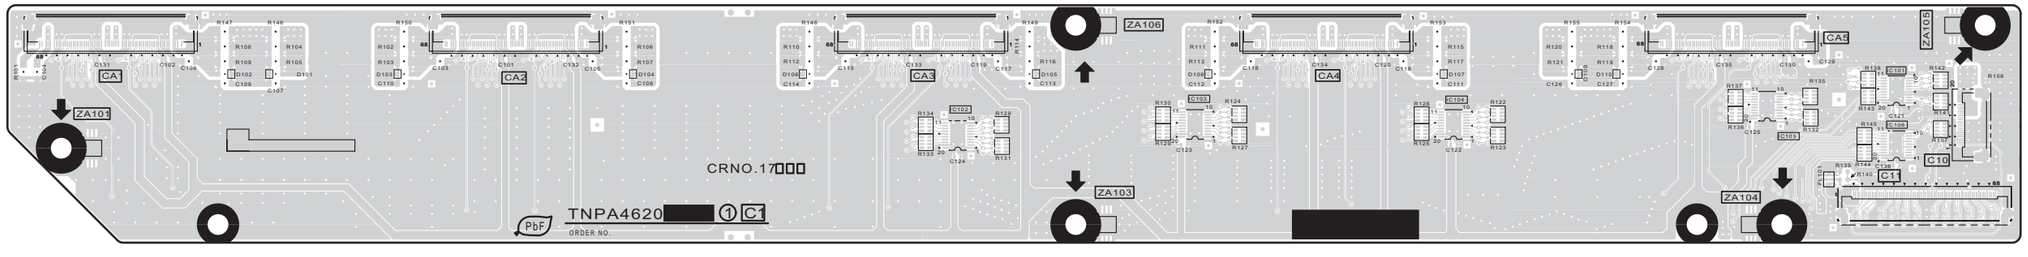


TH-65PY850D/H/M/MR/MS
C1-BOARD TNPA4620

TH-65PY850D/H/M/MR/MS
C1-BOARD TNPA4620


12.9. C2-Board

Parts Location


C2-BOARD	
IC	
IC17201	B-1
IC17202	B-2
IC17203	A-2
IC17204	B-2
IC17205	C-2
IC17206	D-2
IC17207	E-2
IC17208	D-1
IC17209	F-1
IC17210	F-1
IC17211	G-1
IC17212	H-1

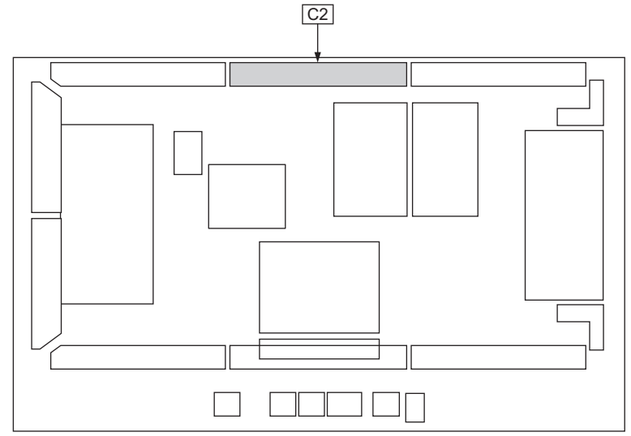

C2-BOARD (FOIL SIDE) TNPA4621

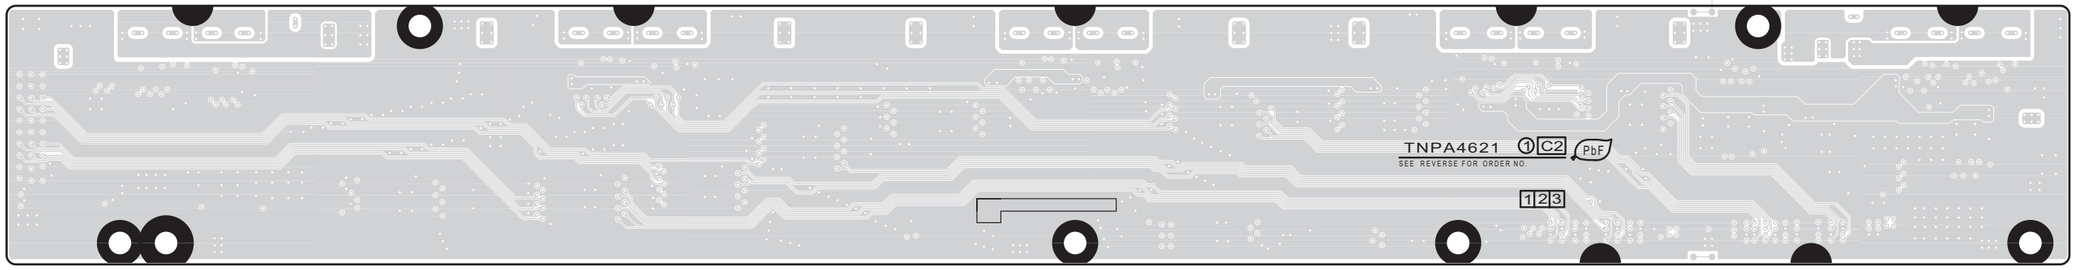


C2-BOARD (COMPONENT SIDE) TNPA4621

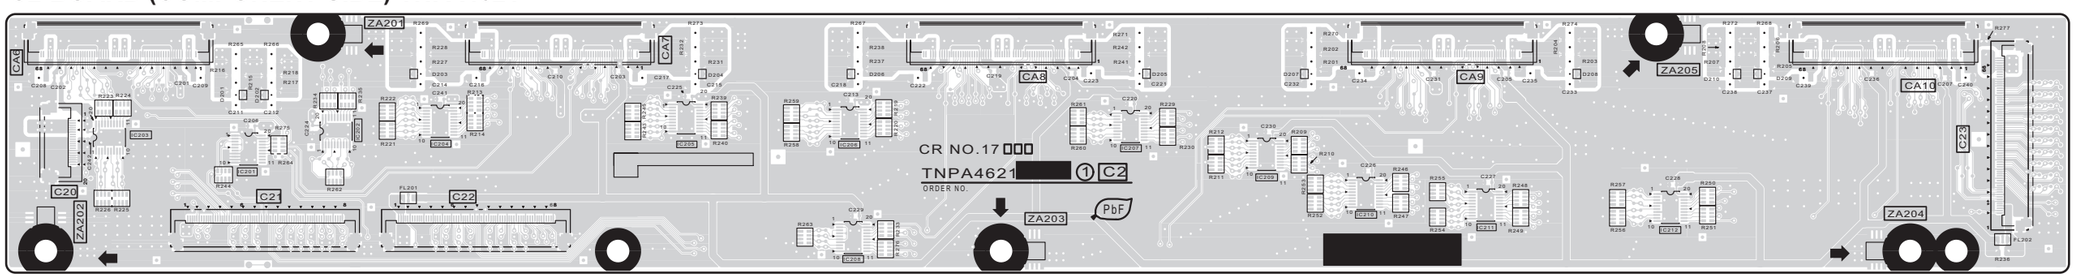

TH-65PY850D/H/M/MR/MS
C2-BOARD TNPA4621

TH-65PY850D/H/M/MR/MS
C2-BOARD TNPA4621


12.10. C3-Board

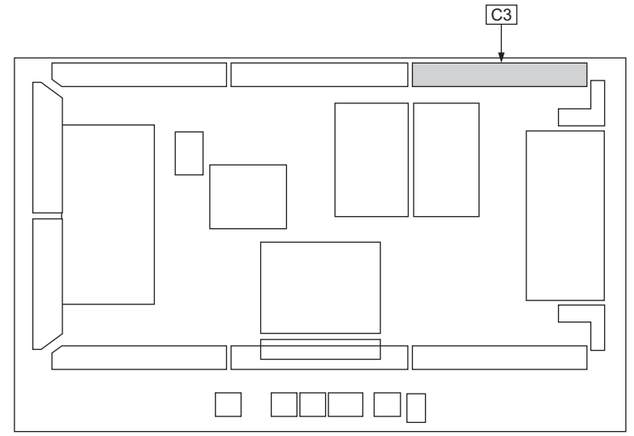


Parts Location

C3-BOARD	
IC	
IC17301 IC17306	B-1 B-1

C3-BOARD (FOIL SIDE) TNPA4622

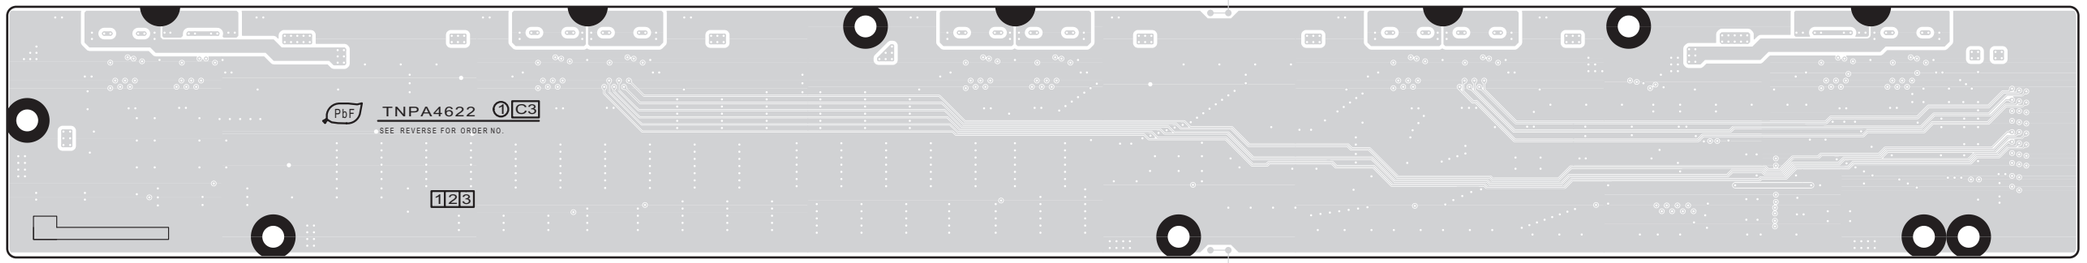

C3-BOARD (COMPONENT SIDE) TNPA4622

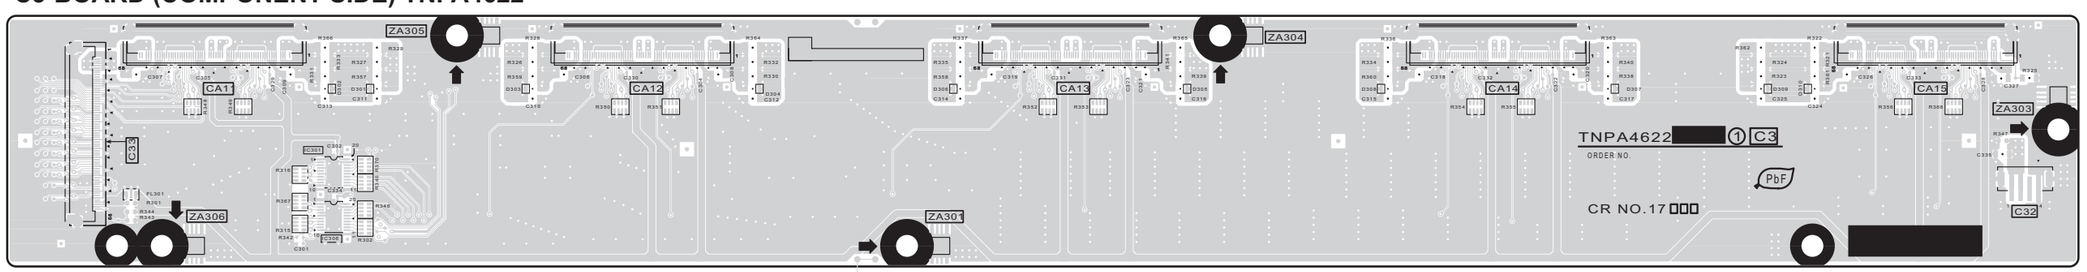

TH-65PY850D/H/M/MR/MS
C3-BOARD TNPA4622

TH-65PY850D/H/M/MR/MS
C3-BOARD TNPA4622


6 5 4 3 2 1

A B C D E F G H I


12.11. C4-Board

Parts Location


C4-BOARD	
IC	
IC17401	B-2
IC17402	B-2

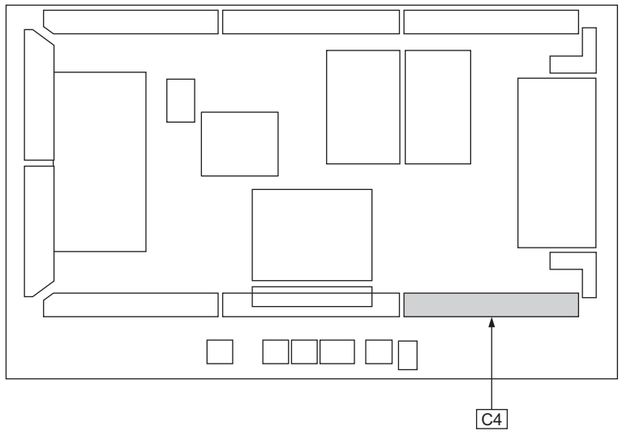

C4-BOARD (FOIL SIDE) TNPA4623

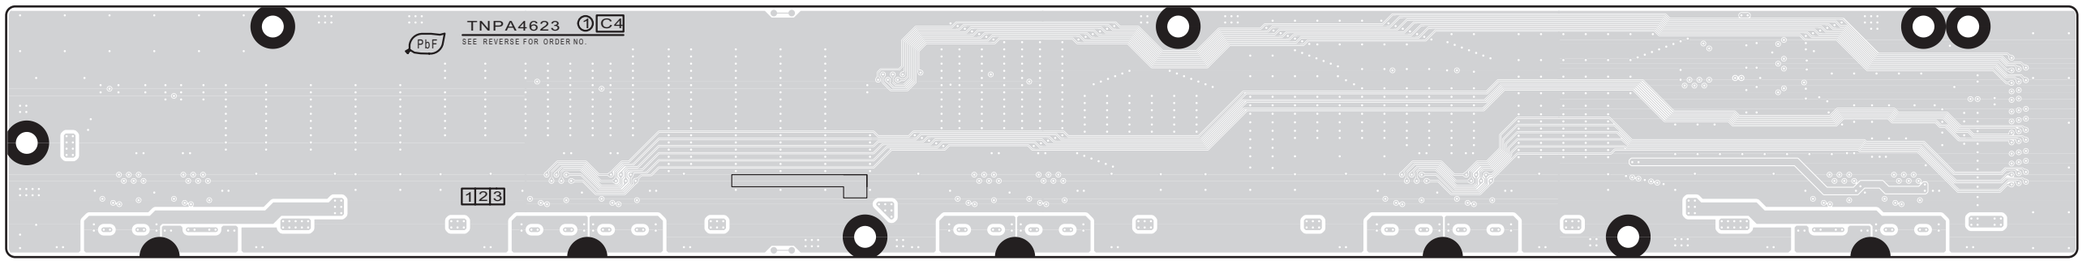

C4-BOARD (COMPONENT SIDE) TNPA4623

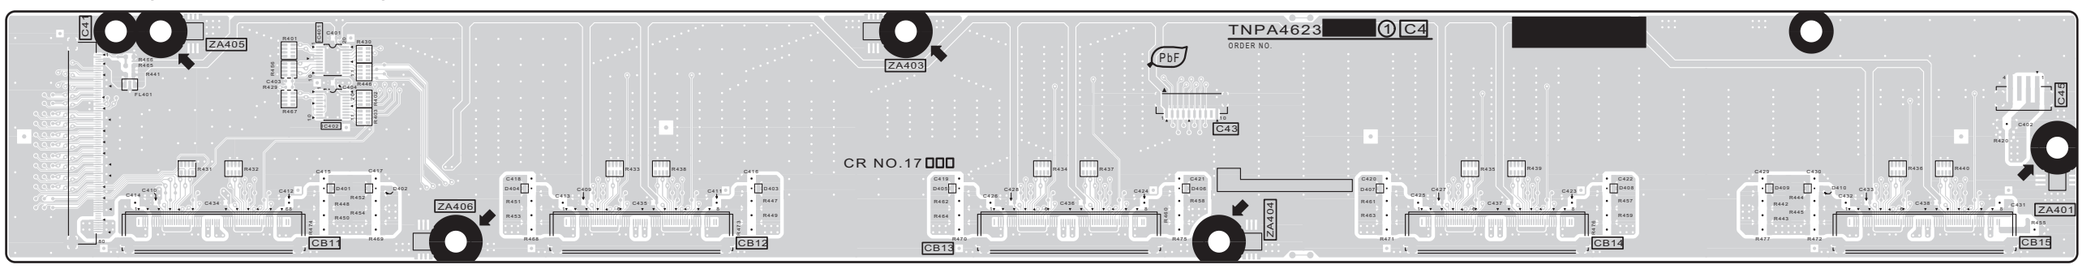


TH-65PY850D/H/M/MR/MS
C4-BOARD TNPA4623

TH-65PY850D/H/M/MR/MS
C4-BOARD TNPA4623


12.12. C5-Board

Parts Location


C5-BOARD	
IC	
IC17501	A-2
IC17502	B-2
IC17503	A-2
IC17504	B-1
IC17505	C-1
IC17506	D-1
IC17507	E-2
IC17508	C-2
IC17509	F-2
IC17510	F-2
IC17511	G-2
IC17512	H-2
IC17513	I-2

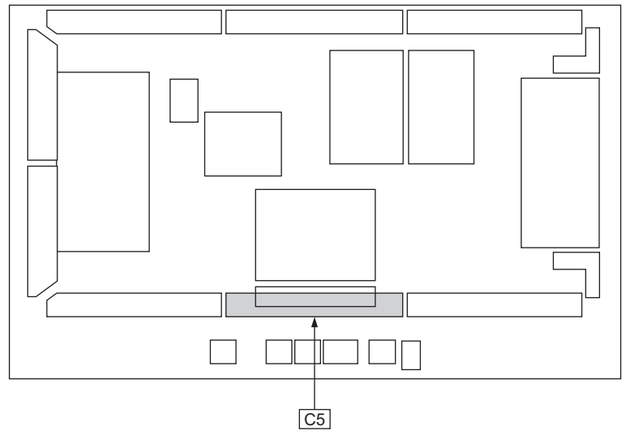

C5-BOARD (FOIL SIDE) TNPA4624

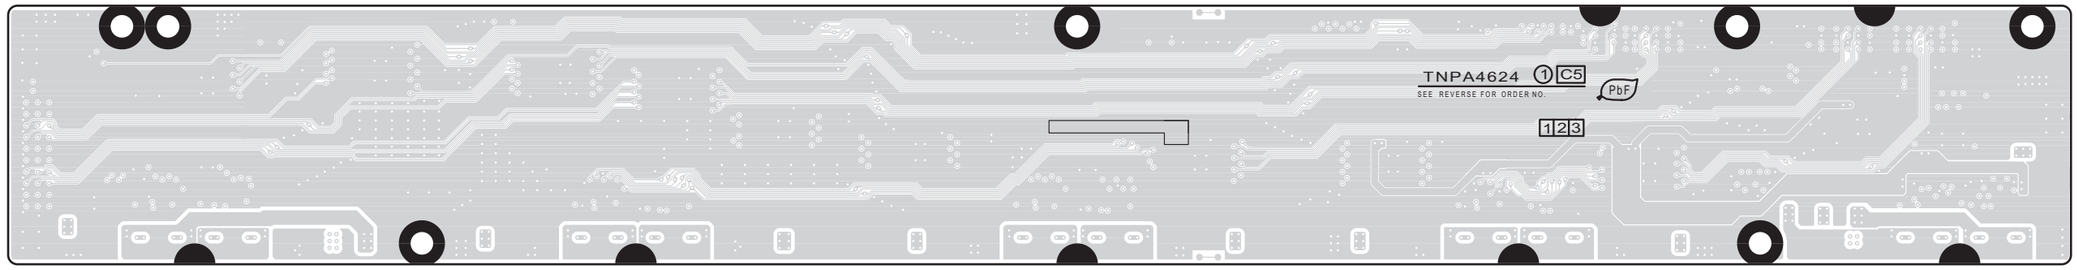

C5-BOARD (COMPONENT SIDE) TNPA4624

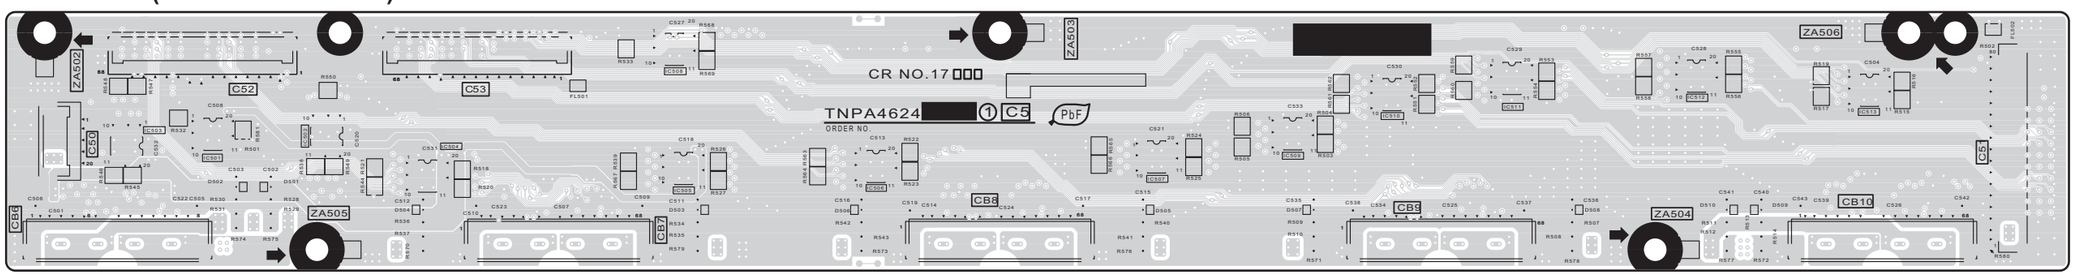


TH-65PY850D/H/M/MR/MS
C5-BOARD TNPA4624

TH-65PY850D/H/M/MR/MS
C5-BOARD TNPA4624


12.13. C6-Board

Parts Location


C6-BOARD	
IC	
IC17601	I-2
IC17602	I-1
IC17603	E-2
IC17604	F-2
IC17605	G-2
IC17606	H-1

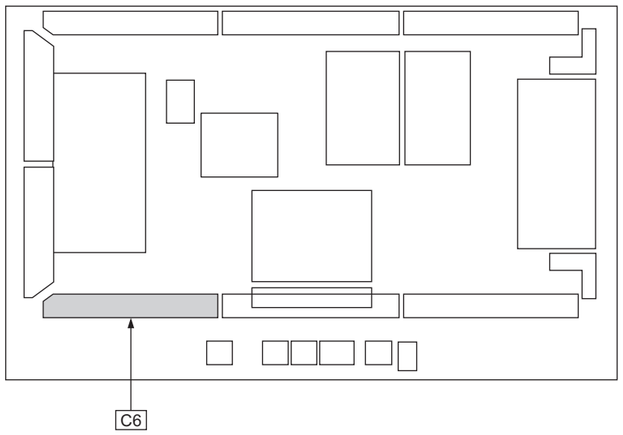

C6-BOARD (FOIL SIDE) TNPA4625

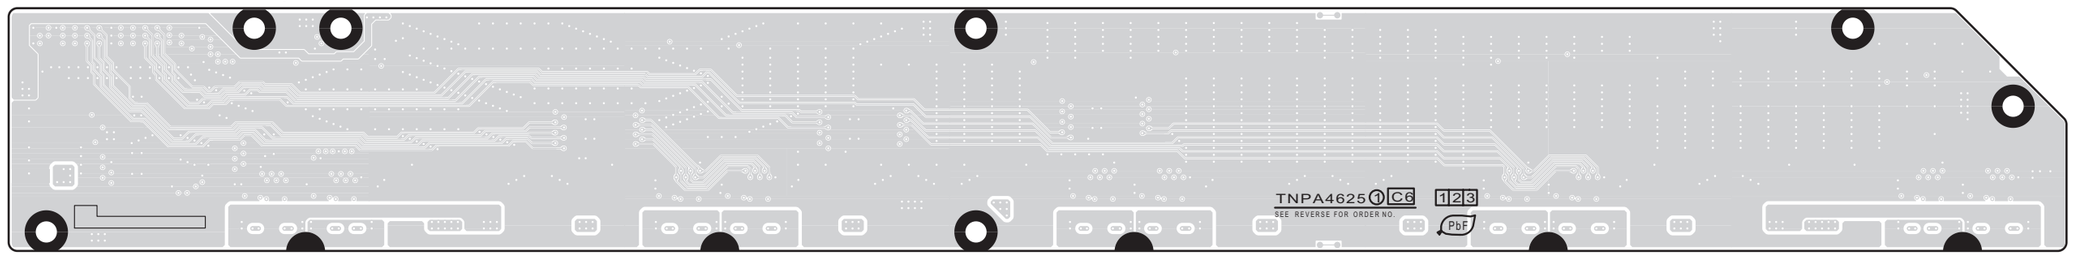

C6-BOARD (COMPONENT SIDE) TNPA4625

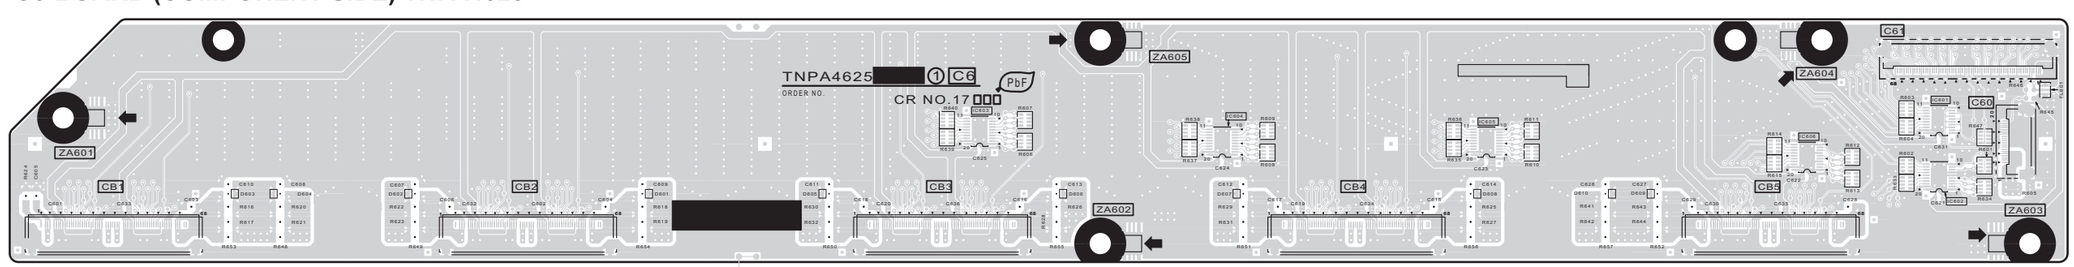

TH-65PY850D/H/M/MR/MS
C6-BOARD TNPA4625


TH-65PY850D/H/M/MR/MS
C6-BOARD TNPA4625

12.14. SC-Board


Parts Location

SC-BOARD (FOIL SIDE)

IC		TRANSISTOR						TEST POINT										VOLUME	
IC16784	H-2	Q16401	B-3	Q16441	D-1	TP1	A-1	TP19	H-2	TP38	H-2	TP63	G-4	TP94	H-2	VR16600	G-2
IC16786	I-2	Q16402	B-3	Q16442	D-1	TP2	A-1	TP20	H-1	TP39	H-2	TP64	H-3	TP95	I-2	VR16602	H-3
IC16788	H-3	Q16403	B-3	Q16443	D-1	TP4	A-1	TP21	H-2	TP40	H-2	TP65	H-3	TP96	D-4		
IC16791	I-3	Q16404	B-3	Q16444	C-1	TP5	A-1	TP22	H-2	TP41	F-4	TP66	I-3				
		Q16405	B-2	Q16451	F-1	TP6	H-1	TP23	H-1	TP42	F-4	TP70	H-2				
		Q16406	B-2	Q16452	F-1	TP7	H-1	TP24	I-2	TP43	F-4	TP78	G-4				
		Q16421	E-3	Q16453	F-1	TP8	I-2	TP25	I-2	TP44	F-4	TP79	G-4				
		Q16422	E-3	Q16454	G-1	TP9	I-2	TP26	I-2	TP45	F-4	TP80	G-4				
		Q16423	E-3	Q16601	G-3	TP10	H-2	TP27	I-2	TP51	G-4	TP81	G-4				
		Q16424	E-2	Q16621	C-3	TP11	H-2	TP28	I-2	TP52	H-2	TP83	H-4				
		Q16425	E-2	Q16622	C-2	TP12	I-1	TP29	I-2	TP54	B-4	TP84	H-4				
				Q16623	B-2	TP13	I-1	TP30	I-2	TP55	B-4	TP85	H-4				
				Q16641	F-3	TP14	H-2	TP31	H-1	TP56	B-4	TP86	H-4				
				Q16642	F-3	TP15	H-2	TP32	I-1	TP57	B-4	TP88	I-1				
				Q16643	G-2	TP16	H-1	TP33	I-1	TP58	B-4	TP89	I-2				
				Q16644	G-2	TP17	I-1	TP34	H-1	TP59	G-4	TP90	C-2				
				Q16661	G-3	TP18	H-2	TP35	I-2	TP60	G-4	TP91	B-2				
				Q16796	H-4			TP36	I-2	TP61	G-4	TP92	G-2				
								TP37	I-1	TP62	G-4	TP93	H-2				

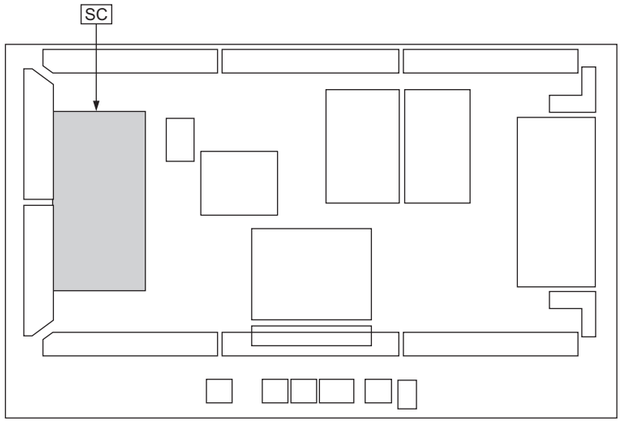

SC-BOARD (FOIL SIDE)
TNPA4604

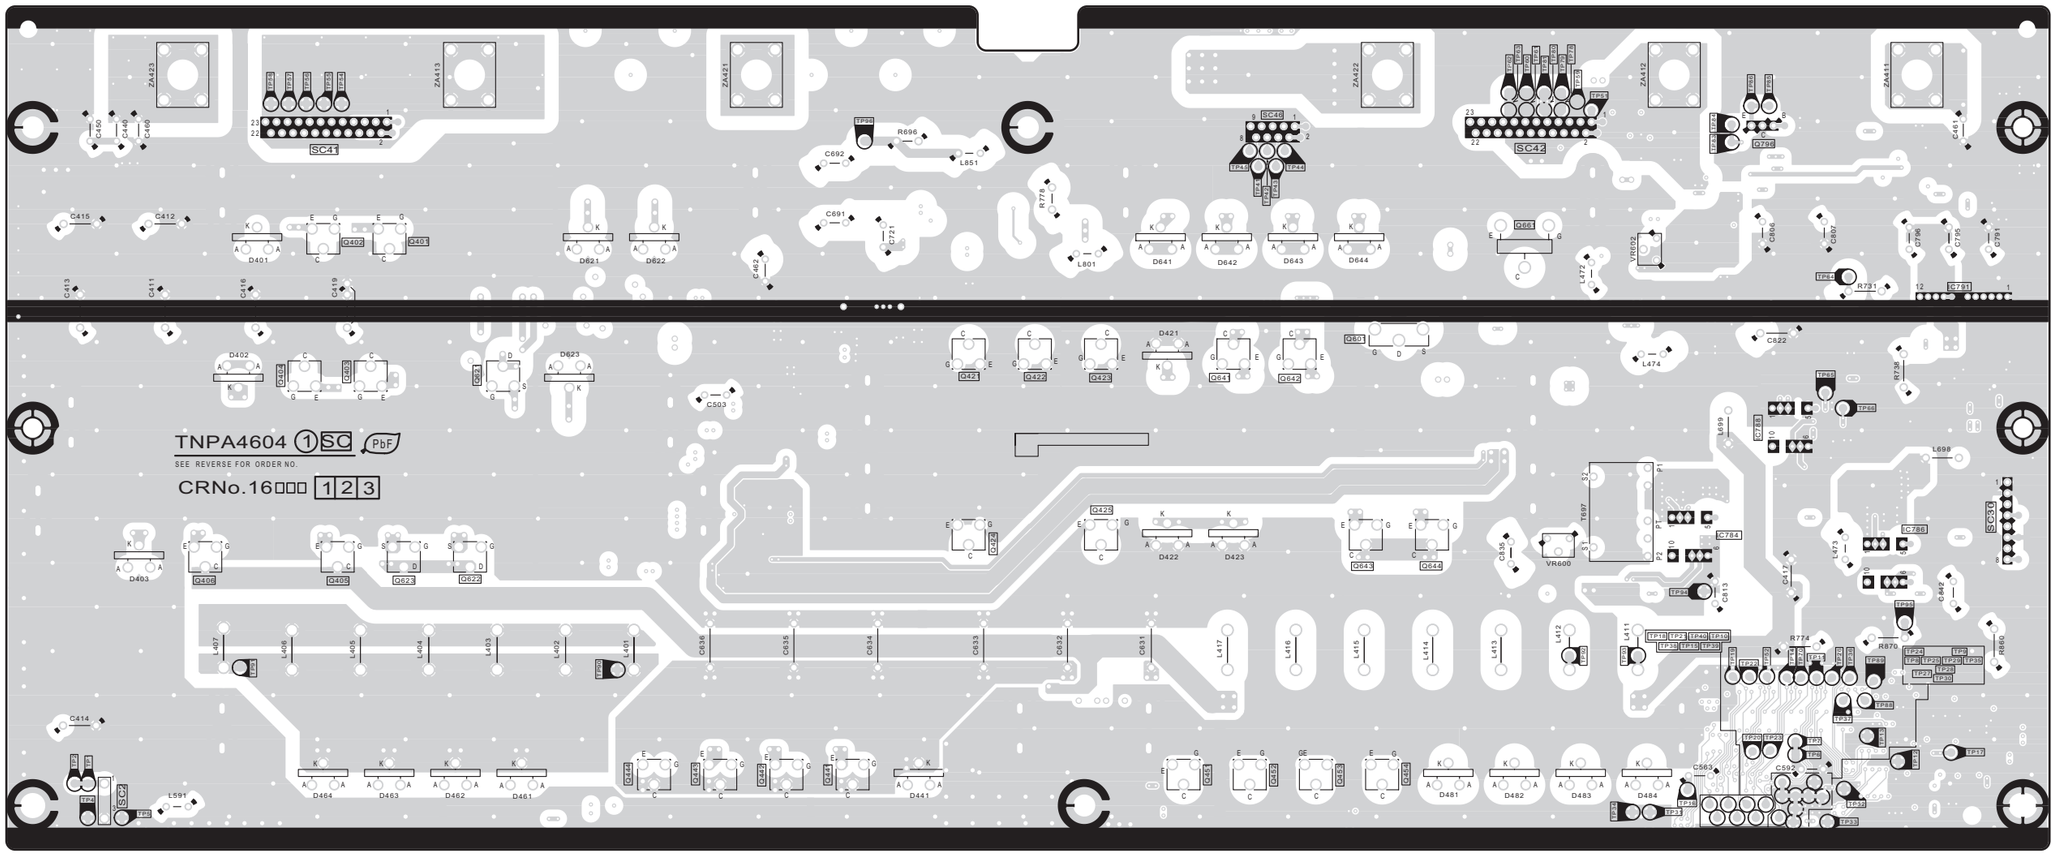


TH-65PY850D/H/M/MR/MS
SC-BOARD TNPA4604

TH-65PY850D/H/M/MR/MS
SC-BOARD TNPA4604


Parts Location

SC-BOARD (COMPONENT SIDE)

IC		IC		TRANSISTOR		Q16453	D-1	Q16609	C-3	Q16781	D-3	TEST POINT	
IC16464	F-2	IC16787	A-2	Q16401	H-3	Q16454	D-1	Q16621	G-3	Q16795	B-4	TP3	A-1
IC16465	F-2	IC16788	B-3	Q16402	H-3	Q16471	E-4	Q16622	G-2	Q16796	B-4	TP46	B-1
IC16471	E-3	IC16789	B-3	Q16403	H-3	Q16501	G-3	Q16623	H-2	Q16801	A-4	TP82	B-1
IC16501	F-3	IC16791	A-3	Q16404	H-3	Q16502	G-3	Q16641	D-3	Q16810	B-4	TPSC1	E-4
IC16521	F-3	IC16792	C-4	Q16405	H-2	Q16503	G-3	Q16642	D-3	Q16814	B-2	TPSOS6	A-1
IC16561	B-1	IC16801	B-4	Q16406	I-2	Q16521	F-3	Q16643	D-2	Q16815	B-2	TPSOS7	A-1
IC16562	B-1	PHOTO COUPLER		Q16421	E-3	Q16522	F-3	Q16644	C-2	Q16816	B-3	TPVAD	C-3
IC16563	A-1	PC16461	F-2	Q16422	E-3	Q16523	F-3	Q16661	C-3	Q16817	A-2	TPVSCN	B-2
IC16564	C-4	PC16480	E-3	Q16423	E-3	Q16531	G-1	Q16662	B-3	Q16871	A-2	TPVSET	C-3
IC16581	A-1	PC16601	B-3	Q16424	E-2	Q16532	G-1	Q16663	B-4	Q16872	B-3	TPVSUS	I-1
IC16724	F-4	PC16603	C-3	Q16425	E-2	Q16551	E-1	Q16664	B-4	Q16873	A-3	VOLUME	
IC16725	E-4	PC16684	B-3	Q16441	F-1	Q16552	E-1	Q16665	A-4	Q16874	B-3	VR16600	B-3
IC16771	F-2	PC16685	F-3	Q16442	F-1	Q16601	D-3	Q16666	C-3	Q16875	A-3	VR16602	C-2
IC16772	B-4	PC16896	B-2	Q16443	F-1	Q16602	C-3	Q16667	A-4	Q16876	A-1		
IC16773	A-4	PC16897	B-2	Q16444	G-1	Q16603	C-3	Q16701	A-4	Q16879	A-3		
IC16784	B-2			Q16451	D-1	Q16604	C-3	Q16702	B-4	Q16881	B-2		
IC16786	B-2			Q16452	D-1	Q16606	D-3	Q16743	B-4	Q16882	B-3		
						Q16607	C-3	Q16762	F-3				

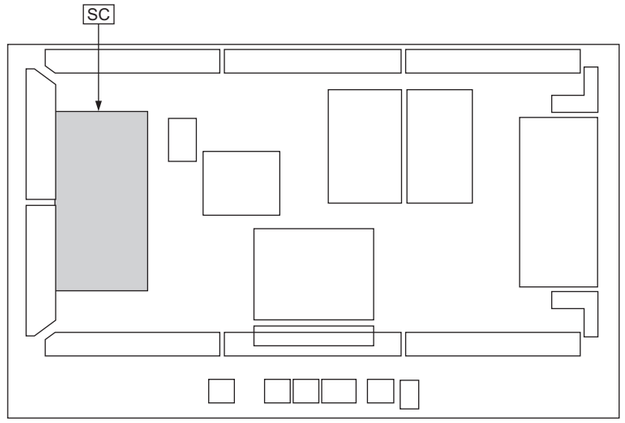

SC-BOARD (COMPONENT SIDE)
TNPA4604

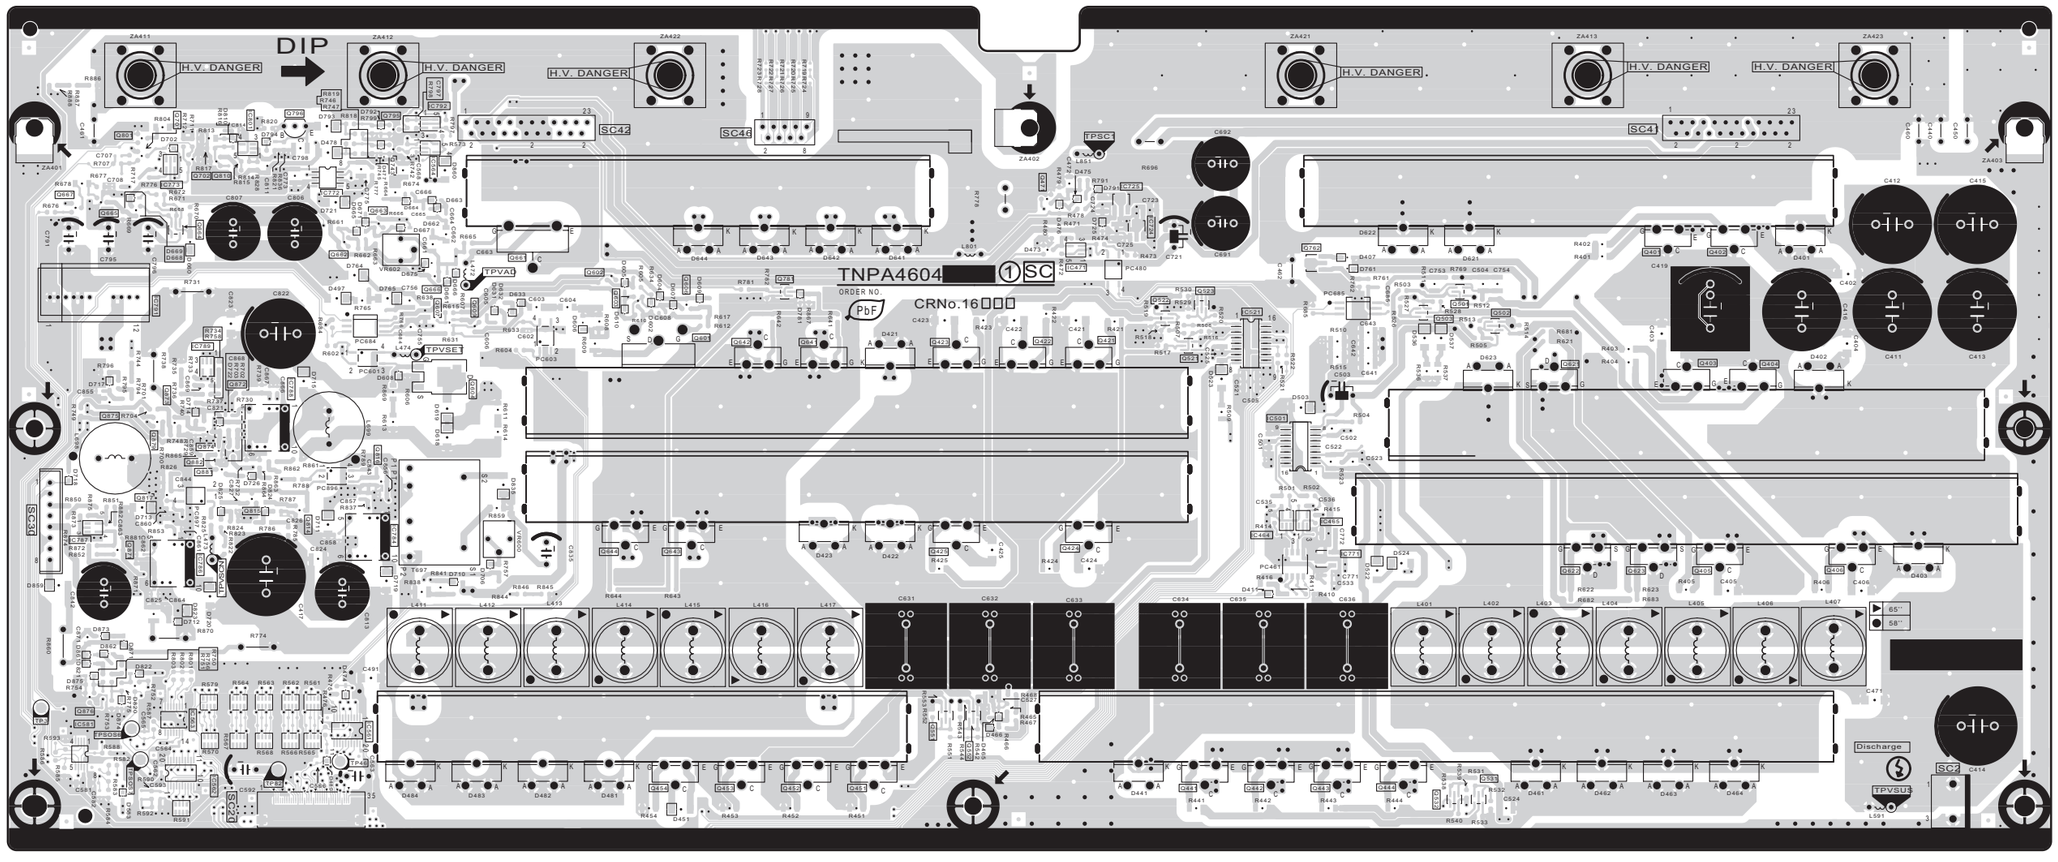

TH-65PY850D/H/M/MR/MS
SC-BOARD TNPA4604


TH-65PY850D/H/M/MR/MS
SC-BOARD TNPA4604

A B C D E F G H I


12.15. SU-Board

Parts Location


SU-BOARD	
IC	
IC14901	B-2
IC14902	C-2
IC14903	D-2
IC14904	D-2
IC14905	E-2
IC14906	F-2
IC14907	G-2
IC14908	H-2
TEST POINT	
TPSU1	E-2
TPSU2	E-1
TPSU3	E-1
TPSU4	A-1
TPSU5	A-1
TPSU6	I-1
TPSU7	I-1

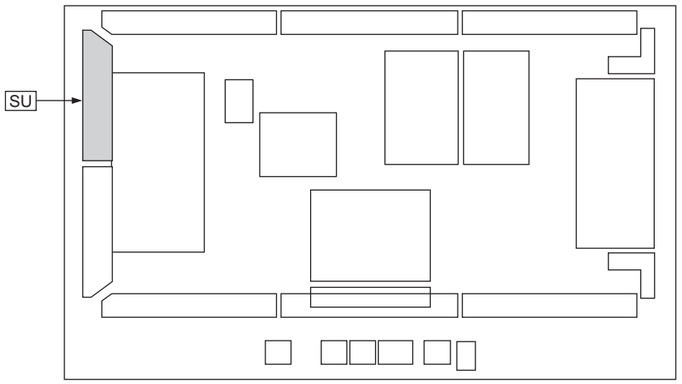

SU-BOARD (FOIL SIDE) TNPA4608

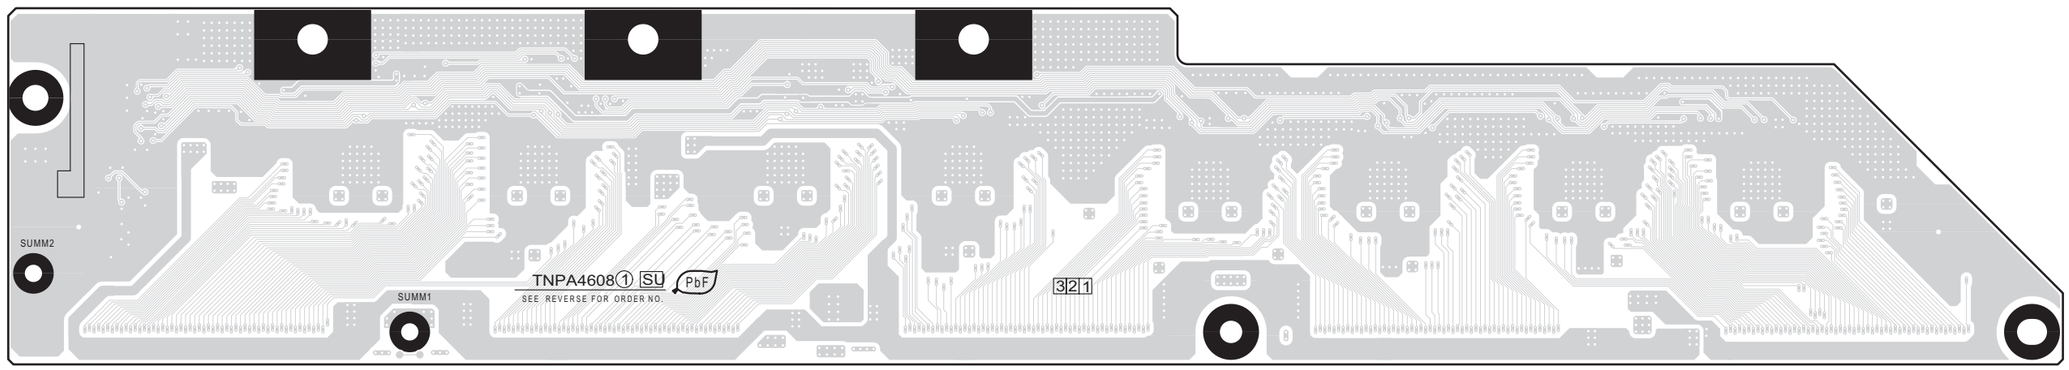

SU-BOARD (COMPONENT SIDE) TNPA4608

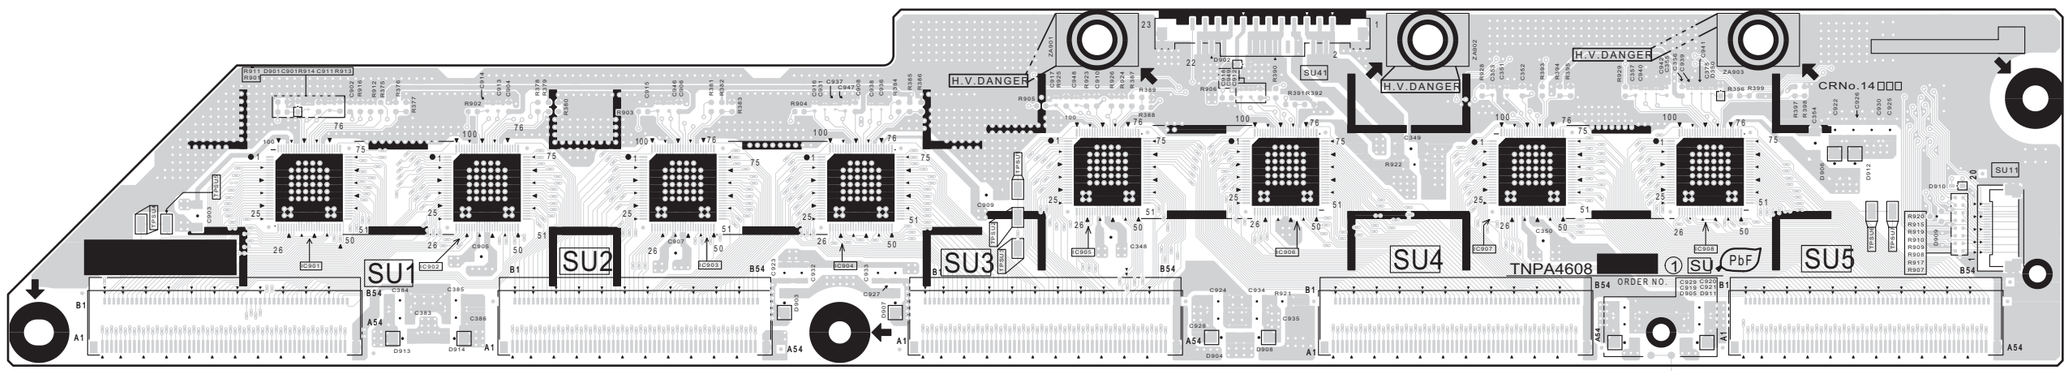


TH-65PY850D/H/M/MR/MS
SU-BOARD TNPA4608

TH-65PY850D/H/M/MR/MS
SU-BOARD TNPA4608


12.16. SD-Board

Parts Location


SD-BOARD	
IC	
IC14951	B-2
IC14952	C-2
IC14953	D-2
IC14954	E-2
IC14955	F-2
IC14956	G-2
IC14957	H-2
IC14958	H-2
IC14961	B-2
IC14962	B-1
IC14963	H-2
IC14964	A-2
IC14965	B-2
TEST POINT	
TPSD1	G-1
TPSD2	G-1
TPSD3	G-1
TPSD4	I-1
TPSD5	I-1

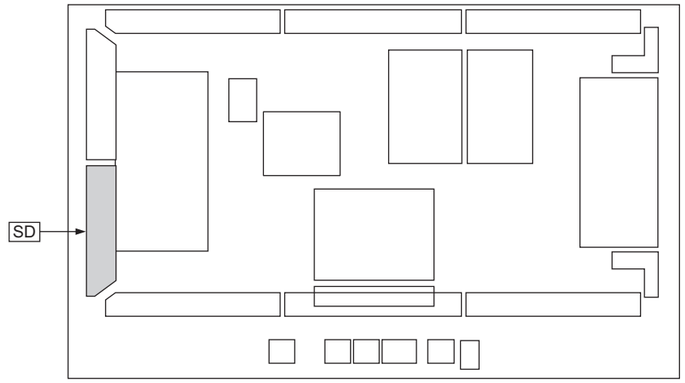

SD-BOARD (FOIL SIDE) TNPA4609

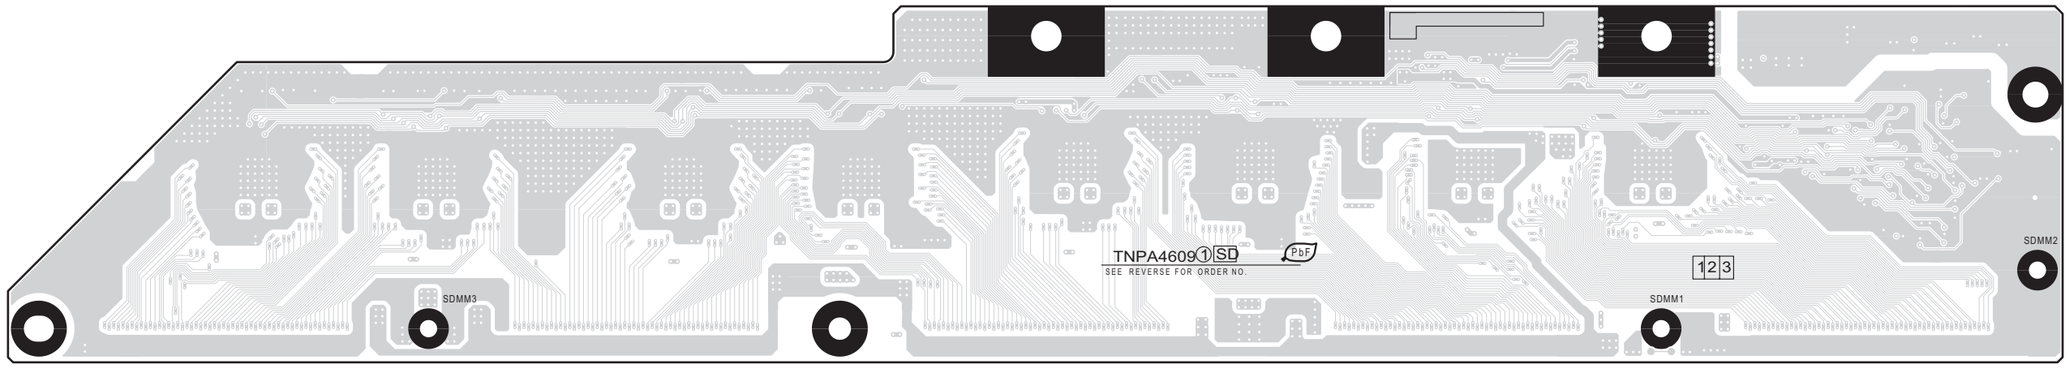

SD-BOARD (COMPONENT SIDE) TNPA4609

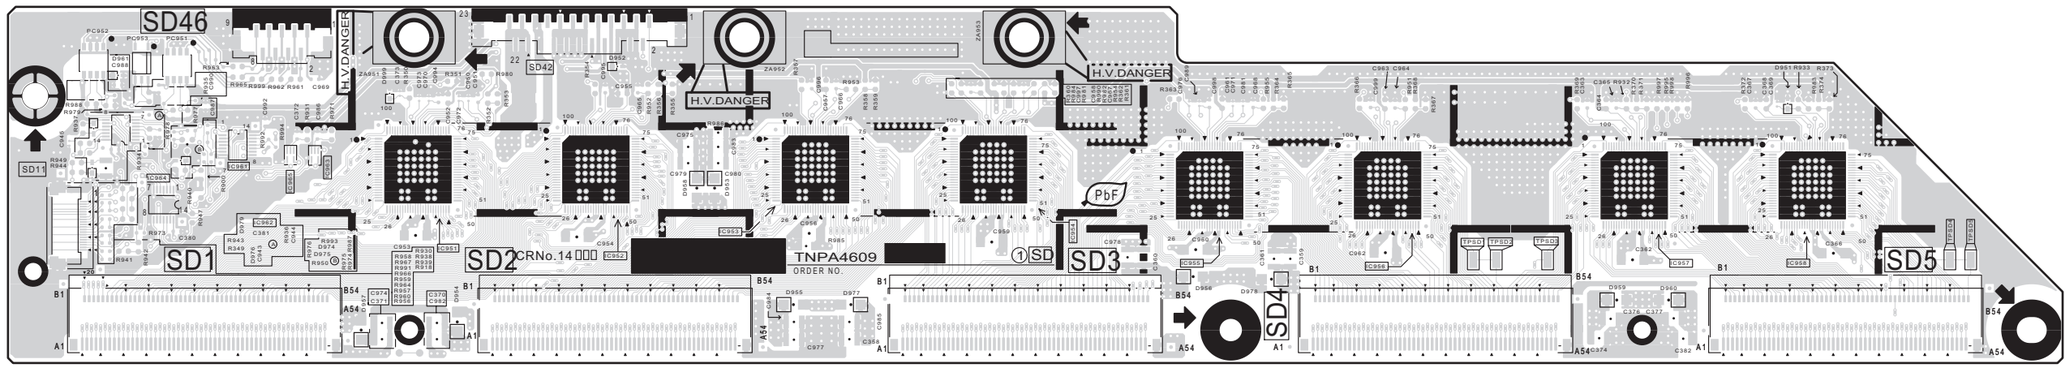

TH-65PY850D/H/M/MR/MS
SD-BOARD TNPA4609

TH-65PY850D/H/M/MR/MS
SD-BOARD TNPA4609

12.17. SS-Board

Parts Location


SS-BOARD (FOIL SIDE)

IC	
IC16301	D-1


TRANSISTOR	
Q16001	C-3
Q16002	D-3
Q16003	D-3
Q16004	D-3
Q16005	E-3
Q16006	E-3
Q16021	G-4
Q16023	I-4
Q16024	I-4
Q16025	I-4
Q16026	I-4
Q16041	E-1
Q16042	E-1
Q16043	F-1
Q16044	F-1
Q16051	G-2
Q16052	G-2
Q16053	G-2
Q16054	H-2
Q16101	B-4
Q16102	B-4
Q16122	G-4
Q16331	A-4

TEST POINT	
TP2	E-1
TP3	D-1
TP4	D-1
TP5	E-1
TP6	E-1
TP7	D-2
TP8	D-2
TP9	A-1
TP10	A-1
TP13	A-3
TP14	B-2
TP15	A-3
TP16	A-3
TP17	A-3
TP18	A-3
TP19	A-3
TP20	A-3
TP21	A-3
TP24	A-4
TP25	B-4
TP26	C-4
TP27	E-4
TP28	F-4
TP29	G-4
TP30	I-4
TP31	I-4
TP33	A-3
TP34	A-3
TP36	I-3
TP38	C-3
TP39	D-3
TP40	H-3
TP41	I-3
TP42	B-1
TP44	A-3
TP45	A-3
TP51	A-4
TP52	I-4
TP53	A-4
TP54	I-4
TP55	I-4
TP56	A-4
TP57	F-4
TP58	D-4
TPSOS8	A-3
TPSS1	C-4
TPVDA	A-1
TPVe2	B-2
TPVSUS	D-1

VOLUME	
VR16000	C-1

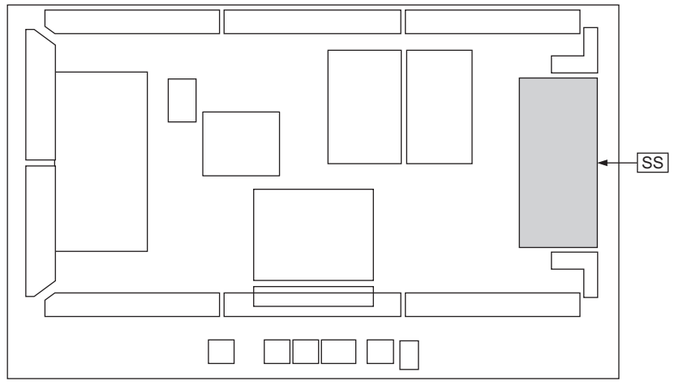

SS-BOARD (FOIL SIDE)
TNPA4605

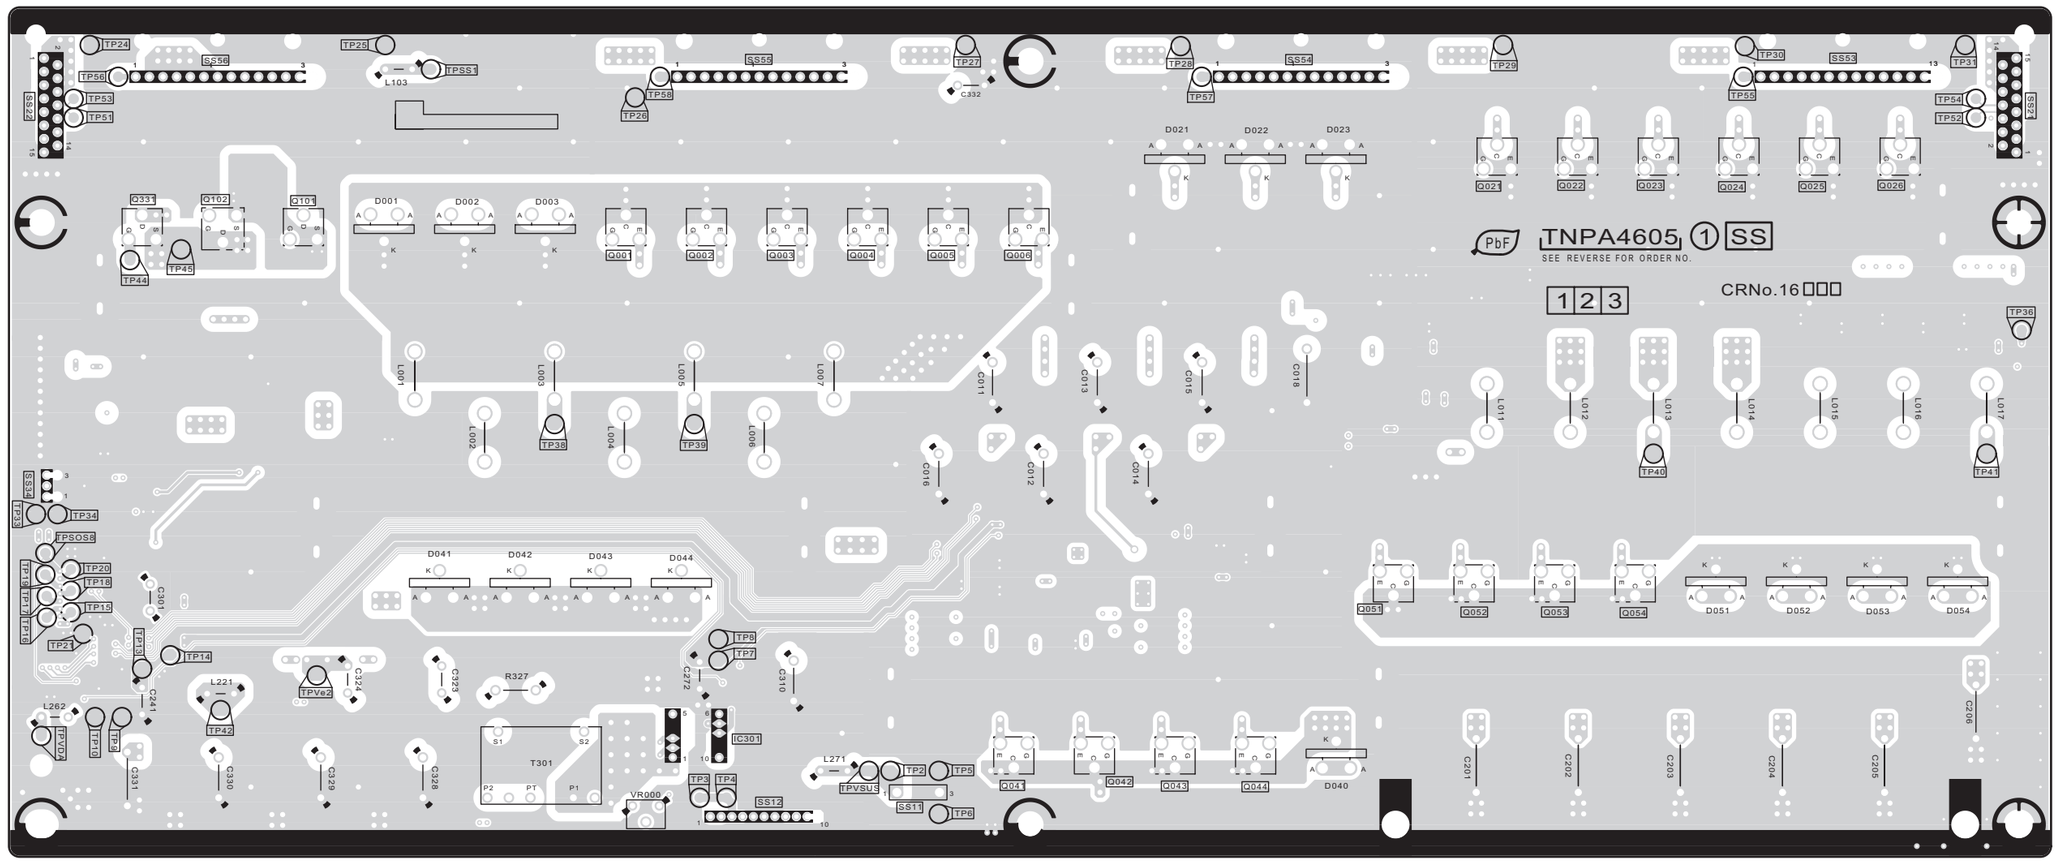


TH-65PY850D/H/M/MR/MS
SS-BOARD TNPA4605


Parts Location

SS-BOARD (COMPONENT SIDE)

IC								TEST POINT	
IC16131	D-3	Q16005	F-4	Q16101	H-4	TPSOS8	I-1
IC16151	E-2	Q16006	E-4	Q16102	H-4	TPSS1	H-4
IC16241	I-2	Q16021	C-4	Q16141	D-3	TPVDA	I-1
IC16251	D-2	Q16022	C-4	Q16161	C-3	TPVe	H-2
IC16301	G-1	Q16023	B-4	Q16191	I-3	TPVSUS	F-1
IC16302	H-1	Q16024	B-4	Q16251	D-2	**VOLUME**	
IC16303	I-2	Q16025	B-4	Q16280	A-3	VR16000	G-1
PHOTO COUPLER		Q16026	A-4	Q16301	I-2		
PC16191	I-3	Q16041	E-1	Q16302	I-2		
TRANSISTOR		Q16042	E-1	Q16304	I-2		
Q16001	G-4	Q16043	D-1	Q16321	H-2		
Q16002	G-4	Q16044	D-1	Q16331	I-3		
Q16003	F-4	Q16051	D-2	Q16339	I-3		
Q16004	F-4	Q16052	C-2	Q16398	D-2		
		Q16053	C-2	Q16399	F-2		
		Q16054	C-2				
		Q16055	F-2				
		Q16056	E-2				

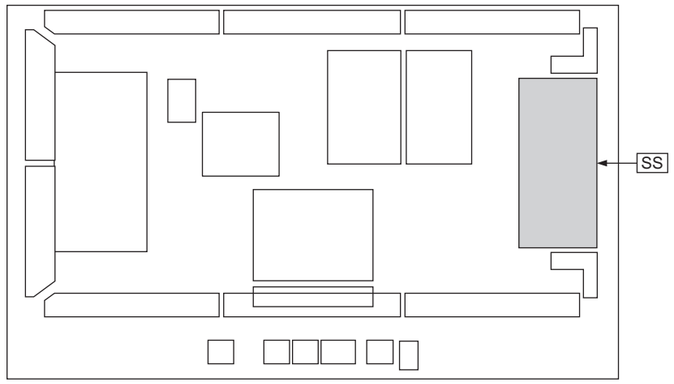


SS-BOARD (COMPONENT SIDE)
TNPA4605

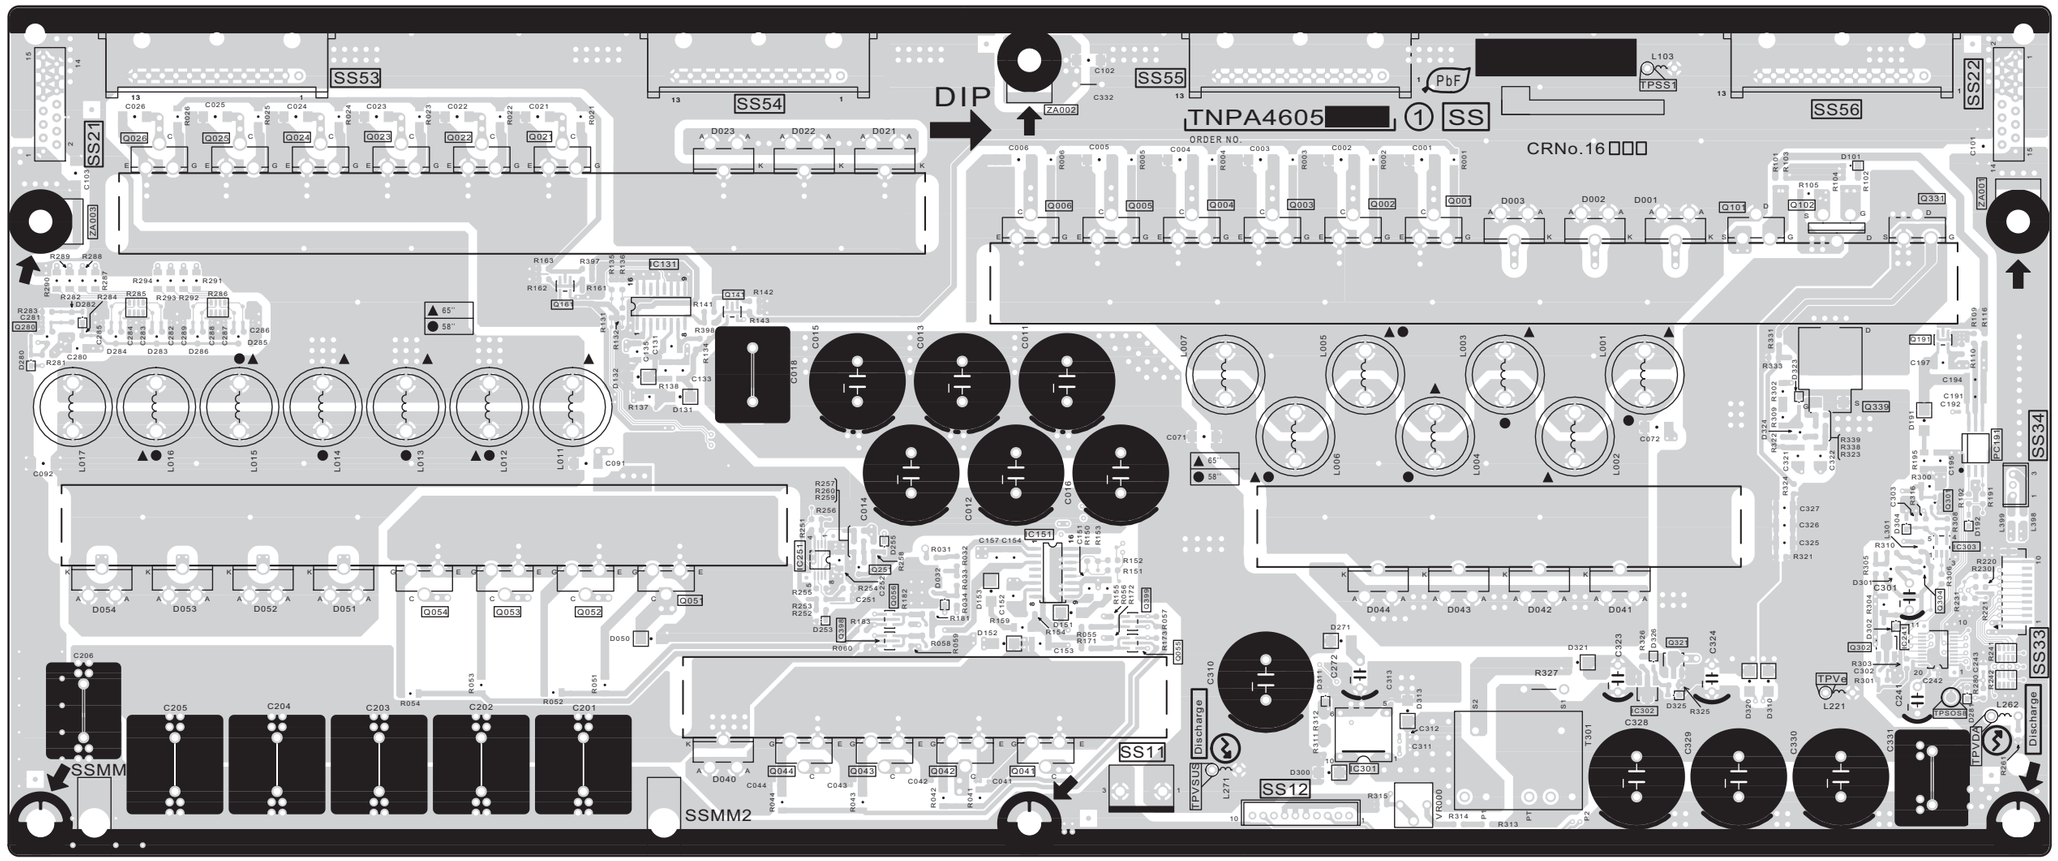



12.18. SS2-Board

SS2-BOARD (FOIL SIDE) TNPA4606

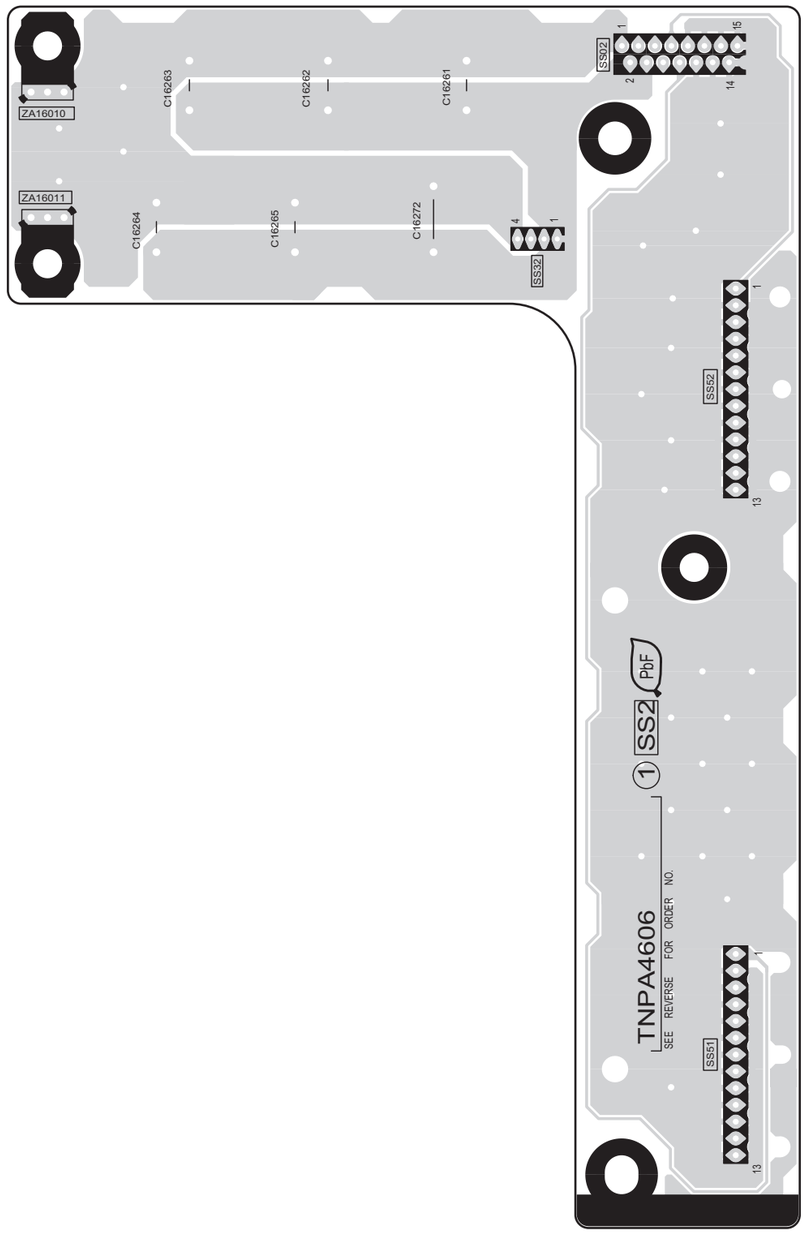

SS2-BOARD (COMPONENT SIDE) TNPA4606

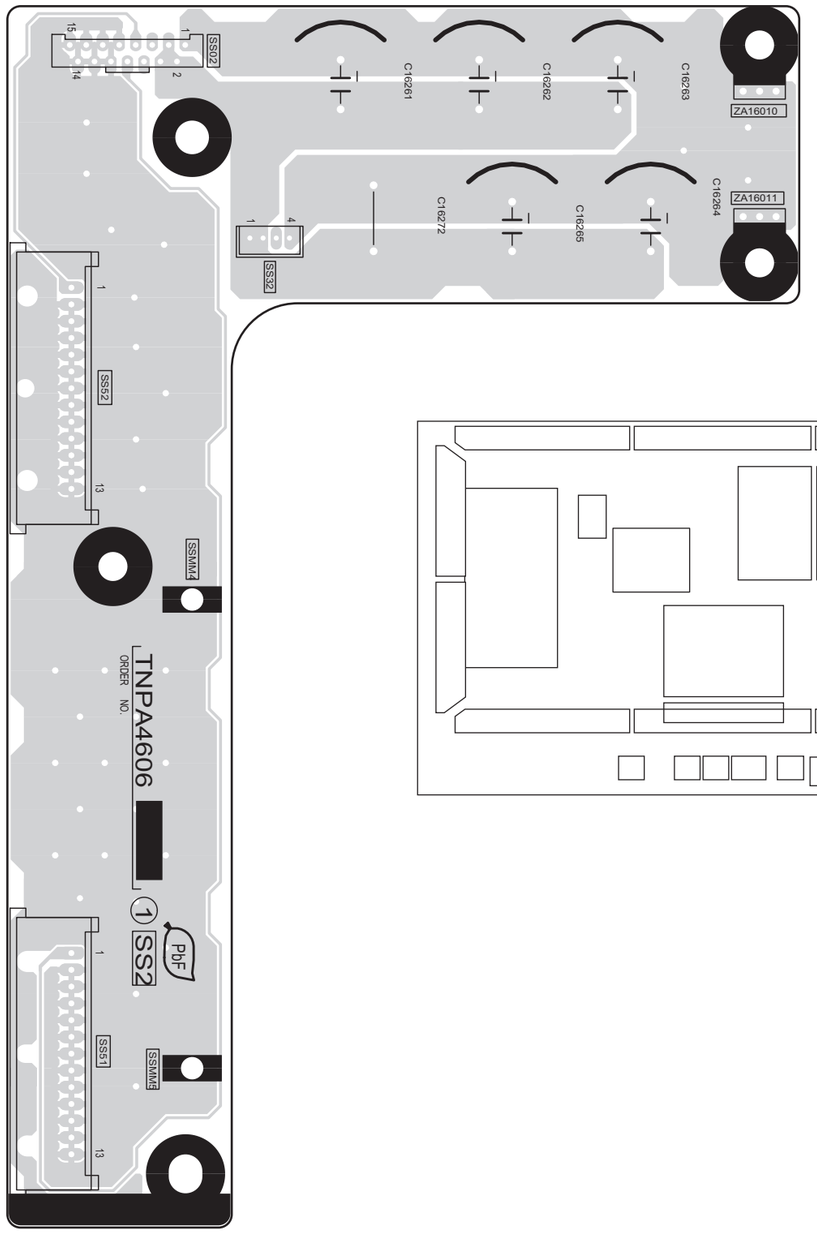

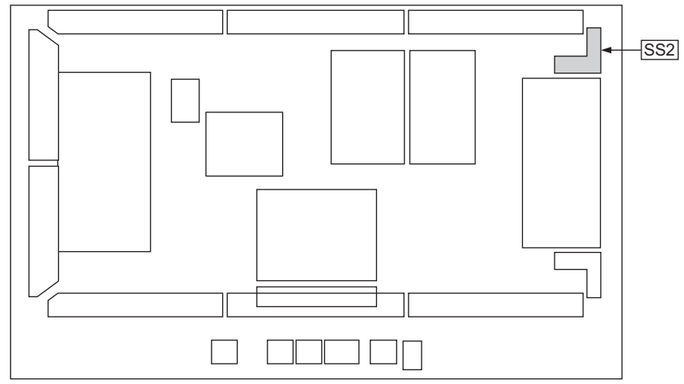


TH-65PY850D/H/M/MR/MS
SS2-BOARD TNPA4606


TH-65PY850D/H/M/MR/MS
SS2-BOARD TNPA4606


12.19. SS3-Board

SS3-BOARD (FOIL SIDE) TNPA4607

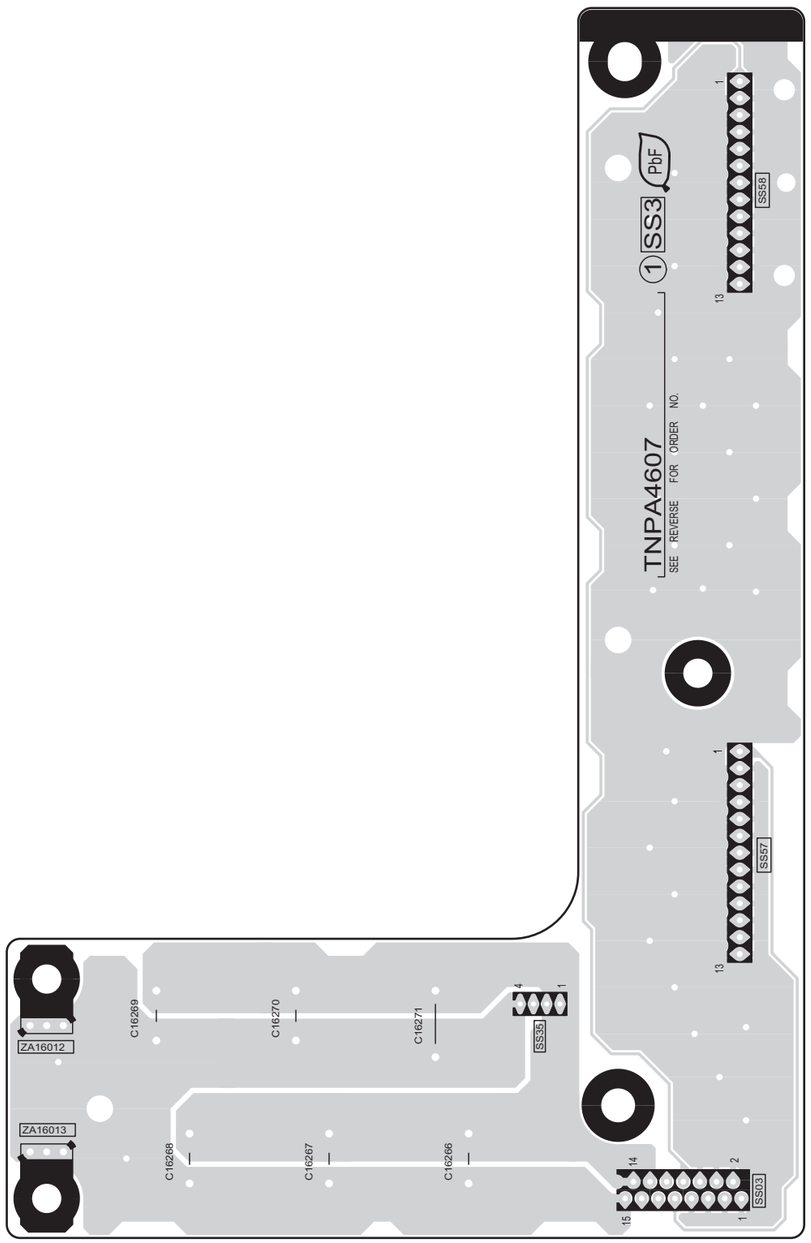

SS3-BOARD (COMPONENT SIDE) TNPA4607

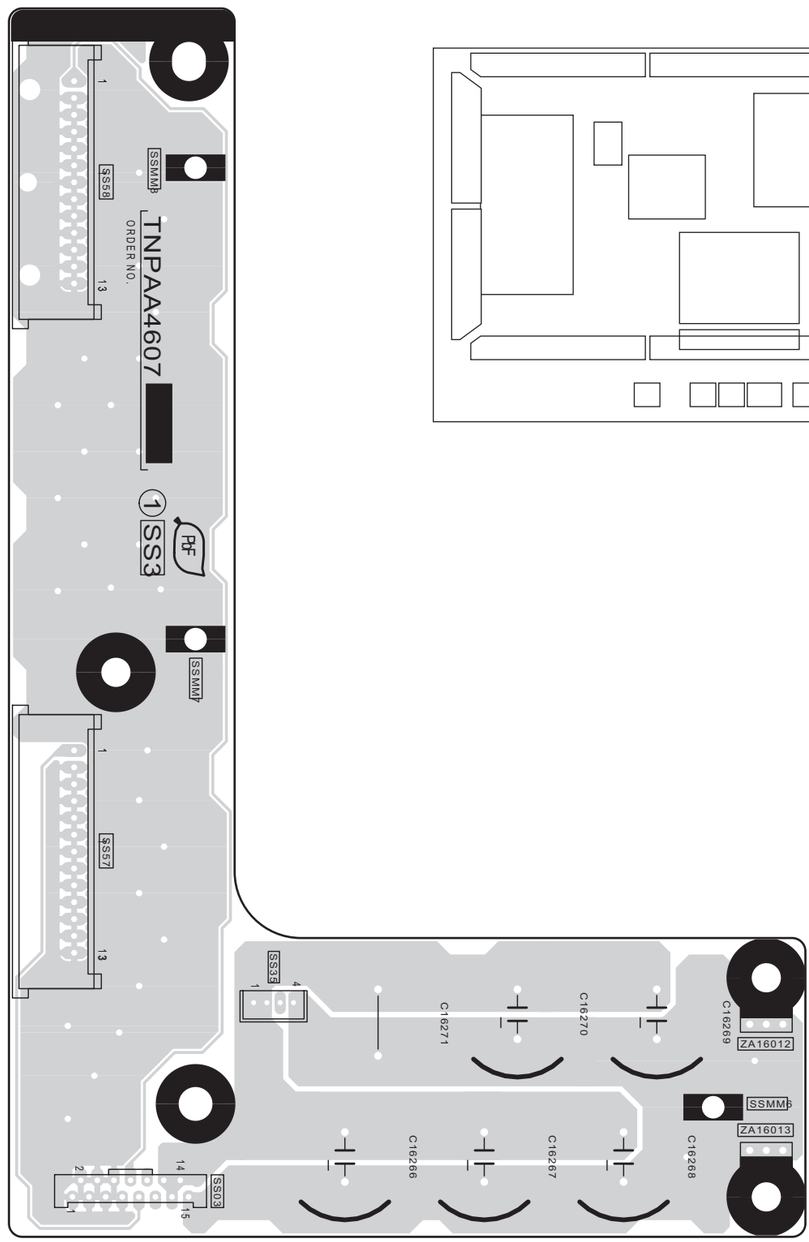

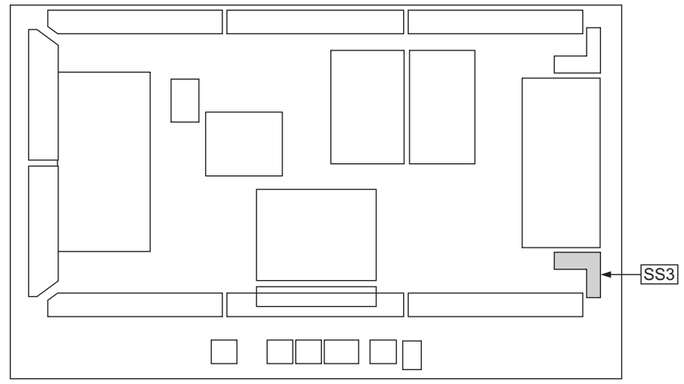


TH-65PY850D/H/M/MR/MS
SS3-BOARD TNPA4607

TH-65PY850D/H/M/MR/MS
SS3-BOARD TNPA4607


13 Exploded View and Replacement Parts List


13.1. Exploded View and Mechanical Replacement Parts List

13.1.1. Exploded View

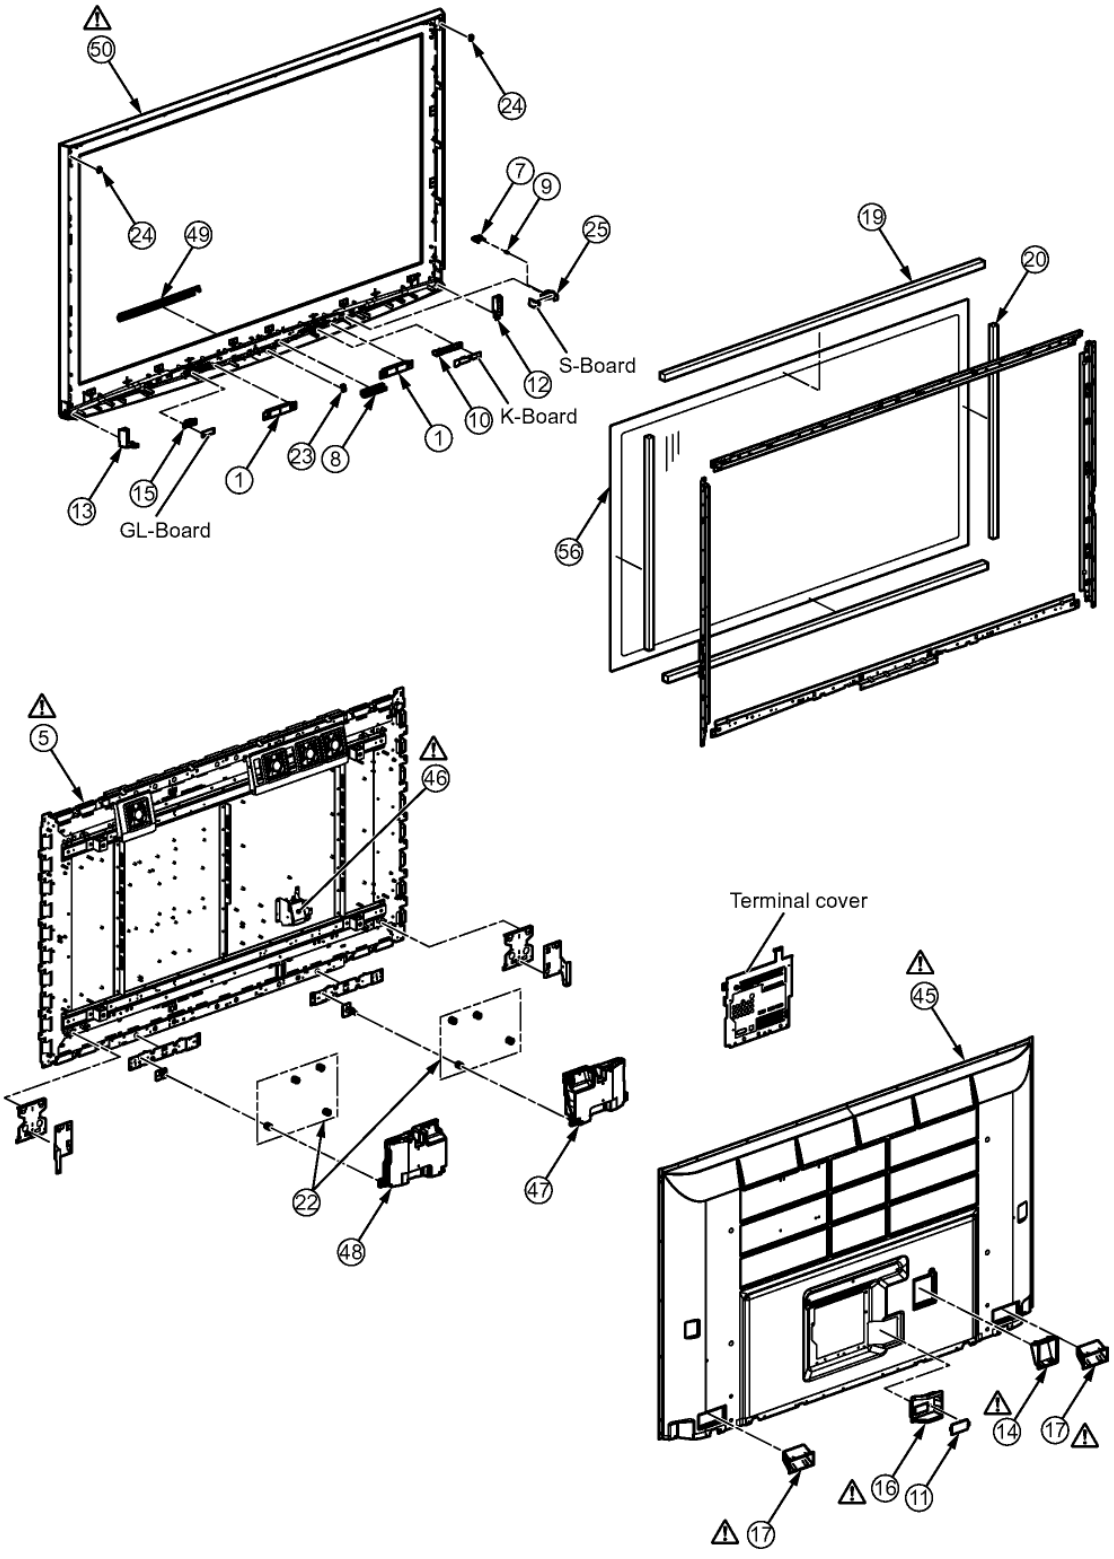



13.1.2. Fan and cable location

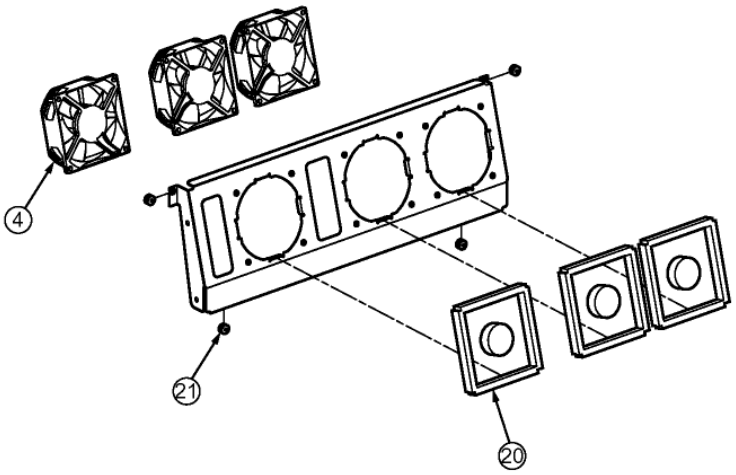

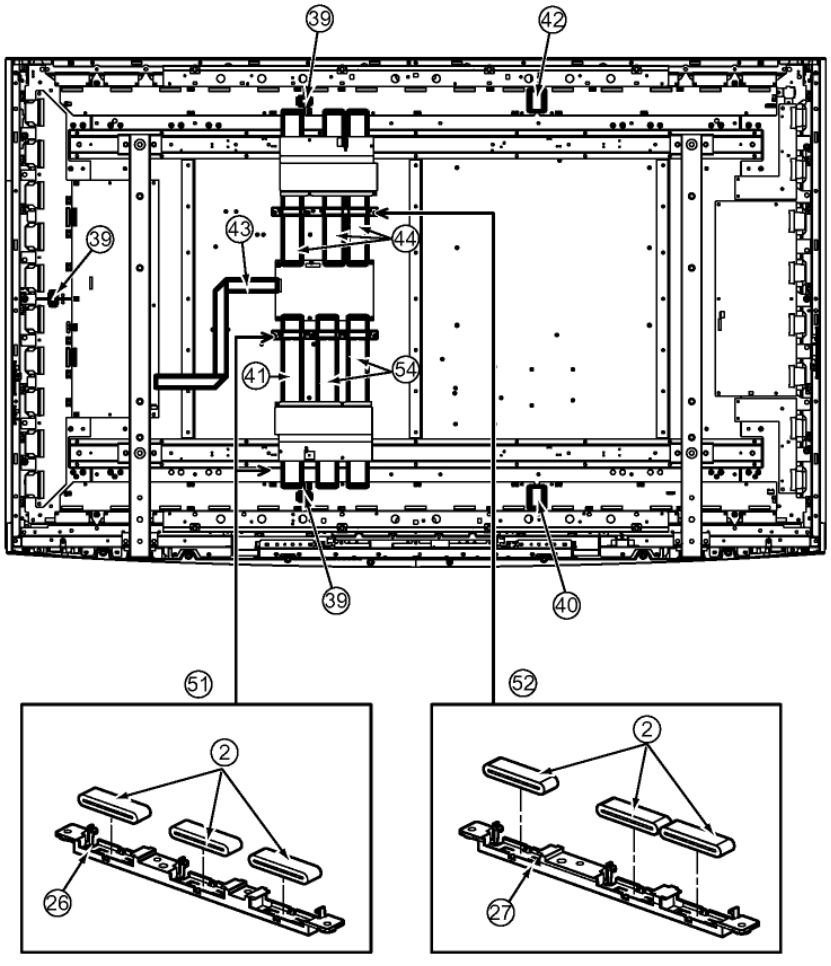


13.1.3. Packing

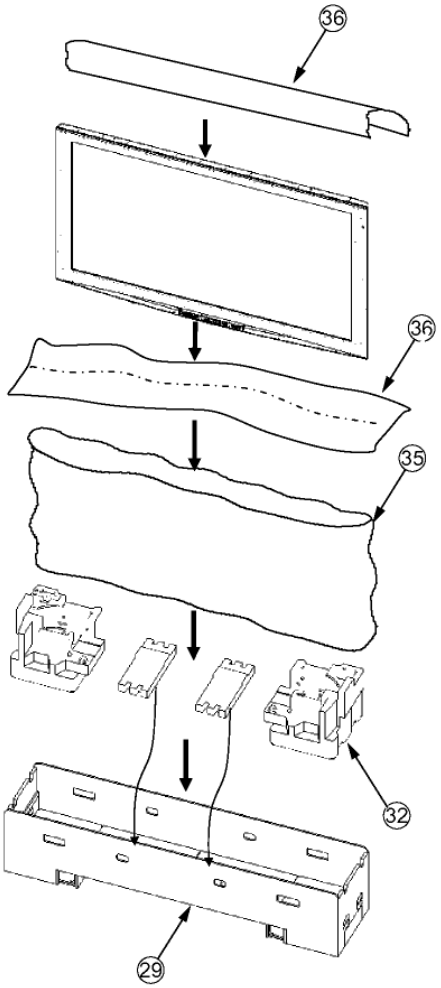

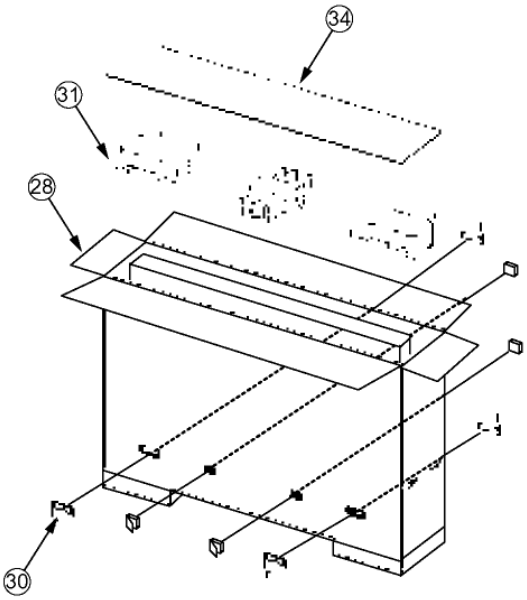

ACCESSORY

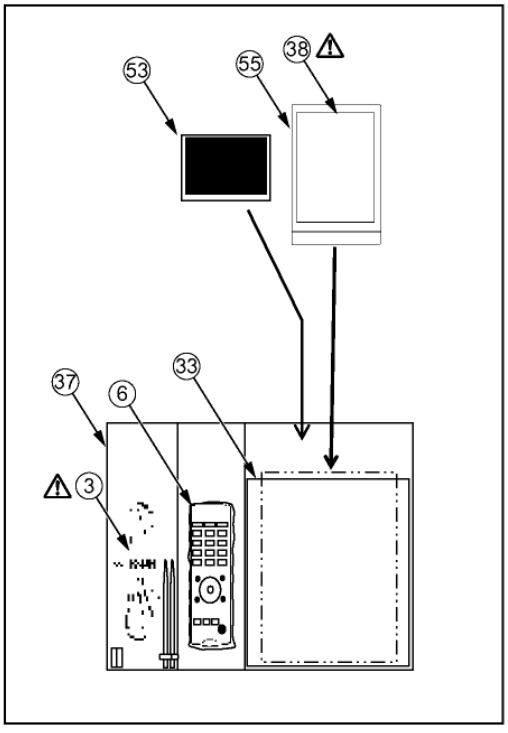

13.1.4. Mechanical Replacement Parts List

Safety	Ref. No.	Part No.	Part Name & Description	Q'ty	Remarks
	1	EAS10D85J	SQUAWKER SPEAKER (LEFT&RIGHT)	2	
	2	J0KD00000096	FERRITE CORE	6	
		J0KG00000127	CORE	1	
⚠	3	K2CN3DH00006	AC CORD	1	MR
⚠	3	K2CT3YY00013	AC CORD	1	H/M/MS
⚠	3	K2CZ3YY00006	AC CORD	1	D
	4	L6FAYYYH0095	FAN UNIT (80MM*25)	4	
⚠	5	MD65F11A1J	PLASMA DISPLAY PANEL	1	
	6	N2QAYB000120	REMOTE CONTROL	1	
	7	TBXA53803	POWER BUTTON	1	
	8	TBXA53902	SELECTION BUTTON	1	
	9	TESD078	BUTTON SPRING	1	
		THEJ016J	SCREW(AC INRET:2)	2	
		THEL0429	SCREW	14	
		THEL065Z	SCREW(BC TOP:7)	7	
		THTD013N	SCREW	8	
		THTF011N	SCREW	78	
	56	TKGA5467	FRONT GLASS	1	
	10	TKKC5325	LED PANEL	1	
	11	TKKL5383	ADJUSTMENT COVER	1	
	12	TKKL5453	CORNER PROTECTION LEFT	1	
	13	TKKL5454	CORNER PROTECTION RIGHT	1	
⚠	14	TKPB13101	INLET COVER	1	
	15	TKPB23701	SD PANEL LIGHT	1	
⚠	16	TKPB30401	TUNER COVER	1	
⚠	17	TKRA52502A	REAR COVER HANDLE	2	
	18	TMKG669	FAN SPONGE	4	
	19	TMKG839	SPONGE(UPPER/BOTTOM)	2	
	20	TMKG840	SPONGE(LEFT/RIGHT)	2	
		TMKG868	INSULATING SPONGE	2	
		TMM15414-2	CLAMPER	2	
		TMM16473-1	CLAMPER	1	
		TMM17499	CLAMPER	1	
		TMM6428-1	CLAMPER	1	
		TMM7464-2	CLAMPER	2	
		TMM7468-1	CLAMPER	1	
		TMME084	CLAMPER	1	
		TMME260	CLAMPER	2	
		TMME261	CLAMPER	1	
		TMME285	CLAMPER	6	
		TMME287	CLAMPER	8	
		TMME289	CLAMPER	2	
		TMME292	CLAMPER	24	

Safety	Ref. No.	Part No.	Part Name & Description	Q'ty	Remarks
		TMME293	CLAMPER	1	
		TMME305	CLAMPER	2	
		TMME324	SPACER	3	
	21	TMMJ068	RUBBER(FAN)	8	
	22	TMMJ070	SPEAKER RUBBER	8	
	23	TMMX226	DOOR SPRING	1	
	24	TMMX234	REAR COVER HOOK	2	
		TMMX243	INSULATION SPACER(A)	6	
		TMMX244	INSULATION SPACER(B)	6	
	25	TMWC021	POWER BUTTON BRACKET	1	
		TMWX054	SPEAKER SHEET BRACKET	1	
	26	TMXX033	CORE HOLDER	1	
		TMXX045	AC CORD HOLDER	1	
		TMXX054	AC CORD CLAMPER	2	
	27	TMXX058	CORE HOLDER	1	
	28	TPCC50101	CARTON BOX TOP	1	M
	28	TPCC50102	CARTON BOX TOP	1	MR
	28	TPCC50103	CARTON BOX TOP	1	MS
	28	TPCC50104	CARTON BOX TOP	1	H
	28	TPCC50105	CARTON BOX TOP	1	D
	29	TPCC52901	CARTON BOX BOTTOM	1	
	30	TPD169487	JOINT	4	
	31	TPDA1908	CUSHION TOP	1	
	32	TPDA1909	CUSHION BOTTOM	1	
		TPDA1942	SKID CUSHION	2	
	33	TPDF2120	ACCESSORIES PAD	1	
	34	TPDF2220	TOP PAD	1	
		TPDF2221	BOTTOM PAD	2	
		TPDX0007	JOINT	4	
		TPDX0016	JOINT	4	
	35	TPEH246	PROTECT COVER	1	
	36	TPEH375	PROTECT SHEET	2	
	37	TPEP022	ACCESSORIES BAG	1	
⚠	38	TQBC2309	INSTRUCTION BOOK (ENGLISH)	1	
⚠	38	TQBC2310	INSTRUCTION BOOK (CHINESE)	1	H/D
⚠	38	TQBC2311	INSTRUCTION BOOK (ARABIC)	1	M/MR/MS
⚠	38	TQBC2312	INSTRUCTION BOOK (PERSIAN)	1	MR
	39	TSXL519	CABLE (C10-C20/C50-C60/SU11-SD11)	3	
	40	TSXL555	CABLE (C41-C51)	1	
	41	TSXL566	CABLE (D31-C61)	1	
	42	TSXL661	CABLE (C23-C33)	1	
	43	TSXL684	CABLE (D20-SC20)	1	
	44	TSXL685	CABLE (D34-C11/D35-C21/D36-C22)	3	

Safety	Ref. No.	Part No.	Part Name & Description	Q'ty	Remarks
⚠	45	TTUA1975	REAR COVER	1	M
⚠	45	TTUA1986	REAR COVER	1	MR
⚠	45	TTUA1987	REAR COVER	1	MS
⚠	45	TTUA1988	REAR COVER	1	H
⚠	45	TTUA2007	REAR COVER	1	D
		TW-4BS-2L	LUG TERMINAL	1	
⚠	46	TXAJS01RATM	AC INLET ASSY	1	
	47	TXFAB01RHTJ	WOOFER BOX ASSY (LEFT)	1	
	48	TXFAB02RHTJ	WOOFER BOX ASSY (RIGHT)	1	
	49	TXFKP01RETC	DOOR ASSY	1	
⚠	50	TXFKY01RATMB	CABINET ASSY	1	
	51	TXFMX01EVTJ	CORE ASSY (68P 3P)	1	
	52	TXFMX01RATM	CORE ASSY	1	
	53	TXFPE01RLTU	CLEANING CLOTH ASSY	1	
	54	TXFSX01DRTU	CABLE ASSY(D34-C55/D35-C54)	2	
		TXJH11RATB	SPEAKER LEAD (H11-SP)	1	
		TXJH12RATM	SPEAKER LEAD (H12-SP)	1	
		XSB3+6FJ	SCREW	3	
		XTB3+10GFJ	SCREW	5	
		XTB4+12GFJ	SCREW	52	
		XTB4+12GFJK	SCREW	23	
		XTT4+12GFJK	SCREW(BC:30)	30	
		XTV3+10GFJ	SCREW	1	
		XTWT4+Z15DFJ	SCREW(SP BOX	6	
		XYN3+F8FJ	SCREW	47	
		XYN3+J12FJ	SCREW	45	
		XYN4+E8FJ	SCREW	1	
		XYN4+F10FJ	SCREW	62	
		XYN4+F14FJ	SCREW	6	
		XYN8+F20FJK	SCREW	4	
	55	XZBT6506	POLY BAG (INSTRUCTION BOOK	1	

13.2. Electrical Replacement Parts List

13.2.1. Replacement Parts List Notes

RTL (Retention Time Limited)

Note: The marking (RTL) indicates that the Retention Time is Limited for this item. After the discontinuation of this assembly in production, the item will continue to be available for a specific period of time. The retention period of availability is dependant on the type of assembly, and in accordance with the laws governing part and product retention. After the end of this period, the assembly will no longer be available.

Abbreviation of part name and description

1. Resistor

Example:

ERD25TJ104 C 100KOHM, J, 1/4W

Type Allowance

2. Capacitor

Example:

ECKF1H103ZF C 0.01UF, Z, 50V

Type Allowance

Type	Allowance
C : Carbon	F : ±1%
F : Fuse	G : ±2%
M : Metal Oxide	J : ±5%
Metal FIlm	K : ±10%
S : Solid	M : ±20%
W : Wire Wound	

Type	Allowance
C : Ceramic	C : ±0.25pF
E : Electrolytic	D : ±0.5pF
P : Polyester	F : ±1pF
Polyprop	G : ±3pF
lene	J : ±5pF
T : Tantalum	K : ±10pF
	L : ±15pF
	M : ±20pF
	P : +100%, -0%
	Z : +80%, -20%

13.2.2. Electrical Replacement Parts List

Safety	Ref. No.	Part No.	Part Name & Description	Pcs	Remarks
	A1	K1KA12A00317	12P CONNECTOR	1	
	A3	K1KA14A00248	14P CONNECTOR	1	
	A5	K1KB31AA0140	31P CONNECTOR	1	
	A6	K1KA20AA0009	20P CONNECTOR	1	
	A7	K1KA11AA0715	11P CONNECTOR	1	
	A8	K1KA06AA0714	6P CONNECTOR	1	
	A9	K1KA06A00508	6P CONNECTOR	1	
	A11	K1KA30AA0009	30P CONNECTOR	1	
	A12	K1KY15AA0607	15P CONNECTOR	1	
	A13	K1KY23AA0607	23P CONNECTOR	1	
	A14	K1KY23AA0607	23P CONNECTOR	1	
	A51	K1KY20A00015	20P CONNECTOR	1	
	A53	K1KA02AA0150	2P CONNECTOR	1	
	C10	K1MN20BA0231	20P CONNECTOR	1	
	C11	K1MN68BA0266	68P CONNECTOR	1	
	C20	K1MN20BA0266	20P CONNECTOR	1	
	C21	K1MN68BA0266	68P CONNECTOR	1	
	C22	K1MN68BA0266	68P CONNECTOR	1	
	C23	K1MN68BA0266	68P CONNECTOR	1	
	C32	K1KA04AA0728	4P CONNECTOR	1	
	C33	K1MN68BA0266	68P CONNECTOR	1	
	C41	K1MN80BA0076	80P CONNECTOR	1	
	C43	K1KA10A00416	10P CONNECTOR	1	
	C45	K1KA04AA0728	4P CONNECTOR	1	
	C50	K1MN20BA0266	20P CONNECTOR	1	
	C51	K1MN80BA0076	80P CONNECTOR	1	
	C52	K1MN68BA0266	68P CONNECTOR	1	
	C53	K1MN68BA0266	68P CONNECTOR	1	
	C60	K1MN20BA0231	20P CONNECTOR	1	
	C61	K1MN68BA0266	68P CONNECTOR	1	
	C858	F1J1E104A227	C 0.10UF, Z, 25V	1	
	C859	F1J1E104A227	C 0.10UF, Z, 25V	1	
	C860	F2A1E101A599	E 100UF, 25V	1	
	C861	F1J1E104A227	C 0.10UF, Z, 25V	1	
	C862	F1J1E104A227	C 0.10UF, Z, 25V	1	
	C869	ECA1EHG471	E 470UF, 25V	1	
	C1102	F1J1A106A043	C 0.010UF, K, 10V	1	
	C1103	F1G1C104A116	C 0.10UF, K, 16V	1	
	C1104	F1G1C104A116	C 0.10UF, K, 16V	1	
	C1106	F1G1H270A731	C 27UF, 50V	1	
	C1107	F1G1H220A731	C 22UF, 50V	1	
	C1108	F1G1C104A116	C 0.10UF, K, 16V	1	
	C1109	F1H1A1050032	C 10UF, 50V	1	
	C1111	F1H1A1050032	C 10UF, 50V	1	
	C1112	F1G1C104A116	C 0.10UF, K, 16V	1	
	C1114	F1G1C104A116	C 0.10UF, K, 16V	1	
	C1117	F1G1C104A116	C 0.10UF, K, 16V	1	
	C1122	F1G1E103A123	C 0.010UF, K, 16V	1	
	C1123	F1H1A1050032	C 10UF, 50V	1	
	C2023	F1G1C104A116	C 0.10UF, K, 16V	1	
	C2048	F1G1C104A116	C 0.10UF, K, 16V	1	
	C2049	F1G1C104A116	C 0.10UF, K, 16V	1	
	C2050	F1G1C104A116	C 0.10UF, K, 16V	1	
	C2052	F1G1C104A116	C 0.10UF, K, 16V	1	
	C2053	F1G1C104A116	C 0.10UF, K, 16V	1	
	C2054	F1J1A106A043	C 0.010UF, K, 10V	1	
	C2055	F1G1H150A731	C 15UF, 50V	1	
	C2056	F1G1H150A731	C 15UF, 50V	1	
	C2057	F1G1C104A116	C 0.10UF, K, 16V	1	
	C2058	F1G1C104A116	C 0.10UF, K, 16V	1	
	C2059	F1J1A106A043	C 0.010UF, K, 10V	1	
	C2091	F1G1H220A731	C 22UF, 50V	1	
	C2092	F1G1H220A731	C 22UF, 50V	1	
	C2096	F1G1C104A116	C 0.10UF, K, 16V	1	
	C2098	F2G0J2210013	E 220UF 6.3V	1	
	C2099	F2G0J2210013	E 220UF 6.3V	1	
	C2100	F1G1C104A116	C 0.10UF, K, 16V	1	
	C2101	F1J1A106A043	C 0.010UF, K, 10V	1	
	C2102	F1G1C104A116	C 0.10UF, K, 16V	1	
	C2105	F1G1C104A116	C 0.10UF, K, 16V	1	
	C2106	F1G1C104A116	C 0.10UF, K, 16V	1	
	C2107	F2G0J470A019	E 47UF 6.3V	1	
	C2108	F2G0J470A019	E 47UF 6.3V	1	
	C2109	F1G1C104A116	C 0.10UF, K, 16V	1	
	C2110	F1G1C104A116	C 0.10UF, K, 16V	1	
	C2111	F1H0J2250008	C 2.2UF, K, 16V	1	
	C2112	F1J1A106A043	C 0.010UF, K, 10V	1	
	C2113	F1J1A106A043	C 0.010UF, K, 10V	1	
	C2114	F1G1C104A116	C 0.10UF, K, 16V	1	
	C2115	F1G1C104A116	C 0.10UF, K, 16V	1	
	C2116	F1G1H471A731	C 470UF, 50V	1	
	C2117	F1G1C104A116	C 0.10UF, K, 16V	1	
	C2118	F1H1A1050032	C 10UF, 50V	1	
	C2119	EEEHB1A221P	C 220PF, J, 10V	1	
	C2120	F1G1H560A731	C 56UF, 50V	1	
	C2121	F1G1H560A731	C 56UF, 50V	1	
	C2124	F1G1C104A116	C 0.10UF, K, 16V	1	
	C2125	F1G1E103A123	C 0.010UF, K, 16V	1	
	C2126	F1J1A106A043	C 0.010UF, K, 10V	1	
	C2127	F1G1E103A123	C 0.010UF, K, 16V	1	
	C2128	F1G1E103A123	C 0.010UF, K, 16V	1	
	C2129	F1G1E103A123	C 0.010UF, K, 16V	1	
	C2131	ERJ2GEJ102X	M 1K OHM J 1/4W	1	
	C2135	F1G1E103A123	C 0.010UF, K, 16V	1	
	C2136	F1G1E103A123	C 0.010UF, K, 16V	1	
	C2137	F1J1A106A043	C 0.010UF, K, 10V	1	
	C2138	F1G1C104A116	C 0.10UF, K, 16V	1	
	C2145	F1G1C104A116	C 0.10UF, K, 16V	1	
	C2146	F1G1C104A116	C 0.10UF, K, 16V	1	
	C2151	F1J1A106A043	C 0.010UF, K, 10V	1	
	C2174	F1H1A1050032	C 10UF, 50V	1	
	C2175	F2G0J470A019	E 47UF 6.3V	1	
	C2176	F1G1E103A123	C 0.010UF, K, 16V	1	
	C2179	F2G0J470A019	E 47UF 6.3V	1	
	C2180	F1H1A1050032	C 10UF, 50V	1	
	C2184	F1G1H102A730	C 1000UF, 50V	1	
	C2187	F1H0J2250008	C 2.2UF, K, 16V	1	
	C2188	F1G1H471A730	C 470UF, 50V	1	
	C2189	F1H1A1050032	C 10UF, 50V	1	
	C2191	F1J1A106A043	C 0.010UF, K, 10V	1	
	C2192	F2G0J470A019	E 47UF 6.3V	1	
	C2195	F1G1H102A730	C 1000UF, 50V	1	
	C2197	F1H1E333A129	C 0.033UF, 25V	1	
	C2198	F1H1E333A129	C 0.033UF, 25V	1	
	C2201	F1G1A473A053	C 0.47UF, 10V	1	
	C2202	F1H0J2250008	C 2.2UF, K, 16V	1	
	C2203	F1H1A1050032	C 10UF, 50V	1	
	C2204	F1H1C105A008	C 1UF, K, 16V	1	
	C2213	F1G1H102A730	C 1000UF, 50V	1	
	C2216	F1G1C104A116	C 0.10UF, K, 16V	1	
	C2244	F1G1C104A116	C 0.10UF, K, 16V	1	
	C2245	F1G1H102A730	C 1000UF, 50V	1	
	C2246	F1J1A106A043	C 0.010UF, K, 10V	1	
	C2251	F1J1A106A043	C 0.010UF, K, 10V	1	

Safety	Ref. No.	Part No.	Part Name & Description	Pcs	Remarks
	C2261	D0GDR00Z0002	M 0 OHM, 1/10W	1	
	C2262	D0GDR00Z0002	M 0 OHM, 1/10W	1	
	C2263	F1J1A106A043	C 0.010UF, K, 10V	1	
	C2264	F1J1A106A043	C 0.010UF, K, 10V	1	
	C2265	F1G1H101A731	C 100PF, K, 50V	1	
	C2266	F1G1H101A731	C 100PF, K, 50V	1	
	C2301	F1G1C104A116	C 0.10UF, K, 16V	1	
	C2302	F1G1C104A116	C 0.10UF, K, 16V	1	
	C2393	F1K1C1060004	C 0.010UF, 16V	1	
	C2394	F1J1H474A757	C 0.47UF, 50V	1	
	C2395	F1J1H474A757	C 0.47UF, 50V	1	
	C2400	F1G1C104A116	C 0.10UF, K, 16V	1	
	C2401	F1G1H181A731	C 180UF, 50V	1	
	C2402	F1G1C104A116	C 0.10UF, K, 16V	1	
	C2403	F2G1V220A020	E 22UF, 35V	1	
	C2404	F1G1H102A730	C 1000UF, 50V	1	
	C2407	F2H0J1010009	C 100UF, 6.3V	1	
	C2408	F1G1C104A116	C 0.10UF, K, 16V	1	
	C2409	F2G0J1020022	E 1100PF, J, 6.3V	1	
	C2410	F1H0J2250008	C 2.2UF, K, 16V	1	
	C2411	ECJ1VB1H104K	C 0.1UF, K, 50V	1	
	C2412	F2G1H100A031	E 10UF, 50V	1	
	C2413	F1H1A1050032	C 10UF, 50V	1	
	C2414	F1G1C104A116	C 0.10UF, K, 16V	1	
	C2415	F1G1C104A116	C 0.10UF, K, 16V	1	
	C2416	F1H1H330A971	C 33UF, 50V	1	
	C2417	F1H1H330A971	C 33UF, 50V	1	
	C2418	F1G1E103A123	C 0.010UF, K, 16V	1	
	C2419	F1G1H101A731	C 100PF, K, 50V	1	
	C2420	F1G1C104A116	C 0.10UF, K, 16V	1	
	C2427	F1H1A1050032	C 10UF, 50V	1	
	C2430	ECJ3YB1E106M	C 10 UF, K, 25V	1	
	C2431	F1G1H101A731	C 100PF, K, 50V	1	
	C2432	F1G1H471A731	C 470UF, 50V	1	
	C2437	F1G1C104A116	C 0.10UF, K, 16V	1	
	C2511	F1H1C104A143	C 0.1UF, K, 16V	1	
	C2512	F1J1A106A043	C 0.010UF, K, 10V	1	
	C2515	F1H1H103A970	C 0.001UF, K, 50V	1	
	C2521	F1H1H103A970	C 0.001UF, K, 50V	1	
	C2525	ECJ1VB1H102K	C 1000PF, K, 50V	1	
	C2601	F1G1A104A012	C 0.01UF, K, 10V	1	
	C2602	F1G1A104A012	C 0.01UF, K, 10V	1	
	C2603	F1G1C103A116	C 0.010UF, K, 16V	1	
	C2604	F1G1A104A012	C 0.01UF, K, 10V	1	
	C2605	F1G1C103A116	C 0.010UF, K, 16V	1	
	C2608	F1G1A104A012	C 0.01UF, K, 10V	1	
	C2609	F1G1C103A116	C 0.010UF, K, 16V	1	
	C2610	F1G1C103A116	C 0.010UF, K, 16V	1	
	C2611	F1G1C103A116	C 0.010UF, K, 16V	1	
	C2612	F1G1A104A012	C 0.01UF, K, 10V	1	
	C2613	F1G1H180A731	C 18UF, 50V	1	
	C2614	F1G1H120A731	C 12UF, 50V	1	
	C2615	F1G1A104A012	C 0.01UF, K, 10V	1	
	C2616	F1G1A104A012	C 0.01UF, K, 10V	1	
	C2617	F1G1A104A012	C 0.01UF, K, 10V	1	
	C2618	F1G1A104A012	C 0.01UF, K, 10V	1	
	C2619	F1G1A104A012	C 0.01UF, K, 10V	1	
	C2620	F1G1A104A012	C 0.01UF, K, 10V	1	
	C2621	F1G1A104A012	C 0.01UF, K, 10V	1	
	C2622	F1G1A104A012	C 0.01UF, K, 10V	1	
	C2623	F1G1A104A012	C 0.01UF, K, 10V	1	
	C2624	F1G1A104A012	C 0.01UF, K, 10V	1	
	C2625	F1G1A104A012	C 0.01UF, K, 10V	1	

Safety	Ref. No.	Part No.	Part Name & Description	Pcs	Remarks
	C2626	F1G1A104A012	C 0.01UF, K, 10V	1	
	C2627	F1G1A104A012	C 0.01UF, K, 10V	1	
	C2628	F1G1C103A116	C 0.010UF, K, 16V	1	
	C2629	F1G1A104A012	C 0.01UF, K, 10V	1	
	C2630	F1G1A104A012	C 0.01UF, K, 10V	1	
	C2631	F1G1C103A116	C 0.010UF, K, 16V	1	
	C2632	F1G1A104A012	C 0.01UF, K, 10V	1	
	C2633	F1G1C103A116	C 0.010UF, K, 16V	1	
	C2634	F1G1A104A012	C 0.01UF, K, 10V	1	
	C2635	ECJ1VB1H473K	C 0.047UF, K, 50V	1	
	C2637	EEEHB0G221P	C 220PF, J, 4V	1	
	C2638	EEEHB0G470R	C 47PF, J, 4V	1	
	C2639	F2G1C2200036	E 22UF, 16V	1	
	C2640	F2G1C2200036	E 22UF, 16V	1	
	C2641	F2G1C2200036	E 22UF, 16V	1	
	C2642	F1G1A104A012	C 0.01UF, K, 10V	1	
	C2643	F1G1C103A116	C 0.010UF, K, 16V	1	
	C2644	F1G1C103A116	C 0.010UF, K, 16V	1	
	C2645	F1G1A104A012	C 0.01UF, K, 10V	1	
	C2646	F1G1A104A012	C 0.01UF, K, 10V	1	
	C2647	F1G1A104A012	C 0.01UF, K, 10V	1	
	C2648	F1G1A104A012	C 0.01UF, K, 10V	1	
	C2649	F1G1A104A012	C 0.01UF, K, 10V	1	
	C2650	F2G1C2200036	E 22UF, 16V	1	
	C2651	F1G1H100A565	C 100PF, K, 50V	1	
	C2652	ECGRL0G680ER	C 68PF, J, 4V	1	
	C2657	F1G1C103A116	C 0.010UF, K, 16V	1	
	C2658	ECJ2VB1C104K	C 0.1UF, K, 16V	1	
	C2661	F1H1A1050032	C 10UF, 50V	1	
	C3099	F2G1C220A022	E 22UF, 16V	1	
	C3104	ECJ1VB1H104K	C 0.1UF, K, 50V	1	
	C3107	F1H1H470A971	C 47UF, K. 50V	1	
	C3109	F1G1H222A730	C 2200UF, 50V	1	
	C3110	F2G1C1010034	E 100PF, J, 16V	1	
	C3115	F1G1H222A730	C 2200UF, 50V	1	
	C3116	ECJ1VB1C105K	C 0.01UF, K, 16V	1	
	C3117	F1H1H561A971	C 560UF, 50V	1	
	C3122	F1H1A1050032	C 10UF, 50V	1	
	C3123	F1H1A1050032	C 10UF, 50V	1	
	C3124	F1H1A1050032	C 10UF, 50V	1	
	C3128	F1H1H561A971	C 560UF, 50V	1	
	C3138	F1H1H561A971	C 560UF, 50V	1	
	C3139	F1H1H561A971	C 560UF, 50V	1	
	C3141	F1H1H561A971	C 560UF, 50V	1	
	C3142	F1H1H561A971	C 560UF, 50V	1	
	C3144	F1H1H561A971	C 560UF, 50V	1	
	C3145	F1H1H561A971	C 560UF, 50V	1	
	C3152	ECJ1VB1C105K	C 0.01UF, K, 16V	1	
	C3154	ECJ1VB1C105K	C 0.01UF, K, 16V	1	
	C3223	ECJ1VB1C105K	C 0.01UF, K, 16V	1	
	C3225	ECJ1VB1H104K	C 0.1UF, K, 50V	1	
	C3226	ECJ1VB1C105K	C 0.01UF, K, 16V	1	
	C3245	ECJ1VB1C105K	C 0.01UF, K, 16V	1	
	C3246	ECJ1VB1C105K	C 0.01UF, K, 16V	1	
	C3247	ECJ1VB1C105K	C 0.01UF, K, 16V	1	
	C3248	ECJ1VB1C105K	C 0.01UF, K, 16V	1	
	C3249	ECJ1VB1C105K	C 0.01UF, K, 16V	1	
	C3250	ECJ1VB1C105K	C 0.01UF, K, 16V	1	
	C3253	F1H1A1050032	C 10UF, 50V	1	
	C3259	F1H1A1050032	C 10UF, 50V	1	
	C3260	F1H1A1050032	C 10UF, 50V	1	
	C3261	ECJ1VB1H104K	C 0.1UF, K, 50V	1	
	C3262	F1H1A1050032	C 10UF, 50V	1	
	C3263	F1H1A1050032	C 10UF, 50V	1	
	C3264	ECJ1VB1C105K	C 0.01UF, K, 16V	1	
	C3265	EEEHB1C221UP	C 220PF, J, 16V	1	
	C3266	ECJ1VB1H104K	C 0.1UF, K, 50V	1	

Safety	Ref. No.	Part No.	Part Name & Description	Pcs	Remarks
	C3267	F1H1A1050032	C 10UF, 50V	1	
	C3268	F1H1A1050032	C 10UF, 50V	1	
	C3269	F1H1A1050032	C 10UF, 50V	1	
	C3270	F1H1A1050032	C 10UF, 50V	1	
	C3271	F1H1A1050032	C 10UF, 50V	1	
	C3275	F1H1A1050032	C 10UF, 50V	1	
	C3276	F1H1A1050032	C 10UF, 50V	1	
	C3277	ECJ1VB1H104K	C 0.1UF, K, 50V	1	
	C3278	F2G1A221A149	E 220UF, 10V	1	
	C3281	ECJ1VB1C105K	C 0.01UF, K, 16V	1	
	C3297	F1J1A106A043	C 0.010UF, K, 10V	1	
	C3298	F1J1A106A043	C 0.010UF, K, 10V	1	
	C3299	F1J1A106A043	C 0.010UF, K, 10V	1	
	C3300	F1J1A106A043	C 0.010UF, K, 10V	1	
	C3302	EEEHB1C221UP	C 220PF, J, 16V	1	
	C3308	F2G1C100A022	C 10UF J 16V	1	
	C3310	ECJ1VB1H104K	C 0.1UF, K, 50V	1	
	C3311	ECJ1VB1H104K	C 0.1UF, K, 50V	1	
	C3319	ECJ1VB1H104K	C 0.1UF, K, 50V	1	
	C3320	F2G1C470A022	E 47UF, 16V	1	
	C3323	F1H1A1050032	C 10UF, 50V	1	
	C3701	ECJ2XC1H561K	C 560PF, K, 50V	1	
	C3703	ECJ2XC1H561K	C 560PF, K, 50V	1	
	C3711	ECJ2VF1H333Z	C 0.033UF, Z, 50V	1	
	C3712	ECJ2VF1H333Z	C 0.033UF, Z, 50V	1	
	C3750	F1J1H102A721	C 1000UF, 50V	1	
	C3801	F1G1C104A116	C 0.10UF, K, 16V	1	
	C3802	F1G1C104A116	C 0.10UF, K, 16V	1	
	C3803	F1H1A1050032	C 10UF, 50V	1	
	C3804	F1G1C104A116	C 0.10UF, K, 16V	1	
	C3806	F1G1C104A116	C 0.10UF, K, 16V	1	
	C3807	F1G1C104A116	C 0.10UF, K, 16V	1	
	C3808	F1G1C104A116	C 0.10UF, K, 16V	1	
	C3809	F1G1C104A116	C 0.10UF, K, 16V	1	
	C3810	F1G1C104A116	C 0.10UF, K, 16V	1	
	C3811	F1G1C104A116	C 0.10UF, K, 16V	1	
	C3812	F1G1C104A116	C 0.10UF, K, 16V	1	
	C3813	F1J0J106A004	C 0.010UF, K, 16V	1	
	C3814	F1G1C104A116	C 0.10UF, K, 16V	1	
	C3815	ECJ0EB1C103K	C 0.010UF, K, 16V	1	
	C3816	ECJ0EB1C103K	C 0.010UF, K, 16V	1	
	C3817	ECJ0EB1C103K	C 0.010UF, K, 16V	1	
	C3818	ECJ0EB1C103K	C 0.010UF, K, 16V	1	
	C3819	ECJ0EB1C103K	C 0.010UF, K, 16V	1	
	C3820	ECJ0EB1C103K	C 0.010UF, K, 16V	1	
	C3823	F1G1C104A116	C 0.10UF, K, 16V	1	
	C3827	F1J1A475A039	C 4.7UF, K, 10V	1	
	C3829	F1H1A1050032	C 10UF, 50V	1	
	C4005	F1G1C104A081	C 0.10UF, K, 16V	1	
	C4006	F1G1C104A081	C 0.10UF, K, 16V	1	
	C4008	F1G1C104A081	C 0.10UF, K, 16V	1	
	C4010	F1G1C104A081	C 0.10UF, K, 16V	1	
	C4011	F1G1C104A081	C 0.10UF, K, 16V	1	
	C4013	F1G1C104A081	C 0.10UF, K, 16V	1	
	C4014	F1G1C104A081	C 0.10UF, K, 16V	1	
	C4015	F1G1C104A081	C 0.10UF, K, 16V	1	
	C4016	F1J1C475A170	C 4.7UF, K, 16V	1	
	C4018	F1G1C104A081	C 0.10UF, K, 16V	1	
	C4019	F1J1H474A757	C 0.47UF, 50V	1	
	C4020	F1G1C104A081	C 0.10UF, K, 16V	1	
	C4021	F1G1C104A081	C 0.10UF, K, 16V	1	
	C4022	F1J1H474A757	C 0.47UF, 50V	1	
	C4023	F1G1C104A081	C 0.10UF, K, 16V	1	

Safety	Ref. No.	Part No.	Part Name & Description	Pcs	Remarks
	C4024	F1G1C104A081	C 0.10UF, K, 16V	1	
	C4025	F1G1C104A081	C 0.10UF, K, 16V	1	
	C4027	F1G1C104A081	C 0.10UF, K, 16V	1	
	C4028	F1G1C104A081	C 0.10UF, K, 16V	1	
	C4030	F1G1C104A081	C 0.10UF, K, 16V	1	
	C4032	F1G1C104A081	C 0.10UF, K, 16V	1	
	C4033	F1G1C104A081	C 0.10UF, K, 16V	1	
	C4034	F1G1C104A081	C 0.10UF, K, 16V	1	
	C4035	F1H1A1050032	C 10UF, 50V	1	
	C4036	F1H1A1050032	C 10UF, 50V	1	
	C4038	F1G1C104A081	C 0.10UF, K, 16V	1	
	C4039	F1G1E103A123	C 0.010UF, K, 16V	1	
	C4040	F1G1H150A731	C 15UF, 50V	1	
	C4045	F1G1C104A081	C 0.10UF, K, 16V	1	
	C4047	F1H1A1050032	C 10UF, 50V	1	
	C4049	F1G1C104A081	C 0.10UF, K, 16V	1	
	C4050	F1H1A1050032	C 10UF, 50V	1	
	C4051	F1G1C104A081	C 0.10UF, K, 16V	1	
	C4052	F1G1C104A081	C 0.10UF, K, 16V	1	
	C4053	F1G1C104A081	C 0.10UF, K, 16V	1	
	C4054	F1K1C1060004	C 0.010UF, 16V	1	
	C4055	F1G1C104A116	C 0.10UF, K, 16V	1	
	C4056	F2G1C470A022	E 47UF, 16V	1	
	C4101	F1G1C104A116	C 0.10UF, K, 16V	1	
	C4255	F1G1C104A116	C 0.10UF, K, 16V	1	
	C4256	F1G1C104A116	C 0.10UF, K, 16V	1	
	C4257	F1G1C104A116	C 0.10UF, K, 16V	1	
	C4258	F1G1C104A116	C 0.10UF, K, 16V	1	
	C4259	F1G1C104A116	C 0.10UF, K, 16V	1	
	C4260	F1G1C104A116	C 0.10UF, K, 16V	1	
	C4261	F1G1C104A116	C 0.10UF, K, 16V	1	
	C4262	F1G1C104A116	C 0.10UF, K, 16V	1	
	C4263	F1G1C104A116	C 0.10UF, K, 16V	1	
	C4264	F1G1C104A116	C 0.10UF, K, 16V	1	
	C4265	F1G1C104A116	C 0.10UF, K, 16V	1	
	C4266	F1H0J1050012	C 1UF, K, 16V	1	
	C4267	F1G1H1020008	C 1000UF, 50V	1	
	C4268	F1G1H1020008	C 1000UF, 50V	1	
	C4270	F1G1C104A116	C 0.10UF, K, 16V	1	
	C4271	F1G1C104A116	C 0.10UF, K, 16V	1	
	C4272	F1G1C104A116	C 0.10UF, K, 16V	1	
	C4273	F1G1C104A116	C 0.10UF, K, 16V	1	
	C4274	F1G1C104A116	C 0.10UF, K, 16V	1	
	C4275	F1G1C104A116	C 0.10UF, K, 16V	1	
	C4276	F1G1C104A116	C 0.10UF, K, 16V	1	
	C4277	F1G1C104A116	C 0.10UF, K, 16V	1	
	C4278	F1G1C104A116	C 0.10UF, K, 16V	1	
	C4279	F1G1C104A116	C 0.10UF, K, 16V	1	
	C4280	F1G1C104A116	C 0.10UF, K, 16V	1	
	C4281	F1G1C104A116	C 0.10UF, K, 16V	1	
	C4282	F1G1C104A116	C 0.10UF, K, 16V	1	
	C4283	F1G1C104A116	C 0.10UF, K, 16V	1	
	C4284	F1G1C104A116	C 0.10UF, K, 16V	1	
	C4285	F1G1C104A116	C 0.10UF, K, 16V	1	
	C4286	F1G1C104A116	C 0.10UF, K, 16V	1	
	C4287	F1G1C104A116	C 0.10UF, K, 16V	1	
	C4288	F1G1C104A116	C 0.10UF, K, 16V	1	
	C4289	F1G1C104A116	C 0.10UF, K, 16V	1	
	C4290	F1G1H1020008	C 1000UF, 50V	1	
	C4291	F1G1C104A116	C 0.10UF, K, 16V	1	
	C4292	F1G1H1020008	C 1000UF, 50V	1	
	C4293	F1G1C104A116	C 0.10UF, K, 16V	1	
	C4294	F1G1H1020008	C 1000UF, 50V	1	
	C4295	F1G1C104A116	C 0.10UF, K, 16V	1	
	C4296	F1G1H1020008	C 1000UF, 50V	1	
	C4297	F1G1C104A116	C 0.10UF, K, 16V	1	
	C4298	F1G1H1020008	C 1000UF, 50V	1	
	C4299	F1G1C104A116	C 0.10UF, K, 16V	1	
	C4300	F2G0J470A019	E 47UF 6.3V	1	
	C4301	F1G1C104A116	C 0.10UF, K, 16V	1	
	C4302	F1J0J106A020	C 0.010UF, K, 16V	1	

Safety	Ref. No.	Part No.	Part Name & Description	Pcs	Remarks
	C4313	F1J0J106A020	C 0.010UF, K, 16V	1	
	C4314	F1G1C104A116	C 0.10UF, K, 16V	1	
	C4315	F1G1C104A116	C 0.10UF, K, 16V	1	
	C4316	F1G1C104A116	C 0.10UF, K, 16V	1	
	C4317	F1J0J106A020	C 0.010UF, K, 16V	1	
	C4318	F1G1C104A116	C 0.10UF, K, 16V	1	
	C4319	F1G1C104A116	C 0.10UF, K, 16V	1	
	C4320	F1G1C104A116	C 0.10UF, K, 16V	1	
	C4321	F1G1C104A116	C 0.10UF, K, 16V	1	
	C4323	F1G1C104A116	C 0.10UF, K, 16V	1	
	C4325	F1J0J106A020	C 0.010UF, K, 16V	1	
	C4326	F1J0J106A020	C 0.010UF, K, 16V	1	
	C4328	F1G1C104A116	C 0.10UF, K, 16V	1	
	C4329	F1G1C104A116	C 0.10UF, K, 16V	1	
	C4500	F1G1C104A116	C 0.10UF, K, 16V	1	
	C4501	F1G1C104A116	C 0.10UF, K, 16V	1	
	C4502	F1G1C104A116	C 0.10UF, K, 16V	1	
	C4503	F1G1C104A116	C 0.10UF, K, 16V	1	
	C4510	F1G1C104A116	C 0.10UF, K, 16V	1	
	C4511	F1G1C104A116	C 0.10UF, K, 16V	1	
	C4513	F1G1C104A081	C 0.10UF, K, 16V	1	
	C4514	F1G1C104A081	C 0.10UF, K, 16V	1	
	C4517	F1G1C104A081	C 0.10UF, K, 16V	1	
	C4520	F1J1A106A043	C 0.010UF, K, 10V	1	
	C4521	F1G1C104A081	C 0.10UF, K, 16V	1	
	C4522	F1G1C104A116	C 0.10UF, K, 16V	1	
	C4523	F1G1C104A081	C 0.10UF, K, 16V	1	
	C4524	F1G1C104A116	C 0.10UF, K, 16V	1	
	C4525	F1G1C104A081	C 0.10UF, K, 16V	1	
	C4533	F1G1H680A731	C 68UF, 50V	1	
	C4534	F1G1C104A116	C 0.10UF, K, 16V	1	
	C4535	F1G1C104A116	C 0.10UF, K, 16V	1	
	C4547	F1G1C104A116	C 0.10UF, K, 16V	1	
	C4548	F1G1C104A116	C 0.10UF, K, 16V	1	
	C4549	F1G1C104A116	C 0.10UF, K, 16V	1	
	C4550	F1G1C104A116	C 0.10UF, K, 16V	1	
	C4551	F1G1C104A116	C 0.10UF, K, 16V	1	
	C4552	F1G1C104A116	C 0.10UF, K, 16V	1	
	C4553	F1G1H102A730	C 1000UF, 50V	1	
	C4554	F2G1C470A022	E 47UF, 16V	1	
	C4555	F1J1A106A043	C 0.010UF, K, 10V	1	
	C4574	F1G1E103A123	C 0.010UF, K, 16V	1	
	C4575	F1H1A1050032	C 10UF, 50V	1	
	C4580	F1G1E103A123	C 0.010UF, K, 16V	1	
	C4585	F1H1A1050032	C 10UF, 50V	1	
	C4595	F1G1E103A123	C 0.010UF, K, 16V	1	
	C4596	F1G1C104A116	C 0.10UF, K, 16V	1	
	C4598	F1H1A1050032	C 10UF, 50V	1	
	C4599	F2G0J470A019	E 47UF 6.3V	1	
	C4600	F1G1C104A116	C 0.10UF, K, 16V	1	
	C4601	F2G0J470A019	E 47UF 6.3V	1	
	C4602	F1G1C104A116	C 0.10UF, K, 16V	1	
	C4603	F1H0J2250008	C 2.2UF, K, 16V	1	
	C4604	F1G1H471A730	C 470UF, 50V	1	
	C4605	F1H1A1050032	C 10UF, 50V	1	
	C4606	F1J1A475A039	C 4.7UF, K, 10V	1	
	C4607	F1J1A475A039	C 4.7UF, K, 10V	1	
	C4608	F1G1C104A116	C 0.10UF, K, 16V	1	
	C4609	F1G1C104A116	C 0.10UF, K, 16V	1	
	C4610	F1G1C104A116	C 0.10UF, K, 16V	1	
	C4611	F1G1C104A116	C 0.10UF, K, 16V	1	
	C4612	F1G1E103A123	C 0.010UF, K, 16V	1	
	C4613	F1H1A1050032	C 10UF, 50V	1	
	C4614	F1G1C104A116	C 0.10UF, K, 16V	1	
	C4615	F1G1C104A116	C 0.10UF, K, 16V	1	

Safety	Ref. No.	Part No.	Part Name & Description	Pcs	Remarks
	C4616	F1J1A475A039	C 4.7UF, K, 10V	1	
	C4617	F1J0G2260001	C 0.001UF, 6.3V	1	
	C4619	F1G1C104A116	C 0.10UF, K, 16V	1	
	C4624	F1G1C104A116	C 0.10UF, K, 16V	1	
	C4625	F1G1C104A116	C 0.10UF, K, 16V	1	
	C4628	F1G1C104A116	C 0.10UF, K, 16V	1	
	C4630	F1G1C104A116	C 0.10UF, K, 16V	1	
	C4632	F1H1A1050032	C 10UF, 50V	1	
	C4634	F1H1A1050032	C 10UF, 50V	1	
	C4636	F1H1A1050032	C 10UF, 50V	1	
	C4638	F1H1A1050032	C 10UF, 50V	1	
	C4640	F1H1A1050032	C 10UF, 50V	1	
	C4642	F1H1A1050032	C 10UF, 50V	1	
	C4643	F1G1C104A116	C 0.10UF, K, 16V	1	
	C4644	F1G1C104A116	C 0.10UF, K, 16V	1	
	C4645	F1G1C104A116	C 0.10UF, K, 16V	1	
	C4646	F1G1C104A116	C 0.10UF, K, 16V	1	
	C4647	F1K1C1060004	C 0.010UF, 16V	1	
	C5001	F1G1C104A116	C 0.10UF, K, 16V	1	
	C5002	F1G1C104A116	C 0.10UF, K, 16V	1	
	C5003	F1G1C104A116	C 0.10UF, K, 16V	1	
	C5004	F1G1C104A116	C 0.10UF, K, 16V	1	
	C5005	F1H0J1050012	C 1UF, K, 16V	1	
	C5006	F1H0J1050012	C 1UF, K, 16V	1	
	C5007	F1J1A106A043	C 0.010UF, K, 10V	1	
	C5008	F1G1C104A116	C 0.10UF, K, 16V	1	
	C5009	F1G1C104A116	C 0.10UF, K, 16V	1	
	C5010	F1G1C104A116	C 0.10UF, K, 16V	1	
	C5011	F1G1C104A116	C 0.10UF, K, 16V	1	
	C5012	F1G1C104A116	C 0.10UF, K, 16V	1	
	C5013	F1J1A106A043	C 0.010UF, K, 10V	1	
	C5014	F1G1C104A116	C 0.10UF, K, 16V	1	
	C5015	F1G1C104A116	C 0.10UF, K, 16V	1	
	C5016	F1J1A106A043	C 0.010UF, K, 10V	1	
	C5017	F1G1C104A116	C 0.10UF, K, 16V	1	
	C5018	F1G1C104A116	C 0.10UF, K, 16V	1	
	C5019	F1G1C104A116	C 0.10UF, K, 16V	1	
	C5020	F1G1C104A116	C 0.10UF, K, 16V	1	
	C5021	F1H0J1050012	C 1UF, K, 16V	1	
	C5022	F1H0J1050012	C 1UF, K, 16V	1	
	C5023	F1H0J1050012	C 1UF, K, 16V	1	
	C5024	F1H0J1050012	C 1UF, K, 16V	1	
	C5025	F1J1A106A043	C 0.010UF, K, 10V	1	
	C5026	F1J1A106A043	C 0.010UF, K, 10V	1	
	C5027	F1G1C104A116	C 0.10UF, K, 16V	1	
	C5028	F1G1C104A116	C 0.10UF, K, 16V	1	
	C5029	F1G1C104A116	C 0.10UF, K, 16V	1	
	C5030	F1G1C104A116	C 0.10UF, K, 16V	1	
	C5031	F1G1C104A116	C 0.10UF, K, 16V	1	
	C5032	F1G1C104A116	C 0.10UF, K, 16V	1	
	C5033	F1H0J1050012	C 1UF, K, 16V	1	
	C5034	F1H0J1050012	C 1UF, K, 16V	1	
	C5035	F1H0J1050012	C 1UF, K, 16V	1	
	C5036	F1H0J1050012	C 1UF, K, 16V	1	
	C5037	F1H0J1050012	C 1UF, K, 16V	1	
	C5038	F1H0J1050012	C 1UF, K, 16V	1	
	C5039	F1J1A106A043	C 0.010UF, K, 10V	1	
	C5040	F1J1A106A043	C 0.010UF, K, 10V	1	
	C5041	F1J1A106A043	C 0.010UF, K, 10V	1	
	C5042	F1G1C104A116	C 0.10UF, K, 16V	1	
	C5043	F1G1C104A116	C 0.10UF, K, 16V	1	
	C5044	F1H0J1050012	C 1UF, K, 16V	1	
	C5045	F1H0J1050012	C 1UF, K, 16V	1	
	C5046	F1J1A106A043	C 0.010UF, K, 10V	1	
	C5047	F1H0J1050012	C 1UF, K, 16V	1	
	C5048	F1H0J2250008	C 2.2UF, K, 16V	1	

Safety	Ref. No.	Part No.	Part Name & Description	Pcs	Remarks
	C5049	F1G1C104A116	C 0.10UF, K, 16V	1	
	C5050	F1H0J1050012	C 1UF, K, 16V	1	
	C5051	F1J1A106A043	C 0.010UF, K, 10V	1	
	C5052	F1J1A106A043	C 0.010UF, K, 10V	1	
	C5053	F1G1C104A116	C 0.10UF, K, 16V	1	
	C5054	F1G1C104A116	C 0.10UF, K, 16V	1	
	C5055	F1G1C104A116	C 0.10UF, K, 16V	1	
	C5056	F1G1C104A116	C 0.10UF, K, 16V	1	
	C5057	F1G1C104A116	C 0.10UF, K, 16V	1	
	C5058	ECGRL0G680ER	C 68PF, J, 4V	1	
	C5059	F1G1C104A116	C 0.10UF, K, 16V	1	
	C5060	F1G1C104A116	C 0.10UF, K, 16V	1	
	C5061	F1G1C104A116	C 0.10UF, K, 16V	1	
	C5062	F1G1C104A116	C 0.10UF, K, 16V	1	
	C5063	F1G1C104A116	C 0.10UF, K, 16V	1	
	C5064	F1G1C104A116	C 0.10UF, K, 16V	1	
	C5065	F1G1C104A116	C 0.10UF, K, 16V	1	
	C5066	F1G1C104A116	C 0.10UF, K, 16V	1	
	C5067	F1G1C104A116	C 0.10UF, K, 16V	1	
	C5072	F1G1C104A116	C 0.10UF, K, 16V	1	
	C5073	F1H0J2250008	C 2.2UF, K, 16V	1	
	C5200	F1H1H180A971	C 18PF, K, 50V	1	
	C5201	F1H1H180A971	C 18PF, K, 50V	1	
	C5301	F1H1A1050032	C 10UF, 50V	1	
	C5302	F1G1C104A081	C 0.10UF, K, 16V	1	
	C5303	F1H1A1050032	C 10UF, 50V	1	
	C5311	ECJ3YB1E106M	C 10 UF, K, 25V	1	
	C5312	ECJ3YB1E106M	C 10 UF, K, 25V	1	
	C5316	F1G1A473A053	C 0.47UF, 10V	1	
	C5317	F1H1A1050032	C 10UF, 50V	1	
	C5320	F1H1E104A129	C 0.1UF, 25V	1	
	C5321	F1G1E103A123	C 0.010UF, K, 16V	1	
	C5322	F1J1A475A039	C 4.7UF, K, 10V	1	
	C5323	F1G1H471A730	C 470UF, 50V	1	
	C5324	F1G1H221A730	C 220UF, 50V	1	
	C5325	F1G1E103A123	C 0.010UF, K, 16V	1	
	C5326	F1G1C104A116	C 0.10UF, K, 16V	1	
	C5327	F1G1C104A116	C 0.10UF, K, 16V	1	
	C5328	ECGRL0G680ER	C 68PF, J, 4V	1	
	C5329	ECGRL0G680ER	C 68PF, J, 4V	1	
	C5341	F1G1C104A116	C 0.10UF, K, 16V	1	
	C5395	F1J1E105A171	C 1 UF 25V	1	
	C5396	EEEHB1E470P	C 47PF, J, 25V	1	
	C5397	ECJ3YB1E106M	C 10 UF, K, 25V	1	
	C5399	ECJ3YB1E106M	C 10 UF, K, 25V	1	
	C5432	ECJ3YB1E106M	C 10 UF, K, 25V	1	
	C5433	F1J1A106A043	C 0.010UF, K, 10V	1	
	C5434	F1J1A106A043	C 0.010UF, K, 10V	1	
	C5435	F1G1E103A123	C 0.010UF, K, 16V	1	
	C5436	F1H1E104A129	C 0.1UF, 25V	1	
	C5441	F1H1E104A129	C 0.1UF, 25V	1	
	C5442	F1H1H682A970	C 6800PF, K, 50V	1	
	C5443	F2H0J2210005	C 220UF, 6.3V	1	
	C5452	ECJ3YB1E106M	C 10 UF, K, 25V	1	
	C5453	F1J1A106A043	C 0.010UF, K, 10V	1	
	C5454	F1J1A106A043	C 0.010UF, K, 10V	1	
	C5455	F1G1E103A123	C 0.010UF, K, 16V	1	
	C5456	F1H1E104A129	C 0.1UF, 25V	1	
	C5461	F1H1E104A129	C 0.1UF, 25V	1	
	C5462	F1H1H392A970	C 3900PF, K, 50V	1	
	C5463	F1G1C104A116	C 0.10UF, K, 16V	1	
	C5464	F1J1A106A043	C 0.010UF, K, 10V	1	
	C5465	F1J1A106A043	C 0.010UF, K, 10V	1	

Safety	Ref. No.	Part No.	Part Name & Description	Pcs	Remarks
	C5466	F1J1A106A043	C 0.010UF, K, 10V	1	
	C5467	F1G1C104A081	C 0.10UF, K, 16V	1	
	C5468	F2G0G101A007	E 100UF 6.3V	1	
	C5469	F2G0G101A007	E 100UF 6.3V	1	
	C5470	F1J0J106A020	C 0.010UF, K, 16V	1	
	C5471	F1J0J106A020	C 0.010UF, K, 16V	1	
	C5472	F1G1C104A116	C 0.10UF, K, 16V	1	
	C5473	F2H0J1010009	C 100UF, 6.3V	1	
	C5474	F1G1C104A116	C 0.10UF, K, 16V	1	
	C5475	F2G1C1010034	E 100PF, J, 16V	1	
	C5476	F1G1C104A116	C 0.10UF, K, 16V	1	
	C5477	F2H0J1010009	C 100UF, 6.3V	1	
	C5478	F1G1C104A116	C 0.10UF, K, 16V	1	
	C5501	F2A1C471A537	E 470UF, 16V	1	
	C5502	ECJ2VB1C104K	C 0.1UF, K, 16V	1	
	C5503	F2A1C471A537	E 470UF, 16V	1	
	C5504	ECJ2VB1C104K	C 0.1UF, K, 16V	1	
	C5505	F2A1E102A220	E 1000UF, 25V	1	
	C5506	ECJ2VB1E104K	C 0.1UF, K, 25V	1	
	C5521	F1G1C104A116	C 0.10UF, K, 16V	1	
	C5522	F1G1C104A116	C 0.10UF, K, 16V	1	
	C5531	F1H1A1050032	C 10UF, 50V	1	
	C5533	F1J1A106A043	C 0.010UF, K, 10V	1	
	C5541	F1H1E104A129	C 0.1UF, 25V	1	
	C5542	F1H1A1050032	C 10UF, 50V	1	
	C5543	F1G1H471A731	C 470UF, 50V	1	
	C5544	F1J0J106A020	C 0.010UF, K, 16V	1	
	C5545	F1G1A104A012	C 0.01UF, K, 10V	1	
	C5546	F2G0G101A007	E 100UF 6.3V	1	
	C5595	F2G1C2200036	E 22UF, 16V	1	
	C5600	F1H1A1050032	C 10UF, 50V	1	
	C5601	F1G1C104A116	C 0.10UF, K, 16V	1	
	C5602	ECGRL0G680ER	C 68PF, J, 4V	1	
	C5603	F1G1E103A123	C 0.010UF, K, 16V	1	
	C5604	F1G1C223A116	C 0.022UF, K, 16V	1	
	C5605	F1J1A475A039	C 4.7UF, K, 10V	1	
	C5606	F1G1H471A730	C 470UF, 50V	1	
	C5607	F1G1H221A731	C 220UF, 50V	1	
	C5608	F1G1C104A116	C 0.10UF, K, 16V	1	
	C5611	ECJ3YB1E106M	C 10 UF, K, 25V	1	
	C5612	ECJ3YB1E106M	C 10 UF, K, 25V	1	
	C5615	ECJ3YB1E106M	C 10 UF, K, 25V	1	
	C5616	F1G1C223A116	C 0.022UF, K, 16V	1	
	C5617	F1H1A1050032	C 10UF, 50V	1	
	C5618	ECJ3YB1E106M	C 10 UF, K, 25V	1	
	C5619	ECJ3YB1E106M	C 10 UF, K, 25V	1	
	C5620	F1H1E104A129	C 0.1UF, 25V	1	
	C5621	F1G1A473A053	C 0.47UF, 10V	1	
	C5622	F1J1A475A039	C 4.7UF, K, 10V	1	
	C5623	F1G1H221A730	C 220UF, 50V	1	
	C5624	F1G1H221A730	C 220UF, 50V	1	
	C5625	F1G1E103A123	C 0.010UF, K, 16V	1	
	C5626	F1G1C104A116	C 0.10UF, K, 16V	1	
	C5627	F1G1C104A116	C 0.10UF, K, 16V	1	
	C5628	ECGRL0G680ER	C 68PF, J, 4V	1	
	C5629	ECGRL0G680ER	C 68PF, J, 4V	1	
	C5631	EEEHB1E470P	C 47PF, J, 25V	1	
	C5632	F1J1E105A171	C 1 UF 25V	1	
	C5636	F1G1C104A116	C 0.10UF, K, 16V	1	
	C5637	F1G1C104A116	C 0.10UF, K, 16V	1	
	C5638	F1G1C104A116	C 0.10UF, K, 16V	1	
	C5639	F1G1C104A116	C 0.10UF, K, 16V	1	
	C5640	F1G1C104A116	C 0.10UF, K, 16V	1	
	C5641	F1G1C104A116	C 0.10UF, K, 16V	1	
	C5642	ECJ3YB1E106M	C 10 UF, K, 25V	1	
	C5643	F1H1E104A129	C 0.1UF, 25V	1	

Safety	Ref. No.	Part No.	Part Name & Description	Pcs	Remarks
	C5644	F1G1E103A123	C 0.010UF, K, 16V	1	
	C5661	F1G1E103A123	C 0.010UF, K, 16V	1	
	C5662	F1G1A473A053	C 0.47UF, 10V	1	
	C5663	F1G1E103A123	C 0.010UF, K, 16V	1	
	C5688	F1H1A225A051	C 22UF, 50V	1	
	C5691	EEEHB1C220UR	C 22PF, J, 16V	1	
	C5695	F2G0J470A019	E 47UF 6.3V	1	
	C5730	F1G1E103A123	C 0.010UF, K, 16V	1	
	C5731	F2G0J470A019	E 47UF 6.3V	1	
	C7700	F1H1C104A143	C 0.1UF, K, 16V	1	
	C7701	F1H1A225A051	C 22UF, 50V	1	
	C7702	F2G0G101A007	E 100UF 6.3V	1	
	C7704	F1H1A1050032	C 10UF, 50V	1	
	C7705	F1H1C104A143	C 0.1UF, K, 16V	1	
	C7706	F1H1A1050032	C 10UF, 50V	1	
	C7708	F1H1A1050032	C 10UF, 50V	1	
	C7709	F1H1A225A051	C 22UF, 50V	1	
	C7710	F1J0J106A020	C 0.010UF, K, 16V	1	
	C7711	F1J0J106A020	C 0.010UF, K, 16V	1	
	C7712	F1H1C104A143	C 0.1UF, K, 16V	1	
	C7713	F1H1H150A971	C 15PF, K, 50V	1	
	C7714	F1H1C104A143	C 0.1UF, K, 16V	1	
	C7715	F1H1H220A971	C 22PF, K, 50V	1	
	C7716	F1J0J106A020	C 0.010UF, K, 16V	1	
	C7717	F1H1C104A143	C 0.1UF, K, 16V	1	
	C7718	F1J0J106A020	C 0.010UF, K, 16V	1	
	C7719	F1H1C104A143	C 0.1UF, K, 16V	1	
	C7720	F1H1C104A143	C 0.1UF, K, 16V	1	
	C7721	F1J0J106A020	C 0.010UF, K, 16V	1	
	C7724	F1H1H150A971	C 15PF, K, 50V	1	
	C7725	F1H1H150A971	C 15PF, K, 50V	1	
	C7729	F1H1H150A971	C 15PF, K, 50V	1	
	C7731	F1H1H150A971	C 15PF, K, 50V	1	
	C7732	F1H1C104A144	C 0.1UF, K, 16V	1	
	C7733	F1H1C104A144	C 0.1UF, K, 16V	1	
	C7736	F1H1C104A144	C 0.1UF, K, 16V	1	
	C7737	F1J0J106A020	C 0.010UF, K, 16V	1	
	C7738	F2G0G101A007	E 100UF 6.3V	1	
	C7742	F1J0J106A020	C 0.010UF, K, 16V	1	
	C8001	F1G1A104A012	C 0.01UF, K, 10V	1	
	C8002	F1G1A104A012	C 0.01UF, K, 10V	1	
	C8003	F1G1A104A012	C 0.01UF, K, 10V	1	
	C8004	F1G1A104A012	C 0.01UF, K, 10V	1	
	C8005	F1G1A104A012	C 0.01UF, K, 10V	1	
	C8006	F1G1A104A012	C 0.01UF, K, 10V	1	
	C8007	F1G1A104A012	C 0.01UF, K, 10V	1	
	C8008	F1G1A104A012	C 0.01UF, K, 10V	1	
	C8009	F1G1A104A012	C 0.01UF, K, 10V	1	
	C8010	F1G1A104A012	C 0.01UF, K, 10V	1	
	C8011	F1J1A106A043	C 0.010UF, K, 10V	1	
	C8012	F1J1A106A043	C 0.010UF, K, 10V	1	
	C8014	F1G1A104A012	C 0.01UF, K, 10V	1	
	C8015	F1G1A104A012	C 0.01UF, K, 10V	1	
	C8016	F1G1A104A012	C 0.01UF, K, 10V	1	
	C8017	F1G1A104A012	C 0.01UF, K, 10V	1	
	C8018	F1G1A104A012	C 0.01UF, K, 10V	1	
	C8019	F1G1A104A012	C 0.01UF, K, 10V	1	
	C8020	F1G1A104A012	C 0.01UF, K, 10V	1	
	C8021	F1G1A104A012	C 0.01UF, K, 10V	1	
	C8022	F1G1A104A012	C 0.01UF, K, 10V	1	
	C8023	F1G1A104A012	C 0.01UF, K, 10V	1	
	C8024	F1G1A104A012	C 0.01UF, K, 10V	1	

Safety	Ref. No.	Part No.	Part Name & Description	Pcs	Remarks
	C8025	F1J1A106A043	C 0.010UF, K, 10V	1	
	C8026	F1J1A106A043	C 0.010UF, K, 10V	1	
	C8027	F1G1A104A012	C 0.01UF, K, 10V	1	
	C8028	F1G1A104A012	C 0.01UF, K, 10V	1	
	C8029	F1G1A104A012	C 0.01UF, K, 10V	1	
	C8030	F1G1A104A012	C 0.01UF, K, 10V	1	
	C8031	F1G1A104A012	C 0.01UF, K, 10V	1	
	C8032	F1G1A104A012	C 0.01UF, K, 10V	1	
	C8033	F1J1A106A043	C 0.010UF, K, 10V	1	
	C8034	F1G1A104A012	C 0.01UF, K, 10V	1	
	C8035	F1G1A104A012	C 0.01UF, K, 10V	1	
	C8036	F1G1A104A012	C 0.01UF, K, 10V	1	
	C8037	F1G1A104A012	C 0.01UF, K, 10V	1	
	C8038	F1G1A104A012	C 0.01UF, K, 10V	1	
	C8039	F1G1A104A012	C 0.01UF, K, 10V	1	
	C8040	F1G1A104A012	C 0.01UF, K, 10V	1	
	C8041	F1G1A104A012	C 0.01UF, K, 10V	1	
	C8042	F1G1A104A012	C 0.01UF, K, 10V	1	
	C8043	F1G1A104A012	C 0.01UF, K, 10V	1	
	C8044	F1G1A104A012	C 0.01UF, K, 10V	1	
	C8045	F1J1A106A043	C 0.010UF, K, 10V	1	
	C8046	F1J1A106A043	C 0.010UF, K, 10V	1	
	C8047	F1J1A106A043	C 0.010UF, K, 10V	1	
	C8048	F1J1A106A043	C 0.010UF, K, 10V	1	
	C8049	F1G1A104A012	C 0.01UF, K, 10V	1	
	C8050	F1G1A104A012	C 0.01UF, K, 10V	1	
	C8051	F1G1A104A012	C 0.01UF, K, 10V	1	
	C8052	F1G1A104A012	C 0.01UF, K, 10V	1	
	C8053	F1G1A104A012	C 0.01UF, K, 10V	1	
	C8054	F1G1A104A012	C 0.01UF, K, 10V	1	
	C8055	F1G1A104A012	C 0.01UF, K, 10V	1	
	C8056	F1G1A104A012	C 0.01UF, K, 10V	1	
	C8057	F1G1A104A012	C 0.01UF, K, 10V	1	
	C8058	F1G1A104A012	C 0.01UF, K, 10V	1	
	C8059	F1G1A104A012	C 0.01UF, K, 10V	1	
	C8060	F1H0J1050012	C 1UF, K, 16V	1	
	C8061	F1H0J1050012	C 1UF, K, 16V	1	
	C8062	F1G1A104A012	C 0.01UF, K, 10V	1	
	C8070	F1H0J1050012	C 1UF, K, 16V	1	
	C8071	F1H0J1050012	C 1UF, K, 16V	1	
	C8072	F1G1A104A012	C 0.01UF, K, 10V	1	
	C8073	F1H0J1050012	C 1UF, K, 16V	1	
	C8074	F1G1A104A012	C 0.01UF, K, 10V	1	
	C8075	F1H0J1050012	C 1UF, K, 16V	1	
	C8076	F1G1A104A012	C 0.01UF, K, 10V	1	
	C8077	F1G1A104A012	C 0.01UF, K, 10V	1	
	C8078	F1G1A104A012	C 0.01UF, K, 10V	1	
	C8079	F1G1A104A012	C 0.01UF, K, 10V	1	
	C8080	F1G1A104A012	C 0.01UF, K, 10V	1	
	C8081	F1G1A104A012	C 0.01UF, K, 10V	1	
	C8082	F1G1A104A012	C 0.01UF, K, 10V	1	
	C8083	F1G1A104A012	C 0.01UF, K, 10V	1	
	C8084	F1G1A104A012	C 0.01UF, K, 10V	1	
	C8085	F1G1A104A012	C 0.01UF, K, 10V	1	
	C8101	F1G1H180A731	C 18UF, 50V	1	
	C8102	F1G1H7R0A732	C 7.0UF, 50V	1	
	C8103	F1H0J1050012	C 1UF, K, 16V	1	
	C8104	F1G1C1030008	C 0.010UF, K, 16V	1	
	C8105	F1J1A106A043	C 0.010UF, K, 10V	1	
	C8106	F1G1A104A012	C 0.01UF, K, 10V	1	
	C8107	F1G1A104A012	C 0.01UF, K, 10V	1	
	C8201	F1G1A105A047	C 1UF, K, 10V	1	
	C8202	ECGMX0E101R	E 100UF, 10V	1	
	C8203	F1G1A105A047	C 1UF, K, 10V	1	
	C8204	F1G1A105A047	C 1UF, K, 10V	1	
	C8205	F1G1A105A047	C 1UF, K, 10V	1	

Safety	Ref. No.	Part No.	Part Name & Description	Pcs	Remarks
	C8206	F1G1A105A047	C 1UF, K, 10V	1	
	C8208	F1G1A104A012	C 0.01UF, K, 10V	1	
	C8209	F1G1A105A047	C 1UF, K, 10V	1	
	C8210	F1G1A105A047	C 1UF, K, 10V	1	
	C8211	F1G1A105A047	C 1UF, K, 10V	1	
	C8212	F1G1A105A047	C 1UF, K, 10V	1	
	C8213	F1G1A105A047	C 1UF, K, 10V	1	
	C8214	F1G1A104A012	C 0.01UF, K, 10V	1	
	C8215	F1G1A104A012	C 0.01UF, K, 10V	1	
	C8216	F1G1A104A012	C 0.01UF, K, 10V	1	
	C8217	F1G1A104A012	C 0.01UF, K, 10V	1	
	C8218	F1G1A104A012	C 0.01UF, K, 10V	1	
	C8219	F1G1A104A012	C 0.01UF, K, 10V	1	
	C8220	F1G1A104A012	C 0.01UF, K, 10V	1	
	C8221	F1G1A105A047	C 1UF, K, 10V	1	
	C8222	F1G1A105A047	C 1UF, K, 10V	1	
	C8223	F1G1A105A047	C 1UF, K, 10V	1	
	C8224	F1G1A105A047	C 1UF, K, 10V	1	
	C8225	F1G1A105A047	C 1UF, K, 10V	1	
	C8226	F1G1A104A012	C 0.01UF, K, 10V	1	
	C8227	F1G1A104A012	C 0.01UF, K, 10V	1	
	C8228	F1G1A104A012	C 0.01UF, K, 10V	1	
	C8229	F1G1A104A012	C 0.01UF, K, 10V	1	
	C8230	F1G1A105A047	C 1UF, K, 10V	1	
	C8231	ECGMX0E101R	E 100UF, 10V	1	
	C8232	F1G1A105A047	C 1UF, K, 10V	1	
	C8233	F1G1A105A047	C 1UF, K, 10V	1	
	C8234	F1G1A105A047	C 1UF, K, 10V	1	
	C8235	F1G1A105A047	C 1UF, K, 10V	1	
	C8501	F2G0J470A019	E 47UF 6.3V	1	
	C8580	F1G1C104A116	C 0.10UF, K, 16V	1	
	C8581	F1G1C104A116	C 0.10UF, K, 16V	1	
	C8601	F1G1C104A116	C 0.10UF, K, 16V	1	
	C8620	F1G1A104A012	C 0.01UF, K, 10V	1	
	C8621	F1G1A104A012	C 0.01UF, K, 10V	1	
	C8622	F1G1A104A012	C 0.01UF, K, 10V	1	
	C8623	F1J1A106A043	C 0.010UF, K, 10V	1	
	C8624	F1G1A104A012	C 0.01UF, K, 10V	1	
	C8625	F1G1H5R0A732	C 5.0PF, K, 50V	1	
	C8626	F1G1H5R0A732	C 5.0PF, K, 50V	1	
	C8627	F1G1A104A012	C 0.01UF, K, 10V	1	
	C8628	F1J1A106A043	C 0.010UF, K, 10V	1	
	C8629	F1J1A106A043	C 0.010UF, K, 10V	1	
	C8630	F1G1A104A012	C 0.01UF, K, 10V	1	
	C8631	F1G1A104A012	C 0.01UF, K, 10V	1	
	C8632	F1G1A104A012	C 0.01UF, K, 10V	1	
	C8633	F1J1A106A043	C 0.010UF, K, 10V	1	
	C8634	F1G1A104A012	C 0.01UF, K, 10V	1	
	C8635	F1G1A104A012	C 0.01UF, K, 10V	1	
	C8637	F2G0J101A019	E 100UF 6.3V	1	
	C8638	F1H0J1050012	C 1UF, K, 16V	1	
	C8639	F1G1A104A012	C 0.01UF, K, 10V	1	
	C8640	F1J1A106A043	C 0.010UF, K, 10V	1	
	C8641	F1G1A104A012	C 0.01UF, K, 10V	1	
	C8642	F1J1A106A043	C 0.010UF, K, 10V	1	
	C8643	ECUV1A335KBN	C 33UF 10V	1	
	C8644	F1G1A104A012	C 0.01UF, K, 10V	1	
	C8645	F1G1A104A012	C 0.01UF, K, 10V	1	
	C8646	F1G1A104A012	C 0.01UF, K, 10V	1	
	C8647	F1J1A106A043	C 0.010UF, K, 10V	1	
	C8648	F1G1A104A012	C 0.01UF, K, 10V	1	
	C8649	F1G1A104A012	C 0.01UF, K, 10V	1	
	C8650	F1J1A106A043	C 0.010UF, K, 10V	1	
	C8651	F1G1A104A012	C 0.01UF, K, 10V	1	
	C8652	F1G1A104A012	C 0.01UF, K, 10V	1	
	C8653	F1G1A104A012	C 0.01UF, K, 10V	1	
	C8654	F1G1A104A012	C 0.01UF, K, 10V	1	

Safety	Ref. No.	Part No.	Part Name & Description	Pcs	Remarks
	C8851	F1G1C1030008	C 0.010UF, K, 16V	1	
	C8852	F1G1H680A731	C 68UF, 50V	1	
	C8853	F1G1H680A731	C 68UF, 50V	1	
	C8854	F1G1H680A731	C 68UF, 50V	1	
	C8855	F1G1H680A731	C 68UF, 50V	1	
	C8856	F1G1C1030008	C 0.010UF, K, 16V	1	
	C9001	ECJ1VB1H104K	C 0.1UF, K, 50V	1	
	C9033	F1G1C104A119	C 0.10UF, K, 16V	1	
	C9034	F1G1C104A119	C 0.10UF, K, 16V	1	
	C9035	F1J1A106A043	C 0.010UF, K, 10V	1	
	C9036	F1J1A106A043	C 0.010UF, K, 10V	1	
	C9037	F1G1E103A123	C 0.010UF, K, 16V	1	
	C9055	F1G1C104A119	C 0.10UF, K, 16V	1	
	C9056	F1G1C104A119	C 0.10UF, K, 16V	1	
	C9057	F1G1C104A119	C 0.10UF, K, 16V	1	
	C9058	F1J1A106A043	C 0.010UF, K, 10V	1	
	C9064	F1G1E103A123	C 0.010UF, K, 16V	1	
	C9065	F1G1E103A123	C 0.010UF, K, 16V	1	
	C9066	F1G1E103A123	C 0.010UF, K, 16V	1	
	C9067	F1G1E103A123	C 0.010UF, K, 16V	1	
	C9068	F1G1E103A123	C 0.010UF, K, 16V	1	
	C9069	F1G1E103A123	C 0.010UF, K, 16V	1	
	C9096	F1G1C104A116	C 0.10UF, K, 16V	1	
	C9097	F1G1C104A116	C 0.10UF, K, 16V	1	
	C9098	F1G1C104A116	C 0.10UF, K, 16V	1	
	C9099	F1G1C104A116	C 0.10UF, K, 16V	1	
	C9100	F1G1C104A116	C 0.10UF, K, 16V	1	
	C9101	F1G1C104A116	C 0.10UF, K, 16V	1	
	C9102	F1G1C104A116	C 0.10UF, K, 16V	1	
	C9103	F1G1C104A116	C 0.10UF, K, 16V	1	
	C9104	F1G1C104A116	C 0.10UF, K, 16V	1	
	C9105	F1G1C104A116	C 0.10UF, K, 16V	1	
	C9106	F1G1C104A116	C 0.10UF, K, 16V	1	
	C9107	F1G1C104A116	C 0.10UF, K, 16V	1	
	C9108	F1G1C104A116	C 0.10UF, K, 16V	1	
	C9109	F1G1C104A116	C 0.10UF, K, 16V	1	
	C9110	F1G1C104A116	C 0.10UF, K, 16V	1	
	C9111	F1G1C104A116	C 0.10UF, K, 16V	1	
	C9112	F1G1C104A116	C 0.10UF, K, 16V	1	
	C9113	F1G1C104A116	C 0.10UF, K, 16V	1	
	C9114	F1G1C104A116	C 0.10UF, K, 16V	1	
	C9115	F1G1C104A116	C 0.10UF, K, 16V	1	
	C9116	F1G1C104A116	C 0.10UF, K, 16V	1	
	C9117	F1G1C104A116	C 0.10UF, K, 16V	1	
	C9119	F1G1C104A116	C 0.10UF, K, 16V	1	
	C9120	F1G1C104A116	C 0.10UF, K, 16V	1	
	C9121	F1G1C104A116	C 0.10UF, K, 16V	1	
	C9122	F1G1C104A116	C 0.10UF, K, 16V	1	
	C9123	F1G1C104A116	C 0.10UF, K, 16V	1	
	C9124	F1G1C104A116	C 0.10UF, K, 16V	1	
	C9125	F1G1C104A116	C 0.10UF, K, 16V	1	
	C9126	F1G1C104A116	C 0.10UF, K, 16V	1	
	C9127	F1G1C104A116	C 0.10UF, K, 16V	1	
	C9128	F1G1C104A116	C 0.10UF, K, 16V	1	
	C9129	F1G1C104A116	C 0.10UF, K, 16V	1	
	C9130	F1G1C104A116	C 0.10UF, K, 16V	1	
	C9131	F1G1C104A116	C 0.10UF, K, 16V	1	
	C9132	F1G1C104A116	C 0.10UF, K, 16V	1	
	C9133	F1G1C104A116	C 0.10UF, K, 16V	1	
	C9135	F1J1A106A043	C 0.010UF, K, 10V	1	
	C9136	F1G1C104A119	C 0.10UF, K, 16V	1	
	C9138	F1G1C104A119	C 0.10UF, K, 16V	1	
	C9139	F1G1C104A119	C 0.10UF, K, 16V	1	

Safety	Ref. No.	Part No.	Part Name & Description	Pcs	Remarks
	C9140	F1G1C104A119	C 0.10UF, K, 16V	1	
	C9142	F1G1C104A116	C 0.10UF, K, 16V	1	
	C9143	F1G1C104A119	C 0.10UF, K, 16V	1	
	C9144	F1G1C104A116	C 0.10UF, K, 16V	1	
	C9145	F1G1C104A116	C 0.10UF, K, 16V	1	
	C9146	F1G1C104A116	C 0.10UF, K, 16V	1	
	C9147	F1G1C104A116	C 0.10UF, K, 16V	1	
	C9148	F1G1C104A116	C 0.10UF, K, 16V	1	
	C9149	F1G1C104A116	C 0.10UF, K, 16V	1	
	C9150	F1G1C104A116	C 0.10UF, K, 16V	1	
	C9152	F1J0J475A035	C 4.7UF, K, 16V	1	
	C9153	F1G1C104A119	C 0.10UF, K, 16V	1	
	C9154	F1G1C104A119	C 0.10UF, K, 16V	1	
	C9155	F1G1C104A119	C 0.10UF, K, 16V	1	
	C9156	F1G1C104A119	C 0.10UF, K, 16V	1	
	C9157	F1G1C104A119	C 0.10UF, K, 16V	1	
	C9158	F1G1C104A119	C 0.10UF, K, 16V	1	
	C9159	F1G1C104A119	C 0.10UF, K, 16V	1	
	C9160	F1G1C104A119	C 0.10UF, K, 16V	1	
	C9161	F1G1C104A119	C 0.10UF, K, 16V	1	
	C9162	F1G1C104A119	C 0.10UF, K, 16V	1	
	C9163	F1J0J475A035	C 4.7UF, K, 16V	1	
	C9164	F1G1C104A119	C 0.10UF, K, 16V	1	
	C9165	F1G1C104A119	C 0.10UF, K, 16V	1	
	C9168	F1G1C104A119	C 0.10UF, K, 16V	1	
	C9169	F1G1C104A116	C 0.10UF, K, 16V	1	
	C9170	F1G1C104A116	C 0.10UF, K, 16V	1	
	C9171	F1G1C104A116	C 0.10UF, K, 16V	1	
	C9172	F1G1C104A116	C 0.10UF, K, 16V	1	
	C9173	F1G1C104A116	C 0.10UF, K, 16V	1	
	C9174	F1G1C104A116	C 0.10UF, K, 16V	1	
	C9175	F1G1C104A116	C 0.10UF, K, 16V	1	
	C9176	F1G1C104A116	C 0.10UF, K, 16V	1	
	C9177	F1G1C104A116	C 0.10UF, K, 16V	1	
	C9178	F1G1C104A116	C 0.10UF, K, 16V	1	
	C9179	F1G1C104A116	C 0.10UF, K, 16V	1	
	C9180	F1G1C104A116	C 0.10UF, K, 16V	1	
	C9181	F1G1C104A116	C 0.10UF, K, 16V	1	
	C9182	F1G1C104A116	C 0.10UF, K, 16V	1	
	C9183	F1G1C104A116	C 0.10UF, K, 16V	1	
	C9184	F1G1C104A116	C 0.10UF, K, 16V	1	
	C9185	F1G1C104A116	C 0.10UF, K, 16V	1	
	C9186	F1G1C104A116	C 0.10UF, K, 16V	1	
	C9187	F1G1C104A116	C 0.10UF, K, 16V	1	
	C9188	F1G1C104A116	C 0.10UF, K, 16V	1	
	C9189	F1G1C104A116	C 0.10UF, K, 16V	1	
	C9190	F1G1C104A116	C 0.10UF, K, 16V	1	
	C9191	F1G1C104A116	C 0.10UF, K, 16V	1	
	C9192	F1G1C104A116	C 0.10UF, K, 16V	1	
	C9193	F1G1C104A116	C 0.10UF, K, 16V	1	
	C9194	F1G1C104A116	C 0.10UF, K, 16V	1	
	C9195	F1G1C104A116	C 0.10UF, K, 16V	1	
	C9196	F1G1C104A116	C 0.10UF, K, 16V	1	
	C9198	F1G1C104A116	C 0.10UF, K, 16V	1	
	C9199	F1G1C104A116	C 0.10UF, K, 16V	1	
	C9200	F1G1C104A116	C 0.10UF, K, 16V	1	
	C9201	F1G1C104A116	C 0.10UF, K, 16V	1	
	C9202	F1G1C104A116	C 0.10UF, K, 16V	1	
	C9203	F1G1C104A116	C 0.10UF, K, 16V	1	
	C9204	F1G1C104A116	C 0.10UF, K, 16V	1	
	C9205	F1G1C104A116	C 0.10UF, K, 16V	1	
	C9206	F1G1C104A116	C 0.10UF, K, 16V	1	
	C9207	F1G1C104A116	C 0.10UF, K, 16V	1	
	C9208	F1G1C104A116	C 0.10UF, K, 16V	1	
	C9209	F1G1C104A116	C 0.10UF, K, 16V	1	
	C9210	F1J1A106A043	C 0.010UF, K, 10V	1	
	C9211	F1G1C104A116	C 0.10UF, K, 16V	1	
	C9212	F1J1A106A043	C 0.010UF, K, 10V	1	
	C9213	F1G1C104A116	C 0.10UF, K, 16V	1	
	C9214	F1G1C104A116	C 0.10UF, K, 16V	1	
	C9215	F1G1C104A116	C 0.10UF, K, 16V	1	
	C9216	F1G1C104A116	C 0.10UF, K, 16V	1	

Safety	Ref. No.	Part No.	Part Name & Description	Pcs	Remarks
	C9217	F1G1C104A116	C 0.10UF, K, 16V	1	
	C9218	F1G1C104A116	C 0.10UF, K, 16V	1	
	C9219	F1G1C104A116	C 0.10UF, K, 16V	1	
	C9220	F1G1C104A116	C 0.10UF, K, 16V	1	
	C9221	F1G1C104A116	C 0.10UF, K, 16V	1	
	C9222	F1G1C104A116	C 0.10UF, K, 16V	1	
	C9223	F1G1C104A116	C 0.10UF, K, 16V	1	
	C9224	F1G1C104A116	C 0.10UF, K, 16V	1	
	C9226	F1G1C104A116	C 0.10UF, K, 16V	1	
	C9227	F1G1C104A116	C 0.10UF, K, 16V	1	
	C9228	F1G1C104A116	C 0.10UF, K, 16V	1	
	C9230	F1G1C104A116	C 0.10UF, K, 16V	1	
	C9231	F1G1C104A116	C 0.10UF, K, 16V	1	
	C9232	F1G1C104A116	C 0.10UF, K, 16V	1	
	C9233	F1G1C104A116	C 0.10UF, K, 16V	1	
	C9234	F1G1C104A116	C 0.10UF, K, 16V	1	
	C9235	F1G1C104A116	C 0.10UF, K, 16V	1	
	C9236	F1G1C104A116	C 0.10UF, K, 16V	1	
	C9237	F1J1A106A043	C 0.010UF, K, 10V	1	
	C9239	F1G1C104A116	C 0.10UF, K, 16V	1	
	C9240	F1G1C104A116	C 0.10UF, K, 16V	1	
	C9241	F1G1C104A116	C 0.10UF, K, 16V	1	
	C9242	F1G1C104A116	C 0.10UF, K, 16V	1	
	C9243	F1G1C104A116	C 0.10UF, K, 16V	1	
	C9244	F1G1C104A116	C 0.10UF, K, 16V	1	
	C9245	F1J1A106A043	C 0.010UF, K, 10V	1	
	C9246	F1G1C104A116	C 0.10UF, K, 16V	1	
	C9247	F1J1A106A043	C 0.010UF, K, 10V	1	
	C9248	F1G1C104A116	C 0.10UF, K, 16V	1	
	C9249	F1G1C104A116	C 0.10UF, K, 16V	1	
	C9250	F1G1C104A116	C 0.10UF, K, 16V	1	
	C9303	F1J1E105A171	C 1 UF 25V	1	
	C9304	F1J1E105A171	C 1 UF 25V	1	
	C9305	F1J1E105A171	C 1 UF 25V	1	
	C9306	F1J1E105A171	C 1 UF 25V	1	
	C9307	F1J1E105A171	C 1 UF 25V	1	
	C9308	F1J1E105A171	C 1 UF 25V	1	
	C9309	F1J1E105A171	C 1 UF 25V	1	
	C9310	F1J1E105A171	C 1 UF 25V	1	
	C9313	F1H1A1050032	C 10UF, 50V	1	
	C9314	F1H1A1050032	C 10UF, 50V	1	
	C9317	ECJ1VB1H104K	C 0.1UF, K, 50V	1	
	C9318	ECJ1VB1H104K	C 0.1UF, K, 50V	1	
	C9319	ECJ1VB1H104K	C 0.1UF, K, 50V	1	
	C9320	ECJ1VB1H104K	C 0.1UF, K, 50V	1	
	C9321	ECJ1VB1H104K	C 0.1UF, K, 50V	1	
	C9322	ECJ1VB1H104K	C 0.1UF, K, 50V	1	
	C9323	ECJ1VB1H104K	C 0.1UF, K, 50V	1	
	C9324	ECJ1VB1H104K	C 0.1UF, K, 50V	1	
	C9333	F1J1E3340003	C 0.33UF, Z, 25V	1	
	C9334	F1J1E3340003	C 0.33UF, Z, 25V	1	
	C9335	F1J1E3340003	C 0.33UF, Z, 25V	1	
	C9336	F1J1E3340003	C 0.33UF, Z, 25V	1	
	C9337	F1H1H223A970	C 0.22UF, K, 50V	1	
	C9338	F1H1H223A970	C 0.22UF, K, 50V	1	
	C9339	F1H1H223A970	C 0.22UF, K, 50V	1	
	C9340	F1H1H223A970	C 0.22UF, K, 50V	1	
	C9341	F1J1E3340003	C 0.33UF, Z, 25V	1	
	C9342	F1J1E3340003	C 0.33UF, Z, 25V	1	
	C9343	F1J1E3340003	C 0.33UF, Z, 25V	1	
	C9344	F1J1E3340003	C 0.33UF, Z, 25V	1	
	C9345	F1H1H223A970	C 0.22UF, K, 50V	1	
	C9346	F1H1H223A970	C 0.22UF, K, 50V	1	
	C9347	F1H1H223A970	C 0.22UF, K, 50V	1	
	C9348	F1H1H223A970	C 0.22UF, K, 50V	1	
	C9353	ECJ1VB1H104K	C 0.1UF, K, 50V	1	
	C9354	ECJ1VB1H104K	C 0.1UF, K, 50V	1	
	C9359	ECJ1VB1H104K	C 0.1UF, K, 50V	1	
	C9360	ECJ1VB1H104K	C 0.1UF, K, 50V	1	
	C9361	EEEFG1E471P	E 470UF, 25V	1	
	C9362	EEEFG1E471P	E 470UF, 25V	1	

Safety	Ref. No.	Part No.	Part Name & Description	Pcs	Remarks
	C9363	ECJ3YB1E106M	C 10 UF, K, 25V	1	
	C9364	ECJ3YB1E106M	C 10 UF, K, 25V	1	
	C9375	F1H1H223A970	C 0.22UF, K, 50V	1	
	C9376	F1H1H223A970	C 0.22UF, K, 50V	1	
	C9377	F1H1H223A970	C 0.22UF, K, 50V	1	
	C9378	F1H1H223A970	C 0.22UF, K, 50V	1	
	C9379	F1H1H223A970	C 0.22UF, K, 50V	1	
	C9380	F1H1H223A970	C 0.22UF, K, 50V	1	
	C9381	F1H1H223A970	C 0.22UF, K, 50V	1	
	C9382	F1H1H223A970	C 0.22UF, K, 50V	1	
	C9383	ECJ1VC1H102K	C 1000PF, K, 50V	1	
	C9384	ECJ1VC1H102K	C 1000PF, K, 50V	1	
	C9385	ECJ1VC1H102K	C 1000PF, K, 50V	1	
	C9386	ECJ1VC1H102K	C 1000PF, K, 50V	1	
	C9387	ECJ1VC1H102K	C 1000PF, K, 50V	1	
	C9388	ECJ1VC1H102K	C 1000PF, K, 50V	1	
	C9389	ECJ1VC1H102K	C 1000PF, K, 50V	1	
	C9390	ECJ1VC1H102K	C 1000PF, K, 50V	1	
	C9406	EEEHB1E470P	C 47PF, J, 25V	1	
	C9407	F1H1C104A143	C 0.1UF, K, 16V	1	
	C9408	F1J1E105A171	C 1 UF 25V	1	
	C9469	F1G1C104A119	C 0.10UF, K, 16V	1	
	C9535	F1G1C104A116	C 0.10UF, K, 16V	1	
	C9536	F1G1C104A116	C 0.10UF, K, 16V	1	
	C9537	F1G1C104A116	C 0.10UF, K, 16V	1	
	C9538	F1G1C104A116	C 0.10UF, K, 16V	1	
	C9539	F1G1C104A116	C 0.10UF, K, 16V	1	
	C9540	F1G1C104A116	C 0.10UF, K, 16V	1	
	C9541	F1G1C104A116	C 0.10UF, K, 16V	1	
	C9542	F1G1C104A116	C 0.10UF, K, 16V	1	
	C9543	F1G1C104A116	C 0.10UF, K, 16V	1	
	C9544	F1G1C104A116	C 0.10UF, K, 16V	1	
	C9545	F1G1C104A116	C 0.10UF, K, 16V	1	
	C9546	F1G1C104A116	C 0.10UF, K, 16V	1	
	C9547	F1G1C104A116	C 0.10UF, K, 16V	1	
	C9548	F1G1C104A116	C 0.10UF, K, 16V	1	
	C9549	F1G1C104A116	C 0.10UF, K, 16V	1	
	C9550	F1G1C104A116	C 0.10UF, K, 16V	1	
	C9551	F1J1A106A043	C 0.010UF, K, 10V	1	
	C9552	F1J1A106A043	C 0.010UF, K, 10V	1	
	C9553	F1J1A106A043	C 0.010UF, K, 10V	1	
	C9823	ECJ3YB1E106M	C 10 UF, K, 25V	1	
	C9825	F1G1H101A731	C 100PF, K, 50V	1	
	C9832	F1J1A106A043	C 0.010UF, K, 10V	1	
	C9837	F1J1A106A043	C 0.010UF, K, 10V	1	
	C9840	F1G1E103A123	C 0.010UF, K, 16V	1	
	C9841	F1G1C104A119	C 0.10UF, K, 16V	1	
	C9842	F1G1C104A119	C 0.10UF, K, 16V	1	
	C9844	F1G1E103A123	C 0.010UF, K, 16V	1	
	C9845	F1G1C104A119	C 0.10UF, K, 16V	1	
	C9846	F1G1C104A119	C 0.10UF, K, 16V	1	
	C9858	ECJ3YB1E106M	C 10 UF, K, 25V	1	
	C9859	F1G1E103A123	C 0.010UF, K, 16V	1	
	C9860	F1J0J475A035	C 4.7UF, K, 16V	1	
	C9861	F1H1E104A129	C 0.1UF, 25V	1	
	C9862	F1H1E104A129	C 0.1UF, 25V	1	
	C9863	F1J0J475A035	C 4.7UF, K, 16V	1	
	C9864	F1H1E104A129	C 0.1UF, 25V	1	
	C9865	ECGRL0G680ER	C 68PF, J, 4V	1	
	C9866	ECGRL0G680ER	C 68PF, J, 4V	1	
	C9867	ECJ3YB1E106M	C 10 UF, K, 25V	1	
	C9868	ECJ3YB1E106M	C 10 UF, K, 25V	1	
	C9869	ECJ3YB1E106M	C 10 UF, K, 25V	1	
	C9870	ECJ3YB1E106M	C 10 UF, K, 25V	1	
	C9871	ECJ3YB1E106M	C 10 UF, K, 25V	1	
	C9872	ECJ3YB1E106M	C 10 UF, K, 25V	1	
	C9873	ECGRL0G680ER	C 68PF, J, 4V	1	

Safety	Ref. No.	Part No.	Part Name & Description	Pcs	Remarks
	C9874	F1G1H680A731	C 68UF, 50V	1	
	C9877	F1G1H680A731	C 68UF, 50V	1	
	C9878	F1G1E103A123	C 0.010UF, K, 16V	1	
	C9879	F1G1C153A116	C 0.015UF, K, 16V	1	
	C9880	F1G1A563A032	C 0.56UF, 10V	1	
	C9881	F1G1E103A123	C 0.010UF, K, 16V	1	
	C9882	F1G1C822A116	C 8200UF, K, 16V	1	
	C9883	F1G1H101A731	C 100PF, K, 50V	1	
	C9884	F1G1H102A730	C 1000UF, 50V	1	
	C9885	F1G1H102A730	C 1000UF, 50V	1	
	C9886	F1H1E104A129	C 0.1UF, 25V	1	
	C9887	F1H1E104A129	C 0.1UF, 25V	1	
	C9888	F1G1H361A731	C 360UF, 50V	1	
	C9927	F1G1C104A116	C 0.10UF, K, 16V	1	
	C9928	F1G1C104A116	C 0.10UF, K, 16V	1	
	C9929	F1G1C104A116	C 0.10UF, K, 16V	1	
	C9930	F1G1C104A116	C 0.10UF, K, 16V	1	
	C9931	F1G1C104A116	C 0.10UF, K, 16V	1	
	C9932	F1G1C104A116	C 0.10UF, K, 16V	1	
	C9933	F1G1C104A116	C 0.10UF, K, 16V	1	
	C9934	F1G1C104A116	C 0.10UF, K, 16V	1	
	C9935	F1G1C104A116	C 0.10UF, K, 16V	1	
	C9936	F1G1C104A116	C 0.10UF, K, 16V	1	
	C9937	F1G1C104A116	C 0.10UF, K, 16V	1	
	C9938	F1G1C104A116	C 0.10UF, K, 16V	1	
	C9939	F1G1C104A116	C 0.10UF, K, 16V	1	
	C9940	F1G1C104A116	C 0.10UF, K, 16V	1	
	C9941	F1G1C104A116	C 0.10UF, K, 16V	1	
	C9942	F1G1C104A116	C 0.10UF, K, 16V	1	
	C9943	F1G1C104A116	C 0.10UF, K, 16V	1	
	C9944	F1G1C104A116	C 0.10UF, K, 16V	1	
	C9945	F1G1C104A116	C 0.10UF, K, 16V	1	
	C9946	F1G1C104A116	C 0.10UF, K, 16V	1	
	C9947	F1G1C104A116	C 0.10UF, K, 16V	1	
	C9948	F1G1C104A116	C 0.10UF, K, 16V	1	
	C9951	F1G1C104A116	C 0.10UF, K, 16V	1	
	C9961	F1J1A106A043	C 0.010UF, K, 10V	1	
	C9966	F1G1C104A116	C 0.10UF, K, 16V	1	
	C9971	F1G1H180A731	C 18UF, 50V	1	
	C9972	F1G1H150A731	C 15UF, 50V	1	
	C14352	F1J1C1050030	C 1UF, Z, 16V	1	
	C14356	F1J1C1050030	C 1UF, Z, 16V	1	
	C14360	F1L2E104A028	E 1000UF, 25V	1	
	C14361	F1L2E104A028	E 1000UF, 25V	1	
	C14364	F1J1C1050030	C 1UF, Z, 16V	1	
	C14368	F1J1C1050030	C 1UF, Z, 16V	1	
	C14369	F1G1H102A730	C 1000UF, 50V	1	
	C14370	F1L2E104A028	E 1000UF, 25V	1	
	C14376	F1L2E104A028	E 1000UF, 25V	1	
	C14377	F1L2E104A028	E 1000UF, 25V	1	
	C14384	F1L2E104A028	E 1000UF, 25V	1	
	C14385	F1L2E104A028	E 1000UF, 25V	1	
	C14901	F1G1H102A730	C 1000UF, 50V	1	
	C14902	F1J1C1050030	C 1UF, Z, 16V	1	
	C14904	F1J1C1050030	C 1UF, Z, 16V	1	
	C14906	F1J1C1050030	C 1UF, Z, 16V	1	
	C14908	F1J1C1050030	C 1UF, Z, 16V	1	
	C14910	F1J1C1050030	C 1UF, Z, 16V	1	
	C14912	F1J1C1050030	C 1UF, Z, 16V	1	
	C14920	F1L2E104A028	E 1000UF, 25V	1	
	C14923	F1L2E104A028	E 1000UF, 25V	1	
	C14924	F1L2E104A028	E 1000UF, 25V	1	
	C14925	F1L2E104A028	E 1000UF, 25V	1	
	C14927	F1L2E104A028	E 1000UF, 25V	1	
	C14929	F1L2E104A028	E 1000UF, 25V	1	
	C14930	F1L2E104A028	E 1000UF, 25V	1	
	C14931	F1G1H102A730	C 1000UF, 50V	1	
	C14934	F1L2E104A028	E 1000UF, 25V	1	
	C14936	F1G1H471A731	C 470UF, 50V	1	
	C14937	F1G1H471A731	C 470UF, 50V	1	

Safety	Ref. No.	Part No.	Part Name & Description	Pcs	Remarks
	C14938	F1G1H471A731	C 470UF, 50V	1	
	C14939	F1G1H471A731	C 470UF, 50V	1	
	C14940	F1G1H102A730	C 1000UF, 50V	1	
	C14941	F1G1H471A731	C 470UF, 50V	1	
	C14942	F1G1H471A731	C 470UF, 50V	1	
	C14943	F1L1E4750004	C 4.7UF, 25V	1	
	C14945	F1G1H101A731	C 100PF, K, 50V	1	
	C14950	F1G1H471A731	C 470UF, 50V	1	
	C14952	F1J1C1050030	C 1UF, Z, 16V	1	
	C14955	F1J1C1050030	C 1UF, Z, 16V	1	
	C14957	F1J1C1050030	C 1UF, Z, 16V	1	
	C14958	F1J1C1050030	C 1UF, Z, 16V	1	
	C14961	F1J1C1050030	C 1UF, Z, 16V	1	
	C14963	F1J1C1050030	C 1UF, Z, 16V	1	
	C14969	ECJ1VB1H104K	C 0.1UF, K, 50V	1	
	C14970	F1G1H471A731	C 470UF, 50V	1	
	C14971	F1G1H471A731	C 470UF, 50V	1	
	C14972	F1G1H471A731	C 470UF, 50V	1	
	C14973	F1G1H102A730	C 1000UF, 50V	1	
	C14974	F1L2E104A028	E 1000UF, 25V	1	
	C14976	F1G1H102A730	C 1000UF, 50V	1	
	C14979	F1L2E104A028	E 1000UF, 25V	1	
	C14980	F1L2E104A028	E 1000UF, 25V	1	
	C14981	F1G1H471A731	C 470UF, 50V	1	
	C14984	F1L2E104A028	E 1000UF, 25V	1	
	C14985	F1L2E104A028	E 1000UF, 25V	1	
	C14987	ECJ1VB1H104K	C 0.1UF, K, 50V	1	
	C14988	ECJ1VB1H104K	C 0.1UF, K, 50V	1	
	C14989	F1G1H471A731	C 470UF, 50V	1	
	C14990	ECJ1VB1H104K	C 0.1UF, K, 50V	1	
	C14992	F1H1C105A008	C 1UF, K, 16V	1	
	C16003	F1L2J562A022	C 5600UF, K,6.3V	1	
	C16011	F2A2T251A004	E 250UF, 220V	1	
	C16012	F2A2T251A004	E 250UF, 220V	1	
	C16013	F2A2T251A004	E 250UF, 220V	1	
	C16014	F2A2T251A004	E 250UF, 220V	1	
	C16015	F2A2T251A004	E 250UF, 220V	1	
	C16016	F2A2T251A004	E 250UF, 220V	1	
	C16018	F0C2E225A231	E 0.022UF, 250V	1	
	C16023	F1L2J562A022	C 5600UF, K,6.3V	1	
	C16071	F1L2J1520001	C 1500UF, K,6.3V	1	
	C16092	F1L2J1520001	C 1500UF, K,6.3V	1	
	C16131	F1L1E4750004	C 4.7UF, 25V	1	
	C16133	F1L1E4750004	C 4.7UF, 25V	1	
	C16135	F1K1E105A029	C 1UF, Z, 25V	1	
	C16151	F1K1E105A029	C 1UF, Z, 25V	1	
	C16152	F1L1E4750004	C 4.7UF, 25V	1	
	C16153	F1L1E4750004	C 4.7UF, 25V	1	
	C16154	F1L1E4750004	C 4.7UF, 25V	1	
	C16157	F1L1E4750004	C 4.7UF, 25V	1	
	C16191	F1L1E4750004	C 4.7UF, 25V	1	
	C16192	ECJ1VB1E104K	C 0.10UF, K, 25V	1	
	C16194	F1L1E4750004	C 4.7UF, 25V	1	
	C16195	F1L1E4750004	C 4.7UF, 25V	1	
	C16197	F1L1E4750004	C 4.7UF, 25V	1	
	C16201	F0C2E405A230	E 0.040UF, 250V	1	
	C16202	F0C2E405A230	E 0.040UF, 250V	1	
	C16203	F0C2E405A230	E 0.040UF, 250V	1	
	C16204	F0C2E405A230	E 0.040UF, 250V	1	
	C16205	F0C2E405A230	E 0.040UF, 250V	1	
	C16241	F2A1A101A106	E 100UF, 10V	1	
	C16242	F1H1C105A008	C 1UF, K, 16V	1	
	C16243	F1H1H103A970	C 0.001UF, K, 50V	1	
	C16251	F1H1C105A008	C 1UF, K, 16V	1	
	C16252	F1K1E105A029	C 1UF, Z, 25V	1	
	C16262	F2AZZ821A012	E 820UF, 80V	1	
	C16263	F2AZZ821A012	E 820UF, 80V	1	
	C16265	F2AZZ821A012	E 820UF, 80V	1	
	C16267	F2AZZ821A012	E 820UF, 80V	1	
	C16268	F2AZZ821A012	E 820UF, 80V	1	
	C16270	F2AZZ821A012	E 820UF, 80V	1	
	C16271	F0C2E405A230	E 0.040UF, 250V	1	

Safety	Ref. No.	Part No.	Part Name & Description	Pcs	Remarks
	C16272	F2A1E471A487	E 470UF, 25V	1	
	C16273	F0C2E405A230	E 0.040UF, 250V	1	
	C16280	F1K1E105A029	C 1UF, Z, 25V	1	
	C16282	ECJ1VB1H104K	C 0.1UF, K, 50V	1	
	C16283	ECJ1VB1H104K	C 0.1UF, K, 50V	1	
	C16284	ECJ1VB1H104K	C 0.1UF, K, 50V	1	
	C16285	ECJ1VB1H104K	C 0.1UF, K, 50V	1	
	C16286	ECJ1VB1H104K	C 0.1UF, K, 50V	1	
	C16287	ECJ1VB1H104K	C 0.1UF, K, 50V	1	
	C16288	ECJ1VB1H104K	C 0.1UF, K, 50V	1	
	C16289	ECJ1VB1H104K	C 0.1UF, K, 50V	1	
	C16301	F2A1E470A454	E 47UF, 25V	1	
	C16302	F1H1H471A219	C 470UF, 50V	1	
	C16303	ECJ1XB1C103K	C 0.010UF, K, 16V	1	
	C16310	F2A2T251A004	E 250UF, 220V	1	
	C16311	F1H1A1050032	C 10UF, 50V	1	
	C16312	F1H1H472A970	C 4700PF, K, 50V	1	
	C16313	F1H1C105A008	C 1UF, K, 16V	1	
	C16321	F1L2E224A028	E 2200UF, 25V	1	
	C16322	F1L2E224A028	E 2200UF, 25V	1	
	C16323	F2A1E470A454	E 47UF, 25V	1	
	C16324	F2A1E471A487	E 470UF, 25V	1	
	C16325	F1L1E4750004	C 4.7UF, 25V	1	
	C16326	F1L1E4750004	C 4.7UF, 25V	1	
	C16328	F2A2D201A226	E 220UF, 200V	1	
	C16329	F2A2D201A226	E 220UF, 200V	1	
	C16331	F0C2E225A231	E 0.022UF, 250V	1	
	C16402	F1L2J562A022	C 5600UF, K,6.3V	1	
	C16411	F2A2T251A004	E 250UF, 220V	1	
	C16412	F2A2T251A004	E 250UF, 220V	1	
	C16413	F2A2T251A004	E 250UF, 220V	1	
	C16414	F2A2T251A004	E 250UF, 220V	1	
	C16415	F2A2T251A004	E 250UF, 220V	1	
	C16416	F2A2T251A004	E 250UF, 220V	1	
	C16417	F2A2T251A004	E 250UF, 220V	1	
	C16419	F0C2E225A231	E 0.022UF, 250V	1	
	C16423	F1L2J562A022	C 5600UF, K,6.3V	1	
	C16471	F1L2J1520001	C 1500UF, K,6.3V	1	
	C16472	F1K1E105A029	C 1UF, Z, 25V	1	
	C16491	F1L2J1520001	C 1500UF, K,6.3V	1	
	C16501	F1K1E105A029	C 1UF, Z, 25V	1	
	C16502	F1L1E4750004	C 4.7UF, 25V	1	
	C16503	F2A1E471A487	E 470UF, 25V	1	
	C16504	F1L1E4750004	C 4.7UF, 25V	1	
	C16505	F1K1E105A029	C 1UF, Z, 25V	1	
	C16521	F1K1E105A029	C 1UF, Z, 25V	1	
	C16522	F1L1E4750004	C 4.7UF, 25V	1	
	C16523	F1L1E4750004	C 4.7UF, 25V	1	
	C16524	F1L1E4750004	C 4.7UF, 25V	1	
	C16525	F1L1E4750004	C 4.7UF, 25V	1	
	C16533	ECJ1VB1H104K	C 0.1UF, K, 50V	1	
	C16535	ECJ1VB1H104K	C 0.1UF, K, 50V	1	
	C16536	ECJ1VB1H104K	C 0.1UF, K, 50V	1	
	C16562	F1H1C105A008	C 1UF, K, 16V	1	
	C16563	F2A1A101A106	E 100UF, 10V	1	
	C16564	F1H1C105A008	C 1UF, K, 16V	1	
	C16565	F1H1H103A970	C 0.001UF, K, 50V	1	
	C16566	F1H1H103A970	C 0.001UF, K, 50V	1	
	C16581	F1K1E105A029	C 1UF, Z, 25V	1	
	C16582	F1H1C105A008	C 1UF, K, 16V	1	
	C16593	F1H1H102A971	C 1000PF, K, 50V	1	
	C16602	F1H1H220A971	C 22PF, K, 50V	1	
	C16603	F1K2J102A014	C 1000UF, K,6.3V	1	
	C16604	F1K2J102A014	C 1000UF, K,6.3V	1	
	C16605	F1H1H220A971	C 22PF, K, 50V	1	
	C16606	F1H1H220A971	C 22PF, K, 50V	1	
	C16608	F1H1H221A971	C 220UF, K, 50V	1	
	C16631	F0C2E405A230	E 0.040UF, 250V	1	
	C16632	F0C2E405A230	E 0.040UF, 250V	1	
	C16633	F0C2E405A230	E 0.040UF, 250V	1	
	C16634	F0C2E405A230	E 0.040UF, 250V	1	

Safety	Ref. No.	Part No.	Part Name & Description	Pcs	Remarks
	C16635	F0C2E405A230	E 0.040UF, 250V	1	
	C16641	F1L2E153A029	E 0.015UF, 25V	1	
	C16642	F1L2E153A029	E 0.015UF, 25V	1	
	C16661	F1K2J102A014	C 1000UF, K,6.3V	1	
	C16662	F1K2J102A014	C 1000UF, K,6.3V	1	
	C16664	F1H1H820A971	C 82UF, 50V	1	
	C16665	F1H1H820A971	C 82UF, 50V	1	
	C16666	F1H1H820A971	C 82UF, 50V	1	
	C16684	ECJ1VB1H104K	C 0.1UF, K, 50V	1	
	C16685	ECJ1VB1H104K	C 0.1UF, K, 50V	1	
	C16691	ECA2CM101	E 100UF, 160V	1	
	C16692	ECA2CM101	E 100UF, 160V	1	
	C16707	F1H1H220A971	C 22PF, K, 50V	1	
	C16708	ECJ1VB1H104K	C 0.1UF, K, 50V	1	
	C16721	F2A1E221A487	E 220UF, 25V	1	
	C16723	F1L1E4750004	C 4.7UF, 25V	1	
	C16724	F1L1E4750004	C 4.7UF, 25V	1	
	C16725	F1L1E4750004	C 4.7UF, 25V	1	
	C16753	F1L1E4750004	C 4.7UF, 25V	1	
	C16755	F1L1E4750004	C 4.7UF, 25V	1	
	C16756	F1L1E4750004	C 4.7UF, 25V	1	
	C16771	F1H1C105A008	C 1UF, K, 16V	1	
	C16772	F1L1E4750004	C 4.7UF, 25V	1	
	C16773	F1L1E4750004	C 4.7UF, 25V	1	
	C16775	F1L1E4750004	C 4.7UF, 25V	1	
	C16791	F2A1E221A487	E 220UF, 25V	1	
	C16795	F2A1E471A487	E 470UF, 25V	1	
	C16796	F2A1E471A487	E 470UF, 25V	1	
	C16806	ECA2CM101	E 100UF, 160V	1	
	C16807	ECA2CM101	E 100UF, 160V	1	
	C16811	ECJ3VC1H472J	C 4700PF, J, 50V	1	
	C16813	ECA2CM101	E 100UF, 160V	1	
	C16814	F1H1H561A971	C 560UF, 50V	1	
	C16821	ECJ1VB1H104K	C 0.1UF, K, 50V	1	
	C16822	F2A2G470A187	E 470UF, 400V	1	
	C16823	F1L2J562A022	C 5600UF, K,6.3V	1	
	C16835	F2A1E221A487	E 220UF, 25V	1	
	C16842	ECA2CM101	E 100UF, 160V	1	
	C16843	ECJ1VB1H104K	C 0.1UF, K, 50V	1	
	C16844	ECJ1VB1H104K	C 0.1UF, K, 50V	1	
	C16855	F1H1C105A008	C 1UF, K, 16V	1	
	C16856	F1H1A1050032	C 10UF, 50V	1	
	C16857	F1H1H472A970	C 4700PF, K, 50V	1	
	C16858	F1H1C104A143	C 0.1UF, K, 16V	1	
	C16860	F1H1A1050032	C 10UF, 50V	1	
	C16861	F1H1H472A970	C 4700PF, K, 50V	1	
	C16862	F1H1C104A143	C 0.1UF, K, 16V	1	
	C16863	F1H1H103A970	C 0.001UF, K, 50V	1	
	C16864	ECJ1VB1H104K	C 0.1UF, K, 50V	1	
	C16866	F1H1A1050032	C 10UF, 50V	1	
	C16867	F1H1H472A970	C 4700PF, K, 50V	1	
	C16868	F1H1C104A143	C 0.1UF, K, 16V	1	
	C16869	ECJ1VB1H104K	C 0.1UF, K, 50V	1	
	C17101	F1H1A1050032	C 10UF, 50V	1	
	C17102	F1H1A1050032	C 10UF, 50V	1	
	C17109	F1K2A105A006	C 1UF, 100V	1	
	C17110	F1K2A105A006	C 1UF, 100V	1	
	C17112	F1K2A105A006	C 1UF, 100V	1	
	C17114	F1K2A105A006	C 1UF, 100V	1	
	C17119	F1H1A1050032	C 10UF, 50V	1	
	C17120	F1H1A1050032	C 10UF, 50V	1	
	C17121	F1H1C104A143	C 0.1UF, K, 16V	1	
	C17122	F1H1C104A143	C 0.1UF, K, 16V	1	
	C17123	F1H1C104A143	C 0.1UF, K, 16V	1	
	C17124	F1H1C104A143	C 0.1UF, K, 16V	1	
	C17125	F1H1C104A143	C 0.1UF, K, 16V	1	
	C17126	F1K2A105A006	C 1UF, 100V	1	
	C17130	F1H1A1050032	C 10UF, 50V	1	
	C17131	F1H1A1050032	C 10UF, 50V	1	
	C17132	F1H1A1050032	C 10UF, 50V	1	
	C17133	F1H1A1050032	C 10UF, 50V	1	
	C17134	F1H1A1050032	C 10UF, 50V	1	

Safety	Ref. No.	Part No.	Part Name & Description	Pcs	Remarks
	C17135	F1H1A1050032	C 10UF, 50V	1	
	C17136	F1H1C104A143	C 0.1UF, K, 16V	1	
	C17201	F1H1A1050032	C 10UF, 50V	1	
	C17202	F1H1A1050032	C 10UF, 50V	1	
	C17203	F1H1A1050032	C 10UF, 50V	1	
	C17204	F1H1A1050032	C 10UF, 50V	1	
	C17205	F1H1A1050032	C 10UF, 50V	1	
	C17206	F1H1C104A143	C 0.1UF, K, 16V	1	
	C17207	F1H1A1050032	C 10UF, 50V	1	
	C17210	F1H1A1050032	C 10UF, 50V	1	
	C17211	F1K2A105A006	C 1UF, 100V	1	
	C17213	F1H1C104A143	C 0.1UF, K, 16V	1	
	C17214	F1K2A105A006	C 1UF, 100V	1	
	C17218	F1K2A105A006	C 1UF, 100V	1	
	C17219	F1H1A1050032	C 10UF, 50V	1	
	C17220	F1H1C104A143	C 0.1UF, K, 16V	1	
	C17224	F1H1C104A143	C 0.1UF, K, 16V	1	
	C17225	F1H1C104A143	C 0.1UF, K, 16V	1	
	C17226	F1H1C104A143	C 0.1UF, K, 16V	1	
	C17227	F1H1C104A143	C 0.1UF, K, 16V	1	
	C17228	F1H1C104A143	C 0.1UF, K, 16V	1	
	C17229	F1H1C104A143	C 0.1UF, K, 16V	1	
	C17230	F1H1C104A143	C 0.1UF, K, 16V	1	
	C17231	F1H1A1050032	C 10UF, 50V	1	
	C17232	F1K2A105A006	C 1UF, 100V	1	
	C17236	F1H1A1050032	C 10UF, 50V	1	
	C17238	F1K2A105A006	C 1UF, 100V	1	
	C17241	F1H1C104A143	C 0.1UF, K, 16V	1	
	C17242	F1H1C104A143	C 0.1UF, K, 16V	1	
	C17302	F1H1C104A143	C 0.1UF, K, 16V	1	
	C17304	F1H1A1050032	C 10UF, 50V	1	
	C17305	F1H1A1050032	C 10UF, 50V	1	
	C17310	F1K2A105A006	C 1UF, 100V	1	
	C17313	F1K2A105A006	C 1UF, 100V	1	
	C17314	F1K2A105A006	C 1UF, 100V	1	
	C17315	F1K2A105A006	C 1UF, 100V	1	
	C17322	F1H1A1050032	C 10UF, 50V	1	
	C17323	F1H1A1050032	C 10UF, 50V	1	
	C17325	F1K2A105A006	C 1UF, 100V	1	
	C17328	F1H1A1050032	C 10UF, 50V	1	
	C17329	F1H1A1050032	C 10UF, 50V	1	
	C17330	F1H1A1050032	C 10UF, 50V	1	
	C17331	F1H1A1050032	C 10UF, 50V	1	
	C17332	F1H1A1050032	C 10UF, 50V	1	
	C17333	F1H1A1050032	C 10UF, 50V	1	
	C17334	F1H1C104A143	C 0.1UF, K, 16V	1	
	C17335	F1K2A105A006	C 1UF, 100V	1	
	C17401	F1H1C104A143	C 0.1UF, K, 16V	1	
	C17402	F1K2A105A006	C 1UF, 100V	1	
	C17404	F1H1C104A143	C 0.1UF, K, 16V	1	
	C17409	F1H1A1050032	C 10UF, 50V	1	
	C17410	F1H1A1050032	C 10UF, 50V	1	
	C17415	F1K2A105A006	C 1UF, 100V	1	
	C17418	F1K2A105A006	C 1UF, 100V	1	
	C17419	F1K2A105A006	C 1UF, 100V	1	
	C17420	F1K2A105A006	C 1UF, 100V	1	
	C17427	F1H1A1050032	C 10UF, 50V	1	
	C17428	F1H1A1050032	C 10UF, 50V	1	
	C17429	F1K2A105A006	C 1UF, 100V	1	
	C17433	F1H1A1050032	C 10UF, 50V	1	
	C17434	F1H1A1050032	C 10UF, 50V	1	
	C17435	F1H1A1050032	C 10UF, 50V	1	
	C17436	F1H1A1050032	C 10UF, 50V	1	
	C17437	F1H1A1050032	C 10UF, 50V	1	
	C17438	F1H1A1050032	C 10UF, 50V	1	
	C17501	F1H1A1050032	C 10UF, 50V	1	
	C17503	F1K2A105A006	C 1UF, 100V	1	
	C17504	F1H1C104A143	C 0.1UF, K, 16V	1	
	C17507	F1H1A1050032	C 10UF, 50V	1	
	C17508	F1H1C104A143	C 0.1UF, K, 16V	1	
	C17512	F1K2A105A006	C 1UF, 100V	1	
	C17513	F1H1C104A143	C 0.1UF, K, 16V	1	
	C17514	F1H1A1050032	C 10UF, 50V	1	

Safety	Ref. No.	Part No.	Part Name & Description	Pcs	Remarks
	C17516	F1K2A105A006	C 1UF, 100V	1	
	C17518	F1H1C104A143	C 0.1UF, K, 16V	1	
	C17520	F1H1C104A143	C 0.1UF, K, 16V	1	
	C17521	F1H1C104A143	C 0.1UF, K, 16V	1	
	C17522	F1H1A1050032	C 10UF, 50V	1	
	C17523	F1H1A1050032	C 10UF, 50V	1	
	C17524	F1H1A1050032	C 10UF, 50V	1	
	C17525	F1H1A1050032	C 10UF, 50V	1	
	C17526	F1H1A1050032	C 10UF, 50V	1	
	C17527	F1H1C104A143	C 0.1UF, K, 16V	1	
	C17528	F1H1C104A143	C 0.1UF, K, 16V	1	
	C17529	F1H1C104A143	C 0.1UF, K, 16V	1	
	C17530	F1H1C104A143	C 0.1UF, K, 16V	1	
	C17531	F1H1C104A143	C 0.1UF, K, 16V	1	
	C17532	F1H1C104A143	C 0.1UF, K, 16V	1	
	C17533	F1H1C104A143	C 0.1UF, K, 16V	1	
	C17534	F1H1A1050032	C 10UF, 50V	1	
	C17535	F1K2A105A006	C 1UF, 100V	1	
	C17539	F1H1A1050032	C 10UF, 50V	1	
	C17541	F1K2A105A006	C 1UF, 100V	1	
	C17601	F1H1A1050032	C 10UF, 50V	1	
	C17602	F1H1A1050032	C 10UF, 50V	1	
	C17607	F1K2A105A006	C 1UF, 100V	1	
	C17610	F1K2A105A006	C 1UF, 100V	1	
	C17611	F1K2A105A006	C 1UF, 100V	1	
	C17612	F1K2A105A006	C 1UF, 100V	1	
	C17619	F1H1A1050032	C 10UF, 50V	1	
	C17620	F1H1A1050032	C 10UF, 50V	1	
	C17621	F1H1C104A143	C 0.1UF, K, 16V	1	
	C17622	F1H1C104A143	C 0.1UF, K, 16V	1	
	C17623	F1H1C104A143	C 0.1UF, K, 16V	1	
	C17624	F1H1C104A143	C 0.1UF, K, 16V	1	
	C17625	F1H1C104A143	C 0.1UF, K, 16V	1	
	C17626	F1K2A105A006	C 1UF, 100V	1	
	C17630	F1H1A1050032	C 10UF, 50V	1	
	C17631	F1H1C104A143	C 0.1UF, K, 16V	1	
	C17632	F1H1A1050032	C 10UF, 50V	1	
	C17633	F1H1A1050032	C 10UF, 50V	1	
	C17634	F1H1A1050032	C 10UF, 50V	1	
	C17635	F1H1A1050032	C 10UF, 50V	1	
	C17636	F1H1A1050032	C 10UF, 50V	1	
	CA1	K1MN68BA0052	68P CONNECTOR	1	
	CA2	K1MN68BA0052	68P CONNECTOR	1	
	CA3	K1MN68BA0052	68P CONNECTOR	1	
	CA4	K1MN68BA0052	68P CONNECTOR	1	
	CA5	K1MN68BA0052	68P CONNECTOR	1	
	CA6	K1MN68BA0052	68P CONNECTOR	1	
	CA7	K1MN68BA0052	68P CONNECTOR	1	
	CA8	K1MN68BA0052	68P CONNECTOR	1	
	CA9	K1MN68BA0052	68P CONNECTOR	1	
	CA10	K1MN68BA0052	68P CONNECTOR	1	
	CA11	K1MN68BA0052	68P CONNECTOR	1	
	CA12	K1MN68BA0052	68P CONNECTOR	1	
	CA13	K1MN68BA0052	68P CONNECTOR	1	
	CA14	K1MN68BA0052	68P CONNECTOR	1	
	CA15	K1MN68BA0052	68P CONNECTOR	1	
	CB1	K1MN68BA0052	68P CONNECTOR	1	
	CB2	K1MN68BA0052	68P CONNECTOR	1	
	CB3	K1MN68BA0052	68P CONNECTOR	1	
	CB4	K1MN68BA0052	68P CONNECTOR	1	
	CB5	K1MN68BA0052	68P CONNECTOR	1	
	CB6	K1MN68BA0052	68P CONNECTOR	1	
	CB7	K1MN68BA0052	68P CONNECTOR	1	
	CB8	K1MN68BA0052	68P CONNECTOR	1	
	CB9	K1MN68BA0052	68P CONNECTOR	1	
	CB10	K1MN68BA0052	68P CONNECTOR	1	
	CB11	K1MN68BA0052	68P CONNECTOR	1	
	CB12	K1MN68BA0052	68P CONNECTOR	1	
	CB13	K1MN68BA0052	68P CONNECTOR	1	
	CB14	K1MN68BA0052	68P CONNECTOR	1	
	CB15	K1MN68BA0052	68P CONNECTOR	1	

Safety	Ref. No.	Part No.	Part Name & Description	Pcs	Remarks
	D3	K1KA14B00129	14P CONNECTOR	1	
	D5	K1KB31BA0064	31P CONNECTOR	1	
	D6	K1KA20AA0009	20P CONNECTOR	1	
	D20	K1MN35BA0266	35P CONNECTOR	1	
	D25	K1KA13B00069	13P CONNECTOR	1	
	D31	K1MN68BA0266	68P CONNECTOR	1	
	D32	K1MN68BA0266	68P CONNECTOR	1	
	D33	K1MN68BA0266	68P CONNECTOR	1	
	D34	K1MN68BA0266	68P CONNECTOR	1	
	D35	K1MN68BA0266	68P CONNECTOR	1	
	D36	K1MN68BA0266	68P CONNECTOR	1	
	D853	MA2J11100L	DIODE	1	
	D855	MA2J11100L	DIODE	1	
	D856	MA2J11100L	DIODE	1	
	D857	MA2J11100L	DIODE	1	
	D859	B0JCME000037	DIODE	1	
	D860	MAZ81100ML	ZENER DIODE	1	
	D861	MA2J11100L	DIODE	1	
	D862	MAZ80330LL	ZENER DIODE	1	
	D1107	MA3X704A0L	ZENER DIODE	1	
	D1112	MA2J72800L	ZENER DIODE	1	
	D2004	MA2J11100L	DIODE	1	
	D2005	MA2J11100L	DIODE	1	
	D2006	MA2J11100L	DIODE	1	
	D2007	MA2J11100L	DIODE	1	
	D2009	MA2J11100L	DIODE	1	
	D2010	MA2J11100L	DIODE	1	
	D2013	MA2J11100L	DIODE	1	
	D2020	MA3X78900L	ZENER DIODE	1	
	D2024	B0BC03900015	ZENER DIODE	1	
	D2201	MA3X704A0L	ZENER DIODE	1	
	D2300	MA2J11100L	DIODE	1	
	D2301	B0HCMM000014	DIODE	1	
	D2302	B0HCMM000014	DIODE	1	
	D2512	MAZ80560ML	ZENER DIODE	1	
	D2520	LNJ107W5PRW	LED	1	
	D2524	MAZ80560ML	ZENER DIODE	1	
	D2530	MAZ80560ML	ZENER DIODE	1	
	D3057	B0BC01100001	ZENER DIODE	1	
	D3077	MAZ81400ML	ZENER DIODE	1	
	D3082	B0BC01100001	ZENER DIODE	1	
	D3086	MAZ81400ML	ZENER DIODE	1	
	D3090	MAZ81400ML	ZENER DIODE	1	
	D3091	MAZ81400ML	ZENER DIODE	1	
	D3092	MAZ81400ML	ZENER DIODE	1	
	D3093	MAZ81400ML	ZENER DIODE	1	
	D3702	MAZ81400ML	ZENER DIODE	1	
	D3703	MAZ81400ML	ZENER DIODE	1	
	D3704	MAZ81400ML	ZENER DIODE	1	
	D3705	MAZ81400ML	ZENER DIODE	1	
	D3706	MAZ81400ML	ZENER DIODE	1	
	D3801	EZAEG2A50AX	DIODE	1	
	D3802	EZAEG2A50AX	DIODE	1	
	D3803	EZAEG2A50AX	DIODE	1	
	D3804	EZAEG2A50AX	DIODE	1	
	D3805	EZAEG2A50AX	DIODE	1	
	D3806	EZAEG2A50AX	DIODE	1	
	D3807	EZJZ0V80008B	VARISTOR	1	
	D3808	EZJZ0V80008B	VARISTOR	1	
	D3809	EZAEG2A50AX	DIODE	1	
	D3810	EZAEG2A50AX	DIODE	1	
	D3811	EZJZ0V80008B	VARISTOR	1	
	D3813	B0HCMM000014	DIODE	1	
	D3814	B0HCMM000014	DIODE	1	
	D3815	EZJZ0V120JA	VARISTOR	1	
	D4502	EZAEG2A50AX	DIODE	1	
	D4503	EZAEG2A50AX	DIODE	1	
	D4504	EZAEG2A50AX	DIODE	1	
	D4505	EZAEG2A50AX	DIODE	1	
	D4506	EZAEG2A50AX	DIODE	1	
	D4507	EZAEG2A50AX	DIODE	1	
	D4508	EZAEG2A50AX	DIODE	1	

Safety	Ref. No.	Part No.	Part Name & Description	Pcs	Remarks
	D4509	EZAEG2A50AX	DIODE	1	
	D4510	EZAEG2A50AX	DIODE	1	
	D4511	EZAEG2A50AX	DIODE	1	
	D4512	EZAEG2A50AX	DIODE	1	
	D4513	B0BC5R6A0275	DIODE	1	
	D4514	EZAEG2A50AX	DIODE	1	
	D4515	B0BC5R6A0275	DIODE	1	
	D4516	EZAEG2A50AX	DIODE	1	
	D4517	EZAEG2A50AX	DIODE	1	
	D4518	EZAEG2A50AX	DIODE	1	
	D4519	EZAEG2A50AX	DIODE	1	
	D4520	EZAEG2A50AX	DIODE	1	
	D4521	EZAEG2A50AX	DIODE	1	
	D4522	EZAEG2A50AX	DIODE	1	
	D4523	EZAEG2A50AX	DIODE	1	
	D4541	MA2J11100L	DIODE	1	
	D4542	MA2J11100L	DIODE	1	
	D4544	EZAEG2A50AX	DIODE	1	
	D4545	EZAEG2A50AX	DIODE	1	
	D4546	EZAEG2A50AX	DIODE	1	
	D4547	EZAEG2A50AX	DIODE	1	
	D4548	EZAEG2A50AX	DIODE	1	
	D4549	EZAEG2A50AX	DIODE	1	
	D4550	B0BC5R6A0275	DIODE	1	
	D4551	EZAEG2A50AX	DIODE	1	
	D4552	EZAEG2A50AX	DIODE	1	
	D4553	EZAEG2A50AX	DIODE	1	
	D4554	EZAEG2A50AX	DIODE	1	
	D4560	MA2J11100L	DIODE	1	
	D4561	MA2J11100L	DIODE	1	
	D4562	MA2J11100L	DIODE	1	
	D4563	MA2J11100L	DIODE	1	
	D4564	MA2J11100L	DIODE	1	
	D4565	MA2J11100L	DIODE	1	
	D4566	B0HCMM000014	DIODE	1	
	D5201	MA2J72800L	ZENER DIODE	1	
	D5301	MA22D3900L	DIODE	1	
	D5302	MA22D3900L	DIODE	1	
	D5303	B0JCDD000002	DIODE	1	
	D5304	B0JCDD000002	DIODE	1	
	D5307	B0BC4R000002	ZENER DIODE	1	
	D5308	B0BC4R000002	ZENER DIODE	1	
	D5406	B0JCME000037	DIODE	1	
	D5407	B0BC4R700007	ZENER DIODE	1	
	D5408	B0BC4R700007	ZENER DIODE	1	
	D5409	B0JCME000037	DIODE	1	
	D5410	B0BC4R700007	ZENER DIODE	1	
	D5411	B0BC4R700007	ZENER DIODE	1	
	D5502	B0BC01000035	ZENER DIODE	1	
	D5503	B0BC01100001	ZENER DIODE	1	
	D5504	B0BC6R600005	ZENER DIODE	1	
	D5521	B0ADEJ000035	ZENER DIODE	1	
	D5522	B0ADEJ000035	ZENER DIODE	1	
	D5574	B0BC3R700006	ZENER DIODE	1	
	D5575	B0BC3R700006	ZENER DIODE	1	
	D5576	MA3X152E0L	ZENER DIODE	1	
	D5577	MAZ80680LL	ZENER DIODE	1	
	D5578	MA8120M	ZENER DIODE	1	
	D5579	MAZ80680LL	ZENER DIODE	1	
	D5580	MA2J11100L	DIODE	1	
	D5600	B0BC4R700007	ZENER DIODE	1	
	D5601	MA22D3900L	DIODE	1	
	D5602	MA22D3900L	DIODE	1	
	D5603	B0JCDD000002	DIODE	1	
	D5604	B0JCDD000002	DIODE	1	
	D5605	MA22D3900L	DIODE	1	
	D5606	B0JCDD000002	DIODE	1	
	D5607	B0BC4R700007	ZENER DIODE	1	
	D5608	B0BC4R700007	ZENER DIODE	1	
	D5691	B0BC6R600005	ZENER DIODE	1	
	D5692	MAZ80560LL	ZENER DIODE	1	
	D7800	B3AEB0000107	LED	1	
	D8901	MA2J72800L	ZENER DIODE	1	

Safety	Ref. No.	Part No.	Part Name & Description	Pcs	Remarks
	D8952	MA2J72800L	ZENER DIODE	1	
	D9002	K7AAAY000003	PHOTO LINK	1	
	D9014	MA2J11100L	DIODE	1	
	D9017	MA2J11100L	DIODE	1	
	D9021	B0JCCE000008	DIODE	1	
	D9022	B0JCCE000008	DIODE	1	
	D9023	B0JCCE000008	DIODE	1	
	D9024	B0JCCE000008	DIODE	1	
	D9025	B0JCCE000008	DIODE	1	
	D9026	B0JCCE000008	DIODE	1	
	D9027	B0BC3R3A0273	ZENER DIODE	1	
	D9028	B0BC3R3A0273	ZENER DIODE	1	
	D9029	B0BC3R3A0273	ZENER DIODE	1	
	D9110	B0JCGD000002	DIODE	1	
	D9807	B0JCCE000008	DIODE	1	
	D9808	B0JCCE000008	DIODE	1	
	D9812	MA22D3900L	DIODE	1	
	D9813	B0JCGD000002	DIODE	1	
	D9814	B0JCGD000002	DIODE	1	
	D9815	B0JCGD000002	DIODE	1	
	D9816	MA22D3900L	DIODE	1	
	D9817	MA22D3900L	DIODE	1	
	D14903	B0HCMM000013	DIODE	1	
	D14904	B0HCMM000013	DIODE	1	
	D14905	B0HCMM000013	DIODE	1	
	D14906	B0HCMM000013	DIODE	1	
	D14907	B0HCMM000013	DIODE	1	
	D14908	B0HCMM000013	DIODE	1	
	D14909	MA3X152E0L	ZENER DIODE	1	
	D14910	MA2J11100L	DIODE	1	
	D14911	B0HCMM000013	DIODE	1	
	D14912	B0HCMM000013	DIODE	1	
	D14913	B0HCMM000013	DIODE	1	
	D14914	B0HCMM000013	DIODE	1	
	D14953	B0HCMM000013	DIODE	1	
	D14954	B0HCMM000013	DIODE	1	
	D14955	B0HCMM000013	DIODE	1	
	D14956	B0HCMM000013	DIODE	1	
	D14957	B0HCMM000013	DIODE	1	
	D14958	B0HCMM000013	DIODE	1	
	D14959	B0HCMM000013	DIODE	1	
	D14960	B0HCMM000013	DIODE	1	
	D14961	MA8056H	ZENER DIODE	1	
	D14974	MA3X152E0L	ZENER DIODE	1	
	D14975	MA2J11100L	DIODE	1	
	D14976	MA2J11100L	DIODE	1	
	D14977	B0HCMM000013	DIODE	1	
	D14978	B0HCMM000013	DIODE	1	
	D14979	MA2J11100L	DIODE	1	
	D16001	B0FBCN000005	DIODE	1	
	D16002	B0FBCN000005	DIODE	1	
	D16003	B0FBCN000005	DIODE	1	
	D16021	MA3DF30000LW	ZENER DIODE	1	
	D16022	MA3DF30000LW	ZENER DIODE	1	
	D16032	MA2J11100L	DIODE	1	
	D16041	MA3DF46000LW	ZENER DIODE	1	
	D16042	MA3DF46000LW	ZENER DIODE	1	
	D16043	MA3DF46000LW	ZENER DIODE	1	
	D16050	B0ECKP000047	DIODE	1	
	D16051	B0FBCN000005	DIODE	1	
	D16052	B0FBCN000005	DIODE	1	
	D16053	B0FBCN000005	DIODE	1	
	D16101	MA22D3900L	DIODE	1	
	D16131	B0ECHP000003	DIODE	1	
	D16151	B0ECHP000003	DIODE	1	
	D16152	B0ECKP000047	DIODE	1	
	D16153	B0ECKP000047	DIODE	1	
	D16191	B0ECKP000047	DIODE	1	
	D16192	MA2J11100L	DIODE	1	
	D16253	B3ABB0000210	LED	1	
	D16255	MA2J11100L	DIODE	1	
	D16280	MA2J11100L	DIODE	1	
	D16281	MAZ80510LL	ZENER DIODE	1	

Safety	Ref. No.	Part No.	Part Name & Description	Pcs	Remarks
	D16282	MAZ80680ML	ZENER DIODE	1	
	D16283	MA3X152D0L	DIODE	1	
	D16284	MA3X152D0L	DIODE	1	
	D16285	MA3X152D0L	DIODE	1	
	D16286	MA3X152D0L	DIODE	1	
	D16300	B0ECKP000047	DIODE	1	
	D16301	MA3X152E0L	ZENER DIODE	1	
	D16302	MA2J11100L	DIODE	1	
	D16304	MAZ80510LL	ZENER DIODE	1	
	D16311	MAZ81500ML	ZENER DIODE	1	
	D16313	B0ECKP000047	DIODE	1	
	D16321	B0ECKP000047	DIODE	1	
	D16323	MAZ80330HL	ZENER DIODE	1	
	D16324	MA3X152D0L	DIODE	1	
	D16401	MA3DF47000LW	ZENER DIODE	1	
	D16402	MA3DF47000LW	ZENER DIODE	1	
	D16403	MA3DF47000LW	ZENER DIODE	1	
	D16407	MA22D3900L	DIODE	1	
	D16411	MA2J11100L	DIODE	1	
	D16421	MA3DF40000LW	ZENER DIODE	1	
	D16422	MA3DF40000LW	ZENER DIODE	1	
	D16423	MA3DF40000LW	ZENER DIODE	1	
	D16451	B0ECKP000047	DIODE	1	
	D16461	MA3DF46000LW	ZENER DIODE	1	
	D16462	MA3DF46000LW	ZENER DIODE	1	
	D16463	MA3DF46000LW	ZENER DIODE	1	
	D16464	MA3DF46000LW	ZENER DIODE	1	
	D16466	MA2J11100L	DIODE	1	
	D16473	MA3X152D0L	DIODE	1	
	D16474	MA2J11100L	DIODE	1	
	D16475	MAZ80510LL	ZENER DIODE	1	
	D16476	MA2J11100L	DIODE	1	
	D16477	MA2J11100L	DIODE	1	
	D16478	B0HCKS000002	DIODE	1	
	D16480	MA2J11100L	DIODE	1	
	D16481	MA3DF46000LW	ZENER DIODE	1	
	D16482	MA3DF46000LW	ZENER DIODE	1	
	D16483	MA3DF46000LW	ZENER DIODE	1	
	D16484	MA3DF46000LW	ZENER DIODE	1	
	D16497	B0ECKP000047	DIODE	1	
	D16503	B0HCKS000002	DIODE	1	
	D16522	B0ECKP000047	DIODE	1	
	D16523	B0ECKP000047	DIODE	1	
	D16524	B0ECKP000047	DIODE	1	
	D16536	B0HCKS000002	DIODE	1	
	D16583	B3ABB0000210	LED	1	
	D16602	MA8120M	ZENER DIODE	1	
	D16604	MA2J11100L	DIODE	1	
	D16605	MAZ80510LL	ZENER DIODE	1	
	D16606	B0ECKM000038	DIODE	1	
	D16607	MA2J11100L	DIODE	1	
	D16608	MA8120M	ZENER DIODE	1	
	D16609	MA2J11100L	DIODE	1	
	D16610	MA2J11100L	DIODE	1	
	D16618	B0ECKP000047	DIODE	1	
	D16619	B0ECKP000047	DIODE	1	
	D16621	B0FBCN000006	DIODE	1	
	D16622	B0FBCN000006	DIODE	1	
	D16623	B0FBCN000006	DIODE	1	
	D16631	MAZ81500ML	ZENER DIODE	1	
	D16632	MAZ81500ML	ZENER DIODE	1	
	D16633	MAZ81500ML	ZENER DIODE	1	
	D16641	MA3DF25000LW	ZENER DIODE	1	
	D16642	MA3DF25000LW	ZENER DIODE	1	
	D16643	MA3DF25000LW	ZENER DIODE	1	
	D16660	B0HCMM000014	DIODE	1	
	D16661	MA2J11100L	DIODE	1	
	D16662	MAZ81500ML	ZENER DIODE	1	
	D16663	MAZ81500ML	ZENER DIODE	1	
	D16664	MAZ81500ML	ZENER DIODE	1	
	D16665	MAZ80510LL	ZENER DIODE	1	
	D16667	MA2J11100L	DIODE	1	
	D16668	MA3X152D0L	DIODE	1	

Safety	Ref. No.	Part No.	Part Name & Description	Pcs	Remarks
	D16669	MA2J11100L	DIODE	1	
	D16671	MA2J11100L	DIODE	1	
	D16702	MA2J11100L	DIODE	1	
	D16710	MAZ815000L	ZENER DIODE	1	
	D16711	B0HCMR000002	DIODE	1	
	D16712	MAZ815000L	ZENER DIODE	1	
	D16713	B0HCMR000002	DIODE	1	
	D16714	MAZ815000L	ZENER DIODE	1	
	D16715	B0HCMR000002	DIODE	1	
	D16717	MA8330M	ZENER DIODE	1	
	D16718	MA2J11100L	DIODE	1	
	D16719	B0ECKP000047	DIODE	1	
	D16720	B0ECKP000047	DIODE	1	
	D16721	B0HCKS000002	DIODE	1	
	D16722	MA2J11100L	DIODE	1	
	D16725	MA2J11100L	DIODE	1	
	D16761	MA22D3900L	DIODE	1	
	D16764	B0HCKS000002	DIODE	1	
	D16765	B0ECKP000047	DIODE	1	
	D16781	MA2J11100L	DIODE	1	
	D16791	MAZ82000ML	ZENER DIODE	1	
	D16820	MA3X152E0L	ZENER DIODE	1	
	D16821	MAZ82000ML	ZENER DIODE	1	
	D16822	MA2J11100L	DIODE	1	
	D16824	MA8330M	ZENER DIODE	1	
	D16825	MA8330M	ZENER DIODE	1	
	D16835	B0ECKP000047	DIODE	1	
	D16859	B0HCKS000002	DIODE	1	
	D16860	B0HCKS000002	DIODE	1	
	D16861	MA8330M	ZENER DIODE	1	
	D16862	MA8330M	ZENER DIODE	1	
	D16871	MAZ815000L	ZENER DIODE	1	
	D16873	MAZ815000L	ZENER DIODE	1	
	D16874	MAZ80510LL	ZENER DIODE	1	
	D16875	MA2J11100L	DIODE	1	
	D17101	B0ECKM000038	DIODE	1	
	D17102	B0ECKM000038	DIODE	1	
	D17103	B0ECKM000038	DIODE	1	
	D17104	B0ECKM000038	DIODE	1	
	D17105	B0ECKM000038	DIODE	1	
	D17106	B0ECKM000038	DIODE	1	
	D17107	B0ECKM000038	DIODE	1	
	D17108	B0ECKM000038	DIODE	1	
	D17109	B0ECKM000038	DIODE	1	
	D17110	B0ECKM000038	DIODE	1	
	D17201	B0ECKM000038	DIODE	1	
	D17202	B0ECKM000038	DIODE	1	
	D17203	B0ECKM000038	DIODE	1	
	D17204	B0ECKM000038	DIODE	1	
	D17205	B0ECKM000038	DIODE	1	
	D17206	B0ECKM000038	DIODE	1	
	D17207	B0ECKM000038	DIODE	1	
	D17208	B0ECKM000038	DIODE	1	
	D17209	B0ECKM000038	DIODE	1	
	D17210	B0ECKM000038	DIODE	1	
	D17301	B0ECKM000038	DIODE	1	
	D17302	B0ECKM000038	DIODE	1	
	D17303	B0ECKM000038	DIODE	1	
	D17304	B0ECKM000038	DIODE	1	
	D17305	B0ECKM000038	DIODE	1	
	D17306	B0ECKM000038	DIODE	1	
	D17307	B0ECKM000038	DIODE	1	
	D17308	B0ECKM000038	DIODE	1	
	D17309	B0ECKM000038	DIODE	1	
	D17310	B0ECKM000038	DIODE	1	
	D17401	B0ECKM000038	DIODE	1	
	D17402	B0ECKM000038	DIODE	1	
	D17403	B0ECKM000038	DIODE	1	
	D17404	B0ECKM000038	DIODE	1	
	D17405	B0ECKM000038	DIODE	1	
	D17406	B0ECKM000038	DIODE	1	
	D17407	B0ECKM000038	DIODE	1	
	D17408	B0ECKM000038	DIODE	1	

Safety	Ref. No.	Part No.	Part Name & Description	Pcs	Remarks
	D17409	B0ECKM000038	DIODE	1	
	D17410	B0ECKM000038	DIODE	1	
	D17501	B0ECKM000038	DIODE	1	
	D17502	B0ECKM000038	DIODE	1	
	D17503	B0ECKM000038	DIODE	1	
	D17504	B0ECKM000038	DIODE	1	
	D17505	B0ECKM000038	DIODE	1	
	D17506	B0ECKM000038	DIODE	1	
	D17507	B0ECKM000038	DIODE	1	
	D17508	B0ECKM000038	DIODE	1	
	D17509	B0ECKM000038	DIODE	1	
	D17510	B0ECKM000038	DIODE	1	
	D17601	B0ECKM000038	DIODE	1	
	D17602	B0ECKM000038	DIODE	1	
	D17603	B0ECKM000038	DIODE	1	
	D17604	B0ECKM000038	DIODE	1	
	D17605	B0ECKM000038	DIODE	1	
	D17606	B0ECKM000038	DIODE	1	
	D17607	B0ECKM000038	DIODE	1	
	D17608	B0ECKM000038	DIODE	1	
	D17609	B0ECKM000038	DIODE	1	
	D17610	B0ECKM000038	DIODE	1	
	FL3710	J0ZZA0000091	FILTER	1	
	FL3711	J0ZZA0000091	FILTER	1	
	FL3712	J0ZZA0000091	FILTER	1	
	FL3713	J0ZZA0000091	FILTER	1	
	FL3714	J0ZZA0000091	FILTER	1	
	FL4206	ECJ1VB0J474K	C 0.47UF, K, 6.3V	1	
	FL5015	J0JAD0000028	CHIP INDUCTOR	1	
	FL5016	J0JAD0000028	CHIP INDUCTOR	1	
	FL5017	J0JAD0000028	CHIP INDUCTOR	1	
	FL5018	J0JAD0000028	CHIP INDUCTOR	1	
	FL5019	J0JAD0000028	CHIP INDUCTOR	1	
	FL5020	J0JAD0000028	CHIP INDUCTOR	1	
	FL5731	J0HABH000013	LC FILTER	1	
	FL5732	J0HABH000013	LC FILTER	1	
	FL5733	J0HABH000013	LC FILTER	1	
	FL5734	J0HABH000013	LC FILTER	1	
	FL9001	J0HABB000003	LC FILTER	1	
	FL9002	J0HABB000003	LC FILTER	1	
	FL9003	J0HABB000004	LC FILTER	1	
	FL9004	J0HABB000004	LC FILTER	1	
	FL9005	J0HABB000004	LC FILTER	1	
	FL9803	F1J1E104A148	C 0.10UF, Z, 25V	1	
	FL9805	F1J1E104A148	C 0.10UF, Z, 25V	1	
	FL9806	F1J1E104A148	C 0.10UF, Z, 25V	1	
	FL17101	J0HABH000013	LC FILTER	1	
	FL17201	J0HABH000013	LC FILTER	1	
	FL17501	J0HABH000013	LC FILTER	1	
	FL17601	J0HABH000013	LC FILTER	1	
	G51	K1KY16BA0192	16P CONNECTOR	1	
	GH10	K1FY121E0001	CONNECTOR	1	
	GH11	K1KA30AA0009	30P CONNECTOR	1	
	GL02	K1KA02B00294	2P CONNECTOR	1	
	GS02	K1KA02A00787	2P CONNECTOR	1	
	GS09	K1KA06A00508	6P CONNECTOR	1	
	H11	K1KA05AA0190	5P CONNECTOR	1	
	H12	K1KA04AA0190	4P CONNECTOR	1	
	HC12	K1KY15AA0606	15P CONNECTOR	1	
	HC13	K1KY23AA0606	23P CONNECTOR	1	
	HC14	K1KY23AA0606	23P CONNECTOR	1	
	HC15	K1KA11AA0715	11P CONNECTOR	1	
	HC16	K1KA20AA0009	20P CONNECTOR	1	
	IC850	C0DBAZF00003	IC	1	

Safety	Ref. No.	Part No.	Part Name & Description	Pcs	Remarks
	IC1100	MN103SG3FPA1	IC	1	
	IC1101	TVRQ306	IC	1	
	IC2008	C0CBCBE00001	IC	1	
	IC2012	C1BB00000947	IC	1	
	IC2013	C0DBGYY00281	IC	1	
	IC2106	C1AB00002909	IC	1	
	IC2107	C0DBFFD00003	IC	1	
	IC2109	C0DBGHF00001	IC	1	
	IC2403	C1AB00002877	IC	1	
	IC2602	C3ABRY000037	IC	1	
	IC2603	C0DBEFH00002	IC	1	
	IC2604	C1AB00002930	IC	1	
	IC3007	AN15876A-VT	IC	1	
	IC3009	AN15862A-VT	IC	1	
	IC3801	C1AB00002835	IC	1	
	IC3802	TVRQ130	IC	1	
	IC4001	C1AB00002687	IC	1	
	IC4002	C0CBCAC00358	IC	1	
	IC4005	C0CBCBC00227	IC	1	
	IC4013	C0JBAZ002060	IC	1	
	IC4200	C1AB00002886	IC	1	
	IC4502	C0JBAU000034	IC	1	
	IC4503	C1AB00002929	IC	1	
	IC4504	C0JBAU000034	IC	1	
	IC4510	C1AB00002966	IC	1	
	IC4511	C0CBCBE00001	IC	1	
	IC4512	C0DBGYY00477	IC	1	
	IC4513	C0DBGYY00477	IC	1	
	IC4516	TVRQ215	IC	1	
	IC5001	C3ABRY000015	IC	1	
	IC5002	C3ABRY000015	IC	1	
	IC5100	MN84527	IC	1	
	IC5300	C0CBCBD00062	IC	1	
	IC5301	C0DBAYY00274	IC	1	
	IC5402	C0DBAYY00183	IC	1	
	IC5403	C0DBAYY00183	IC	1	
	IC5404	C0DBEHG00006	IC	1	
	IC5405	C0DBGYY00204	IC	1	
	IC5501	EHMDD9851	LINEAR IC	1	
	IC5562	C0CBCAC00282	IC	1	
	IC5563	C0CBCAF00032	IC	1	
	IC5600	C0DBAYY00273	IC	1	
	IC5601	C0DBAYY00274	IC	1	
	IC5660	C0EBM0000026	IC	1	
	IC7700	TVRP965	IC	1	
	IC7701	C0DBEHG00006	IC	1	
	IC7702	C1CB00002668	IC	1	
	IC8001	MN2WS0031CTY	IC	1	
	IC8101	C0ZBZ0001567	IC	1	
	IC8201	C3ABSY000010	IC	1	
	IC8202	C3ABSY000010	IC	1	
	IC8203	C3ABRY000015	IC	1	
	IC8204	C3ABRY000015	IC	1	
	IC8580	TVRQ049AA	IC	1	
	IC8601	TVRQ104AA	IC	1	D/H/M/MR
	IC8601	TVRQ107AA	IC	1	MS
	IC8620	C1CB00002607	IC	1	
	IC8621	C0DBZYY00266	IC	1	
	IC9001	C1AB00002875	IC	1	(HC)
	IC9001	TVRQ059	IC	1	(D)
	IC9002	C1AB00002875	IC	1	(HC)
	IC9002	C1ZBZ0003577	IC	1	(D)
	IC9003	C1ZBZ0003775	IC	1	(HC)
	IC9003	MN103SG4GPF3	IC	1	(D)
	IC9011	C0EBF0000431	IC	1	
	IC9013	C0JBAZ002060	IC	1	
	IC9016	C0JBAZ001120	IC	1	
	IC9017	C0JBAZ001120	IC	1	
	IC9018	C0JBAZ001120	IC	1	
	IC9019	C0JBAZ001120	IC	1	
	IC9300	MN84526	IC	1	
	IC9301	C3ABQJ000055	IC	1	

Safety	Ref. No.	Part No.	Part Name & Description	Pcs	Remarks
	IC9303	TVRQ069	IC	1	
	IC9400	MN84526	IC	1	
	IC9401	C3ABQJ000055	IC	1	
	IC9500	C1ZBZ0003760	IC	1	
	IC9802	C0JBAZ001120	IC	1	
	IC9803	C0JBAZ001120	IC	1	
	IC9805	C0DBAYY00274	IC	1	
	IC9806	C0DBAYY00273	IC	1	
	IC14901	AN16181A-VT	IC	1	
	IC14902	AN16181A-VT	IC	1	
	IC14903	AN16181A-VT	IC	1	
	IC14904	AN16181A-VT	IC	1	
	IC14905	AN16181A-VT	IC	1	
	IC14906	AN16181A-VT	IC	1	
	IC14907	AN16181A-VT	IC	1	
	IC14908	AN16181A-VT	IC	1	
	IC14951	AN16181A-VT	IC	1	
	IC14952	AN16181A-VT	IC	1	
	IC14953	AN16181A-VT	IC	1	
	IC14954	AN16181A-VT	IC	1	
	IC14955	AN16181A-VT	IC	1	
	IC14956	AN16181A-VT	IC	1	
	IC14957	AN16181A-VT	IC	1	
	IC14958	AN16181A-VT	IC	1	
	IC14961	C0JBAZ000994	IC	1	
	IC14962	C0JBAZ000994	IC	1	
	IC14963	C0JBAE000321	IC	1	
	IC14964	C0JBAA000174	IC	1	
	IC16131	C0ZBZ0000895	IC	1	
	IC16151	C0ZBZ0001324	IC	1	
	IC16241	C0JBAZ002811	IC	1	
	IC16251	C0BBBA000024	IC	1	
	IC16301	MIP9L02MBS	IC	1	
	IC16302	C0CBALC00012	IC	1	
	IC16303	C0JBAB000715	IC	1	
	IC16464	C0JBAB000715	IC	1	
	IC16465	C0JBAB000715	IC	1	
	IC16471	C0DBEKA00003	IC	1	
	IC16501	C0ZBZ0001324	IC	1	
	IC16521	C0ZBZ0001324	IC	1	
	IC16561	C0JBAZ002811	IC	1	
	IC16562	C0JBAZ002811	IC	1	
	IC16563	C0JBAZ000994	IC	1	
	IC16564	C0JBAB000715	IC	1	
	IC16581	C0BBBA000024	IC	1	
	IC16724	C0CBADC00072	IC	1	
	IC16725	C0CBADC00072	IC	1	
	IC16771	C0CBADC00072	IC	1	
	IC16772	C0ZBZ0001325	IC	1	
	IC16773	C0JBAB000715	IC	1	
	IC16784	MIP9L02MBS	IC	1	
	IC16786	MIP9L02MBS	IC	1	
	IC16787	C0DBEYY00078	IC	1	
	IC16788	MIP9L02MBS	IC	1	
	IC16789	C0DBEYY00078	IC	1	
	IC16791	EHMDD9863	LINEAR IC	1	
	IC16801	C0DBEYY00078	IC	1	
	IC17101	C0JBAZ001120	IC	1	
	IC17102	C0JBAZ001120	IC	1	
	IC17103	C0JBAZ001120	IC	1	
	IC17104	C0JBAZ001120	IC	1	
	IC17105	C0JBAZ001120	IC	1	
	IC17106	C0JBAZ001120	IC	1	
	IC17201	C0JBAZ001120	IC	1	
	IC17202	C0JBAZ001120	IC	1	
	IC17203	C0JBAZ001120	IC	1	
	IC17204	C0JBAZ001120	IC	1	
	IC17205	C0JBAZ001120	IC	1	
	IC17206	C0JBAZ001120	IC	1	
	IC17207	C0JBAZ001120	IC	1	
	IC17208	C0JBAZ001120	IC	1	
	IC17209	C0JBAZ001120	IC	1	
	IC17210	C0JBAZ001120	IC	1	

Safety	Ref. No.	Part No.	Part Name & Description	Pcs	Remarks
	IC17211	C0JBAZ001120	IC	1	
	IC17212	C0JBAZ001120	IC	1	
	IC17301	C0JBAZ001120	IC	1	
	IC17306	C0JBAZ001120	IC	1	
	IC17401	C0JBAZ001120	IC	1	
	IC17402	C0JBAZ001120	IC	1	
	IC17501	C0JBAZ001120	IC	1	
	IC17502	C0JBAZ001120	IC	1	
	IC17503	C0JBAZ001120	IC	1	
	IC17504	C0JBAZ001120	IC	1	
	IC17505	C0JBAZ001120	IC	1	
	IC17506	C0JBAZ001120	IC	1	
	IC17507	C0JBAZ001120	IC	1	
	IC17508	C0JBAZ001120	IC	1	
	IC17509	C0JBAZ001120	IC	1	
	IC17510	C0JBAZ001120	IC	1	
	IC17511	C0JBAZ001120	IC	1	
	IC17512	C0JBAZ001120	IC	1	
	IC17513	C0JBAZ001120	IC	1	
	IC17601	C0JBAZ001120	IC	1	
	IC17602	C0JBAZ001120	IC	1	
	IC17603	C0JBAZ001120	IC	1	
	IC17604	C0JBAZ001120	IC	1	
	IC17605	C0JBAZ001120	IC	1	
	IC17606	C0JBAZ001120	IC	1	
	JA3701	D0GDR00Z0002	M 0 OHM, 1/10W	1	
	JA3702	D0GDR00Z0002	M 0 OHM, 1/10W	1	
	JA3703	D0GDR00Z0002	M 0 OHM, 1/10W	1	
	JA3704	D0GDR00Z0002	M 0 OHM, 1/10W	1	
	JA3751	ERJ8GEY0R00	M 0 OHM, 1/8W	1	
	JA3752	ERJ8GEY0R00	M 0 OHM, 1/8W	1	
	JA3753	ERJ8GEY0R00	M 0 OHM, 1/8W	1	
	JA3754	ERJ8GEY0R00	M 0 OHM, 1/8W	1	
	JK3100	K1U932A00002	CONNECTOR	1	
	JK3701	K4AK18B00007	TERMINAL	1	
	JK4500	K1FY119D0003	CONNECTOR	1	
	JK4501	K1FY119D0003	CONNECTOR	1	
	JK4502	K1FY119D0003	CONNECTOR	1	
	JK7702	K1NA09E00080	9P CONNECTOR	1	
	JK9001	K1FB315A0006	CONNECTOR	1	
	JS851	D0GDR00Z0002	M 0 OHM, 1/10W	1	
	JS852	D0GDR00Z0002	M 0 OHM, 1/10W	1	
	JS1100	D0YAR0000007	M 0 OHM 1/4W	1	
	JS1109	D0YAR0000007	M 0 OHM 1/4W	1	D/H/M/MR
	JS1114	D0YAR0000007	M 0 OHM 1/4W	1	MS
	JS2059	D0YAR0000007	M 0 OHM 1/4W	1	
	JS2060	D0YAR0000007	M 0 OHM 1/4W	1	
	JS2061	D0YAR0000007	M 0 OHM 1/4W	1	
	JS2320	D0YAR0000007	M 0 OHM 1/4W	1	
	JS3039	D0YAR0000007	M 0 OHM 1/4W	1	
	JS3704	D0GDR00Z0002	M 0 OHM, 1/10W	1	
	JS3705	D0GDR00Z0002	M 0 OHM, 1/10W	1	
	JS3707	D0GDR00Z0002	M 0 OHM, 1/10W	1	
	JS3708	D0GDR00Z0002	M 0 OHM, 1/10W	1	
	JS4002	D0YAR0000007	M 0 OHM 1/4W	1	
	JS7700	D0GBR00Z0002	M 0 OHM J 1/16W	1	
	JS9323	D0GBR00Z0002	M 0 OHM J 1/16W	1	
	JS9324	D0GBR00Z0002	M 0 OHM J 1/16W	1	
	JS9325	D0GBR00Z0002	M 0 OHM J 1/16W	1	
	JS9326	D0GBR00Z0002	M 0 OHM J 1/16W	1	
	K1	K1KY12B00001	12P CONNECTOR	1	
	L852	G0C150MA0056	PEAKING COIL	1	
	L1100	J0JYC0000068	CHIP INDUCTOR	1	
	L2001	G1C150KA0038	INDUCTION COIL	1	
	L2005	J0JCC0000284	CHIP INDUCTOR	1	
	L2006	J0JCC0000284	CHIP INDUCTOR	1	
	L2021	G1C470MA0291	INDUCTION COIL	1	

Safety	Ref. No.	Part No.	Part Name & Description	Pcs	Remarks
	L2022	G1C100MA0072	INDUCTION COIL	1	
	L2025	J0JCC0000059	CHIP INDUCTOR	1	
	L2026	J0JCC0000059	CHIP INDUCTOR	1	
	L2030	J0JYC0000068	CHIP INDUCTOR	1	
	L2031	J0JYC0000068	CHIP INDUCTOR	1	
	L2032	J0JYC0000068	CHIP INDUCTOR	1	
	L2033	J0JCC0000059	CHIP INDUCTOR	1	
	L2034	J0JCC0000059	CHIP INDUCTOR	1	
	L2036	J0JYC0000068	CHIP INDUCTOR	1	
	L2300	J0JYC0000068	CHIP INDUCTOR	1	
	L3032	J0JCC0000100	CHIP INDUCTOR	1	
	L3033	J0JCC0000100	CHIP INDUCTOR	1	
	L3036	J0JCC0000100	CHIP INDUCTOR	1	
	L3037	J0JCC0000100	CHIP INDUCTOR	1	
	L3040	J0JCC0000100	CHIP INDUCTOR	1	
	L3041	J0JCC0000100	CHIP INDUCTOR	1	
	L3042	J0JCC0000100	CHIP INDUCTOR	1	
	L3043	J0JCC0000100	CHIP INDUCTOR	1	
	L3044	J0JCC0000100	CHIP INDUCTOR	1	
	L3045	J0JCC0000100	CHIP INDUCTOR	1	
	L3046	J0JCC0000100	CHIP INDUCTOR	1	
	L3047	J0JCC0000100	CHIP INDUCTOR	1	
	L3048	J0JCC0000100	CHIP INDUCTOR	1	
⚠	L3049	G1C101M00018	INDUCTION COIL	1	
⚠	L3050	G1C101M00018	INDUCTION COIL	1	
	L3700	J0JCC0000364	CHIP INDUCTOR	1	
	L3701	J0JCC0000364	CHIP INDUCTOR	1	
	L3707	J0JCC0000100	CHIP INDUCTOR	1	
	L3708	J0JCC0000100	CHIP INDUCTOR	1	
	L3801	J0JHC0000078	CHIP INDUCTOR	1	
	L3804	J0JHC0000078	CHIP INDUCTOR	1	
	L3805	J0JHC0000078	CHIP INDUCTOR	1	
	L4002	J0JHC0000045	CHIP INDUCTOR	1	
	L4004	J0JYC0000068	CHIP INDUCTOR	1	
	L4006	J0JHC0000045	CHIP INDUCTOR	1	
	L4008	J0JYC0000068	CHIP INDUCTOR	1	
	L4009	J0JYC0000068	CHIP INDUCTOR	1	
	L4212	J0JYC0000068	CHIP INDUCTOR	1	
	L4216	J0JYC0000068	CHIP INDUCTOR	1	
	L4217	J0JYC0000068	CHIP INDUCTOR	1	
	L4219	J0JYC0000068	CHIP INDUCTOR	1	
	L4220	J0JYC0000068	CHIP INDUCTOR	1	
	L4502	J0JYC0000068	CHIP INDUCTOR	1	
	L4503	J0JYC0000068	CHIP INDUCTOR	1	
	L4504	J0JYC0000068	CHIP INDUCTOR	1	
	L4505	J0JYC0000068	CHIP INDUCTOR	1	
	L4506	J0JYC0000068	CHIP INDUCTOR	1	
	L4507	J0JYC0000068	CHIP INDUCTOR	1	
	L4508	J0JYC0000068	CHIP INDUCTOR	1	
	L4511	J0JYC0000068	CHIP INDUCTOR	1	
	L4512	J0JYC0000068	CHIP INDUCTOR	1	
	L4513	J0JYC0000068	CHIP INDUCTOR	1	
	L4514	J0JYC0000068	CHIP INDUCTOR	1	
	L4515	J0JYC0000068	CHIP INDUCTOR	1	
	L4516	J0JYC0000068	CHIP INDUCTOR	1	
	L4517	J0JYC0000068	CHIP INDUCTOR	1	
	L4518	J0JYC0000068	CHIP INDUCTOR	1	
	L4519	J0JYC0000068	CHIP INDUCTOR	1	
	L4521	J0JYC0000068	CHIP INDUCTOR	1	
	L4522	J0JYC0000068	CHIP INDUCTOR	1	
	L4523	J0JYC0000068	CHIP INDUCTOR	1	
	L5001	J0JHC0000045	CHIP INDUCTOR	1	
	L5002	J0JHC0000045	CHIP INDUCTOR	1	
	L5004	J0JHC0000045	CHIP INDUCTOR	1	
	L5005	J0JHC0000045	CHIP INDUCTOR	1	
	L5006	J0JHC0000045	CHIP INDUCTOR	1	
	L5300	G1C2R2Z00007	INDUCTION COIL	1	
	L5301	G1C2R2Z00007	INDUCTION COIL	1	
	L5302	J0JYC0000068	CHIP INDUCTOR	1	
	L5304	G1C100MA0203	INDUCTION COIL	1	
	L5305	J0JHC0000075	CHIP INDUCTOR	1	
	L5407	G1C330M00027	INDUCTION COIL	1	
	L5409	G1C100MA0291	INDUCTION COIL	1	

Safety	Ref. No.	Part No.	Part Name & Description	Pcs	Remarks
	L5410	G1C330M00027	INDUCTION COIL	1	
	L5412	J0JYC0000068	CHIP INDUCTOR	1	
	L5414	G1C100MA0291	INDUCTION COIL	1	
	L5415	J0JYC0000068	CHIP INDUCTOR	1	
	L5501	G0A2R7HA0011	CHOKE COIL	1	
	L5502	G0C150MA0056	PEAKING COIL	1	
	L5503	G0C330MA0056	PEAKING COIL	1	
	L5504	G0A2R7HA0011	CHOKE COIL	1	
	L5505	G0A2R7HA0011	CHOKE COIL	1	
	L5600	G1C3R9Z00003	INDUCTION COIL	1	
	L5601	G1C3R9Z00003	INDUCTION COIL	1	
	L5602	G1C2R2Z00007	INDUCTION COIL	1	
	L5604	G1C100MA0203	INDUCTION COIL	1	
	L5605	J0JHC0000075	CHIP INDUCTOR	1	
	L5606	G1C100MA0203	INDUCTION COIL	1	
	L5610	J0JHC0000035	CHIP INDUCTOR	1	
	L5611	J0JHC0000035	CHIP INDUCTOR	1	
	L5690	J0JYC0000068	CHIP INDUCTOR	1	
	L5691	J0JYC0000068	CHIP INDUCTOR	1	
	L5735	J0JYC0000068	CHIP INDUCTOR	1	
	L7704	J0JHC0000045	CHIP INDUCTOR	1	
	L7705	J0JHC0000045	CHIP INDUCTOR	1	
	L8030	J0JHC0000045	CHIP INDUCTOR	1	
	L8031	J0JHC0000045	CHIP INDUCTOR	1	
	L8032	J0JHC0000045	CHIP INDUCTOR	1	
	L8034	J0JHC0000045	CHIP INDUCTOR	1	
	L8035	J0JHC0000045	CHIP INDUCTOR	1	
	L8036	J0JHC0000045	CHIP INDUCTOR	1	
	L8101	J0JHC0000045	CHIP INDUCTOR	1	
	L8201	J0JHC0000045	CHIP INDUCTOR	1	
	L8501	J0JHC0000045	CHIP INDUCTOR	1	
	L8580	J0JHC0000075	CHIP INDUCTOR	1	
	L8620	J0JHC0000045	CHIP INDUCTOR	1	
	L8621	J0JHC0000045	CHIP INDUCTOR	1	
	L8623	J0JHC0000045	CHIP INDUCTOR	1	
	L9000	J0JHC0000078	CHIP INDUCTOR	1	
	L9001	J0JHC0000078	CHIP INDUCTOR	1	
	L9002	J0JHC0000078	CHIP INDUCTOR	1	
	L9003	J0JHC0000078	CHIP INDUCTOR	1	
	L9004	J0JHC0000078	CHIP INDUCTOR	1	
	L9005	J0JHC0000078	CHIP INDUCTOR	1	
	L9006	J0JHC0000078	CHIP INDUCTOR	1	
	L9007	J0JHC0000078	CHIP INDUCTOR	1	
	L9010	G1C220MA0291	INDUCTION COIL	1	
	L9011	G1C220MA0291	INDUCTION COIL	1	
	L9012	G1C220MA0291	INDUCTION COIL	1	
	L9013	G1C220MA0291	INDUCTION COIL	1	
	L9014	G1C220MA0291	INDUCTION COIL	1	
	L9015	G1C220MA0291	INDUCTION COIL	1	
	L9016	G1C220MA0291	INDUCTION COIL	1	
	L9017	G1C220MA0291	INDUCTION COIL	1	
	L9018	J0JHC0000042	CHIP INDUCTOR	1	
	L9019	J0JHC0000042	CHIP INDUCTOR	1	
	L9023	G1C3R0ZA0156	INDUCTION COIL	1	
	L9800	G1C2R2Z00007	INDUCTION COIL	1	
	L9801	G1C1R5Z00006	INDUCTION COIL	1	
	L9802	G1C2R2Z00007	INDUCTION COIL	1	
	L16001	G0C1R4KA0118	PEAKING COIL	1	
	L16002	G0C1R4KA0118	PEAKING COIL	1	
	L16003	G0C1R4KA0118	PEAKING COIL	1	
	L16004	G0C1R4KA0118	PEAKING COIL	1	
	L16005	G0C1R4KA0118	PEAKING COIL	1	
	L16006	G0C1R4KA0118	PEAKING COIL	1	
	L16011	G0C1R4KA0118	PEAKING COIL	1	
	L16012	G0C1R4KA0118	PEAKING COIL	1	
	L16013	G0C1R4KA0118	PEAKING COIL	1	
	L16014	G0C1R4KA0118	PEAKING COIL	1	
	L16015	G0C1R4KA0118	PEAKING COIL	1	
	L16016	G0C1R4KA0118	PEAKING COIL	1	
	L16103	G0ZZ00002183	PEAKING COIL	1	
	L16221	G0ZZ00002183	PEAKING COIL	1	
	L16262	G0ZZ00002183	PEAKING COIL	1	
	L16271	G0ZZ00002183	PEAKING COIL	1	

Safety	Ref. No.	Part No.	Part Name & Description	Pcs	Remarks
	L16301	J0JHC0000031	CHIP INDUCTOR	1	
	L16398	J0JJC0000015	CHIP INDUCTOR	1	
	L16399	J0JJC0000015	CHIP INDUCTOR	1	
	L16401	G0C1R9KA0147	PEAKING COIL	1	
	L16402	G0C1R9KA0147	PEAKING COIL	1	
	L16403	G0C1R9KA0147	PEAKING COIL	1	
	L16404	G0C1R9KA0147	PEAKING COIL	1	
	L16405	G0C1R9KA0147	PEAKING COIL	1	
	L16406	G0C1R9KA0147	PEAKING COIL	1	
	L16407	G0C1R9KA0147	PEAKING COIL	1	
	L16411	G0C1R9KA0147	PEAKING COIL	1	
	L16412	G0C1R9KA0147	PEAKING COIL	1	
	L16413	G0C1R9KA0147	PEAKING COIL	1	
	L16414	G0C1R9KA0147	PEAKING COIL	1	
	L16415	G0C1R9KA0147	PEAKING COIL	1	
	L16416	G0C1R9KA0147	PEAKING COIL	1	
	L16417	G0C1R9KA0147	PEAKING COIL	1	
	L16472	G0ZZ00002183	PEAKING COIL	1	
	L16473	G0ZZ00002183	PEAKING COIL	1	
	L16474	G0ZZ00002183	PEAKING COIL	1	
	L16591	G0ZZ00002183	PEAKING COIL	1	
	L16698	G0C681KA0187	PEAKING COIL	1	
	L16699	G0C331KA0187	PEAKING COIL	1	
	L16801	G0ZZ00002183	PEAKING COIL	1	
	L16851	G0ZZ00002183	PEAKING COIL	1	
	PA5	K1KA12AA0194	12P CONNECTOR	1	
	PA6	K1KA20AA0009	20P CONNECTOR	1	
	PA8	K1KA06A00452	6P CONNECTOR	1	
	PA33	K1KA04AA0192	4P CONNECTOR	1	
	PA35	K1KA03AA0192	3P CONNECTOR	1	
	PA36	K1KA04AA0192	4P CONNECTOR	1	
	PA37	K1KA03AA0192	3P CONNECTOR	1	
⚠	PA5200	K5H5022A0023	FUSE	1	
	PA5400	K5H5022A0023	FUSE	1	
⚠	PA5402	K5H1022A0031	FUSE	1	
⚠	PA5403	K5H1022A0031	FUSE	1	
⚠	PA5600	K5H5022A0023	FUSE	1	
	PA9800	K5H4022A0031	FUSE	1	
	PA9900	K5H5022A0031	FUSE	1	
	PC2511	B3JB00000046	IC	1	
	PC14951	B3PBA0000457	IC	1	
	PC14952	B3PBA0000457	IC	1	
	PC14953	B3PBA0000456	IC	1	
	PC16191	B3PBA0000496	IC	1	
	PC16461	B3PBA0000457	IC	1	
	PC16480	B3PBA0000223	IC	1	
	PC16601	B3PBA0000223	IC	1	
	PC16603	B3PBA0000223	IC	1	
	PC16684	B3PBA0000496	IC	1	
	PC16685	B3PBA0000496	IC	1	
	PC16896	B3PBA0000223	IC	1	
	PC16897	B3PBA0000223	IC	1	
⚠	PCB	TXN/A1RETM	CIRCUIT BOARD A	1	D/H/M/ MR
⚠	PCB	TXN/A1RETQ	CIRCUIT BOARD A	1	MS
⚠	PCB	TXNHC1RHTB	CIRCUIT BOARD HC	1	
⚠	PCB	TXNPA1RETM	CIRCUIT BOARD PA	1	
⚠	PCB	ETX2MM706NGN	CIRCUIT BOARD P	1	
⚠	PCB	TNPA4620	CIRCUIT BOARD C1	1	
⚠	PCB	TNPA4621	CIRCUIT BOARD C2	1	
⚠	PCB	TNPA4622	CIRCUIT BOARD C3	1	
⚠	PCB	TNPA4623	CIRCUIT BOARD C4	1	
⚠	PCB	TNPA4624	CIRCUIT BOARD C5	1	
⚠	PCB	TNPA4625	CIRCUIT BOARD C6	1	
⚠	PCB	TZTNP01RATM	CIRCUIT BOARD D	1	
⚠	PCB	TNPA4604	CIRCUIT BOARD SC	1	
⚠	PCB	TNPA4609	CIRCUIT BOARD SD	1	
⚠	PCB	TNPA4605	CIRCUIT BOARD SS	1	

Safety	Ref. No.	Part No.	Part Name & Description	Pcs	Remarks
⚠	PCB	TNPA4606	CIRCUIT BOARD SS2	1	
⚠	PCB	TNPA4607	CIRCUIT BOARD SS3	1	
⚠	PCB	TNPA4608	CIRCUIT BOARD SU	1	
⚠	PCB	TNPA4535AB	CIRCUIT BOARD S	1	
⚠	PCB	TXN/K1RFTM	CIRCUIT BOARD K	1	
⚠	PCB	TXNGL1RFTM	CIRCUIT BOARD GL	1	
⚠	PCB	TNPA4515AC	CIRCUIT BOARD G	1	
⚠	PCB	TXNGH1RFTM	CIRCUIT BOARD GH	1	
⚠	PCB	TXNGS1RFTM	CIRCUIT BOARD GS	1	
	Q2001	2SD0601ARL	TRANSISTOR	1	
	Q2022	2SB0709ARL	TRANSISTOR	1	
	Q2027	B1CFNG000001	FET	1	
	Q2028	B1CBHD000002	FET	1	
	Q2029	B1CBHD000002	FET	1	
	Q2030	2SB0709ARL	TRANSISTOR	1	
	Q2033	2SB0709ARL	TRANSISTOR	1	
	Q2510	2SD0601ARL	TRANSISTOR	1	
	Q2511	2SD0601ARL	TRANSISTOR	1	
	Q2513	2SD0601ARL	TRANSISTOR	1	
	Q3022	2SD0601ARL	TRANSISTOR	1	
	Q3023	2SD0601ARL	TRANSISTOR	1	
	Q3028	2SB0709ARL	TRANSISTOR	1	
	Q3801	2SD0601ARL	TRANSISTOR	1	
	Q3802	2SD0601ARL	TRANSISTOR	1	
	Q3804	2SD0601ARL	TRANSISTOR	1	
	Q4000	2SA207700L	TRANSISTOR	1	
	Q4001	2SA207700L	TRANSISTOR	1	
	Q4002	2SA207700L	TRANSISTOR	1	
	Q4017	2SD0601ASL	TRANSISTOR	1	
	Q4500	2SD0601ASL	TRANSISTOR	1	
	Q4501	2SD0601ASL	TRANSISTOR	1	
	Q4502	2SD0601ARL	TRANSISTOR	1	
	Q4503	2SD0601ARL	TRANSISTOR	1	
	Q4514	2SB0709ASL	TRANSISTOR	1	
	Q4515	2SB0709ASL	TRANSISTOR	1	
	Q4516	2SB0709ASL	TRANSISTOR	1	
	Q4517	2SB0709ASL	TRANSISTOR	1	
	Q4520	2SD0601ARL	TRANSISTOR	1	
	Q4522	2SD0601ARL	TRANSISTOR	1	
	Q4523	2SD0601ASL	TRANSISTOR	1	
	Q4524	2SD0601ASL	TRANSISTOR	1	
	Q4528	2SB0709ASL	TRANSISTOR	1	
	Q4529	2SB0709ASL	TRANSISTOR	1	
	Q4530	2SB0709ASL	TRANSISTOR	1	
	Q4531	2SB0709ASL	TRANSISTOR	1	
	Q4801	2SD0601ASL	TRANSISTOR	1	
	Q4802	2SD0601ASL	TRANSISTOR	1	
	Q4803	2SD0601ASL	TRANSISTOR	1	
	Q4831	2SD0601ASL	TRANSISTOR	1	
	Q4832	2SD0601ASL	TRANSISTOR	1	
	Q5301	B1MBEDA00015	FET	1	
	Q5302	B1MBEDA00015	FET	1	
	Q5501	2SD0601ASL	TRANSISTOR	1	
	Q5522	2SB0709ARL	TRANSISTOR	1	
	Q5531	2SD0601ARL	TRANSISTOR	1	
	Q5532	2SD0601ARL	TRANSISTOR	1	
	Q5533	2SD0601ARL	TRANSISTOR	1	
	Q5534	2SD0601ARL	TRANSISTOR	1	
	Q5561	B1DHDC000028	FET	1	
	Q5562	2SD0601ARL	TRANSISTOR	1	
	Q5563	2SD0601ARL	TRANSISTOR	1	
	Q5564	2SD0601ARL	TRANSISTOR	1	
	Q5565	2SD0601ASL	TRANSISTOR	1	
	Q5600	B1MBEDA00015	FET	1	
	Q5601	B1MBDDA00003	FET	1	
	Q5602	B1MBDDA00003	FET	1	
	Q5603	2SD0601ARL	TRANSISTOR	1	
	Q5604	2SD0601ARL	TRANSISTOR	1	
	Q5691	2SD0601ARL	TRANSISTOR	1	
	Q5693	B1DHDC000028	FET	1	

Safety	Ref. No.	Part No.	Part Name & Description	Pcs	Remarks
	Q7700	2SB0709ARL	TRANSISTOR	1	
	Q7701	2SD0601ARL	TRANSISTOR	1	
	Q8850	2SD0601ARL	TRANSISTOR	1	
	Q8852	2SD0601ARL	TRANSISTOR	1	
	Q8853	2SD0601ASL	TRANSISTOR	1	
	Q9010	2SD0601ARL	TRANSISTOR	1	
	Q9055	2SD0601ARL	TRANSISTOR	1	
	Q9056	2SD0601ARL	TRANSISTOR	1	
	Q9057	2SD0601ARL	TRANSISTOR	1	
	Q9058	2SD0601ARL	TRANSISTOR	1	
	Q9059	2SD0601ARL	TRANSISTOR	1	
	Q9060	2SD0601ARL	TRANSISTOR	1	
	Q9061	2SD0601ARL	TRANSISTOR	1	
	Q9805	2SD0601ARL	TRANSISTOR	1	
	Q9806	2SD0601ARL	TRANSISTOR	1	
	Q9807	B1MBDDA00003	FET	1	
	Q9808	B1MBDDA00015	FET	1	
	Q9809	B1MBDDA00003	FET	1	
	Q16001	B1JAEN000004	TRANSISTOR	1	
	Q16002	B1JAEN000004	TRANSISTOR	1	
	Q16003	B1JAEN000004	TRANSISTOR	1	
	Q16004	B1JAEN000004	TRANSISTOR	1	
	Q16005	B1JAEN000004	TRANSISTOR	1	
	Q16021	B1JAEN000004	TRANSISTOR	1	
	Q16022	B1JAEN000004	TRANSISTOR	1	
	Q16023	B1JAEN000004	TRANSISTOR	1	
	Q16024	B1JAEN000004	TRANSISTOR	1	
	Q16025	B1JAEN000004	TRANSISTOR	1	
	Q16041	B1JAEN000003	TRANSISTOR	1	
	Q16042	B1JAEN000003	TRANSISTOR	1	
	Q16043	B1JAEN000003	TRANSISTOR	1	
	Q16051	B1JAEN000003	TRANSISTOR	1	
	Q16052	B1JAEN000003	TRANSISTOR	1	
	Q16053	B1JAEN000003	TRANSISTOR	1	
	Q16055	B1HFPFA00001	TRANSISTOR	1	
	Q16056	B1HFPFA00001	TRANSISTOR	1	
	Q16101	2SK4174000RP	FET	1	
	Q16102	2SK4175000LZ	FET	1	
	Q16141	B1HFPFA00001	TRANSISTOR	1	
	Q16161	B1HFPFA00001	TRANSISTOR	1	
	Q16191	B1HFPFA00001	TRANSISTOR	1	
	Q16251	2SD0601ARL	TRANSISTOR	1	
	Q16280	2SD0601ARL	TRANSISTOR	1	
	Q16301	B1CBGD000001	FET	1	
	Q16302	B1CFNG000001	FET	1	
	Q16304	2SB0709ASL	TRANSISTOR	1	
	Q16331	2SK4174000RP	FET	1	
	Q16339	2SK417300L	FET	1	
	Q16398	B1HFPFA00001	TRANSISTOR	1	
	Q16399	B1HFPFA00001	TRANSISTOR	1	
	Q16401	2PG0060A00RP	TRANSISTOR	1	
	Q16402	2PG0060A00RP	TRANSISTOR	1	
	Q16403	2PG0060A00RP	TRANSISTOR	1	
	Q16404	2PG0060A00RP	TRANSISTOR	1	
	Q16406	2PG0060A00RP	TRANSISTOR	1	
	Q16421	B1JAEP000004	TRANSISTOR	1	
	Q16422	B1JAEP000004	TRANSISTOR	1	
	Q16423	B1JAEP000004	TRANSISTOR	1	
	Q16424	B1JAEP000004	TRANSISTOR	1	
	Q16425	B1JAEP000004	TRANSISTOR	1	
	Q16441	B1JAEP000003	TRANSISTOR	1	
	Q16442	B1JAEP000003	TRANSISTOR	1	
	Q16443	B1JAEP000003	TRANSISTOR	1	
	Q16444	B1JAEP000003	TRANSISTOR	1	
	Q16451	B1JAEP000003	TRANSISTOR	1	
	Q16452	B1JAEP000003	TRANSISTOR	1	
	Q16453	B1JAEP000003	TRANSISTOR	1	
	Q16454	B1JAEP000003	TRANSISTOR	1	
	Q16471	B1ABCF000231	TRANSISTOR	1	
	Q16501	B1HFPFA00001	TRANSISTOR	1	
	Q16502	B1HFPFA00001	TRANSISTOR	1	
	Q16503	B1HFPFA00001	TRANSISTOR	1	
	Q16521	B1HFPFA00001	TRANSISTOR	1	

Safety	Ref. No.	Part No.	Part Name & Description	Pcs	Remarks
	Q16522	B1HFPFA00001	TRANSISTOR	1	
	Q16523	B1HFPFA00001	TRANSISTOR	1	
	Q16531	B1HFPFA00001	TRANSISTOR	1	
	Q16532	B1HFPFA00001	TRANSISTOR	1	
	Q16551	B1HFPFA00001	TRANSISTOR	1	
	Q16552	B1HFPFA00001	TRANSISTOR	1	
	Q16601	B1DEET000002	FET	1	
	Q16602	2SD0601AQL	TRANSISTOR	1	
	Q16603	2SB0709ASL	TRANSISTOR	1	
	Q16604	B1CHPM000001	FET	1	
	Q16606	2SD0601AQL	TRANSISTOR	1	
	Q16607	B1CBGD000001	FET	1	
	Q16609	B1CFHL000002	FET	1	
	Q16621	2SK4208000RP	FET	1	
	Q16622	2SK4208000RP	FET	1	
	Q16623	2SK4208000RP	FET	1	
	Q16642	B1JADN000004	TRANSISTOR	1	
	Q16643	B1JADN000004	TRANSISTOR	1	
	Q16644	B1JADN000004	TRANSISTOR	1	
	Q16661	B1JAER000004	TRANSISTOR	1	
	Q16662	2SD0601AQL	TRANSISTOR	1	
	Q16663	2SB0709ASL	TRANSISTOR	1	
	Q16664	B1HFPFA00001	TRANSISTOR	1	
	Q16665	B1ABCF000231	TRANSISTOR	1	
	Q16667	B1ADCN000007	TRANSISTOR	1	
	Q16701	B1ADCN000007	TRANSISTOR	1	
	Q16702	B1ABCF000231	TRANSISTOR	1	
	Q16743	2SD0601ARL	TRANSISTOR	1	
	Q16762	B1ADNF000006	TRANSISTOR	1	
	Q16781	B1HFPFA00001	TRANSISTOR	1	
	Q16801	B1ADCN000007	TRANSISTOR	1	
	Q16810	B1ABCF000231	TRANSISTOR	1	
	Q16814	B1ABCN000007	TRANSISTOR	1	
	Q16815	B1ABCN000007	TRANSISTOR	1	
	Q16816	2SD0601AQL	TRANSISTOR	1	
	Q16817	2SD0601AQL	TRANSISTOR	1	
	Q16871	2SB0709ARL	TRANSISTOR	1	
	Q16872	2SB0709ARL	TRANSISTOR	1	
	Q16873	B1ABCF000231	TRANSISTOR	1	
	Q16874	B1CBGD000001	FET	1	
	Q16875	B1ABCF000231	TRANSISTOR	1	
	Q16876	B1ABCF000231	TRANSISTOR	1	
	Q16879	B1ABCF000231	TRANSISTOR	1	
	R853	ERJ6GEYJ472V	M 4.7K OHM J 1/10W	1	
	R855	ERJ6GEYJ472V	M 4.7K OHM J 1/10W	1	
	R856	ERJ6GEYJ472V	M 4.7K OHM J 1/10W	1	
	R857	ERJ6GEYJ472V	M 4.7K OHM J 1/10W	1	
	R859	ERJ6ENF2101	M2.10KOHM, 1/10W	1	
	R861	ERJ6GEYJ472V	M 4.7K OHM J 1/10W	1	
	R864	D0GDR00Z0002	M 0 OHM, 1/10W	1	
	R869	ERJ6GEYJ102V	M 1K OHM J 1/10W	1	
	R871	ERJ6ENF1302	M 13KOHM, 1/10W	1	
	R872	ERJ6ENF3300	M 330 OHM, 1/10W	1	
	R874	ERJ6GEYJ471	M 470 OHM,J,1/10W	1	
	R880	D0GDR00Z0002	M 0 OHM, 1/10W	1	
	R883	D0GDR00Z0002	M 0 OHM, 1/10W	1	
	R884	D0GDR00Z0002	M 0 OHM, 1/10W	1	
	R891	ERJ6GEY0R00V	M 0 OHM J 1/10W	1	
	R1100	ERJ2GEJ101	M 100 OHM, J,0.063W	1	
	R1101	D0YAR0000007	M 0 OHM 1/4W	1	
	R1102	ERJ2GEJ101	M 100 OHM, J,0.063W	1	
	R1103	ERJ2RKD330	M 33 OHM, J, 2W	1	
	R1104	ERJ2GEJ473	M 47KOHM, J,0.063W	1	
	R1105	ERJ2GEJ101	M 100 OHM, J,0.063W	1	

Safety	Ref. No.	Part No.	Part Name & Description	Pcs	Remarks
	R1106	ERJ2GEJ101	M 100 OHM, J,0.063W	1	
	R1107	ERJ2GEJ101	M 100 OHM, J,0.063W	1	
	R1108	ERJ2GEJ101	M 100 OHM, J,0.063W	1	
	R1109	ERJ2GEJ101	M 100 OHM, J,0.063W	1	
	R1110	ERJ2GEJ473	M 47KOHM, J,0.063W	1	
	R1124	ERJ2GEJ220	M 22 OHM, J,0.063W	1	
	R1125	ERJ2GEJ220	M 22 OHM, J,0.063W	1	
	R1134	ERJ2GEJ101	M 100 OHM, J,0.063W	1	
	R1139	ERJ2GEJ473	M 47KOHM, J,0.063W	1	
	R1146	ERJ2GEJ102X	M 1K OHM J 1/4W	1	
	R1147	ERJ2GEJ103	M 10KOHM, J,0.063W	1	
	R1148	ERJ2GEJ473	M 47KOHM, J,0.063W	1	
	R1153	ERJ2GEJ821	M 820 OHM, J,0.063W	1	
	R1157	ERJ2GEJ473	M 47KOHM, J,0.063W	1	
	R1162	ERJ2GEJ101	M 100 OHM, J,0.063W	1	
	R1164	ERJ2GEJ103	M 10KOHM, J,0.063W	1	
	R1166	ERJ2GEJ104	M 100KOHM, J,0.063W	1	
	R1169	ERJ2GEJ683	M 68KOHM, J,0.063W	1	
	R1170	ERJ2GEJ333	M 33KOHM, J,0.063W	1	
	R1171	ERJ2GEJ683	M 68KOHM, J,0.063W	1	
	R1172	ERJ2GEJ333	M 33KOHM, J,0.063W	1	
	R1173	ERJ2GEJ331	M 330 OHM, J,0.063W	1	
	R1174	D0YAR0000007	M 0 OHM 1/4W	1	
	R1175	D0YAR0000007	M 0 OHM 1/4W	1	
	R1179	ERJ2GEJ101	M 100 OHM, J,0.063W	1	
	R1181	ERJ2GEJ101	M 100 OHM, J,0.063W	1	
	R1182	ERJ2GED273X	M 27KOHM ,J,0.063W	1	
	R1183	ERJ2GEJ220	M 22 OHM, J,0.063W	1	
	R1184	ERJ2GEJ220	M 22 OHM, J,0.063W	1	
	R1194	ERJ2GEJ683	M 68KOHM, J,0.063W	1	
	R1196	ERJ2GEJ473	M 47KOHM, J,0.063W	1	
	R1197	ERJ2GEJ103	M 10KOHM, J,0.063W	1	
	R1200	ERJ2GEJ472	M 4.7KOHM, J,0.063W	1	
	R1201	ERJ2GEJ472	M 4.7KOHM, J,0.063W	1	
	R1203	ERJ2GEJ473	M 47KOHM, J,0.063W	1	
	R1205	ERJ2GEJ220	M 22 OHM, J,0.063W	1	
	R1206	ERJ2GEJ220	M 22 OHM, J,0.063W	1	
	R1208	ERJ2GEJ103	M 10KOHM, J,0.063W	1	
	R1209	ERJ2GEJ472	M 4.7KOHM, J,0.063W	1	
	R1210	ERJ2GEJ473	M 47KOHM, J,0.063W	1	
	R1211	ERJ2GEJ473	M 47KOHM, J,0.063W	1	

Safety	Ref. No.	Part No.	Part Name & Description	Pcs	Remarks
	R1216	ERJ2GEJ103	M 10KOHM, J,0.063W	1	
	R1217	ERJ2GEJ104	M 100KOHM, J,0.063W	1	
	R1218	ERJ2GEJ103	M 10KOHM, J,0.063W	1	
	R1219	ERJ2GEJ103	M 10KOHM, J,0.063W	1	
	R1220	ERJ2GEJ103	M 10KOHM, J,0.063W	1	
	R1221	D1BB7151A055	M7.15KOHM, 1/10W	1	
	R1222	ERJ2GEJ473	M 47KOHM, J,0.063W	1	
	R1229	ERJ2GEJ101	M 100 OHM, J,0.063W	1	
	R1236	ERJ2GEJ473	M 47KOHM, J,0.063W	1	
	R1237	ERJ2GEJ102X	M 1K OHM J 1/4W	1	
	R1238	ERJ2GEJ473	M 47KOHM, J,0.063W	1	
	R1239	D0YAR0000007	M 0 OHM 1/4W	1	
	R1243	ERJ2GEJ473	M 47KOHM, J,0.063W	1	
	R1251	ERJ2GEJ473	M 47KOHM, J,0.063W	1	
	R1255	ERJ2GEJ102X	M 1K OHM J 1/4W	1	
	R2000	D0YAR0000007	M 0 OHM 1/4W	1	
	R2001	D0YAR0000007	M 0 OHM 1/4W	1	
	R2002	ERJ2GEJ681	M 680 OHM, J,0.063W	1	
	R2003	ERJ2GEJ105	M 1MOHM, J,0.063W	1	
	R2006	ERJ2GEJ471	M 470 OHM, J,0.063W	1	
	R2007	ERJ2GEJ221	M 220 OHM, J,0.063W	1	
	R2008	ERJ2GEJ471	M 470 OHM, J,0.063W	1	
	R2015	ERJ2GEJ103	M 10KOHM, J,0.063W	1	
	R2016	ERJ2GEJ103	M 10KOHM, J,0.063W	1	
	R2017	ERJ2GEJ103	M 10KOHM, J,0.063W	1	
	R2018	ERJ2GEJ103	M 10KOHM, J,0.063W	1	
	R2019	D1BB2002A055	M 20KOHM, 1/10W	1	
	R2020	D1BB2001A055	M 2KOHM, 1/10W	1	
	R2023	ERJ2GEJ103	M 10KOHM, J,0.063W	1	
	R2026	D1BB1203A055	M 120KOHM, 1/10W	1	
	R2027	D1BB7502A055	M 75KOHM, 1/10W	1	
	R2047	D1BB2002A055	M 20KOHM, 1/10W	1	
	R2048	D1BB2002A055	M 20KOHM, 1/10W	1	
	R2050	D1BB2002A055	M 20KOHM, 1/10W	1	
	R2051	D1BB2002A055	M 20KOHM, 1/10W	1	
	R2052	ERJ6GEYJ331V	M 330 OHM J 1/ 10W	1	
	R2053	D0YAR0000007	M 0 OHM 1/4W	1	
	R2057	ERJ2GEJ102X	M 1K OHM J 1/4W	1	
	R2058	ERJ2GEJ103	M 10KOHM, J,0.063W	1	
	R2063	ERJ2GEJ101	M 100 OHM, J,0.063W	1	
	R2064	ERJ2GEJ101	M 100 OHM, J,0.063W	1	
	R2065	ERJ2GEJ823	M 82KOHM, J,0.063W	1	
	R2068	D0YAR0000007	M 0 OHM 1/4W	1	
	R2071	ERJ2GEJ104	M 100KOHM, J,0.063W	1	
	R2072	ERJ2GEJ104	M 100KOHM, J,0.063W	1	
	R2073	ERJ6GEYG681	M 680 OHM,J,1/ 10W	1	
	R2074	D1BB6802A055	M 68KOHM, 1/10W	1	
	R2075	D1BB1583A055	M 158KOHM, 1/10W	1	
	R2089	ERJ2GEJ153	M 15KOHM ,J,0.063W	1	

Safety	Ref. No.	Part No.	Part Name & Description	Pcs	Remarks
	R2090	ERJ2GEJ153	M 15KOHM ,J,0.063W	1	
	R2092	ERJ2GEJ103	M 10KOHM, J,0.063W	1	
	R2093	ERJ2GEJ103	M 10KOHM, J,0.063W	1	
	R2095	ERJ2GEJ473	M 47KOHM, J,0.063W	1	
	R2096	ERJ2GEJ473	M 47KOHM, J,0.063W	1	
	R2097	ERJ2GEJ105	M 1MOHM, J,0.063W	1	
	R2098	ERJ2GEJ103	M 10KOHM, J,0.063W	1	
	R2108	ERJ6GEYJ150V	M 15 OHM,J,1/10W	1	
	R2111	ERJ2GEJ103	M 10KOHM, J,0.063W	1	
	R2114	ERJ2GEJ222	M 2.2KOHM, J,0.063W	1	
	R2115	ERJ2GEJ222	M 2.2KOHM, J,0.063W	1	
	R2132	ERJ2GEJ471	M 470 OHM, J,0.063W	1	
	R2141	ERJ2GEJ102X	M 1K OHM J 1/4W	1	
	R2142	ERJ2GEJ222	M 2.2KOHM, J,0.063W	1	
	R2148	ERJ2RHD682X	M 6.8KOHM, J, 2W	1	
	R2149	ERJ2RHD682X	M 6.8KOHM, J, 2W	1	
	R2164	D1BB1003A055	M 100KOHM, 1/10W	1	
	R2165	D1BB3401A055	M 3.4KOHM, 1/10W	1	
	R2166	ERJ6GEYJ153V	M 15KOHM,J,1/10W	1	
	R2172	ERJ2GEJ680	M 68 OHM, J,0.063W	1	
	R2174	ERJ2GEJ221	M 220 OHM, J,0.063W	1	
	R2175	D1BB5600A055	M 600 OHM, 1/10W	1	
	R2176	ERJ6GEYJ271V	M 270 OHM J 1/ 10W	1	
	R2177	D0GBR00Z0002	M 0 OHM J 1/16W	1	
	R2178	D0GBR00Z0002	M 0 OHM J 1/16W	1	
	R2179	ERJ2GEJ221	M 220 OHM, J,0.063W	1	
	R2204	D0GBR00Z0002	M 0 OHM J 1/16W	1	
	R2205	D0GBR00Z0002	M 0 OHM J 1/16W	1	
	R2207	D0GBR00Z0002	M 0 OHM J 1/16W	1	
	R2208	ERJ2GEJ103	M 10KOHM, J,0.063W	1	
	R2211	ERJ2GEJ102X	M 1K OHM J 1/4W	1	
	R2270	EXB28V220J	RESISTOR ARRAY	1	
	R2271	EXB28V220J	RESISTOR ARRAY	1	
	R2272	D0GBR00Z0002	M 0 OHM J 1/16W	1	
	R2300	D1BB4701A055	M 4.7KOHM, 1/10W	1	
	R2506	D0GDR00Z0002	M 0 OHM, 1/10W	1	
	R2507	D0GDR00Z0002	M 0 OHM, 1/10W	1	
	R2516	ERJ3GEYJ223	M 22KOHM,J,1/16W	1	
	R2517	ERJ3GEYJ470	M 47 OHM,J,1/16W	1	
	R2520	ERJ3GEYJ224	M 220KOHM,J,1/ 16W	1	
	R2524	D0GB473JA057	M 47KOHM,J,1/16W	1	
	R2525	D1BB60400001	M 604 OHM, 1/10W	1	
	R2530	D0GB473JA057	M 47KOHM,J,1/16W	1	
	R2531	D1BB2700A055	M 270 OHM, 1/10W	1	
	R2542	D0GB473JA057	M 47KOHM,J,1/16W	1	
	R2556	D0GB103JA041	M 10K OHM J 1/ 16W	1	
	R2557	ERJ3GEYJ223	M 22KOHM,J,1/16W	1	
	R2601	ERJ2GEJ560X	M 56 OHM, J,0.063W	1	
	R2602	ERJ2GEJ560X	M 56 OHM, J,0.063W	1	
	R2603	ERJ2GEJ560X	M 56 OHM, J,0.063W	1	
	R2605	ERJ2GEJ560X	M 56 OHM, J,0.063W	1	
	R2606	ERJ2GEJ560X	M 56 OHM, J,0.063W	1	
	R2607	EXB2HV560JV	RESISTOR ARRAY	1	
	R2608	EXB2HV560JV	RESISTOR ARRAY	1	

Safety	Ref. No.	Part No.	Part Name & Description	Pcs	Remarks
	R2609	ERJ2GEJ560X	M 56 OHM, J,0.063W	1	
	R2610	ERJ2GEJ560X	M 56 OHM, J,0.063W	1	
	R2611	EXB2HV560JV	RESISTOR ARRAY	1	
	R2612	ERJ2GEJ560X	M 56 OHM, J,0.063W	1	
	R2613	ERJ2GEJ560X	M 56 OHM, J,0.063W	1	
	R2614	ERJ2GEJ103	M 10KOHM, J,0.063W	1	
	R2619	ERJ2GEJ680	M 68 OHM, J,0.063W	1	
	R2620	D0YAR0000007	M 0 OHM 1/4W	1	
	R2621	D0YAR0000007	M 0 OHM 1/4W	1	
	R2622	ERJ2GEJ103	M 10KOHM, J,0.063W	1	
	R2623	ERJ2GEJ103	M 10KOHM, J,0.063W	1	
	R2624	ERJ2RKD330	M 33 OHM, J, 2W	1	
	R2625	ERJ2RKD330	M 33 OHM, J, 2W	1	
	R2626	EXB2HV330JV	RESISTOR ARRAY	1	
	R2631	ERJ2RKD330	M 33 OHM, J, 2W	1	
	R2632	ERJ2RKD330	M 33 OHM, J, 2W	1	
	R2633	EXB2HV330JV	RESISTOR ARRAY	1	
	R2634	ERJ2GEJ221	M 220 OHM, J,0.063W	1	
	R2635	ERJ2GEJ221	M 220 OHM, J,0.063W	1	
	R2636	ERJ2RKD330	M 33 OHM, J, 2W	1	
	R2637	ERJ2RKD330	M 33 OHM, J, 2W	1	
	R2638	EXB2HV330JV	RESISTOR ARRAY	1	
	R2644	ERJ2RKD330	M 33 OHM, J, 2W	1	
	R2645	ERJ2RKD330	M 33 OHM, J, 2W	1	
	R2646	EXB28V470JX	RESISTOR ARRAY	1	
	R2647	EXB28V470JX	RESISTOR ARRAY	1	
	R2648	EXB28V470JX	RESISTOR ARRAY	1	
	R2649	EXB28V470JX	RESISTOR ARRAY	1	
	R2650	ERJ2GEJ470	M 47 OHM, J,0.063W	1	
	R2651	ERJ2GEJ470	M 47 OHM, J,0.063W	1	
	R2652	ERJ2GEJ680	M 68 OHM, J,0.063W	1	
	R2653	ERJ2GEJ240	M 24 OHM, J,0.063W	1	
	R2654	ERJ2GEJ240	M 24 OHM, J,0.063W	1	
	R2655	ERJ2GEJ470	M 47 OHM, J,0.063W	1	
	R2656	ERJ2GEJ220	M 22 OHM, J,0.063W	1	
	R2657	ERJ2GEJ680	M 68 OHM, J,0.063W	1	
	R2658	EXB28V330J	RESISTOR ARRAY	1	
	R2659	EXB28V330J	RESISTOR ARRAY	1	
	R2660	EXB28V330J	RESISTOR ARRAY	1	
	R2661	EXB28V330J	RESISTOR ARRAY	1	
	R2662	ERJ2GEJ680	M 68 OHM, J,0.063W	1	
	R2663	EXB28V680JX	RESISTOR ARRAY	1	
	R2664	EXB28V680JX	RESISTOR ARRAY	1	
	R2665	ERJ2GEJ680	M 68 OHM, J,0.063W	1	
	R2666	EXB28V680JX	RESISTOR ARRAY	1	
	R2667	ERJ2GEJ680	M 68 OHM, J,0.063W	1	
	R2669	EXB28V680JX	RESISTOR ARRAY	1	
	R2670	ERJ2GEJ680	M 68 OHM, J,0.063W	1	
	R2671	ERJ2GEJ680	M 68 OHM, J,0.063W	1	
	R2672	EXB28V680JX	RESISTOR ARRAY	1	
	R2673	EXB28V680JX	RESISTOR ARRAY	1	
	R2674	EXB28V680JX	RESISTOR ARRAY	1	
	R2675	EXB28V680JX	RESISTOR ARRAY	1	
	R2676	ERJ2GEJ101	M 100 OHM, J,0.063W	1	

Safety	Ref. No.	Part No.	Part Name & Description	Pcs	Remarks
	R2677	ERJ2GEJ101	M 100 OHM, J,0.063W	1	
	R2703	D1BB5R10A068	M 5.1 OHM, 1/10W	1	
	R2704	ERJ2GEJ680	M 68 OHM, J,0.063W	1	
	R2705	ERJ2GEJ101	M 100 OHM, J,0.063W	1	
	R2709	ERJ2GEJ103	M 10KOHM, J,0.063W	1	
	R2710	ERJ2GEJ680	M 68 OHM, J,0.063W	1	
	R2711	ERJ2GEJ680	M 68 OHM, J,0.063W	1	
	R2712	ERJ2GEJ103	M 10KOHM, J,0.063W	1	
	R2715	D0GBR00Z0002	M 0 OHM J 1/16W	1	
	R2733	D0YAR0000007	M 0 OHM 1/4W	1	
	R3099	ERJ2GEJ473	M 47KOHM, J,0.063W	1	
	R3100	ERJ2GEJ473	M 47KOHM, J,0.063W	1	
	R3103	EXB28VR000X	RESISTOR ARRAY	1	
	R3104	EXB28VR000X	RESISTOR ARRAY	1	
	R3105	D0YAR0000007	M 0 OHM 1/4W	1	
	R3106	D0YAR0000007	M 0 OHM 1/4W	1	
	R3107	D0YAR0000007	M 0 OHM 1/4W	1	
	R3108	D0YAR0000007	M 0 OHM 1/4W	1	
	R3109	D0YAR0000007	M 0 OHM 1/4W	1	
	R3110	ERJ6GEYJ223	M 22KOHM,J,1/10W	1	
	R3111	ERJ6GEYJ223	M 22KOHM,J,1/10W	1	
	R3112	ERJ6GEYJ223	M 22KOHM,J,1/10W	1	
	R3113	ERJ6GEYJ223	M 22KOHM,J,1/10W	1	
	R3114	ERJ6GEYJ223	M 22KOHM,J,1/10W	1	
	R3115	ERJ6GEYJ223	M 22KOHM,J,1/10W	1	
	R3124	ERJ6RED750	M 75 OHM, 1/10W	1	
	R3125	ERJ2GEJ222	M 2.2KOHM, J,0.063W	1	
	R3126	ERJ6RED750	M 75 OHM, 1/10W	1	
	R3127	ERJ2GEJ222	M 2.2KOHM, J,0.063W	1	
	R3130	ERJ2GEJ104	M 100KOHM, J,0.063W	1	
	R3131	ERJ2GEJ104	M 100KOHM, J,0.063W	1	
	R3133	D0YAR0000007	M 0 OHM 1/4W	1	
	R3136	D0YAR0000007	M 0 OHM 1/4W	1	
	R3137	ERJ2GEJ473	M 47KOHM, J,0.063W	1	
	R3138	ERJ2GEJ221	M 220 OHM, J,0.063W	1	
	R3139	ERJ2GEJ221	M 220 OHM, J,0.063W	1	
	R3144	ERJ2GEJ221	M 220 OHM, J,0.063W	1	
	R3145	ERJ2GEJ221	M 220 OHM, J,0.063W	1	
	R3146	ERJ2GEJ221	M 220 OHM, J,0.063W	1	
	R3147	D0YAR0000007	M 0 OHM 1/4W	1	
	R3148	D0YAR0000007	M 0 OHM 1/4W	1	
	R3150	ERJ2GEJ221	M 220 OHM, J,0.063W	1	
	R3151	ERJ2GEJ221	M 220 OHM, J,0.063W	1	
	R3152	ERJ2GEJ221	M 220 OHM, J,0.063W	1	
	R3154	ERJ2GEJ221	M 220 OHM, J,0.063W	1	
	R3155	ERJ2GEJ221	M 220 OHM, J,0.063W	1	
	R3172	ERJ2GEJ473	M 47KOHM, J,0.063W	1	
	R3173	ERJ2GEJ473	M 47KOHM, J,0.063W	1	
	R3174	ERJ2GEJ221	M 220 OHM, J,0.063W	1	
	R3175	ERJ2GEJ473	M 47KOHM, J,0.063W	1	

Safety	Ref. No.	Part No.	Part Name & Description	Pcs	Remarks
	R3176	ERJ6RED750	M 75 OHM, 1/10W	1	
	R3187	ERJ2GEJ104	M 100KOHM, J,0.063W	1	
	R3189	ERJ2GEJ104	M 100KOHM, J,0.063W	1	
	R3208	ERJ6ENF1500	M 150 OHM, 1/10W	1	
	R3212	ERJ6ENF1500	M 150 OHM, 1/10W	1	
	R3213	ERJ6ENF1500	M 150 OHM, 1/10W	1	
	R3217	ERJ6ENF1500	M 150 OHM, 1/10W	1	
	R3218	ERJ6ENF1500	M 150 OHM, 1/10W	1	
	R3219	ERJ6ENF1500	M 150 OHM, 1/10W	1	
	R3220	ERJ6RED750	M 75 OHM, 1/10W	1	
	R3238	ERJ6RED750	M 75 OHM, 1/10W	1	
	R3239	ERJ6RED750	M 75 OHM, 1/10W	1	
	R3240	ERJ6RED750	M 75 OHM, 1/10W	1	
	R3343	ERJ6ENF1500	M 150 OHM, 1/10W	1	
	R3344	ERJ6ENF1500	M 150 OHM, 1/10W	1	
	R3364	ERJ2GEJ221	M 220 OHM, J,0.063W	1	
	R3368	ERJ2GEJ472	M 4.7KOHM, J,0.063W	1	
	R3369	ERJ6ENF1500	M 150 OHM, 1/10W	1	
	R3370	ERJ2GEJ472	M 4.7KOHM, J,0.063W	1	
	R3377	D0YAR0000007	M 0 OHM 1/4W	1	
	R3383	D0YAR0000007	M 0 OHM 1/4W	1	
	R3384	ERJ2GEJ473	M 47KOHM, J,0.063W	1	
	R3385	ERJ2GEJ473	M 47KOHM, J,0.063W	1	
	R3388	ERJ2GEJ221	M 220 OHM, J,0.063W	1	
	R3389	ERJ2GEJ221	M 220 OHM, J,0.063W	1	
	R3390	ERJ2GEJ221	M 220 OHM, J,0.063W	1	
	R3391	ERJ2GEJ221	M 220 OHM, J,0.063W	1	
	R3392	ERJ2GEJ331	M 330 OHM, J,0.063W	1	
	R3393	ERJ6RED750	M 75 OHM, 1/10W	1	
	R3395	ERJ2GEJ221	M 220 OHM, J,0.063W	1	
	R3396	ERJ2GEJ221	M 220 OHM, J,0.063W	1	
	R3397	ERJ2GEJ221	M 220 OHM, J,0.063W	1	
	R3400	ERJ2GEJ221	M 220 OHM, J,0.063W	1	
	R3402	ERJ2GEJ331	M 330 OHM, J,0.063W	1	
	R3403	D0YAR0000007	M 0 OHM 1/4W	1	
	R3404	ERJ2GEJ680	M 68 OHM, J,0.063W	1	
	R3405	ERJ2GEJ680	M 68 OHM, J,0.063W	1	
	R3406	ERJ2GEJ680	M 68 OHM, J,0.063W	1	
	R3410	ERJ2GEJ473	M 47KOHM, J,0.063W	1	
	R3411	ERJ2GEJ221	M 220 OHM, J,0.063W	1	
	R3412	ERJ2GEJ221	M 220 OHM, J,0.063W	1	
	R3414	ERJ2GEJ274	M 270KOHM, J,0.063W	1	
	R3415	ERJ2GEJ473	M 47KOHM, J,0.063W	1	
	R3418	ERJ2GEJ331	M 330 OHM, J,0.063W	1	
	R3419	ERJ2GEJ472	M 4.7KOHM, J,0.063W	1	
	R3420	ERJ6RED750	M 75 OHM, 1/10W	1	
	R3421	ERJ6RED750	M 75 OHM, 1/10W	1	
	R3423	ERJ2GEJ220	M 22 OHM, J,0.063W	1	
	R3424	ERJ2GEJ220	M 22 OHM, J,0.063W	1	
	R3439	ERJ6RED750	M 75 OHM, 1/10W	1	

Safety	Ref. No.	Part No.	Part Name & Description	Pcs	Remarks
	R3440	ERJ2GEJ221	M 220 OHM, J,0.063W	1	
	R3441	ERJ2GEJ104	M 100KOHM, J,0.063W	1	
	R3442	ERJ3RBD361	M 360 OHM,J,1/ 16W	1	
	R3443	ERJ3RBD361	M 360 OHM,J,1/ 16W	1	
	R3449	D0YAR0000007	M 0 OHM 1/4W	1	
	R3450	D0YAR0000007	M 0 OHM 1/4W	1	
	R3451	ERJ2GEJ473	M 47KOHM, J,0.063W	1	
	R3452	ERJ2GEJ274	M 270KOHM, J,0.063W	1	
	R3457	ERJ2GEJ473	M 47KOHM, J,0.063W	1	
	R3458	ERJ6ENF1500	M 150 OHM, 1/10W	1	
	R3459	ERJ6ENF1500	M 150 OHM, 1/10W	1	
	R3460	ERJ6ENF1500	M 150 OHM, 1/10W	1	
	R3461	ERJ2GEJ680	M 68 OHM, J,0.063W	1	
	R3462	ERJ2GEJ680	M 68 OHM, J,0.063W	1	
	R3463	ERJ2GEJ680	M 68 OHM, J,0.063W	1	
	R3465	ERJ6ENF1500	M 150 OHM, 1/10W	1	
	R3470	ERJ6ENF1500	M 150 OHM, 1/10W	1	
	R3475	D0YAR0000007	M 0 OHM 1/4W	1	
	R3480	D0YAR0000007	M 0 OHM 1/4W	1	
	R3484	ERJ6ENF1500	M 150 OHM, 1/10W	1	
	R3485	ERJ6ENF1500	M 150 OHM, 1/10W	1	
	R3489	D0YAR0000007	M 0 OHM 1/4W	1	
	R3490	D0YAR0000007	M 0 OHM 1/4W	1	
	R3491	D0YAR0000007	M 0 OHM 1/4W	1	
	R3492	D0YAR0000007	M 0 OHM 1/4W	1	
	R3495	ERJ2GEJ101	M 100 OHM, J,0.063W	1	
	R3497	ERJ2GEJ101	M 100 OHM, J,0.063W	1	
	R3508	ERJ2GEJ680	M 68 OHM, J,0.063W	1	
	R3509	ERJ2GEJ680	M 68 OHM, J,0.063W	1	
	R3511	ERJ2GEJ473	M 47KOHM, J,0.063W	1	
	R3512	ERJ2GEJ221	M 220 OHM, J,0.063W	1	
	R3513	ERJ2GEJ473	M 47KOHM, J,0.063W	1	
	R3516	D0YAR0000007	M 0 OHM 1/4W	1	
	R3517	D0YAR0000007	M 0 OHM 1/4W	1	
	R3716	ERJ6GEYJ184	M 180KOHM,J,1/ 10W	1	
	R3717	ERJ6GEYJ184	M 180KOHM,J,1/ 10W	1	
	R3721	D0GD103JA036	M 10KOHM,J,0.25W	1	
	R3751	ERJ6ENF1432	M14.3KOHM, 1/10W	1	
	R3753	ERJ6ENF1741	M1.74KOHM, 1/10W	1	
	R3758	ERJ6ENF6651	M6.65KOHM, 1/10W	1	
	R3767	ERJ6ENF7151	M7.15KOHM, 1/10W	1	
	R3801	ERJ2GEJ103	M 10KOHM, J,0.063W	1	
	R3802	ERJ2GEJ103	M 10KOHM, J,0.063W	1	
	R3803	ERJ2GEJ332	M 3.3KOHM, J,0.063W	1	
	R3804	ERJ2GEJ472	M 4.7KOHM, J,0.063W	1	
	R3805	ERJ2GEJ472	M 4.7KOHM, J,0.063W	1	
	R3806	ERJ2GEJ473	M 47KOHM, J,0.063W	1	
	R3807	ERJ2GEJ100	M 10 OHM, J,0.063W	1	
	R3808	ERJ2GEJ100	M 10 OHM, J,0.063W	1	
	R3809	ERJ2GEJ102X	M 1K OHM J 1/4W	1	
	R3810	ERJ2GEJ102X	M 1K OHM J 1/4W	1	

Safety	Ref. No.	Part No.	Part Name & Description	Pcs	Remarks
	R3811	D1BB4701A055	M 4.7KOHM, 1/10W	1	
	R3812	ERJ2GEJ103	M 10KOHM, J,0.063W	1	
	R3814	ERJ2GEJ472	M 4.7KOHM, J,0.063W	1	
	R3815	D0YAR0000007	M 0 OHM 1/4W	1	
	R3818	ERJ2GEJ103	M 10KOHM, J,0.063W	1	
	R3821	ERJ2RKD330	M 33 OHM, J, 2W	1	
	R3822	ERJ2GEJ102X	M 1K OHM J 1/4W	1	
	R3823	ERJ2GEJ103	M 10KOHM, J,0.063W	1	
	R3824	D0GA2R7JA014	M 2.7OHM, J,0.063W	1	
	R3825	D0GA2R7JA014	M 2.7OHM, J,0.063W	1	
	R3826	D0GA2R7JA014	M 2.7OHM, J,0.063W	1	
	R3827	D0GA2R7JA014	M 2.7OHM, J,0.063W	1	
	R3828	D0GA2R7JA014	M 2.7OHM, J,0.063W	1	
	R3829	D0GA2R7JA014	M 2.7OHM, J,0.063W	1	
	R3830	D0GA2R7JA014	M 2.7OHM, J,0.063W	1	
	R3831	D0GA2R7JA014	M 2.7OHM, J,0.063W	1	
	R3832	ERJ2GEJ472	M 4.7KOHM, J,0.063W	1	
	R3834	D1BB49R90002	M 49 OHM, 1/10W	1	
	R3840	ERJ2GEJ100	M 10 OHM, J,0.063W	1	
	R3841	ERJ2GEJ100	M 10 OHM, J,0.063W	1	
	R3845	ERJ2GEJ472	M 4.7KOHM, J,0.063W	1	
	R3847	D0YAR0000007	M 0 OHM 1/4W	1	
	R4029	EXB2HV680J	RESISTOR ARRAY	1	
	R4030	EXB2HV680J	RESISTOR ARRAY	1	
	R4031	ERJ2GEJ680	M 68 OHM, J,0.063W	1	
	R4032	ERJ2GEJ680	M 68 OHM, J,0.063W	1	
	R4033	ERJ2GEJ680	M 68 OHM, J,0.063W	1	
	R4034	D1BB7500A055	M 750 OHM, 1/10W	1	
	R4035	D1BB1241A055	M1.24KOHM, 1/10W	1	
	R4036	D0YAR0000007	M 0 OHM 1/4W	1	
	R4037	D0YAR0000007	M 0 OHM 1/4W	1	
	R4038	ERJ2GEJ681	M 680 OHM, J,0.063W	1	
	R4039	ERJ2GEJ102X	M 1K OHM J 1/4W	1	
	R4040	ERJ2GEJ681	M 680 OHM, J,0.063W	1	
	R4041	ERJ2GEJ102X	M 1K OHM J 1/4W	1	
	R4042	ERJ2GEJ102X	M 1K OHM J 1/4W	1	
	R4043	D0GB202JA057	M 2KOHM,J,1/16W	1	
	R4046	ERJ2GEJ101	M 100 OHM, J,0.063W	1	
	R4047	ERJ2GEJ101	M 100 OHM, J,0.063W	1	
	R4048	ERJ2GEJ103	M 10KOHM, J,0.063W	1	
	R4049	ERJ2GEJ473	M 47KOHM, J,0.063W	1	
	R4153	ERJ2GEJ473	M 47KOHM, J,0.063W	1	
	R4154	ERJ2GEJ473	M 47KOHM, J,0.063W	1	
	R4155	ERJ2GEJ103	M 10KOHM, J,0.063W	1	
	R4158	D0YAR0000007	M 0 OHM 1/4W	1	
	R4274	ERJ2GEJ220	M 22 OHM, J,0.063W	1	
	R4275	ERJ2GEJ680	M 68 OHM, J,0.063W	1	
	R4277	ERJ2GEJ680	M 68 OHM, J,0.063W	1	

Safety	Ref. No.	Part No.	Part Name & Description	Pcs	Remarks
	R4278	ERJ2GEJ680	M 68 OHM, J,0.063W	1	
	R4279	ERJ2GEJ680	M 68 OHM, J,0.063W	1	
	R4281	D0YAR0000007	M 0 OHM 1/4W	1	
	R4282	D0YAR0000007	M 0 OHM 1/4W	1	
	R4283	ERJ2GEJ680	M 68 OHM, J,0.063W	1	
	R4303	ERJ2GEJ103	M 10KOHM, J,0.063W	1	
	R4306	ERJ2GEJ101	M 100 OHM, J,0.063W	1	
	R4335	ERJ2GEJ332	M 3.3KOHM, J,0.063W	1	
	R4338	ERJ2GEJ473	M 47KOHM, J,0.063W	1	
	R4500	ERJ2GEJ103	M 10KOHM, J,0.063W	1	
	R4501	ERJ2GEJ103	M 10KOHM, J,0.063W	1	
	R4502	ERJ2RKD330	M 33 OHM, J, 2W	1	
	R4503	ERJ2RKD330	M 33 OHM, J, 2W	1	
	R4506	ERJ2GEJ680	M 68 OHM, J,0.063W	1	
	R4507	D0YAR0000007	M 0 OHM 1/4W	1	
	R4526	ERJ2GEJ102X	M 1K OHM J 1/4W	1	
	R4527	ERJ2GEJ102X	M 1K OHM J 1/4W	1	
	R4528	ERJ2GEJ103	M 10KOHM, J,0.063W	1	
	R4530	ERJ2GEJ103	M 10KOHM, J,0.063W	1	
	R4538	ERJ2GEJ473	M 47KOHM, J,0.063W	1	
	R4540	ERJ2GEJ473	M 47KOHM, J,0.063W	1	
	R4552	ERJ2GEJ220	M 22 OHM, J,0.063W	1	
	R4567	D1BB4701A055	M 4.7KOHM, 1/10W	1	
	R4587	D1BB1241A055	M1.24KOHM, 1/10W	1	
	R4588	D1BB7150A055	M 715 OHM, 1/10W	1	
	R4589	D1BB7150A055	M 715 OHM, 1/10W	1	
	R4592	D1BB7150A055	M 715 OHM, 1/10W	1	
	R4593	D1BB8060A055	M 806 OHM, 1/10W	1	
	R4596	ERJ6GEYJ102V	M 1K OHM J 1/10W	1	
	R4597	ERJ6GEYJ102V	M 1K OHM J 1/10W	1	
	R4598	ERJ6GEYJ102V	M 1K OHM J 1/10W	1	
	R4600	ERJ2GEJ680	M 68 OHM, J,0.063W	1	
	R4601	ERJ6GEYJ102V	M 1K OHM J 1/10W	1	
	R4603	ERJ2GEJ680	M 68 OHM, J,0.063W	1	
	R4604	ERJ2GEJ680	M 68 OHM, J,0.063W	1	
	R4606	D1BB9101A055	M 9.1KOHM, 1/10W	1	
	R4609	D0YAR0000007	M 0 OHM 1/4W	1	
	R4610	D0YAR0000007	M 0 OHM 1/4W	1	
	R4611	D1BB5601A055	M 5.6KOHM, 1/10W	1	
	R4613	ERJ2GEJ680	M 68 OHM, J,0.063W	1	
	R4614	ERJ2GEJ103	M 10KOHM, J,0.063W	1	
	R4615	ERJ2RKD330	M 33 OHM, J, 2W	1	
	R4619	D0YAR0000007	M 0 OHM 1/4W	1	
	R4621	D0YAR0000007	M 0 OHM 1/4W	1	
	R4626	ERJ3EKF3160	M 316 OHM, 1/16W	1	
	R4627	ERJ3EKF3160	M 316 OHM, 1/16W	1	
	R4628	ERJ2GEJ101	M 100 OHM, J,0.063W	1	
	R4629	ERJ2GEJ101	M 100 OHM, J,0.063W	1	
	R4631	D1BB4990A055	M 499 OHM, 1/10W	1	
	R4634	ERJ3EKF3160	M 316 OHM, 1/16W	1	
	R4635	EXB28V680JX	RESISTOR ARRAY	1	
	R4636	ERJ2GEJ680	M 68 OHM, J,0.063W	1	
	R4637	ERJ2GEJ680	M 68 OHM, J,0.063W	1	

Safety	Ref. No.	Part No.	Part Name & Description	Pcs	Remarks
	R4638	ERJ2GEJ680	M 68 OHM, J,0.063W	1	
	R4639	EXB28V680JX	RESISTOR ARRAY	1	
	R4640	EXB28V680JX	RESISTOR ARRAY	1	
	R4641	ERJ2GEJ220	M 22 OHM, J,0.063W	1	
	R4643	ERJ2GEJ220	M 22 OHM, J,0.063W	1	
	R4644	ERJ2GEJ472	M 4.7KOHM, J,0.063W	1	
	R4645	ERJ2GEJ680	M 68 OHM, J,0.063W	1	
	R4646	ERJ2GEJ680	M 68 OHM, J,0.063W	1	
	R4647	ERJ2GEJ680	M 68 OHM, J,0.063W	1	
	R4648	EXB28V330J	RESISTOR ARRAY	1	
	R4650	ERJ2GEJ680	M 68 OHM, J,0.063W	1	
	R4651	ERJ2GEJ680	M 68 OHM, J,0.063W	1	
	R4652	ERJ2GEJ473	M 47KOHM, J,0.063W	1	
	R4653	D0YAR0000007	M 0 OHM 1/4W	1	
	R4656	ERJ2GEJ222	M 2.2KOHM, J,0.063W	1	
	R4657	D0YAR0000007	M 0 OHM 1/4W	1	
	R4658	D0YAR0000007	M 0 OHM 1/4W	1	
	R4659	D0YAR0000007	M 0 OHM 1/4W	1	
	R4661	D0YAR0000007	M 0 OHM 1/4W	1	
	R4663	D0YAR0000007	M 0 OHM 1/4W	1	
	R4665	ERJ2GEJ473	M 47KOHM, J,0.063W	1	
	R4666	ERJ2GEJ473	M 47KOHM, J,0.063W	1	
	R4673	D0YAR0000007	M 0 OHM 1/4W	1	
	R4678	ERJ2GEJ680	M 68 OHM, J,0.063W	1	
	R4679	EXB28V680JX	RESISTOR ARRAY	1	
	R4680	ERJ2GEJ102X	M 1K OHM J 1/4W	1	
	R4681	ERJ2GEJ103	M 10KOHM, J,0.063W	1	
	R4683	ERJ2GEJ472	M 4.7KOHM, J,0.063W	1	
	R4685	ERJ2GEJ473	M 47KOHM, J,0.063W	1	
	R4686	ERJ2GEJ680	M 68 OHM, J,0.063W	1	
	R4687	ERJ2GEJ680	M 68 OHM, J,0.063W	1	
	R4689	ERJ2GEJ103	M 10KOHM, J,0.063W	1	
	R4690	ERJ2GEJ560X	M 56 OHM, J,0.063W	1	
	R4691	ERJ2GEJ220	M 22 OHM, J,0.063W	1	
	R4692	ERJ2GEJ680	M 68 OHM, J,0.063W	1	
	R4693	ERJ2GEJ680	M 68 OHM, J,0.063W	1	
	R4694	ERJ2GEJ680	M 68 OHM, J,0.063W	1	
	R4696	ERJ2GEJ680	M 68 OHM, J,0.063W	1	
	R4699	ERJ2GEJ680	M 68 OHM, J,0.063W	1	
	R4700	EXB28V680JX	RESISTOR ARRAY	1	
	R4701	ERJ2GEJ680	M 68 OHM, J,0.063W	1	
	R4704	ERJ2GEJ680	M 68 OHM, J,0.063W	1	
	R4705	ERJ2GEJ680	M 68 OHM, J,0.063W	1	
	R4706	ERJ2GEJ680	M 68 OHM, J,0.063W	1	
	R4707	ERJ2GEJ680	M 68 OHM, J,0.063W	1	
	R4708	ERJ2GEJ680	M 68 OHM, J,0.063W	1	

Safety	Ref. No.	Part No.	Part Name & Description	Pcs	Remarks
	R4711	ERJ2GEJ220	M 22 OHM, J,0.063W	1	
	R4712	ERJ2GEJ220	M 22 OHM, J,0.063W	1	
	R4713	ERJ2GEJ220	M 22 OHM, J,0.063W	1	
	R4714	ERJ2GEJ472	M 4.7KOHM, J,0.063W	1	
	R4715	ERJ2GEJ472	M 4.7KOHM, J,0.063W	1	
	R4716	ERJ2GEJ220	M 22 OHM, J,0.063W	1	
	R4717	ERJ2GEJ220	M 22 OHM, J,0.063W	1	
	R4720	ERJ2GEJ220	M 22 OHM, J,0.063W	1	
	R4721	ERJ2GEJ473	M 47KOHM, J,0.063W	1	
	R4722	ERJ2GEJ473	M 47KOHM, J,0.063W	1	
	R4723	ERJ2GEJ220	M 22 OHM, J,0.063W	1	
	R4724	ERJ2GEJ220	M 22 OHM, J,0.063W	1	
	R4726	ERJ2GEJ103	M 10KOHM, J,0.063W	1	
	R4727	ERJ2GEJ103	M 10KOHM, J,0.063W	1	
	R4728	ERJ2GEJ103	M 10KOHM, J,0.063W	1	
	R4729	ERJ2GEJ103	M 10KOHM, J,0.063W	1	
	R4731	ERJ2GEJ103	M 10KOHM, J,0.063W	1	
	R4732	ERJ2GEJ103	M 10KOHM, J,0.063W	1	
	R4733	ERJ2GEJ103	M 10KOHM, J,0.063W	1	
	R4736	ERJ2GEJ103	M 10KOHM, J,0.063W	1	
	R4737	ERJ2GEJ103	M 10KOHM, J,0.063W	1	
	R4742	D0YAR0000007	M 0 OHM 1/4W	1	
	R4743	D0YAR0000007	M 0 OHM 1/4W	1	
	R4749	D0YAR0000007	M 0 OHM 1/4W	1	
	R4750	D0YAR0000007	M 0 OHM 1/4W	1	
	R4755	ERJ2RHD272	M 2.7KOHM, J, 2W	1	
	R4756	ERJ2RHD272	M 2.7KOHM, J, 2W	1	
	R4757	ERJ2GEJ103	M 10KOHM, J,0.063W	1	
	R4758	ERJ2GEJ104	M 100KOHM, J,0.063W	1	
	R4759	ERJ2GEJ103	M 10KOHM, J,0.063W	1	
	R4760	ERJ2GEJ104	M 100KOHM, J,0.063W	1	
	R4761	ERJ2RHD272	M 2.7KOHM, J, 2W	1	
	R4762	ERJ2RHD272	M 2.7KOHM, J, 2W	1	
	R4763	ERJ2GEJ103	M 10KOHM, J,0.063W	1	
	R4764	ERJ2GEJ104	M 100KOHM, J,0.063W	1	
	R4765	ERJ2GEJ103	M 10KOHM, J,0.063W	1	
	R4766	ERJ2GEJ104	M 100KOHM, J,0.063W	1	
	R4810	ERJ2GEJ103	M 10KOHM, J,0.063W	1	
	R4811	ERJ2GEJ473	M 47KOHM, J,0.063W	1	
	R4812	ERJ2GEJ473	M 47KOHM, J,0.063W	1	
	R4813	ERJ2GEJ103	M 10KOHM, J,0.063W	1	
	R4814	ERJ2GEJ103	M 10KOHM, J,0.063W	1	
	R4817	ERJ2GEJ220	M 22 OHM, J,0.063W	1	
	R4832	ERJ2GEJ101	M 100 OHM, J,0.063W	1	
	R4833	ERJ2GEJ104	M 100KOHM, J,0.063W	1	
	R4834	ERJ2GEJ102X	M 1K OHM J 1/4W	1	
	R4841	ERJ2GEJ104	M 100KOHM, J,0.063W	1	
	R4842	ERJ2GEJ102X	M 1K OHM J 1/4W	1	
	R4844	ERJ2GEJ101	M 100 OHM, J,0.063W	1	
	R4853	ERJ2GEJ104	M 100KOHM, J,0.063W	1	
	R4854	ERJ2GEJ104	M 100KOHM, J,0.063W	1	
	R4856	ERJ2GEJ103	M 10KOHM, J,0.063W	1	
	R4857	ERJ2GEJ473	M 47KOHM, J,0.063W	1	
	R5024	ERJ2GEJ101	M 100 OHM, J,0.063W	1	
	R5025	D1BB2700A055	M 270 OHM, 1/10W	1	
	R5026	D1BB2700A055	M 270 OHM, 1/10W	1	
	R5049	ERJ2GEJ470	M 47 OHM, J,0.063W	1	
	R5050	ERJ2GEJ470	M 47 OHM, J,0.063W	1	
	R5051	ERJ2GEJ470	M 47 OHM, J,0.063W	1	
	R5052	ERJ2GEJ470	M 47 OHM, J,0.063W	1	
	R5053	ERJ2GEJ470	M 47 OHM, J,0.063W	1	
	R5054	ERJ2GEJ470	M 47 OHM, J,0.063W	1	
	R5055	ERJ2GEJ470	M 47 OHM, J,0.063W	1	
	R5056	ERJ2GEJ470	M 47 OHM, J,0.063W	1	
	R5057	ERJ2GEJ470	M 47 OHM, J,0.063W	1	
	R5058	ERJ2GEJ470	M 47 OHM, J,0.063W	1	
	R5059	ERJ2GEJ470	M 47 OHM, J,0.063W	1	
	R5060	ERJ2GEJ470	M 47 OHM, J,0.063W	1	
	R5061	ERJ2GEJ470	M 47 OHM, J,0.063W	1	
	R5062	ERJ2GEJ470	M 47 OHM, J,0.063W	1	
	R5063	ERJ2GEJ470	M 47 OHM, J,0.063W	1	
	R5064	ERJ2GEJ470	M 47 OHM, J,0.063W	1	
	R5065	ERJ2GEJ470	M 47 OHM, J,0.063W	1	
	R5066	ERJ2GEJ470	M 47 OHM, J,0.063W	1	
	R5067	ERJ2GEJ221	M 220 OHM, J,0.063W	1	
	R5068	ERJ2GEJ470	M 47 OHM, J,0.063W	1	
	R5070	ERJ2GEJ470	M 47 OHM, J,0.063W	1	
	R5071	ERJ2GEJ470	M 47 OHM, J,0.063W	1	
	R5074	ERJ2GEJ103	M 10KOHM, J,0.063W	1	
	R5075	D1BA75R0A014	M0.75KOHM, 1/10W	1	
	R5076	ERJ2GEJ301	M 300 OHM, J,0.063W	1	
	R5077	D0YAR0000007	M 0 OHM 1/4W	1	
	R5078	ERJ2GEJ221	M 220 OHM, J,0.063W	1	
	R5079	ERJ2GEJ103	M 10KOHM, J,0.063W	1	
	R5080	ERJ2GEJ103	M 10KOHM, J,0.063W	1	
	R5082	ERJ2GEJ103	M 10KOHM, J,0.063W	1	
	R5088	ERJ3GEYJ680	M 68 OHM,J,1/16W	1	
	R5092	D0GBR00Z0002	M 0 OHM J 1/16W	1	

Safety	Ref. No.	Part No.	Part Name & Description	Pcs	Remarks
	R5200	ERJ2GEJ680	M 68 OHM, J,0.063W	1	
	R5201	ERJ2GEJ680	M 68 OHM, J,0.063W	1	
	R5202	ERJ2GEJ680	M 68 OHM, J,0.063W	1	
	R5203	ERJ2GEJ680	M 68 OHM, J,0.063W	1	
	R5204	ERJ2GEJ472	M 4.7KOHM, J,0.063W	1	
	R5205	ERJ2GEJ472	M 4.7KOHM, J,0.063W	1	
	R5206	ERJ2GEJ472	M 4.7KOHM, J,0.063W	1	
	R5207	ERJ2GEJ472	M 4.7KOHM, J,0.063W	1	
	R5208	ERJ2GEJ105	M 1MOHM, J,0.063W	1	
	R5209	D0YAR0000007	M 0 OHM 1/4W	1	
	R5210	ERJ2GEJ103	M 10KOHM, J,0.063W	1	
	R5216	ERJ2GEJ472	M 4.7KOHM, J,0.063W	1	
	R5217	ERJ2GEJ472	M 4.7KOHM, J,0.063W	1	
	R5223	ERJ2GEJ101	M 100 OHM, J,0.063W	1	
	R5225	ERJ2GEJ680	M 68 OHM, J,0.063W	1	
	R5226	ERJ2GEJ332	M 3.3KOHM, J,0.063W	1	
	R5227	D0GB103JA041	M 10K OHM J 1/ 16W	1	
	R5229	D0GB103JA041	M 10K OHM J 1/ 16W	1	
	R5231	EXB2HV680J	RESISTOR ARRAY	1	
	R5232	EXB2HV680J	RESISTOR ARRAY	1	
	R5314	D0GBR00Z0002	M 0 OHM J 1/16W	1	
	R5316	D0YAR0000007	M 0 OHM 1/4W	1	
	R5321	D1BB4702A055	M 47KOHM, 1/10W	1	
	R5322	ERJ2GEJ104	M 100KOHM, J,0.063W	1	
	R5323	D1BB5602A055	M 56KOHM, 1/10W	1	
	R5324	ERJ2GEJ473	M 47KOHM, J,0.063W	1	
	R5325	D0YAR0000007	M 0 OHM 1/4W	1	
	R5326	D0YAR0000007	M 0 OHM 1/4W	1	
	R5327	D0YAR0000007	M 0 OHM 1/4W	1	
	R5328	D0YAR0000007	M 0 OHM 1/4W	1	
	R5329	D1BB2802A055	M 28KOHM, 1/10W	1	
	R5330	D1BB4752A055	M47.5KOHM, 1/10W	1	
	R5331	D1BB3602A055	M 36KOHM, 1/10W	1	
	R5332	D1BB3002A055	M 30KOHM, 1/10W	1	
	R5333	D1BB2802A055	M 28KOHM, 1/10W	1	
	R5334	D1BB2402A055	M 24KOHM, 1/10W	1	
	R5335	ERJ2GEJ680	M 68 OHM, J,0.063W	1	
	R5337	D0YAR0000007	M 0 OHM 1/4W	1	
	R5431	D0YAR0000007	M 0 OHM 1/4W	1	
	R5433	D1BB1002A055	M 10KOHM, 1/10W	1	
	R5434	D1BB2702A055	M 27KOHM, 1/10W	1	
	R5435	ERJ2GEJ332	M 3.3KOHM, J,0.063W	1	
	R5441	D0YAR0000007	M 0 OHM 1/4W	1	
	R5443	D1BB1002A055	M 10KOHM, 1/10W	1	
	R5444	D1BB2201A055	M 2.2KOHM, 1/10W	1	
	R5445	ERJ2GEJ103	M 10KOHM, J,0.063W	1	
	R5451	D1BB5602A055	M 56KOHM, 1/10W	1	
	R5452	D1BB4702A055	M 47KOHM, 1/10W	1	
	R5453	D1BB3002A055	M 30KOHM, 1/10W	1	
	R5456	D0YAR0000007	M 0 OHM 1/4W	1	
	R5459	D0YAR0000007	M 0 OHM 1/4W	1	
	R5503	ERJ6ENF2611	M2.61KOHM, 1/10W	1	
	R5504	ERJ6ENF1271	M1.27KOHM, 1/10W	1	
	R5506	ERJ6GEYJ103V	M 10K OHM J 1/ 10W	1	

Safety	Ref. No.	Part No.	Part Name & Description	Pcs	Remarks
	R5507	ERJ6GEYJ103V	M 10K OHM J 1/ 10W	1	
	R5508	ERJ6GEYF473	M 47KOHM,J,1/10W	1	
	R5509	ERJ6GEY0R00V	M 0 OHM J 1/10W	1	
	R5515	D0GBR00Z0002	M 0 OHM J 1/16W	1	
	R5516	D0GBR00Z0002	M 0 OHM J 1/16W	1	
	R5535	ERJ2GEJ222	M 2.2KOHM, J,0.063W	1	
	R5536	ERJ2GEJ472	M 4.7KOHM, J,0.063W	1	
	R5537	ERJ2GEJ681	M 680 OHM, J,0.063W	1	
	R5538	ERJ2GEJ122	M 1.2KOHM, J,0.063W	1	
	R5542	ERJ6GEYJ471	M 470 OHM,J,1/ 10W	1	
	R5544	ERJ6GEYJ221V	M 220 OHM,J,1/ 10W	1	
	R5550	ERJ6GEYJ102V	M 1K OHM J 1/10W	1	
	R5556	ERJ2GEJ472	M 4.7KOHM, J,0.063W	1	
	R5557	ERJ2GEJ473	M 47KOHM, J,0.063W	1	
	R5558	ERJ2GEJ473	M 47KOHM, J,0.063W	1	
	R5559	ERJ2GEJ333	M 33KOHM, J,0.063W	1	
	R5560	ERJ2GEJ103	M 10KOHM, J,0.063W	1	
	R5561	ERJ2GEJ103	M 10KOHM, J,0.063W	1	
	R5565	ERJ2GEJ103	M 10KOHM, J,0.063W	1	
	R5566	ERJ2GEJ103	M 10KOHM, J,0.063W	1	
	R5567	ERJ2GEJ473	M 47KOHM, J,0.063W	1	
	R5569	ERJ2GEJ103	M 10KOHM, J,0.063W	1	
	R5570	ERJ2GEJ103	M 10KOHM, J,0.063W	1	
	R5571	ERJ2GEJ473	M 47KOHM, J,0.063W	1	
	R5572	ERJ2GEJ222	M 2.2KOHM, J,0.063W	1	
	R5573	ERJ2GEJ472	M 4.7KOHM, J,0.063W	1	
	R5574	ERJ2GEJ103	M 10KOHM, J,0.063W	1	
	R5575	ERJ2GEJ473	M 47KOHM, J,0.063W	1	
	R5576	ERJ2GEJ473	M 47KOHM, J,0.063W	1	
	R5577	ERJ2GEJ333	M 33KOHM, J,0.063W	1	
	R5578	ERJ2GEJ473	M 47KOHM, J,0.063W	1	
	R5579	ERJ2GEJ473	M 47KOHM, J,0.063W	1	
	R5580	ERJ2GEJ102X	M 1K OHM J 1/4W	1	
	R5581	ERJ2GEJ473	M 47KOHM, J,0.063W	1	
	R5582	ERJ2GEJ473	M 47KOHM, J,0.063W	1	
	R5583	ERJ2GEJ473	M 47KOHM, J,0.063W	1	
	R5587	ERJ2GEJ560X	M 56 OHM, J,0.063W	1	
	R5588	ERJ6GEYJ102V	M 1K OHM J 1/10W	1	
	R5589	ERJ6GEYJ104V	M 100KOHM,J,1/ 10W	1	
	R5590	ERJ6GEYJ472V	M 4.7K OHM J 1/ 10W	1	
	R5591	ERJ6GEYJ472V	M 4.7K OHM J 1/ 10W	1	
	R5592	ERJ6GEYJ472V	M 4.7K OHM J 1/ 10W	1	
	R5600	ERJ2GEJ680	M 68 OHM, J,0.063W	1	
	R5601	D0GBR00Z0002	M 0 OHM J 1/16W	1	

Safety	Ref. No.	Part No.	Part Name & Description	Pcs	Remarks
	R5602	D0YAR0000007	M 0 OHM 1/4W	1	
	R5603	D0YAR0000007	M 0 OHM 1/4W	1	
	R5604	D1BB2802A055	M 28KOHM, 1/10W	1	
	R5605	D1BB3602A055	M 36KOHM, 1/10W	1	
	R5606	D0YAR0000007	M 0 OHM 1/4W	1	
	R5607	D0YAR0000007	M 0 OHM 1/4W	1	
	R5610	ERJ2GEJ104	M 100KOHM, J,0.063W	1	
	R5611	D1BB3602A055	M 36KOHM, 1/10W	1	
	R5612	D1BB2402A055	M 24KOHM, 1/10W	1	
	R5614	D0GBR00Z0002	M 0 OHM J 1/16W	1	
	R5616	D0YAR0000007	M 0 OHM 1/4W	1	
	R5620	ERJ2GEJ680	M 68 OHM, J,0.063W	1	
	R5621	D1BB3602A055	M 36KOHM, 1/10W	1	
	R5622	ERJ2GEJ104	M 100KOHM, J,0.063W	1	
	R5623	D1BB3602A055	M 36KOHM, 1/10W	1	
	R5625	D0YAR0000007	M 0 OHM 1/4W	1	
	R5626	D0YAR0000007	M 0 OHM 1/4W	1	
	R5627	D0YAR0000007	M 0 OHM 1/4W	1	
	R5628	D0YAR0000007	M 0 OHM 1/4W	1	
	R5629	D1BB4752A055	M47.5KOHM, 1/10W	1	
	R5630	D1BB4702A055	M 47KOHM, 1/10W	1	
	R5631	D1BB3002A055	M 30KOHM, 1/10W	1	
	R5632	D1BB1272A055	M12.7KOHM, 1/10W	1	
	R5633	D1BB4702A055	M 47KOHM, 1/10W	1	
	R5634	D1BB4702A055	M 47KOHM, 1/10W	1	
	R5635	ERJ2GEJ223	M 22KOHM, J,0.063W	1	
	R5636	ERJ2GEJ683	M 68KOHM, J,0.063W	1	
	R5637	D0YAR0000007	M 0 OHM 1/4W	1	
	R5638	ERJ2GEJ103	M 10KOHM, J,0.063W	1	
	R5641	ERJ2GEJ473	M 47KOHM, J,0.063W	1	
	R5644	ERJ2GEJ222	M 2.2KOHM, J,0.063W	1	
	R5646	ERJ2GEJ103	M 10KOHM, J,0.063W	1	
	R5647	ERJ2GEJ473	M 47KOHM, J,0.063W	1	
	R5660	ERJ2GEJ103	M 10KOHM, J,0.063W	1	
	R5661	ERJ2GEJ123	M 12KOHM ,J,0.063W	1	
	R5662	ERJ2GEJ473	M 47KOHM, J,0.063W	1	
	R5663	ERJ2GEJ101	M 100 OHM, J,0.063W	1	
	R5664	D0YAR0000007	M 0 OHM 1/4W	1	
	R5691	D0GB103JA041	M 10K OHM J 1/ 16W	1	
	R5693	D0GB473JA057	M 47KOHM,J,1/16W	1	
	R5695	D1BB2001A055	M 2KOHM, 1/10W	1	
	R5697	ERJ2GEJ472	M 4.7KOHM, J,0.063W	1	
	R5698	D0GDR00Z0002	M 0 OHM, 1/10W	1	
	R5699	D0GDR00Z0002	M 0 OHM, 1/10W	1	
	R5702	ERJ2GEJ222	M 2.2KOHM, J,0.063W	1	
	R5732	ERJ2GEJ153	M 15KOHM ,J,0.063W	1	
	R5733	ERJ2GEJ333	M 33KOHM, J,0.063W	1	
	R7701	D0GB103JA041	M 10K OHM J 1/ 16W	1	
	R7702	ERJ3EKF75R0	M 0.75HM, 1/16W	1	
	R7703	ERJ3GEYJ223	M 22KOHM,J,1/16W	1	
	R7704	D0GB102JA041	M 1KOHM,J,1/16W	1	
	R7705	D0GB103JA041	M 10K OHM J 1/ 16W	1	
	R7706	ERJ3GEYJ222	M 2.2KOHM,J,1/ 16W	1	
	R7708	D0GB104JA041	M 100KOHM J 1/ 16W	1	
	R7709	D0GB104JA041	M 100KOHM J 1/ 16W	1	
	R7710	D0GB102JA041	M 1KOHM,J,1/16W	1	
	R7711	ERJ3GEYJ472	M 4.7KOHM,J,1/ 16W	1	
	R7712	D0GB104JA041	M 100KOHM J 1/ 16W	1	
	R7713	ERJ3GEYJ222	M 2.2KOHM,J,1/ 16W	1	
	R7714	D1BB1202A055	M 12KOHM, 1/10W	1	
	R7715	ERJ3GEYJ222	M 2.2KOHM,J,1/ 16W	1	
	R7716	D0GB105JA041	M 1M OHM F 1/16W	1	
	R7717	D0GB103JA041	M 10K OHM J 1/ 16W	1	
	R7718	D0GB103JA041	M 10K OHM J 1/ 16W	1	
	R7719	D0GBR00Z0002	M 0 OHM J 1/16W	1	
	R7725	ERJ3GEYJ680	M 68 OHM,J,1/16W	1	
	R7726	D0GB103JA041	M 10K OHM J 1/ 16W	1	
	R7727	D0GB103JA041	M 10K OHM J 1/ 16W	1	
	R7733	ERJ3GEYJ680	M 68 OHM,J,1/16W	1	
	R7734	ERJ3GEYJ680	M 68 OHM,J,1/16W	1	
	R7735	ERJ3GEYJ680	M 68 OHM,J,1/16W	1	
	R7737	ERJ3GEYJ680	M 68 OHM,J,1/16W	1	
	R7738	ERJ3GEYJ680	M 68 OHM,J,1/16W	1	
	R7742	D0GB103JA041	M 10K OHM J 1/ 16W	1	
	R7744	D0GBR00Z0002	M 0 OHM J 1/16W	1	
	R7749	J0JCC0000241	CHIP INDUCTOR	1	
	R7750	J0JCC0000241	CHIP INDUCTOR	1	
	R7751	J0JCC0000241	CHIP INDUCTOR	1	
	R7754	D0GB103JA041	M 10K OHM J 1/ 16W	1	
	R7777	D1BB3402A055	M 34KOHM, 1/10W	1	
	R7778	D1BB1002A055	M 10KOHM, 1/10W	1	
	R7779	EXB38VR000V	RESISTOR ARRAY	1	
	R7781	D0GBR00Z0002	M 0 OHM J 1/16W	1	
	R7782	D0GBR00Z0002	M 0 OHM J 1/16W	1	
	R7800	D0GBR00Z0002	M 0 OHM J 1/16W	1	
	R8001	D1BB3901A055	M 3.9KOHM, 1/10W	1	
	R8002	D1BB2402A055	M 24KOHM, 1/10W	1	
	R8003	D1BB1002A055	M 10KOHM, 1/10W	1	
	R8004	D1BB5601A055	M 5.6KOHM, 1/10W	1	
	R8005	ERJ2GEJ181	M 180 OHM, J,0.063W	1	
	R8006	ERJ2GEJ820	M 82 OHM, J,0.063W	1	
	R8007	ERJ2GEJ181	M 180 OHM, J,0.063W	1	
	R8008	ERJ2GEJ820	M 82 OHM, J,0.063W	1	
	R8016	D0GDR00Z0002	M 0 OHM, 1/10W	1	
	R8017	D0GDR00Z0002	M 0 OHM, 1/10W	1	
	R8101	ERJ2GEJ103	M 10KOHM, J,0.063W	1	
	R8102	ERJ2GEJ103	M 10KOHM, J,0.063W	1	
	R8105	ERJ2GEJ104	M 100KOHM, J,0.063W	1	
	R8106	ERJ2GEJ680	M 68 OHM, J,0.063W	1	
	R8108	ERJ2GEJ820	M 82 OHM, J,0.063W	1	
	R8110	ERJ2GEJ680	M 68 OHM, J,0.063W	1	
	R8111	ERJ2GEJ820	M 82 OHM, J,0.063W	1	
	R8112	ERJ2GEJ103	M 10KOHM, J,0.063W	1	
	R8117	ERJ2GEJ103	M 10KOHM, J,0.063W	1	
	R8126	ERJ2GEJ103	M 10KOHM, J,0.063W	1	
	R8132	D0YAR0000007	M 0 OHM 1/4W	1	
	R8133	D0YAR0000007	M 0 OHM 1/4W	1	

Safety	Ref. No.	Part No.	Part Name & Description	Pcs	Remarks
	R8134	ERJ2GEJ221	M 220 OHM, J,0.063W	1	
	R8135	ERJ2GEJ103	M 10KOHM, J,0.063W	1	
	R8136	ERJ2GEJ221	M 220 OHM, J,0.063W	1	
	R8139	D0YAR0000007	M 0 OHM 1/4W	1	
	R8140	D0YAR0000007	M 0 OHM 1/4W	1	
	R8141	D0YAR0000007	M 0 OHM 1/4W	1	
	R8142	D0YAR0000007	M 0 OHM 1/4W	1	
	R8143	D1BB2700A055	M 270 OHM, 1/10W	1	
	R8144	D1BB2700A055	M 270 OHM, 1/10W	1	
	R8145	ERJ2GEJ101	M 100 OHM, J,0.063W	1	
	R8149	D0YAR0000007	M 0 OHM 1/4W	1	
	R8150	D0YAR0000007	M 0 OHM 1/4W	1	
	R8151	D0YAR0000007	M 0 OHM 1/4W	1	
	R8152	D0YAR0000007	M 0 OHM 1/4W	1	
	R8153	D0YAR0000007	M 0 OHM 1/4W	1	
	R8154	D0YAR0000007	M 0 OHM 1/4W	1	
	R8155	D0YAR0000007	M 0 OHM 1/4W	1	
	R8156	D0YAR0000007	M 0 OHM 1/4W	1	
	R8157	D0YAR0000007	M 0 OHM 1/4W	1	
	R8158	D0YAR0000007	M 0 OHM 1/4W	1	
	R8159	D0YAR0000007	M 0 OHM 1/4W	1	
	R8160	D0YAR0000007	M 0 OHM 1/4W	1	
	R8161	D0YAR0000007	M 0 OHM 1/4W	1	
	R8162	D0YAR0000007	M 0 OHM 1/4W	1	
	R8163	D0YAR0000007	M 0 OHM 1/4W	1	
	R8164	D0YAR0000007	M 0 OHM 1/4W	1	
	R8165	D0YAR0000007	M 0 OHM 1/4W	1	
	R8166	D0YAR0000007	M 0 OHM 1/4W	1	
	R8167	D0YAR0000007	M 0 OHM 1/4W	1	
	R8168	D0YAR0000007	M 0 OHM 1/4W	1	
	R8169	D0YAR0000007	M 0 OHM 1/4W	1	
	R8170	D0YAR0000007	M 0 OHM 1/4W	1	
	R8171	D0YAR0000007	M 0 OHM 1/4W	1	
	R8172	D0YAR0000007	M 0 OHM 1/4W	1	
	R8173	D0YAR0000007	M 0 OHM 1/4W	1	
	R8174	D0YAR0000007	M 0 OHM 1/4W	1	
	R8175	D0YAR0000007	M 0 OHM 1/4W	1	
	R8176	D0YAR0000007	M 0 OHM 1/4W	1	
	R8177	D0YAR0000007	M 0 OHM 1/4W	1	
	R8178	D0YAR0000007	M 0 OHM 1/4W	1	
	R8179	D1BB75R0A055	M 75 OHM, 1/10W	1	
	R8180	ERJ3GEYJ301	M 300 OHM,J,1/ 16W	1	
	R8181	D1BB75R0A055	M 75 OHM, 1/10W	1	
	R8182	D1BB75R0A055	M 75 OHM, 1/10W	1	
	R8183	D1BB75R0A055	M 75 OHM, 1/10W	1	
	R8184	ERJ3GEYJ301	M 300 OHM,J,1/ 16W	1	
	R8185	D1BB75R0A055	M 75 OHM, 1/10W	1	
	R8186	D1BB75R0A055	M 75 OHM, 1/10W	1	
	R8187	ERJ2GEJ101	M 100 OHM, J,0.063W	1	
	R8188	D1BB2700A055	M 270 OHM, 1/10W	1	
	R8189	D1BB2700A055	M 270 OHM, 1/10W	1	
	R8190	D0YAR0000007	M 0 OHM 1/4W	1	
	R8191	D0YAR0000007	M 0 OHM 1/4W	1	
	R8192	D0YAR0000007	M 0 OHM 1/4W	1	
	R8193	D0YAR0000007	M 0 OHM 1/4W	1	
	R8196	ERJ2GEJ221	M 220 OHM, J,0.063W	1	
	R8197	ERJ2GEJ103	M 10KOHM, J,0.063W	1	
	R8198	ERJ2GEJ221	M 220 OHM, J,0.063W	1	
	R8199	D0YAR0000007	M 0 OHM 1/4W	1	
	R8201	ERJ2GEJ470	M 47 OHM, J,0.063W	1	
	R8202	ERJ2GEJ470	M 47 OHM, J,0.063W	1	
	R8203	ERJ2GEJ470	M 47 OHM, J,0.063W	1	

Safety	Ref. No.	Part No.	Part Name & Description	Pcs	Remarks
	R8204	ERJ2GEJ470	M 47 OHM, J,0.063W	1	
	R8205	ERJ2GEJ470	M 47 OHM, J,0.063W	1	
	R8206	ERJ2GEJ470	M 47 OHM, J,0.063W	1	
	R8207	ERJ2GEJ470	M 47 OHM, J,0.063W	1	
	R8208	ERJ2GEJ470	M 47 OHM, J,0.063W	1	
	R8209	ERJ2GEJ470	M 47 OHM, J,0.063W	1	
	R8210	ERJ2GEJ470	M 47 OHM, J,0.063W	1	
	R8211	ERJ2GEJ470	M 47 OHM, J,0.063W	1	
	R8212	ERJ2GEJ470	M 47 OHM, J,0.063W	1	
	R8213	ERJ2GEJ470	M 47 OHM, J,0.063W	1	
	R8214	D0YAR0000007	M 0 OHM 1/4W	1	
	R8215	D0YAR0000007	M 0 OHM 1/4W	1	
	R8216	ERJ2GEJ470	M 47 OHM, J,0.063W	1	
	R8217	ERJ2GEJ470	M 47 OHM, J,0.063W	1	
	R8218	ERJ2GEJ470	M 47 OHM, J,0.063W	1	
	R8219	ERJ2GEJ470	M 47 OHM, J,0.063W	1	
	R8220	ERJ2GEJ470	M 47 OHM, J,0.063W	1	
	R8221	ERJ2GEJ470	M 47 OHM, J,0.063W	1	
	R8222	ERJ2GEJ470	M 47 OHM, J,0.063W	1	
	R8223	ERJ2GEJ470	M 47 OHM, J,0.063W	1	
	R8224	ERJ2GEJ470	M 47 OHM, J,0.063W	1	
	R8225	ERJ2GEJ470	M 47 OHM, J,0.063W	1	
	R8226	ERJ2GEJ470	M 47 OHM, J,0.063W	1	
	R8227	ERJ2GEJ470	M 47 OHM, J,0.063W	1	
	R8228	ERJ2GEJ470	M 47 OHM, J,0.063W	1	
	R8229	ERJ2GEJ470	M 47 OHM, J,0.063W	1	
	R8230	ERJ2GEJ470	M 47 OHM, J,0.063W	1	
	R8231	ERJ2GEJ470	M 47 OHM, J,0.063W	1	
	R8232	ERJ2GEJ470	M 47 OHM, J,0.063W	1	
	R8233	ERJ2GEJ470	M 47 OHM, J,0.063W	1	
	R8234	ERJ2GEJ470	M 47 OHM, J,0.063W	1	
	R8235	ERJ2GEJ470	M 47 OHM, J,0.063W	1	
	R8236	ERJ2GEJ470	M 47 OHM, J,0.063W	1	
	R8237	ERJ2GEJ470	M 47 OHM, J,0.063W	1	
	R8238	D0YAR0000007	M 0 OHM 1/4W	1	
	R8239	D0YAR0000007	M 0 OHM 1/4W	1	
	R8240	ERJ2GEJ470	M 47 OHM, J,0.063W	1	
	R8241	ERJ2GEJ470	M 47 OHM, J,0.063W	1	
	R8242	ERJ2GEJ470	M 47 OHM, J,0.063W	1	
	R8243	ERJ2GEJ470	M 47 OHM, J,0.063W	1	
	R8244	ERJ2GEJ470	M 47 OHM, J,0.063W	1	
	R8245	ERJ2GEJ470	M 47 OHM, J,0.063W	1	

Safety	Ref. No.	Part No.	Part Name & Description	Pcs	Remarks
	R8246	ERJ2GEJ470	M 47 OHM, J,0.063W	1	
	R8247	ERJ2GEJ470	M 47 OHM, J,0.063W	1	
	R8248	ERJ2GEJ470	M 47 OHM, J,0.063W	1	
	R8249	D0YAR0000007	M 0 OHM 1/4W	1	
	R8250	D0YAR0000007	M 0 OHM 1/4W	1	
	R8251	D0YAR0000007	M 0 OHM 1/4W	1	
	R8252	D0YAR0000007	M 0 OHM 1/4W	1	
	R8253	D0YAR0000007	M 0 OHM 1/4W	1	
	R8254	D0YAR0000007	M 0 OHM 1/4W	1	
	R8255	D0YAR0000007	M 0 OHM 1/4W	1	
	R8256	D0YAR0000007	M 0 OHM 1/4W	1	
	R8257	D0YAR0000007	M 0 OHM 1/4W	1	
	R8258	D0YAR0000007	M 0 OHM 1/4W	1	
	R8259	D0YAR0000007	M 0 OHM 1/4W	1	
	R8260	D0YAR0000007	M 0 OHM 1/4W	1	
	R8261	D0YAR0000007	M 0 OHM 1/4W	1	
	R8262	D0YAR0000007	M 0 OHM 1/4W	1	
	R8263	D0YAR0000007	M 0 OHM 1/4W	1	
	R8264	D0YAR0000007	M 0 OHM 1/4W	1	
	R8265	D0YAR0000007	M 0 OHM 1/4W	1	
	R8266	D0YAR0000007	M 0 OHM 1/4W	1	
	R8267	D0YAR0000007	M 0 OHM 1/4W	1	
	R8268	D0YAR0000007	M 0 OHM 1/4W	1	
	R8269	D0YAR0000007	M 0 OHM 1/4W	1	
	R8270	D0YAR0000007	M 0 OHM 1/4W	1	
	R8271	D0YAR0000007	M 0 OHM 1/4W	1	
	R8272	D0YAR0000007	M 0 OHM 1/4W	1	
	R8273	D0YAR0000007	M 0 OHM 1/4W	1	
	R8274	D0YAR0000007	M 0 OHM 1/4W	1	
	R8275	D0YAR0000007	M 0 OHM 1/4W	1	
	R8276	D0YAR0000007	M 0 OHM 1/4W	1	
	R8277	D0YAR0000007	M 0 OHM 1/4W	1	
	R8278	D0YAR0000007	M 0 OHM 1/4W	1	
	R8279	D0YAR0000007	M 0 OHM 1/4W	1	
	R8280	D0YAR0000007	M 0 OHM 1/4W	1	
	R8281	D0YAR0000007	M 0 OHM 1/4W	1	
	R8282	D0YAR0000007	M 0 OHM 1/4W	1	
	R8283	D0YAR0000007	M 0 OHM 1/4W	1	
	R8284	D0YAR0000007	M 0 OHM 1/4W	1	
	R8285	D0YAR0000007	M 0 OHM 1/4W	1	
	R8286	D0YAR0000007	M 0 OHM 1/4W	1	
	R8287	D0YAR0000007	M 0 OHM 1/4W	1	
	R8288	D0YAR0000007	M 0 OHM 1/4W	1	
	R8289	D0YAR0000007	M 0 OHM 1/4W	1	
	R8290	D0YAR0000007	M 0 OHM 1/4W	1	
	R8291	D0YAR0000007	M 0 OHM 1/4W	1	
	R8292	D0YAR0000007	M 0 OHM 1/4W	1	
	R8293	D0YAR0000007	M 0 OHM 1/4W	1	
	R8294	D0YAR0000007	M 0 OHM 1/4W	1	
	R8295	D0YAR0000007	M 0 OHM 1/4W	1	
	R8296	D0YAR0000007	M 0 OHM 1/4W	1	
	R8297	D0YAR0000007	M 0 OHM 1/4W	1	
	R8298	D0YAR0000007	M 0 OHM 1/4W	1	
	R8299	D0YAR0000007	M 0 OHM 1/4W	1	
	R8328	ERJ2GEJ103	M 10KOHM, J,0.063W	1	
	R8370	ERJ2GEJ103	M 10KOHM, J,0.063W	1	
	R8385	ERJ2GEJ103	M 10KOHM, J,0.063W	1	
	R8446	ERJ2GEJ103	M 10KOHM, J,0.063W	1	
	R8447	ERJ2GEJ103	M 10KOHM, J,0.063W	1	
	R8448	ERJ2GEJ103	M 10KOHM, J,0.063W	1	
	R8449	EXB2HV103JV	RESISTOR ARRAY	1	
	R8525	ERJ2GEJ103	M 10KOHM, J,0.063W	1	
	R8526	ERJ2GEJ560X	M 56 OHM, J,0.063W	1	

Safety	Ref. No.	Part No.	Part Name & Description	Pcs	Remarks
	R8527	ERJ2GEJ560X	M 56 OHM, J,0.063W	1	
	R8528	ERJ2GEJ560X	M 56 OHM, J,0.063W	1	
	R8529	ERJ2GEJ103	M 10KOHM, J,0.063W	1	
	R8530	ERJ2GEJ103	M 10KOHM, J,0.063W	1	
	R8531	ERJ2GEJ560X	M 56 OHM, J,0.063W	1	
	R8532	ERJ2GEJ560X	M 56 OHM, J,0.063W	1	
	R8533	ERJ2GEJ121	M 120 OHM, J,0.063W	1	
	R8534	ERJ2GEJ121	M 120 OHM, J,0.063W	1	
	R8535	ERJ2GEJ121	M 120 OHM, J,0.063W	1	
	R8536	ERJ2GEJ121	M 120 OHM, J,0.063W	1	
	R8537	D1HG1218A002	NETWORK RESISTER	1	
	R8538	D1HG1218A002	NETWORK RESISTER	1	
	R8539	D1HG1218A002	NETWORK RESISTER	1	
	R8540	D1HG1218A002	NETWORK RESISTER	1	
	R8541	ERJ2GEJ121	M 120 OHM, J,0.063W	1	
	R8542	ERJ2GEJ121	M 120 OHM, J,0.063W	1	
	R8543	ERJ2GEJ121	M 120 OHM, J,0.063W	1	
	R8544	ERJ2GEJ121	M 120 OHM, J,0.063W	1	
	R8545	ERJ2GEJ121	M 120 OHM, J,0.063W	1	
	R8546	ERJ2GEJ121	M 120 OHM, J,0.063W	1	
	R8547	ERJ2GEJ121	M 120 OHM, J,0.063W	1	
	R8548	ERJ2GEJ121	M 120 OHM, J,0.063W	1	
	R8549	ERJ2GEJ103	M 10KOHM, J,0.063W	1	
	R8550	ERJ2GEJ121	M 120 OHM, J,0.063W	1	
	R8551	ERJ2GEJ560X	M 56 OHM, J,0.063W	1	
	R8552	ERJ2GEJ103	M 10KOHM, J,0.063W	1	
	R8553	ERJ2GEJ121	M 120 OHM, J,0.063W	1	
	R8554	ERJ2GEJ560X	M 56 OHM, J,0.063W	1	
	R8555	ERJ2GEJ560X	M 56 OHM, J,0.063W	1	
	R8556	ERJ2GEJ560X	M 56 OHM, J,0.063W	1	
	R8557	ERJ2GEJ103	M 10KOHM, J,0.063W	1	
	R8558	ERJ2GEJ103	M 10KOHM, J,0.063W	1	
	R8559	ERJ2GEJ102X	M 1K OHM J 1/4W	1	
	R8560	ERJ2GEJ332	M 3.3KOHM, J,0.063W	1	
	R8561	ERJ2GEJ332	M 3.3KOHM, J,0.063W	1	
	R8562	ERJ2GEJ332	M 3.3KOHM, J,0.063W	1	
	R8563	ERJ2GEJ332	M 3.3KOHM, J,0.063W	1	
	R8564	ERJ2GEJ332	M 3.3KOHM, J,0.063W	1	
	R8565	ERJ2GEJ332	M 3.3KOHM, J,0.063W	1	
	R8566	ERJ2GEJ103	M 10KOHM, J,0.063W	1	
	R8567	ERJ2GEJ103	M 10KOHM, J,0.063W	1	
	R8569	ERJ2GEJ103	M 10KOHM, J,0.063W	1	

Safety	Ref. No.	Part No.	Part Name & Description	Pcs	Remarks
	R8581	ERJ2GEJ103	M 10KOHM, J,0.063W	1	
	R8583	D0YAR0000007	M 0 OHM 1/4W	1	
	R8601	D0YAR0000007	M 0 OHM 1/4W	1	
	R8602	D0YAR0000007	M 0 OHM 1/4W	1	
	R8603	ERJ2GEJ473	M 47KOHM, J,0.063W	1	
	R8604	ERJ2GEJ220	M 22 OHM, J,0.063W	1	
	R8620	ERJ2GEJ101	M 100 OHM, J,0.063W	1	
	R8621	ERJ2GEJ153	M 15KOHM ,J,0.063W	1	
	R8622	ERJ2GEJ103	M 10KOHM, J,0.063W	1	
	R8623	ERJ2GEJ473	M 47KOHM, J,0.063W	1	
	R8625	D1BA1601A026	M 1.6KOHM, 1/10W	1	
	R8626	ERJ2GEJ101	M 100 OHM, J,0.063W	1	
	R8627	ERJ2GEJ103	M 10KOHM, J,0.063W	1	
	R8628	ERJ2GEJ103	M 10KOHM, J,0.063W	1	
	R8629	ERJ2GEJ472	M 4.7KOHM, J,0.063W	1	
	R8630	ERJ2GEJ153	M 15KOHM ,J,0.063W	1	
	R8631	ERJ2GEJ103	M 10KOHM, J,0.063W	1	
	R8632	D0YAR0000007	M 0 OHM 1/4W	1	
	R8650	ERJ2GEJ103	M 10KOHM, J,0.063W	1	
	R8651	ERJ2GEJ103	M 10KOHM, J,0.063W	1	
	R8661	ERJ2GEJ103	M 10KOHM, J,0.063W	1	
	R8663	ERJ2GEJ103	M 10KOHM, J,0.063W	1	
	R8701	EXB2HV680J	RESISTOR ARRAY	1	
	R8702	EXB2HV680J	RESISTOR ARRAY	1	
	R8703	EXB2HV101J	RESISTOR ARRAY	1	
	R8704	EXB2HV101J	RESISTOR ARRAY	1	
	R8705	EXB2HV101J	RESISTOR ARRAY	1	
	R8706	ERJ2GEJ101	M 100 OHM, J,0.063W	1	
	R8707	ERJ2GEJ101	M 100 OHM, J,0.063W	1	
	R8709	ERJ2GEJ103	M 10KOHM, J,0.063W	1	
	R8710	ERJ2GEJ222	M 2.2KOHM, J,0.063W	1	
	R8711	ERJ2GEJ103	M 10KOHM, J,0.063W	1	
	R8715	ERJ2GEJ103	M 10KOHM, J,0.063W	1	
	R8716	ERJ2GEJ103	M 10KOHM, J,0.063W	1	
	R8718	ERJ2GEJ101	M 100 OHM, J,0.063W	1	
	R8719	ERJ2GEJ101	M 100 OHM, J,0.063W	1	
	R8720	ERJ2GEJ101	M 100 OHM, J,0.063W	1	
	R8721	ERJ2GEJ101	M 100 OHM, J,0.063W	1	
	R8722	ERJ2GEJ101	M 100 OHM, J,0.063W	1	
	R8723	ERJ2GEJ101	M 100 OHM, J,0.063W	1	
	R8724	ERJ2GEJ101	M 100 OHM, J,0.063W	1	
	R8725	ERJ2GEJ101	M 100 OHM, J,0.063W	1	
	R8726	ERJ2GEJ101	M 100 OHM, J,0.063W	1	
	R8727	ERJ2GEJ101	M 100 OHM, J,0.063W	1	
	R8728	ERJ2GEJ101	M 100 OHM, J,0.063W	1	

Safety	Ref. No.	Part No.	Part Name & Description	Pcs	Remarks
	R8732	ERJ2GEJ101	M 100 OHM, J,0.063W	1	
	R8733	ERJ2GEJ101	M 100 OHM, J,0.063W	1	
	R8734	ERJ2GEJ680	M 68 OHM, J,0.063W	1	
	R8735	ERJ2GEJ472	M 4.7KOHM, J,0.063W	1	
	R8736	ERJ2GEJ472	M 4.7KOHM, J,0.063W	1	
	R8737	ERJ2GEJ472	M 4.7KOHM, J,0.063W	1	
	R8738	ERJ2GEJ472	M 4.7KOHM, J,0.063W	1	
	R8739	ERJ2GEJ680	M 68 OHM, J,0.063W	1	
	R8740	ERJ2GEJ680	M 68 OHM, J,0.063W	1	
	R8741	ERJ2GEJ680	M 68 OHM, J,0.063W	1	
	R8742	ERJ2GEJ680	M 68 OHM, J,0.063W	1	
	R8743	EXB38V560JV	RESISTOR ARRAY	1	
	R8744	ERJ2GEJ680	M 68 OHM, J,0.063W	1	
	R8745	ERJ2GEJ560X	M 56 OHM, J,0.063W	1	
	R8746	ERJ2GEJ560X	M 56 OHM, J,0.063W	1	
	R8747	ERJ2GEJ560X	M 56 OHM, J,0.063W	1	
	R8748	ERJ2GEJ560X	M 56 OHM, J,0.063W	1	
	R8749	ERJ2GEJ560X	M 56 OHM, J,0.063W	1	
	R8750	ERJ2GEJ560X	M 56 OHM, J,0.063W	1	
	R8751	ERJ2GEJ560X	M 56 OHM, J,0.063W	1	
	R8752	ERJ2GEJ560X	M 56 OHM, J,0.063W	1	
	R8753	ERJ2GEJ560X	M 56 OHM, J,0.063W	1	
	R8754	ERJ2GEJ103	M 10KOHM, J,0.063W	1	
	R8757	ERJ2GEJ103	M 10KOHM, J,0.063W	1	
	R8758	ERJ2GEJ103	M 10KOHM, J,0.063W	1	
	R8759	ERJ2GEJ103	M 10KOHM, J,0.063W	1	
	R8760	ERJ2GEJ103	M 10KOHM, J,0.063W	1	
	R8761	ERJ2GEJ103	M 10KOHM, J,0.063W	1	
	R8762	ERJ2GEJ103	M 10KOHM, J,0.063W	1	
	R8764	ERJ2GEJ103	M 10KOHM, J,0.063W	1	
	R8765	ERJ2GEJ103	M 10KOHM, J,0.063W	1	
	R8766	ERJ2GEJ680	M 68 OHM, J,0.063W	1	
	R8767	ERJ2GEJ680	M 68 OHM, J,0.063W	1	
	R8768	ERJ2GEJ680	M 68 OHM, J,0.063W	1	
	R8769	ERJ2GEJ680	M 68 OHM, J,0.063W	1	
	R8770	ERJ2GEJ680	M 68 OHM, J,0.063W	1	
	R8771	ERJ2GEJ680	M 68 OHM, J,0.063W	1	
	R8772	ERJ2GEJ680	M 68 OHM, J,0.063W	1	
	R8773	ERJ2GEJ680	M 68 OHM, J,0.063W	1	
	R8774	ERJ2GEJ680	M 68 OHM, J,0.063W	1	
	R8775	ERJ2GEJ103	M 10KOHM, J,0.063W	1	

Safety	Ref. No.	Part No.	Part Name & Description	Pcs	Remarks
	R8776	ERJ2GEJ103	M 10KOHM, J,0.063W	1	
	R8777	ERJ2GEJ103	M 10KOHM, J,0.063W	1	
	R8778	ERJ2GEJ103	M 10KOHM, J,0.063W	1	
	R8781	ERJ2GEJ103	M 10KOHM, J,0.063W	1	
	R8782	ERJ2GEJ103	M 10KOHM, J,0.063W	1	
	R8783	ERJ2GEJ103	M 10KOHM, J,0.063W	1	
	R8785	ERJ2GEJ560X	M 56 OHM, J,0.063W	1	
	R8786	ERJ2GEJ560X	M 56 OHM, J,0.063W	1	
	R8787	ERJ2GEJ560X	M 56 OHM, J,0.063W	1	
	R8788	ERJ2GEJ560X	M 56 OHM, J,0.063W	1	
	R8789	ERJ2GEJ103	M 10KOHM, J,0.063W	1	
	R8790	ERJ2GEJ103	M 10KOHM, J,0.063W	1	
	R8791	ERJ2GEJ103	M 10KOHM, J,0.063W	1	
	R8792	ERJ2GEJ103	M 10KOHM, J,0.063W	1	
	R8795	ERJ2GEJ103	M 10KOHM, J,0.063W	1	
	R8796	ERJ2GEJ560X	M 56 OHM, J,0.063W	1	
	R8798	ERJ2GEJ101	M 100 OHM, J,0.063W	1	
	R8799	ERJ2GEJ103	M 10KOHM, J,0.063W	1	
	R8806	ERJ2GEJ103	M 10KOHM, J,0.063W	1	
	R8807	ERJ2GEJ103	M 10KOHM, J,0.063W	1	
	R8809	ERJ2GEJ103	M 10KOHM, J,0.063W	1	
	R8811	D0YAR0000007	M 0 OHM 1/4W	1	
	R8812	D0YAR0000007	M 0 OHM 1/4W	1	
	R8813	D0YAR0000007	M 0 OHM 1/4W	1	
	R8816	ERJ2GEJ223	M 22KOHM, J,0.063W	1	
	R8817	ERJ2GEJ562	M 5.6KOHM, J,0.063W	1	
	R8818	ERJ2GEJ104	M 100KOHM, J,0.063W	1	
	R8821	ERJ8GEYJ472V	M 4.7KOHM, J,1/ 8W	1	
	R8823	ERJ2GEJ103	M 10KOHM, J,0.063W	1	
	R8824	ERJ2GEJ473	M 47KOHM, J,0.063W	1	
	R8825	D0YAR0000007	M 0 OHM 1/4W	1	
	R8826	ERJ2GEJ101	M 100 OHM, J,0.063W	1	
	R8829	ERJ2GEJ103	M 10KOHM, J,0.063W	1	
	R8830	ERJ2GEJ103	M 10KOHM, J,0.063W	1	
	R8831	ERJ2GEJ101	M 100 OHM, J,0.063W	1	
	R8832	ERJ2GEJ101	M 100 OHM, J,0.063W	1	
	R8833	D0YAR0000007	M 0 OHM 1/4W	1	
	R8834	D0YAR0000007	M 0 OHM 1/4W	1	
	R8835	D0YAR0000007	M 0 OHM 1/4W	1	
	R8837	ERJ2GEJ103	M 10KOHM, J,0.063W	1	
	R8838	ERJ2GEJ103	M 10KOHM, J,0.063W	1	
	R8839	ERJ2GEJ103	M 10KOHM, J,0.063W	1	
	R8850	ERJ2GEJ101	M 100 OHM, J,0.063W	1	
	R8851	EXB38V103JV	RESISTOR ARRAY	1	
	R8852	ERJ2GEJ103	M 10KOHM, J,0.063W	1	
	R8853	ERJ2GEJ103	M 10KOHM, J,0.063W	1	
	R8855	EXB38VR000V	RESISTOR ARRAY	1	
	R8856	ERJ2GEJ103	M 10KOHM, J,0.063W	1	
	R8857	ERJ2GEJ103	M 10KOHM, J,0.063W	1	
	R8859	ERJ2GEJ103	M 10KOHM, J,0.063W	1	
	R8860	ERJ2GEJ103	M 10KOHM, J,0.063W	1	
	R8861	ERJ2GEJ104	M 100KOHM, J,0.063W	1	
	R8864	ERJ2GEJ103	M 10KOHM, J,0.063W	1	
	R8865	EXB2HV103JV	RESISTOR ARRAY	1	
	R8866	ERJ3GEYJ471	M 470 OHM,J,1/ 16W	1	
	R8869	D0GBR00Z0002	M 0 OHM J 1/16W	1	
	R8901	EXB2HV103JV	RESISTOR ARRAY	1	
	R8902	EXB2HV103JV	RESISTOR ARRAY	1	
	R8903	EXB2HV103JV	RESISTOR ARRAY	1	
	R8904	ERJ2GEJ103	M 10KOHM, J,0.063W	1	
	R8905	ERJ2GEJ103	M 10KOHM, J,0.063W	1	
	R8906	ERJ2GEJ103	M 10KOHM, J,0.063W	1	
	R8907	ERJ2GEJ103	M 10KOHM, J,0.063W	1	
	R8910	EXB2HV103JV	RESISTOR ARRAY	1	
	R8911	EXB2HV103JV	RESISTOR ARRAY	1	
	R8912	EXB2HV103JV	RESISTOR ARRAY	1	
	R8913	ERJ2RHD272	M 2.7KOHM, J, 2W	1	
	R8914	ERJ2GEJ103	M 10KOHM, J,0.063W	1	
	R8915	ERJ2GEJ103	M 10KOHM, J,0.063W	1	
	R8916	ERJ2GEJ103	M 10KOHM, J,0.063W	1	
	R8917	ERJ2GEJ103	M 10KOHM, J,0.063W	1	
	R8918	ERJ2GEJ103	M 10KOHM, J,0.063W	1	
	R8920	ERJ2GEJ103	M 10KOHM, J,0.063W	1	
	R8921	ERJ2GEJ103	M 10KOHM, J,0.063W	1	
	R8922	ERJ2GEJ103	M 10KOHM, J,0.063W	1	
	R8923	ERJ2GEJ103	M 10KOHM, J,0.063W	1	
	R8924	ERJ2GEJ103	M 10KOHM, J,0.063W	1	
	R8926	D0YAR0000007	M 0 OHM 1/4W	1	
	R8927	D0YAR0000007	M 0 OHM 1/4W	1	
	R8928	D0YAR0000007	M 0 OHM 1/4W	1	
	R8929	D0YAR0000007	M 0 OHM 1/4W	1	
	R8930	ERJ2GEJ560X	M 56 OHM, J,0.063W	1	
	R8931	ERJ2GEJ560X	M 56 OHM, J,0.063W	1	
	R8932	ERJ2GEJ560X	M 56 OHM, J,0.063W	1	
	R8933	EXB2HV560JV	RESISTOR ARRAY	1	
	R8934	EXB2HV560JV	RESISTOR ARRAY	1	
	R8940	D1BB91R0A055	M 91 OHM, 1/10W	1	
	R8941	D1BB91R0A055	M 91 OHM, 1/10W	1	
	R8942	D1BB91R0A055	M 91 OHM, 1/10W	1	
	R8950	ERJ2GEJ103	M 10KOHM, J,0.063W	1	
	R8954	ERJ2RKD330	M 33 OHM, J, 2W	1	
	R8955	ERJ2RKD330	M 33 OHM, J, 2W	1	
	R8956	ERJ2GEJ104	M 100KOHM, J,0.063W	1	
	R8957	ERJ2GEJ104	M 100KOHM, J,0.063W	1	

Safety	Ref. No.	Part No.	Part Name & Description	Pcs	Remarks
	R8959	ERJ2GEJ103	M 10KOHM, J,0.063W	1	
	R8960	ERJ2GEJ104	M 100KOHM, J,0.063W	1	
	R8961	EXB2HV330JV	RESISTOR ARRAY	1	
	R8962	EXB2HV330JV	RESISTOR ARRAY	1	
	R8963	ERJ3GEYJ471	M 470 OHM,J,1/ 16W	1	
	R8964	ERJ2GEJ560X	M 56 OHM, J,0.063W	1	
	R8965	ERJ2GEJ103	M 10KOHM, J,0.063W	1	
	R8966	ERJ2GEJ103	M 10KOHM, J,0.063W	1	
	R8970	ERJ2GEJ560X	M 56 OHM, J,0.063W	1	
	R8972	ERJ2GEJ560X	M 56 OHM, J,0.063W	1	
	R8973	ERJ2GEJ560X	M 56 OHM, J,0.063W	1	
	R8974	ERJ2GEJ560X	M 56 OHM, J,0.063W	1	
	R9001	D0GBR00Z0002	M 0 OHM J 1/16W	1	
	R9002	D0GBR00Z0002	M 0 OHM J 1/16W	1	
	R9007	D0GBR00Z0002	M 0 OHM J 1/16W	1	
	R9013	ERJ6GEYJ472V	M 4.7K OHM J 1/ 10W	1	
	R9014	ERJ6GEYJ472V	M 4.7K OHM J 1/ 10W	1	
	R9015	D0GDR00Z0002	M 0 OHM, 1/10W	1	
	R9016	D0GDR00Z0002	M 0 OHM, 1/10W	1	
	R9023	D0GBR00Z0002	M 0 OHM J 1/16W	1	
	R9027	D0GBR00Z0002	M 0 OHM J 1/16W	1	
	R9028	D0GBR00Z0002	M 0 OHM J 1/16W	1	
	R9029	D0GBR00Z0002	M 0 OHM J 1/16W	1	
	R9069	EXB2HV220JV	RESISTOR ARRAY	1	
	R9070	EXB2HV220JV	RESISTOR ARRAY	1	
	R9071	EXB2HV220JV	RESISTOR ARRAY	1	
	R9072	EXB2HV220JV	RESISTOR ARRAY	1	
	R9073	EXB2HV220JV	RESISTOR ARRAY	1	
	R9074	ERJ2GEJ472	M 4.7KOHM, J,0.063W	1	
	R9075	ERJ2GEJ104	M 100KOHM, J,0.063W	1	
	R9076	ERJ2GEJ103	M 10KOHM, J,0.063W	1	
	R9077	EXB38V470J	RESISTOR ARRAY	1	
	R9078	EXB38V470J	RESISTOR ARRAY	1	
	R9079	D0GDR00Z0002	M 0 OHM, 1/10W	1	
	R9080	D0GDR00Z0002	M 0 OHM, 1/10W	1	
	R9081	D0GDR00Z0002	M 0 OHM, 1/10W	1	
	R9086	ERJ2GEJ220	M 22 OHM, J,0.063W	1	
	R9087	ERJ2GEJ220	M 22 OHM, J,0.063W	1	
	R9088	ERJ2GEJ220	M 22 OHM, J,0.063W	1	
	R9089	ERJ2GEJ220	M 22 OHM, J,0.063W	1	
	R9092	ERJ2GEJ472	M 4.7KOHM, J,0.063W	1	
	R9093	ERJ2GEJ104	M 100KOHM, J,0.063W	1	
	R9094	ERJ2GEJ103	M 10KOHM, J,0.063W	1	
	R9095	EXB2HV220JV	RESISTOR ARRAY	1	
	R9096	EXB2HV220JV	RESISTOR ARRAY	1	
	R9097	EXB2HV220JV	RESISTOR ARRAY	1	
	R9098	EXB2HV220JV	RESISTOR ARRAY	1	
	R9099	EXB2HV220JV	RESISTOR ARRAY	1	
	R9100	EXB2HV220JV	RESISTOR ARRAY	1	
	R9101	ERJ2GEJ102X	M 1K OHM J 1/4W	1	
	R9103	ERJ2GEJ103	M 10KOHM, J,0.063W	1	
	R9105	ERJ2GEJ103	M 10KOHM, J,0.063W	1	
	R9106	ERJ2GEJ472	M 4.7KOHM, J,0.063W	1	
	R9107	ERJ2GEJ332	M 3.3KOHM, J,0.063W	1	
	R9108	ERJ2GEJ104	M 100KOHM, J,0.063W	1	
	R9109	ERJ2GEJ103	M 10KOHM, J,0.063W	1	
	R9110	ERJ2GEJ102X	M 1K OHM J 1/4W	1	
	R9111	EXB2HV220JV	RESISTOR ARRAY	1	
	R9112	ERJ2GEJ470	M 47 OHM, J,0.063W	1	
	R9113	ERJ2GEJ470	M 47 OHM, J,0.063W	1	
	R9114	ERJ2GEJ470	M 47 OHM, J,0.063W	1	
	R9115	ERJ2GEJ101	M 100 OHM, J,0.063W	1	
	R9116	ERJ2GEJ101	M 100 OHM, J,0.063W	1	
	R9117	ERJ2GEJ472	M 4.7KOHM, J,0.063W	1	
	R9118	D0GDR00Z0002	M 0 OHM, 1/10W	1	(D)
	R9118	ERJ3GEYJ471	M 470 OHM,J,1/ 16W	1	(HC)
	R9119	EXB38V470J	RESISTOR ARRAY	1	
	R9120	EXB2HV103JV	RESISTOR ARRAY	1	
	R9121	ERJ2GEJ104	M 100KOHM, J,0.063W	1	(D)
	R9121	ERJ8GEYJ3R3V	M 3.3 OHM, J,1/ 8W	1	(HC)
	R9122	ERJ2GEJ332	M 3.3KOHM, J,0.063W	1	(D)
	R9122	ERJ8GEYJ3R3V	M 3.3 OHM, J,1/ 8W	1	(HC)
	R9123	ERJ8GEYJ3R3V	M 3.3 OHM, J,1/ 8W	1	(HC)
	R9123	EXB2HV470JV	RESISTOR ARRAY	1	(D)
	R9124	D0GDR00Z0002	M 0 OHM, 1/10W	1	(D)
	R9124	ERJ8GEYJ3R3V	M 3.3 OHM, J,1/ 8W	1	(HC)
	R9125	ERJ2GEJ472	M 4.7KOHM, J,0.063W	1	(D)
	R9125	ERJ8GEYJ3R3V	M 3.3 OHM, J,1/ 8W	1	(HC)
	R9126	ERJ2GEJ101	M 100 OHM, J,0.063W	1	(D)
	R9126	ERJ8GEYJ3R3V	M 3.3 OHM, J,1/ 8W	1	(HC)
	R9127	ERJ2GEJ680	M 68 OHM, J,0.063W	1	(D)
	R9127	ERJ8GEYJ3R3V	M 3.3 OHM, J,1/ 8W	1	(HC)
	R9128	ERJ8GEYJ3R3V	M 3.3 OHM, J,1/ 8W	1	
	R9129	D0GB100JA041	M 10 OHM J 1/16W	1	(HC)
	R9129	ERJ2GEJ683	M 68KOHM, J,0.063W	1	(D)
	R9130	D0GB100JA041	M 10 OHM J 1/16W	1	(HC)
	R9130	ERJ2GEJ104	M 100KOHM, J,0.063W	1	(D)
	R9131	ERJ2GEJ472	M 4.7KOHM, J,0.063W	1	
	R9132	ERJ2GEJ472	M 4.7KOHM, J,0.063W	1	
	R9133	D0GB100JA041	M 10 OHM J 1/16W	1	(HC)
	R9133	ERJ2GEJ680	M 68 OHM, J,0.063W	1	(D)
	R9134	ERJ2GEJ680	M 68 OHM, J,0.063W	1	
	R9135	ERJ2GEJ472	M 4.7KOHM, J,0.063W	1	
	R9136	ERJ2GEJ103	M 10KOHM, J,0.063W	1	
	R9137	D0GB100JA041	M 10 OHM J 1/16W	1	(HC)
	R9137	EXB2HV220JV	RESISTOR ARRAY	1	(D)
	R9138	D0GB100JA041	M 10 OHM J 1/16W	1	(HC)
	R9138	EXB2HV220JV	RESISTOR ARRAY	1	(D)
	R9139	EXB2HV220JV	RESISTOR ARRAY	1	
	R9140	EXB2HV220JV	RESISTOR ARRAY	1	

Safety	Ref. No.	Part No.	Part Name & Description	Pcs	Remarks
	R9141	ERJ2GEJ101	M 100 OHM, J,0.063W	1	
	R9142	ERJ2GEJ220	M 22 OHM, J,0.063W	1	
	R9143	ERJ2GEJ220	M 22 OHM, J,0.063W	1	
	R9144	ERJ2GEJ680	M 68 OHM, J,0.063W	1	
	R9145	ERJ2GEJ472	M 4.7KOHM, J,0.063W	1	
	R9146	EXB2HV220JV	RESISTOR ARRAY	1	
	R9147	EXB2HV220JV	RESISTOR ARRAY	1	
	R9148	EXB38V680J	RESISTOR ARRAY	1	
	R9149	ERJ2GEJ472	M 4.7KOHM, J,0.063W	1	
	R9150	ERJ2GEJ103	M 10KOHM, J,0.063W	1	
	R9151	ERJ2GEJ103	M 10KOHM, J,0.063W	1	
	R9154	ERJ2GEJ470	M 47 OHM, J,0.063W	1	
	R9155	ERJ2GEJ103	M 10KOHM, J,0.063W	1	
	R9156	ERJ2GEJ680	M 68 OHM, J,0.063W	1	
	R9157	ERJ2GEJ472	M 4.7KOHM, J,0.063W	1	
	R9158	ERJ2GEJ470	M 47 OHM, J,0.063W	1	
	R9159	ERJ2GEJ393	M 39KOHM,J,0.063W	1	
	R9160	ERJ2GEJ393	M 39KOHM,J,0.063W	1	
	R9161	D0GB100JA041	M 10 OHM J 1/16W	1	(HC)
	R9161	ERJ2GEJ393	M 39KOHM,J,0.063W	1	(D)
	R9162	ERJ2GEJ104	M 100KOHM, J,0.063W	1	
	R9163	ERJ2GEJ103	M 10KOHM, J,0.063W	1	
	R9164	ERJ2GEJ220	M 22 OHM, J,0.063W	1	
	R9166	ERJ2GEJ220	M 22 OHM, J,0.063W	1	
	R9167	ERJ2GEJ472	M 4.7KOHM, J,0.063W	1	
	R9168	D0GDR00Z0002	M 0 OHM, 1/10W	1	
	R9170	ERJ2GEJ472	M 4.7KOHM, J,0.063W	1	
	R9171	ERJ2GEJ103	M 10KOHM, J,0.063W	1	
	R9172	D0YAR0000007	M 0 OHM 1/4W	1	
	R9174	ERJ2GEJ102X	M 1K OHM J 1/4W	1	
	R9175	ERJ2GEJ101	M 100 OHM, J,0.063W	1	
	R9177	ERJ2GEJ220	M 22 OHM, J,0.063W	1	
	R9178	ERJ2GEJ220	M 22 OHM, J,0.063W	1	
	R9179	ERJ2GEJ220	M 22 OHM, J,0.063W	1	
	R9180	ERJ2GEJ220	M 22 OHM, J,0.063W	1	
	R9181	ERJ2GEJ220	M 22 OHM, J,0.063W	1	
	R9182	ERJ2GEJ220	M 22 OHM, J,0.063W	1	
	R9185	ERJ2GEJ223	M 22KOHM, J,0.063W	1	
	R9186	ERJ2GEJ333	M 33KOHM, J,0.063W	1	
	R9187	ERJ2GED563X	M 56KOHM ,J,0.063W	1	
	R9188	ERJ2GEJ243	M 24KOHM, J,0.063W	1	
	R9189	ERJ2GEJ104	M 100KOHM, J,0.063W	1	
	R9190	ERJ2GEJ472	M 4.7KOHM, J,0.063W	1	

Safety	Ref. No.	Part No.	Part Name & Description	Pcs	Remarks
	R9191	ERJ2GEJ104	M 100KOHM, J,0.063W	1	
	R9192	ERJ2GEJ103	M 10KOHM, J,0.063W	1	
	R9193	EXB2HV220JV	RESISTOR ARRAY	1	
	R9195	EXB2HV220JV	RESISTOR ARRAY	1	
	R9197	ERJ2GEJ470	M 47 OHM, J,0.063W	1	
	R9198	D0YAR0000007	M 0 OHM 1/4W	1	
	R9199	ERJ2GEJ470	M 47 OHM, J,0.063W	1	
	R9200	ERJ2GEJ100	M 10 OHM, J,0.063W	1	
	R9201	ERJ2GEJ100	M 10 OHM, J,0.063W	1	
	R9202	ERJ2GEJ470	M 47 OHM, J,0.063W	1	
	R9203	D0YAR0000007	M 0 OHM 1/4W	1	
	R9204	ERJ2GEJ223	M 22KOHM, J,0.063W	1	
	R9205	ERJ2GEJ331	M 330 OHM, J,0.063W	1	
	R9206	ERJ2GEJ102X	M 1K OHM J 1/4W	1	
	R9207	ERJ2GEJ470	M 47 OHM, J,0.063W	1	
	R9208	EXB2HV220JV	RESISTOR ARRAY	1	
	R9209	EXB2HV220JV	RESISTOR ARRAY	1	
	R9210	EXB2HV220JV	RESISTOR ARRAY	1	
	R9211	EXB2HV220JV	RESISTOR ARRAY	1	
	R9212	EXB2HV470JV	RESISTOR ARRAY	1	
	R9213	ERJ2GEJ101	M 100 OHM, J,0.063W	1	
	R9214	ERJ2GEJ104	M 100KOHM, J,0.063W	1	
	R9215	ERJ2GEJ470	M 47 OHM, J,0.063W	1	
	R9216	ERJ2GEJ220	M 22 OHM, J,0.063W	1	
	R9217	ERJ2GEJ680	M 68 OHM, J,0.063W	1	
	R9218	ERJ2GEJ470	M 47 OHM, J,0.063W	1	
	R9219	ERJ2GEJ103	M 10KOHM, J,0.063W	1	
	R9223	ERJ2RHD272	M 2.7KOHM, J, 2W	1	
	R9224	ERJ2GEJ220	M 22 OHM, J,0.063W	1	
	R9225	ERJ2RHD272	M 2.7KOHM, J, 2W	1	
	R9226	ERJ2GEJ101	M 100 OHM, J,0.063W	1	
	R9229	ERJ2GEJ101	M 100 OHM, J,0.063W	1	
	R9230	EXB38V470J	RESISTOR ARRAY	1	
	R9231	D0YAR0000007	M 0 OHM 1/4W	1	
	R9232	ERJ2GEJ470	M 47 OHM, J,0.063W	1	
	R9233	ERJ2GEJ472	M 4.7KOHM, J,0.063W	1	
	R9234	EXB2HV470JV	RESISTOR ARRAY	1	
	R9235	EXB2HV470JV	RESISTOR ARRAY	1	
	R9236	ERJ2RKD330	M 33 OHM, J, 2W	1	
	R9237	EXB38V470J	RESISTOR ARRAY	1	
	R9238	ERJ2GEJ151	M 150 OHM, J,0.063W	1	
	R9245	ERJ2GEJ102X	M 1K OHM J 1/4W	1	
	R9246	ERJ2GEJ103	M 10KOHM, J,0.063W	1	
	R9247	ERJ2GEJ470	M 47 OHM, J,0.063W	1	
	R9248	D1BB1001A055	M 1KOHM, 1/16W	1	
	R9249	D1BB1001A055	M 1KOHM, 1/16W	1	
	R9250	D1BB1001A055	M 1KOHM, 1/16W	1	
	R9251	D1BB1001A055	M 1KOHM, 1/16W	1	
	R9252	ERJ2RKD330	M 33 OHM, J, 2W	1	
	R9253	EXB2HV103JV	RESISTOR ARRAY	1	
	R9254	EXB2HV103JV	RESISTOR ARRAY	1	
	R9255	EXB2HV103JV	RESISTOR ARRAY	1	
	R9256	EXB38V470J	RESISTOR ARRAY	1	

Safety	Ref. No.	Part No.	Part Name & Description	Pcs	Remarks
	R9257	EXB38V470J	RESISTOR ARRAY	1	
	R9258	EXB38V470J	RESISTOR ARRAY	1	
	R9259	EXB38V470J	RESISTOR ARRAY	1	
	R9260	EXB38V470J	RESISTOR ARRAY	1	
	R9261	EXB38V470J	RESISTOR ARRAY	1	
	R9262	EXB38V470J	RESISTOR ARRAY	1	
	R9263	EXB38V470J	RESISTOR ARRAY	1	
	R9264	ERJ2GEJ470	M 47 OHM, J,0.063W	1	
	R9265	ERJ2GEJ470	M 47 OHM, J,0.063W	1	
	R9266	ERJ2GEJ470	M 47 OHM, J,0.063W	1	
	R9267	ERJ2GEJ470	M 47 OHM, J,0.063W	1	
	R9270	ERJ2GEJ470	M 47 OHM, J,0.063W	1	
	R9271	ERJ2GEJ470	M 47 OHM, J,0.063W	1	
	R9272	ERJ2GEJ101	M 100 OHM, J,0.063W	1	
	R9273	ERJ2GEJ470	M 47 OHM, J,0.063W	1	
	R9274	EXB2HV151J	RESISTOR ARRAY	1	
	R9275	EXB2HV151J	RESISTOR ARRAY	1	
	R9276	EXB2HV151J	RESISTOR ARRAY	1	
	R9277	EXB2HV151J	RESISTOR ARRAY	1	
	R9278	D0YAR0000007	M 0 OHM 1/4W	1	
	R9279	D0YAR0000007	M 0 OHM 1/4W	1	
	R9280	EXB2HV103JV	RESISTOR ARRAY	1	
	R9281	EXB2HV103JV	RESISTOR ARRAY	1	
	R9282	EXB2HV103JV	RESISTOR ARRAY	1	
	R9283	ERJ2GEJ103	M 10KOHM, J,0.063W	1	
	R9286	D0YAR0000007	M 0 OHM 1/4W	1	
	R9287	D0YAR0000007	M 0 OHM 1/4W	1	
	R9288	D0YAR0000007	M 0 OHM 1/4W	1	
	R9290	EXB2HV103JV	RESISTOR ARRAY	1	
	R9291	EXB2HV103JV	RESISTOR ARRAY	1	
	R9294	EXB2HV103JV	RESISTOR ARRAY	1	
	R9295	ERJ2GEJ101	M 100 OHM, J,0.063W	1	
	R9296	ERJ2GEJ101	M 100 OHM, J,0.063W	1	
	R9297	ERJ2GEJ101	M 100 OHM, J,0.063W	1	
	R9298	ERJ2GEJ101	M 100 OHM, J,0.063W	1	
	R9299	ERJ2GEJ101	M 100 OHM, J,0.063W	1	
	R9300	ERJ2GEJ101	M 100 OHM, J,0.063W	1	
	R9301	ERJ2GEJ101	M 100 OHM, J,0.063W	1	
	R9302	ERJ2GEJ101	M 100 OHM, J,0.063W	1	
	R9303	ERJ2GEJ101	M 100 OHM, J,0.063W	1	
	R9304	ERJ2GEJ101	M 100 OHM, J,0.063W	1	
	R9308	ERJ2GEJ102X	M 1K OHM J 1/4W	1	
	R9309	ERJ2GEJ103	M 10KOHM, J,0.063W	1	
	R9310	EXB38V103JV	RESISTOR ARRAY	1	
	R9311	ERJ2GEJ102X	M 1K OHM J 1/4W	1	
	R9312	ERJ2GEJ332	M 3.3KOHM, J,0.063W	1	
	R9315	ERJ2GEJ103	M 10KOHM, J,0.063W	1	
	R9316	ERJ2GEJ220	M 22 OHM, J,0.063W	1	
	R9318	ERJ2GEJ220	M 22 OHM, J,0.063W	1	
	R9320	ERJ2GEJ220	M 22 OHM, J,0.063W	1	
	R9322	ERJ2GEJ220	M 22 OHM, J,0.063W	1	

Safety	Ref. No.	Part No.	Part Name & Description	Pcs	Remarks
	R9325	ERJ2GEJ103	M 10KOHM, J,0.063W	1	
	R9327	ERJ2GEJ103	M 10KOHM, J,0.063W	1	
	R9333	EXB38V103JV	RESISTOR ARRAY	1	
	R9334	ERJ2GEJ103	M 10KOHM, J,0.063W	1	
	R9335	EXB2HV103JV	RESISTOR ARRAY	1	
	R9337	ERJ2GEJ103	M 10KOHM, J,0.063W	1	
	R9341	ERJ2GEJ101	M 100 OHM, J,0.063W	1	
	R9342	ERJ2GEJ102X	M 1K OHM J 1/4W	1	
	R9343	ERJ2GEJ102X	M 1K OHM J 1/4W	1	
	R9344	ERJ2GEJ470	M 47 OHM, J,0.063W	1	
	R9345	ERJ2GEJ680	M 68 OHM, J,0.063W	1	
	R9348	ERJ2GEJ103	M 10KOHM, J,0.063W	1	
	R9350	ERJ2GEJ101	M 100 OHM, J,0.063W	1	
	R9351	ERJ2GEJ101	M 100 OHM, J,0.063W	1	
	R9352	EXB2HV470JV	RESISTOR ARRAY	1	
	R9353	EXB38V470J	RESISTOR ARRAY	1	
	R9354	EXB2HV103JV	RESISTOR ARRAY	1	
	R9355	ERJ2GEJ103	M 10KOHM, J,0.063W	1	
	R9358	ERJ2GEJ103	M 10KOHM, J,0.063W	1	
	R9362	ERJ2GEJ103	M 10KOHM, J,0.063W	1	
	R9385	ERJ2GEJ472	M 4.7KOHM, J,0.063W	1	
	R9419	ERJ3GEYJ220	M 22 OHM,J,1/16W	1	
	R9420	ERJ3GEYJ220	M 22 OHM,J,1/16W	1	
	R9421	D0GB103JA041	M 10K OHM J 1/ 16W	1	
	R9578	ERJ2GEJ472	M 4.7KOHM, J,0.063W	1	
	R9599	ERJ2GEJ680	M 68 OHM, J,0.063W	1	
	R9600	ERJ2GEJ680	M 68 OHM, J,0.063W	1	
	R9611	ERJ2GEJ680	M 68 OHM, J,0.063W	1	
	R9824	ERJ2GEJ101	M 100 OHM, J,0.063W	1	
	R9825	ERJ2GEJ101	M 100 OHM, J,0.063W	1	
	R9826	ERJ2GEJ101	M 100 OHM, J,0.063W	1	
	R9839	EXB38V101JV	RESISTOR ARRAY	1	
	R9840	ERJ2GEJ220	M 22 OHM, J,0.063W	1	
	R9846	EXB2HV103JV	RESISTOR ARRAY	1	
	R9847	EXB2HV103JV	RESISTOR ARRAY	1	
	R9848	EXB2HV470JV	RESISTOR ARRAY	1	
	R9849	EXB2HV470JV	RESISTOR ARRAY	1	
	R9854	ERJ2GEJ101	M 100 OHM, J,0.063W	1	
	R9859	EXB38V101JV	RESISTOR ARRAY	1	
	R9868	ERJ2GEJ104	M 100KOHM, J,0.063W	1	
	R9869	ERJ2GEJ103	M 10KOHM, J,0.063W	1	
	R9870	ERJ2GEJ103	M 10KOHM, J,0.063W	1	
	R9871	ERJ2GEJ103	M 10KOHM, J,0.063W	1	
	R9878	D1BB1502A055	M 15KOHM, 1/10W	1	
	R9879	D1BB1302A055	M 13KOHM, 1/10W	1	
	R9886	D1BB4702A055	M 47KOHM, 1/10W	1	
	R9887	D1BB5102A055	M 51KOHM, 1/10W	1	
	R9888	D1BB1502A055	M 15KOHM, 1/10W	1	
	R9889	D1BB1822A055	M18.2KOHM, 1/10W	1	
	R9890	D1BB4752A055	M47.5KOHM, 1/10W	1	

Safety	Ref. No.	Part No.	Part Name & Description	Pcs	Remarks
	R9891	D1BB1272A055	M12.7KOHM, 1/10W	1	
	R9892	ERJ2GEJ104	M 100KOHM, J,0.063W	1	
	R9893	D1BB4302A055	M 43KOHM, 1/10W	1	
	R9894	D1BB2002A055	M 20KOHM, 1/10W	1	
	R9895	ERJ2GEJ104	M 100KOHM, J,0.063W	1	
	R9896	D1BB1822A055	M18.2KOHM, 1/10W	1	
	R9897	D1BB4752A055	M47.5KOHM, 1/10W	1	
	R9901	D0YAR0000007	M 0 OHM 1/4W	1	
	R9905	ERJ2RKD330	M 33 OHM, J, 2W	1	
	R9907	ERJ2GEJ151	M 150 OHM, J,0.063W	1	
	R9936	D1BB1001A055	M 1KOHM, 1/16W	1	
	R9937	D1BB1001A055	M 1KOHM, 1/16W	1	
	R9938	D1BB1001A055	M 1KOHM, 1/16W	1	
	R9939	D1BB1001A055	M 1KOHM, 1/16W	1	
	R9940	ERJ2RKD330	M 33 OHM, J, 2W	1	
	R9944	EXB38V470J	RESISTOR ARRAY	1	
	R9945	EXB38V470J	RESISTOR ARRAY	1	
	R9946	EXB38V470J	RESISTOR ARRAY	1	
	R9947	EXB38V470J	RESISTOR ARRAY	1	
	R9948	EXB38V470J	RESISTOR ARRAY	1	
	R9949	EXB38V470J	RESISTOR ARRAY	1	
	R9950	EXB38V470J	RESISTOR ARRAY	1	
	R9951	EXB38V470J	RESISTOR ARRAY	1	
	R9952	ERJ2GEJ470	M 47 OHM, J,0.063W	1	
	R9953	ERJ2GEJ470	M 47 OHM, J,0.063W	1	
	R9954	ERJ2GEJ470	M 47 OHM, J,0.063W	1	
	R9955	ERJ2GEJ470	M 47 OHM, J,0.063W	1	
	R9966	ERJ2GEJ471	M 470 OHM, J,0.063W	1	
	R9969	ERJ2GEJ470	M 47 OHM, J,0.063W	1	
	R9972	ERJ2GEJ103	M 10KOHM, J,0.063W	1	
	R9973	ERJ2GEJ103	M 10KOHM, J,0.063W	1	
	R9974	ERJ2GEJ103	M 10KOHM, J,0.063W	1	
	R9975	ERJ2GEJ470	M 47 OHM, J,0.063W	1	
	R9980	D0YAR0000007	M 0 OHM 1/4W	1	
	R14349	D0GD103JA036	M 10KOHM,J,0.25W	1	
	R14353	D0GDR00Z0002	M 0 OHM, 1/10W	1	
	R14354	D0GDR00Z0002	M 0 OHM, 1/10W	1	
	R14355	D0GDR00Z0002	M 0 OHM, 1/10W	1	
	R14357	D0GDR00Z0002	M 0 OHM, 1/10W	1	
	R14359	D0GDR00Z0002	M 0 OHM, 1/10W	1	
	R14360	D0GDR00Z0002	M 0 OHM, 1/10W	1	
	R14361	D0GDR00Z0002	M 0 OHM, 1/10W	1	
	R14363	D0GDR00Z0002	M 0 OHM, 1/10W	1	
	R14365	D0GDR00Z0002	M 0 OHM, 1/10W	1	
	R14366	D0GDR00Z0002	M 0 OHM, 1/10W	1	
	R14367	D0GDR00Z0002	M 0 OHM, 1/10W	1	
	R14369	D0GDR00Z0002	M 0 OHM, 1/10W	1	
	R14371	D0GDR00Z0002	M 0 OHM, 1/10W	1	
	R14372	D0GDR00Z0002	M 0 OHM, 1/10W	1	
	R14373	D0GDR00Z0002	M 0 OHM, 1/10W	1	
	R14375	D0GDR00Z0002	M 0 OHM, 1/10W	1	
	R14376	D0GDR00Z0002	M 0 OHM, 1/10W	1	
	R14378	D0GDR00Z0002	M 0 OHM, 1/10W	1	
	R14379	D0GDR00Z0002	M 0 OHM, 1/10W	1	
	R14381	D0GDR00Z0002	M 0 OHM, 1/10W	1	
	R14382	D0GDR00Z0002	M 0 OHM, 1/10W	1	
	R14384	D0GDR00Z0002	M 0 OHM, 1/10W	1	
	R14385	D0GDR00Z0002	M 0 OHM, 1/10W	1	
	R14387	D0GDR00Z0002	M 0 OHM, 1/10W	1	
	R14388	D0GDR00Z0002	M 0 OHM, 1/10W	1	
	R14390	D0GDR00Z0002	M 0 OHM, 1/10W	1	
	R14391	D0GDR00Z0002	M 0 OHM, 1/10W	1	
	R14393	D0GDR00Z0002	M 0 OHM, 1/10W	1	

Safety	Ref. No.	Part No.	Part Name & Description	Pcs	Remarks
	R14394	D0GDR00Z0002	M 0 OHM, 1/10W	1	
	R14397	D0GDR00Z0002	M 0 OHM, 1/10W	1	
	R14901	D0GD101JA036	M 100 OHM,J,0.25W	1	
	R14902	ERJ6GEYJ221V	M 220 OHM,J,1/ 10W	1	
	R14903	ERJ6GEYJ221V	M 220 OHM,J,1/ 10W	1	
	R14904	ERJ6GEYJ221V	M 220 OHM,J,1/ 10W	1	
	R14905	ERJ6GEYJ221V	M 220 OHM,J,1/ 10W	1	
	R14906	ERJ6GEYJ221V	M 220 OHM,J,1/ 10W	1	
	R14907	ERJ3GEYJ220	M 22 OHM,J,1/16W	1	
	R14908	ERJ3GEYJ220	M 22 OHM,J,1/16W	1	
	R14909	ERJ3GEYJ220	M 22 OHM,J,1/16W	1	
	R14910	ERJ3GEYJ220	M 22 OHM,J,1/16W	1	
	R14911	D0GD103JA036	M 10KOHM,J,0.25W	1	
	R14912	D0GD103JA036	M 10KOHM,J,0.25W	1	
	R14913	D0GD103JA036	M 10KOHM,J,0.25W	1	
	R14914	D0GD103JA036	M 10KOHM,J,0.25W	1	
	R14915	ERJ3GEYJ220	M 22 OHM,J,1/16W	1	
	R14916	D0GD103JA036	M 10KOHM,J,0.25W	1	
	R14917	ERJ3GEYJ220	M 22 OHM,J,1/16W	1	
	R14919	ERJ3GEYJ220	M 22 OHM,J,1/16W	1	
	R14920	ERJ3GEYJ220	M 22 OHM,J,1/16W	1	
	R14921	ERJ8GEYJ224V	M 220KOHM, J,1/ 8W	1	
	R14923	D0GD103JA036	M 10KOHM,J,0.25W	1	
	R14924	D0GD103JA036	M 10KOHM,J,0.25W	1	
	R14925	D0GD103JA036	M 10KOHM,J,0.25W	1	
	R14926	D0GD103JA036	M 10KOHM,J,0.25W	1	
	R14928	ERJ6GEYJ221V	M 220 OHM,J,1/ 10W	1	
	R14929	ERJ6GEYJ221V	M 220 OHM,J,1/ 10W	1	
	R14930	D0GDR00Z0002	M 0 OHM, 1/10W	1	
	R14932	ERJ6GEYJ221V	M 220 OHM,J,1/ 10W	1	
	R14933	D0GD101JA036	M 100 OHM,J,0.25W	1	
	R14934	ERJ3GEYJ470	M 47 OHM,J,1/16W	1	
	R14935	ERJ6GEYJ222V	M 2.2K OHM J 1/ 10W	1	
	R14936	ERJ6GEYJ472V	M 4.7K OHM J 1/ 10W	1	
	R14937	ERJ6GEYJ102V	M 1K OHM J 1/10W	1	
	R14939	D0GDR00Z0002	M 0 OHM, 1/10W	1	
	R14940	D0GDR00Z0002	M 0 OHM, 1/10W	1	
	R14942	D0GDR00Z0002	M 0 OHM, 1/10W	1	
	R14943	ERJ6GEYJ470V	M 47 OHM,J,1/10W	1	
	R14944	ERJ6GEYJ100V	M 10 OHM,J,1/10W	1	
	R14947	D0GDR00Z0002	M 0 OHM, 1/10W	1	
	R14949	ERJ6GEYJ203	M 20KOHM,J,1/10W	1	
	R14950	D0GD103JA036	M 10KOHM,J,0.25W	1	
	R14951	ERJ6GEYJ221V	M 220 OHM,J,1/ 10W	1	
	R14952	ERJ6GEYJ221V	M 220 OHM,J,1/ 10W	1	
	R14953	ERJ6GEYJ221V	M 220 OHM,J,1/ 10W	1	
	R14954	ERJ6GEYJ221V	M 220 OHM,J,1/ 10W	1	
	R14955	ERJ6GEYJ221V	M 220 OHM,J,1/ 10W	1	
	R14956	ERJ3GEYJ220	M 22 OHM,J,1/16W	1	
	R14957	ERJ3GEYJ220	M 22 OHM,J,1/16W	1	
	R14958	ERJ3GEYJ220	M 22 OHM,J,1/16W	1	
	R14959	ERJ3GEYJ220	M 22 OHM,J,1/16W	1	
	R14960	ERJ3GEYJ220	M 22 OHM,J,1/16W	1	
	R14961	ERJ6GEYJ331V	M 330 OHM J 1/ 10W	1	
	R14962	ERJ6GEYJ331V	M 330 OHM J 1/ 10W	1	
	R14963	ERJ6GEYJ331V	M 330 OHM J 1/ 10W	1	

Safety	Ref. No.	Part No.	Part Name & Description	Pcs	Remarks
	R14964	ERJ3GEYJ220	M 22 OHM,J,1/16W	1	
	R14965	ERJ6GEYJ331V	M 330 OHM J 1/ 10W	1	
	R14966	ERJ3GEYJ220	M 22 OHM,J,1/16W	1	
	R14967	ERJ3GEYJ220	M 22 OHM,J,1/16W	1	
	R14971	ERJ6GEYJ220	M 22 OHM,J,1/10W	1	
	R14973	ERJ3GEYJ470	M 47 OHM,J,1/16W	1	
	R14974	ERJ3GEYJ470	M 47 OHM,J,1/16W	1	
	R14975	ERJ3GEYJ470	M 47 OHM,J,1/16W	1	
	R14976	ERJ3GEYJ470	M 47 OHM,J,1/16W	1	
	R14977	ERJ6GEYJ222V	M 2.2K OHM J 1/ 10W	1	
	R14978	ERJ6GEYJ222V	M 2.2K OHM J 1/ 10W	1	
	R14979	ERJ6GEYJ222V	M 2.2K OHM J 1/ 10W	1	
	R14980	ERJ6GEYJ221V	M 220 OHM,J,1/ 10W	1	
	R14981	D0GD103JA036	M 10KOHM,J,0.25W	1	
	R14982	D0GD103JA036	M 10KOHM,J,0.25W	1	
	R14983	D0GD103JA036	M 10KOHM,J,0.25W	1	
	R14984	D0GD103JA036	M 10KOHM,J,0.25W	1	
	R14986	ERJ8GEYJ224V	M 220KOHM, J,1/ 8W	1	
	R14987	ERJ3GEYJ470	M 47 OHM,J,1/16W	1	
	R14988	ERJ6GEYJ222V	M 2.2K OHM J 1/ 10W	1	
	R14990	D0GD103JA036	M 10KOHM,J,0.25W	1	
	R14991	ERJ3GEYJ220	M 22 OHM,J,1/16W	1	
	R14992	ERJ3GEYJ470	M 47 OHM,J,1/16W	1	
	R14993	ERJ3GEYJ470	M 47 OHM,J,1/16W	1	
	R14994	ERJ3GEYJ470	M 47 OHM,J,1/16W	1	
	R14995	D0GD103JA036	M 10KOHM,J,0.25W	1	
	R14996	D0GD103JA036	M 10KOHM,J,0.25W	1	
	R14997	D0GD103JA036	M 10KOHM,J,0.25W	1	
	R14998	D0GD103JA036	M 10KOHM,J,0.25W	1	
	R14999	ERJ6GEYJ331V	M 330 OHM J 1/ 10W	1	
	R16001	ERJT08J7R5V	M 7.5OHM,J, 0.33W	1	
	R16002	ERJT08J7R5V	M 7.5OHM,J, 0.33W	1	
	R16003	ERJT08J7R5V	M 7.5OHM,J, 0.33W	1	
	R16004	ERJT08J7R5V	M 7.5OHM,J, 0.33W	1	
	R16005	ERJT08J7R5V	M 7.5OHM,J, 0.33W	1	
	R16021	ERJT08J7R5V	M 7.5OHM,J, 0.33W	1	
	R16022	ERJT08J7R5V	M 7.5OHM,J, 0.33W	1	
	R16023	ERJT08J7R5V	M 7.5OHM,J, 0.33W	1	
	R16024	ERJT08J7R5V	M 7.5OHM,J, 0.33W	1	
	R16025	ERJT08J7R5V	M 7.5OHM,J, 0.33W	1	
	R16031	ERJ6ENF8202	M 82KOHM, 1/10W	1	
	R16032	ERJ6ENF8202	M 82KOHM, 1/10W	1	
	R16033	ERJ6ENF5602	M 56KOHM, 1/10W	1	
	R16034	ERJ6ENF2702	M 27KOHM, 1/10W	1	
	R16041	ERJT08J5R6V	M 5.6 OHM,F,0.33W	1	
	R16042	ERJT08J5R6V	M 5.6 OHM,F,0.33W	1	
	R16043	ERJT08J5R6V	M 5.6 OHM,F,0.33W	1	
	R16051	ERJT08J5R6V	M 5.6 OHM,F,0.33W	1	
	R16052	ERJT08J5R6V	M 5.6 OHM,F,0.33W	1	
	R16053	ERJT08J5R6V	M 5.6 OHM,F,0.33W	1	
	R16055	ERJT06J100V	M 10 OHM,F,0.25W	1	
	R16056	ERJ6GEYF473	M 47KOHM,J,1/10W	1	
	R16057	ERJ6GEYF473	M 47KOHM,J,1/10W	1	
	R16058	ERJT06J100V	M 10 OHM,F,0.25W	1	

Safety	Ref. No.	Part No.	Part Name & Description	Pcs	Remarks
	R16059	ERJ6GEYF473	M 47KOHM,J,1/10W	1	
	R16060	ERJ6GEYF473	M 47KOHM,J,1/10W	1	
	R16101	ERJT06J221V	M 220 OHM,F,0.25W	1	
	R16102	ERJT06J221V	M 220 OHM,F,0.25W	1	
	R16103	ERJT06J100V	M 10 OHM,F,0.25W	1	
	R16104	ERJT06J100V	M 10 OHM,F,0.25W	1	
	R16105	ERJ8GEYJ474	M 470KOHM, J,1/ 8W	1	
	R16109	ERJT06J100V	M 10 OHM,F,0.25W	1	
	R16110	ERJ6GEYF473	M 47KOHM,J,1/10W	1	
	R16116	ERJ6GEYF473	M 47KOHM,J,1/10W	1	
	R16131	D0GD101JA036	M 100 OHM,J,0.25W	1	
	R16132	D0GD101JA036	M 100 OHM,J,0.25W	1	
	R16134	ERJT06J750V	M 75 OHM,F,0.25W	1	
	R16137	ERJT08J1R0V	M 1.8OHM,J, 0.33W	1	
	R16138	ERJ14Y0R00	M 0 OHM, J,1/4W	1	
	R16141	ERJT06J100V	M 10 OHM,F,0.25W	1	
	R16142	ERJ6GEYF473	M 47KOHM,J,1/10W	1	
	R16143	ERJ6GEYF473	M 47KOHM,J,1/10W	1	
	R16151	D0GD101JA036	M 100 OHM,J,0.25W	1	
	R16152	D0GD101JA036	M 100 OHM,J,0.25W	1	
	R16154	ERJT06J750V	M 75 OHM,F,0.25W	1	
	R16155	ERJT08J1R0V	M 1.8OHM,J, 0.33W	1	
	R16159	ERJT08J1R0V	M 1.8OHM,J, 0.33W	1	
	R16161	ERJT06J100V	M 10 OHM,F,0.25W	1	
	R16162	ERJ6GEYF473	M 47KOHM,J,1/10W	1	
	R16163	ERJ6GEYF473	M 47KOHM,J,1/10W	1	
	R16171	ERJT06J100V	M 10 OHM,F,0.25W	1	
	R16172	ERJ6GEYF473	M 47KOHM,J,1/10W	1	
	R16173	ERJ6GEYF473	M 47KOHM,J,1/10W	1	
	R16181	ERJT06J100V	M 10 OHM,F,0.25W	1	
	R16182	ERJ6GEYF473	M 47KOHM,J,1/10W	1	
	R16183	ERJ6GEYF473	M 47KOHM,J,1/10W	1	
	R16191	D0GD151JA036	M 150 OHM,J,0.25W	1	
	R16192	ERJ6GEYJ103V	M 10K OHM J 1/ 10W	1	
	R16195	ERJT08J1R0V	M 1.8OHM,J, 0.33W	1	
	R16220	ERJ6GEYJ470V	M 47 OHM,J,1/10W	1	
	R16221	ERJ6GEYJ472V	M 4.7K OHM J 1/ 10W	1	
	R16230	ERJ6GEYJ470V	M 47 OHM,J,1/10W	1	
	R16231	ERJ6GEYJ472V	M 4.7K OHM J 1/ 10W	1	
	R16241	EXB38V470J	RESISTOR ARRAY	1	
	R16242	EXB38V472JV	RESISTOR ARRAY	1	
	R16251	ERJ6ENF1401	M 1.4KOHM, 1/10W	1	
	R16252	ERJ6ENF3902	M 39KOHM, 1/10W	1	
	R16253	ERJ6ENF3902	M 39KOHM, 1/10W	1	
	R16254	ERJ6ENF6801	M 6.8KOHM, 1/10W	1	
	R16255	ERJ6ENF1201	M 1.2KOHM, 1/10W	1	
	R16256	ERJ6ENF1501	M 1.5KOHM, 1/10W	1	
	R16257	D0GD273JA036	M 27KOHM,J,0.25W	1	
	R16258	ERJ6GEYJ103V	M 10K OHM J 1/ 10W	1	
	R16260	ERJ6GEYJ222V	M 2.2K OHM J 1/ 10W	1	
	R16261	ERJ6GEYJ104V	M 100KOHM,J,1/ 10W	1	
	R16280	ERJ6GEYJ222V	M 2.2K OHM J 1/ 10W	1	
	R16281	D0GD103JA036	M 10KOHM,J,0.25W	1	
	R16282	ERJ6GEYJ221V	M 220 OHM,J,1/ 10W	1	
	R16283	ERJ6GEYF473	M 47KOHM,J,1/10W	1	
	R16284	ERJ6GEYJ224	M 220KOHM,J,1/ 10W	1	

Safety	Ref. No.	Part No.	Part Name & Description	Pcs	Remarks
	R16285	EXB38V623J	RESISTOR ARRAY	1	
	R16286	EXB38V623J	RESISTOR ARRAY	1	
	R16287	ERJT08J334V	M 330KOHM,F,0.33W	1	
	R16288	ERJT08J334V	M 330KOHM,F,0.33W	1	
	R16289	ERJT08J334V	M 330KOHM,F,0.33W	1	
	R16290	ERJT08J334V	M 330KOHM,F,0.33W	1	
	R16291	ERJT08J334V	M 330KOHM,F,0.33W	1	
	R16292	ERJT08J334V	M 330KOHM,F,0.33W	1	
	R16293	ERJT08J334V	M 330KOHM,F,0.33W	1	
	R16294	ERJT08J334V	M 330KOHM,F,0.33W	1	
	R16300	ERJT08J102V	M 1KOHM,J, 0.33W	1	
	R16301	ERJ6GEYJ472V	M 4.7K OHM J 1/ 10W	1	
	R16302	ERJ8GEYJ333	M 33KOHM, J,1/8W	1	
	R16303	D0GD101JA036	M 100 OHM,J,0.25W	1	
	R16304	ERJT08J751	M750 OHM,F,0.33W	1	
	R16305	ERJ6GEYJ271V	M 270 OHM J 1/ 10W	1	
	R16306	D0GD101JA036	M 100 OHM,J,0.25W	1	
	R16308	D0GD101JA036	M 100 OHM,J,0.25W	1	
	R16309	ERJ8GEYJ333	M 33KOHM, J,1/8W	1	
	R16310	ERJ6GEYJ223	M 22KOHM,J,1/10W	1	
	R16311	ERJ6GEYJ124V	M 120KOHM,J,1/ 10W	1	
	R16312	ERJ6GEYJ124V	M 120KOHM,J,1/ 10W	1	
	R16313	ERJ6ENF5762	M57.6KOHM, 1/10W	1	
	R16314	ERJ6ENF6192	M61.9KOHM, 1/10W	1	
	R16315	ERJ6ENF1241	M1.24KOHM, 1/10W	1	
	R16316	ERJ6GEYJ103V	M 10K OHM J 1/ 10W	1	
	R16321	ERJ6GEYF473	M 47KOHM,J,1/10W	1	
	R16322	ERJ6GEYF561	M 560 OHM,F,1/ 10W	1	
	R16323	ERJ6GEYJ103V	M 10K OHM J 1/ 10W	1	
	R16324	ERJ6GEYF473	M 47KOHM,J,1/10W	1	
	R16325	D0GDR00Z0002	M 0 OHM, 1/10W	1	
	R16331	ERJT06J101V	M 100 OHM,F,0.25W	1	
	R16333	ERJ6ENF3303	M 330KOHM, 1/10W	1	
	R16338	ERJT06J101V	M 100 OHM,F,0.25W	1	
	R16339	ERJ6ENF3303	M 330KOHM, 1/10W	1	
	R16401	ERJT08J7R5V	M 7.5OHM,J, 0.33W	1	
	R16402	ERJT08J7R5V	M 7.5OHM,J, 0.33W	1	
	R16403	ERJT08J7R5V	M 7.5OHM,J, 0.33W	1	
	R16404	ERJT08J7R5V	M 7.5OHM,J, 0.33W	1	
	R16406	ERJT08J7R5V	M 7.5OHM,J, 0.33W	1	
	R16410	ERJ6GEYG391	M 390 OHM,F,1/ 10W	1	
	R16411	ERJ6ENF2700	M 270 OHM, 1/10W	1	
	R16414	ERJ6GEYJ331V	M 330 OHM J 1/ 10W	1	
	R16415	ERJ6GEYJ331V	M 330 OHM J 1/ 10W	1	
	R16416	D0GD103JA036	M 10KOHM,J,0.25W	1	
	R16421	ERJT08J7R5V	M 7.5OHM,J, 0.33W	1	
	R16422	ERJT08J7R5V	M 7.5OHM,J, 0.33W	1	
	R16423	ERJT08J7R5V	M 7.5OHM,J, 0.33W	1	

Safety	Ref. No.	Part No.	Part Name & Description	Pcs	Remarks
	R16424	ERJT08J7R5V	M 7.5OHM,J, 0.33W	1	
	R16425	ERJT08J7R5V	M 7.5OHM,J, 0.33W	1	
	R16441	ERJT08J5R6V	M 5.6 OHM,F,0.33W	1	
	R16442	ERJT08J5R6V	M 5.6 OHM,F,0.33W	1	
	R16443	ERJT08J5R6V	M 5.6 OHM,F,0.33W	1	
	R16444	ERJT08J5R6V	M 5.6 OHM,F,0.33W	1	
	R16451	ERJT08J5R6V	M 5.6 OHM,F,0.33W	1	
	R16452	ERJT08J5R6V	M 5.6 OHM,F,0.33W	1	
	R16453	ERJT08J5R6V	M 5.6 OHM,F,0.33W	1	
	R16454	ERJT08J5R6V	M 5.6 OHM,F,0.33W	1	
	R16465	ERJ6ENF2702	M 27KOHM, 1/10W	1	
	R16466	ERJ6ENF5602	M 56KOHM, 1/10W	1	
	R16467	ERJ6ENF8202	M 82KOHM, 1/10W	1	
	R16468	ERJ6ENF8202	M 82KOHM, 1/10W	1	
	R16471	ERJ6GEYG392	M 3.9KOHM,J,1/ 10W	1	
	R16472	ERJ6GEYJ222V	M 2.2K OHM J 1/ 10W	1	
	R16473	ERJ6GEYF561	M 560 OHM,F,1/ 10W	1	
	R16474	ERJ6GEYJ102V	M 1K OHM J 1/10W	1	
	R16475	ERJ6GEYJ472V	M 4.7K OHM J 1/ 10W	1	
	R16476	ERJ6GEYJ472V	M 4.7K OHM J 1/ 10W	1	
	R16478	ERJ6GEYJ562V	M 5.6KOHM,J,1/ 10W	1	
	R16479	D0GD103JA036	M 10KOHM,J,0.25W	1	
	R16480	ERJ6GEYJ472V	M 4.7K OHM J 1/ 10W	1	
	R16500	ERJT08J2R2V	M 2.2OHM,J, 0.33W	1	
	R16501	D0GD101JA036	M 100 OHM,J,0.25W	1	
	R16502	D0GD101JA036	M 100 OHM,J,0.25W	1	
	R16503	ERJT06J100V	M 10 OHM,F,0.25W	1	
	R16504	ERJT06J750V	M 75 OHM,F,0.25W	1	
	R16505	ERJT06J100V	M 10 OHM,F,0.25W	1	
	R16506	ERJT06J100V	M 10 OHM,F,0.25W	1	
	R16507	ERJT06J100V	M 10 OHM,F,0.25W	1	
	R16509	ERJT08J1R0V	M 1.8OHM,J, 0.33W	1	
	R16510	ERJT14J1R0U	C1.0 OHM, J,1/4W	1	
	R16511	ERJ6GEYF473	M 47KOHM,J,1/10W	1	
	R16512	ERJ6GEYF473	M 47KOHM,J,1/10W	1	
	R16513	ERJ6GEYF473	M 47KOHM,J,1/10W	1	
	R16514	ERJ6GEYF473	M 47KOHM,J,1/10W	1	
	R16516	ERJ6GEYF473	M 47KOHM,J,1/10W	1	
	R16517	ERJ6GEYF473	M 47KOHM,J,1/10W	1	
	R16518	ERJ6GEYF473	M 47KOHM,J,1/10W	1	
	R16519	ERJ6GEYF473	M 47KOHM,J,1/10W	1	
	R16520	ERJT06J100V	M 10 OHM,F,0.25W	1	
	R16521	D0GD101JA036	M 100 OHM,J,0.25W	1	
	R16522	D0GD101JA036	M 100 OHM,J,0.25W	1	
	R16523	ERJT06J750V	M 75 OHM,F,0.25W	1	
	R16526	ERJT06J100V	M 10 OHM,F,0.25W	1	
	R16527	ERJ6GEYF473	M 47KOHM,J,1/10W	1	
	R16528	ERJ6GEYF473	M 47KOHM,J,1/10W	1	
	R16529	ERJ6GEYF473	M 47KOHM,J,1/10W	1	
	R16530	ERJ6GEYF473	M 47KOHM,J,1/10W	1	
	R16531	ERJT06J100V	M 10 OHM,F,0.25W	1	
	R16532	ERJ6GEYF473	M 47KOHM,J,1/10W	1	
	R16533	ERJ6GEYF473	M 47KOHM,J,1/10W	1	
	R16536	ERJT08J1R0V	M 1.8OHM,J, 0.33W	1	

Safety	Ref. No.	Part No.	Part Name & Description	Pcs	Remarks
	R16538	ERJT06J100V	M 10 OHM,F,0.25W	1	
	R16539	ERJ6GEYF473	M 47KOHM,J,1/10W	1	
	R16540	ERJ6GEYF473	M 47KOHM,J,1/10W	1	
	R16542	ERJT06J100V	M 10 OHM,F,0.25W	1	
	R16543	ERJ6GEYF473	M 47KOHM,J,1/10W	1	
	R16544	ERJ6GEYF473	M 47KOHM,J,1/10W	1	
	R16551	ERJT06J100V	M 10 OHM,F,0.25W	1	
	R16552	ERJ6GEYF473	M 47KOHM,J,1/10W	1	
	R16553	ERJ6GEYF473	M 47KOHM,J,1/10W	1	
	R16561	EXB38V470J	RESISTOR ARRAY	1	
	R16562	EXB38V470J	RESISTOR ARRAY	1	
	R16563	EXB38V470J	RESISTOR ARRAY	1	
	R16564	EXB38V470J	RESISTOR ARRAY	1	
	R16565	EXB38V472JV	RESISTOR ARRAY	1	
	R16566	EXB38V472JV	RESISTOR ARRAY	1	
	R16567	EXB38V472JV	RESISTOR ARRAY	1	
	R16568	EXB38V472JV	RESISTOR ARRAY	1	
	R16570	EXB38V472JV	RESISTOR ARRAY	1	
	R16573	ERJ6GEYJ220	M 22 OHM,J,1/10W	1	
	R16579	EXB38V470J	RESISTOR ARRAY	1	
	R16582	ERJ6ENF3902	M 39KOHM, 1/10W	1	
	R16583	ERJ6ENF3902	M 39KOHM, 1/10W	1	
	R16584	ERJ6ENF6801	M 6.8KOHM, 1/10W	1	
	R16585	ERJ6ENF1201	M 1.2KOHM, 1/10W	1	
	R16586	ERJ6ENF1501	M 1.5KOHM, 1/10W	1	
	R16587	ERJ6GEYJ222V	M 2.2K OHM J 1/ 10W	1	
	R16588	D0GD103JA036	M 10KOHM,J,0.25W	1	
	R16590	ERJ6GEYJ221V	M 220 OHM,J,1/ 10W	1	
	R16591	EXB38V472JV	RESISTOR ARRAY	1	
	R16592	ERJ6GEYJ472V	M 4.7K OHM J 1/ 10W	1	
	R16593	ERJ6ENF1401	M 1.4KOHM, 1/10W	1	
	R16602	ERJ6GEYJ102V	M 1K OHM J 1/10W	1	
	R16604	ERJ6GEYJ331V	M 330 OHM J 1/ 10W	1	
	R16605	ERJ6GEYJ471	M 470 OHM,J,1/ 10W	1	
	R16606	D0GD103JA036	M 10KOHM,J,0.25W	1	
	R16607	ERJ6ENF7151	M7.15KOHM, 1/10W	1	
	R16608	ERJT08J102V	M 1KOHM,J, 0.33W	1	
	R16609	D0GZ102JA020	M 1KOHM,J,1/16W	1	
	R16610	ERJ6GEYJ104V	M 100KOHM,J,1/ 10W	1	
	R16611	ERJ8GEYJ683V	M 68KOHM, J,1/8W	1	
	R16612	ERJT06J470V	M 47 OHM,F,0.25W	1	
	R16613	ERJ8GEYJ473	M 47KOHM, J,1/8W	1	
	R16614	ERJ8GEYJ683V	M 68KOHM, J,1/8W	1	
	R16615	ERJ6ENF1101	M 1.1KOHM, 1/10W	1	
	R16617	ERJ6GEYJ222V	M 2.2K OHM J 1/ 10W	1	
	R16621	ERJ6GEYF561	M 560 OHM,F,1/ 10W	1	
	R16622	ERJ6GEYF561	M 560 OHM,F,1/ 10W	1	
	R16623	ERJ6GEYF561	M 560 OHM,F,1/ 10W	1	
	R16631	D0GD103JA036	M 10KOHM,J,0.25W	1	
	R16633	ERJ6GEYJ223	M 22KOHM,J,1/10W	1	
	R16634	ERJ6GEYJ221V	M 220 OHM,J,1/ 10W	1	
	R16638	D0GZ6R8JA020	M 6.8 OHM,J, 0.5W	1	
	R16642	ERJT06J330V	M 33 OHM,F,0.25W	1	
	R16643	ERJT06J330V	M 33 OHM,F,0.25W	1	
	R16644	ERJT06J330V	M 33 OHM,F,0.25W	1	
	R16661	ERJ6GEYG182	M 1.8KOHM,J,1/ 10W	1	
	R16662	ERJ6ENF2201	M 2.2KOHM, 1/10W	1	
	R16663	ERJ6GEYJ562V	M 5.6KOHM,J,1/ 10W	1	
	R16664	D0GZ102JA020	M 1KOHM,J,1/16W	1	
	R16665	ERJT06J330V	M 33 OHM,F,0.25W	1	
	R16666	D0GD103JA036	M 10KOHM,J,0.25W	1	
	R16668	ERJ6GEYF473	M 47KOHM,J,1/10W	1	

Safety	Ref. No.	Part No.	Part Name & Description	Pcs	Remarks
	R16669	ERJ6GEYJ472V	M 4.7K OHM J 1/ 10W	1	
	R16670	ERJT06J470V	M 47 OHM,F,0.25W	1	
	R16671	ERJ6GEYF473	M 47KOHM,J,1/10W	1	
	R16672	ERJ6GEYJ102V	M 1K OHM J 1/10W	1	
	R16674	D0GZ102JA020	M 1KOHM,J,1/16W	1	
	R16676	ERJ6GEYJ472V	M 4.7K OHM J 1/ 10W	1	
	R16677	ERJ6RBD152	M 1.5KOHM,J,1/ 10W	1	
	R16678	ERJ8GEYJ563	M 56KOHM, J,1/8W	1	
	R16681	ERJT06J100V	M 10 OHM,F,0.25W	1	
	R16682	ERJT06J100V	M 10 OHM,F,0.25W	1	
	R16683	ERJT06J100V	M 10 OHM,F,0.25W	1	
	R16684	ERJ6GEYJ221V	M 220 OHM,J,1/ 10W	1	
	R16685	ERJ6GEYJ221V	M 220 OHM,J,1/ 10W	1	
	R16696	ERF5TK2R2	W 2.2 OHM, K, 5W	1	
	R16700	ERJ6GEYJ472V	M 4.7K OHM J 1/ 10W	1	
	R16701	D0GD103JA036	M 10KOHM,J,0.25W	1	
	R16702	ERJ6GEYJ332V	M 3.3K OHM J 1/ 10W	1	
	R16703	D0GD103JA036	M 10KOHM,J,0.25W	1	
	R16704	D0GD103JA036	M 10KOHM,J,0.25W	1	
	R16707	ERJ6GEYG392	M 3.9KOHM,J,1/ 10W	1	
	R16711	ERJ6GEYJ472V	M 4.7K OHM J 1/ 10W	1	
	R16712	ERJ6GEYJ102V	M 1K OHM J 1/10W	1	
	R16717	ERJ6GEYJ102V	M 1K OHM J 1/10W	1	
	R16719	ERJ3GEYJ220	M 22 OHM,J,1/16W	1	
	R16720	ERJ3GEYJ220	M 22 OHM,J,1/16W	1	
	R16721	ERJ3GEYJ220	M 22 OHM,J,1/16W	1	
	R16722	ERJ3GEYJ220	M 22 OHM,J,1/16W	1	
	R16723	ERJ3GEYJ220	M 22 OHM,J,1/16W	1	
	R16729	ERJ6GEYF473	M 47KOHM,J,1/10W	1	
	R16730	ERJ6GEYF473	M 47KOHM,J,1/10W	1	
	R16731	ERG1FJS823D	M 82KOHM, J, 1W	1	
	R16732	ERJ6GEYG392	M 3.9KOHM,J,1/ 10W	1	
	R16733	ERJ6GEYJ474	M 470KOHM,J,1/ 10W	1	
	R16734	ERJ6ENF4991	M4.99KOHM, 1/10W	1	
	R16735	ERJ6ENF2213	M 221KOHM, 1/10W	1	
	R16736	ERJ6ENF2213	M 221KOHM, 1/10W	1	
	R16737	ERJ6ENF2103	M 210KOHM, 1/10W	1	
	R16738	ERG1FJS823D	M 82KOHM, J, 1W	1	
	R16740	ERJ6GEYJ104V	M 100KOHM,J,1/ 10W	1	
	R16742	D0GD103JA036	M 10KOHM,J,0.25W	1	
	R16744	ERJ6ENF2003	M 200KOHM, 1/10W	1	
	R16745	ERJ6ENF4701	M 4.7KOHM, 1/10W	1	
	R16746	ERJT06J103V	M 10KOHM,F,0.25W	1	
	R16747	ERJT06J103V	M 10KOHM,F,0.25W	1	
	R16749	D0GD103JA036	M 10KOHM,J,0.25W	1	
	R16750	ERJT06J223V	M 22 KOHM,F,0.25W	1	
	R16751	ERJT06J224V	M 220KOHM,F,0.25W	1	
	R16752	ERJ6GEYJ472V	M 4.7K OHM J 1/ 10W	1	
	R16753	ERJ6GEYF473	M 47KOHM,J,1/10W	1	
	R16756	ERJT06J223V	M 22 KOHM,F,0.25W	1	
	R16757	ERJ6ENF2702	M 27KOHM, 1/10W	1	
	R16758	ERJ6ENF3241	M3.24KOHM, 1/10W	1	
	R16761	ERJT06J100V	M 10 OHM,F,0.25W	1	
	R16762	ERJ6GEYF473	M 47KOHM,J,1/10W	1	
	R16765	ERJT08J7R5V	M 7.5OHM,J, 0.33W	1	
	R16766	ERJT06J750V	M 75 OHM,F,0.25W	1	
	R16769	ERJT06J750V	M 75 OHM,F,0.25W	1	
	R16774	ERG1SJ683	M 68KOHM, J, 1W	1	

Safety	Ref. No.	Part No.	Part Name & Description	Pcs	Remarks
	R16775	ERJ6GEYJ472V	M 4.7K OHM J 1/ 10W	1	
	R16776	D0GD101JA036	M 100 OHM,J,0.25W	1	
	R16777	ERJT06J151V	M 150 OHM,F,0.25W	1	
	R16778	ERF5TK2R2	W 2.2 OHM, K, 5W	1	
	R16781	ERJT06J470V	M 47 OHM,F,0.25W	1	
	R16782	ERJ6GEYF473	M 47KOHM,J,1/10W	1	
	R16785	ERJ6ENF8202	M 82KOHM, 1/10W	1	
	R16786	ERJ6ENF8202	M 82KOHM, 1/10W	1	
	R16787	ERJ6ENF3302	M 33KOHM, 1/10W	1	
	R16788	ERJT06J154V	M 150KOHM,F,0.25W	1	
	R16789	D0GD103JA036	M 10KOHM,J,0.25W	1	
	R16791	ERJ6GEYJ102V	M 1K OHM J 1/10W	1	
	R16794	ERJ6ENF2003	M 200KOHM, 1/10W	1	
	R16795	ERJ6ENF2003	M 200KOHM, 1/10W	1	
	R16796	ERJ6ENF5602	M 56KOHM, 1/10W	1	
	R16802	ERJ6ENF3321	M3.32KOHM, 1/10W	1	
	R16804	ERJ8GEYJ563	M 56KOHM, J,1/8W	1	
	R16813	ERJ8GEYJ102V	M 1KOHM, J,1/8W	1	
	R16814	ERJ6ENF3091	M3.09KOHM, 1/10W	1	
	R16815	ERJ6ENF1001	M 1KOHM, 1/10W	1	
	R16816	D0GDR00Z0002	M 0 OHM, 1/10W	1	
	R16822	ERJ6ENF8202	M 82KOHM, 1/10W	1	
	R16823	ERJ6ENF8202	M 82KOHM, 1/10W	1	
	R16824	ERJ6ENF3302	M 33KOHM, 1/10W	1	
	R16825	ERJT06J154V	M 150KOHM,F,0.25W	1	
	R16826	D0GD103JA036	M 10KOHM,J,0.25W	1	
	R16828	ERJ6GEYJ472V	M 4.7K OHM J 1/ 10W	1	
	R16838	ERJ14YJ563U	M 56KOHM, 1/2W	1	
	R16841	ERJ14YJ563U	M 56KOHM, 1/2W	1	
	R16844	ERJ6ENF1241	M1.24KOHM, 1/10W	1	
	R16845	ERJ6ENF2702	M 27KOHM, 1/10W	1	
	R16846	ERJ6ENF3902	M 39KOHM, 1/10W	1	
	R16851	ERJ6GEYJ104V	M 100KOHM,J,1/ 10W	1	
	R16852	D0GD103JA036	M 10KOHM,J,0.25W	1	
	R16860	D0D28R2JA021	M 8.2 OHM,J,2W	1	
	R16867	ERJ6GEYF473	M 47KOHM,J,1/10W	1	
	R16869	ERJ8GEYJ473	M 47KOHM, J,1/8W	1	
	R16870	ERG2FJS333D	M 33KOHM, J, 2W	1	
	R16871	ERJ6GEYG392	M 3.9KOHM,J,1/ 10W	1	
	R16872	ERJ6GEYJ332V	M 3.3K OHM J 1/ 10W	1	
	R16873	ERJ6ENF2491	M2.49KOHM, 1/10W	1	
	R16874	ERJ6ENF7322	M73.2KOHM, 1/10W	1	
	R16875	ERJ6ENF7152	M71.5KOHM, 1/10W	1	
	R16886	ERJ6GEYJ224	M 220KOHM,J,1/ 10W	1	
	R16887	ERJ6GEYJ224	M 220KOHM,J,1/ 10W	1	
	R16888	ERJ6GEYJ224	M 220KOHM,J,1/ 10W	1	
	R17101	D0GF103JA047	M 10 KOHM,J, 0.33W	1	
	R17102	ERJT14J6R8U	C6.8 OHM, J,1/4W	1	
	R17103	ERJT14J6R8U	C6.8 OHM, J,1/4W	1	
	R17104	ERJT14J6R8U	C6.8 OHM, J,1/4W	1	
	R17105	ERJT14J6R8U	C6.8 OHM, J,1/4W	1	
	R17106	ERJT14J6R8U	C6.8 OHM, J,1/4W	1	
	R17107	ERJT14J6R8U	C6.8 OHM, J,1/4W	1	
	R17108	ERJT14J6R8U	C6.8 OHM, J,1/4W	1	
	R17109	ERJT14J6R8U	C6.8 OHM, J,1/4W	1	
	R17110	ERJT14J6R8U	C6.8 OHM, J,1/4W	1	
	R17111	ERJT14J6R8U	C6.8 OHM, J,1/4W	1	
	R17112	ERJT14J6R8U	C6.8 OHM, J,1/4W	1	
	R17113	ERJT14J6R8U	C6.8 OHM, J,1/4W	1	
	R17114	ERJT14J6R8U	C6.8 OHM, J,1/4W	1	
	R17115	ERJT14J6R8U	C6.8 OHM, J,1/4W	1	
	R17116	ERJT14J6R8U	C6.8 OHM, J,1/4W	1	
	R17117	ERJT14J6R8U	C6.8 OHM, J,1/4W	1	
	R17118	ERJT14J6R8U	C6.8 OHM, J,1/4W	1	
	R17119	ERJT14J6R8U	C6.8 OHM, J,1/4W	1	
	R17120	ERJT14J6R8U	C6.8 OHM, J,1/4W	1	
	R17121	ERJT14J6R8U	C6.8 OHM, J,1/4W	1	
	R17122	EXB38V471J	RESISTOR ARRAY	1	
	R17123	EXB38V471J	RESISTOR ARRAY	1	
	R17124	EXB38V471J	RESISTOR ARRAY	1	
	R17125	EXB38V470J	RESISTOR ARRAY	1	
	R17126	EXB38V470J	RESISTOR ARRAY	1	
	R17127	EXB38V471J	RESISTOR ARRAY	1	
	R17128	EXB38V471J	RESISTOR ARRAY	1	
	R17129	EXB38V470J	RESISTOR ARRAY	1	
	R17130	EXB38V470J	RESISTOR ARRAY	1	
	R17131	EXB38V471J	RESISTOR ARRAY	1	
	R17132	EXB38V471J	RESISTOR ARRAY	1	
	R17133	EXB38V470J	RESISTOR ARRAY	1	
	R17134	EXB38V470J	RESISTOR ARRAY	1	
	R17135	EXB38V471J	RESISTOR ARRAY	1	
	R17136	EXB38V470J	RESISTOR ARRAY	1	
	R17137	EXB38V470J	RESISTOR ARRAY	1	
	R17138	EXB38V470J	RESISTOR ARRAY	1	
	R17139	ERJ6GEYJ223	M 22KOHM,J,1/10W	1	
	R17140	ERJ6GEYJ104V	M 100KOHM,J,1/ 10W	1	
	R17141	EXB38V681J	RESISTOR ARRAY	1	
	R17142	EXB38V681J	RESISTOR ARRAY	1	
	R17143	EXB38V220JV	RESISTOR ARRAY	1	
	R17144	EXB38V220JV	RESISTOR ARRAY	1	
	R17145	EXB38V220JV	RESISTOR ARRAY	1	
	R17156	ERJ6GEYJ224	M 220KOHM,J,1/ 10W	1	
	R17201	ERJT14J6R8U	C6.8 OHM, J,1/4W	1	
	R17202	ERJT14J6R8U	C6.8 OHM, J,1/4W	1	
	R17203	ERJT14J6R8U	C6.8 OHM, J,1/4W	1	
	R17204	ERJT14J6R8U	C6.8 OHM, J,1/4W	1	
	R17205	ERJT14J6R8U	C6.8 OHM, J,1/4W	1	
	R17206	ERJT14J6R8U	C6.8 OHM, J,1/4W	1	
	R17207	ERJT14J6R8U	C6.8 OHM, J,1/4W	1	
	R17208	ERJT14J6R8U	C6.8 OHM, J,1/4W	1	
	R17209	EXB38V220JV	RESISTOR ARRAY	1	
	R17210	EXB38V220JV	RESISTOR ARRAY	1	
	R17211	EXB38V471J	RESISTOR ARRAY	1	
	R17212	EXB38V471J	RESISTOR ARRAY	1	
	R17213	EXB38V470J	RESISTOR ARRAY	1	
	R17214	EXB38V470J	RESISTOR ARRAY	1	
	R17215	ERJT14J6R8U	C6.8 OHM, J,1/4W	1	
	R17216	ERJT14J6R8U	C6.8 OHM, J,1/4W	1	
	R17217	ERJT14J6R8U	C6.8 OHM, J,1/4W	1	
	R17218	ERJT14J6R8U	C6.8 OHM, J,1/4W	1	
	R17219	EXB38V470J	RESISTOR ARRAY	1	
	R17220	EXB38V470J	RESISTOR ARRAY	1	
	R17221	EXB38V471J	RESISTOR ARRAY	1	
	R17222	EXB38V471J	RESISTOR ARRAY	1	
	R17223	EXB38V470J	RESISTOR ARRAY	1	
	R17224	EXB38V470J	RESISTOR ARRAY	1	
	R17225	EXB38V471J	RESISTOR ARRAY	1	
	R17226	EXB38V471J	RESISTOR ARRAY	1	
	R17227	ERJT14J6R8U	C6.8 OHM, J,1/4W	1	
	R17228	ERJT14J6R8U	C6.8 OHM, J,1/4W	1	
	R17229	EXB38V470J	RESISTOR ARRAY	1	
	R17230	EXB38V470J	RESISTOR ARRAY	1	
	R17231	ERJT14J6R8U	C6.8 OHM, J,1/4W	1	
	R17232	ERJT14J6R8U	C6.8 OHM, J,1/4W	1	
	R17233	EXB38V220JV	RESISTOR ARRAY	1	
	R17234	EXB38V470J	RESISTOR ARRAY	1	
	R17235	EXB38V470J	RESISTOR ARRAY	1	
	R17236	D0GDR00Z0002	M 0 OHM, 1/10W	1	
	R17237	ERJT14J6R8U	C6.8 OHM, J,1/4W	1	
	R17238	ERJT14J6R8U	C6.8 OHM, J,1/4W	1	
	R17239	EXB38V470J	RESISTOR ARRAY	1	
	R17240	EXB38V470J	RESISTOR ARRAY	1	
	R17241	ERJT14J6R8U	C6.8 OHM, J,1/4W	1	
	R17242	ERJT14J6R8U	C6.8 OHM, J,1/4W	1	
	R17243	EXB38V471J	RESISTOR ARRAY	1	

Safety	Ref. No.	Part No.	Part Name & Description	Pcs	Remarks
	R17244	EXB38V681J	RESISTOR ARRAY	1	
	R17245	EXB38V471J	RESISTOR ARRAY	1	
	R17246	EXB38V220JV	RESISTOR ARRAY	1	
	R17247	EXB38V220JV	RESISTOR ARRAY	1	
	R17248	EXB38V220JV	RESISTOR ARRAY	1	
	R17249	EXB38V220JV	RESISTOR ARRAY	1	
	R17250	EXB38V220JV	RESISTOR ARRAY	1	
	R17251	EXB38V220JV	RESISTOR ARRAY	1	
	R17252	EXB38V471J	RESISTOR ARRAY	1	
	R17253	EXB38V471J	RESISTOR ARRAY	1	
	R17254	EXB38V471J	RESISTOR ARRAY	1	
	R17255	EXB38V471J	RESISTOR ARRAY	1	
	R17256	EXB38V471J	RESISTOR ARRAY	1	
	R17257	EXB38V471J	RESISTOR ARRAY	1	
	R17258	EXB38V471J	RESISTOR ARRAY	1	
	R17259	EXB38V471J	RESISTOR ARRAY	1	
	R17260	EXB38V471J	RESISTOR ARRAY	1	
	R17261	EXB38V471J	RESISTOR ARRAY	1	
	R17262	EXB38V681J	RESISTOR ARRAY	1	
	R17263	EXB38V681J	RESISTOR ARRAY	1	
	R17264	ERJ3GEYJ220	M 22 OHM,J,1/16W	1	
	R17275	EXB38V220JV	RESISTOR ARRAY	1	
	R17276	EXB38V220JV	RESISTOR ARRAY	1	
	R17277	ERJ6GEYJ224	M 220KOHM,J,1/ 10W	1	
	R17301	D0GDR00Z0002	M 0 OHM, 1/10W	1	
	R17302	EXB38V470J	RESISTOR ARRAY	1	
	R17315	EXB38V681J	RESISTOR ARRAY	1	
	R17316	EXB38V681J	RESISTOR ARRAY	1	
	R17321	ERJT14J6R8U	C6.8 OHM, J,1/4W	1	
	R17322	ERJT14J6R8U	C6.8 OHM, J,1/4W	1	
	R17323	ERJT14J6R8U	C6.8 OHM, J,1/4W	1	
	R17324	ERJT14J6R8U	C6.8 OHM, J,1/4W	1	
	R17325	D0GF103JA047	M 10 KOHM,J, 0.33W	1	
	R17326	ERJT14J6R8U	C6.8 OHM, J,1/4W	1	
	R17327	ERJT14J6R8U	C6.8 OHM, J,1/4W	1	
	R17328	ERJT14J6R8U	C6.8 OHM, J,1/4W	1	
	R17329	ERJT14J6R8U	C6.8 OHM, J,1/4W	1	
	R17330	ERJT14J6R8U	C6.8 OHM, J,1/4W	1	
	R17331	ERJT14J6R8U	C6.8 OHM, J,1/4W	1	
	R17332	ERJT14J6R8U	C6.8 OHM, J,1/4W	1	
	R17333	ERJT14J6R8U	C6.8 OHM, J,1/4W	1	
	R17334	ERJT14J6R8U	C6.8 OHM, J,1/4W	1	
	R17335	ERJT14J6R8U	C6.8 OHM, J,1/4W	1	
	R17336	ERJT14J6R8U	C6.8 OHM, J,1/4W	1	
	R17337	ERJT14J6R8U	C6.8 OHM, J,1/4W	1	
	R17338	ERJT14J6R8U	C6.8 OHM, J,1/4W	1	
	R17339	ERJT14J6R8U	C6.8 OHM, J,1/4W	1	
	R17340	ERJT14J6R8U	C6.8 OHM, J,1/4W	1	
	R17341	ERJT14J6R8U	C6.8 OHM, J,1/4W	1	
	R17342	D0GBR00Z0002	M 0 OHM J 1/16W	1	
	R17343	ERJ6GEYJ104V	M 100KOHM,J,1/ 10W	1	
	R17344	ERJ6GEYJ223	M 22KOHM,J,1/10W	1	
	R17345	EXB38V220JV	RESISTOR ARRAY	1	
	R17346	EXB38V220JV	RESISTOR ARRAY	1	
	R17347	ERJ6GEYJ224	M 220KOHM,J,1/ 10W	1	
	R17348	EXB38V331J	RESISTOR ARRAY	1	
	R17349	EXB38V331J	RESISTOR ARRAY	1	
	R17350	EXB38V331J	RESISTOR ARRAY	1	
	R17351	EXB38V331J	RESISTOR ARRAY	1	
	R17352	EXB38V331J	RESISTOR ARRAY	1	
	R17353	EXB38V331J	RESISTOR ARRAY	1	
	R17354	EXB38V471J	RESISTOR ARRAY	1	
	R17355	EXB38V471J	RESISTOR ARRAY	1	
	R17356	EXB38V471J	RESISTOR ARRAY	1	
	R17368	EXB38V471J	RESISTOR ARRAY	1	
	R17370	EXB38V220JV	RESISTOR ARRAY	1	
	R17401	EXB38V681J	RESISTOR ARRAY	1	
	R17402	EXB38V220JV	RESISTOR ARRAY	1	
	R17403	EXB38V220JV	RESISTOR ARRAY	1	

Safety	Ref. No.	Part No.	Part Name & Description	Pcs	Remarks
	R17420	ERJ6GEYJ224	M 220KOHM,J,1/ 10W	1	
	R17429	D0GBR00Z0002	M 0 OHM J 1/16W	1	
	R17430	EXB38V220JV	RESISTOR ARRAY	1	
	R17431	EXB38V331J	RESISTOR ARRAY	1	
	R17432	EXB38V331J	RESISTOR ARRAY	1	
	R17433	EXB38V331J	RESISTOR ARRAY	1	
	R17434	EXB38V331J	RESISTOR ARRAY	1	
	R17435	EXB38V471J	RESISTOR ARRAY	1	
	R17436	EXB38V471J	RESISTOR ARRAY	1	
	R17437	EXB38V331J	RESISTOR ARRAY	1	
	R17438	EXB38V331J	RESISTOR ARRAY	1	
	R17439	EXB38V471J	RESISTOR ARRAY	1	
	R17440	EXB38V471J	RESISTOR ARRAY	1	
	R17441	D0GDR00Z0002	M 0 OHM, 1/10W	1	
	R17442	ERJT14J6R8U	C6.8 OHM, J,1/4W	1	
	R17443	ERJT14J6R8U	C6.8 OHM, J,1/4W	1	
	R17444	ERJT14J6R8U	C6.8 OHM, J,1/4W	1	
	R17445	ERJT14J6R8U	C6.8 OHM, J,1/4W	1	
	R17446	EXB38V470J	RESISTOR ARRAY	1	
	R17447	ERJT14J6R8U	C6.8 OHM, J,1/4W	1	
	R17448	ERJT14J6R8U	C6.8 OHM, J,1/4W	1	
	R17449	ERJT14J6R8U	C6.8 OHM, J,1/4W	1	
	R17450	ERJT14J6R8U	C6.8 OHM, J,1/4W	1	
	R17451	ERJT14J6R8U	C6.8 OHM, J,1/4W	1	
	R17452	ERJT14J6R8U	C6.8 OHM, J,1/4W	1	
	R17453	ERJT14J6R8U	C6.8 OHM, J,1/4W	1	
	R17454	ERJT14J6R8U	C6.8 OHM, J,1/4W	1	
	R17455	D0GF103JA047	M 10 KOHM,J, 0.33W	1	
	R17456	EXB38V681J	RESISTOR ARRAY	1	
	R17457	ERJT14J6R8U	C6.8 OHM, J,1/4W	1	
	R17458	ERJT14J6R8U	C6.8 OHM, J,1/4W	1	
	R17459	ERJT14J6R8U	C6.8 OHM, J,1/4W	1	
	R17460	ERJT14J6R8U	C6.8 OHM, J,1/4W	1	
	R17461	ERJT14J6R8U	C6.8 OHM, J,1/4W	1	
	R17462	ERJT14J6R8U	C6.8 OHM, J,1/4W	1	
	R17463	ERJT14J6R8U	C6.8 OHM, J,1/4W	1	
	R17464	ERJT14J6R8U	C6.8 OHM, J,1/4W	1	
	R17465	ERJ6GEYJ223	M 22KOHM,J,1/10W	1	
	R17466	ERJ6GEYJ104V	M 100KOHM,J,1/ 10W	1	
	R17501	ERJ3GEYJ220	M 22 OHM,J,1/16W	1	
	R17502	D0GDR00Z0002	M 0 OHM, 1/10W	1	
	R17503	EXB38V220JV	RESISTOR ARRAY	1	
	R17504	EXB38V220JV	RESISTOR ARRAY	1	
	R17505	EXB38V471J	RESISTOR ARRAY	1	
	R17506	EXB38V471J	RESISTOR ARRAY	1	
	R17507	ERJT14J6R8U	C6.8 OHM, J,1/4W	1	
	R17508	ERJT14J6R8U	C6.8 OHM, J,1/4W	1	
	R17509	ERJT14J6R8U	C6.8 OHM, J,1/4W	1	
	R17510	ERJT14J6R8U	C6.8 OHM, J,1/4W	1	
	R17511	ERJT14J6R8U	C6.8 OHM, J,1/4W	1	
	R17512	ERJT14J6R8U	C6.8 OHM, J,1/4W	1	
	R17513	ERJT14J6R8U	C6.8 OHM, J,1/4W	1	
	R17514	ERJT14J6R8U	C6.8 OHM, J,1/4W	1	
	R17515	EXB38V470J	RESISTOR ARRAY	1	
	R17516	EXB38V470J	RESISTOR ARRAY	1	
	R17517	EXB38V681J	RESISTOR ARRAY	1	
	R17518	EXB38V470J	RESISTOR ARRAY	1	
	R17519	EXB38V681J	RESISTOR ARRAY	1	
	R17520	EXB38V470J	RESISTOR ARRAY	1	
	R17521	EXB38V471J	RESISTOR ARRAY	1	
	R17522	EXB38V470J	RESISTOR ARRAY	1	
	R17523	EXB38V470J	RESISTOR ARRAY	1	
	R17524	EXB38V470J	RESISTOR ARRAY	1	
	R17525	EXB38V470J	RESISTOR ARRAY	1	
	R17526	EXB38V470J	RESISTOR ARRAY	1	
	R17527	EXB38V470J	RESISTOR ARRAY	1	
	R17528	ERJT14J6R8U	C6.8 OHM, J,1/4W	1	
	R17529	ERJT14J6R8U	C6.8 OHM, J,1/4W	1	
	R17530	ERJT14J6R8U	C6.8 OHM, J,1/4W	1	
	R17531	ERJT14J6R8U	C6.8 OHM, J,1/4W	1	
	R17532	EXB38V681J	RESISTOR ARRAY	1	

Safety	Ref. No.	Part No.	Part Name & Description	Pcs	Remarks
	R17533	EXB38V681J	RESISTOR ARRAY	1	
	R17534	ERJT14J6R8U	C6.8 OHM, J,1/4W	1	
	R17535	ERJT14J6R8U	C6.8 OHM, J,1/4W	1	
	R17536	ERJT14J6R8U	C6.8 OHM, J,1/4W	1	
	R17537	ERJT14J6R8U	C6.8 OHM, J,1/4W	1	
	R17538	EXB38V470J	RESISTOR ARRAY	1	
	R17539	EXB38V471J	RESISTOR ARRAY	1	
	R17540	ERJT14J6R8U	C6.8 OHM, J,1/4W	1	
	R17541	ERJT14J6R8U	C6.8 OHM, J,1/4W	1	
	R17542	ERJT14J6R8U	C6.8 OHM, J,1/4W	1	
	R17543	ERJT14J6R8U	C6.8 OHM, J,1/4W	1	
	R17544	EXB38V471J	RESISTOR ARRAY	1	
	R17545	EXB38V470J	RESISTOR ARRAY	1	
	R17546	EXB38V470J	RESISTOR ARRAY	1	
	R17547	EXB38V471J	RESISTOR ARRAY	1	
	R17548	EXB38V471J	RESISTOR ARRAY	1	
	R17549	EXB38V470J	RESISTOR ARRAY	1	
	R17550	EXB38V681J	RESISTOR ARRAY	1	
	R17551	EXB38V220JV	RESISTOR ARRAY	1	
	R17552	EXB38V220JV	RESISTOR ARRAY	1	
	R17553	EXB38V220JV	RESISTOR ARRAY	1	
	R17554	EXB38V220JV	RESISTOR ARRAY	1	
	R17555	EXB38V220JV	RESISTOR ARRAY	1	
	R17556	EXB38V220JV	RESISTOR ARRAY	1	
	R17557	EXB38V471J	RESISTOR ARRAY	1	
	R17558	EXB38V471J	RESISTOR ARRAY	1	
	R17559	EXB38V471J	RESISTOR ARRAY	1	
	R17560	EXB38V471J	RESISTOR ARRAY	1	
	R17561	EXB38V471J	RESISTOR ARRAY	1	
	R17562	EXB38V471J	RESISTOR ARRAY	1	
	R17563	EXB38V471J	RESISTOR ARRAY	1	
	R17564	EXB38V471J	RESISTOR ARRAY	1	
	R17565	EXB38V471J	RESISTOR ARRAY	1	
	R17566	EXB38V471J	RESISTOR ARRAY	1	
	R17567	EXB38V471J	RESISTOR ARRAY	1	
	R17568	EXB38V220JV	RESISTOR ARRAY	1	
	R17569	EXB38V220JV	RESISTOR ARRAY	1	
	R17580	ERJ6GEYJ224	M 220KOHM,J,1/10W	1	
	R17581	EXB38V220JV	RESISTOR ARRAY	1	
	R17601	EXB38V681J	RESISTOR ARRAY	1	
	R17602	EXB38V220JV	RESISTOR ARRAY	1	
	R17603	EXB38V220JV	RESISTOR ARRAY	1	
	R17604	EXB38V220JV	RESISTOR ARRAY	1	
	R17605	ERJ6GEYJ224	M 220KOHM,J,1/10W	1	
	R17606	EXB38V471J	RESISTOR ARRAY	1	
	R17607	EXB38V471J	RESISTOR ARRAY	1	
	R17608	EXB38V471J	RESISTOR ARRAY	1	
	R17609	EXB38V471J	RESISTOR ARRAY	1	
	R17610	EXB38V471J	RESISTOR ARRAY	1	
	R17611	EXB38V471J	RESISTOR ARRAY	1	
	R17612	EXB38V471J	RESISTOR ARRAY	1	
	R17613	EXB38V471J	RESISTOR ARRAY	1	
	R17614	EXB38V470J	RESISTOR ARRAY	1	
	R17615	EXB38V470J	RESISTOR ARRAY	1	
	R17616	ERJT14J6R8U	C6.8 OHM, J,1/4W	1	
	R17617	ERJT14J6R8U	C6.8 OHM, J,1/4W	1	
	R17618	ERJT14J6R8U	C6.8 OHM, J,1/4W	1	
	R17619	ERJT14J6R8U	C6.8 OHM, J,1/4W	1	
	R17620	ERJT14J6R8U	C6.8 OHM, J,1/4W	1	
	R17621	ERJT14J6R8U	C6.8 OHM, J,1/4W	1	
	R17622	ERJT14J6R8U	C6.8 OHM, J,1/4W	1	
	R17623	ERJT14J6R8U	C6.8 OHM, J,1/4W	1	
	R17624	D0GF103JA047	M 10 KOHM,J, 0.33W	1	
	R17625	ERJT14J6R8U	C6.8 OHM, J,1/4W	1	
	R17626	ERJT14J6R8U	C6.8 OHM, J,1/4W	1	
	R17627	ERJT14J6R8U	C6.8 OHM, J,1/4W	1	
	R17628	ERJT14J6R8U	C6.8 OHM, J,1/4W	1	
	R17629	ERJT14J6R8U	C6.8 OHM, J,1/4W	1	
	R17630	ERJT14J6R8U	C6.8 OHM, J,1/4W	1	
	R17631	ERJT14J6R8U	C6.8 OHM, J,1/4W	1	
	R17632	ERJT14J6R8U	C6.8 OHM, J,1/4W	1	

Safety	Ref. No.	Part No.	Part Name & Description	Pcs	Remarks
	R17633	EXB38V470J	RESISTOR ARRAY	1	
	R17634	EXB38V681J	RESISTOR ARRAY	1	
	R17635	EXB38V470J	RESISTOR ARRAY	1	
	R17636	EXB38V470J	RESISTOR ARRAY	1	
	R17637	EXB38V470J	RESISTOR ARRAY	1	
	R17638	EXB38V470J	RESISTOR ARRAY	1	
	R17639	EXB38V470J	RESISTOR ARRAY	1	
	R17640	EXB38V470J	RESISTOR ARRAY	1	
	R17641	ERJT14J6R8U	C6.8 OHM, J,1/4W	1	
	R17642	ERJT14J6R8U	C6.8 OHM, J,1/4W	1	
	R17643	ERJT14J6R8U	C6.8 OHM, J,1/4W	1	
	R17644	ERJT14J6R8U	C6.8 OHM, J,1/4W	1	
	R17645	ERJ6GEYJ223	M 22KOHM,J,1/10W	1	
	R17646	ERJ6GEYJ104V	M 100KOHM,J,1/10W	1	
	R2582A	J0JCC0000241	CHIP INDUCTOR	1	
	R2583A	J0JCC0000241	CHIP INDUCTOR	1	
	RM2501	B3RAD0000160	REMOTE SENSOR	1	
	S1	K1KA03AA0193	3P CONNECTOR	1	
	SC2	K1KA02A00676	2P CONNECTOR	1	
	SC20	K1MN35BA0266	35P CONNECTOR	1	
	SC41	K1KA23AA0733	23P CONNECTOR	1	
	SC42	K1KA23AA0733	23P CONNECTOR	1	
	SC46	K1KA09A00239	9P CONNECTOR	1	
	SD11	K1MN20BA0231	20P CONNECTOR	1	
	SD42	K1KB23AA0234	23P CONNECTOR	1	
	SD46	K1KY09AA0607	9P CONNECTOR	1	
	SD1B	K1MNA8BA0250	8P CONNECTOR	1	
	SD5B	K1MNA8BA0250	8P CONNECTOR	1	
	SD4B	K1MNA8BA0250	8P CONNECTOR	1	
	SD2B	K1MNA8BA0250	8P CONNECTOR	1	
	SD3B	K1MNA8BA0250	8P CONNECTOR	1	
	SS02	K1KB15AA0032	15P CONNECTOR	1	
	SS03	K1KB15AA0032	15P CONNECTOR	1	
	SS11	K1KA02A00676	2P CONNECTOR	1	
	SS12	K1KA10AA0194	10P CONNECTOR	1	
	SS21	K1KY15AA0606	15P CONNECTOR	1	
	SS22	K1KY15AA0606	15P CONNECTOR	1	
	SS32	K1KA04AA0193	4P CONNECTOR	1	
	SS33	K1KA10A00416	10P CONNECTOR	1	
	SS34	K1KA03AA0193	3P CONNECTOR	1	
	SS35	K1KA04AA0193	4P CONNECTOR	1	
	SS51	K1MN13B00091	13P CONNECTOR	1	
	SS52	K1MN13B00091	13P CONNECTOR	1	
	SS53	K1MN13B00091	13P CONNECTOR	1	
	SS54	K1MN13B00091	13P CONNECTOR	1	
	SS55	K1MN13B00091	13P CONNECTOR	1	
	SS56	K1MN13B00091	13P CONNECTOR	1	
	SS57	K1MN13B00091	13P CONNECTOR	1	
	SS58	K1MN13B00091	13P CONNECTOR	1	
	SSMM2	TMME190	CLAMPER	1	
	SSMM4	TMME260	CLAMPER	1	
	SSMM7	TMME260	CLAMPER	1	
	SU11	K1MN20BA0266	20P CONNECTOR	1	
	SU41	K1KB23AA0234	23P CONNECTOR	1	
	SU1B	K1MNA8BA0250	8P CONNECTOR	1	
	SU5B	K1MNA8BA0250	8P CONNECTOR	1	
	SU2B	K1MNA8BA0250	8P CONNECTOR	1	
	SU4B	K1MNA8BA0250	8P CONNECTOR	1	
	SU3B	K1MNA8BA0250	8P CONNECTOR	1	
⚠	SW2500	K0F162B00002	SWITCH	1	
	SW3753	EVQPC105K	SWITCH	1	
	SW3754	EVQPC105K	SWITCH	1	
	SW3755	EVQPC105K	SWITCH	1	
	SW3756	EVQPC105K	SWITCH	1	

Safety	Ref. No.	Part No.	Part Name & Description	Pcs	Remarks
	SW3757	EVQPC105K	SWITCH	1	
	T16301	ETS19AB249AC	SWITCHING TRANS	1	
	T16697	ETS19AB249AC	SWITCHING TRANS	1	
⚠	TU8301A	ENG39E04GF	TUNER	1	
	VR16000	EVMEASA00B54	CONTROL 50KOHMB 0.3W	1	
	VR16600	EVMEASA00B54	CONTROL 50KOHMB 0.3W	1	
	VR16602	EVMEASA00B23	CONTROL 2KOHMB 0.3W	1	
	X1100	H0J100500035	CRYSTAL	1	
	X2010	H0J245500089	CRYSTAL	1	
	X2601	H0J202500019	CRYSTAL	1	
	X5200	H0J270500113	CRYSTAL	1	
	X7700	H0J240500037	CRYSTAL	1	
	X8101	H0J270500061	CRYSTAL	1	
	X8620	H0J300500026	CRYSTAL	1	
	X9000	H2D100500004	CRYSTAL	1	
	X9200	H0J200500076	CRYSTAL	1	
	ZA0001	K4AZ01D00004	TERMINAL	1	
	ZA0002	K4AZ01D00004	TERMINAL	1	
	ZA0003	K4AZ01D00004	TERMINAL	1	
	ZA0004	K4AZ01D00004	TERMINAL	1	
	ZA0005	K4AZ01D00004	TERMINAL	1	
	ZA0006	K4AZ01D00004	TERMINAL	1	
	ZA0007	K4AZ01D00004	TERMINAL	1	
	ZA0008	K4AZ01D00004	TERMINAL	1	
	ZA0010	TESA169	SHIELD CLIP	1	
	ZA0011	TESA169	SHIELD CLIP	1	
	ZA851	K4CZ01000027	AV TERMINAL	1	
	ZA852	K4CZ01000027	AV TERMINAL	1	
	ZA3701	K4CZ01000027	AV TERMINAL	1	
	ZA3702	K4CZ01000027	AV TERMINAL	1	
	ZA3801	K4AD01D00005	TERMINAL	1	
	ZA3802	K4AD01D00005	TERMINAL	1	
	ZA9000	K4CD01000011	AV TERMINAL	1	
	ZA9001	K4AZ01D00004	TERMINAL	1	
	ZA9002	K4AZ01D00004	TERMINAL	1	
	ZA14901	K4AD01Z00004	TERMINAL	1	
	ZA14902	K4AD01Z00004	TERMINAL	1	
	ZA14903	K4AD01Z00004	TERMINAL	1	
	ZA14951	K4AD01Z00004	TERMINAL	1	
	ZA14952	K4AD01Z00004	TERMINAL	1	
	ZA14953	K4AD01Z00004	TERMINAL	1	
	ZA16001	K4CD01000011	AV TERMINAL	1	
	ZA16002	K4CD01000011	AV TERMINAL	1	
	ZA16003	K4CD01000011	AV TERMINAL	1	
	ZA16010	K4ZZ01000206	TERMINAL	1	
	ZA16011	K4ZZ01000206	TERMINAL	1	
	ZA16012	K4ZZ01000206	TERMINAL	1	
	ZA16013	K4ZZ01000206	TERMINAL	1	
	ZA16401	K4CD01000011	AV TERMINAL	1	
	ZA16402	K4CD01000011	AV TERMINAL	1	
	ZA16403	K4CD01000011	AV TERMINAL	1	
	ZA17101	K4CD01000013	AV TERMINAL	1	
	ZA17103	K4CD01000013	AV TERMINAL	1	
	ZA17104	K4CD01000013	AV TERMINAL	1	
	ZA17105	K4CD01000013	AV TERMINAL	1	
	ZA17106	K4CD01000013	AV TERMINAL	1	
	ZA17201	K4CD01000013	AV TERMINAL	1	
	ZA17202	K4CD01000013	AV TERMINAL	1	
	ZA17203	K4CD01000013	AV TERMINAL	1	
	ZA17204	K4CD01000013	AV TERMINAL	1	
	ZA17205	K4CD01000013	AV TERMINAL	1	
	ZA17301	K4CD01000013	AV TERMINAL	1	
	ZA17303	K4CD01000013	AV TERMINAL	1	
	ZA17304	K4CD01000013	AV TERMINAL	1	
	ZA17305	K4CD01000013	AV TERMINAL	1	
	ZA17306	K4CD01000013	AV TERMINAL	1	

Safety	Ref. No.	Part No.	Part Name & Description	Pcs	Remarks
	ZA17401	K4CD01000013	AV TERMINAL	1	
	ZA17403	K4CD01000013	AV TERMINAL	1	
	ZA17404	K4CD01000013	AV TERMINAL	1	
	ZA17405	K4CD01000013	AV TERMINAL	1	
	ZA17406	K4CD01000013	AV TERMINAL	1	
	ZA17502	K4CD01000013	AV TERMINAL	1	
	ZA17503	K4CD01000013	AV TERMINAL	1	
	ZA17504	K4CD01000013	AV TERMINAL	1	
	ZA17505	K4CD01000013	AV TERMINAL	1	
	ZA17506	K4CD01000013	AV TERMINAL	1	
	ZA17601	K4CD01000013	AV TERMINAL	1	
	ZA17602	K4CD01000013	AV TERMINAL	1	
	ZA17603	K4CD01000013	AV TERMINAL	1	
	ZA17604	K4CD01000013	AV TERMINAL	1	
	ZA17605	K4CD01000013	AV TERMINAL	1	
⚠	A601	AYRA362MSV7T	ARRESTOR	1	
⚠	A602	AYRA362MSV7T	ARRESTOR	1	
	C201	ACKZE1H220T	50V 22PF	1	
	C202	ACCC3FD470JP	3kV 47PF	1	
	C203	ACCC3FD470JP	3kV 47PF	1	
⚠	C204	ACMPEF12333H	1250V 0.033PF	1	
⚠	C205	ACMPEF12333H	1250V 0.033PF	1	
	C207	ACDE1SL471JP	1kV 470PF	1	
	C208	ACDE1SL471JP	1kV 470PF	1	
	C209	ECQV1H224JL	P 0.22UF, J, 50V	1	
	C210	ECQV1H224JL	P 0.22UF, J, 50V	1	
	C231	ACKZE1H220T	50V 22PF	1	
	C232	ACKZE1H220T	50V 22PF	1	
	C251	ECQV1H104JL	P 0.1UF, J, 50V	1	
	C252	ECQV1H224JL	P 0.22UF, J, 50V	1	
	C254	ECQE2223SKF	250V 0.022PF	1	
	C255	ECQE2223SKF	250V 0.022PF	1	
⚠	C256	ACKMQ220901Z	220V 900PF	1	
⚠	C257	ACKMQ220901Z	220V 900PF	1	
⚠	C258	ACKMQ220901Z	220V 900PF	1	
⚠	C259	ACKMQ220901Z	220V 900PF	1	
	C301	ACKZE1H220T	50V 22PF	1	
	C302	ACRR3DD101K7	2kV 100PF	1	
	C303	ACRR3DD101K7	2kV 100PF	1	
⚠	C304	ACMPEF12473H	1250V 0.047PF	1	
	C305	ACCK1B681KP	1kV 680p	1	
	C306	ACCK1B681KP	1kV 680p	1	
	C352	ACKZE1E182ST	25V 1800PF	1	
	C354	ECQV1H224JL	P 0.22UF, J, 50V	1	
	C355	ECQV1H823JL	50V 0.082PF	1	
	C357	ACKZE1E471LT	25V 470PF	1	
	C358	ACKZE1E471LT	25V 470PF	1	
	C401	ECQE2104SKF	250V 0.1PF	1	
	C402	ECQE2104SKF	250V 0.1PF	1	
⚠	C403	EETHC2C471HX	160V 470PF	1	
	C404	ACKZE1H101T	50V 100PF	1	
⚠	C406	EETHC2A122JJ	100V 1200PF	1	
	C409	ECQE2104SKF	250V 0.1PF	1	
	C451	ACKZE1A471C	10V 470PF	1	
	C500	ACKZE1H221T	50V 220PF	1	
⚠	C501	ECQU2A103MLA	P 0.01UF, M,250V	1	
⚠	C503	ACKMQ2W560T	450V 56PF	1	
	C504	ACKZE1H220T	50V 22PF	1	
	C505	ECQV1H224JL	P 0.22UF, J, 50V	1	
	C506	ACKZE1H100T	50V 10PF	1	
	C507	ACKZE1H221T	50V 220PF	1	
	C508	ACKZE1H220T	50V 22PF	1	
	C551	ACKZE1A102LC	10V 1000PF	1	
	C555	ACKZE1E470T	25V 47PF	1	
	C558	ECQV1H224JL	P 0.22UF, J, 50V	1	
	C559	ECQV1H474JL	P 0.47UF, J, 50V	1	
⚠	C602	ECQU2A104MLA	P 0.1UF, M,250V	1	
⚠	C603	ECKENA221KBR	C 221P 250V	1	
⚠	C604	ECKENA221KBR	C 221P 250V	1	
	C605	ACDE1R102K7	1kV 680p	1	

Safety	Ref. No.	Part No.	Part Name & Description	Pcs	Remarks
⚠	C606	AC4MPH105KA3	450V 1PF	1	
	C610	ECQV1H105JL	50V 1PF	1	
	C611	ACKZE1H220T	50V 22PF	1	
⚠	C612	EETHD2W301LZ	450V 300PF	1	
⚠	C613	EETHD2W301LZ	450V 300PF	1	
⚠	C615	ECKENA101KBR	C 100P 250V	1	
⚠	C620	ECKENA101KBR	C 100P 250V	1	
⚠	C621	ECKENA101KBR	C 100P 250V	1	
	C625	ACRR3AD222KP	1kV 2200PF	1	
⚠	C629	AC4MPH105KA3	450V 1PF	1	
	C701	ACKZE1A471C	10V 470PF	1	
	C702	ECQV1H103JL2	50V 0.01PF	1	
⚠	C801	ECQU2A104MLA	P 0.1UF, M,250V	1	
⚠	C802	ECKENA101KBR	C 100P 250V	1	
⚠	C803	ECKENA101KBR	C 100P 250V	1	
	C807	ACDE1R102K7	1kV 680p	1	
⚠	C808	AC4MPH105KA3	450V 1PF	1	
	C809	ACRR3AD222KP	1kV 2200PF	1	
	C810	ECQV1H105JL	50V 1PF	1	
	C811	ACKZE1H220T	50V 22PF	1	
⚠	C812	EETHD2W301LZ	450V 300PF	1	
⚠	C814	ECKENA101KBR	C 100P 250V	1	
⚠	C815	ECKENA221KBR	C 221P 250V	1	
⚠	C816	ECKENA221KBR	C 221P 250V	1	
⚠	C818	AC4MPH105KA3	450V 1PF	1	
	D201	VDAG01AT	DIODE	1	
	D202	VDAG01AT	DIODE	1	
	D251	MA165TAKU	DIODE	1	
	D254	MA2DF3100S	DIODE	1	
	D255	MA2DF3100S	DIODE	1	
	D256	MA2DF3100S	DIODE	1	
	D257	MA2DF3100S	DIODE	1	
	D351	VDG865C08R	DIODE	1	
	D352	VDAG01AT	DIODE	1	
	D353	VDG865C08R	DIODE	1	
	D401	VDD6SBN20	DIODE	1	
	D402	VDAG01AT	DIODE	1	
	D403	VDYG901C3R	DIODE	1	
	D500	VDAG01AT	DIODE	1	
⚠	D501	VDS1WBA80	DIODE	1	
	D504	VXST3D82BL3	DIODE	1	
	D505	VDAG01AT	DIODE	1	
	D506	VDAG01AT	DIODE	1	
	D551	VDRK39A5	DIODE	1	
	D603	VDAP01CT	DIODE	1	
	D604	VDAP01CT	DIODE	1	
	D606	VDS3V60L1	DIODE	1	
	D651	MA165TAKU	DIODE	1	
	D652	MA165TAKU	DIODE	1	
	D702	VDERA83-004T	DIODE	1	
	D703	MA165TAKU	DIODE	1	
	D801	MA165TAKU	DIODE	1	
	D802	MA165TAKU	DIODE	1	
	D803	VDAP01CT	DIODE	1	
	D804	VDAP01CT	DIODE	1	
	D805	VDS3V60L1	DIODE	1	
⚠	F201	HU216005BEP	FUSE	1	
⚠	F301	HU216005BEP	FUSE	1	
⚠	F601	HU215010BEP	FUSE	1	
⚠	F602	HU215010BEP	FUSE	1	
⚠	F801	HU215010BEP	FUSE	1	
⚠	F802	HU215010BEP	FUSE	1	
⚠	F803	HU382T2P	FUSE	1	
	IC251	AN1431TBTA	IC	1	
	IC352	AN1431TBTA	IC	1	
	IC401	AN1431TBTA	IC	1	
⚠	IC501	MIP3E30MPSCF	IC	1	
	IC555	AN1431TBTA	IC	1	

Safety	Ref. No.	Part No.	Part Name & Description	Pcs	Remarks
⚠	K601	ALKT329C93	RELAY	1	
⚠	K602	ALDJ5D2T8	RELAY	1	
⚠	K801	ALKT329C93	RELAY	1	
⚠	K802	ALDJ5D2T8	RELAY	1	
	L401	AYLH8TB681K	FILTER CHOKE	1	
	L402	AYH221012HY	FILTER CHOKE	1	
	L500	EXCELDR35V	CORE	1	
	L501	EXCELSA35	BEAD CHOKE	1	
	L502	EXCELDR35V	CORE	1	
	L503	EXCELDR35V	CORE	1	
⚠	L601	AYP3165208ZA	FILTER CHOKE	1	
⚠	L602	AYP3165208ZA	FILTER CHOKE	1	
	L603	ETB50CZ14GAD	TRANSFORMER	1	
⚠	L604	AYP3165208ZA	FILTER CHOKE	1	
	L801	EXCELSA35	BEAD CHOKE	1	
⚠	L802	AYP2590204Z	FILTER CHOKE	1	
⚠	L803	AYP2590204Z	FILTER CHOKE	1	
	L805	ETB32CZ13GAD	TRANSFORMER	1	
⚠	MC201	MDPPND471	MODULE	1	
⚠	MC203	MP00R3A1	MODULE	1	
⚠	MC204	MP00R3A1	MODULE	1	
⚠	MC231	MDPHHA101	MODULE	1	
⚠	MC301	MDPPND472	MODULE	1	
⚠	MC352	MDPJFB471	MODULE	1	
⚠	MC401	MDPPSA471	MODULE	1	
⚠	MC451	MDPLSC471	MODULE	1	
⚠	MC501	MDPTZA101	MODULE	1	
⚠	MC502	MDPHHA101	MODULE	1	
⚠	MC552	MDPPFC101	MODULE	1	
⚠	MC601	MDPLPB101	MODULE	1	
⚠	MC602	MP00P18	MODULE	1	
⚠	MC603	MP00P28	MODULE	1	
⚠	MC606	MP00P29	MODULE	1	
⚠	MC701	MDPZDA471	MODULE	1	
⚠	MC801	MP00P15A1	MODULE	1	
⚠	MC802	MDPLPB472	MODULE	1	
	P2	AKB2P3-VH-B	2P CONNECTOR	1	
	P6	AKB12B-EH-A	12P CONNECTOR	1	
	P7	AKB11B-EH-A	11P CONNECTOR	1	
	P9	AKB03P-VL	3P CONNECTOR	1	
	P11	AKB2P3-VH-B	2P CONNECTOR	1	
	P12	AKB10B-PH-KS	10P CONNECTOR	1	
	P25	AKB13B-PH-KS	13P CONNECTOR	1	
⚠	P51	AKB3P4VH-B-L	3P CONNECTOR	1	
⚠	P52	AKB3P4VH-B-L	3P CONNECTOR	1	
⚠	P53	AKB2P-VH	2P CONNECTOR	1	
⚠	P54	AKB2P-VH	2P CONNECTOR	1	
	P55	AKB8B-PH-KS	8P CONNECTOR	1	
	P56	AKB8B-PH-KS	8P CONNECTOR	1	
⚠	PC201	VPS2581AL1VH	OPTOISOLATOR	1	
⚠	PC202	VPS2581AL1VH	OPTOISOLATOR	1	
⚠	PC231	VPS2581AL1VH	OPTOISOLATOR	1	
⚠	PC301	VPS2581AL1VH	OPTOISOLATOR	1	
⚠	PC302	VPS2581AL1VH	OPTOISOLATOR	1	
⚠	PC401	VPS2581AL1VH	OPTOISOLATOR	1	
⚠	PC501	VPS2581AL1VH	OPTOISOLATOR	1	
⚠	PC502	VPS2581AL1VH	OPTOISOLATOR	1	
	Q201	2SD21770SA	TRANSISTOR	1	
	Q202	2SB14340SA	TRANSISTOR	1	
	Q203	2SD21770SA	TRANSISTOR	1	
	Q204	2SB14340SA	TRANSISTOR	1	
⚠	Q301	VKFMA16N55G	FET	1	
⚠	Q302	VKFMA16N55G	FET	1	

Safety	Ref. No.	Part No.	Part Name & Description	Pcs	Remarks
	Q351	2SK3704	FET	1	
	Q401	2SK3607	FET	1	
	Q402	2SA17670Q2	TRANSISTOR	1	
	Q403	2SA17670Q2	TRANSISTOR	1	
	Q651	2SB1030AR	TRANSISTOR	1	
	Q652	2SB1030AR	TRANSISTOR	1	
	R201	ERG12SJ820J	M 82 OHM, J,1/2W	1	
	R202	ERQ14AJ4R7J	F 4.7 OHM, J,1/4W	1	
	R203	ERDS2FJ334	C 330KOHM, J,1/4W	1	
	R204	ERDS2FJ334	C 330KOHM, J,1/4W	1	
	R205	ERDS2FJ334	C 330KOHM, J,1/4W	1	
	R206	ERDS2FJ334	C 330KOHM, J,1/4W	1	
	R207	ERG12SJ820J	M 82 OHM, J,1/2W	1	
	R208	ER0S2CKF1000	M 100 OHM, F,1/4W	1	
	R209	ERDS2FJ154	C 150KOHM, J,1/4W	1	
	R210	ERDS2FJ154	C 150KOHM, J,1/4W	1	
	R211	ERX12SJ3R3J	M 3.3 OHM, J,1/2W	1	
	R212	ERX12SJ3R3J	M 3.3 OHM, J,1/2W	1	
	R215	ERG12SJ220J	M 22 OHM, J,1/2W	1	
	R216	ERG12SJ220J	M 22 OHM, J,1/2W	1	
	R218	ERG12SJ220J	M 22 OHM, J,1/2W	1	
	R219	ERG12SJ220J	M 22 OHM, J,1/2W	1	
	R220	ER0S2CHF1300	M 130 OHM, F,1/4W	1	
	R251	ARRCR1F1153T	METAL GLAZE FIXED RESISTOR	1	
	R252	ARRCR1F1133T	METAL GLAZE FIXED RESISTOR	1	
	R253	ERDS2FJ151	C 150 OHM, J,1/4W	1	
	R254	ERDS2FJ102	M 1KOHM,J,1/10W	1	
	R256	ER0S2THD1002	M 10 KOHM, F,1/4W	1	
	R257	ERDS2FJ472	C 4.7KOHM, J,1/4W	1	
	R258	ERDS2FJ472	C 4.7KOHM, J,1/4W	1	
	R259	ERDS2FJ472	C 4.7KOHM, J,1/4W	1	
	R263	ERDS2FJ220	C 22 OHM, J,1/4W	1	
	R264	ERDS2FJ102	M 1KOHM,J,1/10W	1	
	R265	ARRCR1F2103T	METAL GLAZE FIXED RESISTOR	1	
	R266	ARRCR1F3323T	METAL GLAZE FIXED RESISTOR	1	
	R267	ARRCR1F3243T	METAL GLAZE FIXED RESISTOR	1	
	R302	ERQ14AJ4R7J	F 4.7 OHM, J,1/4W	1	
	R303	ERDS2FJ334	C 330KOHM, J,1/4W	1	
	R304	ERDS2FJ334	C 330KOHM, J,1/4W	1	
	R308	ERG12SJ910J	M 91 OHM, J,1/2W	1	
	R309	ERG12SJ680J	M 68 OHM, J,1/2W	1	
	R310	ERG12SJ220J	M 22 OHM, J,1/2W	1	
	R311	ERG12SJ910J	M 91 OHM, J,1/2W	1	
	R351	ER0S2CHF8871	M8.87KOHM, F,1/4W	1	
	R352	ARRF5EJ30MB	METAL GLAZE FIXED RESISTOR	1	
	R353	ERDS2FJ561	C 560 OHM, J,1/4W	1	
	R354	ERDS2FJ221	C 220 OHM, J,1/4W	1	
	R355	ERDS2FJ222	C 2.2KOHM, J,1/4W	1	

Safety	Ref. No.	Part No.	Part Name & Description	Pcs	Remarks
	R356	ER0S2THD1002	M 10 KOHM, F,1/4W	1	
	R359	ER0S2THD5232	M52.3KOHM, F,1/4W	1	
	R362	ERG12SJ332J	M 3.3KOHM, J,1/2W	1	
	R366	ER0S2THF6981	M6.98KOHM, F,1/4W	1	
	R367	ER0S2CHF8451	M8.45KOHM, F,1/4W	1	
	R371	ER0S2THF6981	M6.98KOHM, F,1/4W	1	
	R372	ER0S2THF1151	M1150 OHM, F,1/4W	1	
	R403	ERG12SJ100J	M 10 OHM, J,1/2W	1	
	R404	ER0S2CHF5492	M54.9KOHM, F,1/4W	1	
	R405	ARRF2EJR10B	METAL GLAZE FIXED RESISTOR	1	
	R409	ERDS2FJ473	C 47KOHM, J,1/4W	1	
	R411	ER0S2CKF2001	M 2KOHM, F,1/4W	1	
	R412	ER0S2CKF2001	M 2KOHM, F,1/4W	1	
	R413	ER0S2CHF3092	M30.9KOHM, F,1/4W	1	
	R417	ER0S2CHF4222	M42.2KOHM, F,1/4W	1	
	R418	ER0S2CHF4022	M40.2KOHM, F,1/4W	1	
	R420	ER0S2THF5620	M 56.2 OHM, F,1/4W	1	
	R421	ER0S2THF4422	M42.2KOHM, F,1/4W	1	
	R422	ER0S2CHF1272	M12.7KOHM, F,1/4W	1	
	R423	ER0S2CHF1333	M 133KOHM, F,1/4W	1	
	R456	ER0S2CKF1332	M13.3KOHM, F,1/4W	1	
⚠	R502	ARRCR6J825M	METAL GLAZE FIXED RESISTOR	1	
	R505	ERDS2FJ201	C 200 OHM, J,1/4W	1	
	R506	ARRCR2F1304T	METAL GLAZE FIXED RESISTOR	1	
	R507	ARRCR2F1184T	METAL GLAZE FIXED RESISTOR	1	
	R509	ARRCR2F1304T	METAL GLAZE FIXED RESISTOR	1	
	R510	ARRCR2F1184T	METAL GLAZE FIXED RESISTOR	1	
	R522	ERDS2FJ180	C 18 OHM, J,1/4W	1	
	R555	ER0S2CKF1052	M10.5KOHM, F,1/4W	1	
	R557	ERDS2TJ392	C 3.9KOHM, J,1/4W	1	
	R560	ERDS2FJ222	C 2.2KOHM, J,1/4W	1	
	R561	ER0S2CKF2152	M21.5KOHM, F,1/4W	1	
	R562	ERDS2FJ150	C 15 OHM, J,1/4W	1	
	R563	ERDS2FJ121	C 120 OHM, J,1/4W	1	
	R564	ER0S2THD1002	M 10 KOHM, F,1/4W	1	
	R603	ARRCR2F4753T	METAL GLAZE FIXED RESISTOR	1	
	R604	ARRCR2F4023T	METAL GLAZE FIXED RESISTOR	1	
	R607	ARRCR2F7503T	METAL GLAZE FIXED RESISTOR	1	
	R608	ARRCR2F7503T	METAL GLAZE FIXED RESISTOR	1	
	R611	ER0S2THF5112	M51.1KOHM, F,1/4W	1	
	R617	ARRF5EJR15B	METAL GLAZE FIXED RESISTOR	1	
	R618	ARRF5EJR15B	METAL GLAZE FIXED RESISTOR	1	
	R619	ARRF5EJR10B	METAL GLAZE FIXED RESISTOR	1	

Safety	Ref. No.	Part No.	Part Name & Description	Pcs	Remarks
	R622	ERDS2FJ472	C 4.7KOHM, J,1/4W	1	
	R623	ERG12SJ270J	M 27 OHM, J,1/2W	1	
	R624	ERDS2FJ472	C 4.7KOHM, J,1/4W	1	
	R625	ERG12SJ270J	M 27 OHM, J,1/2W	1	
	R626	ERDS2FJ472	C 4.7KOHM, J,1/4W	1	
	R627	ERG12SJ270J	M 27 OHM, J,1/2W	1	
	R630	ARRCR1F2493T	METAL GLAZE FIXED RESISTOR	1	
	R631	ARRCR1F2493T	METAL GLAZE FIXED RESISTOR	1	
	R632	ARRCR1F2213T	METAL GLAZE FIXED RESISTOR	1	
	R651	ERDS2FJ103	C 10KOHM, J,1/4W	1	
	R652	ERDS2FJ103	C 10KOHM, J,1/4W	1	
	R653	ERDS2FJ222	C 2.2KOHM, J,1/4W	1	
	R654	ERDS2FJ222	C 2.2KOHM, J,1/4W	1	
	R655	ERDS2FJ221	C 220 OHM, J,1/4W	1	
	R656	ERDS2FJ221	C 220 OHM, J,1/4W	1	
	R657	ERDS2FJ222	C 2.2KOHM, J,1/4W	1	
	R658	ERDS2FJ681	C680 OHM, J,1/4W	1	
	R701	ERDS2FJ221	C 220 OHM, J,1/4W	1	
	R702	ERDS2FJ222	C 2.2KOHM, J,1/4W	1	
	R705	ERDS2FJ393	C 39KOHM, J,1/4W	1	
	R706	ERDS2FJ221	C 220 OHM, J,1/4W	1	
	R707	ERDS2FJ222	C 2.2KOHM, J,1/4W	1	
	R712	ERDS2FJ221	C 220 OHM, J,1/4W	1	
	R713	ERDS2FJ222	C 2.2KOHM, J,1/4W	1	
⚠	R801	ARRCR5J624M	METAL GLAZE FIXED RESISTOR	1	
⚠	R802	ARR5B100JC2	5W 10 OHM	1	
	R803	ARRCR2F7503T	METAL GLAZE FIXED RESISTOR	1	
	R804	ARRCR2F7503T	METAL GLAZE FIXED RESISTOR	1	
	R805	ARRCR2F7503T	METAL GLAZE FIXED RESISTOR	1	
	R806	ARRCR2F7503T	METAL GLAZE FIXED RESISTOR	1	
	R807	ER0S2CHF3482	M34.8KOHM, F,1/4W	1	
	R809	ARRF5EJR10B	METAL GLAZE FIXED RESISTOR	1	
	R810	ARRF5EJR10B	METAL GLAZE FIXED RESISTOR	1	
	R811	ERDS2FJ472	C 4.7KOHM, J,1/4W	1	
	R812	ERG12SJ270J	M 27 OHM, J,1/2W	1	
	R813	ERDS2FJ472	C 4.7KOHM, J,1/4W	1	
	R814	ERG12SJ270J	M 27 OHM, J,1/2W	1	
	R815	ARRCR1F2493T	METAL GLAZE FIXED RESISTOR	1	
	R816	ARRCR1F2493T	METAL GLAZE FIXED RESISTOR	1	
	R817	ARRCR1F2213T	METAL GLAZE FIXED RESISTOR	1	
⚠	RF601	HUY5JA200JP	W 20 OHM, J, 5W	1	
⚠	RF801	HUY5JA200JP	W 20 OHM, J, 5W	1	
⚠	T201	ETB58LZ12GAD	TRANSFORMER	1	
⚠	T301	ETB50LZ1DGAD	TRANSFORMER	1	
⚠	T501	ETB25BG128AH	TRANSFORMER	1	

Safety	Ref. No.	Part No.	Part Name & Description	Pcs	Remarks
	VR251	EVMEASA01B55	VARIABLE RESISTOR	1	
	VR401	EVMEASA01B14	VARIABLE RESISTOR	1	
⚠	Z501	ERZVGAD471	VARISTOR	1	
⚠	Z502	ERZVGAD471	VARISTOR	1	
⚠	Z601	ERZVGED751	VARISTOR	1	
⚠	Z602	ERZVGED751	VARISTOR	1	
⚠	Z603	ERZVGAD471	VARISTOR	1	
⚠	Z801	ERZVGED751	VARISTOR	1	
⚠	Z802	ERZVGED751	VARISTOR	1	
	ZD201	MA4270NMTA	ZENER DIODE	1	
	ZD203	MA4270NMTA	ZENER DIODE	1	
	ZD204	MA4270NMTA	ZENER DIODE	1	
	ZD206	MA4270NMTA	ZENER DIODE	1	
	ZD207	MA4270NMTA	ZENER DIODE	1	
	ZD251	MA4330NMTA	ZENER DIODE	1	
	ZD301	MA4270NMTA	ZENER DIODE	1	
	ZD302	MA4270NMTA	ZENER DIODE	1	
	ZD305	MA4270NMTA	ZENER DIODE	1	
	ZD351	MA4330NMTA	ZENER DIODE	1	
	ZD401	MA4360NM	ZENER DIODE	1	
	ZD451	MAZ4068NMF	ZENER DIODE	1	
	ZD501	MA4300NMTA	ZENER DIODE	1	
	ZD502	MA4300NMTA	ZENER DIODE	1	
	ZD503	MA4082NM	ZENER DIODE	1	
	ZD555	MA4330NMTA	ZENER DIODE	1	
	ZD601	MA4047NM	ZENER DIODE	1	
	ZD801	MA4047NM	ZENER DIODE	1	