



LOCATION OF CONTROLS

Base Unit

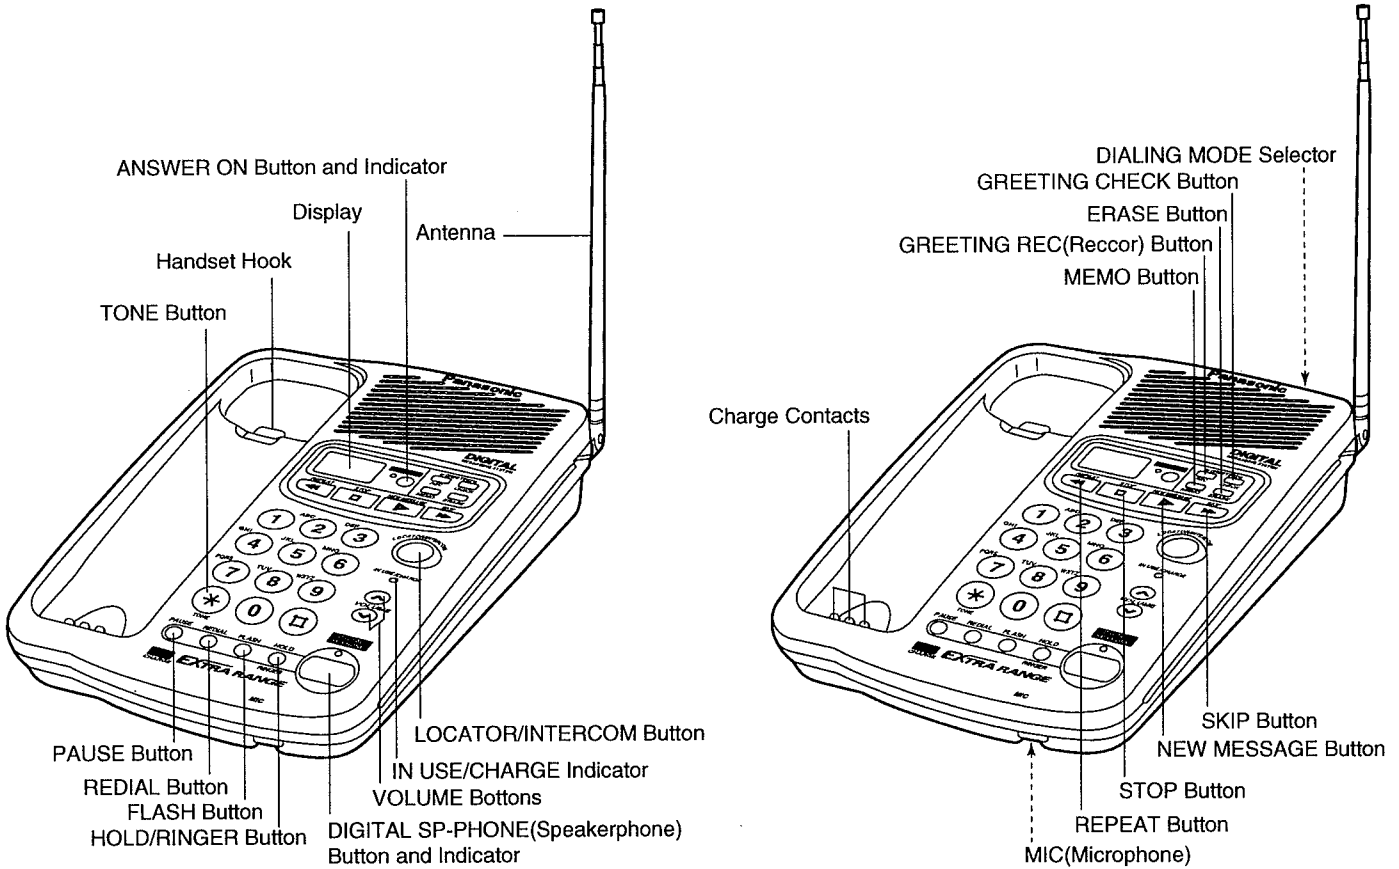


Portable Handset

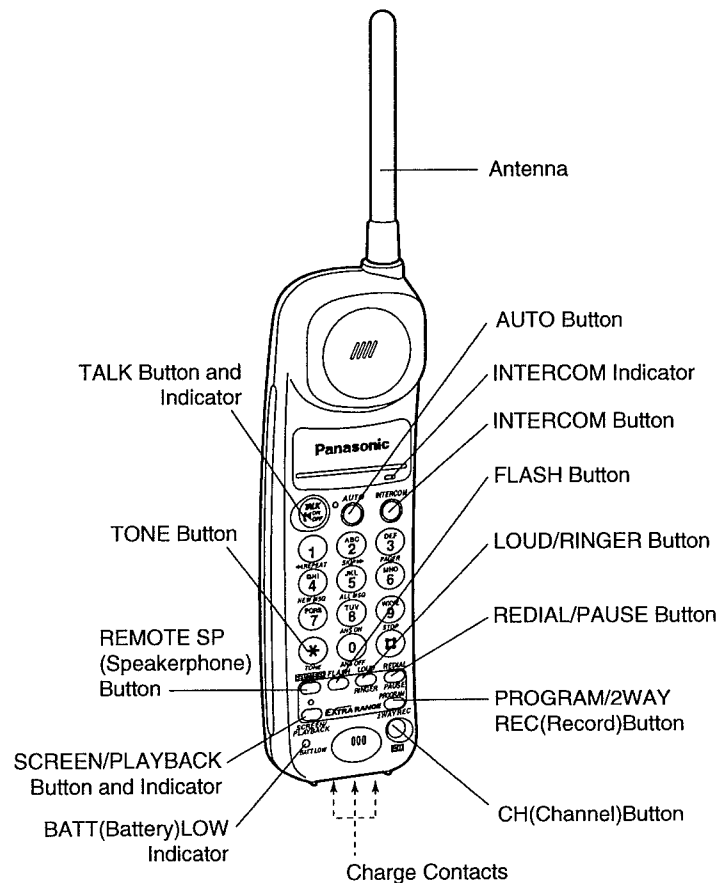


Display of the base unit




The clock needs adjusting.




12 messages have been recorded.




Your message was not recorded correctly. Record it again.




Memory is full. Erase some or all of the messages.



The unit is in programming mode.



The recording time is set to "greeting only".




The speaker volume level is set to "5".

You can select:

- 9 levels (0-8) while using the answering system.
- 8 levels (1-8) while using the speakerphone.



The base unit ringer volume is set to OFF.



The pager call mode is set to ON.

STANDARD BATTERY LIFE

If your Panasonic battery is fully charged;

While in use (TALK)	Up to about 6 hours
While not in use (Stand-by)	Up to about 30 days

- Battery life may vary depending on usage conditions and ambient temperature.
- **Clean the handset and the base unit charge contacts with a soft dry cloth once a month. Clean more often if the unit is subject to grease, dust or high humidity.** If not, the battery may not charge properly.
- Once the battery is fully charged, you do not have to place the handset on the base unit until the BATT LOW indicator flashes. This will maximize the battery life.
- The battery cannot be overcharged.

FREQUENCY TABLE (MHz)

	BASE UNIT		PORTABLE HANDSET	
	Receive Frequency	Transmit Frequency	Transmit Frequency	Receive Frequency
1	49.460	43.720	49.460	43.720
2	49.845	43.740	49.845	43.740
3	49.860	43.820	49.860	43.820
4	49.500	43.840	49.500	43.840
5	49.875	43.920	49.875	43.920
6	49.830	43.960	49.830	43.960
7	49.890	44.120	49.890	44.120
8	49.930	44.160	49.930	44.160
9	49.990	44.180	49.990	44.180
10	49.970	44.200	49.970	44.200
A	49.950	43.700	49.640	44.540
B	49.700	44.100		44.520
C	49.810		49.620	44.560

ADJUSTMENTS (BASE UNIT)

If your unit have below symptoms, adjust each item using remedy column from the table.

Symptom	Remedy
The base unit dose not respond to a call from portable handset.	Make adjustments in item (A)
The base unit dose not transmit or the transmit frequency is off.	Make adjustments in item (B)
The transmit frequency is off.	Make confirmations in item (C)
The transmit power output is low, and the operating distance between base unit and portable handset is less than normal.	Make adjustments in item (D)
The reception sensitivity of base unit is low with noise.	Make adjustments in item (E)
The transmit level is large or small.	Make adjustments in item (F), (G)
The reception level is large or small.	Make adjustments in item (H)
The unit does not link.	Make confirmations in item (I)

Unit condition:

Remove the antenna from P.C Board of the base unit.

How to set the test mode:

1. In pressing S1 and "UP" switch, set S10 to ON (Power supply is turned ON).
2. Separate S1 and "UP" switch. The unit becomes test mode (1).
3. The state of the unit changes as following when "NEW MESSAGE" switch is pressed.

	Test Mode	RX Freq.	TX Freq.	Mode
Power supply is turned ON	Test Mode (1)	CH10	CH10	Talk
Press "NEW MESSAGE" switch 1 time	Test Mode (2)	CHA	CHA	Talk
Press "NEW MESSAGE" switch 1 time	Test Mode (3)	CHB	CHB	Talk
Press "NEW MESSAGE" switch 1 time	Test Mode (4)	CHC	CH1	Talk
Press "NEW MESSAGE" switch 1 time	Test Mode (5)	CH1	CHB	Int'com
Press "NEW MESSAGE" switch 1 time	Test Mode (6)	CH1	CHB	Locator

When replacing these parts, adjust as shown in below table.

Replace Parts	Adjustment items	Test Mode	Adjustment point	Procedure
IC201, T203	(A) RX VCO Adjustment	Test Mode (1)	T203	1. Set S3 to ON. 2. Adjust T203 so that the reading of the Digital Voltmeter is $3.5V \pm 0.1 V$.
D301, T301	(B) TX VCO Adjustment	Test Mode (1)	T301	1. Set S2 to ON. 2. Adjust T301 so that the reading of the Digital Voltmeter is $1.5 V \pm 0.1 V$.
DUP301, T202, X201	(C) TX Frequency Cofirmation	Test Mode (3)	—	1. Set S8 to ON. 2. Confirm so that the reading of the frequency counter is $44.100 \text{ MHz} \pm 700 \text{ Hz}$.

When replacing these parts, adjust as shown in table below.

Replace Parts	Adjustment items	Test Mode	Adjustment Point	Procedure
VR302, Q302 T351	(D) TX Power Adjustment	Test Mode (2)	T351 VR302	1. Set S4 to ON. 2. Adjust T351 so that the reading of the RF VTVM is peak level. 3. Adjust VR302 so that the reading of the RF VTVM is $1000\text{mv} \pm 50\text{mV}$.
T201	(E) RX Sensitivity Adjustment	Test Mode (2)	T201	1. Set S5 to ON. 2. Apply a 60dB μ Vemf output from S.S.G. (modulation frequency 1kHz, dev. 0kHz). 3. Adjust T201 so that the reading of the RF VTVM is maximum output (10~50 mV).
T202	(F) Line Output Maximum Adjustment	Test Mode (3)	T202	1. Set S5 and S6 to ON. 2. Apply a 40dB μ Vemf output from S.S.G. (modulation frequency 1kHz, dev. 0 kHz), and adjust T202 so that reading of the DC voltmeter is $0.9\text{ V} \pm 0.05\text{ V}$.
VR201	(G) Line Output Level Adjustment	Test Mode (3)	VR201	1. Set S5 and S6 to ON. 2. Apply a 40dB μ Vemf output from S.S.G. (modulation frequency 1kHz, dev. 3kHz). 3. Adjust VR201 so that the reading of the AF VTVM is $-5.0\text{dBm} \pm 0.5\text{dBm}$ (600Ω load).
VR301	(H) Line Input Modulation Adjustment	Test Mode (3)	VR301	1. Set S5, S8 and S9 to ON. 2. Input via loop simulator 1.0kHz, -20.0 dBm/600Ω (measured at T-R) signal. 3. Apply a 40 dB μ Vemf output from S.S.G. (modulation frequency 1kHz, dev. 0kHz). 4. Adjust VR301 so that the reading of the FM Deviation Meter is $4.0\text{ kHz} \pm 0.1\text{kHz}$.
IC201	(I) Carrier Sensitivity Confirmation	Test Mode (4)	—	1. Set S5, S8 to ON. 2. Apply a 35dB μ Vemf output from S.S.G. (modulation frequency 1kHz, dev. 3kHz). Confirm so that the oscilloscope becomes Low. 3. Apply a 15dB μ Vemf output from S.S.G. (modulation frequency 1kHz, dev. 3kHz). Confirm so that the oscilloscope becomes High.

The connection of adjustment equipments are as shown on page 25.

■ FOR SCHEMATIC DIAGRAM (BASE UNIT) [page 24]

1. DC voltage measurements are taken with electronic voltmeter from negative voltage line.
























This schematic diagram may be modified at any time with development of new technology.

Important Safety Notice









The shaded area on this schematic diagram incorporates special features important for protection from fire and electrical shock hazards. When servicing it is essential that only manufacturer's specified parts be used for the critical components in the shaded areas of the schematic.

TERMINAL GUIDE OF IC'S, TRANSISTORS AND DIODES

(BASE UNIT)

 AN6183SAE1 PQVI93LC46XI	 PQVITB31224H	 PQVI53MF5005	 PQVID6471A	 PQVIMCL548DW
 PQVIKM29N4TC	 PQVISC111815	 PQVINJM4558M	 PQVIBU4053BF	 2SA1625, 2SC2120
 2SC1740S	 2SK543	 PQVTMSC2295C 2SC2412K, 2SD1819A 2SB709A, 2SD601A PQVTFB1A4M, 2SB1218A PQVTDTA114YU	 2SD2137	 2SD1994A 2SD1991A
 PQVDS1ZB40F1	 MA110	 PQVDKV1832C3	 MA4100, MA4062 MA4047	 1SS119
 MA700A	 PQVDMTZ3R6 MA4220	 LNJ301MPUJA PQVDSL210VC		

(PORTABLE HANDSET)

 PQVI0008GE47	 PQVIXCC3501P PQVIS80730AL	 PQVTDTC114EU 2SD601A, 2SB709A PQVTD123T146 XN1116, 2SC2295 PQVTMSC2295C PQVT143XK146	 MA110 MA728	 PQVDS5688G
 LNJ301MPUJA PQVDSL210VC	 PQVITB31224R	 MA840BTAKU MA840ATAKU		

HOW TO REPLACE FLAT PACKAGE IC

■ PREPARATION


- SOLDER - - - - - Sparkle Solder 115A-1, 115B-1
OR
Almit Solder KR-19, KR-19RMA
- Soldering iron - - - - - Recommended power consumption will be between 30 W to 40 W.
Temperature of Copper Rod $662 \pm 50^{\circ}\text{F}$ ($350 \pm 10^{\circ}\text{C}$)

(An expert may handle 60~80 W iron, but beginner might damage foil by overheating.)
- Flux - - - - - HI115 Specific gravity 0.863

(Original flux will be replaced daily.)

■ PROCEDURE


1. Temporary fix FLAT PACKAGE IC by soldering on two marked 2 pins.



● - - - - - Temporary soldering point.


*Most important matter is accurate setting of IC to the corresponding soldering foil.

2. Apply flux for all pins of FLAT PACKAGE IC.





○ - - - - - Flux

3. Solder employing specified solder to direction of arrow, as sliding the soldering iron.

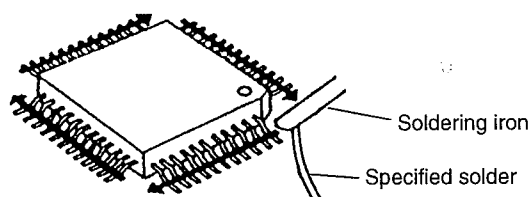


■ MODIFICATION PROCEDURE OF BRIDGE

1. Re-solder slightly on bridged portion.
2. Remove remained solder along pins employing soldering iron as shown in below figure.




CIRCUIT BOARD (OPERATION)


(Component View)

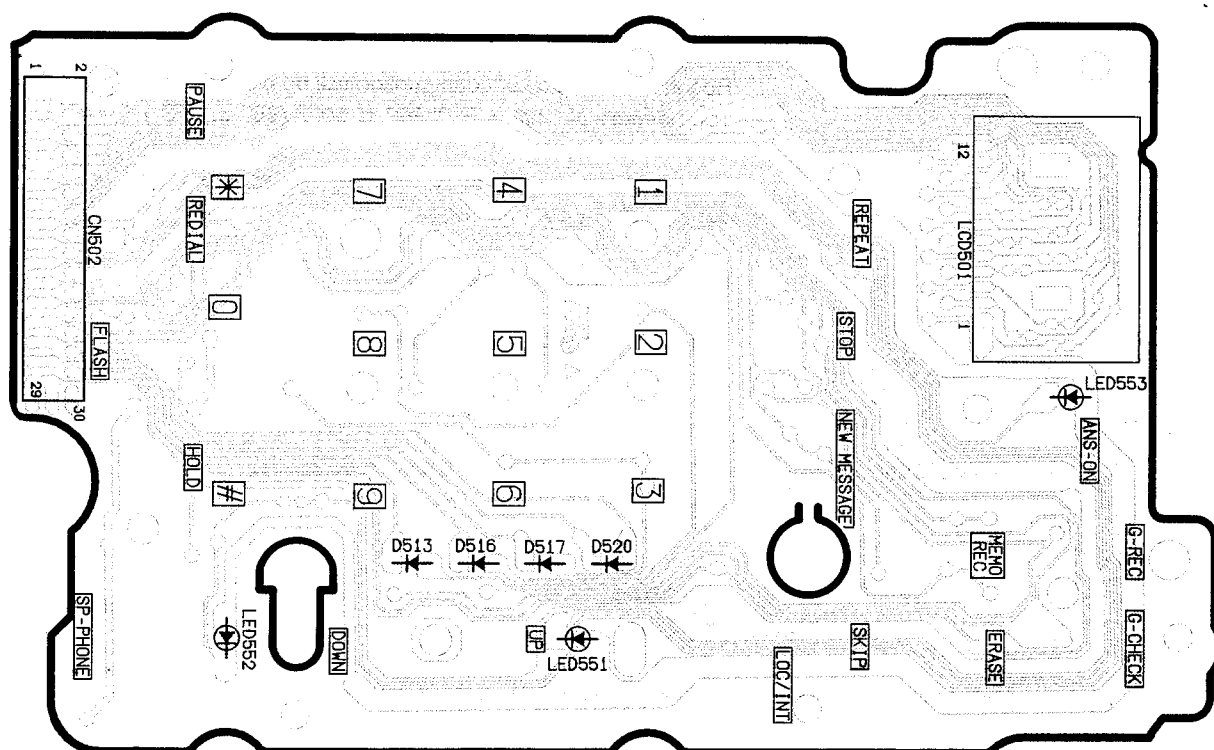



(Bottom View)

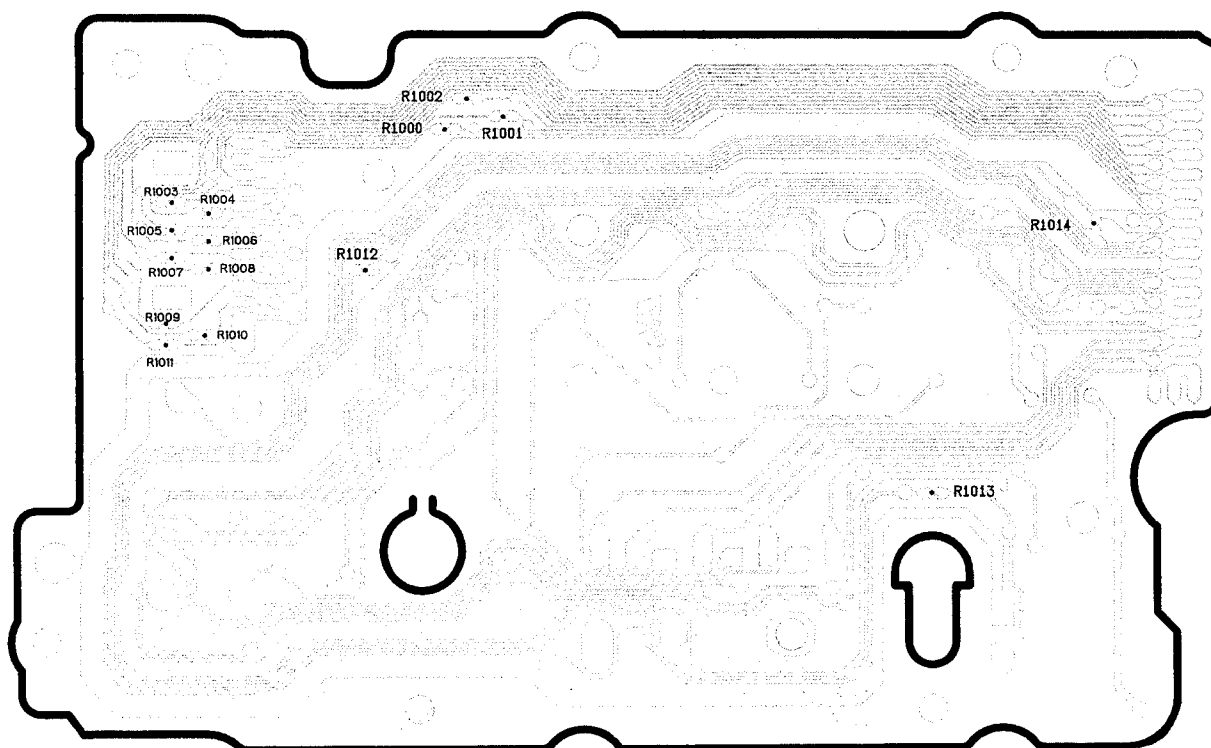


SCHEMATIC DIAGRAM (BASE UNIT)

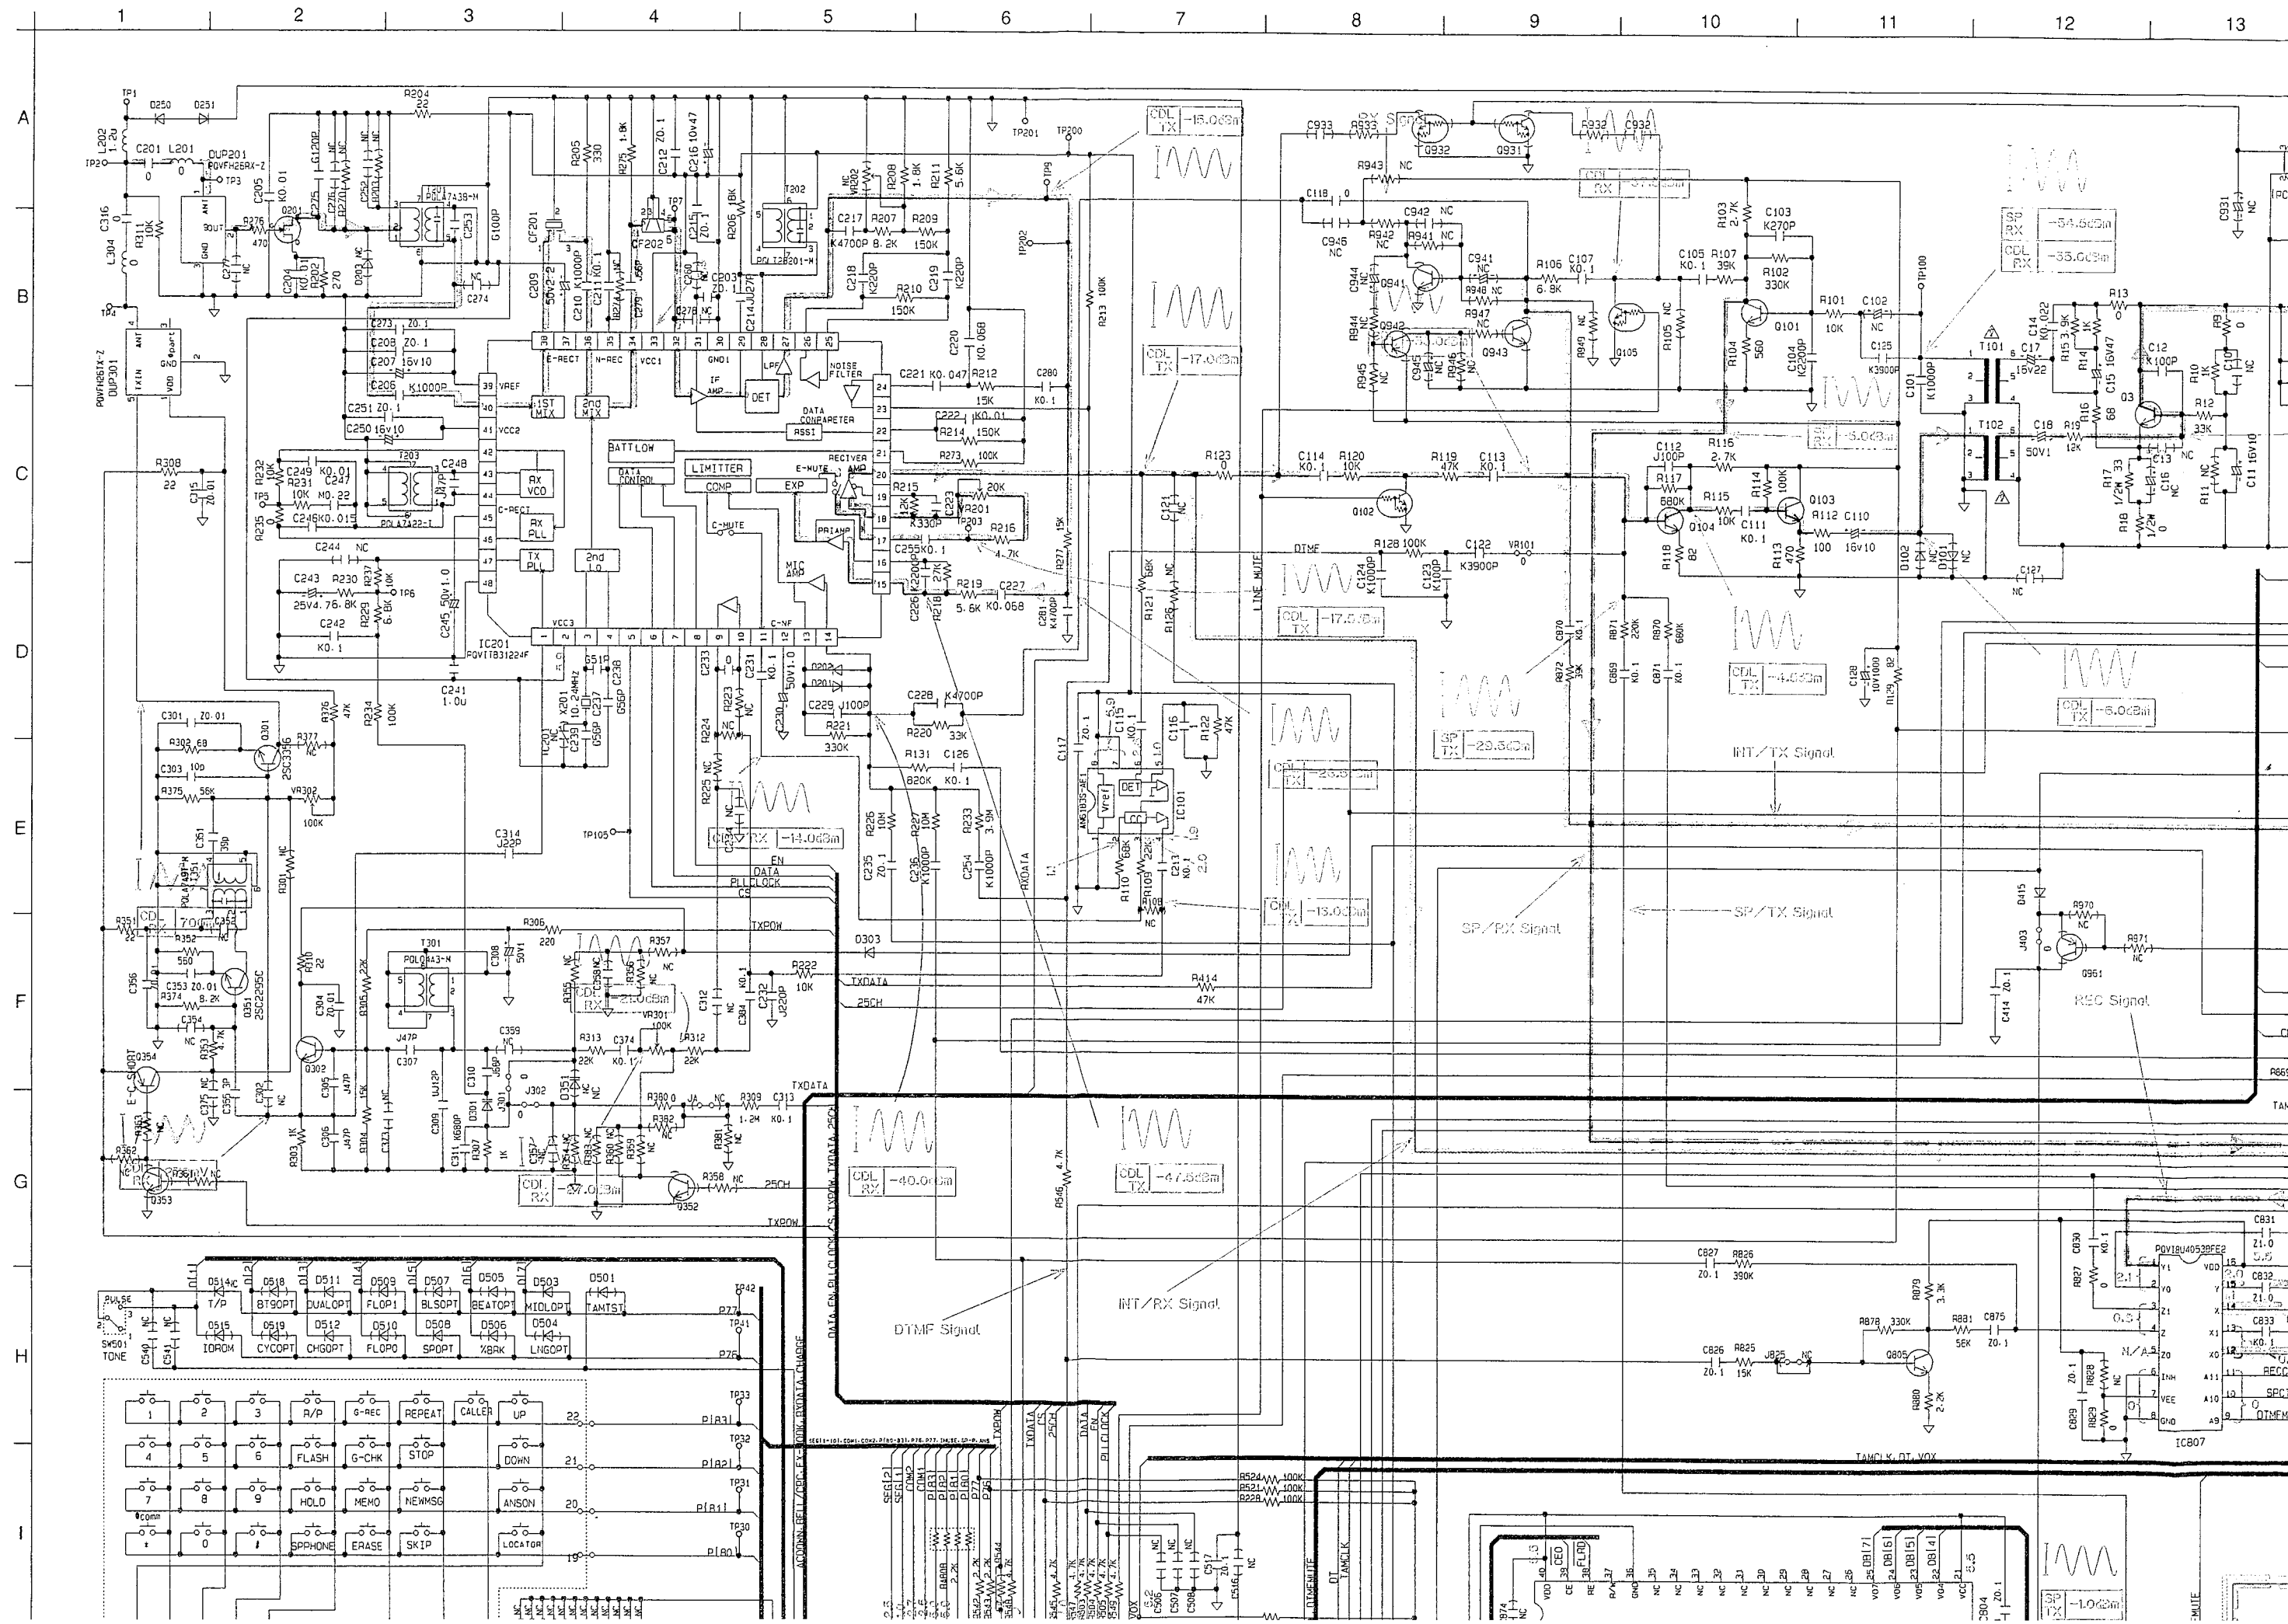

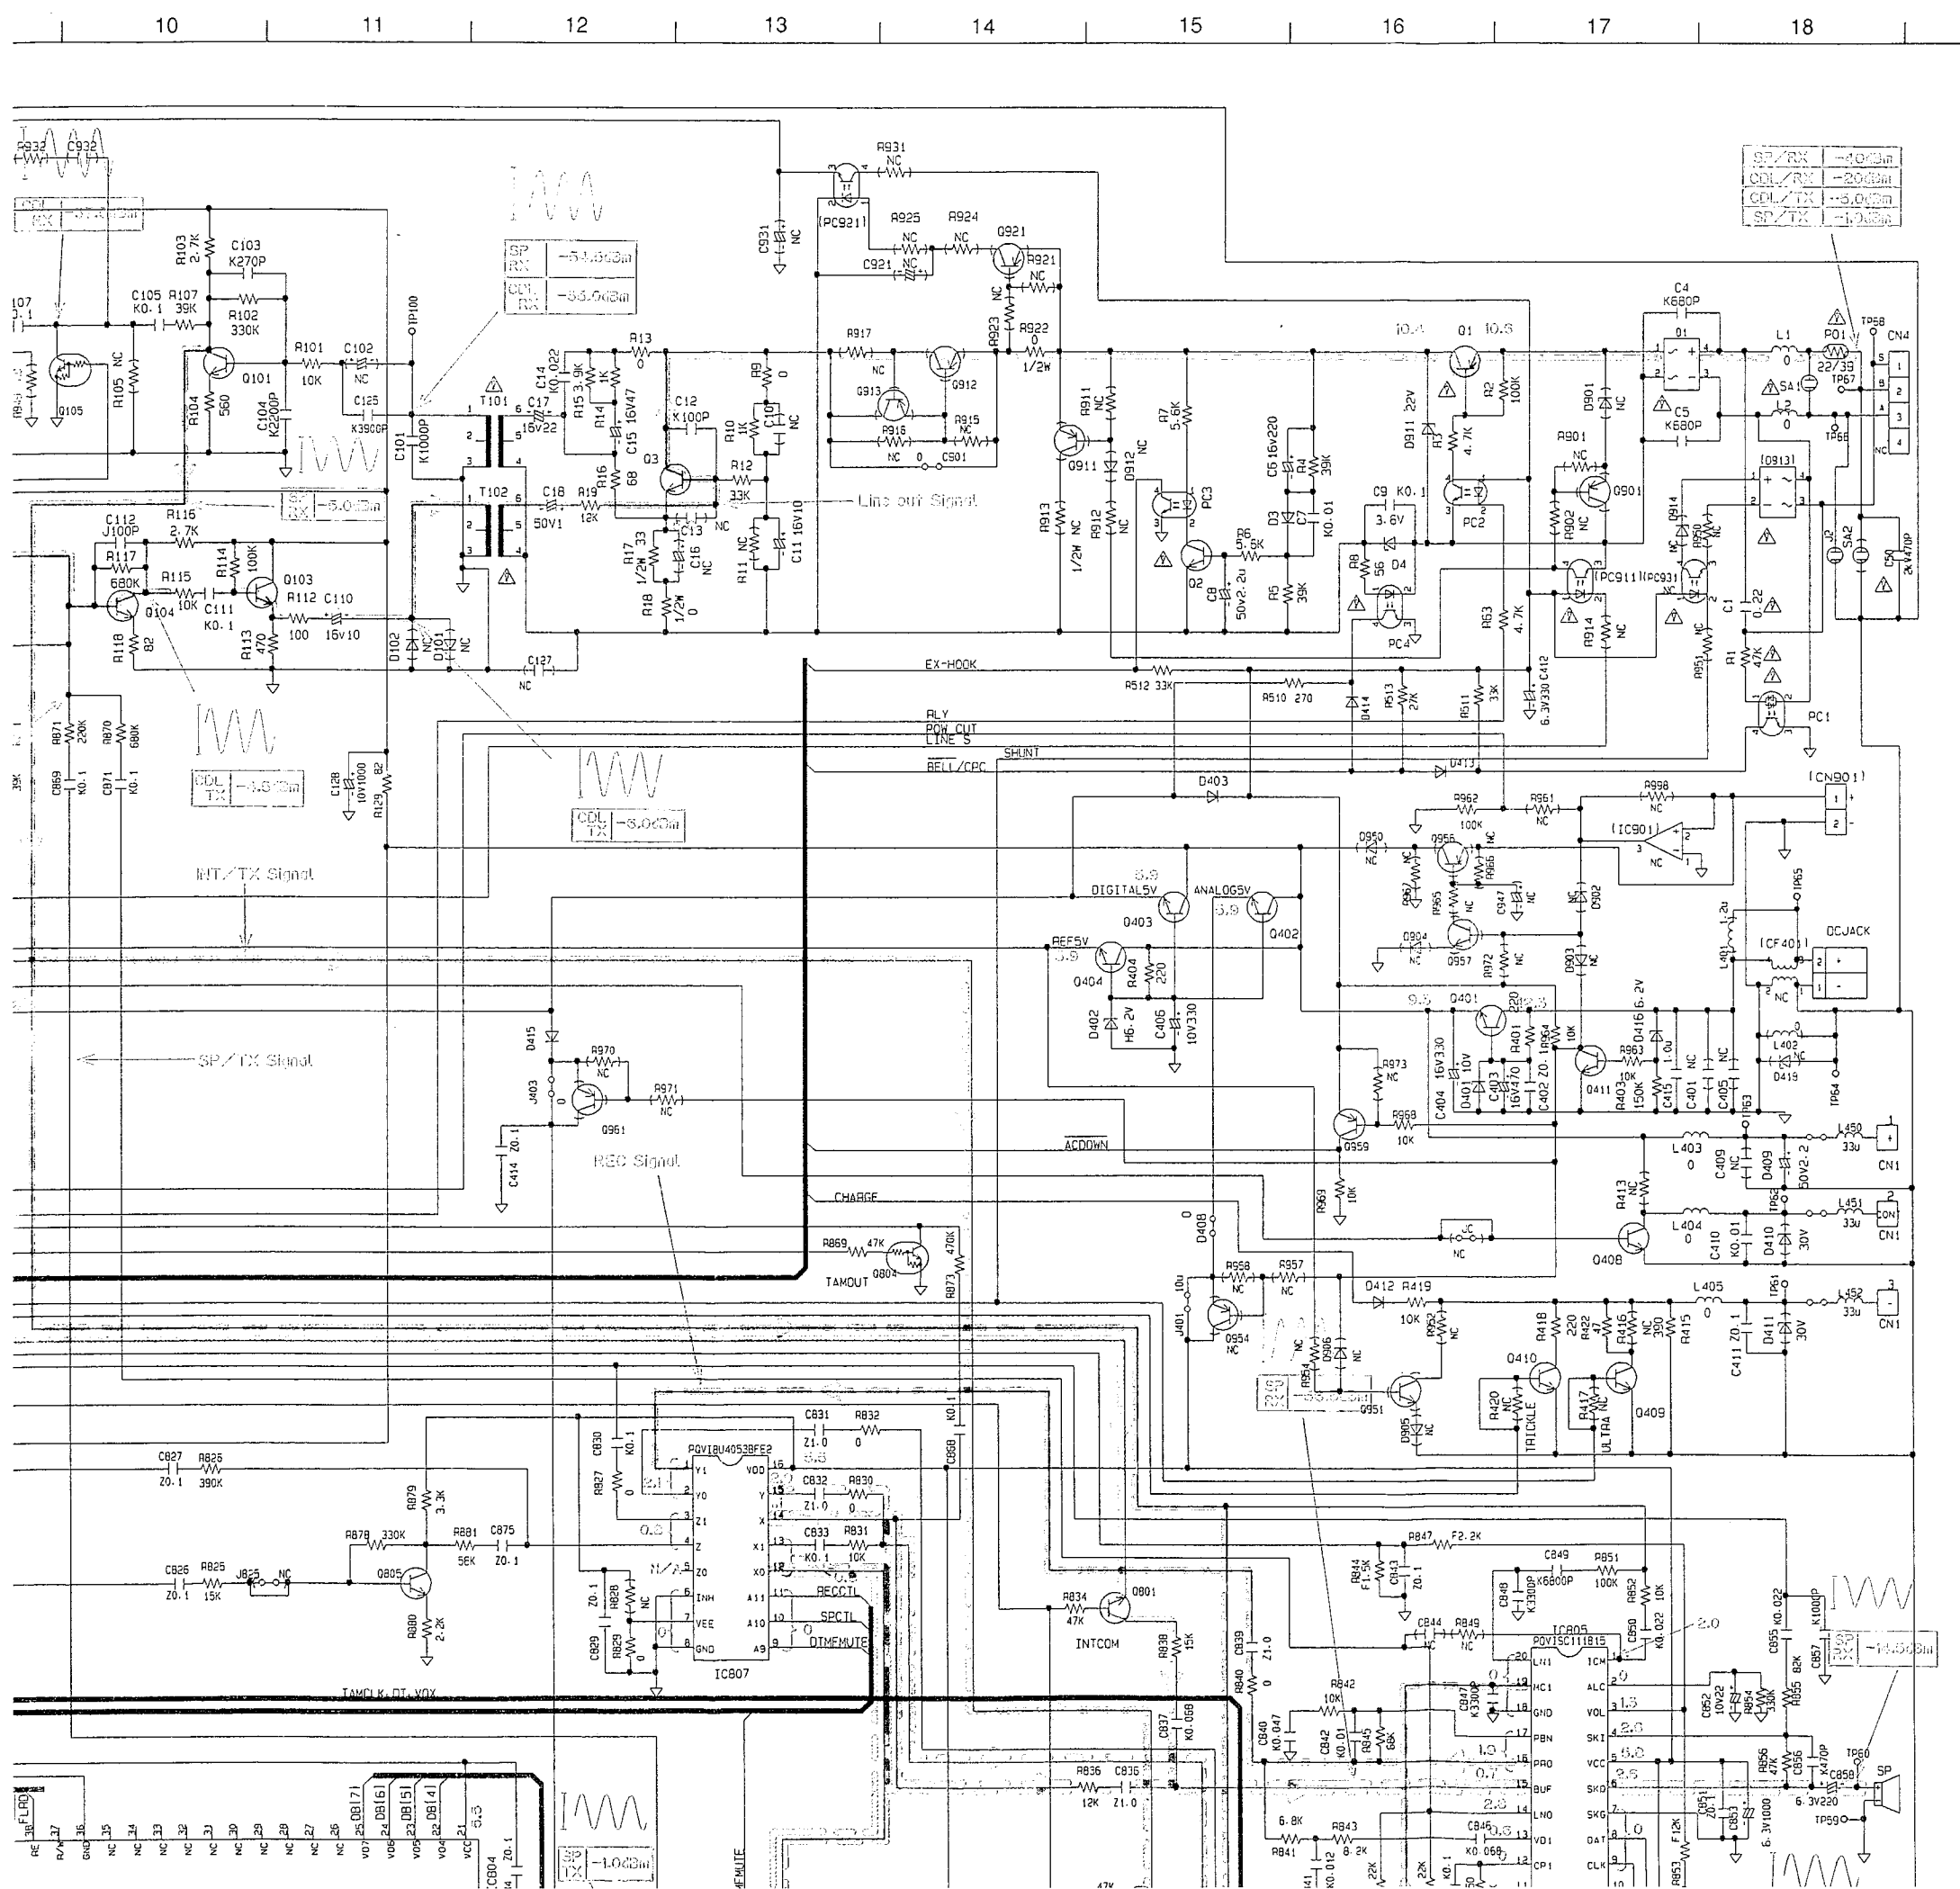


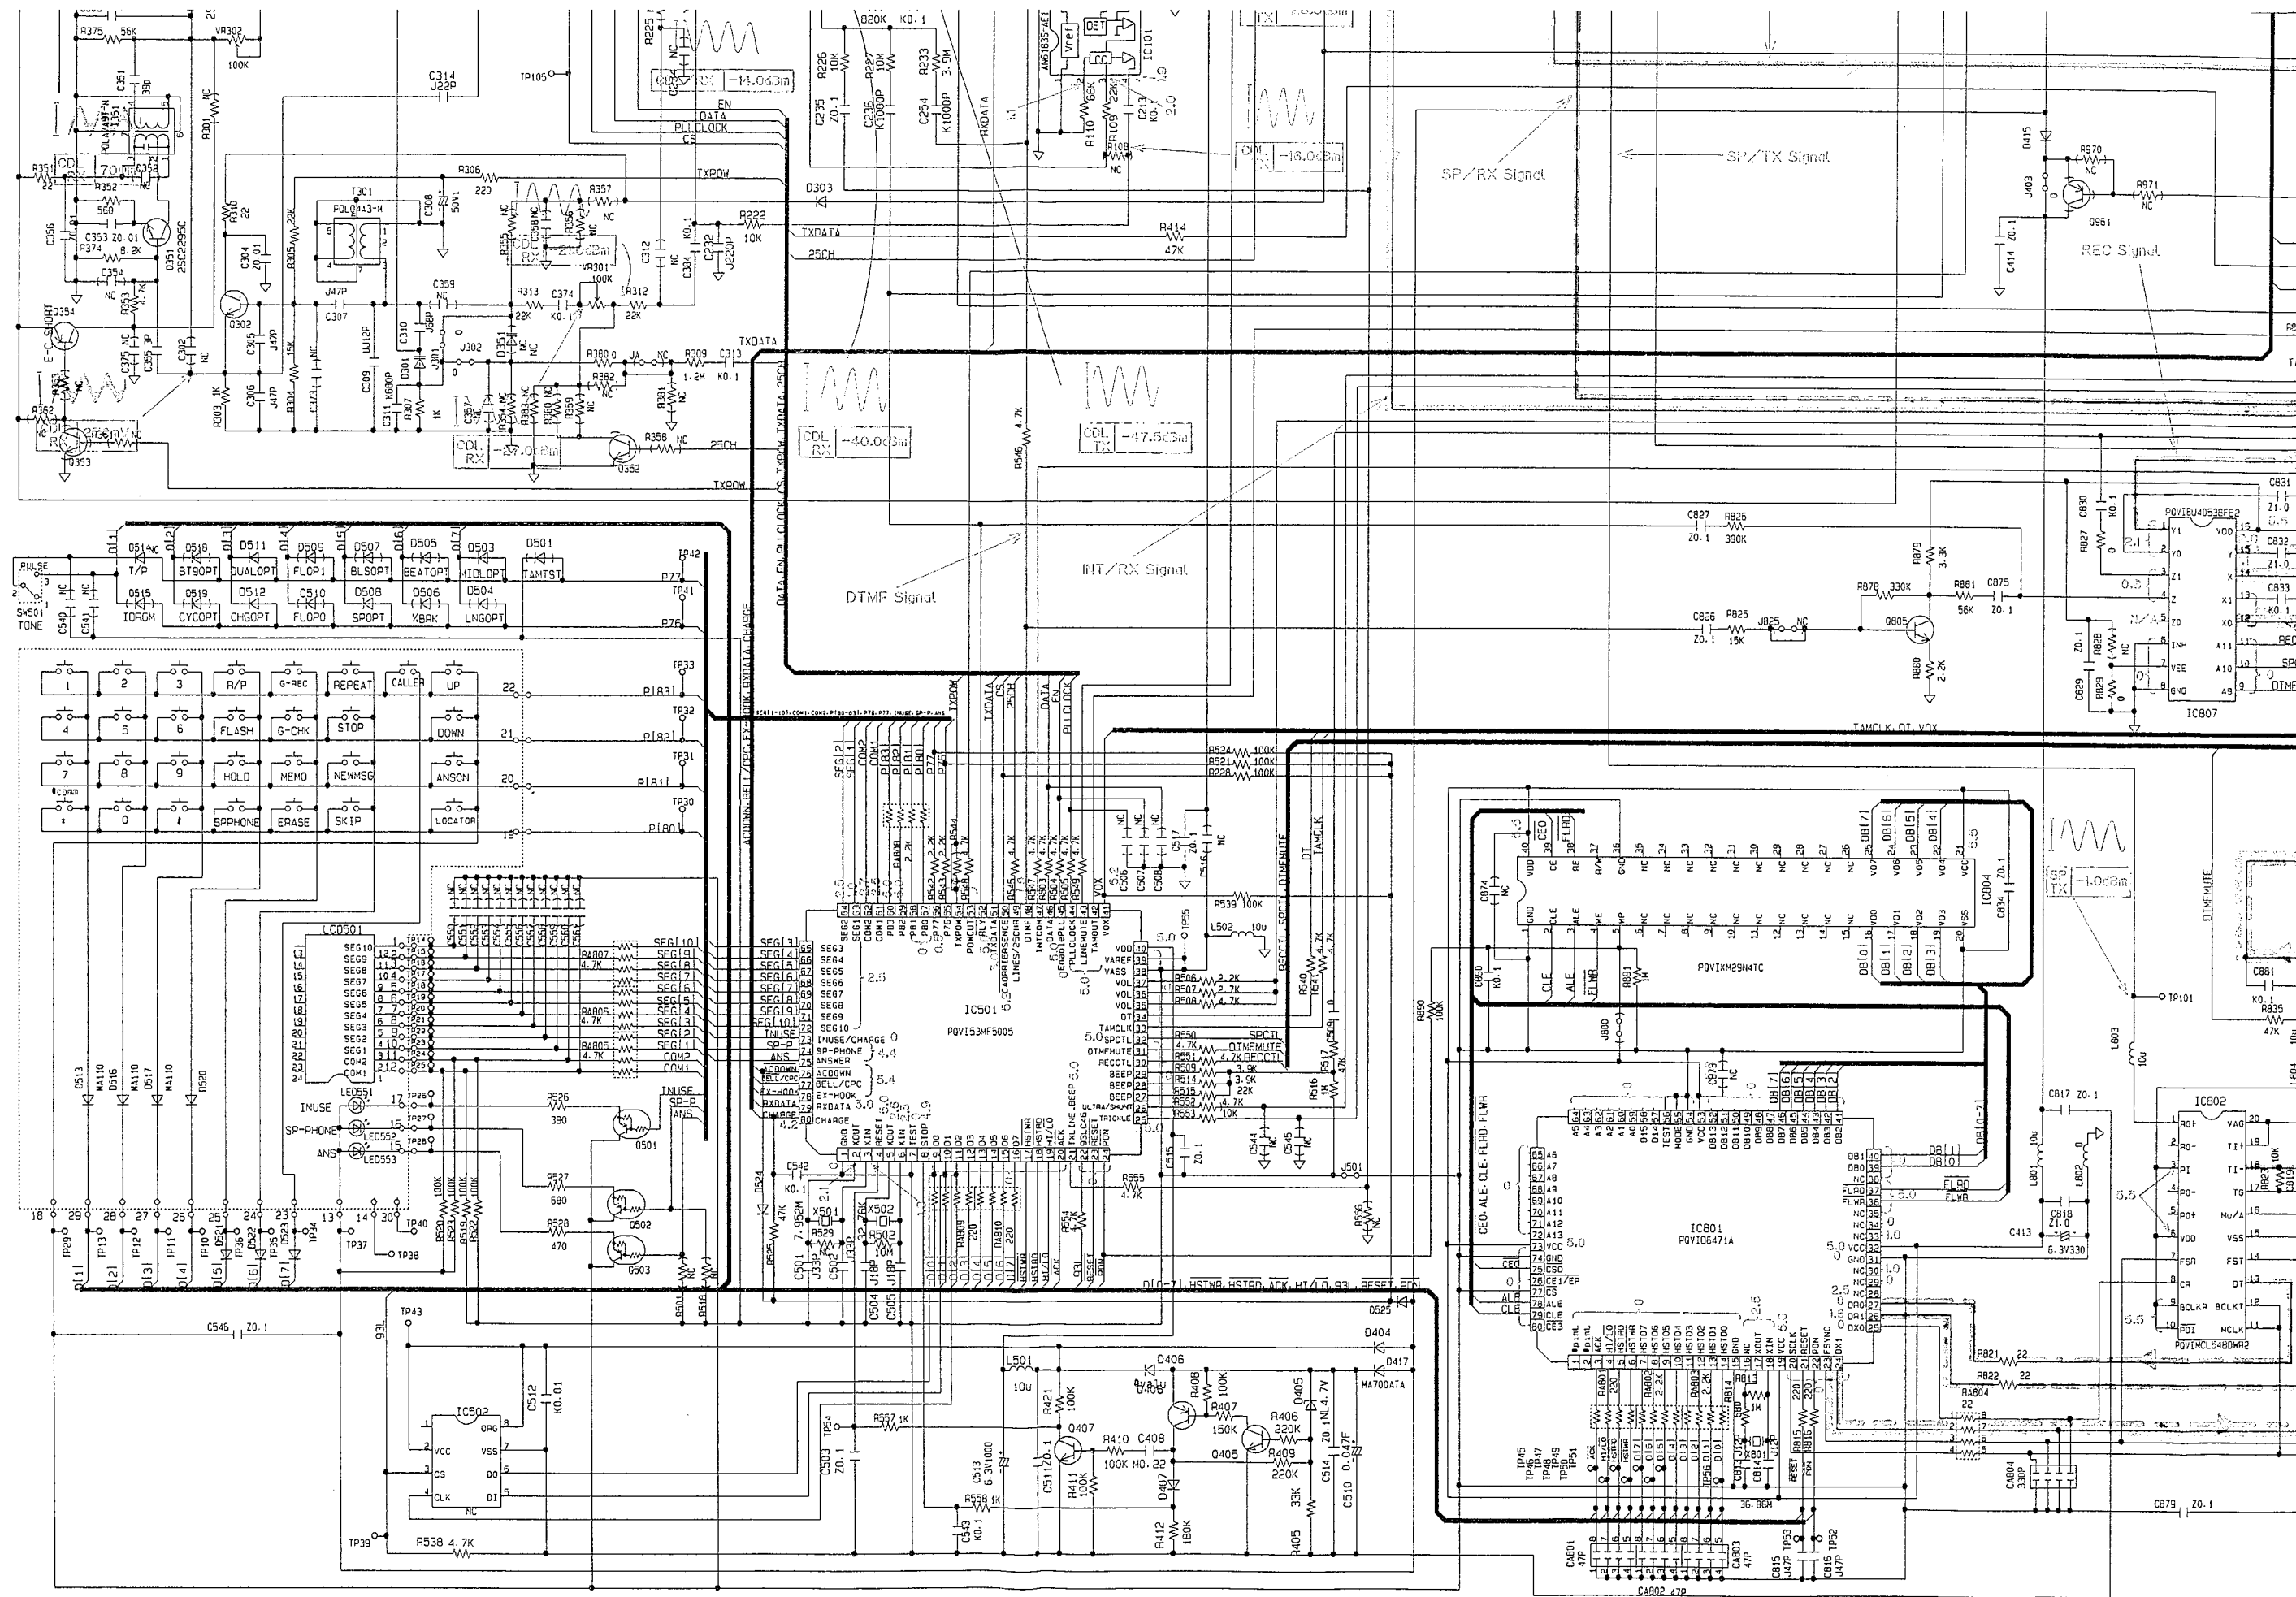

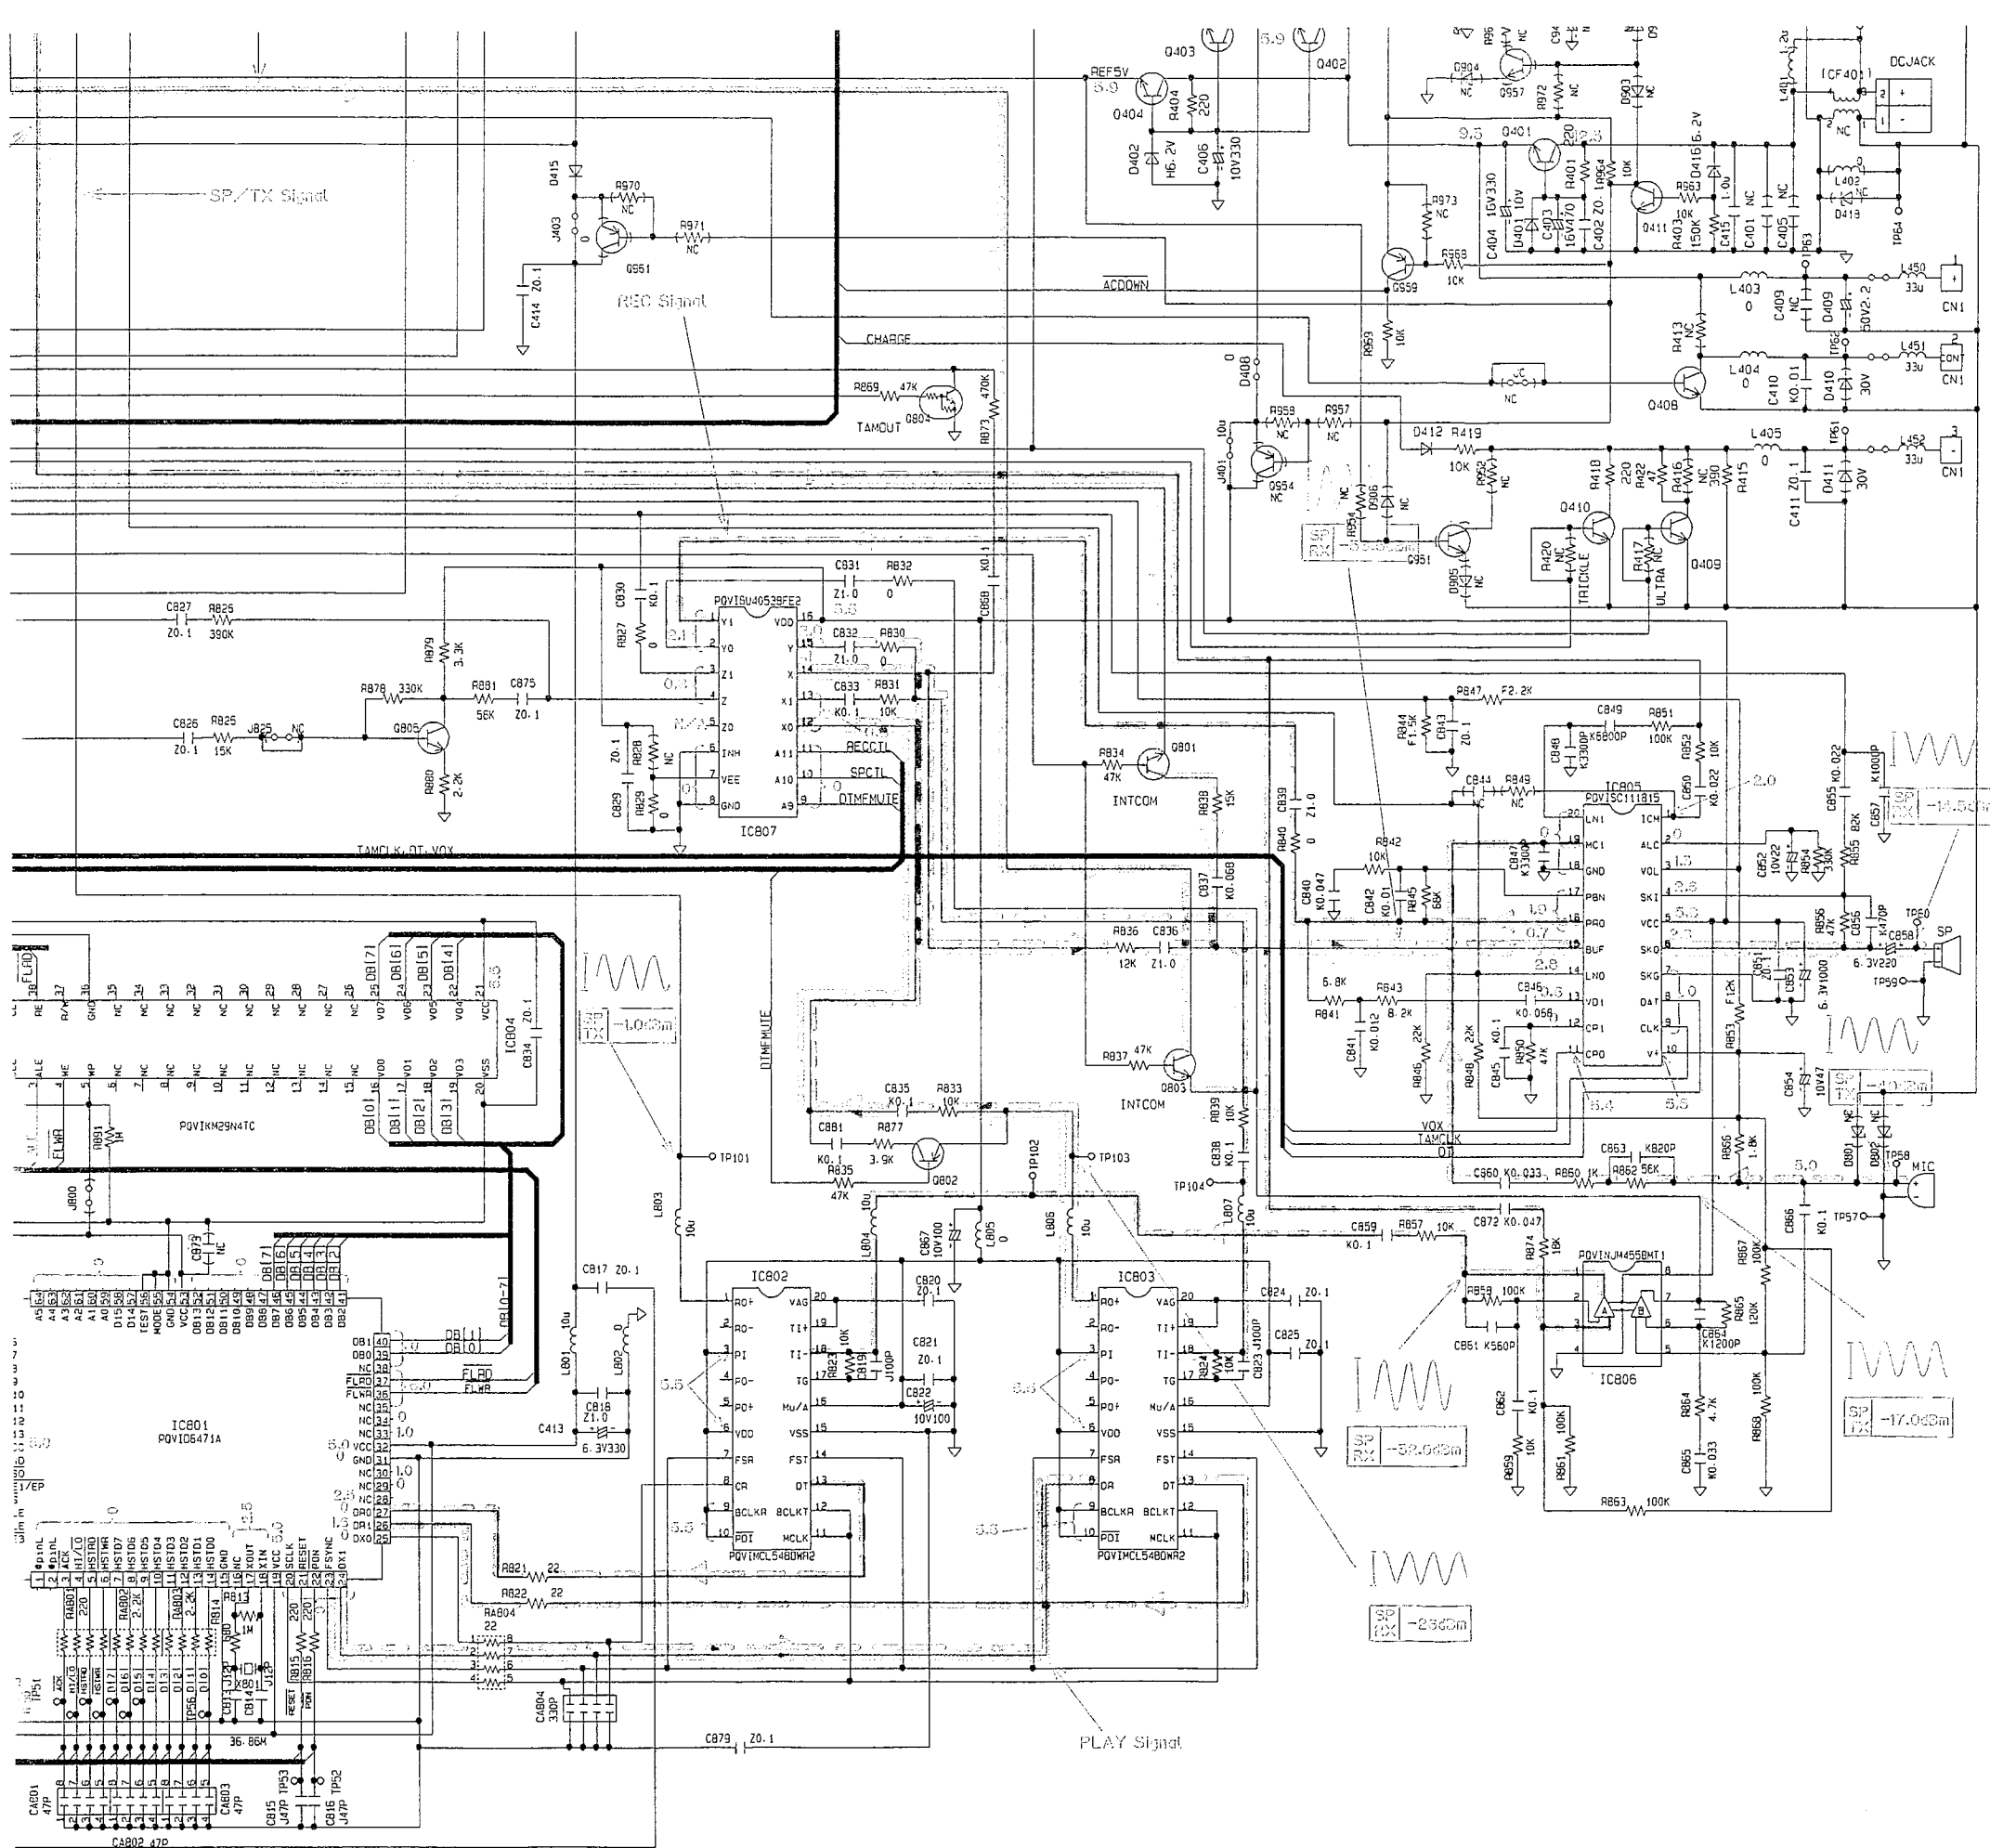

CIRCUIT BOARD AND WIRING CONNECTION DIAGRAM (BASE UNIT)

(Flow Solder Side View)

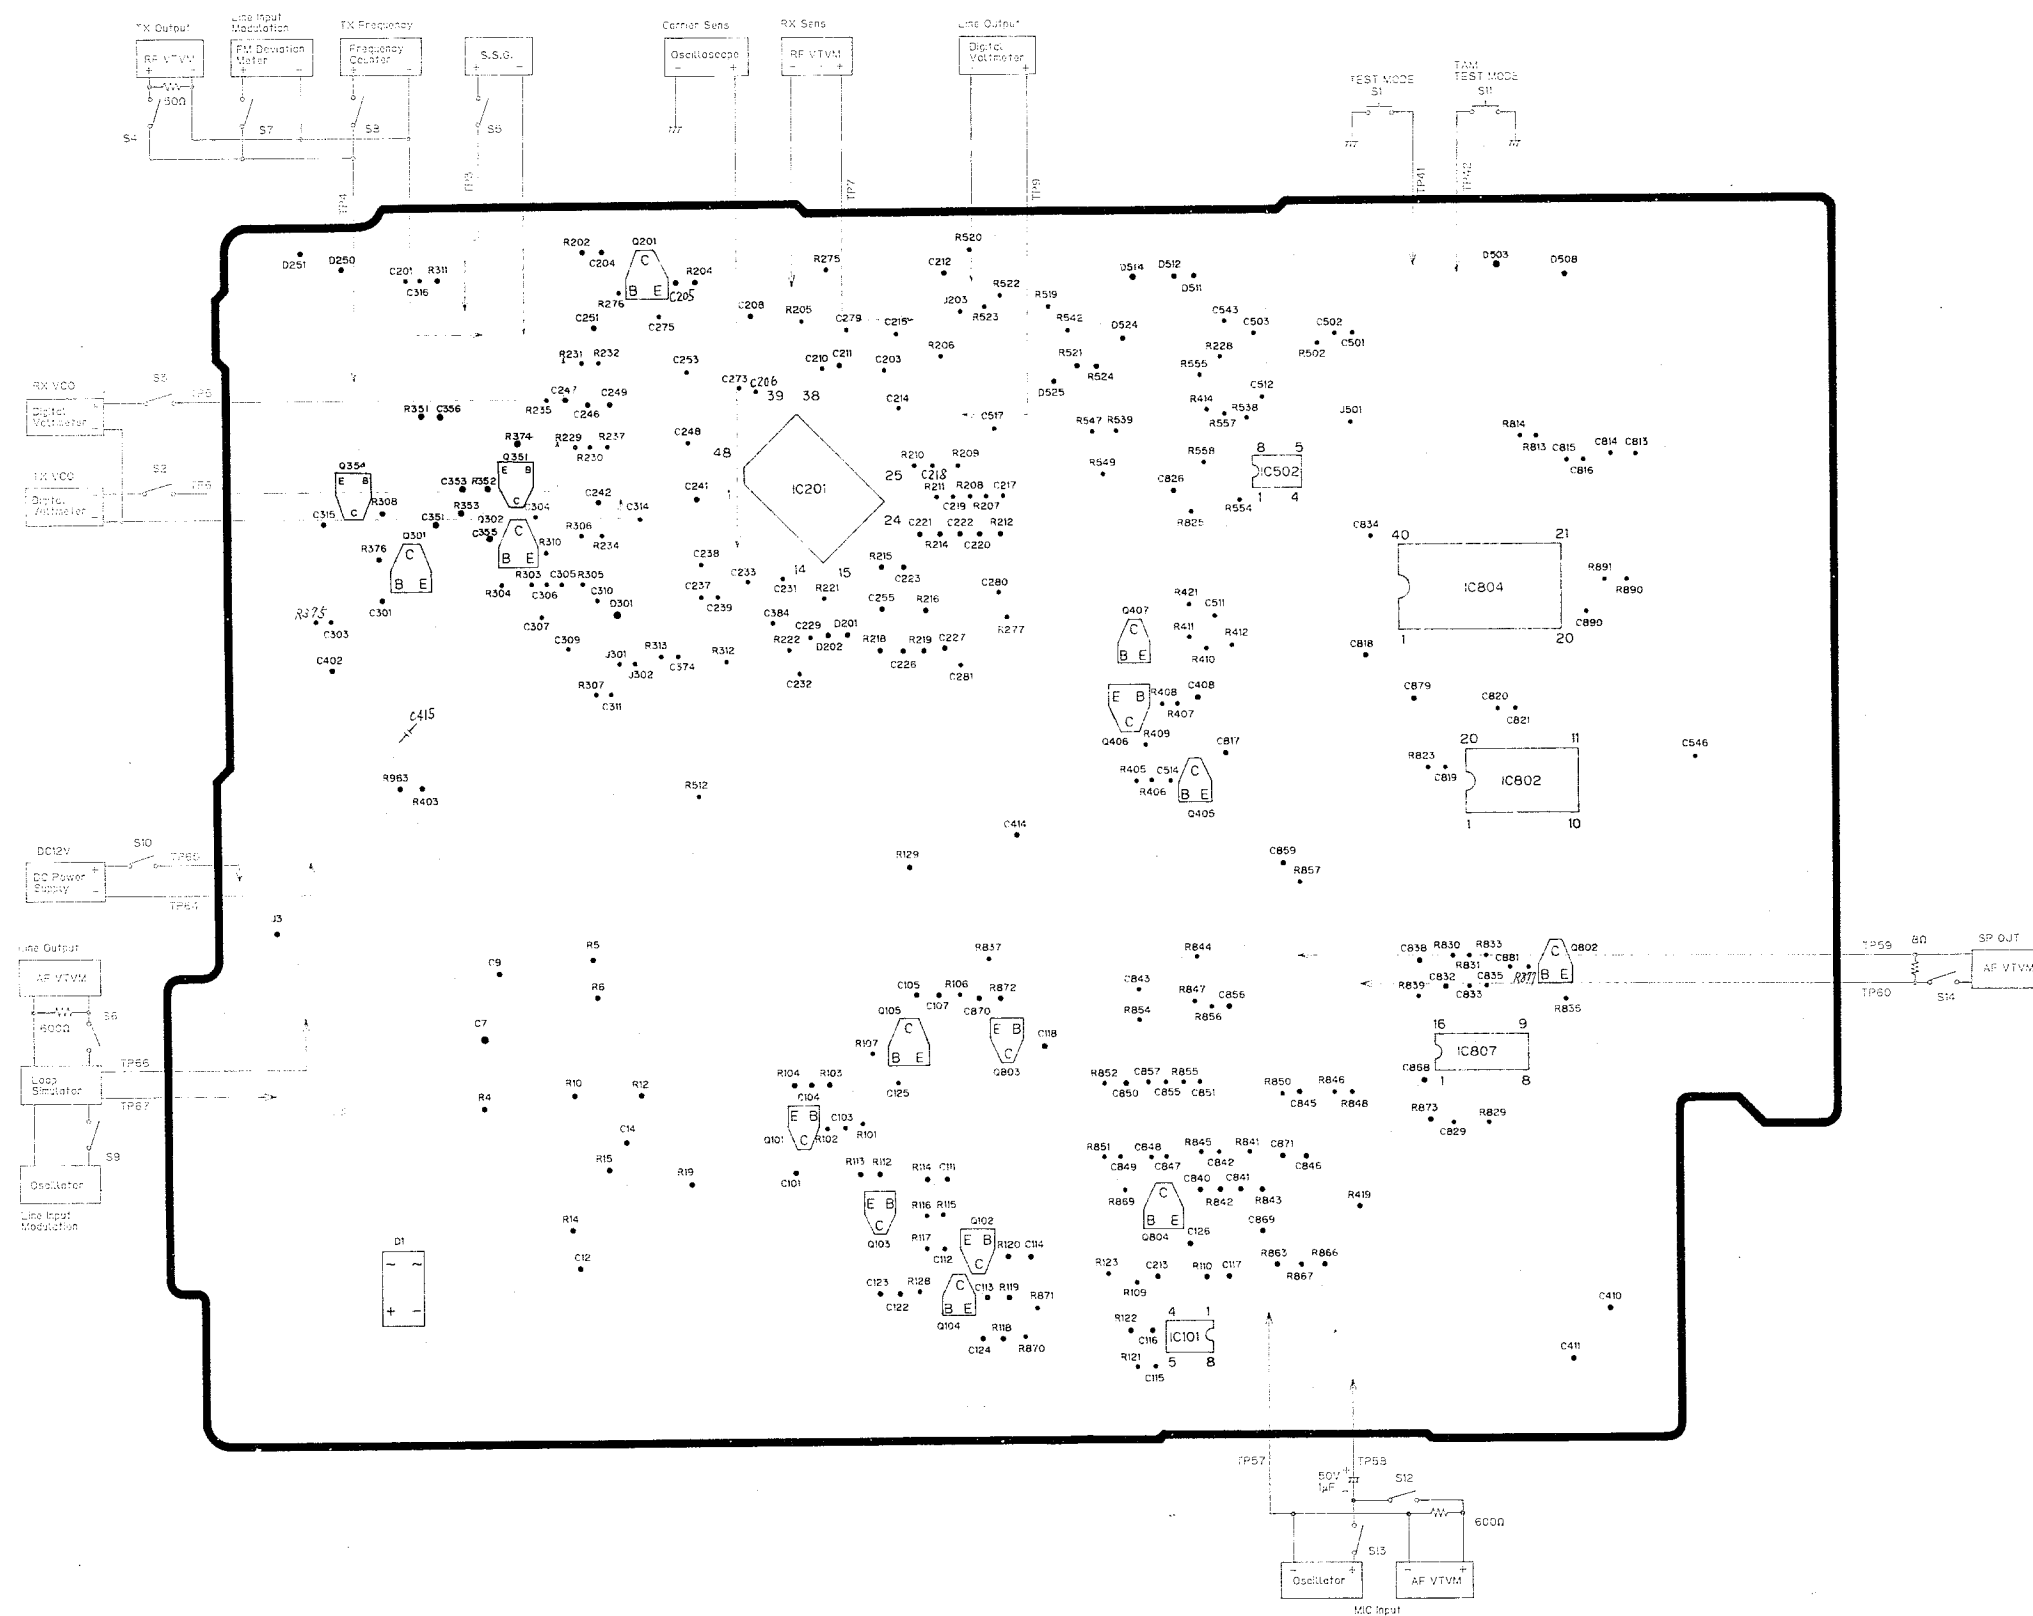

CIRCUIT BOARD AND WIRING CONNECTION DIAGRAM (BASE UNIT)


(Component View)

IC501 Voltage No Mark: Standby, (): Talk



Pin No.	Value (V)	Pin No.	Value (V)
1	0	45	0
2	2.1	46	5.0
3	1.8	47-49	0
4	5.0	50	5.2
5	2.6	51	3.0
6	2.3	52	5.0
7	0	53-55	0
8	4.9	56	0.5
9-20	0	57, 58	0
21	5.0	59, 60	5.0
22-24	0	61	2.5
25	5.0	62	2.7
26-31	0	63	1
32	5.0	64-72	2.5
33-39	0	73	0
40	5.0	74, 75	4.4
41	5.2	76-78	3.0
42-44	5.0	80	4.2

IC801 Voltage No Mark: Standby, (): Talk

Pin No.	Value (V)	Pin No.	Value (V)
1-15	0	31	0
16-18	2.5	32	5.0
19	5.0	33	1
20-24	0	34	0
25	0	35-37	5.0
26	1.6	38-52	0
27	0	53	5.0
28	2.5	54-72	0
29	0	73	5.0
30	1	74-80	0



2" (5 cm) PM DYNAMIC
SPEAKER

MICROPHONE

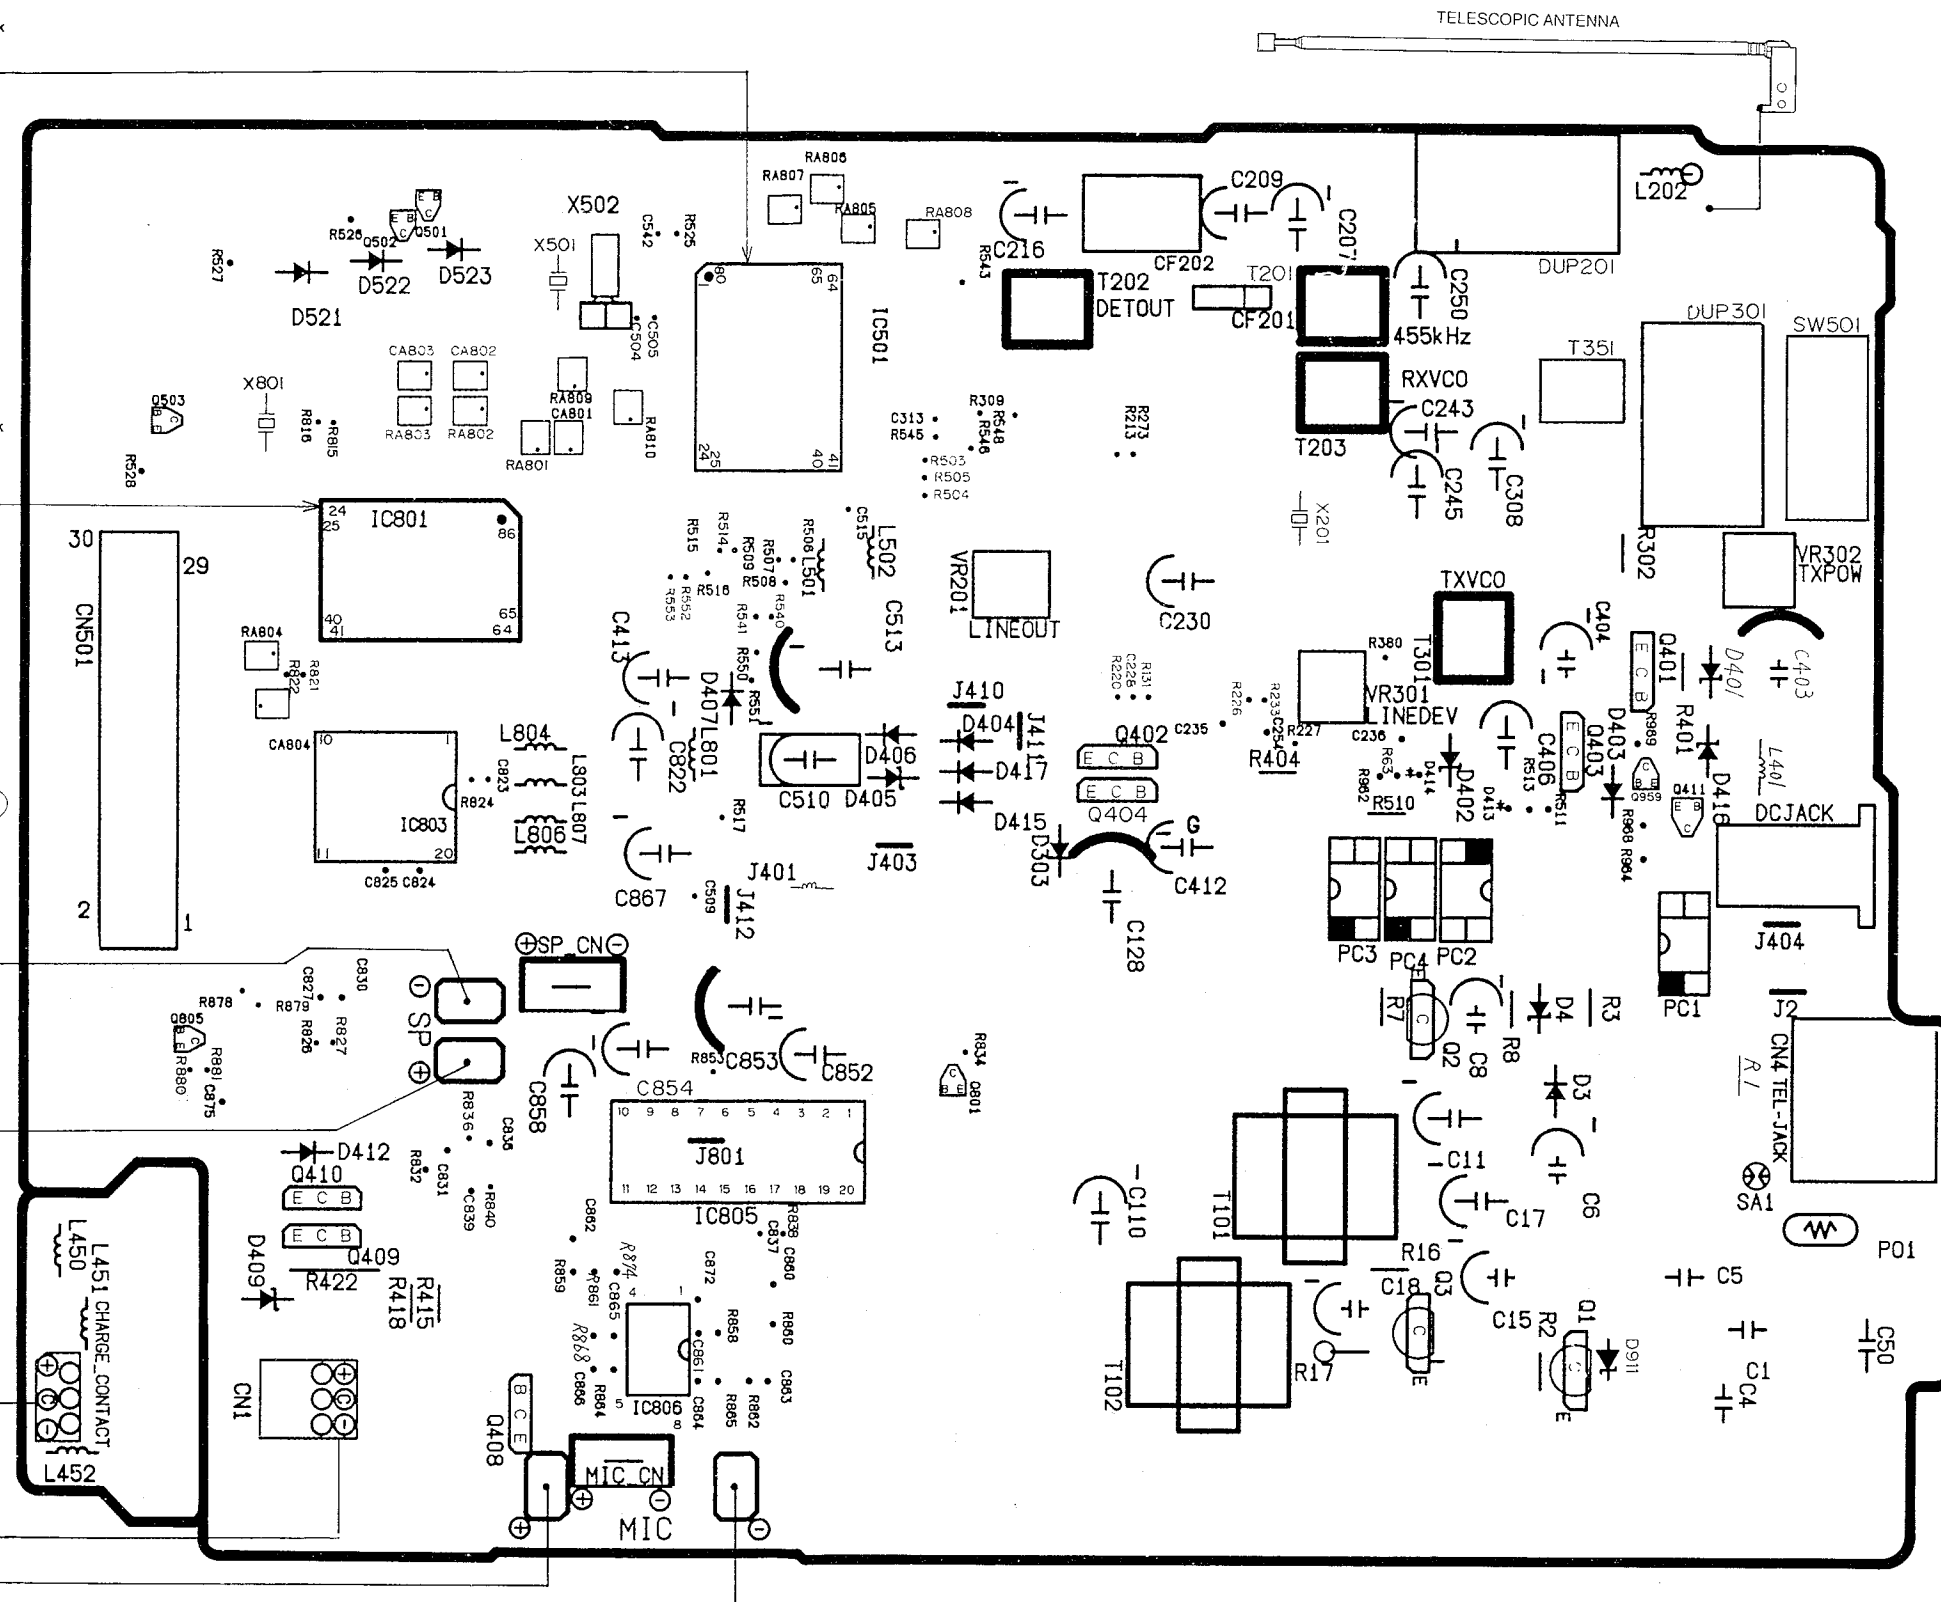


CIRCUIT BOARD AND WIRING CONNECTION DIAGRAM (PORTABLE HANDSET)

(Component View)

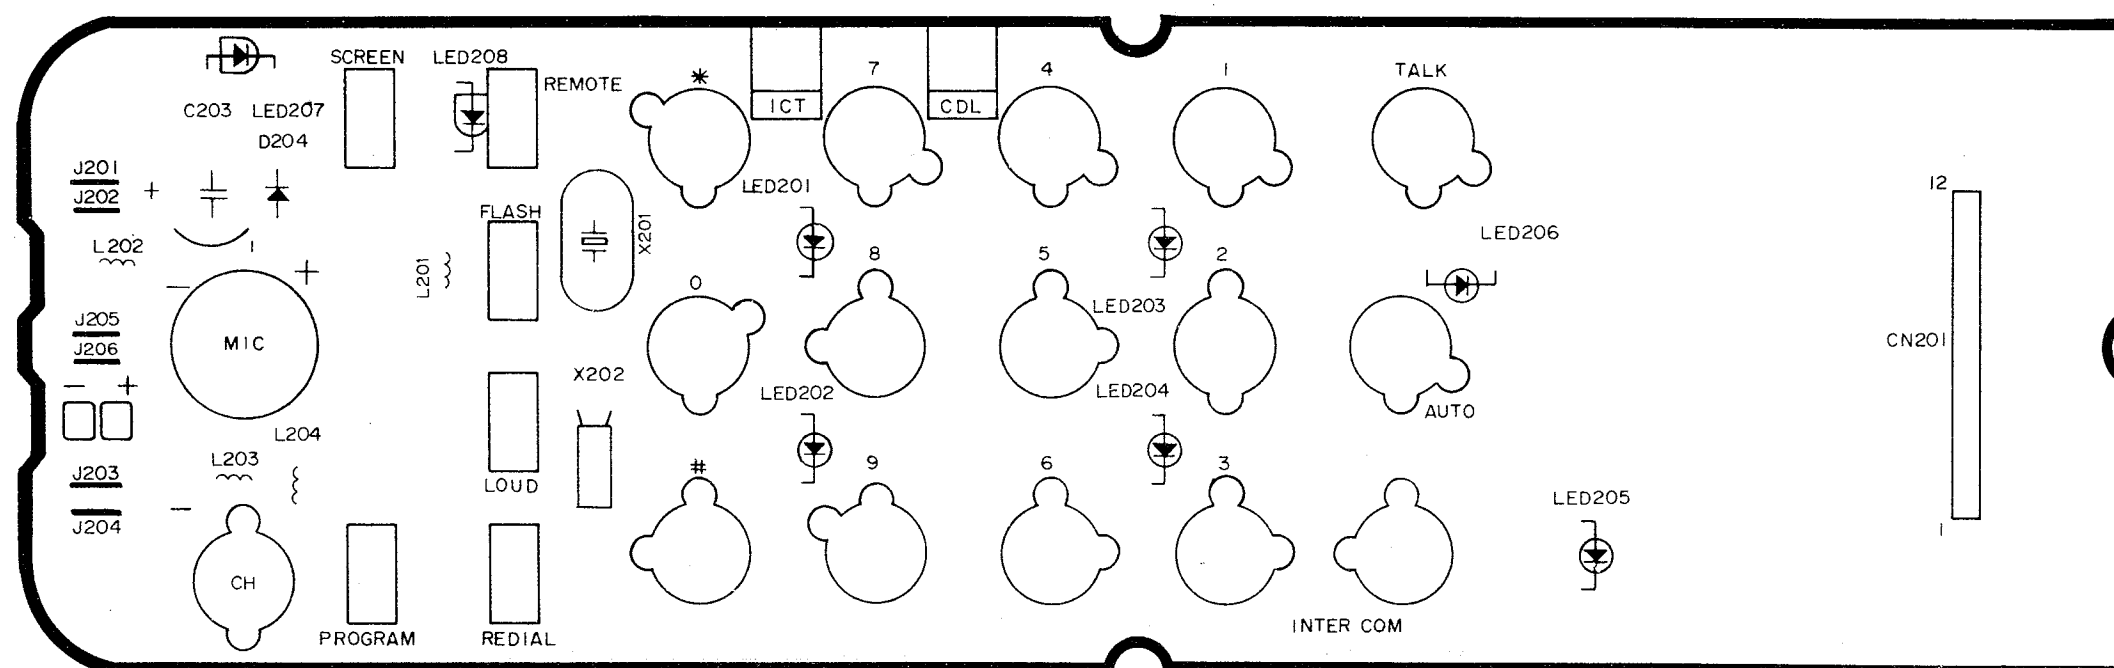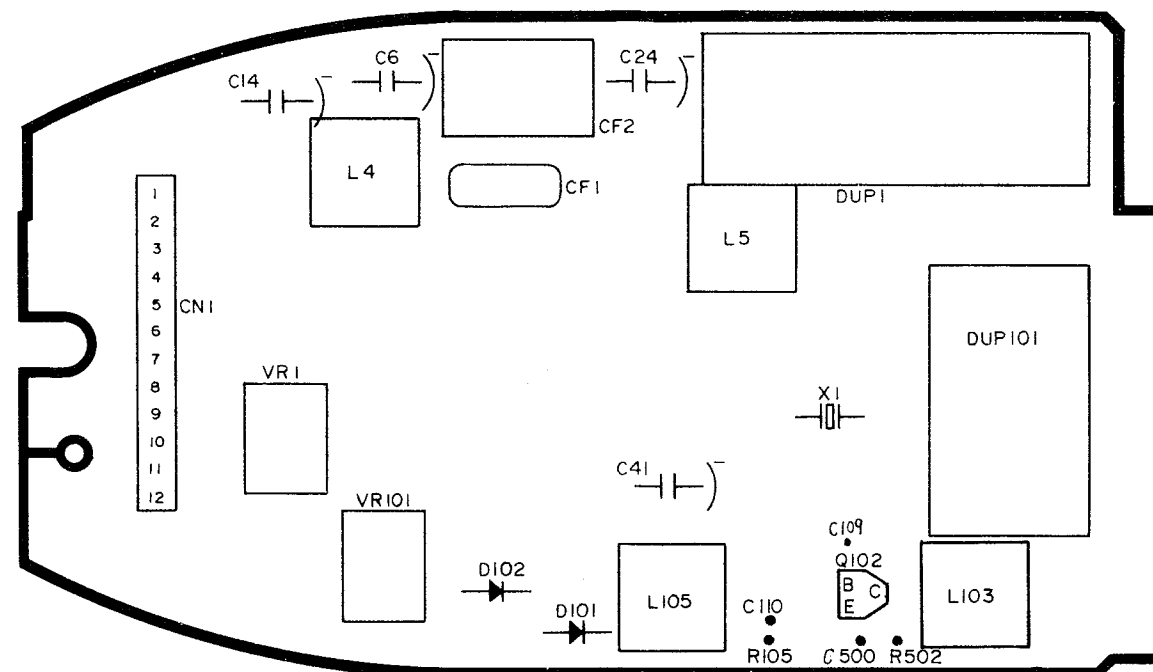

CIRCUIT BOARD AND WIRING CONNECTION DIAGRAM (PORTABLE HANDSET)

(Flow Solder Side View)

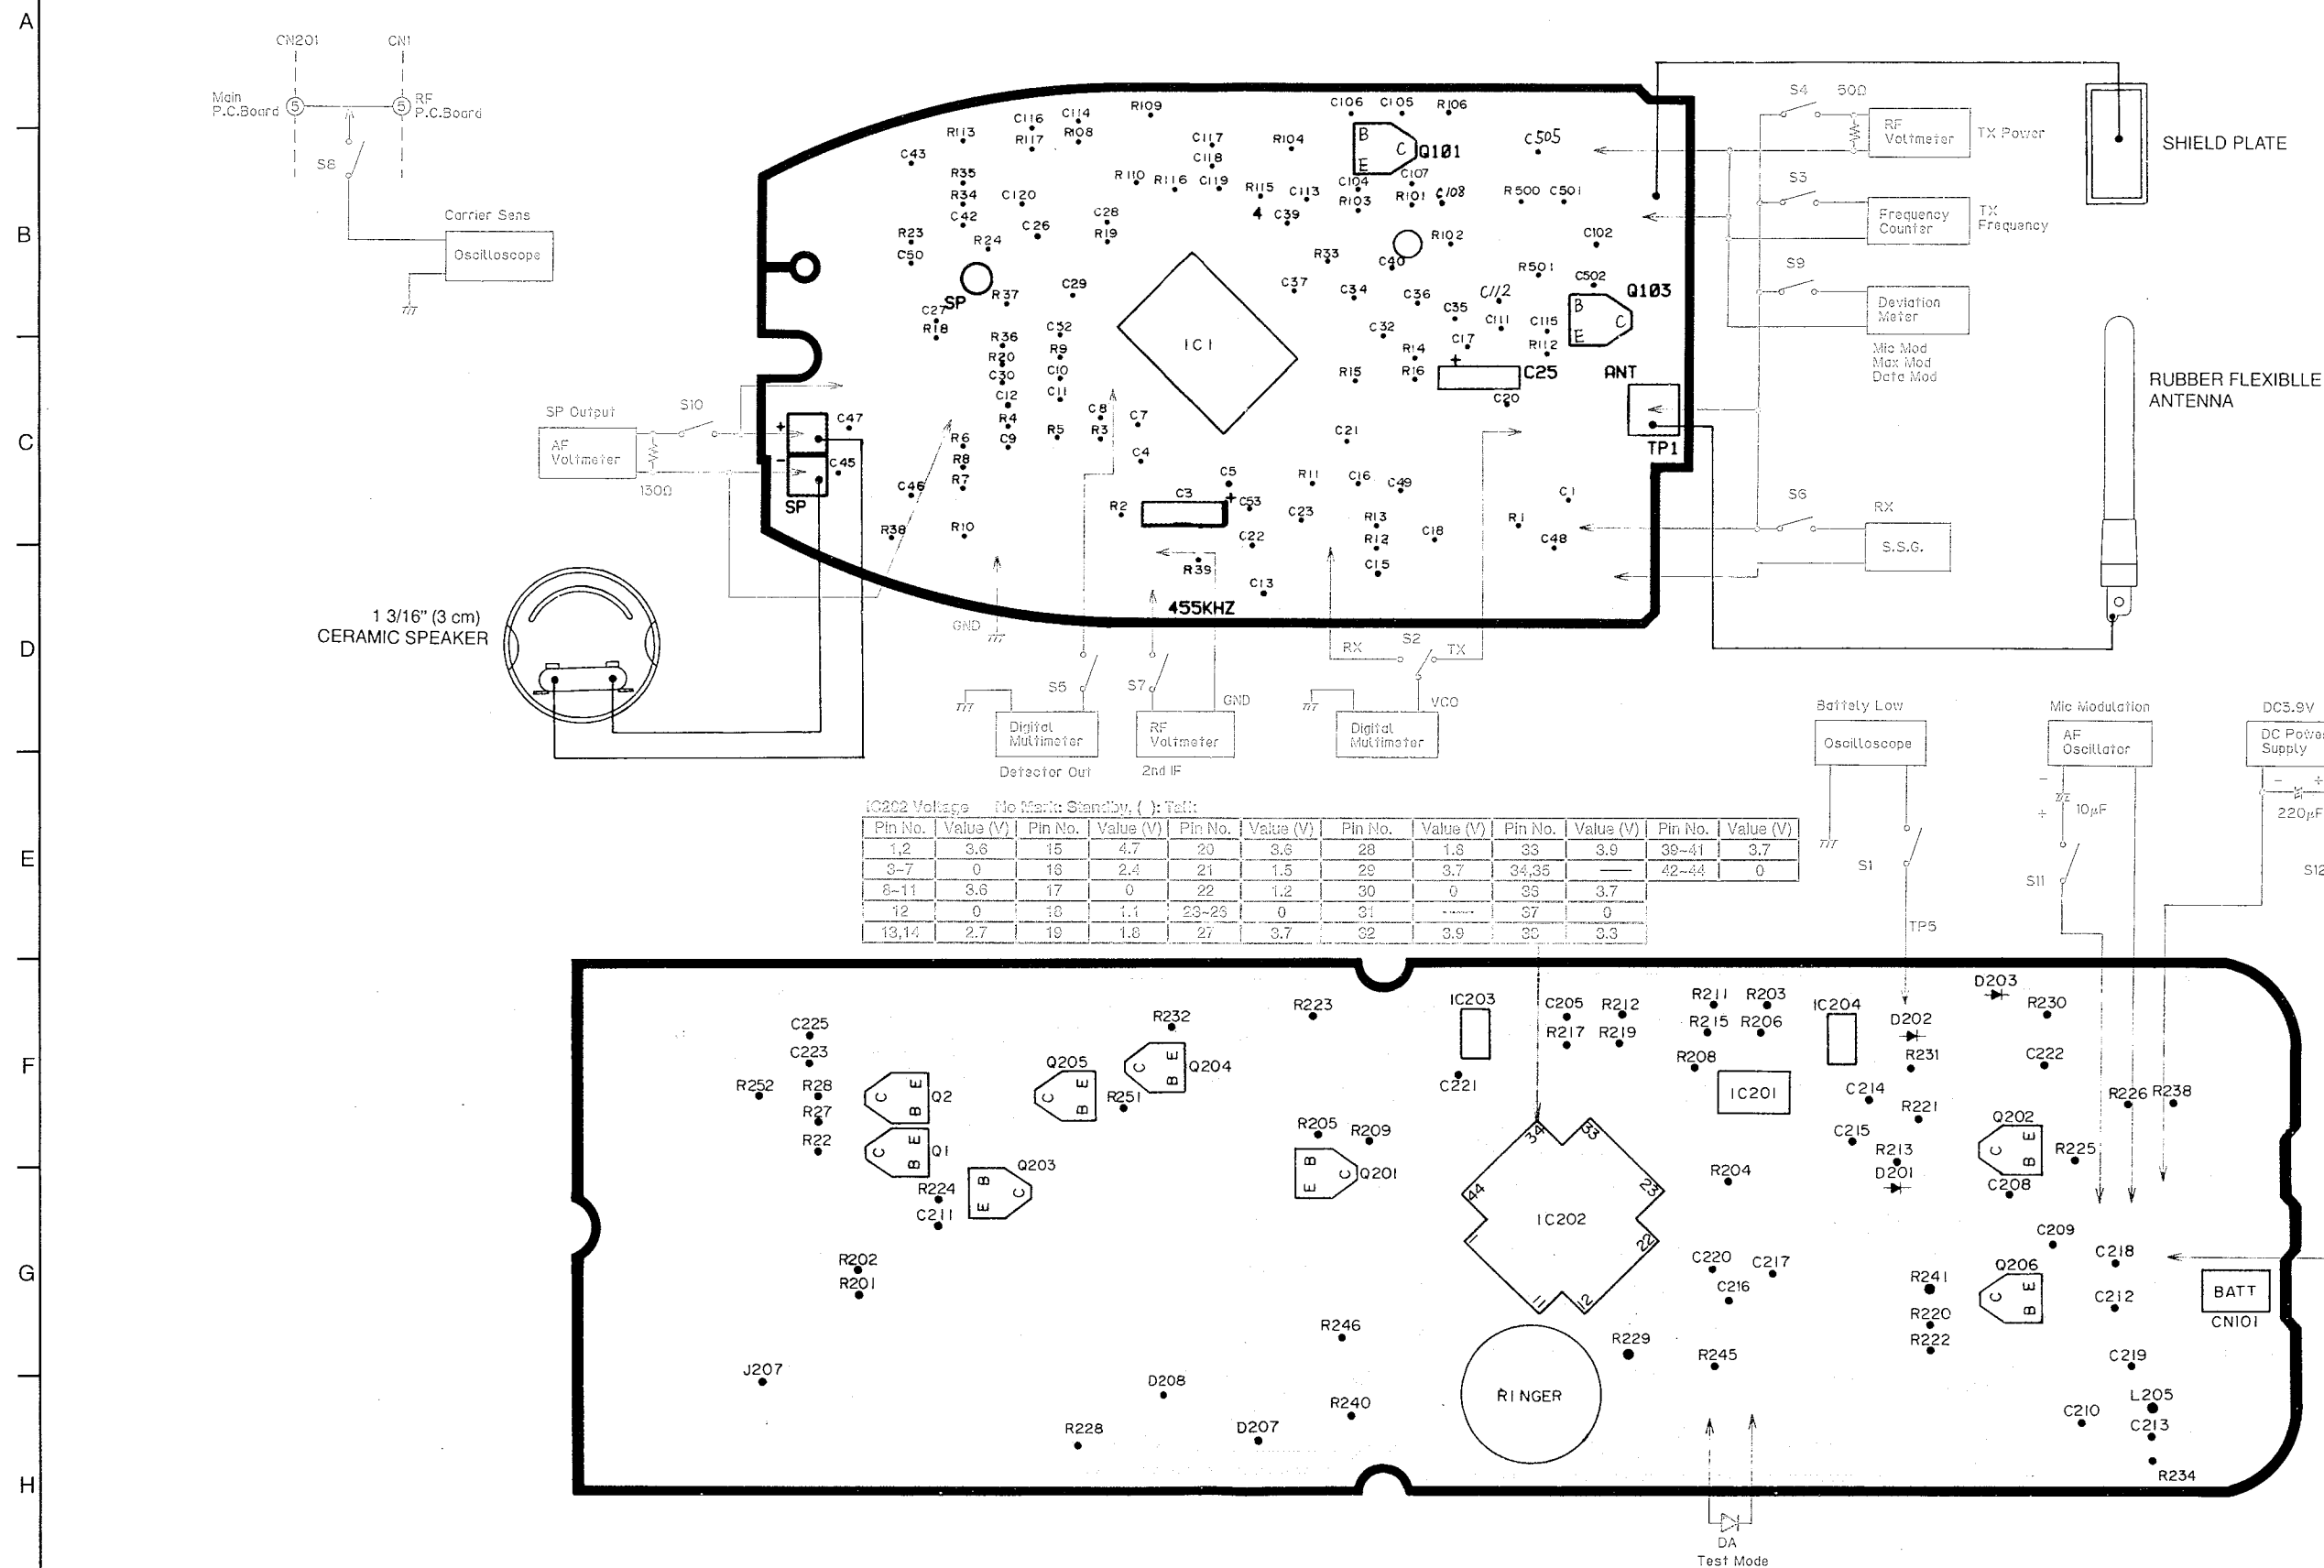

1	2	3	4	5	6	7	8	9	10	11	12
---	---	---	---	---	---	---	---	---	----	----	----



ADJUSTMENTS (PORTABLE HANDSET)

If your unit have below symptoms, adjust each item using remedy column from the table.

Symptom	Remedy
The movement of Battery Low Indicator is wrong.	Make confirmation in item (A)
The base unit does not respond to a call from portable handset.	Make adjustment in item (B)
The base unit does not transmit or the transmit frequency is off.	Make adjustment in item (C)
The transmit frequency is off.	Make confirmation in item (D)
The transmit power output is low, and the operating distance between base unit and portable handset is less than normal.	Make confirmation in item (E)
The reception sensitivity of base unit is low with noise.	Make adjustment in item (F)
Does not link between base unit and portable handset.	Make confirmation in item(G), (H)
The reception level is large or small.	Make adjustment in item (I)
The transmit level is large or small.	Make adjustment in item (J)

Unit condition:

1. Remove the antenna lead wire from P.C Board of portable handset.
2. **Connect the Main P.C.Board (CN201) and RF P.C.Board (CN1) by extension cord (PQZZ12K11Z).**
3. Power Supply: DC 3.9V
4. Speaker Load: 130Ω

How to set the test Mode

1. After connecting diode DA, set S12 to ON (Power supply is turned ON).
2. The unit becomes test mode (1).
3. The state of the unit changes as following when "AUTO" switch is pressed.

	Test Mode	RX Freq.	TX Freq.	Mode
Power supply is turned ON	Test Mode (1)	CH10	CH10	Talk
Press "AUTO" switch 1 time	Test Mode (2)	CHA	CHA	Talk
Press "AUTO" switch 1 time	Test Mode (3)	CHB	CH1	Talk
Press "AUTO" switch 1 time	Test Mode (4)	CH1	CH1	Talk

When replacing these parts, adjust as shown in table below.

Replace Parts	Adjustment items	Test Mode	Adjustment Point	Procedure
IC1, X1, L5	(C) RX VCO Voltage Adjustment	Test Mode (1)	L5	1. Set S2 to RX VCO side. 2. Adjust L5 so that the reading of digital voltmeter is $3.1\text{ V} \pm 0.1\text{ V}$ (After adjusting, set S2 to OFF).
X1, IC1	(D) TX frequency Confirmation	Test Mode (2)	—	1. Set S3 to ON. 2. Confirm that the reading of frequency counter is $49.640\text{ MHz} \pm 700\text{ Hz}$.
DUP101 L103	(E) TX Output Adjustment	Test Mode (1)	L103	1. Set S4 to ON. 2. Adjust L103 so that its reading of RF VTVM (50Ω load) is over 900mv at maximum output.
L4,DUP1	(F)RX Adjustment (Detector Output) (2nd IF Output)	Test Mode (2)	L4	1. Set S5 and S6 to ON. 2. Apply a 45 dB μ Vemf output from S.S.G. (modulation frequency 1 kHz, dev. 0 kHz) 3. Adjust L4 so that the reading of DC voltmeter $0.9 \pm 0.05\text{ V}$ 4. Set S7 to ON. 5. Apply a 60 dB μ Vemf output from S.S.G. (modulation frequency 1kHz, dev. 0 kHz) 6. Comfirm 2nd IF output so that its reading of RF VTVM is maximum output (20~50 mV).
	(G) Carrier Sensitivity Confirmation	Test Mode (2)	—	1. Set S6 and S8 to ON. 2. Apply 30 dB μ Vemf output from S.S.G.(modulation frequency 1kHz, dev. 3 kHz) signal on oscilloscope becomes low. 3. Apply 15 dB μ Vemf output from S.S.G.(modulation frequency 1kHz, dev. 3 kHz) signal on oscilloscope becomes high.
	(H) Data Moudulation Confirmation	Test Mode (2)	—	1. Set S9 to ON. 2. Keep pressing the flash button. 3. Confirm for a 4.5~6.5 kHz FM Deviation Meter reading.
VR1	(I) Speaker Output Level Adjustment	Test Mode (2)	VR1	1. Set S6 and S10 to ON. 2. Apply a 45 dB μ Vemf output from S.S.G.(modulation frequency 1kHz, dev. 3kHz). 3. Adjust VR1 so that the reading of AF VTVM is -18dBm $\pm 0.5\text{ dB}$.
VR101	(J) MIC Modulation Factor Adjustment	Test Mode (2)	VR101	1. Set S9 and S11 to ON. 2. Apply a MIC signal (1kHz, -40 dBm at 600 Ω load). 3. Adjust VR 101 so that the reading of FM Deviation Meter is $2.8\text{ kHz} \pm 0.1\text{ kHz}$.

The connections of adjustment equipments are as shown in page 28.

■ For SCHEMATIC DIAGRAM (PORTABLE HANDSET) [Page 29]

1. SW201: Talk Switch
2. SW202: Auto Switch
3. SW203: Intercom Switch
4. SW204: ChannelSwitch
5. SW205: Program/2Way Rec Switch
6. SW208: Screen/Playback Switch
7. SW209: Loud/Ringer Switch
8. SW210: Flash Switch
9. SW211: Redial/Pause Switch
10. SW212: Remote Speakerphone Switch
11. SW213~224: Dialing Switch
12. DC voltage measurements are taken with electronic voltmeter from negative voltage line. (Talk Posittion)

This schematic diagram may be modified at any time with the development of new technology.

RF SPECIFICATION

BASE UNIT

Item	Value	Refer to —.	Remarks
TX Frequency	44.100 MHz $\pm$ 700 Hz	Page 18 (C)	
TX Power	More than 900mV	Page 19 (D)	
Line Modulation factor	3.8 kHz~4.2 kHz	———	Input signal from Tel line: -20 dBm/600 Ω , f=1.0 kHz at CHB Talk
Line Modulation Distortion	Less than 7%	———	Input signal from Tel line: -20 dBm/600 Ω , f=1.0 kHz at CHB Talk
Line Modulation factor (Max.)	4.5 kHz~7.5 kHz	———	Input signal from Tel line: 0 dBm/600 Ω , f=1.0 kHz at CHB Talk
Data Modulation factor	4.5 kHz~7.5 kHz	———	Press Locator switch at CHB Standby

PORTABLE HANDSET

Item	Value	Refer to —.	Remarks
Practical Sensitivity	Less than 9 dB μ V	———	at CHA Talk
Carrier Sensitivity	Less than 30 dB μ V	———	High $\rightarrow$ Low at CHB Talk
TX Frequency	49.640 MHz $\pm$ 700 Hz	Page 30 (D)	
TX Output	More than 900mV	Page 30 (E)	
Data Modulation factor	4.5 kHz/dev~6.5 kHz/dev	Page 30 (H)	
MIC Modulation factor	2.7 kHz/dev~2.9 kHz/dev	———	Input signal from MIC: -40 dBm/600 Ω , f=1.0 kHz at CHA Talk

HOW TO CHECK THE PORTABLE HANDSET SPEAKER

1. Prepare the digital voltmeter, and set the selector knob to ohm meter.
2. Put the probes at the speaker terminals as shown in Fig.7.



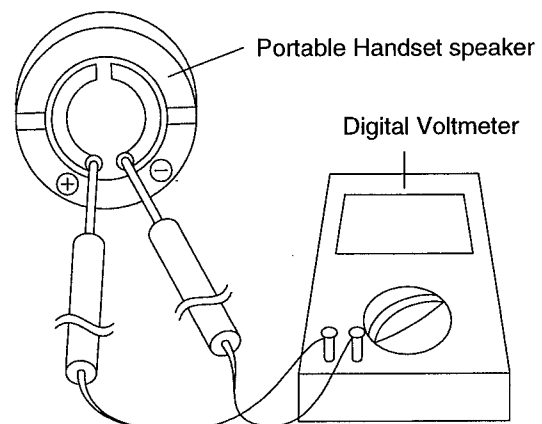



Fig. 7

EXPLANATION OF CPU DATA COMMUNICATION

1. Calling

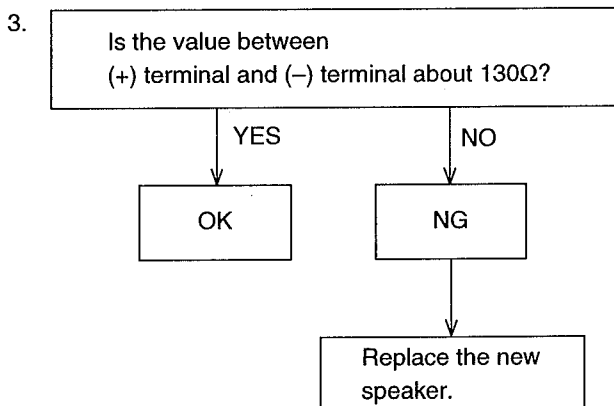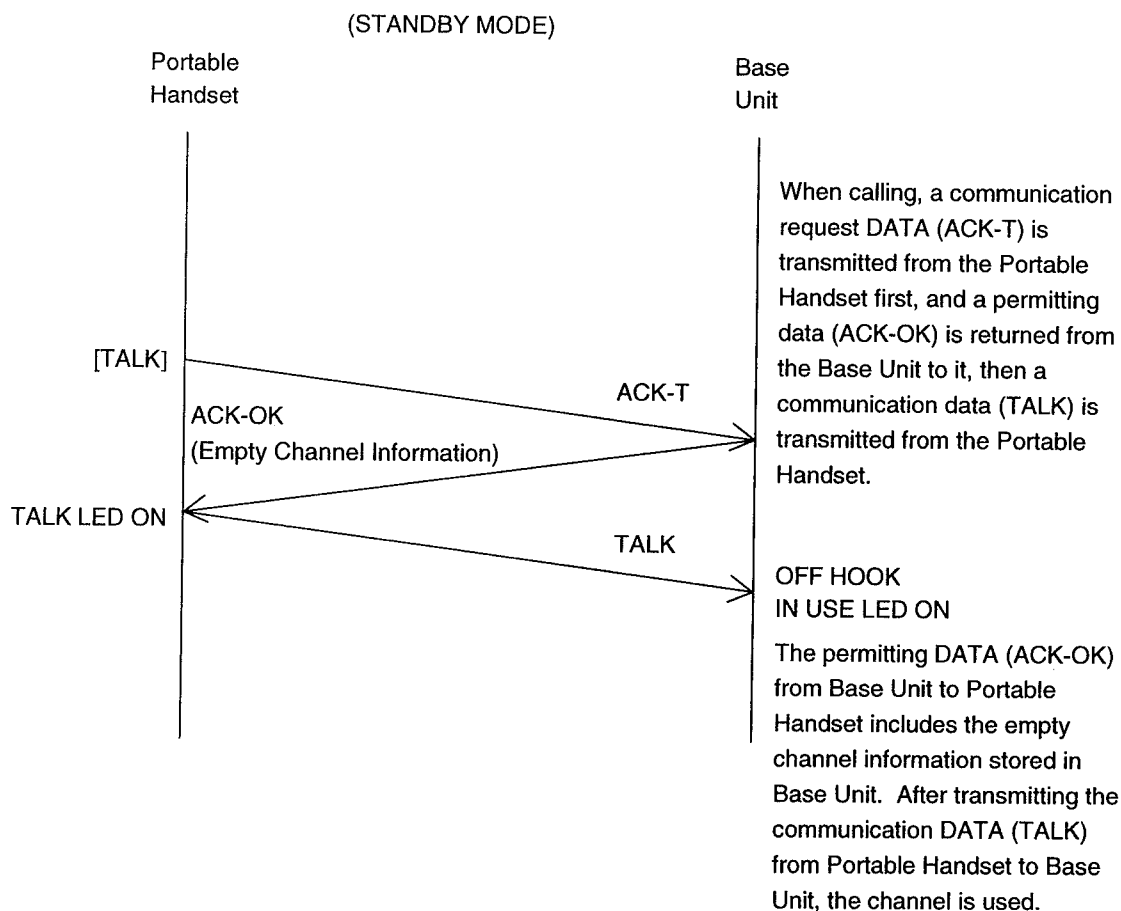


2. Ringing

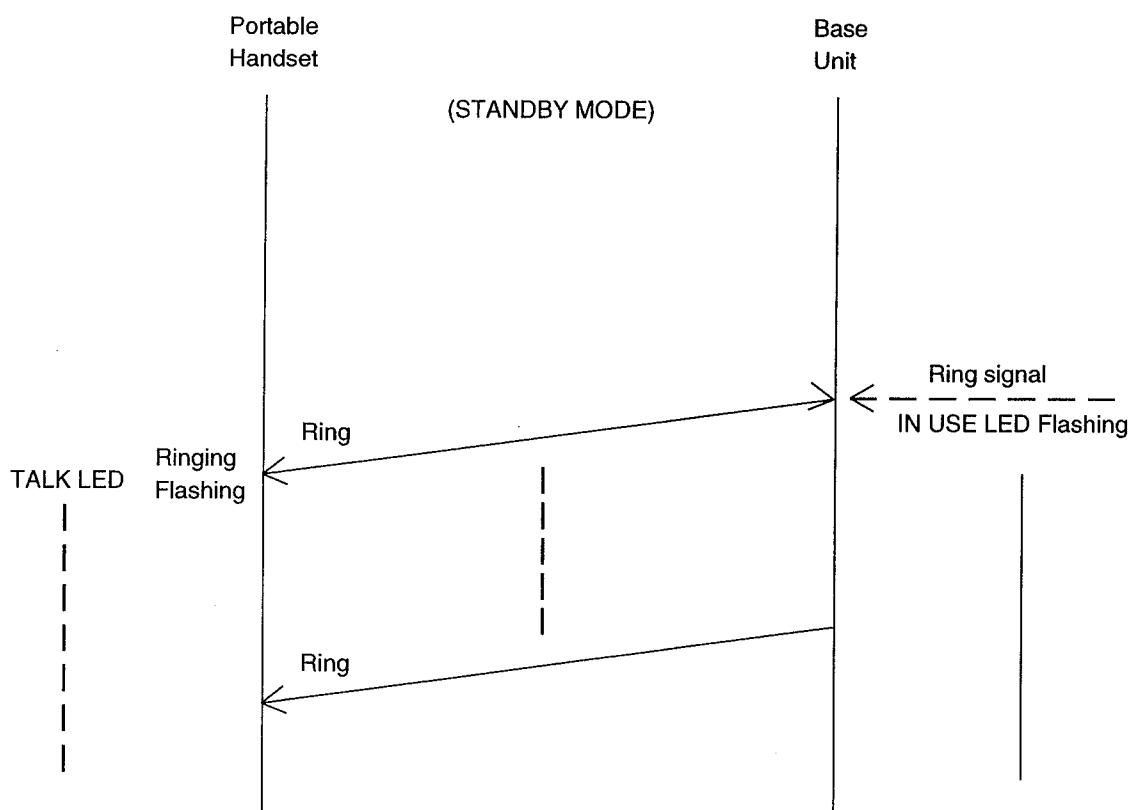

CH CHANGE MODE:


ex): (CH6 → CH8)

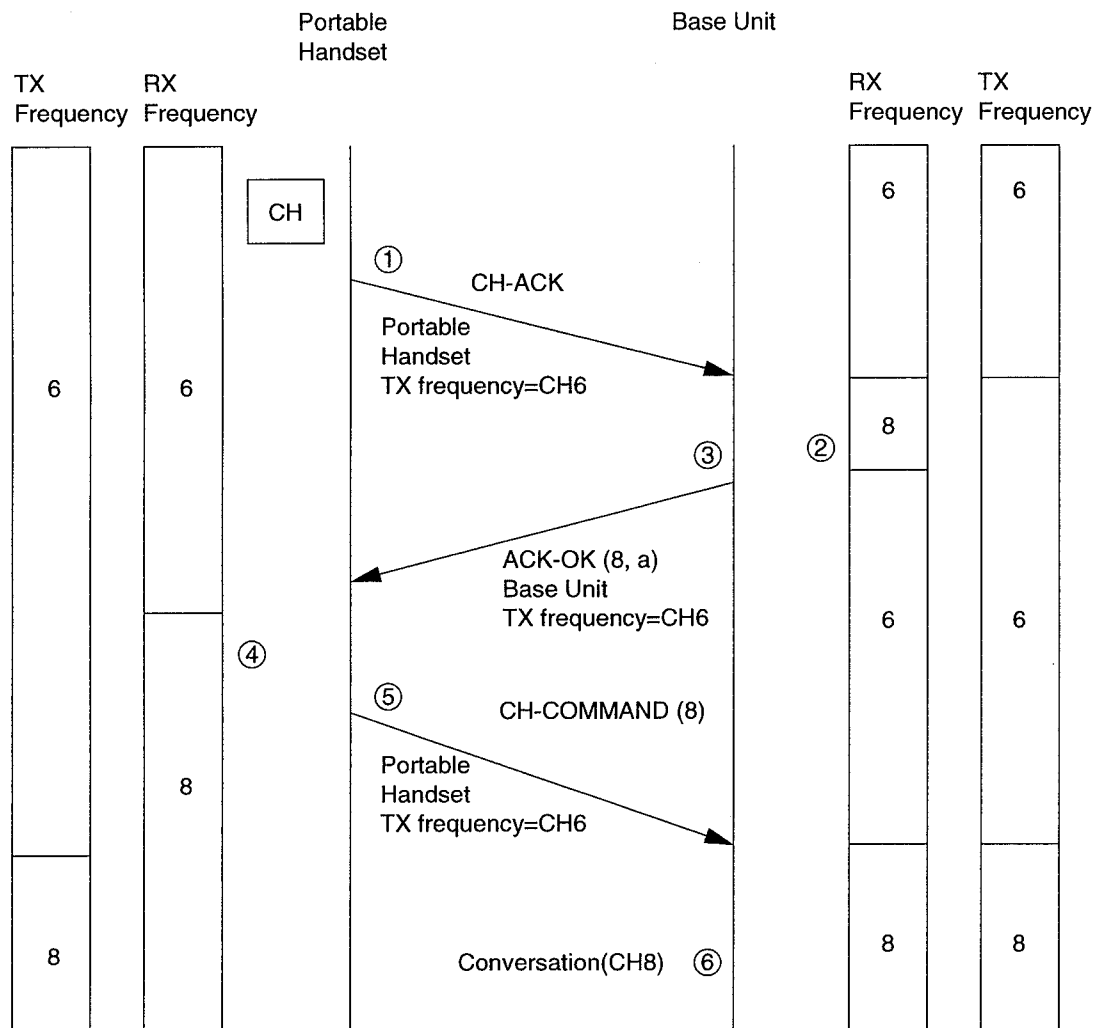


- ① When the user pushes the CH button, the portable handset sends a CH-ACK request to the base unit. (on the portable handset's conversation frequency)
- ② The base unit checks the base unit's RX frequency of the vacant (b) channel selected at random.
- ③ The base unit sends a ACK-OK.
This ACK-OK includes the number of the 2 vacant channels.
One vacant (a) channel and the vacant (b) channel selected in step 2.
- ④ The portable handset checks the handset's RX frequency of the vacant (b) channel in step 2.
- ⑤ The portable handset sends a CH-COMMAND.
This CH-COMMAND includes the number of the vacant (b) channel.
After sending the CH-ACK, portable handset changes to a vacant (b) channel.
- ⑥ The base unit changes to the vacant (b) channel.
The a conversation can be accessed.

KX-TCM526BX-B

2. To terminate Communication

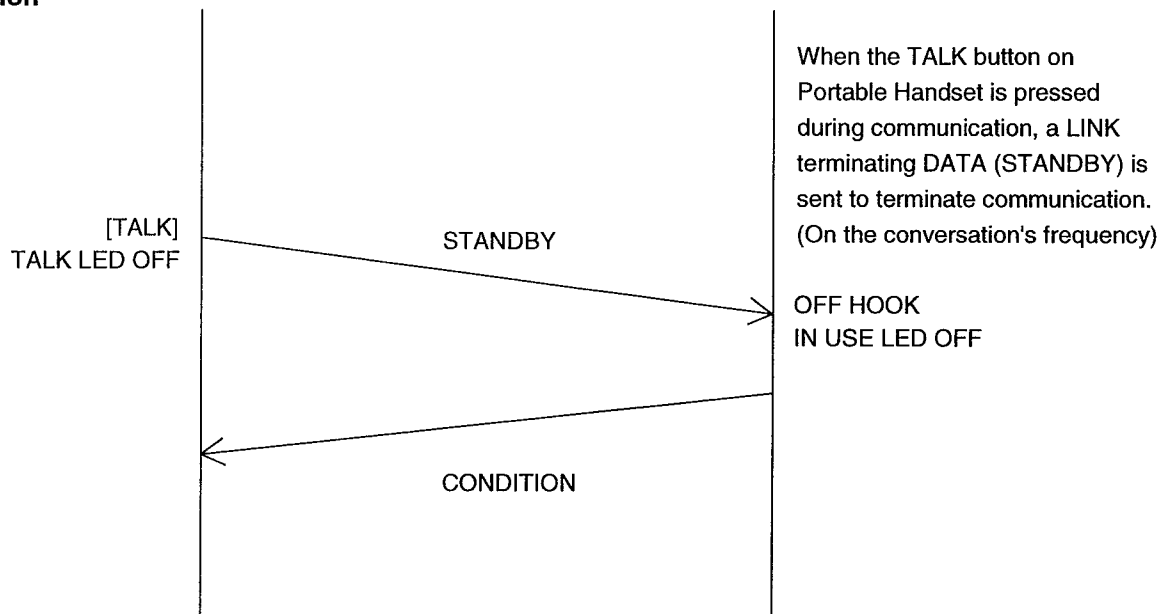


3. Ringing

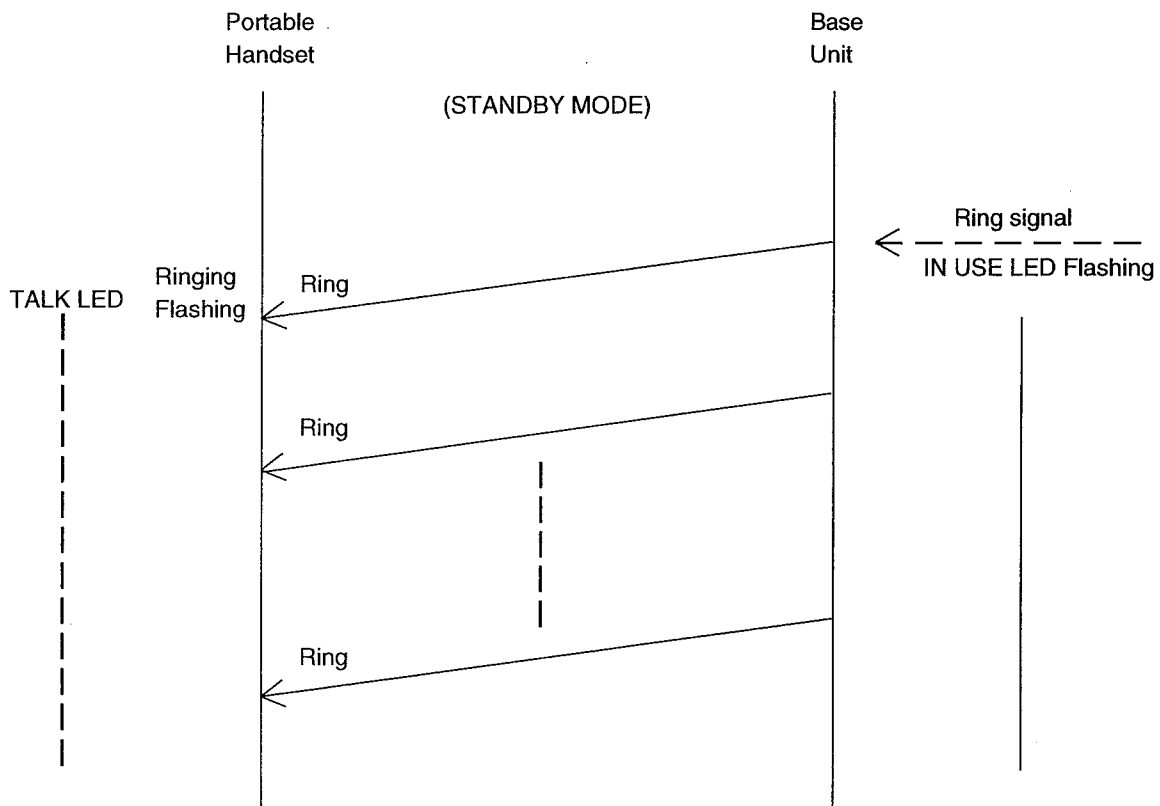


After detecting the Ring signal from circuit, Base Unit sends a ring signal DATA (Ring) on the base's (a) TX frequency, then the Portable Handset starts ringing.

PORTABLE HANDSET

Transmitting DATA Format

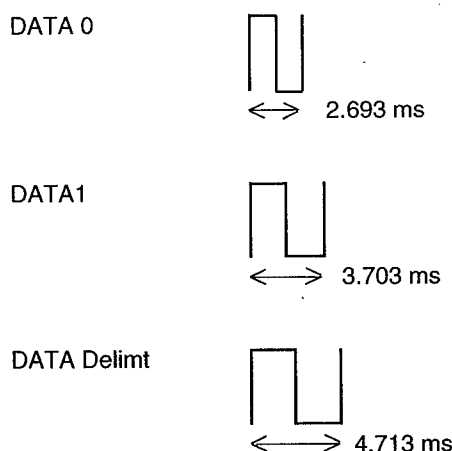


Pre data

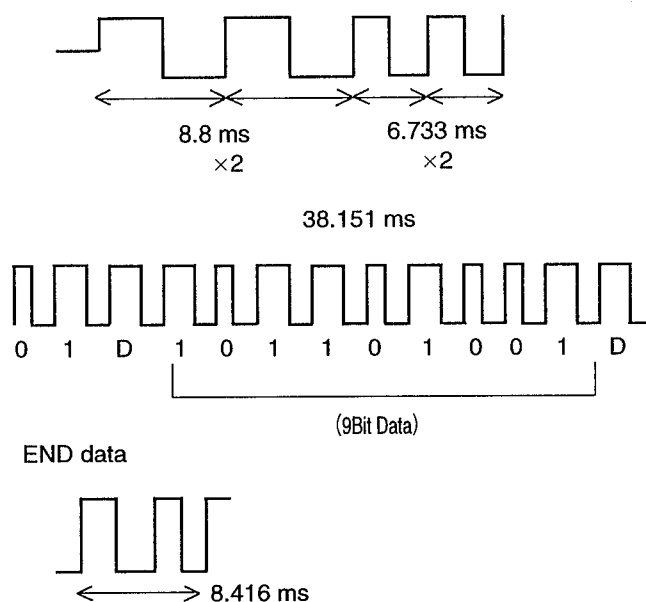


BASE UNIT


Transmitting DATA Format

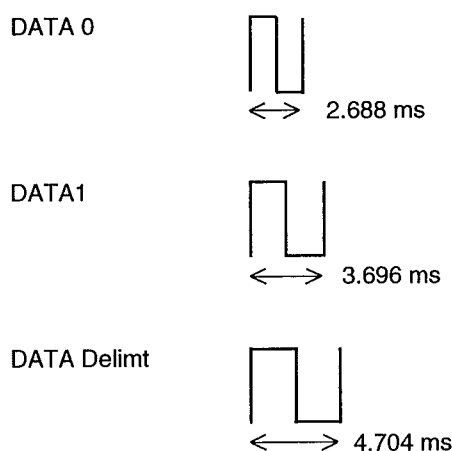

Pre data

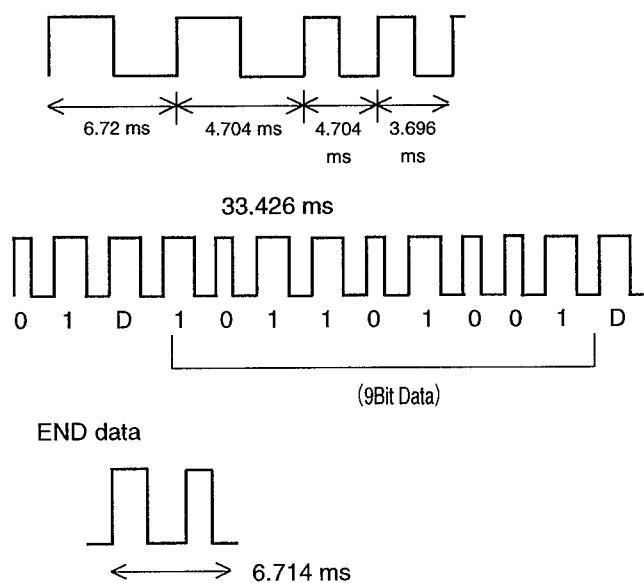

6. When LINKing

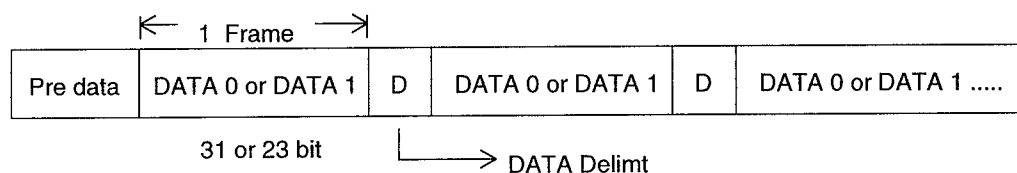


When LINKing from the Portable Handset (when becoming STBY to TALK), DATA is transmitted in above format. The combined portion of DATA 0 and DATA 1 is transmitted in LINK requesting DATA format first. Then, when LINK OK(ACK-OK) DATA is returned from the Base Unit, it is sent as LINK from DATA after changing the combination of DATA 0 and DATA 1. And the DATA

Delimt is between each Frame as a stop.

The contents of LINK requesting DATA and LINK from DATA are different depending on each operation.


KX-TCM526BX-B

7. Pulse Dial

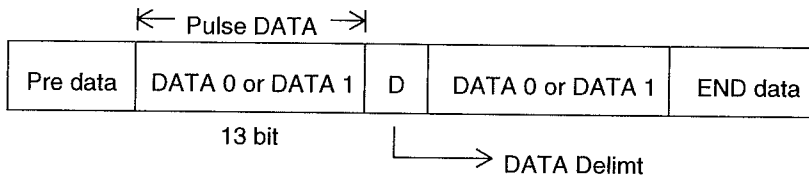

When executing Pulse Dial, the Pulse Dial DATA is transmitted from the Portable Handset to the Base Unit in above format. The combination of DATA 0 and DATA 1 are changed by each Dial No. And the DATA Delim is between each Frame as a stop. The number of Frame is 2.

8. Tone Dial

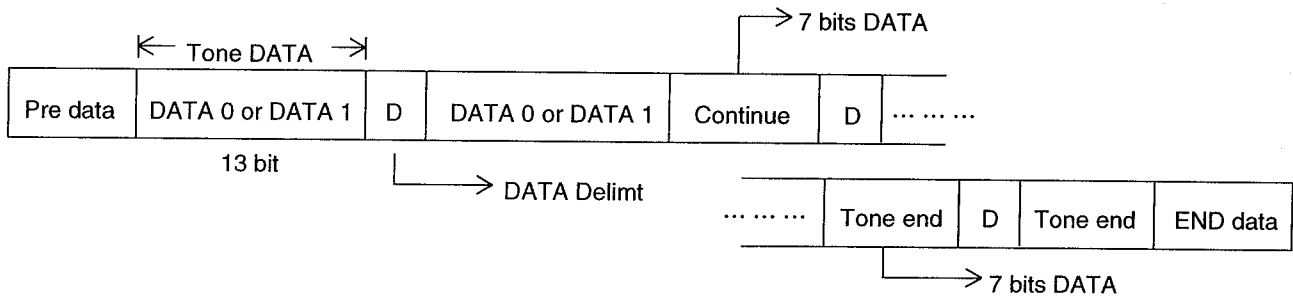


When executing Tone Dial, Tone Dial DATA is transmitted from the Portable Handset to the Base Unit in above format. The DATA is changed by Dial No. as same as Pulse Dial. When Tone Dialing, DATA (Continue DATA) that the key is pressed continuously is sent to the Base Unit during the key is pressed. When depressing the key, the TONE Dial exterminating DATA (Tone end DATA) is send, and the END data is sent finally.

NOTE

65,000 kinds of the security code are available for the model KX-TCM526BX-B. Each time the portable unit is set on the cradle of the base unit (for charging), the CPU automatically changes the security code.

BLOCK DIAGRAM (BASE UNIT)

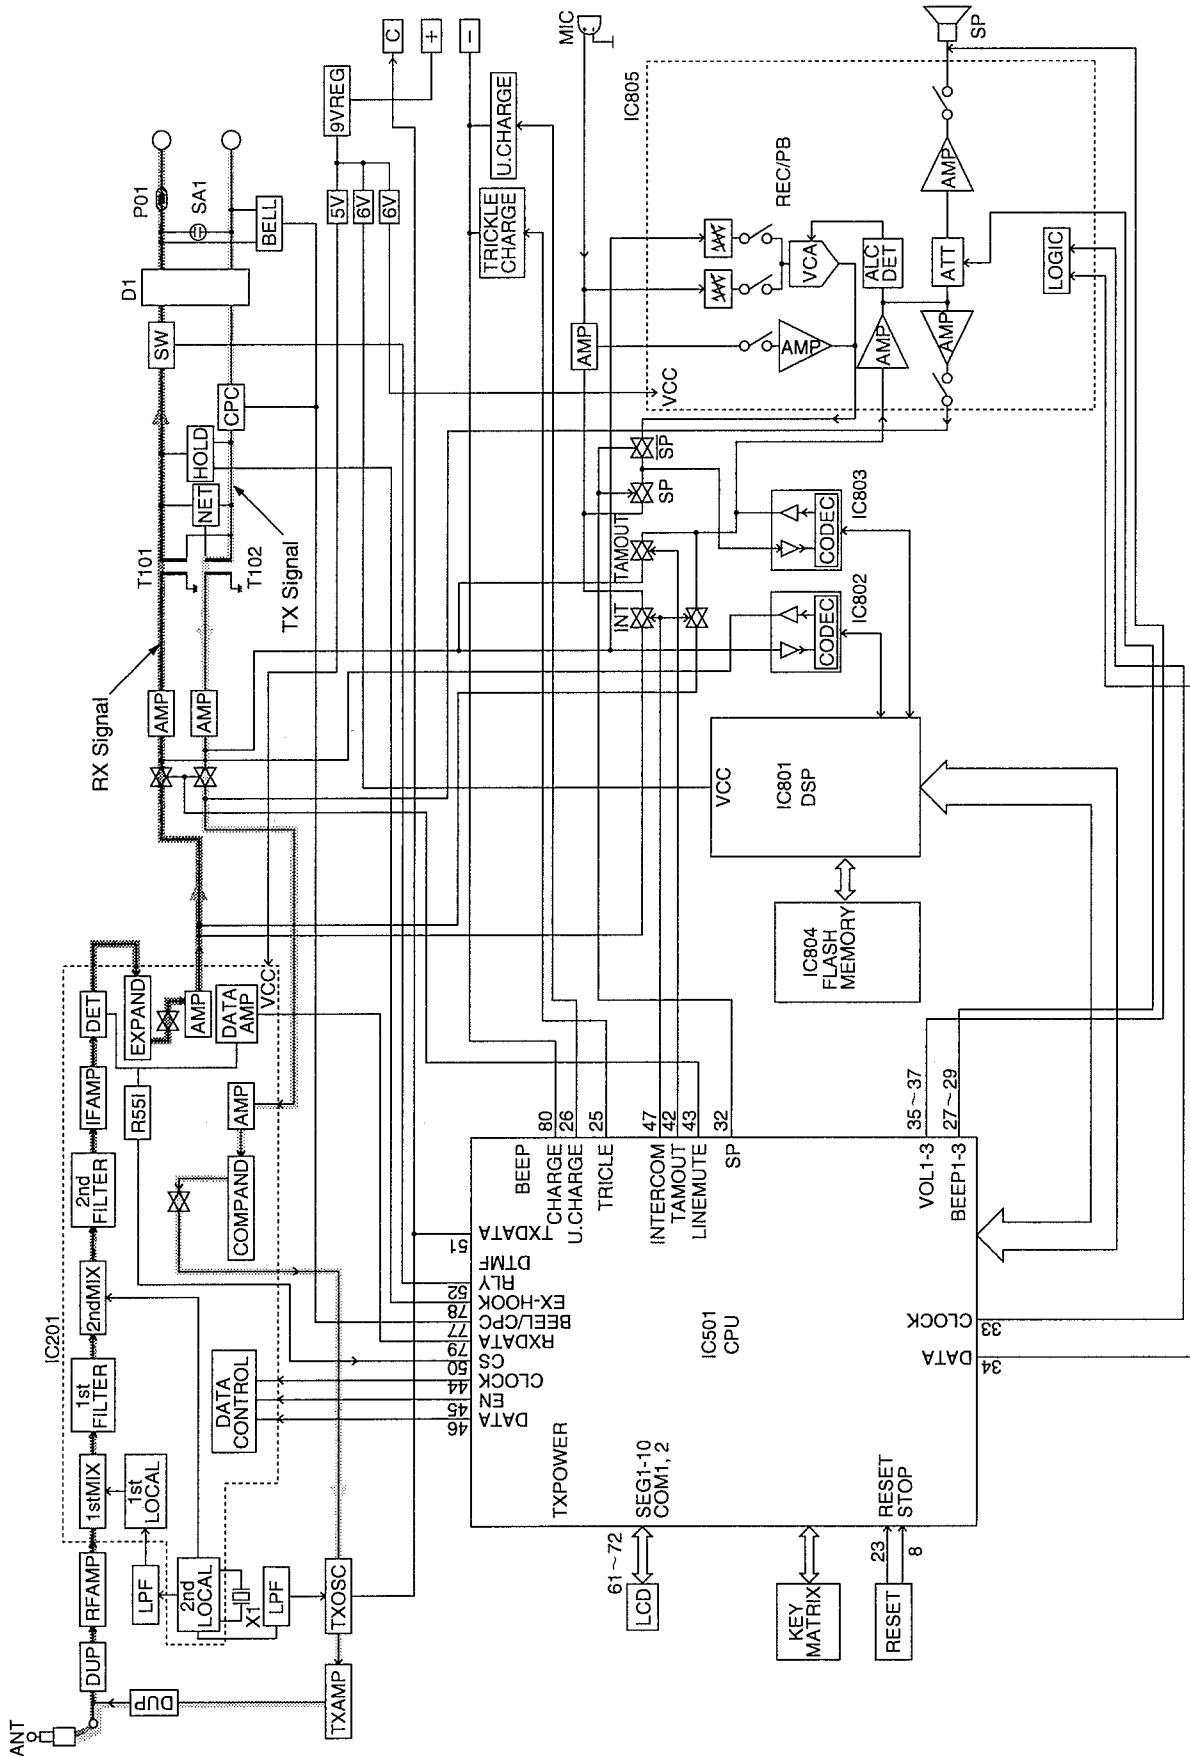


NEW CIRCUIT OPERATION (BASE UNIT)

■ TRANSMITTER CIRCUIT

The voice signal or data signal sent to the portable handset is applied in the anode of the variable capacitor diode(VARICAP)D301,as shown on figure.

VR301 is used for changing the voice signal level,thus changing the modulation level.

Circuit Diagram

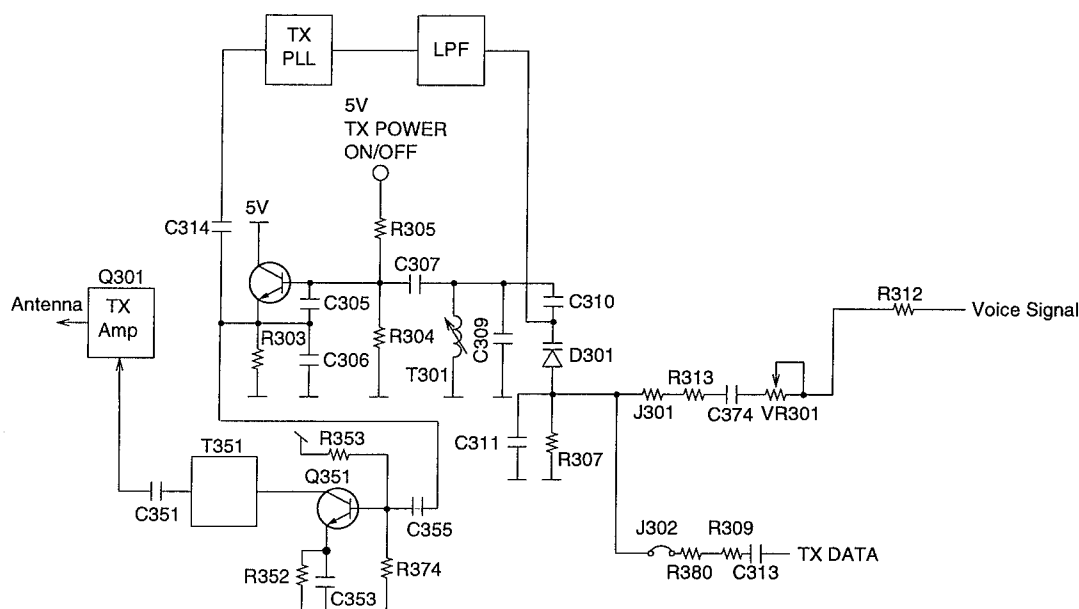


■ TRANSMITTER OUTPUT AMP CIRCUIT

The signal which is oscillated at TXVCO is amplified by Q302, which is biased by the TX duplexer and whose gain is adjusted by moving T351, VR302.

The signal passes through the duplexor and it is radiated from the antenna.

Circuit Diagram

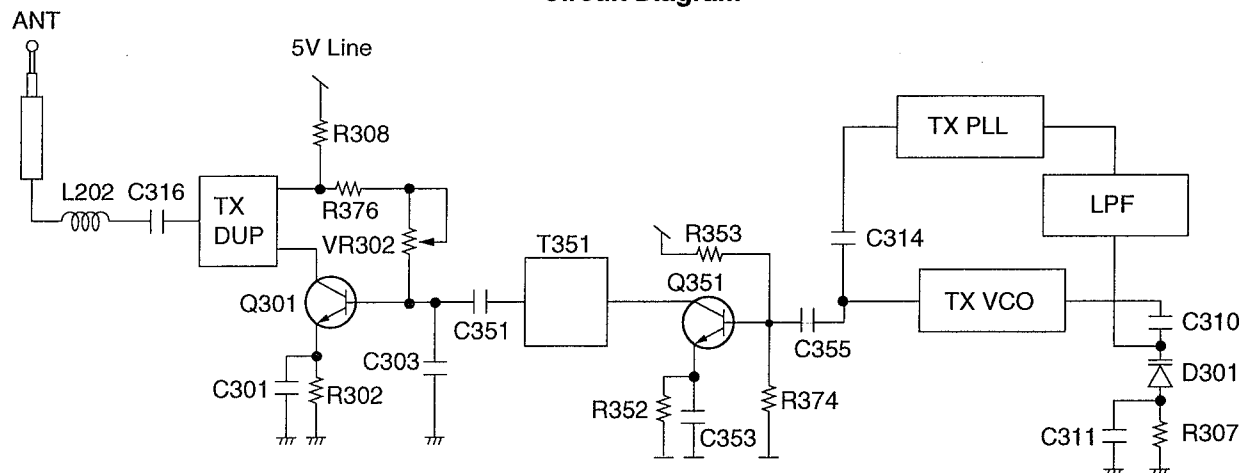

RECEIVER RF IF CIRCUIT


Circuit Operation:

The signal of 49 MHz band (49.46~49.99MHz) which is input from ANT is filtered at DUP201, passes through the filter AMP of 49 MHz band at T201 and Q201, and is input to Pin 4 of IC201.

RX VCO which oscillates at T203 and Pins 42, 46 of IC201 is input to program control at inside of IC201, 1st local frequency is controlled to assigned channel by serial data which is output, from Pins 12, 13 and 28 of IC501 (CPU), makes loop with Phase Detector Out and RX VCO, and locks 1st local frequency.

The input signal of Pin 4 of IC201 and 1st local frequency output from RX VCO are mixed at inside of IC201, then it passes through CF201, and 1st IF frequency of 10.695 MHz is generated. Farther, the 10.240 MHz and 10.695 MHz which are oscillated at X201 and Pins 3, 4 of IC201 are mixed at inside of IC201 and filtered at CF202, and 2nd IF 455 Hz is output.

Circuit Diagram

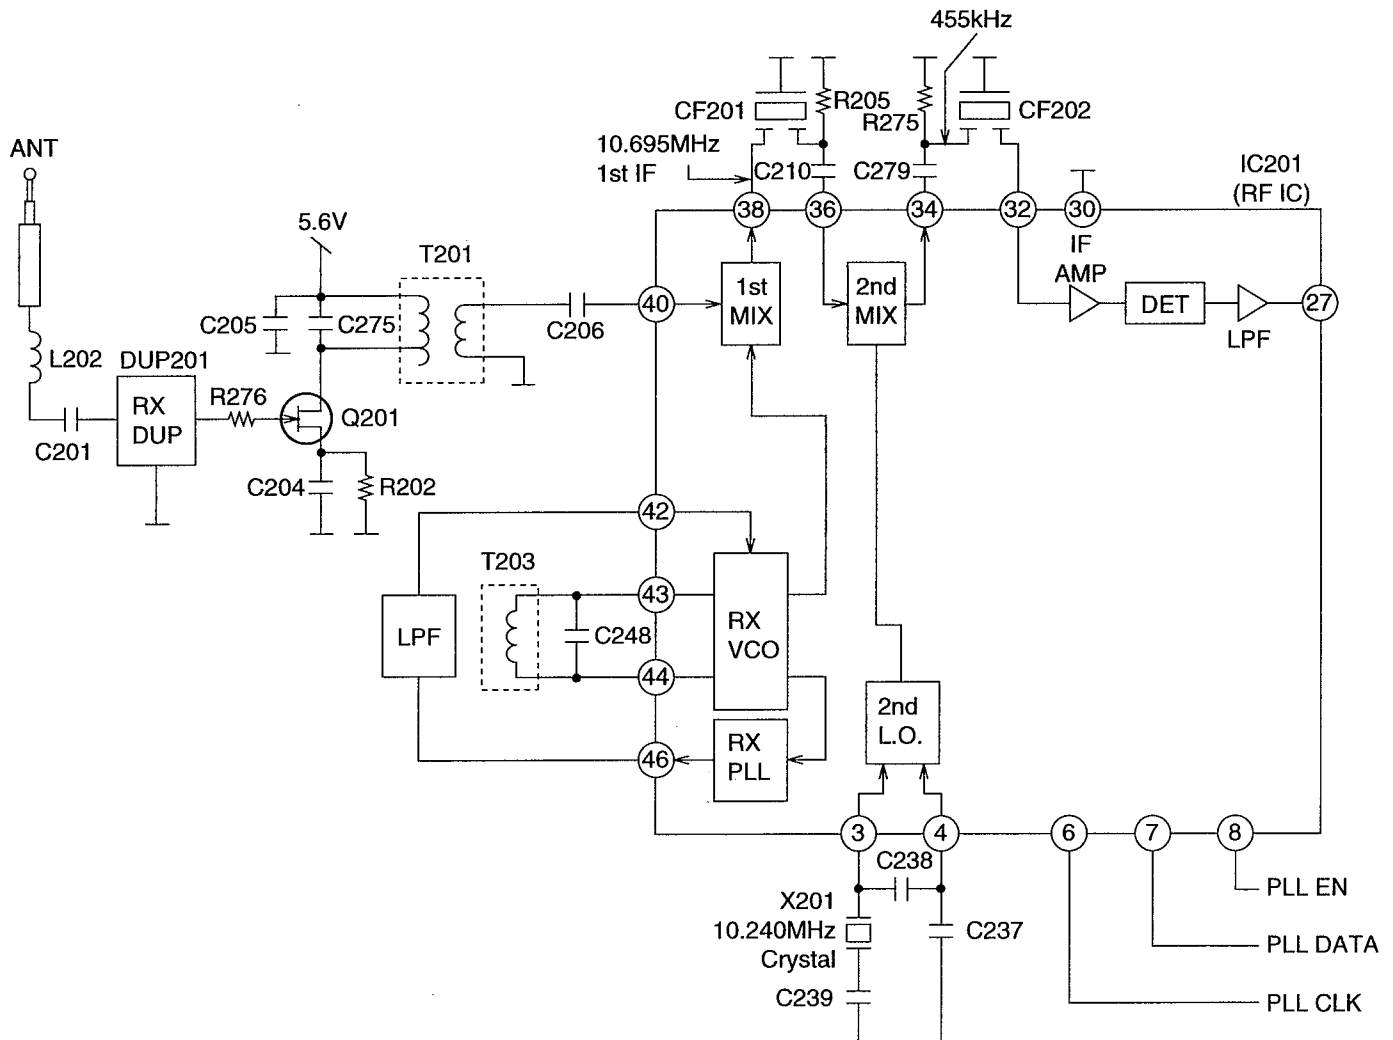


KX-TCM526BX-B

RECEIVER SIGNAL CIRCUIT

Circuit Operation:

1. The detected signal passes through R277→C277→(R219) and it is input to the Pre Amplifier inside of IC201; it passes through the expander and goes out from pin 17 of IC201.
2. The signal passes through C255→R216→VR201→, and it is input to the Receiver Amplifier of IC201, on pin 18.
3. The signal is output from the amplifier on pin 20 of IC201 and it goes thru Q103 and Q104, to the telephone line.
4. The signal is also input to the IC101 (sidetone IC) in pin 6, in order to define the attenuation level of this IC.

Circuit Diagram

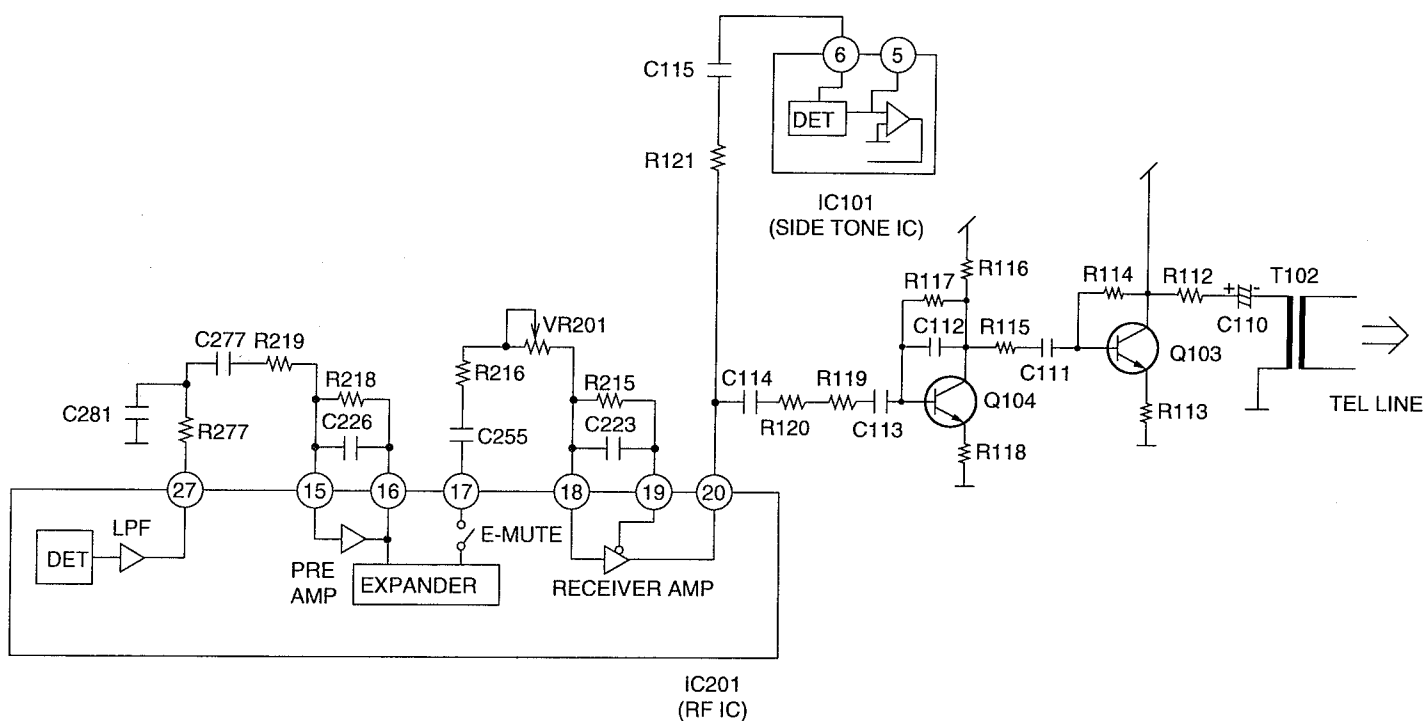


SP-PHONE RX CIRCUIT

Circuit Operation:

Telephone Line → C17 → T101 → C125 → R101 → Q101 → C872 → C874 → Pin 3 of IC806 → Pin 1 of IC806 → R857 → C859 → L804 → Pin 17 of IC802 → Pin 13 of IC802 → R821 → Pin 27 of IC801 → Pin 24 of IC801 → RA804 → Pin 8 of IC803 → Pin 1 of IC803 → L806 → R833 → C835 → Pin 12 of IC807 → Pin 1 of IC807 → C839 → R840 → Pin 15 of IC805 → Pin 6 of IC805 → C858 → Speaker

Circuit Diagram

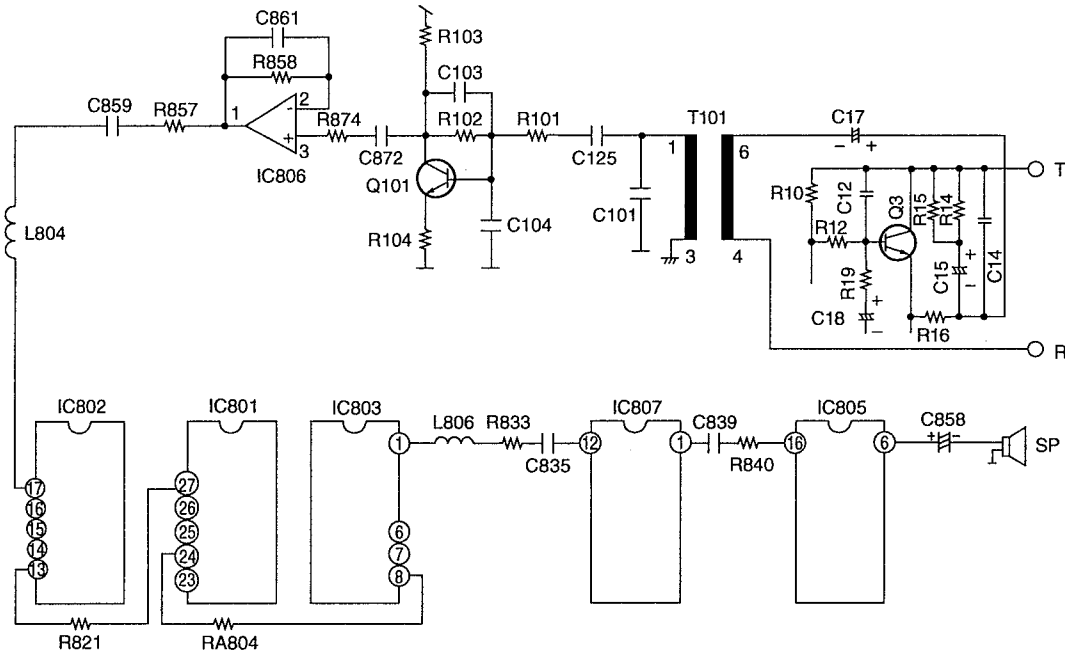


SP-PHONE TX CIRCUIT

Circuit Operation:

MIC → C866 → Pin 5 of IC806 → Pin 7 of IC806 → Pin 2 of IC807 → Pin 15 of IC807 → L832 → R830 → R839 → C838 → L807 → Pin 17 of IC803 → Pin 13 of IC803 → Pin 26 of IC801 → Pin 25 of IC801 → Pin 8 of IC802 → Pin 1 of IC802 → L803 → C869 → R871 → Base of Q104 → Collector of Q104 → R115 → C111 → Base of Q103 → Emitter of Q103 → R112 → C110 → T102 → C18 → R19 → Q3 → Telephone Line

Circuit Diagram

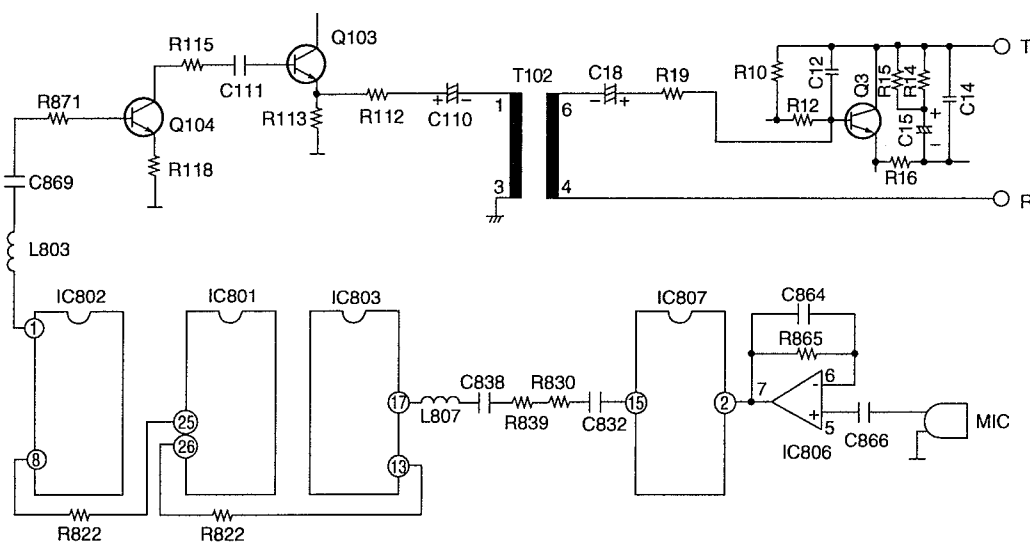

NORMAL CIRCUIT OPERATION (BASE UNIT)

■ TELEPHONE LINE INTERFACE

Circuit Operation:

● ANSWER

In the idle mode, Q1 is open to cut the DC loop current and decrease the ring load. When ring voltage appears at the Tip (T) and Ring (R) leads (When the telephone rings), the AC ring voltage is transferred as follows:

T→PO1→C1→R1→PC1→IC501 Pin 77

When the CPU detects a ring signal, Q110 turns on, thus providing an off-hook condition (active DC current flow through the circuit) and the following signal flow is for the voice signal.

T→PO1→D1→Q1→T101 Pin 6→T101 Pin 4→D4→D1→R

● ON HOOK

Q1 is open, Q1 is connected as to cut the DC loop current and to cut the voice signal. The unit is consequently in an on-hook condition.

● SPECIFICATIONS


In the on-hook state (idle), the current flows between the telephone line and the unit is as follows:

T→C1→R1→PC1→R

The DC component is blocked by C1: thereby providing an on-hook condition.

The AC interface impedance is over 47 kΩ; thus, satisfying the telephone company requirements.

Circuit Diagram

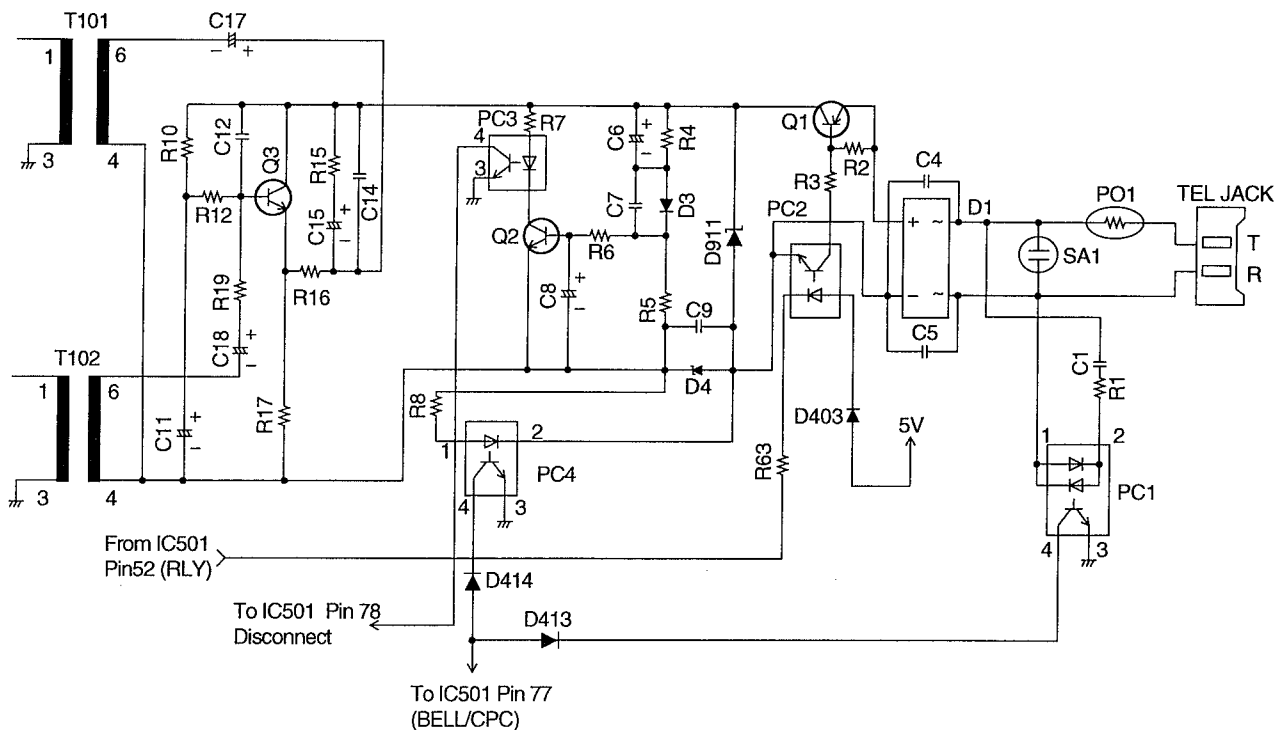

■ INTERCOM MODE

- 1) When the base unit PAGE/INT button is pressed, a call monitor signal of 1.95 kHz (intercom sound) is output from Pin 37 of IC501.
- 2) At the same time, Pin 54 of IC501 goes "High", and the transmission state is reached. Then the modulated data signal is output from Pin 51 of IC501. Flashing of the INTERCOM LED (LED551) is obtained from Pin 73 of IC501. This status is called "Intercom stand-by".
- 3) The receiving signal flows:
Pin 47 of IC501 → Q801 (Pin 47 of IC501 Low → High) → R838 → C837 → Pin 15 of IC805 → Speaker.
- 4) The transmission signal flows:
MIC → IC806 (Amp) [pin 7 is outputted] → Q803 (Pin 47 of IC501 Low → High) → R872 → C870 → R94 → ANT.

■ INITIALIZING CIRCUIT


Function:

This circuit is used for to initialize the microcomputer when it incorporates an AC adaptor.

Circuit Operation:

When the AC Adaptor is inserted into the unit, then the voltage is shifted by D417 and power is supplied to the CPU.

The set can operate beyond point (A) in the circuit voltage diagram.

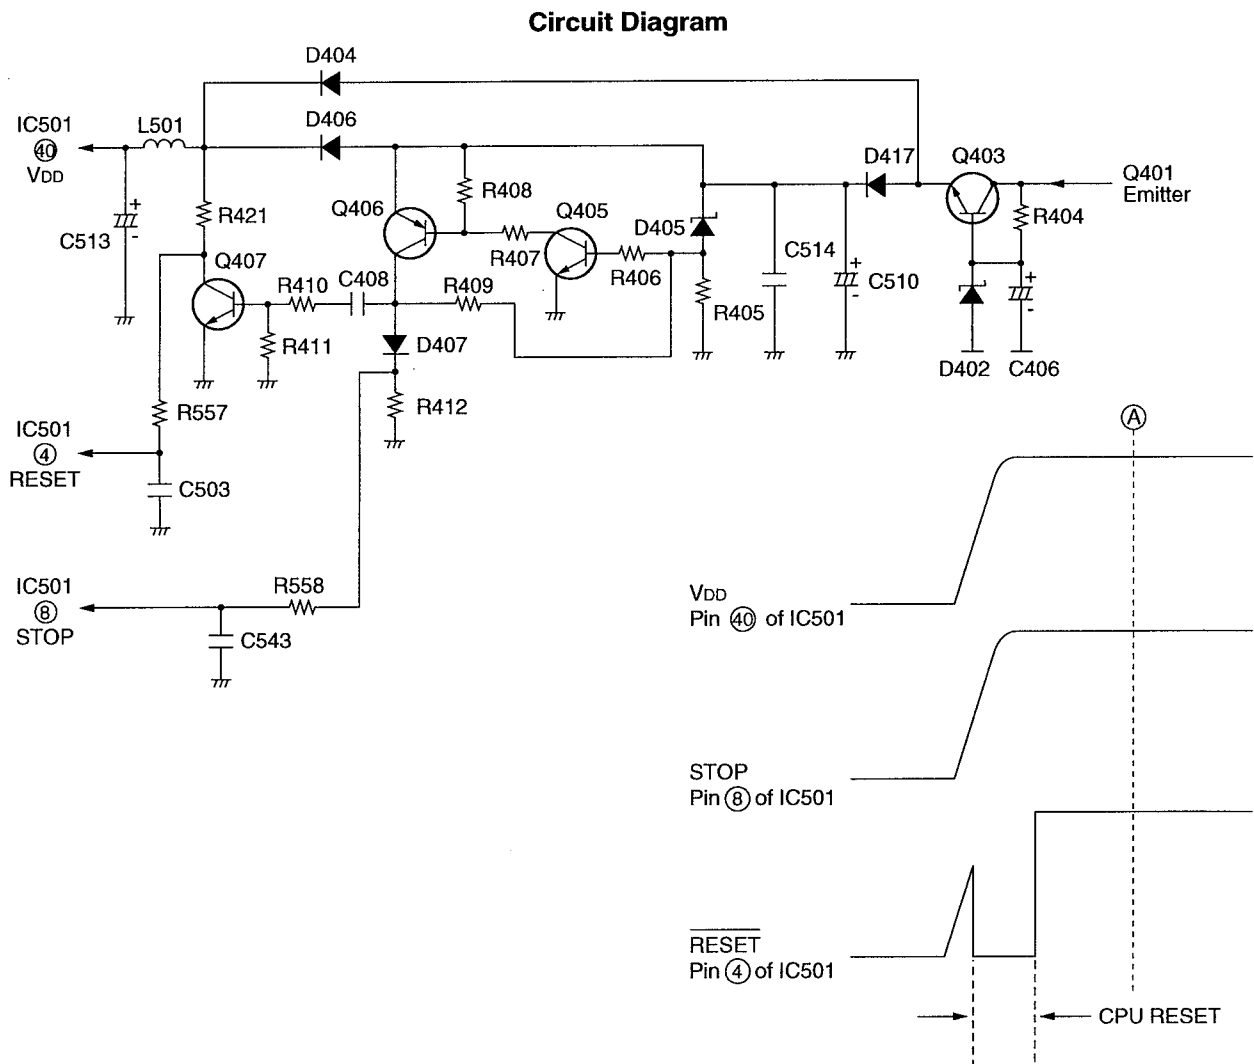


KX-TCM526BX-B

■ GREETING RECORDING CIRCUIT

Circuit Operation:

MIC → R862 → C860 → Pin 19 of IC805 → Pin 16 of IC805 → R840 → C839 → Pin 1 of IC807 → Pin 15 of IC807 → R839 → C838 → L807 → Digital TAM Circuit.

Circuit Diagram

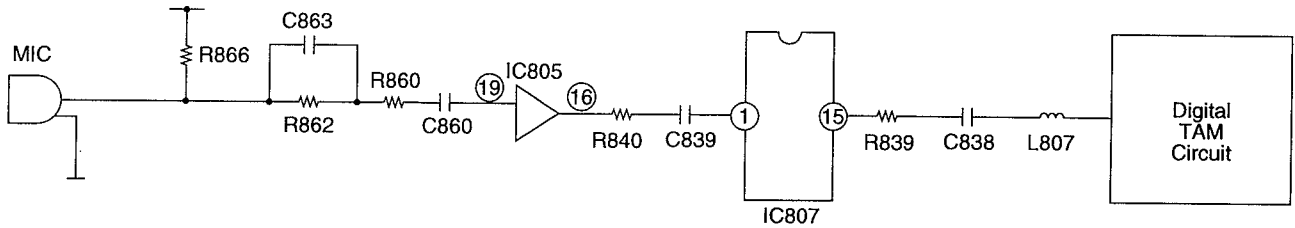


■ GREETING PLAY BACK CIRCUIT

Circuit Operation:

Digital TAM Circuit → L806 → R833 → C835 → Pin 12 of IC807 → Pin 14 of IC807 → R836 → C836 → Pin 15 of IC805 → Pin 14 of IC805 → C871 → R870 → base of Q104 → collector of Q104 → Base of Q103 → emitter of Q103 → C110 → T101 → Telephone Line.

Circuit Diagram

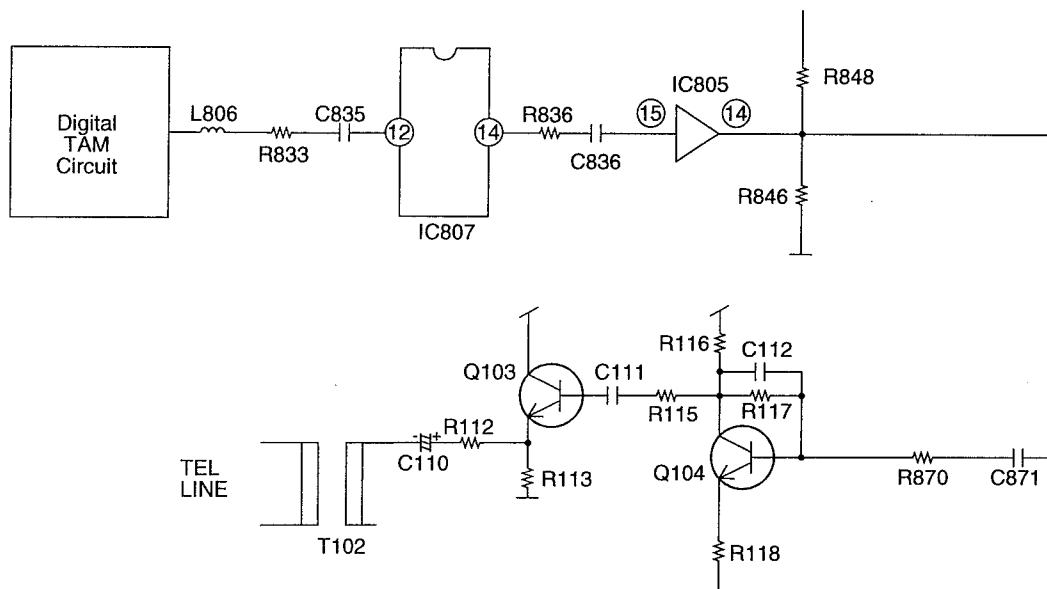


ICM RECORDING CIRCUIT

Circuit Operation:

Telephone Line → T101 → C125 → R101 → Q101 → R851 → C849 → Pin 20 of IC805 → Pin 16 of IC805 → C839 → Pin 1 of IC807 → Pin 15 of IC807 → C832 → R830 → R839 → C838 → L807 → Digital TAM Circuit.

Circuit Diagram

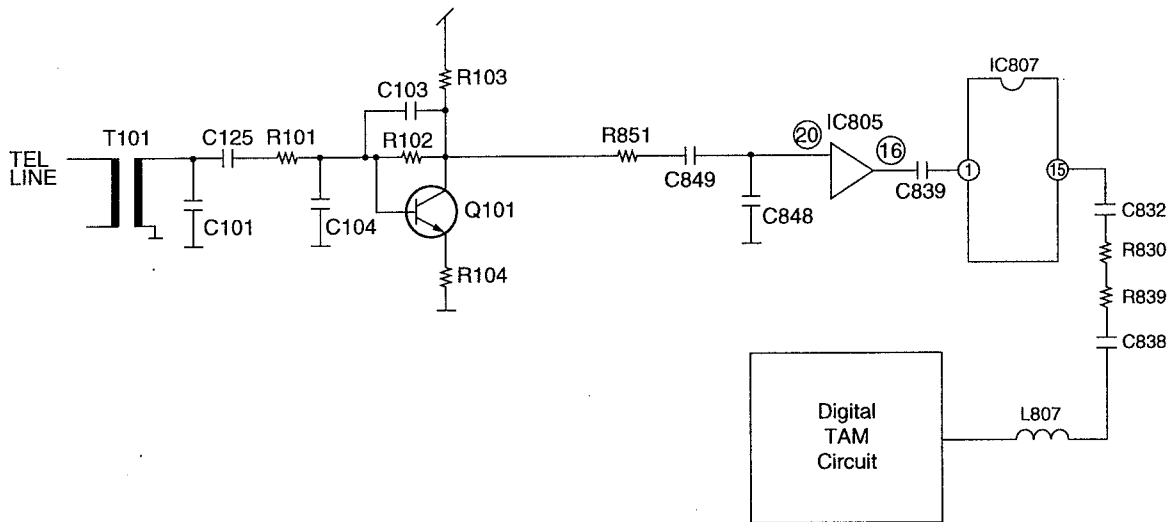


ICM PLAY CIRCUIT

Circuit Operation:

Digital TAM Circuit → L806 → R833 → C835 → Pin 12 of IC807 → Pin 14 of IC807 → R836 → C836 → Pin 15 of IC805 → Pin 6 of IC805 → C858 → Speaker.

Circuit Diagram

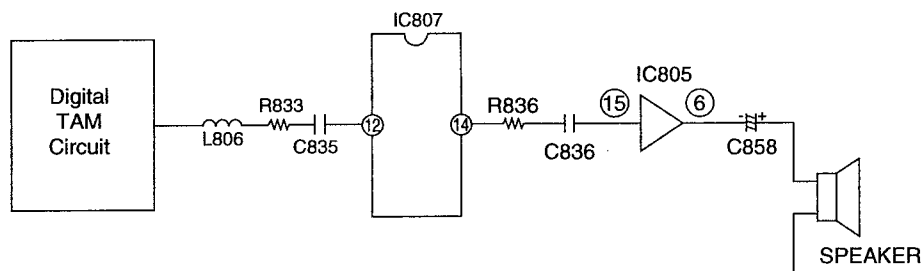

KX-TCM526BX-B

■ AUTO DISCONNECT CIRCUIT

Function:

This circuit is used to detect the fact that another telephone connected to the same line is OFF-HOOK while the unit is in a receiving status or OGM transmitting status.

Circuit Operation:


T → PO1 → D1 → Q1 → R4 → D3 → R6 → Q2. During this interval C8 charges and the base of Q1 becomes High, causing Q1 to go ON.

If a parallel-connected telephone is put into an OFF HOOK status, charge ceases to flow to C6, and the base of Q1 becomes Low, causing Q1 to go OFF.

However, the system is designed so that if the voltage fluctuation is small, the charging and discharging of C8 has no effect on the system.

When a line is connected, Q1 goes ON, causing Pin 78 of IC501 to go low. When the line is disconnected, Q1 goes off, causing Pin 78 of IC501 to go high.

Circuit Diagram

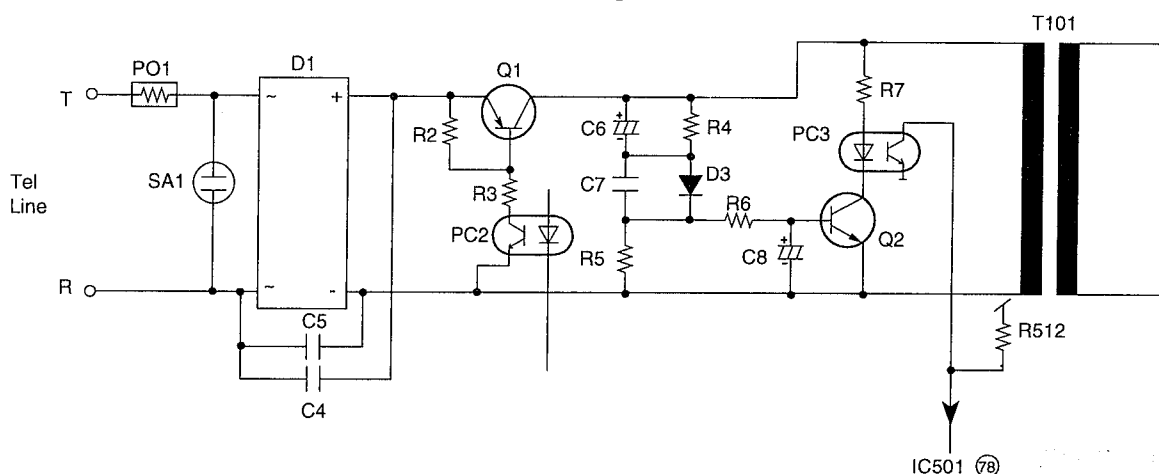

■ POWER SUPPLY CIRCUIT


Function:

Power from the AC adaptor passes through a 2-stage regulating block consisting of Q401, Q402, Q403 and Q404 and provides system voltages of 5.4 and 9 V.

Circuit Operation:

Power from the AC adaptor is supplied directly to the plunger. Q401 is a regulated power supply. The voltage at point (B) is regulated to 9 V by the zener voltage of D401 → Amp power. Q402, Q403 and Q404 are a regulated power supply. The voltage at point (C) is regulated to 6 V by the zener voltage of D402. The 6 V voltage is dropped by D414 to 5.4 V.

Circuit Diagram

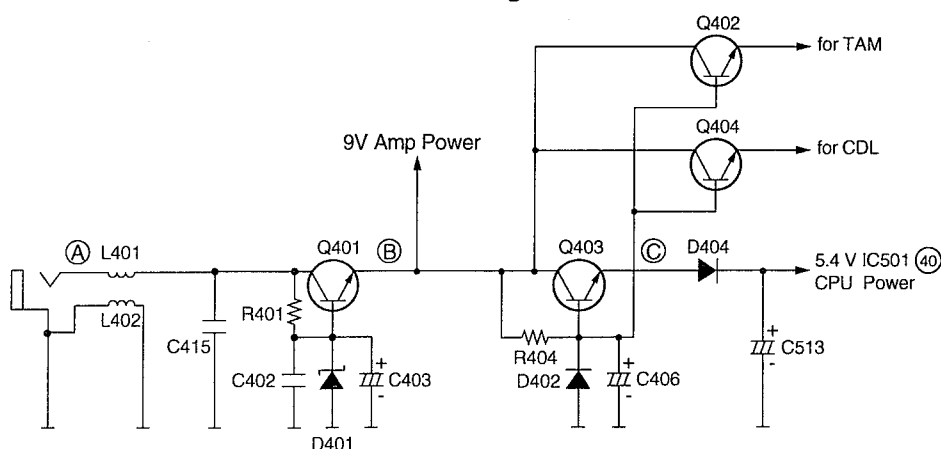

■ DSP (Digital Speech/Signal Processing) CIRCUIT


General Description:

IC801~IC804 are a digital speakerphone/speech/signal processing system that implements all the functions of speech compression, record and playback, and memory management required in a digital telephone answering machine.

The DSP system is fully controlled by a host processor (IC501), via 8 bit interface. The host processor provides activation and control of all that functions, such as speech Recording, Playback, Tone detecting and Line Monitoring.

The DSP system comprises of following.

- a Digital Signal Processor which includes the firmware implemented functions.
- a Codec (IC802, IC803), which is used as the analog I/O interface.
- an Audio grade Flash MEM (IC804), which is used for stored voice messages, and Synthesized Voice.

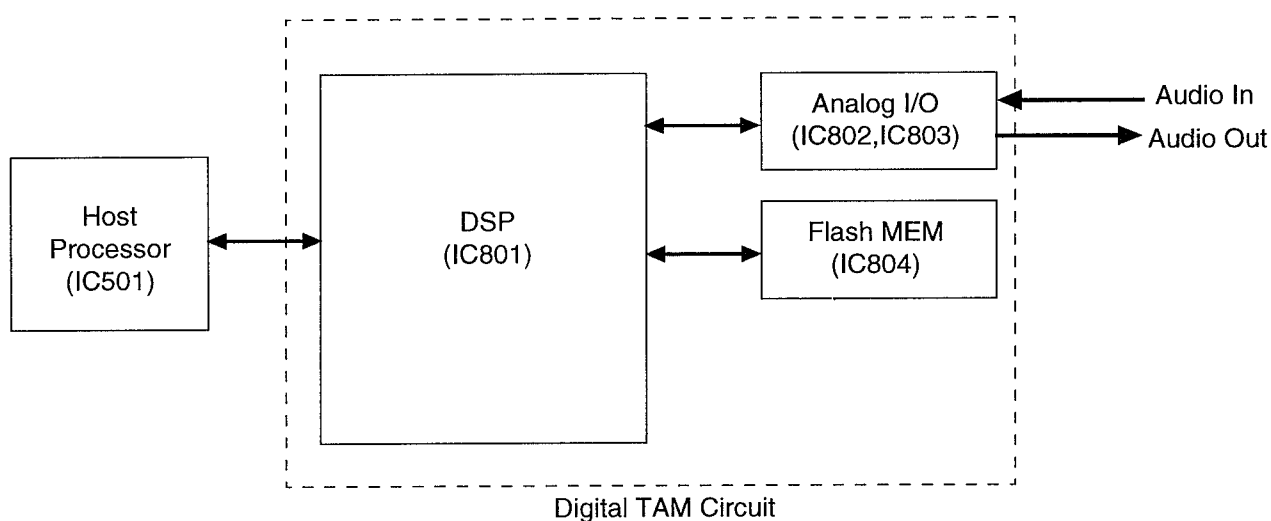

• Voice Message Recording

The DSP system use a proprietary speech compression technique to record and store voice message in the Flash MEM (IC804). An error correction algorithm is used to enable playback of these messages from the Flash MEM.

• DTMF Detection

The DTMF detection is implemented by the DSP system in software. The DTMF detection is performed during Record, Playback, and Line Monitoring modes of operation.

• Synthesized Voice

The DSP implements synthesized Voice, utilizing the built in speech detector and an external Flash MEM (IC804), which stored the vocabulary.

KX-TCM526BX-B

■ CPC (CALLING PARTY CONTROL) DETECTOR CIRCUIT

Function:

The CPC DETECTOR complements the units shut off, in the ANSWER mode, after the caller hangs up. At this time, the CPC DETECTOR takes over.

The CPC DETECTOR senses the temporary disconnection of the telephone line which occurs after the caller hangs up.

Circuit Operation:


When off-hook, the DC current of telephone line flows as follows:

T→D1→T101→R8→PC4→D1→R

When in the off-hook mode, the collector of PC4 is at Low level.


If an instant break down of the telephone line occurs, the collector of phototransistor goes to a high level from a low level.
(The CPC detector is designed for the instant break down of more than 8 msec. or 600 msec.)

Circuit Diagram

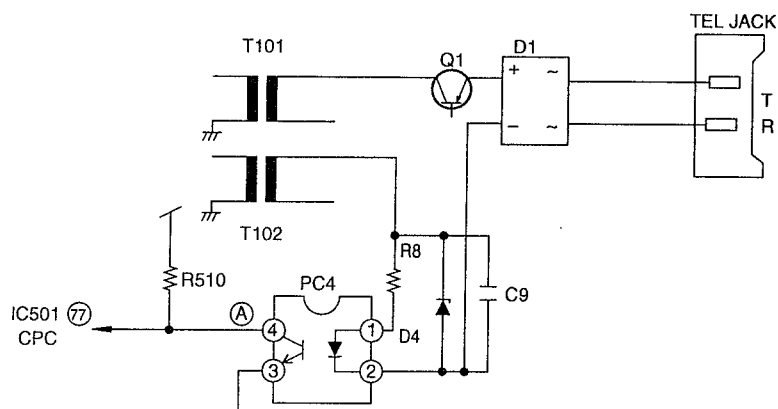

CPC Function

	A	B
OK	more than 8 ms	more than 600 ms
NG	less than 5 ms	less than 350 ms

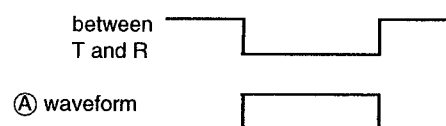


CPU OPERATION

1. TEL MODE

CPU Terminals	18 TX POW	19 TX DATA	21 TR-RLY	41 BEEP
Operation Mode				
STANDBY	L	H	H	L
TALK	H	H	L	L
Portable Handset→Base Unit Paging	H	DATA OUTPUT	H	
Base Unit→Portable Handset Ring	H	DATA	H	L
Base Unit→Portable Handset Paging	H	DATA	H	
CHARGE	L	DATA	H	L
CH Changing (TALK)	H	DATA	L	L


The base unit mode is :
 OFF : LOW
 LOW : 
 HIGH : 

2. TIMING OF IC501 (CPU) OUTPUT PORT WITH THE BASE UNIT IN HANDSET LOCATOR MODE

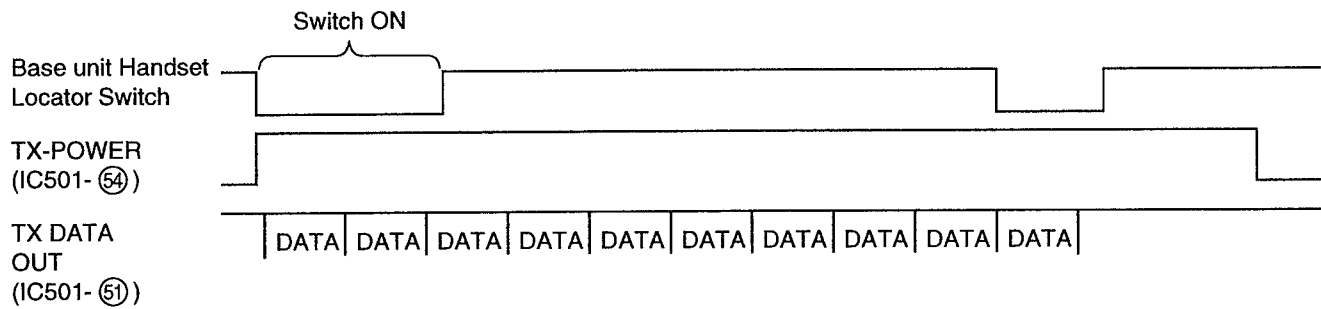


3. WHEN PRESSING THE TALK BUTTON OF THE PORTABLE HANDSET

4. THE PORTABLE HANDSET TO OFF

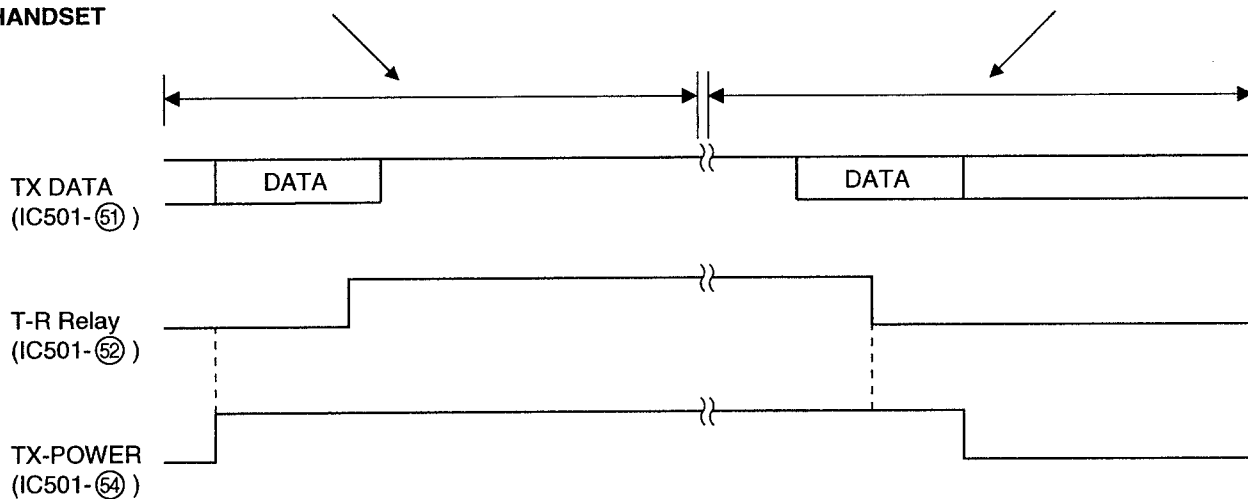

4. RESONANCE PREVENTION CIRCUIT

Circuit Diagram

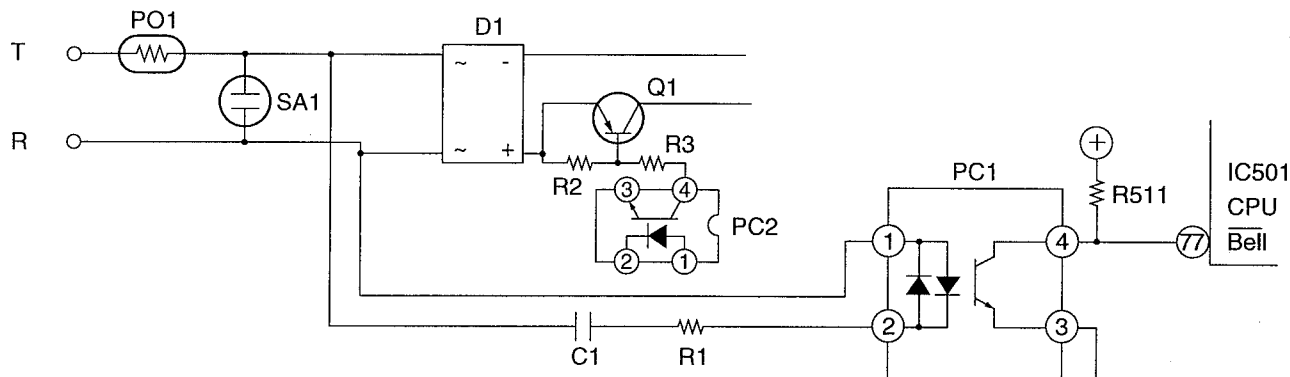


Ring signal


• T-R



• PC1-①



• PC1-④

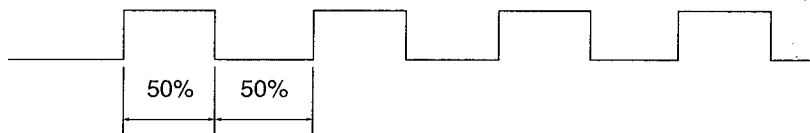


Make/break ratio when dialing with the Portable handset: 40%: 60%
 High/low ratio upon ring signal: 50%: 50%
 Therefore, if the low/high ratio is greater than 45% at IC501- ⑦⑦ (CPU), it is judged as a ring signal.

5. EXPLANATION OF THE DATA RECEPTION CIRCUIT


5-1. Signal Flow

Circuit Diagram

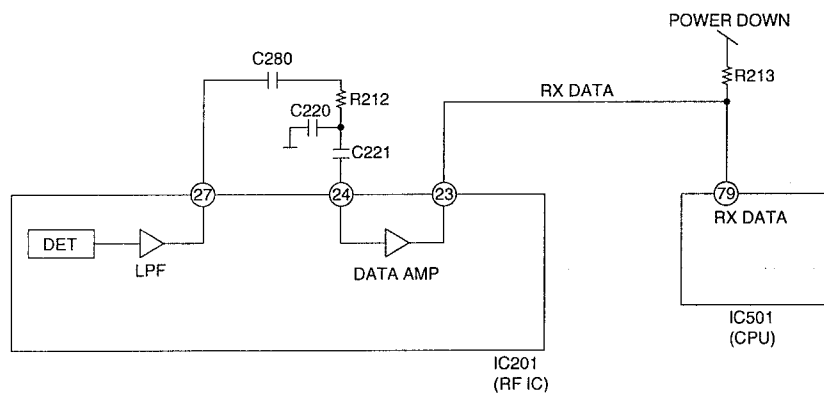

In area where the transmission power from the portable handset is extremely weak, noise is superimposed on the data and the chance of an error can become extremely great upon reception of the data. To help prevent this, the above circuit is used.

BLOCK DIAGRAM (PORTABLE HANDSET)

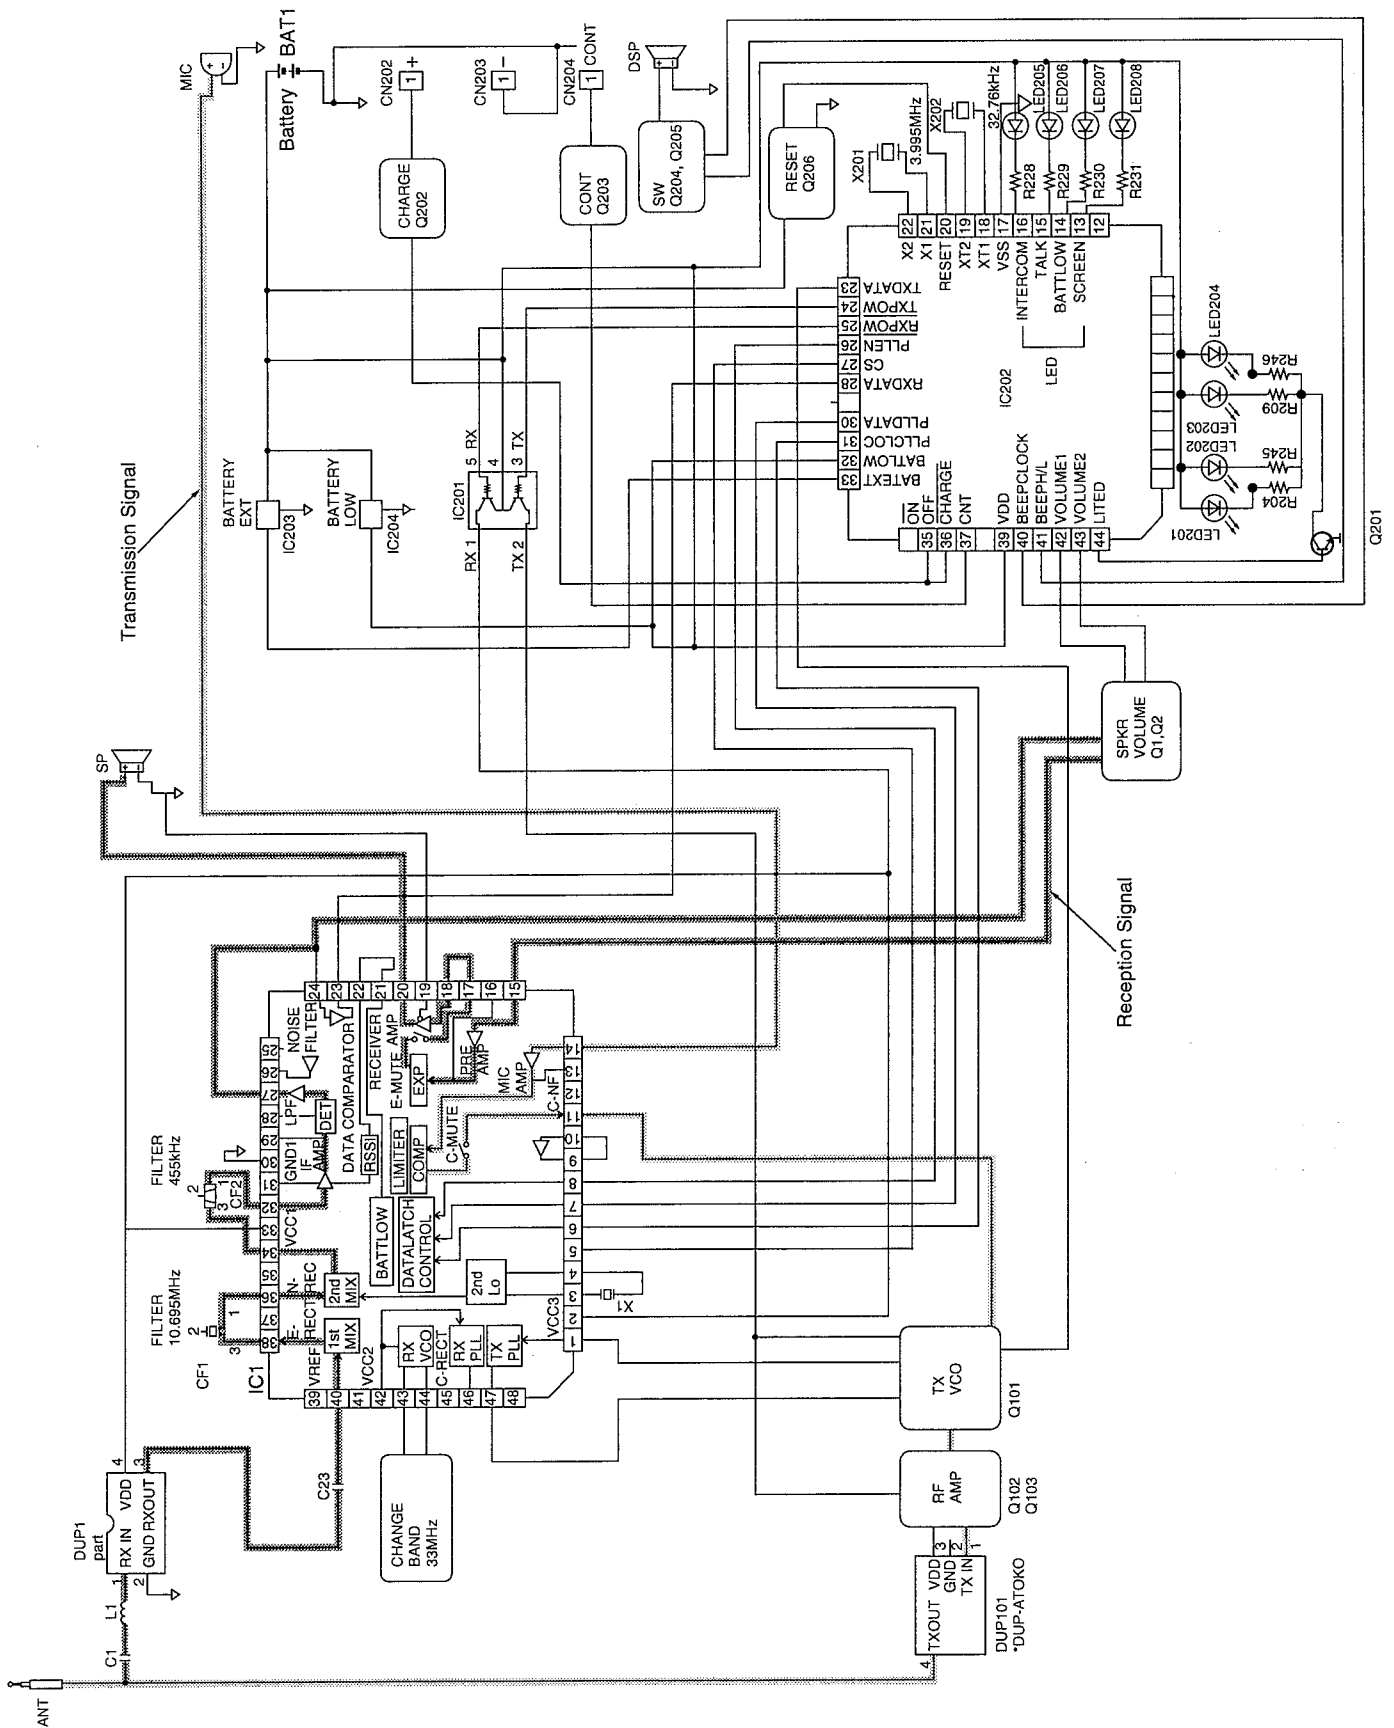

NEW CIRCUIT OPERATION (PORTABLE HANDSET)

RECEIVER RF IF CIRCUIT


Circuit Operation:

The signal of 44 MHz band (43.72 MHz~44.20 MHz) which is input from ANT is filtered by DUP1, and is input to Pin 40 of IC1. The RX VCO which oscillates at L5 and IC1 is locked to 1st Local frequency by PLL inside IC1. (PLL is controlled by serial data output from Pin 26, 30 and 31 of IC202.)

An input signal from Pin 40 of IC1 and 1st Local frequency output from RX VCO are mixed inside IC1, pass through CF1, and 1st IF frequency of 10.695 MHz is generated.

Further, 10.240 MHz and 10.695 MHz oscillated at X1, pass through MIXER inside IC1 and are filtered at CF2 and output 2nd IF 455 kHz.

Circuit Diagram

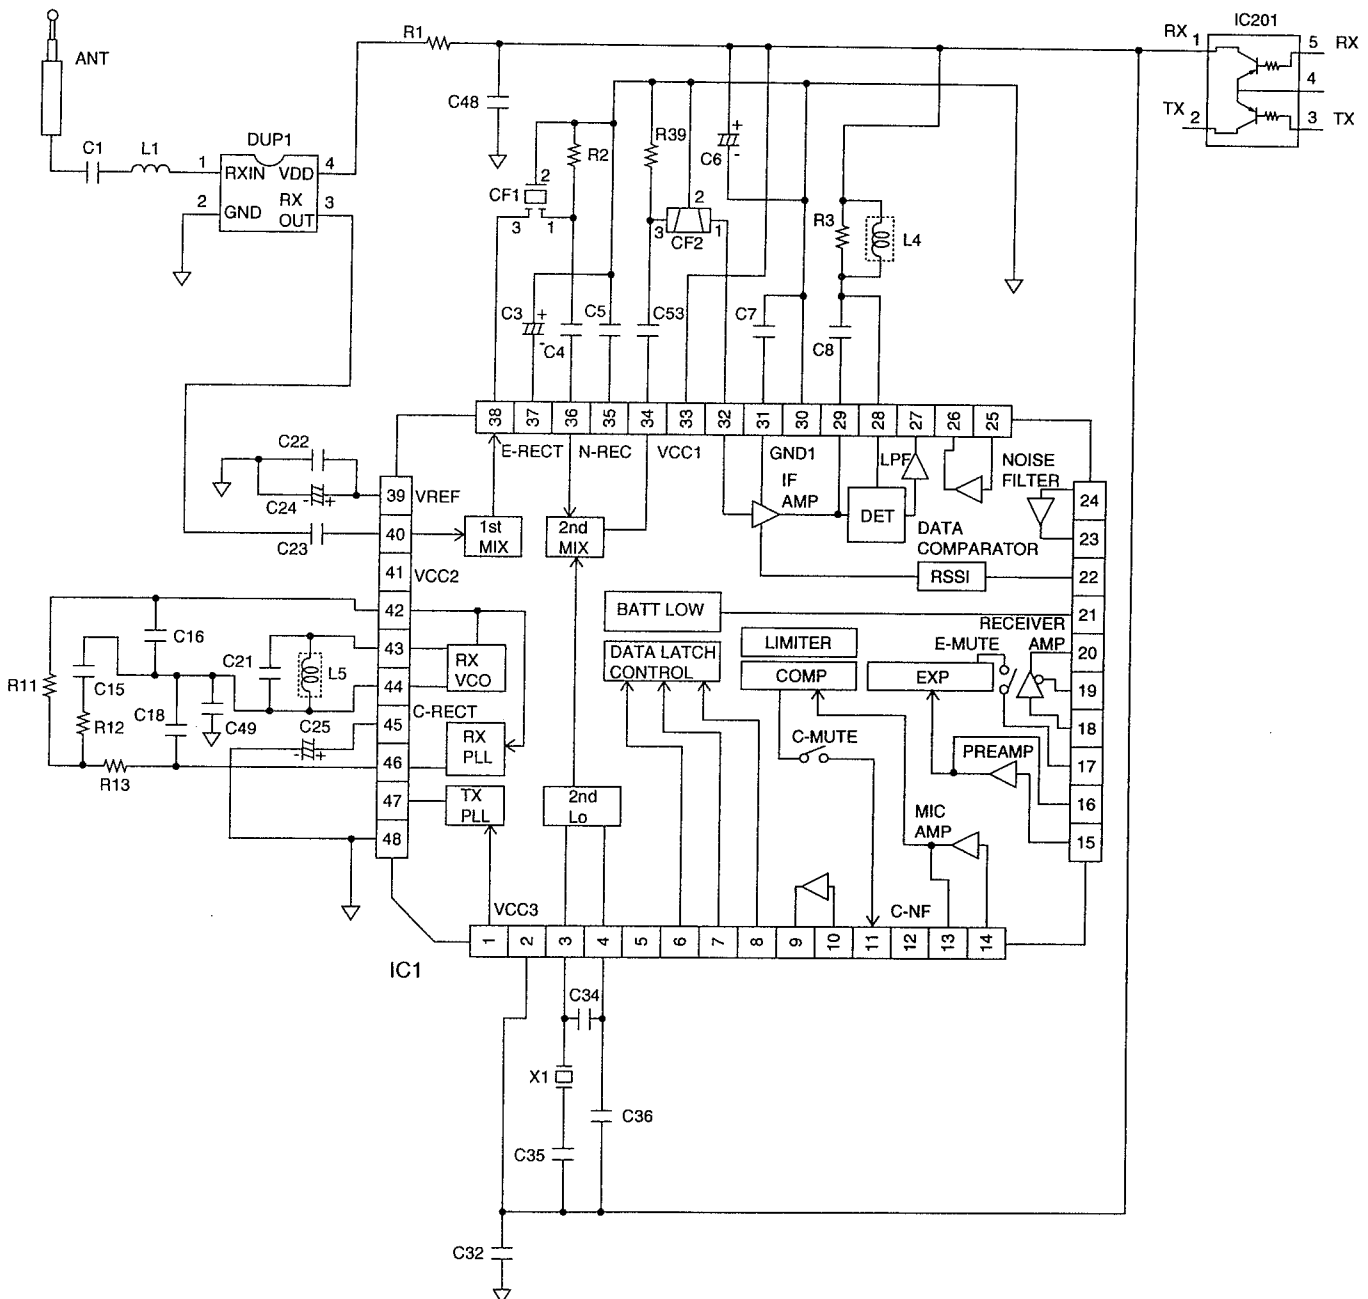

RECEIVER SIGNAL CIRCUIT


Circuit Operation:

After getting the 455kHz signal, it is input to Pin 32 of IC1 and passes through IF AMP and Detector Circuit are output to Pin 27. It is an AF signal flows through C50, R23. Its level is switched by Q2 and Q1 which are controlled by the CPU.

The signal is received at Pin 15 of IC1, then it passes through the following circuits: PRIAMP, Expander and Amplifier: It goes out at Pin 20 and finally is sent to the SP.

Inside IC1, E-MUTE, C-MUT and PLL circuits are controlled by the serial data that the CPU send from Pins 26, 31 and 32.

Circuit Diagram

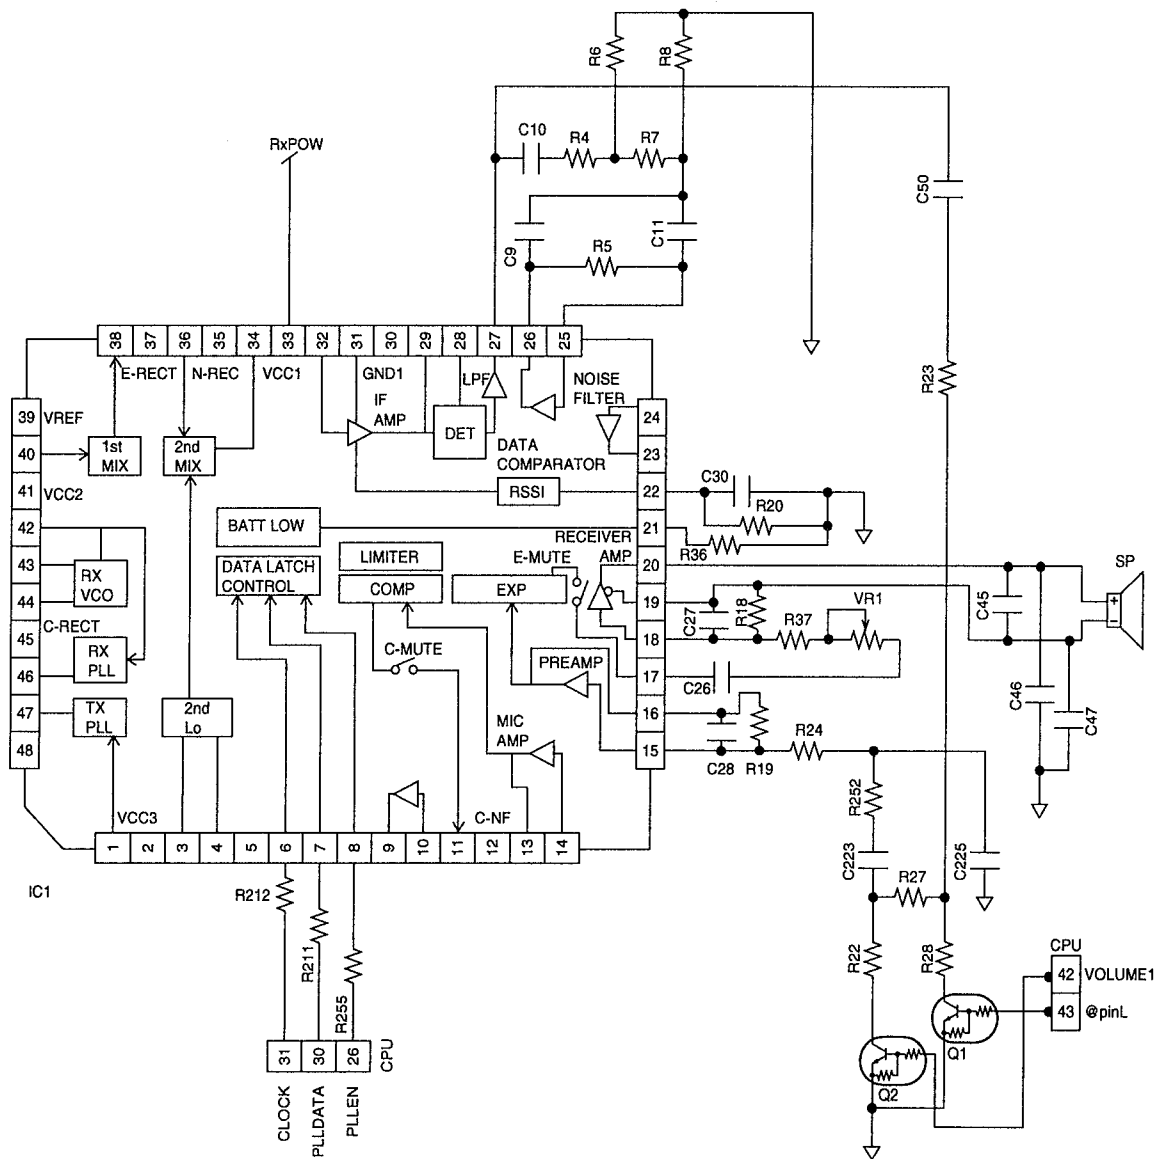


KX-TCM526BX-B

TRANSMITTER SIGNAL CIRCUIT

Circuit Operation:

Input signal from MIC passes through the filters arranged by C43, R35 and C42, R34 and it is input to the Pin 14 of IC1. Inside it, the signal passes through the MIC AMP and Compressor circuits and is output to Pin 11. It flows through C39, R33, C119 and VR101, then is input to modulator circuit.

Circuit Diagram

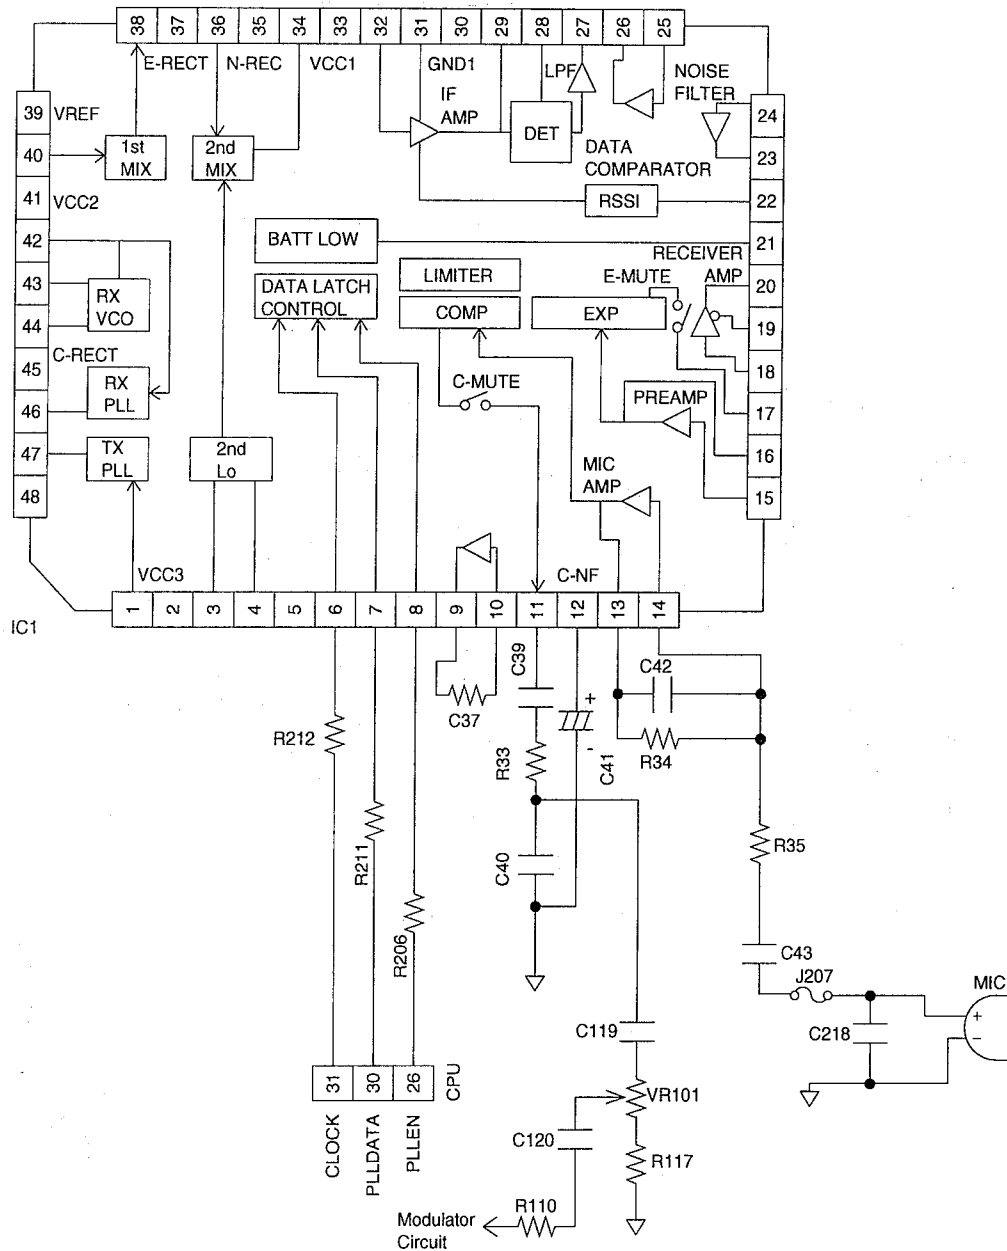


RECEIVER DATA CIRCUIT

Circuit Operation

Only the data received are passed through the low pass filter conformed by R9 and C12 to be input at pin 24 of IC1, where the its wave forme is adjusted. The resulting signal is output from Pin 23 and sent to CPU directly.

Circuit Diagram

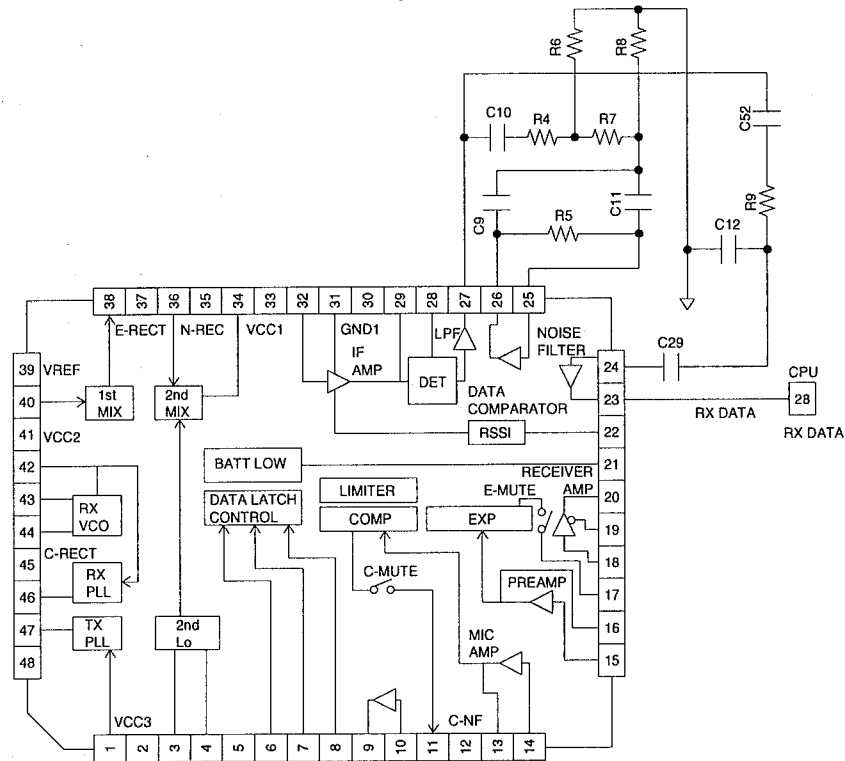


BATTERY LOW DETECTOR CIRCUIT

Circuit Operation:

When the battery voltage goes down less than 3.55V. This level is detected by the input of IC 204, so its output becomes from a high state to low state. The CPU detects this level by its Pin 32 and battery low indicator lights starts flashing.

The IC203 check the level of the battery, if this level is less than 3.0V, the output of IC203 becomes to low state, then CPU stops working to keep memory.

Circuit Diagram

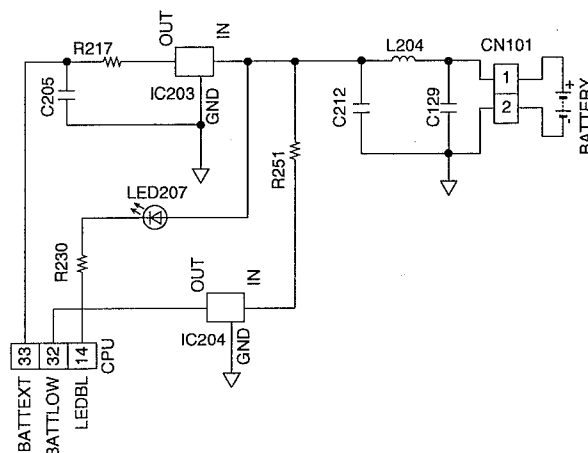

NORMAL CIRCUIT OPERATION (PORTABLE HANDSET)

■ CPU OPERATION

CPU Terminals Operation Mode	23 TX DATA	25 RX POW	24 TX POW	41 BEEP	15 TALKLED
STANDBY	L	Intermittently H or L	H	H	H
TALK	L	L	L	H	L
Base Unit→Portable Handset Ring	—	L	H	L	FLASHING
Base Unit→Portable Handset Paging	—	L	H	L	H
CHARGE	L	H	H	H	H
During (TALK)	—	L	L	H	L
Portable Handset PULSE DIAL	DATA	L	L	H	FLASHING
Portable Handset TONE DIAL	DATA	L	L	H	L
Portable Handset OFF MODE	L	H	H	H	H


■ RESET CIRCUIT POWER ON/OFF CIRCUIT

Reset circuit


There are two ways to reset CPU.

1. When the battery is connected, there is an impulse through C210 then Q206 generates an reset signal which is received in Pin 20 of CPU.
2. When the portable handset is charged, the impulse is sent through C209, Q206 generates the reset signal and it is sent to Pin 20 of CPU.


Circuit Diagram

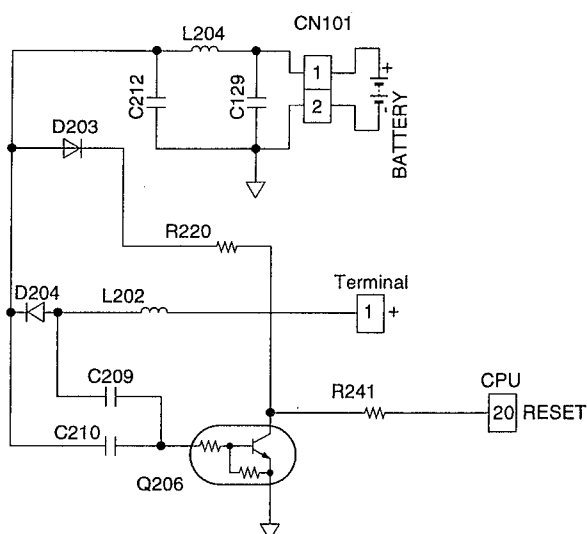


Timing Chart

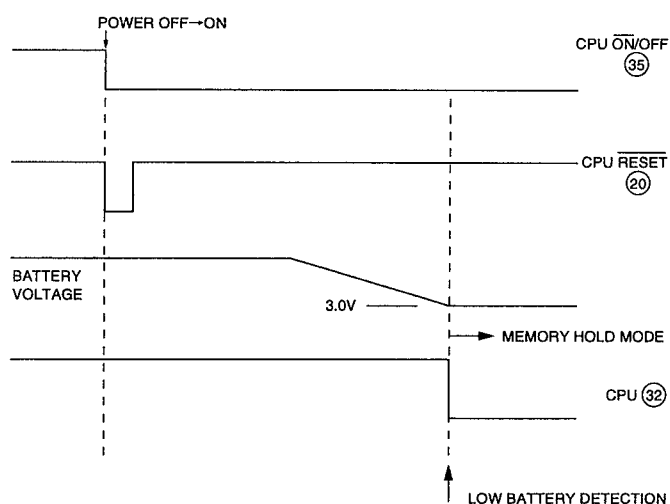

CONNECTION

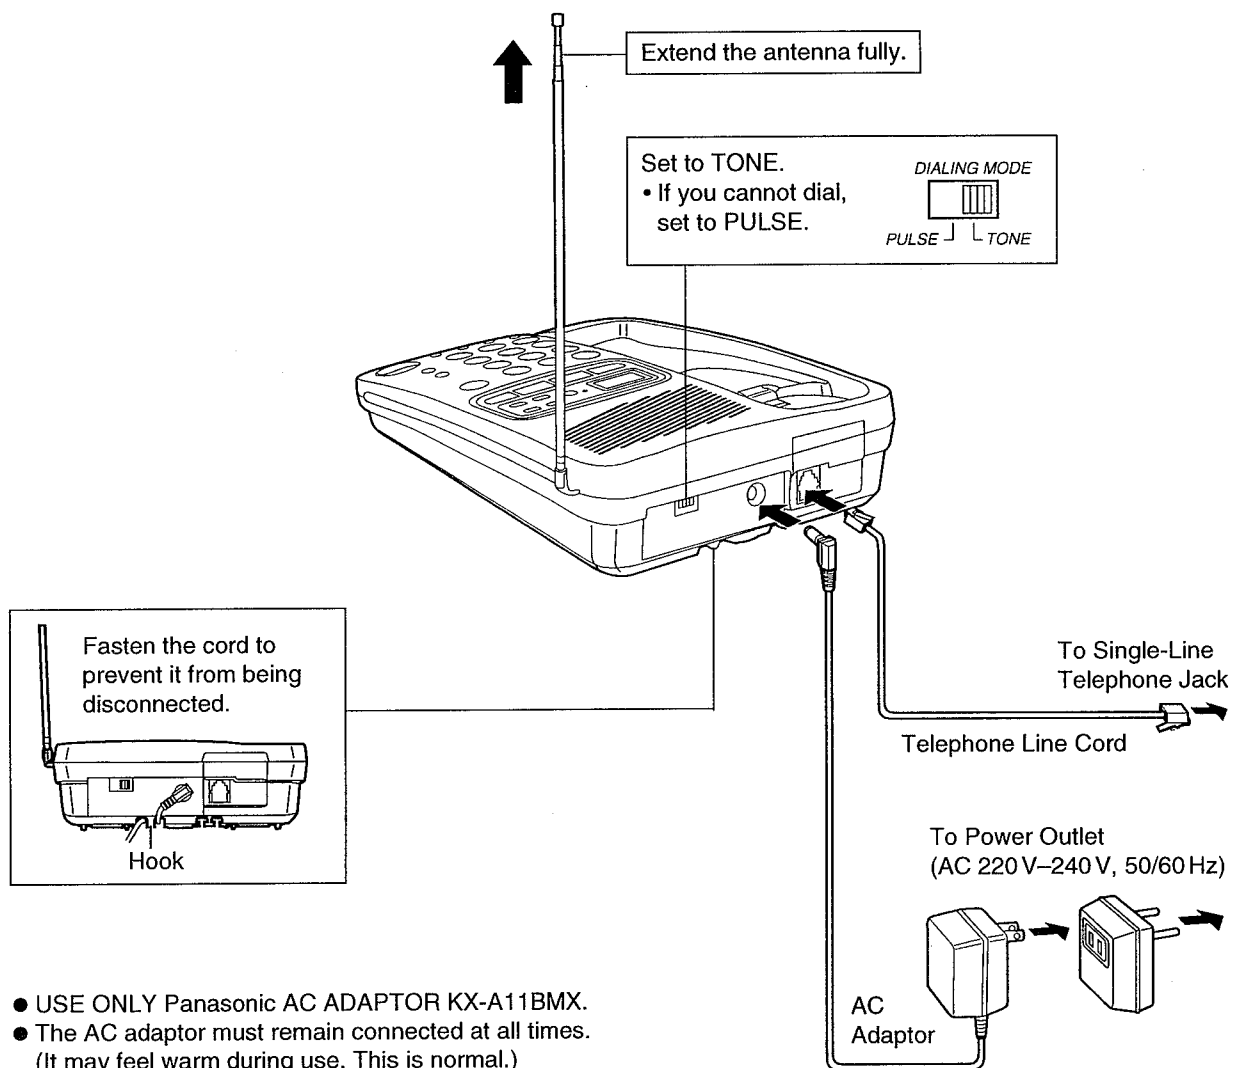

Adding Another Phone

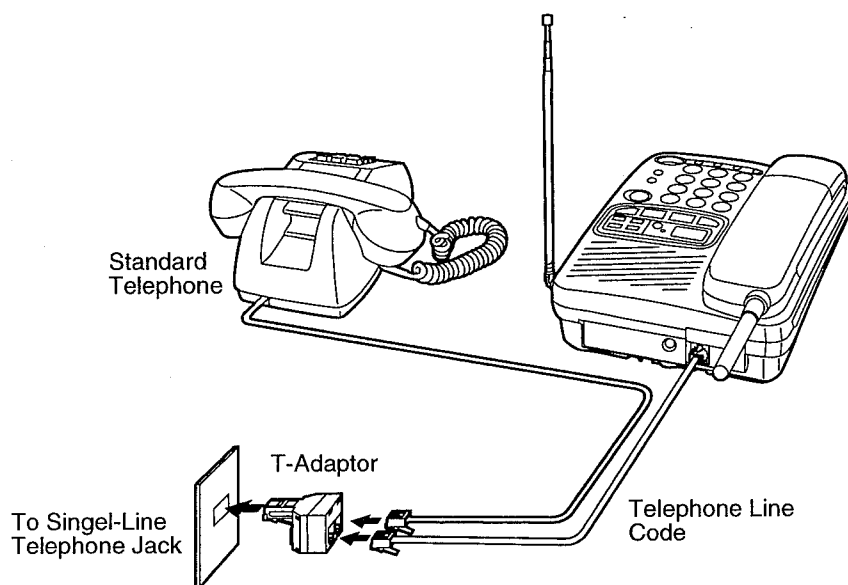

TROUBLESHOOTING GUIDE

Symptom	Refer to page –.	Unit for repair
The base unit does not respond to a call from portable handset.	18,19	Base Unit
The base unit does not transmit or the transmit frequency is off.		
The transmit frequency is off.		
The transmit power output is low, and the operating distance between base unit and portable handset is less than normal.		
The reception sensitivity of base unit is low with noise.		
The transmit level is large or small.		
The reception level is large or small.		
The unit does not link.		
The In Use/Charge indicator does not flash.	72,73	
The charge indicator does not light.	73	
The beep is not heard from the portable handset.	73	
No power/dead.	74	
Does not record.	75	
Does not playback.	75	
Cannot find the synthesized voice.	76	
End of message is clipped when caller hangs up.	76	
When speakerphone works, does not receive.	77	
When speakerphone works, does not transmit.	77	
The movement of battery low indicator is wrong.	39, 40	Portable Handset
The base unit does not respond to a call from portable handset.		
The base unit does not transmit or the transmit frequency is off.		
The transmit frequency is off.		
The transmit power output is low, and the operating distance between base unit and portable handset is less than normal.		
The reception sensitivity of base unit is low with noise.		
Does not link between base unit and portable handset.		
The reception level is large or small.		
The transmit level is large or small.		
After stand-by mode, the portable handset does not becomes the battery save mode.	78	
The beep is not heard from the portable handset.	79	
The TALK indicator does not flash.	79	

TROUBLESHOOTING GUIDE (BASE UNIT)


Base Unit Condition:

1. Set the Volume/Ringer button to "MAX".
2. Set the dialing mode selector to "Tone".

When checking the base unit only


Check the base unit as shown by following below flow chart.


Operation

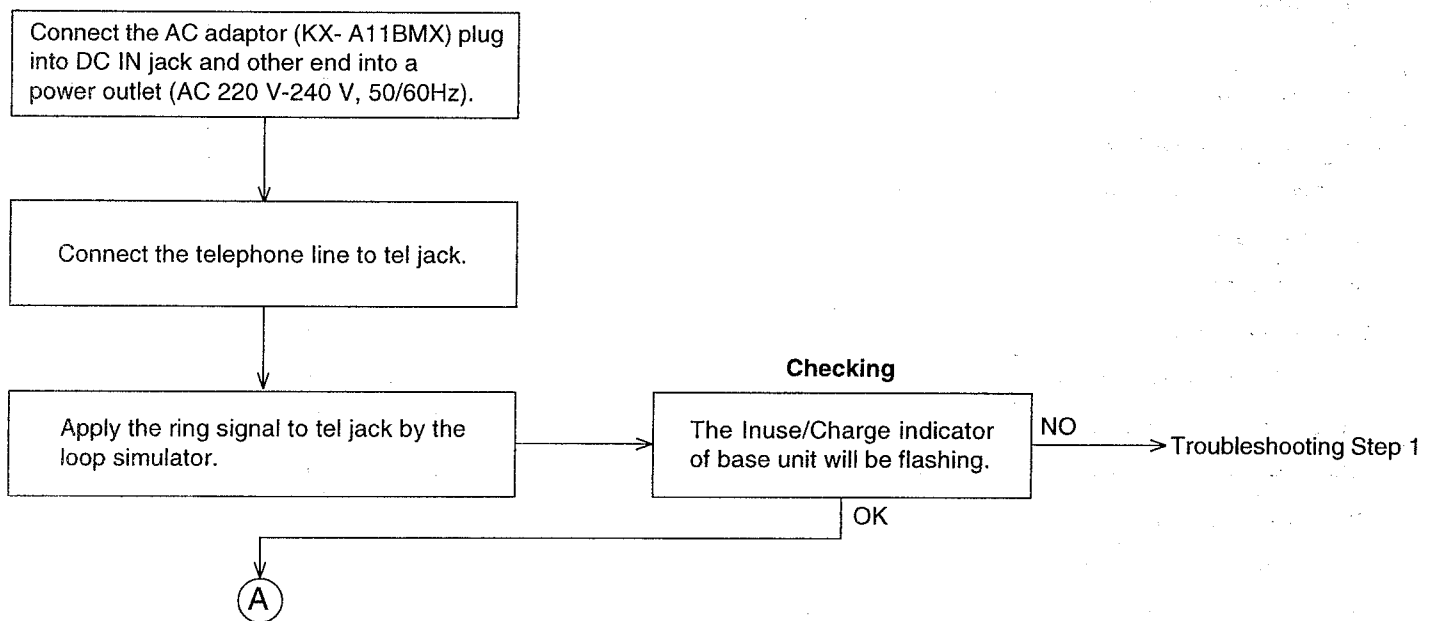

When checking the base unit and portable handset



Operation

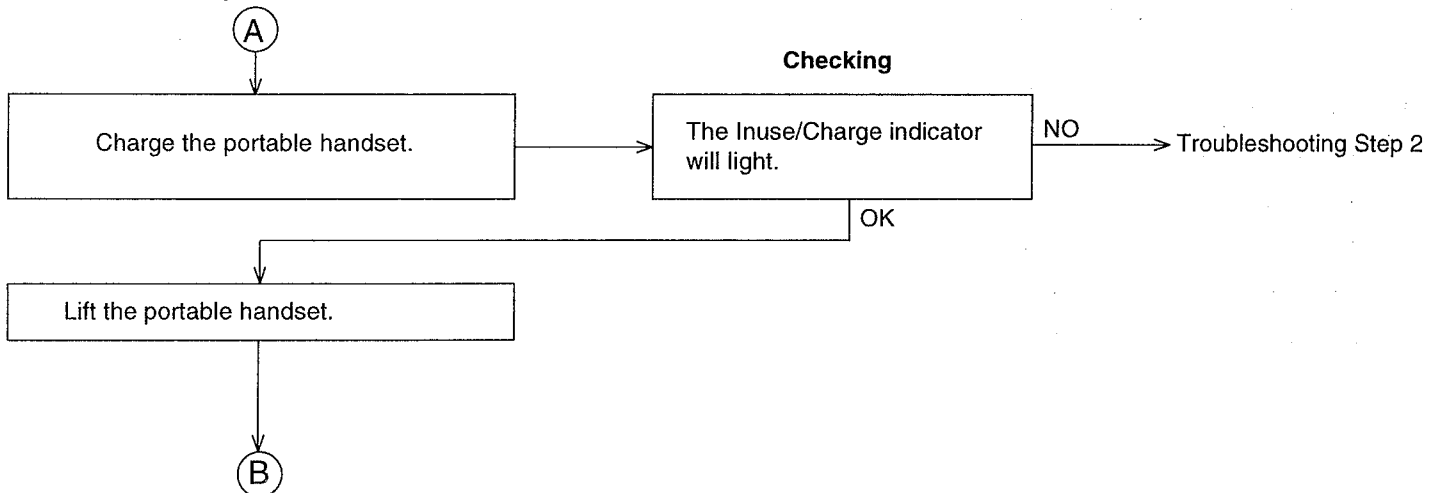

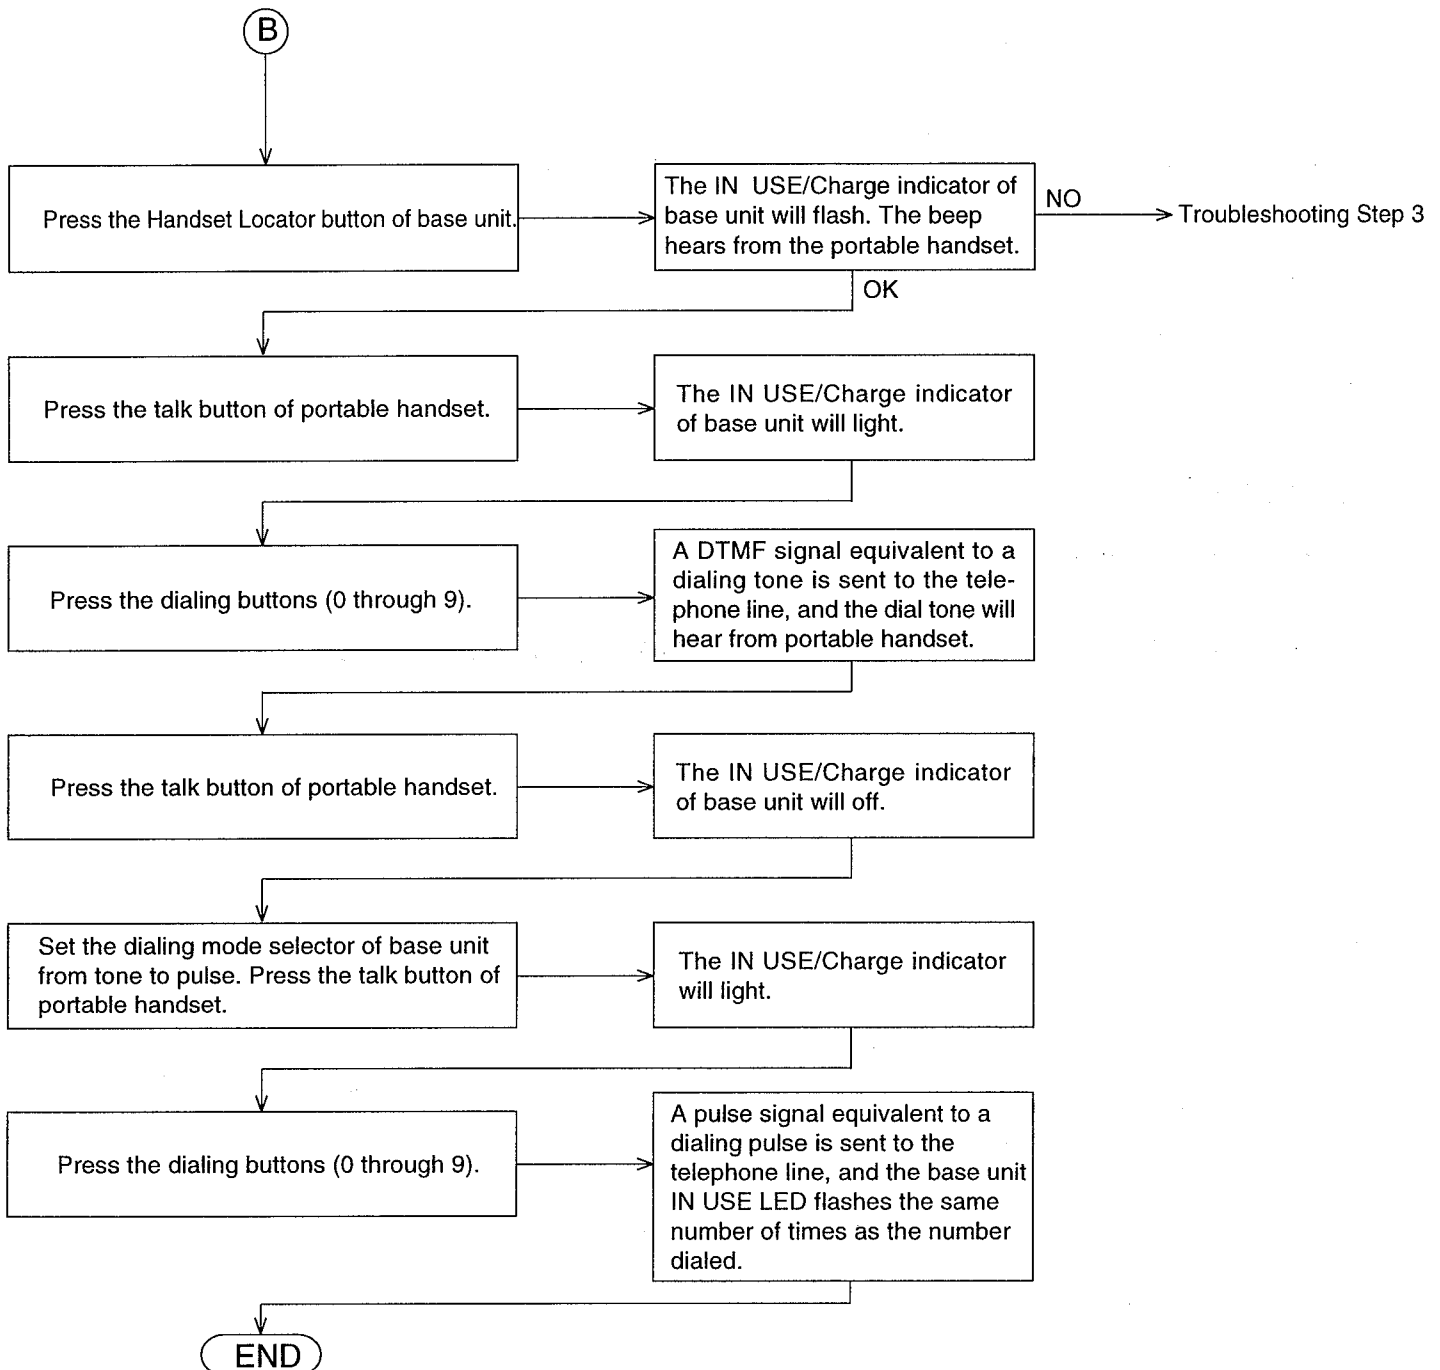

Troubleshooting Step 1:

The In Use/Charge indicator (LED551) does not flash.

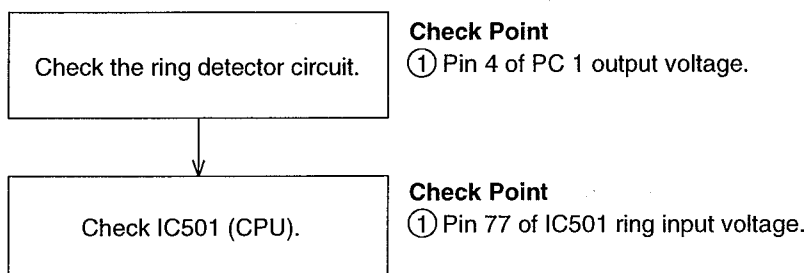

KX-TCM526BX-B

Troubleshooting Step 2: The charge indicator does not light.

Check the charge detector circuit.

Check Point

- ① Is the $\ominus$ contact of base unit is low logic level?

Check LED551.

Troubleshooting Step 3:

1) The INUSE/CHARGE indicator does not flash.

Check IC501(CPU).

Check Point

- ① Is the pin 73 of IC501 (INUSE/Charge output) at a low logic level?


Check LED551.

2) The beep is not heard from the portable handset.

Check the data transmission during charge mode.

Check Points

- ① Pin 51 of IC 501 data output voltage.
② Collector of Q408 output voltage.




Check during charge mode

Check the modulation circuit (D301).

Check the oscillation circuit.

Check Point

- ① Is the base of Q302 (TX VCO)?
② Is the Pin 47 of IC201?
③ Are the Pins 44, 45, 46 of IC501 (PLL control)?




Check the transmitter amplifier.

Check Point

- ① Is the base of Q301 (Final power amplifier)?


(TAM SECTION)

1. NO POWER/DEAD

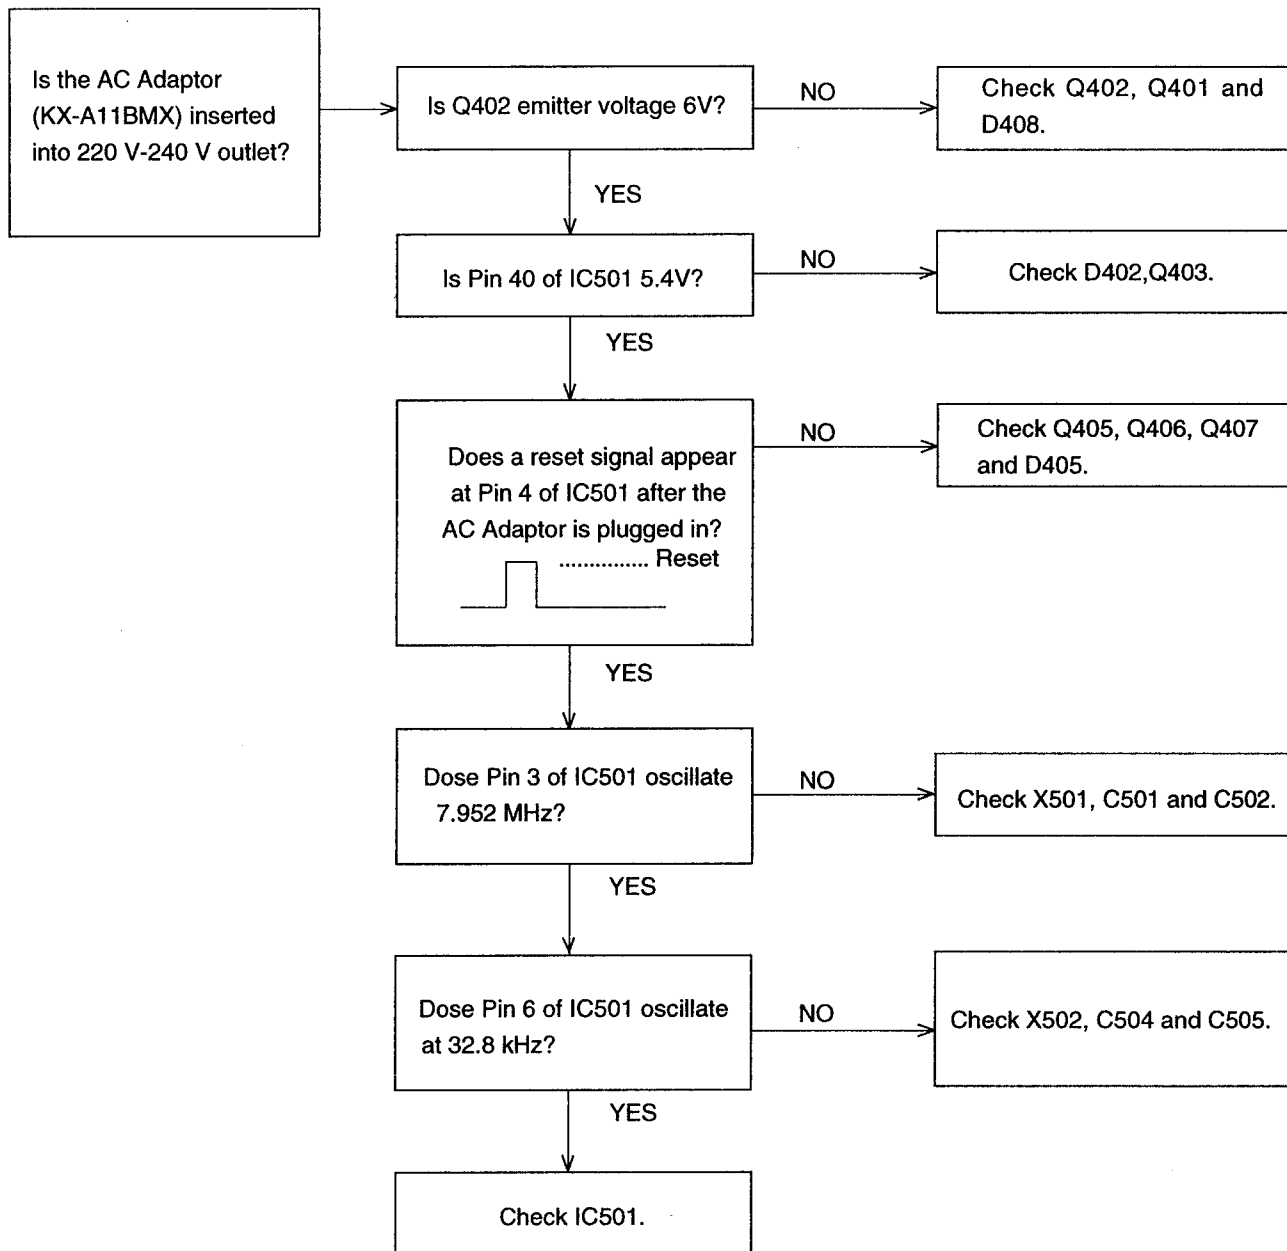


KX-TCM526BX-B


2. DOES NOT RECORD

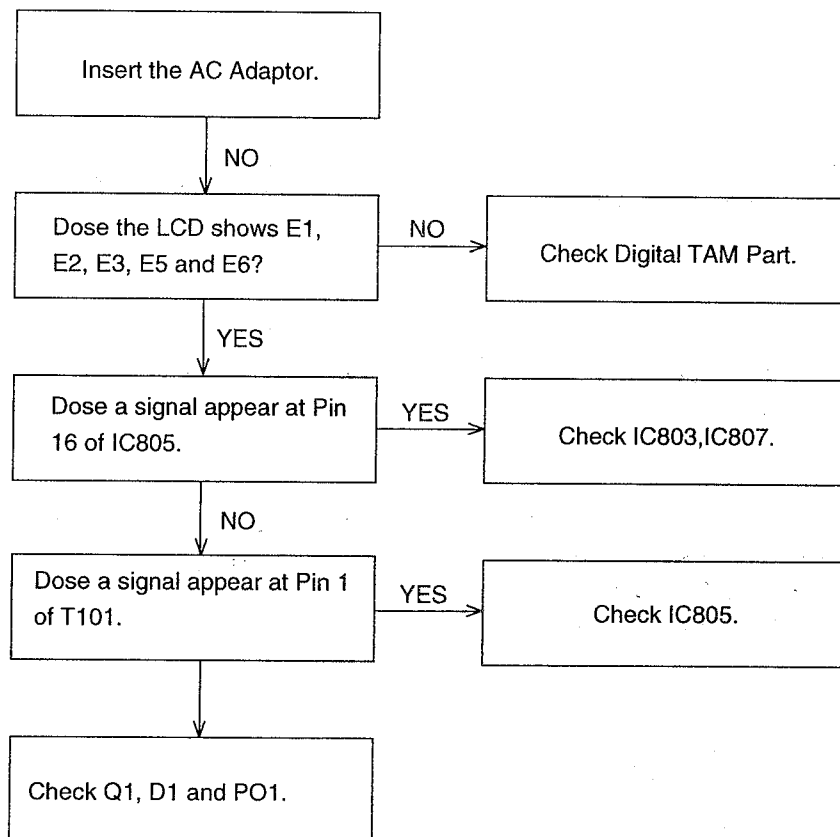

3. DOES NOT PLAYBACK

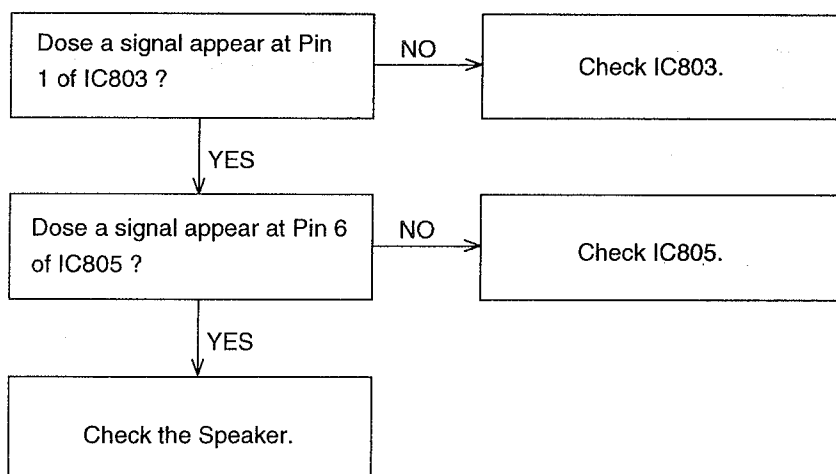

4. CANNOT FIND THE SYNTHESIZED VOICE

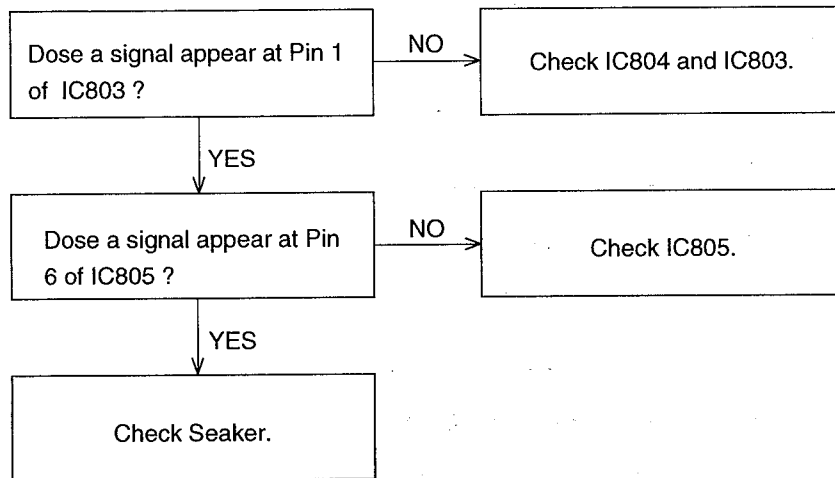

5. END OF MESSAGE IS CLIPPED WHEN CALLER HANGS UP.



When caller hangs up, the KX-TCM526BX-B can detect the following 4 signal type.

- A. CPC pulse.
- B. Dial tone or other continuous tones.
- C. Silence.
- D. Cycle signals.

A. Check CPC DETECTOR CIRCUIT (D4, R8, C9, R501 and PC4)

B.,C.,D

Check VOX DETECTOR CIRCUIT (IC805, R843, R841, C841 and C846)

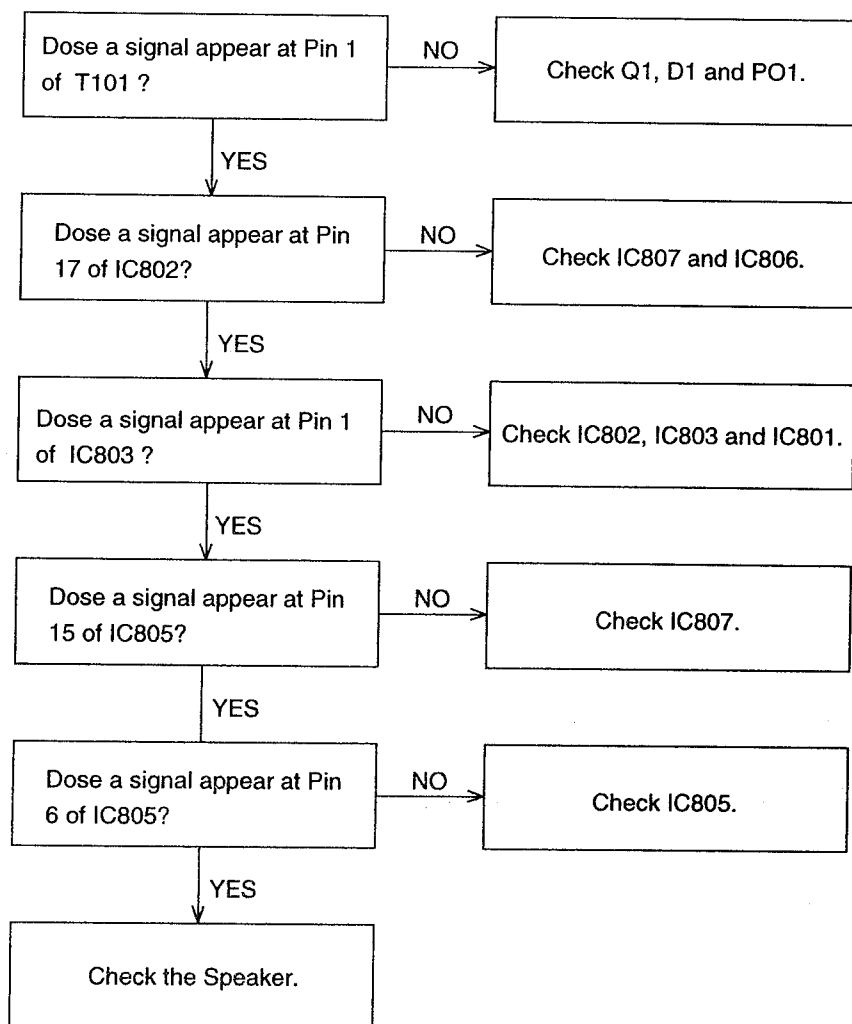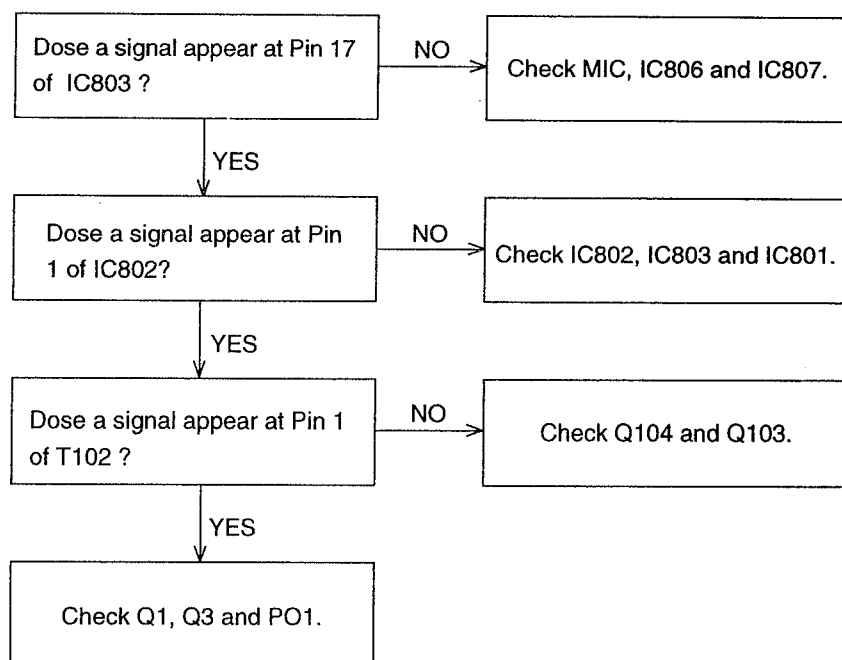KX-TCM526BX-B**6. WHEN SP-PHONE WORKS, DOES NOT RECEIVE.****7. WHEN SP-PHONE WORKS, DOES NOT TRANSMIT.**

TROUBLESHOOTING GUIDE (PORTABLE HANDSET)


Use the right base unit for this troubleshooting.

Charge the battery of the portable handset by the base unit.

Base unit condition:

1. Connect the AC Adaptor (KX-A11BMX) plug into DC IN jack and the other end into a power outlet (AC 220 V-240 V, 50/60Hz).
2. Connect the loop simulator (DC 48 V) to tel jack.


Check the portable handset as shown by following below flow chart.

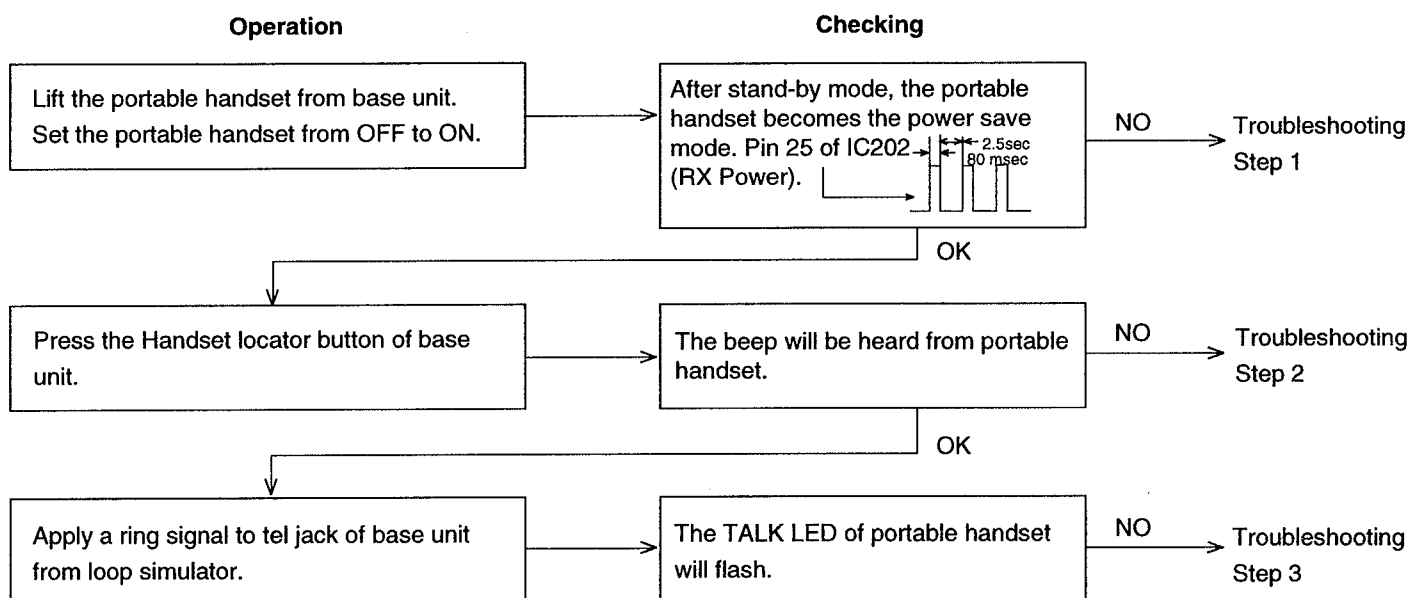

Troubleshooting Step 1: After stand-by mode, the portable handset does not becomes the battery save mode.

Check point


- (1) Pin 25 of IC202
RX power output voltage

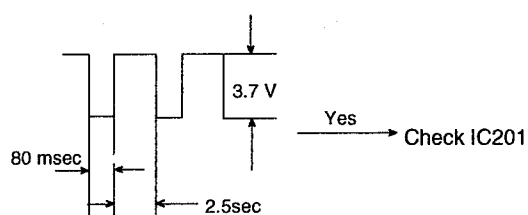

KX-TCM526BX-B

Troubleshooting Step 2: The Beep is not heard on the Portable Handset.

Check Points

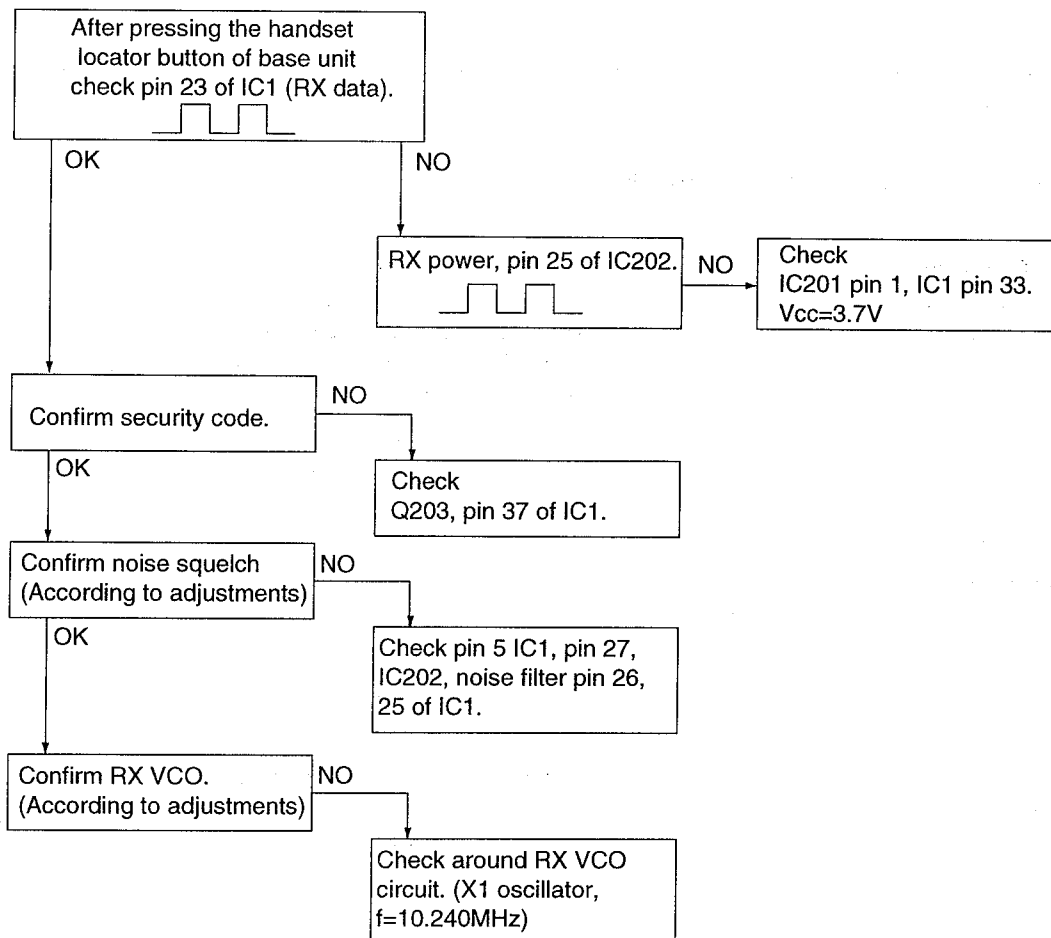


Troubleshooting Step 3: The TALK indicator does not flash (Check the data reception).


Check Point

Check the signal level of receiver data circuit on page 68.



CABINET AND ELECTRICAL PARTS LOCATION (BASE UNIT)

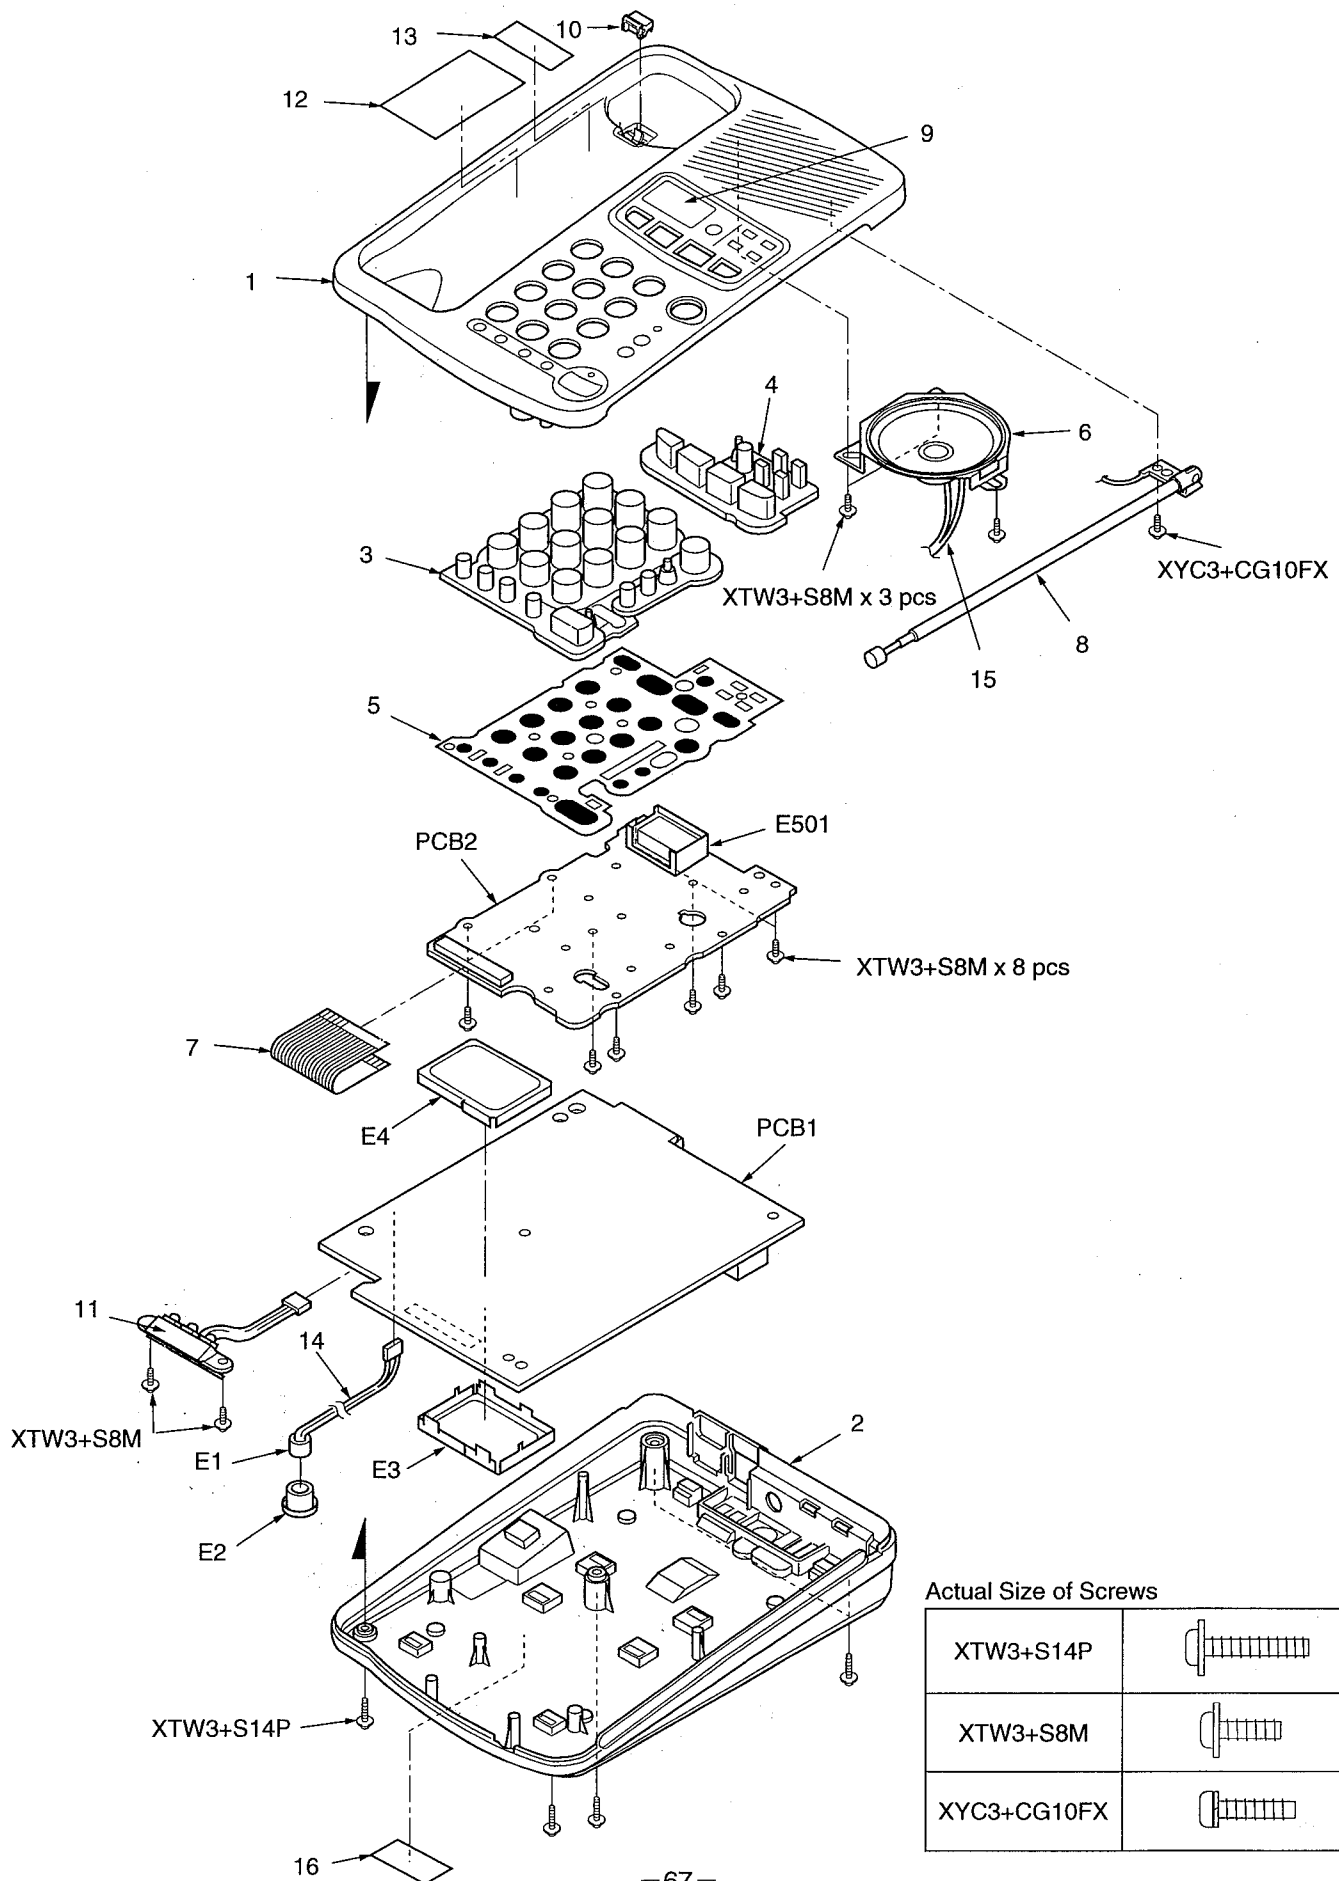


CABINET AND ELECTRICAL PARTS LOCATION (PORTABLE HANDSET)

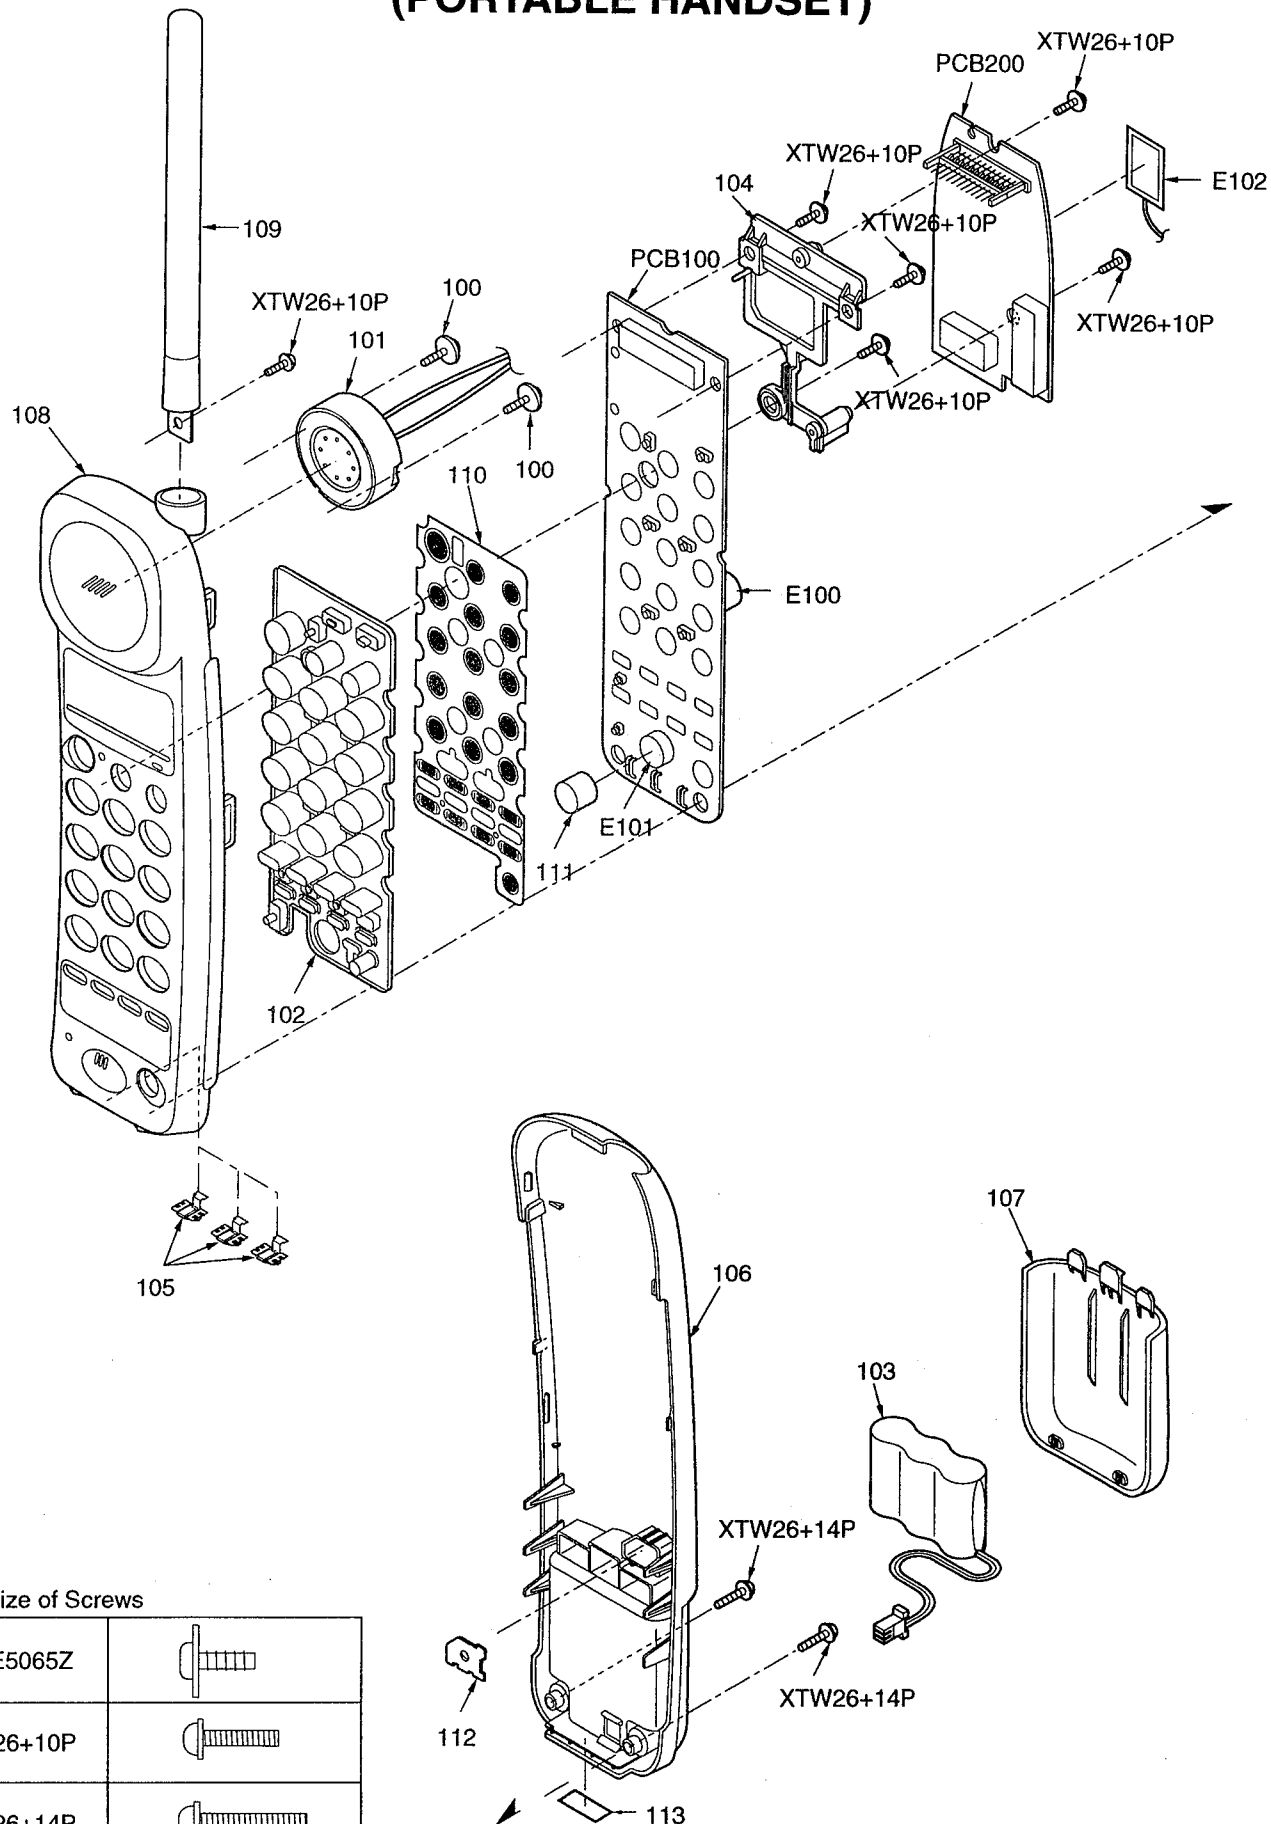


Actual Size of Screws

PJHE5065Z	
XTW26+10P	
XTW26+14P	

ACCESSORIES AND PACKING MATERIALS

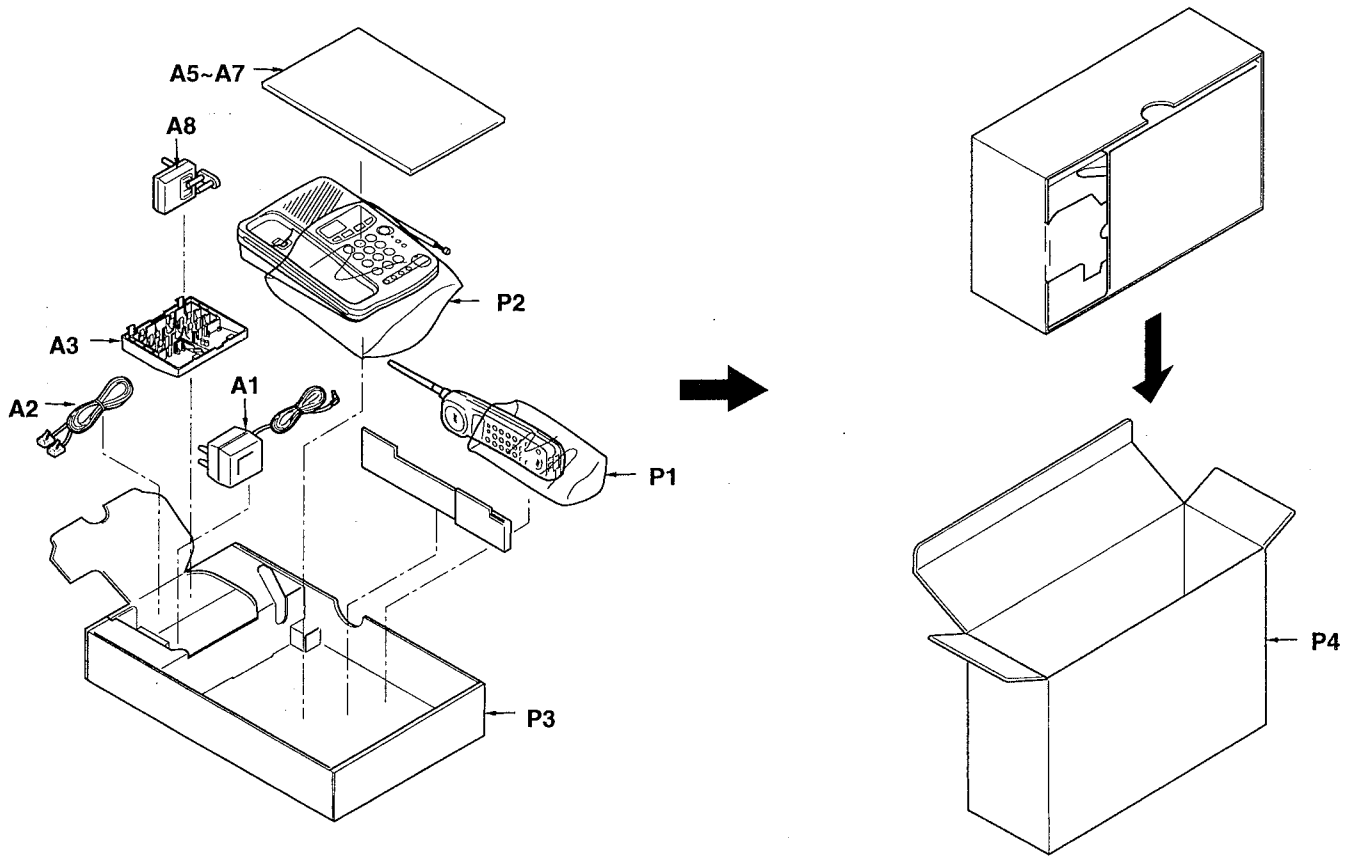

EXTENSION CABLE CONNECTING METHOD

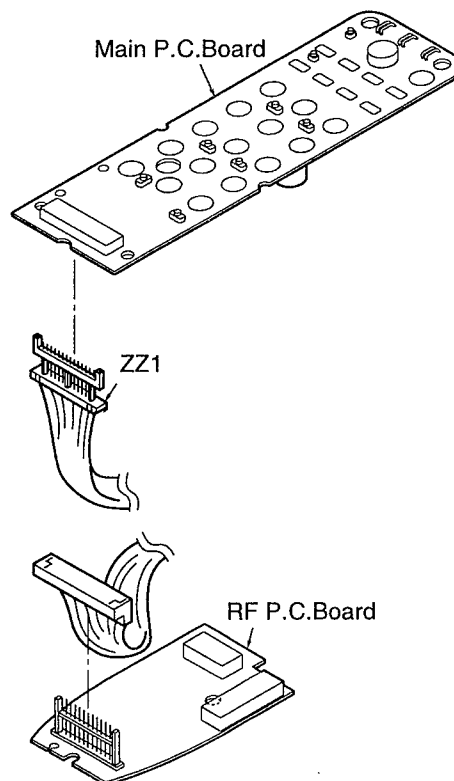

KX-TCM526BX-B

This replacement parts list is only for the model : KX-TCM526BX-B.

REPLACEMENT PARTS LIST

Base Unit

Note:

1. RTL (Retention Time Limited)

The marking (RTL) indicates that the Retention Time is limited for this item. After the discontinuation of this assembly in production, the item will continue to be available for a specific period of time. The retention period of availability is dependent on the type of assembly, and in accordance with the laws governing part and product retention.

After the end of this period, the assembly will no longer be available.

2. Important safety notice.

Components identified by a Δ mark special characteristics important for safety. When replacing any of these components, use only manufacturer's specified parts.

3. The S mark indicates service standard parts and may differ from production parts.

4. RESISTORS & CAPACITORS

Unless otherwise specified.

All resistors are in ohms (Ω) K=1000 Ω , M=1000K Ω

All capacitors are in MICRO FARADS (μ F) P= μ μF

*Type & Wattage of Resistor

Type

ERC:Solid	ERX:Metal Film	PQ4R:Carbon
ERD:Carbon	ERG:Metal Oxide	ERS:Fusible Resistor
PQRD:Carbon	ER0:Metal Film	ERF:Cement Resistor

Wattage

10,16:1/8W	14,25:1/4W	12:1/2W	1:1W	2:2W	3:3W
------------	------------	---------	------	------	------

*Type & Voltage of Capacitor

Type

ECFD:Semiconductor	ECCD,ECKD,ECBT,PQCBC : Ceramic
ECQS:Styrol	ECQE,ECQV,ECQG : Polyester
PQCUV:Chip	ECEA,ECSZ : Electrolytic
ECQMS:Mica	ECQP : Polypropylene

Voltage

ECQ Type	ECQG ECQV Type	ECSZ Type	Others		
1H: 50V	05: 50V	0F:3.15V	0J :6.3V	1V :35V	
2A:100V	1:100V	1A:10V	1A :10V	50,1H:50V	
2E:250V	2:200V	1V:35V	1C :16V	1J :63V	
2H:500V		0J:6.3V	1E,25:25V	2A :100V	

Ref. No.	Part No.	Part Name & Description	Pcs/Set
MAIN P.C.BOARD PARTS			
PCB1	PQWP1M526BXH	P.C.BOARD AS'Y (RTL) Δ	1
IC101	AN6183SAE1	(ICS) IC	1
IC201	PQVITB31224H	IC	1
IC501	PQV153MF5005	IC	1
IC502	PQV193LC46XI	IC	1
IC801	PQVID6471A	IC	1
IC802	PQVIMCL548DW	IC	1
IC803	PQVIMCL548DW	IC	1
IC804	PQVIKM29N4TC	IC	1
IC805	PQVISC111815	IC	1
IC806	PQVINJM4558M	IC	1
IC807	PQVIBU4053BF	IC	1
Q1	2SA1625	(TRANSISTORS) TRANSISTOR(SI) (or 2SA1776Q) Δ	1
Q2	2SC1740S	TRANSISTOR(SI) Δ	1
Q3	2SC2120	(or 2SC3311AS or 2SC3330U) TRANSISTOR(SI) Δ	1
Q101	2SD1819A	TRANSISTOR(SI)	1
Q102	PQVTFB1A4M	TRANSISTOR(SI)	1
Q103	2SD1819A	TRANSISTOR(SI)	1
Q104	2SD1819A	TRANSISTOR(SI)	1
Q105	PQVTFB1A4M	TRANSISTOR(SI)	1
Q201	2SK543	TRANSISTOR(SI)	1
Q301	2SC3356R24	TRANSISTOR(SI) (or 2SC2295C) (or 2SC2413KPT146)	1
Q302	2SC2412K	TRANSISTOR(SI)	1
Q351	2SC2295	TRANSISTOR(SI)	1
Q354	PQ4R10XJ000	0	1
Q401	2SD2137	TRANSISTOR(SI)	1
Q402	2SD1994A	TRANSISTOR(SI)	1
Q403	2SD1994A	TRANSISTOR(SI)	1
Q404	2SD1991A	TRANSISTOR(SI)	1
Q405	2SD1819A	TRANSISTOR(SI)	1
Q406	2SB709A	TRANSISTOR(SI)	1
Q407	2SD1819A	TRANSISTOR(SI) (or 2SC4081ST106 or 2SC4155S)	1
Q408	2SD1991A	TRANSISTOR(SI)	1
Q409	2SD1991A	TRANSISTOR(SI)	1
Q410	2SD1991A	TRANSISTOR(SI)	1
Q411	2SD601A	TRANSISTOR(SI)	1
Q501	PQVTDTA114YU	TRANSISTOR(SI)	1
Q502	PQVTDTA114YU	TRANSISTOR(SI)	1
Q503	PQVTDTA114YU	TRANSISTOR(SI)	1
Q801	2SD1819A	TRANSISTOR(SI) (or 2SC4081ST106 or 2SC4155S)	1
Q802	2SB1218A	TRANSISTOR(SI) (or 2SA1576ST106 or 2SA1603S)	1
Q803	2SD1819A	TRANSISTOR(SI) (or 2SC4081ST106 or 2SC4155S)	1
Q804	PQVTFB1A4M	TRANSISTOR(SI)	1
Q805	2SD1819A	TRANSISTOR(SI) (or 2SC4081ST106 or 2SC4155S)	1
Q959	2SB1218A	TRANSISTOR(SI) (or 2SA1576ST106 or 2SA1603S)	1

Ref. No.	Part No.	Part Name & Description	Pcs/Set
----------	----------	-------------------------	---------

CABINET & ELECTRICAL PARTS

1	PQKM10297X4	UPPER CABINET	1
2	PQYF10110V2	LOWER CABINET	1
3	PQBX10284X	BUTTON, 20KEY	1
4	PQBX10285Z	BUTTON, TAM KEY	1
5	PQSX10056Z	SHEET SWITCH	1
6	PQAS65P36Y	SPEAKER	1
7	PQJE10085Z	FLAT CABLE	1
8	XEAPQK170D	ANTENNA	1
9	PQGP10134Z2	LCD PANEL	1
10	PQKE10066Z2	HANGER	1
11	PQJT10136Z	CHARGE TERMINAL	1
12	PQQT11232Z	INDICATION LABEL	1
13	PQQT11431Z	INDICATION LABEL	1
14	PQJS02P24Y	CONNECTOR (for MIC)	1
15	PQJS02P27Z	CONNECTOR (for SP)	1
16	PQGT12895Z	NAME PLATE	1

This replacement parts list is only for the model : KX-TCM526BX-B.

Ref. No.	Part No.	Part Name & Description	Pcs/Set	Ref. No.	Part No.	Part Name & Description	Pcs/Set
		(DIODES)				(COILS AND TRANSFORMERS)	
D1	PQVDS1ZB40F1	DIODE(SI) Δ	1	L202	PQLQZK1R2K	COIL	1
D3	MA700A	DIODE(SI) Δ	1	L401	PQLQZK1R2K	COIL	1
D4	PQVDMTZ3R6	DIODE(SI) Δ	1	L450	PQLQZM330K	COIL	1
D201	MA110	DIODE(SI)	1	L451	PQLQZM330K	COIL	1
D202	MA110	DIODE(SI)	1	L452	PQLQZM330K	COIL	1
D250	MA110	DIODE(SI)	1	L501	PQLQZM100K	COIL	1
D251	MA110	DIODE(SI)	1	L502	PQLQZM100K	COIL	1
D301	PQVDKV1832C3	DIODE(SI)	1	L801	PQLQZM100K	COIL	1
D303	1SS119	DIODE(SI)	1	L803	PQLQZM100K	COIL	1
D401	MA4100	DIODE(SI)	1	L804	PQLQZM100K	COIL	1
D402	MA4062	DIODE(SI)	1	L806	PQLQZM100K	COIL	1
D403	1SS119	DIODE(SI)	1	L807	PQLQZM100K	COIL	1
D404	1SS119	DIODE(SI)	1	T101	PQLT3E3A	I/F TRANSFORMER Δ	1
D405	MA4047	DIODE(SI)	1	T102	PQLT3E3A	I/F TRANSFORMER Δ	1
D406	1SS119	DIODE(SI)	1	T201	PQLA7A36	COIL	1
D407	1SS119	DIODE(SI)	1	T202	PQLI2B201	COIL	1
D409	ECEA1HKS2R2	2.2	1	T203	PQLA7A22	COIL	1
D412	1SS119	DIODE(SI)	1	T301	PQL04A3	COIL	1
D413	MA110	DIODE(SI)	1	T351	PQLA7A9	COIL	1
D414	MA110	DIODE(SI)	1	J401	PQLQZM100K	COIL	1
D415	1SS119	DIODE(SI)	1				
D416	MA4062	DIODE(SI)	1				
D417	MA700A	DIODE(SI)	1				
D503	MA110	DIODE(SI)	1				
D508	MA110	DIODE(SI)	1				
D511	MA110	DIODE(SI)	1			(PHOTO COUPLERS)	
D512	MA110	DIODE(SI)	1	PC1	PQVIPC814K	PHOTO ELECTRIC TRANSDUCER Δ	1
D514	MA110	DIODE(SI)	1	PC2	PQVITLP627	PHOTO ELECTRIC TRANSDUCER Δ	1
D521	1SS119	DIODE(SI)	1	PC3	PQVIPC817CD	PHOTO ELECTRIC TRANSDUCER Δ	1
D522	1SS119	DIODE(SI)	1	PC4	PQVIPC817CD	PHOTO ELECTRIC TRANSDUCER Δ	1
D523	1SS119	DIODE(SI)	1				
D524	MA110	DIODE(SI)	1				
D525	MA110	DIODE(SI)	1			(VARIABLE RESISTORS)	
D911	MA4220	DIODE(SI) Δ	1	VR201	EVNDXAA03B24	VARIABLE RESISTOR	1
				VR301	EVNDXAA03B15	VARIABLE RESISTOR	1
				VR302	EVNDXAA03B35	VARIABLE RESISTOR	1
		(CAPACITOR ARRAYS)				(RESISTOE ARRAYS)	
CA801	EXF1E4470KCV	COMPONENTS PARTS, 47P	1	RA801	EXRV8V221JV	RESISTOR ARRAY, 220	1
CA802	EXF1E4470KCV	COMPONENTS PARTS, 47P	1	RA802	EXRV8V222JV	RESISTOR ARRAY, 2.2K	1
CA803	EXF1E4470KCV	COMPONENTS PARTS, 47P	1	RA803	EXRV8V222JV	RESISTOR ARRAY, 2.2K	1
CA804	EXF1E4331KSL	COMPONENTS PARTS, 330I	1	RA804	EXRV8V220JV	RESISTOR ARRAY, 22	1
				RA805	EXRV8V472JV	RESISTOR ARRAY, 4.7K	1
				RA806	EXRV8V472JV	RESISTOR ARRAY, 4.7K	1
		(CERAMIC FILTERS)		RA807	EXRV8V472JV	RESISTOR ARRAY, 4.7K	1
CF201	PQVFSFE107MJ	CERAMIC FILTER	S 1	RA808	EXRV8V222JV	RESISTOR ARRAY, 2.2K	1
CF202	PQVFCFH455F1	CERAMIC FILTER	1	RA809	EXRV8V221JV	RESISTOR ARRAY, 220	1
				RA810	EXRV8V221JV	RESISTOR ARRAY, 220	1
		(CONNECTORS)				(OTHERS)	
CN1	PQJP3G38Z	CONNECTOR	1	JJ1	PQJJ1B4Y	JACK, DC IN Δ	1
CN501	PQJS30A19Z	CONNECTOR	1	CN4	PQJJ1TA15Z	JACK, TEL Δ	1
CHARGE	PQJS03P23Z	CONNECTOR	1	DUP201	PQVFH26RX	DUPLEX	1
MIC CN	PQJP02B59Z	CONNECTOR	1	DUP301	PQVFH26TX	DUPLEX	1
SP CN	PQJP02B59Z	CONNECTOR	1	SA1	PQVDDSS301L	VARIATOR Δ	1
				PO1	PQRPAR390N	THERMISTOR Δ S	1
		(CRYSTAL OSCILLATORS)		E1	PQJM122Z	MICROPHONE	1
X201	PQVCK1024LC5	CRYSTAL OSCILLATOR	1	E2	PQMG10020Z	SPACER	1
X501	PQVCK7952N4Z	CRYSTAL OSCILLATOR	1	E3	PQMC10252Z	SHIELD COVER	1
X502	PQVCL3276N6Z	CRYSTAL OSCILLATOR	1	E4	PQMC10253Z	SHIELD COVER	1
X801	PQVCJ3686N4Z	CRYSTAL OSCILLATOR	1	J2	PQVDDSP272MR	VARIATOR Δ	1
				SW501	PQSS2A27W	SWITCH, DIALING MODE SELECTOR	1

KX-TCM526BX-B

This replacement parts list is only for the model : KX-TCM526BX-B.

Ref. No.	Part No.	Value	Pcs/Set	Ref. No.	Part No.	Value	Pcs/Set
		(RESISTORS)					
R1	ERDS2TJ473	47K	△ 1	R229	ERJ3GEYJ682	6.8K	1
R2	ERDS2TJ104	100K	△ 1	R230	ERJ3GEYJ682	6.8K	1
R3	ERDS2TJ472	4.7K	△ 1	R231	ERJ3GEYJ103	10K	1
R4	PQ4R10XJ393	39K	△ S 1	R232	ERJ3GEYJ103	10K	1
R5	PQ4R10XJ393	39K	△ S 1	R233	ERJ3GEYJ395	3.9M	1
R6	PQ4R10XJ562	5.6K	△ S 1	R234	ERJ3GEYJ104	100K	1
R7	ERDS2TJ562	5.6K	△ 1	R235	ERJ3GEY0R00	0	1
R8	ERDS2TJ560	56	△ 1	R237	ERJ3GEYJ103	10K	1
R10	PQ4R10XJ102	1K	△ S 1	R273	ERJ3GEYJ104	100K	1
R12	PQ4R10XJ333	33K	△ S 1	R275	ERJ3GEYJ182	1.8K	1
R14	PQ4R10XJ102	1K	△ S 1	R276	ERJ3GEYJ471	470	1
R15	PQ4R10XJ392	3.9K	△ S 1	R277	ERJ3GEYJ153	15K	1
R16	ERDS2TJ680	68	△ 1	R302	ERDS2TJ680	68	1
R17	ERDS1TJ330	33	△ S 1	R303	ERJ3GEYJ102	1K	1
R19	PQ4R10XJ123	12K	△ S 1	R304	ERJ3GEYJ153	15K	1
R63	PQ4R10XJ472	4.7K	△ S 1	R305	ERJ3GEYJ223	22K	1
R101	ERJ3GEYJ103	10K	1	R306	ERJ3GEYJ221	220	1
R102	ERJ3GEYJ334	330K	1	R307	ERJ3GEYJ102	1K	1
R103	PQ4R10XJ272	2.7K	S 1	R308	PQ4R10XJ220	22	S 1
R104	PQ4R10XJ561	560	S 1	R309	ERJ3GEYJ125	1.2M	1
R106	ERJ3GEYJ682	6.8K	1	R310	ERJ3GEYJ220	22	1
R107	ERJ3GEYJ393	39K	1	R311	PQ4R10XJ103	10K	S 1
R109	ERJ3GEYJ223	22K	1	R312	ERJ3GEYJ223	22K	1
R110	PQ4R10XJ683	68K	S 1	R313	ERJ3GEYJ223	22K	1
R112	PQ4R10XJ101	100	S 1	R351	PQ4R10XJ220	22	1
R113	PQ4R10XJ471	470	S 1	R352	PQ4R10XJ561	560	1
R114	PQ4R10XJ104	100K	S 1	R353	PQ4R10XJ473	47K	1
R115	ERJ3GEYJ103	10K	1	R374	ERJ3GEYJ822	8.2K	1
R116	ERJ3GEYJ272	2.7K	1	R375	ERJ3GEYJ563	56K	1
R117	ERJ3GEYJ684	680K	1	R376	PQ4R10XJ473	47K	S 1
R118	PQ4R10XJ820	82	S 1	R380	ERJ3GEY0R00	0	1
R119	PQ4R10XJ473	47K	S 1	R401	ERDS2TJ221	220	1
R120	PQ4R10XJ103	10K	S 1	R403	PQ4R10XJ154	150K	S 1
R121	ERJ3GEYJ683	68K	1	R404	ERDS2TJ221	220	1
R122	PQ4R10XJ473	47K	S 1	R405	ERJ3GEYJ333	33K	1
R123	ERJ3GEY0R00	0	1	R406	ERJ3GEYJ224	220K	1
R128	ERJ3GEYJ104	100K	1	R407	ERJ3GEYJ154	150K	1
R129	PQ4R10XJ820	82	S 1	R408	ERJ3GEYJ104	100K	1
R131	ERJ3GEYJ824	820K	1	R409	ERJ3GEYJ224	220K	1
R202	PQ4R10XJ271	270	S 1	R410	ERJ3GEYJ104	100K	1
R204	PQ4R10XJ220	22	S 1	R411	ERJ3GEYJ104	100K	1
R205	ERJ3GEYJ331	330	1	R412	ERJ3GEYJ184	180K	1
R206	ERJ3GEYJ183	18K	1	R414	ERJ3GEYJ473	47K	1
R207	ERJ3GEYJ822	8.2K	1	R415	ERDS2TJ391	390	1
R208	ERJ3GEYJ182	1.8K	1	R418	ERDS2TJ221	220	1
R209	ERJ3GEYJ154	150K	1	R419	PQ4R10XJ103	10K	S 1
R210	ERJ3GEYJ154	150K	1	R421	ERJ3GEYJ104	100K	1
R211	ERJ3GEYJ562	5.6K	1	R422	ERDS1TJ470	47	1
R212	PQ4R10XJ153	15K	S 1	R502	ERJ3GEYJ106	10M	1
R213	ERJ3GEYJ104	100K	1	R503	ERJ3GEYJ472	4.7K	1
R214	PQ4R10XJ154	150K	S 1	R504	ERJ3GEYJ472	4.7K	1
R215	PQ4R10XJ123	12K	S 1	R505	ERJ3GEYJ472	4.7K	1
R216	PQ4R10XJ472	4.7K	S 1	R506	ERJ3GEYJ222	2.2K	1
R218	PQ4R10XJ273	27K	S 1	R507	ERJ3GEYJ272	2.7K	1
R219	PQ4R10XJ562	5.6K	S 1	R508	ERJ3GEYJ472	4.7K	1
R220	ERJ3GEYJ333	33K	1	R509	ERJ3GEYJ392	3.9K	1
R221	ERJ3GEYJ334	330K	1	R510	ERDS2TJ271	270	1
R222	ERJ3GEYJ103	10K	1	R511	PQ4R10XJ333	33K	S 1
R226	ERJ3GEYJ106	10M	1	R512	ERJ3GEYJ333	33K	1
R227	ERJ3GEYJ106	10M	1				
R228	ERJ3GEYJ104	100K	1				

This replacement parts list is only for the model : KX-TCM526BX-B.

Ref. No.	Part No.	Value	Pcs/Set	Ref. No.	Part No.	Value	Pcs/Set
R513	PQ4R10XJ273	27K	S 1	R847	ERJ3GEYF222	2.2K	1
R514	ERJ3GEYJ392	3.9K	1	R848	ERJ3GEYJ223	22K	1
R515	ERJ3GEYJ223	22K	1				
R516	ERJ3GEYJ105	1M	1	R850	ERJ3GEYJ473	47K	1
R517	ERJ3GEYJ473	47K	1	R851	ERJ3GEYJ104	100K	1
R519	ERJ3GEYJ104	100K	1	R852	ERJ3GEYJ103	10K	1
				R853	ERJ3GEYF123	12K	1
R520	ERJ3GEYJ104	100K	1	R854	ERJ3GEYJ334	330K	1
R521	PQ4R10XJ104	100K	S 1	R855	ERJ3GEYJ823	82K	1
R522	ERJ3GEYJ104	100K	1	R856	ERJ3GEYJ473	47K	1
R523	ERJ3GEYJ104	100K	1	R857	ERJ3GEYJ103	10K	1
R524	PQ4R10XJ104	100K	S 1	R858	PQ4R10XJ104	100K	S 1
R525	ERJ3GEYJ473	47K	1	R859	PQ4R10XJ103	10K	S 1
R526	PQ4R10XJ391	390	S 1				
R527	PQ4R10XJ681	680	S 1	R860	PQ4R10XJ102	1K	S 1
R528	PQ4R10XJ471	470	S 1	R861	PQ4R10XJ104	100K	S 1
				R862	PQ4R10XJ563	56K	S 1
R538	ERJ3GEYJ472	4.7K	1	R863	PQ4R10XJ104	100K	S 1
R539	ERJ3GEYJ104	100K	1	R864	PQ4R10XJ472	4.7K	S 1
				R865	PQ4R10XJ124	120K	S 1
R540	ERJ3GEYJ472	4.7K	1	R866	PQ4R10XJ182	1.8K	S 1
R541	ERJ3GEYJ472	4.7K	1	R867	PQ4R10XJ104	100K	S 1
R542	ERJ3GEYJ222	2.2K	1	R868	PQ4R10XJ104	100K	S 1
R543	ERJ3GEYJ222	2.2K	1	R869	ERJ3GEYJ473	47K	1
R545	ERJ3GEYJ472	4.7K	1				
R546	ERJ3GEYJ472	4.7K	1	R870	ERJ3GEYJ684	680K	1
R547	ERJ3GEYJ472	4.7K	1	R871	ERJ3GEYJ224	220K	1
R548	ERJ3GEYJ472	4.7K	1	R872	PQ4R10XJ393	39K	S 1
R549	ERJ3GEYJ472	4.7K	1	R873	PQ4R10XJ474	470K	S 1
				R874	PQ4R10XJ183	18K	S 1
R550	ERJ3GEYJ472	4.7K	1	R877	ERJ3GEYJ392	3.9K	1
R551	ERJ3GEYJ472	4.7K	1	R878	ERJ3GEYJ334	330K	1
R552	ERJ3GEYJ472	4.7K	1	R879	ERJ3GEYJ332	3.3K	1
R553	ERJ3GEYJ103	10K	1				
R554	ERJ3GEYJ472	4.7K	1	R880	ERJ3GEYJ222	2.2K	1
R555	ERJ3GEYJ472	4.7K	1	R881	ERJ3GEYJ563	56K	1
R557	ERJ3GEYJ102	1K	1				
R558	ERJ3GEYJ102	1K	1	R890	ERJ3GEYJ104	100K	1
				R891	ERJ3GEYJ105	1M	1
R813	ERJ3GEYJ105	1M	1				
R814	ERJ3GEYJ681	680	1	R962	PQ4R10XJ104	100K	S 1
R815	ERJ3GEYJ221	220	1	R963	PQ4R10XJ103	10K	S 1
R816	ERJ3GEYJ221	220	1	R964	PQ4R10XJ103	10K	S 1
				R968	PQ4R10XJ103	10K	S 1
R821	ERJ3GEYJ220	22	1	R969	PQ4R10XJ103	10K	S 1
R822	ERJ3GEYJ220	22	1				
R823	ERJ3GEYJ103	10K	1	J3	PQ4R10XJ000	0	1
R824	ERJ3GEYJ103	10K	1	J203	ERJ3GEY0R00	0	1
R825	ERJ3GEYJ153	15K	1	J301	ERJ3GEY0R00	0	1
R826	ERJ3GEYJ394	390K	1	J302	ERJ3GEY0R00	0	1
R827	ERJ3GEY0R00	0	1	J501	ERJ3GEY0R00	0	1
R829	ERJ3GEY0R00	0	1				
R830	ERJ3GEY0R00	0	1				
R831	ERJ3GEYJ103	10K	1				
R832	PQ4R10XJ000	0	1				
R833	ERJ3GEYJ103	10K	1				
R834	ERJ3GEYJ473	47K	1				
R835	ERJ3GEYJ473	47K	1				
R836	ERJ3GEYJ123	12K	1				
R837	ERJ3GEYJ473	47K	1				
R838	ERJ3GEYJ153	15K	1				
R839	ERJ3GEYJ103	10K	1				
R840	ERJ3GEY0R00	0	1				
R841	ERJ3GEYJ682	6.8K	1				
R842	PQ4R10XJ103	10K	S 1				
R843	PQ4R10XJ822	8.2K	S 1				
R844	ERJ3GEYF152	1.5K	1				
R845	ERJ3GEYJ683	68K	1				
R846	ERJ3GEYJ223	22K	1				

KX-TCM526BX-B

This replacement parts list is only for the model : KX-TCM526BX-B.

Ref. No.	Part No.	Value	Pcs/Set	Ref. No.	Part No.	Value	Pcs/Set
		(CAPACITORS)					
C1	ECQE2224KF	0.22	△ 1	C231	ECUV1C104KBV	0.1	1
C4	ECKD2H681KB	680P	△ S 1	C232	ECUV1H221JCV	220P	1
C5	ECKD2H681KB	680P	△ S 1	C233	ERJ3GEY0R00	0	1
C6	ECEA1CKA221	220	△ 1	C235	PQCUV1E104MD	0.1	S 1
C7	ECUV1H103KB	0.01	△ 1	C236	PQCUV1H102J	1000P	S 1
C8	ECEA1HKS2R2	2.2	△ S 1	C237	ECUV1H560GCV	56P	1
C9	PQCUV1E104MD	0.1	△ S 1	C238	ECUV1H510GCV	51P	1
				C239	ECUV1H560GCV	56P	1
C11	ECEA1CKS100	10	△ S 1	C241	PQCUV1C105ZF	1	1
C12	PQCUV1H101JC	100P	△ 1	C242	PQCUV1E104MD	0.1	S 1
C14	PQCUV1H223KB	0.022	△ 1	C243	ECEA1EU4R7	4.7	1
C15	ECEA1EK470	47	△ S 1	C245	ECEA1HKS010	1	S 1
C17	ECEA1CKS220	22	△ S 1	C246	PQCUV1H153KB	0.015	1
C18	ECEA1HKS010	1	△ S 1	C247	PQCUV1C224ZF	0.22	S 1
				C248	ECUV1H470JCV	47P	1
C50	ECKDNB471MB	470P	△ 1	C249	PQCUV1H103KB	0.01	1
C101	PQCUV1H102J	1000P	S 1	C250	ECEA1CKS100	10	S 1
C103	ECUV1H271JCV	270P	1	C251	PQCUV1E104MD	0.1	S 1
C104	PQCUV1H222KB	2200P	1	C253	ECUV1H101GCV	100P	1
C105	PQCUV1E104MD	0.1	S 1	C254	PQCUV1H102J	1000P	S 1
C107	PQCUV1E104MD	0.1	S 1	C255	PQCUV1E104MD	0.1	S 1
C110	ECEA1CKS100	10	1	C273	ECUV1C104ZFB	0.1	1
C111	PQCUV1E104MD	0.1	S 1	C275	ECUV1H121GCV	120P	1
C112	ECUV1H101JCV	100P	1	C279	ECUV1H560JCV	56P	1
C113	PQCUV1E104MD	0.1	S 1				
C114	PQCUV1E104MD	0.1	S 1	C280	ECUV1C104KBV	0.1	1
C115	ECUV1C104KBV	0.1	1	C281	ECUV1H472KBV	4700P	1
C116	PQCUV1C105ZF	1	1				
C117	PQCUV1E104MD	0.1	S 1	C301	PQCUV1H103ZF	0.01	1
C118	PQ4R10XJ000	0	1	C303	ECUV1H100DCV	10P	1
				C304	ECUV1H103KBV	0.01	S 1
C122	PQCUV1H392KB	3900P	1	C305	ECUV1H470JCV	47P	1
C123	PQCUV1H101JC	100P	1	C306	ECUV1H470JCV	47P	1
C124	PQCUV1H102J	1000P	S 1	C307	ECUV1H470JCV	47P	1
C125	ECUV1H392KBV	3900P	1	C308	ECEA1HKS010	1	S 1
C126	PQCUV1E104MD	0.1	S 1	C309	ECUV1H120JUV	12P	1
C128	ECA1AM102	1000	1				
C201	ERJ3GEY0R00	0	1	C310	ECUV1H680JCV	68P	1
C203	ECUV1C104ZFB	0.1	1	C311	ECUV1H681JCV	680P	S 1
C204	PQCUV1H103KB	0.01	1	C313	ECUV1C104KBV	0.1	1
C205	PQCUV1H103KB	0.01	1	C314	ECUV1H220JCV	22P	1
C206	ECUV1H102KBV	1000P	1	C315	PQCUV1H103ZF	0.01	1
C207	ECEA1CKS100	10	S 1	C316	ERJ3GEY0R00	0	1
C208	PQCUV1E104MD	0.1	S 1				
C209	ECEA1HKS2R2	2.2	S 1	C351	ECUV1H390JCV	39P	1
				C353	ECUV1H103KBV	0.01	1
C210	ECUV1H102KBV	1000P	1	C355	ECUV1H030CCV	3P	1
C211	PQCUV1E104MD	0.1	S 1	C356	ECUV1H103KBV	0.01	1
C212	PQCUV1E104MD	0.1	S 1				
C213	PQCUV1E104MD	0.1	S 1	C374	ECUV1C104KBV	0.1	1
C214	ECUV1H270JCV	27P	S 1				
C215	ECUV1C104ZFB	0.1	1	C384	ECUV1C104KBV	0.1	1
C216	ECEA1EK470	47	S 1				
C217	ECUV1H472KBV	4700P	1	C402	PQCUV1E104MD	0.1	S 1
C218	ECUV1H221JCV	220P	1	C403	ECEA1CU471	470	1
C219	ECUV1H221JCV	220P	1	C404	ECEA1CU331	330	1
				C406	ECEA1AU331	330	1
C220	PQCUV1C683KB	0.068	1	C408	PQCUV1C224ZF	0.22	S 1
C221	PQCUV1E473MD	0.047	S 1				
C222	PQCUV1H103KB	0.01	1	C410	PQCUV1H103KB	0.01	1
C223	PQCUV1H331JC	330P	S 1	C411	PQCUV1E104MD	0.1	S 1
C226	PQCUV1H222KB	2200P	1	C412	ECEA0JU331	330	1
C227	PQCUV1C683KB	0.068	1	C413	ECEA0JKA331	330	1
C228	ECUV1H472KBV	4700P	1	C414	PQCUV1E104MD	0.1	S 1
C229	ECUV1H101JCV	100P	1	C415	ECUV1E105ZF	1	1
C230	ECEA1HKS010	1	S 1	C501	ECUV1H330JCV	33P	1
				C502	ECUV1H330JCV	33P	1

This replacement parts list is only for the model : KX-TCM526BX-B.

Ref. No.	Part No.	Value	Pcs/Set	Ref. No.	Part No.	Value	Pcs/Set
C503	ECUV1C104ZFV	0.1	1	C864	PQCUV1H122KB	1200P	1
C504	ECUV1H180JCV	18P	1	C865	PQCUV1E333MD	0.033	S 1
C505	ECUV1H180JCV	18P	1	C866	PQCUV1E104MD	0.1	S 1
C509	ERJ3GEY0R00	0	1	C867	ECEA1AKS101	100	1
C510	EECW5R5D473	0.047	S 1	C868	PQCUV1E104MD	0.1	S 1
C511	ECUV1C104ZFV	0.1	1	C869	PQCUV1E104MD	0.1	S 1
C512	ECUV1H103KBV	0.01	1	C870	PQCUV1E104MD	0.1	S 1
C513	ECEA0JU102	1000	1	C871	PQCUV1E104MD	0.1	S 1
C514	ECUV1C104ZFV	0.1	1	C872	PQCUV1E473MD	0.047	S 1
C515	ECUV1C104ZFV	0.1	1	C875	PQCUV1E104MD	0.1	S 1
C517	ECUV1C104ZFV	0.1	1	C879	PQCUV1E104MD	0.1	S 1
C542	ECUV1C104KBV	0.1	1	C881	ECUV1C104KBV	0.1	1
C543	ECUV1C104KBV	0.1	1	C890	ECUV1C104KBV	0.1	1
C546	ECUV1C104ZFV	0.1	1				
C813	ECUV1H120JCV	12P	1				
C814	ECUV1H120JCV	12P	1				
C815	ECUV1H470JCV	47P	1				
C816	ECUV1H470JCV	47P	1				
C817	PQCUV1E104MD	0.1	S 1				
C818	PQCUV1C105ZF	1	1				
C819	ECUV1H101JCV	100P	1				
C820	ECUV1C104ZFV	0.1	1				
C821	ECUV1C104ZFV	0.1	1				
C822	ECEA1CK101	100	S 1				
C823	ECUV1H101JCV	100P	1				
C824	ECUV1C104ZFV	0.1	1				
C825	ECUV1C104ZFV	0.1	1				
C826	PQCUV1E104MD	0.1	S 1				
C827	PQCUV1E104MD	0.1	S 1				
C829	ECUV1C104ZFV	0.1	1				
C830	PQCUV1E104MD	0.1	S 1				
C831	PQCUV1C105ZF	1	1				
C832	PQCUV1C105ZF	1	1				
C833	ECUV1C104KBV	0.1	1				
C834	ECUV1C104ZFV	0.1	1				
C835	ECUV1C104KBV	0.1	1				
C836	PQCUV1C105ZF	1	1				
C837	ECUV1C683KBV	0.068	1				
C838	PQCUV1E104MD	0.1	S 1				
C839	PQCUV1C105ZF	1	1				
C840	PQCUV1E473MD	0.047	S 1				
C841	PQCUV1H123MD	0.012	S 1				
C842	ECUV1H103KBV	0.01	1				
C843	ECUV1C104ZFV	0.1	1				
C845	PQCUV1E104MD	0.1	S 1				
C846	PQCUV1C683KB	0.068	1				
C847	ECUV1H332KBV	3300P	1				
C848	ECUV1H332KBV	3300P	1				
C849	ECUV1H682KBV	6800P	1				
C850	PQCUV1H223KB	0.022	1				
C851	ECUV1C104ZFV	0.1	1				
C852	ECEA1CKS220	22	S 1				
C853	ECEA0JU102	1000	1				
C854	ECEA1CKS470	47	S 1				
C855	ECUV1H223KBV	0.022	S 1				
C856	PQCUV1H471JC	470P	S 1				
C857	ECUV1H102KBV	1000P	1				
C858	ECEA1AKS221	220	S 1				
C859	PQCUV1E104MD	0.1	S 1				
C860	PQCUV1E333MD	0.033	S 1				
C861	PQCUV1H561JC	560P	S 1				
C862	PQCUV1E104MD	0.1	S 1				
C863	PQCUV1H821JC	820P	S 1				
				OPERATIONAL P.C.BOARD PARTS			
				PCB2	PQWP2CM422BH	P.C.BOARD ASS'Y (RTL)	1
						(DIODES)	
				D513	1SS119	DIODE(SI)	1
				D516	1SS119	DIODE(SI)	1
				D517	1SS119	DIODE(SI)	1
				D520	1SS119	DIODE(SI)	1
				LED551	LNJ301MPUJA	LED	1
				LED552	PQVDSL210VC	LED	1
				LED553	PQVDSL210VC	LED	1
						(LCD)	
				LCD501	PQADHLC7124	LCD	1
						(OTHER)	
				CN502	PQJS30A19Z	CONNECTOR	1
				E501	PQHR10552Z	LCD HOLDER	1

KX-TCM526BX-B

This replacement parts list is only for the model : KX-TCM526BX-B.

REPLACEMENT PARTS LIST

Portable Handset

Note:

1. RTL (Retention Time Limited)

The marking (RTL) indicates that the Retention Time is limited for this item. After the discontinuation of this assembly in production, the item will continue to be available for a specific period of time. The retention period of availability is dependent on the type of assembly, and in accordance with the laws governing part and product retention.

After the end of this period, the assembly will no longer be available.

2. Important safety notice.

Components identified by a Δ mark special characteristics important for safety. When replacing any of these components, use only manufacturer's specified parts.

3. The S mark indicates service standard parts and may differ from production parts.

4. RESISTORS & CAPACITORS

Unless otherwise specified.

All resistors are in ohms (Ω) K=1000 Ω , M=1000K Ω

All capacitors are in MICRO FARADS (μ F) P= μ F

*Type & Wattage of Resistor

Type

ERC:Solid	ERX:Metal Film	PQ4R:Carbon
ERD:Carbon	ERG:Metal Oxide	ERS:Fusible Resistor
PQRD:Carbon	ER0:Metal Film	ERF:Cement Resistor

Wattage

10,16:1/8W	14,25:1/4W	12:1/2W	1:1W	2:2W	3:3W
------------	------------	---------	------	------	------

*Type & Voltage of Capacitor

Type

ECFD:Semi-Conductor	ECCD,ECKD,ECBT,PQCBC : Ceramic
ECQS:Styrol	ECQE,ECQV,ECQG : Polyester
PQCUV:Chip	ECEA,ECSZ : Electrolytic
ECQMS:Mica	ECQP : Polypropylene

Voltage

ECQ Type	ECQG ECQV Type	ECSZ Type	Others		
1H: 50V	05: 50V	0F:3.15V	0J :6.3V	1V :35V	
2A:100V	1:100V	1A:10V	1A :10V	50,1H:50V	
2E:250V	2:200V	1V:35V	1C :16V	1J :63V	
2H:500V		0J:6.3V	1E,25:25V	2A :100V	

Ref. No.	Part No.	Part Name & Description	Pcs/Set
MAIN P.C.BOARD PARTS			
PCB100	PQWP1M526BXR	P.C.BOARD ASS'Y (RTL)	1
		(ICS)	
IC201	XN1116	TRANSISTOR(SI)	1
IC202	PQVI0008GE47	IC	1
IC203	PQVIS80730AL	IC	1
IC204	PQVIXCC3501P	IC	1
		(TRANSISTORS)	
Q1	PQVTDTC114EU	TRANSISTOR(SI)	1
Q2	PQVTDTC114EU	TRANSISTOR(SI)	1
		(or 2SC2712GRTE85)	
Q201	2SD601A	TRANSISTOR(SI)	1
		(or 2SC2712GRTE85)	
Q202	2SD601A	TRANSISTOR(SI)	1
		(or 2SC2712GRTE85)	
Q203	2SB709A	TRANSISTOR(SI)	1
		(or 2SA1162GRTE85)	
Q204	PQVTD123T146	TRANSISTOR(SI)	S 1
Q205	PQVTD123T146	TRANSISTOR(SI)	S 1
Q206	PQVT143XK146	TRANSISTOR(SI)	1
		(DIODES)	
D201	MA110	DIODE(SI)	1
D202	MA110	DIODE(SI)	1
D203	MA728	DIODE(SI)	1
D204	PQVDS5688G	DIODE(SI)	1
D207	MA110	DIODE(SI)	1
D208	MA110	DIODE(SI)	1
LED201	LNJ301MPUJA	LED	1
LED202	LNJ301MPUJA	LED	1
LED203	LNJ301MPUJA	LED	1
LED204	LNJ301MPUJA	LED	1
LED205	LNJ301MPUJA	LED	1
LED206	LNJ301MPUJA	LED	1
LED207	PQVDSL210VC	LED	1
LED208	PQVDSL210VC	LED	1
		(COILS)	
L201	PQLQZMR68M	COIL	S 1
L202	PQLQZM100K	COIL	1
L203	PQLQZM220K	COIL	1
L204	PQLQZM1R0K	COIL	1
L205	ELJFAR68M	COIL	1
		(CONNECTORS)	
CN101	PQJP2D13Z	CONNECTOR	1
CN201	PQJS12A36Z	CONNECTOR	1
		(CRYSTALS)	
X201	PQVCJ3995N9Z	CRYSTAL OSCILLATOR	1
X202	PQVCL3276N9Z	CRYSTAL OSCILLATOR	1
		(OTHERS)	
E100	PQEFBDB111GP	BUZZER	1
E101	PQJM122Z	MICROPHONE	1
E102	PQMC10265Z	SHIELD COVER	1

CABINET & ELECTRICAL PARTS

Ref. No.	Part No.	Part Name & Description	Pcs/Set
100	PJHE5065Z	SCREW	2
101	PQAX3P16Z	SPEAKER	1
102	PQBX10288U	BUTTON, KEY	1
103	PQXA36ASVC	RECHARGEABLE BATTERY	1
104	PQHR10559Z	RF HOLDER	1
105	PQJT10137Z	BATTERY TERMINAL	3
106	PQKF10202W2	REAR CABINET	1
107	PQKK10081Z2	BATTERY COVER	1
108	PQKM10277V8	FRONT CABINET	1
109	PQSA10065Y	ANTENNA	1
110	PQSX10057Z	KEY BOARD SWITCH	1
111	PQHE10070Z	SPONGE	1
112	PQHG10479Z	SPACER	1
113	PQGT12896Z	NAME PLATE	1

This replacement parts list is only for the model : KX-TCM526BX-B.

[illegible]

KX-TCM526BX-B

This replacement parts list is only for the model : KX-TCM526BX-B.

Ref. No.	Part No.	Value	Pcs/Set	Ref. No.	Part No.	Value	Pcs/Set
		(RESISTORS)					
R1	ERJ3GEYJ680	68	1	C10	ECUV1H472KBV	4700P	1
R2	ERJ3GEYJ331	330	1	C11	ECUV1H221JCV	220P	1
R3	ERJ3GEYJ183	18K	1	C12	PQCUV1C683KB	0.068	1
R4	ERJ3GEYJ183	18K	1	C13	PQCUV1C105ZF	1	1
R5	ERJ3GEYJ154	150K	1	C14	ECEA1CKS100	10	1
R6	ERJ3GEYJ681	680	1	C15	PQCUV1C224KB	0.22	1
R7	ERJ3GEYJ154	150K	1	C16	ECUV1H103KBV	0.01	1
R8	ERJ3GEYJ562	5.6K	1	C17	PQCUV1C224KB	0.22	1
R9	ERJ3GEYJ153	15K	1	C18	ECUV1H153KBV	0.015	1
R10	ERJ3GEYJ561	560	1	C20	ECUV1H223KBV	0.022	S 1
R11	ERJ3GEYJ822	8.2K	1	C21	ECUV1H220JCV	22P	1
R12	ERJ3GEYJ822	8.2K	1	C22	ECUV1C104ZJV	0.1	1
R13	ERJ3GEY0R00	0	1	C23	ECUV1H471JCV	470P	1
R14	ERJ3GEYJ333	33K	1	C24	ECEA1CKS220	22	1
R15	ERJ3GEYJ272	2.7K	1	C25	ECSTAJ1CA225	2.2	S 1
R16	ERJ3GEYJ473	47K	1	C26	PQCUV1C224KB	0.22	1
R18	ERJ3GEYJ223	22K	1	C27	ECUV1H102KBV	1000P	1
R19	ERJ3GEYJ124	120K	1	C28	ECUV1H122KBV	1200P	1
R20	ERJ3GEYJ104	100K	1	C29	ECUV1C473KBV	0.047	1
R23	ERJ3GEYJ153	15K	1	C30	ECUV1H103KBV	0.01	1
R24	ERJ3GEYJ223	22K	1	C32	ECUV1C104ZJV	0.1	1
R33	ERJ3GEYJ332	3.3K	1	C34	ECUV1H560GCV	56P	1
R34	ERJ3GEYJ154	150K	1	C35	ECUV1H560GCV	56P	1
R35	ERJ3GEYJ103	10K	1	C36	ECUV1H560GCV	56P	1
R36	ERJ3GEYJ104	100K	1	C37	ERJ3GEY0R00	0	1
R37	ERJ3GEYJ562	5.6K	1	C39	ECUV1H103KBV	0.01	1
R38	ERJ3GEYJ182	1.8K	1	C40	ECUV1H222KBV	2200P	1
R39	ERJ3GEYJ222	2.2K	1	C41	ECEA1HKS010	1	1
R101	ERJ3GEYJ561	560	1	C42	ECUV1H221JCV	220P	1
R102	ERJ3GEYJ220	22	1	C43	ECUV1H103KBV	0.01	1
R103	ERJ3GEYJ223	22K	1	C45	ECUV1H102KBV	1000P	1
R104	ERJ3GEYJ273	27K	1	C46	ECUV1H102KBV	1000P	1
R105	ERJ3GEYJ561	560	1	C47	ECUV1H102KBV	1000P	1
R106	ERJ3GEYJ220	22	1	C48	ECUV1C104ZJV	0.1	1
R108	ERJ3GEYJ472	4.7K	1	C49	ECUV1H103KBV	0.01	S 1
R109	ERJ3GEYJ822	8.2K	1	C50	ECUV1C104KBV	0.1	1
R110	ERJ3GEYJ393	39K	1	C52	ECUV1C104KBV	0.1	1
R112	ERJ3GEYJ100	10	1	C53	ECUV1H820JCV	82P	1
R113	ERJ3GEYJ823	82K	1	C102	ERJ3GEY0R00	0	1
R115	ECUV1H103KBV	0.01	S 1	C104	ECUV1H220JCV	22P	1
R116	ERJ3GEYJ683	68K	1	C105	ECUV1H103KBV	0.01	S 1
R117	ERJ3GEYJ564	560K	1	C106	ECUV1H680JCV	68P	1
R500	ERJ3GEYJ2R2	2.2	1	C107	ECUV1H470JCV	47P	1
R501	ERJ3GEYJ153	15K	1	C108	ECUV1H050CCV	5P	1
R502	ERJ3GEYJ393	39K	1	C109	ERJ3GEYJ223	22K	1
C1	ERJ3GEY0R00	0	1	C110	ECUV1H103KBV	0.01	1
C3	ECST1EY474	0.47	1	C111	ECUV1H220JCV	22P	1
C4	ECUV1H102KBV	1000P	1	C112	ECUV1H100DCV	10P	1
C5	PQCUV1E104MD	0.1	S 1	C113	ECUV1H150JCV	15P	1
C6	ECEA0JKS470	47	1	C114	ECUV1H102KBV	1000P	1
C7	ECUV1C104ZJV	0.1	1	C115	ECUV1H103KBV	0.01	S 1
C8	ECUV1H270JCV	27P	S 1	C116	ECUV1C104ZJV	0.1	1
C9	ECUV1H221JCV	220P	1	C117	ECUV1H151JCV	150P	1
		(CAPACITORS)		C118	ECUV1H3R0BCV	3	1
				C119	ECUV1C104ZJV	0.1	1
				C120	ECUV1C104ZJV	0.1	1
				C500	ECUV1H103KBV	0.01	1
				C501	ECUV1H103KBV	0.01	S 1
				C502	ECUV1H220JCV	22P	S 1
				C505	ECUV1H030CCV	3P	S 1

This replacement parts list is only for the model : KX-TCM526BX-B.

KX-TCM526BX-B			
Ref. No.	Part No.	Part Name & Description	Pcs/Set
ACCESSORIES			
A1	KX-A11BMX	AC ADAPTOR 	1
A2	PQJA10075Z	TEL CORD	1
A3	PQKL10028Z2	WALL MOUNT BRACKET	1
A4	PQQT11156Y	TEL CARD LABEL	1
A5	PQQW11825Z	QUICK REFERENCE GUIDE (English)	1
A6	PQQW11826Z	QUICK REFERENCE GUIDE (Spanish)	1
A7	PQQX11791Z	INSTRUCTION BOOK	1
A8	KX-J05X	PLUG ADAPTOR	1
PACKING MATERIALS			
P1	XZB10X35A02	PROTECTION COVER (for Portable Handset)	1
P2	XZB23X35A02	PROTECTION COVER (for Base Unit)	1
P3	PQPN10618Z	INNER BOX	1
P4	PQPK12373Z	GIFT BOX (BLACK)	1
TOOL			
ZZ1	PQZZ12K11Z	EXTENSION CORD, 12P	1
Note: PQZZ12K11Z is useful for servicing (It make servicing easy).			

OPERATIONS

NEW OPERATIONS

Simultaneous Keypad Dialing

You can use the base unit like a standard telephone. After pressing **TALK** to make a call with the handset near the base unit, you can also dial using the base unit keypad.

- 1** Handset:
Press **TALK**.

- 2** Base unit:
Dial a telephone number while hearing a dial tone with the handset.
●When the other party answers, talk using the handset.



- 3** Handset:
To hang up, press **TALK** or place the handset on the base unit.

Useful information

This feature is convenient when you need to enter numbers during a call using the handset (for example, to access an answering service, electronic banking service, etc.). You can enter numbers using the base unit keypad.

- 1.**Handset:
Press **TALK**.

- 2.**Handset:
Dial a telephone number.
●You may also dial with the base unit keypad.

- 3.**Base Unit:
Enter the required numbers.


- 4.**Handset:
To hang up, press **TALK** or place the handset on the base unit.

Simultaneous Keypad Dialing is available only after pressing **REMOTE SP** or **TALK**.

Remote Speakerphone


you can switch a call with the handset to the speakerphone easily.

- 1** Handset:
During a call with the handset, press **REMOTE SP**.
●The call is switched to the base unit.
●The INTERCOM indicator flashes.
●The DIGITAL SP-PHONE indicator lights.

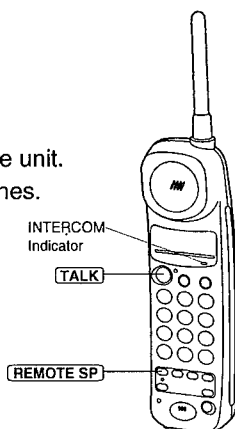

- 2** Base unit:
Speak into the MIC.

- 3** Base unit:
To hang up, press **DIGITAL SP-PHONE**.
●The indicator lights go out.
●you can also hang up by pressing **REMOTE SP**.

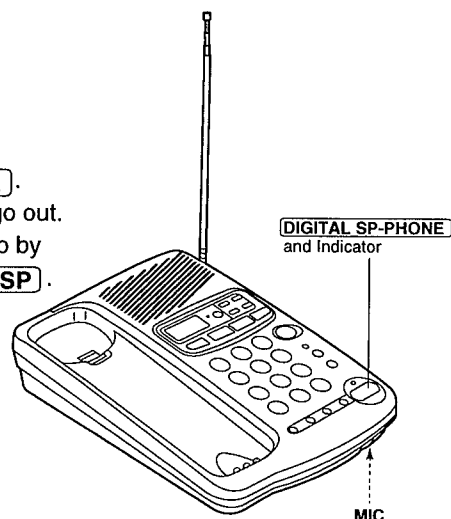

When you use **REDIAL/PAUSE** or **REDIAL**, dial a stored number, etc, press **REMOTE SP** after dialing is completed.

You can turn on the base unit speakerphone by using the handset as a remote control.

Making calls with the remote speakerphone

- 1.**Handset:
Press **REMOTE SP**.
2.Handset:
Dial a telephone number.
●You may also dial with the base unit keypad.
3.Base Unit:
Speak into the MIC.
4.Handset:
To hang up, press **REMOTE SP**.
●You may also hang up by pressing **DIGITAL SP-PHONE**.

When you redial

A number dialed with the handset keypad is saved in the handset. A number dialed with the base unit keypad is saved in the base unit.

To switch to handset (while using the remote speakerphone)

- Press **TALK**.
●You can continue the conversation using the handset.
●To hang up, press **TALK** or place the handset on base unit.


When you use **REDIAL/PAUSE** or **REDIAL**, dial a stored number, etc, press **TALK** after dialing is completed.

Answering calls with the remote speakerphone

- 1.**Handset:
Press **REMOTE SP**.
2.Base unit:
Speak into the MIC.
3.Handset:
To hang up, press **REMOTE SP**.
●You may also hang up by pressing **DIGITAL SP-PHONE**.

Storing the Pager Number

- 1 Press **PROGRAM/2WAY REC**.
 - The TALK indicator flashes.
- 2 Press **SCREEN/PLAYBACK**.
 - The indicator lights.
 - "P" is displayed on the base unit.
- 3 Press **#**.
- 4 a) Enter your pager number.
 - (If necessary, press **REDIAL/PAUSE** twice.)
 b) Enter the call back number to be displayed on the pager.
 - (Press **#** if required by your pager company.)
 - If you misdial, press **PROGRAM/2WAY REC** then restart from step 1.
 - You can enter up to 48 digits total.

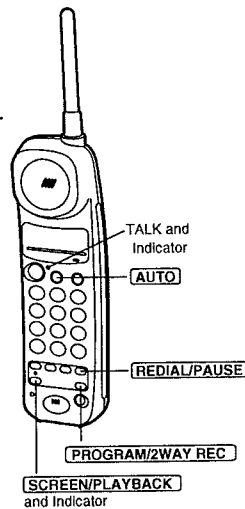

- 5 When finished, press **PROGRAM/2WAY REC**.
 - The indicator lights go out.

Your pager company may require a delay after the pager number is dialed. Contact your pager company regarding the required pause time.

Pressing **REDIAL/PAUSE** once creates a 3.5 second delay and counts as one digit.

To confirm the stored pager number

Press **TALK** → **AUTO** → **#**.

- The unit dials the stored number.
- If the pager does not beep, restart from step 1 to store the number again.


To erase the stored pager number

Press **PROGRAM/2WAY REC** → **SCREEN/PLAYBACK** → **#** → **PROGRAM/2WAY REC**.

NORMAL OPERATIONS

Making Calls with the Handset

- 1 Press **TALK**.
 - The TALK indicator lights.
- 2 Dial a telephone number.
 - If you misdial, press **FLASH** firmly then dial again.
- 3 To hang up, press **TALK** or place the handset on the base unit.
 - The TALK indicator light goes out.
 - If an alarm tone sounds in step 1, move towards the base unit or place the handset on the base unit. Then try again.

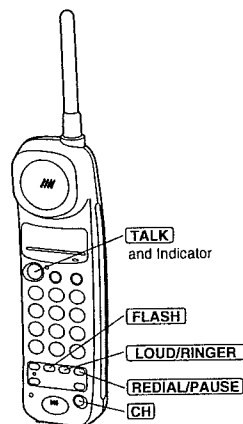

To redial the last number

Press **TALK** → **REDIAL/PAUSE**.

To select the receiver volume LOW, MEDIUM (preset) or HIGH

Press **LOUD/RINGER** while talking.

- Each time you press the button, the volume level will change. (MEDIUM → HIGH → LOW → MEDIUM → ...)


If noise interfaces with the conversation

Press **CH** to select a clear channel or move closer to the base unit.

Answering Calls with the Handset


If the handset is off the base unit, press **TALK**.

- You can also answer a call by pressing any dialing button 0 to 9, *, or # (-Any Key Talk).



OR

If on the base unit, just lift it up.



Adjusting the handset ringer volume

Be sure the TALK indicator light is off.


- To select HIGH (preset) or LOW, press **LOUD/RINGER** lightly. (Each time you press the button, the ringer volume will change.)
- To turn the ringer OFF, press **LOUD/RINGER** until 2 beeps sound.
- To turn the ringer ON, press **LOUD/RINGER** lightly. The ringer sounds at the HIGH level.

Lighted keypad

The dialing buttons will light while dialing and flash when a call is received. The lights will go out about 10 seconds after dialing or answering a call.

Making Calls with the Base Unit (Digital Duplex Speakerphone)

- 1 Press **DIGITAL SP-PHONE**.
●The indicator lights.
- 2 Dial a telephone number.
●If you misdial, press **FLASH** firmly then dial again.
- 3 When the other party answers, speak into the **MIC**(microphone).
- 4 To hang up, press **DIGITAL SP-PHONE**.
●The indicator light goes out.

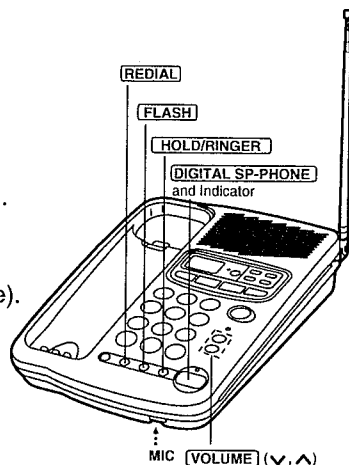

●While using the speakerphone, if the handset is on the base unit, you may switch to the handset by lifting it up.

To adjust the speaker volume (8 levels)

To increase, press **^**. To decrease, press **v**.

To redial the last number

Press **DIGITAL SP-PHONE** → **REDIAL**.

To put a call on hold

Press **HOLD/RINGER**.

- The DIGITAL SP-PHONE indicator flashes.
- If you put a call on hold for 6 minutes, a warning tone will sound.
The call will be disconnected after a total of 10 minutes.

To release the hold


For the base unit, press **DIGITAL SP-PHONE**.

For the handset, press **TALK** or lift the handset off the base unit.

- You may also press **REMOTE SP** on the handset to release the hold at the base unit.
- If another phone is connected on the same line, you can also release the hold by lifting its handset.

Answering Calls with the Base Unit

- 1 Press **DIGITAL SP-PHONE**.
- 2 Speak into the **MIC**.
- 3 To hang up, press **DIGITAL SP-PHONE**.

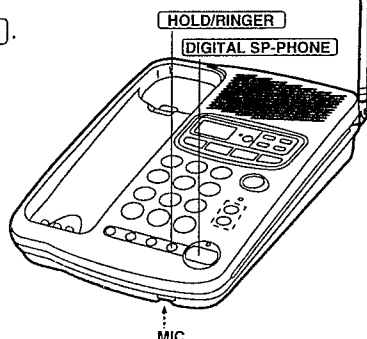

Adjusting the base unit ringer volume

Be sure the DIGITAL SP-PHONE indicator light is off.

- To select **HIGH** (preset) or **LOW**, press

HOLD/RINGER lightly.

(Each time you press the button, the ringer volume will change.)

- To turn the ringer **OFF**, press **HOLD/RINGER** until 2 beeps sound.

"**RINGER OFF**" is displayed.

- To turn the ringer **ON**, press **HOLD/RINGER** lightly. The ringer sounds at the **HIGH** level.


Greeting Message

you can prepare a personal greeting message. If you do not, one of two pre-recorded greetings will be played when a call is received.

All message (greeting, incoming, memo, etc.) are stored in digital memory. The **total recording time is about 16 minutes**. We recommend you record a **brief greeting message** in order to leave more time in memory.

To record a greeting message

- 1 Press **GREETING REC** to start the recording mode.
●"Press RECORD again to record greeting." is heard.
- 2 Within 5 seconds, press **GREETING REC** again to record your greeting.
●A long beep sounds.
- 3 After the long beep, speak clearly about 8 inches (20 cm) away from the **MIC** (microphone).
●The display shows the elapsed recording time.
- 4 When finished, press **STOP**.
●To check the recorded greeting, press **GREETING CHECK**.
●To change the message, repeat from step 1.

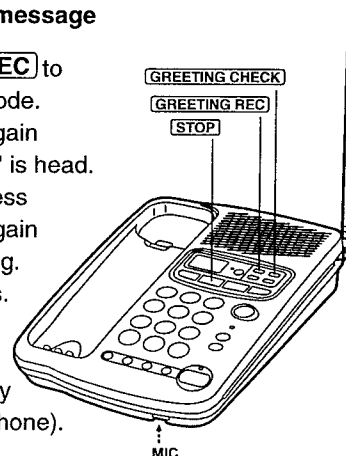

To erase the recorded greeting message

Press **GREETING CHECK** → press **ERASE** while the message is being played.

- The unit will answer a call with a pre-recorded greeting.

DISASSEMBLY INSTRUCTIONS


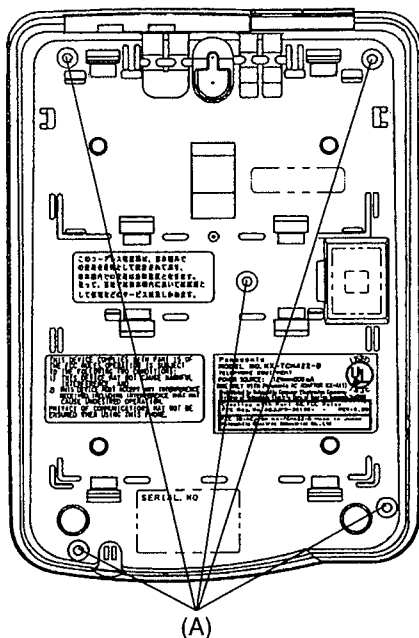


Fig. 1

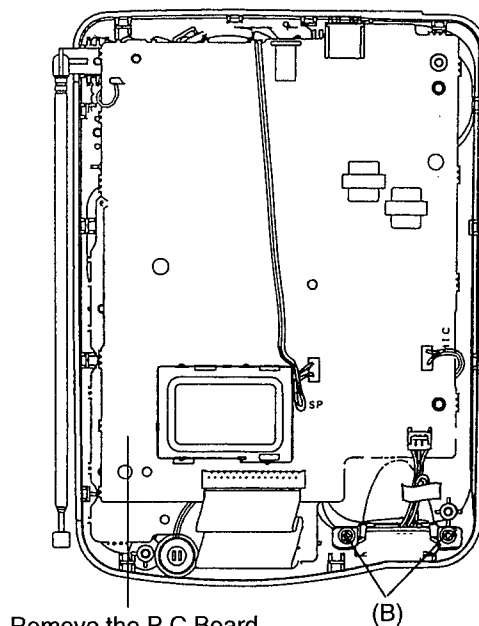

Remove the P.C.Board

Fig. 2

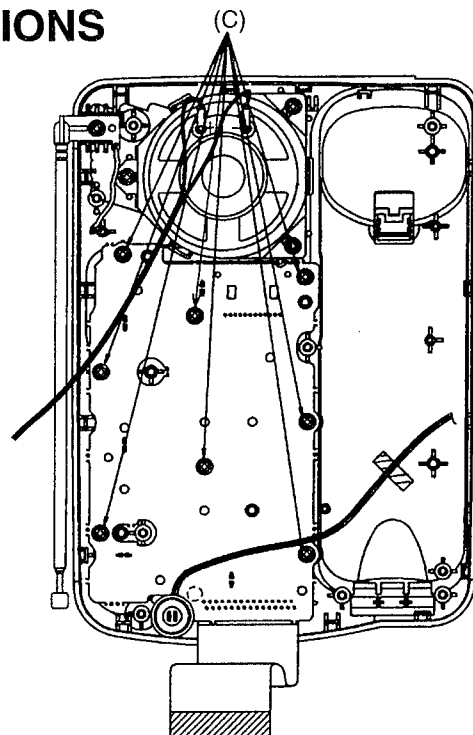


Fig. 3

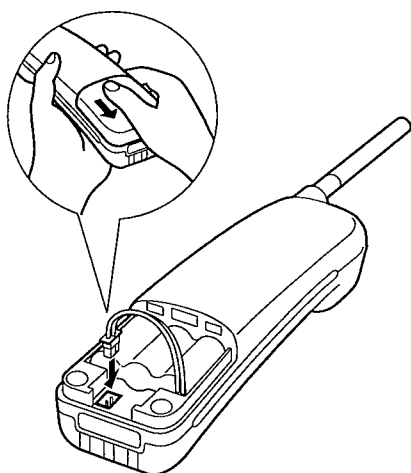


Fig. 4

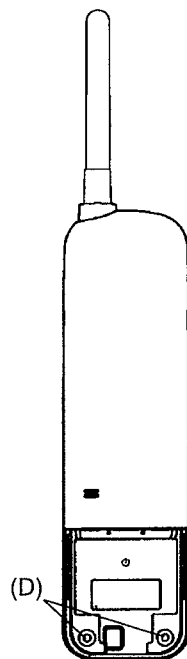


Fig. 5


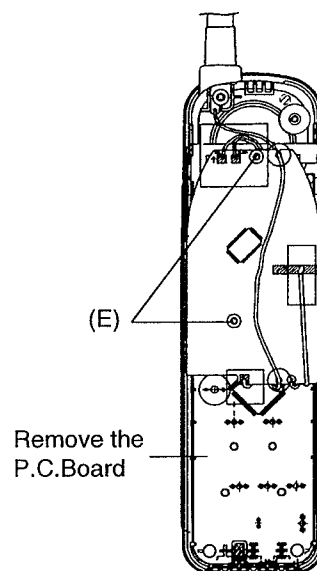
Remove the
P.C.Board

Fig. 6

Ref. No.	Procedure	Shown in Fig.—	To remove—	Remove—
1	1	1	Lower Cabinet	Screws (3×14)..... (A)×5
2	1, 2	2	Main Printed Circuit Board and Battery Terminal Board	Screws (3×8)..... (B)×2
3	1, 2, 3	3	Operation Printed Circuit Board	Screws (3×8)..... (C)×8
4	4, 5	4	Rear Cabinet	Remove the battery compartment cover
5		5		Screws (2.6×14)..... (D)×2
6	4~6	6	Printed Circuit Board	Screw (2.6×10)..... (E)×2

CPU DATA (BASE UNIT)

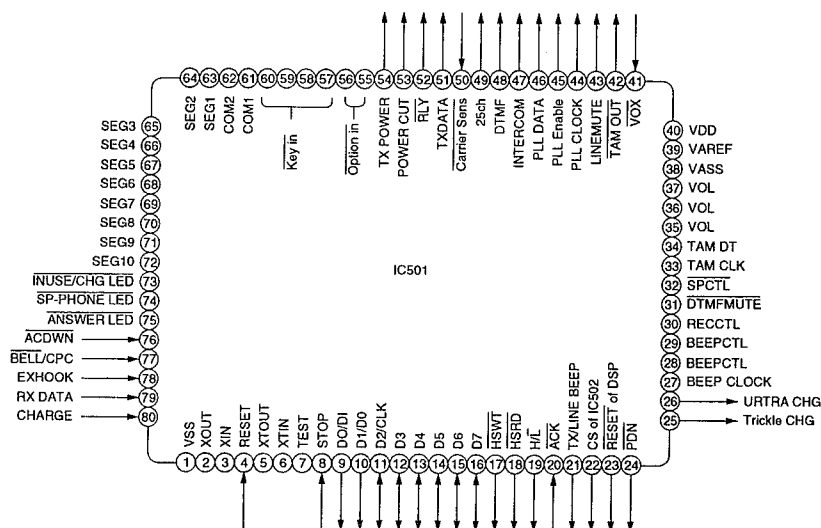

IC501: PQVI53MF5005

Pin No.	Description	I/O	High	High-Z	Low	Pin No.	Description	I/O	High	High-Z	Low
1	VSS	-	-	-	GND	41	VOX	I	-	-	Active
2	XOUT	O	-	-	-	42	TAM OUT	O	MUTE	-	Unmute
3	XIN	I	-	-	-	43	LINEMUTE	O	MUTE	-	Unmute
4	RESET	I	Normal	-	RESET	44	PLL CLOCK	O	(H/L)	-	Normal
5	XTOUT	O	-	-	-	45	PLL Enable	O	Latch	-	Normal
6	XTIN	I	-	-	-	46	PLL DATA	O	(H/L)	-	Normal
7	TEST	I	-	-	GND	47	INTERCOM	O	INTERCOM	-	Normal
8	STOP	I	Normal	-	STOP	48	DTMF	O	-	-	-
9	DO/DI	I/O	DATA	Normal	DATA	49	25ch	O	NEW CH	-	OLD CH
10	D1/D0	I/O	DATA	Normal	DATA	50	Carrier Sens	I	Low	-	High
11	D2/CLK	I/O	DATA	Normal	DATA	51	TXDATA	O	1	-	0
12	D3	I/O	DATA	Normal	DATA	52	RLY	O	OFF	-	ON
13	D4	I/O	DATA	Normal	DATA	53	POWER CUT	I	Battery	-	Batt Low
14	D5	I/O	DATA	Normal	DATA	54	TX POWER	O	POWER ON	-	POWER OFF
15	D6	I/O	DATA	Normal	DATA	55	Option in	I	DISABLE	-	ENABLE
16	D7	I/O	DATA	Normal	DATA	56	Option in	I	DISABLE	-	ENABLE
17	HSWT	O	-	-	Write to DSP	57	Key in	I	DISABLE	-	ENABLE
18	HSRD	O	-	-	Read from DSP	58	Key in	I	DISABLE	-	ENABLE
19	H/L	O	High byte	-	Low byte	59	Key in	I	DISABLE	-	ENABLE
20	ACK	I	DSP Active	-	DATA RECEPTION OK	60	Key in	I	DISABLE	-	ENABLE
21	TX/LINE BEEP	O	Active	-	Normal	61	COM1	O	COM1 mode	-	COM1 mode
22	CS of IC502	O	ON	-	OFF	62	COM2	O	COM2 mode	-	COM2 mode
23	RESET of DSP	O	RESET	-	NORMAL	63	SEG1	O	-	-	-
24	PDN	O	POWER ON	-	POWER DWN	64	SEG2	O	-	-	-
25	Trickle CHG	O	Normal	-	Trickle	65	SEG3	O	-	-	-
26	ULTRA CHG	O	ULTRA	-	Normal	66	SEG4	O	-	-	-
27	BEEP CLOCK	O	Active	-	Normal	67	SEG5	O	-	-	-
28	BEEPCTL	O	-	High	Low	68	SEG6	O	-	-	-
29	BEEPCTL	O	-	High	Low	69	SEG7	O	-	-	-
30	RECCTL	O	REC MODE	-	Normal	70	SEG8	O	-	-	-
31	DTMFMUTE	O	Unmute	-	MUTE	71	SEG9	O	-	-	-
32	SPCTL	O	Normal	-	SP-Phone	72	SEG10	O	-	-	-
33	TAM CLK	O	-	-	-	73	INUSE/CHG LED	O	-	LED OFF	LED ON
34	TAM DT	O	-	-	-	74	SP-PHONE LED	O	-	LED OFF	LED ON
35	VOL	O	-	High	Low	75	ANSWER LED	O	-	LED OFF	LED ON
36	VOL	O	-	High	Low	76	ACDWN	I	AC	-	AC DOWN
37	VOL	O	-	High	Low	77	BELL/CPC	I	CPC	-	BELL
38	VASS	-	-	-	GND	78	EXHOOK	I	EXHOOK	-	-
39	VAREF	-	VDD	-	-	79	RX DATA	I	1	-	0
40	VDD	-	VDD	-	-	80	CHARGE	I	Charge	-	No Charge


EXPLANATION OF IC TERMINALS (BASE UNIT)



● Pin Description

Pin No.	Name	Description
1	ICM/OGM	I/O for ICM head. I/O impedance is approximately 20 kohm that keeps high impedance sufficient for head load.
2	ALC	For connection to CR for ALC detection smoothing. The time constant of the CR decides the recovery time. The attack time depends on the values of C and internal resistance (approx. 8.5 kohm).
3	VLC	Volume control input. The DC voltage gained by dividing V+ the resistor adjusts the speaker output.
4	SKI	Reverse input of the speaker amplifier. The gain and frequency characteristics are set by external CR. Non-reverse input is biased by internal power source (approx. 1/2 Vcc).
5	Vcc	Power source of IC except LOGIC part.
6	SKO	Output of speaker amplifier. Sets frequency characteristics by connecting to Pin 4 in parallel. Speaker's impedance is normally 8 ohms.
7	SKG	GND speaker amplifier output part.
8	DATA	Input of control data for mute mode. For serial synchronous input with clock signal.
9	CLK	Clock input for data input sychronization. Controls shift register by data bit at fall, and latches by reading data at rise.
10	V+	5.4 V stable output to supply bias with microphone.
11	CPO	output of comparator. Connected to open-collector of NPN transistor.
12	CPI	Input of VOX detector comparator. Compares internal reference voltage with gained voltage, and has a bit hysteresis characteristics.
13	VDI	Input of VOX detector.
14	LNO	Output of buffer amplifier for line output. Current amplifier.
15	BUFI	Inputs of Recording amplifier, line output amplifier, speaker amplifier, and ALC detector. These are input after voltage/radio conversion by CR between this pin and pin 16.
16	PRO	Output of MIC/LINE amplifier and playback amplifier.
17	PBNF	Reverse input of playback amplifier for controlling frequency characteristics. The CR network between this pin and Pins 16 and 18 set frequency and gain.
18	GND	GND for all ICs except speaker amplifier.
19	MCI	Input of microphone amplifier. The input resistance is normally 33 kohms.
20	LNI	Input of line amplifier. The same configuration as MCI.

KX-TCM526BX-B

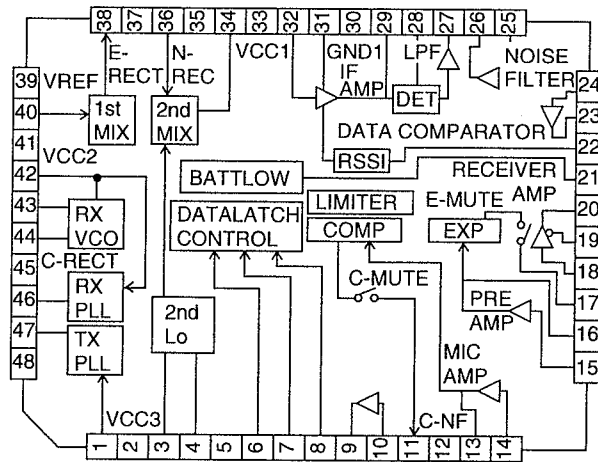

Part No.
 IC201: PQVITB31224H (Base Unit)
 IC1: PQVITB31224R (Portable Handset)

Pin No.	Name	Description	
1	TX-IN	Input terminal of TX-VCO	
2	VCC3	Power supply terminal	
3	LO-1	Local oscillator input output terminal	
4	LO-2	Colpitts oscillating circuit consists of internal emitter follower circuit and external crystal. Additionally external injection through pin 3 is available.	
5	SIG OUT	Detection signal output terminal, which is an open drain.	
6	CLK	Clock input terminal	Input the serial data to control this IC.
7	DATA	Serial data input terminal	
8	STB	Strobe signal input terminal	
9	FIL-OUT	Filter amplifier output terminal	
10	FIL-IN	Filter amplifier input terminal	
11	COMP-OUT	Compressor output	
12	C-NF	SUM amplifier T-shape feed-back circuit consists of external compressor.	
13	MIC-OUT	Mic amplifier output, which is connected to SUM amplifier input directly.	
14	MIC-IN	Mic amplifier input terminal	
15	PRE-IN	Preamplifier inverting input terminal	
16	PRE-OUT	Preamplifier output terminal, which is connected to expander directly.	
17	EXP-OUT	Expander SUM amplifier output terminal, where the signal from gain cell is amplified as inverting amplifier.	
18	RECE-IN	Receiver amplifier inverting input terminal	
19	RO1	Receiving output terminal for dynamic receiver	
20	RO2	Outputs from RO1 and RO2 (BTL type) when ceramic receiver is using.	
21	BAT-ALM	Battery alarm terminal goes high when power supply voltage VCC becomes VBAT-L or less. Data bit controls the detection voltage. This terminal is an open collector output.	
22	RSSI	DC voltage is output according to the input signal level of IF amplifier. The dynamic range is approximately 70dB.	
23	DATA-OUT	Wave arrangement output terminal. This terminal is an open collector output.	
24	D-COMP-IN	Data comparator input terminal to which demodulated signal of data is input.	

Pin No.	Name	Description
25	N FIL-IN	Noise filter input output terminal. BPF consists of external condenser and resistor. This terminal is connected to the rectifier circuit through inside coupling condenser.
26	N FIL-OUT	
27	AF-OUT	Demodulation output signal terminal. Carrier leak is decreased by built-in LPF. Output impedance is approximately 360 .
28	QUAD	Phase input terminal of FM demodulator
29	IF-OUT	IF output terminal
30	GND1	GND terminal
31	DEC	2nd IF input terminal and decoupling terminal for bias. Input impedance of Pin 32 is approximately 1.5k .
32	IF-IN	
33	Vcc1	Power supply terminal
34	2nd MIX-OUT	Mixer output terminal. Output impedance is approximately 1.5k .
35	N-REC	The noise filter output is filtered through external capacitor after amplified about 20dB
36	2nd MIX-IN	1st IF input terminal. Input impedance is approximately 4.7k (at 10.695MHz).
37	E-RECT	Connects to the capacitor for rectification in full-wave rectifier circuit of expander.
38	1st MIX-OUT	Mixer output terminal which is connected to the external filter. Output impedance is approximately 330 (standard).
39	V REF	Reference voltage of compander which is passed through inside buffer.
40	1st MIX-IN	Mixer input terminal. The mixer is applied the double balanced mixer method.
41	VCC2	Regulator terminal, which outputs 2.0V.
42	VCO-CONT	RX-VCO voltage control terminal
43	VCO-1	RX-VCO resonant terminal
44	VCO-2	
45	C-RECT	Rectifier terminal of compressor. The circuit configuration is the same with E-RECT terminal.
46	RX-OUT	Charge pump output terminal. Constant current output type is adopted and output current can be changed according to the input data.
47	TX-OUT	
48	GND2	GND terminal

KX-TCM526BX-B




IC802,IC803 : PQVIMCL548DW

● Pin Description

Pin No.	Pin Name	Function
1	RO+	Recept the outputted analog.
2	RO-	Recept the outputted analog.
3	PI	Input the power amp.
4	PO-	Output the power amp.
5	PO+	Output the power amp.
6	Vdd	Positive power supply pin.
7	FSR	Frame synchronization, reception
8	CR	Recept the data.
9	BCLKR	Recept the bit clock.
10	PDI	Input the power down.
11	MCLK	Master Clock pin.
12	BCLKT	Transmit the bit clock.
13	DT	Transmit the data.
14	FST	Frame synchronization, transmission
15	Vss	Negative power supply pin.
16	Mu/A	Select the Mu/A.
17	TG	Transmit gain
18	TI-	Transmit the inputted analog.
19	TI+	Transmit the inputted analog.
20	VAG	Output the analog ground.

CPU DATA (PORTABLE HANDSET)

IC202:PQVI0008GE47

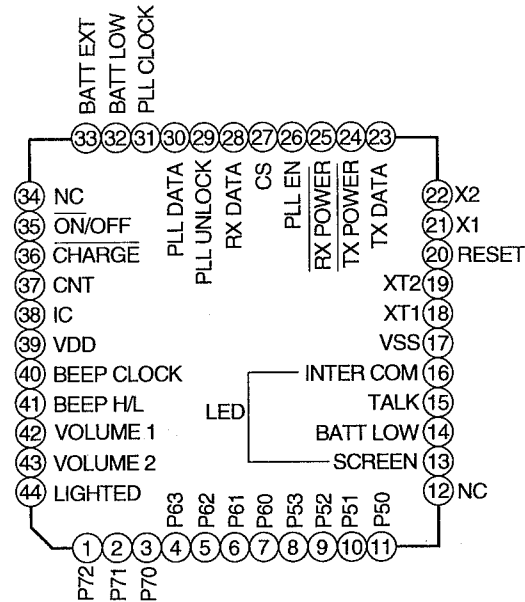

Pin No.	Description	I/O	High	High-Z	Low	Pin No.	Description	I/O	High	High-Z	Low
1	Option Strobe 1	O	Normal		Active	25	RX Power	O	Off		On
2	Option Strobe 0	O	Normal		Active	26	PLL En	O	Latch		Normal
3	Key Strobe 4	O	Normal		Active	27	Squelch	I	Electric Field Low		Electric Field High
4	Key Strobe 3	O		Normal	Active	28	RX Data	I	(Data)		Normal
5	Key Strobe 2	O		Normal	Active	29	PLL Unlock	I	Unlock		Lock
6	Key Strobe 1	O		Normal	Active	30	PLL Data	O	(Data)		Normal
7	Key Strobe 0	O		Normal	Active	31	PLL Clock	O	(Clock)		Normal
8	Key In 3	I	Off		On	32	Batt Low	I	High		Low
9	Key In 2	I	Off		On	33	BATT EXT	I	High		Low
10	Key In 1	I	Off		On	34	Not Used				
11	Key In 0	I	Off		On	35	On/Off	I	Off		On
12	Not Used					36	Charge (Battery Terminal)	I	Normal		Charge
13	LED (SCREEN)	O		Off	On	37	(Control)	I	Base Unit		Charger
14	LED (BATT LOW)	O		Off	On	38	Internally Conn.				
15	LED (TALK)	O		Off	On	39	VDD				
16	LED (INTERCOM)	O		Off	On	40	Beep Clock	O	Normal		(Clock)
17	GND					41	Beep Control	O	Low		High
18	Sub Clock	I				42	RX Volume Selector	O	1		0
19	(32.768kHz)	I				43	RX Volume Selector	O	1		0
20	Reset	I	Normal		Reset	44	LIGHTED DIAL	O	On		Off
21	Main Clock	I									
22	(3.995MHz)	I									
23	TX Data	O	(Data)		Normal						
24	TX Power	O	Off		On						

CONFIRMATION (TAM)

How to set the test mode:

1. Set S10 to ON (Power supply is turned ON).
2. After pressing S11 for 500 msec, separate S11 (The unit becomes TAM test mode).

When replacing these parts, confirm as shown below table.

Replace Parts	Confirmation items	Test Mode	Procedure
IC801~IC803	(A) Greeting Message Characteristics	TAM Test Mode	1. Set S6, S12, S13, S14 to ON. 2. Record the GREETING with a 1 kHz, -45 dBm sine wave MIC input signal through the capacitor 50V, 1μF. 3. Confirm the speaker output level VR MAX (8) is $+2 \pm 4$ dBm. 4. Confirm the Line output level (600Ω load) is $+10 \pm 4$ dBm.
IC801~IC803	(B) ICM Characteristics	TAM Test Mode	1. Set S6, S9, S14 to ON. 2. Record the ICM with a 1 kHz, -30 dBm line input signal. 3. Confirm the speaker output level VR MAX (8) is $+2 \pm 4$ dBm. 4. Confirm the Line output level (600Ω load) is $+10 \pm 4$ dBm.

The connection of confirmation equipments are as shown in pages 29 and 30.

CPU OPTIONS

Base Unit

Diode No.	Description	Diode Open	Diode Connect
D514	Tone/Pulse Selector	Tone	Pulse
D515	Reading EEPROM	Not Read	Read
D518	9 bit Data Mute	9 bit Data Mute	Not Mute
D519	VOX Detect	Detect	Not Detect
D511	Dual Key	Disable	Enable
D512	Quick Charge	Disable	Enable
D509	Flash Time	0 } 700 msec	0 } 400 msec 1 } 250 msec 1 } 80 msec
D510	Flash Time	0 }	1 }
D507	Ring Detect	1Ring/600 msec	1 Ring/250 msec
D508	Speakerphone	Disable	Enable
D505	BEAT Measure	CH25	CH23 (Skip 16, 19ch)
D506	% Break	61%	67%
D503	43-49 MHz	0 } U.S.A.CH25	0 } 30-40 MHz 1 } 43-49 MHz 1 } 43-49 MHz
D504	30-40 MHz	0 }	1 } 0 } CH10 1 } CH6
D501	TAM Test Mode	Normal	Test

Portable Handset

Diode No.	Description	Diode Open	Diode Close
D209	Test Mode	Normal	Test Mode
D208	Model with TAM	——	Used
D207	43 MHz / 49 MHz	Not Measured	Measured
D206	Test Mode CH	CH10	Imagination CH
D213	Tone/Pulse	Program	BX: Prohibition
D212	30 MHz / 40 MHz	Not Measured	Measured
D211	Battery Low LED	30 min. Light	10 min. Light
D210	PRE DATA	9 Bit	100Hz

Service Manual

Telephone Equipment


KX-TCM526BX-B




Cordless Answering System

EXTRA RANGE
Black Version

(for Asia, Middle Near East and Other areas)



(Portable Handset)

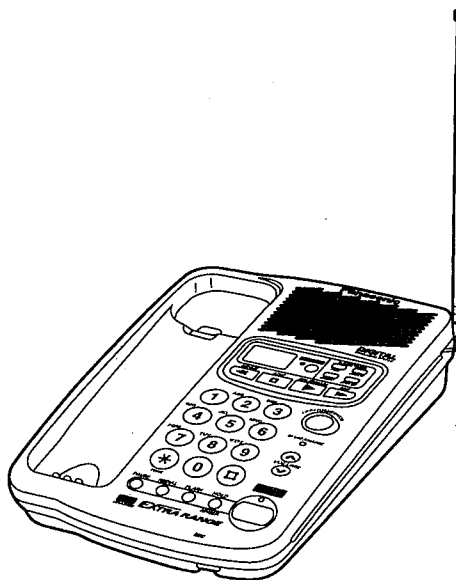

(Base Unit)

SPECIFICATIONS

General

Modulation:	FM, 5 kHz Deviation
Frequency Stability:	± 2.5 kHz
Dial Type:	Tone (DTMF)/Pulse
Redial:	Last dialed number each time the Redial button is pressed
Pause:	3.5 seconds per pause

Memory Capacity:	10 telephone numbers, up to 16 digits per station
------------------	---

Answering system

Greeting Message and Incoming Message:	Full digital recording Total recording time, 16 minutes
--	--

	Base Unit	Portable Handset
Power Source: (Receiver Section)	AC adaptor KX-A11BMX (DC 12 V)	Built-in rechargeable Ni-Cd battery (PQXA36ASVC)
Receiving Frequency:	10 channels within 49.46 to 49.99 MHz	10 channels within 43.72 to 44.20 MHz
Adjacent Channel Rejection:	40 dB	40 dB
Sensitivity: (Transmitter Section)	1dB μ V for 20 dB S/N	2 dB μ V for 20 dB S/N
Transmitting Frequency:	10 channels within 43.72 to 44.20 MHz	10 channels within 49.46 to 49.99 MHz
Jacks:	DC IN, Telephone line	
Antenna:	Telescopic	Rubber Flexible
Speaker:	2" (6.6 cm) PM dynamic	1 $\frac{3}{16}$ " (3 cm) ceramic
Microphone:	Condenser microphone	Condenser microphone
Dimensions (H $\times$ W $\times$ D):	2 $\frac{5}{16}$ " $\times$ 6 $\frac{11}{16}$ " $\times$ 9" (59 $\times$ 170 $\times$ 229 mm)	1 $\frac{7}{8}$ " $\times$ 2 $\frac{5}{32}$ " $\times$ 1 $\frac{23}{32}$ " (302 $\times$ 55 $\times$ 44 mm)
Weight:	1.32 lb (600 g)	0.52 lb (234g) with battery

Design and specifications are subject to change without notice.

Panasonic

©1997 Kyushu Matsushita Electric Co., Ltd.

All rights reserved. Unauthorized copying and distribution is a violation of law.

 WARNING

This service information is designed for experienced repair technicians only and is not designed for use by the general public. It does not contain warnings or cautions to advise non-technical individuals of potential dangers in attempting to service a product. Products powered by electricity should be serviced or repaired only by experienced professional technicians. Any attempt to service or repair the product or products dealt with in this service information by anyone else could result in serious injury or death.

When you mention the serial number, write down all 11 digits. The serial number may be found on the label affixed to the bottom of the unit.

FOR SERVICE TECHNICIANS

ICs and LSIs are vulnerable to static electricity.

When repairing, the following precautions will help prevent recurring malfunctions.

1. Cover plastic parts boxes with aluminum foil.
2. Ground the soldering irons.
3. Use a conductive mat on worktable.
4. Do not grasp IC or LSI pins with bare fingers.

TABLE OF CONTENTS

LOCATION OF CONTROLS	3, 4	RF SPECIFICATION	31
STANDARD BATTERY LIFE	4	HOW TO CHECK THE PORTABLE	
CONNECTION	5	HANDSET SPEAKER	31
OPERATIONS	6-8	EXPLANATION OF CPU DATA	
DISASSEMBLY INSTRUCTIONS	9	COMMUNICATION	32-36
CPU DATA (BASE UNIT)	10	BLOCK DIAGRAM (BASE UNIT)	37
EXPLANATION OF IC TERMINALS (BASE UNIT)	11-14	NEW CIRCUIT OPERATION (BASE UNIT)	38-41
CPU DATA (PORTABLE HANDSET)	15	NORMAL CIRCUIT OPERATION (BASE UNIT)	42-50
CONFIRMATION (TAM)	16	BLOCK DIAGRAM (PORTABLE HANDSET)	51
CPU OPTIONS	16	NEW CIRCUIT OPERATION (PORTABLE HANDSET)	52-55
FREQUENCY TABLE	17	NORMAL CIRCUIT OPERATION (PORTABLE HANDSET) ...	56
ADJUSTMENTS (BASE UNIT)	18, 19	TROUBLESHOOTING GUIDE	57
TERMINAL GUIDE OF IC'S, TRANSISTORS AND DIODES	20	TROUBLESHOOTING GUIDE (BASE UNIT)	58-64
HOW TO REPLACE FLAT PACKAGE IC	21	TROUBLESHOOTING GUIDE (PORTABLE HANDSET) ..	65, 66
CIRCUIT BOARD (OPERATION)	22	CABINET AND ELECTRICAL	
SCHEMATIC DIAGRAM (BASE UNIT)	23	PARTS LOCATION (BASE UNIT)	67
CIRCUIT BOARD AND WIRING		CABINET AND ELECTRICAL	
CONNECTION DIAGRAM (BASE UNIT)	25, 26	PARTS LOCATION (PORTABLE HANDSET) ..	68
CIRCUIT BOARD AND WIRING		ACCESSORIES AND PACKING MATERIALS	69
CONNECTION DIAGRAM (PORTABLE HANDSET)	27, 28	EXTENSION CABLE CONNECTING METHOD	69
SCHEMATIC DIAGRAM (PORTABLE HANDSET)	29	REPLACEMENT PARTS LIST (BASE UNIT)	70-75
ADJUSTMENTS (PORTABLE HANDSET)	30	REPLACEMENT PARTS LIST (PORTABLE HANDSET) ..	76-79