
ORDER NO.ITD0907082CE

Service Manual

Plasma Television

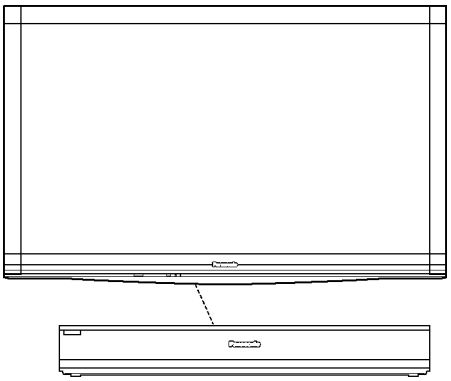

TH-P54Z1D : as System
TH-P54Z1M : as System
TH-P54Z1N : as System
TH-P54Z1T : as System
TH-P54Z1DM : Display unit
TH-P54Z1MM : Display unit
TH-P54Z1SM : Display unit
TH-P54Z1TM : Display unit
TU-Z100D : Tuner Box
TU-Z100M : Tuner Box
TU-Z100S : Tuner Box
TU-Z100T : Tuner Box
SP-54Z1A : Speakers

Model No. **TH-P54Z1D**
TH-P54Z1M
TH-P54Z1N
TH-P54Z1T
TH-P54Z1DM
TH-P54Z1MM
TH-P54Z1SM
TH-P54Z1TM
TU-Z100D
TU-Z100M
TU-Z100S
TU-Z100T
SP-54Z1A

GPF12ZA Chassis

⚠ WARNING

This service information is designed for experienced repair technicians only and is not designed for use by the general public.
It does not contain warnings or cautions to advise non-technical individuals of potential dangers in attempting to service a product.
Products powered by electricity should be serviced or repaired only by experienced professional technicians. Any attempt to service or repair the product or products dealt with in this service information by anyone else could result in serious injury or death.

IMPORTANT SAFETY NOTICE

There are special components used in this equipment which are important for safety. These parts are marked by ⚠ in the Schematic Diagrams, Circuit Board Diagrams, Exploded Views and Replacement Parts List. It is essential that these critical parts should be replaced with manufacturer's specified parts to prevent shock, fire or other hazards. Do not modify the original design without permission of manufacturer.

Panasonic®

© Panasonic Corporation 2009.
Unauthorized copying and distribution is a violation of law.

TABLE OF CONTENTS

PAGE

1 Safety Precautions ---------- 3
1.1. General Guidelines ---------- 3
1.2. Touch-Current Check ---------- 3
2 Warning ---------- 4
2.1. Prevention of Electrostatic Discharge (ESD) to Electrostatically Sensitive (ES) Devices ---------- 4
2.2. About lead free solder (PbF) ---------- 5
3 Service Navigation ---------- 6
3.1. Service Hint ---------- 6
3.2. Applicable signals ---------- 8
4 Specifications ---------- 9
5 Service Mode ---------- 11
5.1. Tuner box ---------- 11
5.2. Display unit ---------- 16
5.3. Hotel mode ---------- 19
6 Troubleshooting Guide ---------- 20
6.1. Check of the IIC bus lines ---------- 20
6.2. Power LED Blinking timing chart ---------- 22
6.3. No Power ---------- 23
6.4. No Picture ---------- 24
6.5. Local screen failure ---------- 25
7 Service Fixture & Tools ---------- 26
7.1. SC jig ---------- 26
8 Disassembly and Assembly Instructions ---------- 27
8.1. Tuner box ---------- 27
8.2. Display unit ---------- 30
9 Measurements and Adjustments ---------- 39
9.1. Adjustment Procedure ---------- 39
10 Block Diagram ---------- 43
10.1. Main Block Diagram (Tuner box) ---------- 43
10.2. Main Block Diagram (Display unit) ---------- 44
10.3. Tuner box (1/3) Block Diagram ---------- 45
10.4. Tuner box (2/3) Block Diagram ---------- 46
10.5. Tuner box (3/3) Block Diagram ---------- 47
10.6. Display unit (1/4) Block Diagram ---------- 48
10.7. Display unit (2/4) Block Diagram ---------- 49
10.8. Display unit (3/4) Block Diagram ---------- 50
10.9. Display unit (4/4) Block Diagram ---------- 51
10.10. Wireless unit Block Diagram ---------- 52
11 Wiring Connection Diagram ---------- 53
11.1. Caution statement. ---------- 53
11.2. Wiring (Tuner box) ---------- 53
11.3. Wiring (Display unit 1) ---------- 54
11.4. Wiring (Display unit 2) ---------- 54
11.5. Wiring (Display unit 3) ---------- 55
11.6. Wiring (Display unit 4) ---------- 55
11.7. Wiring (Display unit 5) ---------- 56
11.8. Wiring (Display unit 6) ---------- 56
12 Schematic Diagram ---------- 57
12.1. Schematic Diagram Note ---------- 57
12.2. Tuner box ---------- 58
12.3. Display unit ---------- 83
13 Printed Circuit Board ---------- 120
13.1. Tuner box ---------- 120
13.2. Display unit ---------- 127
14 Exploded View and Replacement Parts List --------- 147
14.1. Exploded View and Mechanical Replacement Parts List ---------- 147

PAGE

14.2. Electrical Replacement Parts List ---------- 162

1 Safety Precautions

1.1. General Guidelines

1. When servicing, observe the original lead dress. If a short circuit is found, replace all parts which have been overheated or damaged by the short circuit.
2. After servicing, see to it that all the protective devices such as insulation barriers, insulation papers shields are properly installed.
3. After servicing, make the following leakage current checks to prevent the customer from being exposed to shock hazards.
4. When servicing, observe the original lead dress. If a short circuit is found, replace all parts which have been overheated or damaged by the short circuit.
5. After servicing, see to it that all the protective devices such as insulation barriers, insulation papers shields are properly installed.
6. After servicing, make the following leakage current checks to prevent the customer from being exposed to shock hazards.

1.2. Touch-Current Check

1. Plug the AC cord directly into the AC outlet. Do not use an isolation transformer for this check.
2. Connect a measuring network for touch currents between each exposed metallic part on the set and a good earth ground such as a water pipe, as shown in Figure 1.
3. Use Leakage Current Tester (Simpson 228 or equivalent) to measure the potential across the measuring network.
4. Check each exposed metallic part, and measure the voltage at each point.
5. Reserve the AC plug in the AC outlet and repeat each of the above measure.
6. The potential at any point (TOUGH CURRENT) expressed as voltage U_1 and U_2, does not exceed the following values:

   For a. c.: U_1 = 35 V (peak) and U_2 = 0.35 V (peak);


   For d. c.: U_1 = 1.0 V,

   Note:

   The limit value of U_2 = 0.35 V (peak) for a. c. and U_1 = 1.0 V for d. c. correspond to the values 0.7 mA (peak) a. c. and 2.0 mA d. c.

   The limit value U_1 = 35 V (peak) for a. c. correspond to the value 70 mA (peak) a. c. for frequencies greater than 100 kHz.
7. In case a measurement is out of the limits specified, there is a possibility of a shock hazard, and the equipment should be repaired and rechecked before it is returned to the customer.

Measuring network for TOUCH CURRENTS

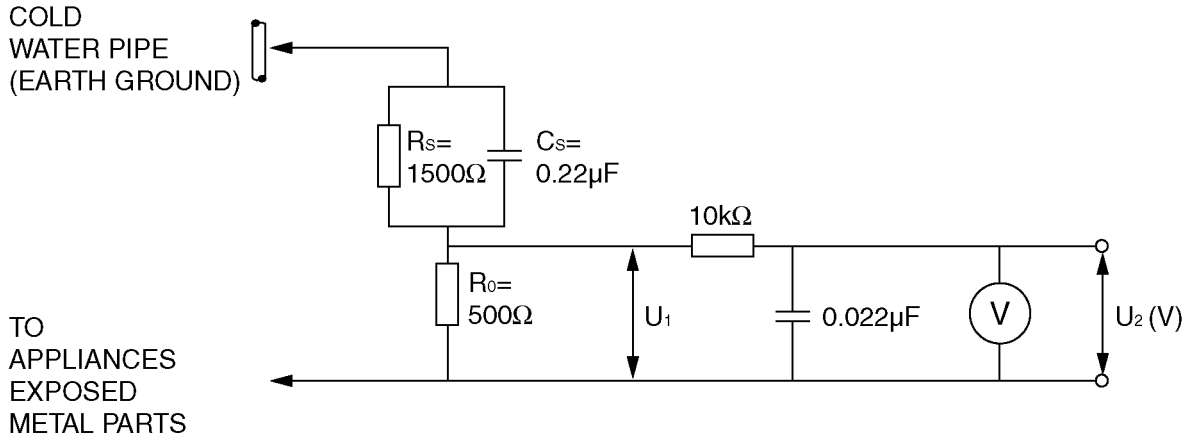

Resistance values in ohms (Ω)

V: Voltmeter or oscilloscope
(r.m.s. or peak reading)

Input resistance: ≥ 1 MΩ
Input capacitance: ≤ 200 pF
Frequency range: 15 Hz to 1 MHz and d.c. respectively

NOTE - Appropriate measures should be taken to obtain the correct value in case of non-sinusoidal waveforms.

Figure 1

2 Warning

2.1. Prevention of Electrostatic Discharge (ESD) to Electrostatically Sensitive (ES) Devices

Some semiconductor (solid state) devices can be damaged easily by static electricity. Such components commonly are called Electrostatically Sensitive (ES) Devices. Examples of typical ES devices are integrated circuits and some field-effect transistors and semiconductor [chip] components. The following techniques should be used to help reduce the incidence of component damage caused by electrostatic discharge (ESD).

1. Immediately before handling any semiconductor component or semiconductor-equipped assembly, drain off any ESD on your body by touching a known earth ground. Alternatively, obtain and wear a commercially available discharging ESD wrist strap, which should be removed for potential shock reasons prior to applying power to the unit under test.
2. After removing an electrical assembly equipped with ES devices, place the assembly on a conductive surface such as aluminum foil, to prevent electrostatic charge buildup or exposure of the assembly.
3. Use only a grounded-tip soldering iron to solder or unsolder ES devices.
4. Use only an anti-static solder removal device. Some solder removal devices not classified as [anti-static (ESD protected)] can generate electrical charge sufficient to damage ES devices.
5. Do not use freon-propelled chemicals. These can generate electrical charges sufficient to damage ES devices.
6. Do not remove a replacement ES device from its protective package until immediately before you are ready to install it. (Most replacement ES devices are packaged with leads electrically shorted together by conductive foam, aluminum foil or comparable conductive material).
7. Immediately before removing the protective material from the leads of a replacement ES device, touch the protective material to the chassis or circuit assembly into which the device will be installed.

   Caution

   Be sure no power is applied to the chassis or circuit, and observe all other safety precautions.
8. Minimize bodily motions when handling unpackaged replacement ES devices. (Otherwise ham less motion such as the brushing together of your clothes fabric or the lifting of your foot from a carpeted floor can generate static electricity (ESD) sufficient to damage an ES device).

2.2. About lead free solder (PbF)


Note: Lead is listed as (Pb) in the periodic table of elements.
In the information below, Pb will refer to Lead solder, and PbF will refer to Lead Free Solder.
The Lead Free Solder used in our manufacturing process and discussed below is (Sn+Ag+Cu).
That is Tin (Sn), Silver (Ag) and Copper (Cu) although other types are available.

This model uses Pb Free solder in it's manufacture due to environmental conservation issues. For service and repair work, we'd suggest the use of Pb free solder as well, although Pb solder may be used.

PCBs manufactured using lead free solder will have the PbF within a leaf Symbol **PbF** stamped on the back of PCB.


Caution

- Pb free solder has a higher melting point than standard solder. Typically the melting point is 50 ~ 70 °F (30~40 °C) higher. Please use a high temperature soldering iron and set it to 700 ± 20 °F (370 ± 10 °C).
- Pb free solder will tend to splash when heated too high (about 1100 °F or 600 °C).
  If you must use Pb solder, please completely remove all of the Pb free solder on the pins or solder area before applying Pb solder. If this is not practical, be sure to heat the Pb free solder until it melts, before applying Pb solder.
- After applying PbF solder to double layered boards, please check the component side for excess solder which may flow onto the opposite side. (see figure below)

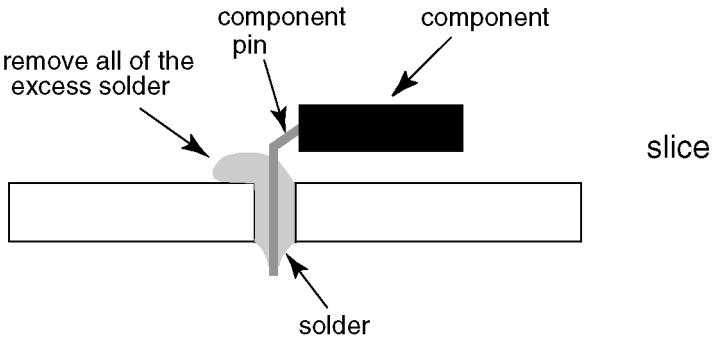

Suggested Pb free solder

There are several kinds of Pb free solder available for purchase. This product uses Sn+Ag+Cu (tin, silver, copper) solder. However, Sn+Cu (tin, copper), Sn+Zn+Bi (tin, zinc, bismuth) solder can also be used.

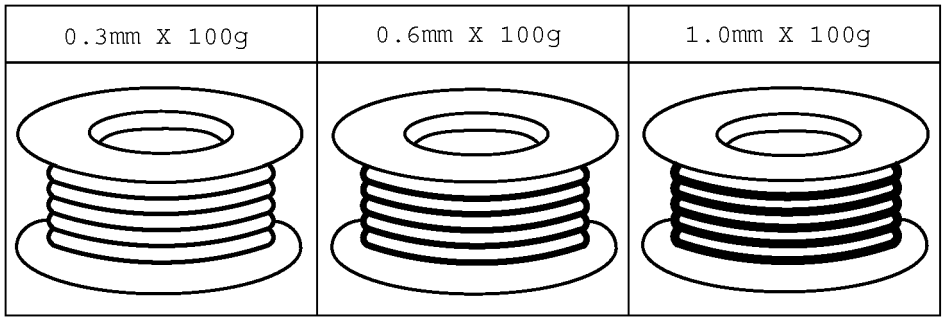



3 Service Navigation

3.1. Service Hint

3.1.1. Tuner box

Remove the Top case

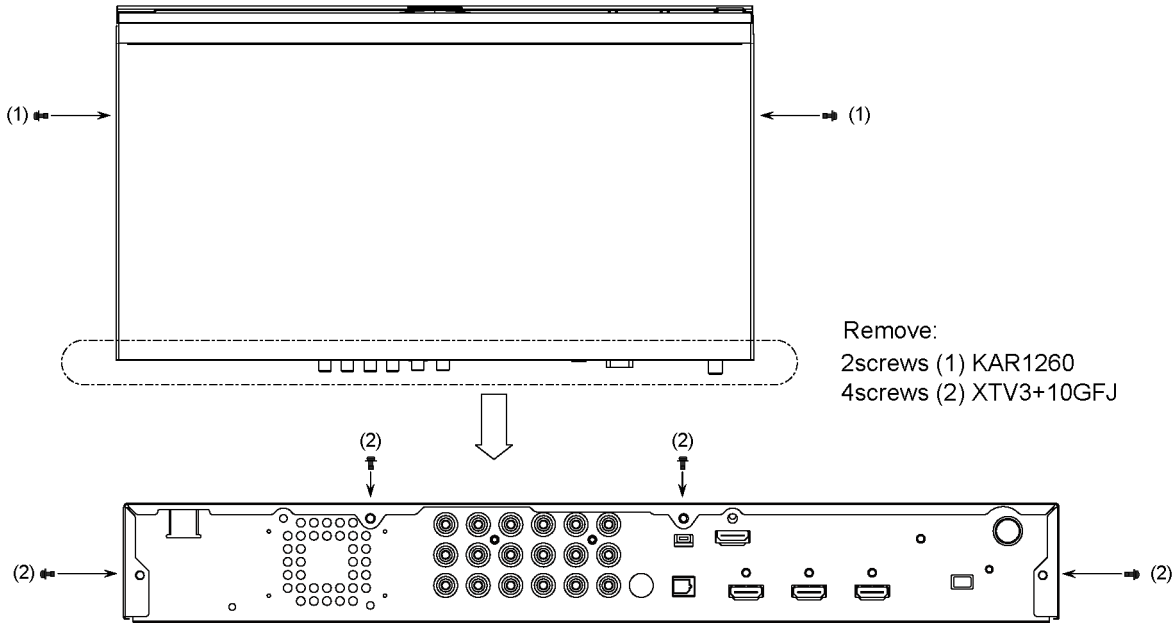


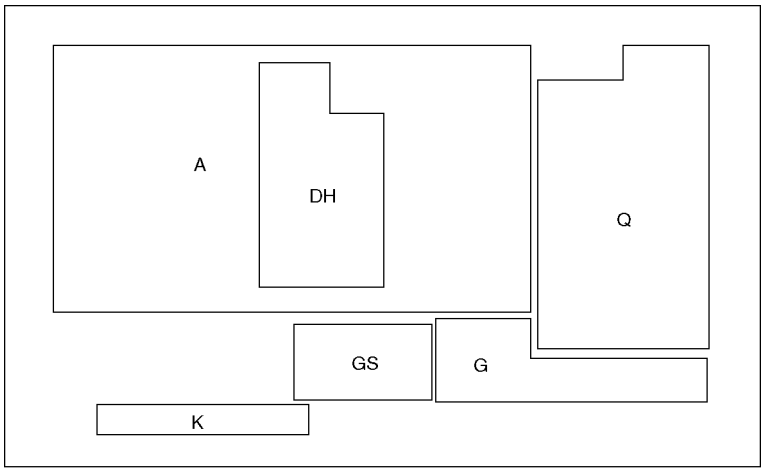


Board Name	Function	Board Name	Function
Q	Power Supply Non-serviceable. Q-Board should be exchanged for service.	G	Front Terminal
		GS	SD Card Slot, HDMI4 in
		K	Power Switch, Key Switch, Power LED, SD LED
A	Digital Signal Processor		
DH	HDMI out		

3.1.2. Display unit

Remove the Rear cover, Rear cover bottom and Bottom cover

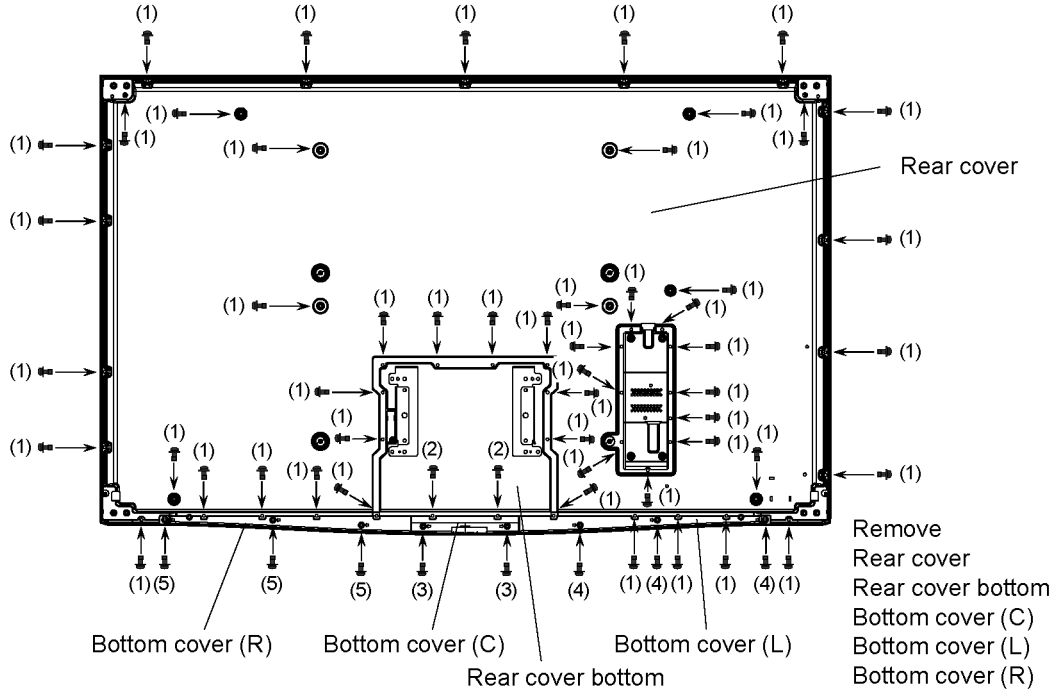

Remove
Rear cover :52screws (1) THEL0239
Rear cover bottom :2screws (2) THEL0239
Bottom cover (C) :2screws (3) THEL0239
Bottom cover (L) :3screws (4) THEL0239
Bottom cover (R) :3screws (5) THEL0239

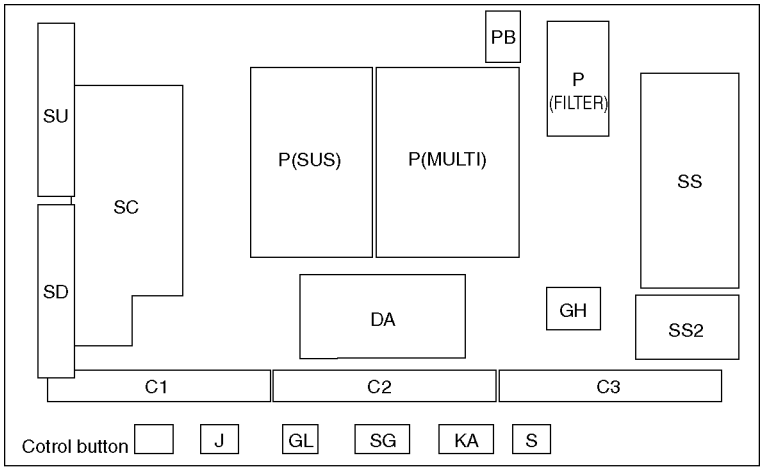

Board Name	Function	Board Name	Function
P	Power Supply	C1	Data Driver (Lower Right)
DA	Digital Signal Processor	C2	Data Driver (Lower Center)
GH	HDMI in	C3	Data Driver (Lower Left)
PB	Fan control	SC	Scan Drive
S	Power Switch	SU	Scan out (Upper) Non-serviceable. SU-Board should be exchanged for service.
KA	IR Remote receiver, Power LED, C.A.T.S sensor		
SG	SD Card Slot		
GL	SD Blue LED	SD	Scan out (Lower) Non-serviceable. SD-Board should be exchanged for service.
J	Connection for Key Switch		
		SS	Sustain Drive
		SS2	Sustain connector (Lower)

3.2. Applicable signals

COMPONENT (Y, P_B/C_B, P_R/C_R), HDMI

* Mark: Applicable input signal

Signal name	COMPONENT	HDMI
525 (480) / 60i	*	*
525 (480) / 60p	*	*
625 (576) / 50i	*	*
625 (576) / 50p	*	*
750 (720) / 60p	*	*
750 (720) / 50p	*	*
1,125 (1,080) / 60i	*	*
1,125 (1,080) / 50i	*	*
1,125 (1,080) / 60p		*
1,125 (1,080) / 50p		*
1,125 (1,080) / 24p		*

PC (D-sub 15P)

Signal name	Horizontal frequency (kHz)	Vertical frequency (Hz)
640 × 400 @70 Hz	31.47	70.07
640 × 480 @60 Hz	31.47	59.94
640 × 480 @75 Hz	37.50	75.00
800 × 600 @60 Hz	37.88	60.32
800 × 600 @75 Hz	46.88	75.00
800 × 600 @85 Hz	53.67	85.06
852 × 480 @60 Hz	31.44	59.89
1,024 × 768 @60 Hz	48.36	60.00
1,024 × 768 @70 Hz	56.48	70.07
1,024 × 768 @75 Hz	60.02	75.03
1,024 × 768 @85 Hz	68.68	85.00
1,280 × 1,024 @60 Hz	63.98	60.02
1,280 × 768 @60 Hz	47.70	60.00
1,366 × 768 @60 Hz	48.39	60.04
Macintosh13 inch (640 × 480)	35.00	66.67
Macintosh16 inch (832 × 624)	49.73	74.55
Macintosh21 inch (1,152 × 870)	68.68	75.06

Note

- Signals other than above may not be displayed properly.
- The above signals are reformatted for optimal viewing on your display.
- Applicable input signal for PC is basically compatible to VESA standard timing.
- PC signal is magnified or compressed for display, so that it may not be possible to show fine detail with sufficient clarity.

4 Specifications

Power

Source	AC 220 - 240 V, 50 / 60 Hz

Power Consumption

Average use	348 W
Standby condition	Display Unit: 0.5 W Tuner Box: 0.5 W

Display panel

Aspect Ratio	16:9
Visible screen size	137 cm (diagonal) 1,198 mm (W) × 673 mm (H)
Number of pixels	2,073,600 (1,920 (W) × 1,080 (H)) [5,760 × 1,080 dots]

Sound

Speaker	Woofer (35 mm × 200 mm) × 2, Tweeter (23 mm × 100 mm) × 2
Audio Output	20 W (10 W + 10 W), 10% THD
Headphones	M3 (3.5 mm) stereo mini Jack × 1

PC signals

VGA, SVGA, WVGA, XGA
SXGA, WXGA ..... (compressed)
Horizontal scanning frequency 31 - 69 kHz
Vertical scanning frequency 59 - 86 Hz

Receiving Systems / Band name

17 Systems		Function
1	PAL B, G, H	Reception of broadcast transmissions and Playback from Video Cassette Tape Recorders
2	PAL I	
3	PAL D, K	
4	SECAM B, G	
5	SECAM D, K	
6	SECAM K1	
7	NTSC M (NTSC 3.58/4.5 MHz)	

17 Systems		Function
8	NTSC 4.43/5.5 MHz	Playback from Special VCR's or DVD
9	NTSC 4.43/6.0 MHz	
10	NTSC 4.43/6.5 MHz	
11	NTSC 3.58/5.5 MHz	
12	NTSC 3.58/6.0 MHz	
13	NTSC 3.58/6.5 MHz	
14	SECAM I	
15	PAL 60 Hz/5.5 MHz	Playback from Special Disc Players and Special VCR's or DVD
16	PAL 60 Hz/6.0 MHz	
17	PAL 60 Hz/6.5 MHz	

Receiving Channels (Analogue TV)

VHF BAND

2-12 (PAL/SECAM B, K1)	0-12 (PAL B AUST.)
1-9 (PAL B N.Z.)	1-12 (PAL/SECAM D)
1-12 (NTSC M Japan)	2-13 (NTSC M USA)

UHF BAND

21-69 (PAL G, H, I/SECAM G, K, K1)	
28-69 (PAL B AUST.)	13-57 (PAL D, K)
13-62 (NTSC M Japan)	14-69 (NTSC M USA)

CATV

S1-S20 (OSCAR)	1-125 (USA CATV)
C13-C49 (JAPAN)	S21-S41 (HYPER)
Z1-Z37 (CHINA)	5A, 9A (AUST.)

Aerial input VHF / UHF

Operating Conditions

Temperature :	0 °C - 35 °C
Humidity :	20 % - 80 % RH (non-condensing)

Connection Terminals

AV1 Input		
AUDIO L - R	RCA PIN Type × 2	0.5 V [rms]
VIDEO	RCA PIN Type × 1	1.0 V [p-p] (75 Ω)
COMPONENT	Y	1.0 V [p-p] (including synchronization)
	P_B/C_B, P_R/C_R	±0.35 V [p-p]
AV2 Input		
AUDIO L - R	RCA PIN Type × 2	0.5 V [rms]
VIDEO	RCA PIN Type × 1	1.0 V [p-p] (75 Ω)
COMPONENT	Y	1.0 V [p-p] (including synchronization)
	P_B/C_B, P_R/C_R	±0.35 V [p-p]
AV3 Input		
AUDIO L - R	RCA PIN Type × 2	0.5 V [rms]
VIDEO	RCA PIN Type × 1	1.0 V [p-p] (75 Ω)
S VIDEO	Mini DIN 4-pin	Y:1.0 V [p-p] (75 Ω) C:0.286 V [p-p] (75 Ω)
AV4 Input		
AUDIO L - R	RCA PIN Type × 2	0.5 V [rms]
VIDEO	RCA PIN Type × 1	1.0 V [p-p] (75 Ω)
S VIDEO	Mini DIN 4-pin	Y:1.0 V [p-p] (75 Ω) C:0.286 V [p-p] (75 Ω)

Monitor Output		
AUDIO L - R	RCA PIN Type × 2	0.5 V [rms] (high impedance)
VIDEO	RCA PIN Type × 1	1.0 V [p-p] (75 Ω)
Others		
HDMI1 - 4 Input	TYPE A Connectors	● This TV supports “HDAVI Control 4” function.
PC Input	HIGH-DENSITY D-SUB 15PIN	R, G, B / 0.7 V [p-p] (75 Ω) HD, VD / TTL Level 2.0 - 5.0 V [p-p] (high impedance)
DIGITAL AUDIO OUT	PCM / Dolby Digital, Fiber optic	
Card slot	SD Card slot × 1	
Dimensions (W × H × D)		
Display Unit	1,428 mm × 893 mm × 379 mm (with speakers and pedestal) 1,428 mm × 820 mm × 25 mm (with speakers)	
Tuner Box	430 mm × 59 mm × 249 mm	
Mass		
Display Unit	38.0 kg (with speakers and pedestal) 32.0 kg (with speakers)	
Tuner Box	3.0 kg	

Note


• Design and Specifications are subject to change without notice. Mass and Dimensions shown are approximate.

5 Service Mode

5.1. Tuner box

5.1.1. How to enter into Service Mode

While pressing [VOLUME (-)] button of the Tuner box, press [0] button of the remote control three times within 2 seconds.

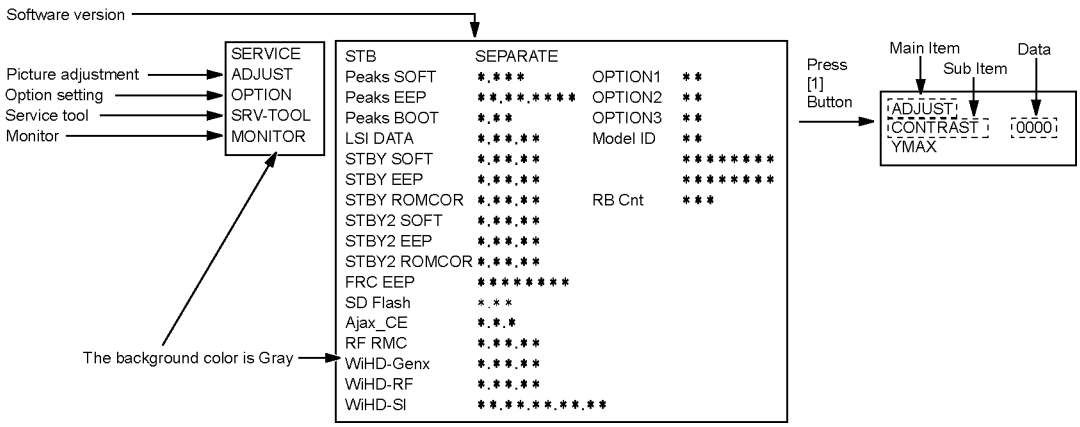

5.1.1.1. Key command

[1] button...Main items Selection in forward direction
[2] button...Main items Selection in reverse direction
[3] button...Sub items Selection in forward direction
[4] button...Sub items Selection in reverse direction
[RED] button...All Sub items Selection in forward direction
[GREEN] button...All Sub items Selection in reverse direction
[VOL] button...Value of sub items change in forward direction (+), in reverse direction (-)

5.1.1.2. Contents of adjustment mode

- Value is shown as a hexadecimal number.
- Preset value differs depending on models.
- After entering the adjustment mode, take note of the value in each item before starting adjustment.

Main item	Sub item	Sample data	Remark
ADJUST	CONTRAST	000	
	COLOR	3D	
	TINT	00	
	Video-Gain 2	0	
	SUB-BRT	800	
	H-POS	0	
	H-AMP	0	
	V-POS	0	
	V-AMP	0	
OPTION	Boot	ROM	Factory Preset
	STBY-SET	00	
	EMERGENCY	ON	
	Y/C Delay	0	
	OPT 1	00111100	
	OPT 2	11101111	
	OPT 3	00000001	
SRV-TOOL			see next
MONITOR			see next


5.1.1.3. How to exit

Switch off the power with the [POWER] button on the main unit or the [POWER] button on the remote control.

5.1.2. Monitor mode


5.1.2.1. How to access

1. Select [Monitor] in Service Mode of Tuner box.
2. Press [OK] button on the remote control.

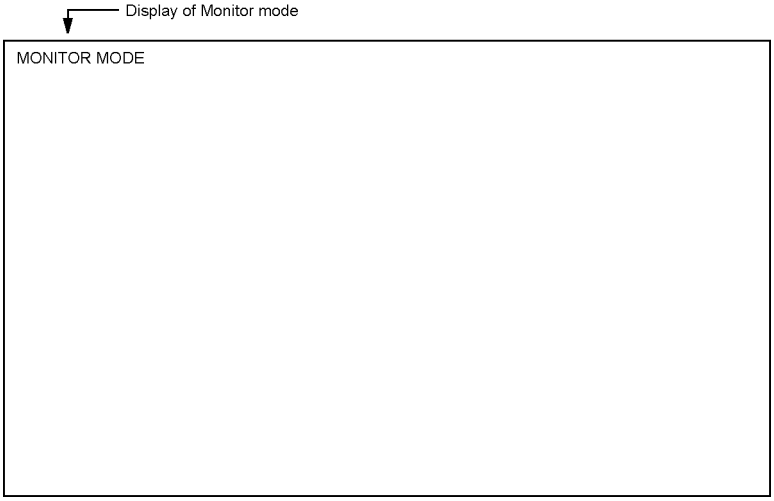

5.1.2.2. How to enter into Service Mode of the Display unit

While pressing [VOLUME (-)] button of the Display unit, press [0] button of the remote control three times within 2 seconds.
Service mode of the Display unit sees section 5.2.

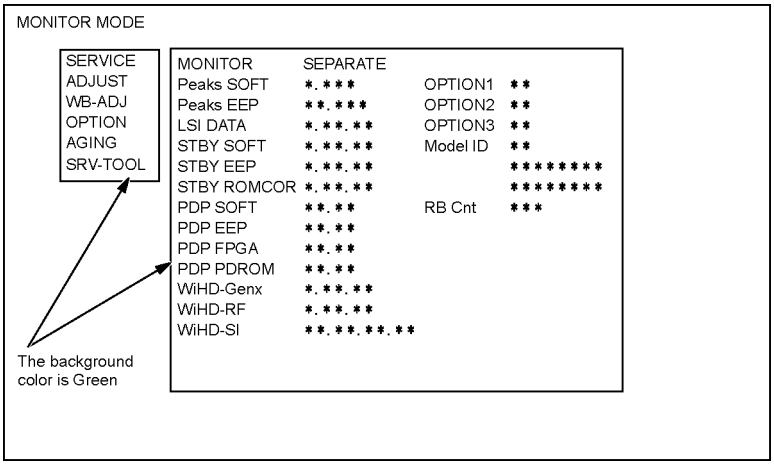

5.1.2.3. How to enter into Self-check of the Display unit


Self-check indication only:

Produce TV reception screen, and while pressing [VOLUME (-)] button on the Display unit, press [OK] button on the remote control for more than 3 seconds.

Self-check indication and forced to factory shipment setting:

Produce TV reception screen, and while pressing [VOLUME (-)] button on the Display unit, press [MENU] button on the remote control for more than 3 seconds.


Self-check of the Display unit sees section 6.1.2.

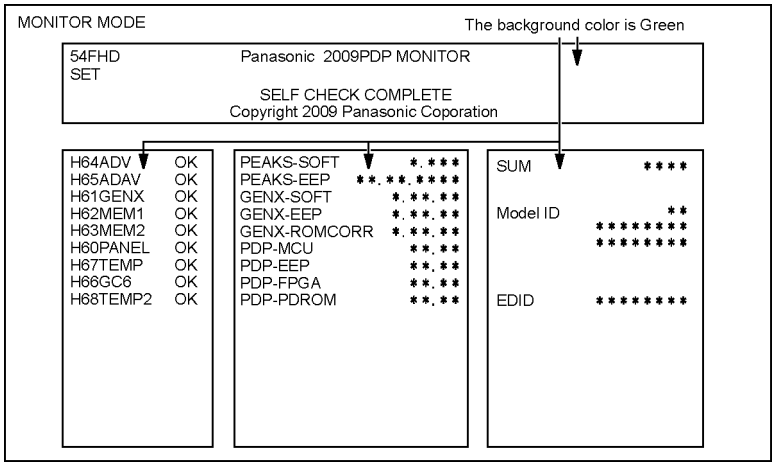

5.1.3. Service tool mode

5.1.3.1. How to access

1. Select [SRV-TOOL] in Service Mode.
2. Press [OK] button on the remote control.

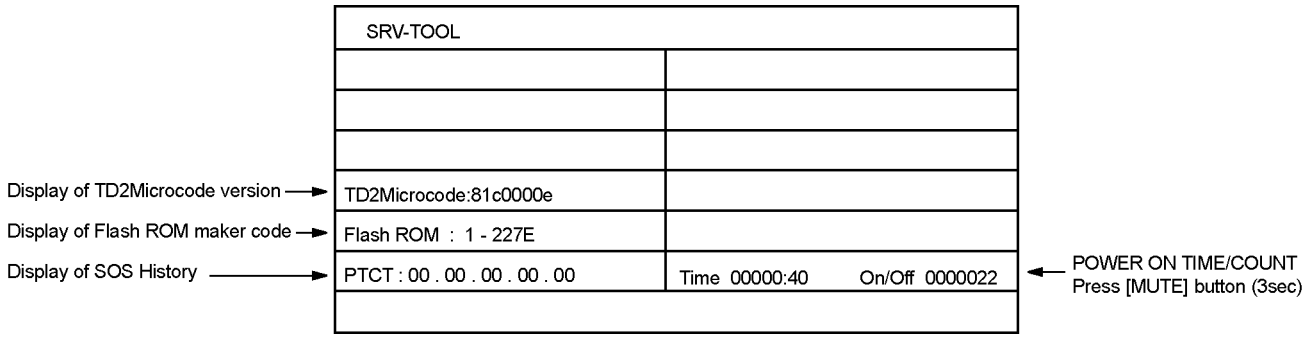

5.1.3.2. Display of SOS History

SOS History (Number of LED blinking) indication.
From left side; Last SOS, before Last, three occurrence before, 2nd occurrence after shipment, 1st occurrence after shipment.
This indication will be cleared by [Self-check indication and forced to factory shipment setting].

5.1.3.3. POWER ON Time, On/Off

Note : To display Time, On/Off menu, highlight position, then press MUTE for 3sec.
Time : Cumulative power on time, indicated hour : minute by decimal
On/Off : Number of On/Off switching by decimal
Note : This indication will not be cleared by either of the self-checks or any other command.

5.1.3.4. Exit


1. Disconnect the AC cord from wall outlet.

5.2. Display unit

5.2.1. How to enter into Service Mode

Service mode of display unit have 2 versions.

1. Separate mode: Normal mode (Connect the Display unit and Tuner Box).
   Enter: Monitor mode (See section 5.1.2.).
2. Stand alone mode: WB-ADJ mode (Connect the Display unit and HDMI equipment (Ex. DIGA) with HDMI cable).
   Tools: IR remote control (Recommended IR remote control 09' PDP / LCD models).
   Enter: While pressing [VOLUME (-)] button of the Display unit, press [0] button of the IR remote control 3 times within 2 seconds.

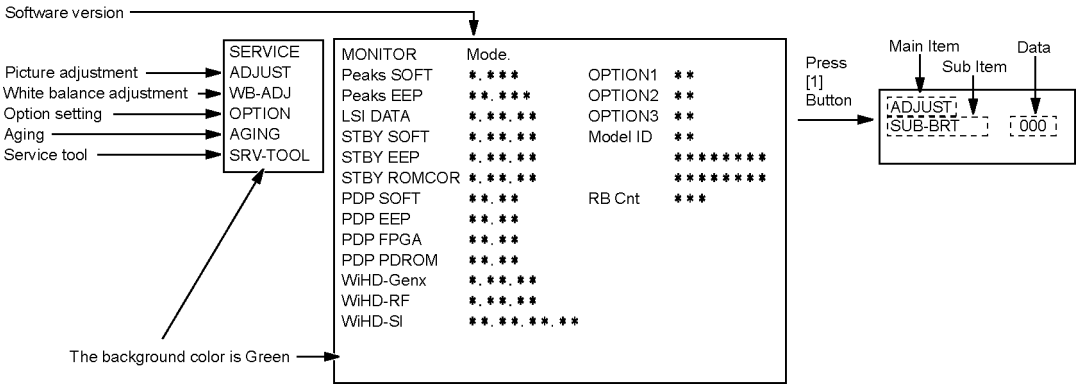

5.2.1.1. Key command

[1] button...Main items Selection in forward direction
[2] button...Main items Selection in reverse direction
[3] button...Sub items Selection in forward direction
[4] button...Sub items Selection in reverse direction
[RED] button...All Sub items Selection in forward direction
[GREEN] button...All Sub items Selection in reverse direction
[VOL] button...Value of sub items change in forward direction (+), in reverse direction (-)

5.2.1.2. Contents of adjustment mode

- Value is shown as a hexadecimal number.
- Preset value differs depending on models.
- After entering the adjustment mode, take note of the value in each item before starting adjustment.

Main item	Sub item	Sample data	Remark	Mode	
				Separate	Stand alone
ADJUST	SUB-BRT	818	Factory Preset	×	○
WB-ADJ	R-CUT	80	Factory Preset		
	G-CUT	80			
	B-CUT	80			
	R-DRV	F6			
	G-DRV	FC			
	B-DRV	D3			
	ALL-CUT	80			
	ALL-DRV	FC			
OPTION	Panel-Type	54FHD	Factory Preset	○	×
	Boot	ROM			
	STBY-SET	00			
	EMERGENCY	ON			
	Y/C Delay	0			
	OPT 1	11111111			
	OPT 2	11111111			
	OPT 3	11111111			
AGING	RGBW			○	×
	Vertical line				
	All white (COUNTER)				
	All white				
	All red				
	All green				
	All blue				
	ON/OFF				
	Diagonal lamp W				
	Diagonal lamp R				
	Diagonal lamp G				
	Diagonal lamp B				
	1% WINDOW				
	COLOR BAR				
	A B zone/checkerd 4 trio				
	SCROLL BAR				
	2dot width border				
	Low setup red				
	Low setup green				
	Low setup blue				
SRV-TOOL			see next	○	○


5.2.1.3. How to exit

Switch off the power with the [POWER] button on the main unit or the [POWER] button on the remote control.

5.2.2. Service tool mode

5.2.2.1. How to access

1. Select [SRV-TOOL] in Service Mode.
2. Press [OK] button on the remote control.

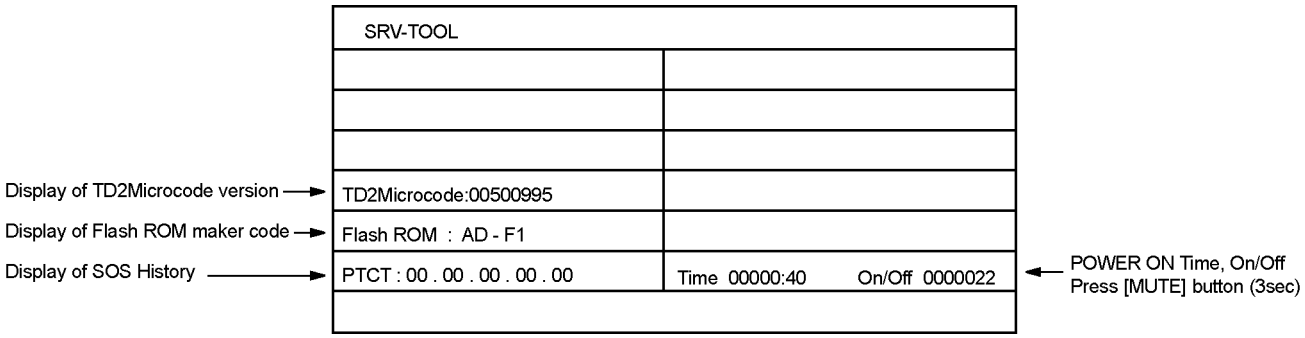

5.2.2.2. Display of SOS History

SOS History (Number of LED blinking) indication.
From left side; Last SOS, before Last, three occurrence before, 2nd occurrence after shipment, 1st occurrence after shipment.
This indication will be cleared by [Self-check indication and forced to factory shipment setting].

5.2.2.3. POWER ON Time, On/Off

Note : To display Time, On/Off menu, highlight position, then press MUTE for 3sec.
Time : Cumulative power on time, indicated hour : minute by decimal
On/Off : Number of On/Off switching by decimal
Note : This indication will not be cleared by either of the self-checks or any other command.


5.2.2.4. Exit

1. Disconnect the AC cord from wall outlet or switch off the power with [Power] button on the Display unit.

5.3. Hotel mode

1. Purpose
   Restrict a function for hotels.
2. Access command to the Hotel mode setup menu
   In order to display the Hotel mode setup menu, please enter the following command **(within 2 second)**.
   [TV] : Vol. [Down] + [REMOTE] : AV (3 times)

   Then, the Hotel mode setup menu is displayed.

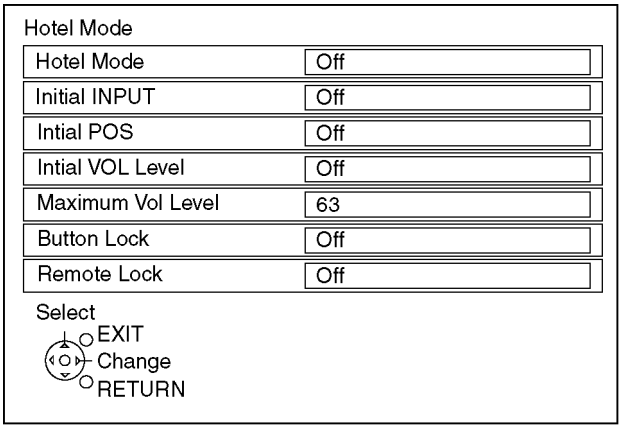

3. To exit the Hotel mode setup menu
   Disconnect AC power cord from wall outlet.
4. Explain the Hotel mode setup menu

item	Function
Hotel Mode	Select hotel mode ON/OFF
Initial INPUT	Select input signal modes. Set the input, when each time power is switched on. Selection : Off/TV/AV1/AV2/AV3/AV4/COMPONENT/PC/ HDMI1/HDMI2/HDMI3/HDMI4 • Off: give priority to a last memory. However, Euro model is compulsorily set to TV. • AVnS/AVnC: only Euro model selectable • PC: selectable with VGA option
Initial POS	Select programme number. Selection : Off/0 to 99 • Off: give priority to a last memory
Initial VOL level	Adjust the volume when each time power is switched on. Selection/Range : Off/0 to 63 • Off: give priority to a last memory
Maximum VOL level	Adjust maximum volume. Range : 0 to 63
Button lock	Select local key conditions. Selection : Off/SETUP/MENU/ALL • Off: altogether valid • SETUP: only F-key is invalid (Tuning guide(menu) can not be selected.) • MENU: only F-key is invalid (only Volume/Mute can be selected.) • ALL: altogether invalid.
Remote lock	Select remote control key conditions. Selection : Off/SETUP/MENU • Off: altogether valid • SETUP: only Setup menu is invalid • MENU: Picture/Sound/Setup menu are invalid

6 Troubleshooting Guide

Use the self-check function to test the unit.

1. Checking the IIC bus lines
2. Power LED Blinking timing

6.1. Check of the IIC bus lines

6.1.1. Tuner box

6.1.1.1. How to access

Self-check indication only:

Produce TV reception screen, and while pressing [VOLUME (-)] button on the Tuner box, press [OK] button on the remote control for more than 3 seconds.


Self-check indication and forced to factory shipment setting:

Produce TV reception screen, and while pressing [VOLUME (-)] button on the Tuner box, press [MENU] button on the remote control for more than 3 seconds.

6.1.1.2. Exit

Disconnect the AC cord from wall outlet.

6.1.1.3. Screen display

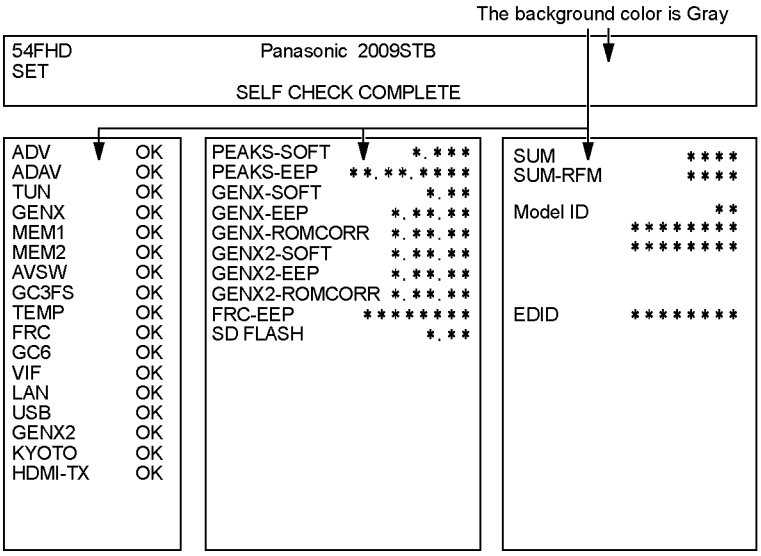

6.1.1.4. Check Point

Confirm the following parts if NG was displayed.

DISPLAY	Ref. No.	Description	P.C.B.
ADV	IC4510	ADV7470 (ADV7496)	A-Board
ADAV	IC4510	ADV7470 (ADAV4622)	A-Board
TUN	TU2901	TUNER	A-Board
GENX	IC1100	SYSTEM MPU	A-Board
MEM1	IC1101	EEPROM (SYSTEM MPU)	A-Board
MEM2	IC8502	EEPROM (Peaks)	A-Board
AVSW	IC3001	AUDIO/VIDEO SW	A-Board
GC3FS	IC4001	GC3FS	A-Board
TEMP	IC4701	TEMP SENSOR	A-Board
FRC	IC2600	FRAME RATE CONVERTER	A-Board
GC6	IC5100	GC6	A-Board
VIF	TU2901	TUNER	A-Board
LAN	IC8503	LAN I/F	A-Board
USB	IC7702	SD USB	GS-Board
GENX2	IC1500	SYSTEM MPU CEC	A-Board
KYOTO	IC9005	KYOTO	DH-Board
HDMITx	IC9004	HDMI Tx	DH-Board

6.1.2. Display unit


6.1.2.1. How to access

Self-check indication only:
Produce TV reception screen, and while pressing [VOLUME (-)] button on the Display unit, press [OK] button on the remote control for more than 3 seconds.
Self-check indication and forced to factory shipment setting:
Produce TV reception screen, and while pressing [VOLUME (-)] button on the Display unit, press [MENU] button on the remote control for more than 3 seconds.

6.1.2.2. Exit

Disconnect the AC cord from wall outlet.

6.1.2.3. Screen display

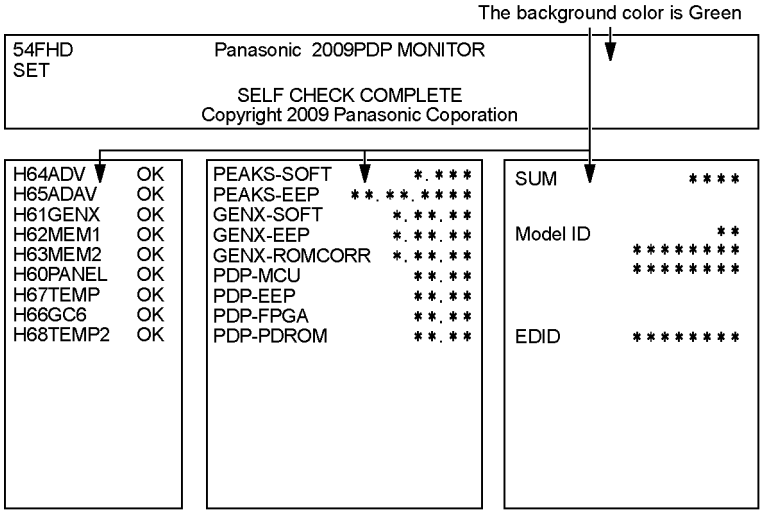




6.1.2.4. Check Point

Confirm the following parts if NG was displayed.

DISPLAY	Ref. No.	Description	P.C.B.
ADV	IC24510	ADV7471 (ADV7496)	DA-Board
ADAV	IC24510	ADV7471 (ADAV4622)	DA-Board
GenX	IC21100	SYSTEM MPU	DA-Board
MEM1	IC21101	EEPROM (SYSTEM MPU)	DA-Board
MEM2	IC29001	EEPROM (Peaks)	DA-Board
PANEL	IC29003	PANEL MICOM	DA-Board
TEMP	IC21000	TEMP SENSOR	DA-Board
GC6	IC25100	GC6	DA-Board
TEMP2	IC7900	TEMP SENSOR	SG-Board

6.2. Power LED Blinking timing chart

1. Subject
   Information of LED Flashing timing chart.
2. Contents
   When an abnormality has occurred the unit, the protection circuit operates and reset to the stand by mode. At this time, the defective block can be identified by the number of blinks of the Power LED on the front panel of the Tuner box and Display unit.

Blinking Times	Blinking timing	Contents	Blinking LED		Check point	
			Tuner box	Display unit	Tuner box	Display unit
1		Unknown SOS	-	○	-	-
		Status SOS			-	-
2		15V SOS	-	○	-	DA-Board
3		3.3V SOS	-	○	-	DA-Board
4		Power SOS	-	○	-	P-Board
5		5V SOS	-	○	-	DA-Board
6		Driver SOS1 (SC Energy recovery circuit)	-	○	-	SC-Board
7		Driver SOS2 (SC floating voltage area)	-	○	-	SU-Board SD-Board SC-Board *
8		Driver SOS3 (SS FPC/DET) (SS Energy recovery circuit)	-	○	-	SS-Board SS2-Board
9		Panel Config SOS	-	○	-	DA-Board
10		Sub 9V/5V/3.3V SOS Tuner Power SOS DA-Board Power SOS	○	○	A-Board	DA-Board
11		Fan SOS	○	○	A-Board Fan	PB-Board Fan
12		Sound SOS	-	○	-	DA-Board Speaker
13		Emergency	○	○	A-Board	DA-Board
14		Audio PWM SOS	○	○	A-Board	DA-Board


*Use SC jig to isolate the board.


6.3. No Power

First check point


There are following 2 states of No Power indication by power LED.

1. No lit
2. Red is lit then turns red blinking a few seconds later. (See 6.2.)

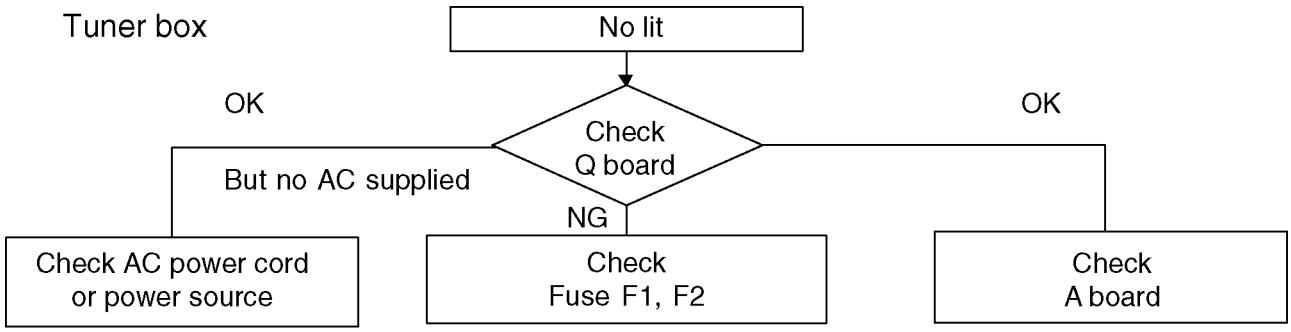


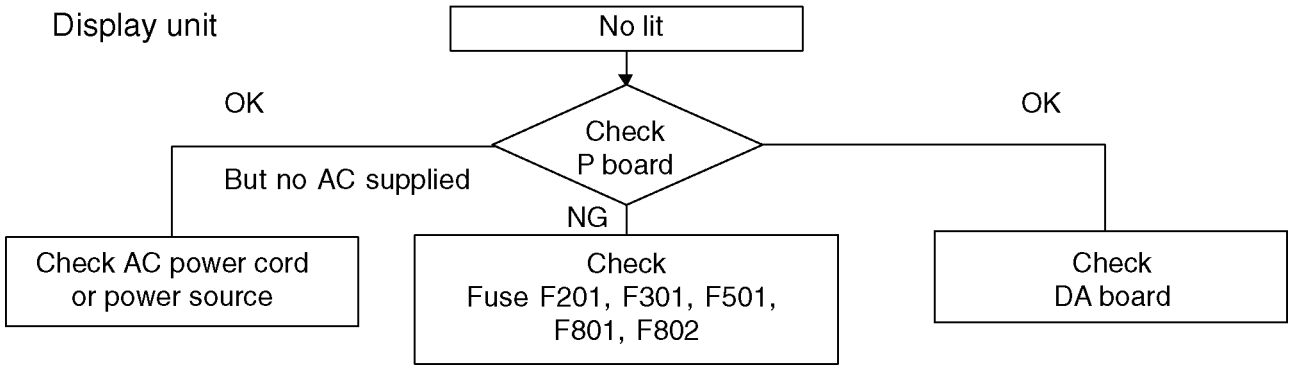

6.4. No Picture

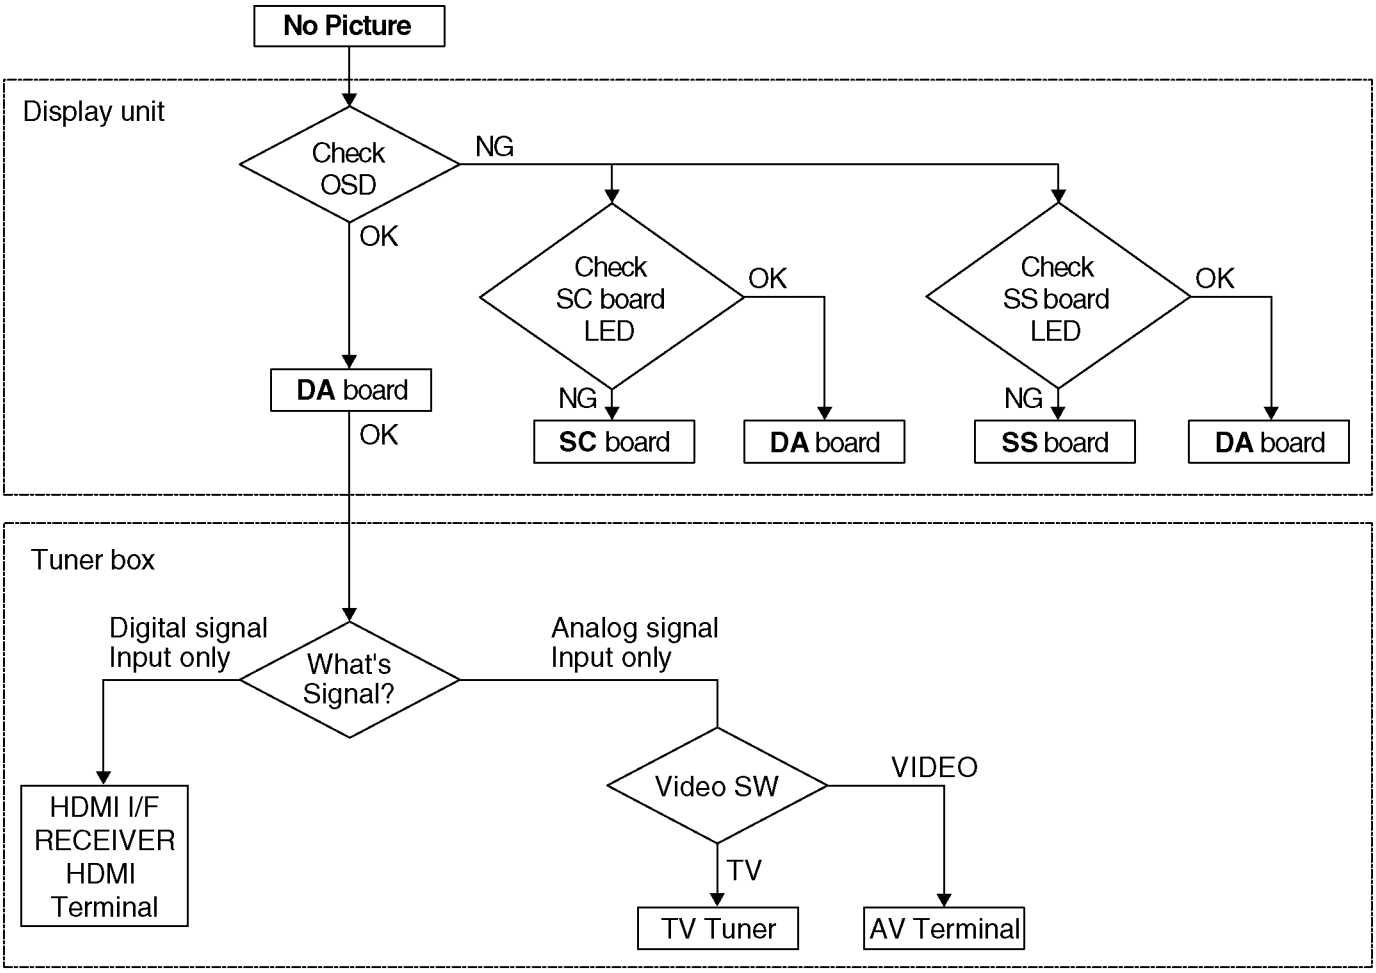


Drive circuits LED indicator

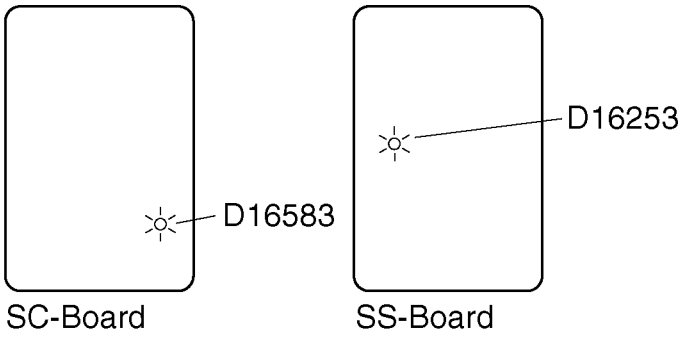

6.5. Local screen failure

Plasma display may have local area failure on the screen. Fig-1 is the possible defect P.C.B. for each local area.

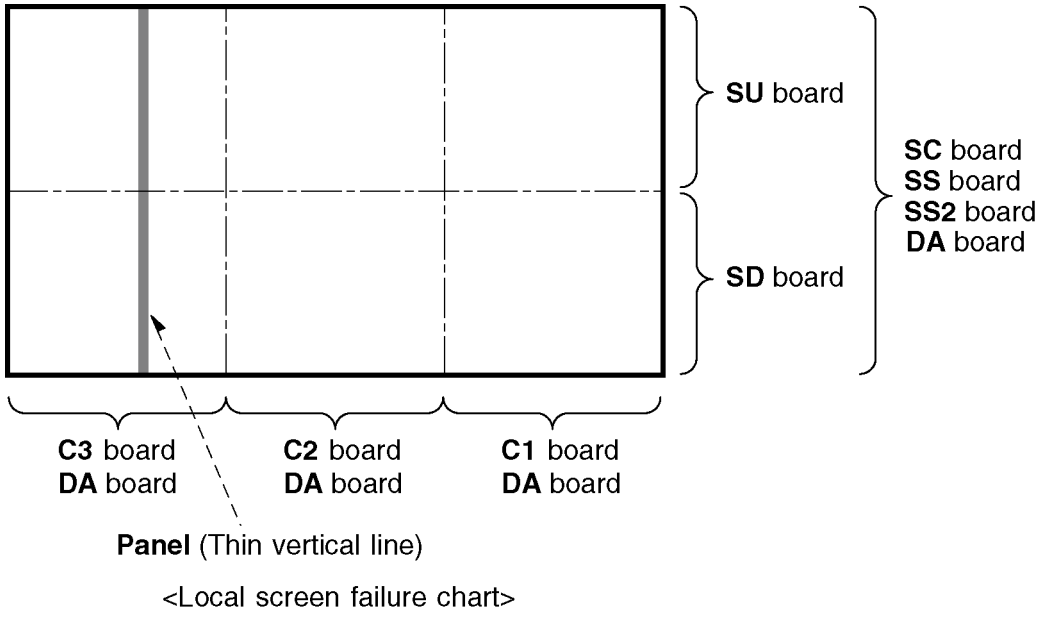

<Local screen failure chart>

Fig-1

7 Service Fixture & Tools

7.1. SC jig

Purpose:

To find the failure board (SC or SU/SD) when the power LED is blinking 7 times.

SC jig:

Jumper connector to connect to SC50 connector on SC board

Part number:


TZSC09187

How to use:

Caution: Remove SC jig from SC board after inspection.

1. Remove all connector between SC board and SU/SD board to isolate SC board from both SU and SD board electrically.
   Note: The board will be damaged if all connector is not removed (for example; remove connector only for SU board and stay connecting with SD board. The board will be damaged.)
2. Connect SC jig to connector SC50 at left bottom side of SC board
3. Turn of the TV/Display Unit and confirm the power LED blinking.
   LED blinking: Possible cause of failure is in SC board
   No LED blinking (Lighting or no lighting): Possible cause of failure is in SU or SD board
4. After inspection, turn off the TV/Display Unit and wait a few minutes to discharge.
5. Remove SC jig from SC board.

Remark: This SC jig can be used for all 2009 Plasma TV and Plasma Display.

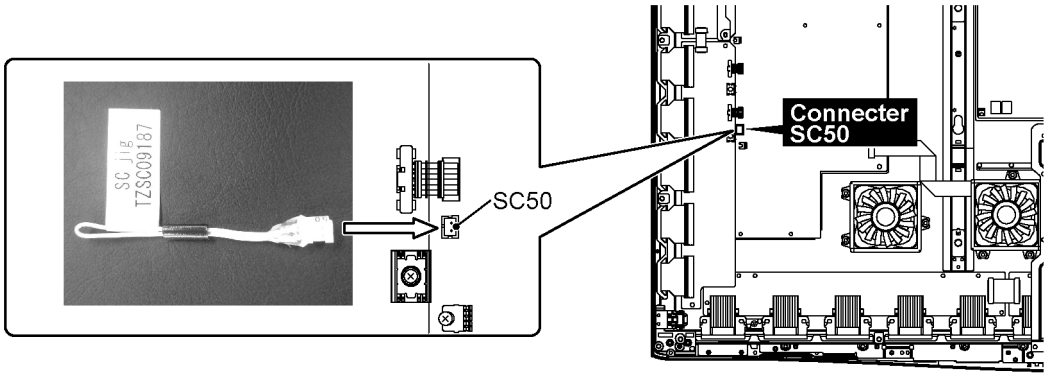

8 Disassembly and Assembly Instructions


8.1. Tuner box

8.1.1. Remove the Top case

1. See Service Hint (Section 3.1.1.)

8.1.2. Remove the Rear panel

1. Remove the screws (×4 ➡, ×4 ⇨ , ×2 ➡)
2. Remove the Rear panel.

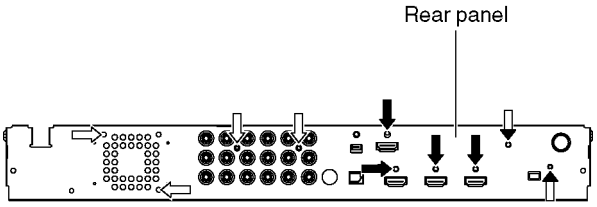


8.1.3. Remove the Q-Board

Caution:


To remove P.C.B. wait 1 minute after power was off for discharge from electrolysis capacitors.


1. Disconnect the connector (P1).
2. Disconnect the bridge connector (A10-P9).
3. Remove the screws (×4 ➡) and remove the Q-Board.
4. Remove the Q-board barrier.

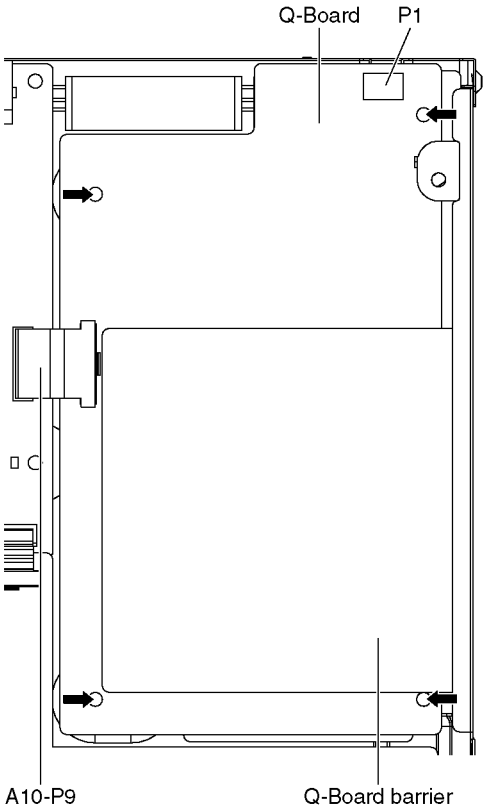

8.1.4. Remove the Front panel assy


1. Remove the claws (×2 ➡, ×2 ⇨, ×3 ➡) and remove the Front panel assy.

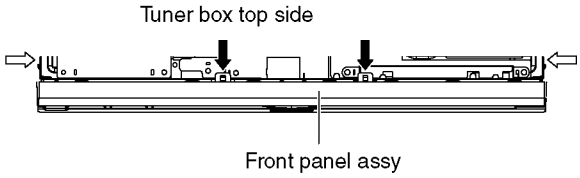

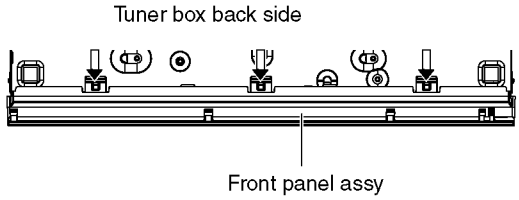


8.1.5. Remove the K-Board

1. Remove the Front panel assy. (See section 8.1.4.)
2. Remove the screws (×3 ➡).
3. Disconnect the connector (K12) and remove the K-Board.

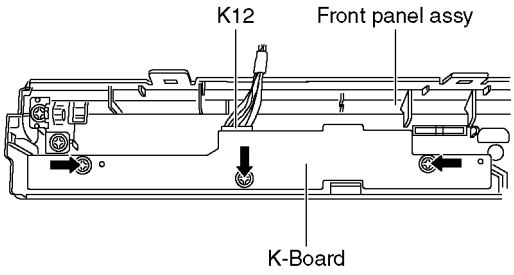


8.1.6. Remove the G-Board

1. Remove the Front panel assy. (See section 8.1.4.)
2. Remove the screws (×6 ➡, ×1 ⇨) and remove the Front terminal shield.

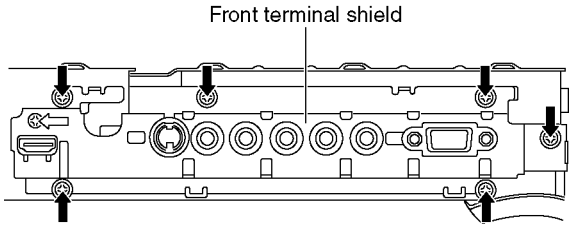


3. Remove the screws (×2 ➡) and remove the Terminal rear shield.
4. Disconnect the bridge connectors (A51-G51 and A52-G52).

5. Remove the G-Board.

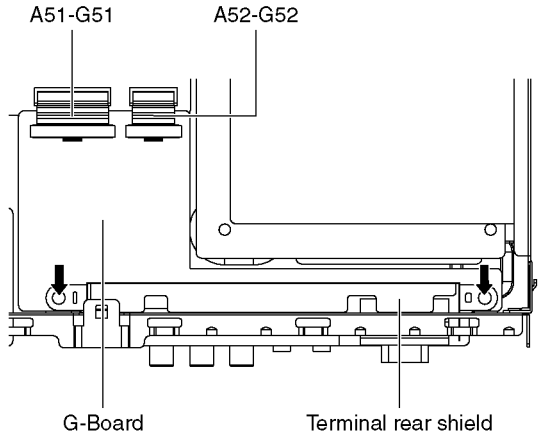


8.1.7. Remove the GS-Board

1. Remove the Front panel assy. (See section 8.1.4.)
2. Disconnect the flexible cable (GS11).
3. Disconnect the connector (GS09).
4. Remove the screws (×2 ➡) and remove the GS-Board.

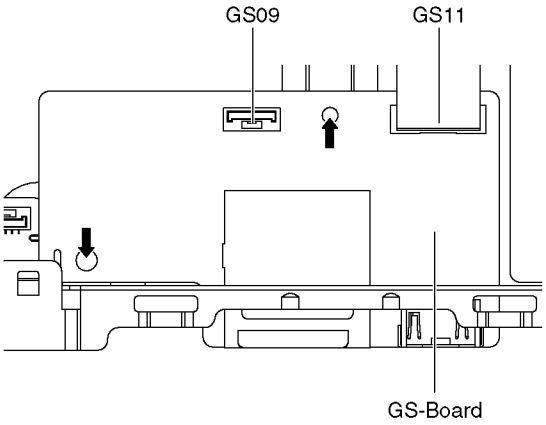


8.1.8. Remove the Fan

1. Remove the Rear panel. (See section 8.1.2.)
2. Disconnect the connector (A35) and remove the Fan.

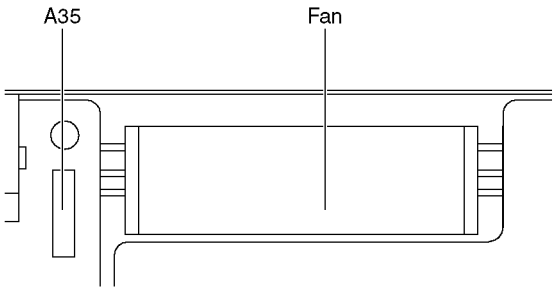


8.1.9. Remove the DH-Board and the DH-Board shield metal

1. Remove the Rear panel. (See section 8.1.2.)
2. Disconnect the flexible cable (DH5).
3. Disconnect the connectors (DH71 and DH72).
4. Remove the screws (×4 ➡) and remove the DH-Board.

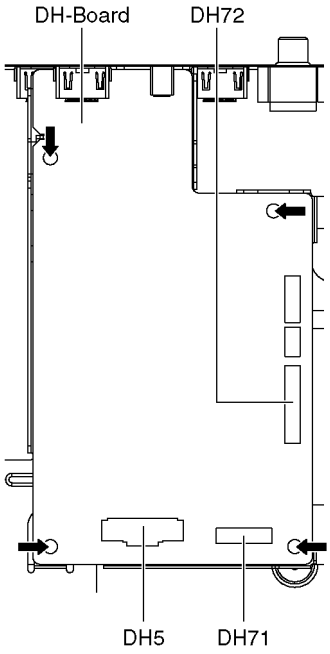


5. Unlock the cable clampers to free the flexible cable (A11-GS11).
6. Remove the screws (×2 ➡) and remove the DH-Board shield metal.

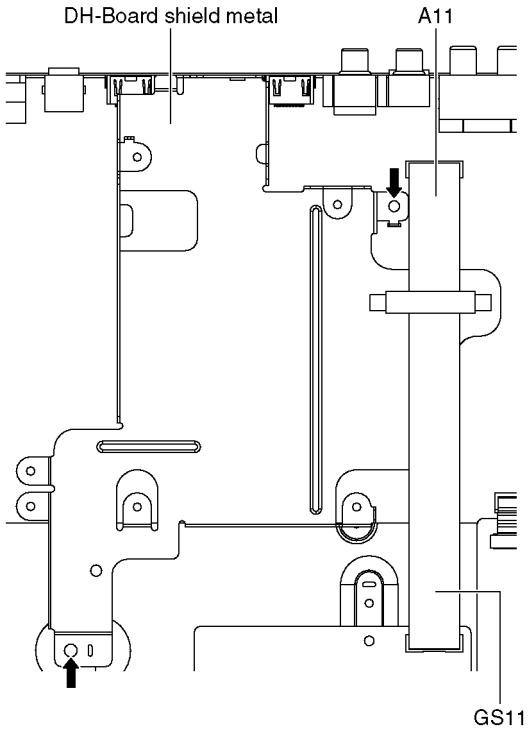

8.1.10. Remove the A-Board


1. Remove the Rear panel. (See section 8.1.2.)
2. Remove the DH-Board and DH-Board shield metal. (See section 8.1.9.)
3. Unlock the cable clampers to free the cable.
4. Disconnect the flexible cables (A5 and A11).
5. Disconnect the connectors (A9, A12, A71, A72 and A81).
6. Disconnect the bridge connectors (A10-P9, A51-G51 and A52-G52).
7. Remove the screws (×4 ➡) and remove the A-Board.

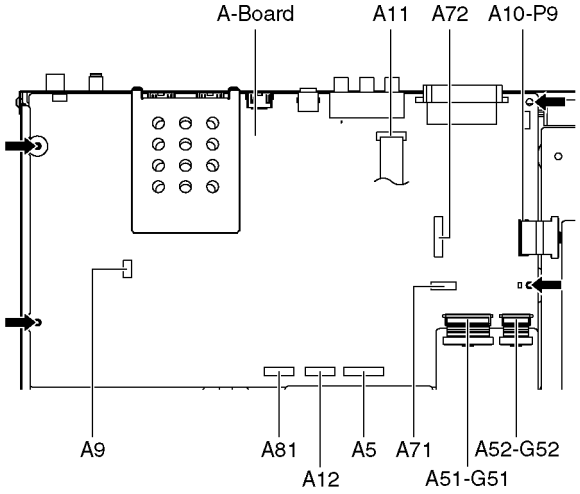


8.2. Display unit

8.2.1. Remove the Speakers (L, R)

1. Remove the Speaker cables (L, R).

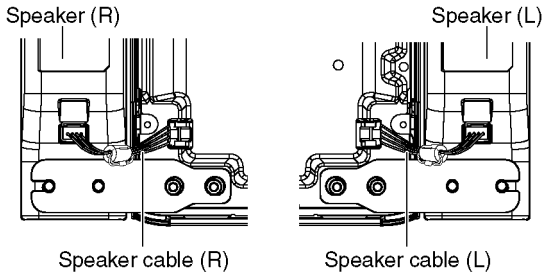


2. Remove the screws (×4 ➡) and remove the Speakers (L, R).
3. Remove the screws (×4 ⇨) and remove the Speaker mounting brackets (LT, RT, LB and RB).

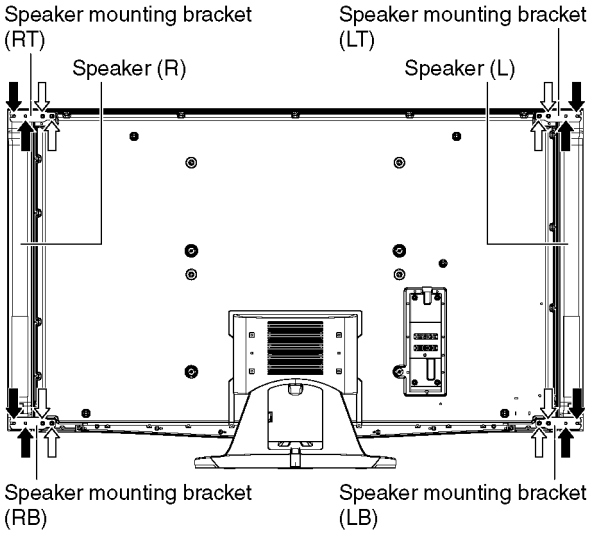


8.2.2. Remove the Pedestal stand


1. Remove the Plasma panel section from the servicing stand and lay on a flat surface such as a table (covered by a soft cloth) with the Plasma panel surface facing downward.
2. Remove the screws (×4 ➡) and remove the Stand cover.

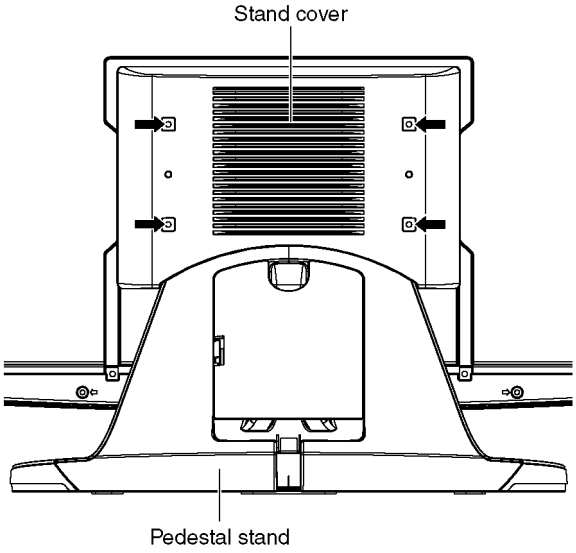

3. Remove the screws (×4 ➡) and remove the Pedestal stand.

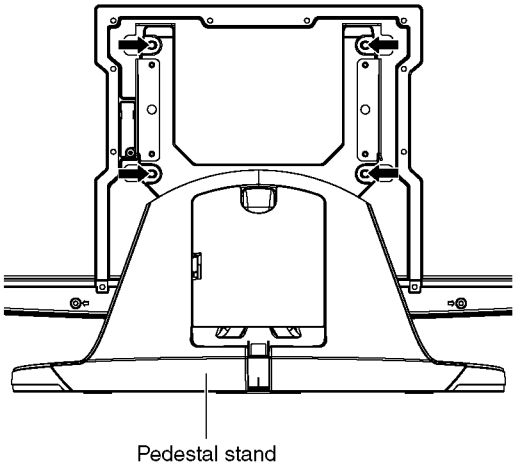

4. Remove the screws (×4 ➡) and remove the Stand holder (L, R).

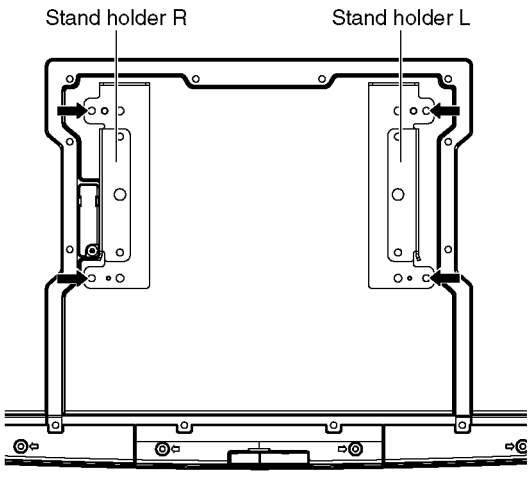

8.2.3. Remove the Bottom covers (C, L and R)


1. See Service Hint (Section 3.1.2.)

8.2.4. Remove the Rear cover and Rear cover bottom


1. See Service Hint (Section 3.1.2.)

8.2.5. Remove the Bottom plates (C, L and R)


1. Remove the screws (×4 ➡) and remove the Bottom plate (C).

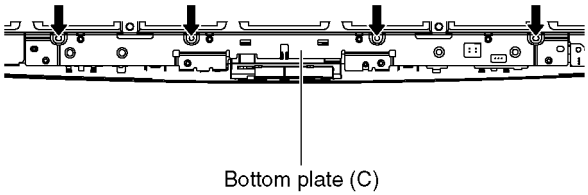

2. Remove the screws (×3 ➡) and remove the Bottom plate (L).

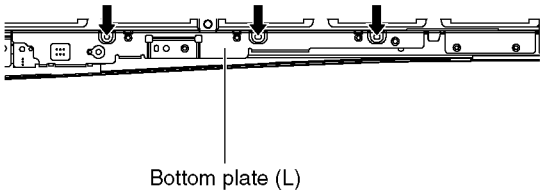


3. Remove the screws (×3 ➡) and remove the Bottom plate (R).

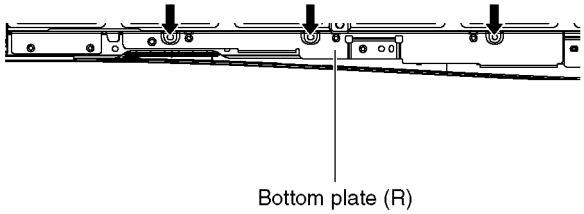


8.2.6. Remove the AC filter shield metal

1. Remove the screws (×4 ➡) and remove the AC filter shield metal.

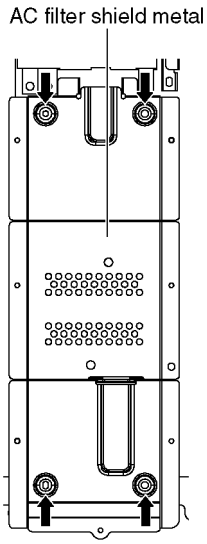

8.2.7. Remove the Fan

1. Unlock the cable clampers to free the cable.
2. Remove the screws (×3 ➡).
3. Remove the relay connectors and remove the Fan.

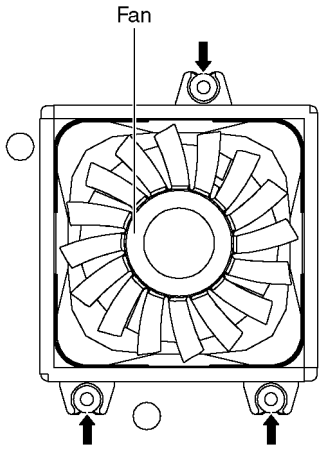


8.2.8. Remove the AC inlet assy

Caution:

To remove P.C.B. wait 1 minute after power was off for discharge from electrolysis capacitors.

1. Remove the screws (×2 ➡) and remove the AC inlet assy.

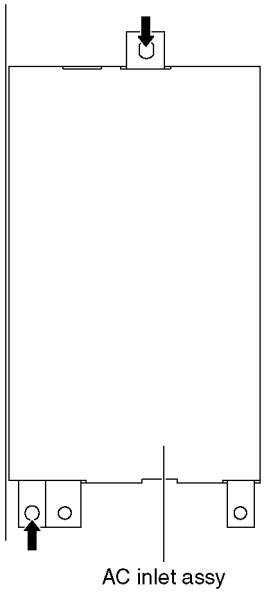


8.2.9. Remove the P-Board


Caution :

To remove P.C.B. wait 1 minute after power was off for discharge from electrolysis capacitors.

1. Unlock the cable clampers to free the cable.
2. Disconnect the connectors (P51-P57, P52-P58, P53-P54 and P55-P56).
3. Disconnect the connectors (P2, P6, P7, P11, P12, P34 and P35).
4. Remove the screws (×6 ⬅) and remove the P(SUS)-Board.
5. Remove the screws (×6 ⇦) and remove the P(MULTI)-Board.
6. Remove the Partition P-Board.

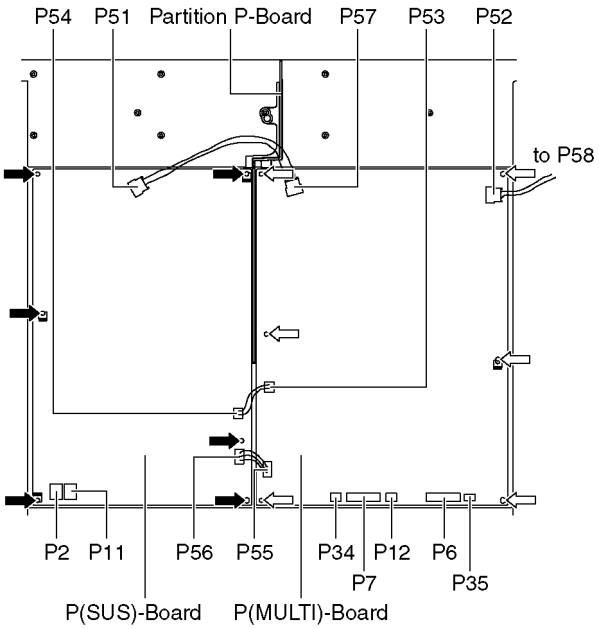


7. Disconnect the connector (P9).
8. Remove the screws (×6 ⇦) and remove the P(FILTER)-Board.

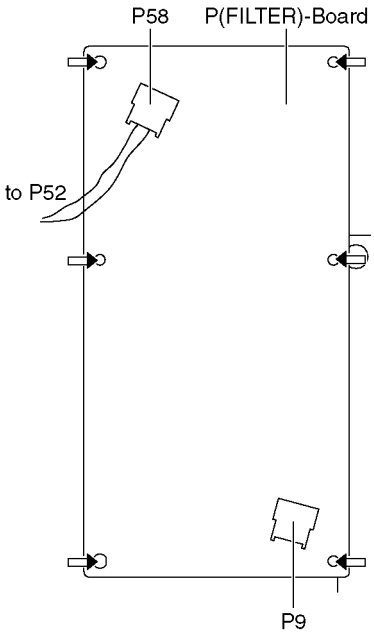


8.2.10. Remove the PB-Board

1. Unlock the cable clampers to free the cable.
2. Disconnect the connectors (PB1, PB2, PB3, PB4, PB5 and PB6).
3. Remove the screws (×4 ➡) and remove the PB-Board.

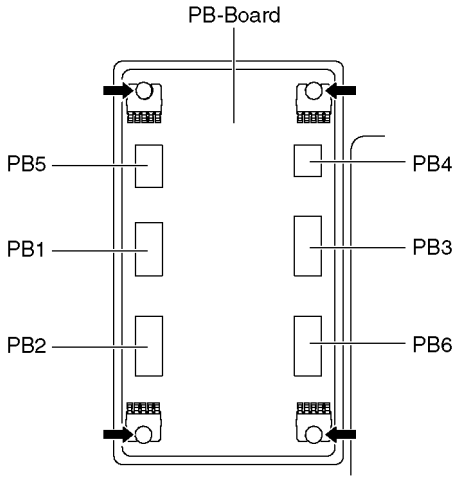


8.2.11. Remove the GH-Board

1. Unlock the cable clampers to free the cable.
2. Disconnect the connectors (GH10 and GH11).
3. Remove the screws (×4 ➡) and remove the GH-Board.
4. Remove the screws (×2 ⇨) and remove the HDMI shield metal.

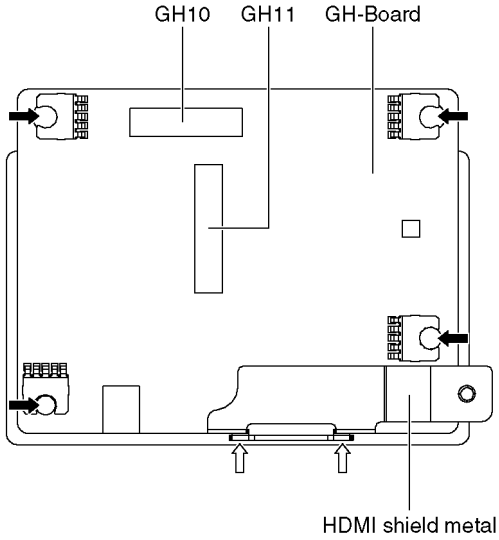


8.2.12. Remove the DA-Board

1. Unlock the cable clampers to free the cable.
2. Disconnect the connectors (DA1, DA3, DA4, DA6, DA10, DA30 and DA52).
3. Disconnect the flexible cables (DA11, DA20, DA31 and DA32).
4. Remove the screws (×7 ➡) and remove the DA-Board.
5. Remove the screws (×2 ⇨) and remove the Partition DA-Board.

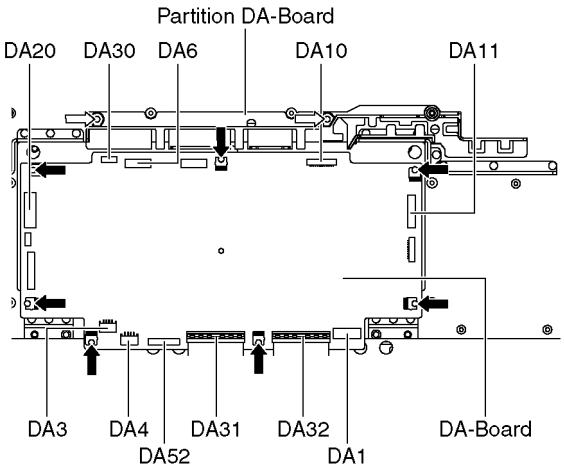


8.2.13. Remove the S-Board

1. Remove the Bottom plate (L). (See section 8.2.5.)
2. Disconnect the connector (S1).
3. Remove the screws (×2 ➡) and remove the S-Board.

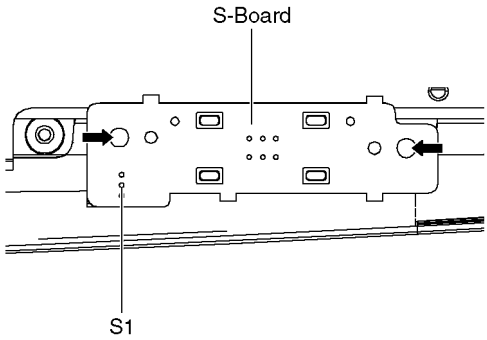


8.2.14. Remove the KA-Board

1. Remove the Bottom plate (C). (See section 8.2.5.)
2. Disconnect the connector (KA1).
3. Remove the screws (×2 ➡) and remove the KA-Board.

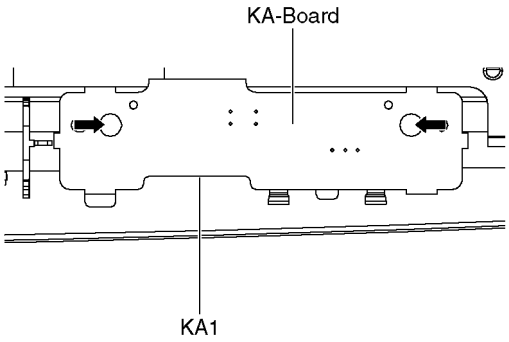


8.2.15. Remove the SG-Board

1. Remove the Bottom plate (C). (See section 8.2.5.)
2. Remove the screws (×2 ➡) and remove the SG-Board unit.

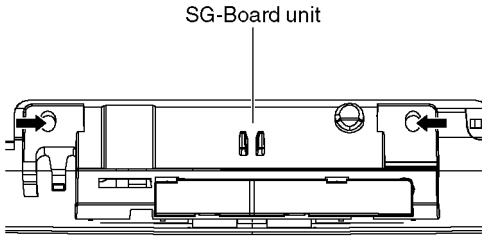


3. Remove the screw (×1 ➡).
4. Remove the claws (×2 ⇨).
5. Disconnect the connector (SG52).
6. Remove the SG-Board from SG-Board bracket.

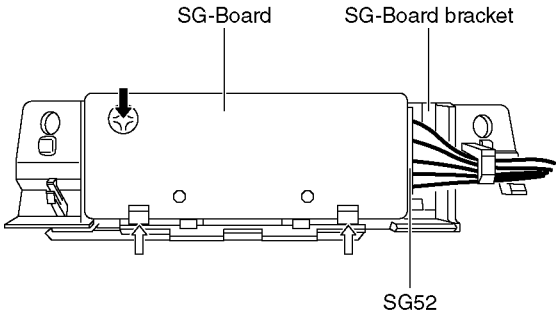


8.2.16. Remove the GL-Board

1. Remove the Bottom plate (C). (See section 8.2.5.)
2. Disconnect the connector (GL02).
3. Remove the screws (×2 ➡) and remove the GL-Board.

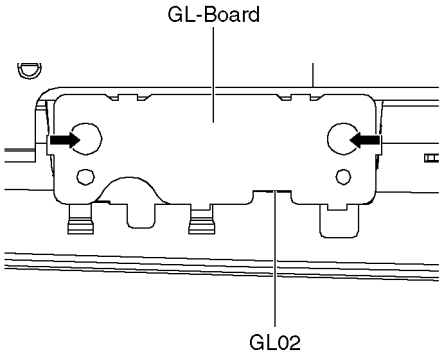


8.2.17. Remove the J-Board

1. Remove the Bottom plate (R). (See section 8.2.5.)
2. Disconnect the flexible cable (J1).
3. Disconnect the connector (J2).
4. Remove the claws (×2 ➡) and remove the J-Board.

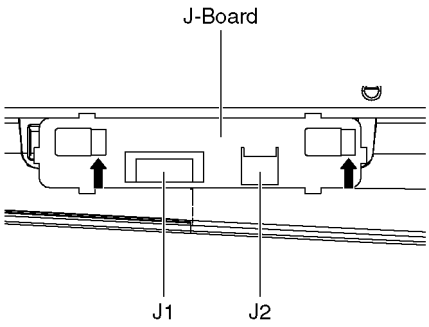


8.2.18. Remove the SP connector edge cover (L, R)

1. Disconnect the connectors (SPL and SPR).
2. Remove the screw (×1 ➡) and remove the SP connector edge cover (L, R).

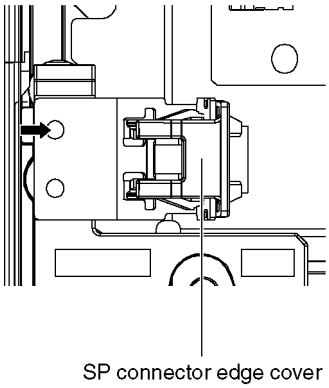


8.2.19. Remove the SU-Board

1. Remove the screws (×2 ➡).
2. Remove the Partition SU-Board.
3. Remove the flexible cables (SU1B, SU2B, SU3B, SU4B and SU5B) connected to the SU-Board.
4. Remove the flexible cable (SU11-SD11) and the bridge connector (SC41-SU41).
5. Remove the molding prop (×1 ⇨).
6. Remove the screws (×2 ➡) and remove the SU-Board.

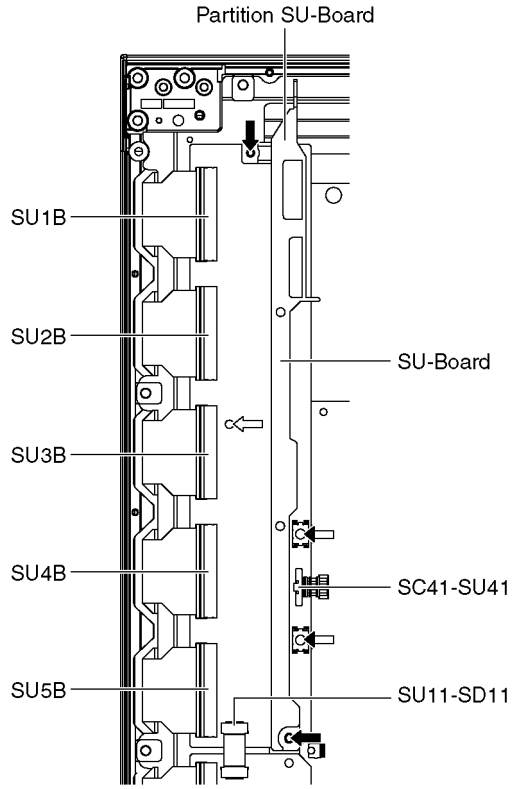


8.2.20. Remove the SD-Board

1. Remove the flexible cables (SD1B, SD2B, SD3B, SD4B and SD5B) connected to the SD-Board.
2. Remove the flexible cable (SU11-SD11) and the bridge connectors (SC42-SD42 and SC46-SD46).
3. Remove the molding prop (×1 ⇨).
4. Remove the screws (×2 ➡, ×2 ➡) and remove the SD-Board.

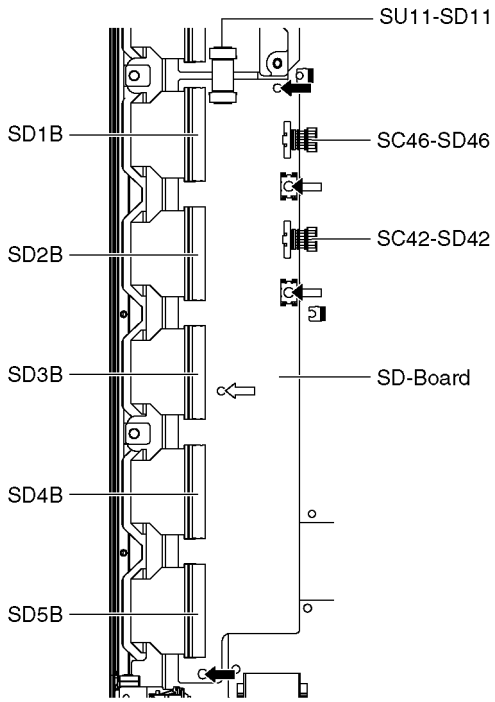


8.2.21. Remove the SC-Board

1. Remove the SU-Board and SD-Board. (See section 8.2.19 and 8.2.20.)
2. Unlock the cable clampers to free the cable.
3. Disconnect the connector (SC2).
4. Disconnect the flexible cable (SC20).
5. Remove the screws (×9 ➡) and remove the SC-Board.

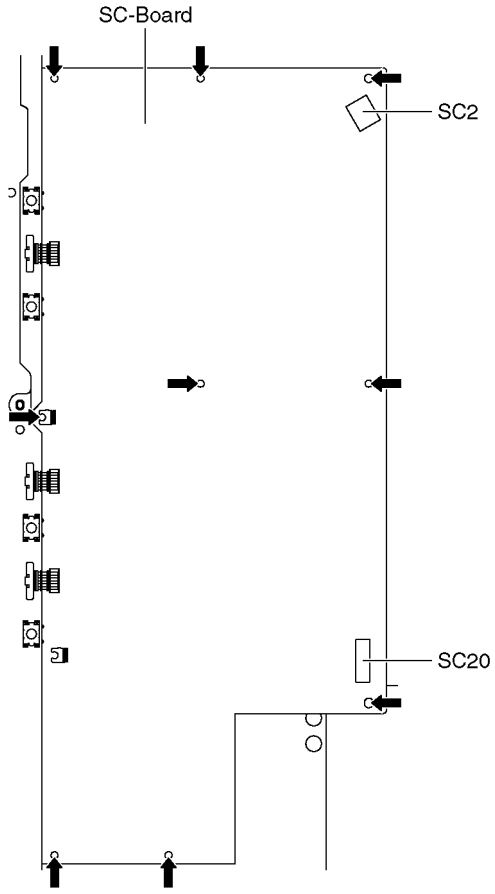


8.2.22. Remove the SS2-Board

1. Disconnect the bridge connector (SS21-SS22) and disconnect the flexible cable (SS58).
2. Disconnect the connectors (SS35 and SS36).
3. Remove the screws (×5 ➡) and remove the SS2-Board.

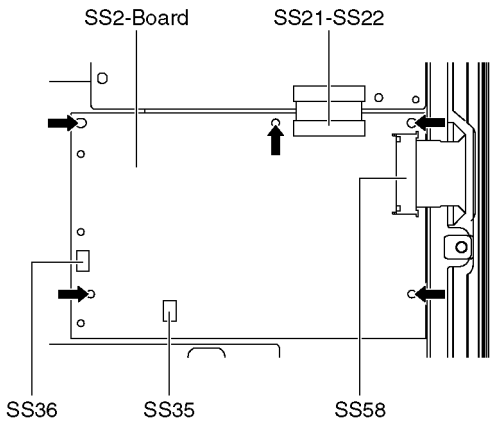


8.2.23. Remove the SS-Board

1. Unlock the cable clampers to free the cable.
2. Disconnect the connectors (SS11, SS12 and SS33).
3. Disconnect the flexible cables (SS53, SS55 and SS56).
4. Disconnect the bridge connector (SS21-SS22).
5. Remove the screws (×8 ➡) and remove the SS-Board.

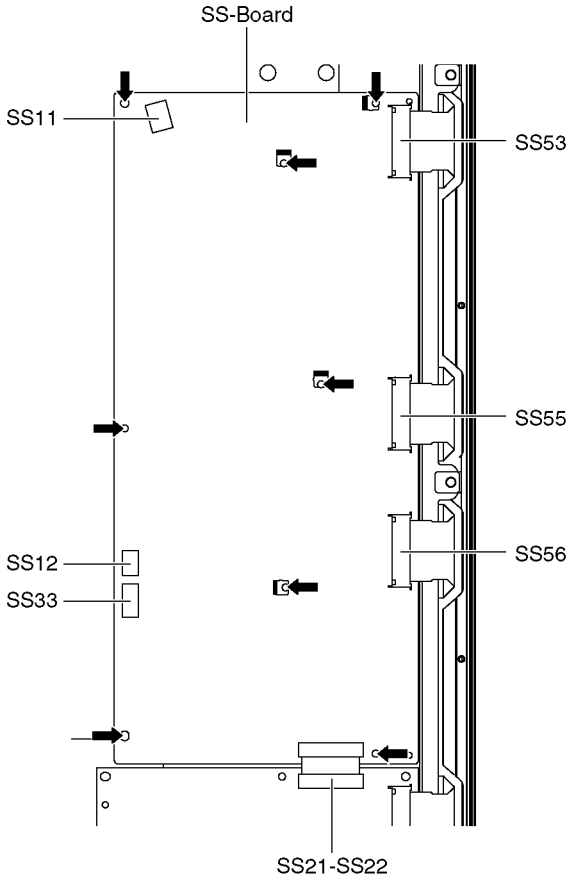


8.2.24. Remove the C1-Board

1. Unlock the cable clampers to free the cable.
2. Remove the DD-Heat-sink fastening screws (×10 ⇨).
3. Remove the DD-Heat-sink (×5).

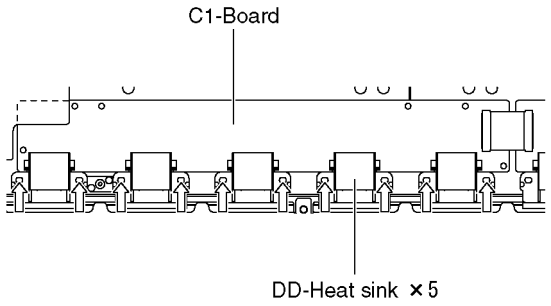


4. Disconnect the flexible cables (CB1, CB2, CB3, CB4 and CB5).
5. Disconnect the flexible cable (C10).
6. Remove the screws (×4 ➡) and remove the C1-Board.

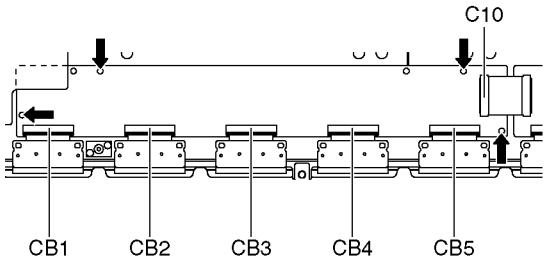


8.2.25. Remove the C2-Board

1. Unlock the cable clampers to free the cable.
2. Remove the DD-Heat-sink fastening screws (×10 ⇨).
3. Remove the DD-Heat-sink (×5).

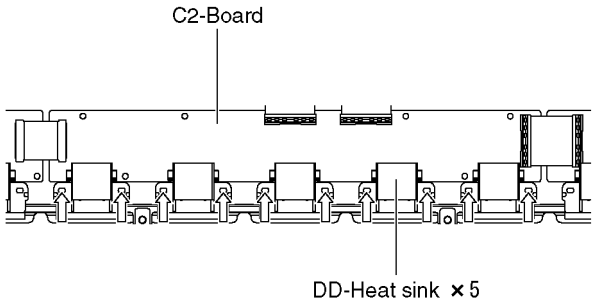


4. Disconnect the flexible cables (CB6, CB7, CB8, CB9 and CB10).
5. Disconnect the flexible cables (C20, C21, C22 and C26).
6. Remove the screws (×4 ➡) and remove the C2-Board.

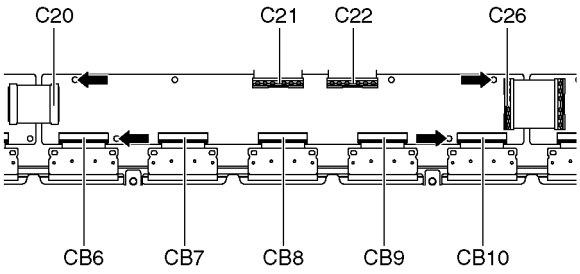


8.2.26. Remove the C3-Board

1. Unlock the cable clampers to free the cable.
2. Remove the DD-Heat-sink fastening screws (×10 ⇨).
3. Remove the DD-Heat-sink (×5).

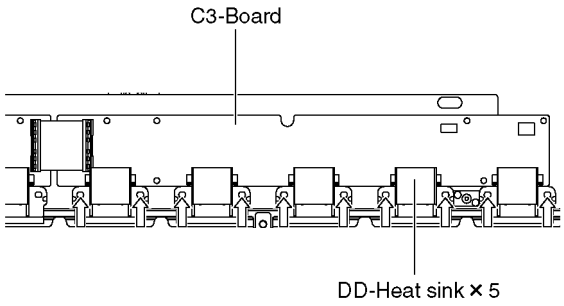


4. Disconnect the flexible cables (CB11, CB12, CB13, CB14 and CB15).
5. Disconnect the flexible cable (C36).
6. Disconnect the connectors (C33 and C35).
7. Remove the screws (×4 ➡) and remove the C3-Board.

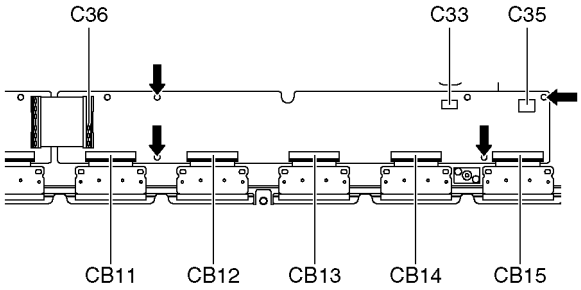


8.2.27. Remove the Barrier

1. Remove the Print Circuit Board.
2. Remove the Barriers.

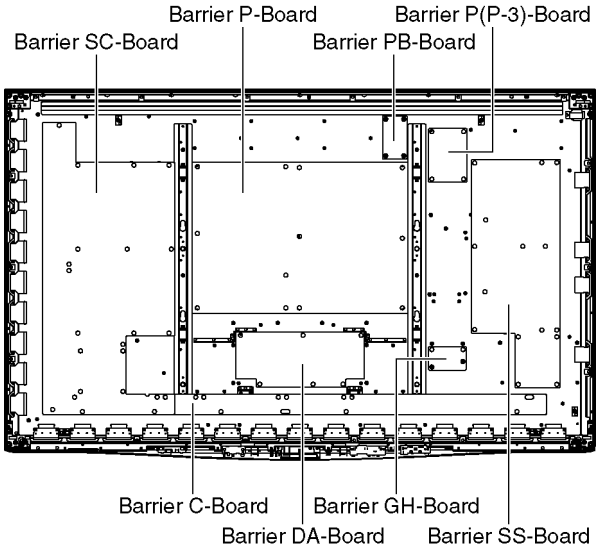


8.2.28. Remove the Control button

1. Disconnect the flexible cable (J1). (See section 8.2.17.)
2. Remove the screws (×11 ➡).
3. Remove the Cabinet bottom.

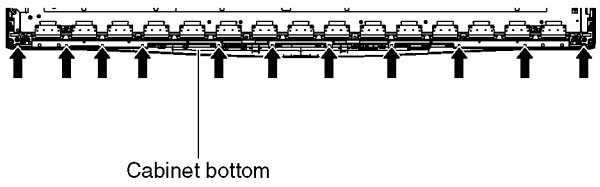


4. Remove the Control button.

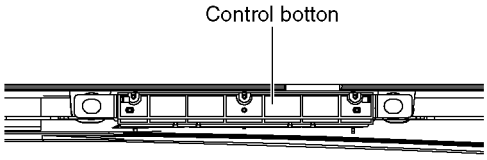


8.2.29. Remove the Corner metal

1. Remove the screws (×3 ➡ each).
2. Remove the Corner metal (LT, RT).
3. Remove the screws (×3 ➡ each) and remove the screw (×1 ⇨ each).
4. Remove the Corner metal (LB, RB).

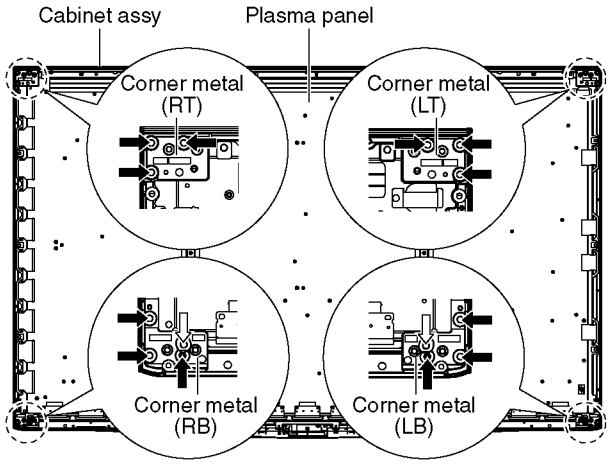


8.2.30. Remove the Cabinet assy from the Plasma panel.


1. Place the Cabinet assy on a flat surface of a table (covered by a soft cloth) and a cushion.

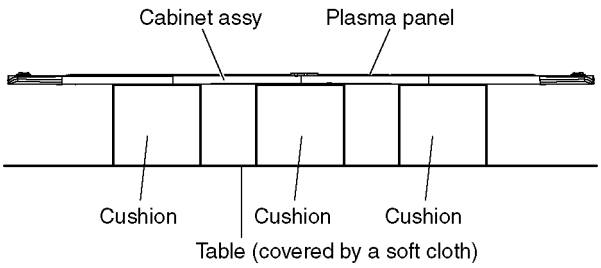


2. Remove the Corner metal. (See section 8.2.29.)
3. Remove the screws (×18 ➡).

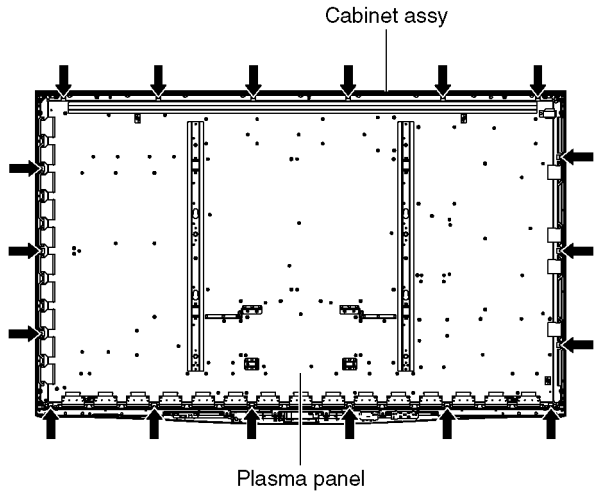


4. Remove the Cabinet assy from the Plasma panel.

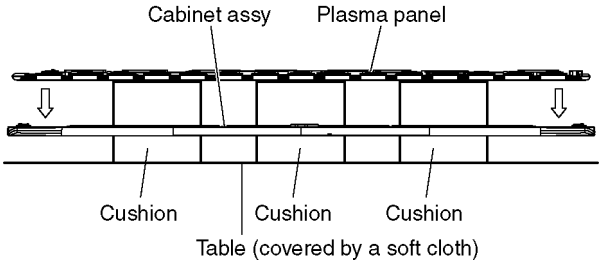

5. Remove the Spacer A (×6 ⇨) from the Plasma panel.

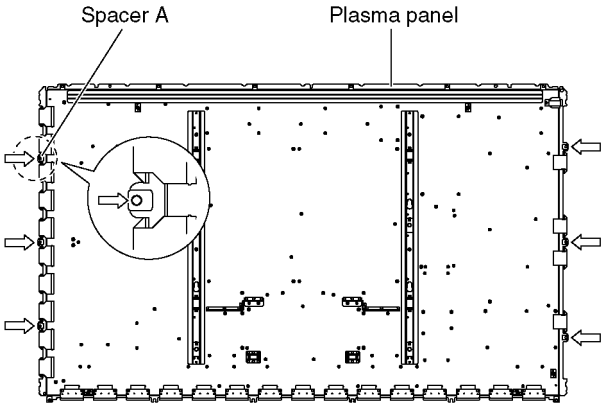


6. Remove the Spacer B (×6 ➡) from the Cabinet assy.

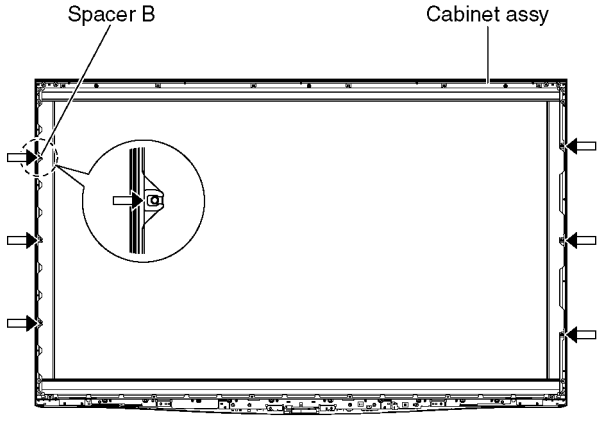

8.2.31. Replace the plasma panel

Caution:

Place the Plasma panel on a flat surface of a table (covered by a soft cloth) and a cushion.

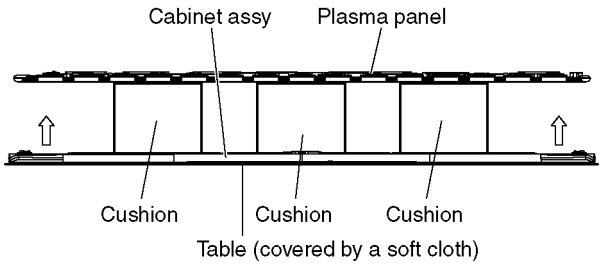

A new plasma panel itself without Cabinet assy is fragile. To avoid the damage to new plasma panel, carry a new plasma panel taking hold of the Cabinet assy.

1. Place a carton box packed a new plasma panel on the flat surface of the work bench.
2. Open a box and without taking a new plasma panel.
3. Attach the cabinet assy and each P.C.Board and so on, to the new plasma panel.

***When fitting the cabinet assy, be careful not to allow any debris, dust or handling residue to remain between the cabinet assy and plasma panel.**

9 Measurements and Adjustments

9.1. Adjustment Procedure

9.1.1. Driver Set-up

9.1.1.1. Item / Preparation

1. Input a white signal to plasma video input.
2. Set the picture controls as follows.
   Picture menu : Dynamic
   PNR : Min
   Aspect : 16:9

Caution

1. First perform Vsus adjustment.
2. The Vscn voltages are measured from the Vad (Vad_base), but may be measured from the GND (GND_base) in an unavoidable case.


9.1.1.2. Adjustments

Adjust driver section voltages referring the panel data on the panel data label.
Check or adjust the following voltages with the multimeter.

Name	Test Point	Voltage	Volume	Remarks
Vsus	TPVSUS (SS)	Vsus ± 2V	VR201 (P)	*
Ve	TPVE (SS)	Ve ± 2.5V	Fixed	*
Vset	TPVSET (SC)	290V ± 9V	Fixed	
Vad	TPVAD (SC)	- 175V ± 2V	VR16600 (SC)	
Vscn	TPVSCN (SC)	Vad_base : 145V ± 4V GND_base : - 30V ± 6V	Fixed	

*See the Panel label.

Panel Label information

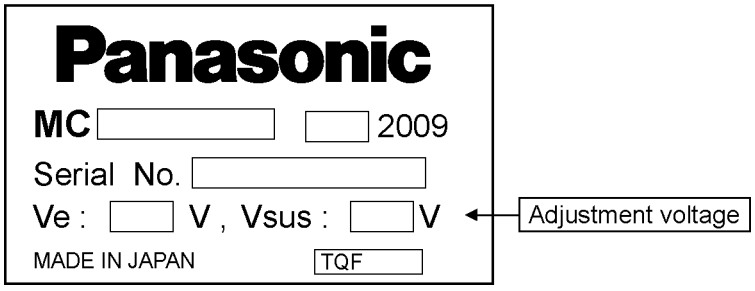


9.1.2. Initialization Pulse Adjust

1. Input the White signal to plasma video input.
2. Set the picture controls as follows.
   Picture menu : Dynamic
   PNR : Min
   Aspect : 16:9
3. Connect Oscilloscope to TPSC1 (SC).
   Check the voltage (T2) at 100μs period on the down slop.

	Test point	Volume	Level
T2	TPSC1 (SC)	VR16601 (SC)	250 V ± 10 V

TPSC1

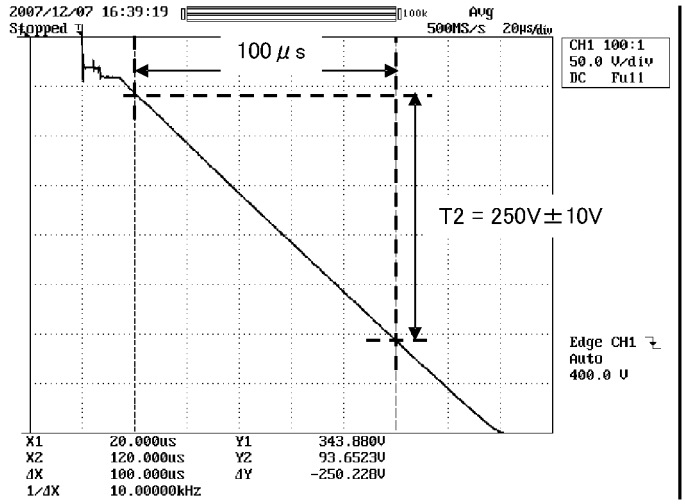

9.1.3. P.C.B. (Printed Circuit Board) exchange

9.1.3.1. Caution

1. To remove P.C.B., wait 1 minute after power was off for discharge from electrolysis capacitors.

9.1.3.2. Quick adjustment after P.C.B. exchange

Adjust the following voltages with the multimeter.


P.C.B.	Name	Test Point	Voltage	Volume	Remarks
P Board	Vsus	TPVSUS (SS)	Vsus ± 2V	VR201 (P)	*
SC Board	Vad	TPVAD (SC)	- 175V ± 2V	VR16600 (SC)	
DA Board	White balance and Sub brightness for NTSC, PAL, HD, PC and 625i signals				

*See the Panel label.


Caution:

Absolutely do not reduce Vsus below Ve not to damage the P.C.B.

9.1.4. Adjustment Volume Location

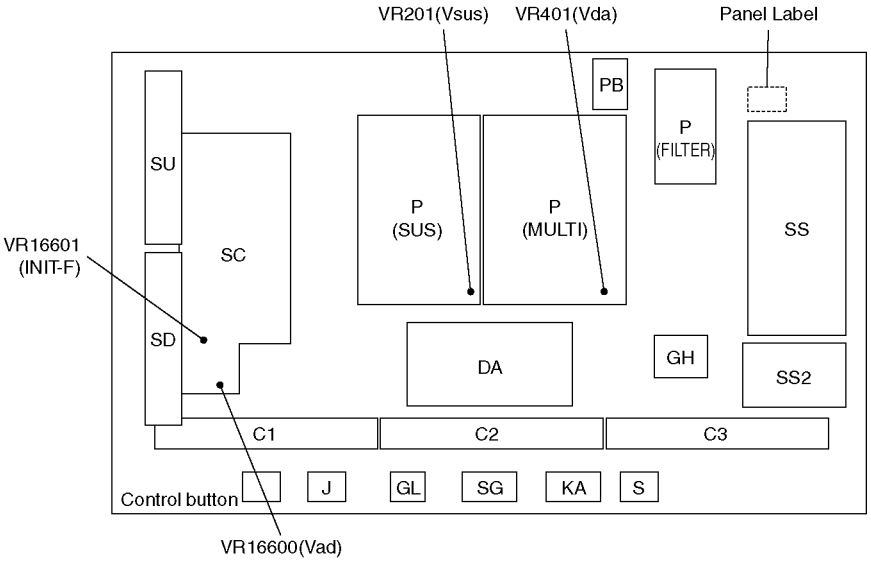


9.1.5. Test Point Location

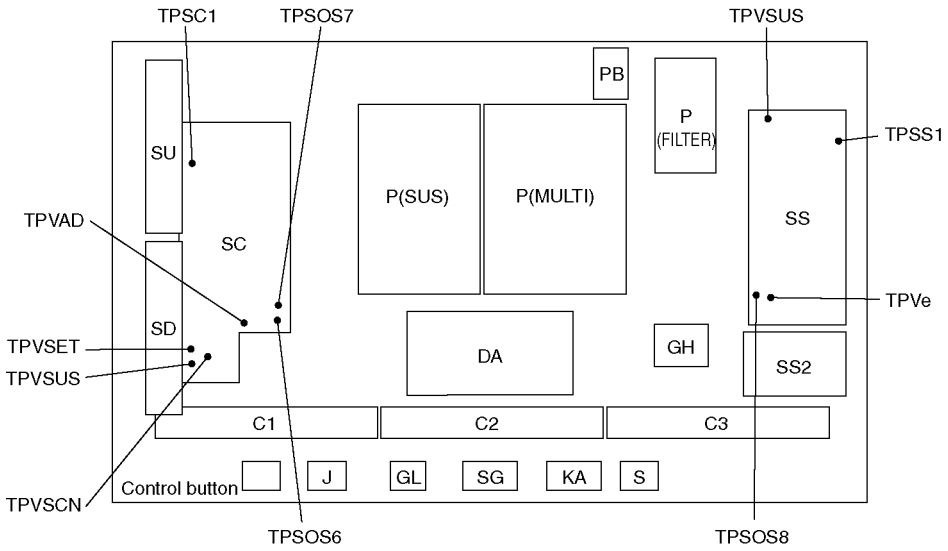


10 Block Diagram


10.1. Main Block Diagram (Tuner box)

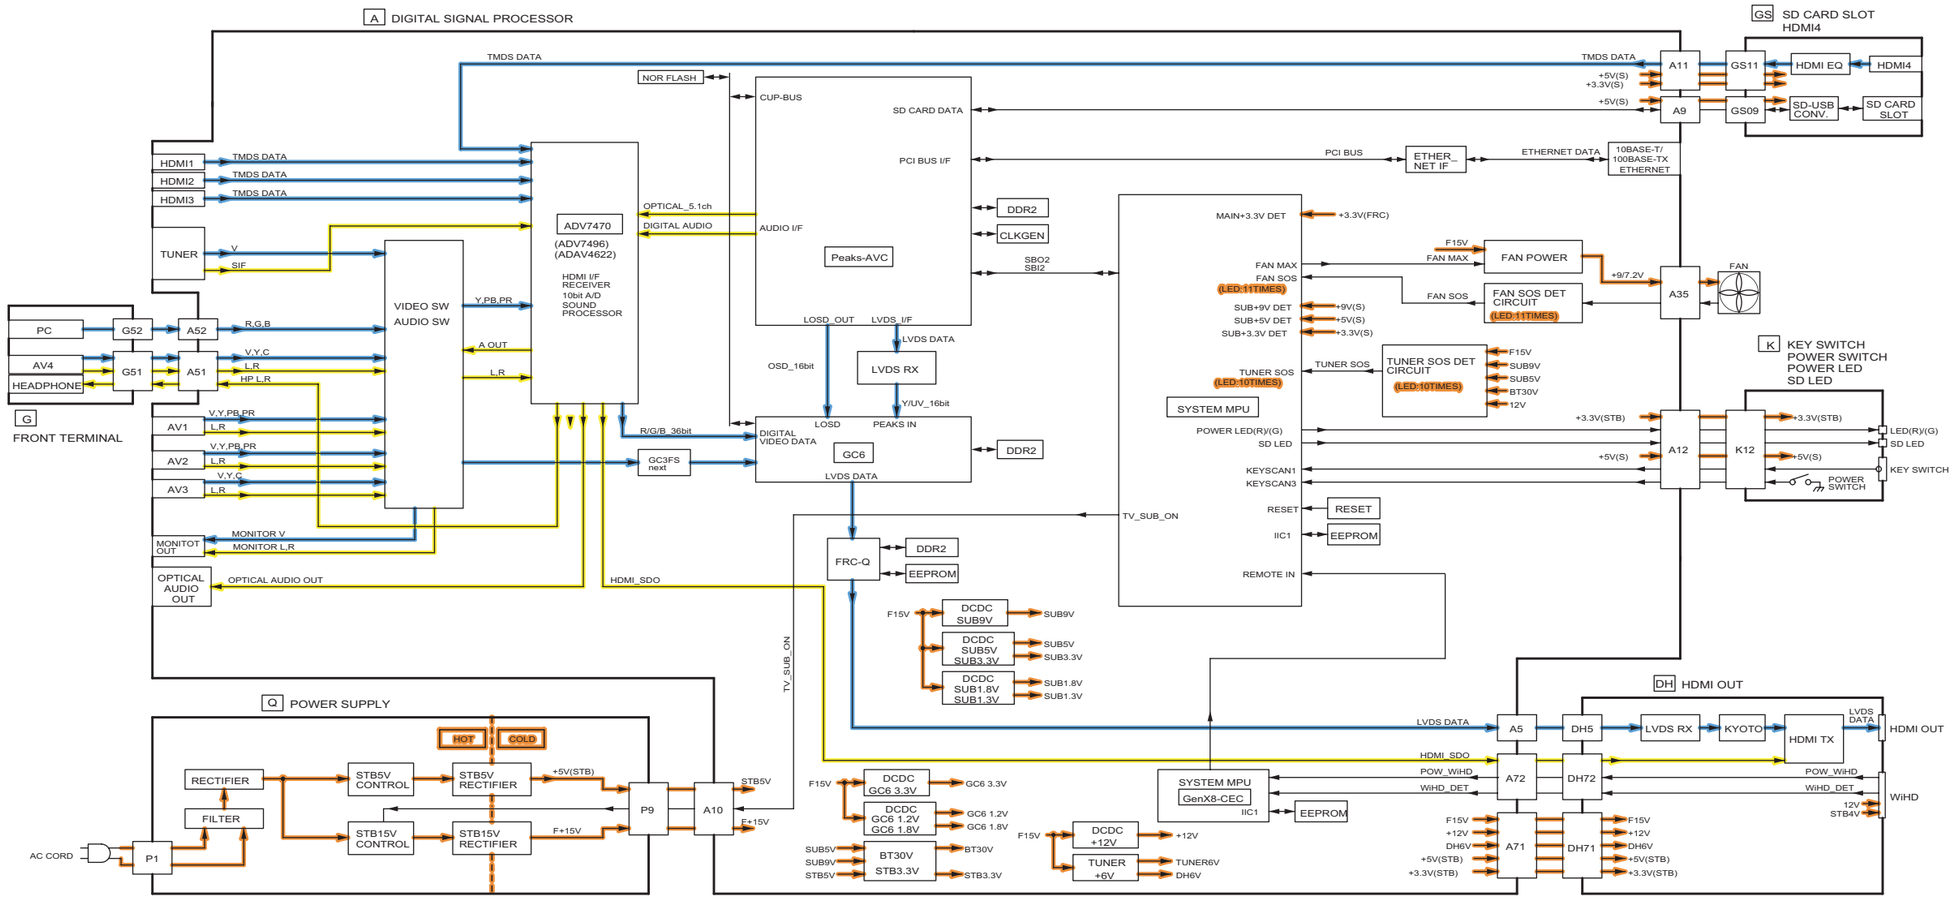


10.2. Main Block Diagram (Display unit)

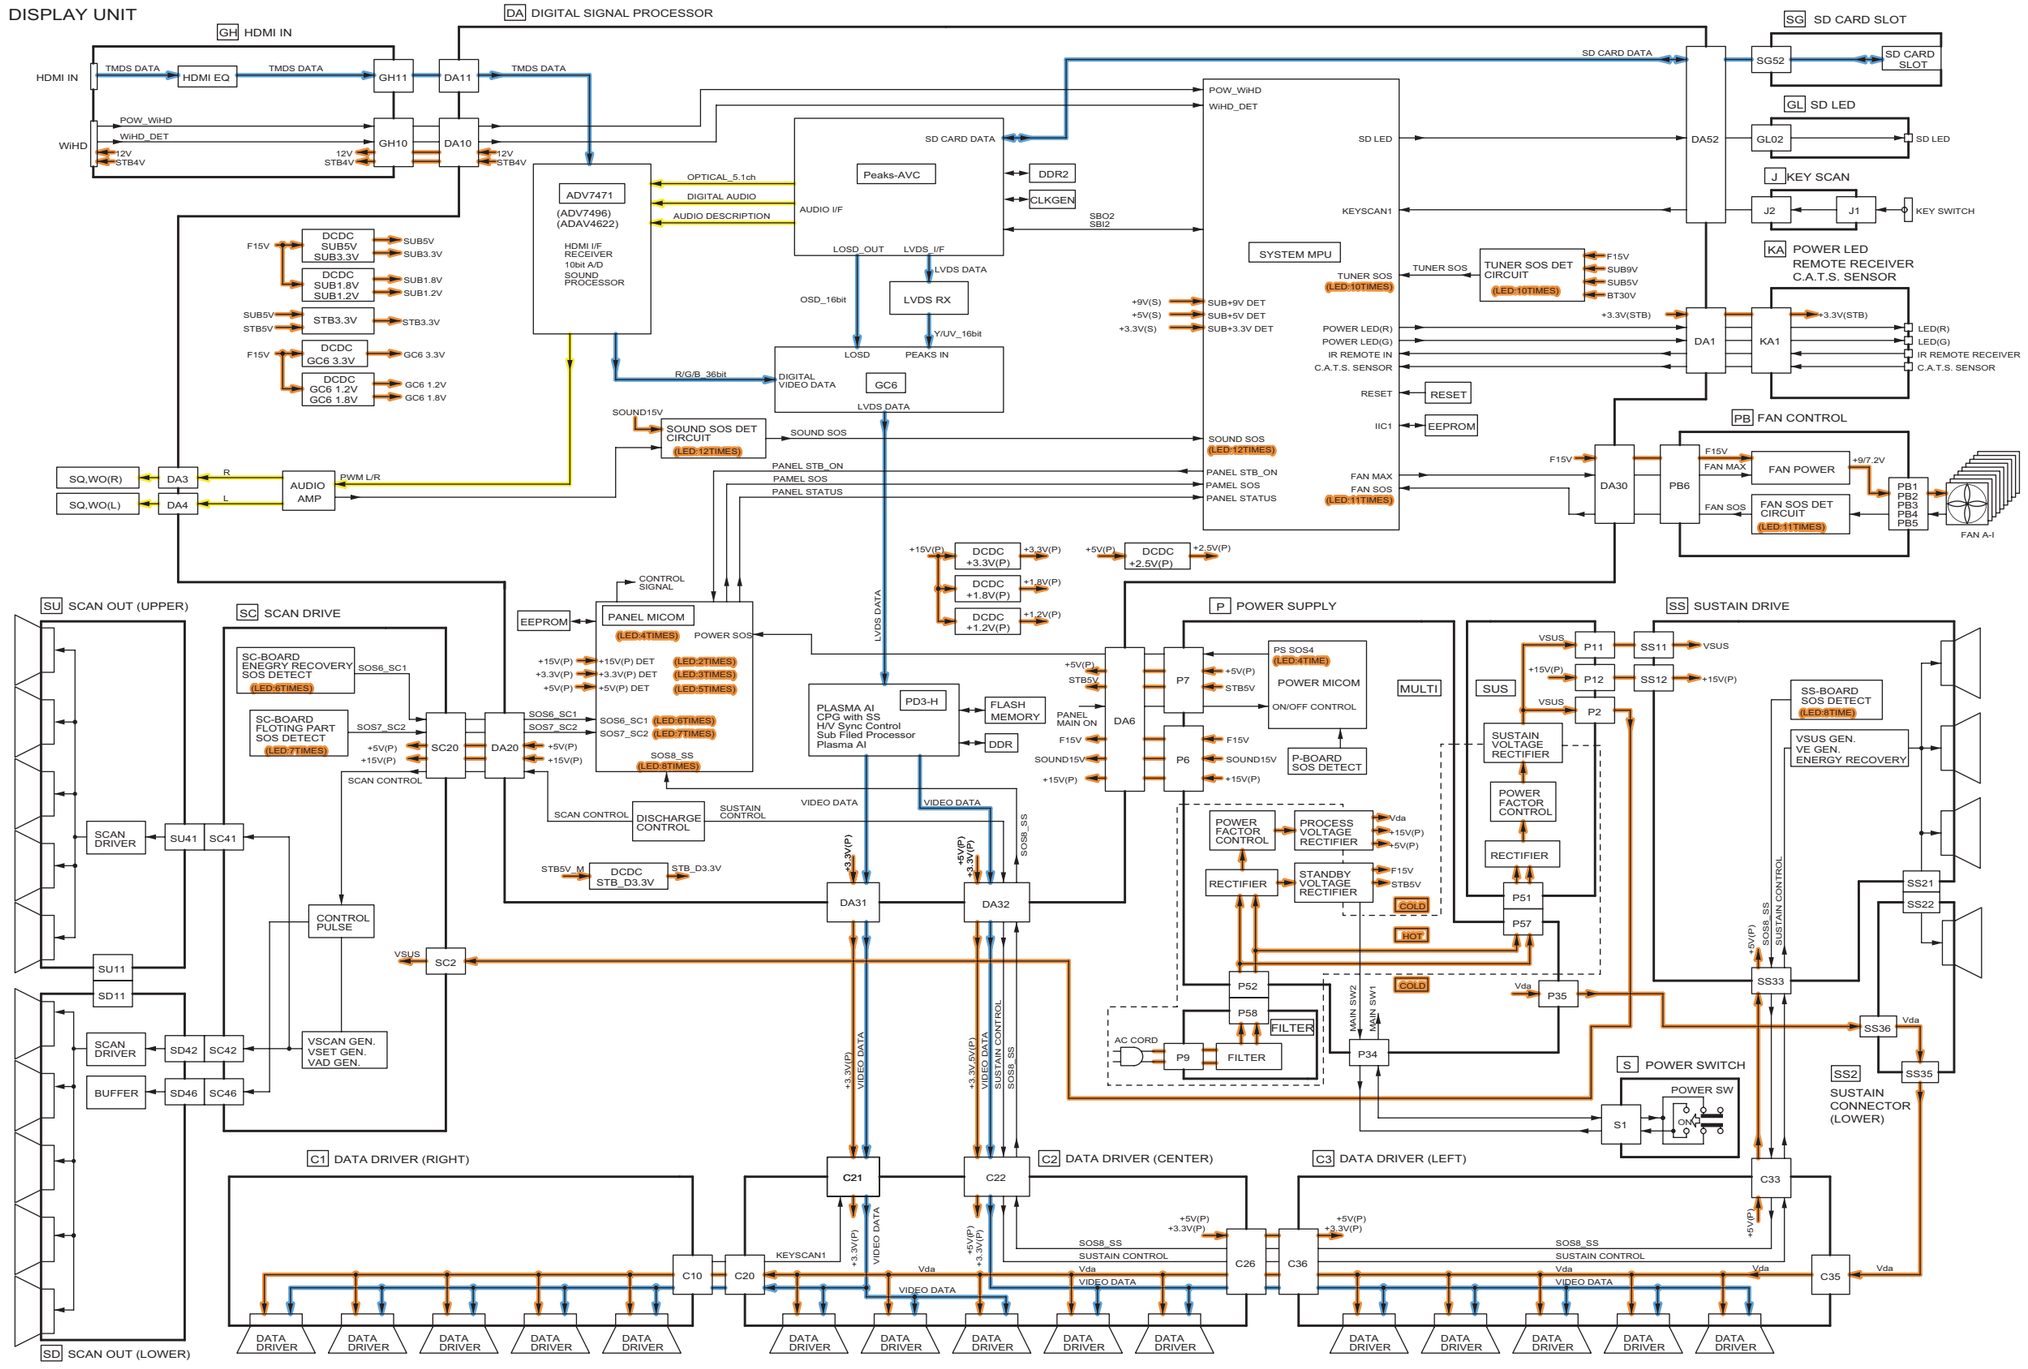


10.3. Tuner box (1/3) Block Diagram

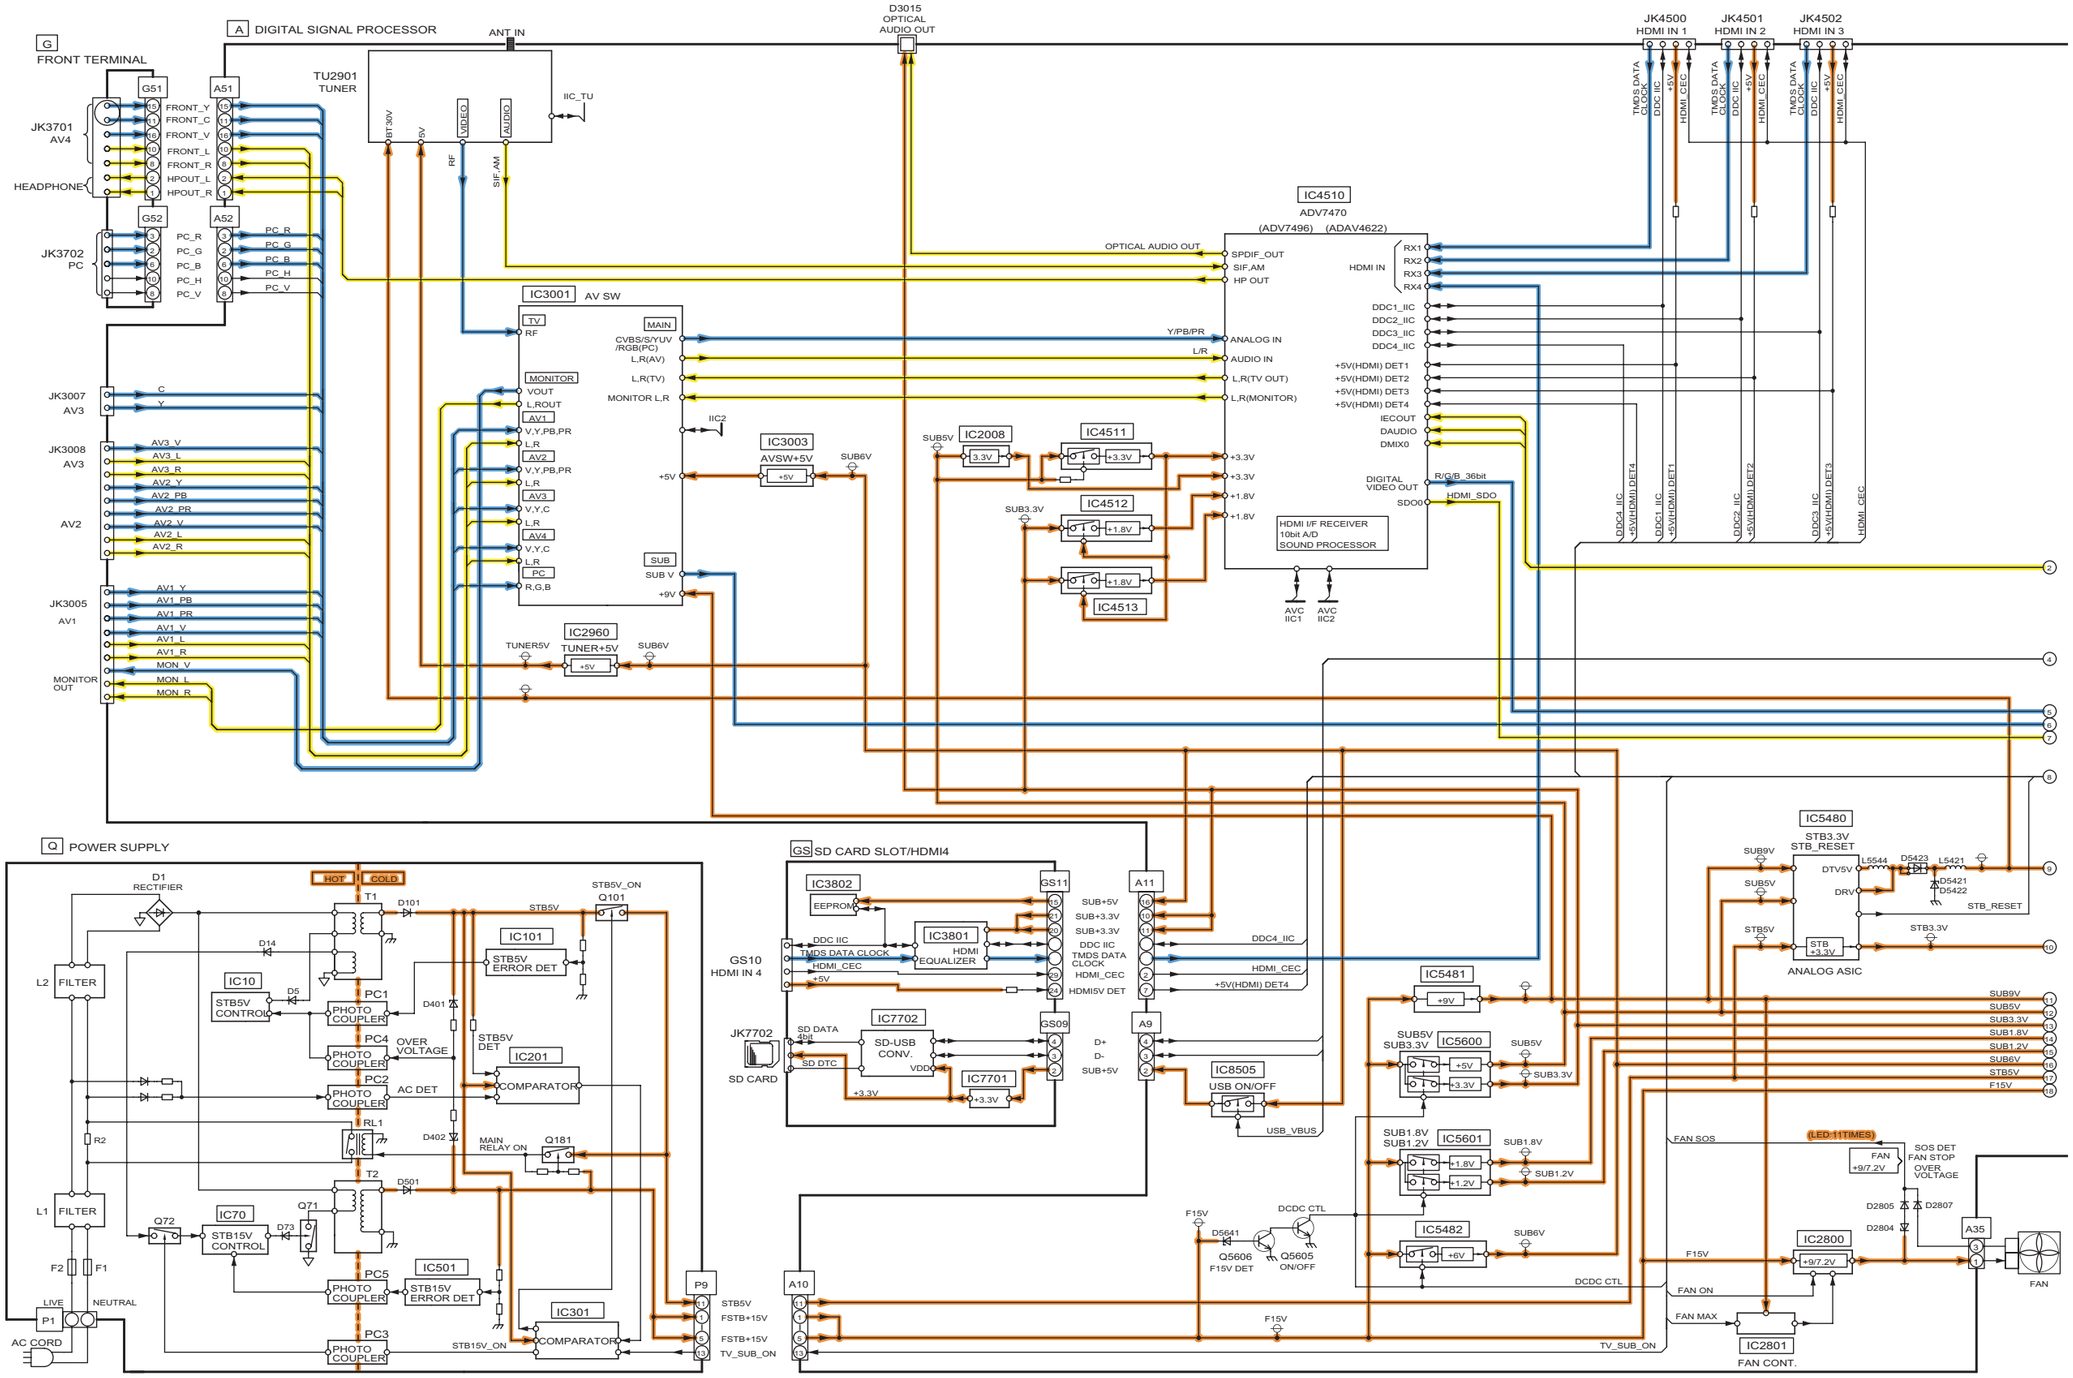


10.4. Tuner box (2/3) Block Diagram

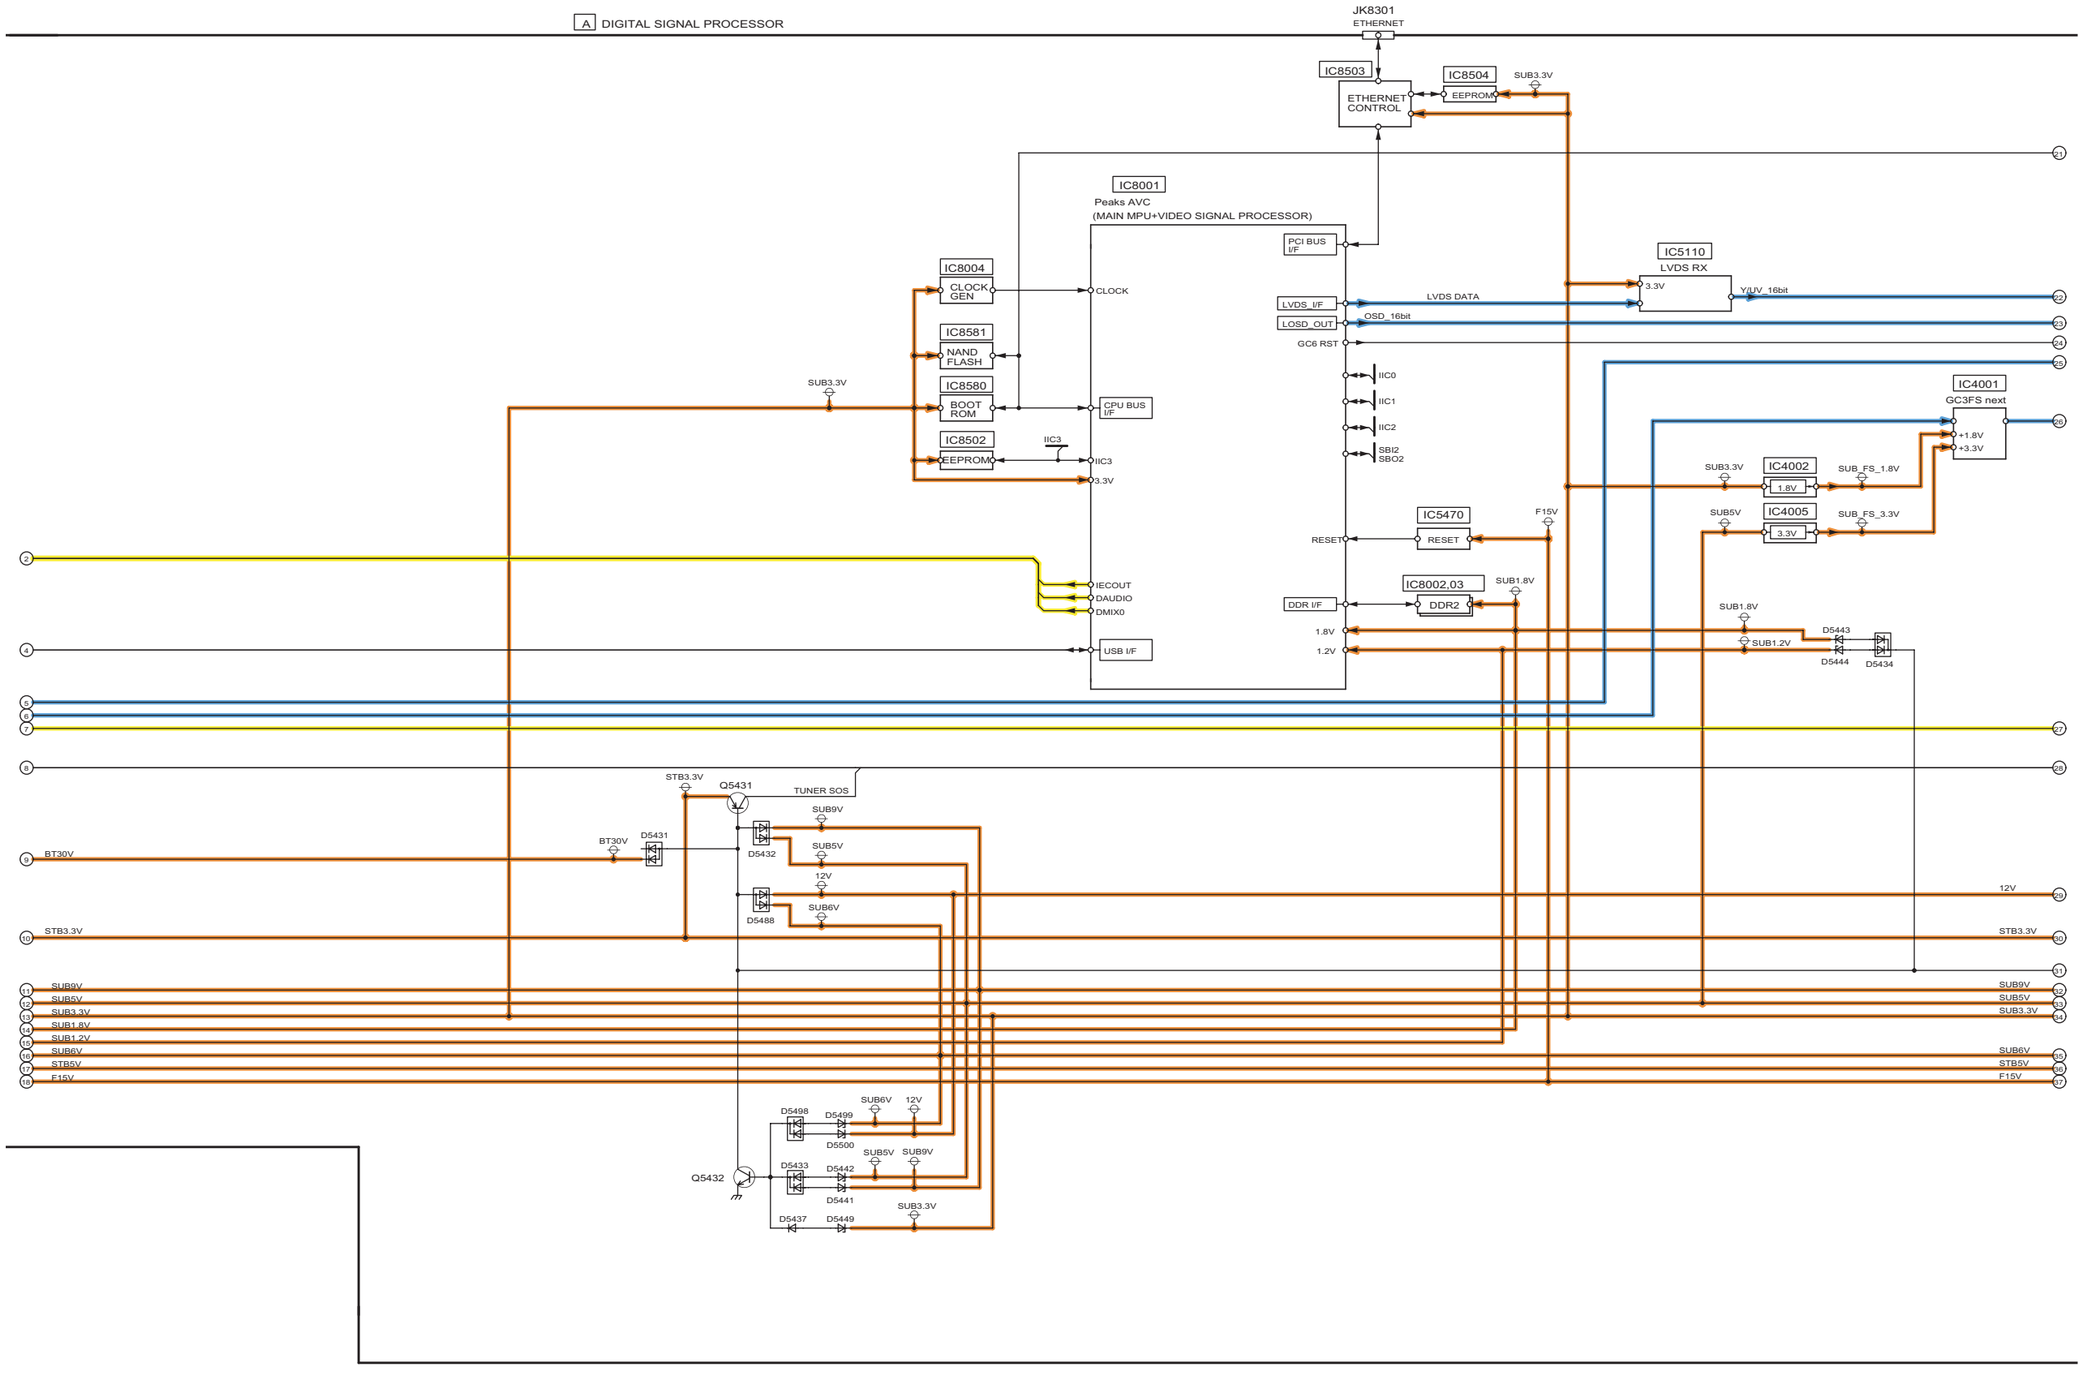


10.5. Tuner box (3/3) Block Diagram

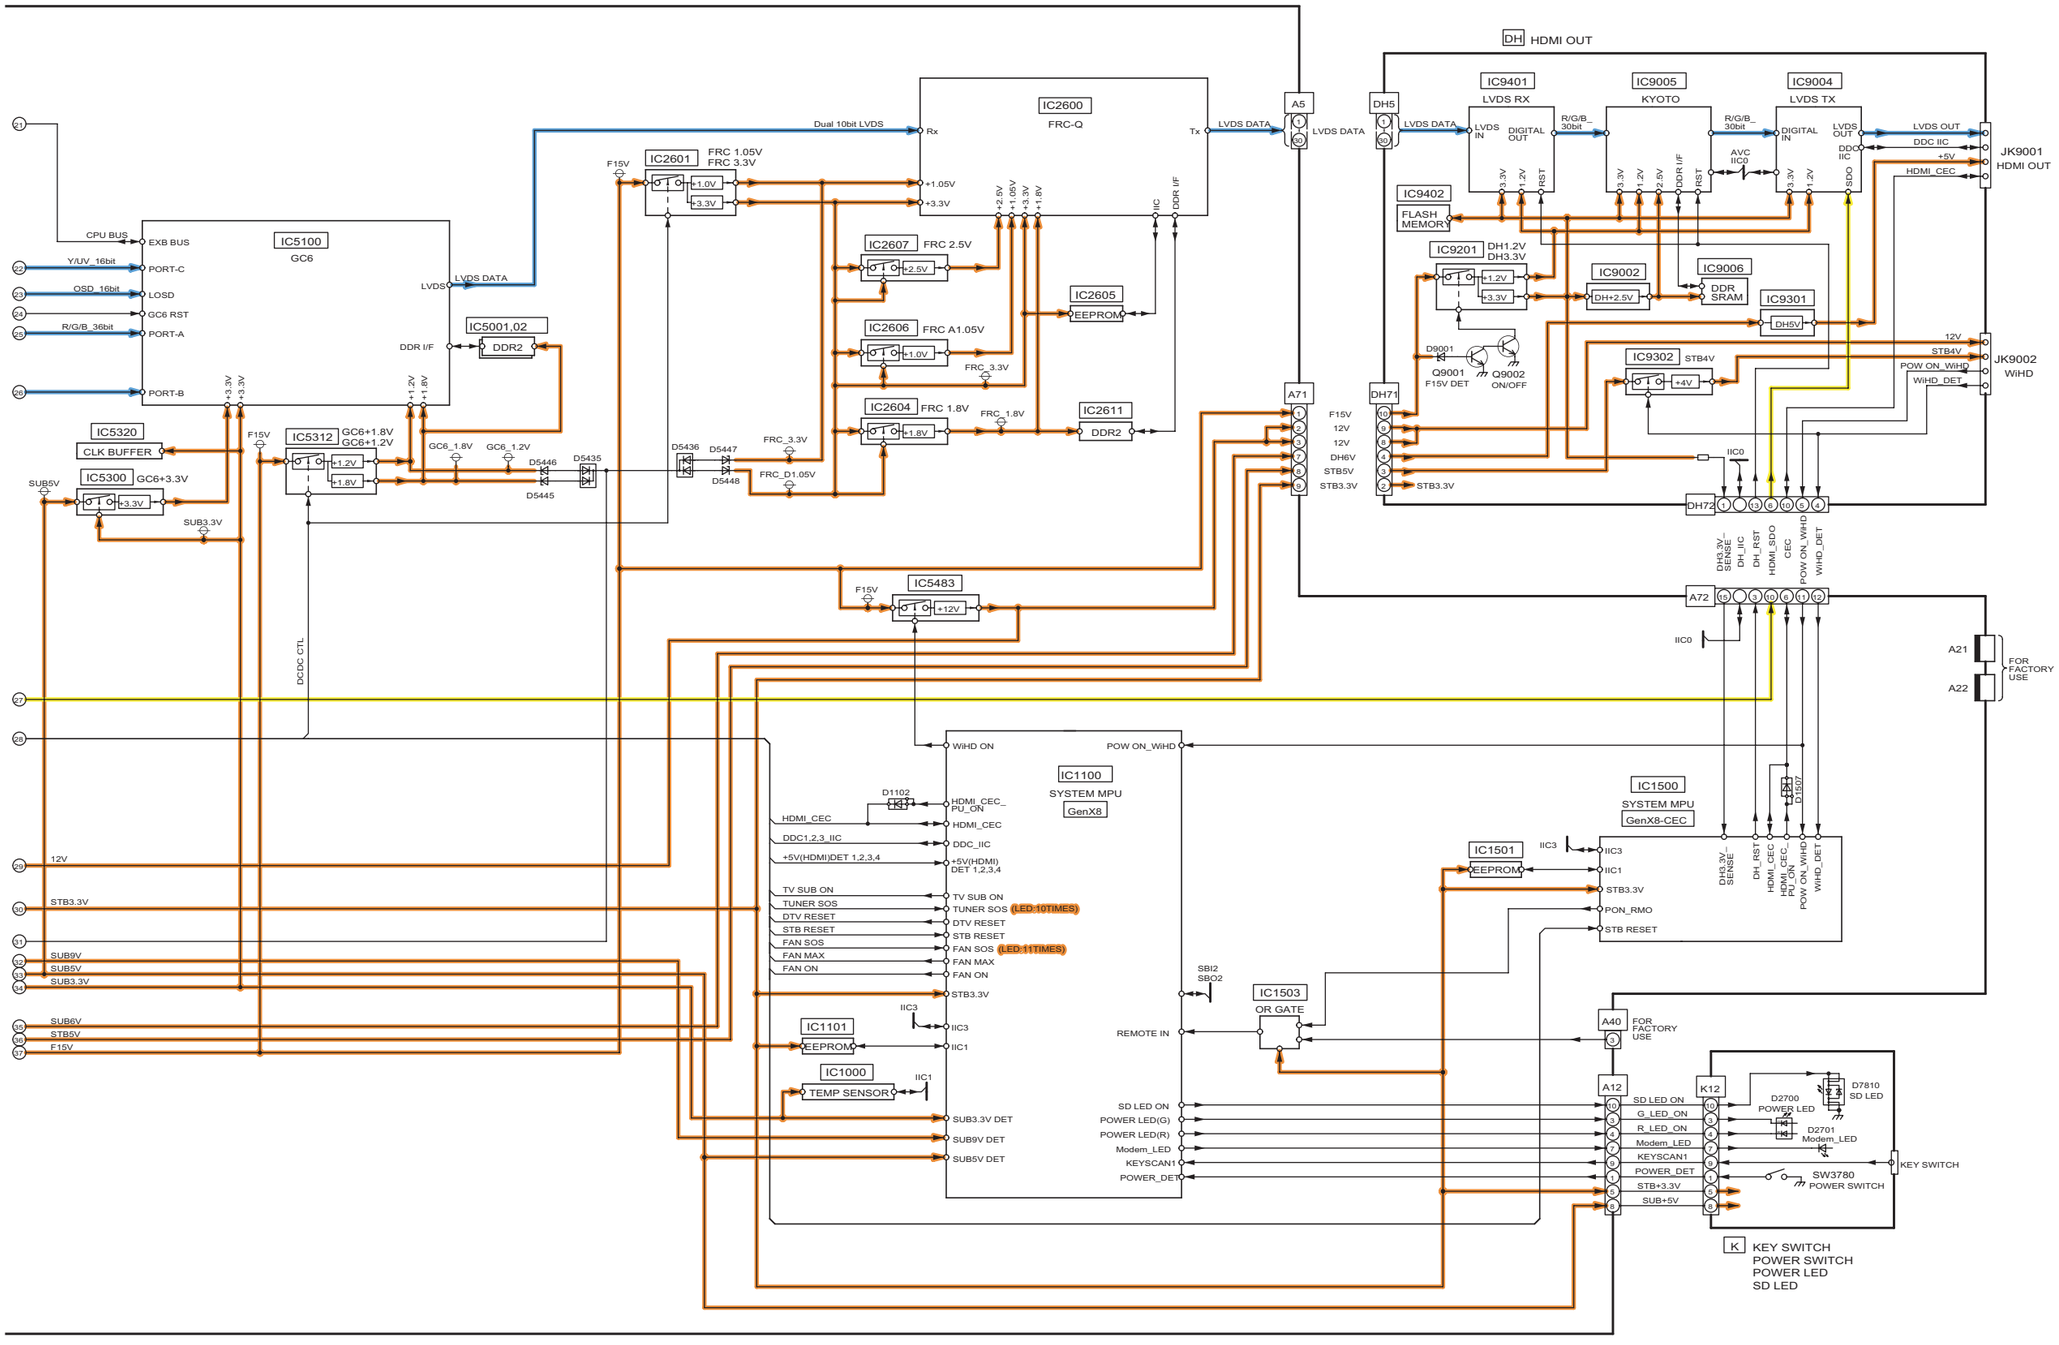


10.6. Display unit (1/4) Block Diagram

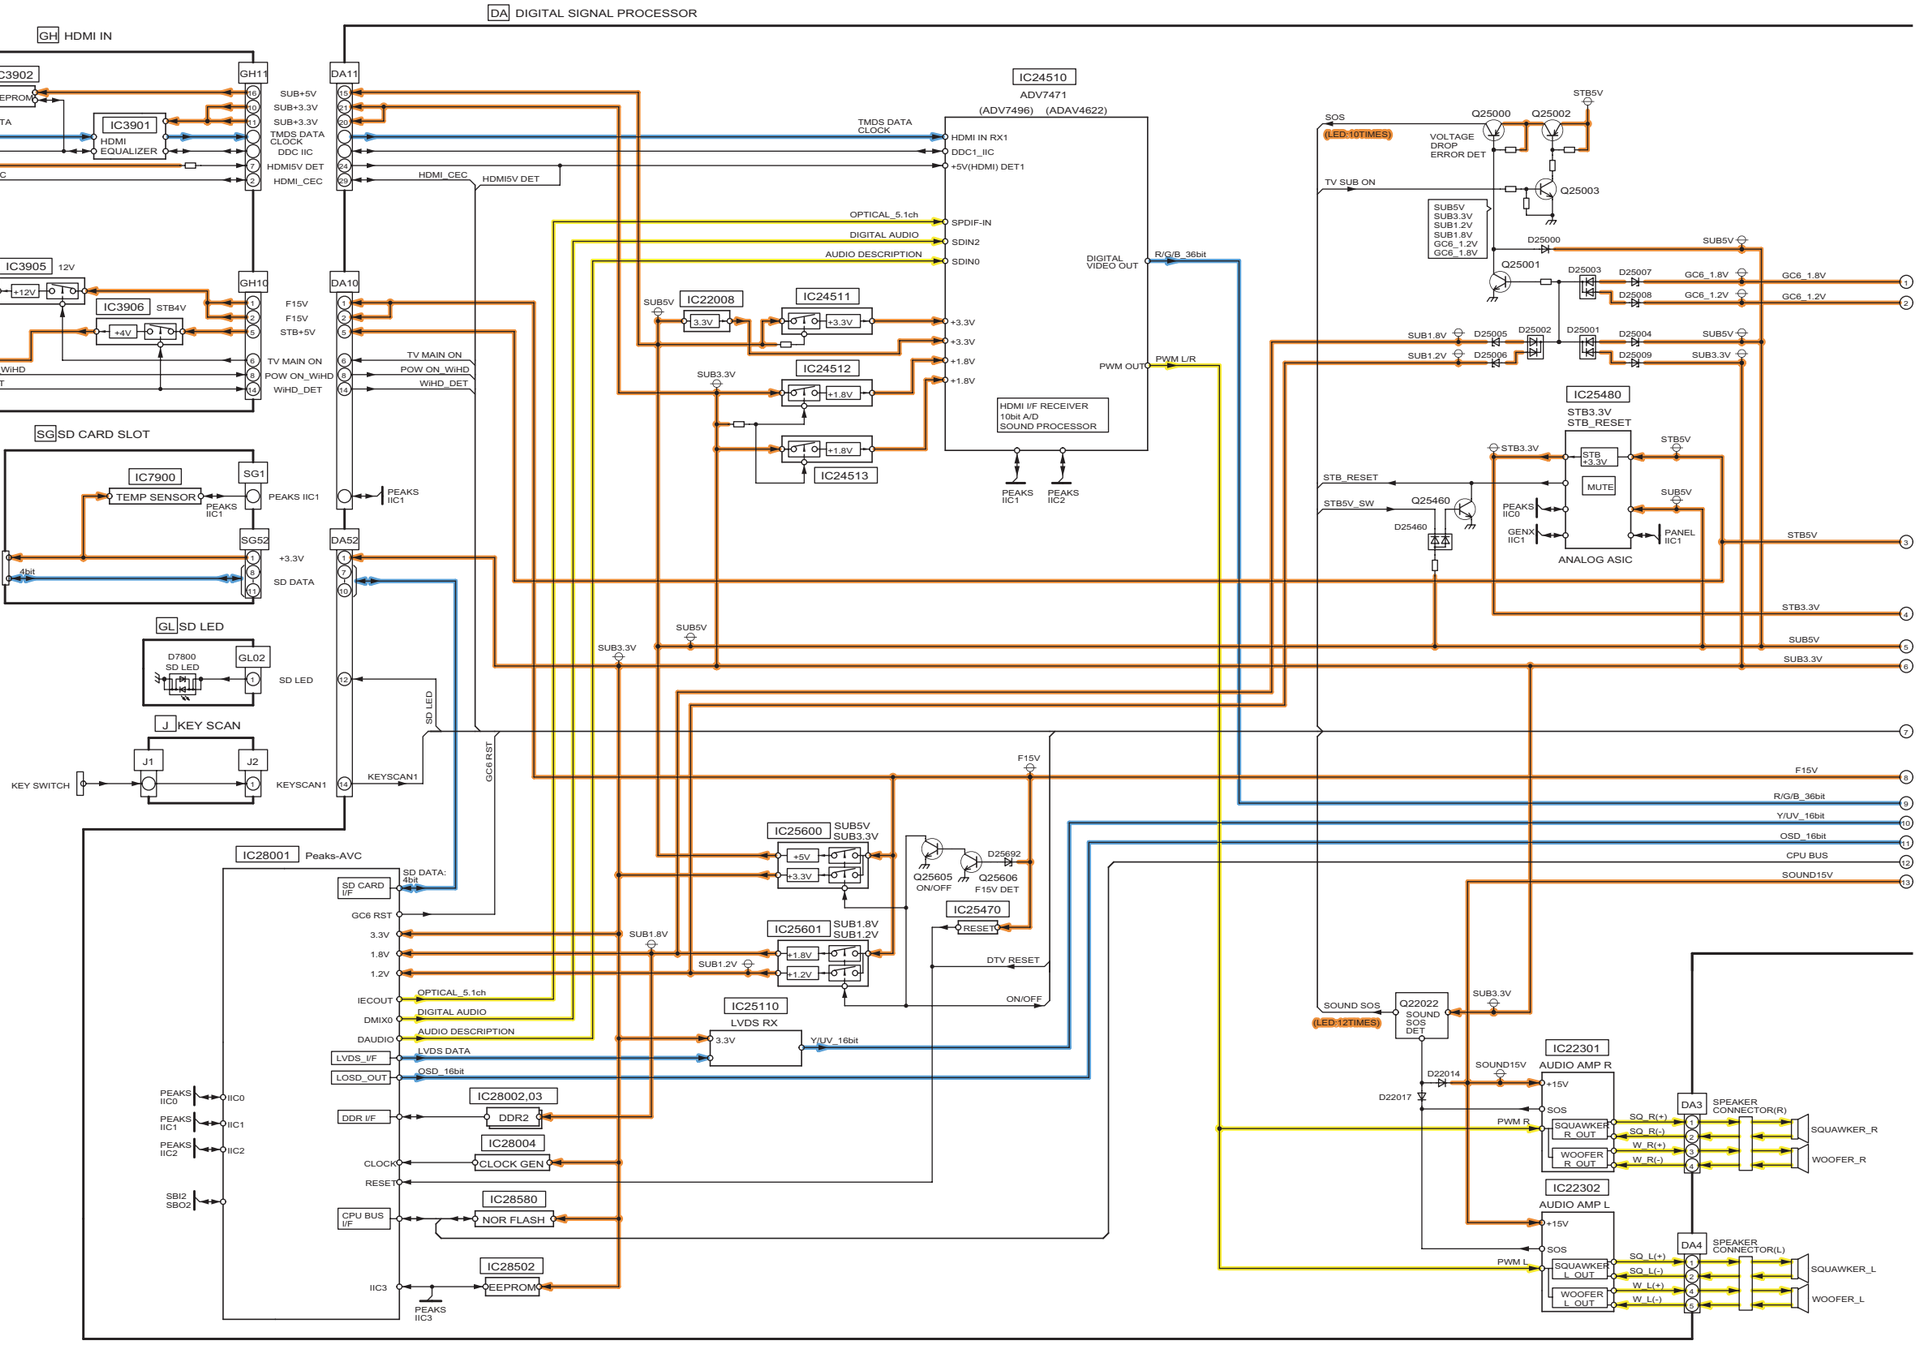


10.7. Display unit (2/4) Block Diagram

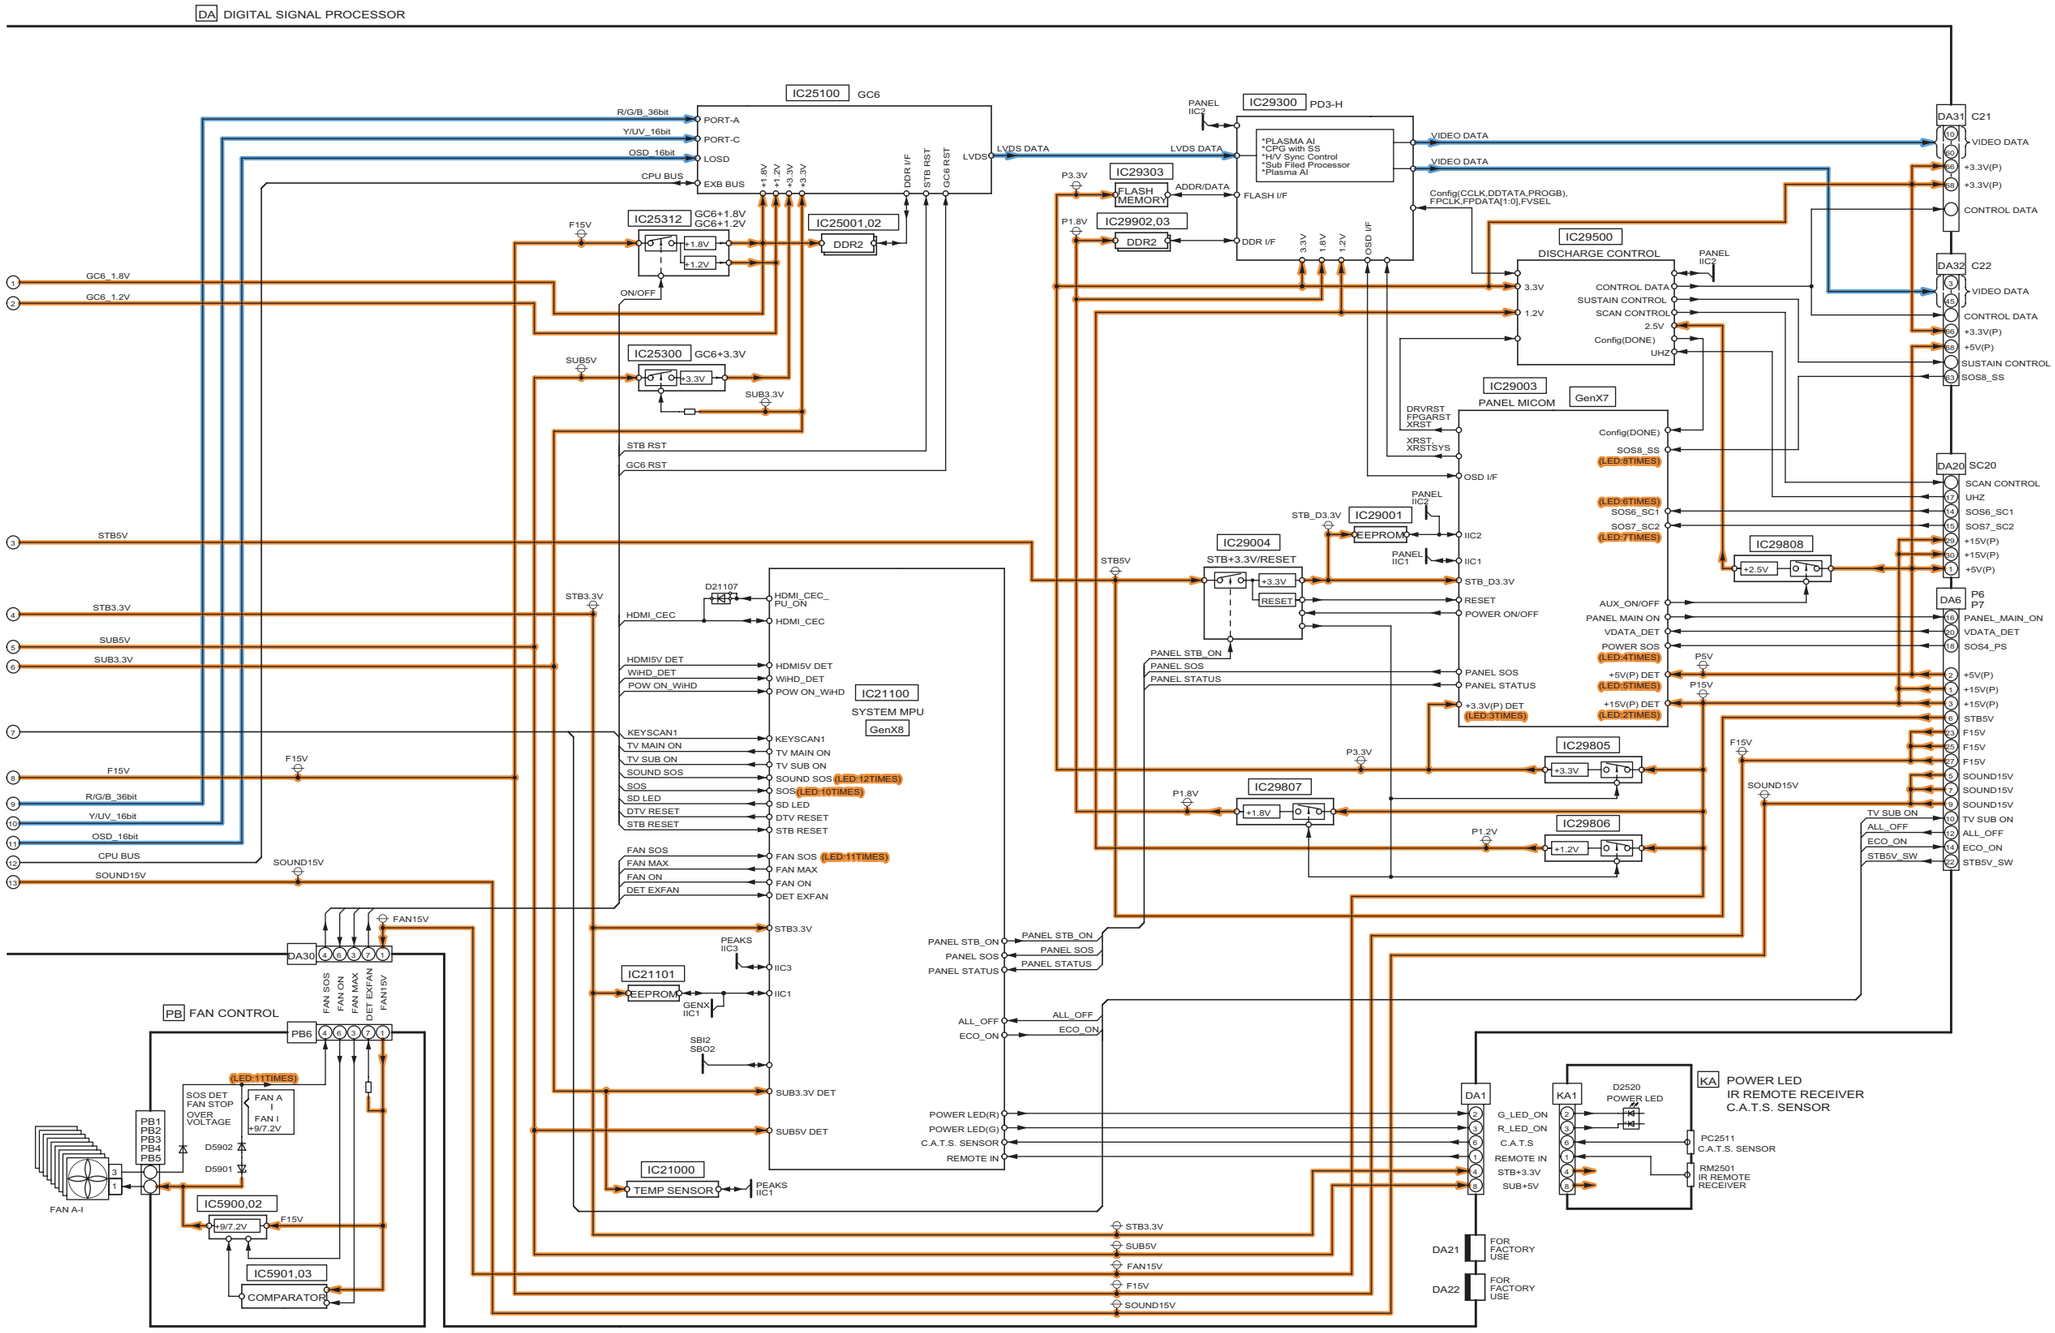


10.8. Display unit (3/4) Block Diagram

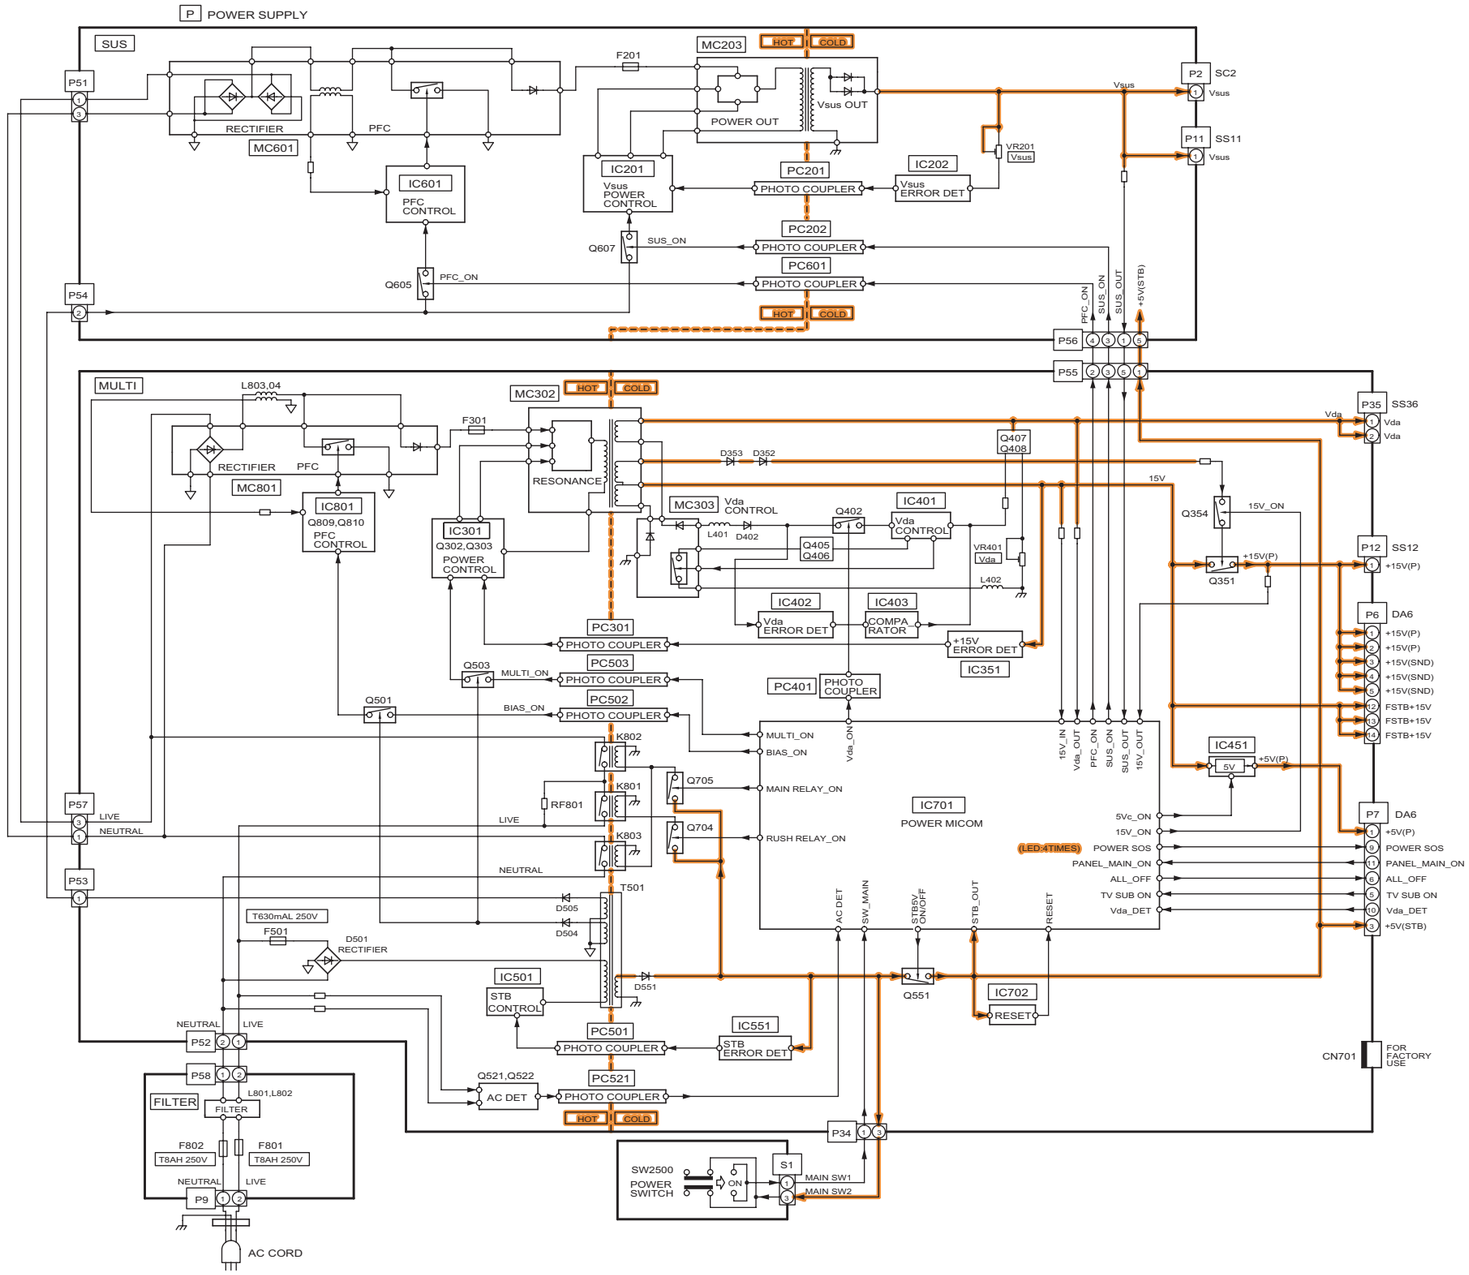


10.9. Display unit (4/4) Block Diagram

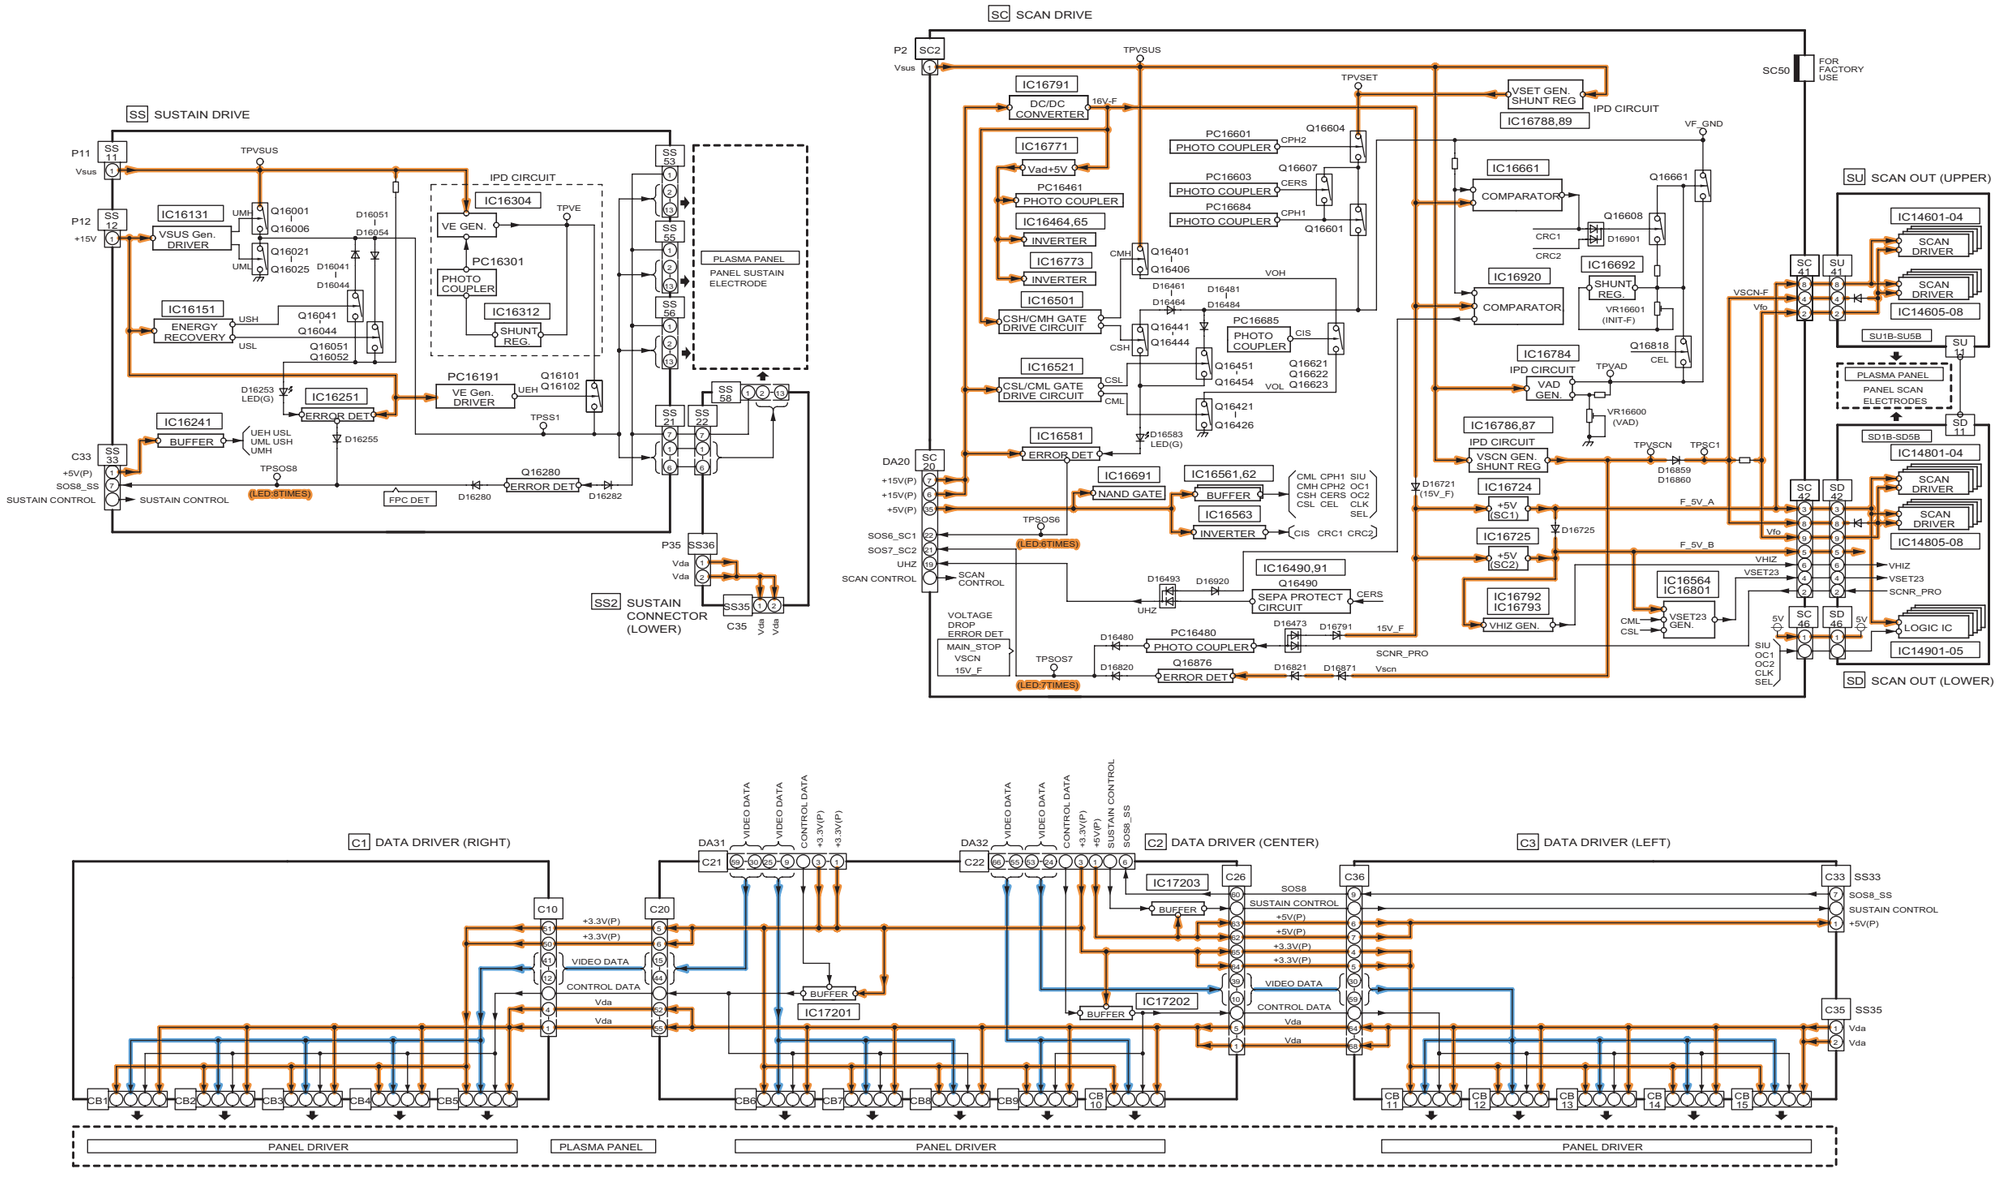

10.10. Wireless unit Block Diagram

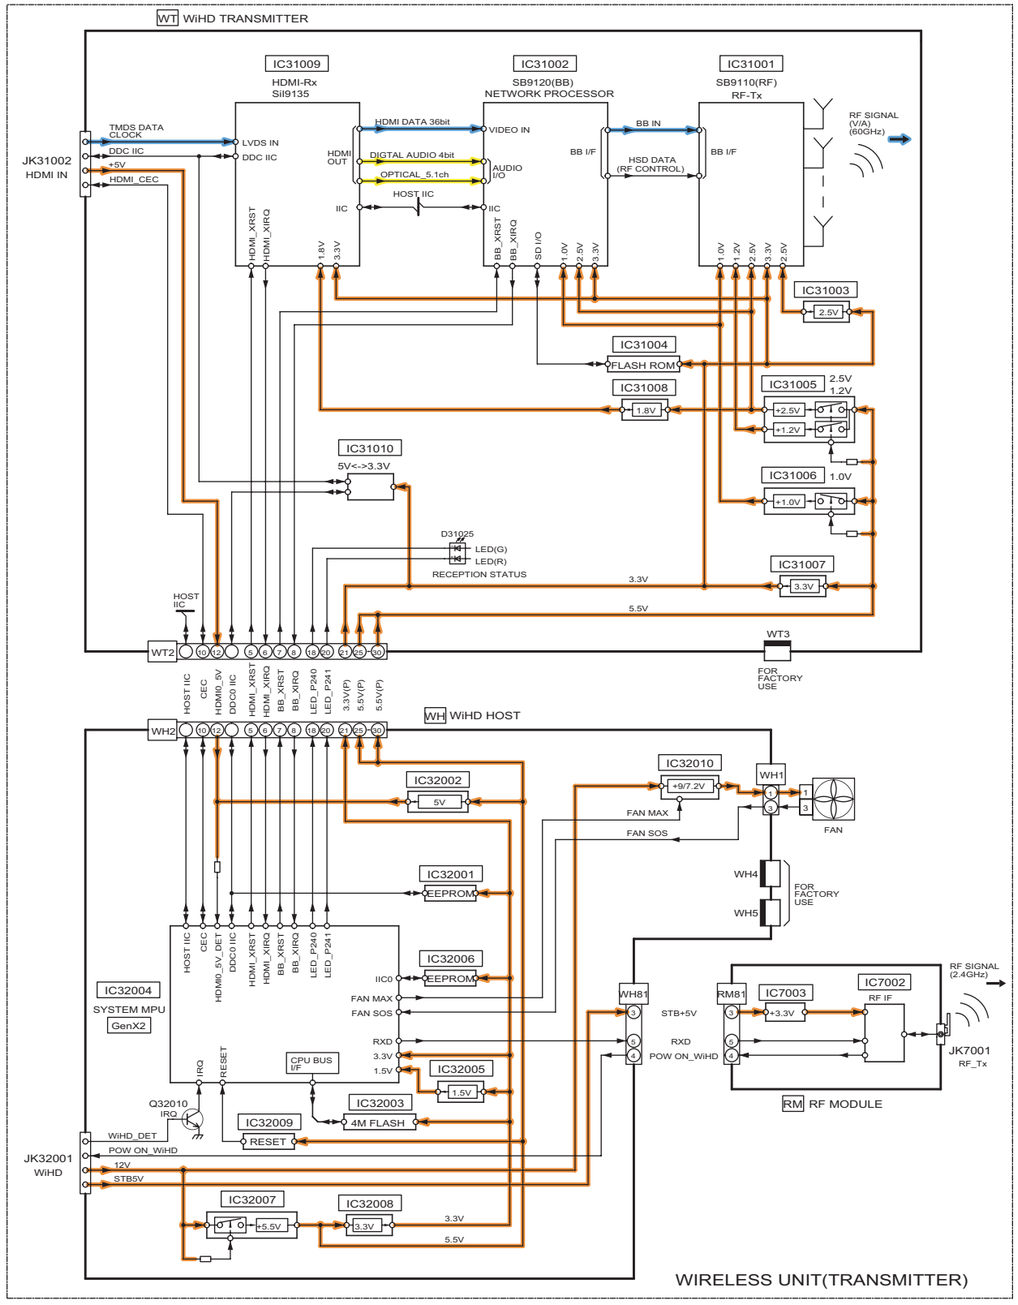

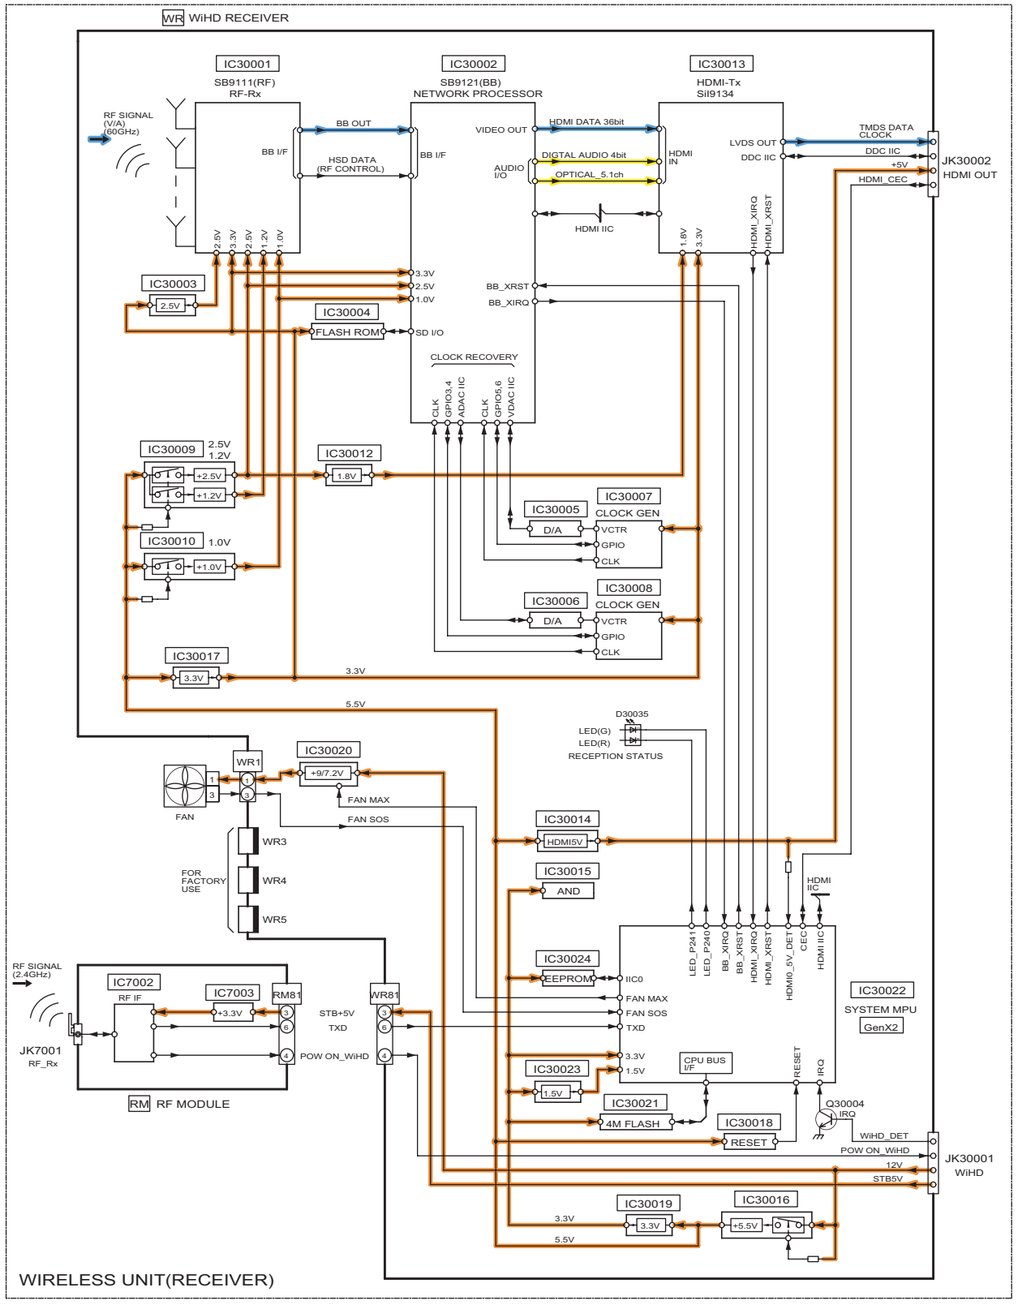


11 Wiring Connection Diagram

11.1. Caution statement.

Caution:


Please confirm that all flexible cables are assembled correctly.
Also make sure that they are locked in the connectors.
Verify by giving the flexible cables a very slight pull.

11.2. Wiring (Tuner box)

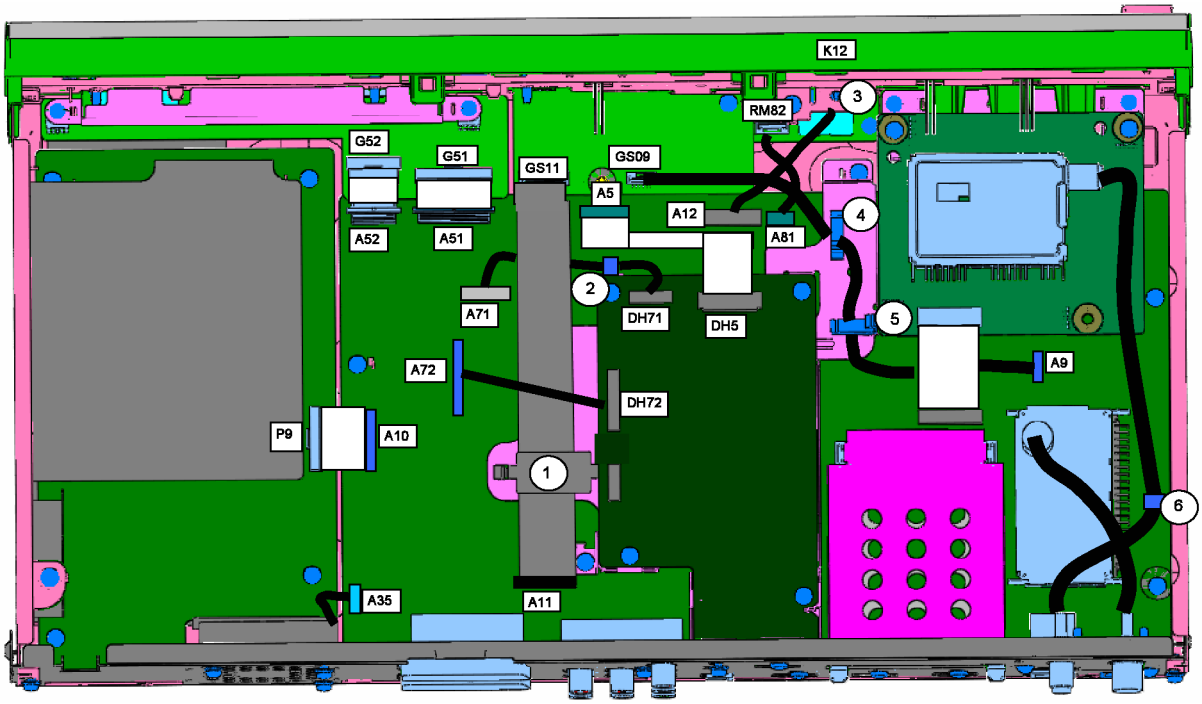

WIRE	CLAMPER					
	1	2	3	4	5	6
A11-GS11	●					
A81-RM81						
A5-DH5						
A71-DH71		●				
A72-DH72						
A9-GS09				●	●	
A35-FAN						
TUNER (XS) - OUTPUT						●
TUNER (A) - OUTPUT						
A12-K12			●			

11.3. Wiring (Display unit 1)

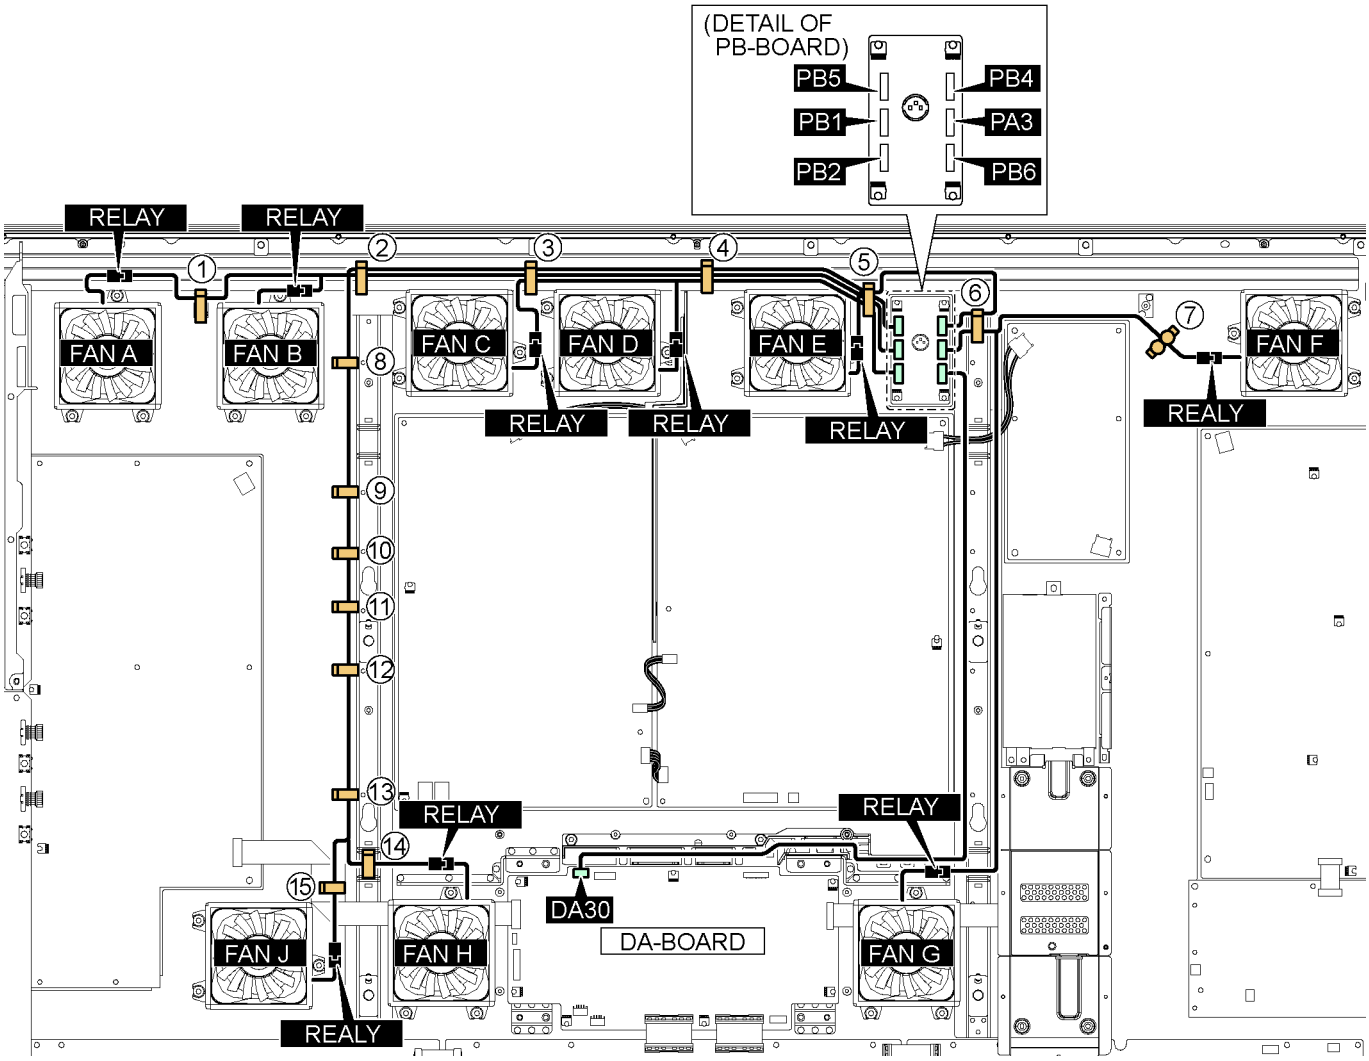


11.4. Wiring (Display unit 2)

WIRE \ CLAMPER	①	②	③	④	⑤	⑥	⑦	⑧	⑨	⑩	⑪	⑫	⑬	⑭	⑮
DA30 — PB6															
FAN A — PB1	●	●	●	●	●										
FAN B — PB1		●	●	●	●										
FAN C — PB2			●	●	●										
FAN D — PB2				●	●										
FAN E — PB4					●	●									
FAN F — PB3						●	●								
FAN G — PB3															
FAN H — PB5		●	●	⊜	●			●	●	●	●	●	●	●	
FAN J — PB5		●	●	⊜	●			●	●	●	●	●	●		●

⊜ : 3 TIMES


11.5. Wiring (Display unit 3)

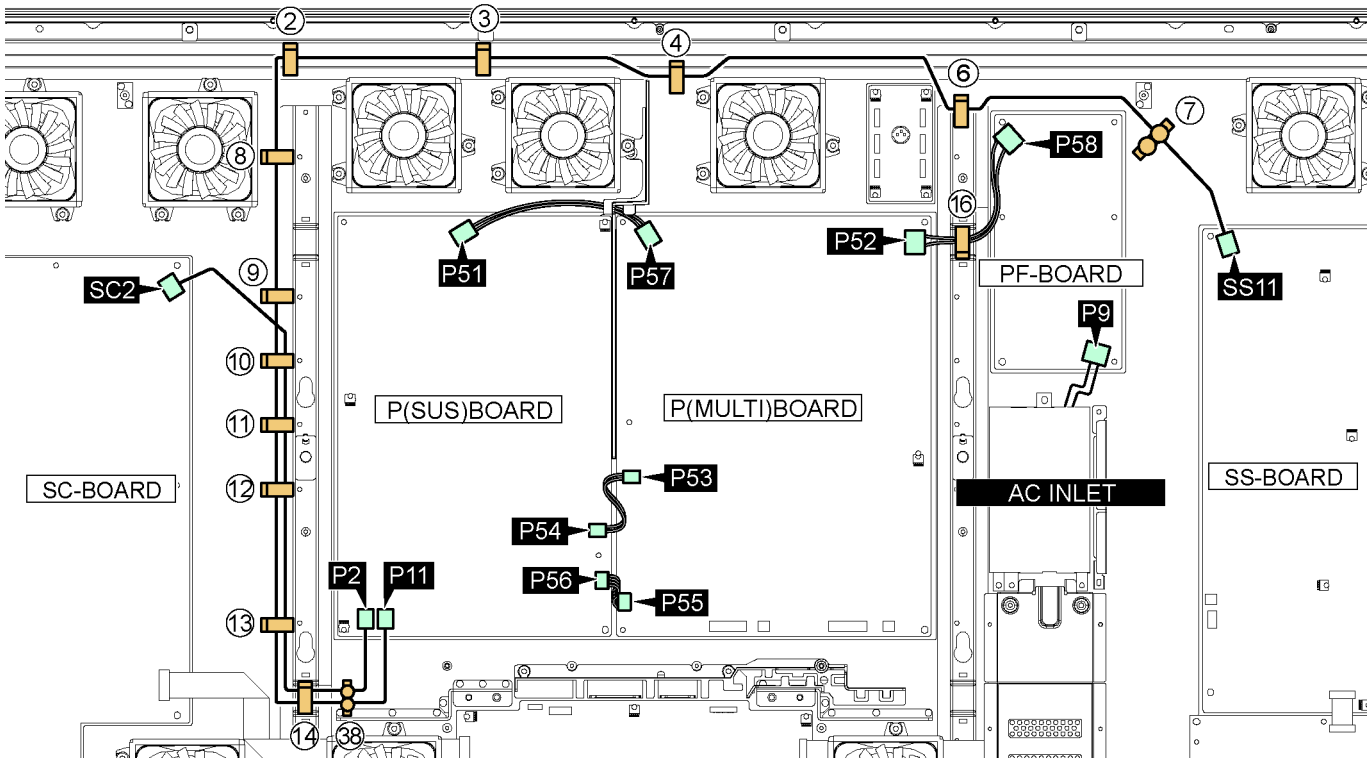

11.6. Wiring (Display unit 4)

WIRE \ CLAMPER	②	③	④	⑥	⑦	⑧	⑨	⑩	⑪	⑫	⑬	⑭	⑯	㊳
P51 — P57														
P52 — P58													●	
P53 — P54														
P55 — P56														
SC2 — P2								●	●	●	●	●		●
P11 — SS11	●	●	●	●	●	●	●	●	●	●	●	●		●
AC INLET — P9														

11.7. Wiring (Display unit 5)

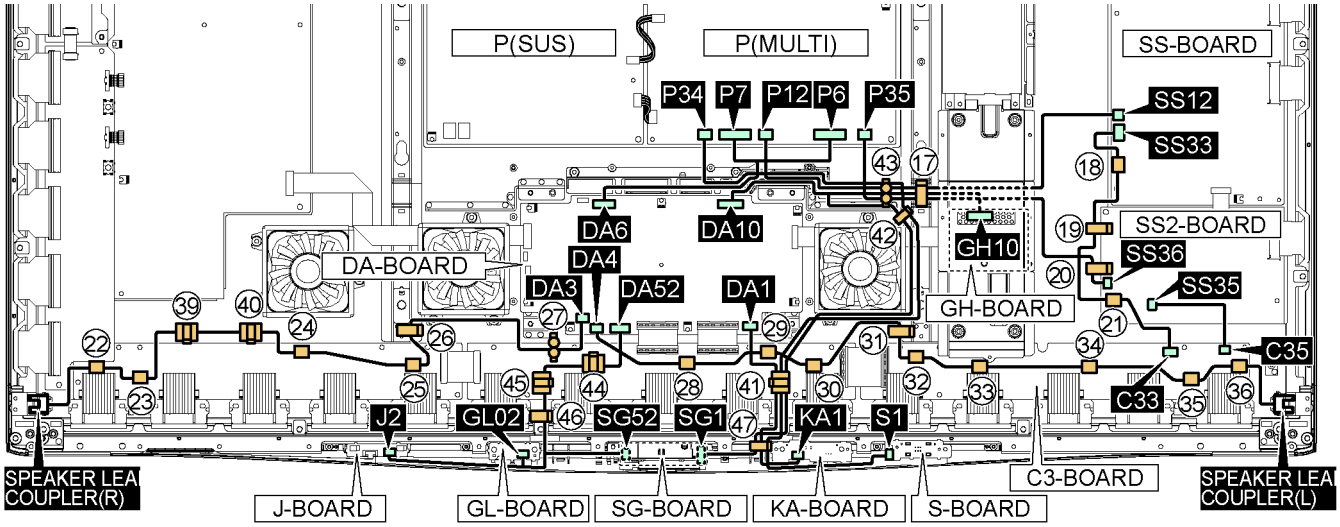

11.8. Wiring (Display unit 6)

WIRE \ CLAMPER	⑰	⑱	⑲	⑳	㉑	㉒	㉓	㉔	㉕	㉖	㉗	㉘	㉙	㉚	㉛	㉜	㉝	㉞	㉟	㊱	㊴	㊵	㊶	㊷	㊸	㊹	㊺	㊻	㊼
DA6 — P6/P7																													
SS33 — C33		●	●		●																								
SS35 — C35																													
DA3 — SPEAKER LEAD COUPLER(R)						●	●	●	●	●	●										●	●							
DA4 — SPEAKER LEAD COUPLER(L)												●	●	●	●	●	●	●	●	●									
S1 — P34																							●	●	②				●
DA52 — G52																													
DA52 — GL02																										●	●	●	
DA52 — J2																													
DA1 — KA1																							●						●
DA10 — GH10	●																								●				
P12 — SS12	●																								●				
P35 — SS36	●			●																					●				
SG1 — DA10																							●	●	●				●

② : 2 TIMES

12 Schematic Diagram

12.1. Schematic Diagram Note

Notes:


1. **Resistor**
   Unit of resistance is OHM [Ω] (K=1,000, M=1,000,000).
2. **Capacitor**
   Unit of capacitance is μF, unless otherwise noted.
3. Coil
   Unit of inductance is H, unless otherwise noted.
4. Test Point
   ⚲ : Test Point position
5. Earth Symbol
   ⏚ : Chassis Earth (Cold) ⏚ : Line Earth (Hot)
6. Voltage Measurement
   Voltage is measured by a DC voltmeter.
   Conditions of the measurement are the following:
   Power Source AC220-240V, 50/60Hz
   Receiving Signal ..... Colour Bar signal (RF)
   All customer's controls ..... Maximum positions
7. When arrow mark (↗) is found, connection is easily found from the direction of arrow.
8. Indicates the major signal flow. : Video ➡ Audio ⇨
9. This schematic diagram is the latest at the time of printing and subject to change without notice.


Remarks:

1. The Power Circuit contains a circuit area which uses a separate power supply to isolate the earth connection.
   The circuit is defined by HOT and COLD indications in the schematic diagram. Take the follwing precautions.
   All circuits, except the Power Circuit, are cold.
   Precautions
   a. Do not touch the hot part or the hot and cold parts at the same time or you may be shocked.
   b. Do not short- circuit the hot and cold circuits or a fuse may blow and parts may break.
   c. Do not connect an instrument, such as an oscilloscope, to the hot and cold circuits simultaneously or a fuse may blow.
   Connect the earth of instruments to the earth connection of the circuit being measured.
   d. Make sure to disconnect the power plug before removing the chassis.

12.2. Tuner box


12.2.1. G and K-Board Schematic Diagram

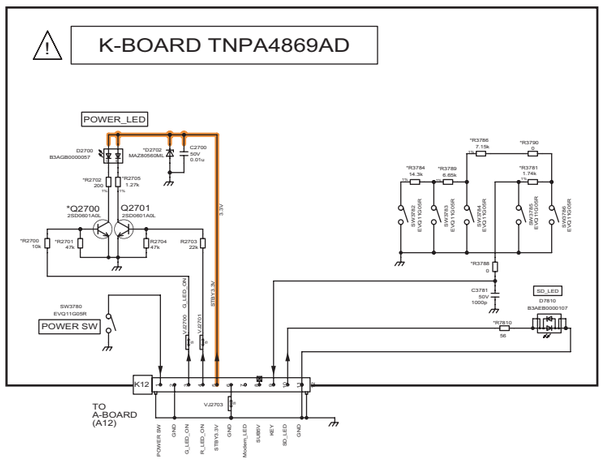

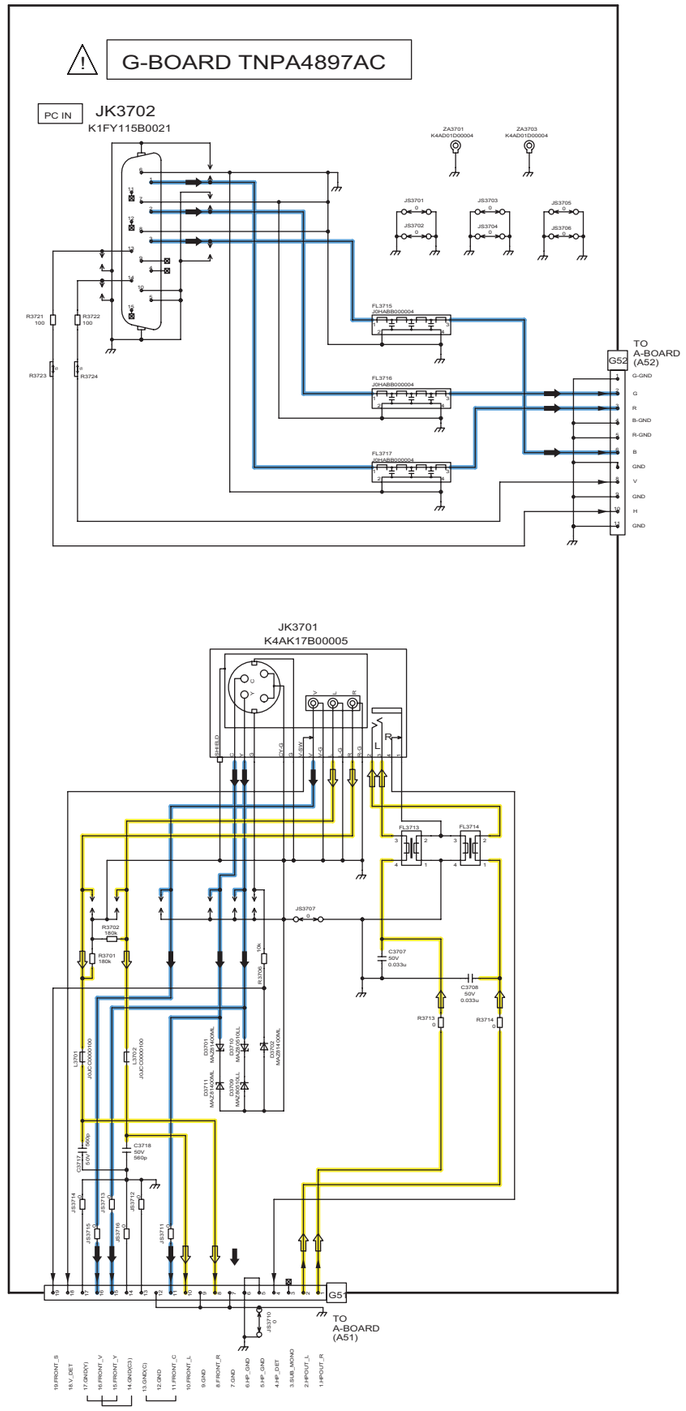


12.2.2. GS-Board Schematic Diagram

GS-BOARD TNPA4867AC

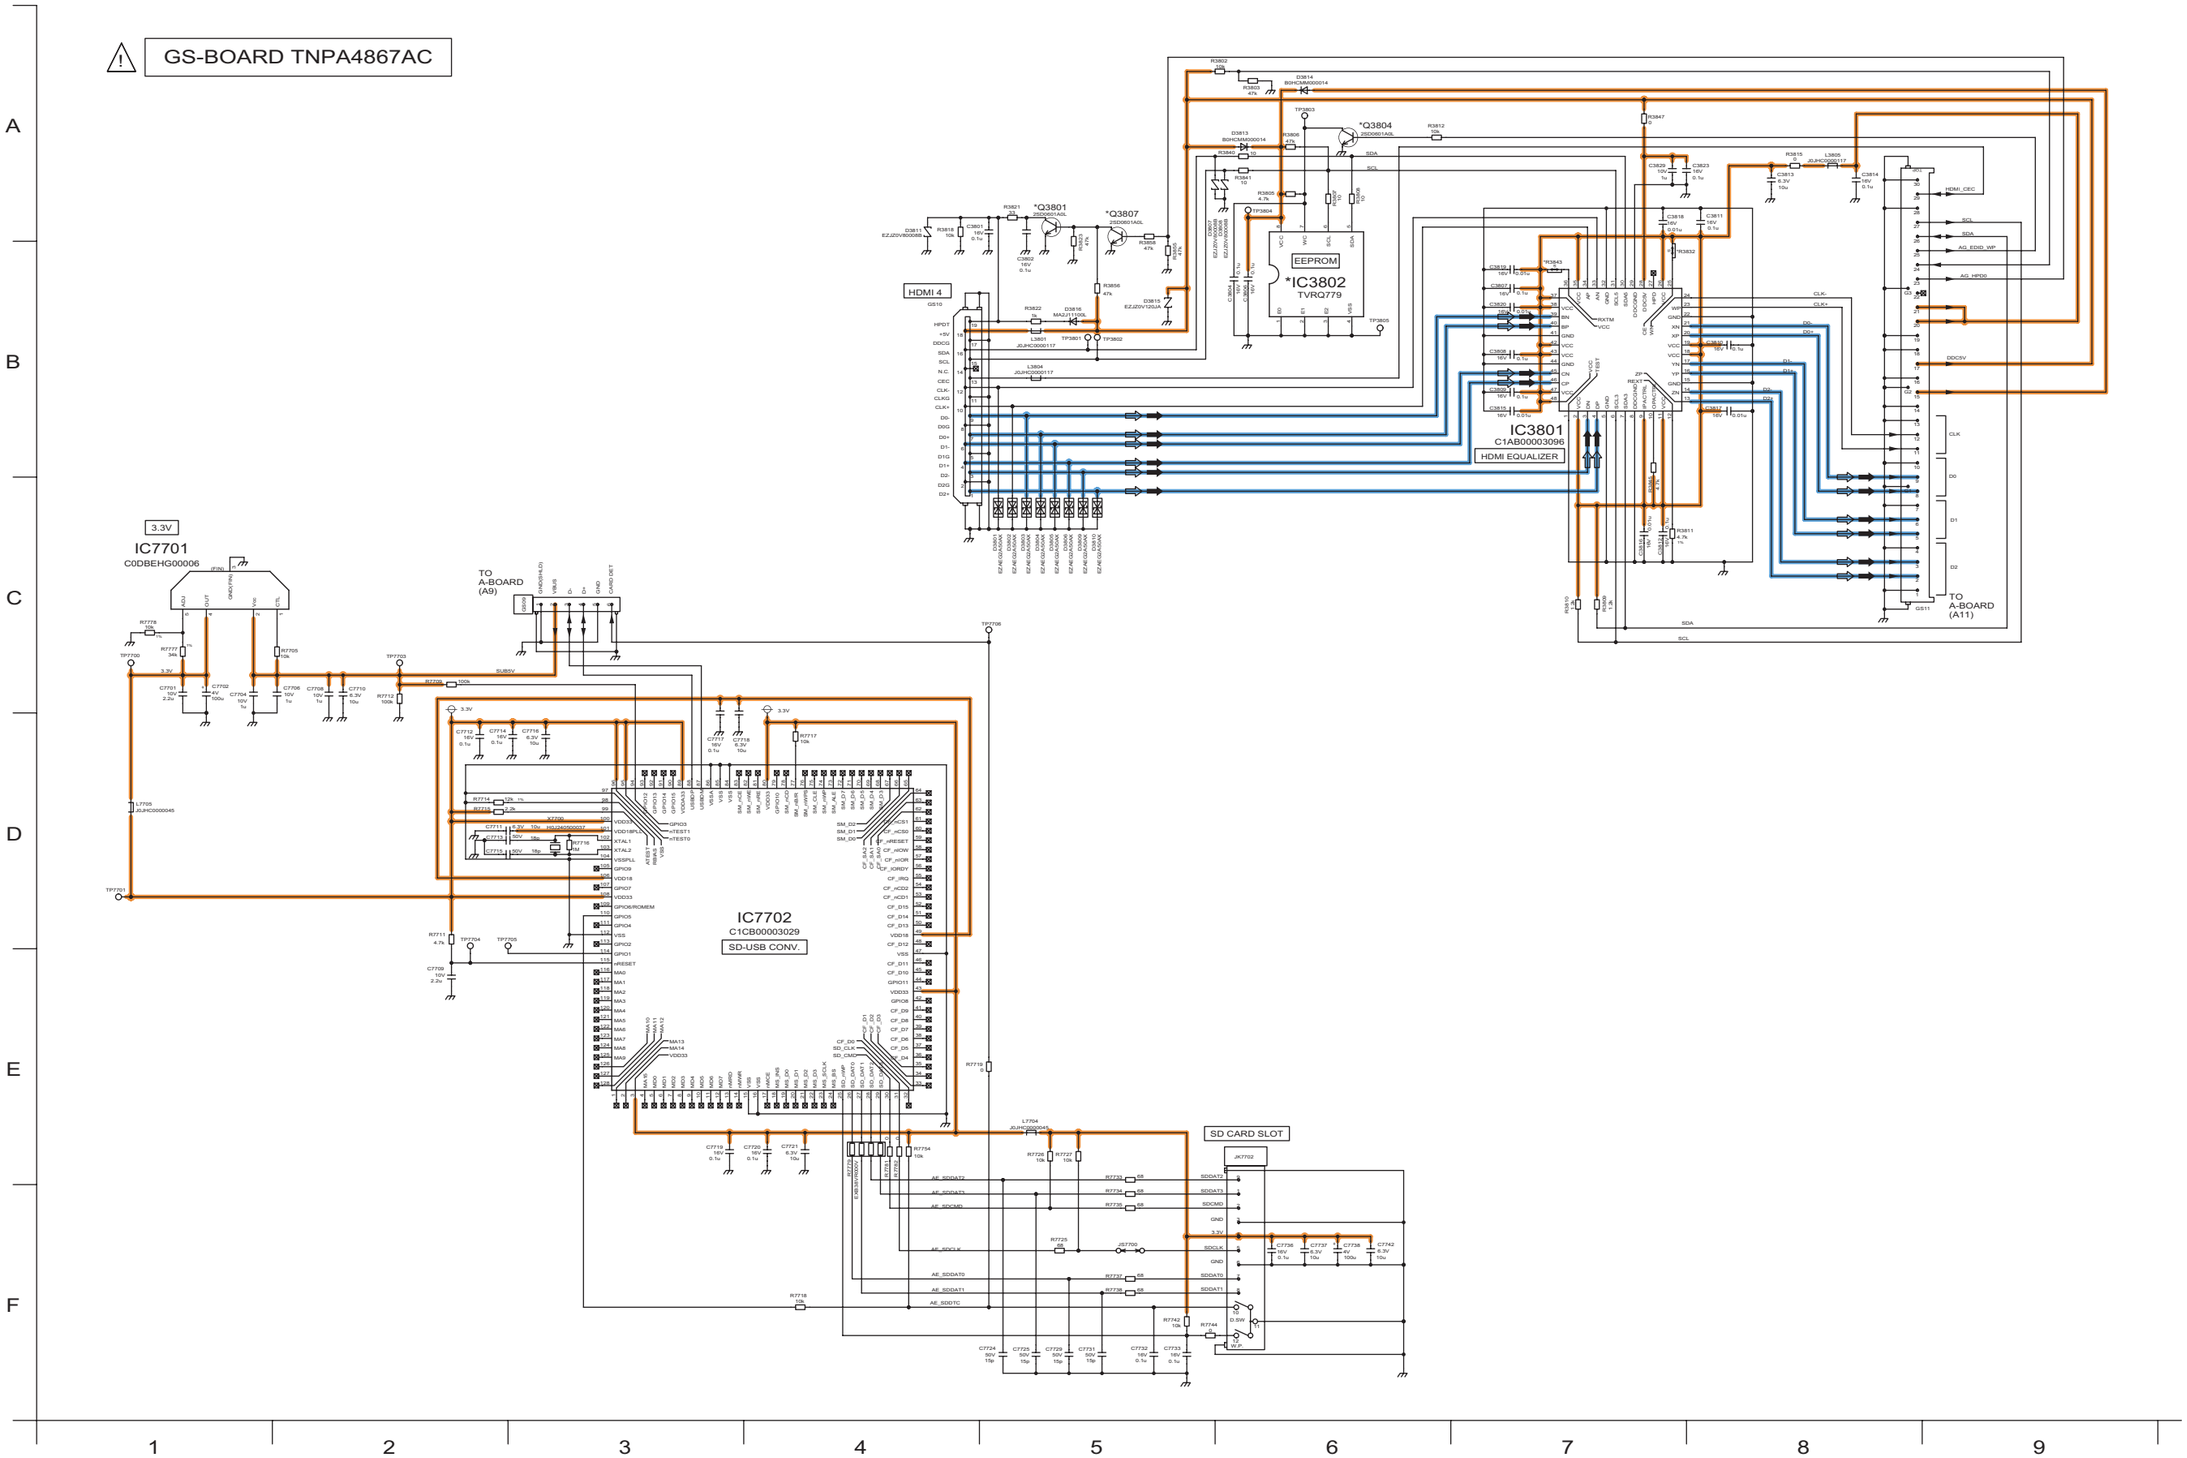


12.2.3. A-Board (1/20) Schematic Diagram

A-BOARD TXN/A1DKUM (1/20)

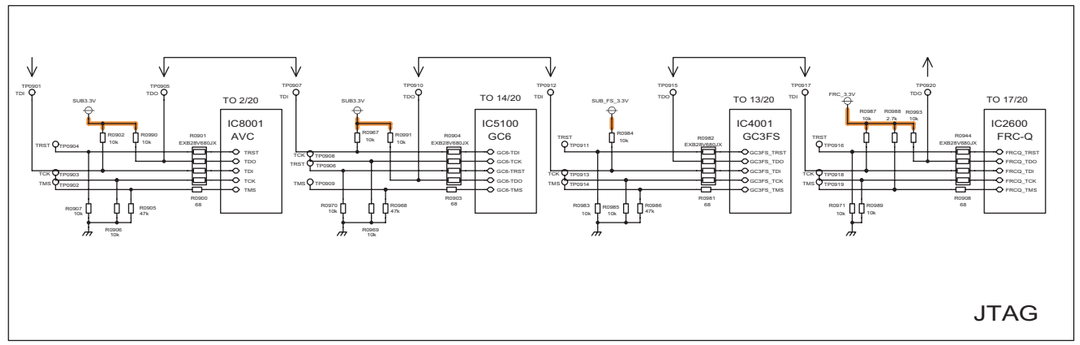

IIC


REF No. 0900-0999
REF No. 1000-1099

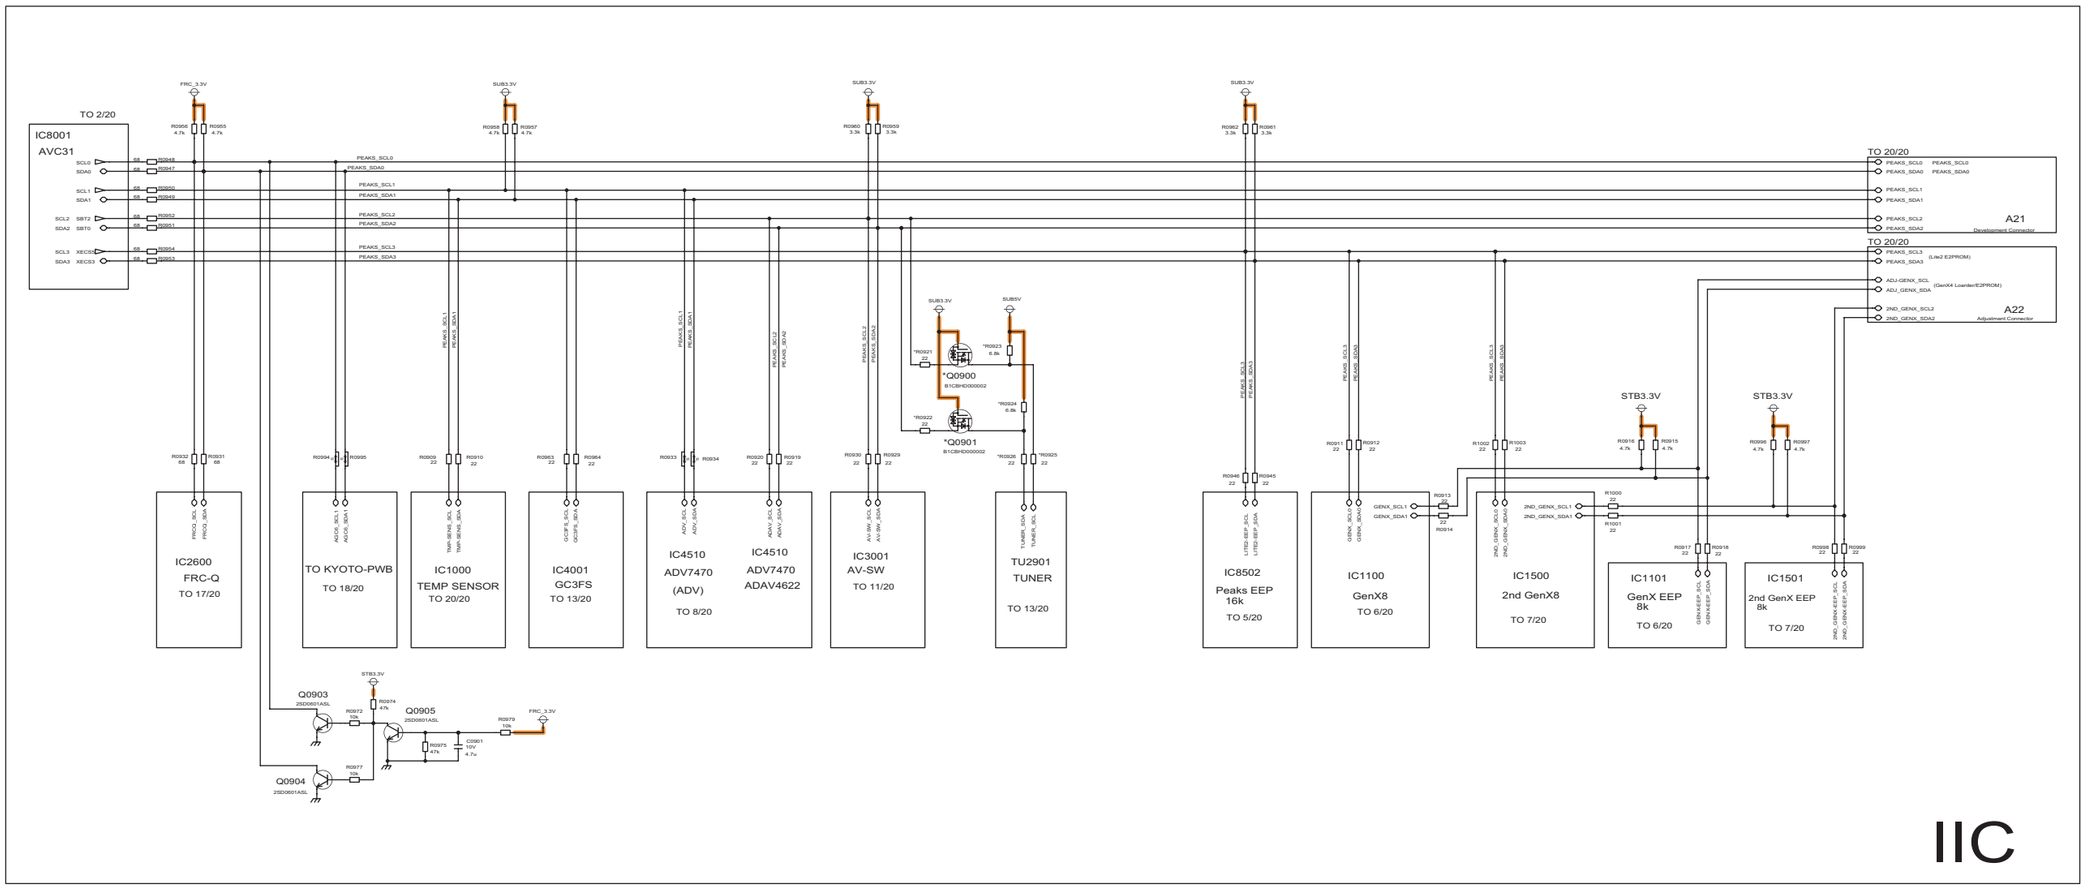

12.2.4. A-Board (2/20) Schematic Diagram

⚠ A-BOARD TXN/A1DKUM (2/20)


Peaks-COMMON
REF No. 8000-8999

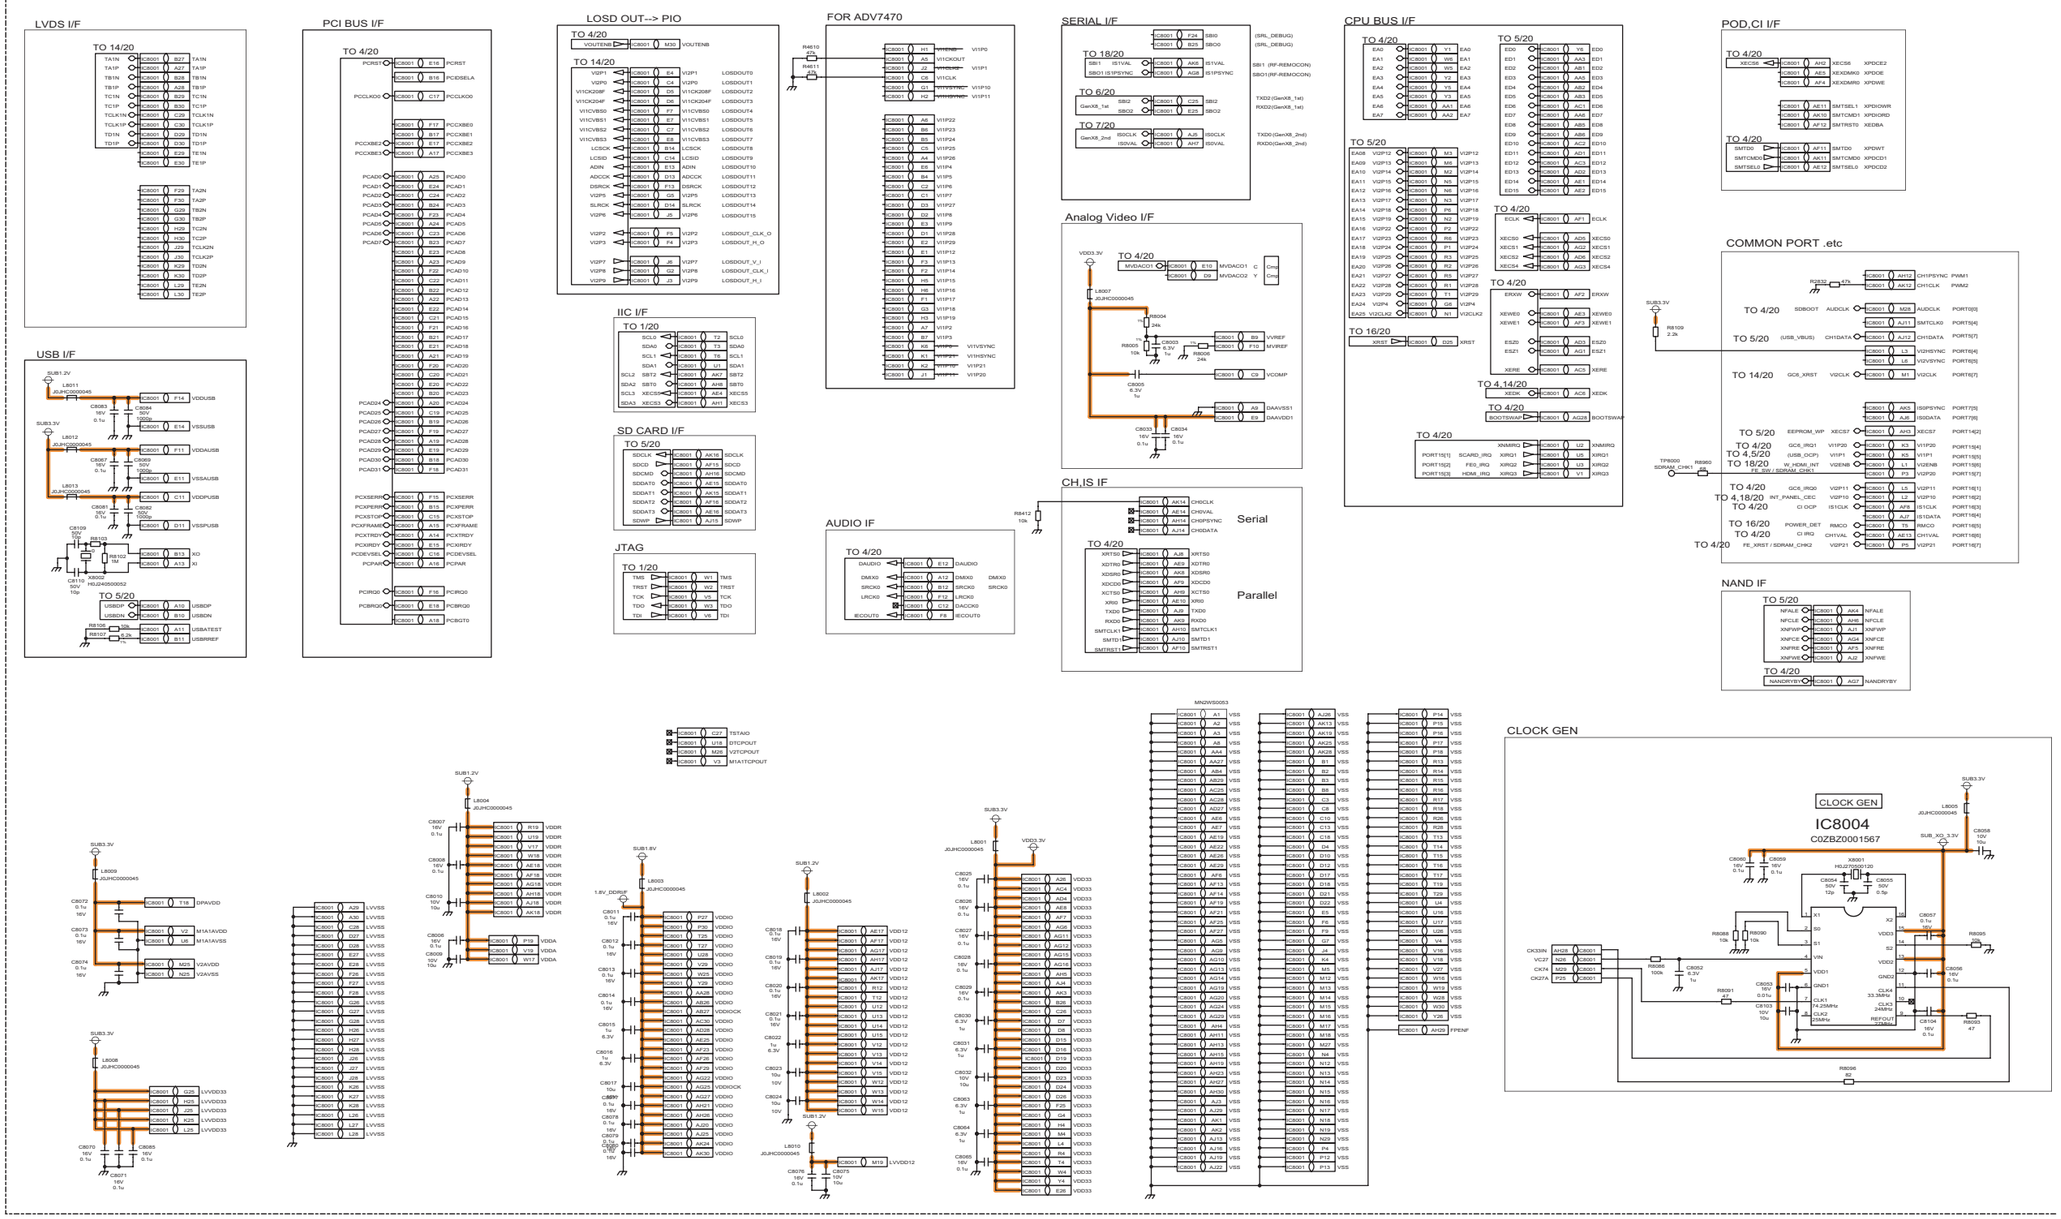

12.2.5. A-Board (3/20) Schematic Diagram

⚠ A-BOARD TXN/A1DKUM (3/20)


Peaks-COMMON
REF No. 8000-8999

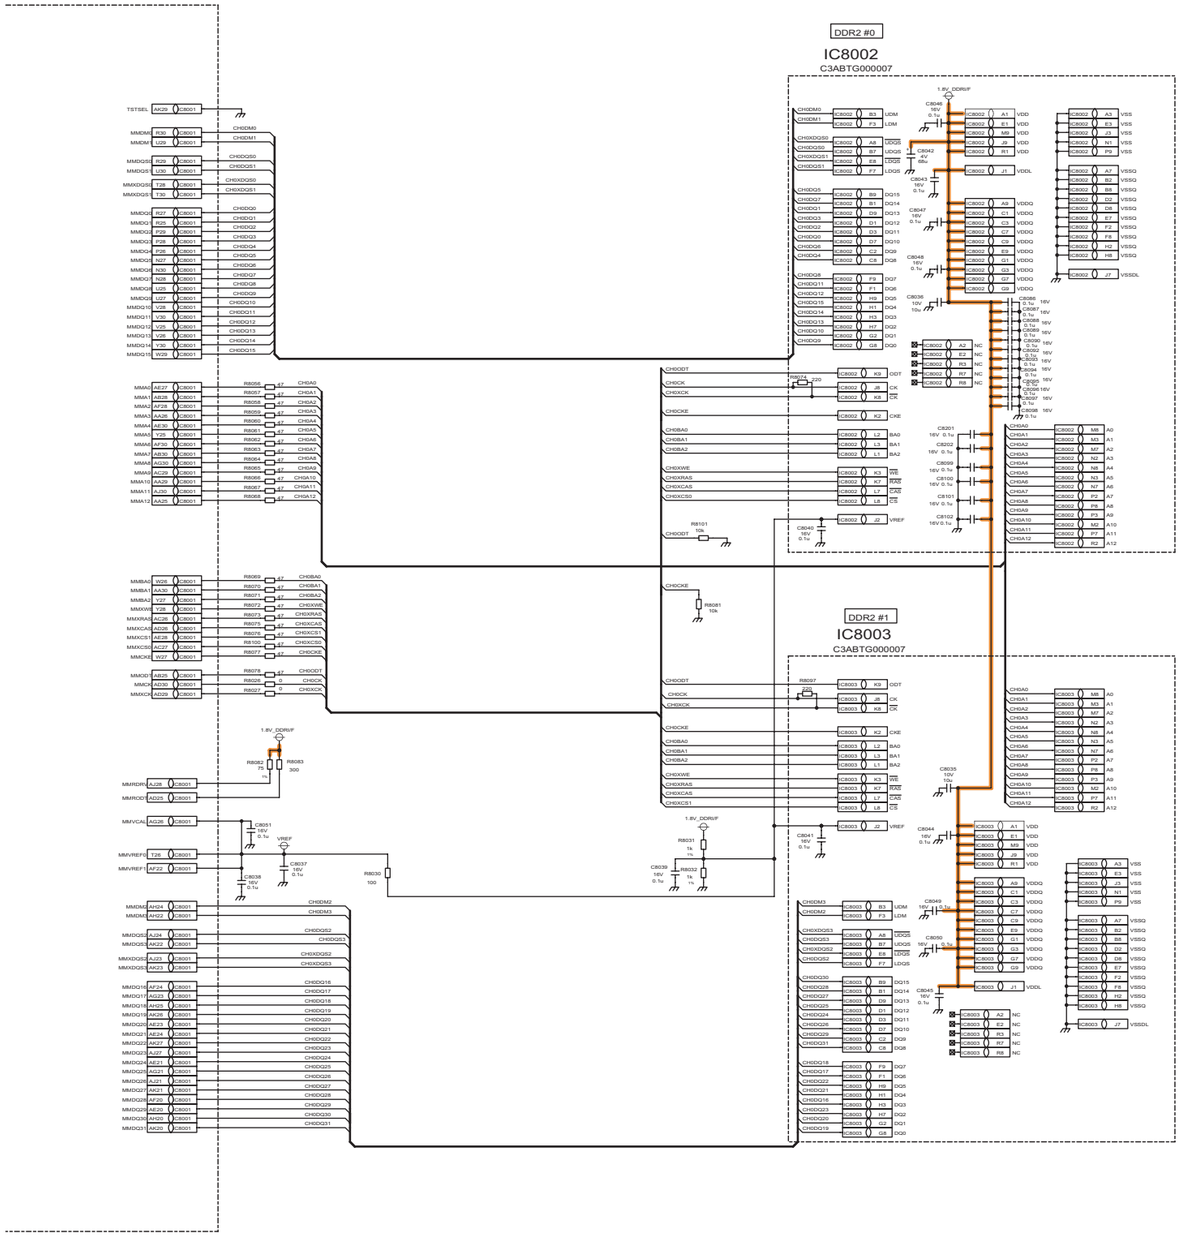


12.2.6. A-Board (4/20) Schematic Diagram

⚠ A-BOARD TXN/A1DKUM (4/20)

Peaks-DEST
REF No. 8000-8999

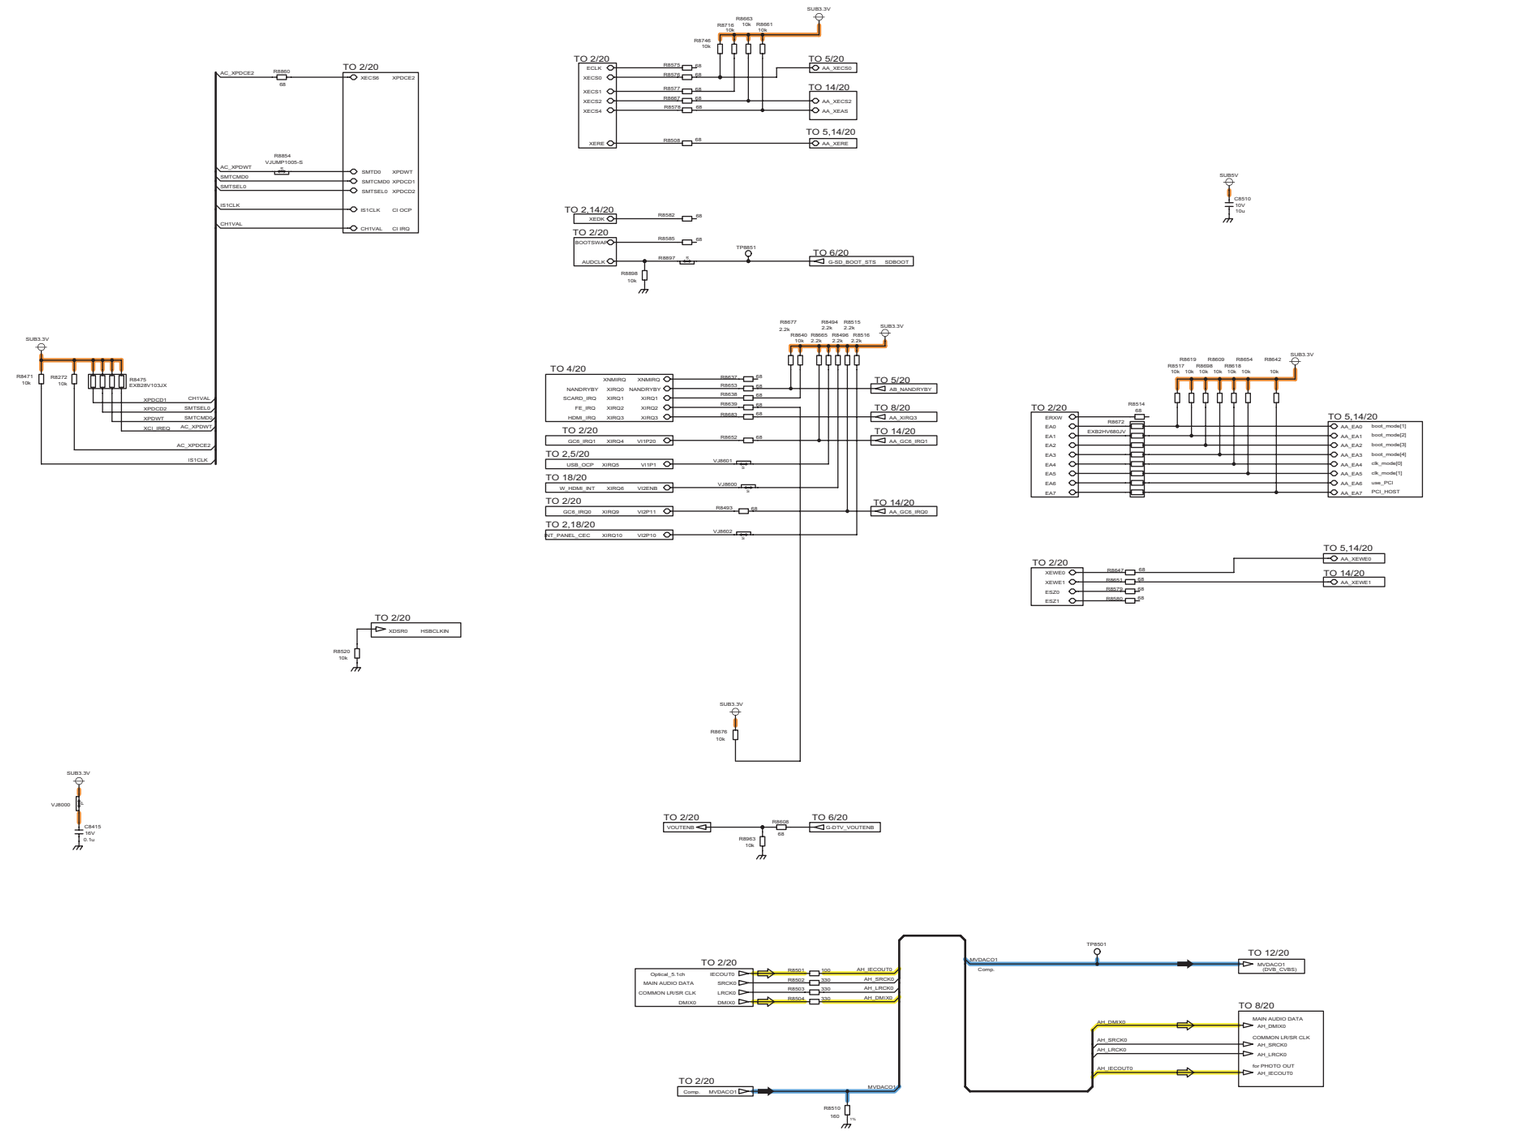

12.2.7. A-Board (5/20) Schematic Diagram

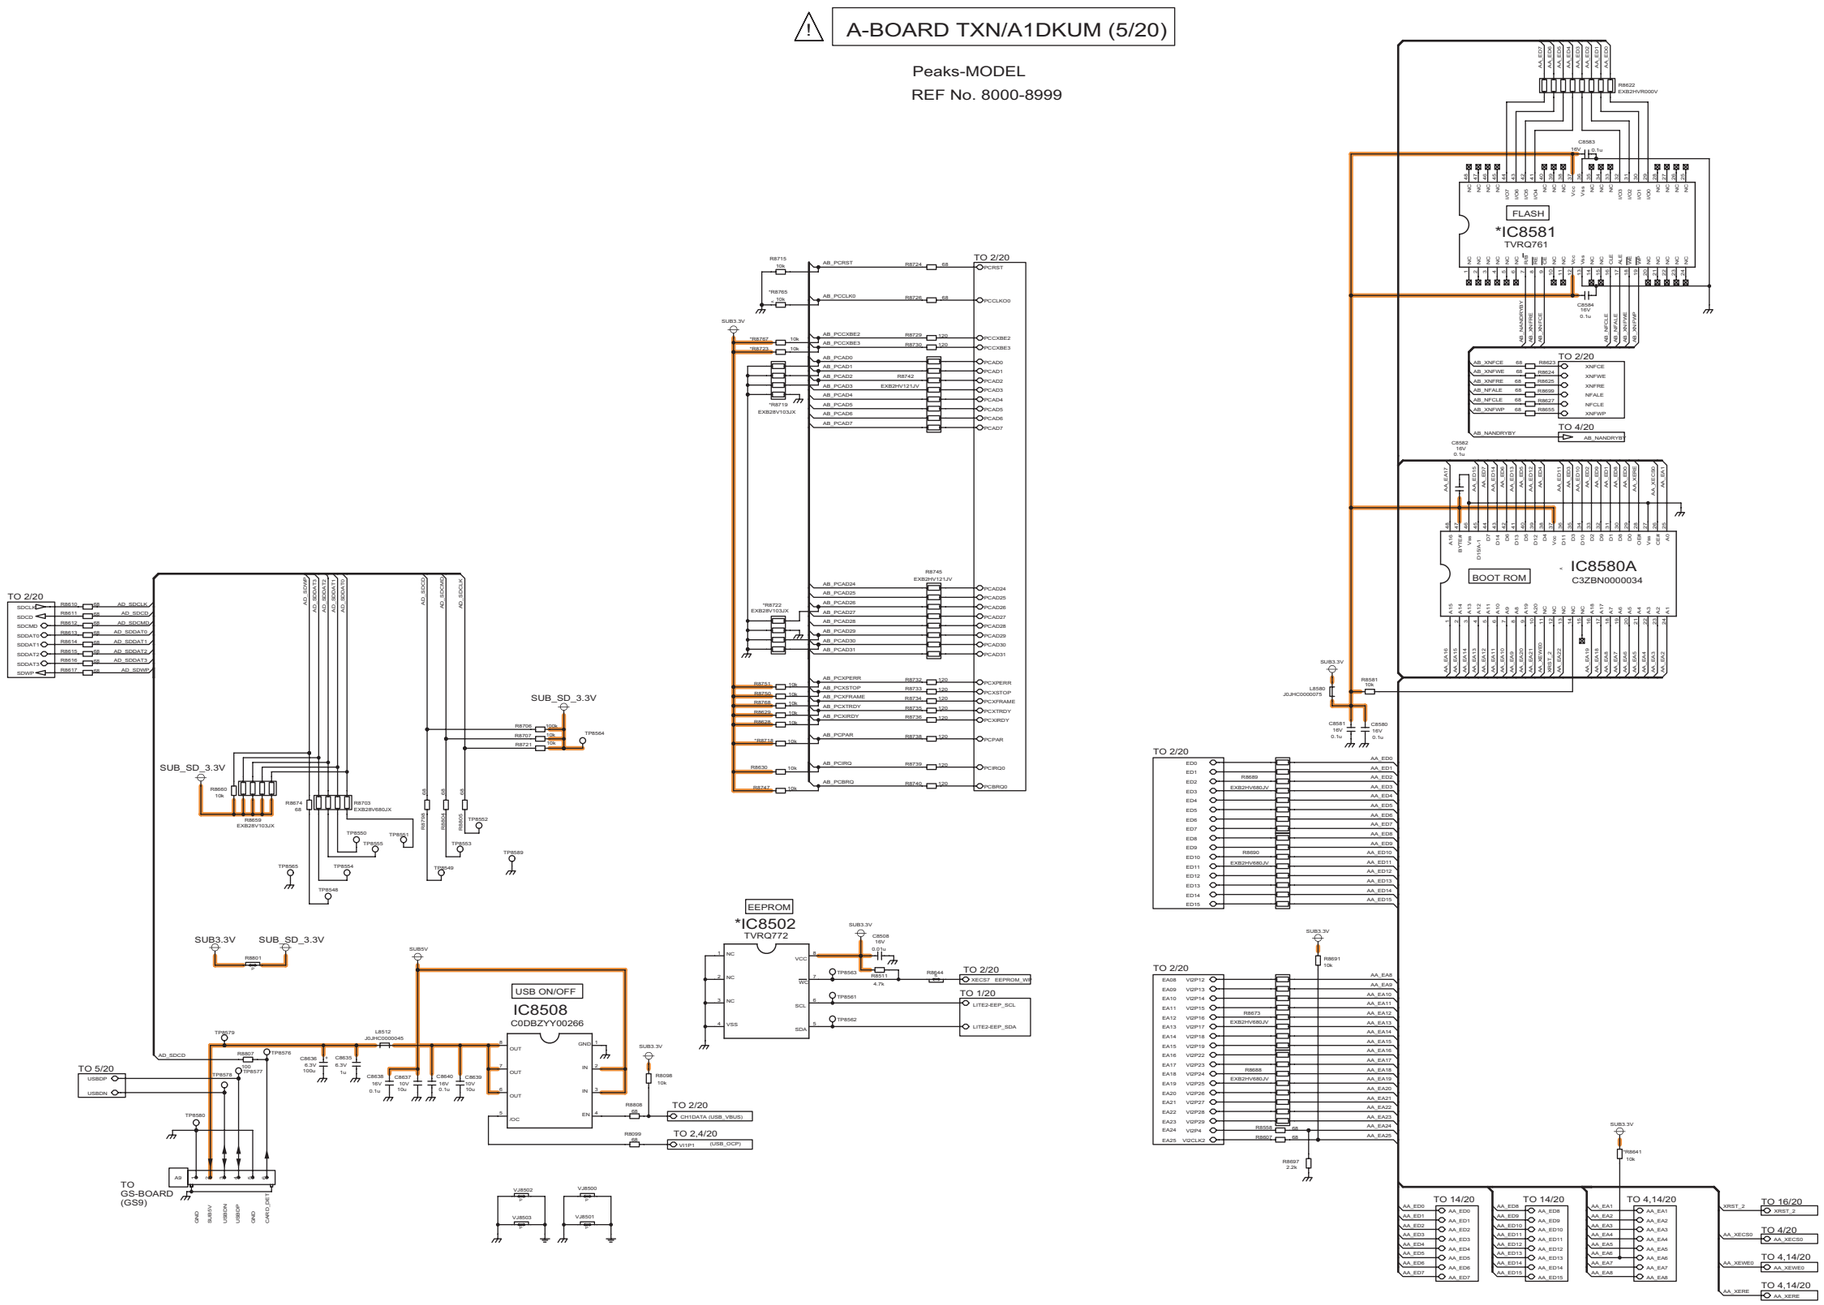


12.2.8. A-Board (6/20) Schematic Diagram

A-BOARD TXN/A1DKUM (6/20)

GenX


REF No. 1100-1499

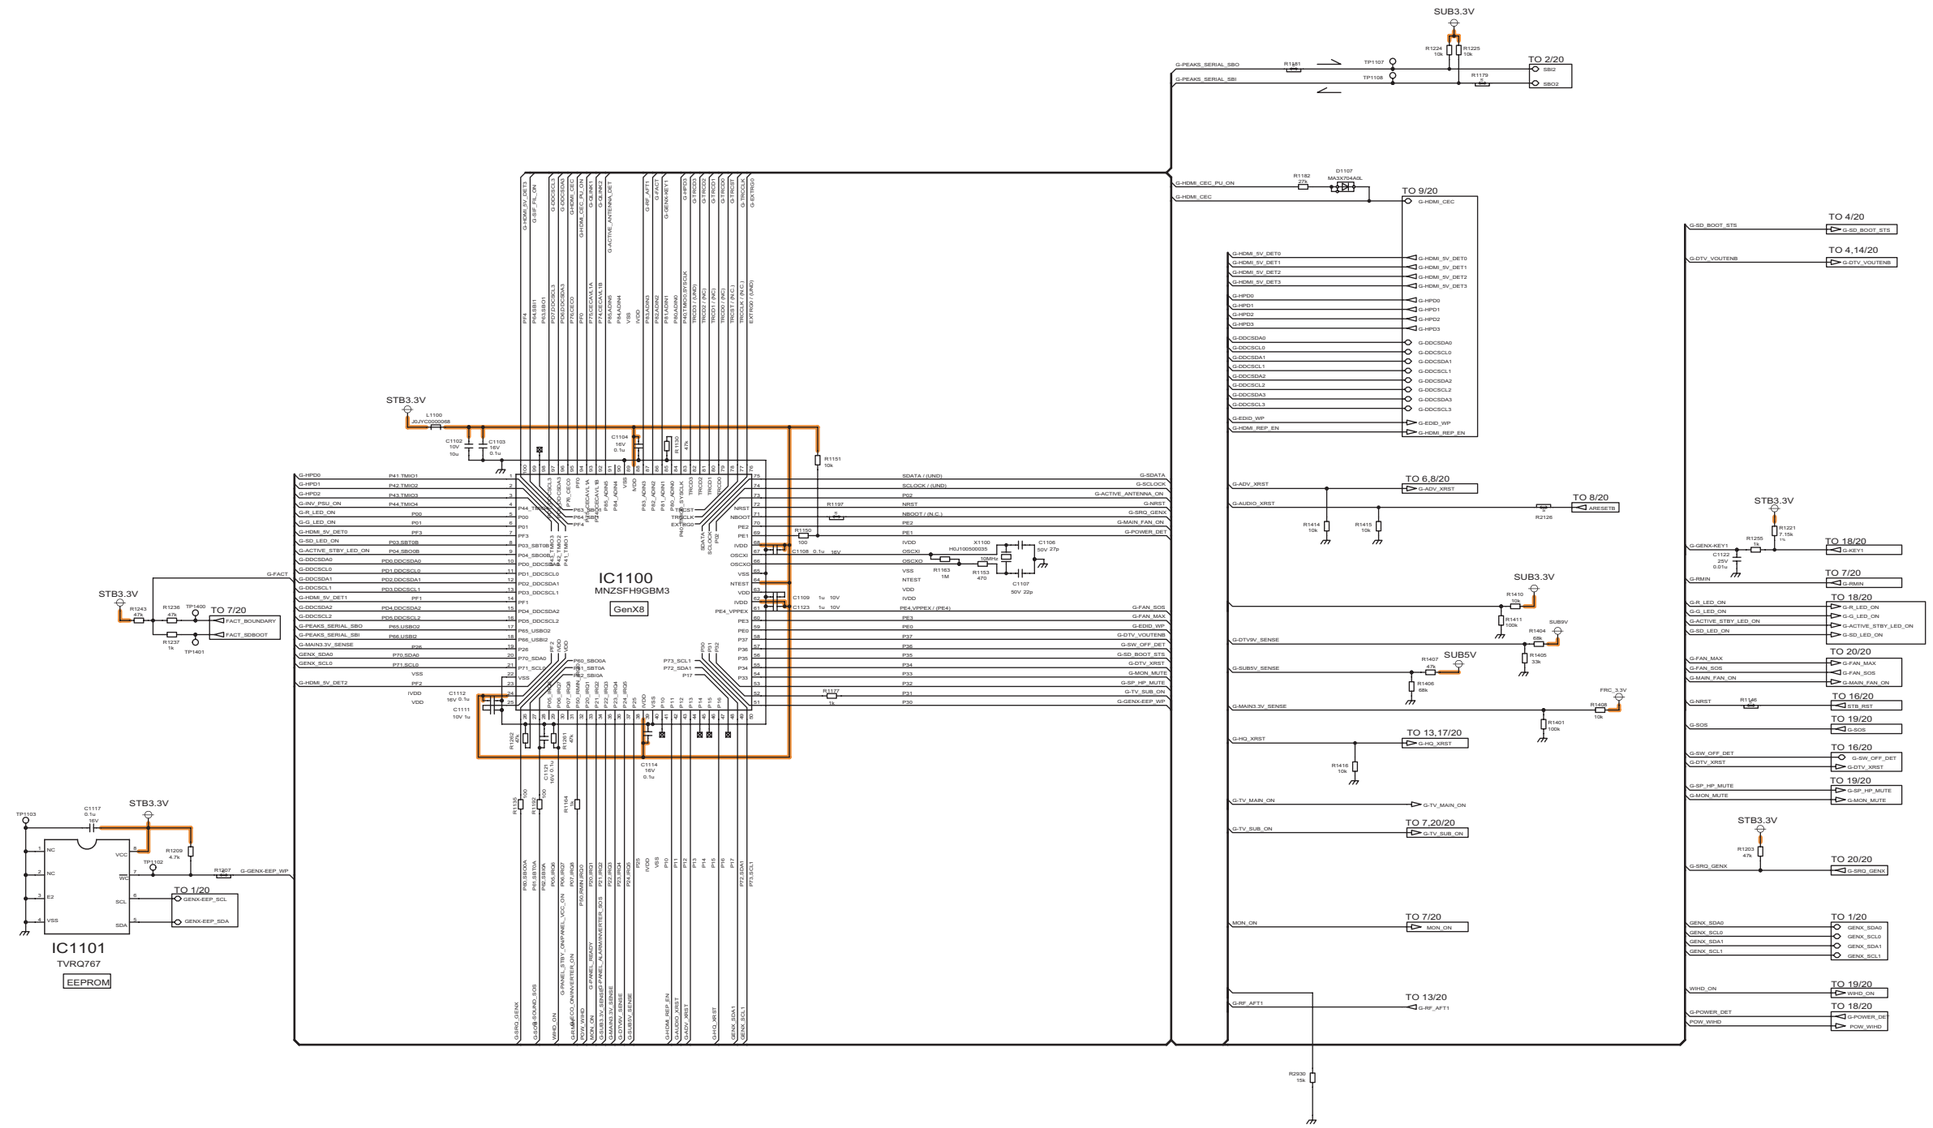

12.2.9. A-Board (7/20) Schematic Diagram

⚠ A-BOARD TXN/A1DKUM (7/20)

REF No. 1500-1999

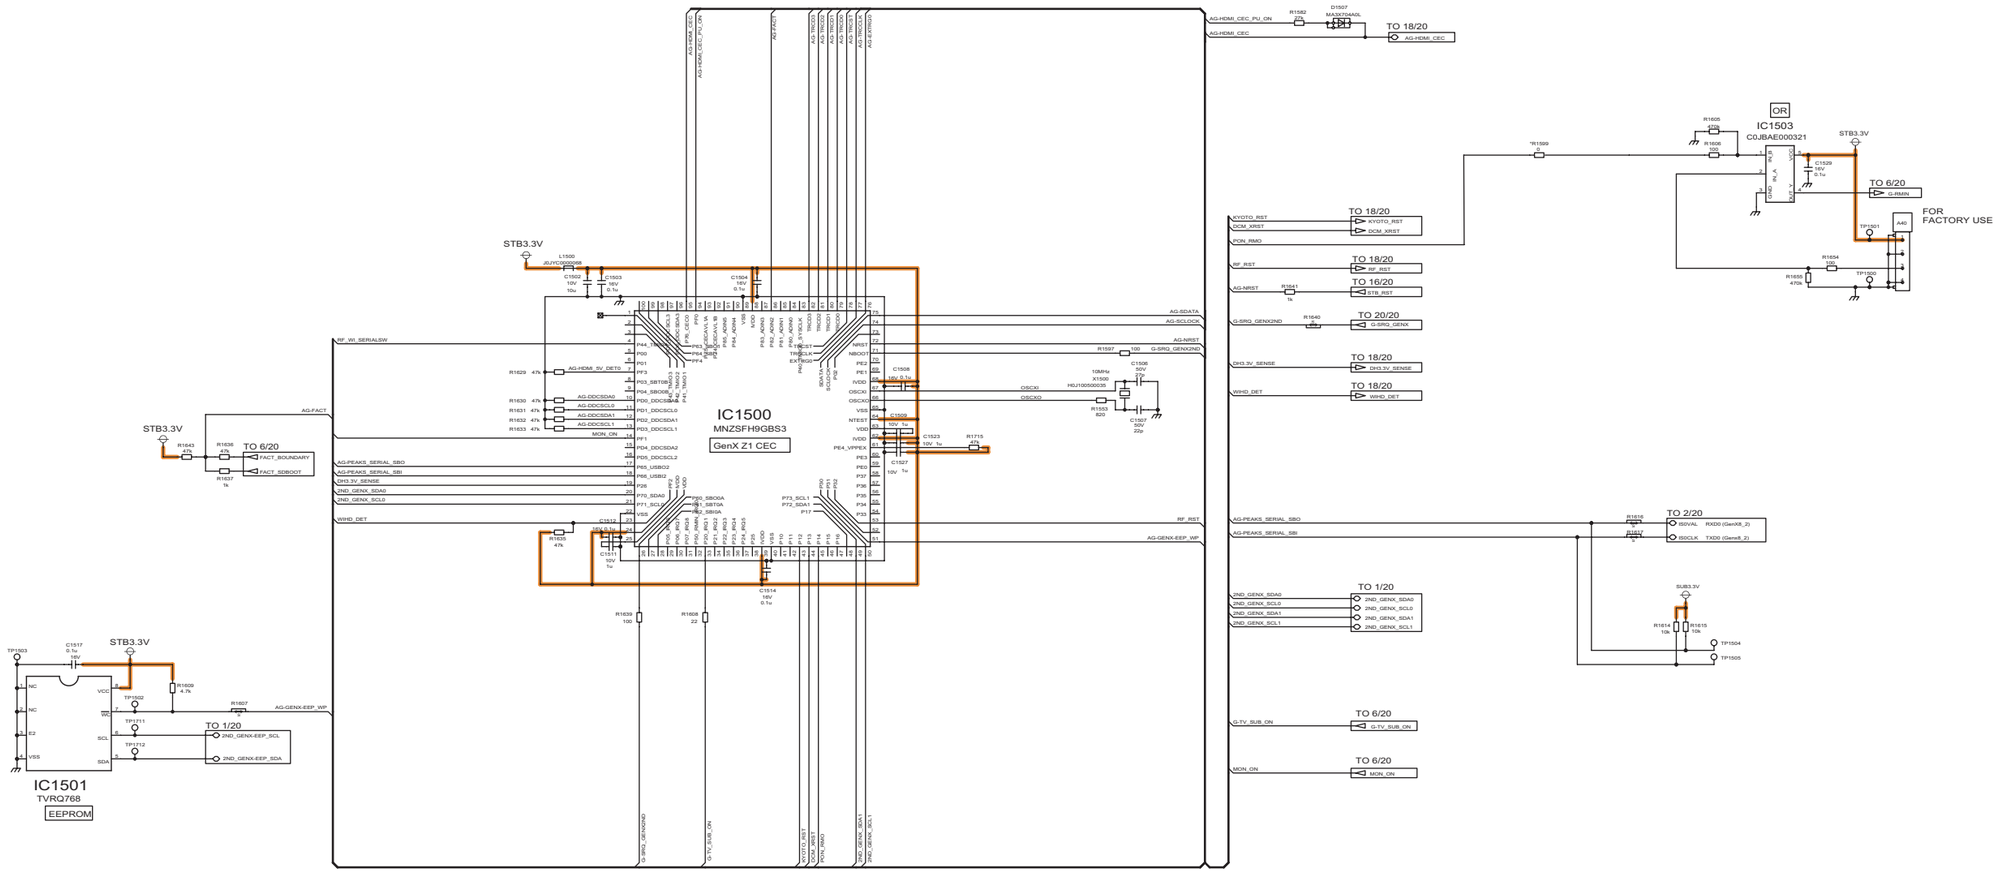


12.2.10. A-Board (8/20) Schematic Diagram


⚠ A-BOARD TXN/A1DKUM (8/20)

ADV


REF No. 4500-4799

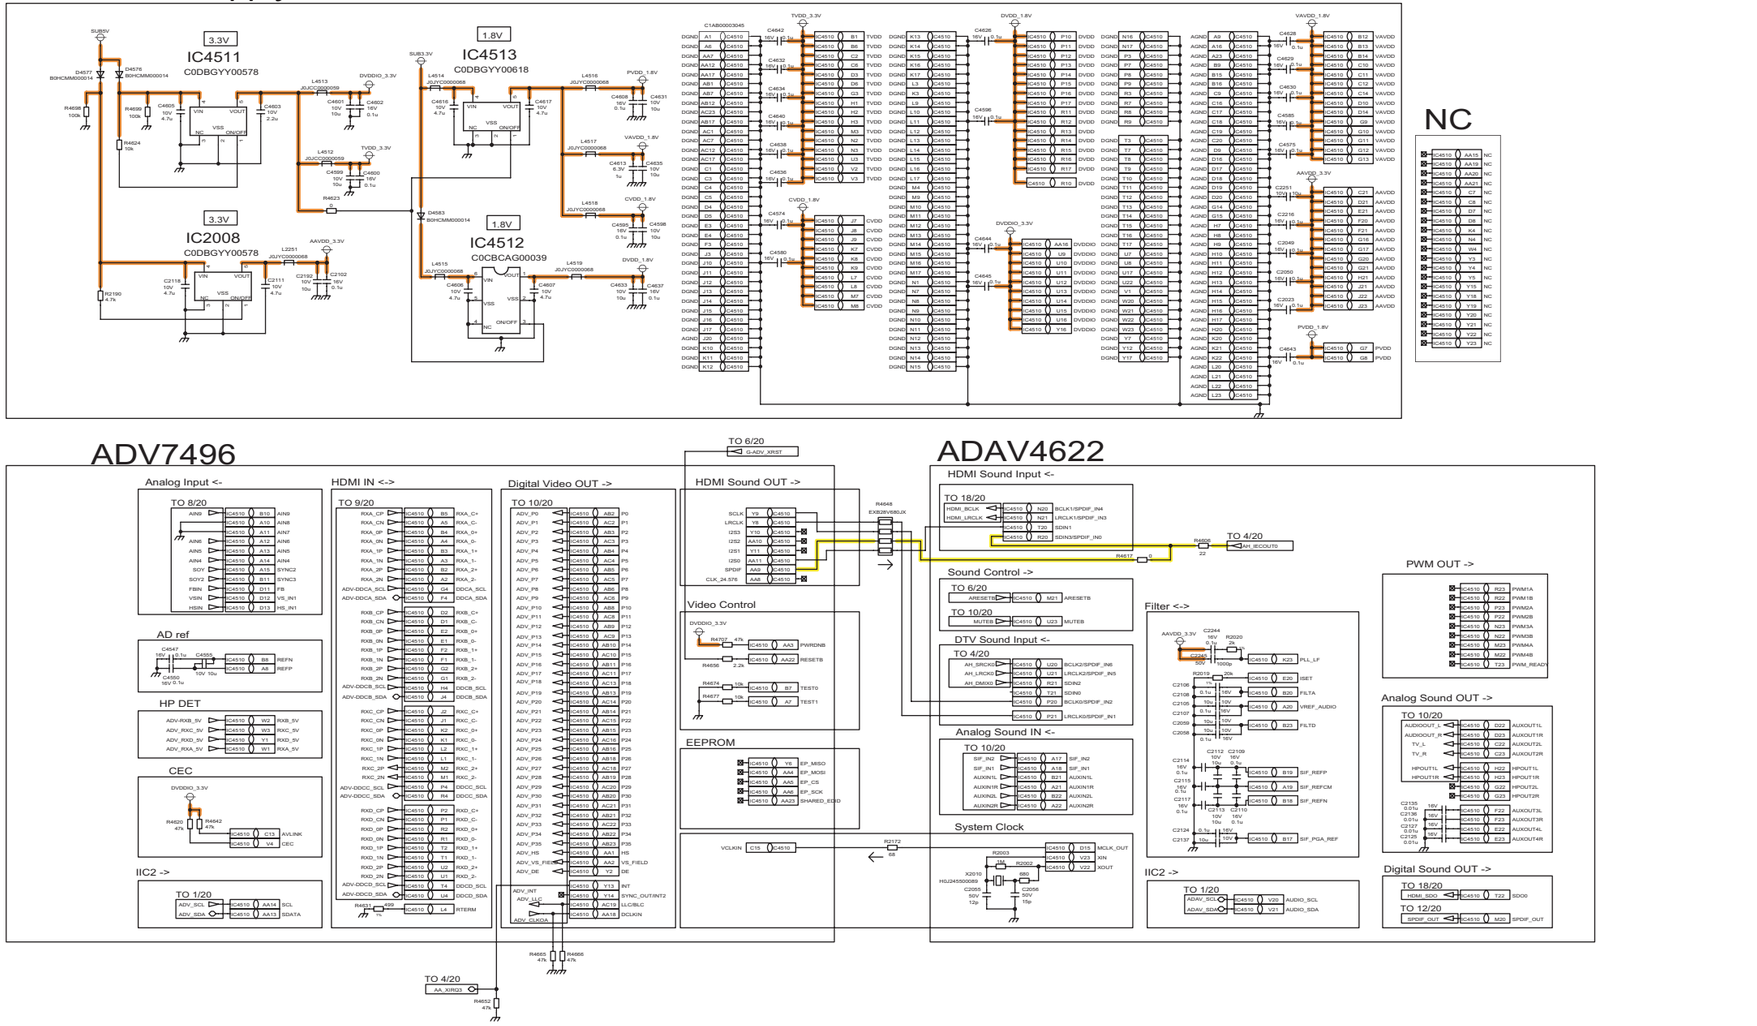


12.2.11. A-Board (9/20) Schematic Diagram

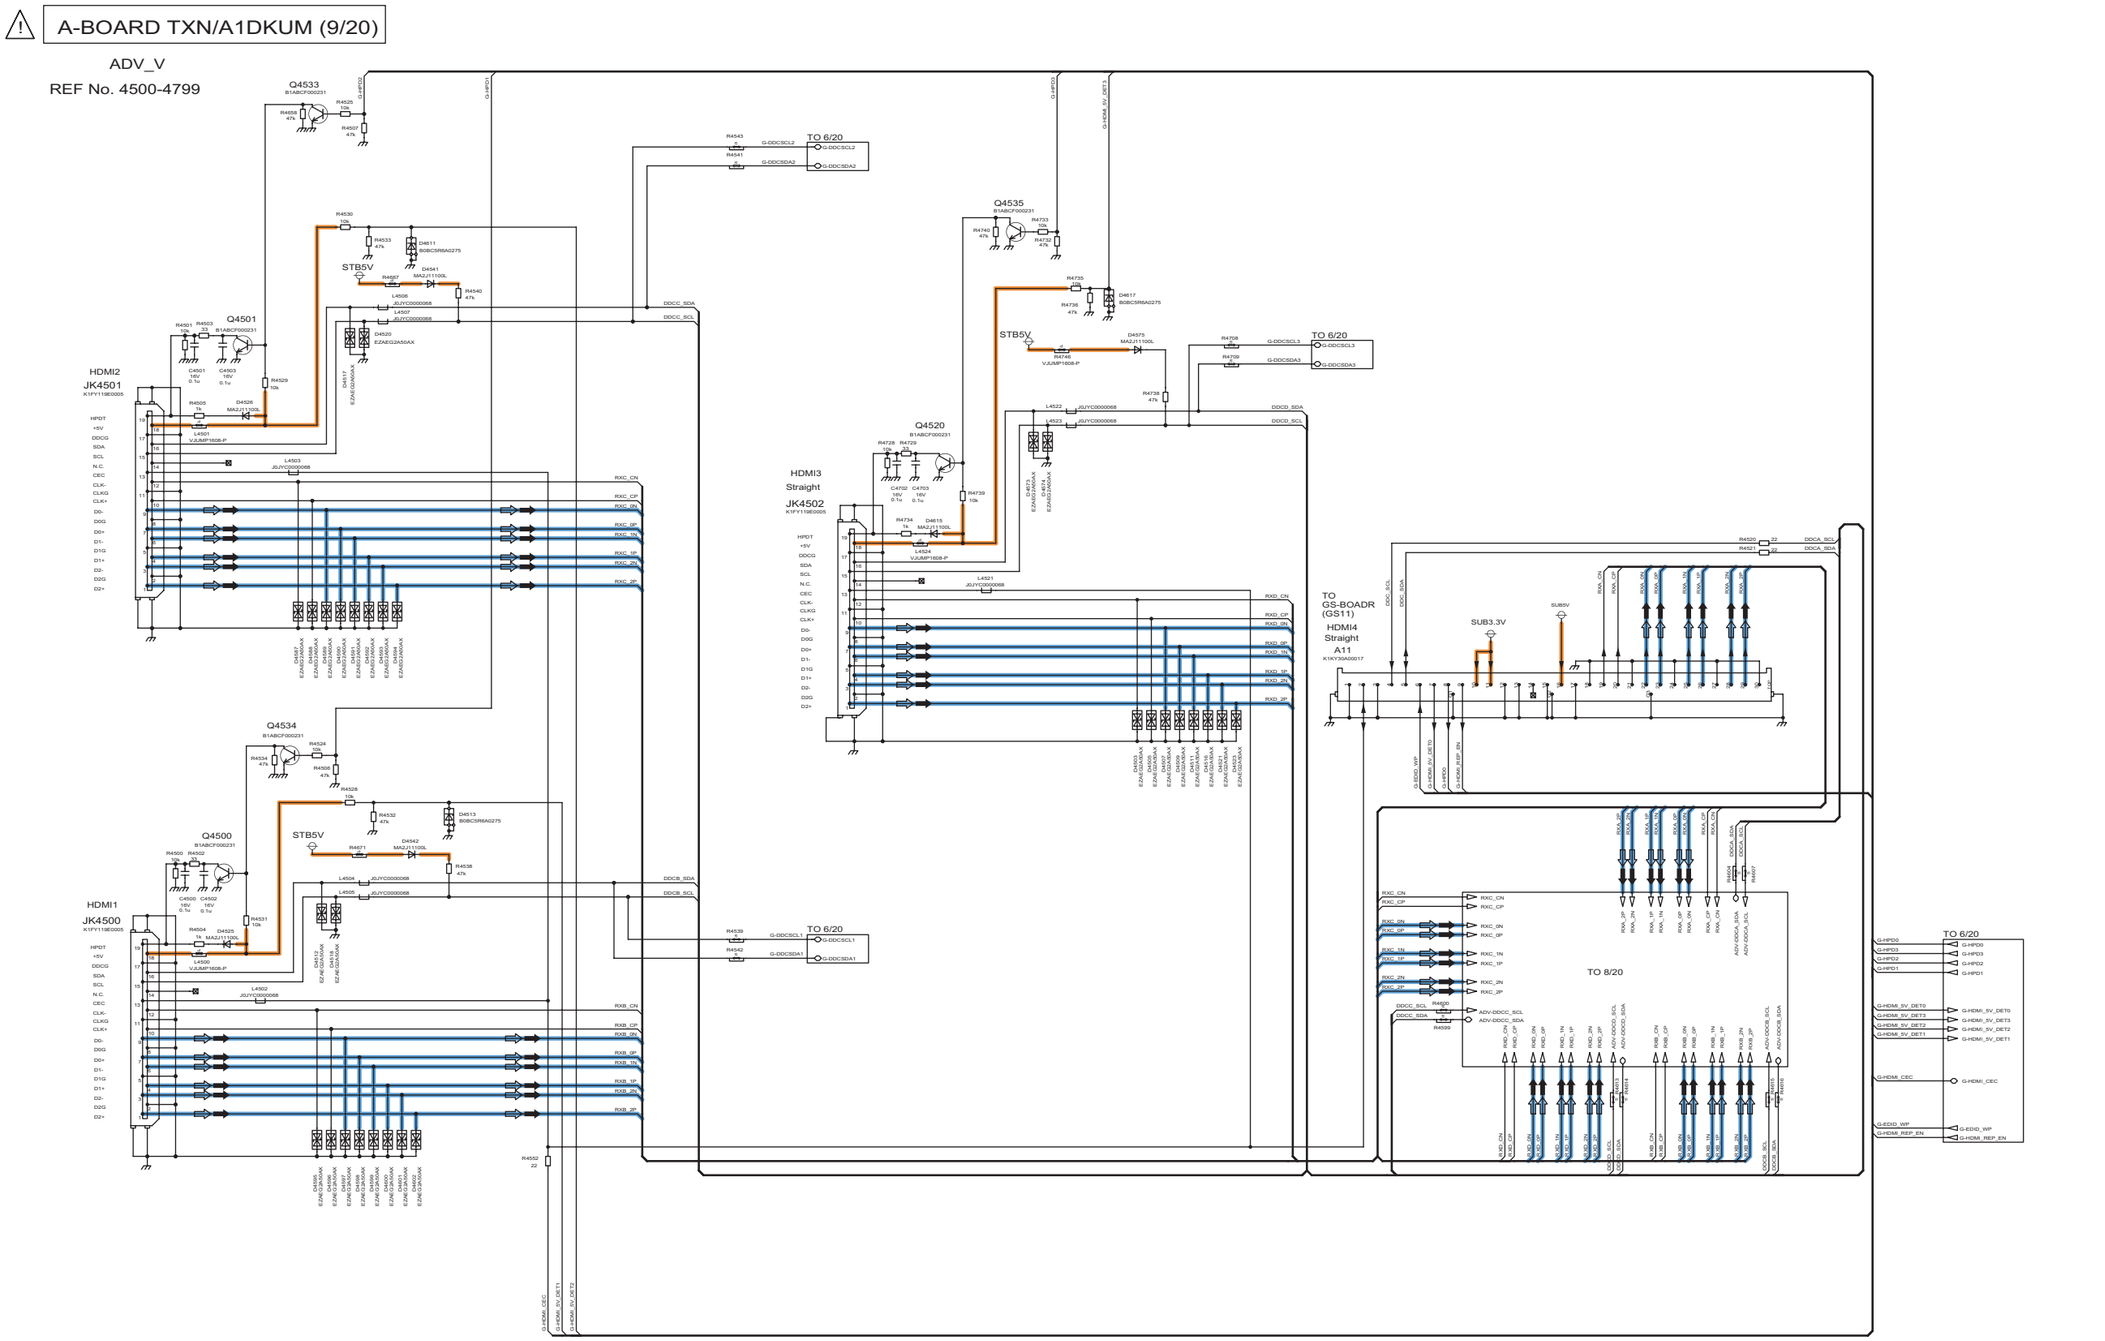

12.2.12. A-Board (10/20) Schematic Diagram

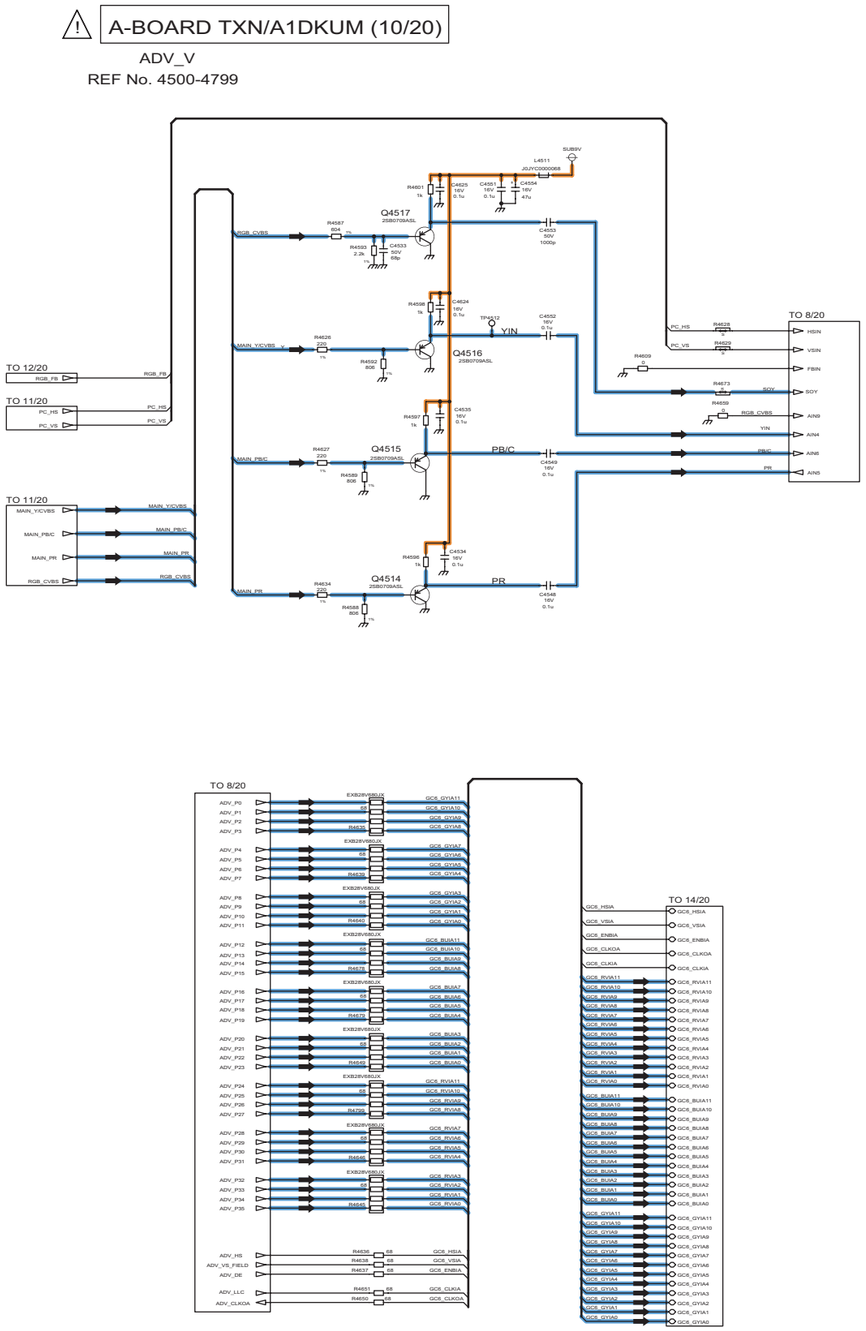


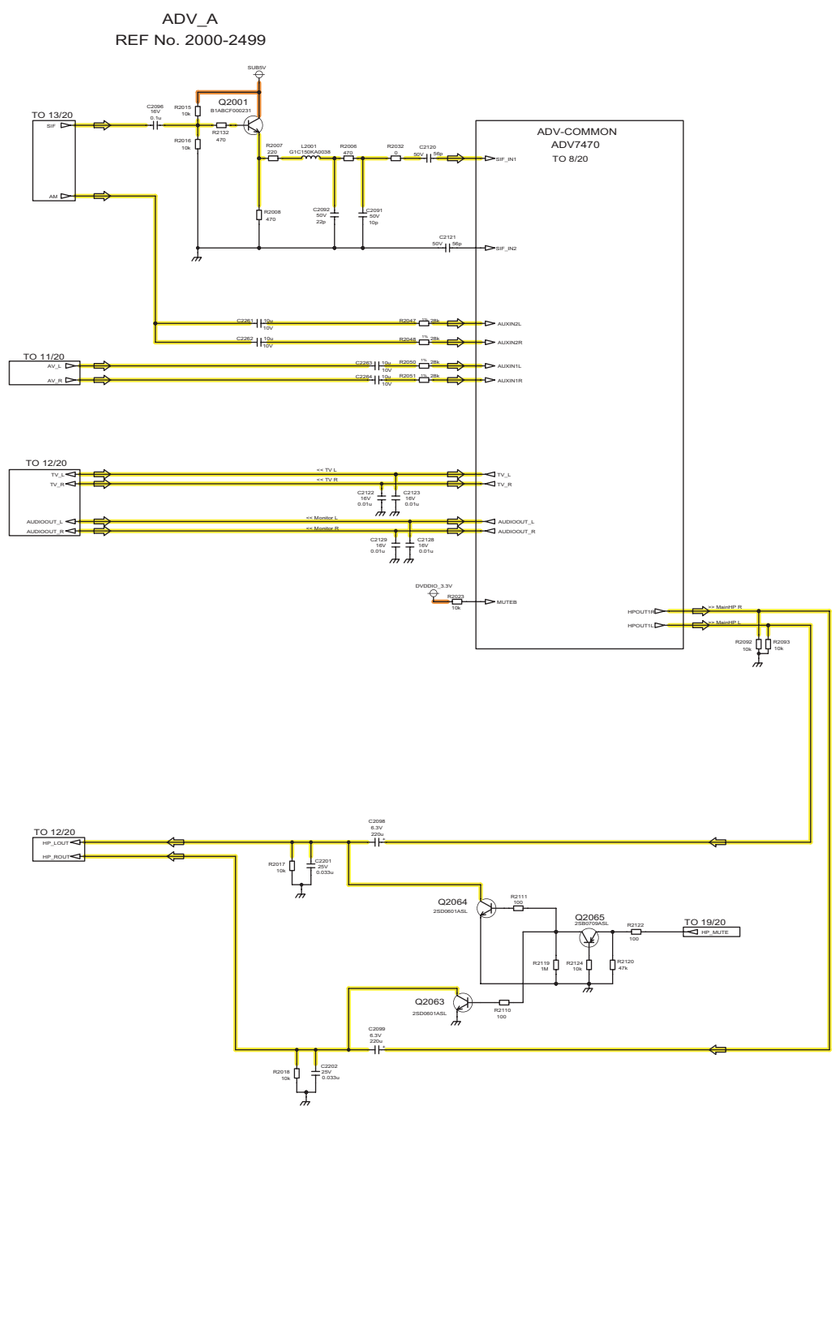



12.2.13. A-Board (11/20) Schematic Diagram


⚠ A-BOARD TXN/A1DKUM (11/20)

AVSW
REF No. 3000-3399

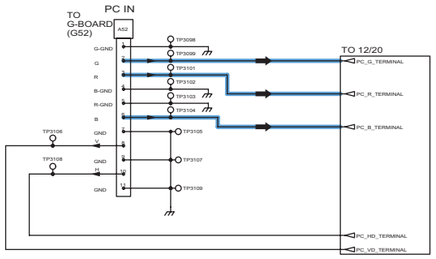


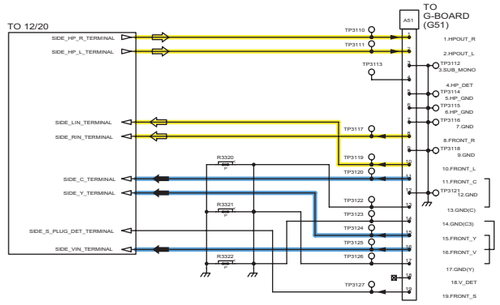

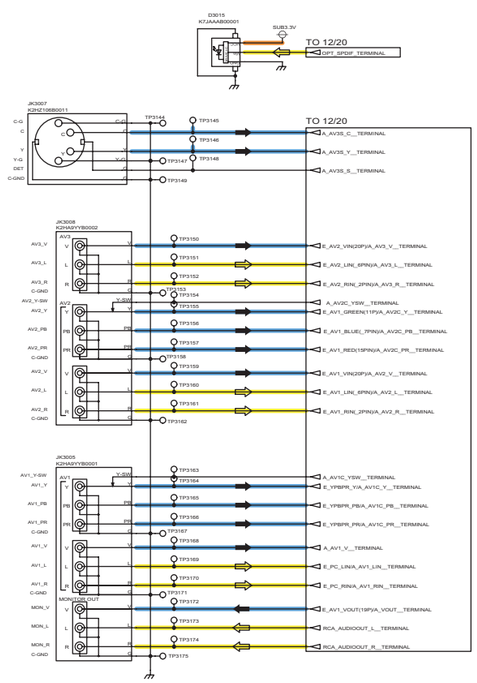


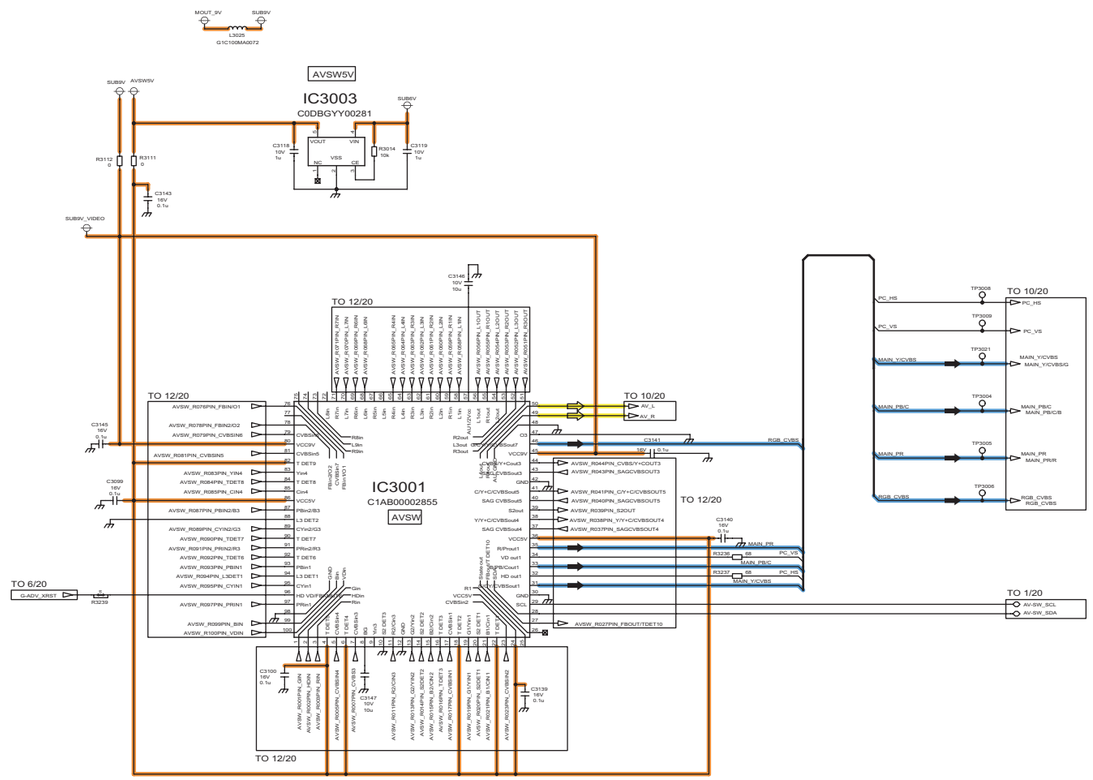


12.2.14. A-Board (12/20) Schematic Diagram

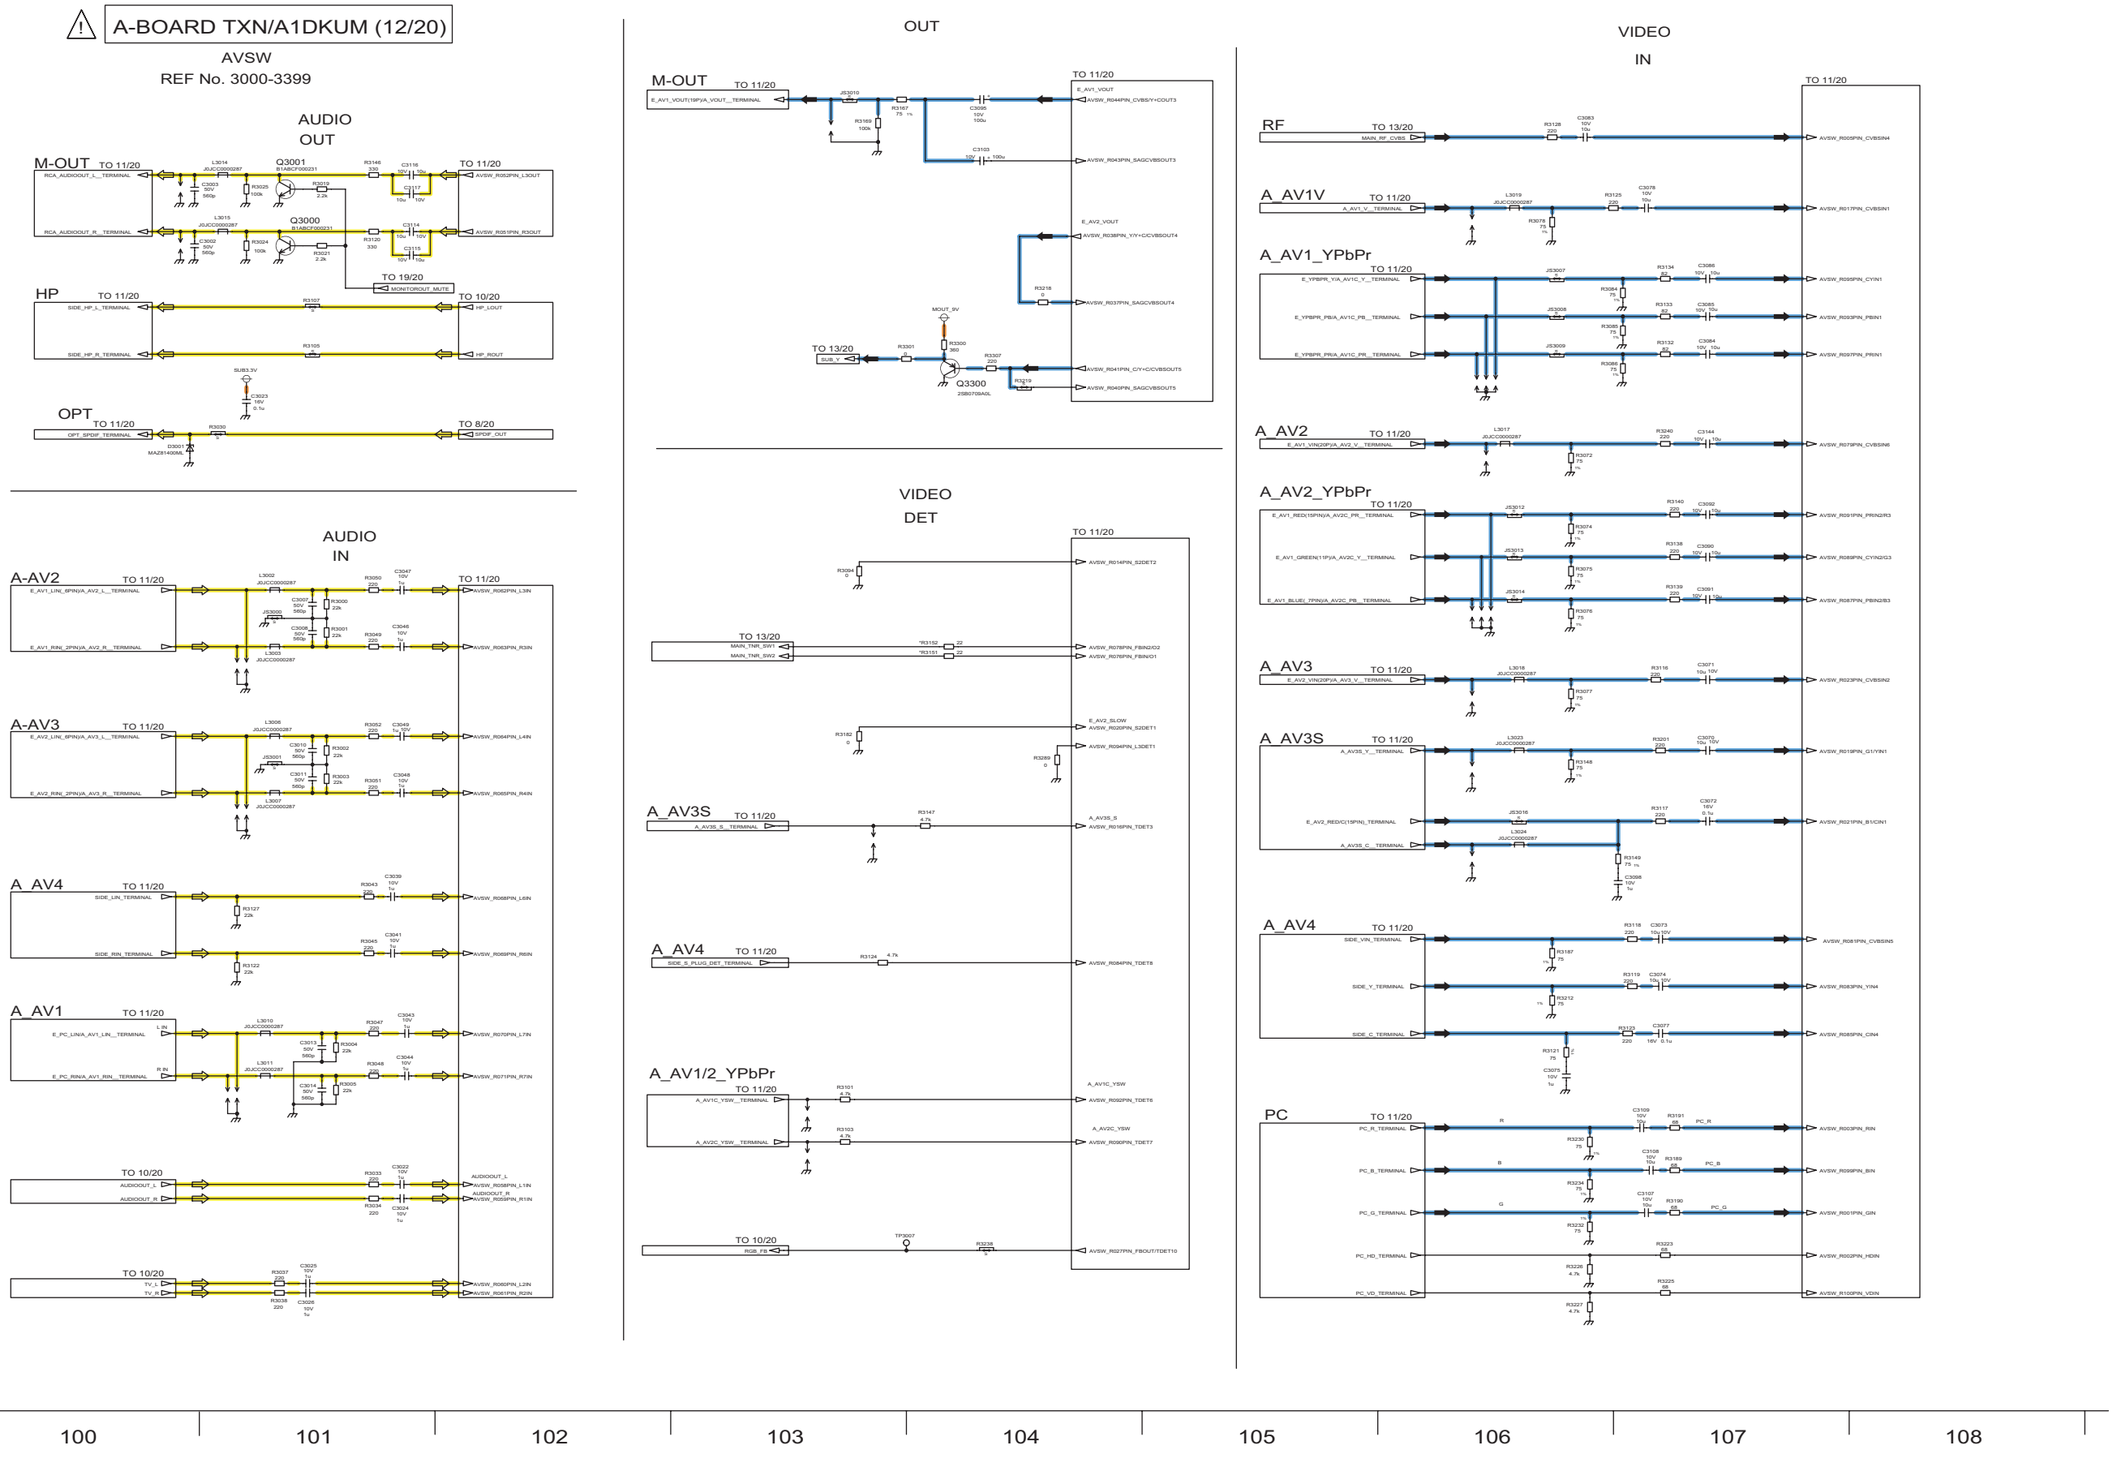


12.2.15. A-Board (13/20) Schematic Diagram

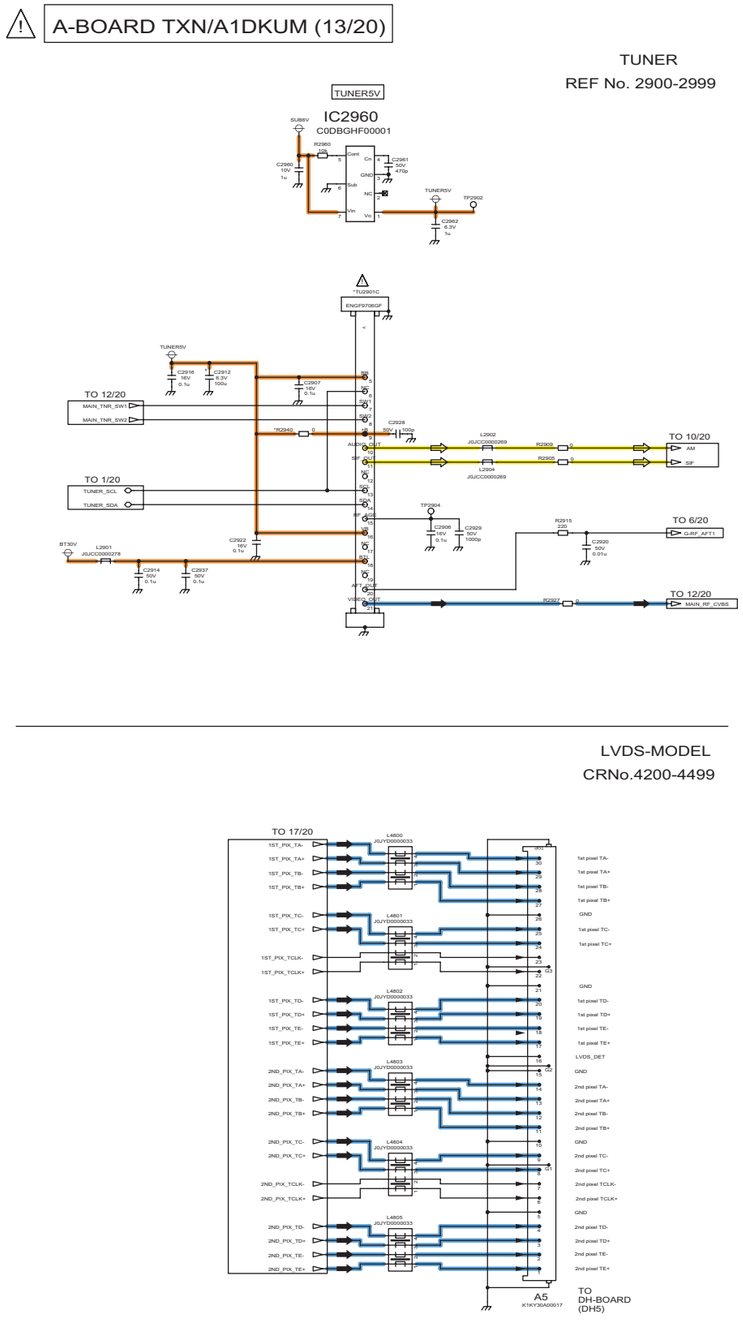


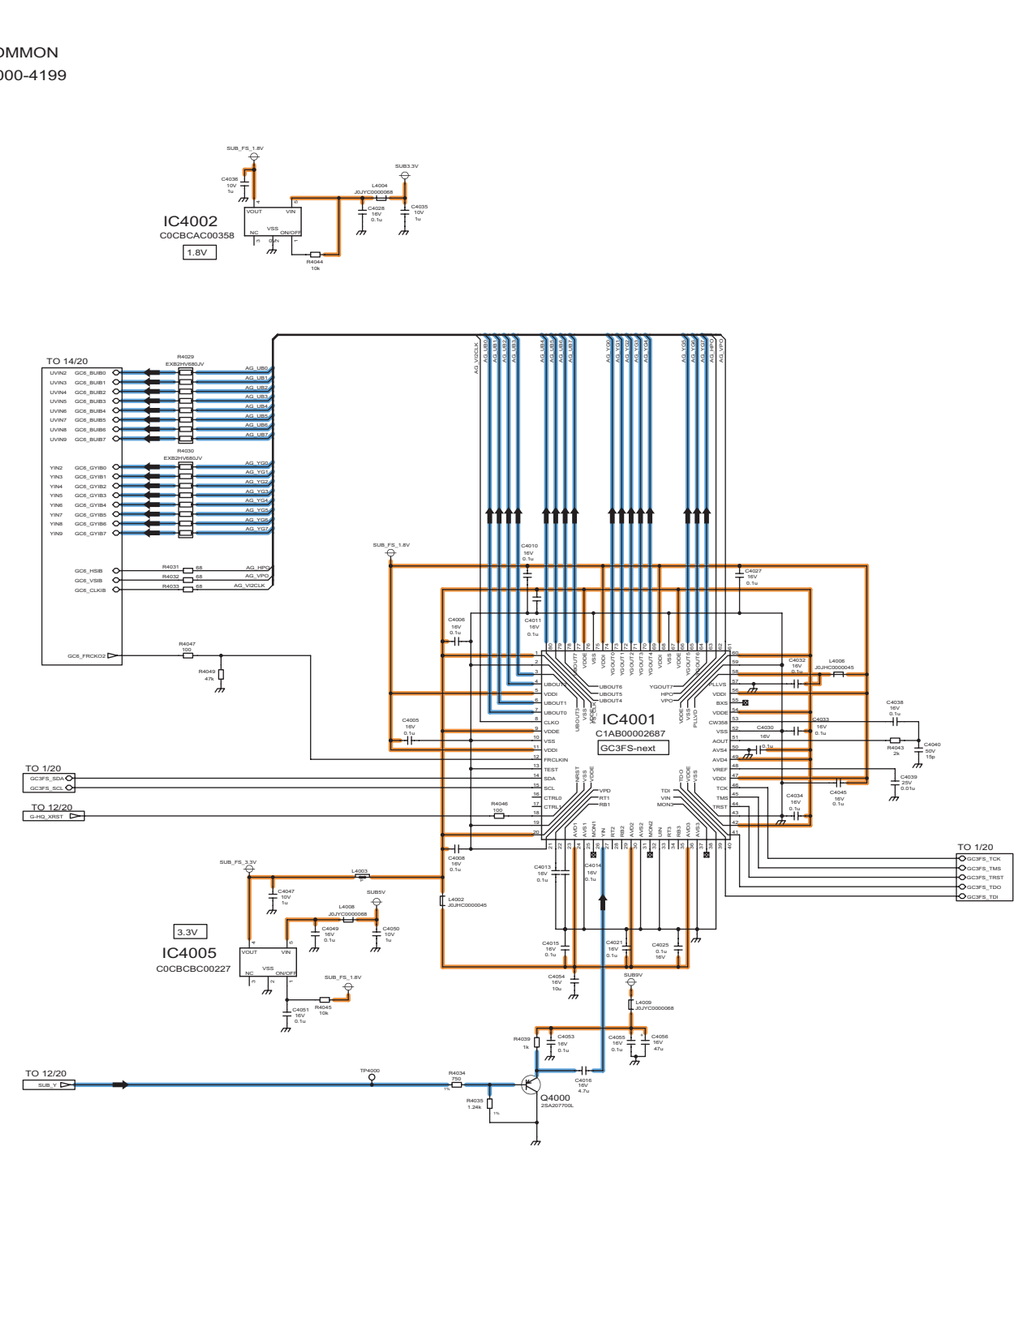

12.2.16. A-Board (14/20) Schematic Diagram

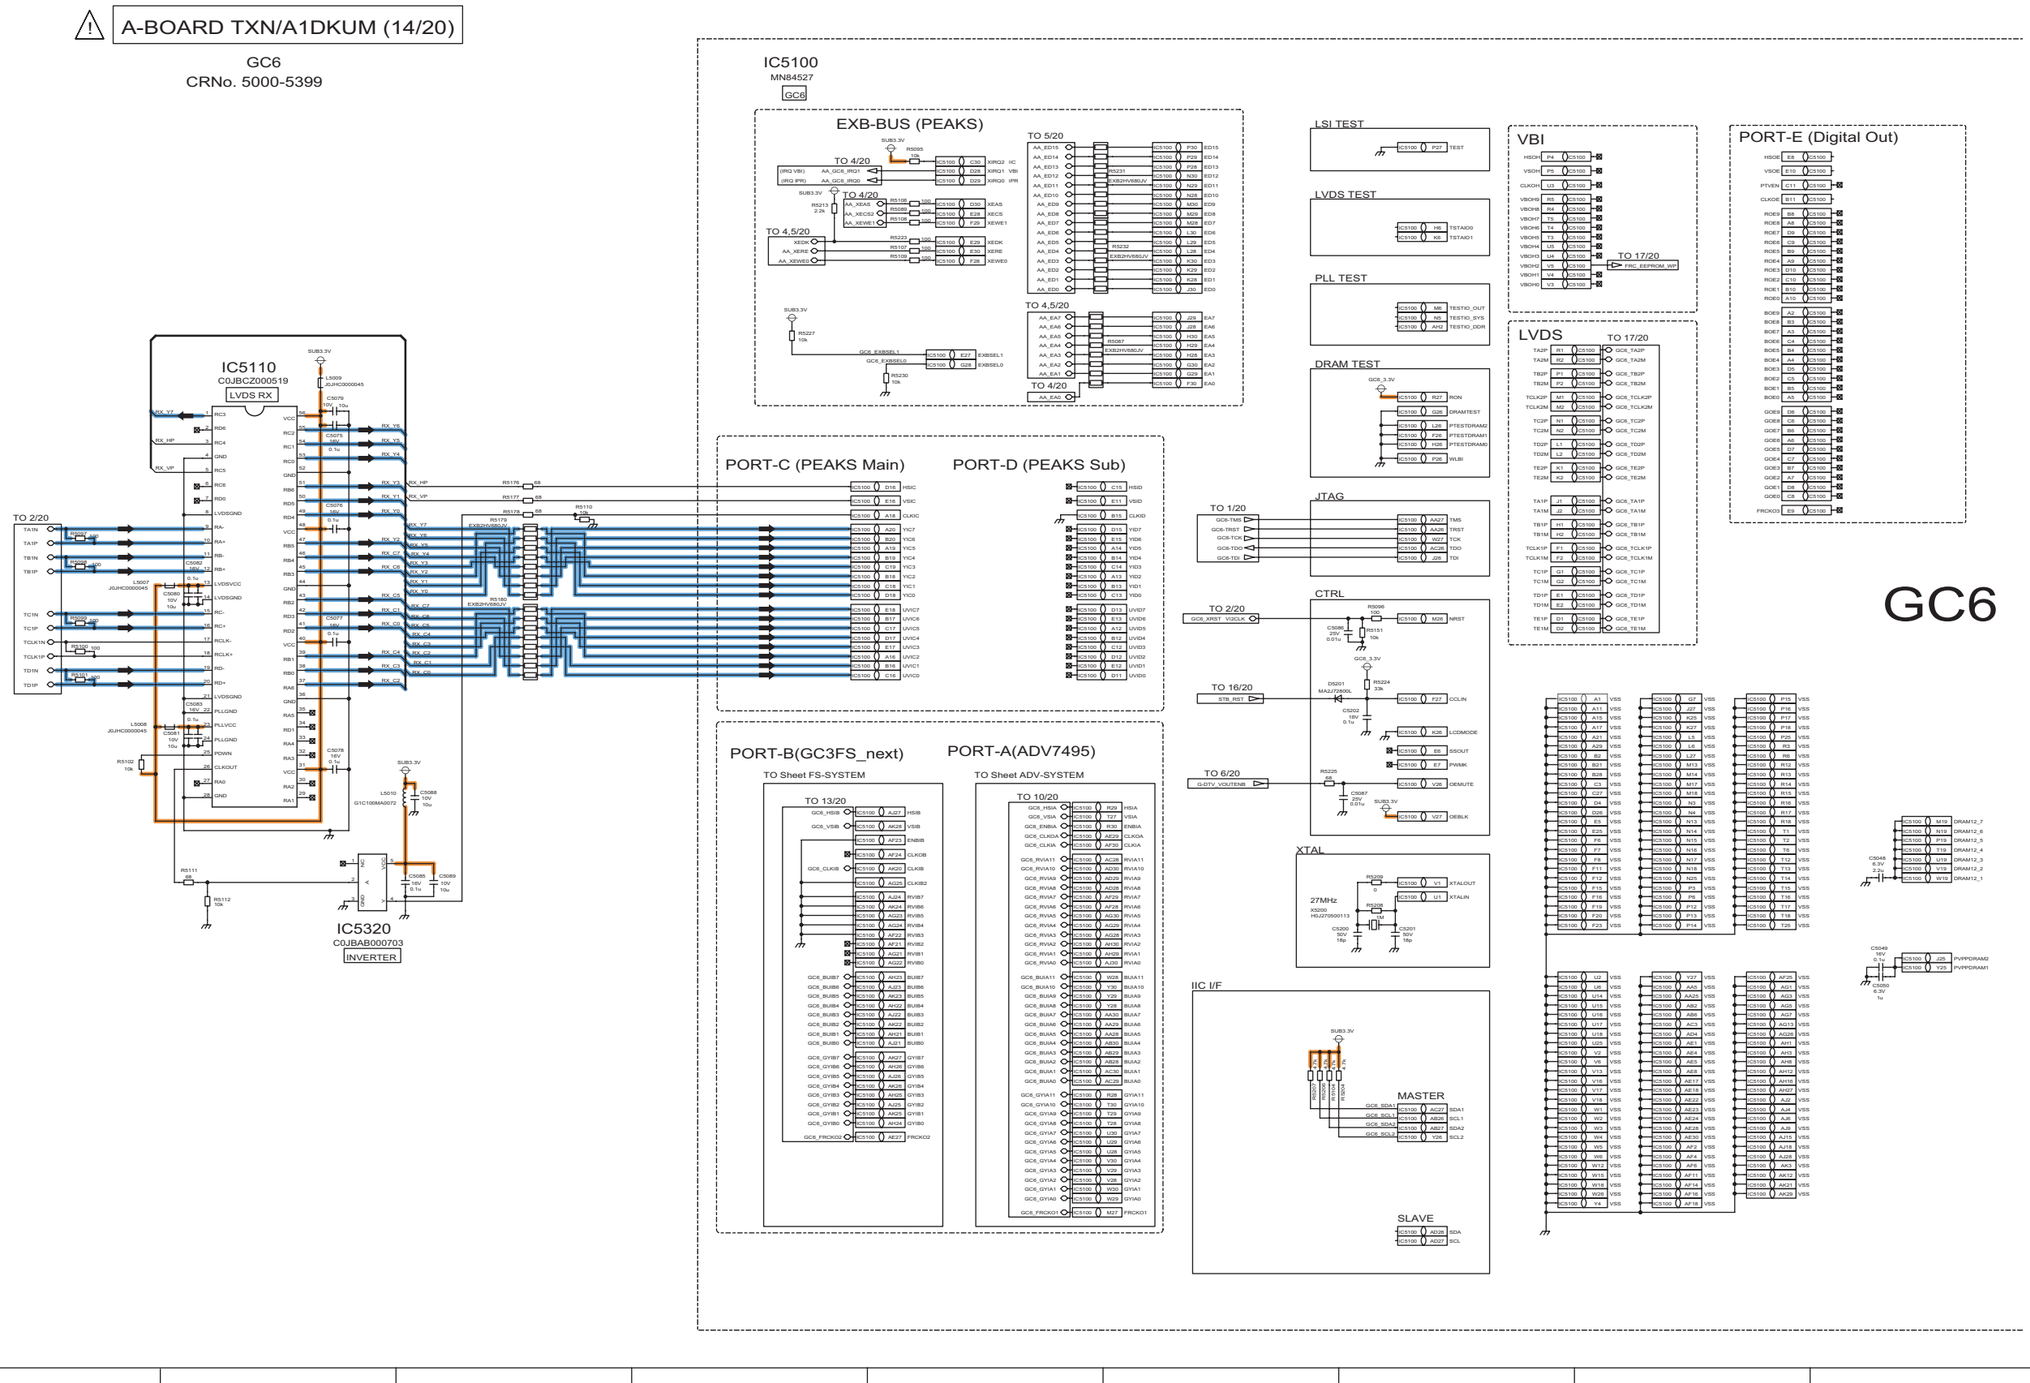

12.2.17. A-Board (15/20) Schematic Diagram

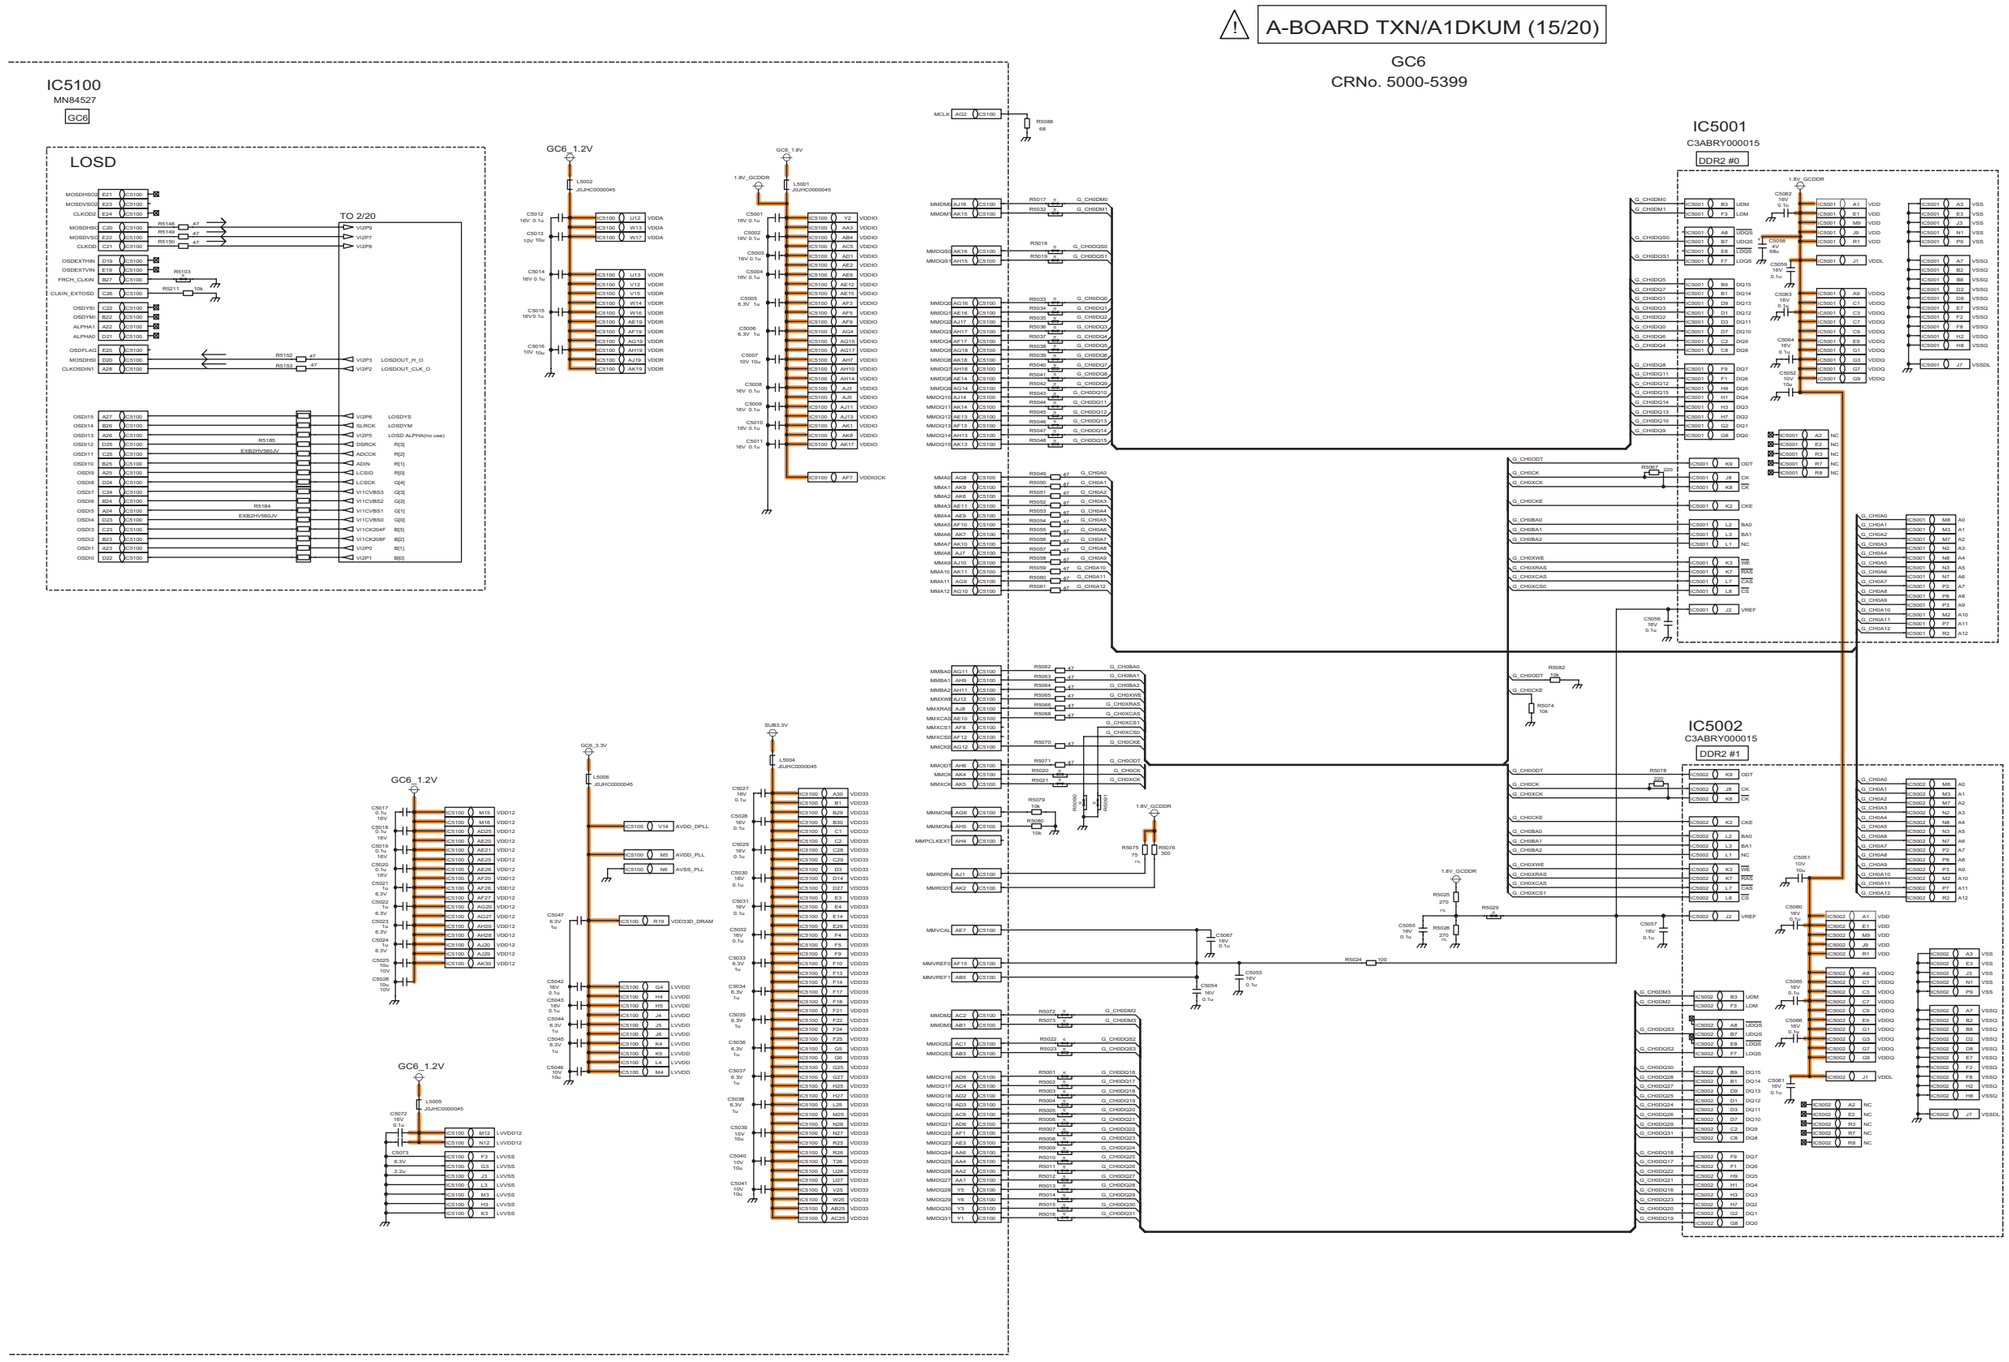


12.2.18. A-Board (16/20) Schematic Diagram


STB-RESET
REF No. 5400-5499

FRC-Q-PDP
REF No. 2600-2749

⚠ A-BOARD TXN/A1DKUM (16/20)

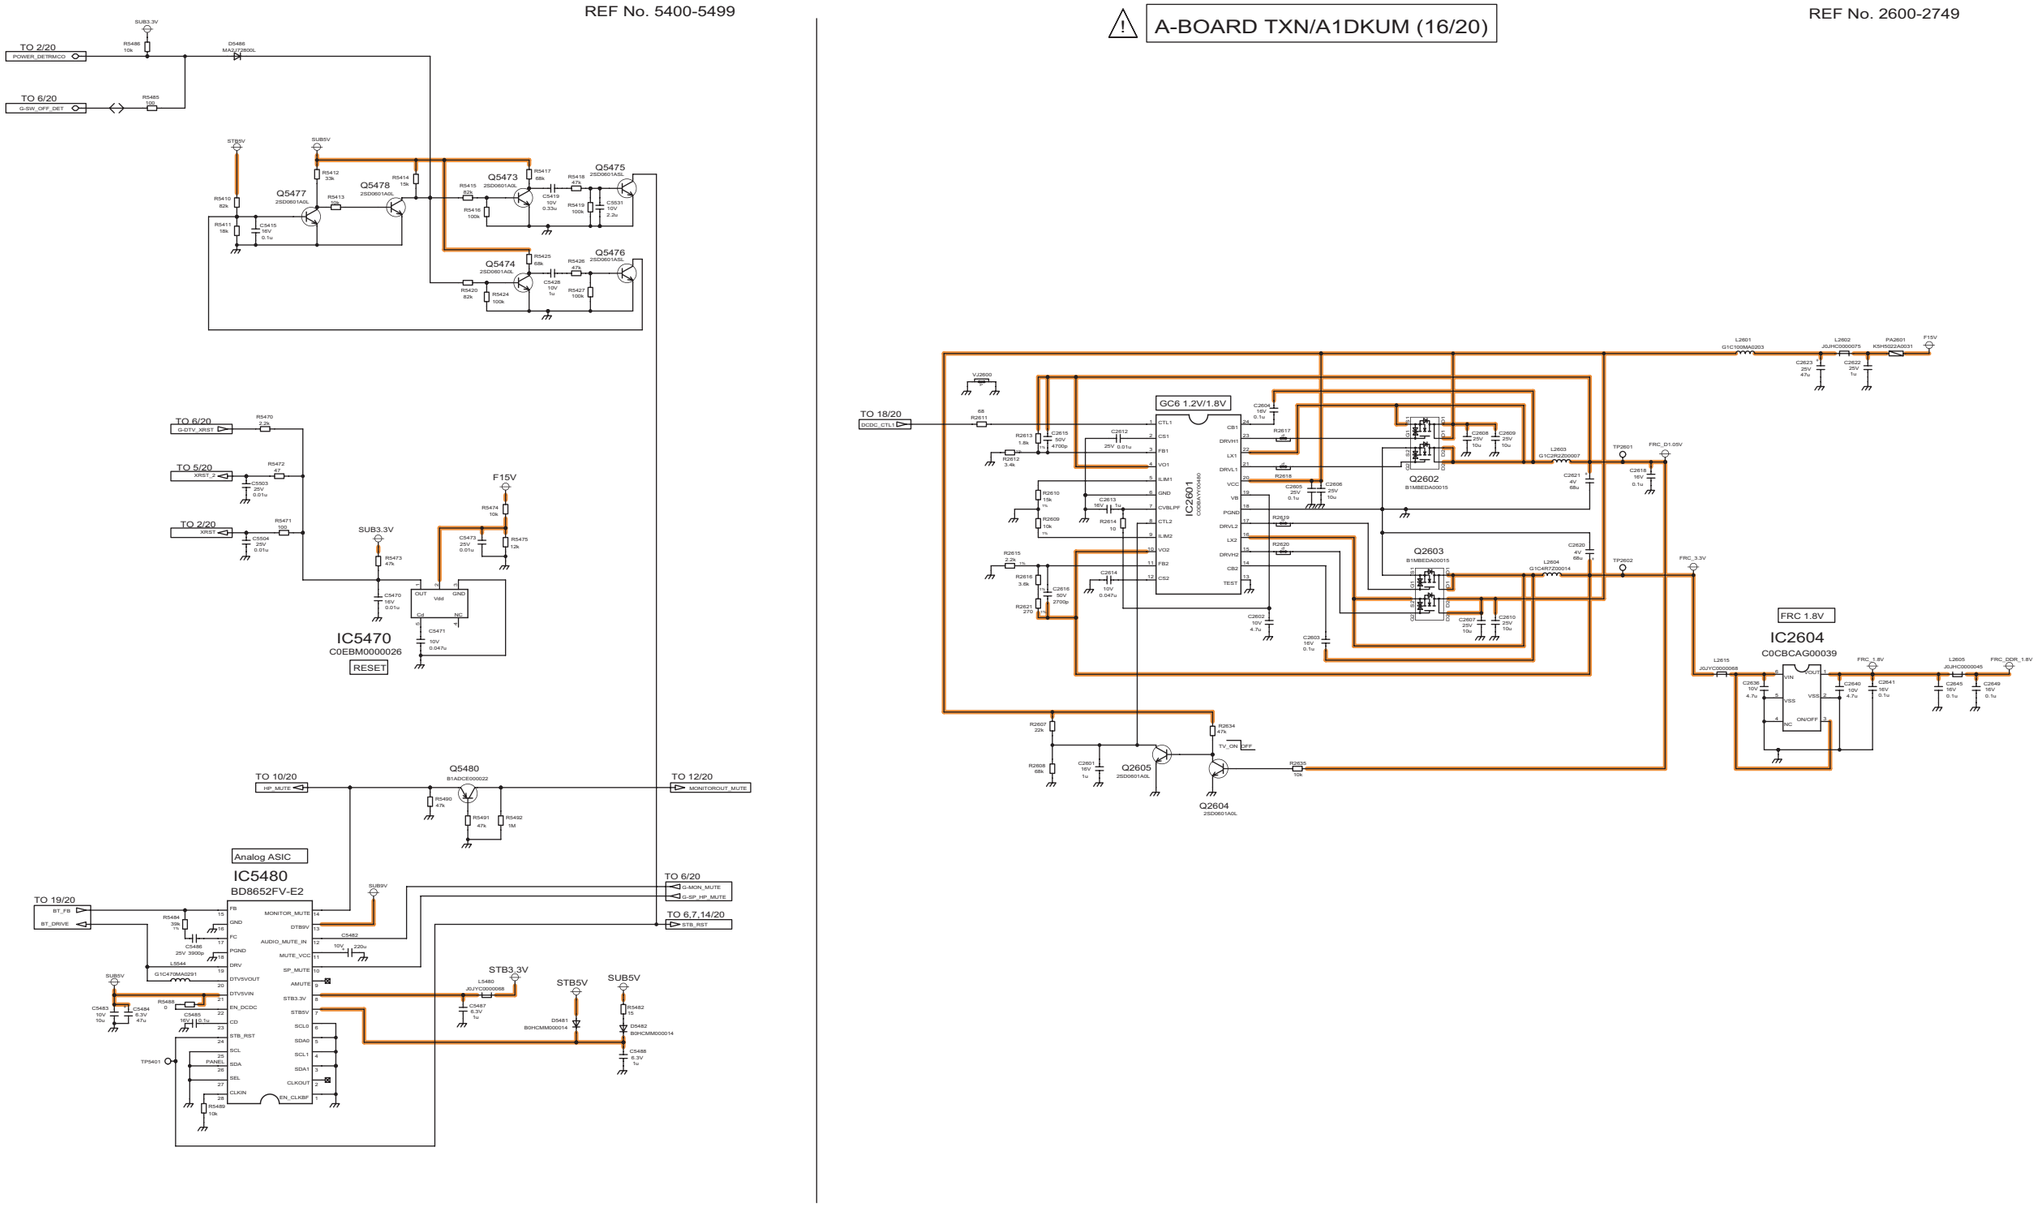

12.2.19. A-Board (17/20) Schematic Diagram

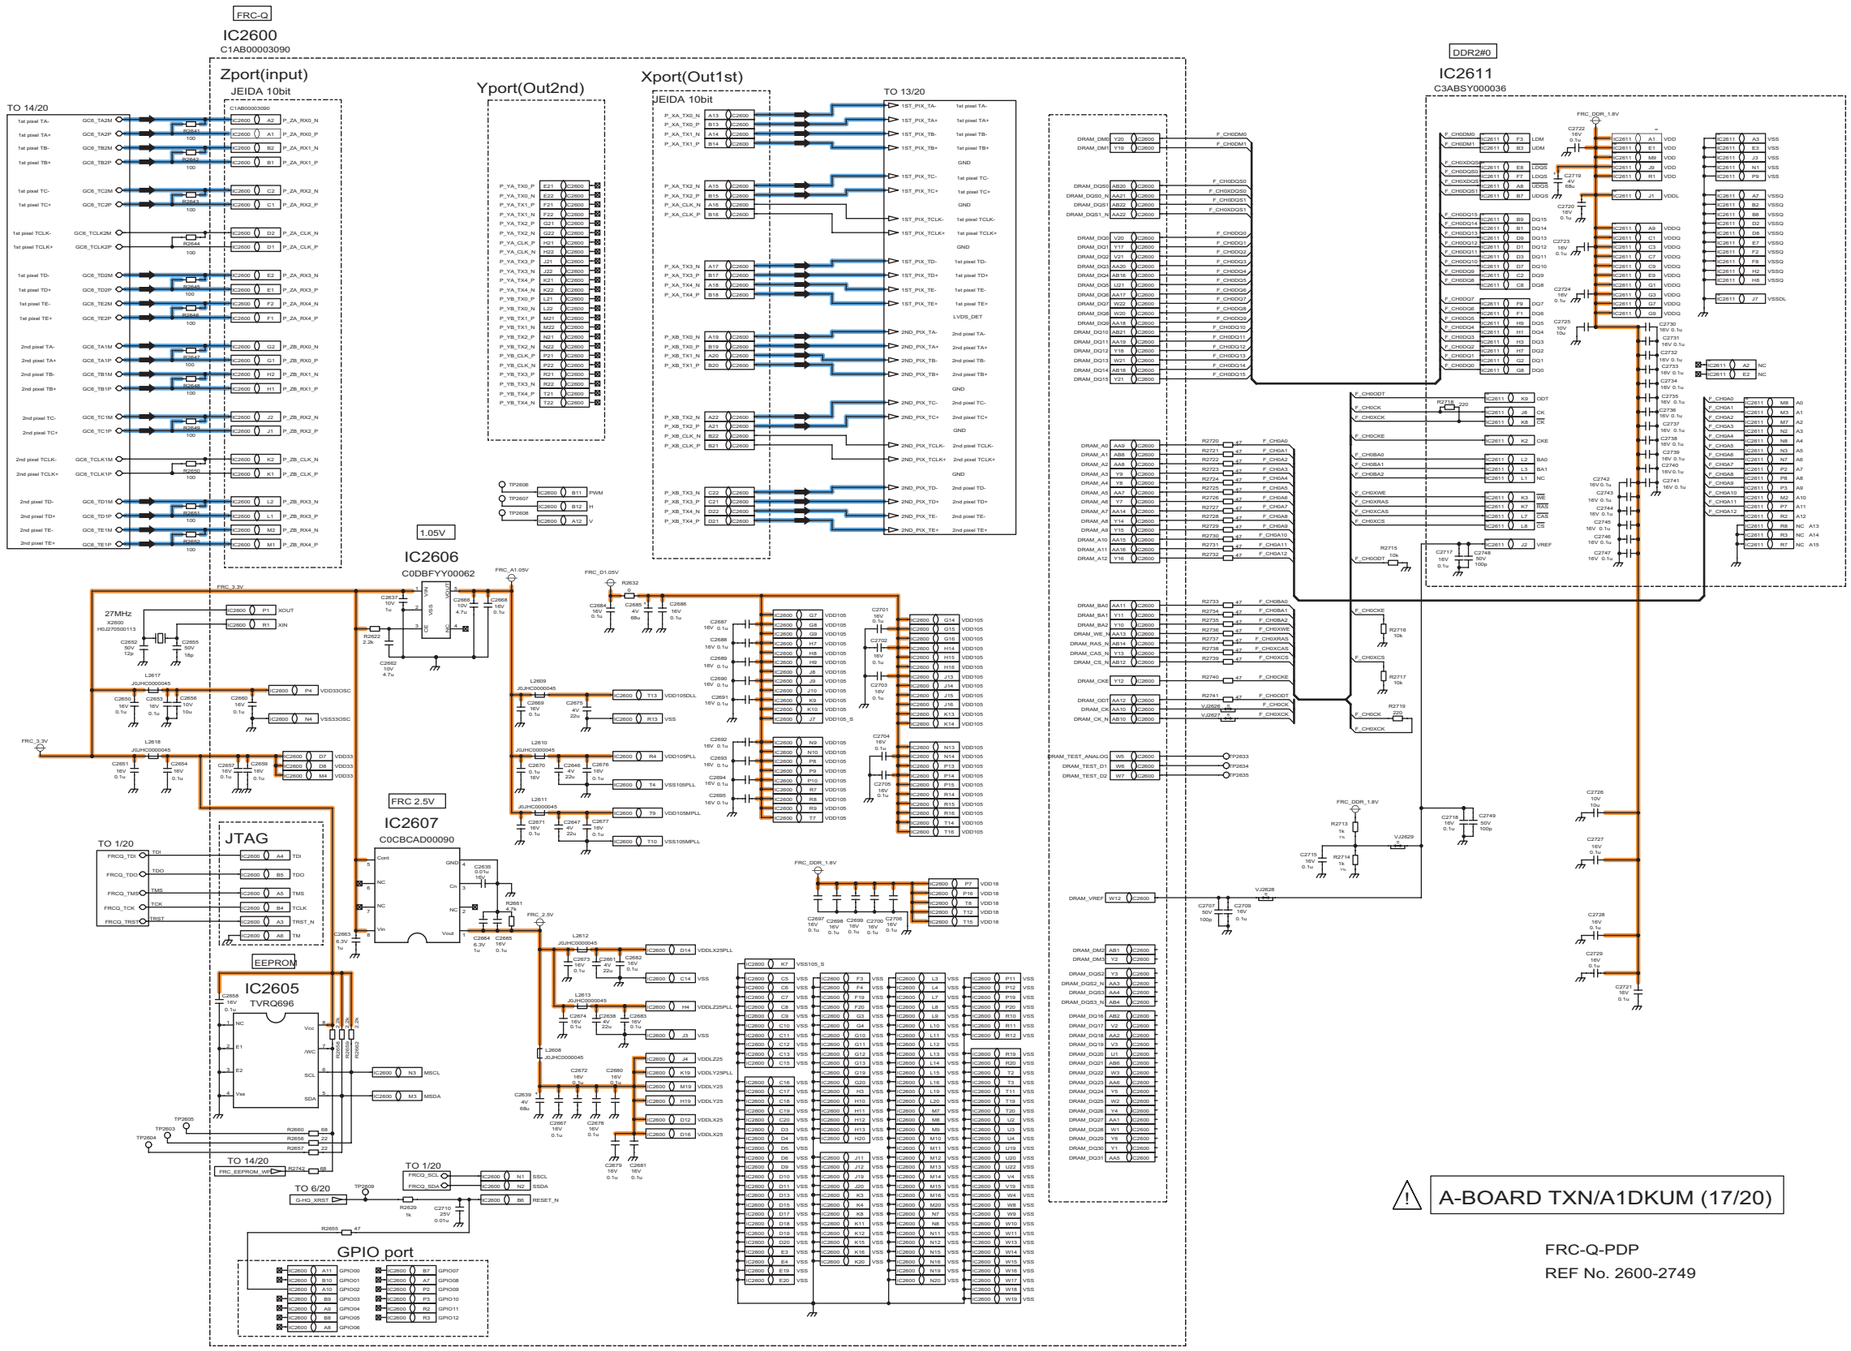


12.2.20. A-Board (18/20) Schematic Diagram

CRNo.4400-4499

POWER-Peaks
REF No. 5600-5749

⚠ A-BOARD TXN/A1DKUM (18/20)

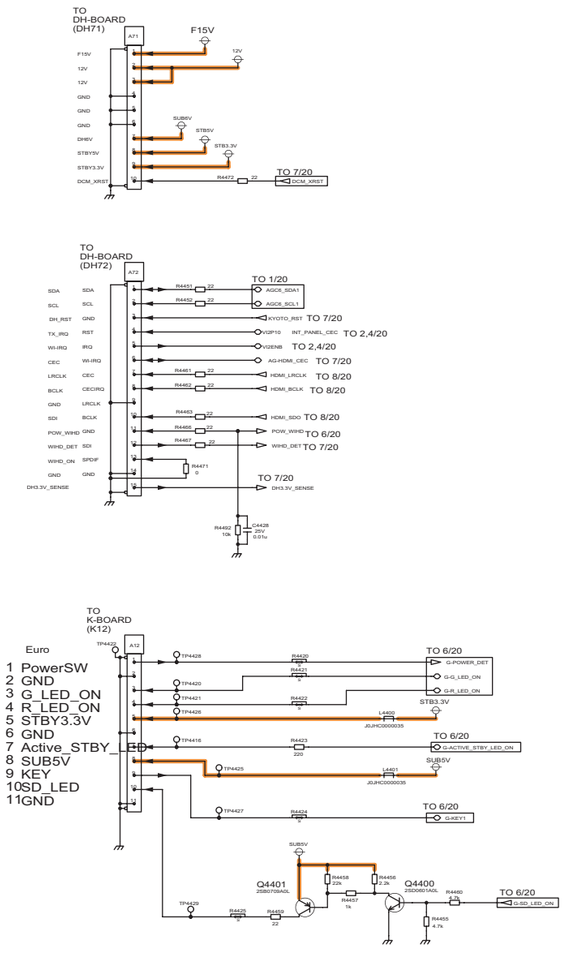


12.2.21. A-Board (19/20) Schematic Diagram

A-BOARD TXN/A1DKUM (19/20)

POWER-MODEL
REF No. 5400-5499


POWER-GC6
CRNo.5300-5399

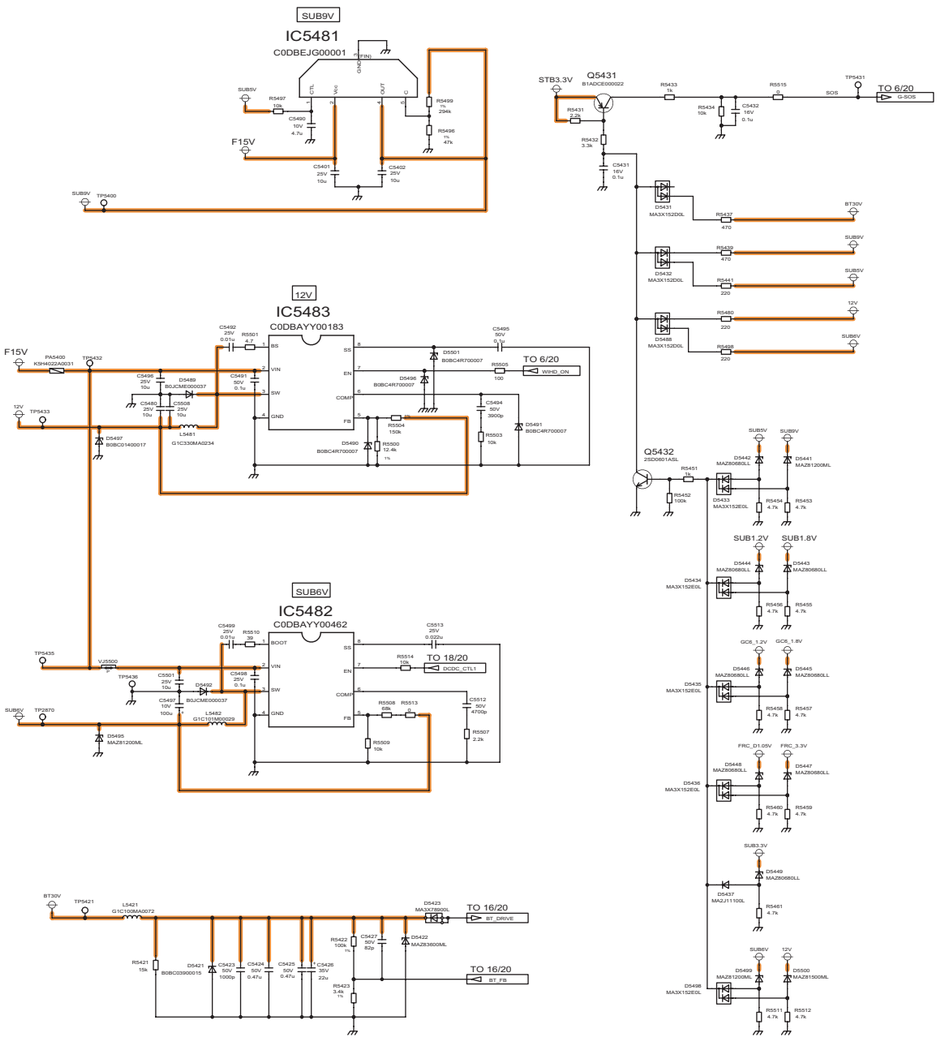


12.2.22. A-Board (20/20) Schematic Diagram

⚠ A-BOARD TXN/A1DKUM (20/20)


Set
REF No. 2750-2899

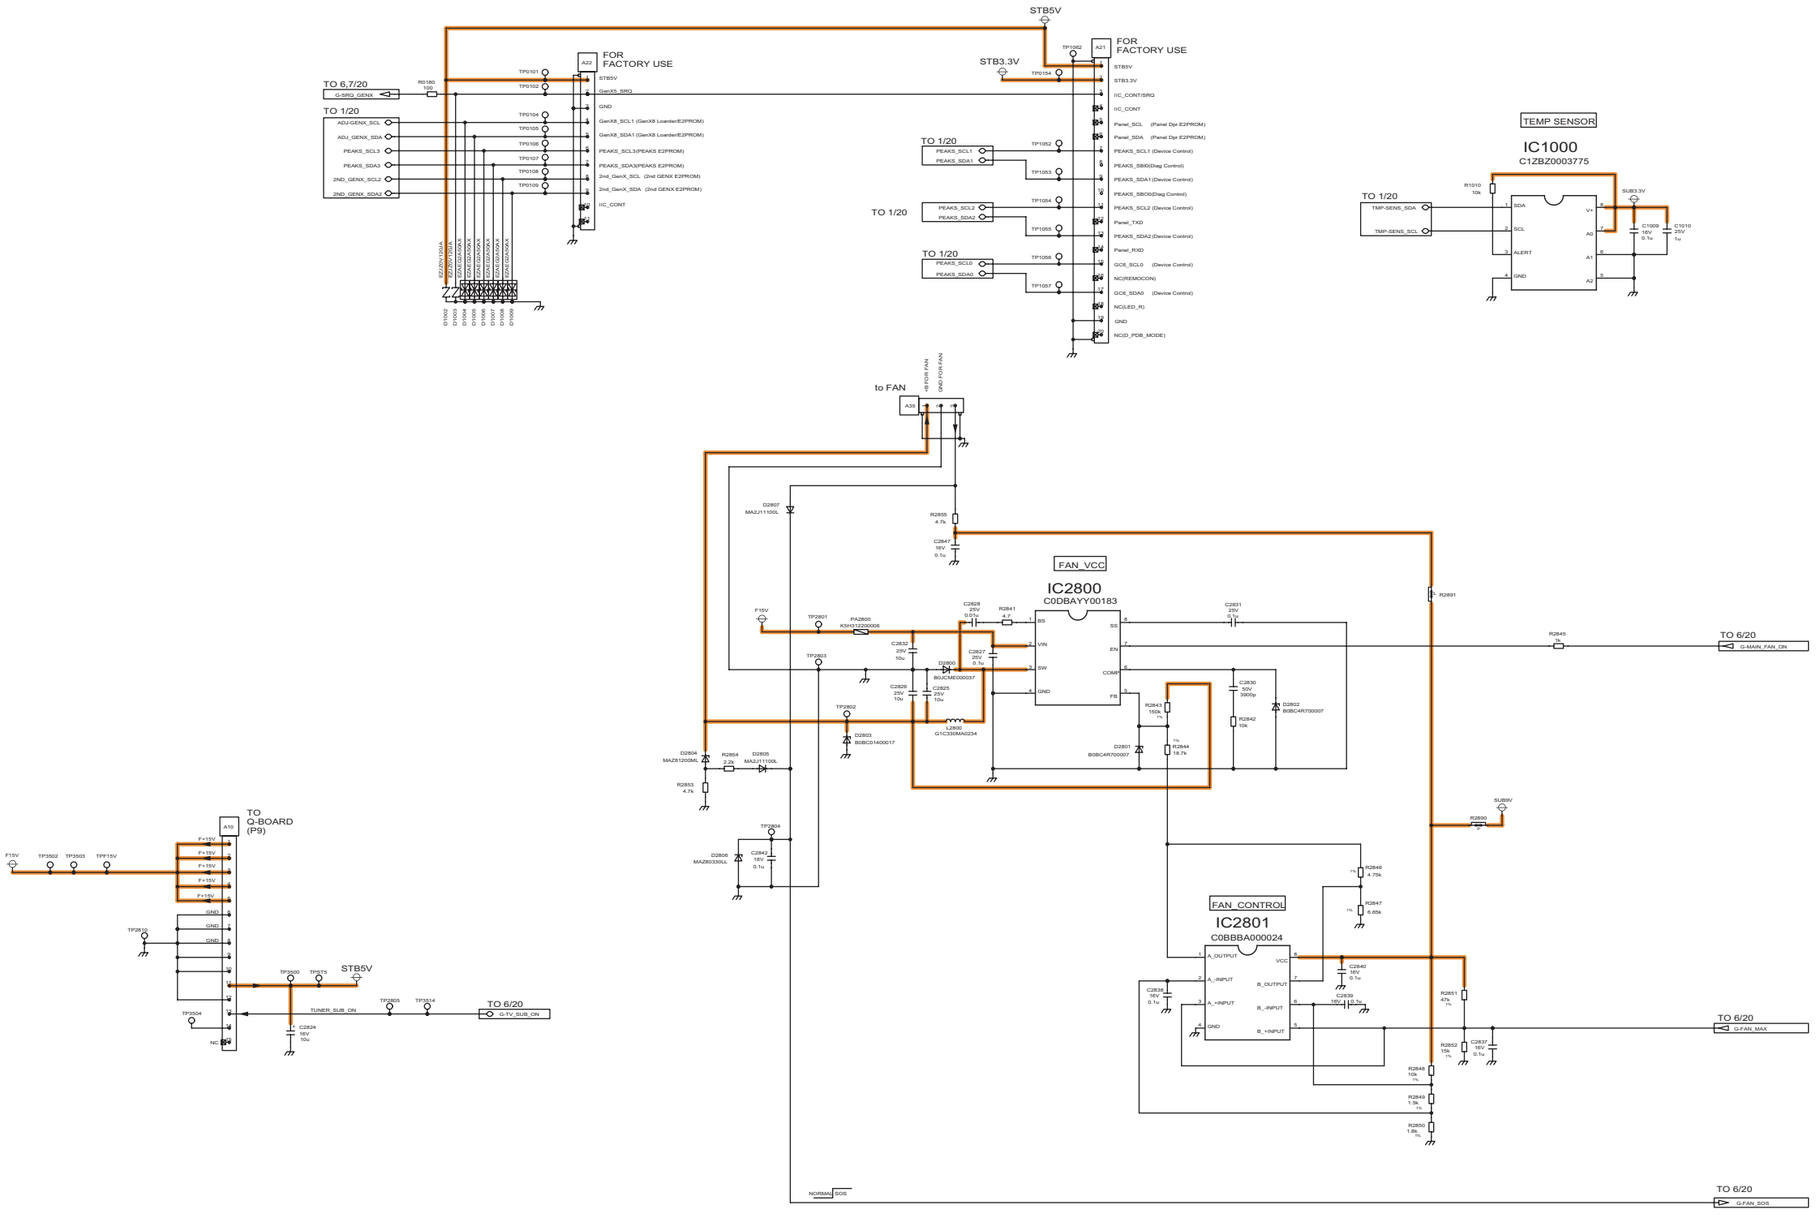

12.2.23. DH-Board (1/3) Schematic Diagram

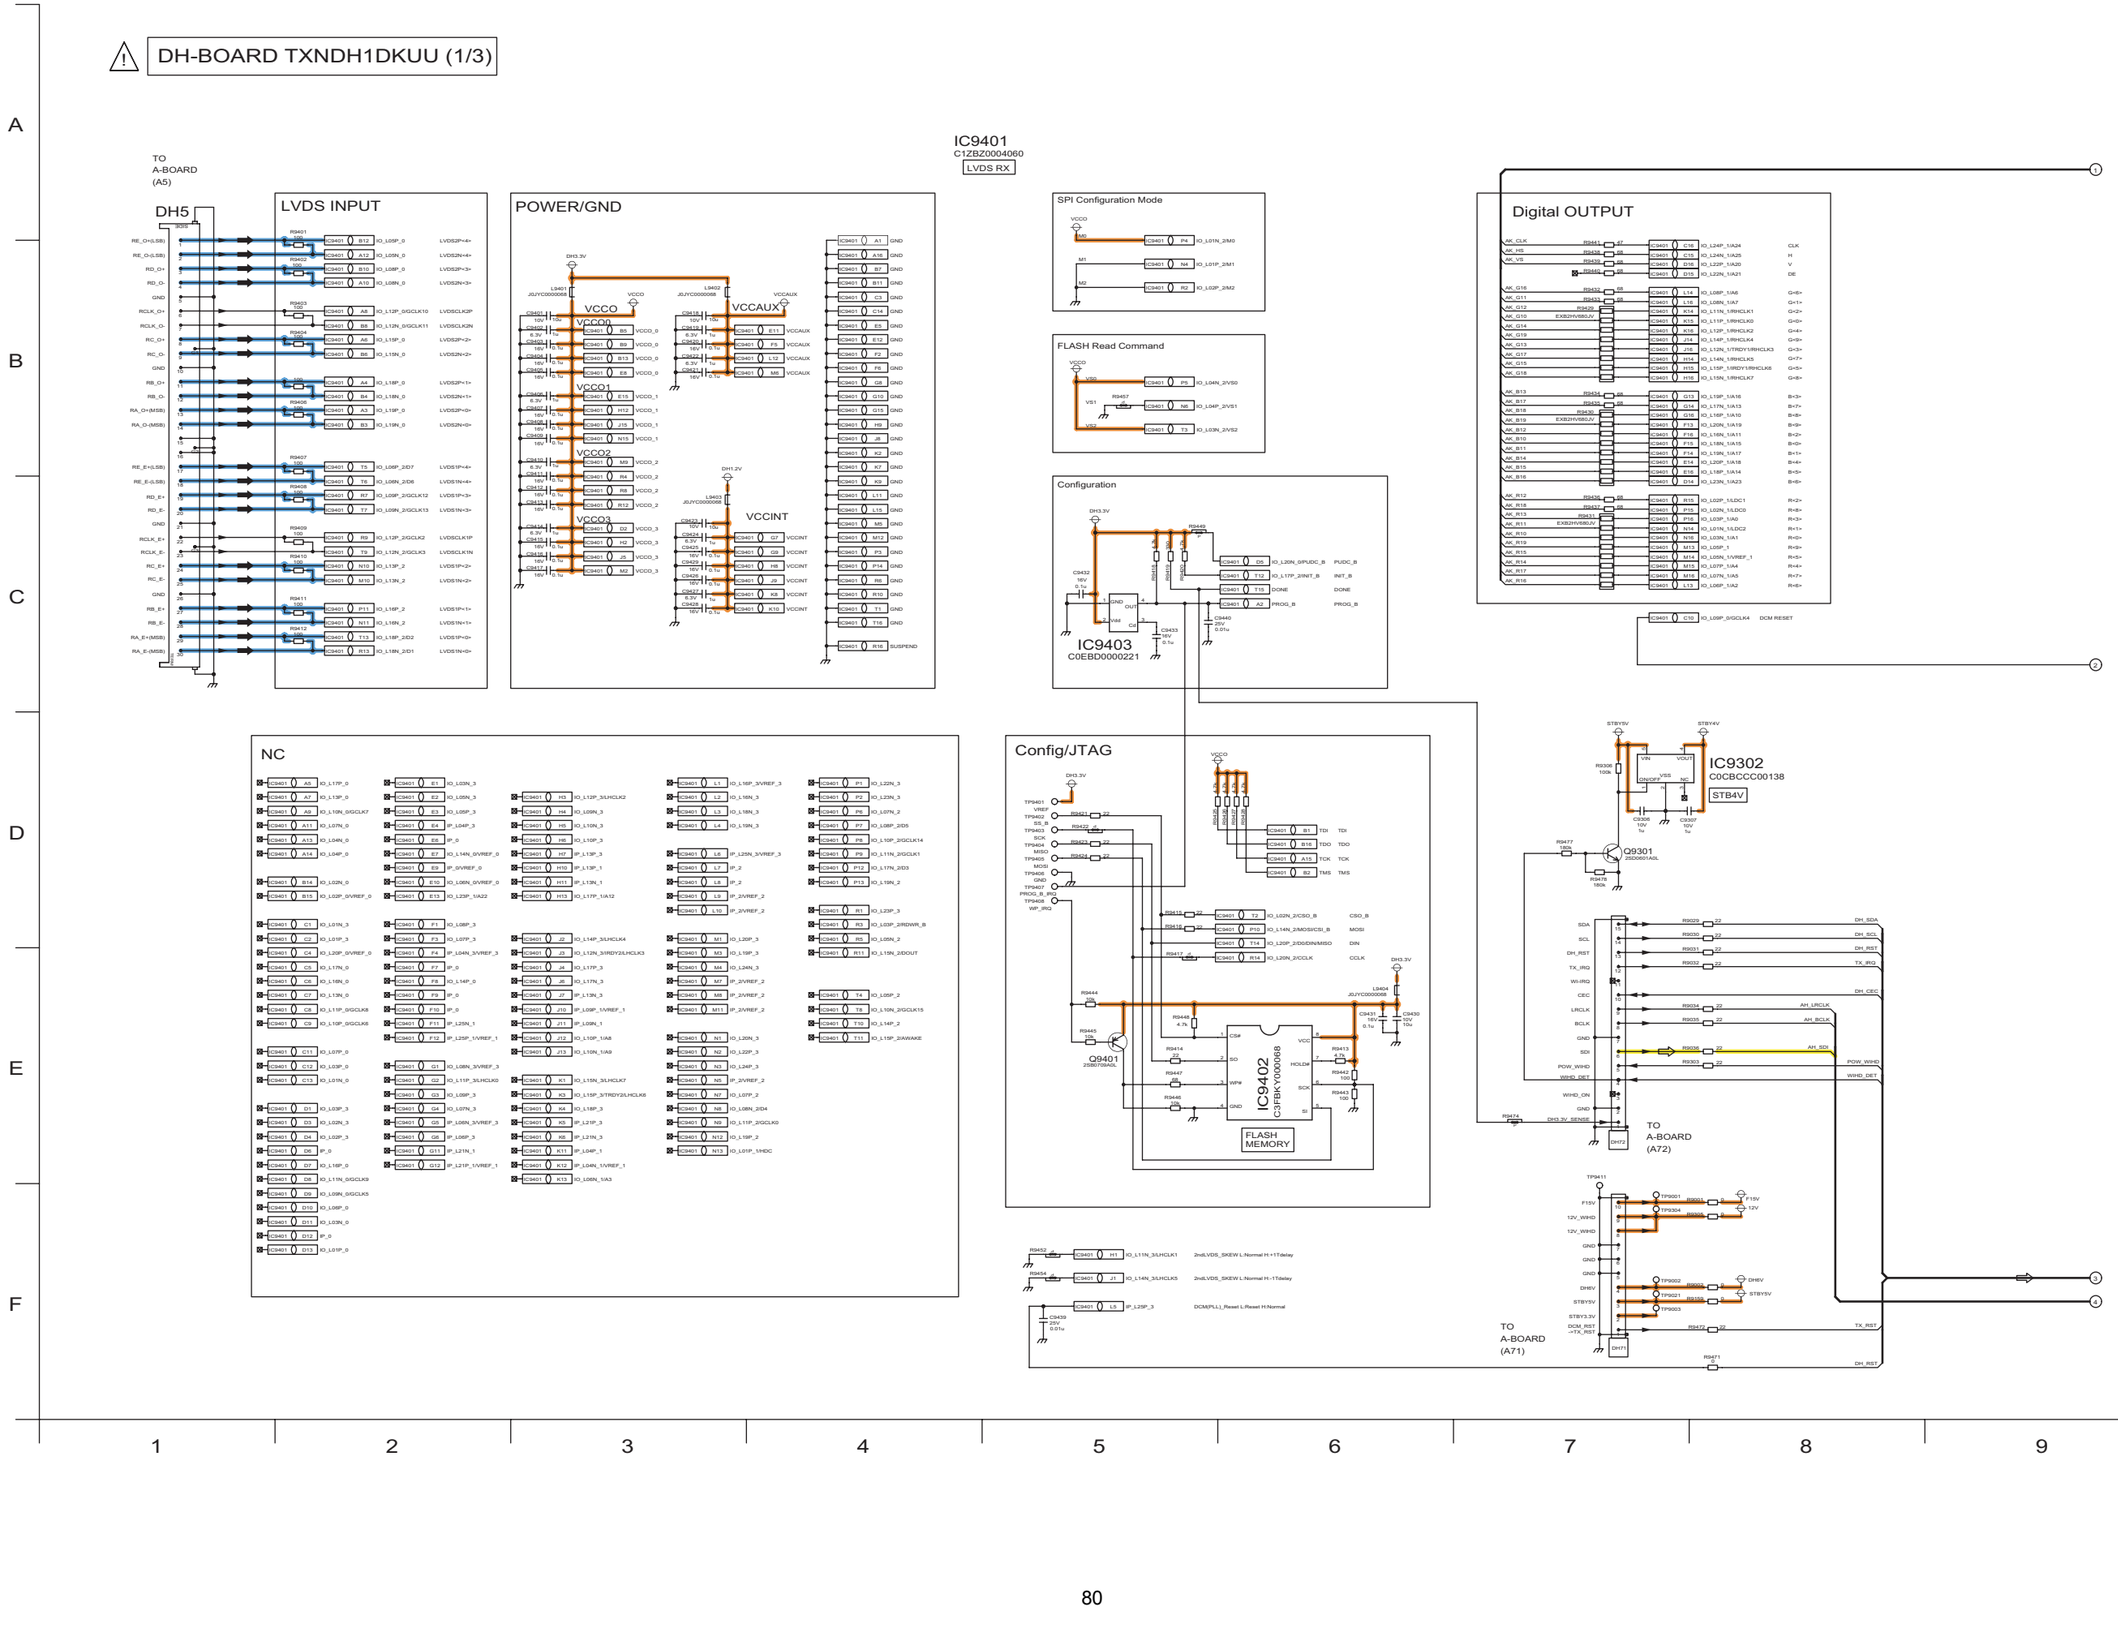


12.2.24. DH-Board (2/3) Schematic Diagram

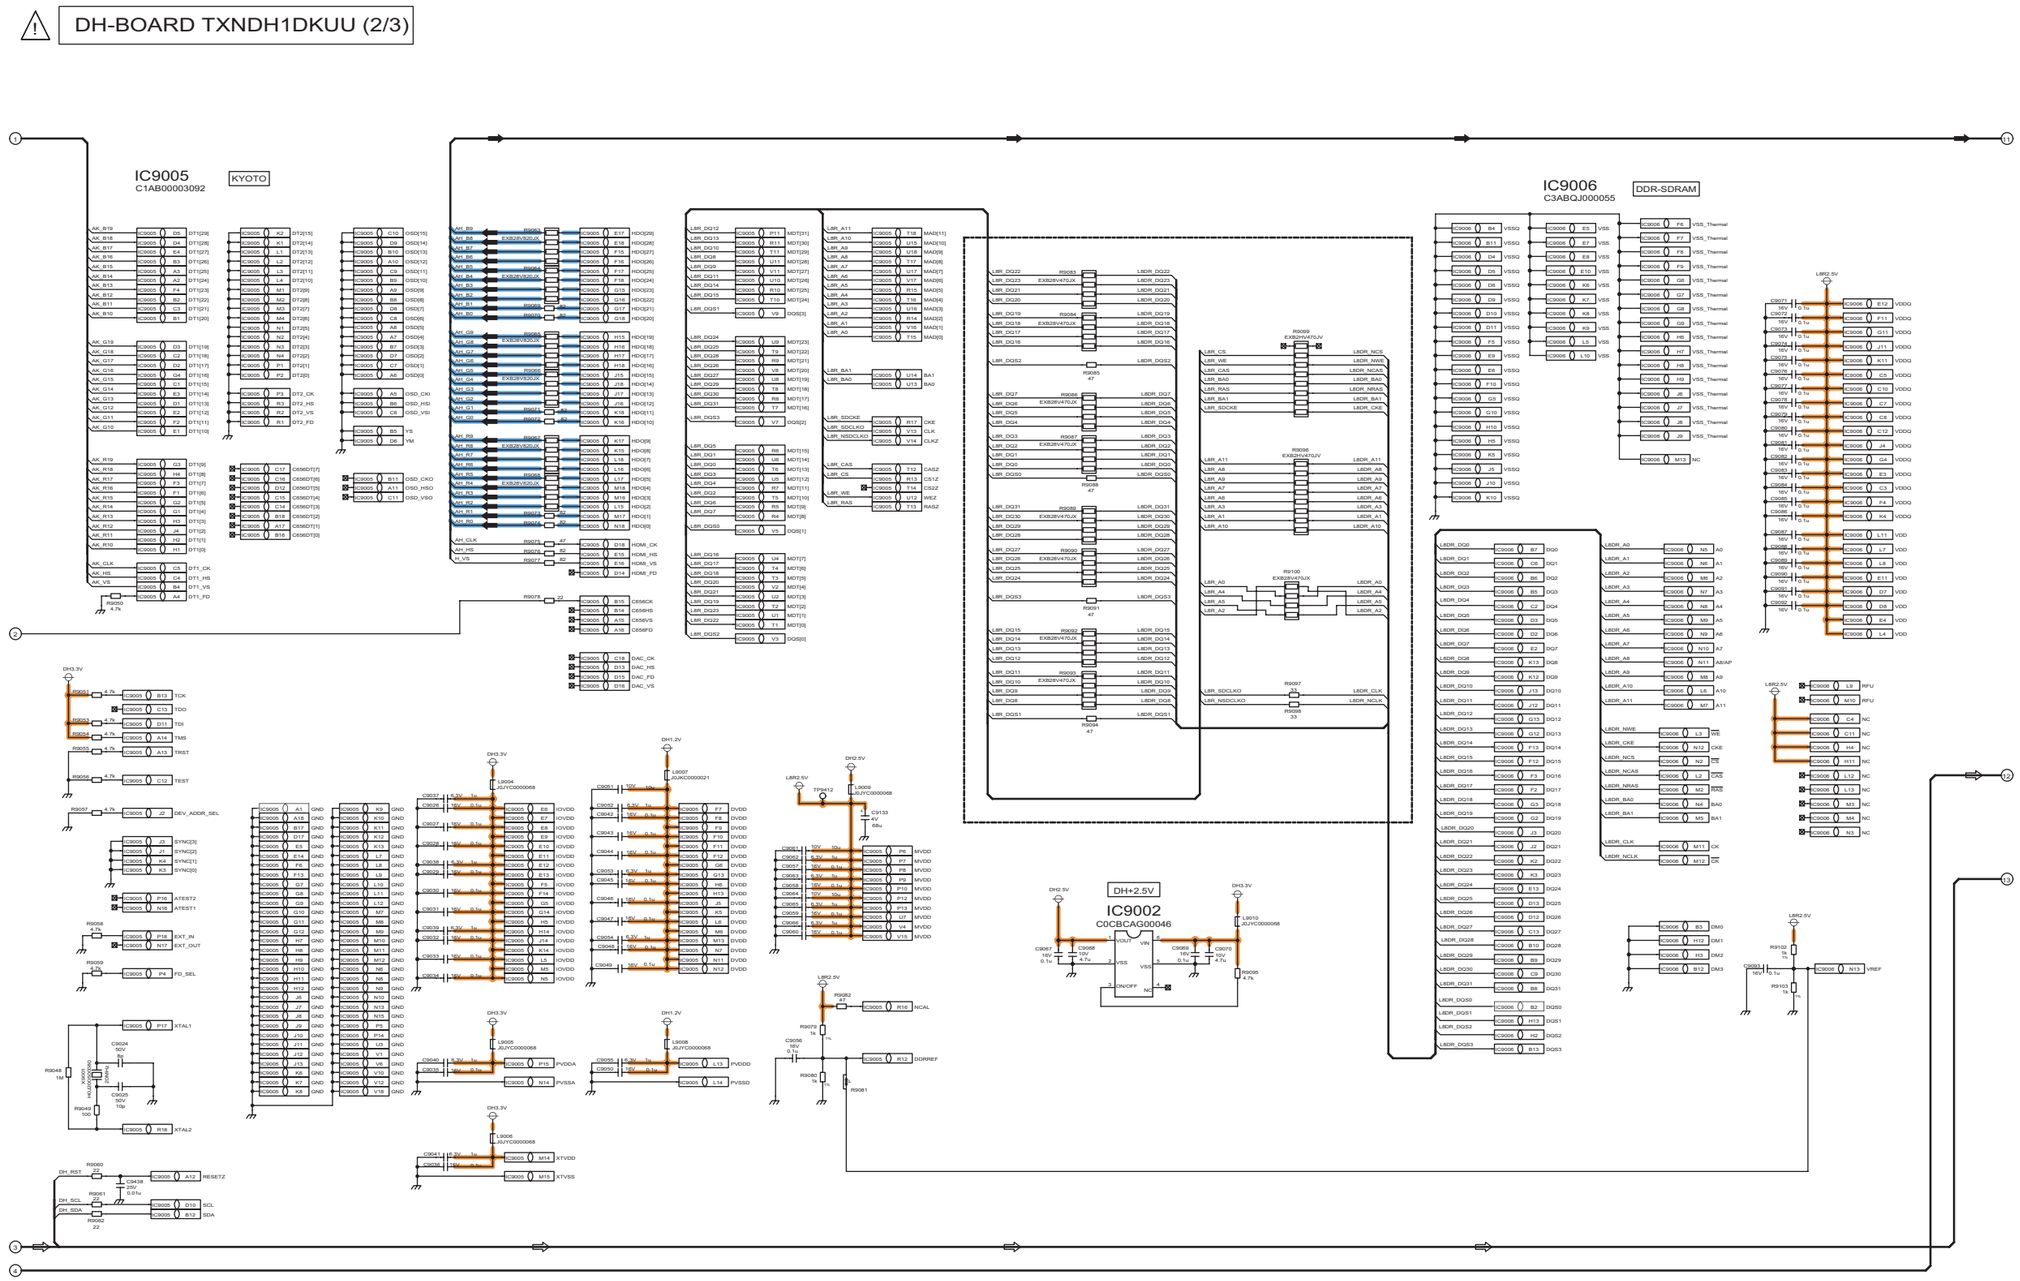


12.2.25. DH-Board (3/3) Schematic Diagram

DH-BOARD TXNDH1DKUU (3/3)

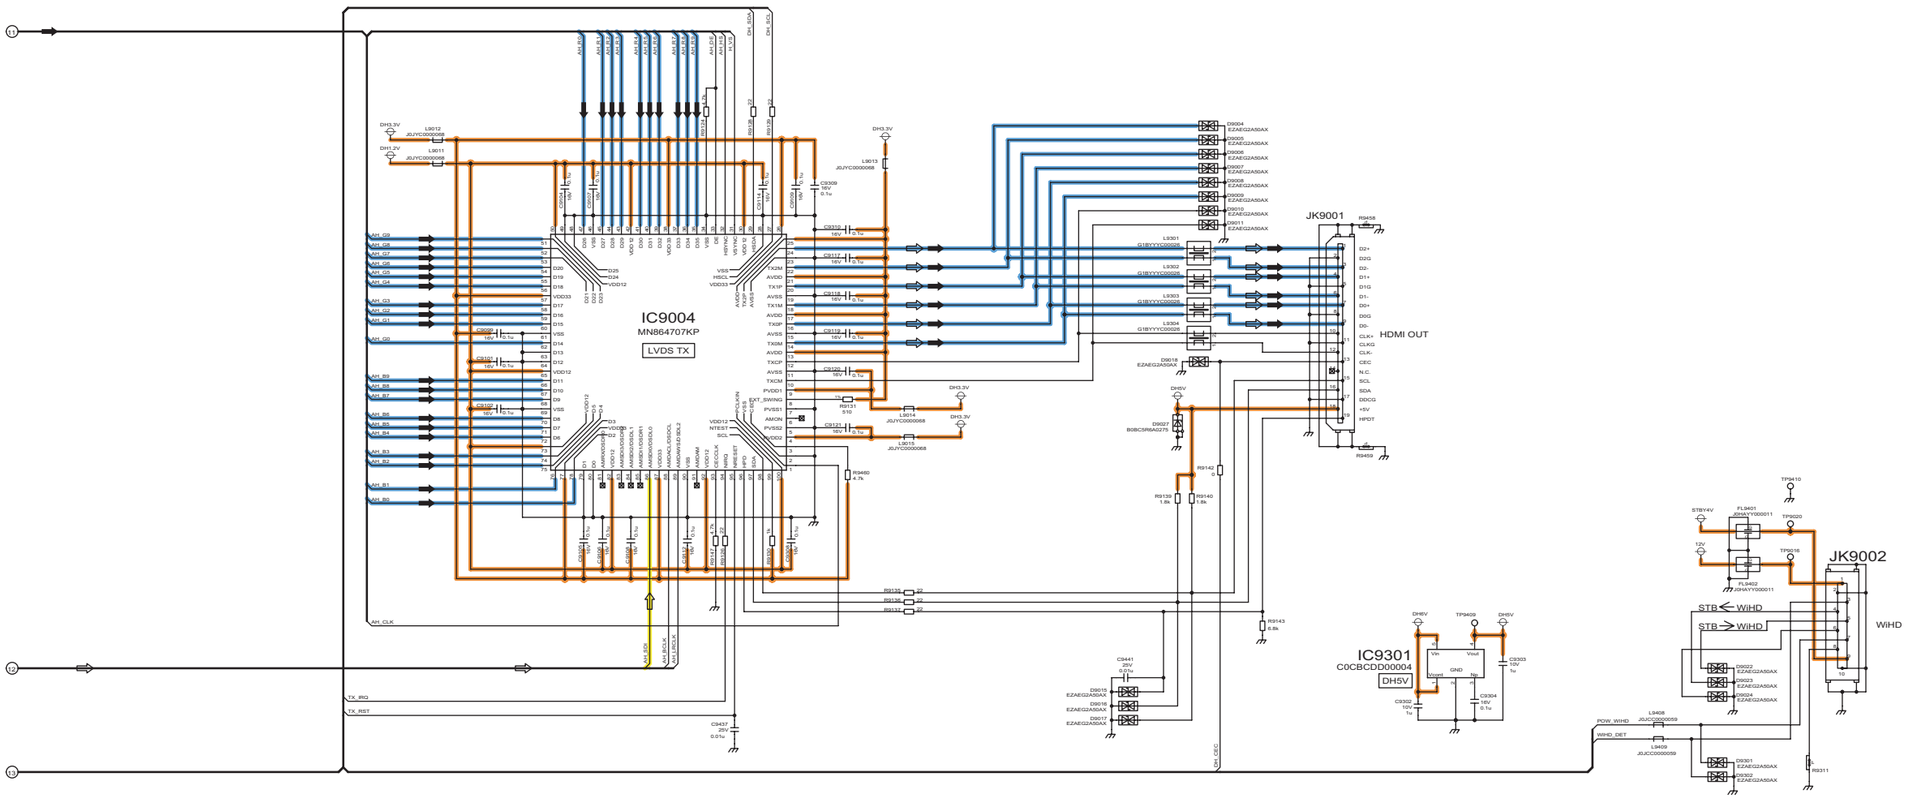


12.3. Display unit


12.3.1. P(SUS)-Board Schematic Diagram

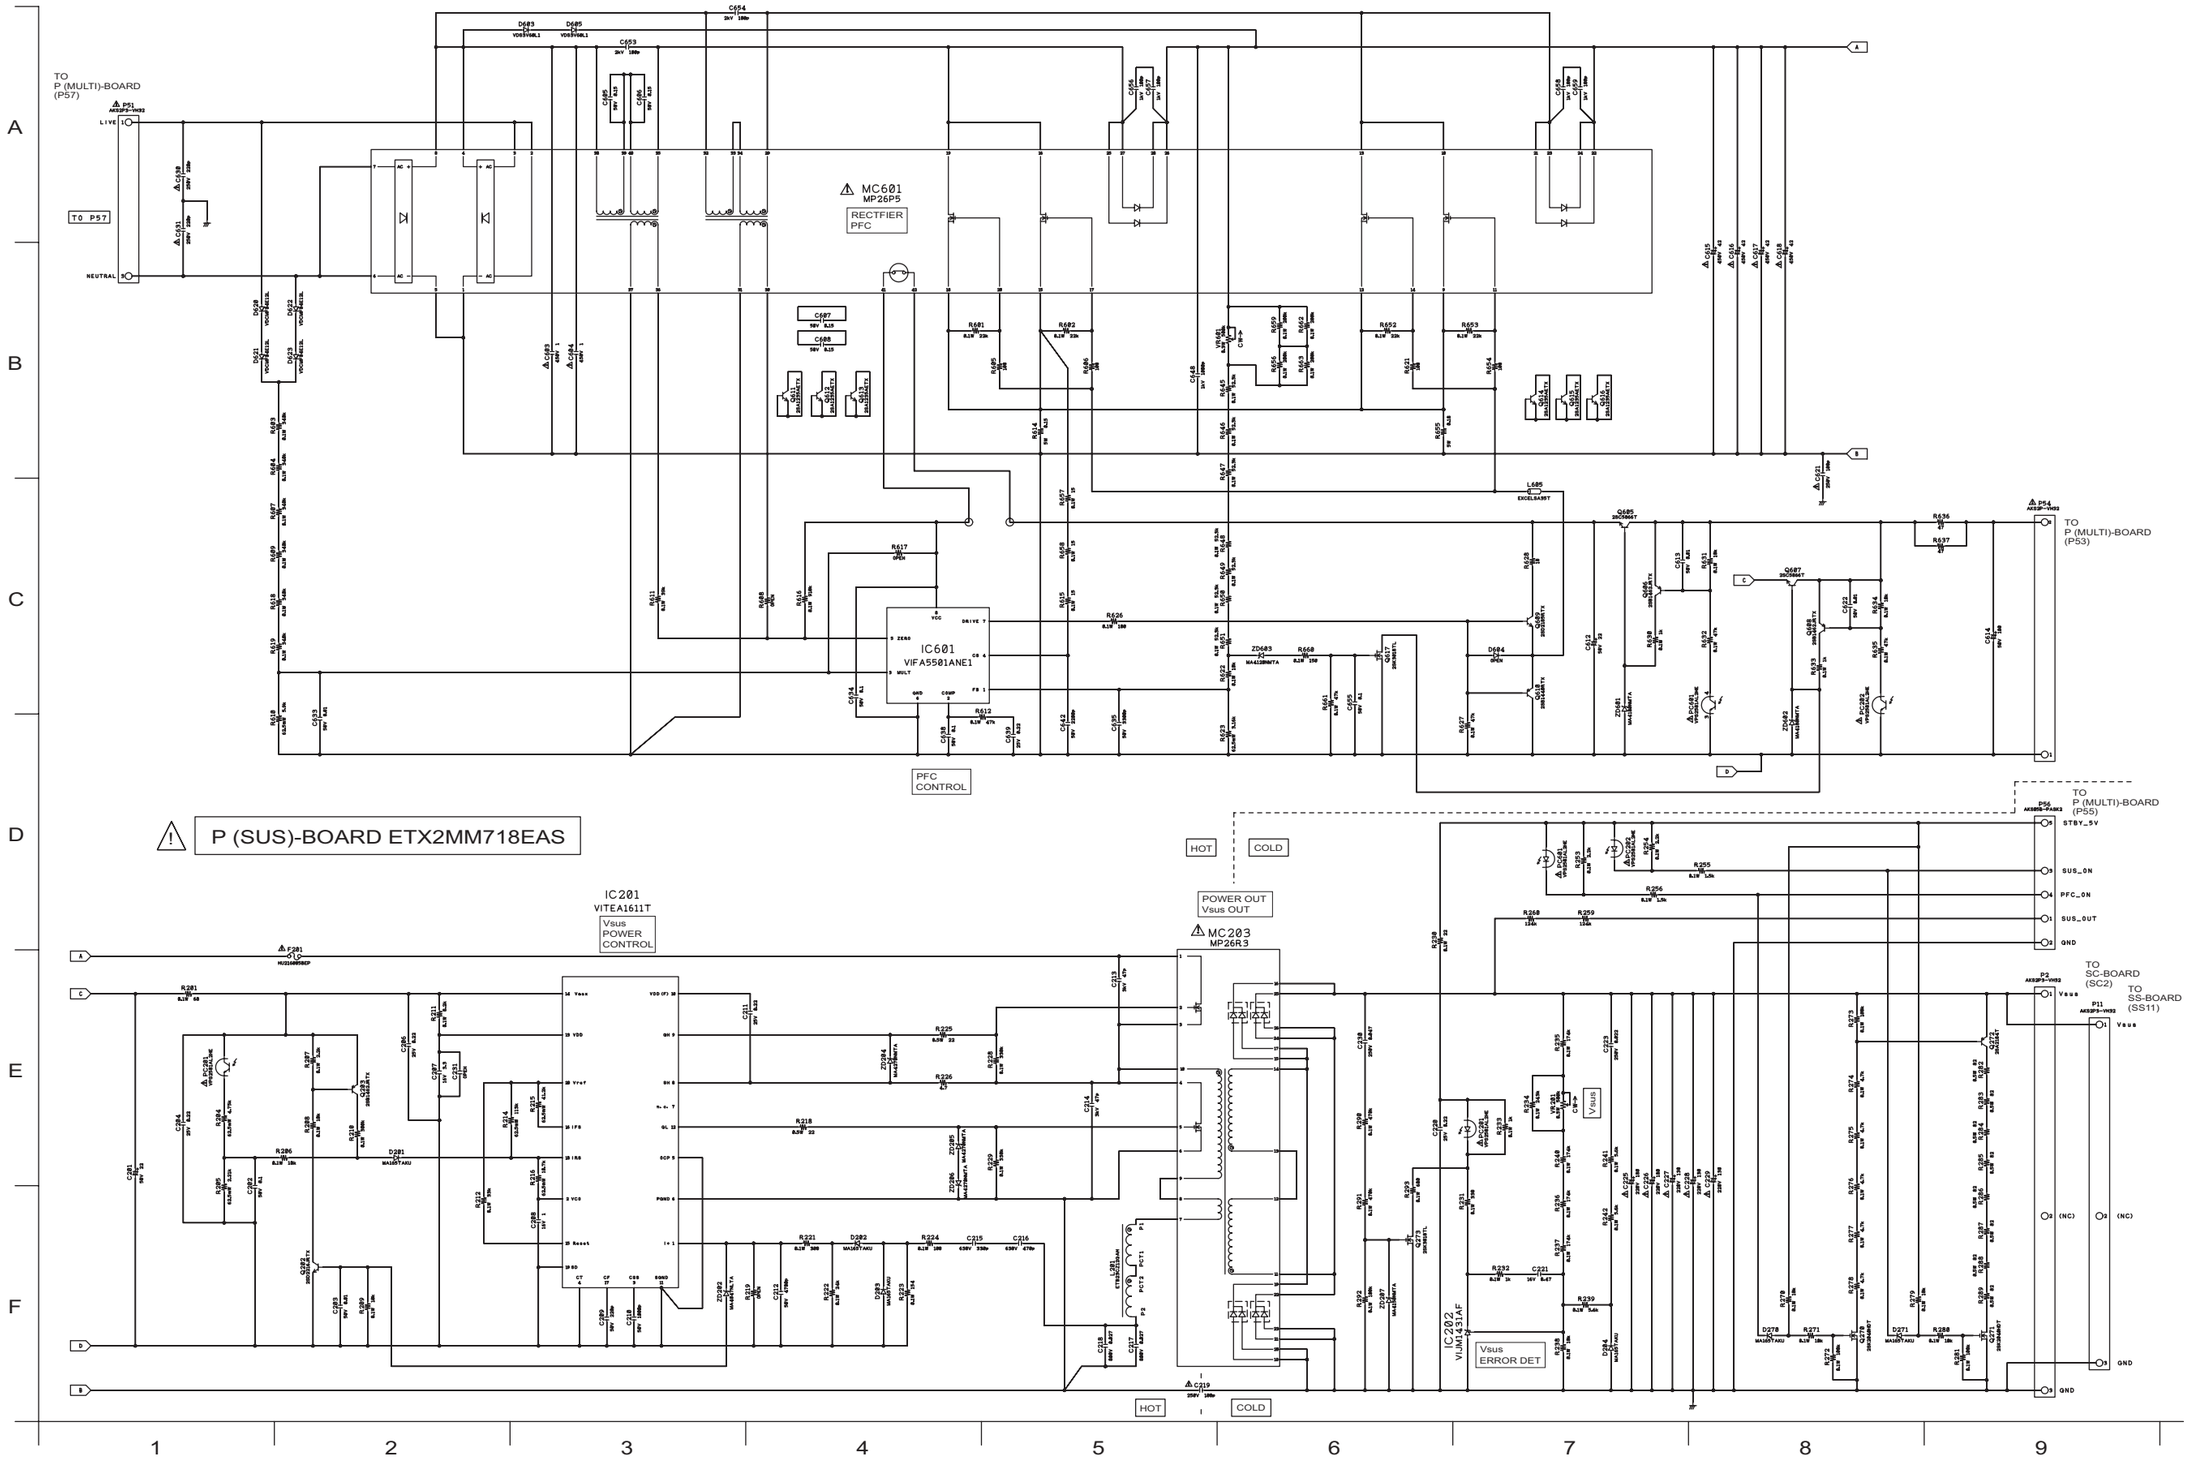


12.3.2. P(MULTI)-Board (1/2) Schematic Diagram

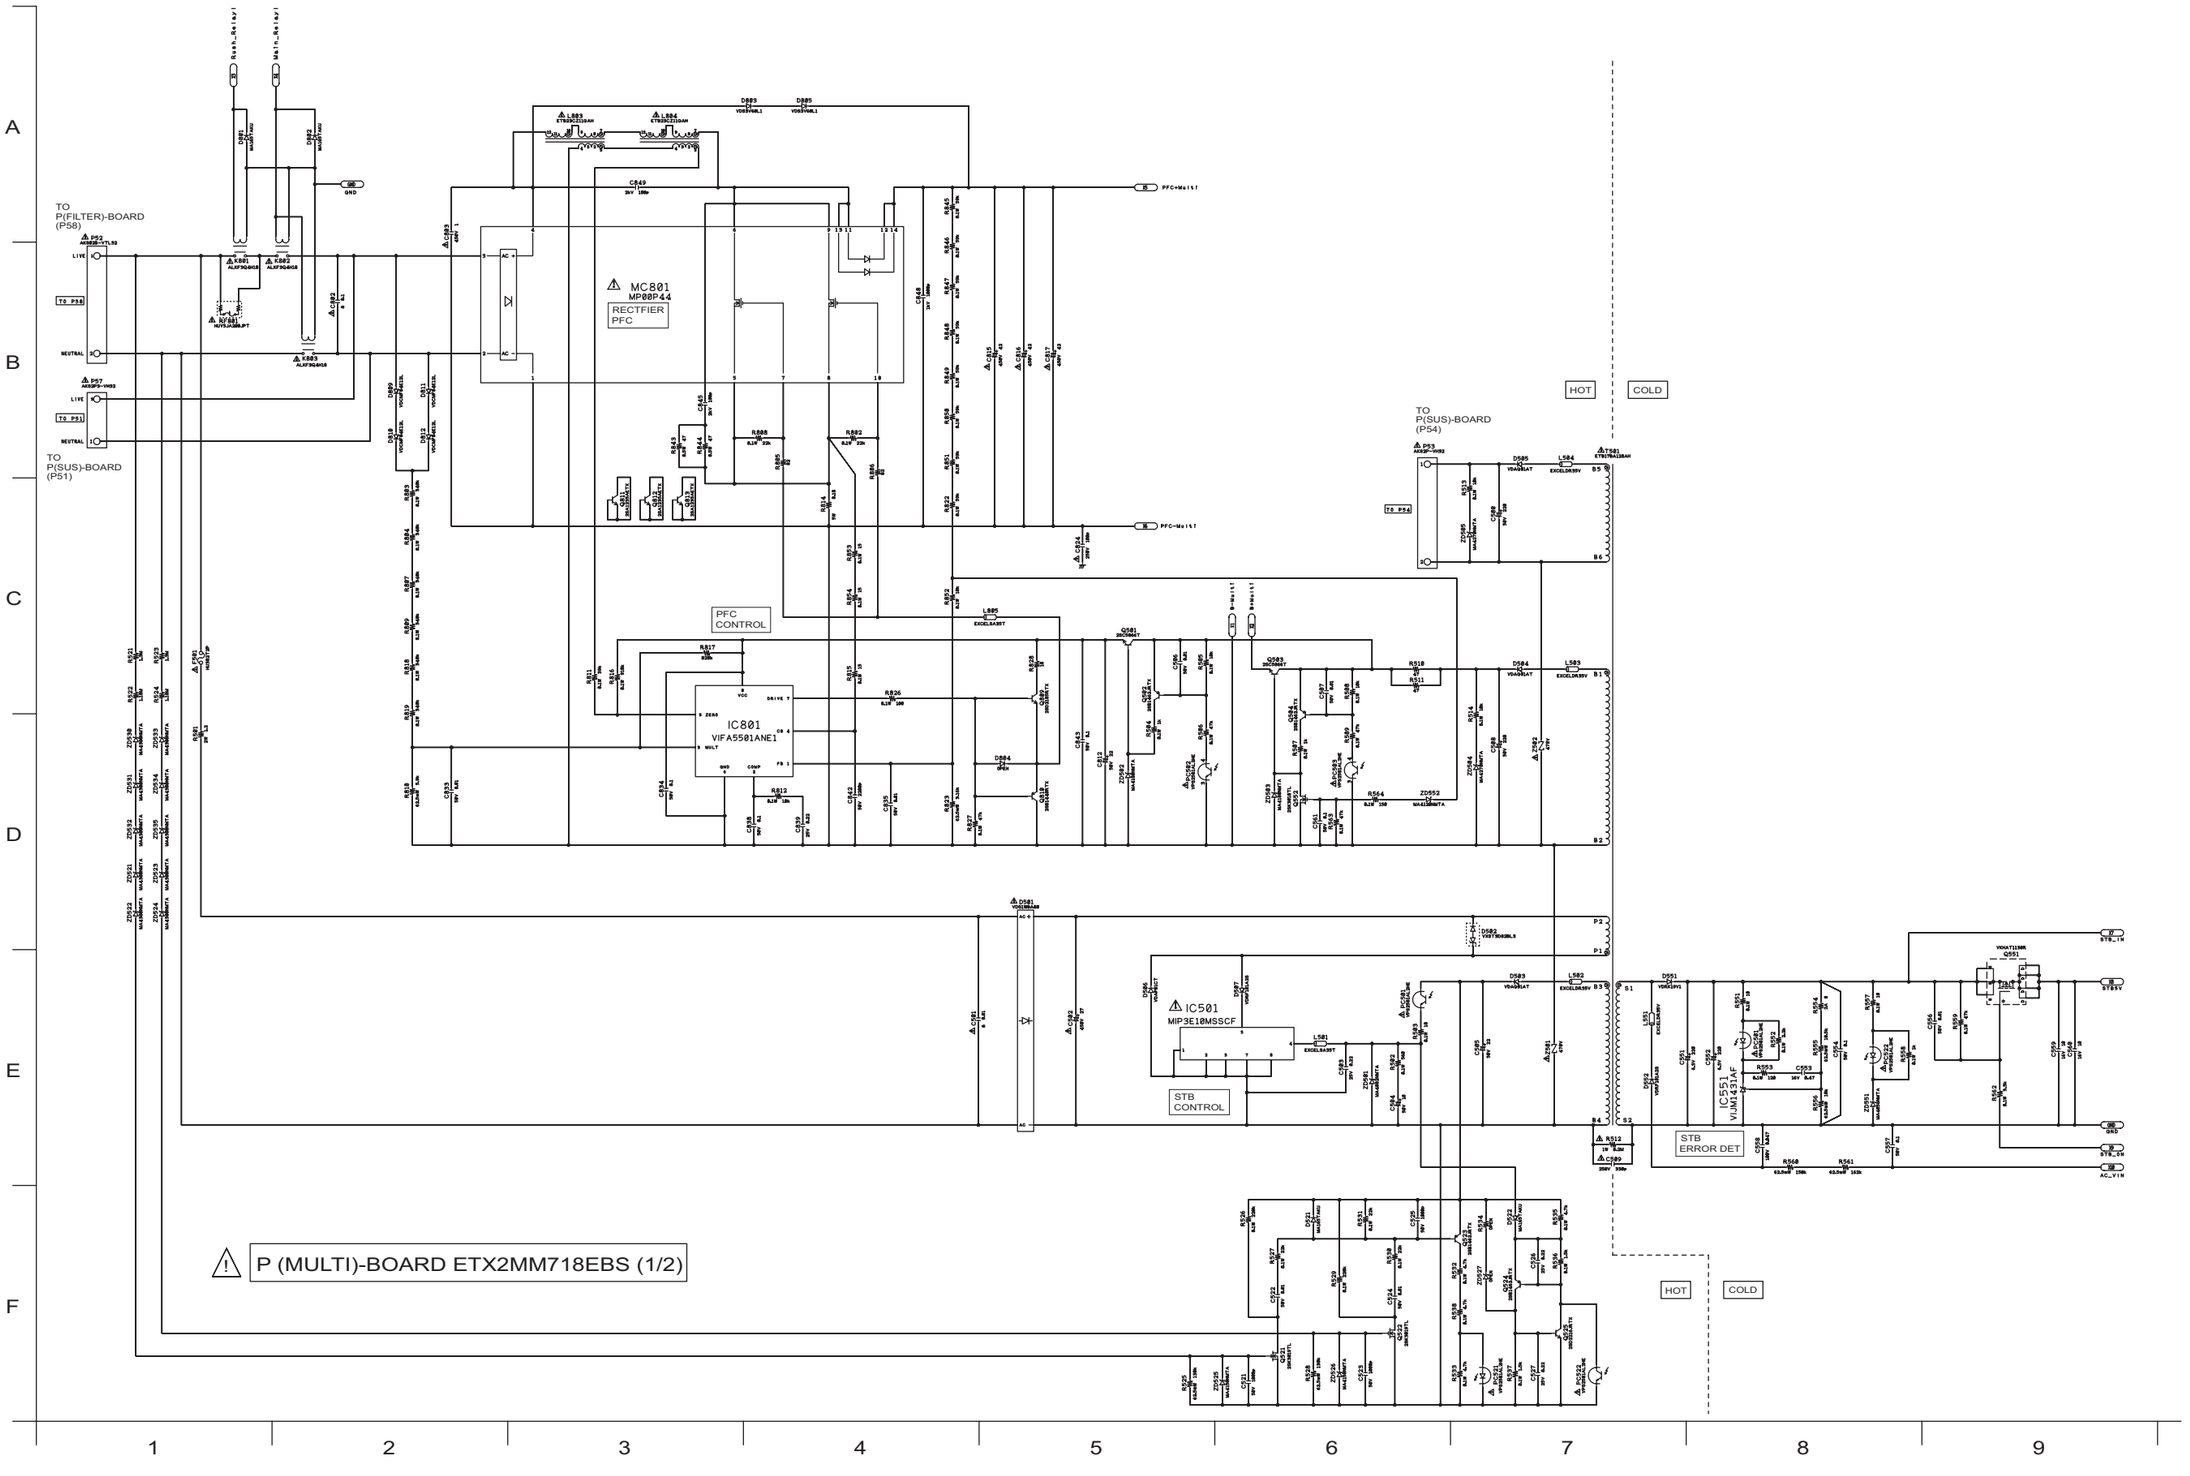


12.3.3. P(MULTI)-Board (2/2) Schematic Diagram

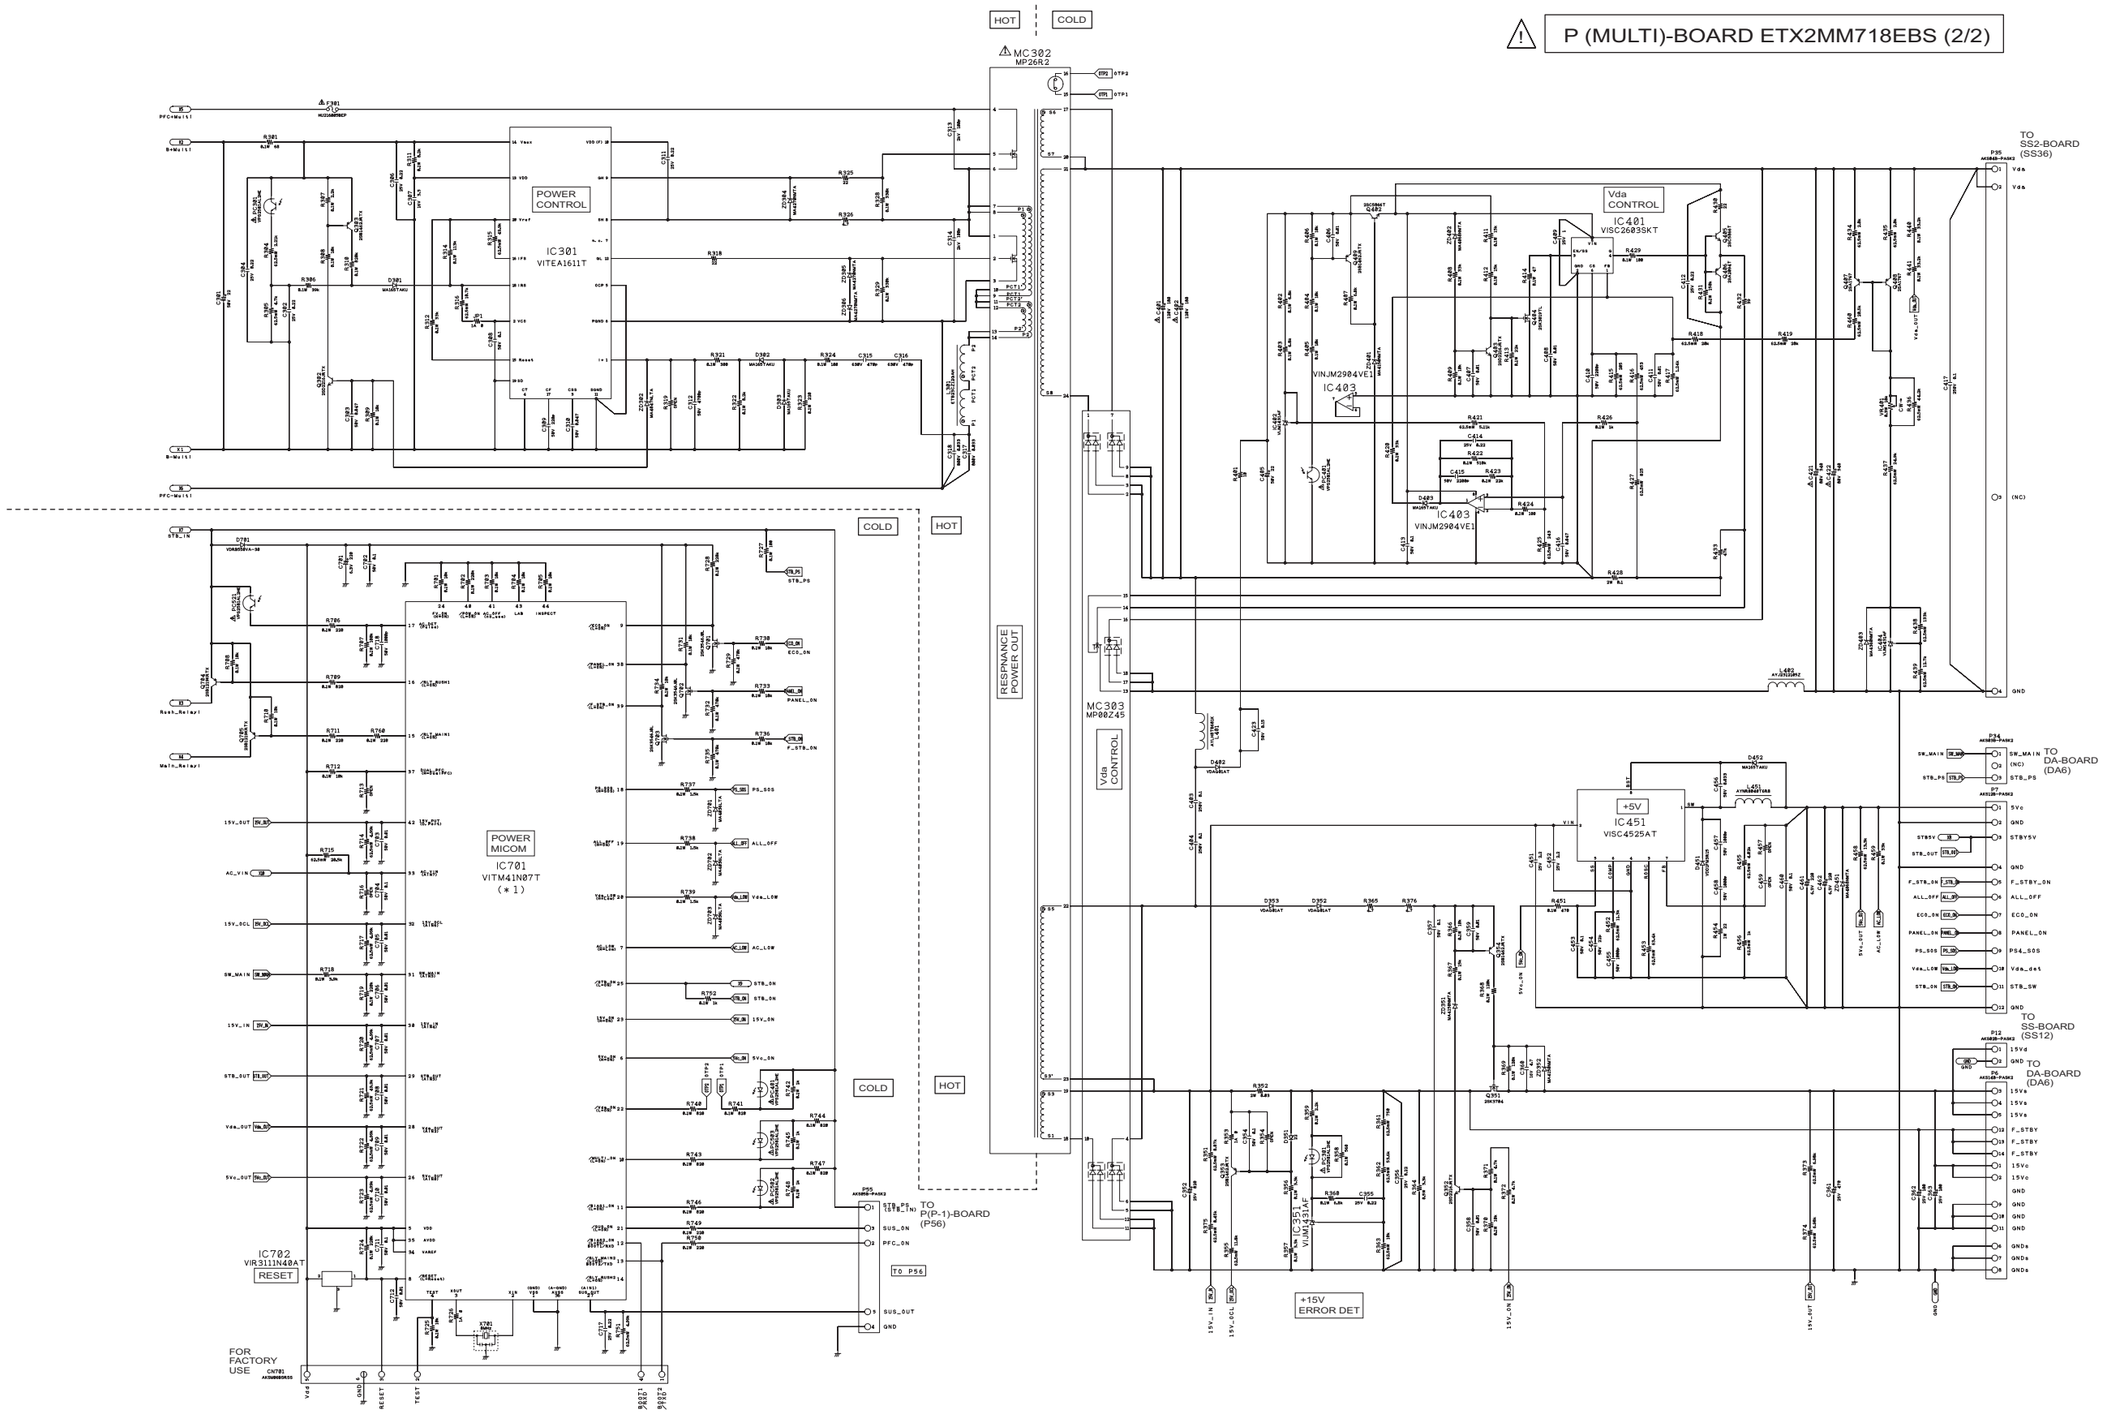


12.3.4. P(FILTER)-Board Schematic Diagram

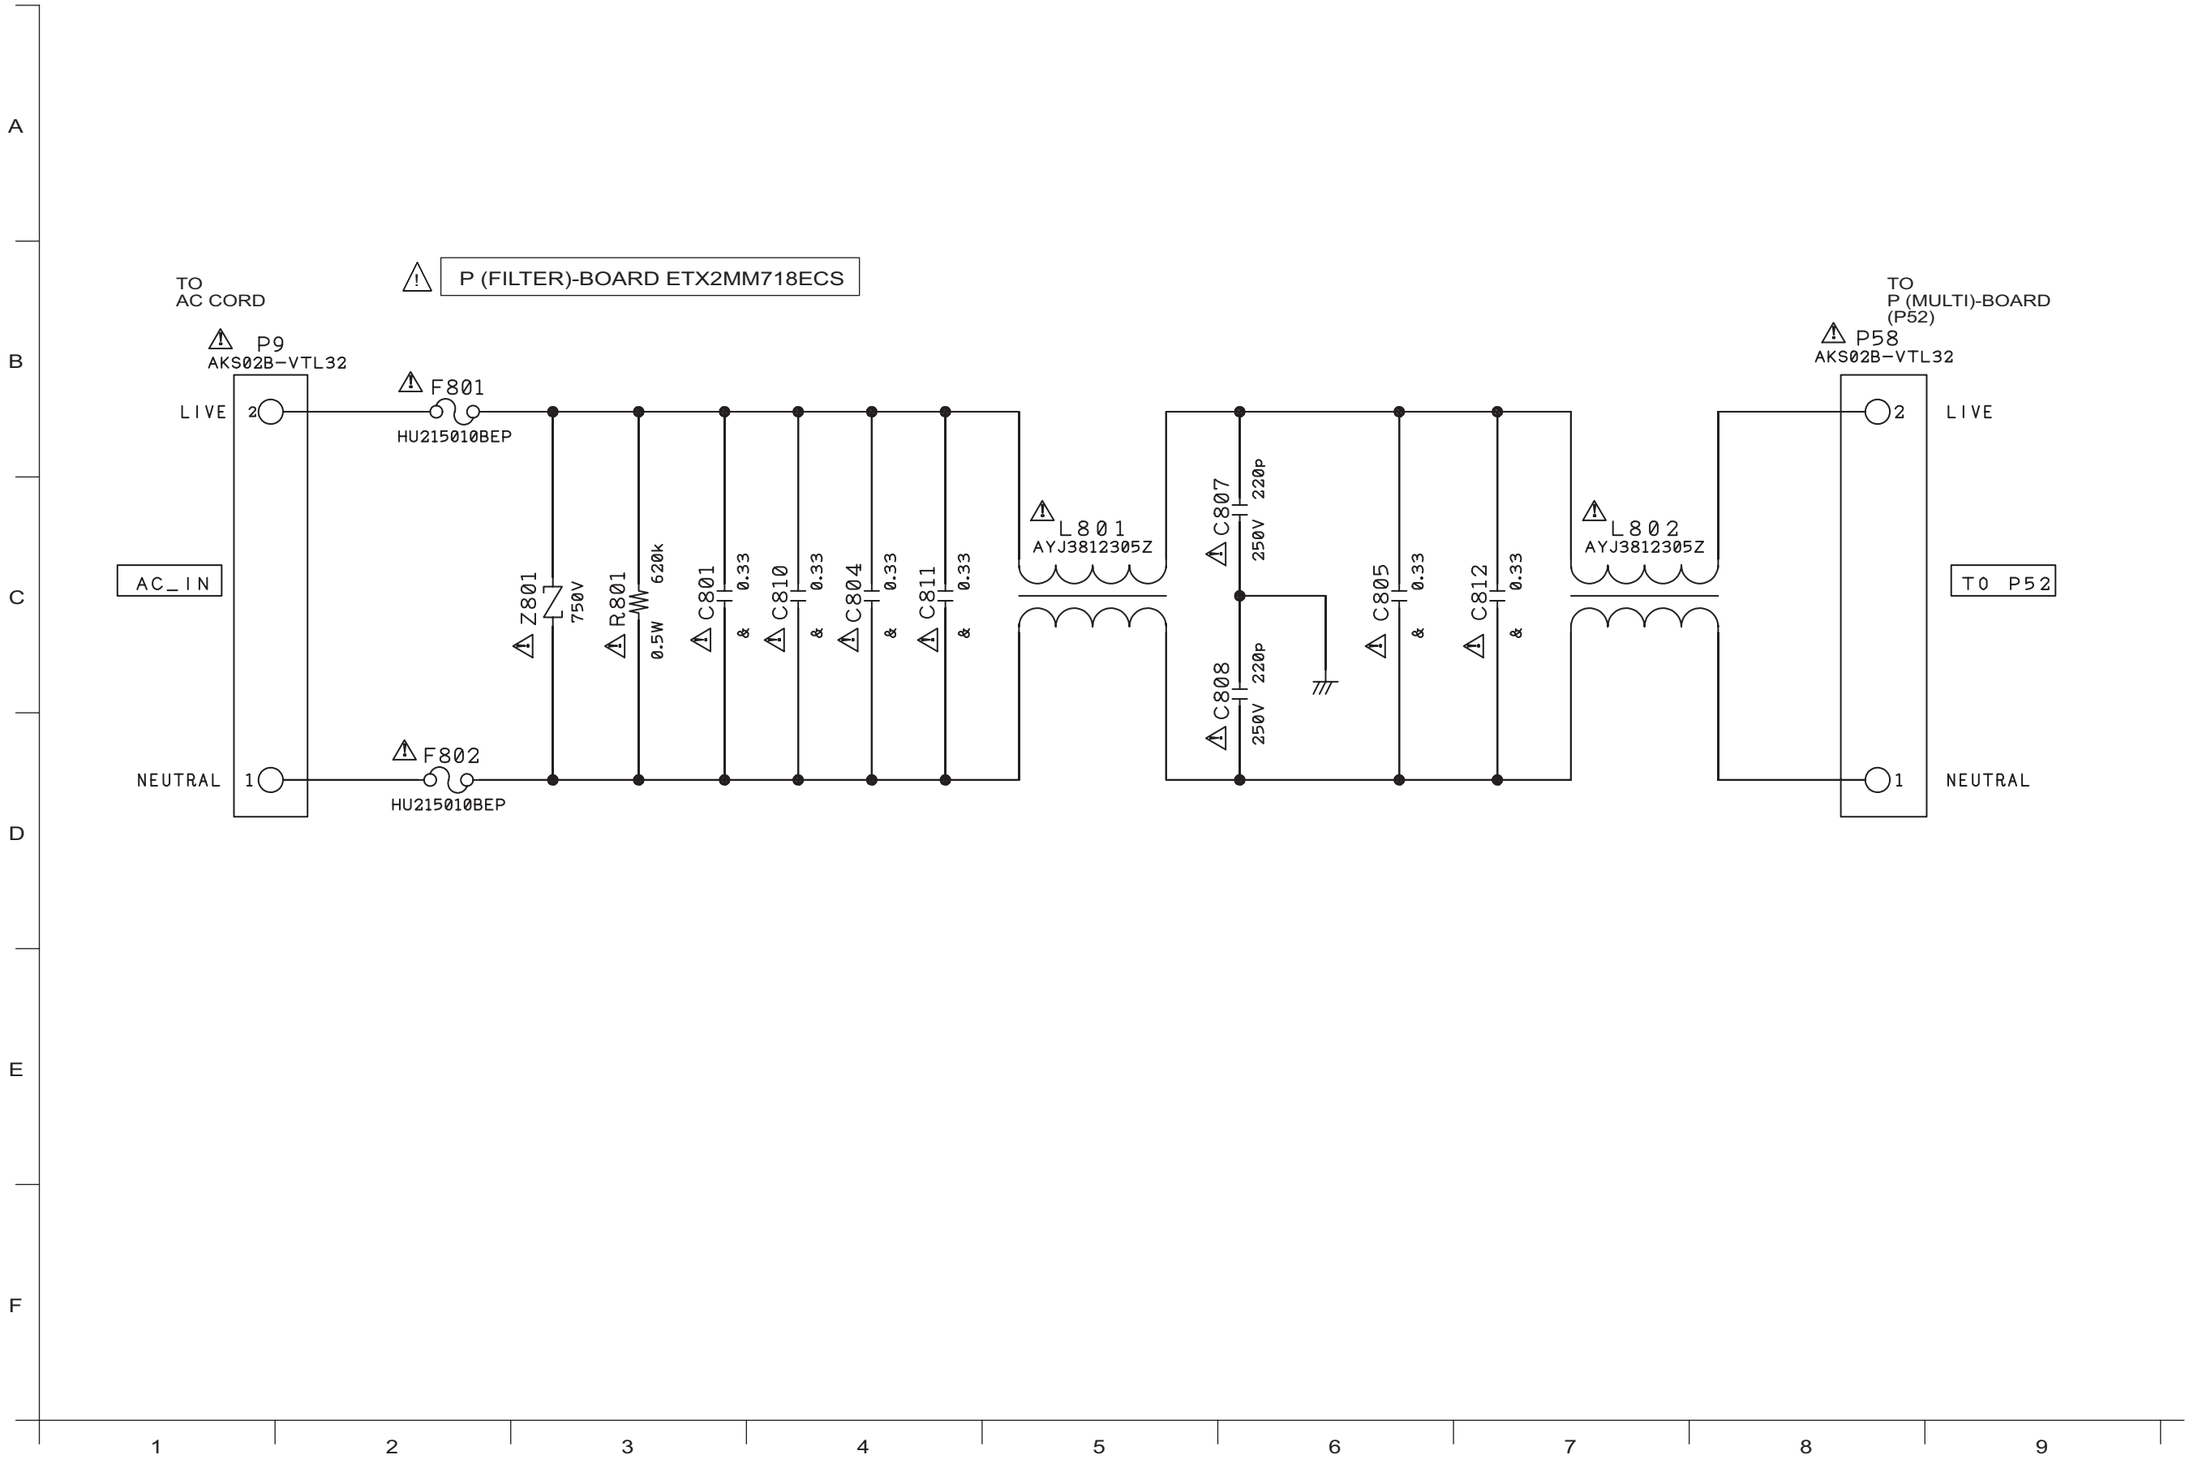



12.3.5. PB-Board Schematic Diagram

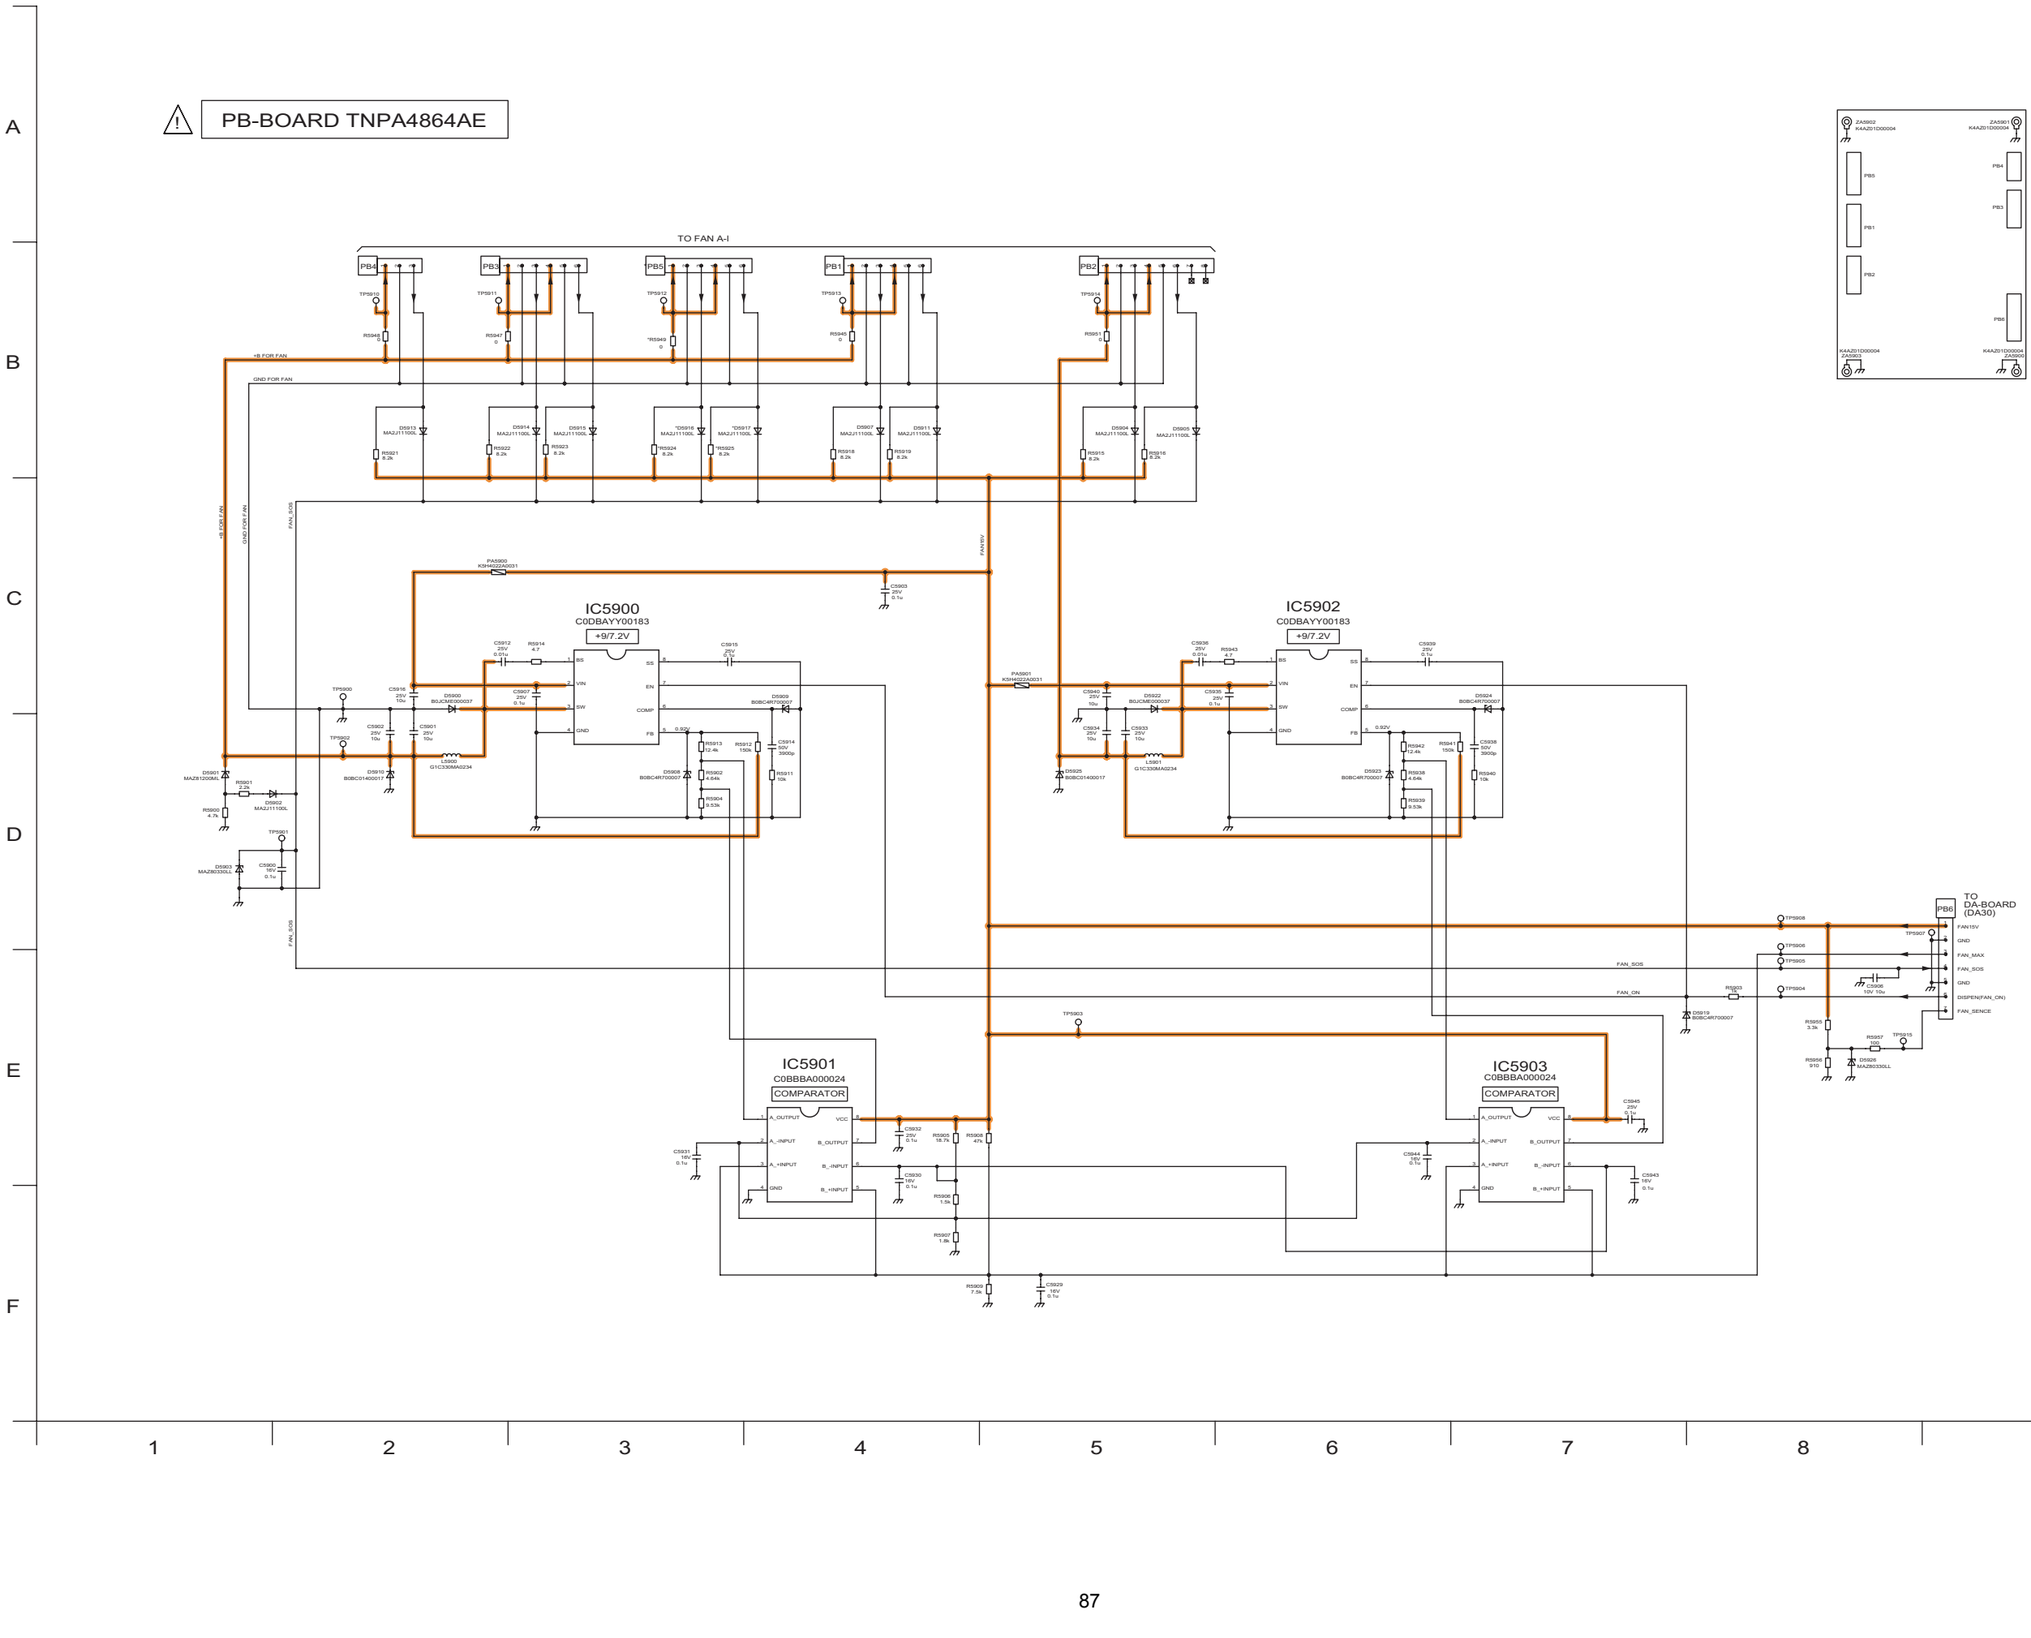


12.3.6. GL, KA, J, S and SG-Board Schematic Diagram

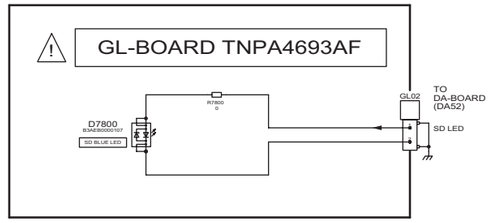


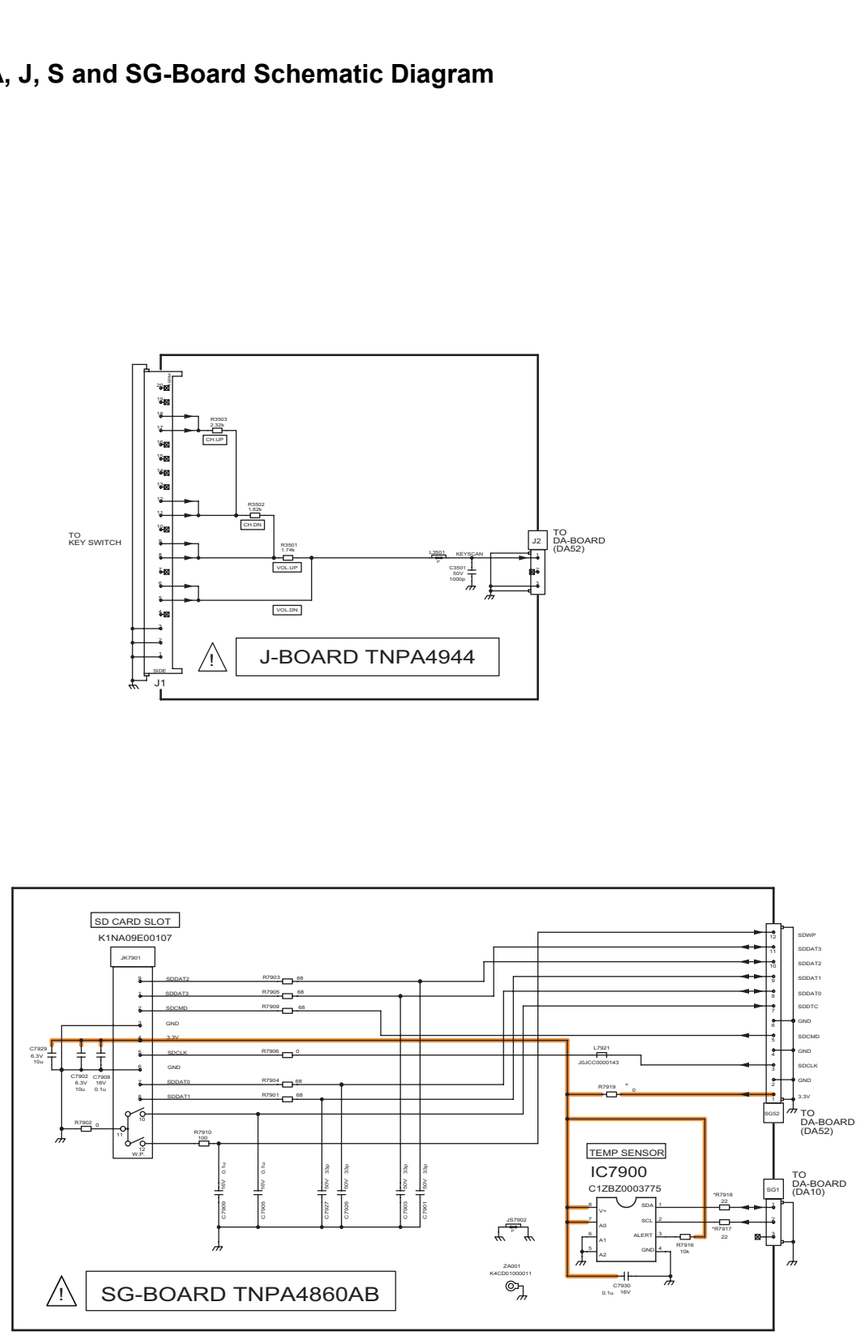

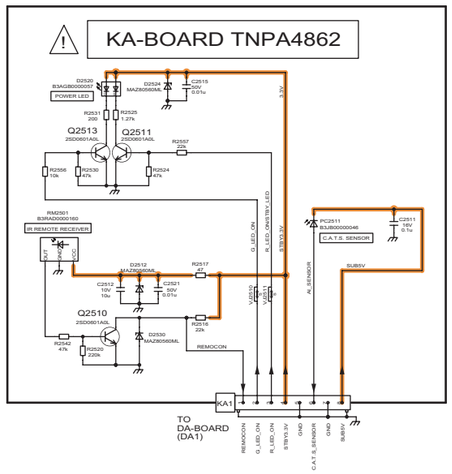

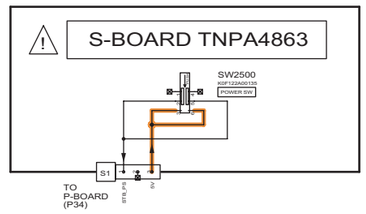

12.3.7. GH-Board Schematic Diagram

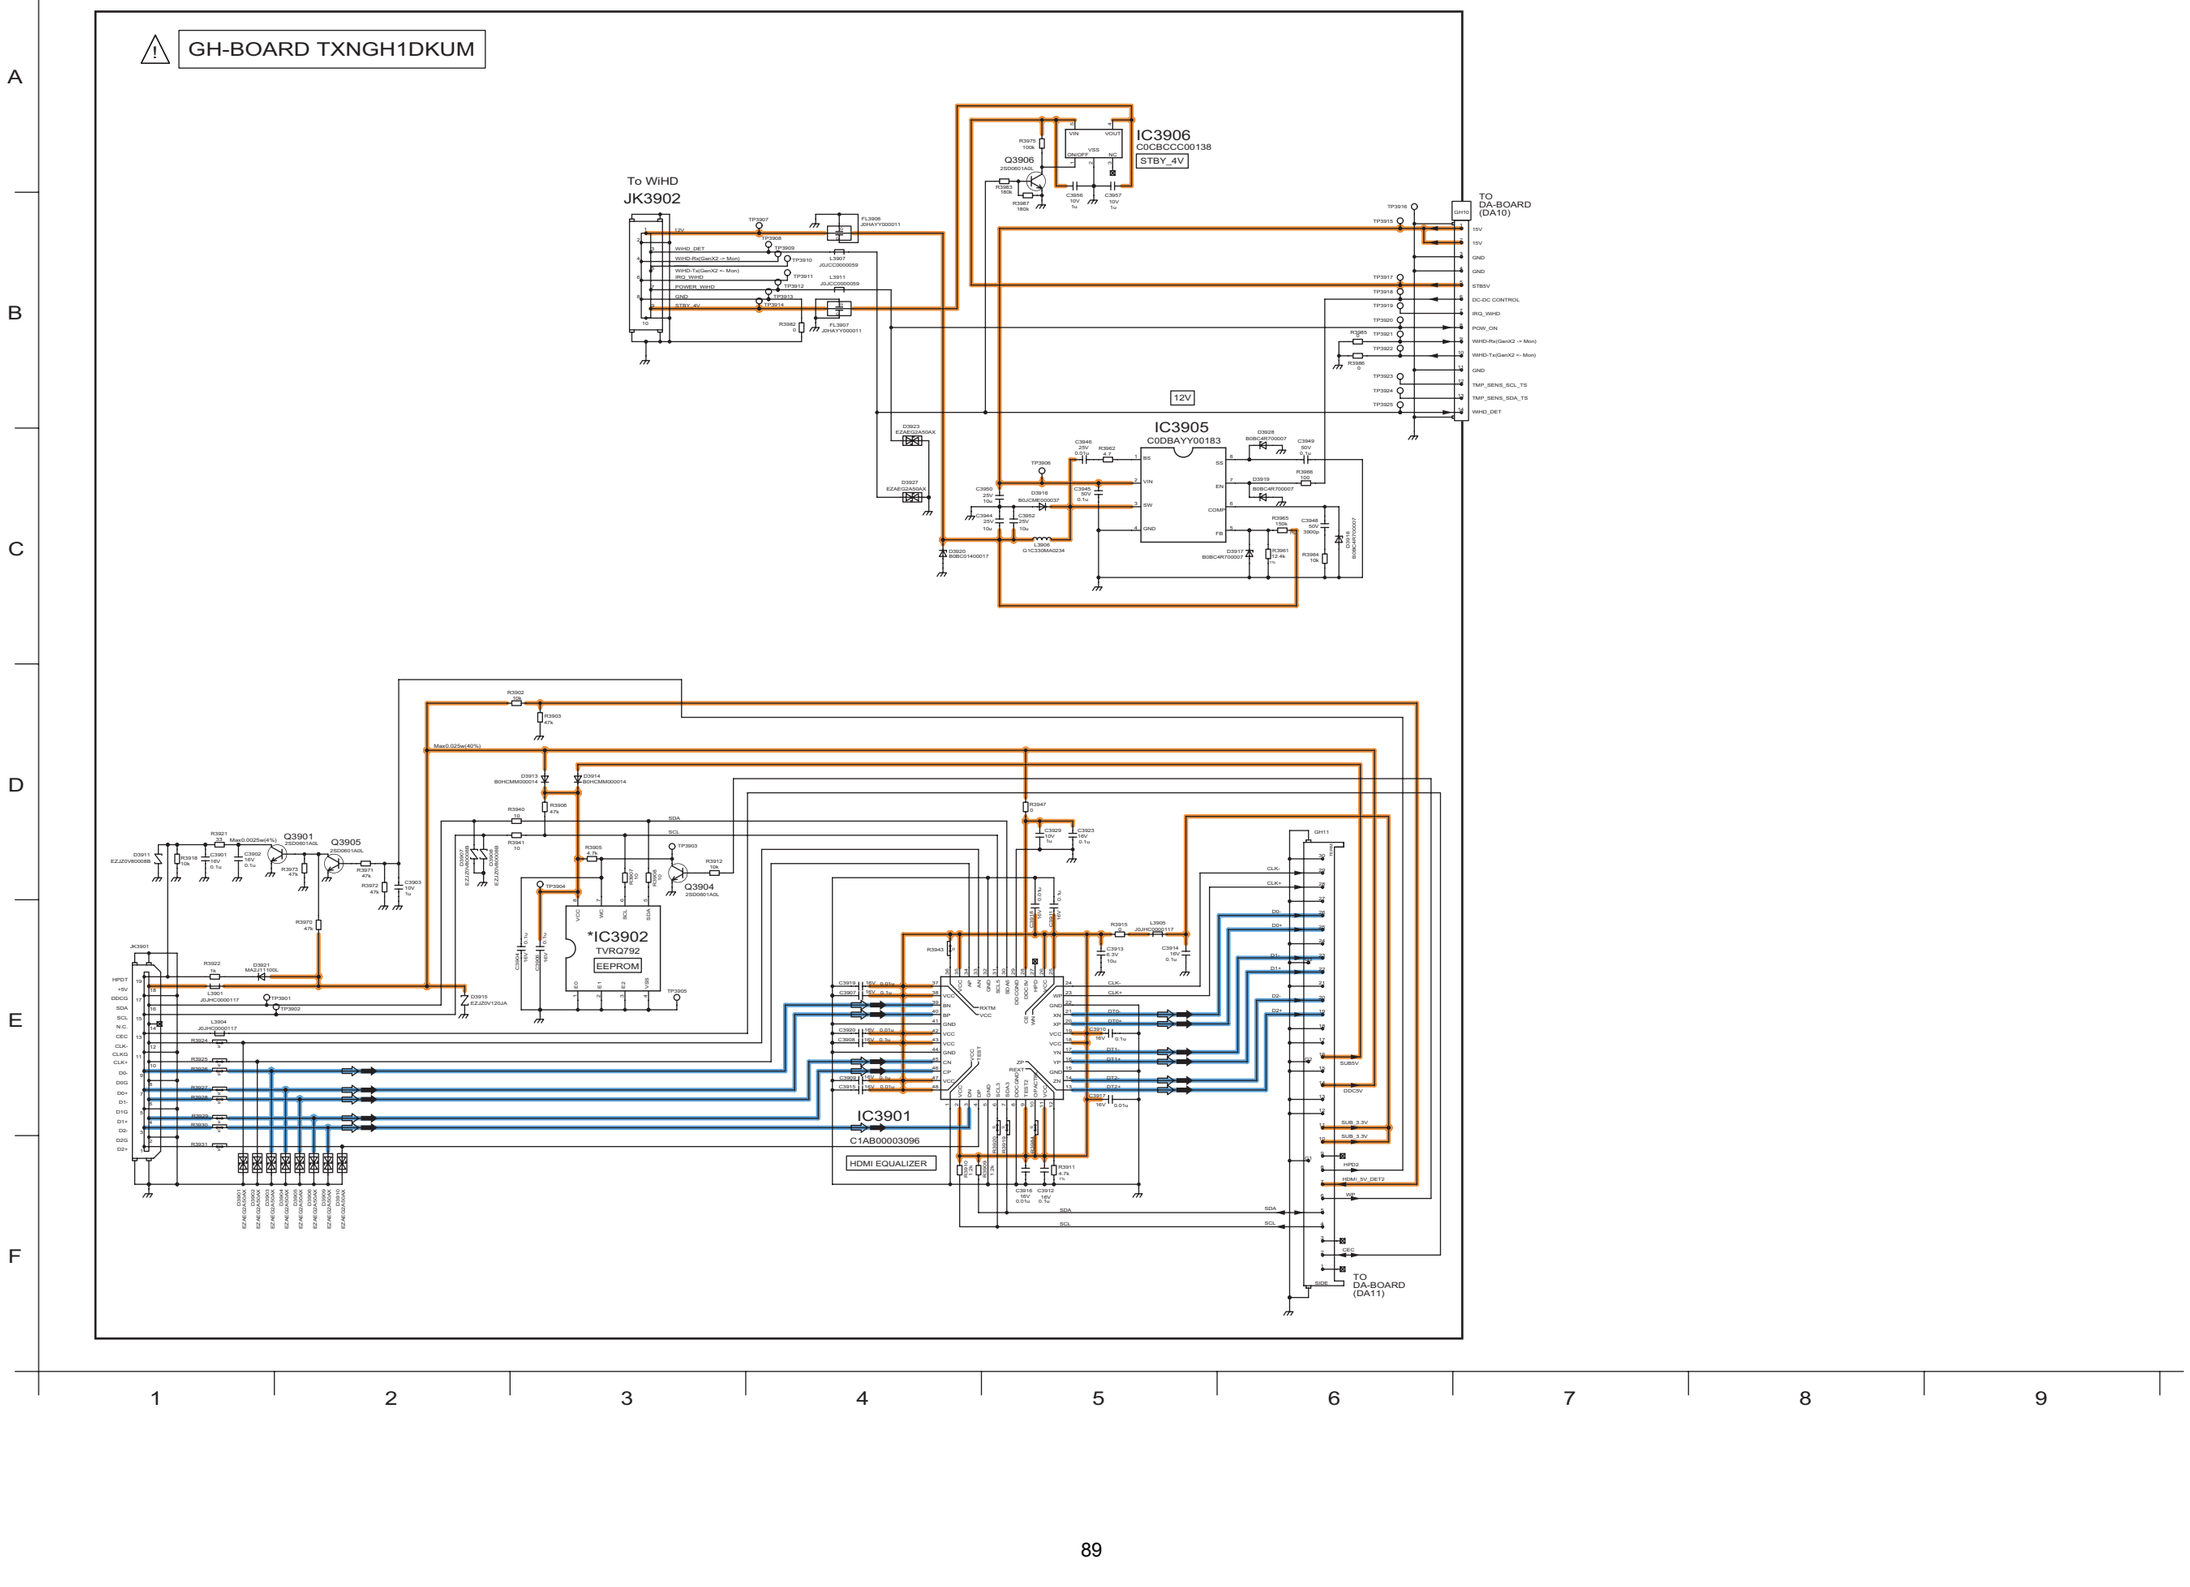



12.3.8. DA-Board (1/18) Schematic Diagram


DA-BOARD (1/18)
TZTNP02DKUM

IIC

SUFFIX




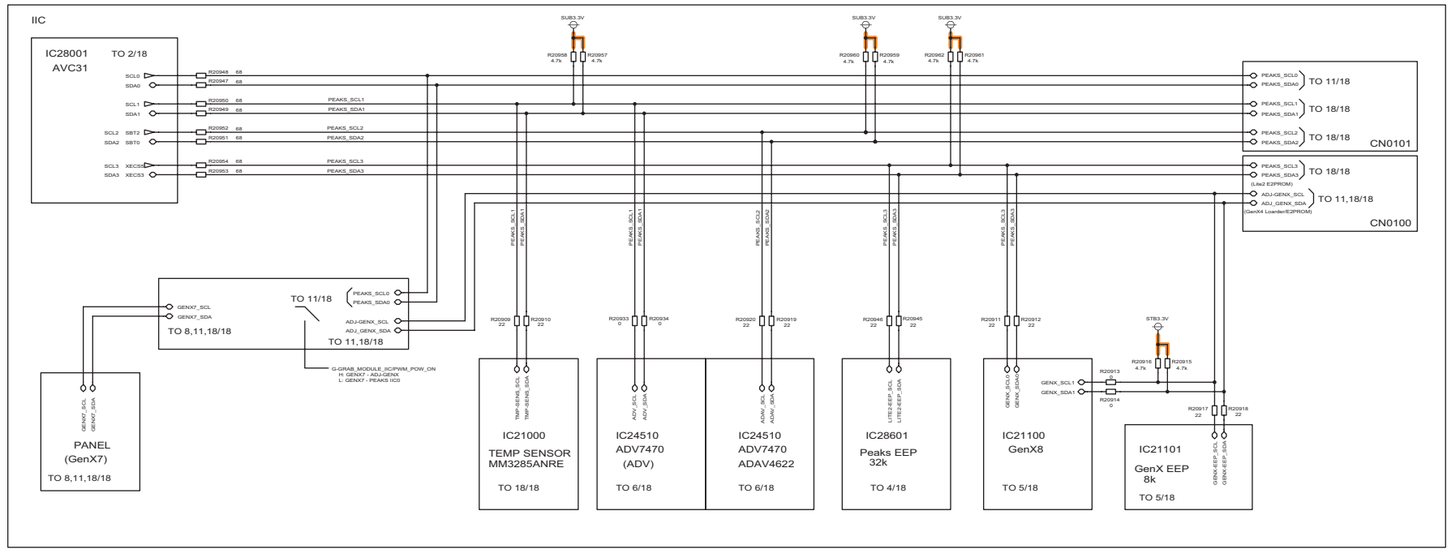

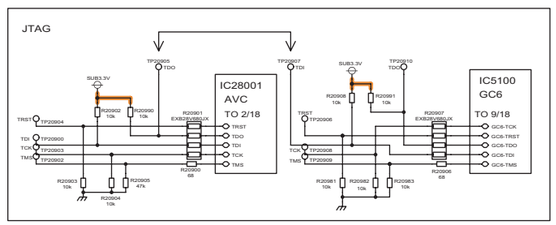


12.3.9. DA-Board (2/18) Schematic Diagram

⚠ DA-BOARD TZTNP02DKUM (2/18) Peaks-AVC

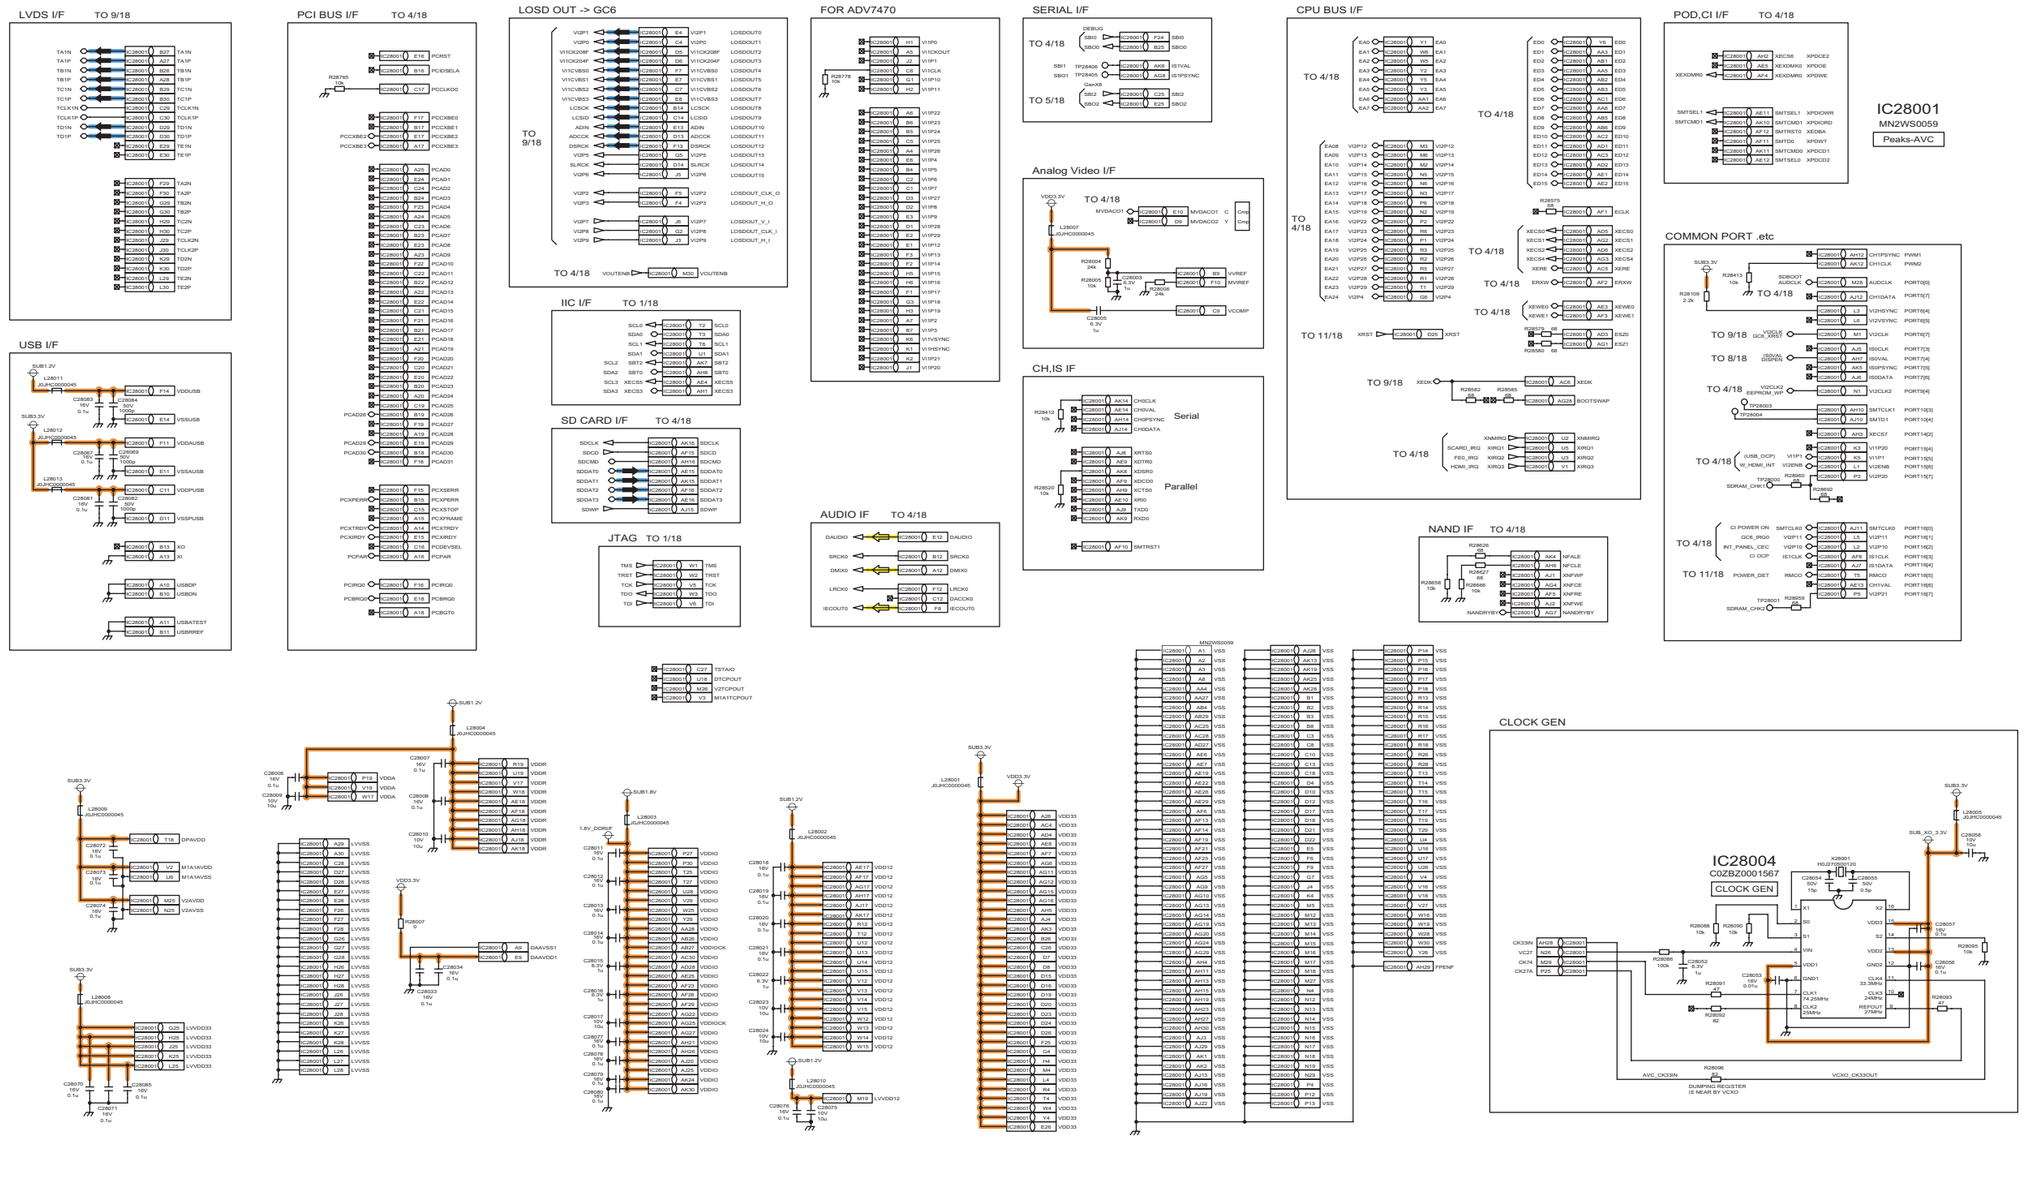


12.3.10. DA-Board (3/18) Schematic Diagram

DA-BOARD TZTNP02DKUM (3/18) Peaks-AVC

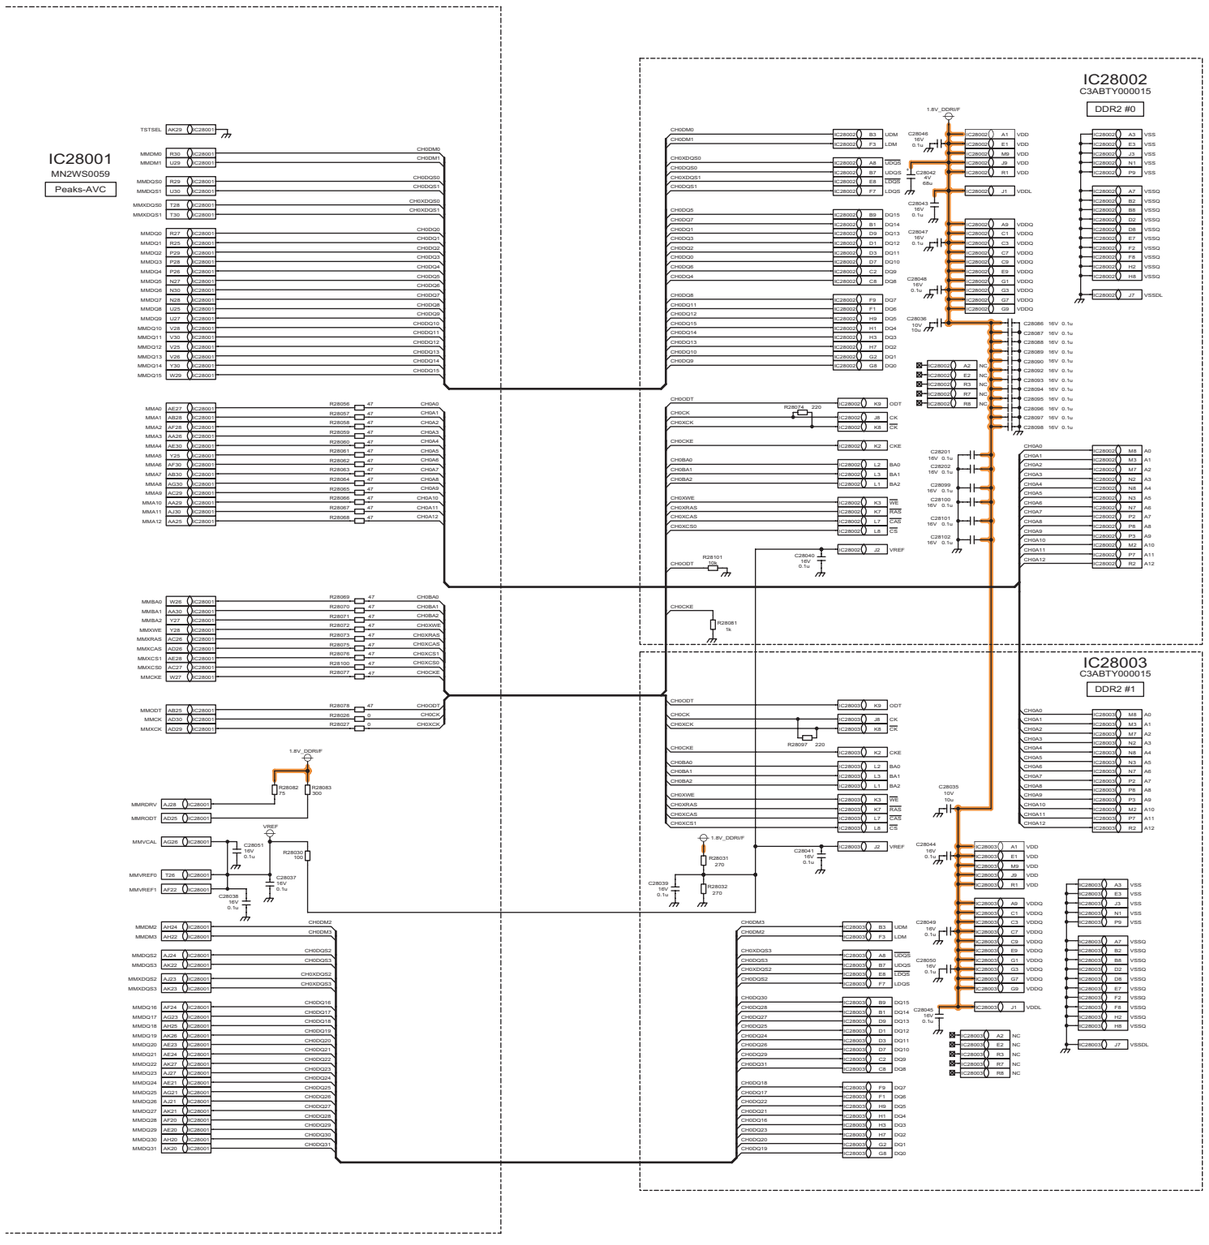

12.3.11. DA-Board (4/18) Schematic Diagram


DA-BOARD (4/18)
TZTNP02DKUM
Peaks-MODEL

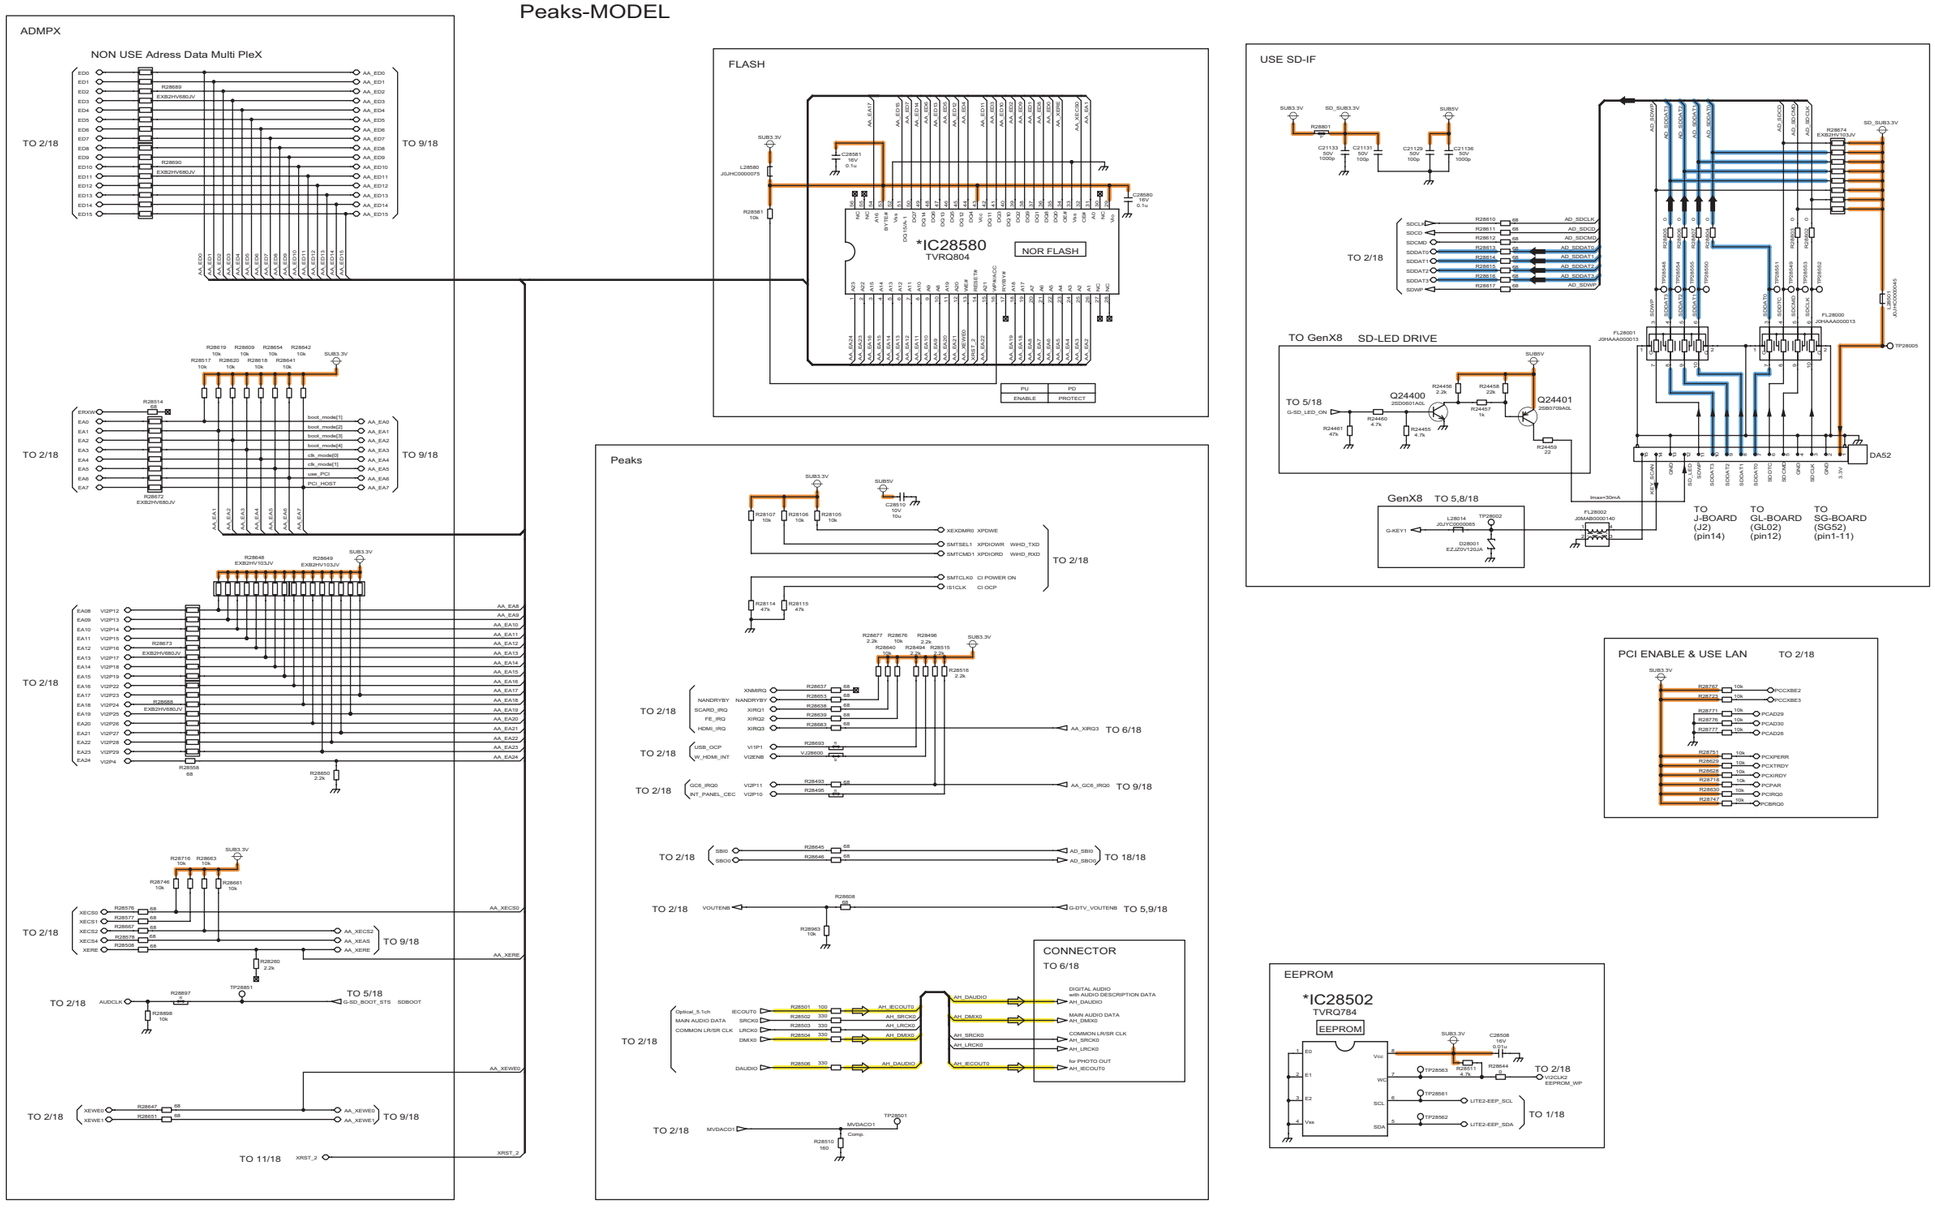

12.3.12. DA-Board (5/18) Schematic Diagram

DA-BOARD TZTNP02DKUM (5/18)


GenX8,EEPROM

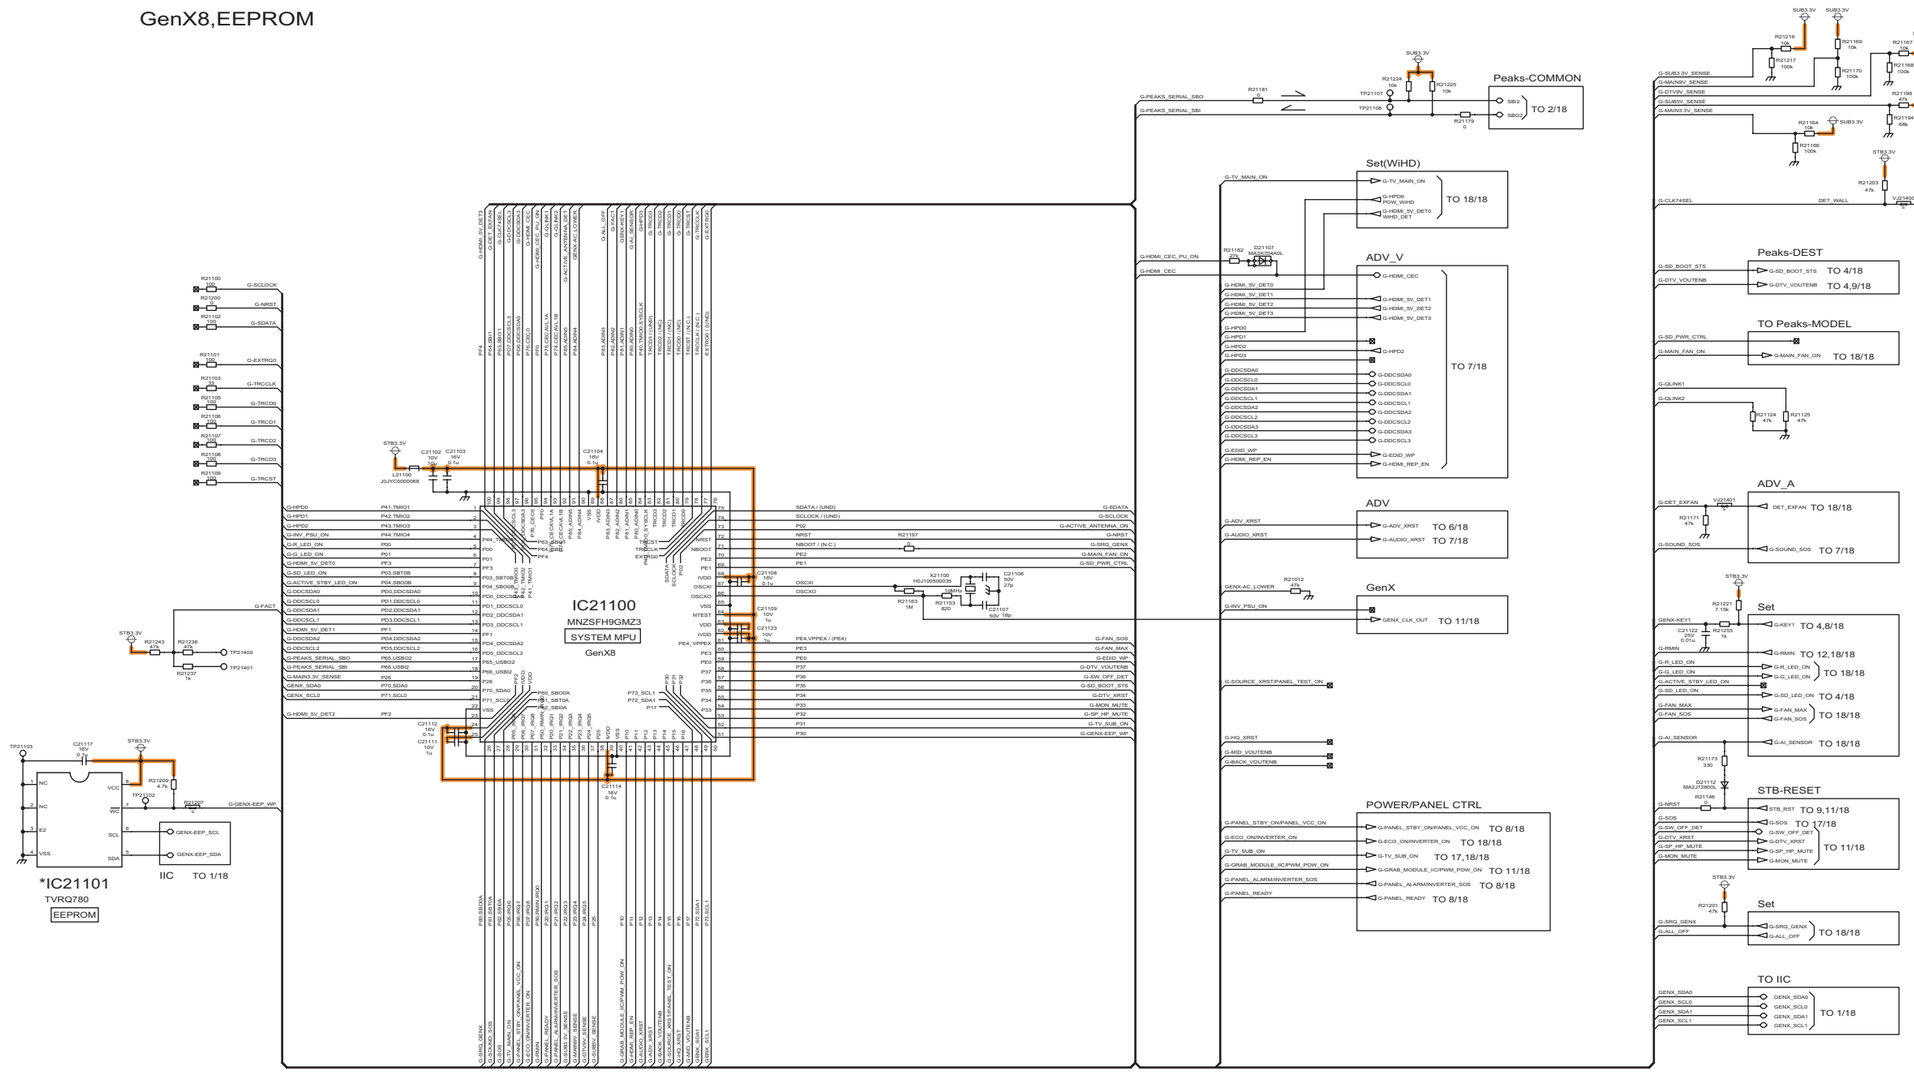


12.3.13. DA-Board (6/18) Schematic Diagram

⚠ DA-BOARD TZTNP02DKUM (6/18)


ADV7471

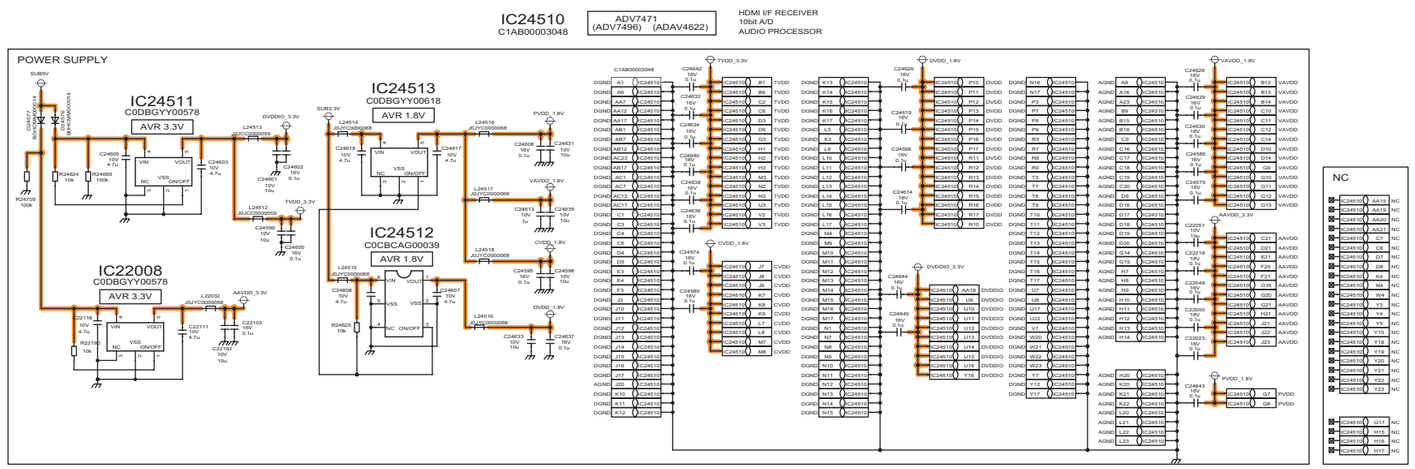

ADV7496

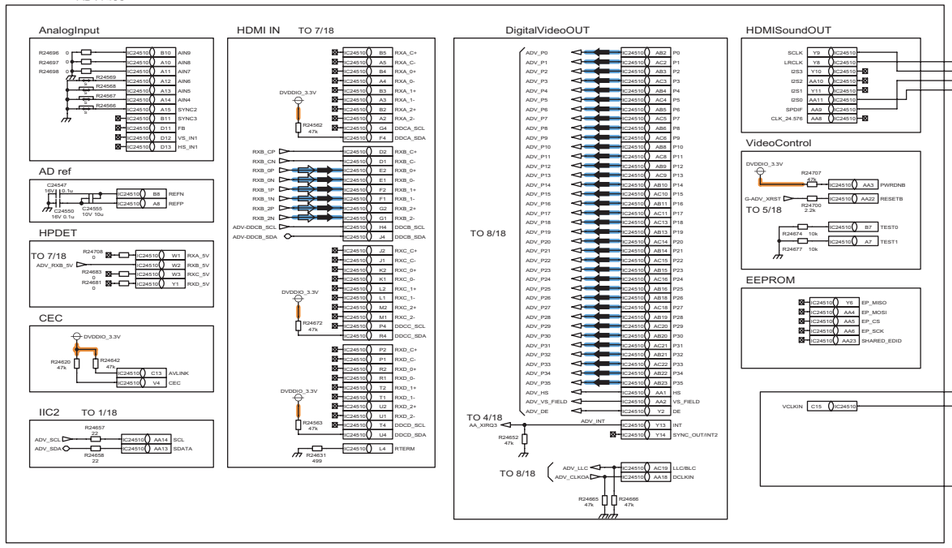


ADAV4622

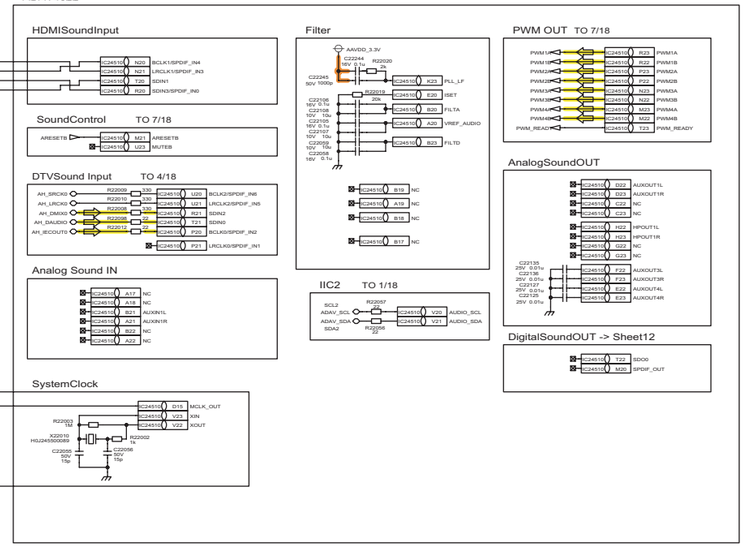

12.3.14. DA-Board (7/18) Schematic Diagram

⚠ DA-BOARD TZTNP02DKUM (7/18)


ADV_V

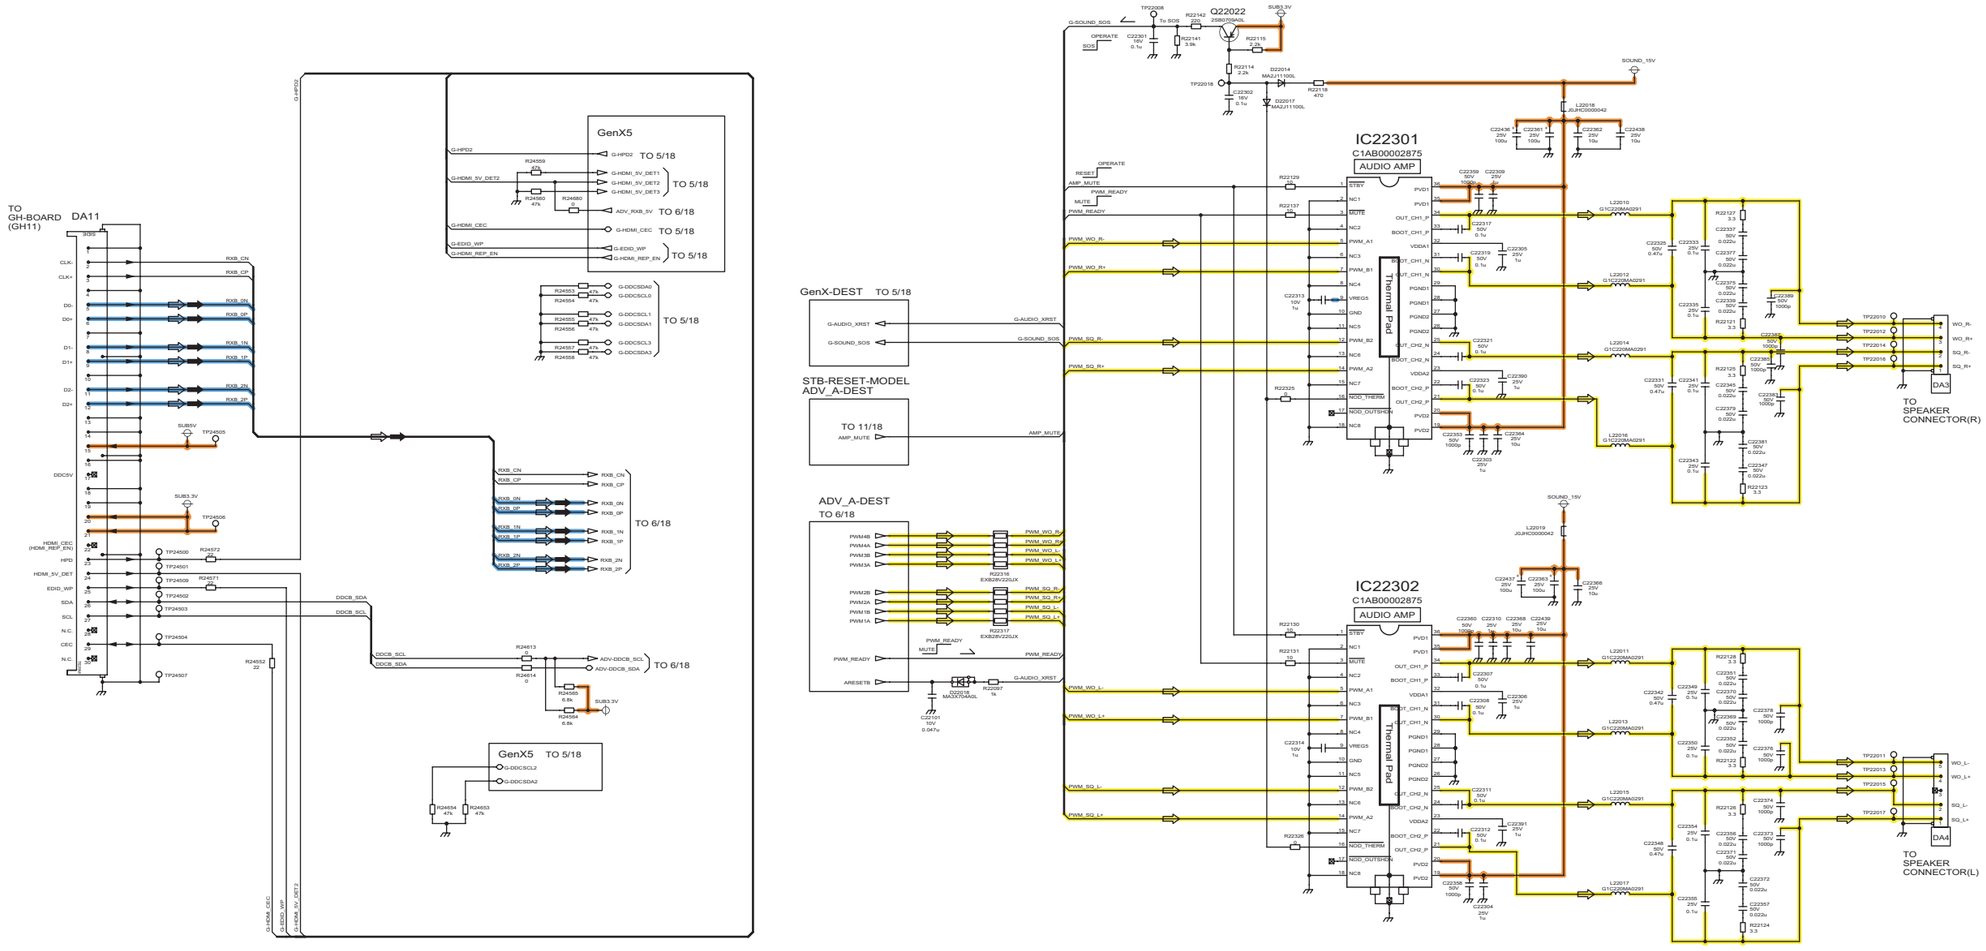



12.3.15. DA-Board (8/18) Schematic Diagram

⚠ DA-BOARD TZTNP02DKUM (8/18)


LVDS-MODEL

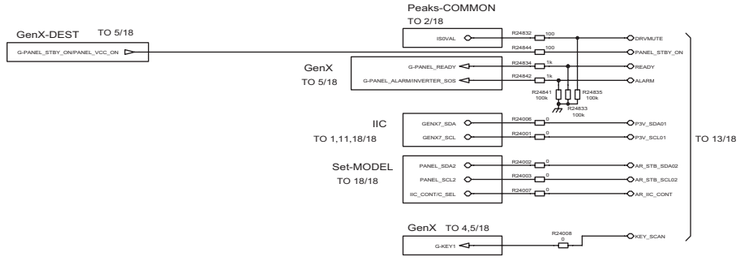

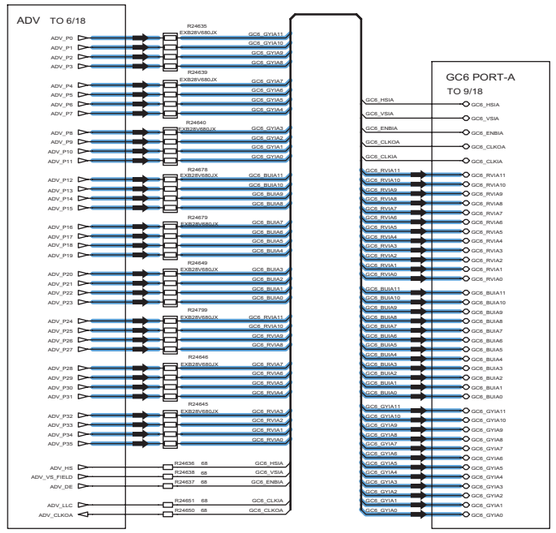


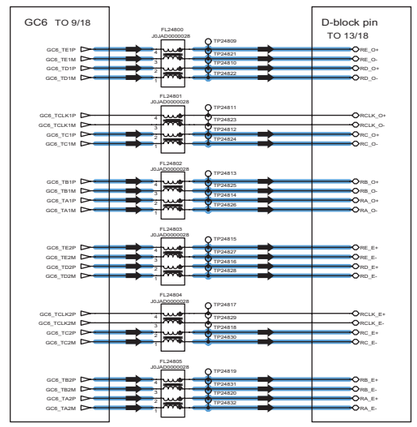

12.3.16. DA-Board (9/18) Schematic Diagram

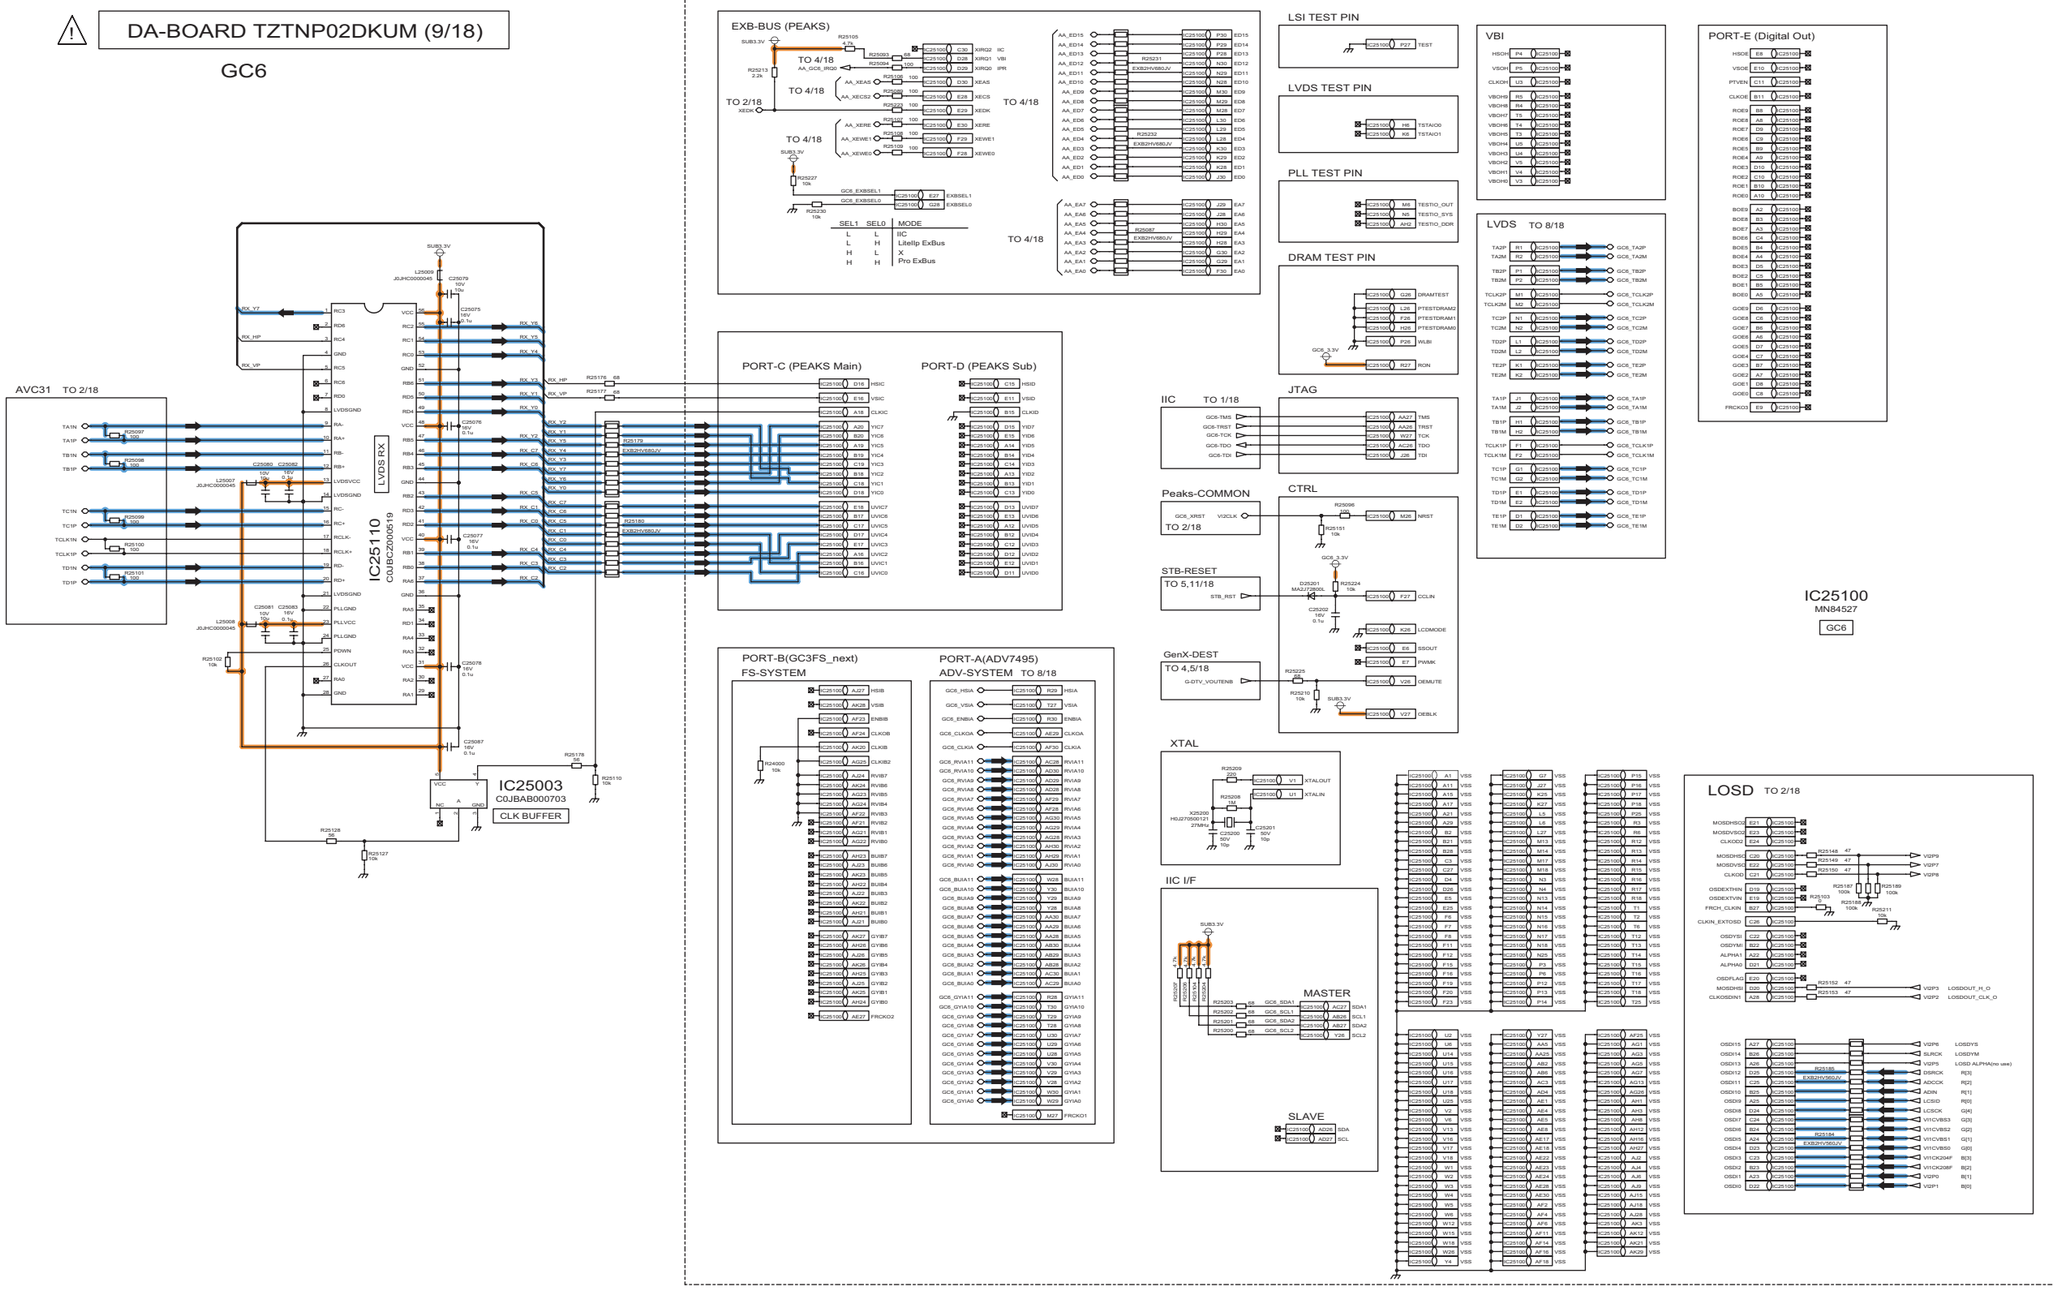


12.3.17. DA-Board (10/18) Schematic Diagram

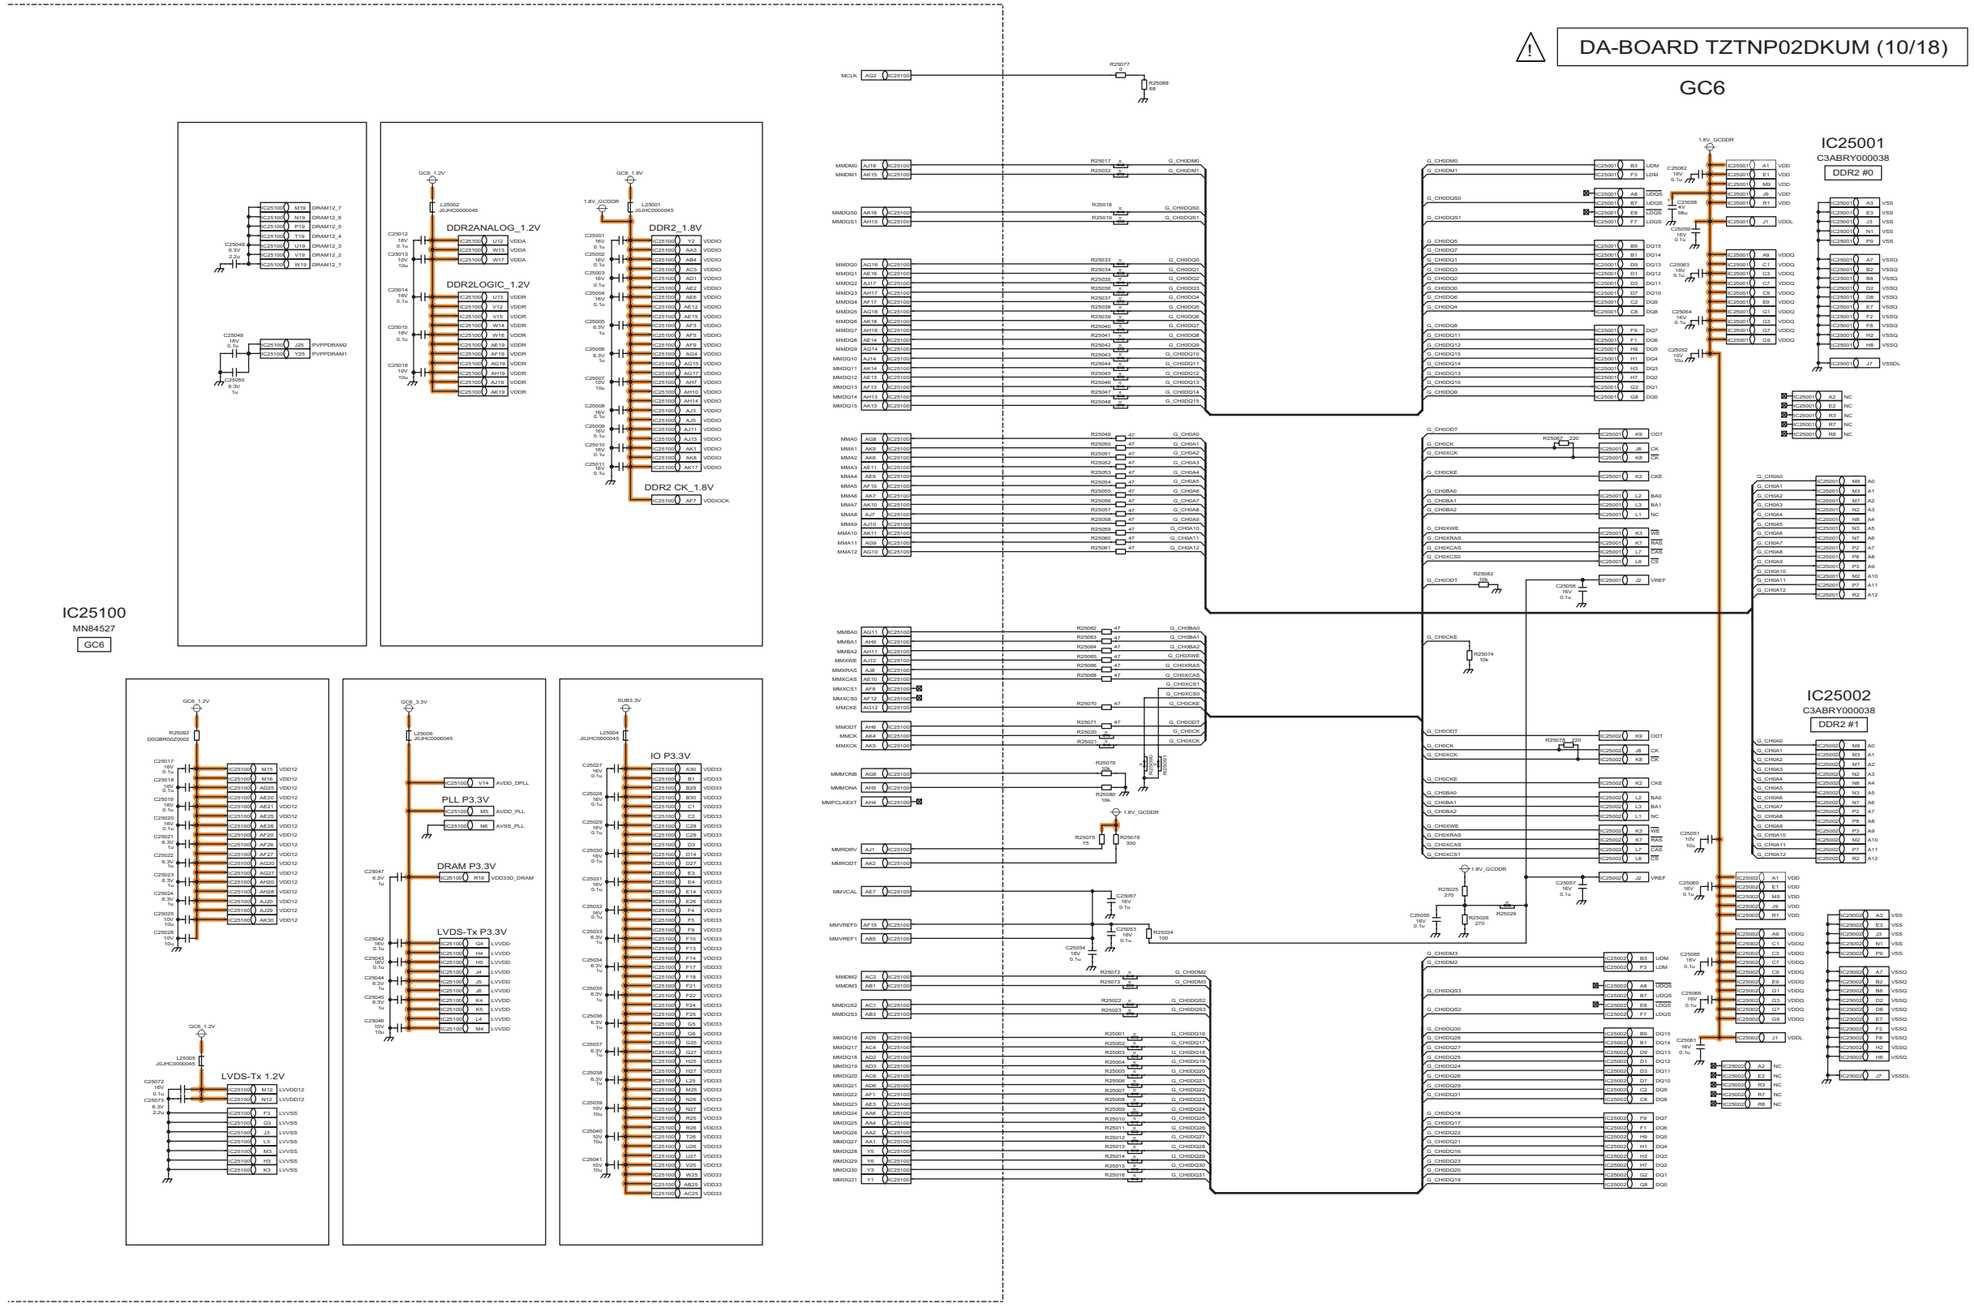

12.3.18. DA-Board (11/18) Schematic Diagram

DA-BOARD TZTNP02DKUM (11/18)


STB-RESET

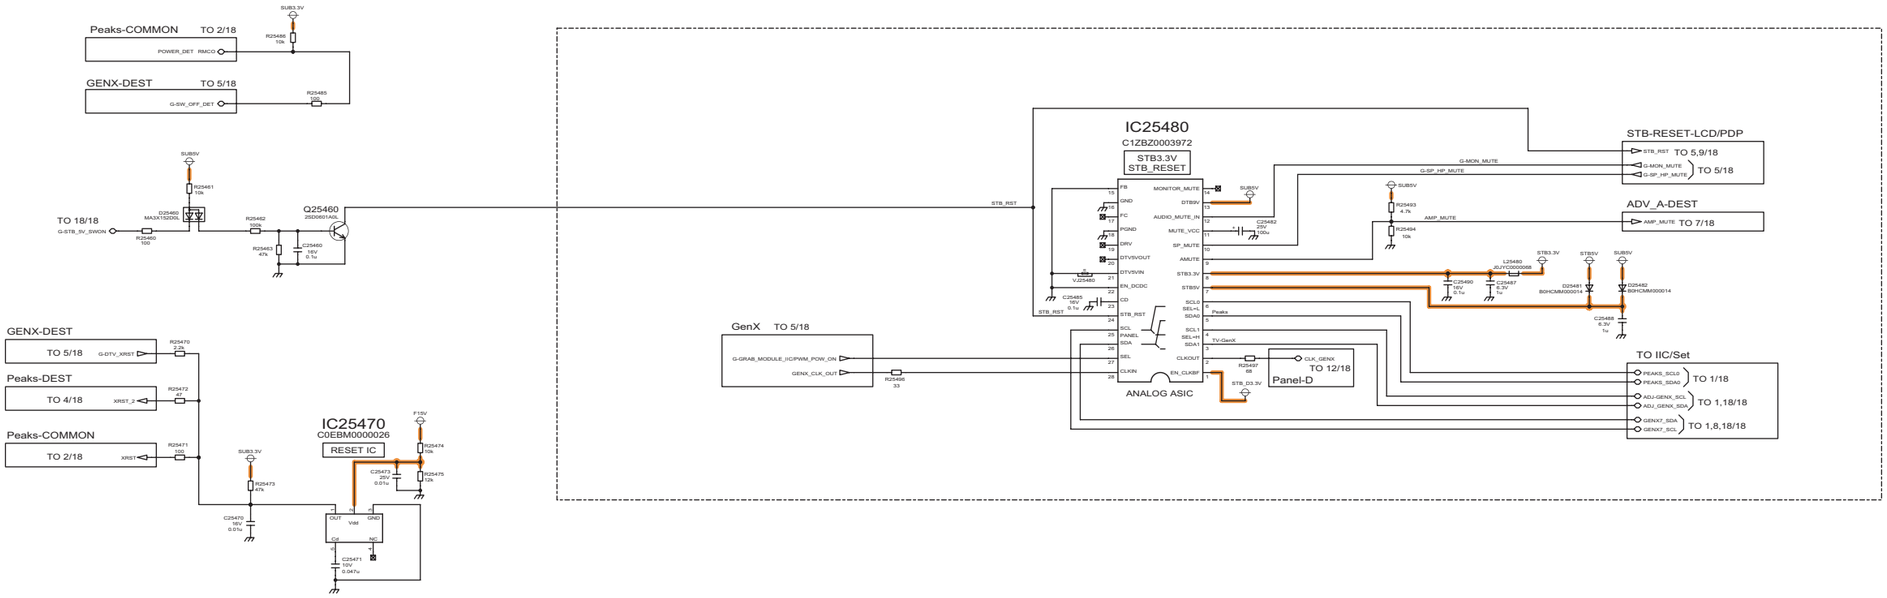


12.3.19. DA-Board (12/18) Schematic Diagram

⚠ DA-BOARD TZTNP02DKUM (12/18)

Panel-D

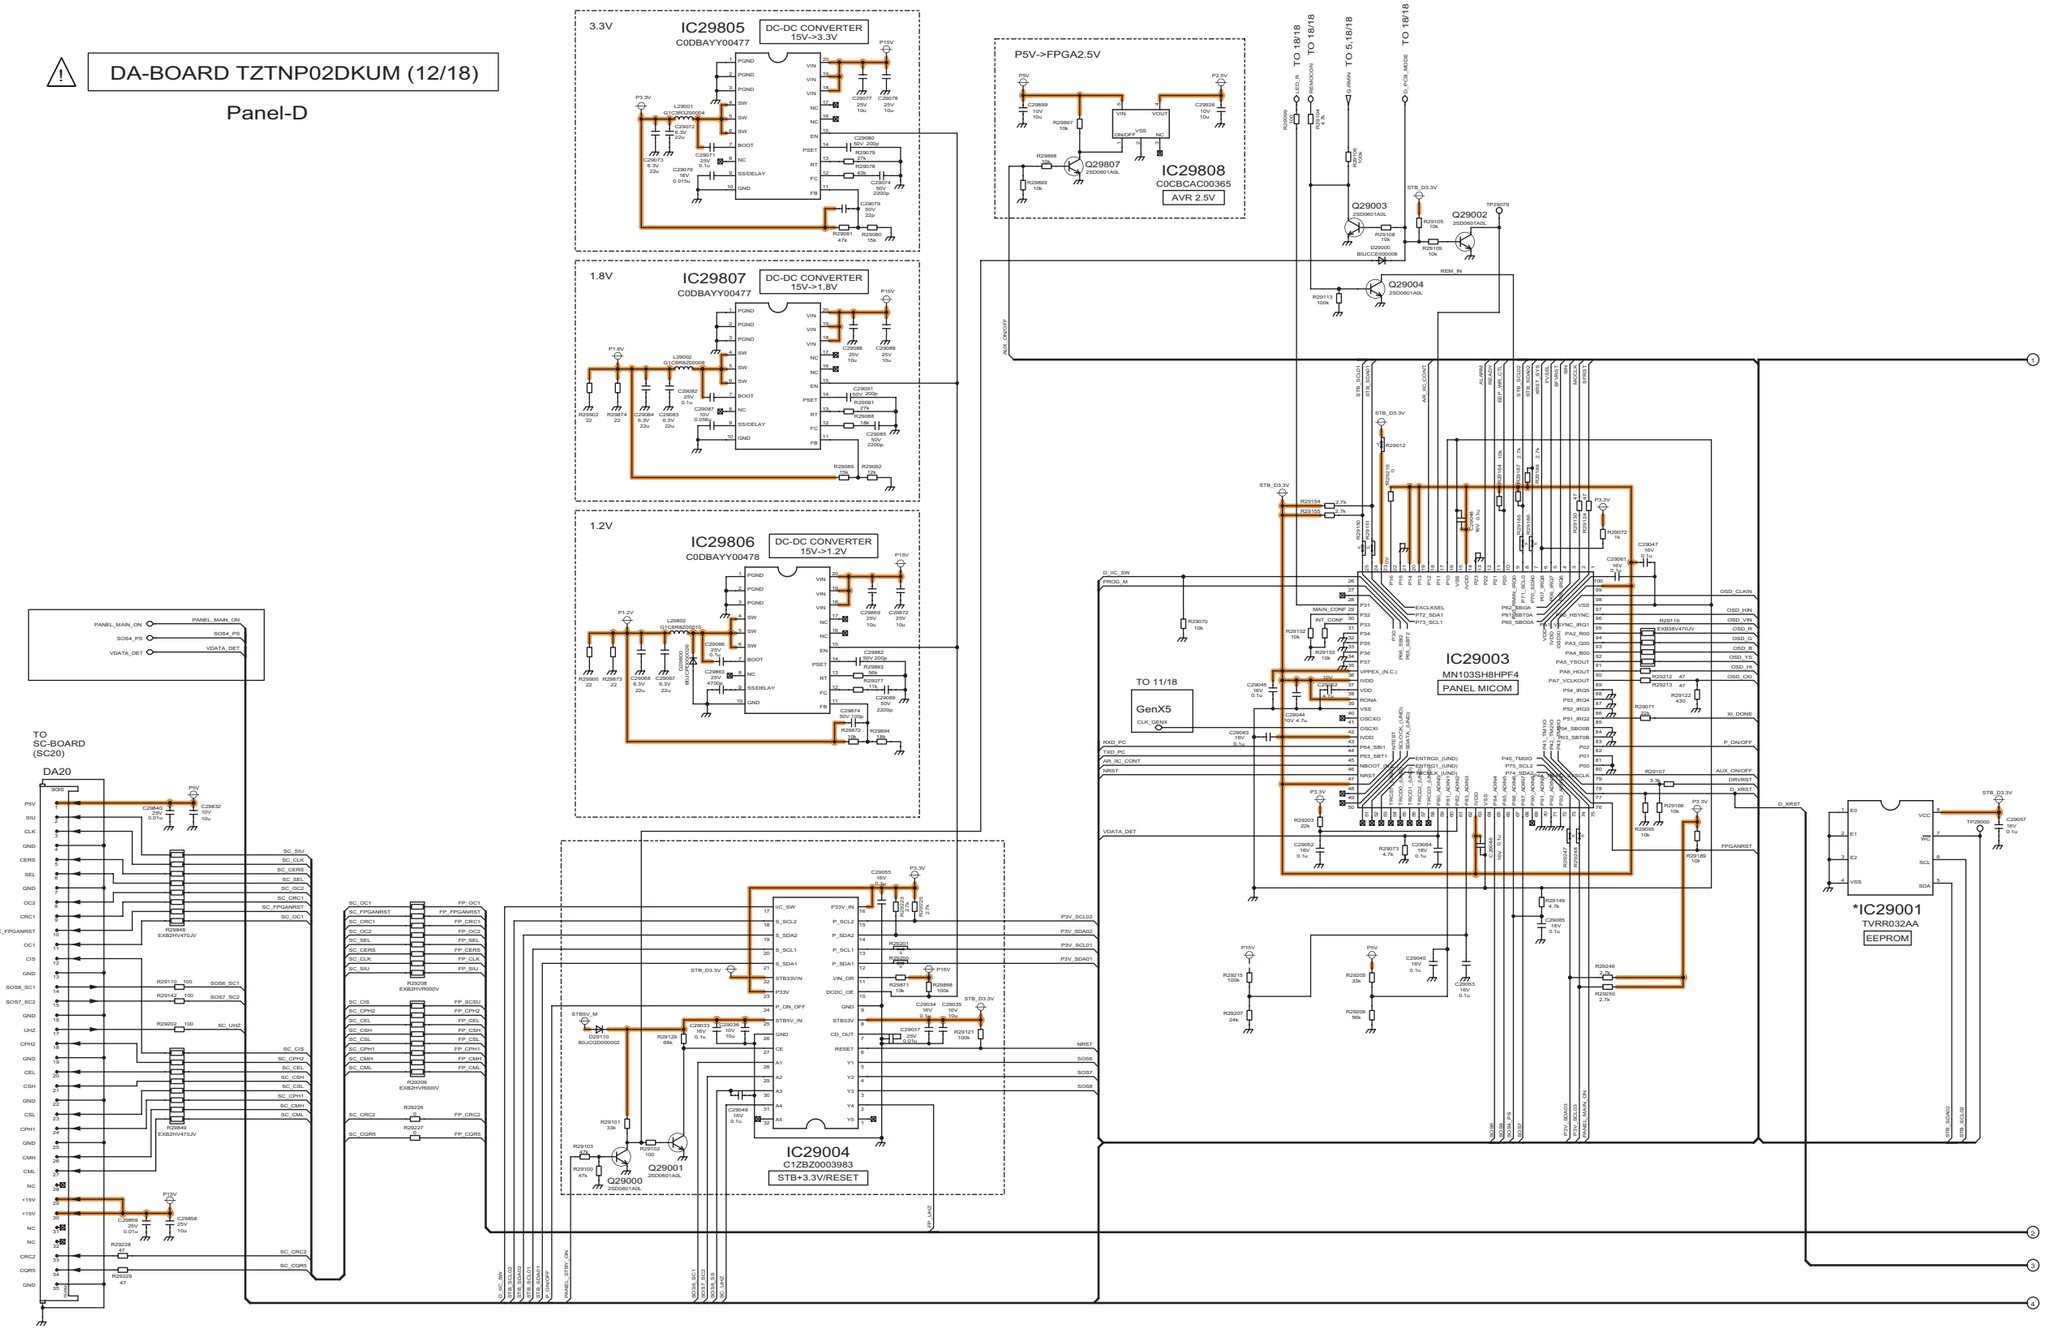


12.3.20. DA-Board (13/18) Schematic Diagram

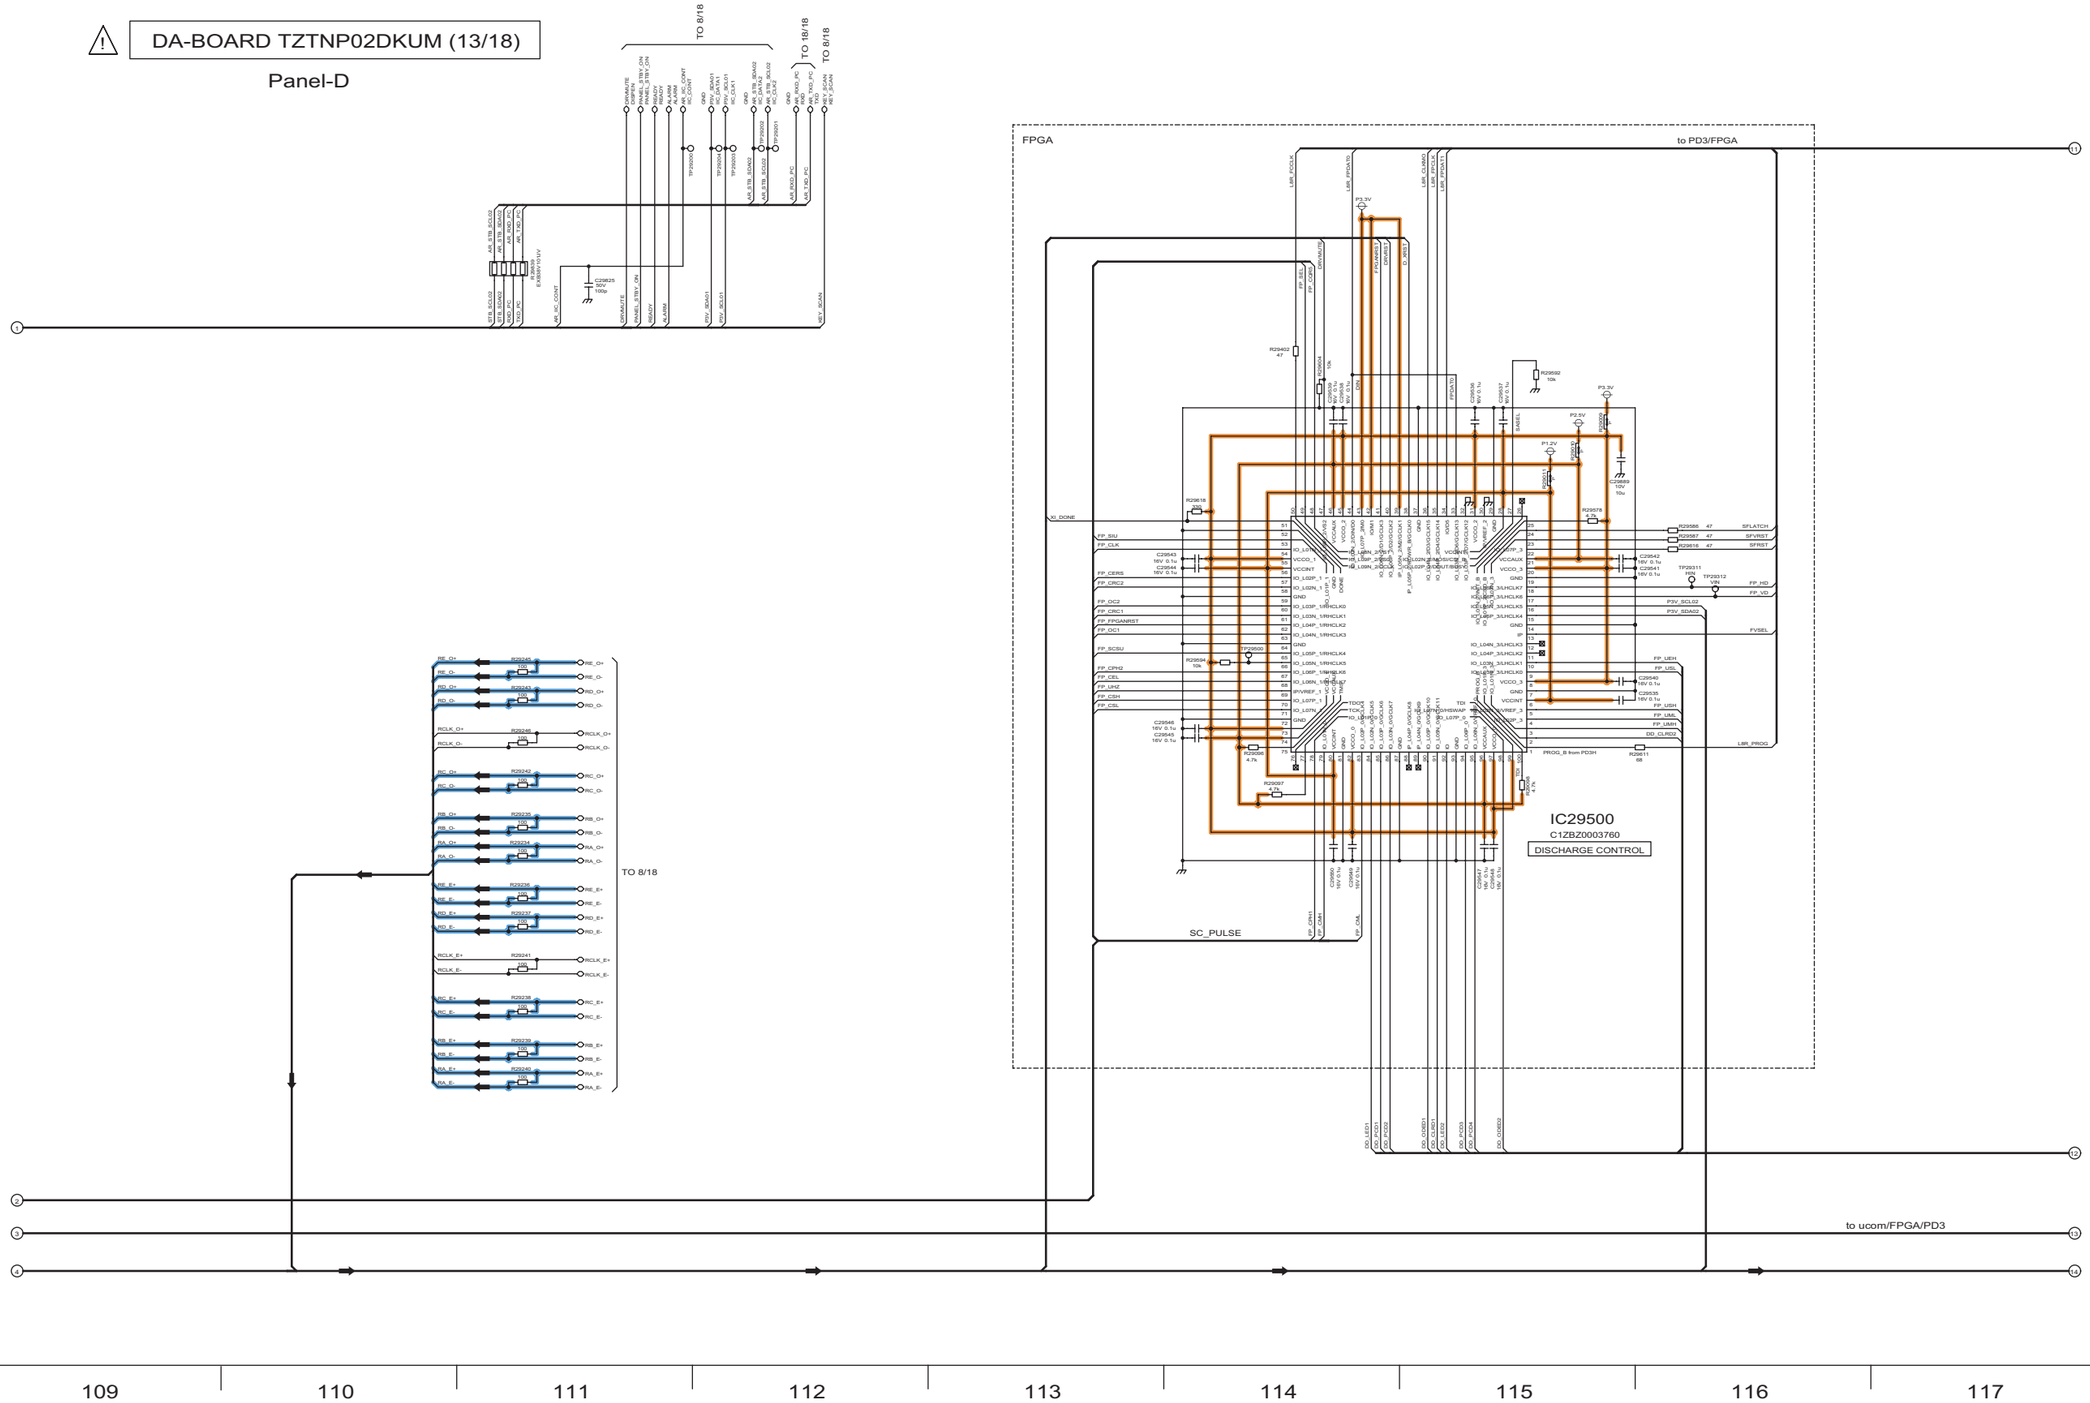

12.3.21. DA-Board (14/18) Schematic Diagram


DA-BOARD TZTNP02DKUM (14/18)

Panel-D

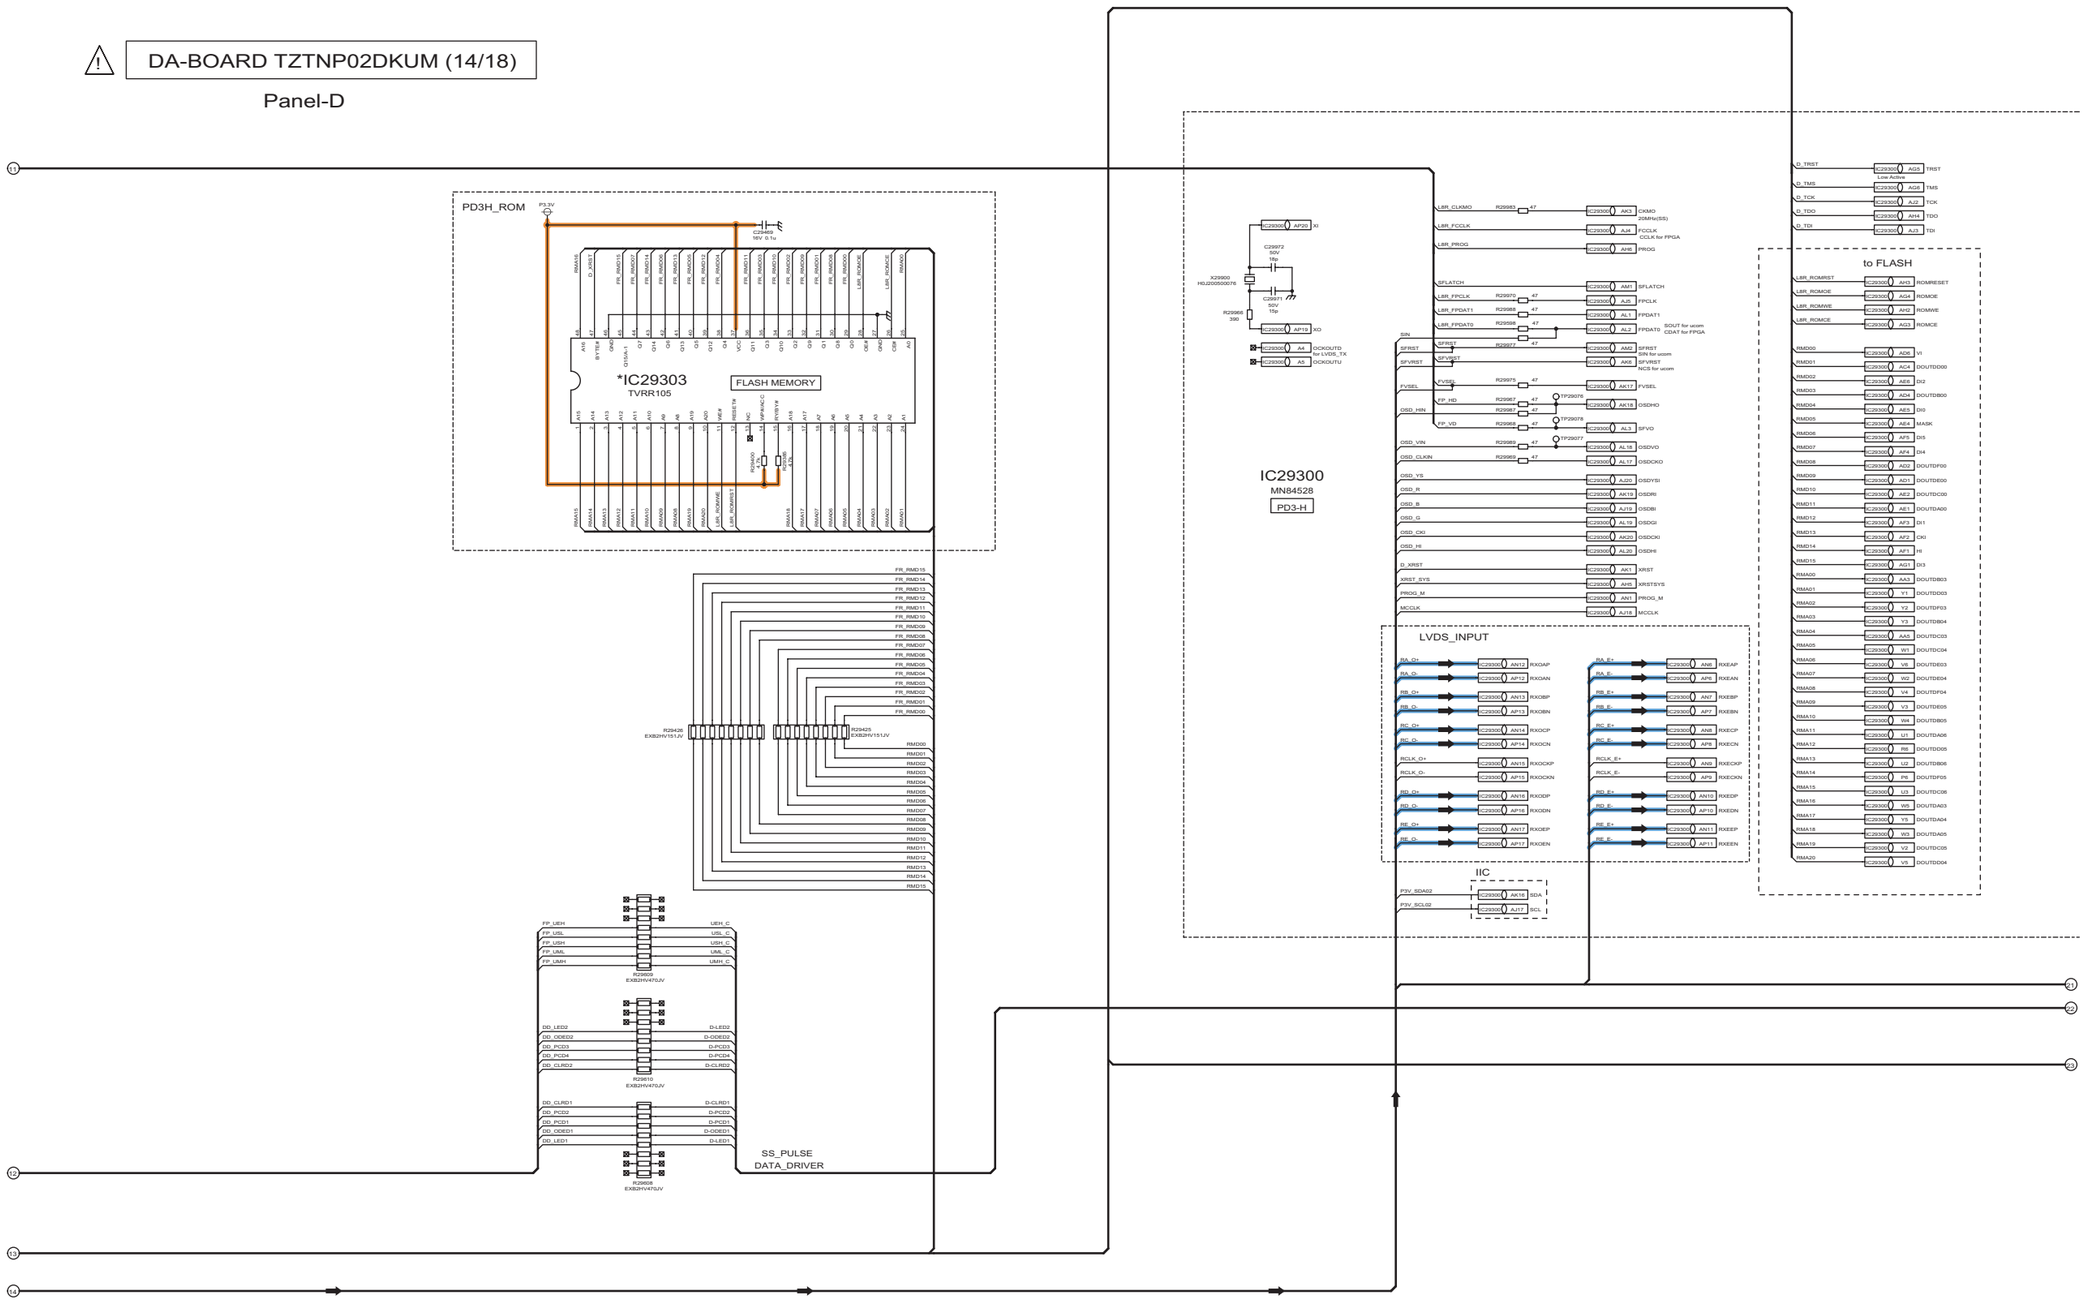


12.3.22. DA-Board (15/18) Schematic Diagram

⚠ DA-BOARD TZTNP02DKUM (15/18) Panel-D

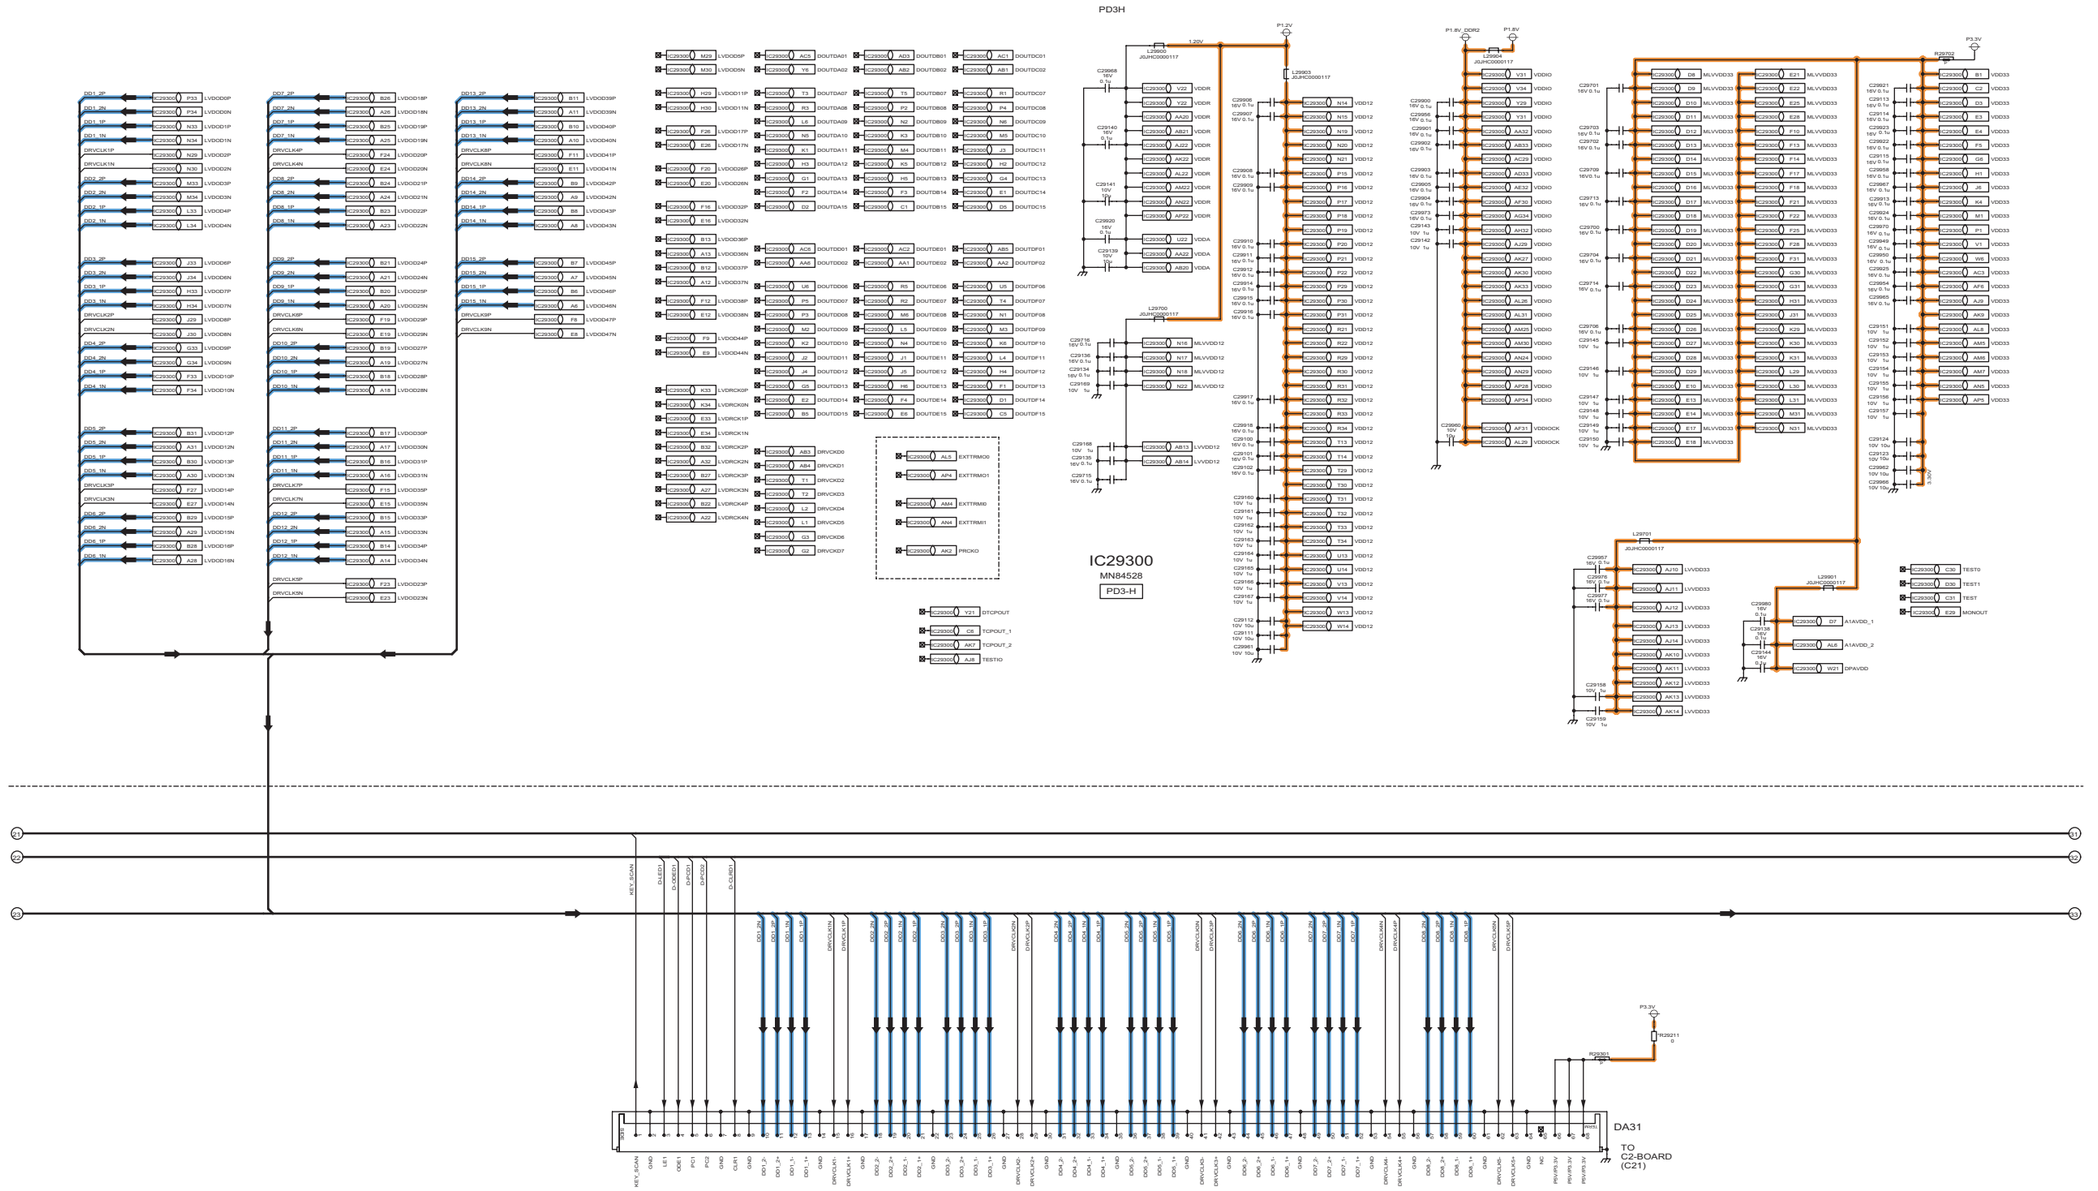


12.3.23. DA-Board (16/18) Schematic Diagram

⚠ DA-BOARD TZTNP02DKUM (16/18) Panel-D

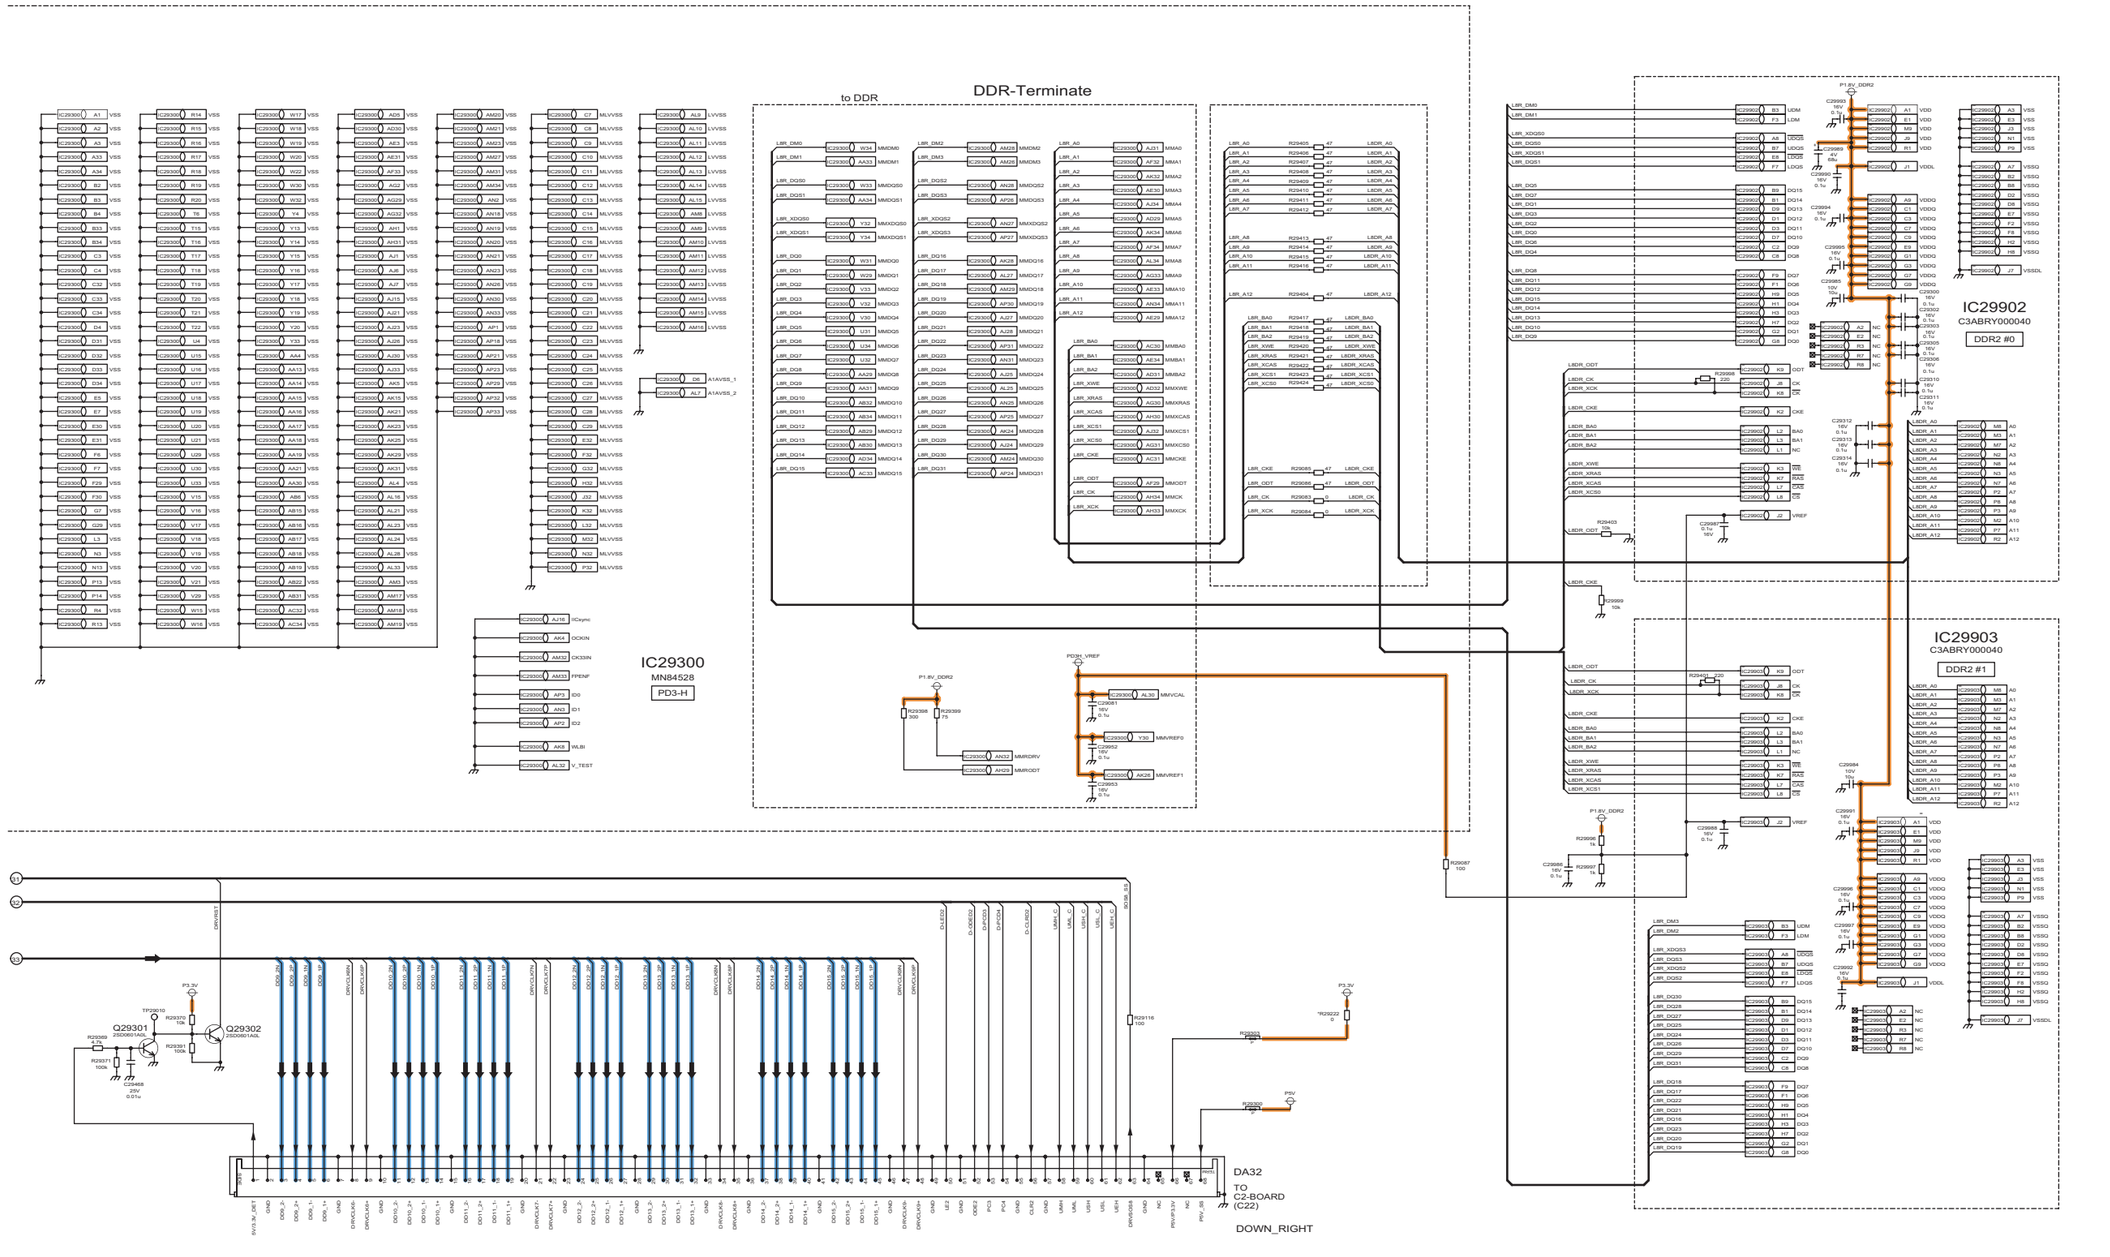


12.3.24. DA-Board (17/18) Schematic Diagram

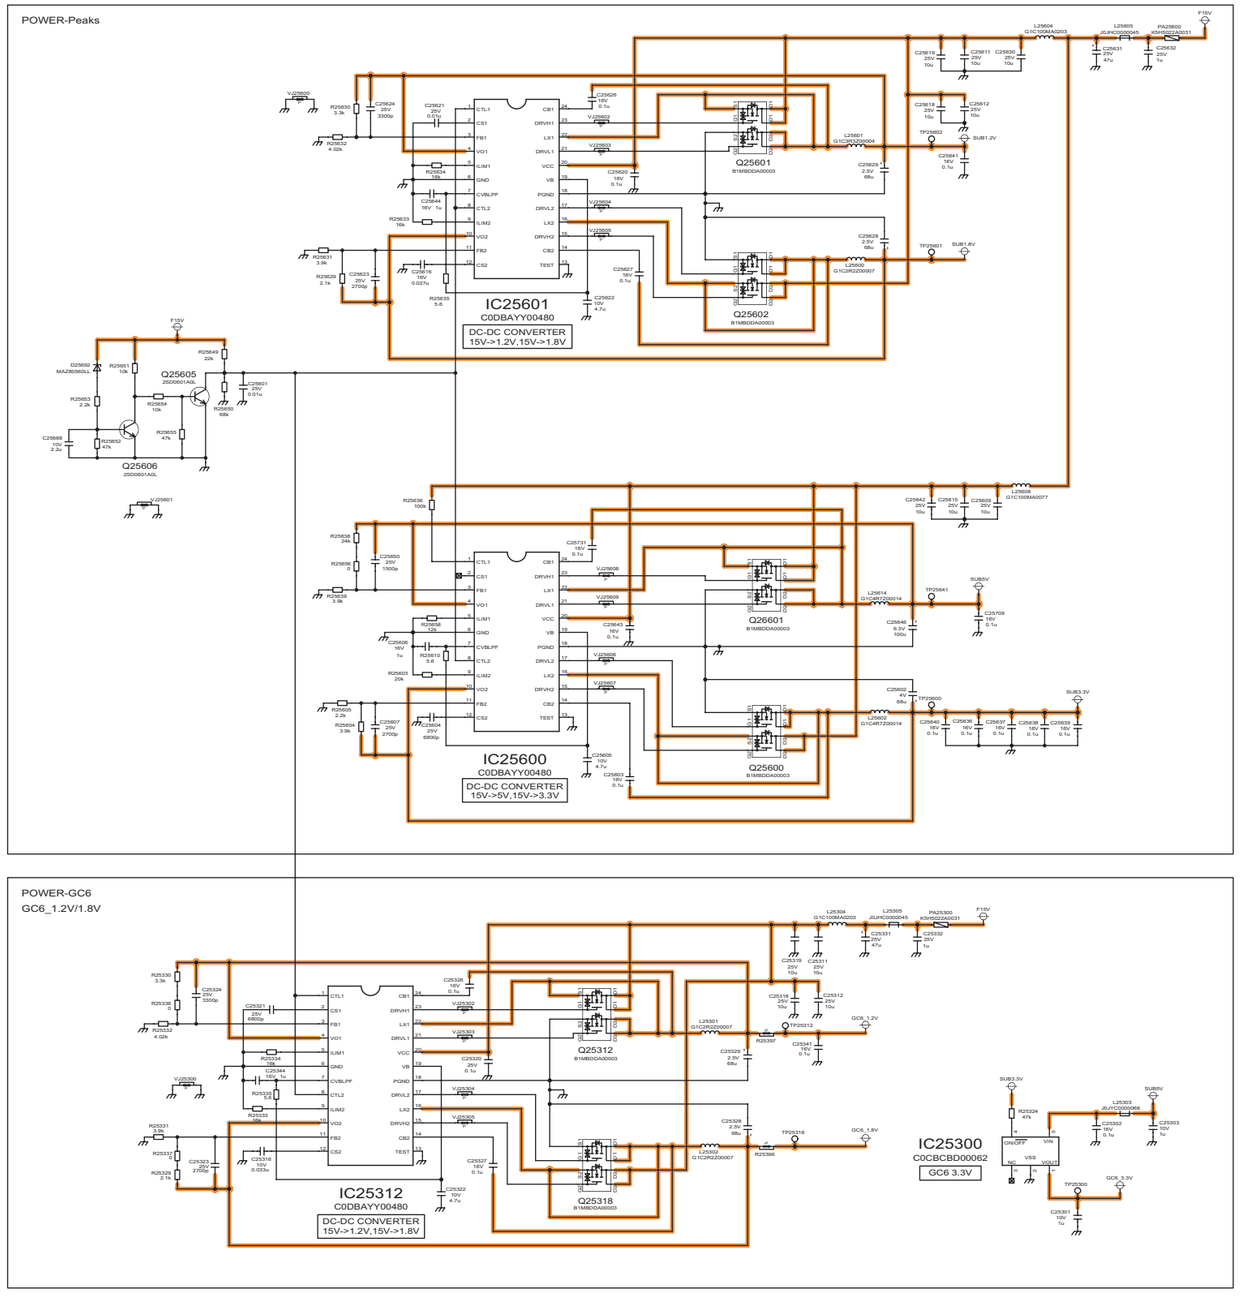

⚠ DA-BOARD TZTNP02DKUM (17/18)


POWER SUPPLY

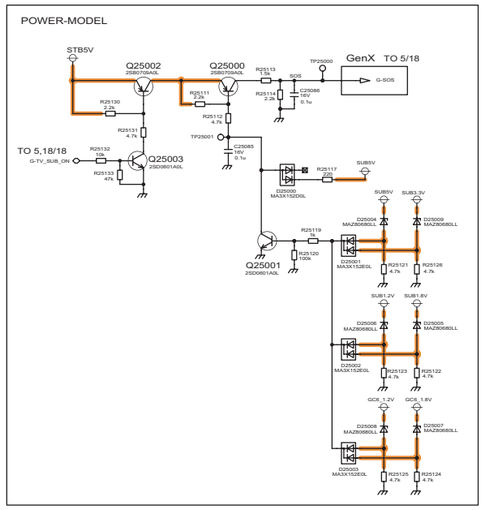



12.3.25. DA-Board (18/18) Schematic Diagram


⚠ DA-BOARD TZTNP02DKUM (18/18)


CONNECTOR

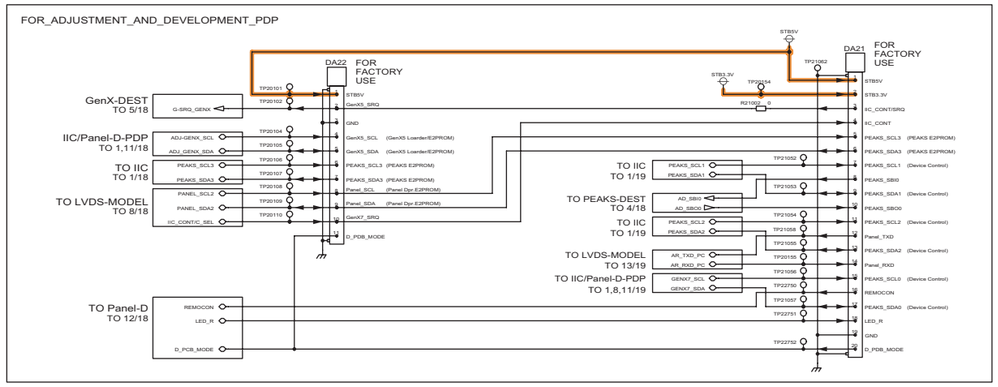

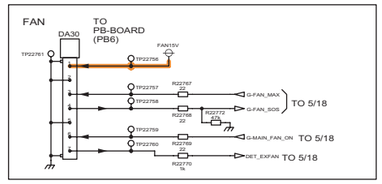

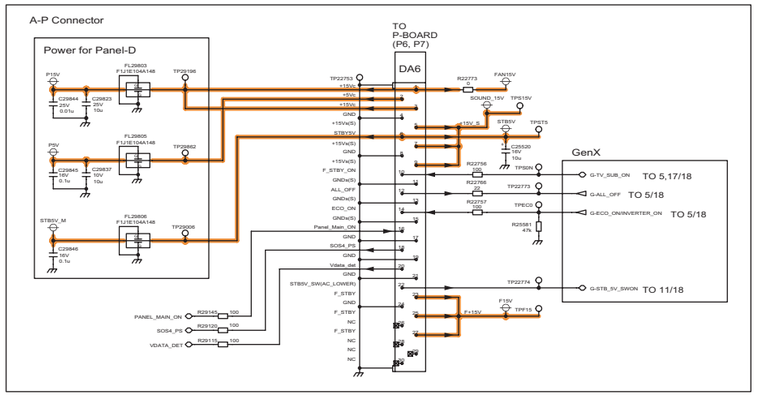


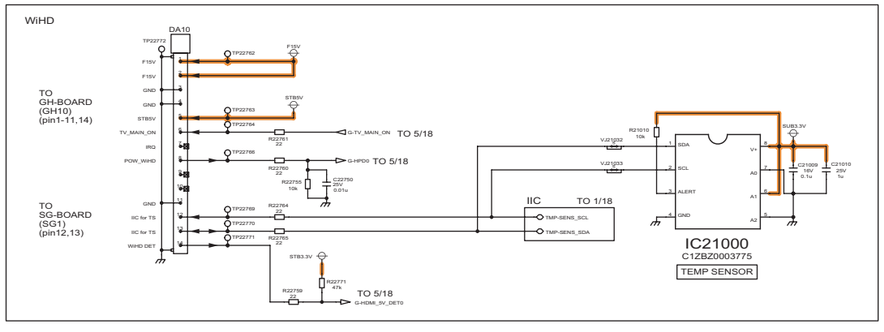

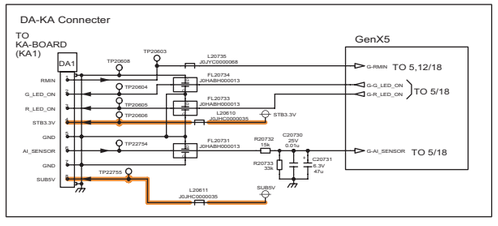


12.3.26. C1-Board (1/2) Schematic Diagram

C1-BOARD TNPA4770AC (1/2)

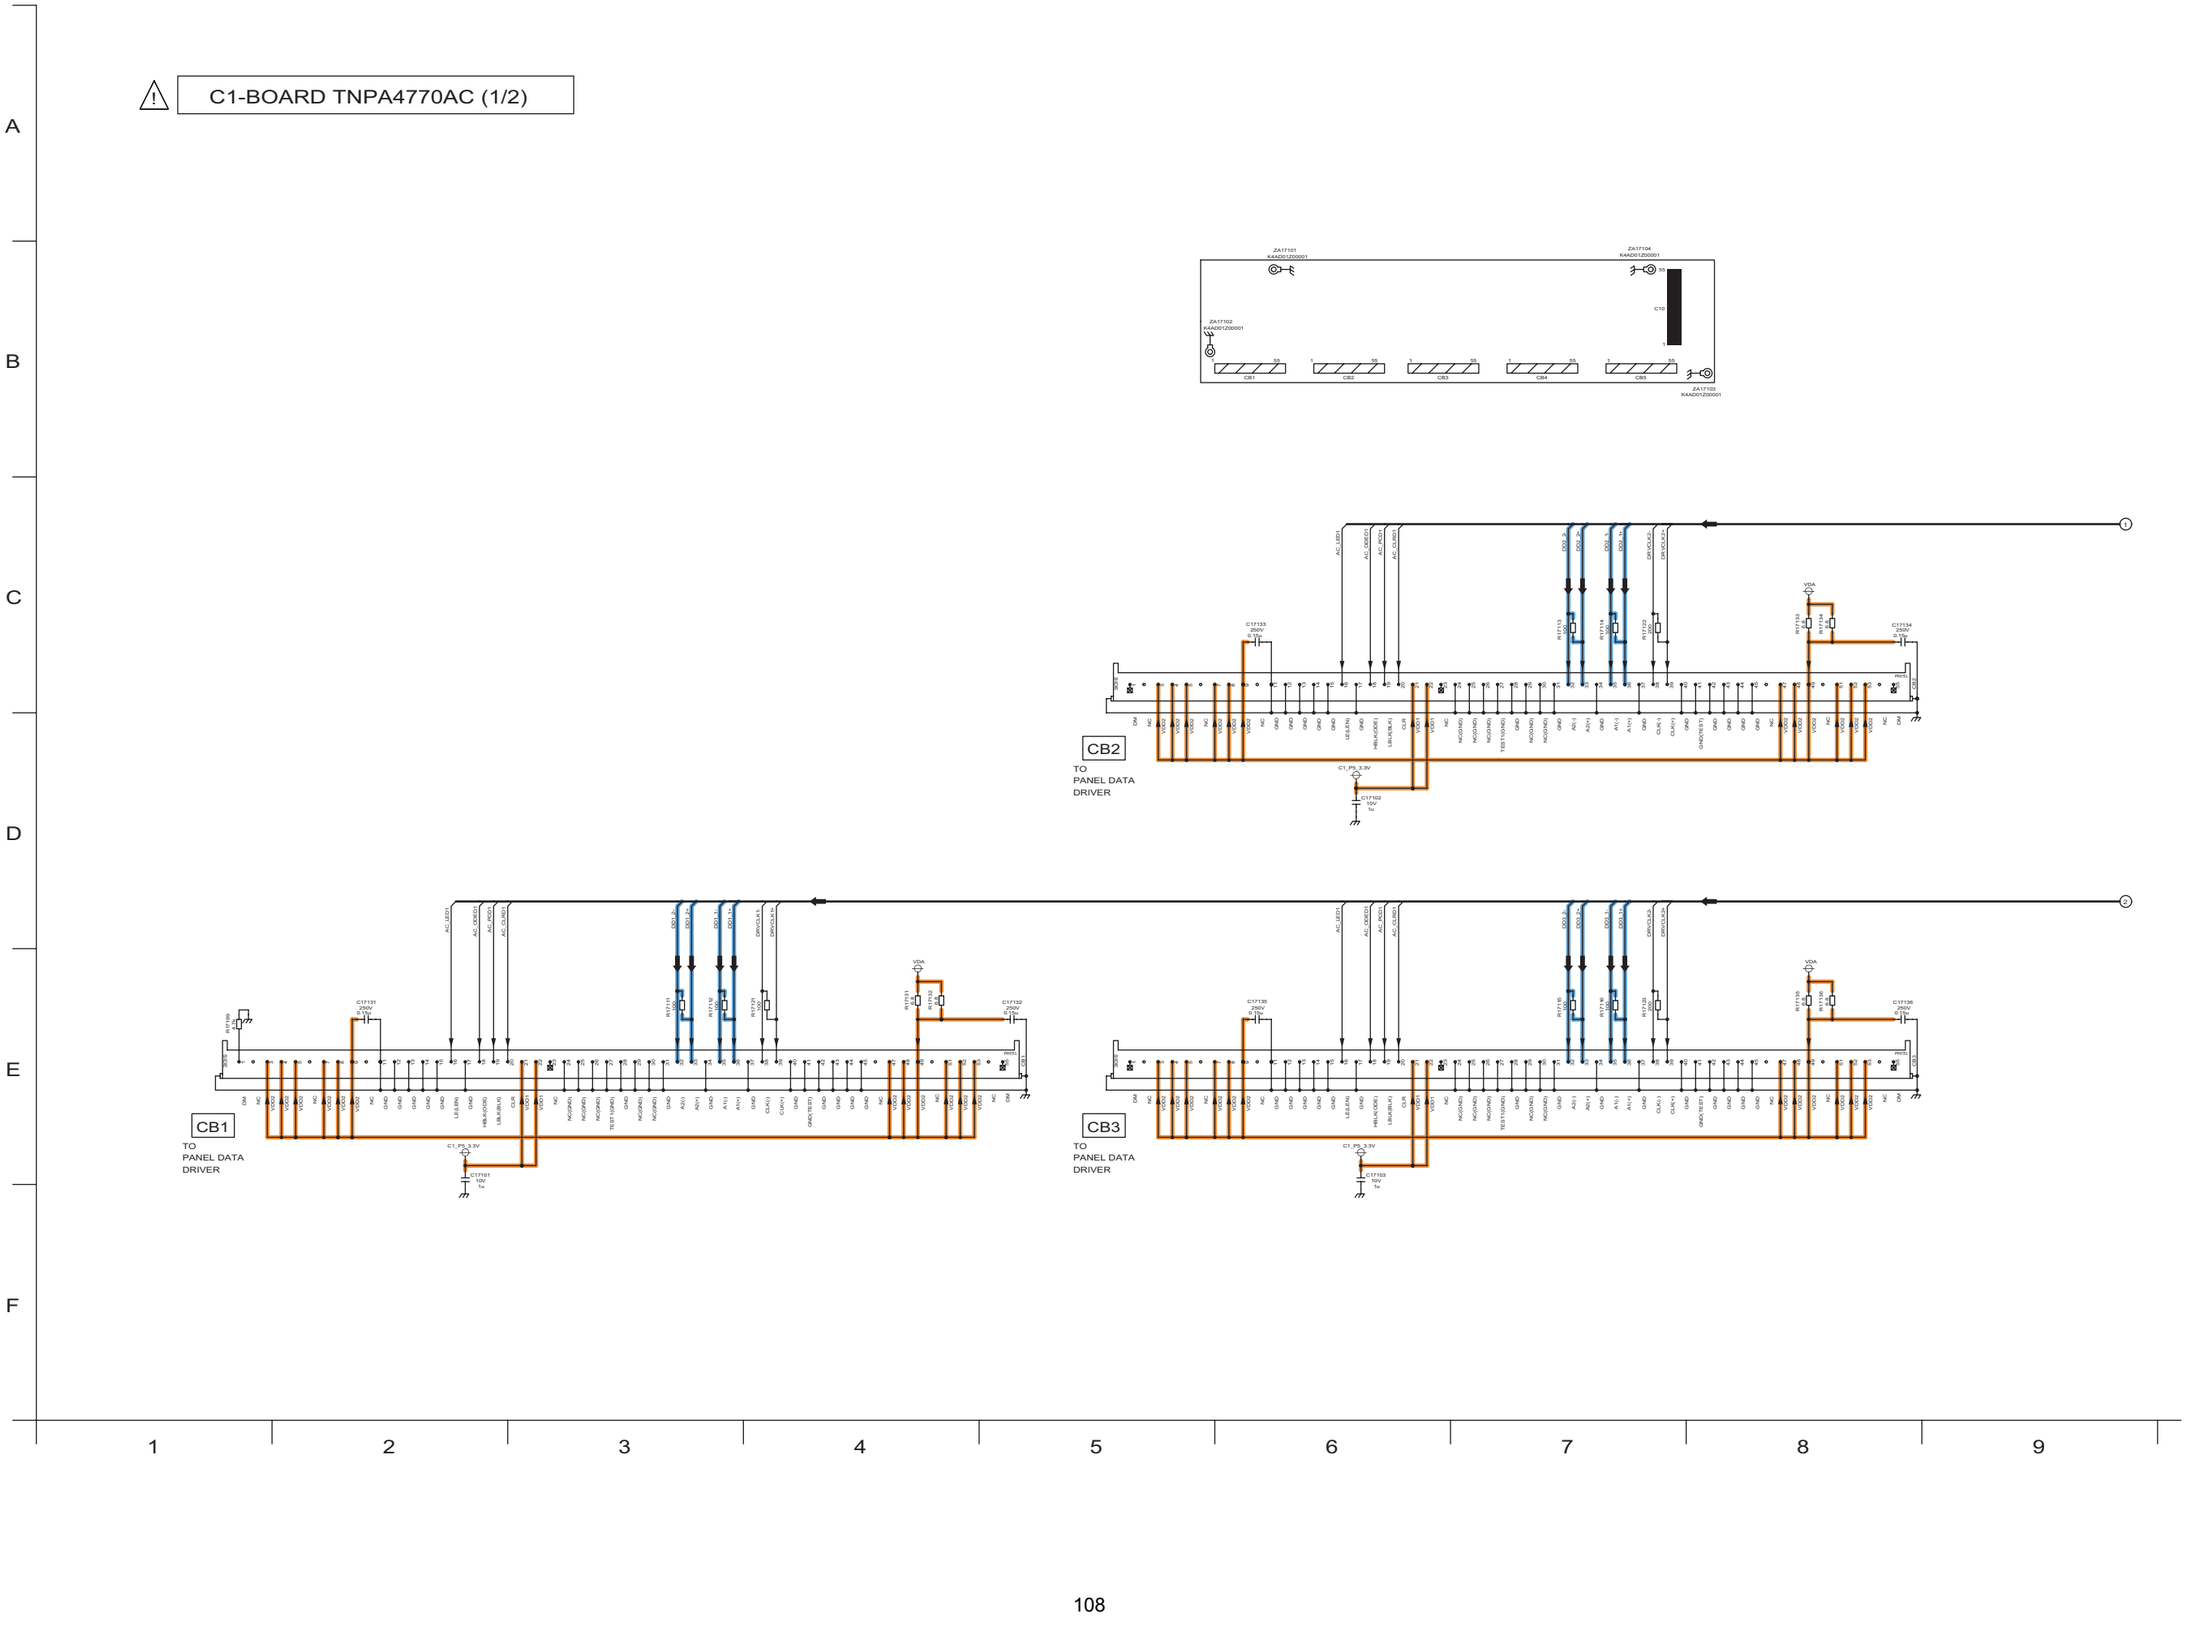


12.3.27. C1-Board (2/2) Schematic Diagram


⚠ C1-BOARD TNPA4770AC (2/2)

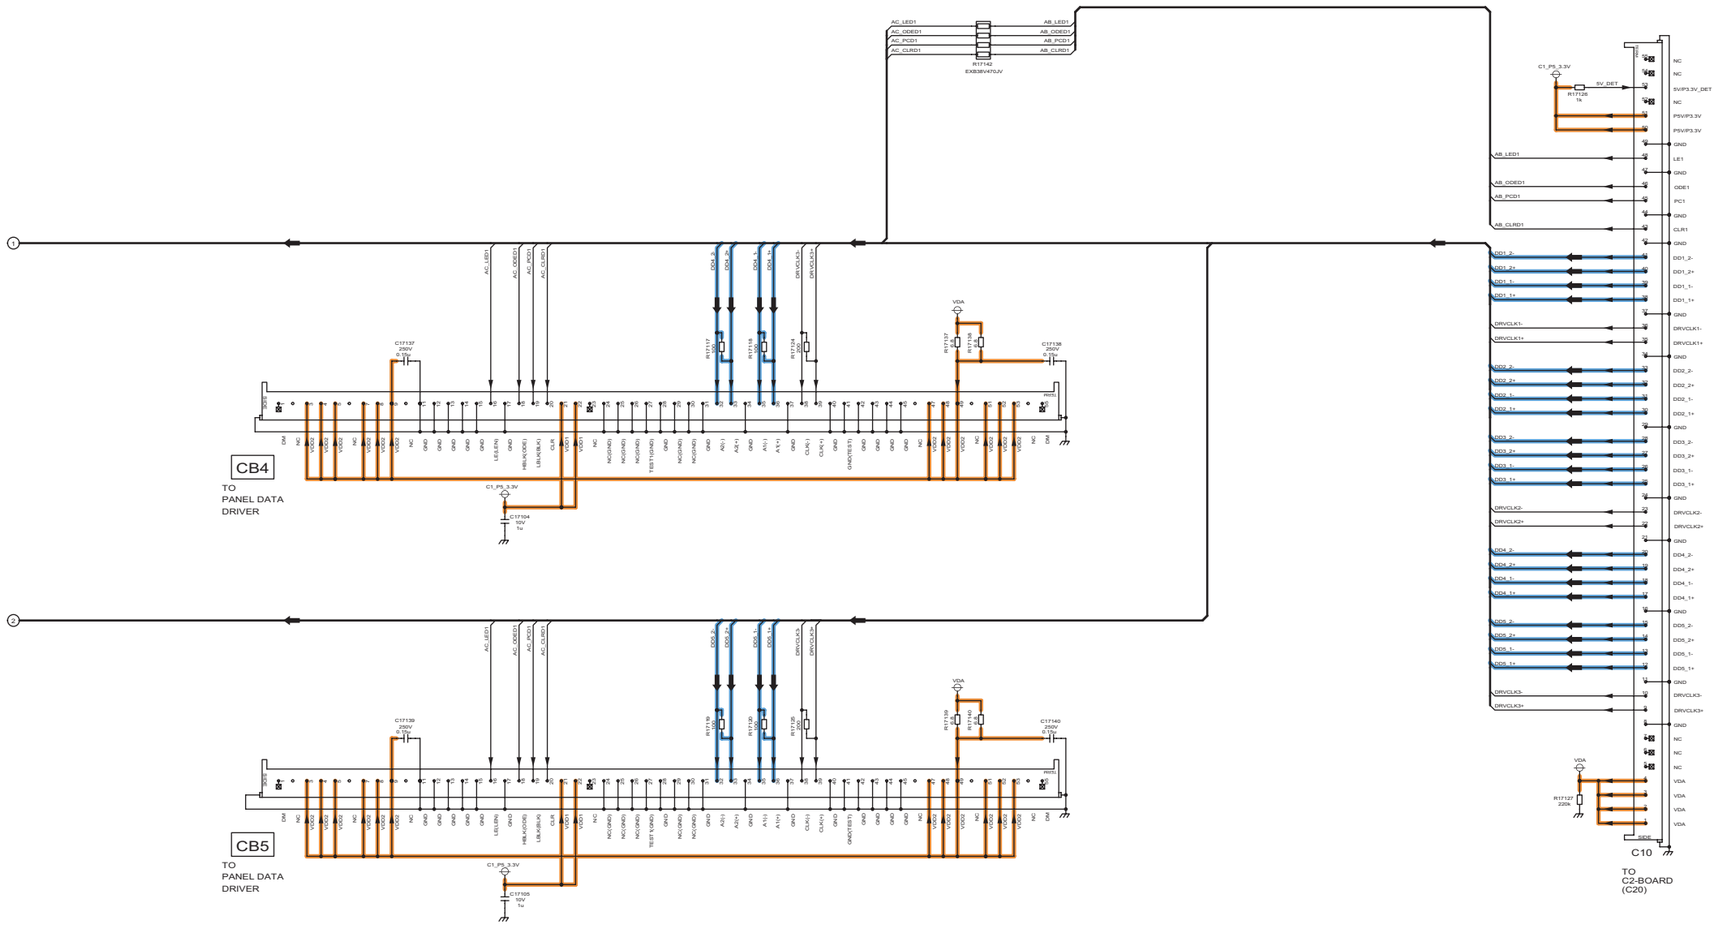


12.3.28. C2-Board (1/2) Schematic Diagram

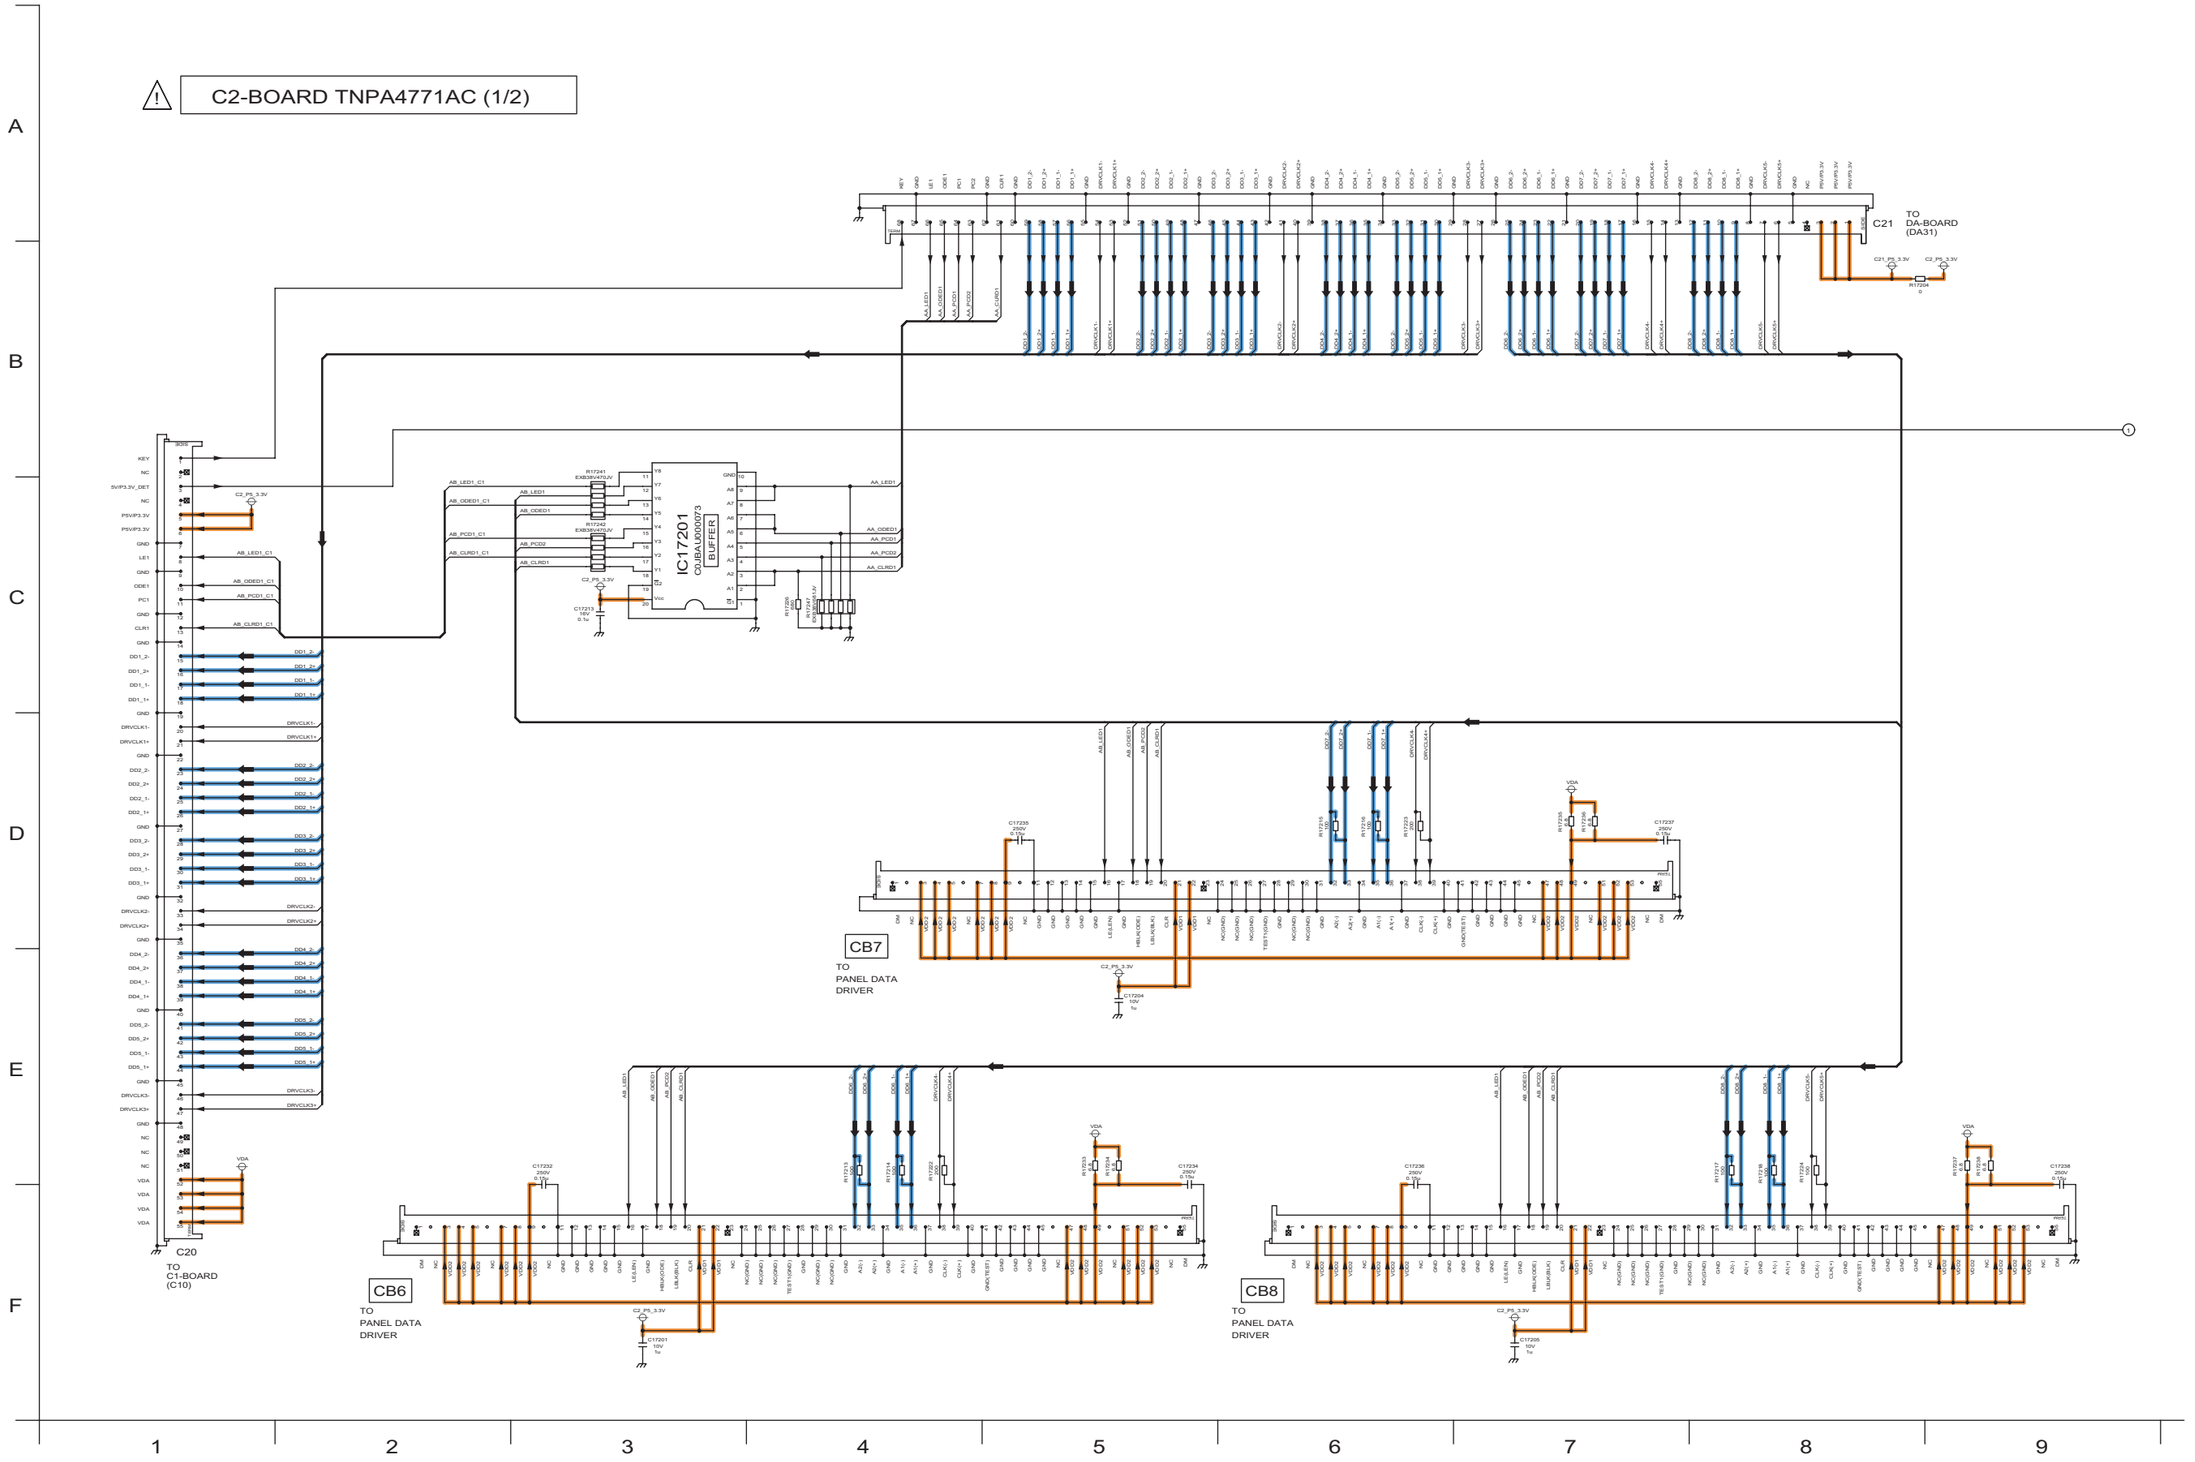

12.3.29. C2-Board (2/2) Schematic Diagram

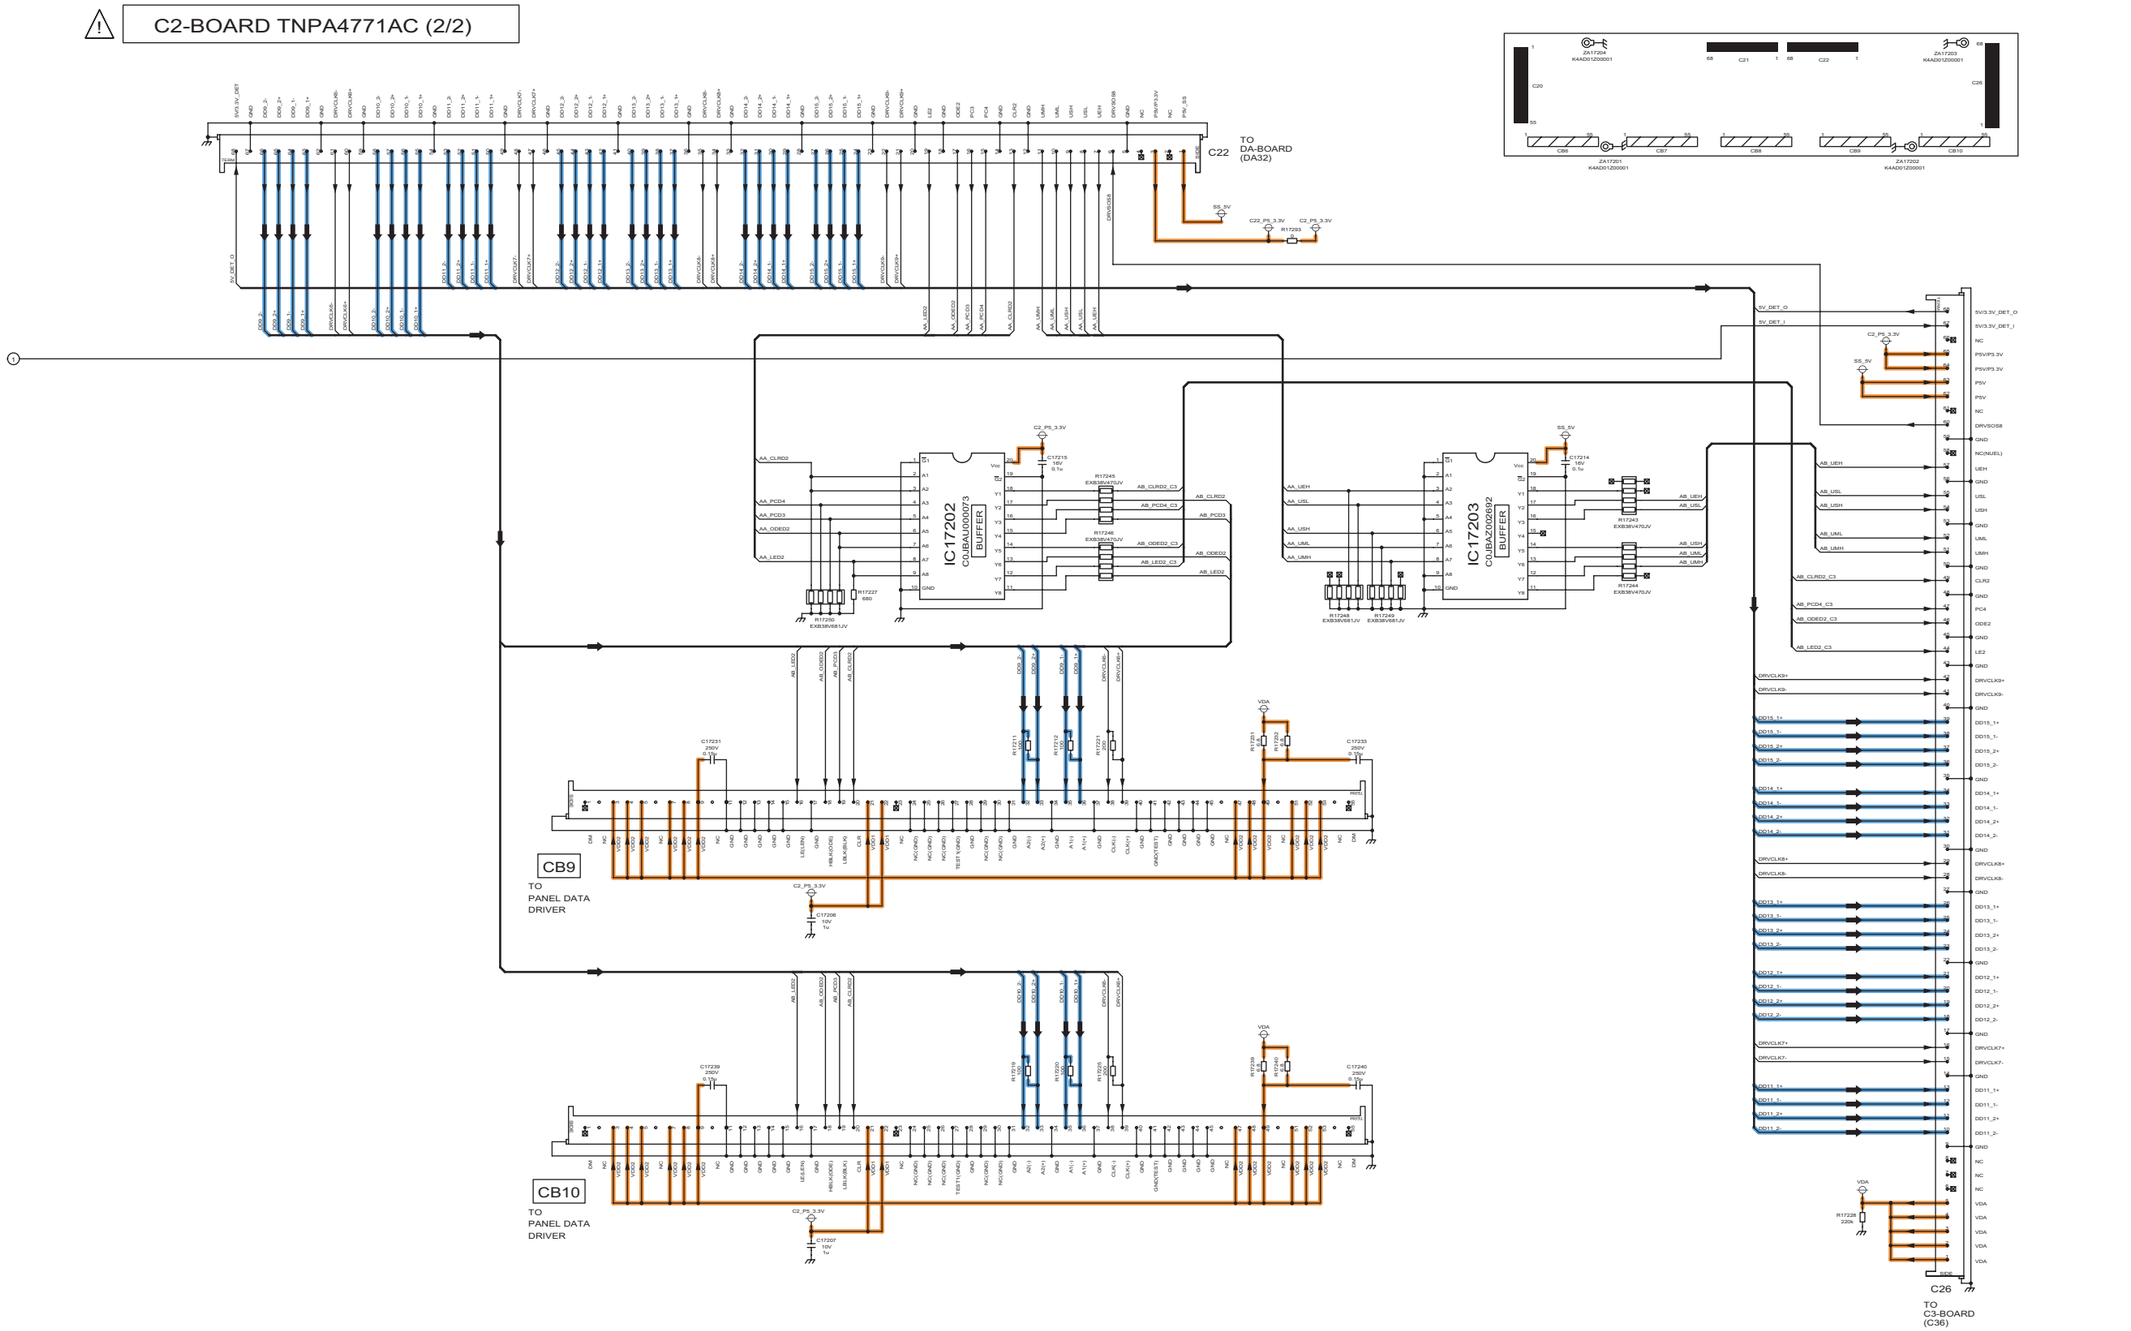


12.3.30. C3-Board (1/2) Schematic Diagram

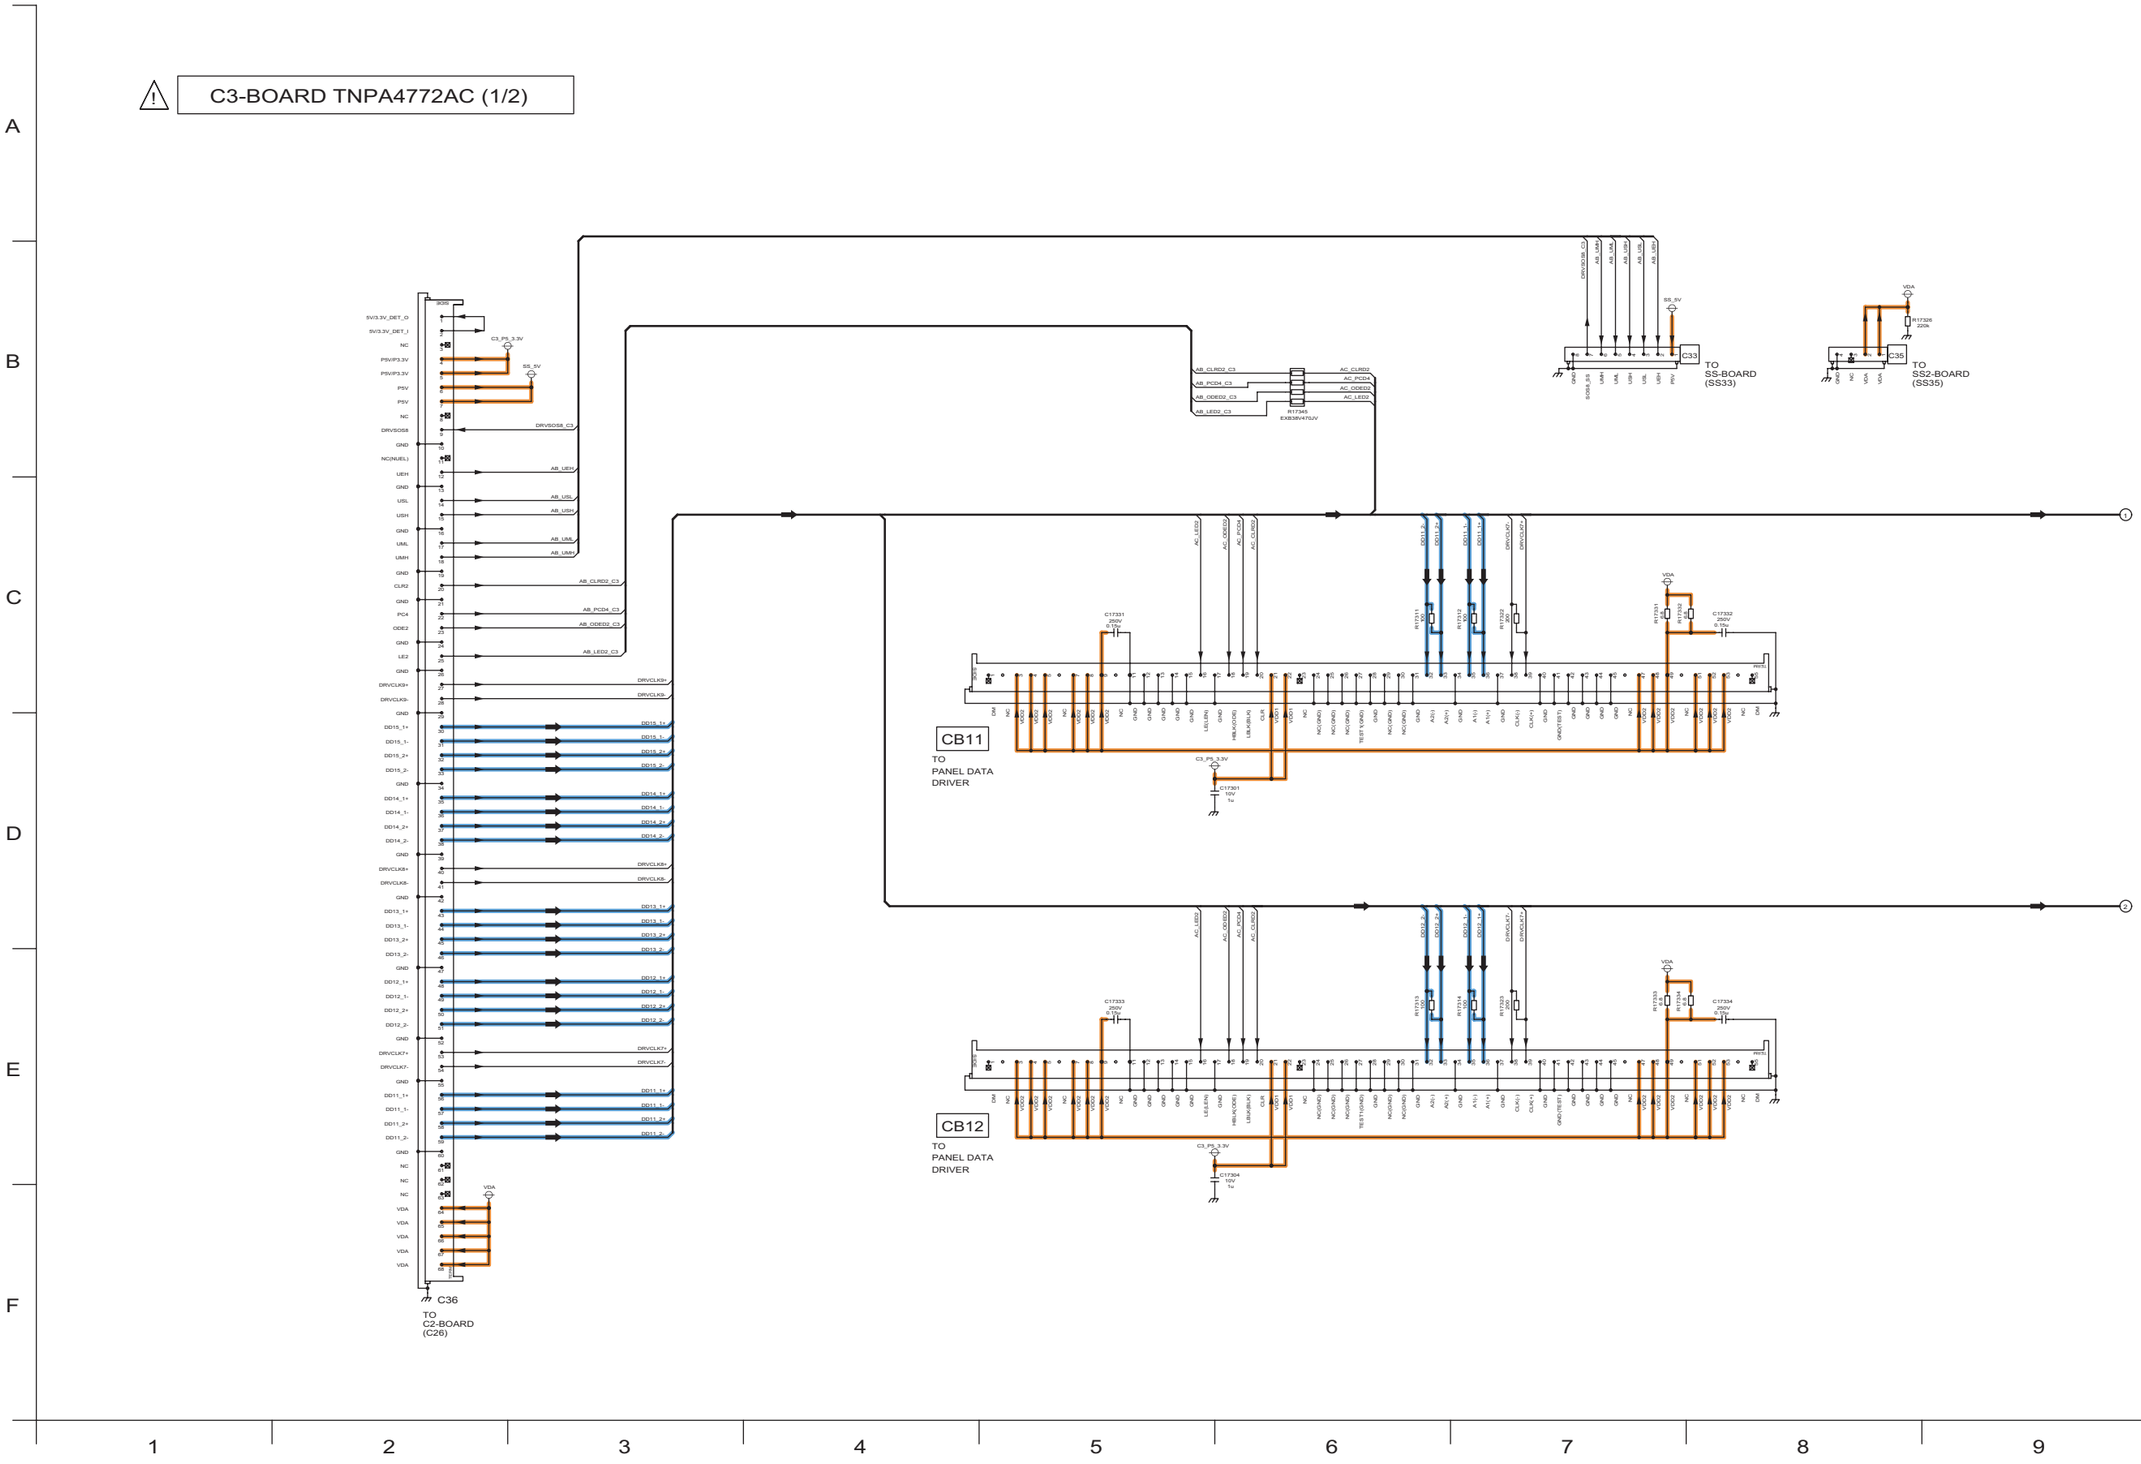


12.3.31. C3-Board (2/2) Schematic Diagram

⚠ C3-BOARD TNPA4772AC (2/2)

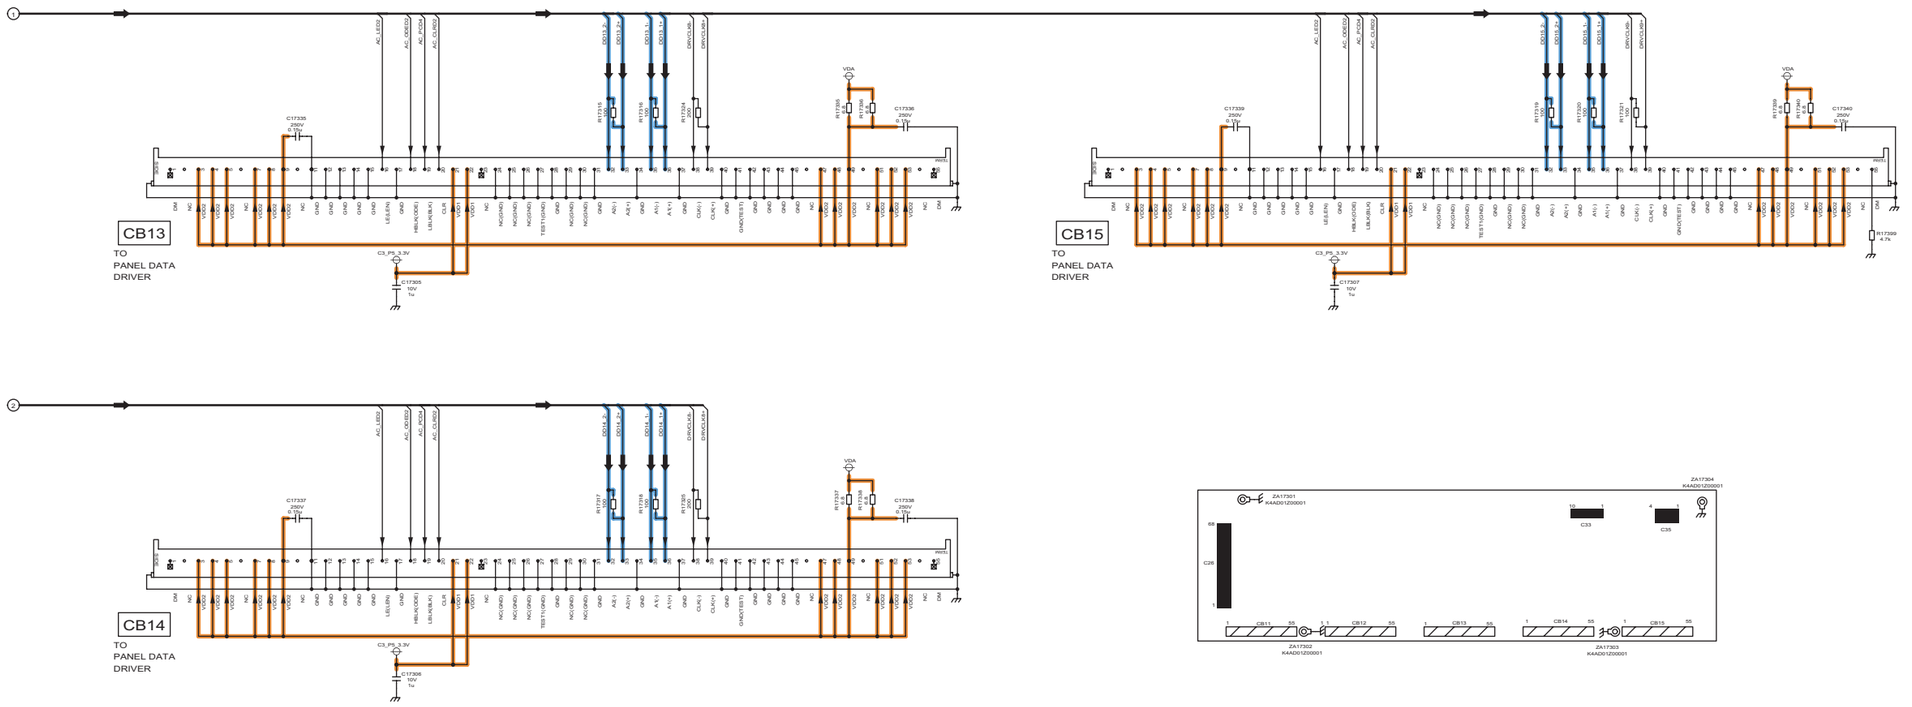


12.3.32. SC-Board (1/4) Schematic Diagram


SC-BOARD TNPA4840AF (1/4)

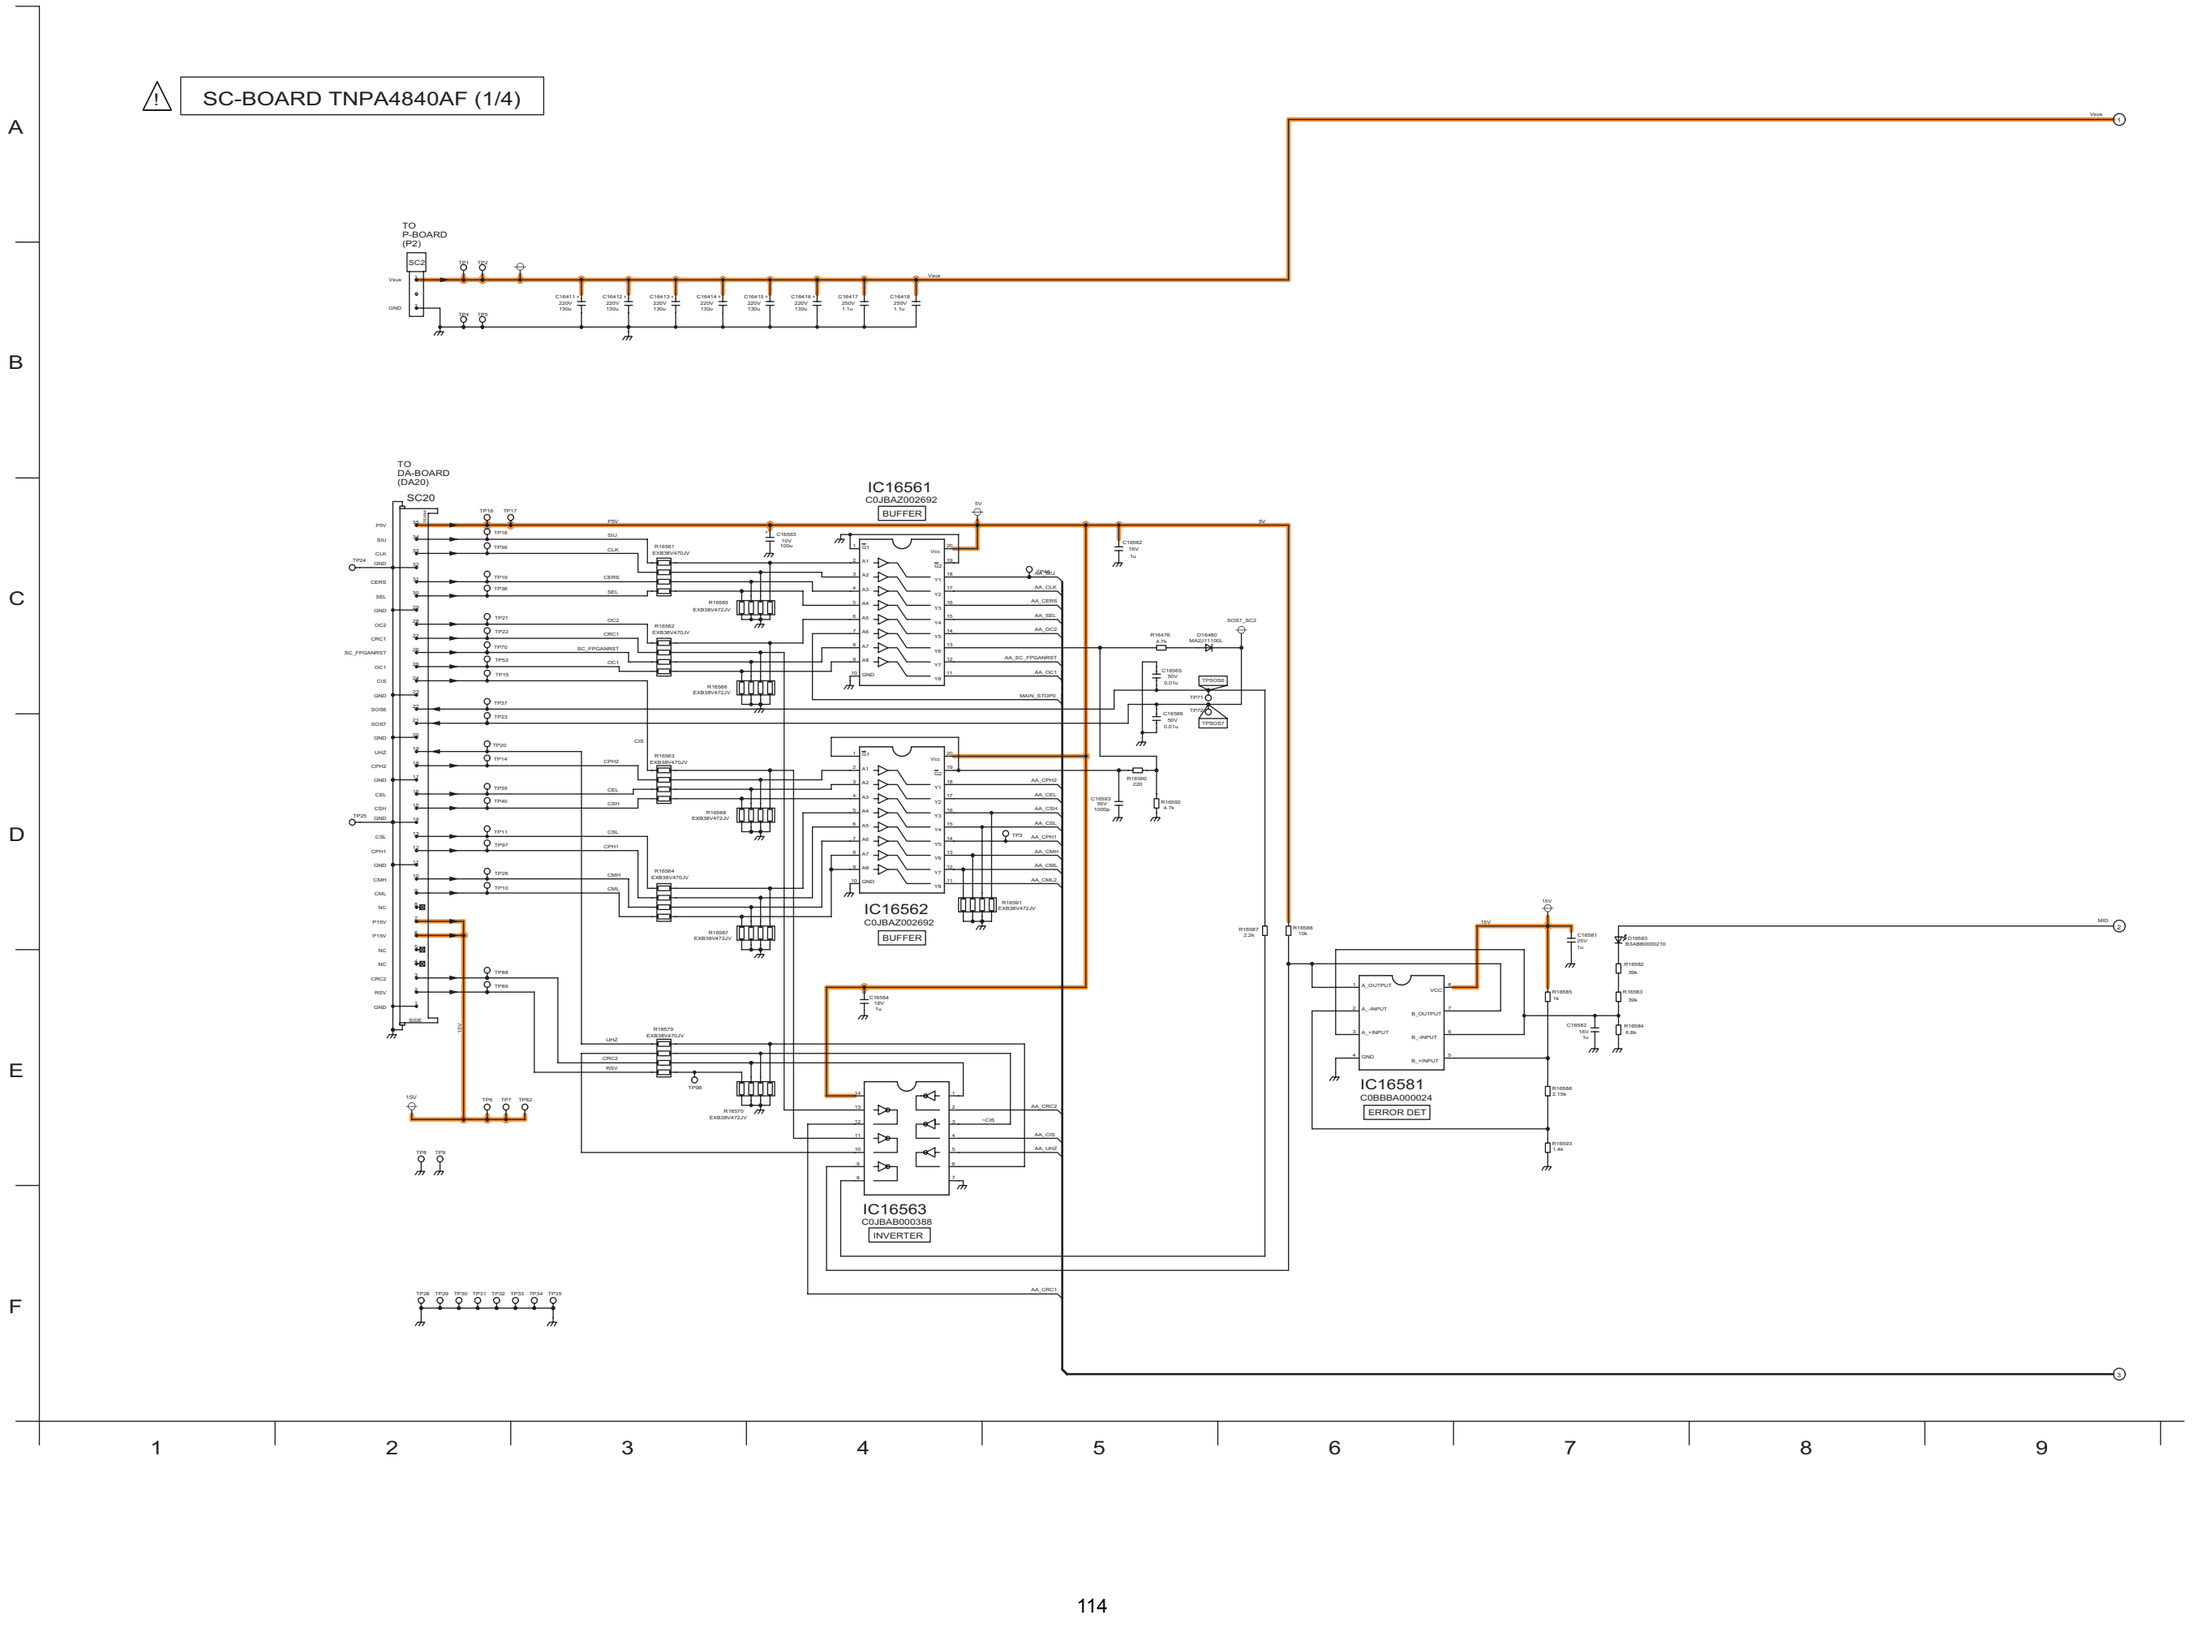


12.3.33. SC-Board (2/4) Schematic Diagram

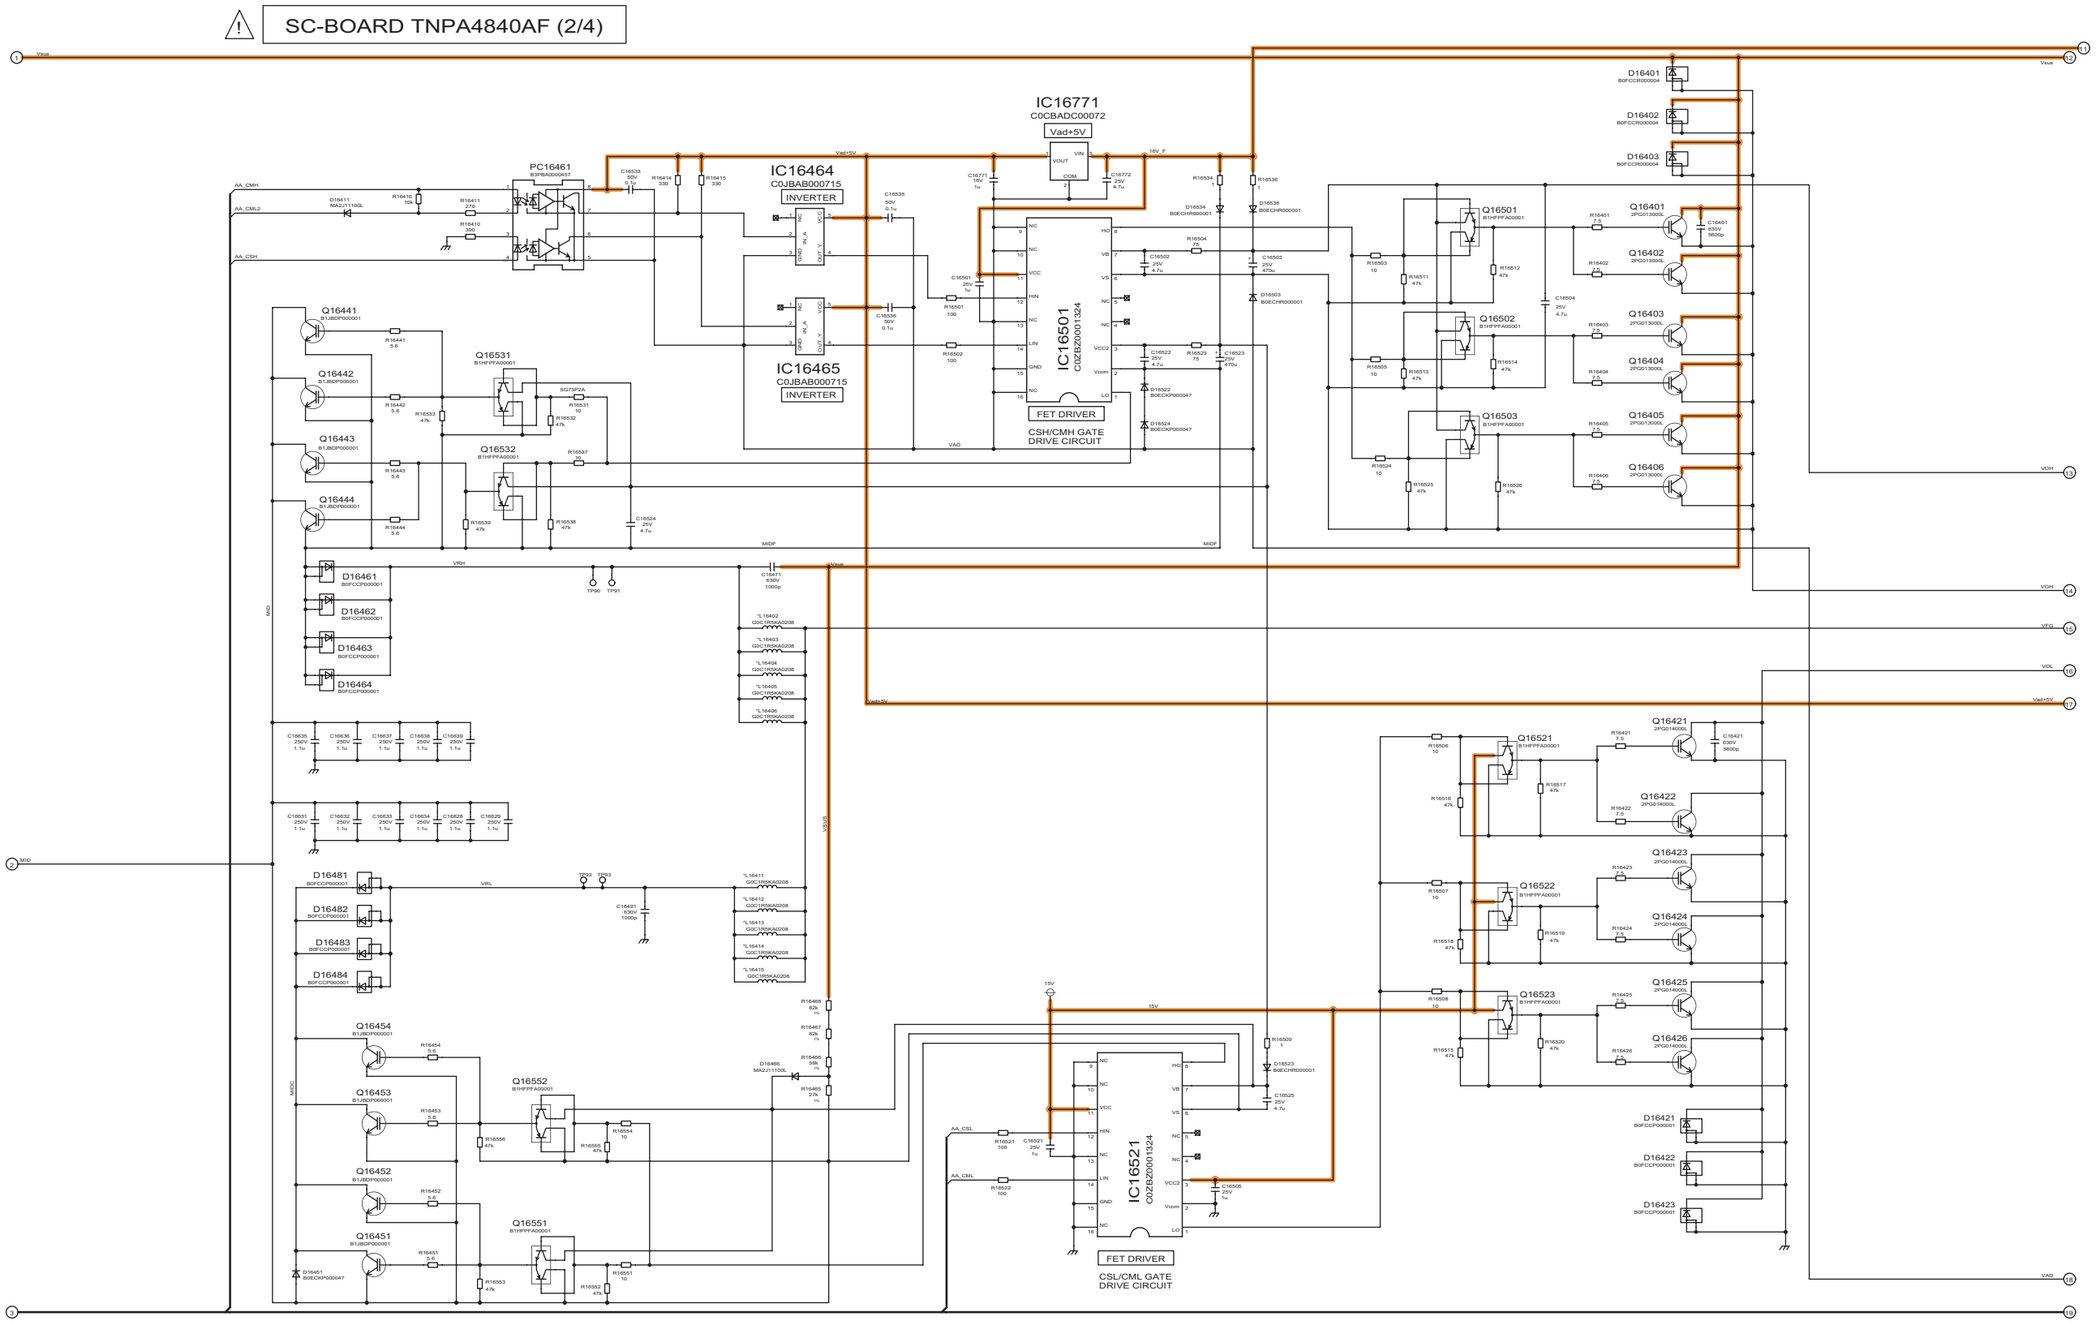


12.3.34. SC-Board (3/4) Schematic Diagram

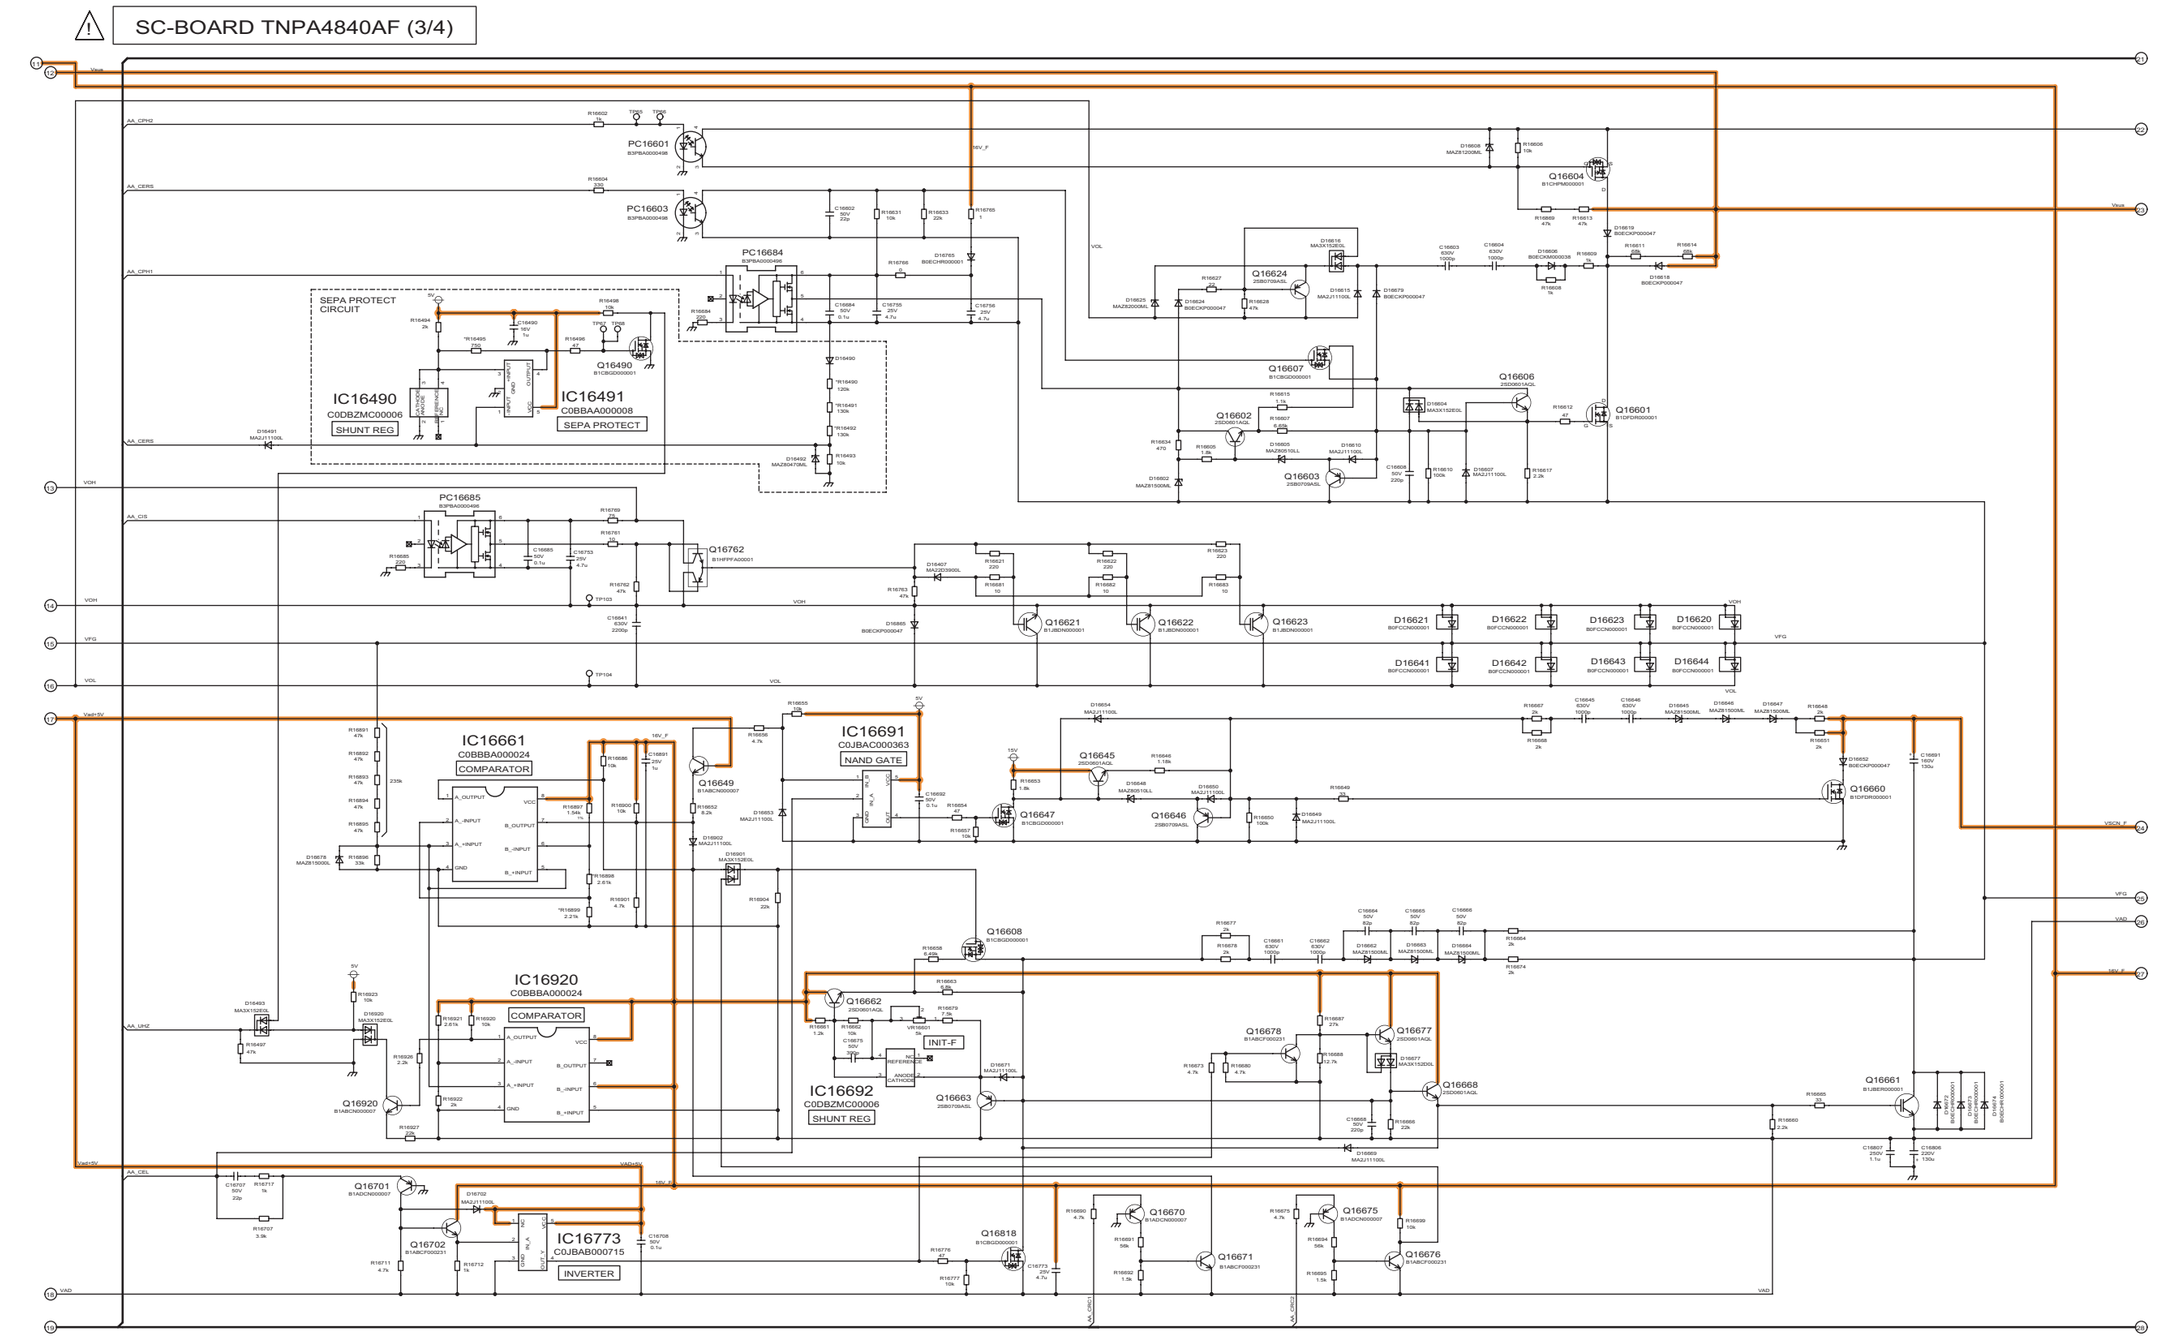


12.3.35. SC-Board (4/4) Schematic Diagram

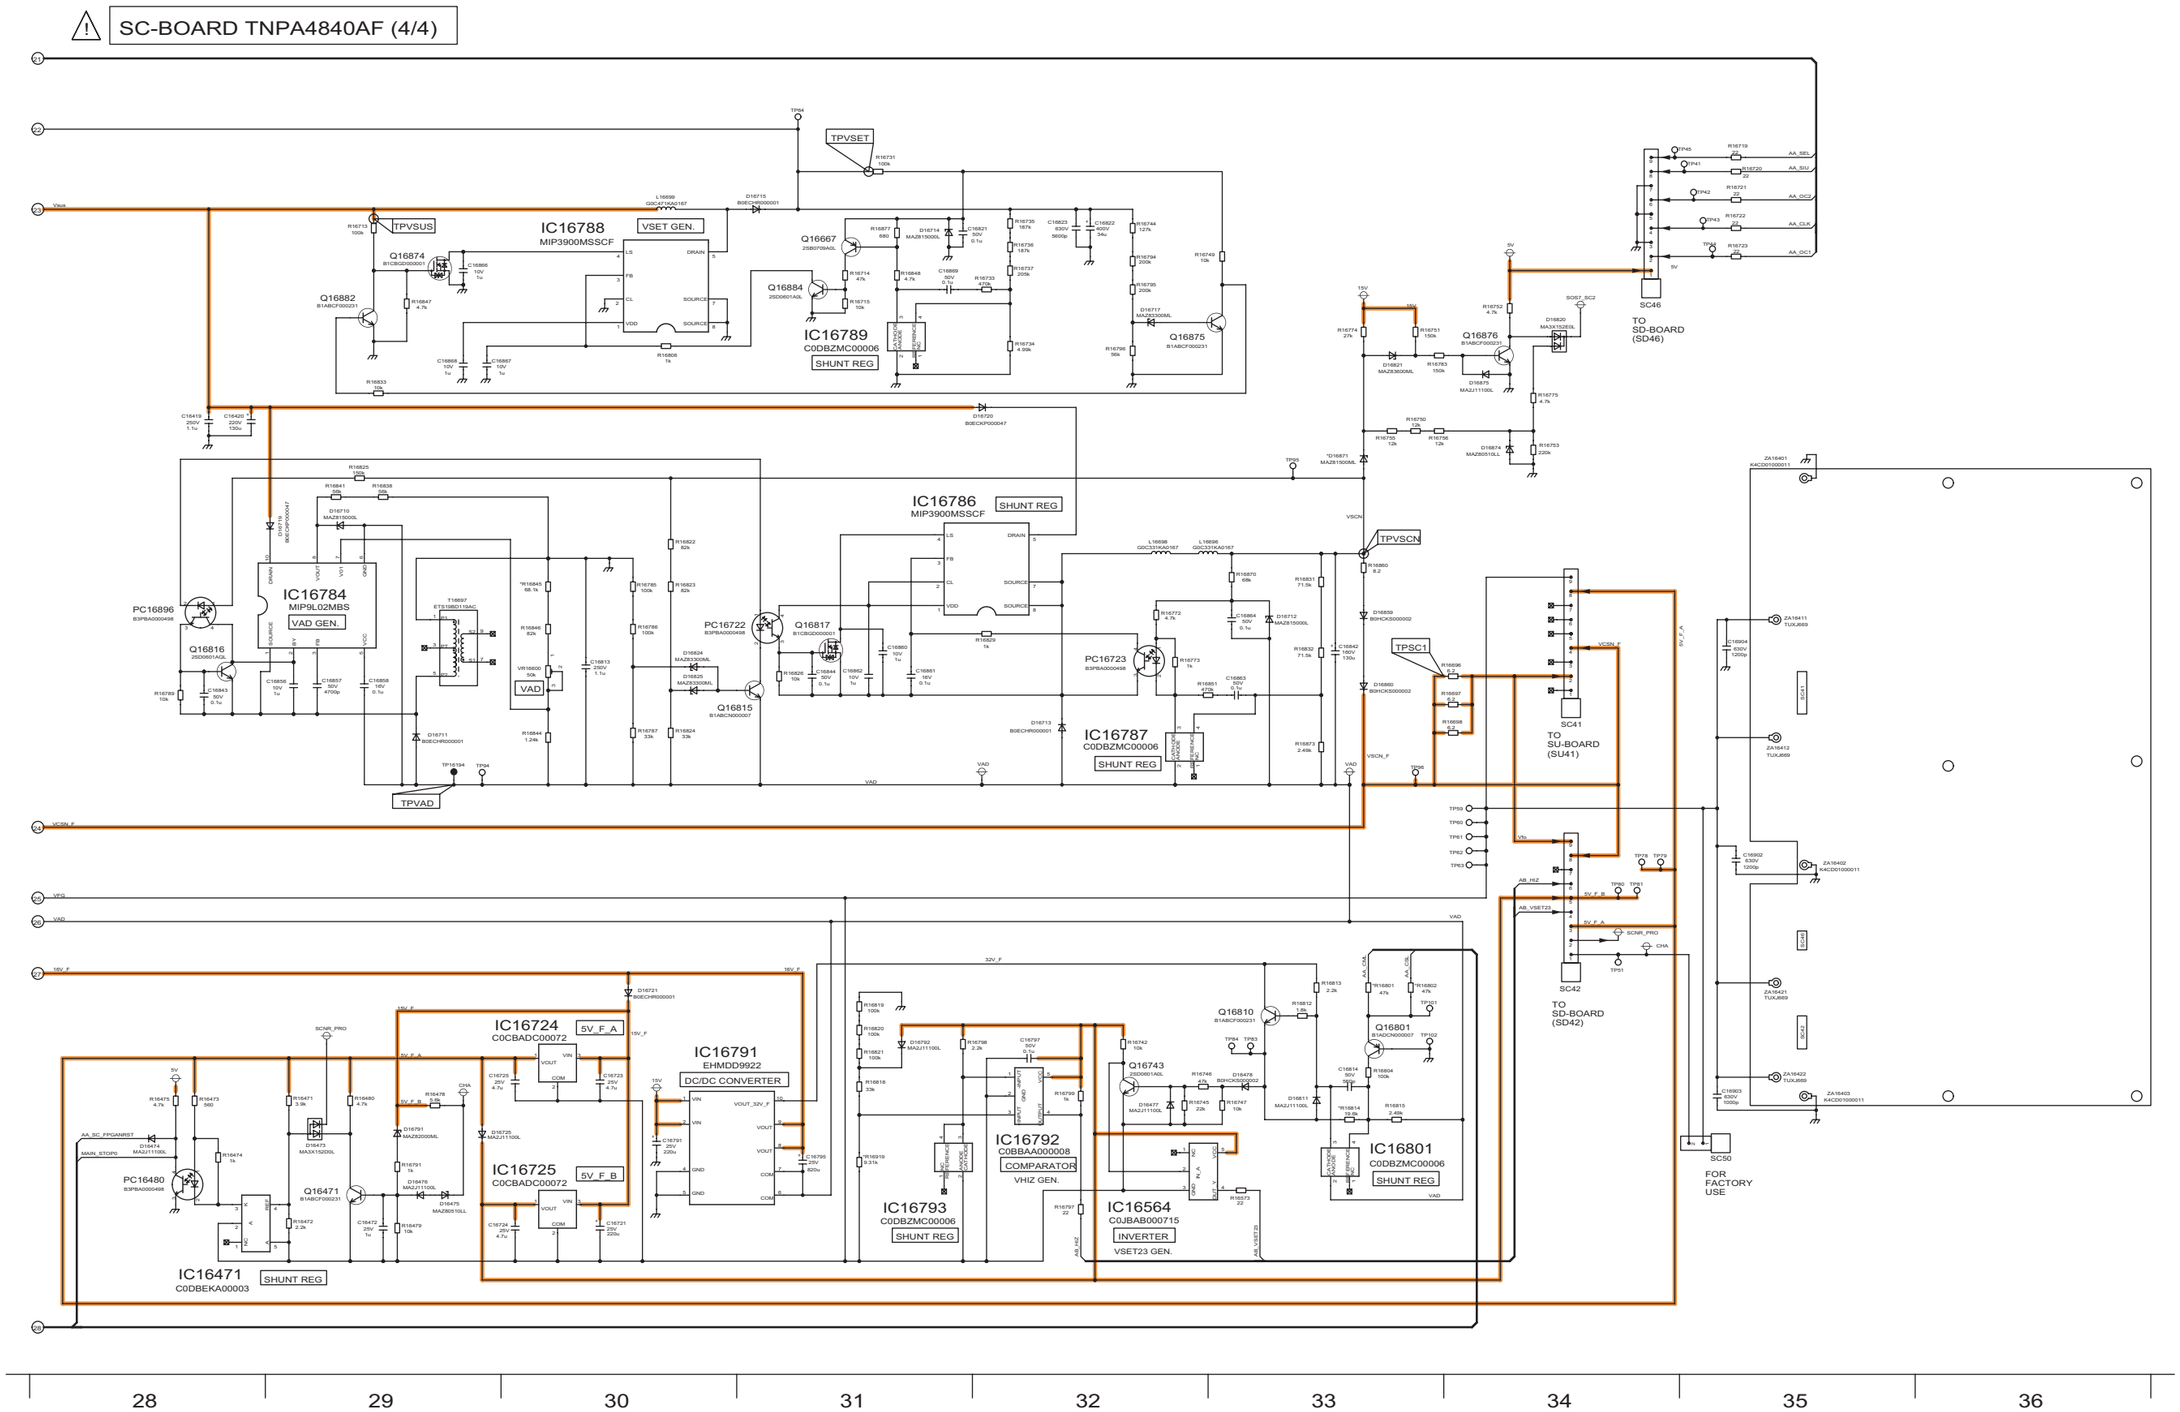

12.3.36. SS-Board (1/2) Schematic Diagram

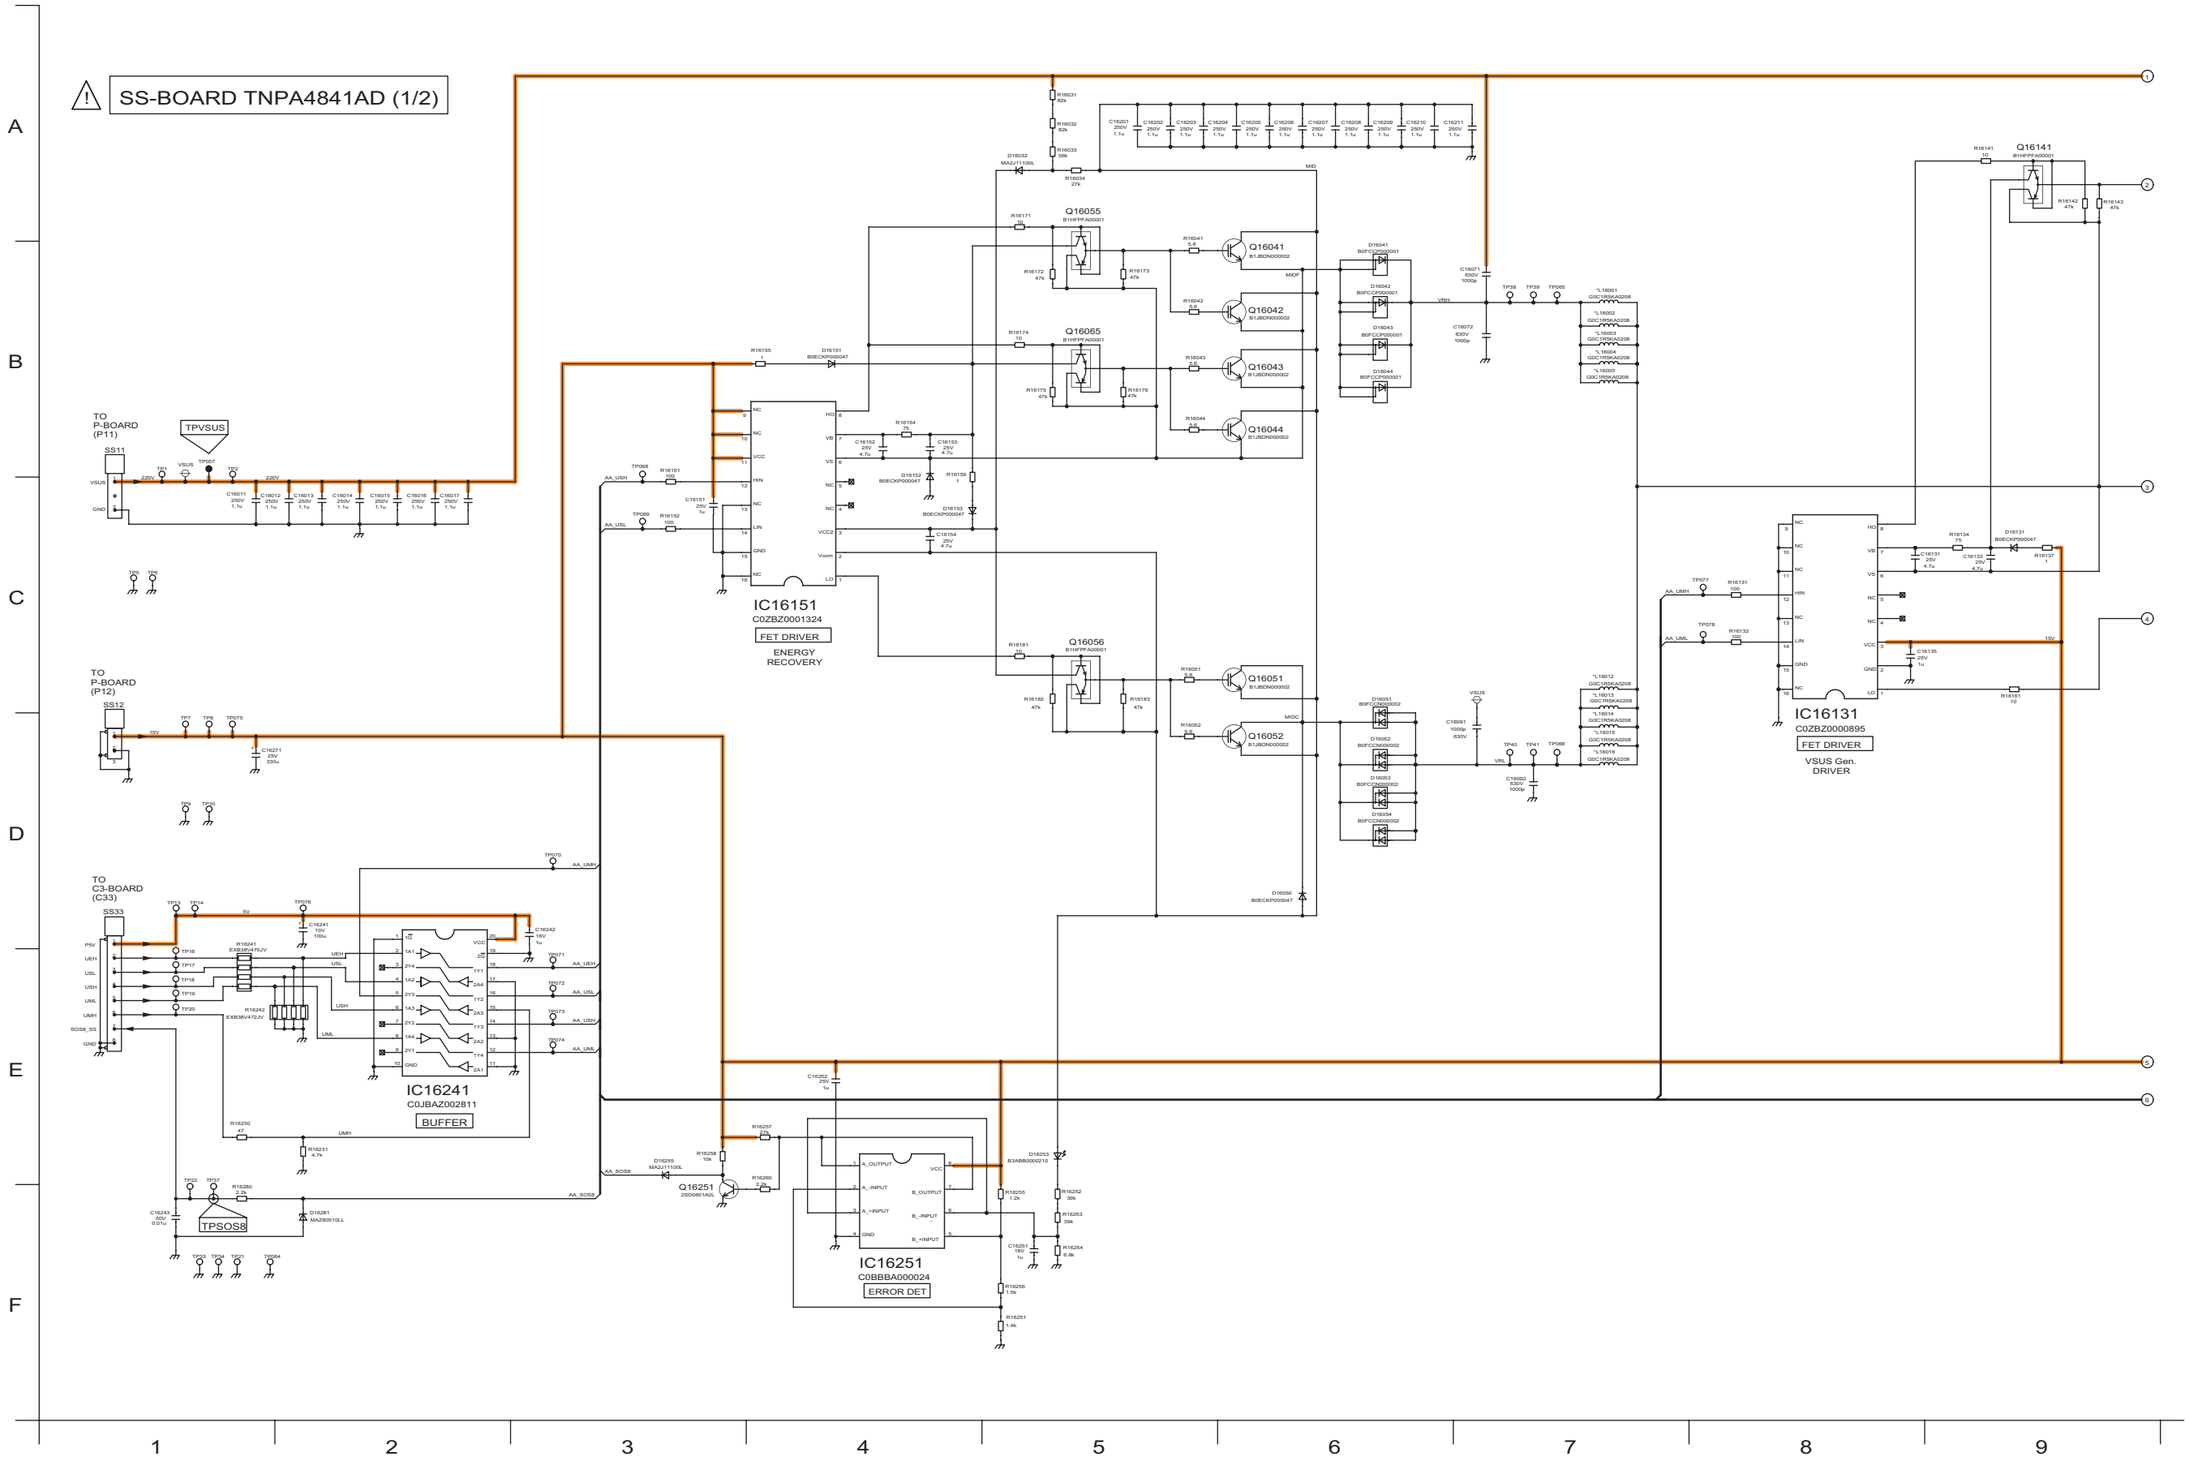

12.3.37. SS-Board (2/2) and SS2-Board Schematic Diagram

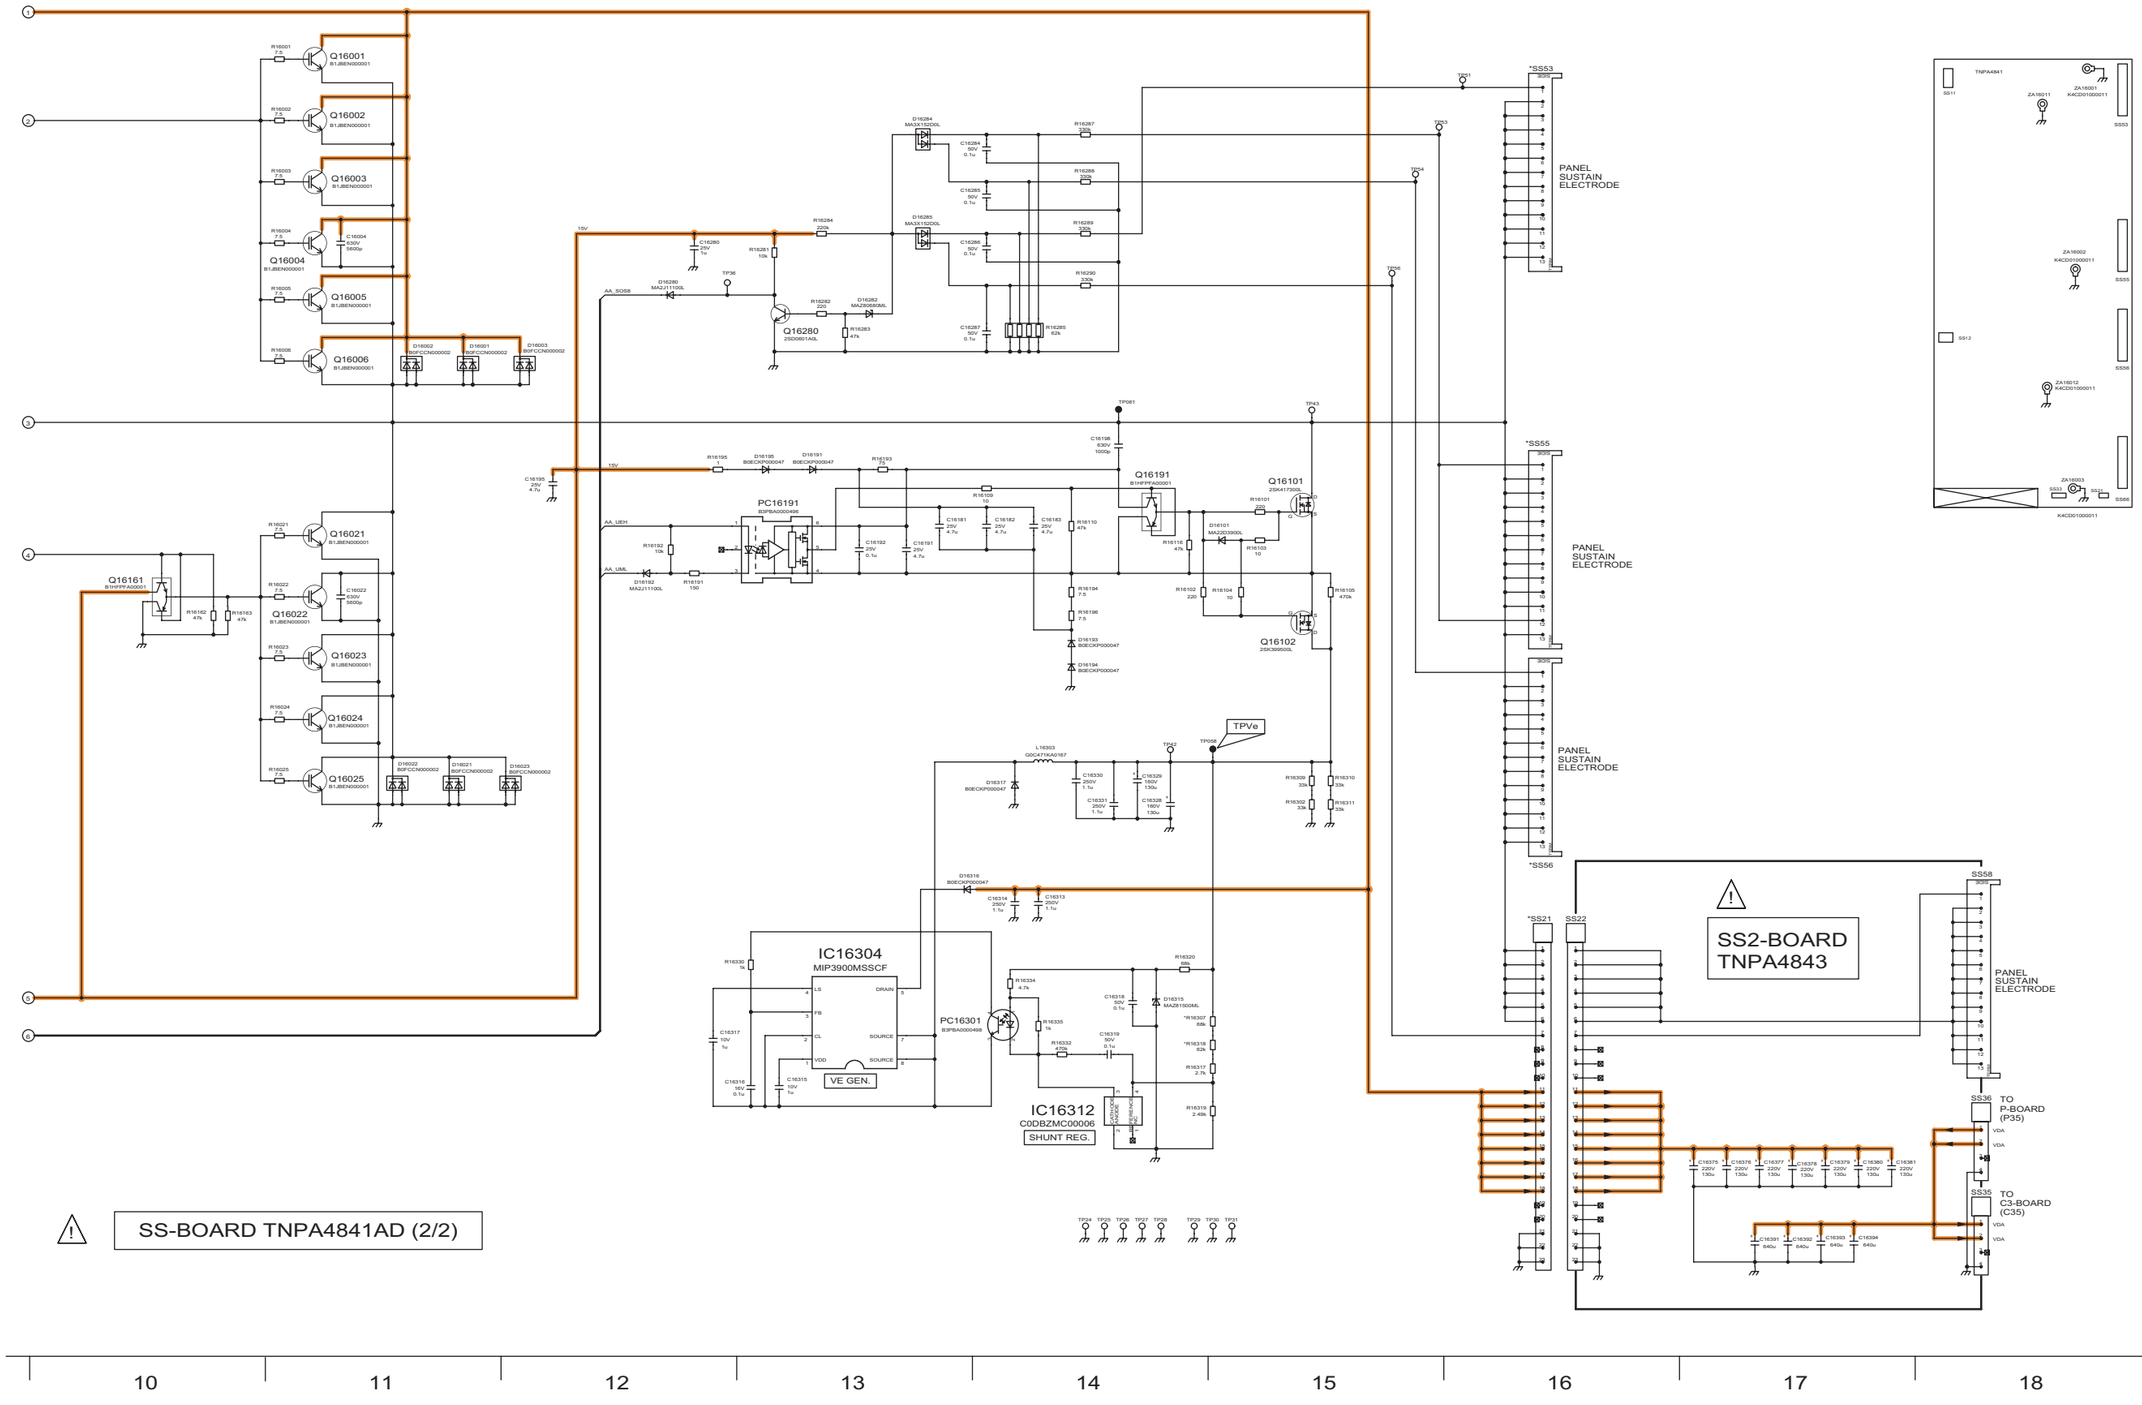



13 Printed Circuit Board

13.1. Tuner box

13.1.1. A-Board

A-BOARD (FOIL SIDE)
TXN/A1DKUM

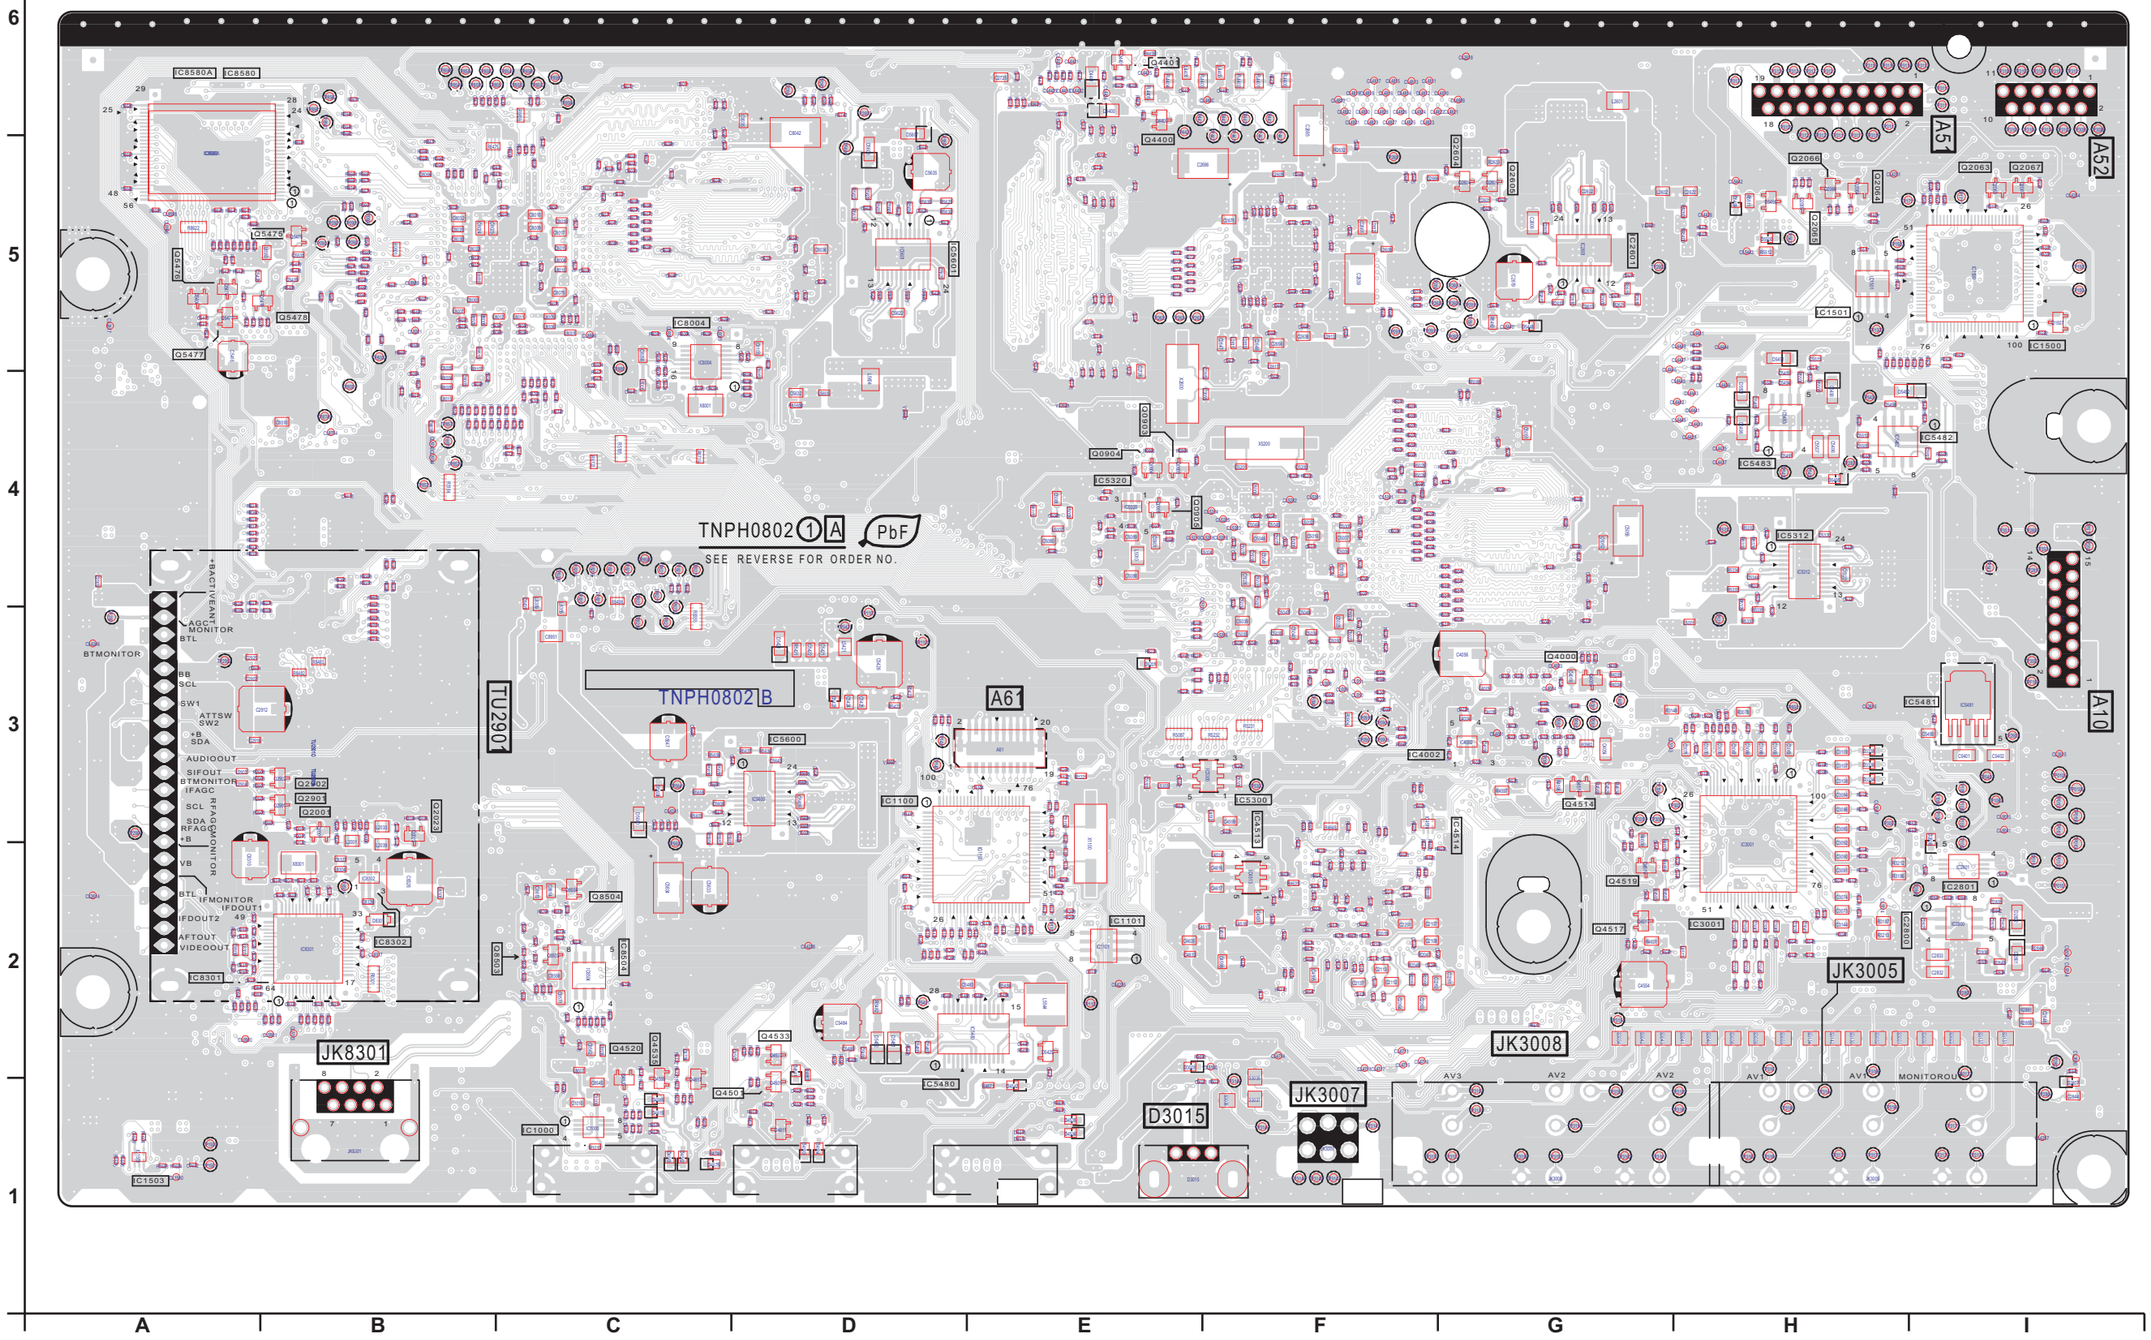

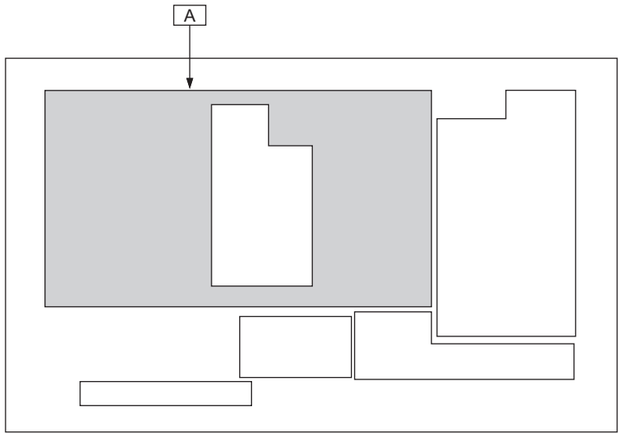


Parts Location

A-BOARD (FOIL SIDE)			
IC		**TRANSISTOR**	
IC1000	C-1	Q0903	E-4
IC1100	D-2	Q0904	E-4
IC1101	E-2	Q0905	E-4
IC1500	I-5	Q2001	B-3
IC1501	H-5	Q2023	B-3
IC1503	A-1	Q2063	I-5
IC2601	G-5	Q2064	H-5
IC2800	H-2	Q2065	H-5
IC2801	I-2	Q2066	H-5
IC3001	H-2	Q2067	I-5
IC4002	G-3	Q2604	G-5
IC4513	F-2	Q2605	G-5
IC4514	G-3	Q2901	B-3
IC5300	F-3	Q2902	B-3
IC5312	H-4	Q4000	G-3
IC5320	E-4	Q4400	E-5
IC5480	D-1	Q4401	E-6
IC5481	I-3	Q4501	D-1
IC5482	I-4	Q4514	G-3
IC5483	H-4	Q4517	G-2
IC5600	D-3	Q4519	G-2
IC5601	D-5	Q4520	C-2
IC8004	C-5	Q4533	D-2
IC8301	A-2	Q4535	C-2
IC8302	B-2	Q5475	B-5
IC8504	C-2	Q5476	A-5
IC8580	A-6	Q5477	A-5
IC8580A	A-6	Q5478	B-5
		Q8503	C-2
		Q8504	C-2

Parts Location


A-BOARD (COMPONENT SIDE)			
IC		**TRANSISTOR**	
IC1502	B-5	Q0900	H-1
IC2008	D-2	Q0901	I-1
IC2600	D-5	Q2602	C-5
IC2604	E-4	Q2603	C-5
IC2605	F-5	Q2800	A-2
IC2606	D-4	Q2903	I-2
IC2607	D-5	Q2904	I-4
IC2611	E-5	Q3000	B-2
IC2612	E-5	Q3001	B-2
IC2901	A-3	Q3300	C-3
IC2960	I-1	Q4409	C-4
IC3003	B-3	Q4500	E-1
IC4001	C-3	Q4515	C-3
IC4005	C-3	Q4516	C-3
IC4400	C-4	Q4534	E-1
IC4510	D-2	Q5312	B-4
IC4511	D-3	Q5318	B-3
IC4512	D-2	Q5431	A-3
IC5001	C-4	Q5432	A-3
IC5002	C-4	Q5473	H-5
IC5100	D-4	Q5474	I-5
IC5110	E-4	Q5480	A-2
IC5470	G-4	Q5600	F-2
IC8001	G-5	Q5601	F-5
IC8002	F-5	Q5602	F-5
IC8003	G-5	Q5605	F-2
IC8502	H-5	Q5606	F-2
IC8503	G-2	Q5609	F-3
IC8508	G-4		
IC8581	I-5		

A-BOARD (COMPONENT SIDE)
TXN/A1DKUM

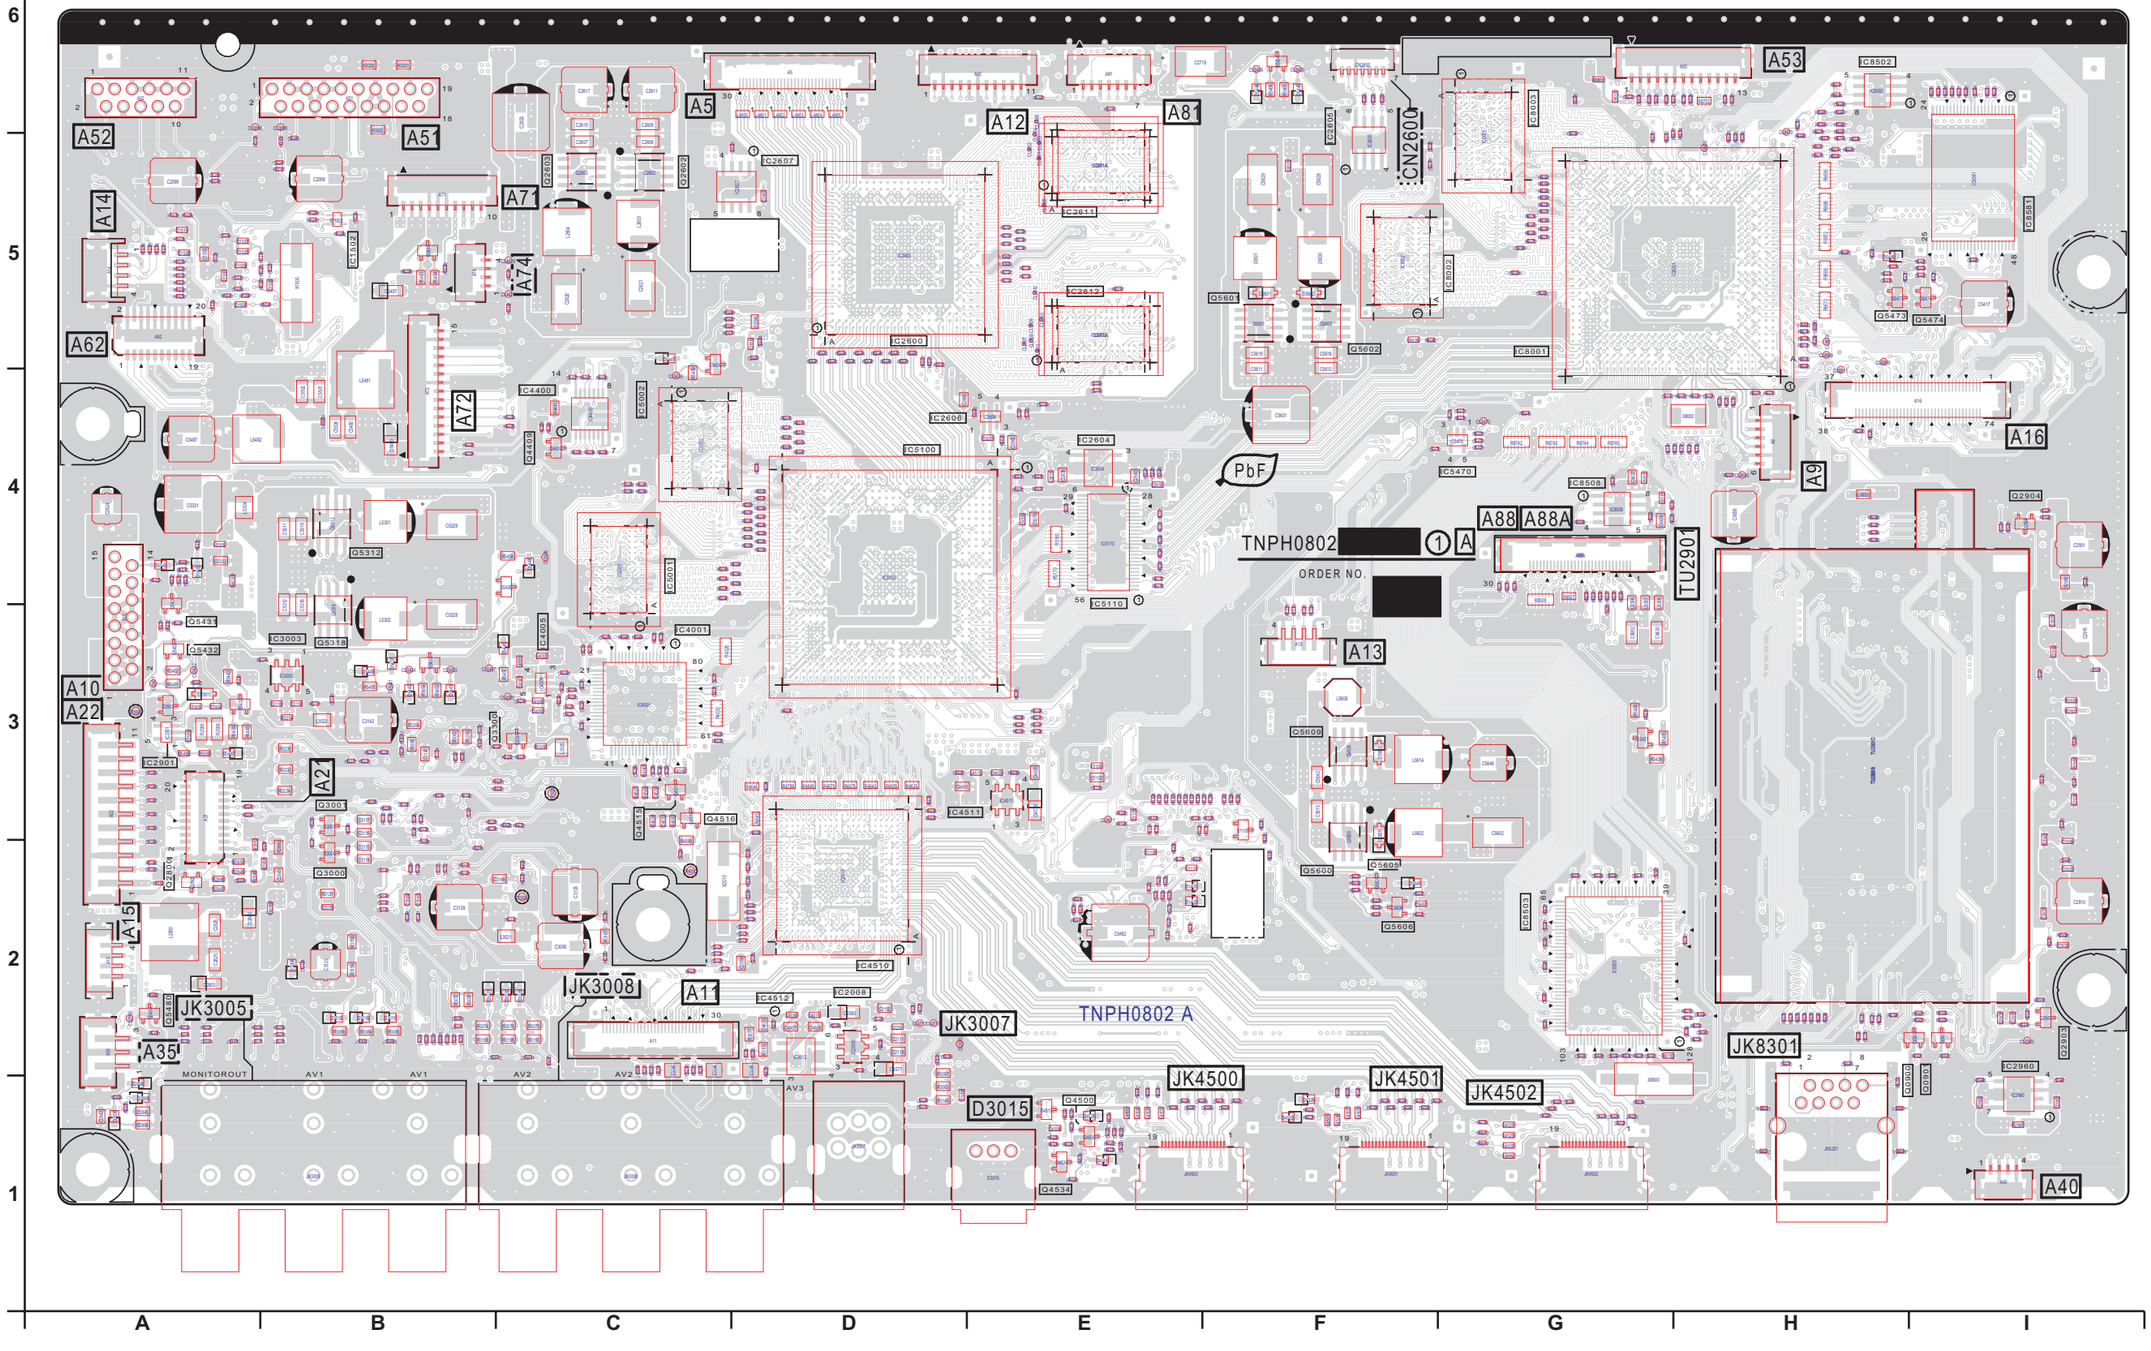



13.1.2. DH-Board

DH-BOARD (FOIL SIDE)
TXNDH1DKUU

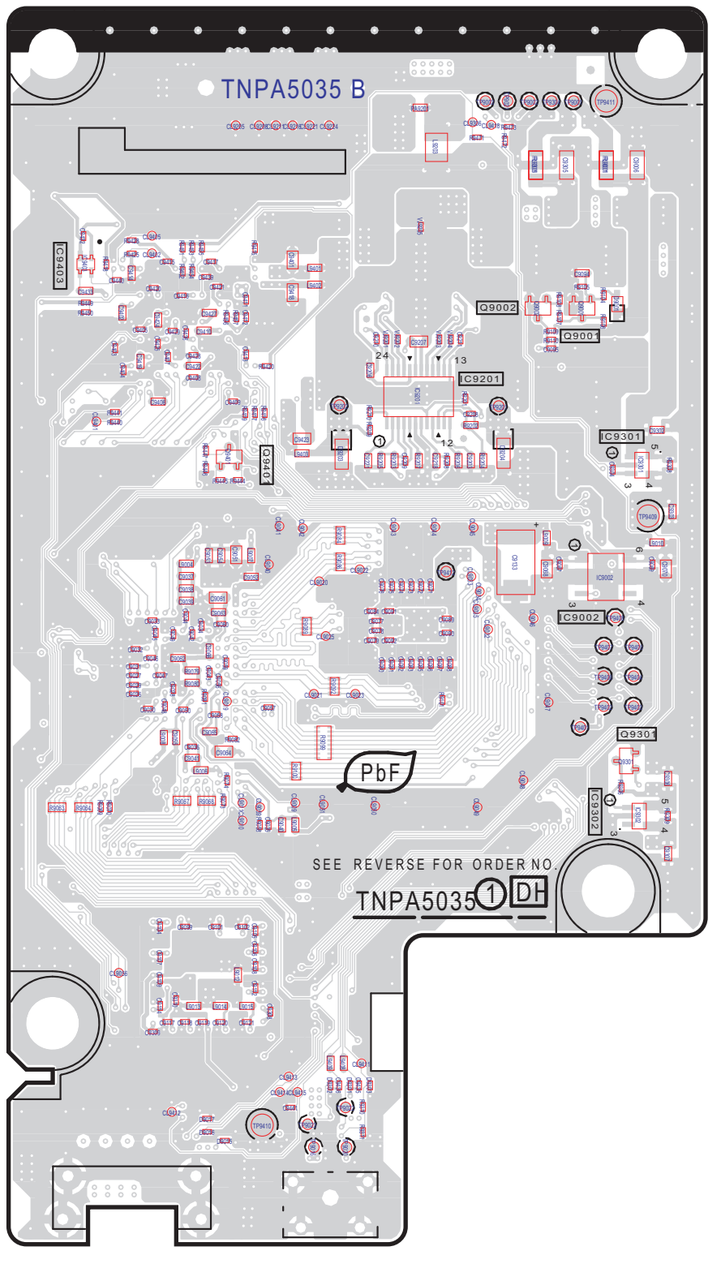

DH-BOARD (COMPONENT SIDE)
TXNDH1DKUU

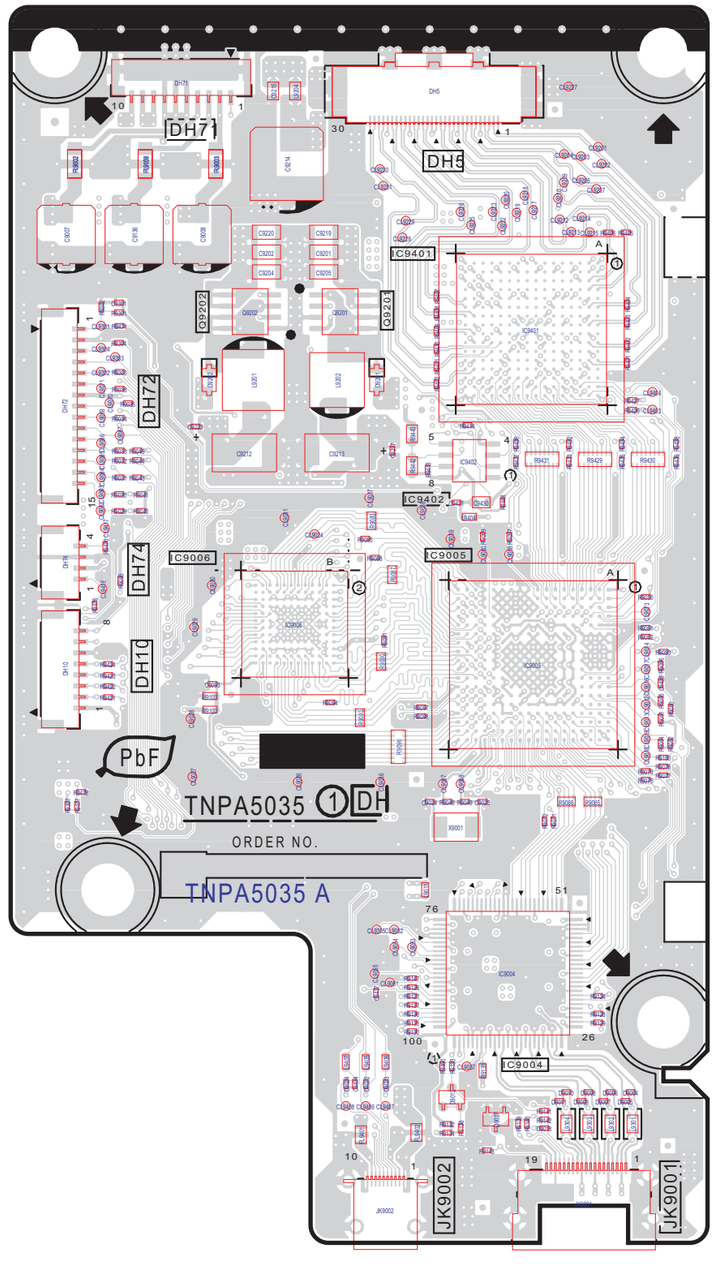


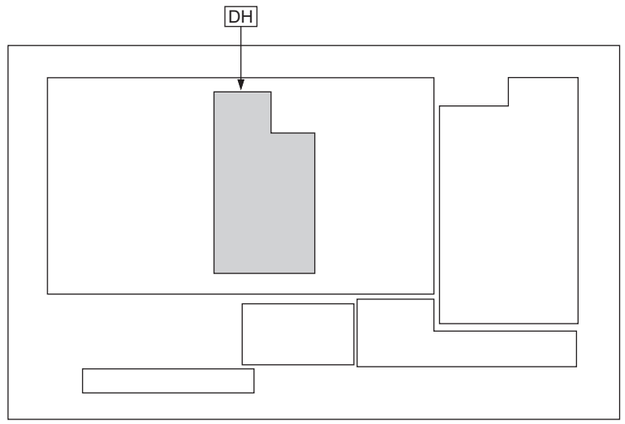


Parts Location

DH-BOARD			
IC		**TEST POINT**	
IC9002	C-3	TP9001	C-5
IC9004	F-2	TP9002	C-5
IC9005	F-3	TP9003	C-5
IC9006	E-3	TP9016	B-1
IC9201	B-4	TP9020	B-1
IC9301	C-4	TP9021	C-5
IC9302	C-2	TP9022	B-1
IC9401	F-5	TP9023	B-1
IC9402	F-4	TP9201	C-4
IC9403	A-5	TP9202	B-4
TRANSISTOR		TP9304	C-5
		TP9401	C-3
Q9001	C-5	TP9402	C-3
Q9002	C-5	TP9403	C-3
Q9201	E-5	TP9404	C-3
Q9202	E-5	TP9405	C-3
Q9301	C-3	TP9406	C-3
Q9401	B-4	TP9407	C-3
		TP9408	C-3
		TP9409	C-4
		TP9410	B-1
		TP9411	C-5
		TP9412	B-3


13.1.3. K-Board

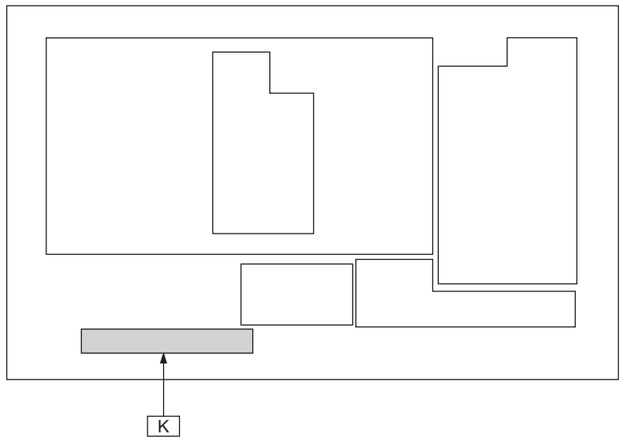

K-BOARD (FOIL SIDE)
TNPA4869AD

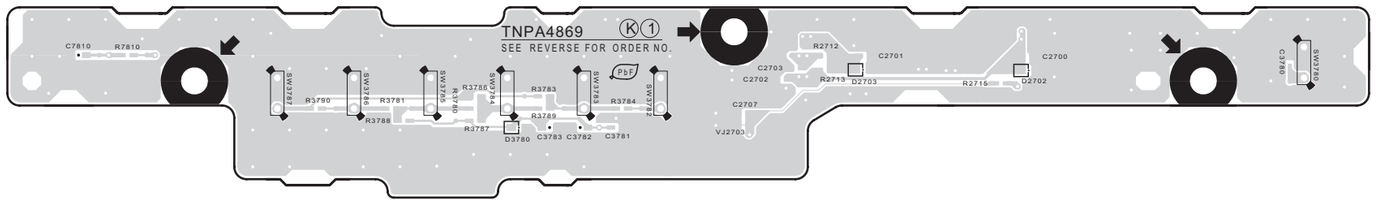



K-BOARD (COMPONENT SIDE)
TNPA4869AD

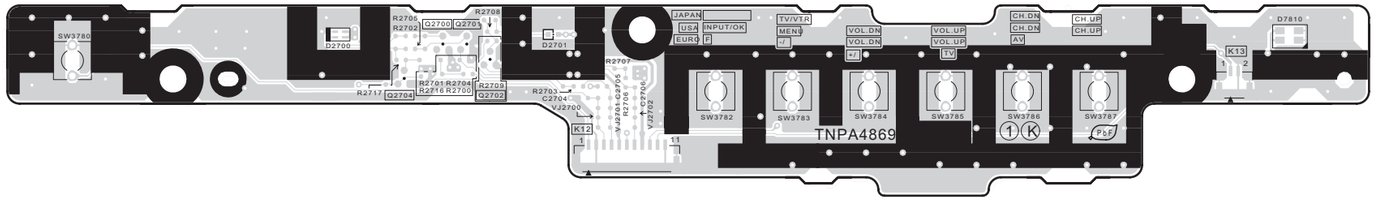


13.1.4. G-Board

G-BOARD (FOIL SIDE)
TNPA4897AC

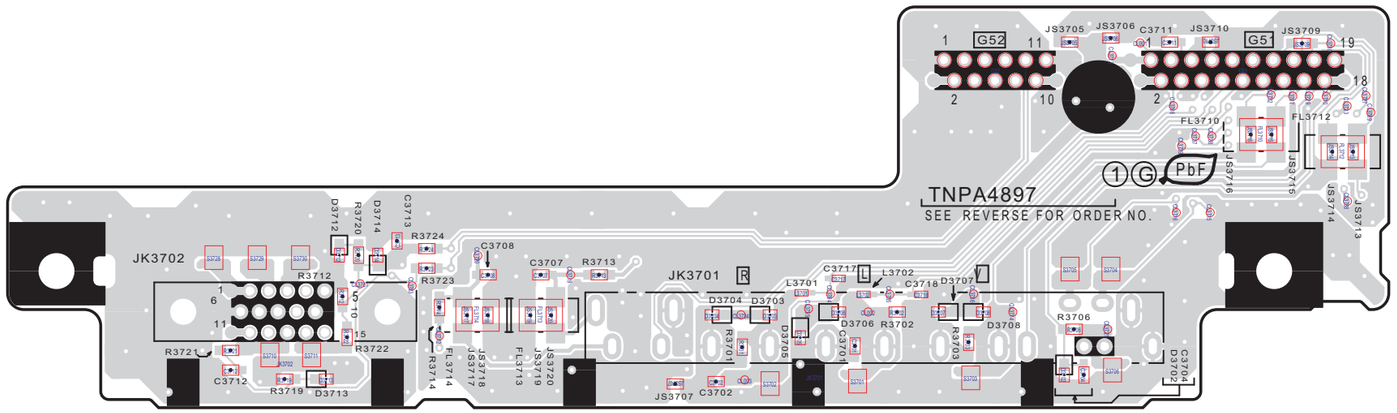

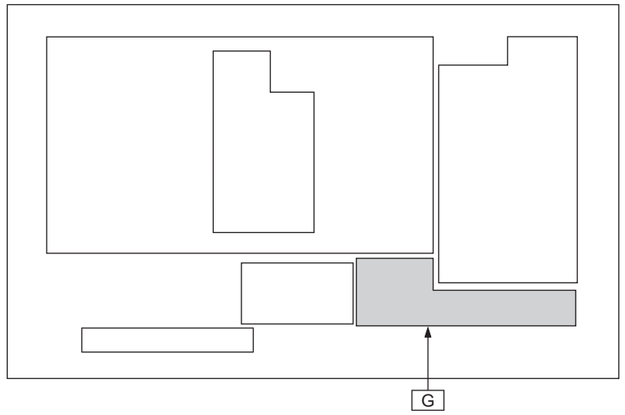



G-BOARD (COMPONENT SIDE)
TNPA4897AC

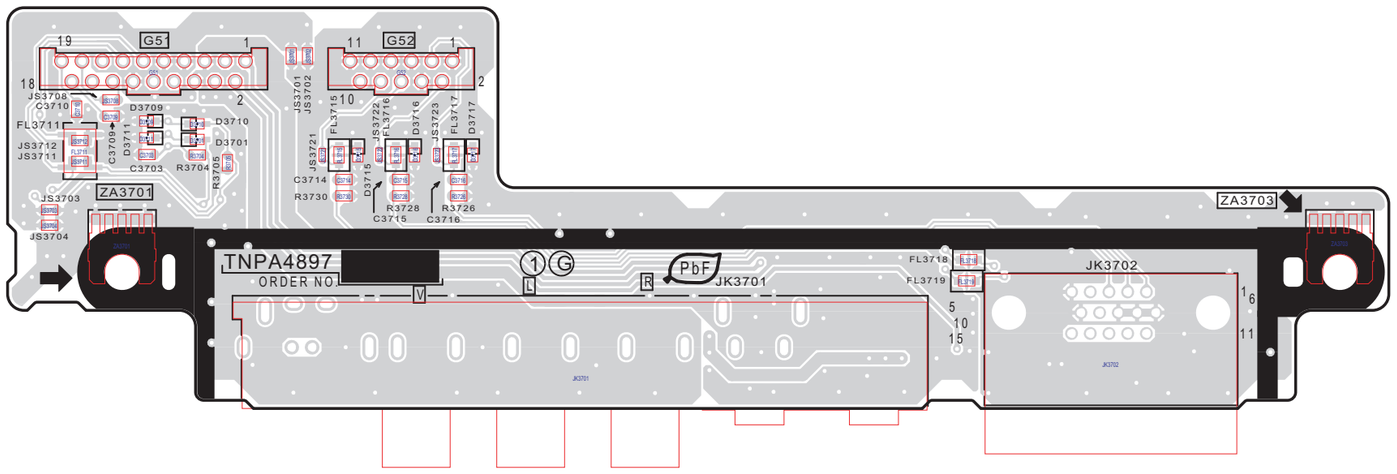


13.1.5. GS-Board

GS-BOARD (FOIL SIDE)
TNPA4867AC

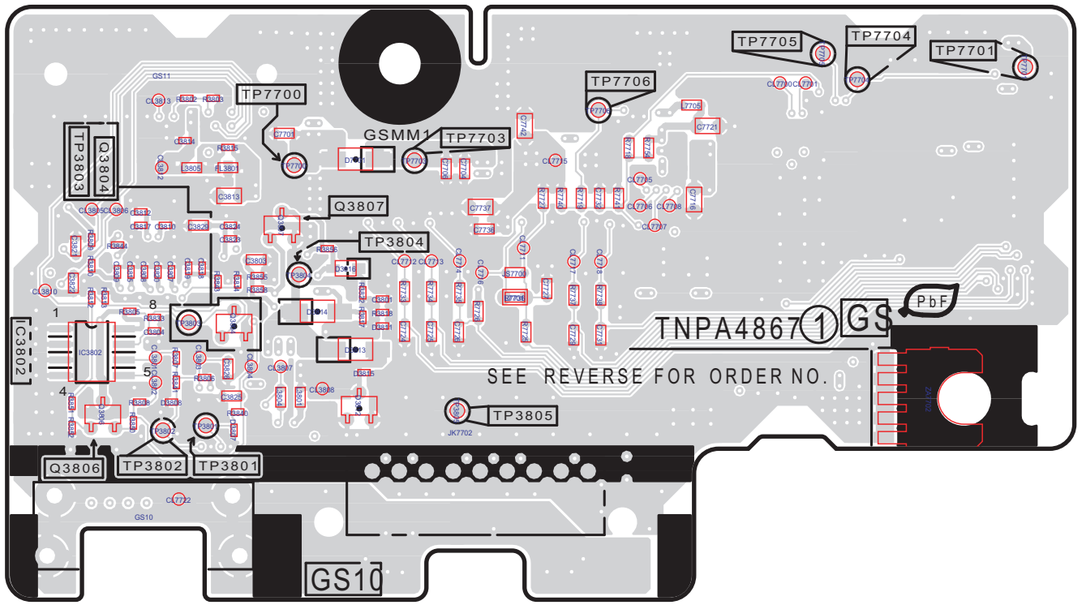

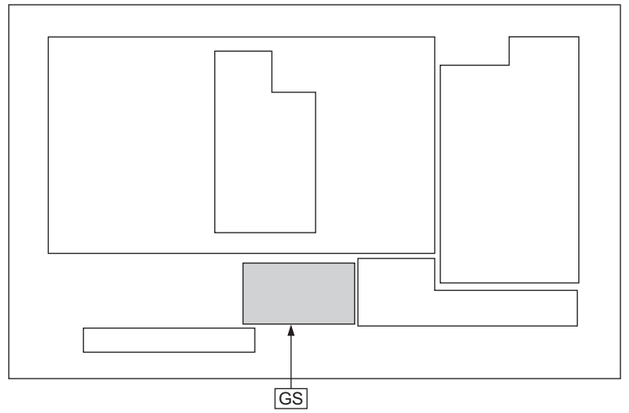

GS-BOARD (COMPONENT SIDE)
TNPA4867AC

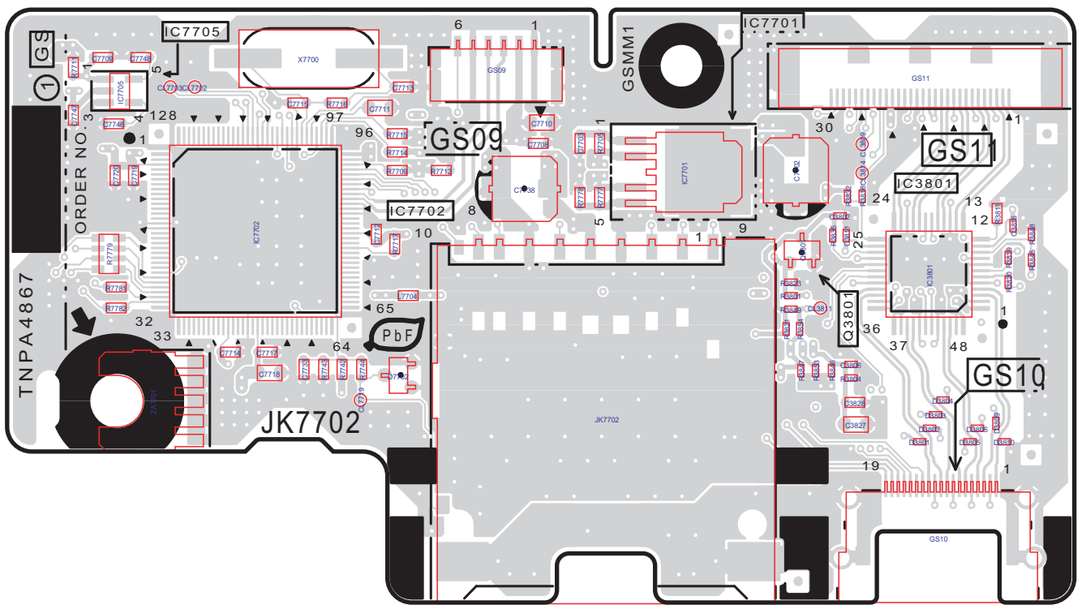


Parts Location


GS-BOARD					
IC		**TRANSISTOR**		**TEST POINT**	
IC3801	E-2	Q3801	D-2	TP3801	B-4
IC3802	A-5	Q3804	B-5	TP3802	A-4
IC7701	D-2	Q3806	A-4	TP3803	B-5
IC7702	B-2	Q3807	B-5	TP3804	B-5
IC7705	A-3			TP3805	C-4
				TP7700	B-5
				TP7701	E-6
				TP7703	C-5
				TP7704	D-6
				TP7705	D-6
				TP7706	C-6

13.2. Display unit

13.2.1. P(SUS)-Board

P (SUS)-BOARD (FOIL SIDE)
ETX2MM718EAS

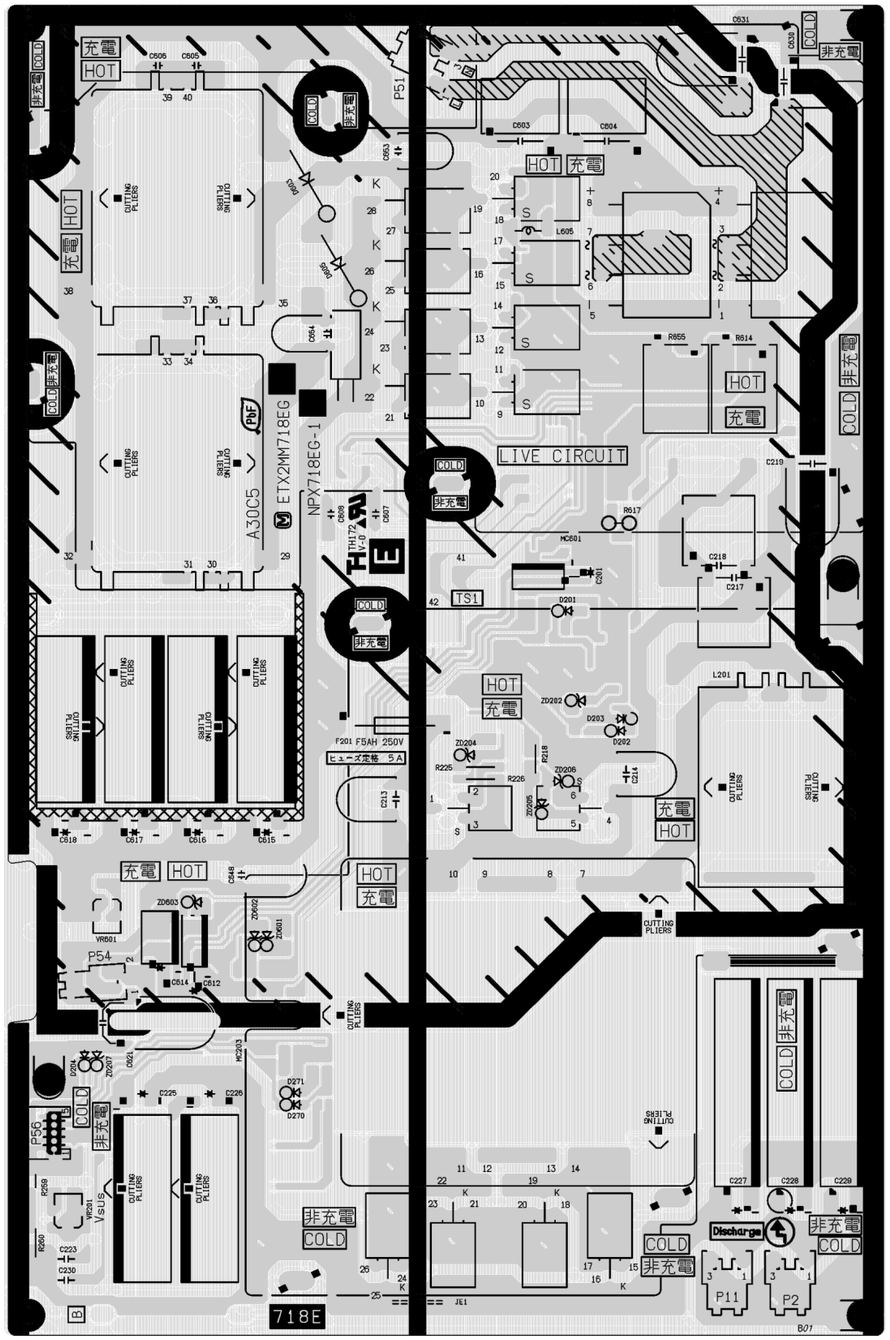


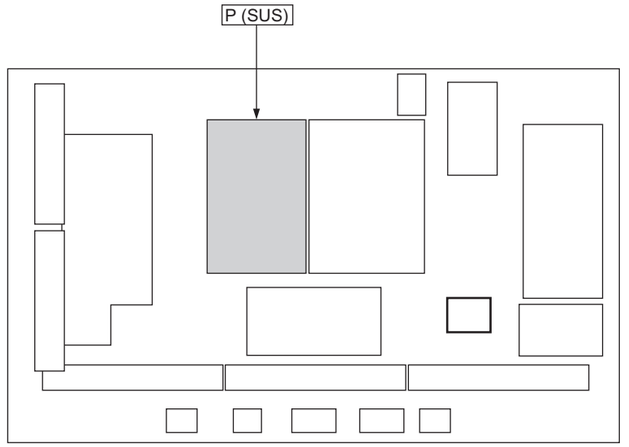


Parts Location

P (SUS))-BOARD (FOIL SIDE)			
MODULE		**VOLUME**	
MC203 MC601	B-2 D-4	VR201 VR601	B-1 B-2

P (SUS)-BOARD (COMPONENT SIDE)
ETX2MM718EAS

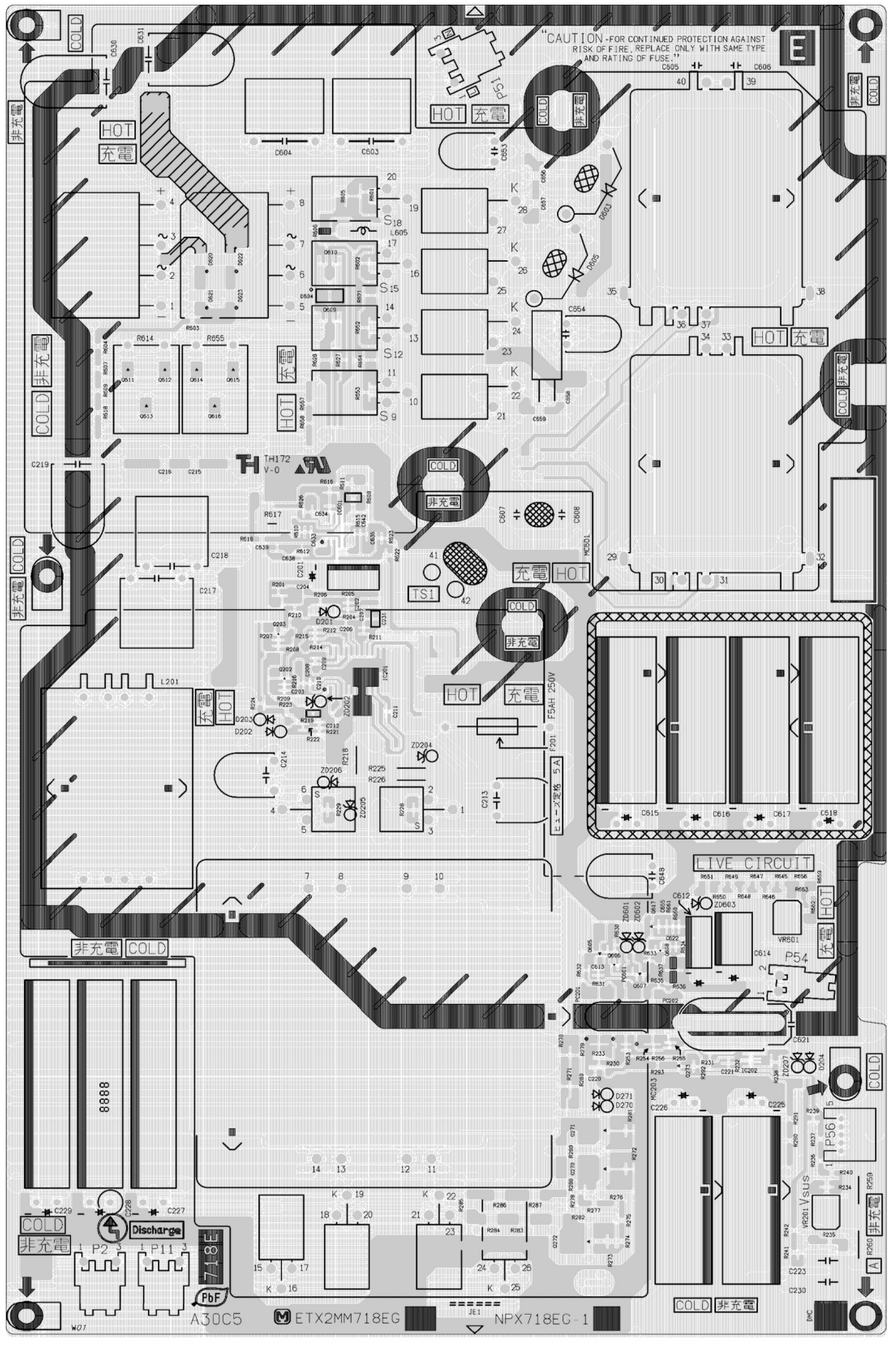

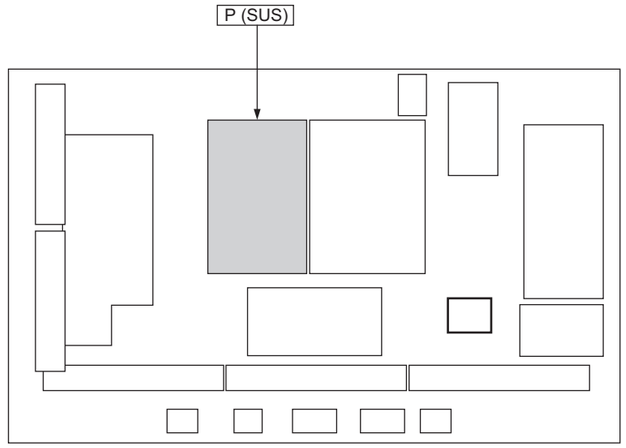



Parts Location

P (SUS)-BOARD (COMPONENT SIDE)					
IC		**TRANSISTOR**		**VOLUME**	
IC201	C-3	Q202	C-3	VR201	E-1
IC202	E-2	Q203	C-4	VR601	E-2
IC601	C-4	Q270	D-1		
MODULE		Q271	D-2		
MC203	D-2	Q272	D-1		
MC601	D-4	Q273	D-2		
PHOTO COUPLER		Q605	D-2		
PC201	D-2	Q606	D-2		
PC202	D-2	Q607	D-2		
PC601	D-2	Q608	D-2		
		Q609	C-5		
		Q610	C-5		
		Q611	B-5		
		Q612	B-5		
		Q613	B-5		
		Q614	B-5		
		Q615	B-5		
		Q616	B-5		
		Q617	D-2		

13.2.2. P(MULTI)-Board

P (MULTI)-BOARD (FOIL SIDE)
ETX2MM718EBS

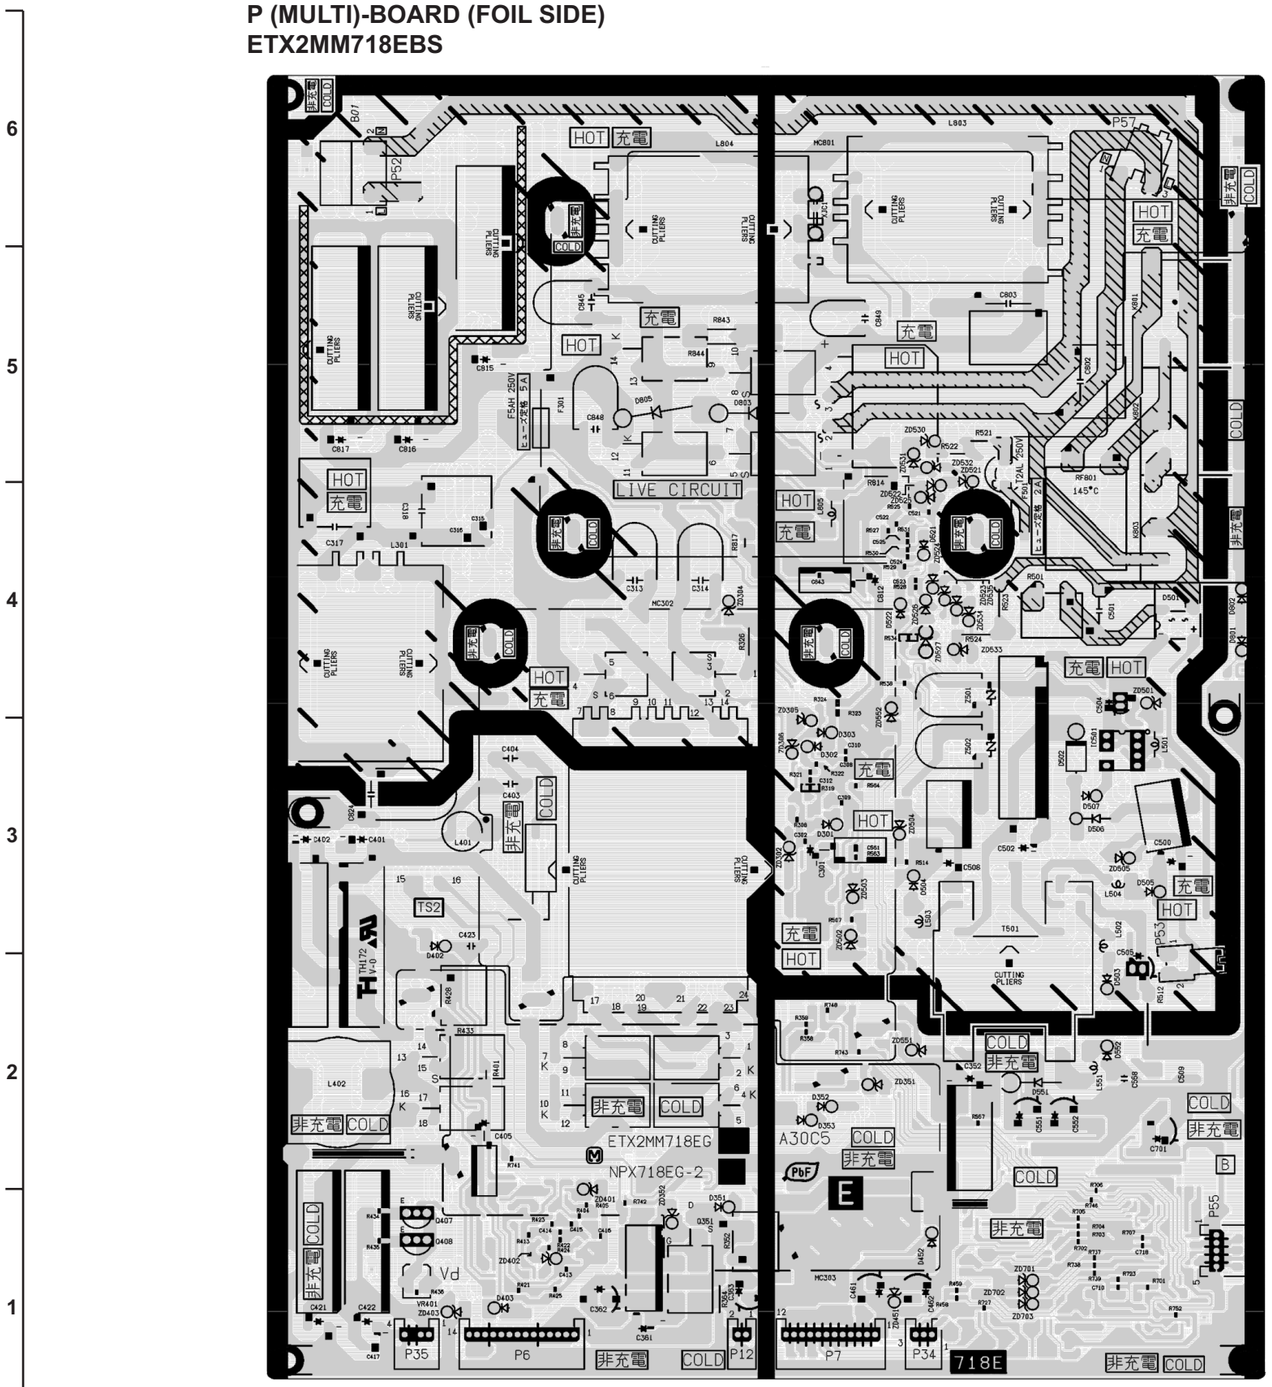


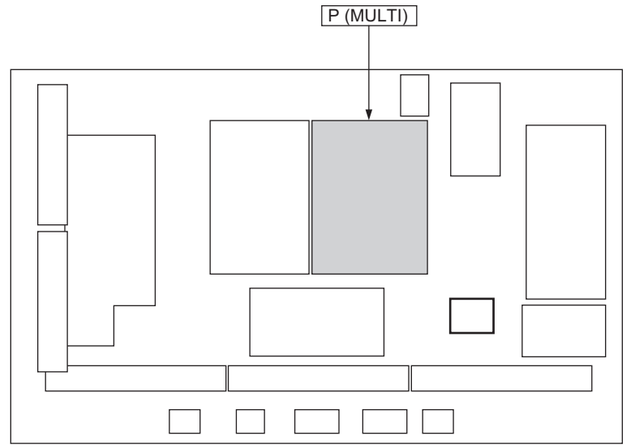


Parts Location

P (MULTI)-BOARD (FOIL SIDE)			
IC		**TRANSISTOR**	
IC501	E-3	Q351 Q407 Q408	C-1 B-1 B-1
MODULE			
MC302 MC303 MC801	C-4 D-1 D-6	**RESISTOR**	
		VR401	B-1

P (MULTI)-BOARD (COMPONENT SIDE)
ETX2MM718EBS

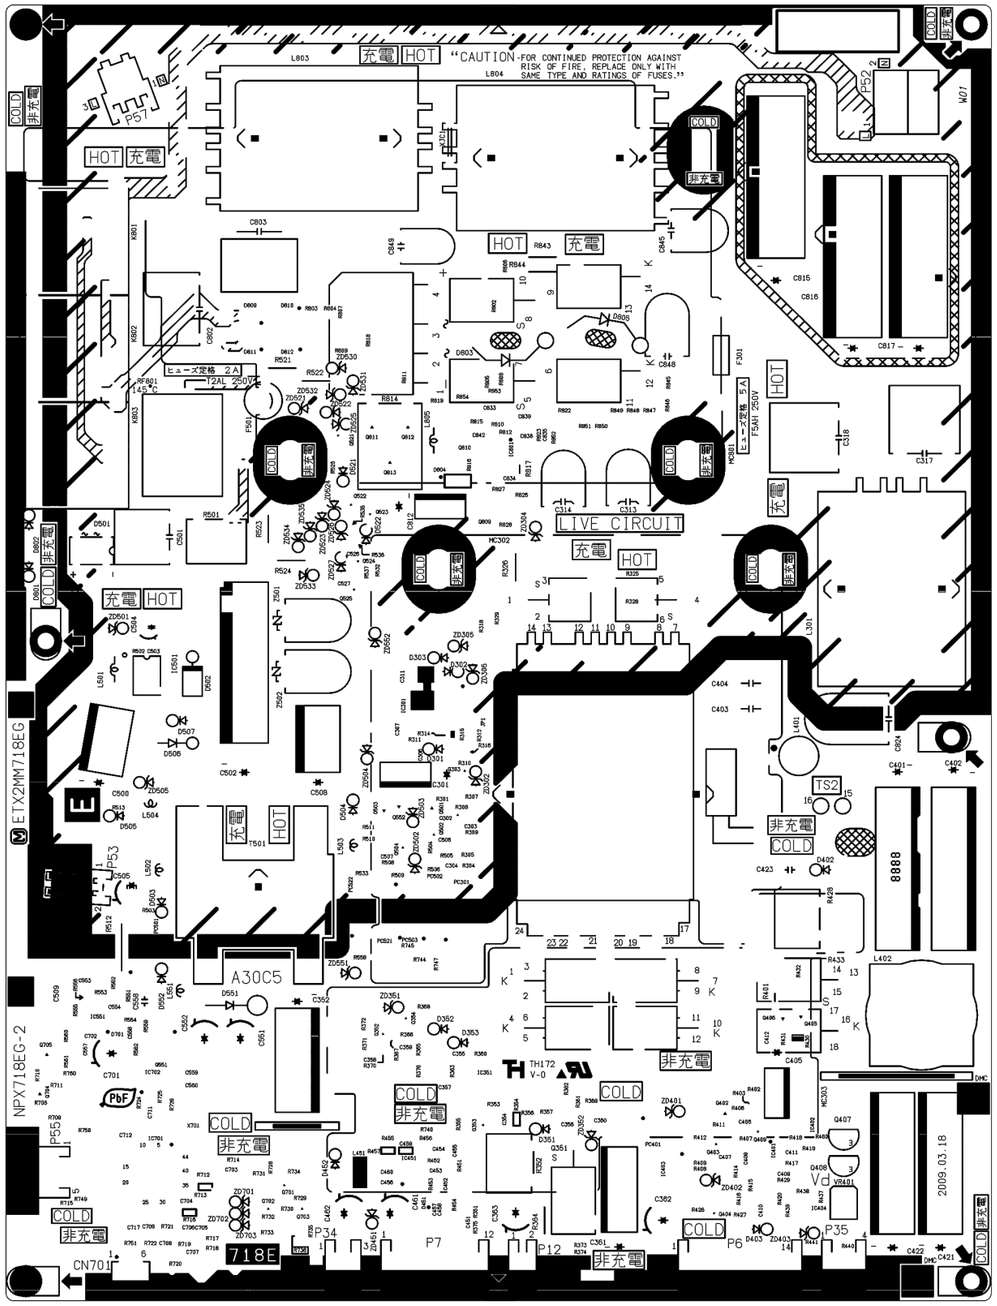

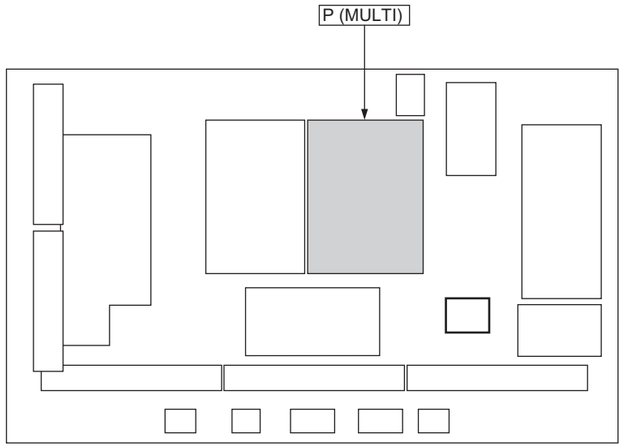


Parts Location


P (MULTI)-BOARD (COMPONENT SIDE)			
IC		**TRANSISTOR**	
IC301	C-3	Q302	C-3
IC351	D-2	Q303	C-3
IC401	E-1	Q351	D-1
IC402	E-1	Q352	C-2
IC403	D-1	Q353	C-1
IC404	E-1	Q354	C-2
IC451	C-1	Q402	E-2
IC501	B-3	Q403	E-1
IC551	B-2	Q404	E-1
IC701	B-1	Q405	E-2
IC702	B-2	Q406	E-2
IC801	D-4	Q407	E-1
MODULE		Q408	E-1
MC302	D-4	Q409	E-1
MC303	E-2	Q501	C-3
MC801	E-4	Q502	C-3
OPTOISOLATOR		Q503	C-3
PC301	C-3	Q504	C-3
PC401	D-1	Q521	C-4
PC501	B-2	Q522	C-4
PC502	C-3	Q523	C-4
PC503	C-2	Q524	C-4
PC521	C-2	Q525	C-4
PC522	C-2	Q551	B-2
		Q552	C-3
		Q701	C-1
		Q702	C-1
		Q703	C-1
		Q704	B-2
		Q705	B-2
		Q809	D-4
		Q810	C-4
		Q811	C-4
		Q812	C-4
		Q813	C-4
		TRANSISTOR	
		VR401	E-1


13.2.3. P(FILTER)-Board

P (FILTER)-BOARD (FOIL SIDE)
ETX2MM718ECS

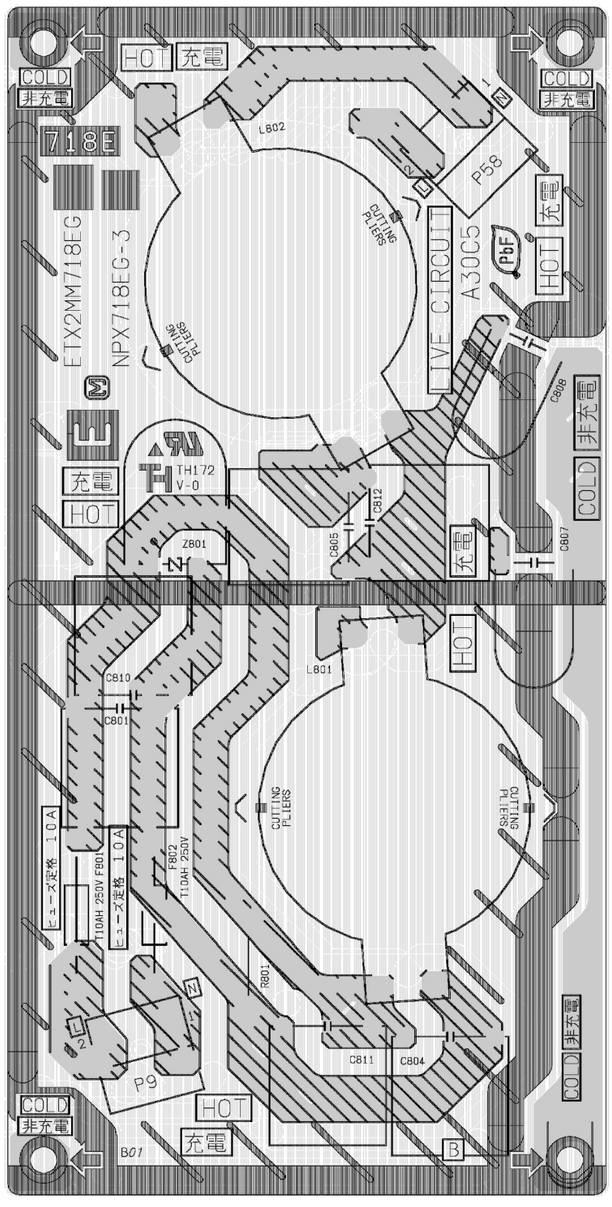

P (FILTER)-BOARD (COMPONENT SIDE)
ETX2MM718ECS

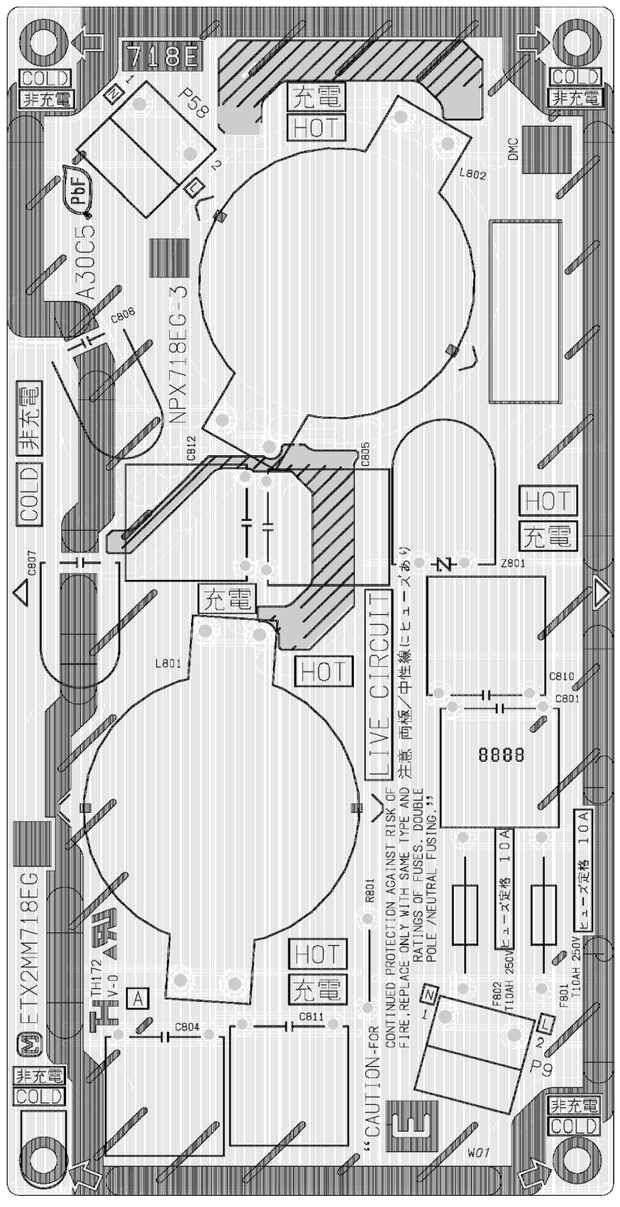

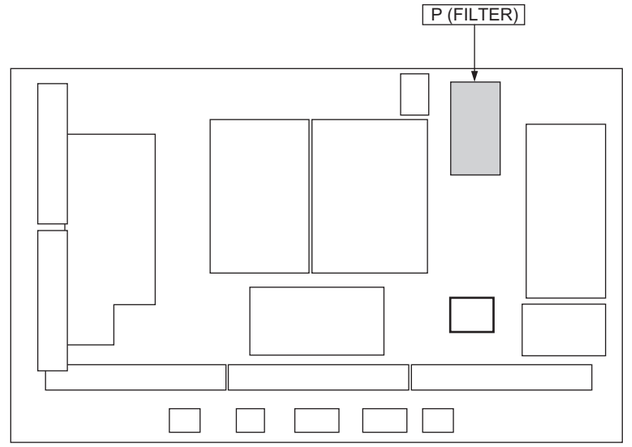


13.2.4. GH and PB-Board

Parts Location


GH-BOARD					
IC		**TEST POINT**		TP3913	B-3
IC3901	D-2	TP3901	C-3	TP3914	B-4
IC3902	D-3	TP3902	C-2	TP3915	A-3
IC3904	D-2	TP3903	B-3	TP3916	A-3
IC3905	A-2	TP3904	B-3	TP3917	A-3
IC3906	B-4	TP3905	B-3	TP3918	A-3
TRANSISTOR		TP3906	A-3	TP3919	A-3
Q3901	C-3	TP3907	B-3	TP3920	A-3
Q3904	B-3	TP3908	B-3	TP3921	A-3
Q3905	C-3	TP3909	B-3	TP3922	A-3
Q3906	B-4	TP3910	B-3	TP3923	A-3
		TP3911	B-3	TP3924	A-3
		TP3912	B-3	TP3925	A-3

Parts Location


PB-BOARD			
IC		**TEST POINT**	
IC5900	H-2	TP5900	F-2
IC5901	H-2	TP5901	G-2
IC5902	H-3	TP5902	F-2
IC5903	H-4	TP5903	G-2
		TP5904	F-2
		TP5905	F-2
		TP5906	F-2
		TP5907	G-2
		TP5908	F-2
		TP5910	F-3
		TP5911	F-3
		TP5912	G-3
		TP5913	G-3
		TP5914	G-2
		TP5915	F-2

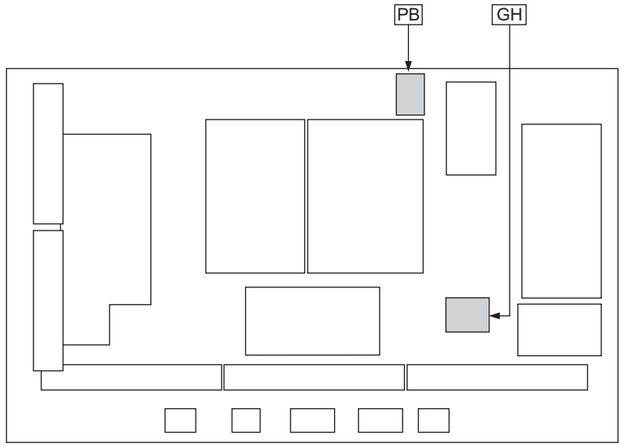


GH-BOARD (FOIL SIDE)
TXNGH1DKUM

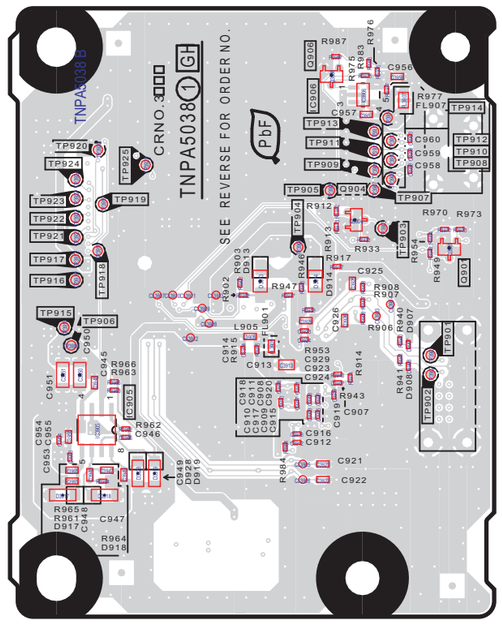


GH-BOARD (COMPONENT SIDE)
TXNGH1DKUM

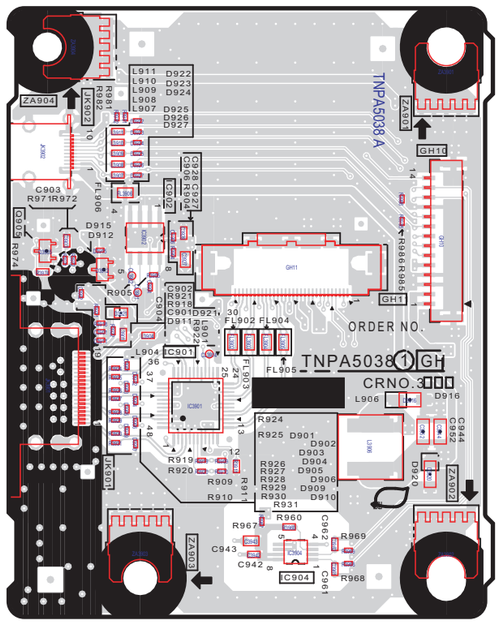

PB-BOARD (FOIL SIDE)
TNPA4864AE

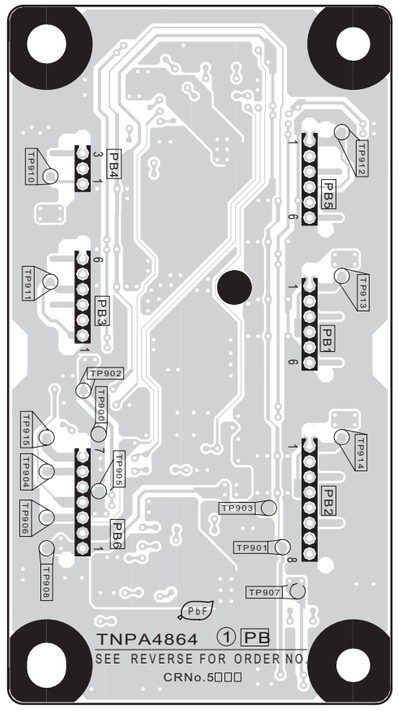


PB-BOARD (COMPONENT SIDE)
TNPA4864AE

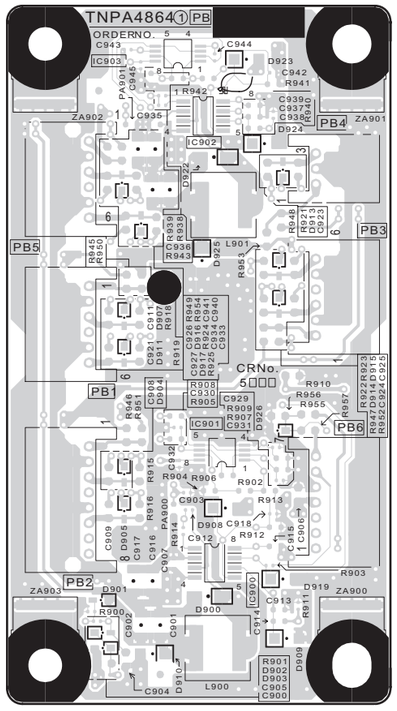



13.2.5. GL, KA, J, S and SG-Board

J-BOARD (FOIL SIDE)
TNPA4944

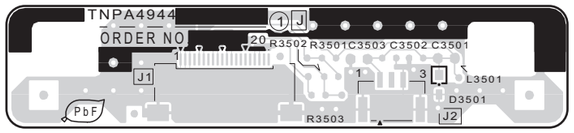

GL-BOARD (FOIL SIDE)
TNPA4693AF

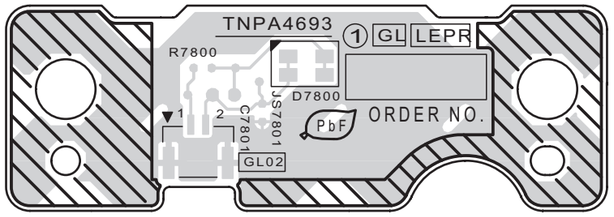


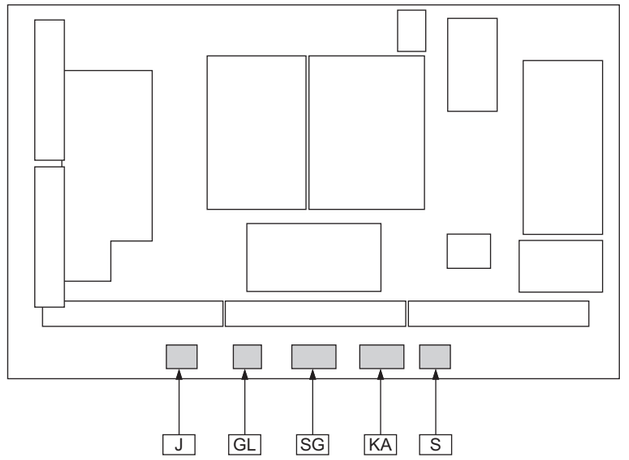


J-BOARD (COMPONENT SIDE)
TNPA4944




GL-BOARD (COMPONENT SIDE)
TNPA4693AF

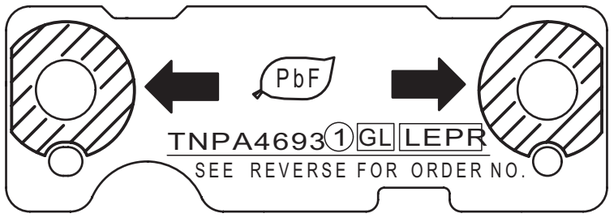


SG-BOARD (FOIL SIDE)
TNPA4860AB

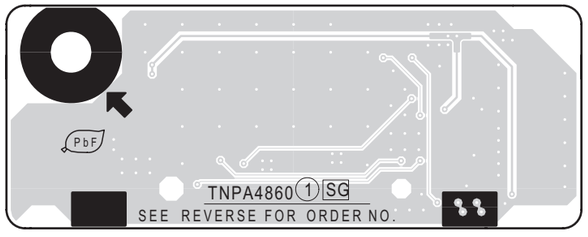


KA-BOARD (FOIL SIDE)
TNPA4862

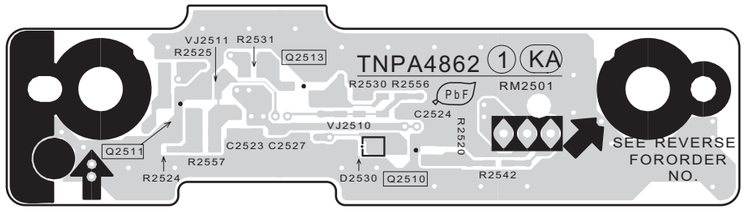


S-BOARD (FOIL SIDE)
TNPA4863

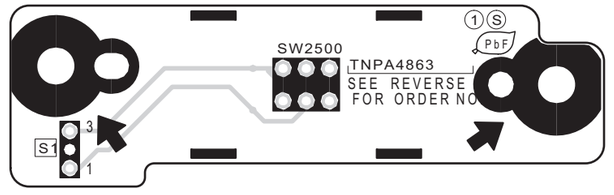


SG-BOARD (COMPONENT SIDE)
TNPA4860AB

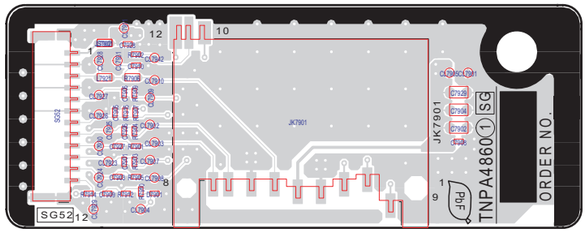

KA-BOARD (COMPONENT SIDE)
TNPA4862

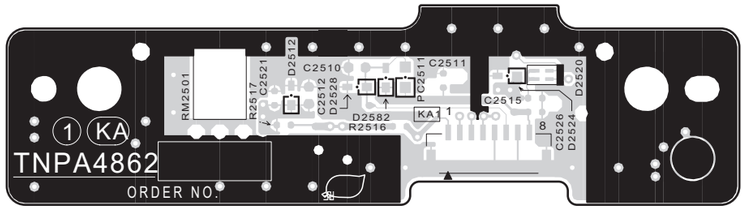



S-BOARD (COMPONENT SIDE)
TNPA4863

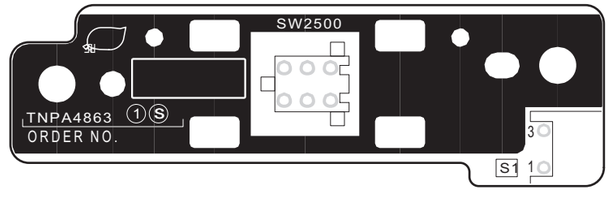

13.2.6. DA-Board

DA-BOARD (FOIL SIDE)
TZTNP02DKUM

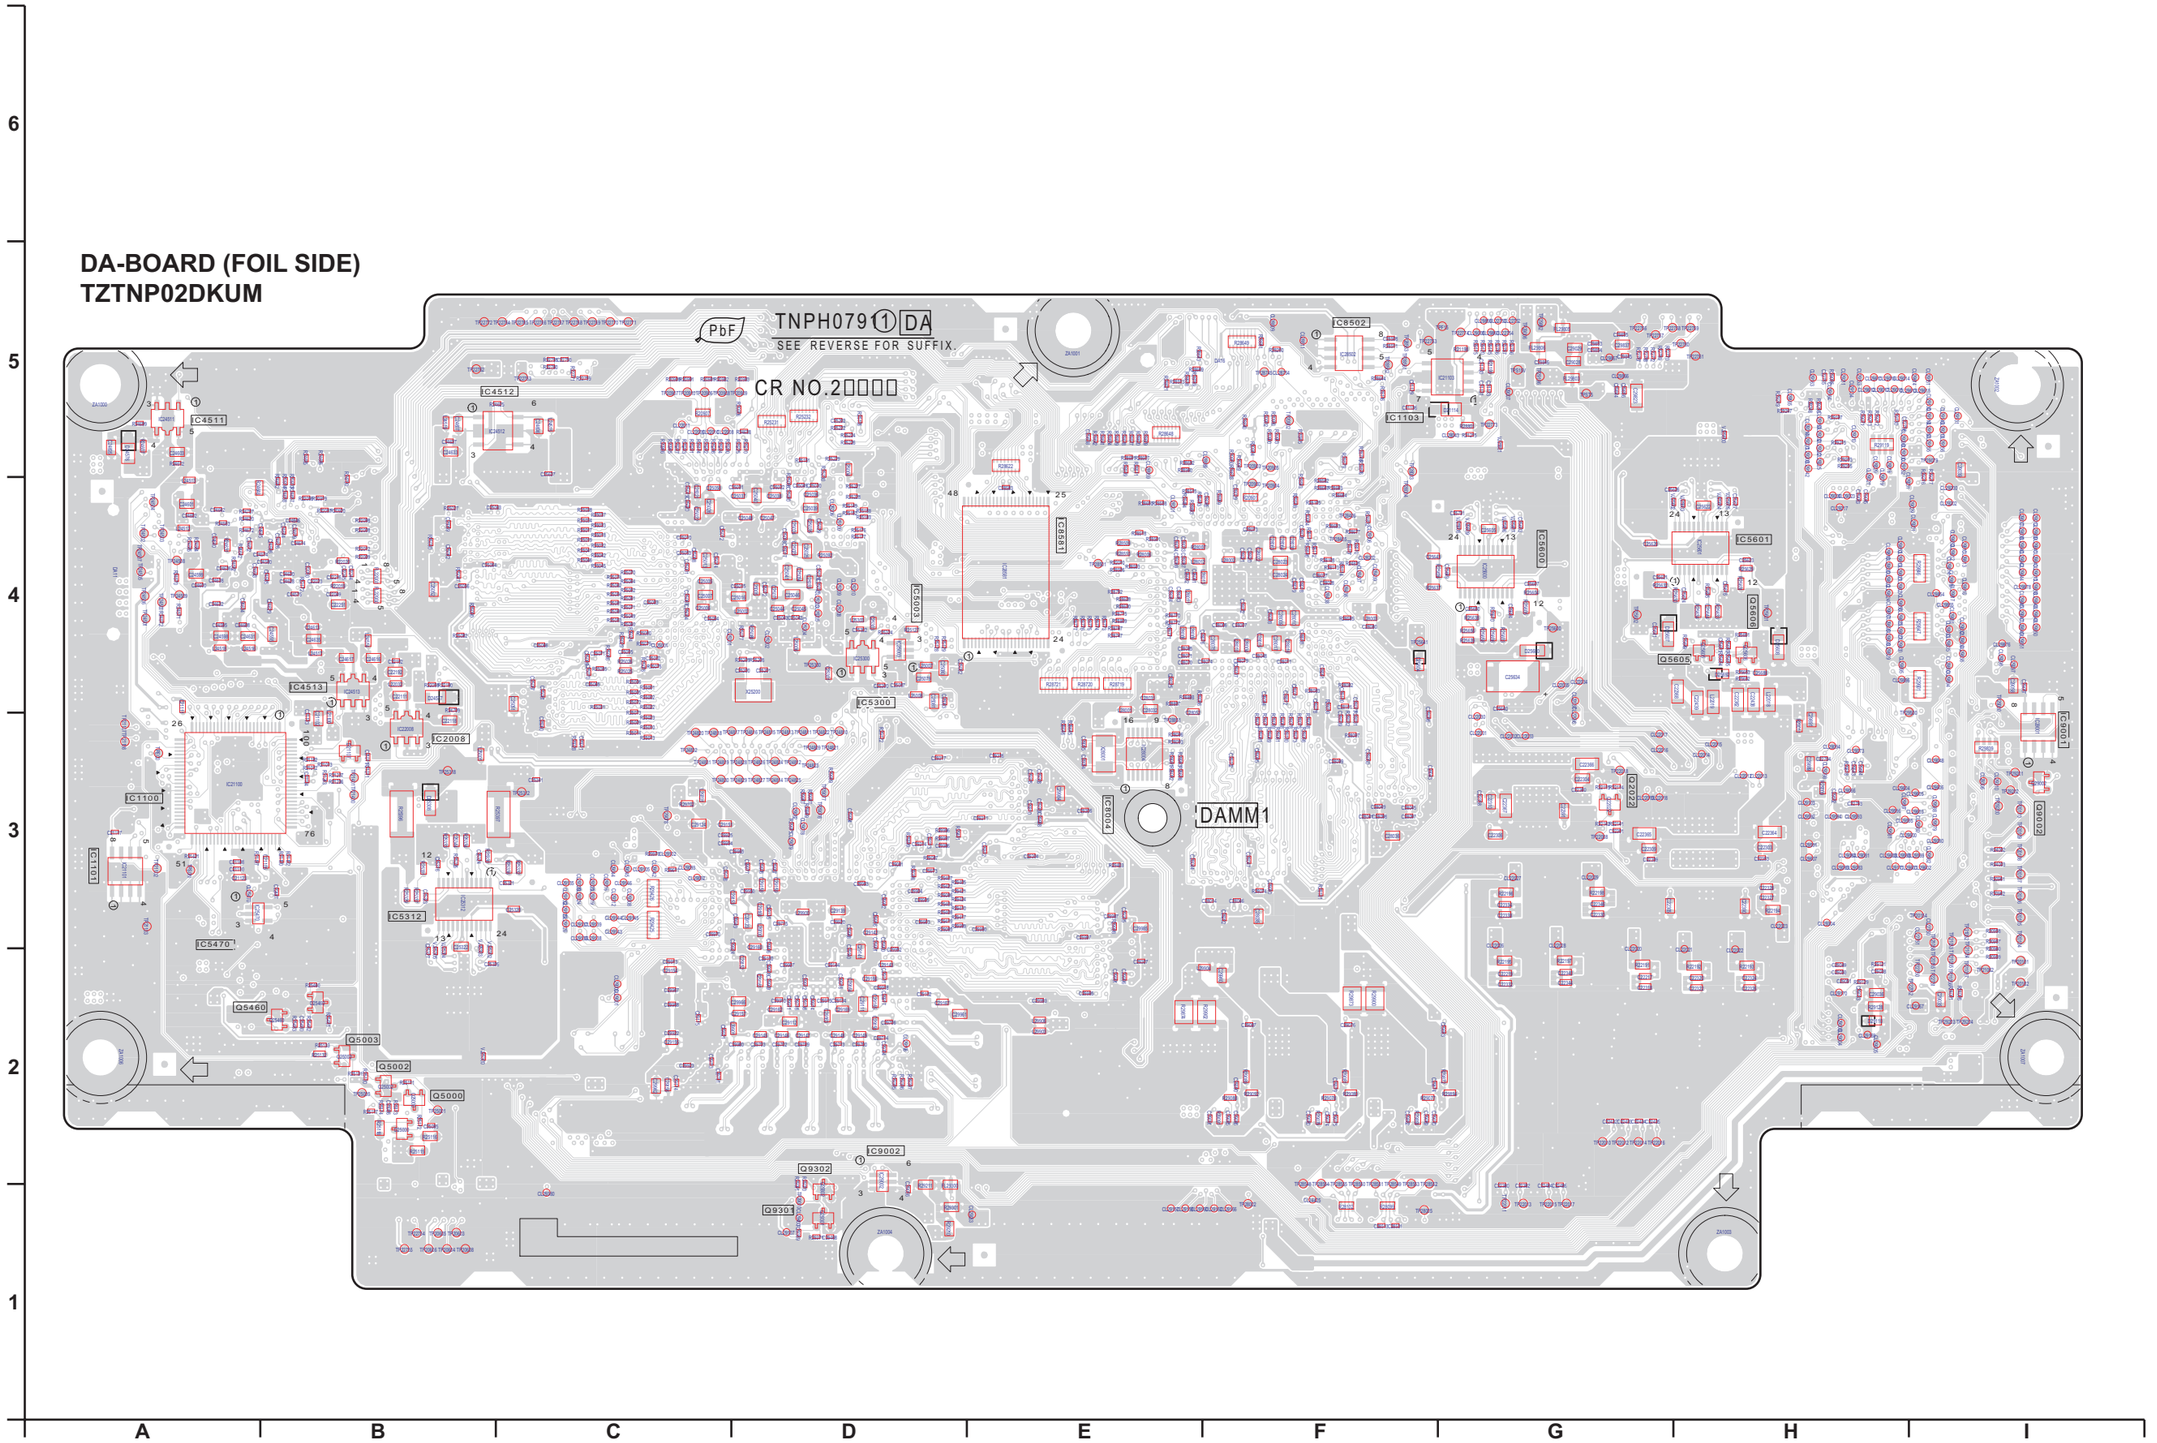

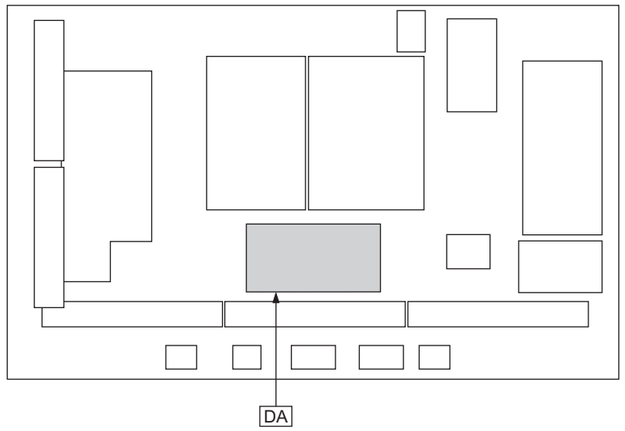

Parts Location

DA-BOARD (FOIL SIDE)


IC		TRANSISTOR		TEST POINT	
IC21100	A-3	Q22022	G-3	TP20101	I-2
IC21101	A-3	Q25000	B-2	TP20102	I-2
IC21103	G-5	Q25002	B-2	TP20104	I-3
IC22008	B-3	Q25003	B-2	TP20105	I-3
IC24511	A-5	Q25460	B-2	TP20106	I-3
IC24512	C-5	Q25605	H-4	TP20107	I-3
IC24513	B-4	Q25606	H-4	TP20108	I-3
IC25003	D-4	Q29002	I-3	TP20109	I-3
IC25300	D-4	Q29301	D-1	TP20110	I-3
IC25312	B-3	Q29302	D-1	TP20154	I-3
IC25470	A-3			TP20155	I-2
IC25600	G-4			TP20603	B-1
IC25601	H-4			TP20604	B-1
IC28004	E-3			TP20605	B-1
IC28502	F-5			TP20606	B-1
IC28581	E-4			TP20608	B-1
IC29001	I-3			TP20900	F-4
IC29002	D-2			TP20902	F-5
				TP20903	F-5
				TP20904	F-4
				TP20905	F-5
				TP20906	C-5
				TP20907	C-5
				TP20908	C-5
				TP20909	D-5
				TP20910	C-5
				TP21052	I-3
				TP21053	I-3
				TP21054	I-2
				TP21055	I-2
				TP21056	I-2
				TP21057	I-2
				TP21058	I-3
				TP21062	I-2
				TP21102	A-3
				TP21103	A-3
				TP21107	A-3
				TP21108	A-3
				TP21400	B-3
				TP21401	B-3
				TP22008	G-3
				TP22010	G-2
				TP22011	G-1
				TP22012	G-2
				TP22013	G-1
				TP22014	G-2
				TP22015	G-1
				TP22016	G-2
				TP22017	G-1
				TP22018	G-3
				TP22750	I-2
				TP22751	I-2
				TP22752	I-2
				TP22753	F-5
				TP22754	B-1
				TP22755	B-1
				TP22756	G-5
				TP22757	G-5
				TP22758	G-5
				TP22759	H-5
				TP22760	H-5
				TP22761	H-5
				TP22762	B-5
				TP22763	C-5
				TP22764	C-5
				TP22765	C-5
				TP22766	C-5
				TP22767	C-5
				TP22768	C-5
				TP22769	C-5
				TP22770	C-5
				TP22771	C-5
				TP22772	B-5
				TP22773	G-5
				TP22774	G-5
				TP24500	A-4
				TP24501	A-4
				TP24502	A-4
				TP24503	A-4
				TP24504	A-4
				TP24505	A-4
				TP24506	A-4
				TP24507	A-4
				TP24508	A-4
				TP24509	A-4
				TP24809	D-3
				TP24810	D-3
				TP24811	D-3
				TP24812	D-3
				TP24813	D-3
				TP24814	D-3
				TP24815	D-3
				TP24816	D-3
				TP24817	C-3
				TP24818	C-3
				TP24819	C-3
				TP24820	C-3
				TP24821	D-3
				TP24822	D-3
				TP24823	D-3
				TP24824	D-3
				TP24825	D-3
				TP24826	D-3
				TP24827	D-3
				TP24828	D-3
				TP24829	D-3
				TP24830	C-3
				TP24831	C-3
				TP24832	C-3
				TP25000	B-2
				TP25001	B-2
				TP25300	D-4
				TP25312	C-3
				TP25318	B-3
				TP25600	G-4
				TP25601	H-4
				TP25602	G-4
				TP25641	F-4
				TP28002	F-1
				TP28003	F-5
				TP28004	F-4
				TP28005	F-1
				TP28405	F-4
				TP28406	F-4
				TP28501	E-4
				TP28548	F-1
				TP28549	F-1
				TP28550	F-1
				TP28551	F-1
				TP28552	F-1
				TP28553	F-1
				TP28554	F-1
				TP28555	F-1
				TP28561	F-5
				TP28562	F-5
				TP28563	F-5
				TP28745	F-5
				TP28851	E-3
				TP29000	I-4
				TP29006	G-5
				TP29010	D-1
				TP29076	D-3
				TP29077	D-3
				TP29078	C-3
				TP29079	I-5
				TP29196	G-5
				TP29200	I-3
				TP29201	I-3
				TP29202	I-3
				TP29203	I-2
				TP29204	I-2
				TP29500	H-3
				TP29862	G-5
				TPEC0	A-3
				TPF15	G-5
				TPS0N	A-3
				TPS15V	G-5
				TPST5	G-5

Parts Location


DA-BOARD (COMPONENT SIDE)

IC		TRANSISTOR		TEST POINT	
IC21000	A-2	Q20903	I-4	TP28000	E-5
IC22301	B-3	Q20904	H-4	TP28001	E-5
IC22302	C-3	Q20905	I-4	TP29311	B-3
IC24510	H-4	Q24400	D-2	TP29312	B-3
IC25001	H-4	Q24401	D-2		
IC25002	G-4	Q25001	H-3		
IC25100	F-4	Q25312	G-2		
IC25110	E-4	Q25318	H-2		
IC25480	H-2	Q25600	C-4		
IC28001	D-4	Q25601	B-4		
IC28002	D-3	Q25602	B-4		
IC28003	D-3	Q26601	C-4		
IC28580	E-4	Q29000	B-3		
IC28582	E-4	Q29001	B-3		
IC29003	B-5	Q29003	A-3		
IC29004	B-2	Q29004	A-3		
IC29300	F-2	Q29807	B-4		
IC29303	G-3				
IC29500	B-3				
IC29802	A-4				
IC29803	A-4				
IC29805	D-2				
IC29806	C-2				
IC29807	D-2				
IC29808	B-4				
IC29809	A-4				
IC29902	E-3				
IC29903	E-3				


DA-BOARD (COMPONENT SIDE)
TZTNP02DKUM

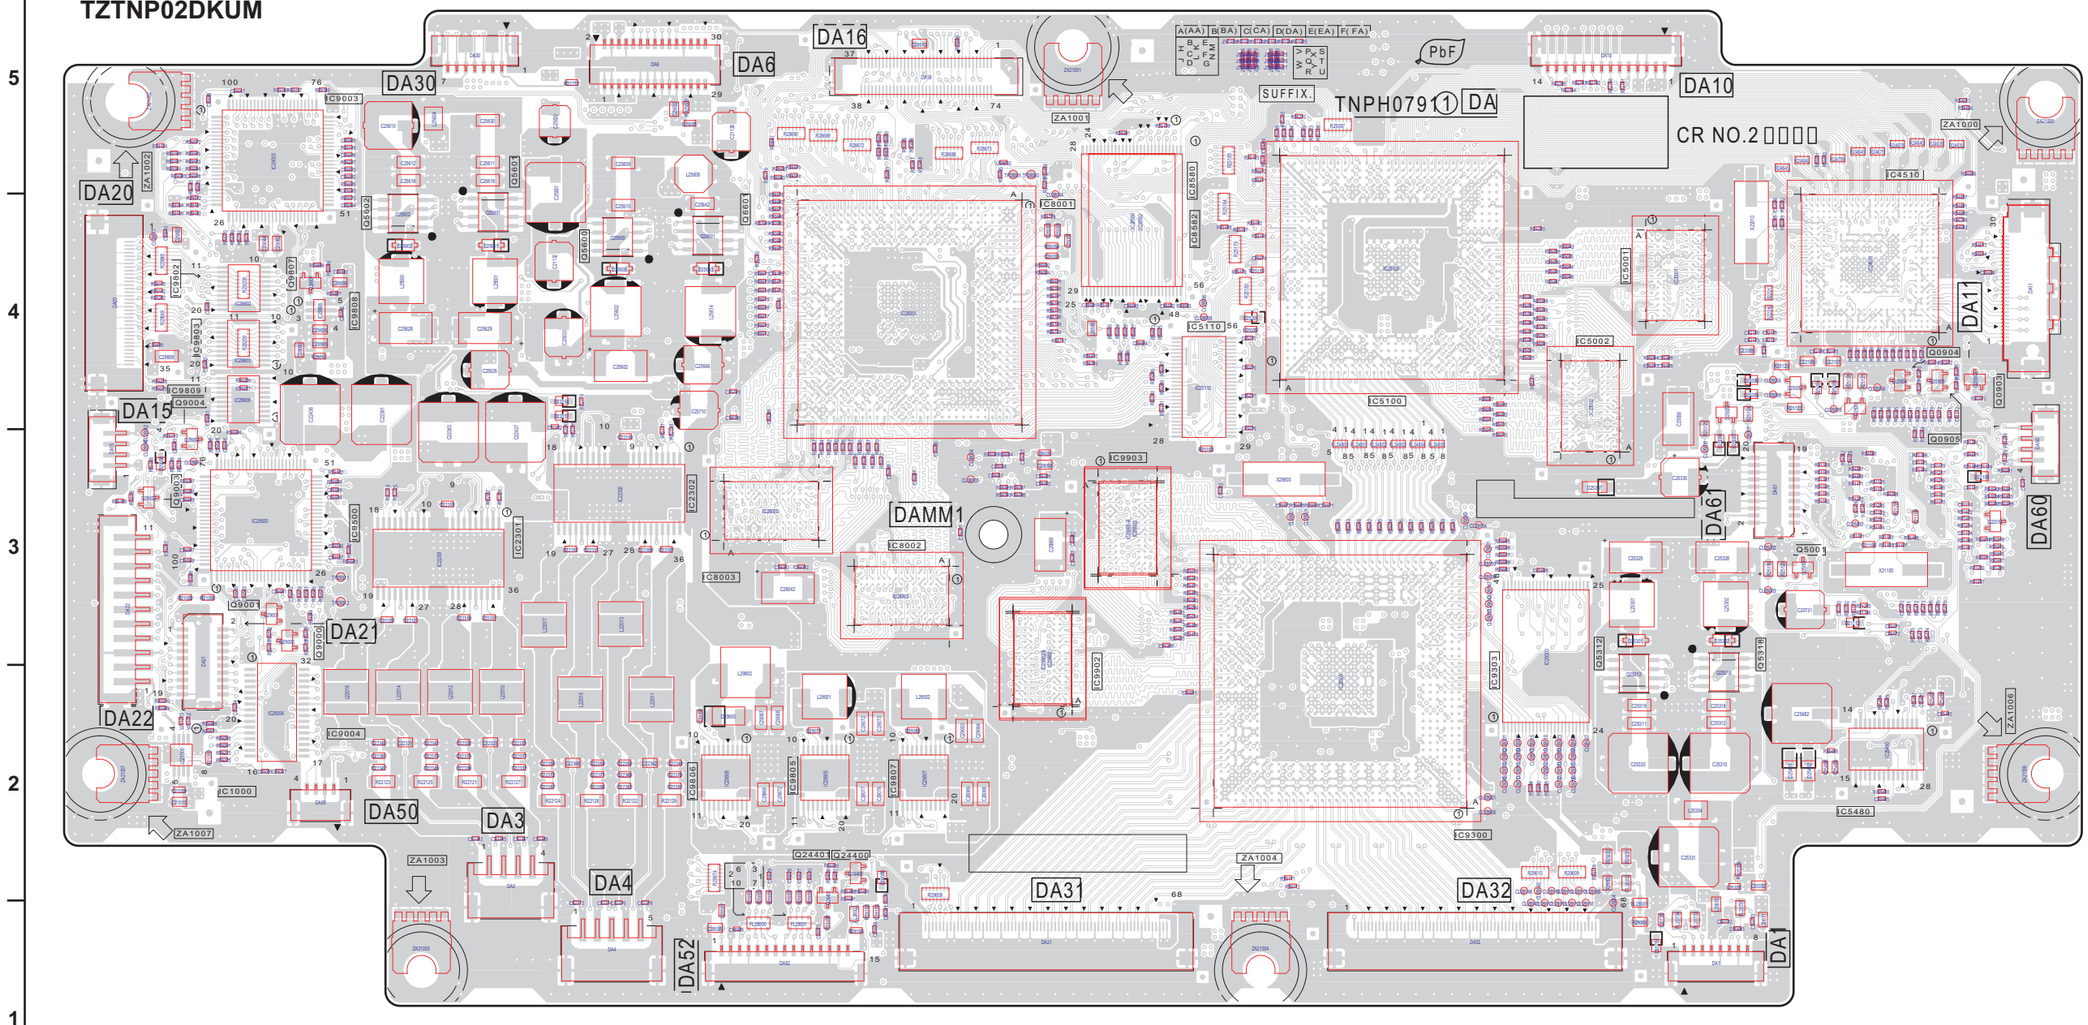


13.2.7. C1-Board

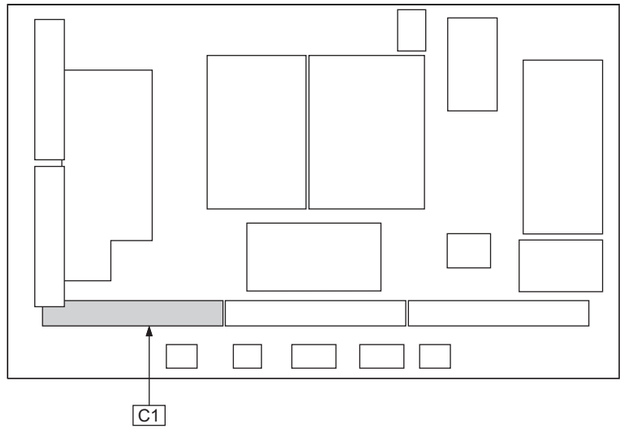


C1-BOARD (FOIL SIDE)
TNPA4770AC

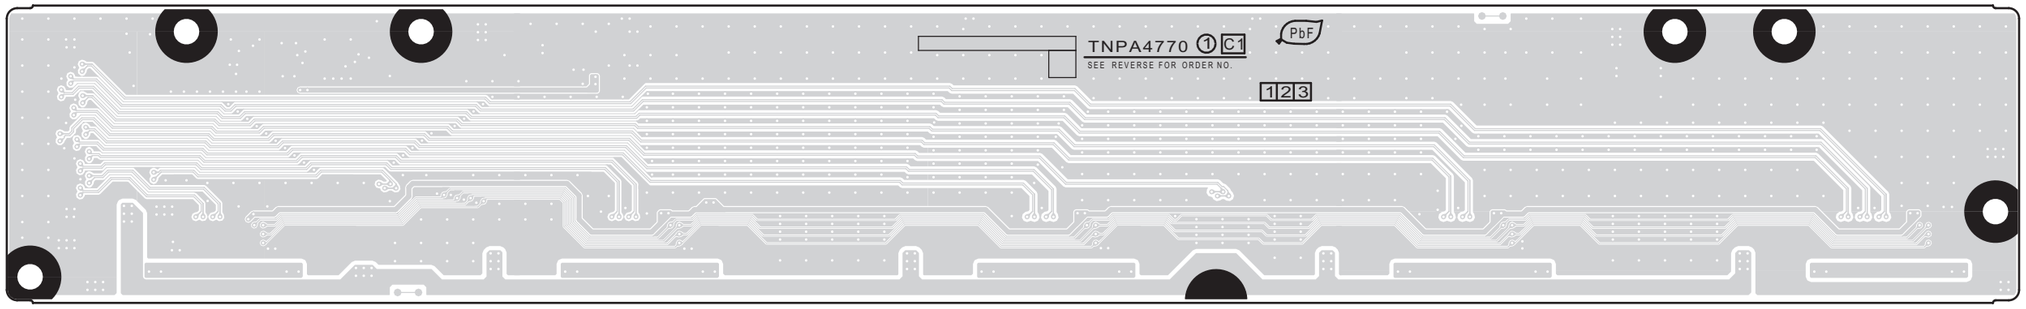

C1-BOARD (COMPONENT SIDE)
TNPA4770AC

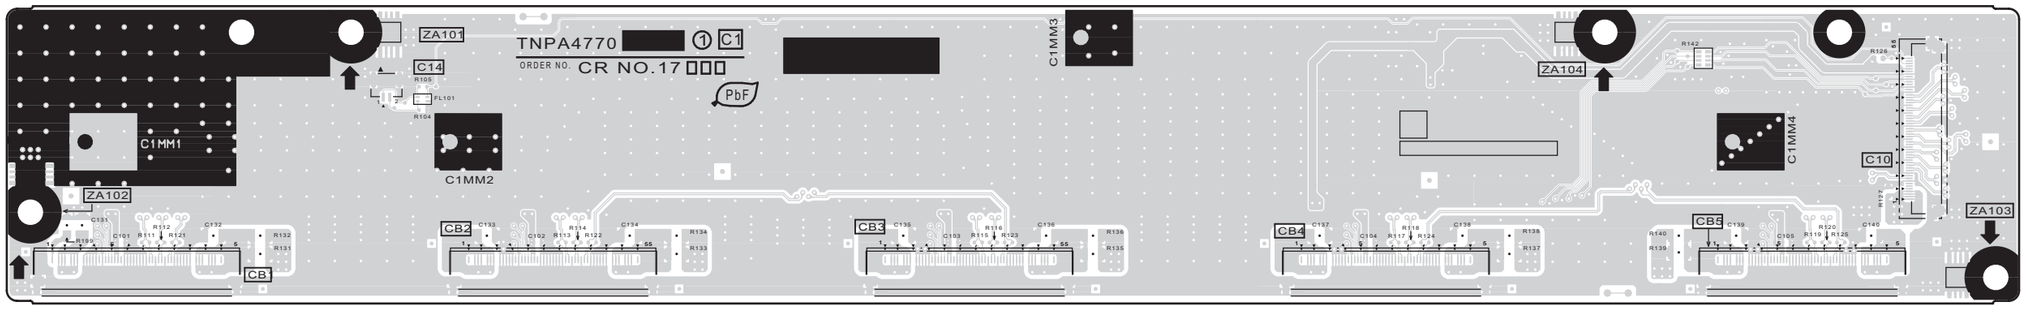


13.2.8. C2-Board

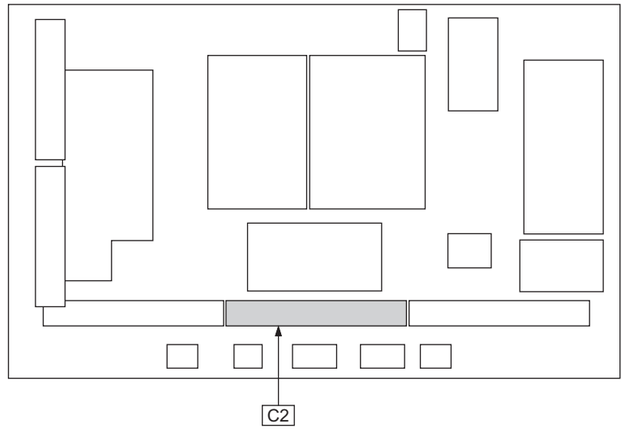


Parts Location

C2-BOARD	
IC	
IC17201	D-2
IC17202	G-2
IC17203	H-2
IC17211	H-3


C2-BOARD (FOIL SIDE)
TNPA4771AC

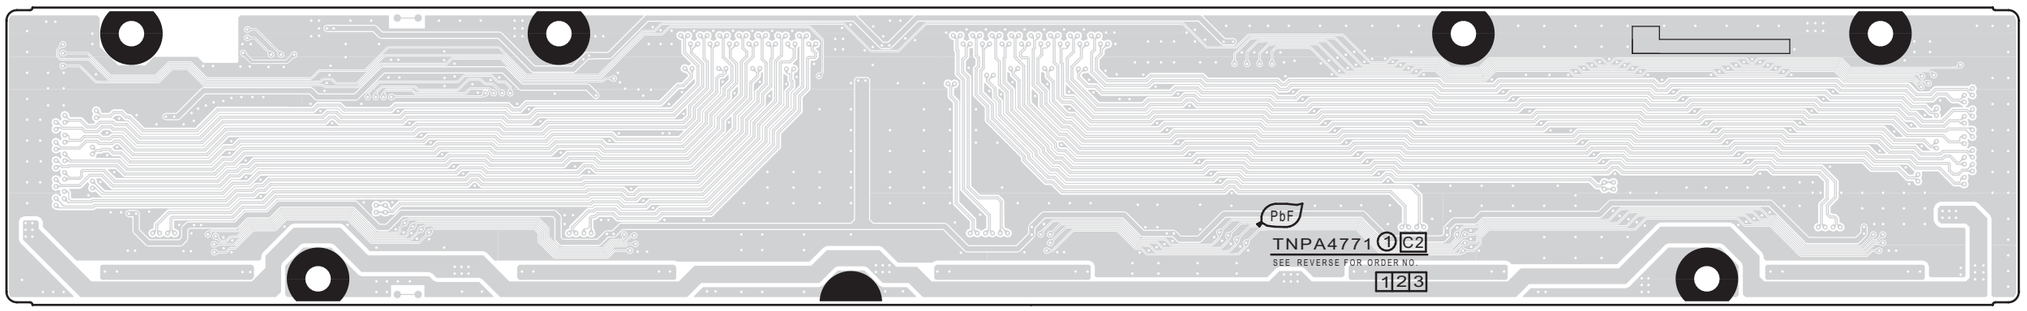


C2-BOARD (COMPONENT SIDE)
TNPA4771AC

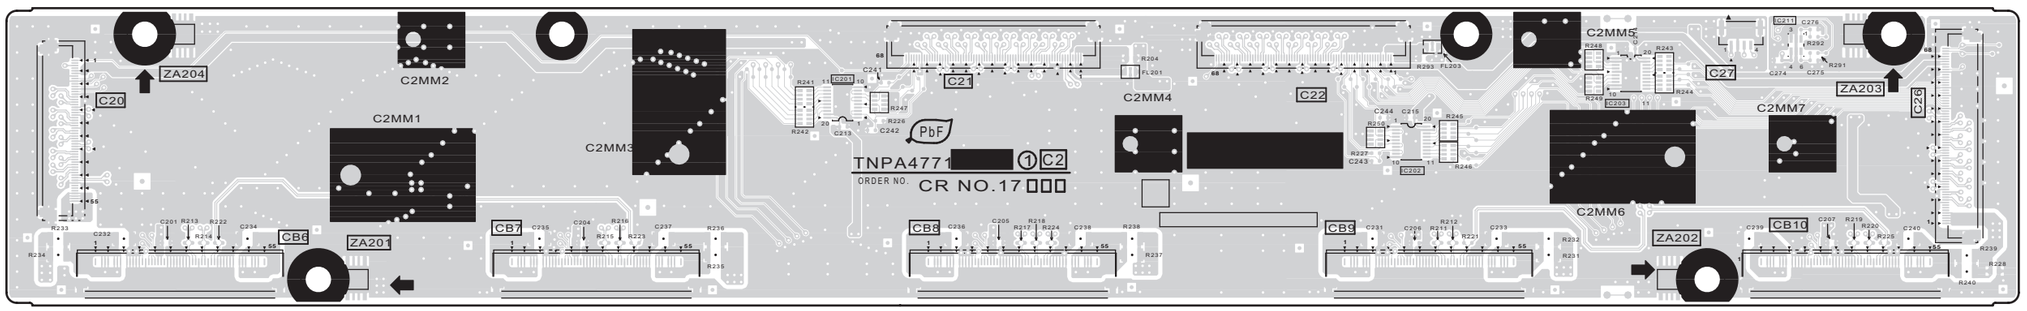


13.2.9. C3-Board

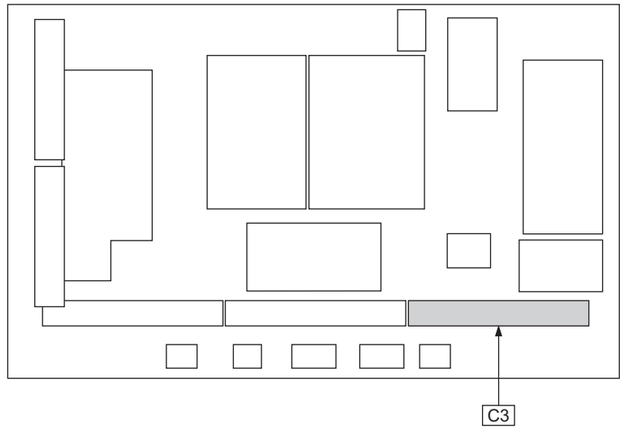

C3-BOARD (FOIL SIDE)
TNPA4772AC

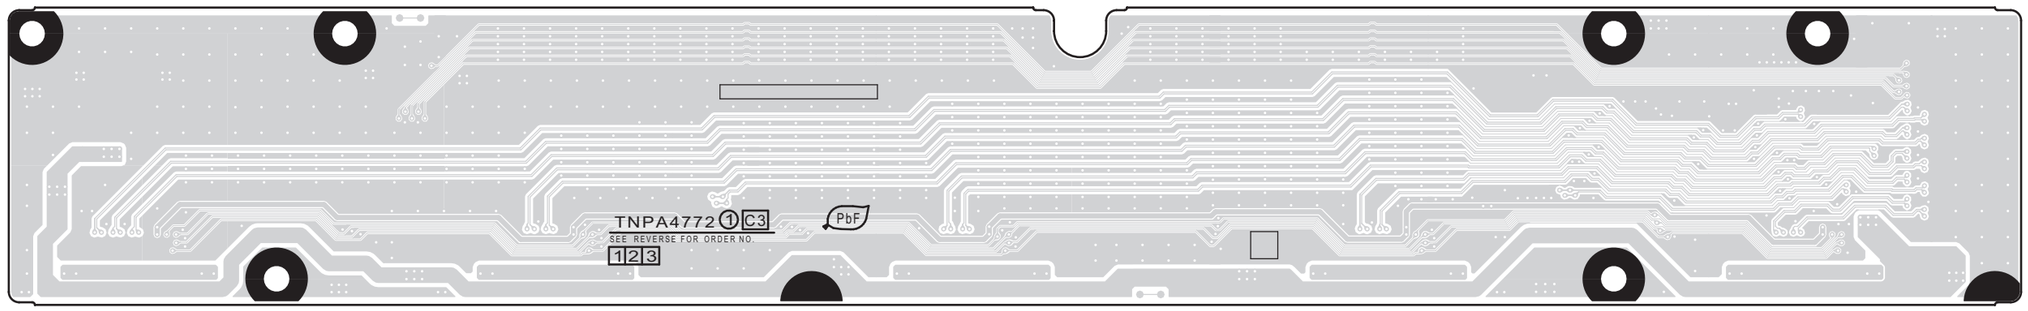



C3-BOARD (COMPONENT SIDE)
TNPA4772AC

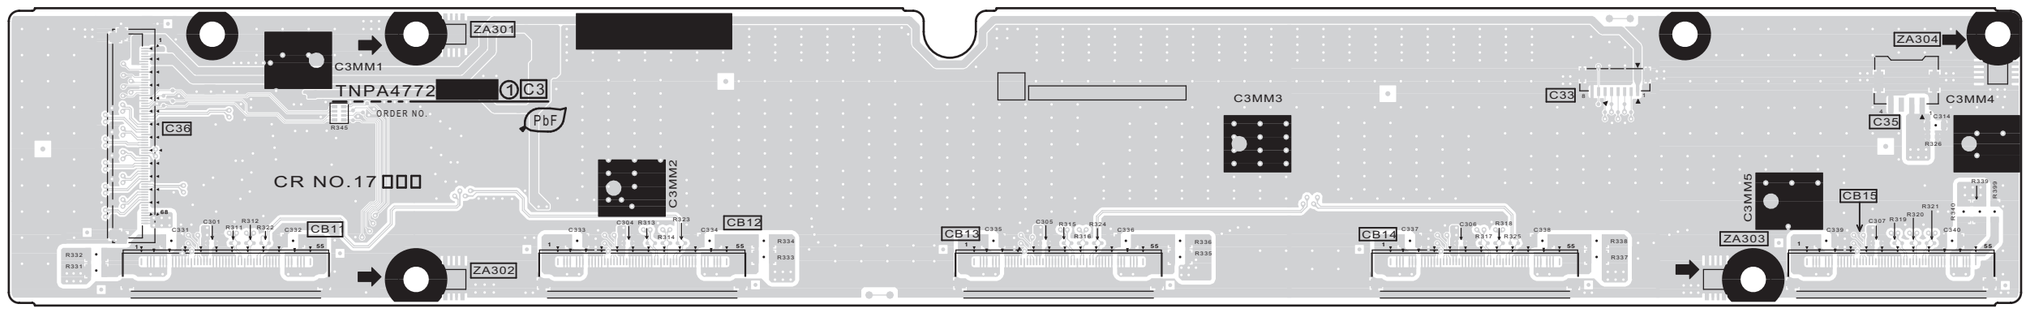

13.2.10. SC-Board

SC-BOARD (FOIL SIDE)
TNPA4840AF

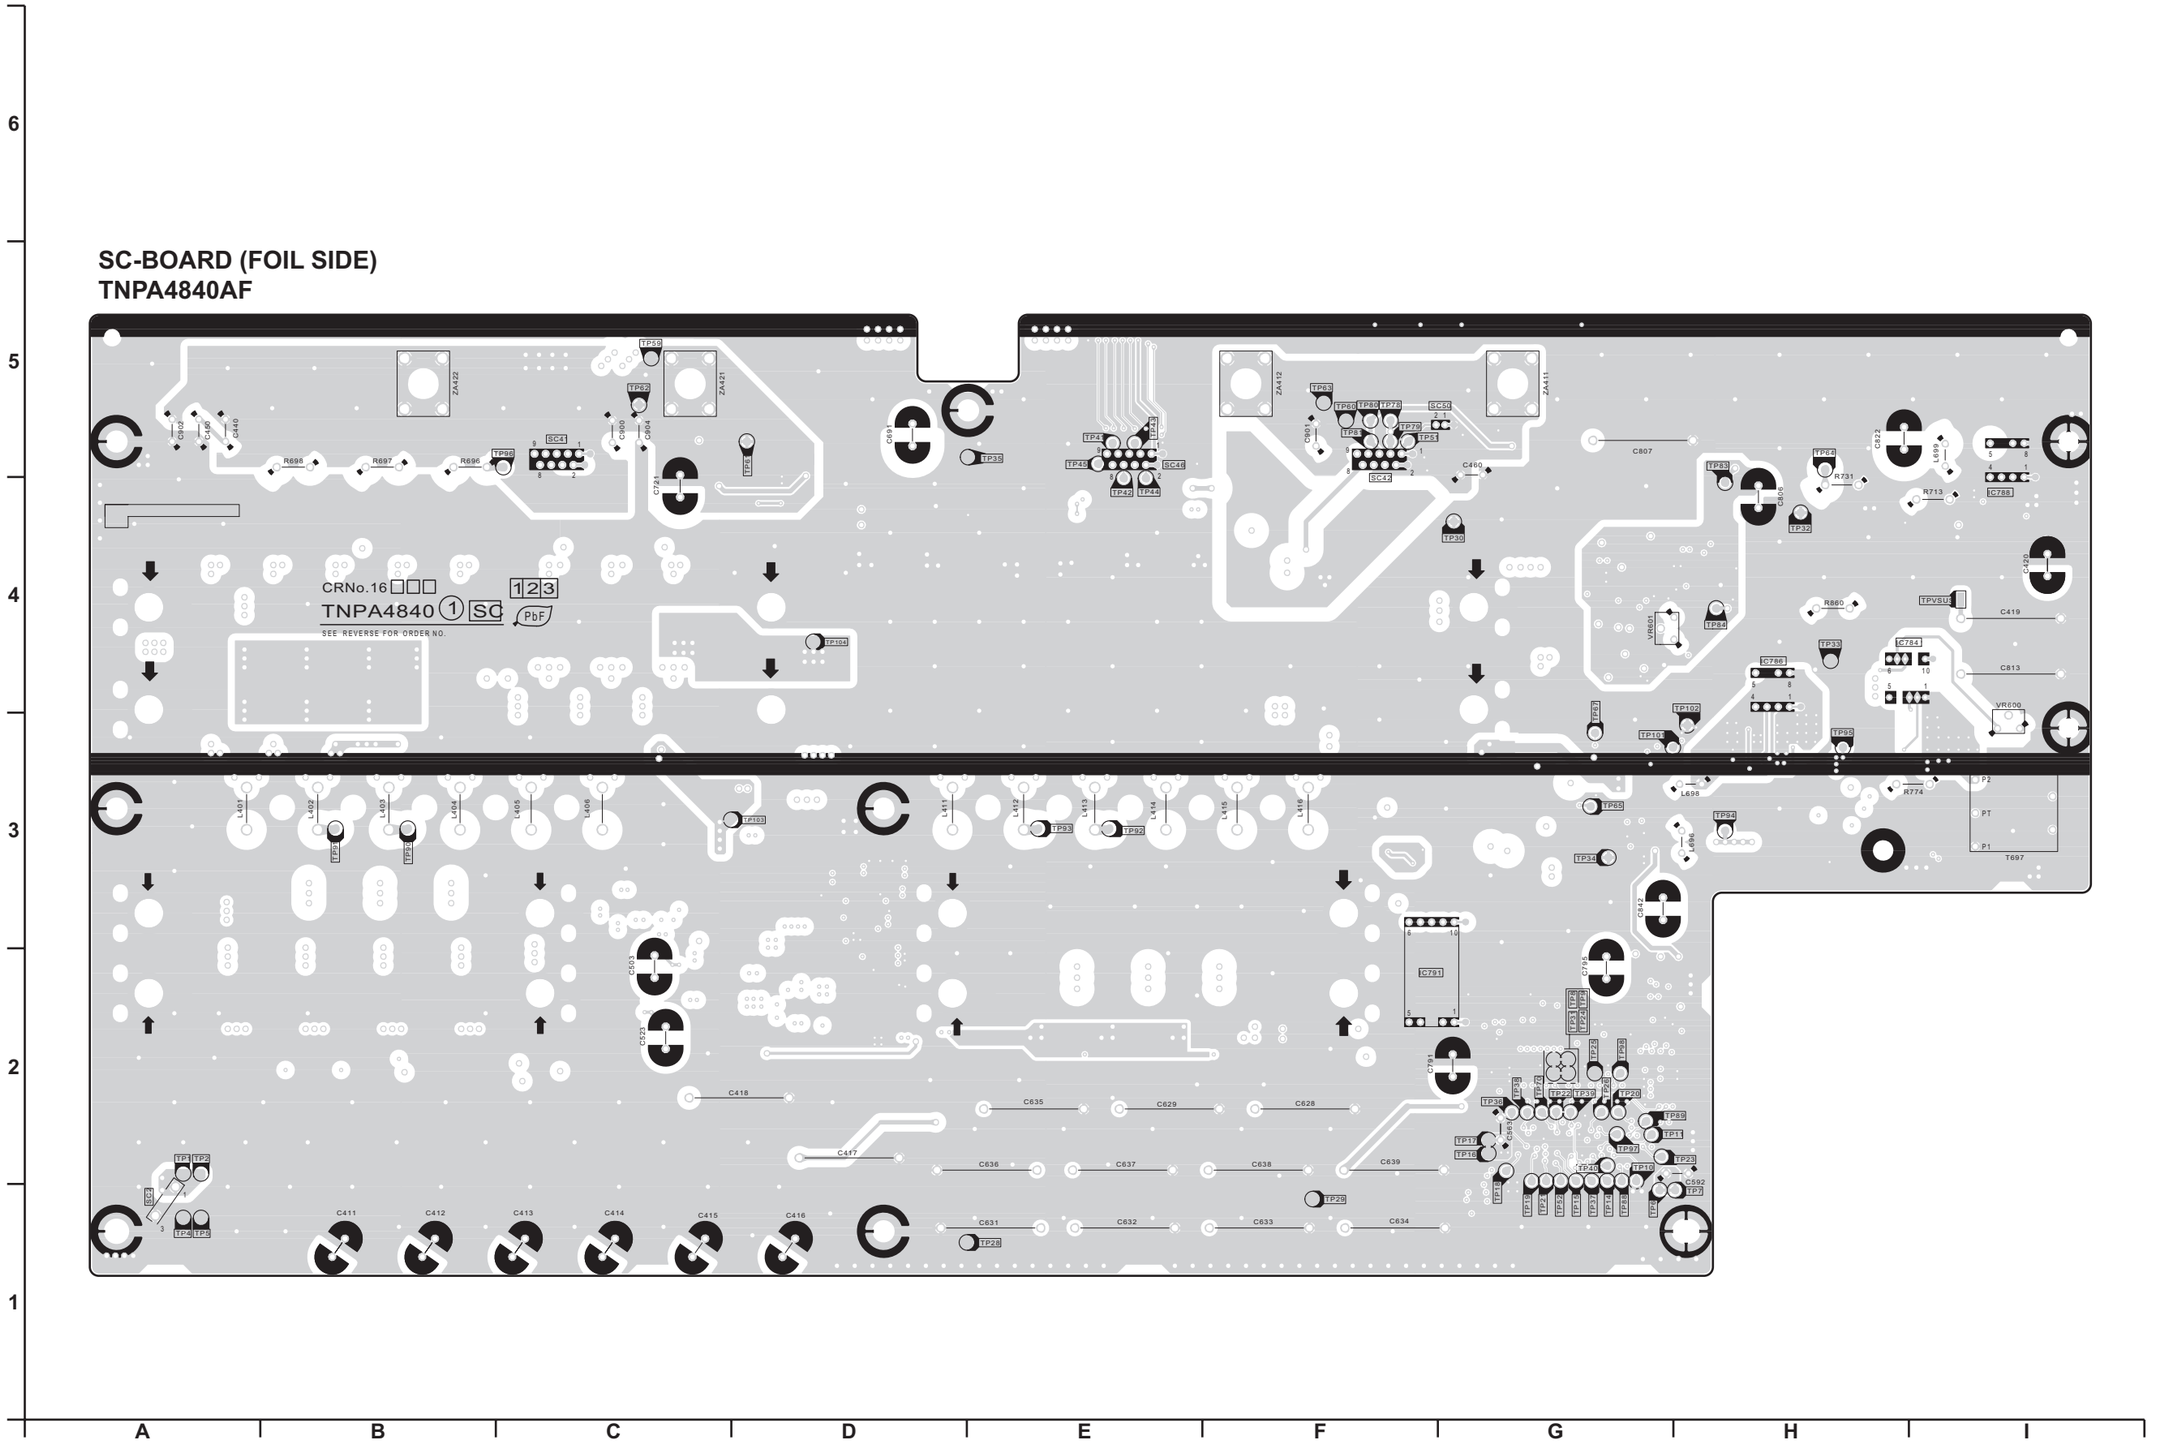

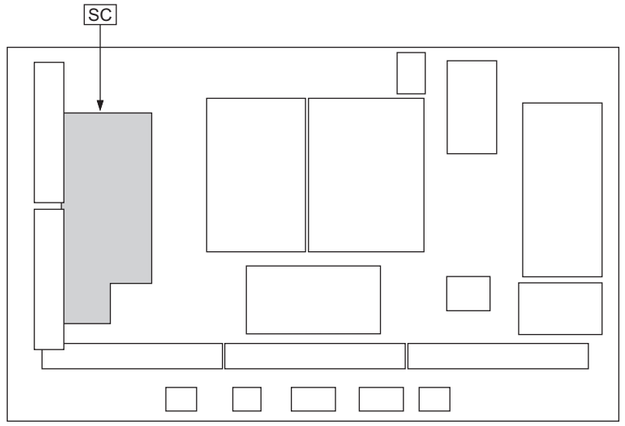

Parts Location

SC-BOARD (FOIL SIDE)


IC		TEST POINT			
IC16784	H-4	TP1	A-2	TP43	E-5
IC16786	H-4	TP2	A-2	TP44	E-4
IC16788	I-5	TP4	A-1	TP45	E-5
IC16791	F-2	TP5	A-1	TP51	F-5
		TP6	G-1	TP52	G-2
VOLUME		TP7	H-1	TP59	C-5
VR16600	I-3	TP8	G-2	TP60	F-5
VR16601	G-4	TP9	G-2	TP61	D-5
		TP10	G-2	TP62	C-5
		TP11	G-2	TP63	F-5
		TP14	G-2	TP64	H-5
		TP15	G-2	TP65	G-3
		TP16	G-2	TP67	G-3
		TP17	G-2	TP70	G-2
		TP18	G-2	TP78	F-5
		TP19	G-2	TP79	F-5
		TP20	G-2	TP80	F-5
		TP21	G-2	TP81	F-5
		TP22	G-2	TP83	H-4
		TP23	G-2	TP84	H-4
		TP24	G-2	TP88	B-2
		TP25	G-2	TP89	G-2
		TP26	G-2	TP90	B-3
		TP28	E-1	TP91	B-3
		TP29	F-1	TP92	E-3
		TP30	G-4	TP93	E-3
		TP31	G-2	TP94	H-3
		TP32	H-4	TP95	H-3
		TP33	H-4	TP96	C-5
		TP34	G-3	TP97	G-2
		TP35	E-5	TP98	G-2
		TP36	G-2	TP101	H-3
		TP37	G-2	TP102	H-3
		TP38	G-2	TP103	D-3
		TP39	G-2	TP104	D-4
		TP40	G-2	TPVSUS	I-4
		TP41	E-5		
		TP42	E-4		

Parts Location

SC-BOARD (COMPONENT SIDE)

IC		PHOTO COUPLER		Q16523	F-3	Q16817	B-3
IC16464	F-2	PC16461	F-2	Q16531	H-2	Q16818	C-4
IC16465	F-2	PC16480	F-4	Q16532	G-2	Q16874	A-4
IC16471	F-4	PC16601	C-3	Q16551	E-2	Q16875	B-4
IC16490	C-3	PC16603	C-3	Q16552	E-2	Q16876	A-3
IC16491	C-3	PC16684	C-3	Q16601	D-4	Q16882	A-4
IC16501	G-2	PC16685	F-3	Q16602	C-3	Q16884	A-4
IC16521	F-2	PC16722	B-3	Q16603	D-3	Q16920	C-4
IC16561	C-2	PC16723	B-3	Q16604	C-3		
IC16562	C-2	PC16896	B-3	Q16606	D-3	**TEST POINT**	
IC16563	C-2			Q16607	C-3	TP3	C-2
IC16564	C-5	**TRANSISTOR**		Q16608	C-4	TP46	C-2
IC16581	C-2	Q16401	H-4	Q16621	G-4	TP66	C-3
IC16661	E-4	Q16402	H-4	Q16622	G-4	TP68	C-3
IC16691	F-4	Q16403	H-4	Q16623	G-4	TP82	C-1
IC16692	C-4	Q16404	H-4	Q16624	D-3	TP16194	B-3
IC16724	G-5	Q16405	H-4	Q16645	F-5	TPSC1	H-5
IC16725	G-5	Q16406	H-4	Q16646	F-4	TPSOS6	C-2
IC16771	F-3	Q16421	F-4	Q16647	F-4	TPSOS7	C-2
IC16773	B-4	Q16422	F-4	Q16649	E-4	TPVAD	B-3
IC16784	B-4	Q16423	E-4	Q16660	D-4	TPVSCN	B-4
IC16786	B-4	Q16424	E-4	Q16661	D-4	TPVSET	B-4
IC16787	B-3	Q16425	E-4	Q16662	C-4	TPVSUS	B-4
IC16788	A-5	Q16426	E-4	Q16663	B-4		
IC16789	A-4	Q16441	I-2	Q16667	A-4	**VOLUME**	
IC16791	D-2	Q16442	H-2	Q16668	C-4	VR16600	A-3
IC16792	D-5	Q16443	H-2	Q16670	E-4	VR16601	C-4
IC16793	C-5	Q16444	H-2	Q16671	E-4		
IC16801	B-4	Q16451	E-2	Q16675	E-4		
IC16920	C-4	Q16452	E-2	Q16676	E-4		
		Q16453	E-2	Q16677	C-4		
		Q16454	D-2	Q16678	C-4		
		Q16471	G-4	Q16701	C-3		
		Q16490	C-3	Q16702	B-4		
		Q16501	G-3	Q16743	C-5		
		Q16502	G-3	Q16762	F-3		
		Q16503	G-3	Q16801	B-3		
		Q16521	F-2	Q16810	B-4		
		Q16522	F-3	Q16815	B-3		
				Q16816	B-3		


SC-BOARD (COMPONENT SIDE)
TNPA4840AF

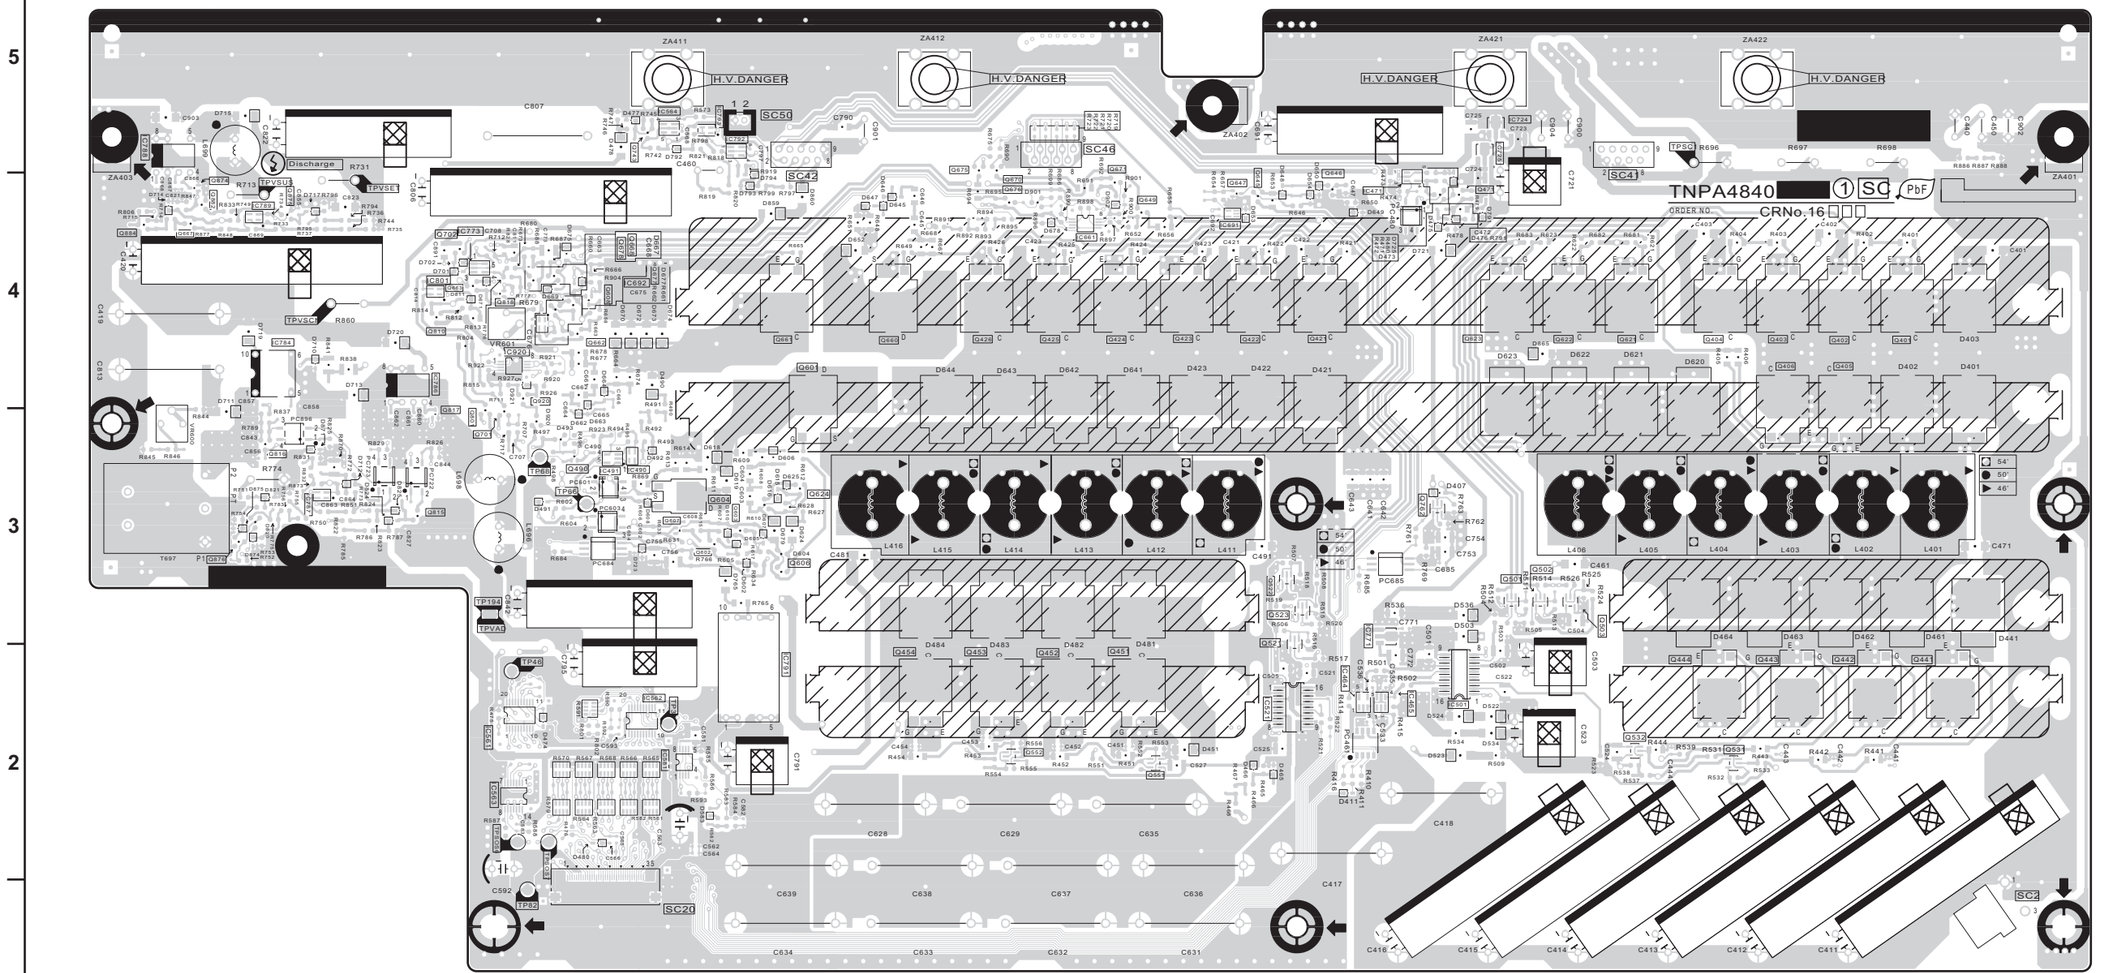


13.2.11. SS-Board

Parts Location

SS-BOARD (FOIL SIDE)							
IC		TP20	B-1	TP53	E-4	**VOLUME**	
IC16304	B-1	TP21	B-1	TP54	C-4	VR16001	A-2
TEST POINT		TP24	C-2	TP56	A-4		
TP2	I-1	TP25	E-2	TP068	F-2		
TP5	I-1	TP26	F-2	TP069	F-2		
TP6	I-1	TP27	H-2	TP070	B-1		
TP7	C-1	TP28	B-1	TP071	B-1		
TP8	C-1	TP29	D-4	TP072	C-1		
TP9	C-1	TP30	E-4	TP073	B-1		
TP10	C-1	TP31	I-4	TP074	B-1		
TP13	C-1	TP33	C-1	TP077	F-2		
TP14	C-1	TP34	C-1	TP078	F-2		
TP16	C-1	TP36	A-3	TPSOS8	B-1		
TP17	C-1	TP38	E-3	TPSS1	B-4		
TP18	B-1	TP39	D-3	TPVe	B-2		
TP19	B-1	TP40	H-3	TPVSUS	I-1		
		TP41	F-3				
		TP51	H-4				

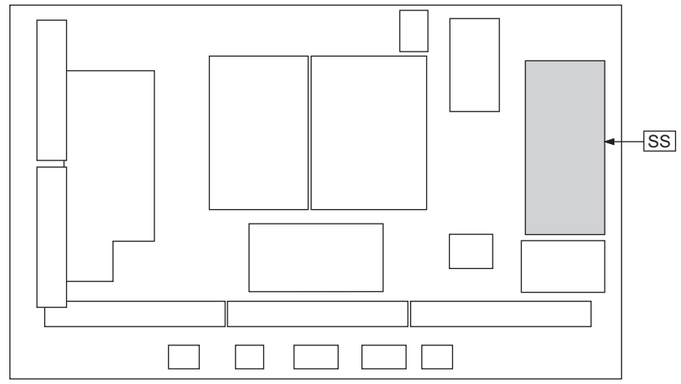


SS-BOARD (FOIL SIDE)
TNPA4841AD

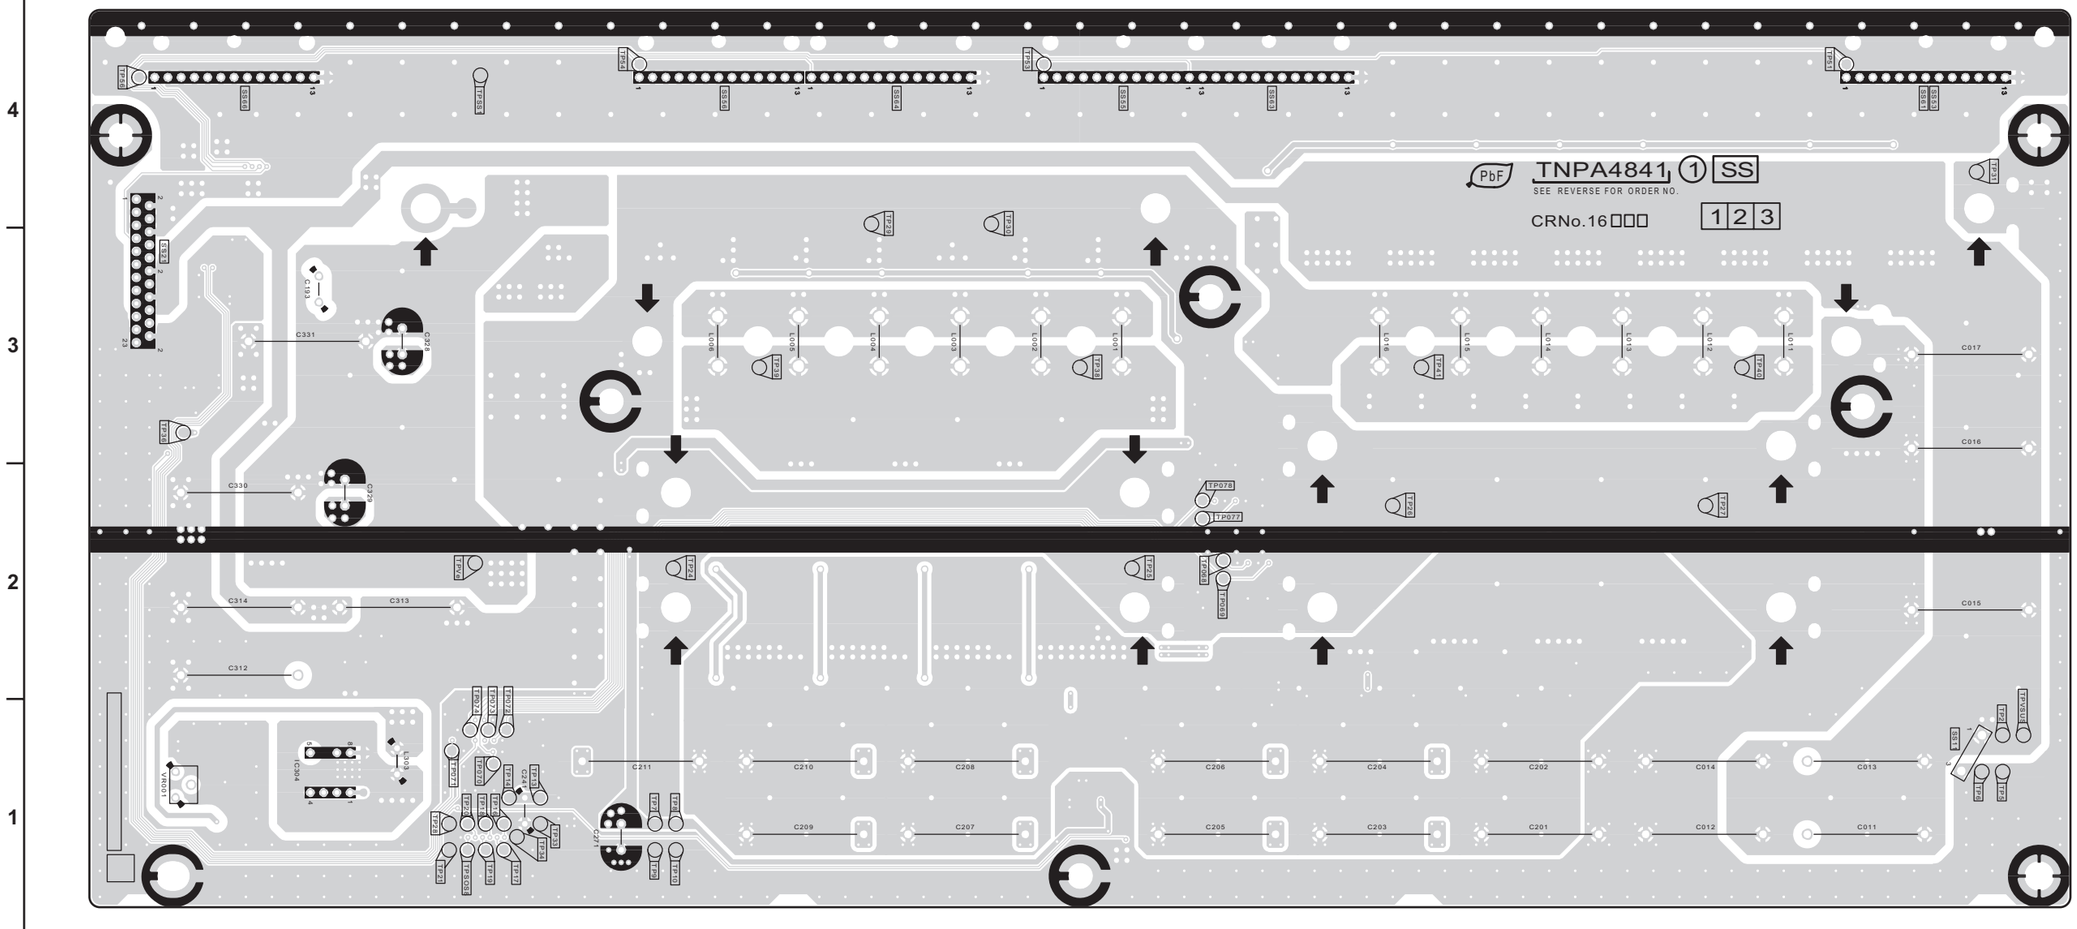


Parts Location


SS-BOARD (COMPONENT SIDE)							
IC		**TRANSISTOR**		Q16051	D-2	**TEST POINT**	
IC16131	D-3	Q16001	A-4	Q16052	C-2	TP062	D-4
IC16151	D-2	Q16002	B-4	Q16053	C-2	TP063	H-4
IC16241	G-1	Q16003	C-4	Q16054	B-2	TP064	H-1
IC16251	E-1	Q16004	C-4	Q16055	E-2	TP065	E-3
IC16304	H-1	Q16005	C-4	Q16056	D-2	TP066	C-3
IC16312	I-1	Q16006	D-4	Q16065	F-2	TP067	A-2
PHOTO COUPLER		Q16021	E-4	Q16066	C-2	TP075	G-1
PC16191	H-3	Q16022	E-4	Q16101	G-4	TP076	G-1
PC16301	H-1	Q16023	F-4	Q16102	H-4	TPSOS8	H-1
		Q16024	F-4	Q16141	D-3	TPSS1	B-4
		Q16025	F-4	Q16161	D-3	TPVe	H-2
		Q16041	E-2	Q16191	H-3	TPVSUS	A-1
		Q16042	F-2	Q16251	E-1	**VOLUME**	
		Q16043	F-2	Q16280	I-4	VR16001	I-1
		Q16044	F-2				

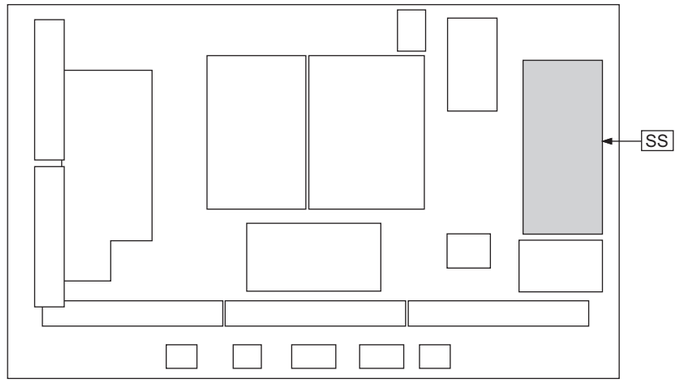


SS-BOARD (COMPONENT SIDE)
TNPA4841AD

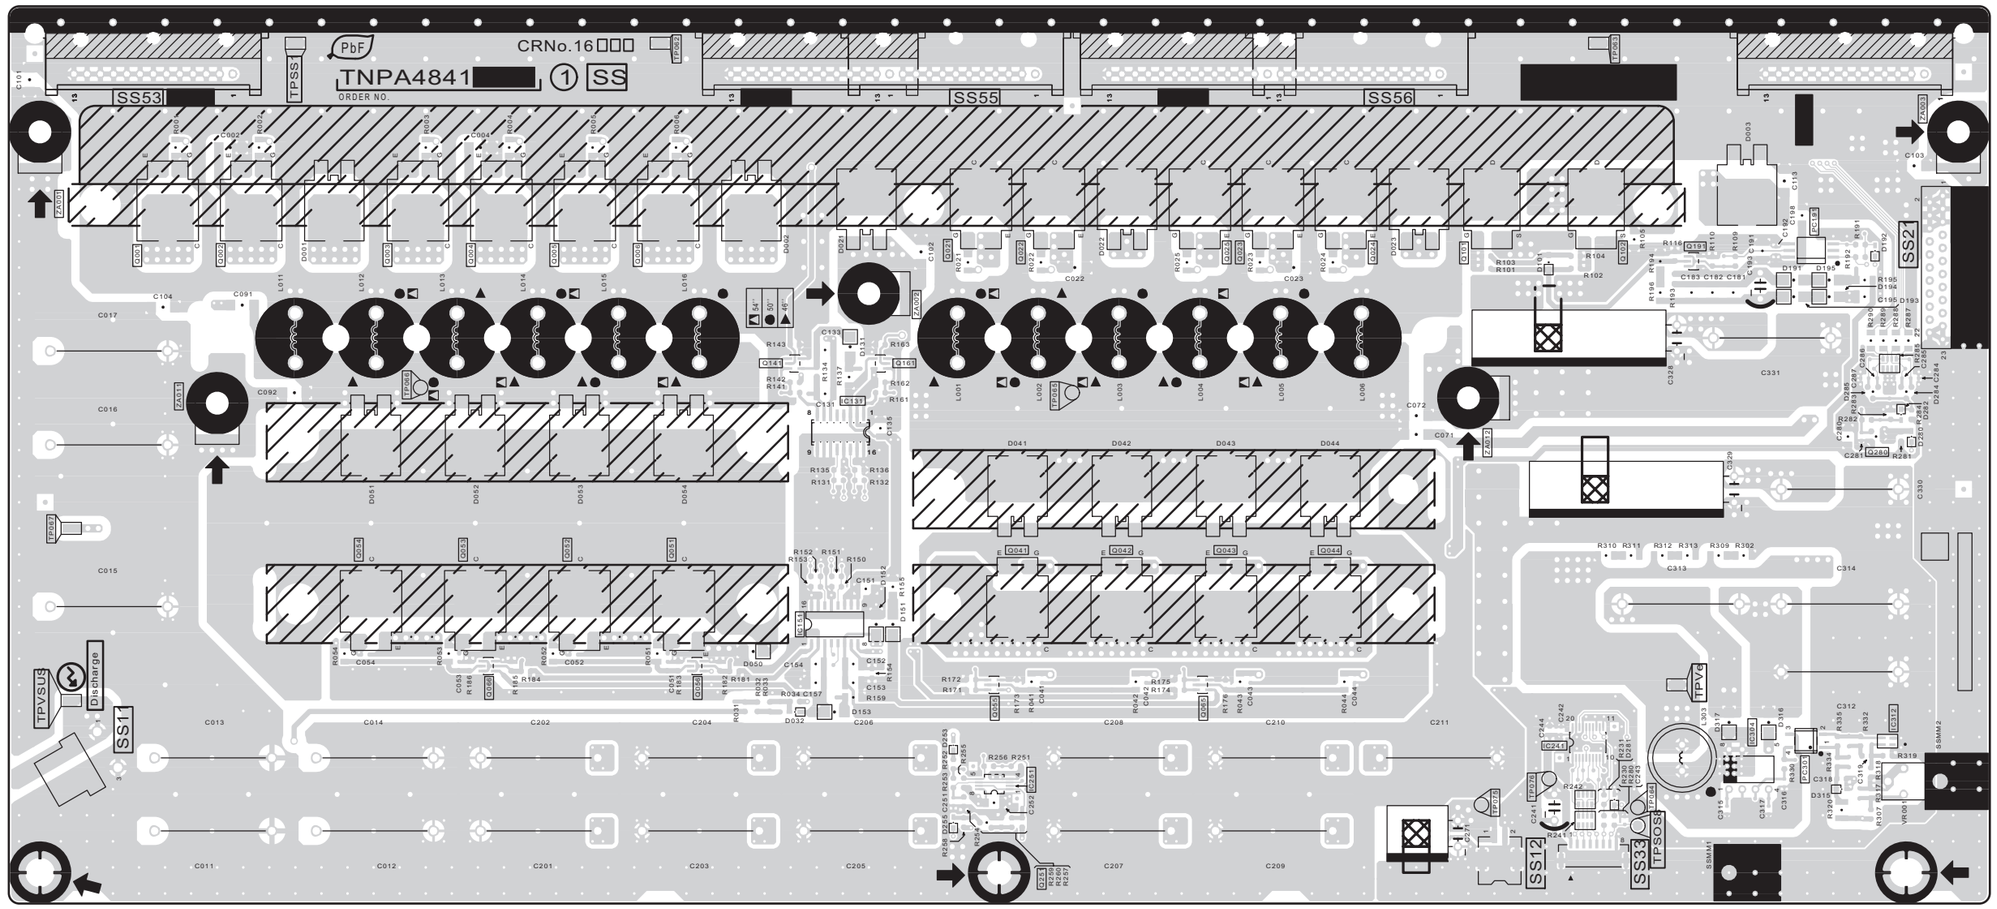


13.2.12. SS2-Board

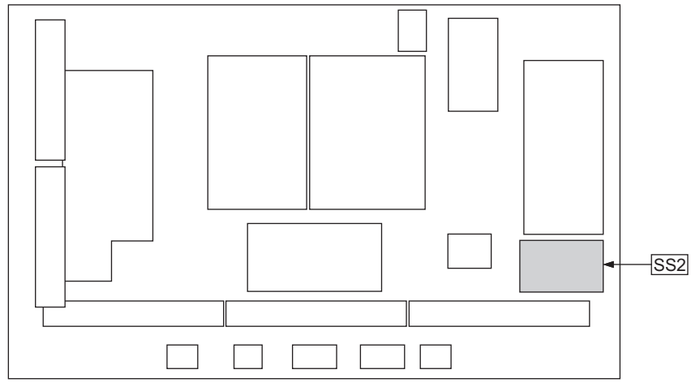

SS2-BOARD (FOIL SIDE)
TNPA4843

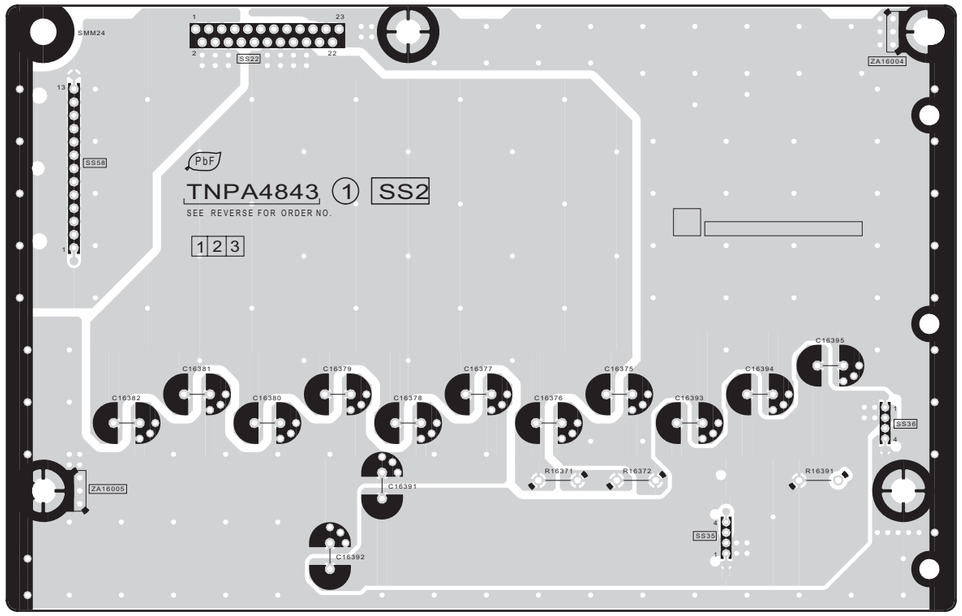


SS2-BOARD (COMPONENT SIDE)
TNPA4843

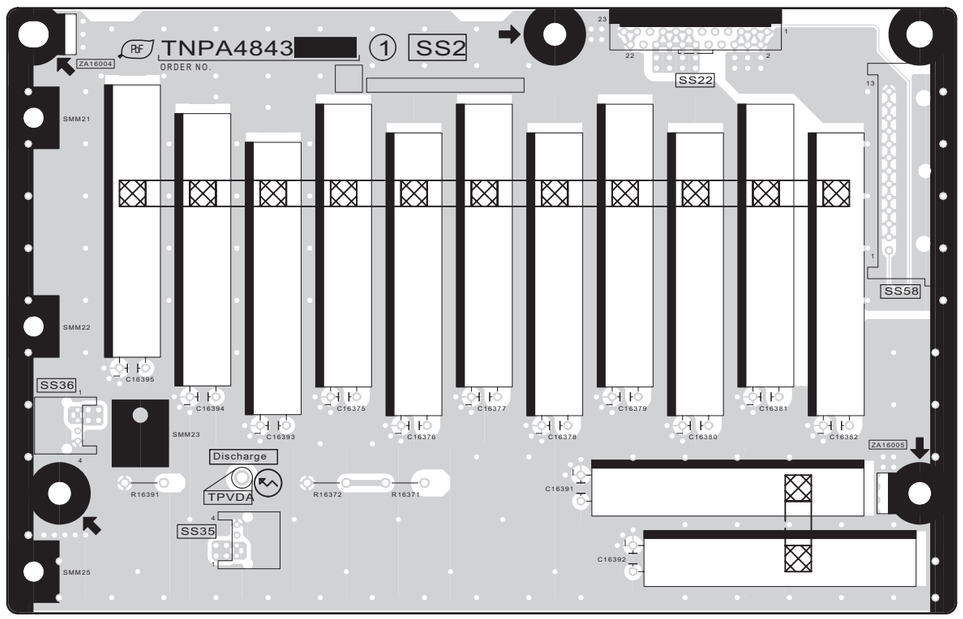


14 Exploded View and Replacement Parts List

14.1. Exploded View and Mechanical Replacement Parts List


14.1.1. Exploded View 1 (Tuner box)

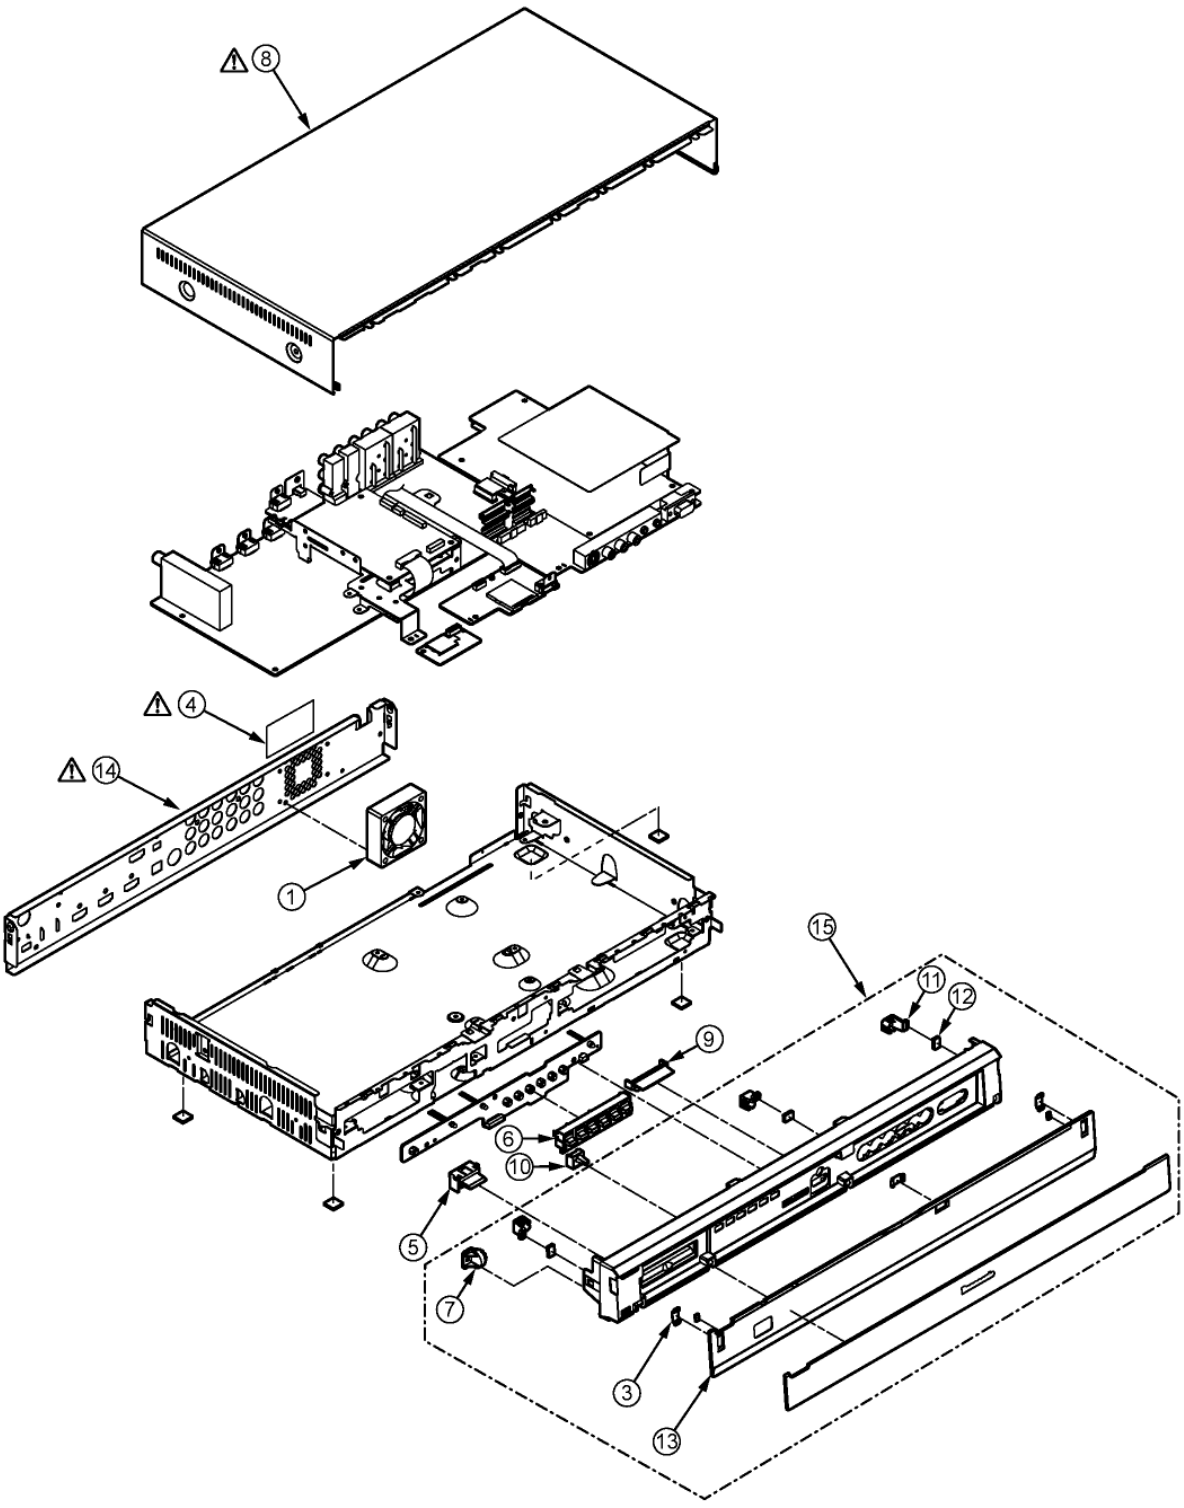


14.1.2. Exploded View 2 (Display unit)

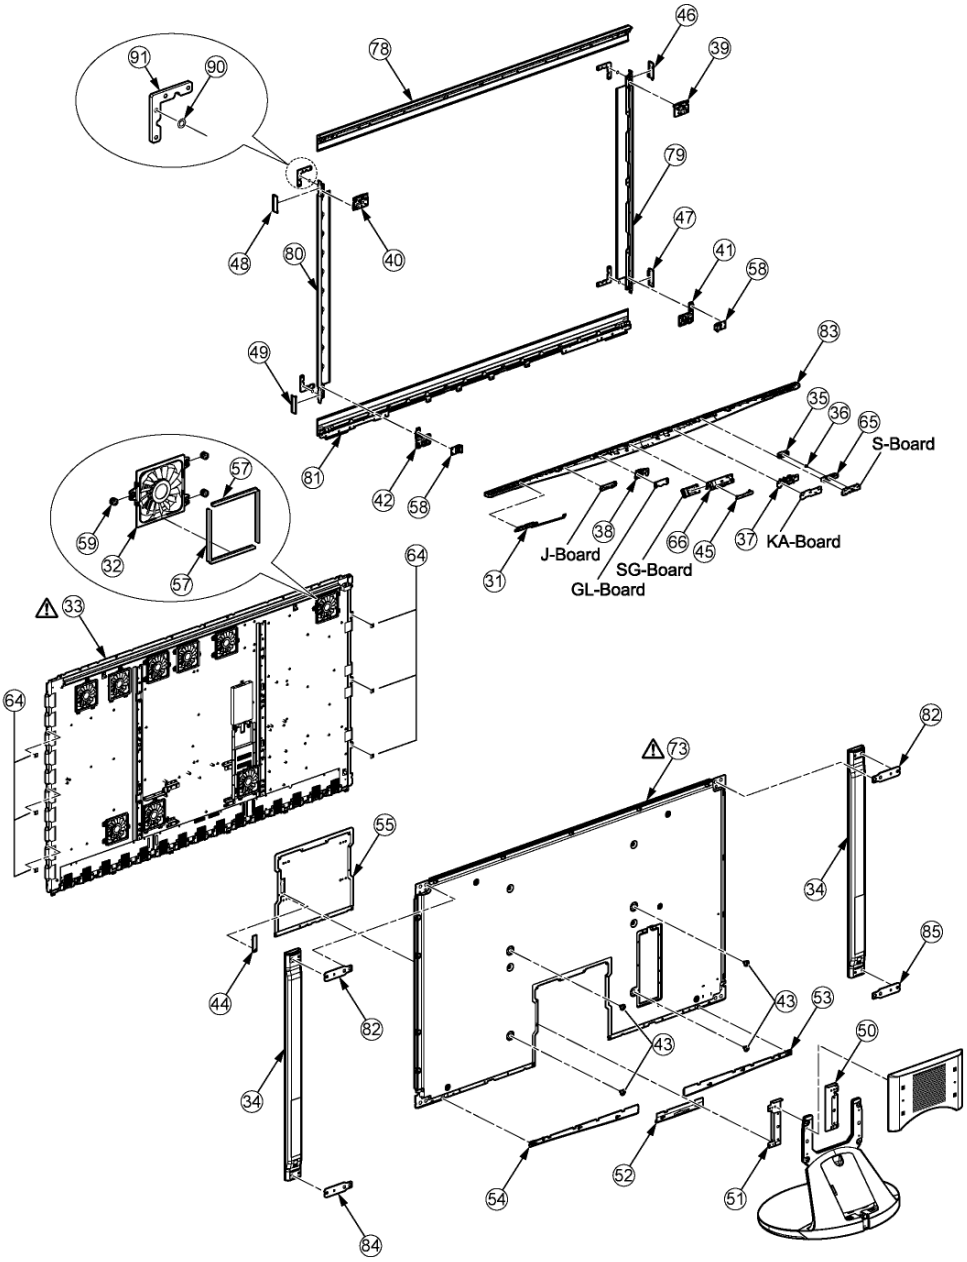


14.1.3. Exploded View 3 (Display unit)

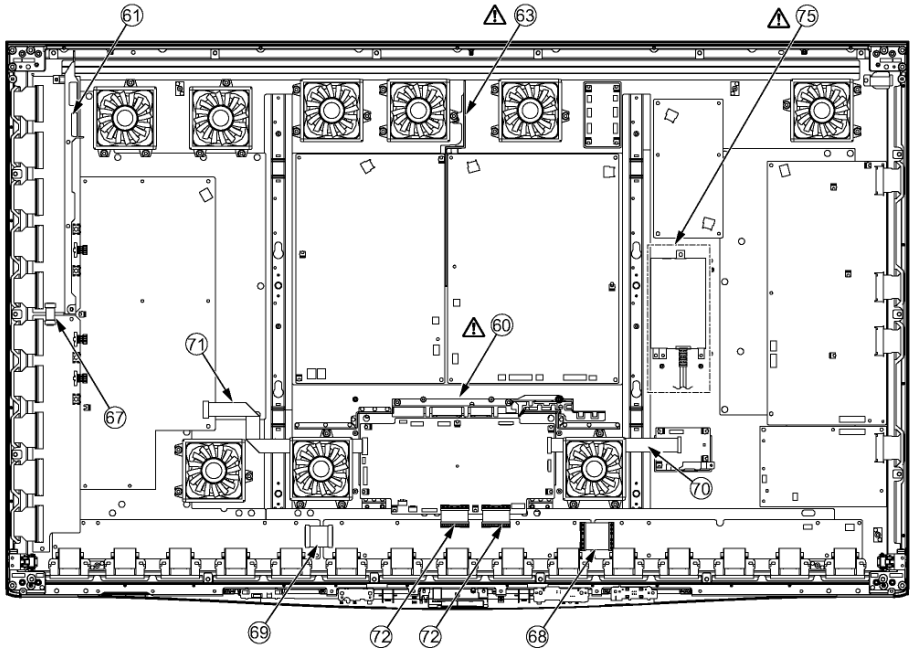


14.1.4. Packing 1

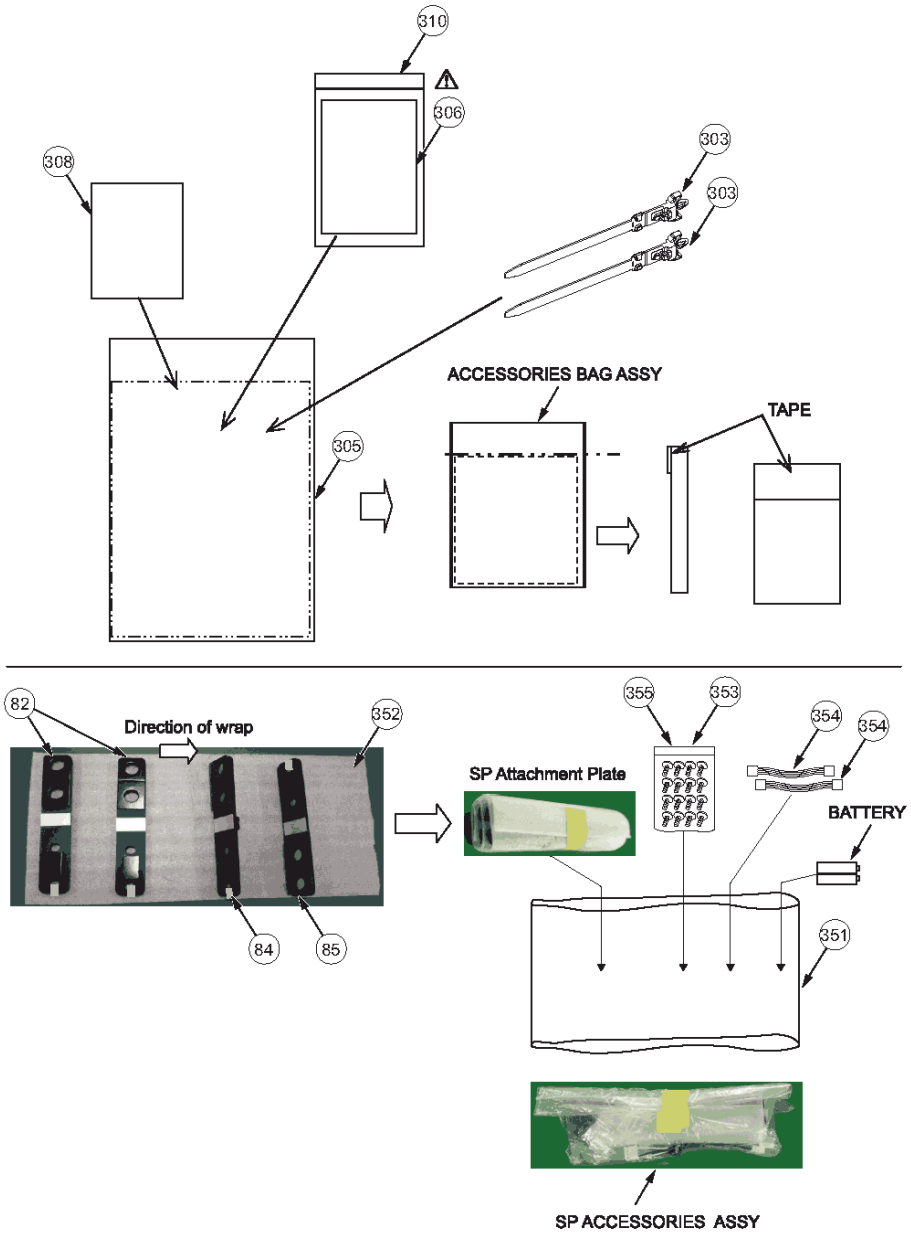


14.1.5. Packing 2

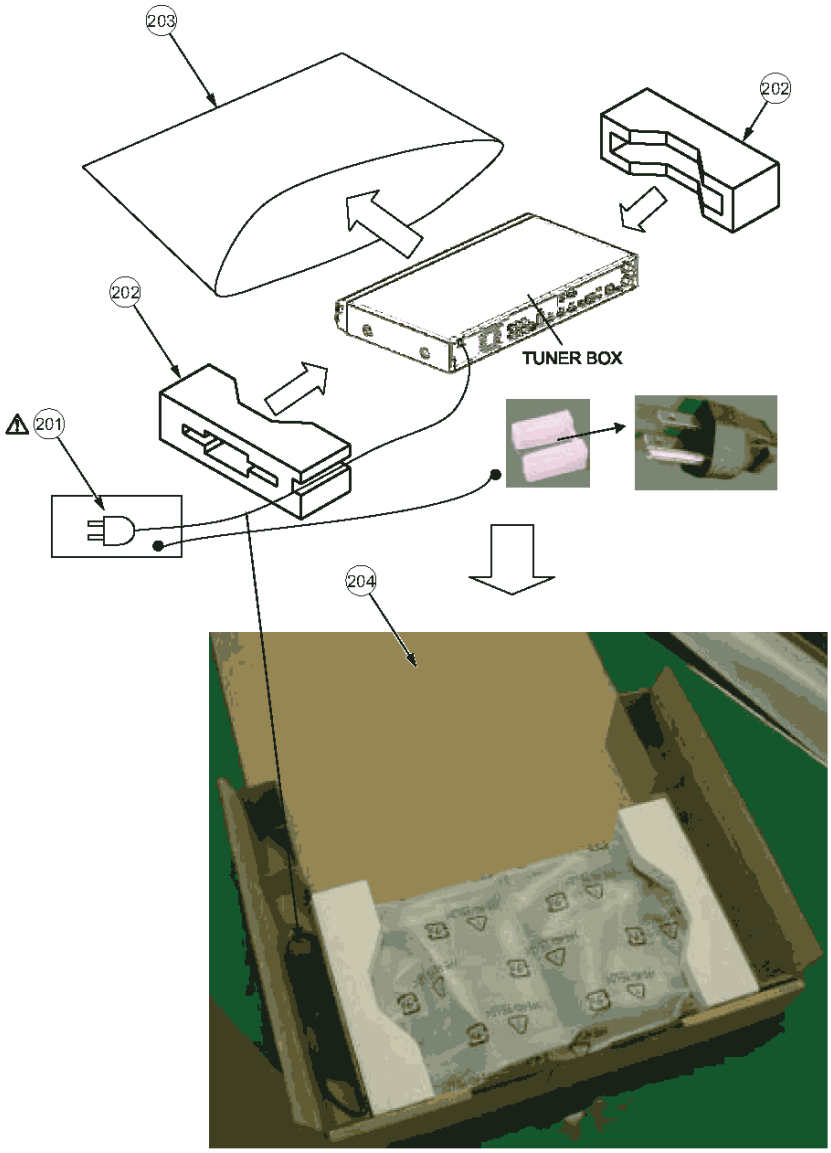


14.1.6. Packing 3

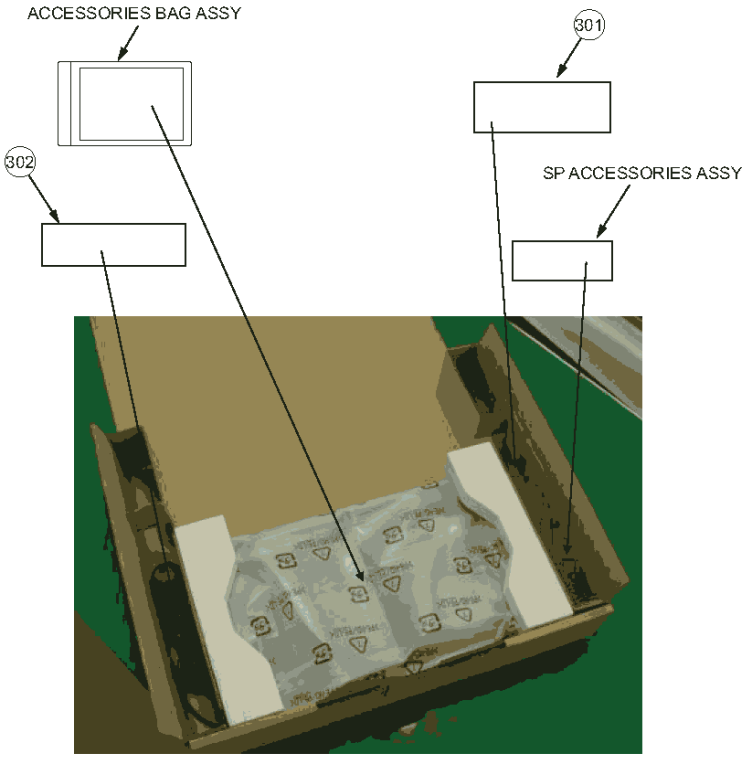


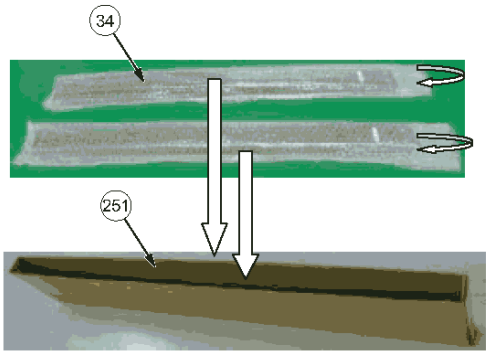


14.1.7. Packing 4 (Pedestal stand)

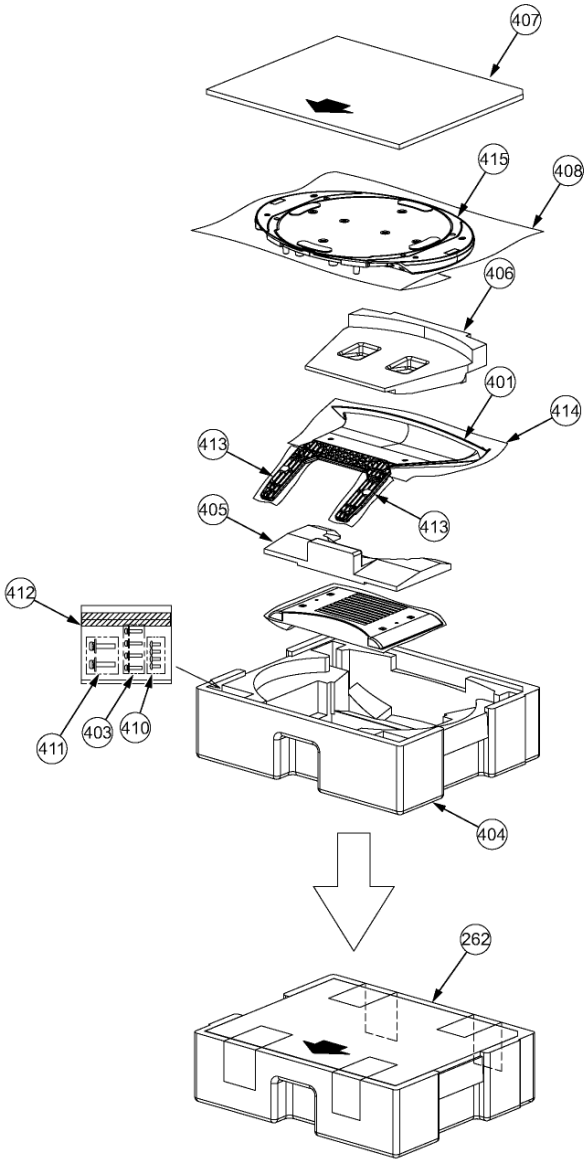


14.1.8. Packing 5

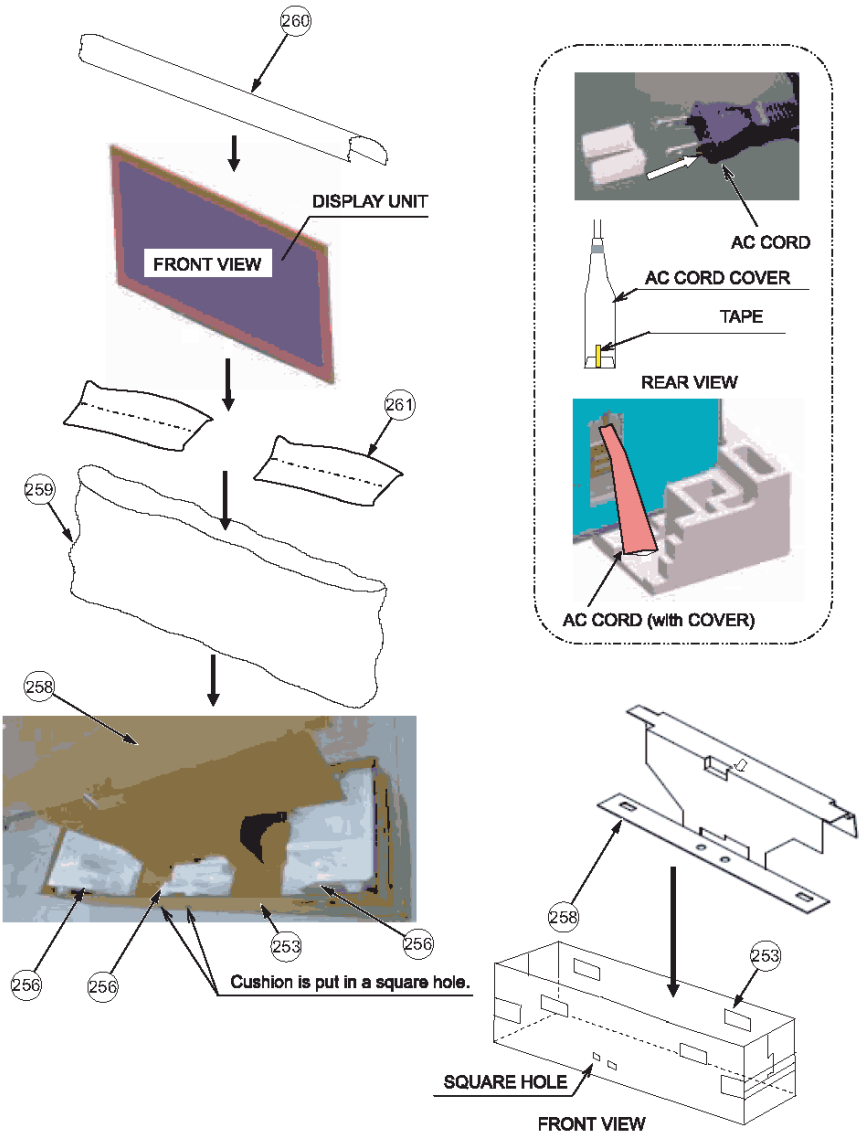

14.1.9. Packing 6

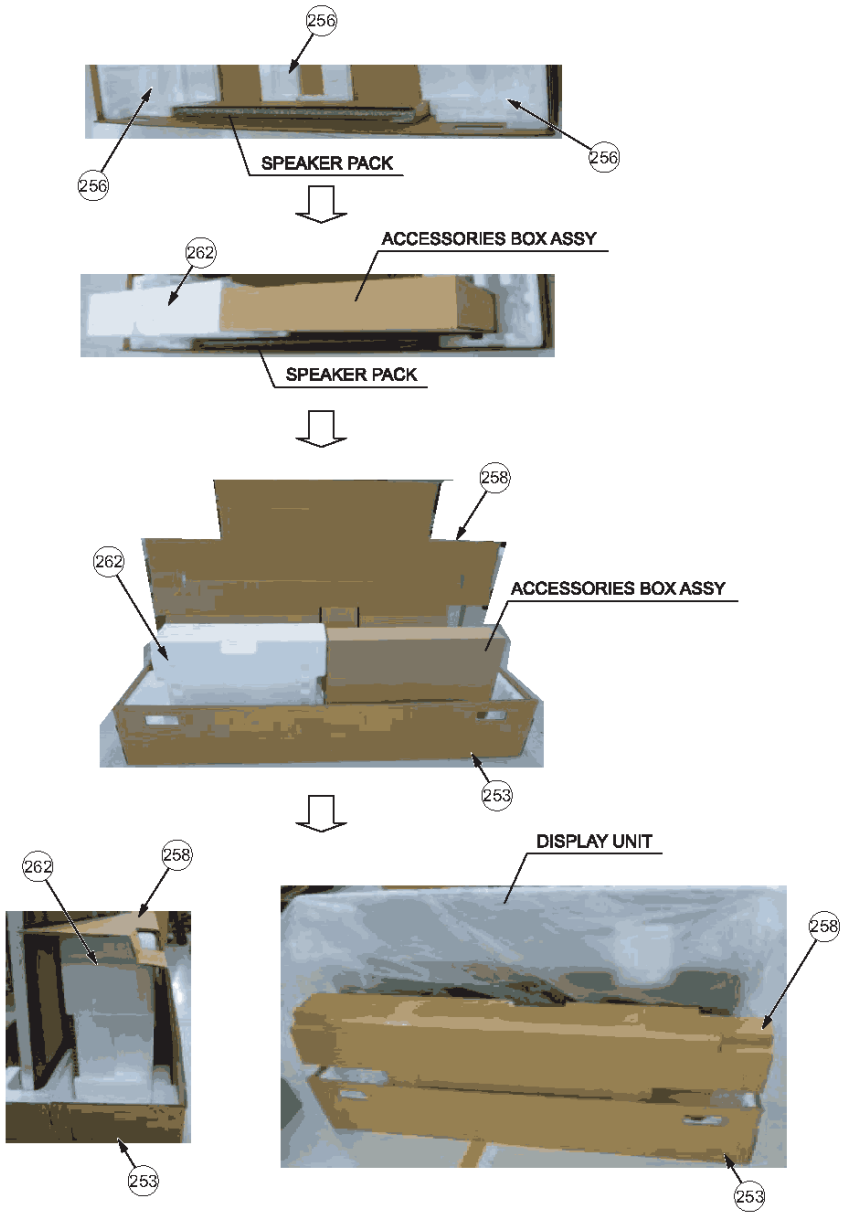

14.1.10. Packing 7

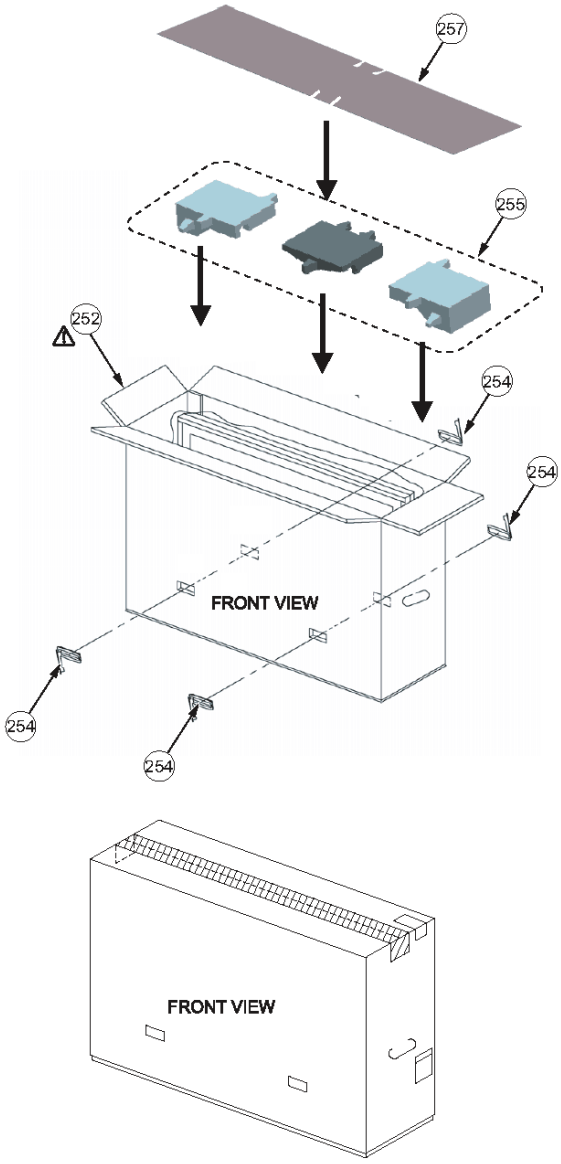

14.1.11. Mechanical Replacement Parts List

Safety	Ref. No.	Part No.	Part Name & Description	Q'ty	Remarks
MECHANICAL REPLACEMENT PARTS (TUNER BOX)					
		K1TYYYY00119	RF CABLE (TUNER)	1	
	1	L6FAYYYH0118	FAN (TUNER)	1	
	3	RMA2032	MAGNET CATCHER (TUNER)	3	
		TBLG3087	FOOT RUBBER (TUNER)	4	
⚠	4	TBMH467	MODEL NAME PLATE (TUNER)	1	
	5	TBXA55401	POWER BUTTON (TUNER)	1	
	6	TBXA55502	CONTROL BUTTON (TUNER)	1	
	7	TEKC090	DUMPER (TUNER)	1	
		THTD019J	SCREW(RM-P SHIELD:2) (TUNER)	2	
		THTD022J	SCREW	29	
⚠	8	TKFA18501	TOP CASE (TUNER)	1	
	9	TKKC5374	SD LED PANEL (TUNER)	1	
	10	TKKC5375-1	LED PANEL (TUNER)	1	
	11	TKKH5119	MAGNET STOPPER (TUNER)	3	
		TMME084	CLAMPER (TUNER)	1	
		TMME292	CLAMPER (TUNER)	4	
		TMME324	SPACER (TUNER)	2	
		TMME365	FFC CLAMPER (TUNER)	1	
	12	TMZA5012	MAGNET (TUNER)	3	
		TSXL871	CABLE (A5-DH5) (TUNER)	1	
		TSXL874	CABLE (GS11-A11) (TUNER)	1	
	13	TTPA0522	DOOR ASSY (TUNER)	1	
⚠	14	TXFKF01DKUG	REAR PANEL ASSY	1	D
⚠	14	TXFKF01DKUM	REAR PANEL ASSY	1	M
⚠	14	TXFKF01DKUS	REAR PANEL ASSY	1	N
⚠	14	TXFKF01DKUV	REAR PANEL ASSY	1	T
	15	TXFKP01DKUM	FRONT PANEL ASSY	1	
		XSB3+5FJK	SCREW(HDMI FRONT 1)(TUNER)	1	
		XSB3+6FJ	SCREW(HDMI REAR 4)(TUNER)	4	
		XTV3+10JFJK	SCREW(REAR AV:2)(TUNER)	2	
		XTV3+8GFJ	SCREW	7	
		XTV3+8JFJK	SCREW(TUNER COVER) (TUNER)	1	
		XYN3+F8FJ	SCREW(DH:4 GA-DHM:1)(TUNER)	5	
		XYN4+E8FJ	SCREW(FOR GROUND)(TUNER)	1	
MECHANICAL REPLACEMENT PARTS (DISPLAY UNIT)					
		J0KG00000011	FERRITE CORE	1	
	31	K0RB00400017	CONTROL PANEL UNIT	1	
	32	L6FAYYYH0111	FAN UNIT(A)	9	
⚠	33	MD54F12A5J	PLASMA DISPLAY PANEL	1	
		TBLG3087	RUBBER SHEET	2	

Safety	Ref. No.	Part No.	Part Name & Description	Q'ty	Remarks
	36	TESD101	POWER BUTTON SPRING	1	
		THEC108J	SCREW (P-FILTER)	2	
		THEC127N	THIN HEAD SCREW (CORNER METAL)	12	
		THEL0239	SCREW	63	
		THEL071J	SCREW	66	
		THTA0419	HOOK SCREW	2	
		THTD023J	STEP SCREW(FAN)	27	
		THTD024J	MACHINE SCREW	19	
		TKKC5372	IR PANEL	1	
	38	TKKC5373	SD LIGHTING PANEL	1	
	39	TKKF5133-1	CORNER METAL (TOP/LEFT)	1	
	40	TKKF5134-1	CORNER METAL (TOP RIGHT)	1	
	41	TKKF5135	CORNER METAL (BOTTOM/LEFT)	1	
	42	TKKF5136	CORNER METAL (BOTTOM/RIGHT)	1	
	44	TKKL5477	ADJUSTMENT COVER	1	
	43	TKKL5480	M8 SPACER CAP	4	
	45	TKPB39501	SG-PCB SERVICE COVER	1	
	46	TKPB40801A	CABINET CAP (TOP/LEFT)	1	
	47	TKPB40901A	CABINET CAP (BOTTOM/LEFT)	1	
	48	TKPB41001A	CABINET CAP (TOP RIGHT)	1	
	49	TKPB41101A	CABINET CAP (BOTTOM/RIGHT)	1	
	50	TKRA71801	STAND HOLDER LEFT	1	
	51	TKRA71901	STAND HOLDER RIGHT	1	
	52	TKUC22901	BOTTOM COVER CENTER	1	
	53	TKUC23301	BOTTOM COVER LEFT	1	
	54	TKUC23401	BOTTOM COVER RIGHT	1	
	55	TKUX18401	REAR COVER BOTTOM	1	
	57	TMKH125	FAN SPONGE A	18	
		TMKH140	FAN SPONGE	9	
		TMKK362	SERCON SHEET UPPER	1	
		TMKY850	PLASTIC SPACER	4	
		TMM14490	CLAMPER	3	
		TMM15414-2	CLAMPER	1	
		TMM7468-1	CLAMPER	2	
	58	TMMA050	SP CONNECTOR EDGE COVER	2	
		TMME261	CLAMPER	13	
		TMME272	CLAMPER	5	
		TMME351	CLAMPER	11	
		TMME360	FLAT CLAMPER	3	
		TMME366	CLAMPER	4	
	59	TMMJ106	RUBBER CUSHION	27	
		TMMX256-1	M8 SPACER	4	
	64	TMMX262	INSULATION SPACER (A)	14	

Safety	Ref. No.	Part No.	Part Name & Description	Q'ty	Remarks
	65	TMWC033	POWER BUTTON BRACKET	1	
	66	TMWF010	SG-PCB BRACKET	1	
		TPDF2368	SPACER SHEET	2	
	67	TSXL519	CABLE (SU11-SD11)	1	
	68	TSXL661	CABLE (C26-C36)	1	
	69	TSXL737	CABLE (C10-C20)	1	
	70	TSXL832	CABLE (DA11-GH11)	1	
	71	TSXL835	CABLE (DA20-SC20)	1	
	72	TSXL836	CABLE (DA31-C21/DA32-C22)	2	
⚠	73	TTUA2211	REAR COVER	1	M
⚠	73	TTUA2214	REAR COVER	1	T
⚠	73	TTUA2215	REAR COVER	1	D
⚠	73	TTUA2216	REAR COVER	1	N
⚠	75	TXAJS01DKUG	AC FILTER ASSY	1	D
⚠	75	TXAJS01DKUM	AC FILTER ASSY	1	M/N
⚠	75	TXAJS01DKUV	AC FILTER ASSY	1	T
	35	TXFBX01DLUJ	POWER BUTTON ASSY	1	
	34	TXFEA01DKUM	SPEAKER COMPLETE (SP-54Z1A)	2	
	37	TXFKK01DLUJ	IR PANEL ASSY	1	
	78	TXFKR021ZBS	CABINET TOP ASSY	1	
	84	TXFKR02JXUE	SP ATTACHMENT PLATE (BOTTOM RIGHT) ASSY	1	
	79	TXFKR031ZBS	CABINET LEFT ASSY	1	
	85	TXFKR03JXUE	SP ATTACHMENT PLATE (BOTTOM LEFT) ASSY	1	
	80	TXFKR041ZBS	CABINET LEFT ASSY	1	
	81	TXFKR04DKUU	CABINET BOTTOM ASSY	1	
	82	TXFKR04DLUJ	SP ATTACHMENT PLATE (TOP) ASSY	2	
	83	TXFKY01DKUA	BOTTOM PANEL ASSY	1	
	61	TXFMX01DKUJ	PARTITION SU-PCB ASSY	1	
⚠	63	TXFMX01DLUJ	PARTITION P-PCB ASSY	1	
⚠	60	TXFMX02DLUJ	PARTITION DA-PCB ASSY	1	
		TXJDA3DKUJ-2	SPEAKER LEAD (DA3-SPR)	1	
		TXJDA4DKUJ-2	SPEAKER LEAD (DA4-SPL)	1	
	90	TMKY850	PLASTIC SPACER	4	
	91	TUWX183	CABINET ANGLE METAL	4	
		XST2+6FJ	SCREW(HDMI SHIELD)	2	
		XTB3+10GFJ	SCREW	23	
		XTB3+8GFJ	SCREW M3	1	
		XYN3+F8FJ	SCREW-M3X8	10	
		XYN4+E6FJ	SCREW(ACF:1)	1	
		XYN4+F10FJ	SCREW (ALCH-CABINET_ASSY)	18	
		XYN4+F12FJK	SCREW(STAND HOLDER:4)	4	
		XYN4+F6FJ	SCREW(SUSD-SC:4)	4	
		XYN4+F8FJ	SCREW-M4X8 (CABINET ANGLE METAL)	16	

Safety	Ref. No.	Part No.	Part Name & Description	Q'ty	Remarks
PACKING REPLACEMENT PARTS (TUNER BOX)					
⚠	201	K2CT3YY00019	AC CORD (TUNER)	1	M/N
⚠	201	K2CZ3YY00008	AC CORD (TUNER)	1	D
⚠	201	K2CZ3YY00009	AC CORD (TUNER)	1	T
	204	TPCC68701	CARTON BOX (TUNER)	1	
	202	TPDA1996	CUSHION LEFT/RIGHT (TUNER)	1	
	203	TPEH454	BAG FOR TUNER	1	
PACKING REPLACEMENT PARTS (DISPLAY UNIT)					
	251	TPCC62201A	CARTON BOX (SPEAKER)	1	
	253	TPCC68601	CARTON BOX BOTTOM	1	
⚠	252	TPCC70201	CARTON TOP (WITH STAMP)	1	M
⚠	252	TPCC70203	CARTON TOP (WITH STAMP)	1	T
⚠	252	TPCC70204	CARTON TOP (WITH STAMP)	1	D
⚠	252	TPCC70207	CARTON TOP (WITH STAMP)	1	N
	254	TPD169487	JOINT	4	
	255	TPDA2097	TOP SIDE CUSHION	1	
	256	TPDA2098	BOTTOM SIDE CUSHION	1	
	257	TPDF2337	TOP PAD	1	
	258	TPDF2338	ACCESSORIES PAD	1	
	259	TPEH170	PROTECT COVER	1	
	260	TPEH273	TOP PROTECT SHEET	1	
	261	TPEH448	PROTECT SHEET(BOTTOM)	2	
		TQZJ165	WARNING FLIER	1	
PACKING REPLACEMENT PARTS (ACCESSORIES)					
	301	K1HY19YY0004	HDMI CABLE	1	
	302	N2QAYB000431	RF REMOTE TRANSMITTER(IN BAG)	1	
	303	TMME289	CLAMPER	2	
	305	TPEP028	ACCESSORIES BAG	1	
⚠	306	TQBC2478	INSTRUCTION BOOK (ENGLISH)	1	
⚠	306	TQBC2479	INSTRUCTION BOOK (ARABIC)	1	M
⚠	306	TQBC2481	INSTRUCTION BOOK (THAI)	1	T
⚠	306	TQBC2482	INSTRUCTION BOOK (CHINESE)	1	N
	308	TXFPE01RLTU	CLEANING CLOTH ASSY	1	
	310	XZBT6506	POLY BAG (INSTRUCTION BOOK)	1	
PACKING REPLACEMENT PARTS (SP ACCESSORIES)					
		TMME370	CLAMPER	2	
	351	TPEH457	BAG FOR SP ACCESSORIES	1	
	352	TPEH458-1	SP ACCESSORIES PACKING SHEET	1	
	353	TXFXY01DLUJB	SCREW FOR SPEAKER ASSY	1	

Safety	Ref. No.	Part No.	Part Name & Description	Q'ty	Remarks
	354	TXJ/SPDKUU-1	SPEAKER LEAD	2	
	355	XSS26+5FJK	SCREW (CLAMPER)	2	
PACKING REPLACEMENT PARTS (PEDESTAL STAND)					
	415	TBLA0460	STAND BASE ASSY	1	
	401	TBLA0464	STAND FRAME ASSY	1	
	262	TBLX0107	PEDESTAL STAND	1	
	403	THEL062N	SCREW (STAND-TV)	4	
	404	TPDA2076	BOTTOM POLYFOAM	1	
	405	TPDA2078	HOLDER POLYFOAM	1	
	406	TPDA2080	FRAME POLYFOAM	1	
	407	TPDF2313	TOP CARDBOARD	1	
	408	TPEB368	BAG (PEDESTAL STAND)	1	
	413	TPEB374	FRAME ASSY EPE BAG 1	2	
	414	TPEB380	FRAME ASSY EPE BAG 2	1	
		TPEB408	PROTECTOR SHEET	1	
	410	XSB4+10FNK	SCREW M4x10 Black	4	
		XSB4+15FN	SCREW 4x15 Silver	3	
		XSB4+8FNK	SCREW 4x8 Black	6	
		XTB3+8GFN	SCREW 3x8 (TAP)Silver	4	
		XTB4+10GFN	SCREW 4x10 (TAP)	14	
	411	XYN8+F30FN	SCREW M8x30 Silver	2	
	412	XZB6X8A04	BAG (SCREW ASSY)	1	

14.2. Electrical Replacement Parts List

14.2.1. Replacement Parts List Notes

RTL (Retention Time Limited)

Note: The marking (RTL) indicates that the Retention Time is Limited for this item.
After the discontinuation of this assembly in production, the item will continue to be available for a specific period of time. The retention period of availability is dependant on the type of assembly, and in accordance with the laws governing part and product retention. After the end of this period, the assembly will no longer be available.

Abbreviation of part name and description

1. Resistor

Example:

ERD25TJ104 C 100KOHM, J, 1/4W

Type Allowance

2. Capacitor

Example:

ECKF1H103ZF C 0.01UF, Z, 50V

Type Allowance

Type	Allowance
C : Carbon	F : ±1%
F : Fuse	G : ±2%
M : Metal Oxide	J : ±5%
Metal FIlm	K : ±10%
S : Solid	M : ±20%
W : Wire Wound	

Type	Allowance
C : Ceramic	C : ±0.25pF
E : Electrolytic	D : ±0.5pF
P : Polyester	F : ±1pF
Polyprop	G : ±3pF
lene	J : ±5pF
T : Tantalum	K : ±10pF
	L : ±15pF
	M : ±20pF
	P : +100%, -0%
	Z : +80%, -20%

14.2.2. Electrical Replacement Parts List

Safety	Ref. No.	Part No.	Part Name & Description	Pcs	Remarks
	A5	K1KY30A00017	30P CONNECTOR	1	
	A9	K1KA06A00508	6P CONNECTOR	1	
	A10	K1KY15AA0606	15P CONNECTOR	1	
	A11	K1KY30A00017	30P CONNECTOR	1	
	A12	K1KA11A00178	11P CONNECTOR	1	
	A21	K1KA20AA0009	20P CONNECTOR	1	
	A22	K1KA11AA0715	11P CONNECTOR	1	
	A35	K1KA03AA0714	3P CONNECTOR	1	
	A40	K1KA04B00273	4P CONNECTOR	1	
	A51	K1KY19AA0606	19P CONNECTOR	1	
	A52	K1KA11A00124	11P CONNECTOR	1	
	A71	K1KA10A00416	10P CONNECTOR	1	
	A72	K1KA15A00148	15P CONNECTOR	1	
	C10	K1MY55BA0345	55P CONNECTOR	1	
	C20	K1MY55BA0345	55P CONNECTOR	1	
	C21	K1MY68BA0345	68P CONNECTOR	1	
	C22	K1MY68BA0345	68P CONNECTOR	1	
	C26	K1MY68BA0345	68P CONNECTOR	1	
	C33	K1KA08B00270	8P CONNECTOR	1	
	C35	K1KA04BA0107	4P CONNECTOR	1	
	C36	K1MY68BA0345	68P CONNECTOR	1	
	C0901	F1J1A475A039	C 4.7UF, K, 10V	1	
	C1009	F1H1C104A143	C 0.1UF, K, 16V	1	
	C1010	F1J1E105A171	C 1 UF 25V	1	
	C1102	F1J1A106A043	C 0.010UF, K, 10V	1	
	C1103	F1G1C104A116	C 0.10UF, K, 16V	1	
	C1104	F1G1C104A116	C 0.10UF, K, 16V	1	
	C1106	F1H1H270A971	C 27UF, 50V	1	
	C1107	F1G1H220A731	C 22UF, 50V	1	
	C1108	F1G1C104A116	C 0.10UF, K, 16V	1	
	C1109	F1H1A1050032	C 10UF, 50V	1	
	C1111	F1H1A1050032	C 10UF, 50V	1	
	C1112	F1G1C104A116	C 0.10UF, K, 16V	1	
	C1114	F1G1C104A116	C 0.10UF, K, 16V	1	
	C1117	F1G1C104A116	C 0.10UF, K, 16V	1	
	C1121	F1G1C104A116	C 0.10UF, K, 16V	1	
	C1122	F1G1E103A123	C 0.010UF, K, 25V	1	
	C1123	F1H1A1050032	C 10UF, 50V	1	
	C1502	F1J1A106A043	C 0.010UF, K, 10V	1	
	C1503	F1G1C104A116	C 0.10UF, K, 16V	1	
	C1504	F1G1C104A116	C 0.10UF, K, 16V	1	
	C1506	F1H1H270A971	C 27UF, 50V	1	
	C1507	F1G1H220A731	C 22UF, 50V	1	
	C1508	F1G1C104A116	C 0.10UF, K, 16V	1	
	C1509	F1H1A1050032	C 10UF, 50V	1	
	C1511	F1H1A1050032	C 10UF, 50V	1	
	C1512	F1G1C104A116	C 0.10UF, K, 16V	1	
	C1514	F1G1C104A116	C 0.10UF, K, 16V	1	
	C1517	F1G1C104A116	C 0.10UF, K, 16V	1	
	C1523	F1H1A1050032	C 10UF, 50V	1	
	C1527	F1H1A1050032	C 10UF, 50V	1	
	C1529	F1G1C104A116	C 0.10UF, K, 16V	1	
	C2023	F1G1C104A116	C 0.10UF, K, 16V	1	
	C2049	F1G1C104A116	C 0.10UF, K, 16V	1	
	C2050	F1G1C104A116	C 0.10UF, K, 16V	1	
	C2055	F1G1H120A731	C 12UF, 50V	1	
	C2056	F1G1H150A731	C 15UF, 50V	1	
	C2058	F1G1C104A116	C 0.10UF, K, 16V	1	
	C2059	F1J1A106A043	C 0.010UF, K, 10V	1	
	C2091	F1G1H100A731	C 10PF, K, 50V	1	
	C2092	F1G1H220A731	C 22UF, 50V	1	
	C2096	F1G1C104A116	C 0.10UF, K, 16V	1	
	C2098	EEEHB0J221UP	C 220PF, J, 6.3V	1	
	C2099	EEEHB0J221UP	C 220PF, J, 6.3V	1	
	C2102	F1G1C104A116	C 0.10UF, K, 16V	1	

Safety	Ref. No.	Part No.	Part Name & Description	Pcs	Remarks
	C2105	F1G1C104A116	C 0.10UF, K, 16V	1	
	C2106	F1G1C104A116	C 0.10UF, K, 16V	1	
	C2107	F1J1A106A043	C 0.010UF, K, 10V	1	
	C2108	F1J1A106A043	C 0.010UF, K, 10V	1	
	C2109	F1G1C104A116	C 0.10UF, K, 16V	1	
	C2110	F1G1C104A116	C 0.10UF, K, 16V	1	
	C2111	F1J1A475A039	C 4.7UF, K, 10V	1	
	C2112	F1J1A106A043	C 0.010UF, K, 10V	1	
	C2113	F1J1A106A043	C 0.010UF, K, 10V	1	
	C2114	F1G1C104A116	C 0.10UF, K, 16V	1	
	C2115	F1G1C104A116	C 0.10UF, K, 16V	1	
	C2117	F1G1C104A116	C 0.10UF, K, 16V	1	
	C2118	F1J1A475A039	C 4.7UF, K, 10V	1	
	C2120	F1G1H560A731	C 56UF, 50V	1	
	C2121	F1G1H560A731	C 56UF, 50V	1	
	C2122	F1G1C103A116	C 0.010UF, K, 16V	1	
	C2123	F1G1C103A116	C 0.010UF, K, 16V	1	
	C2124	F1G1C104A116	C 0.10UF, K, 16V	1	
	C2125	F1G1C103A116	C 0.010UF, K, 16V	1	
	C2127	F1G1C103A116	C 0.010UF, K, 16V	1	
	C2128	F1G1C103A116	C 0.010UF, K, 16V	1	
	C2129	F1G1C103A116	C 0.010UF, K, 16V	1	
	C2135	F1G1C103A116	C 0.010UF, K, 16V	1	
	C2136	F1G1C103A116	C 0.010UF, K, 16V	1	
	C2137	F1J1A106A043	C 0.010UF, K, 10V	1	
	C2192	F1J1A106A043	C 0.010UF, K, 10V	1	
	C2201	F1G1E333A091	C 0.033UF, K, 25V	1	
	C2202	F1G1E333A091	C 0.033UF, K, 25V	1	
	C2216	F1G1C104A116	C 0.10UF, K, 16V	1	
	C2244	F1G1C104A116	C 0.10UF, K, 16V	1	
	C2245	F1G1H102A730	C 1000UF, 50V	1	
	C2251	F1J1A106A043	C 0.010UF, K, 10V	1	
	C2261	F1J1A106A043	C 0.010UF, K, 10V	1	
	C2262	F1J1A106A043	C 0.010UF, K, 10V	1	
	C2263	F1J1A106A043	C 0.010UF, K, 10V	1	
	C2264	F1J1A106A043	C 0.010UF, K, 10V	1	
	C2511	F1H1C104A143	C 0.1UF, K, 16V	1	
	C2512	F1J1A106A043	C 0.010UF, K, 10V	1	
	C2515	F1H1H103A970	C 0.001UF, K, 50V	1	
	C2521	F1H1H103A970	C 0.001UF, K, 50V	1	
	C2601	F1H1C105A145	C 0.01UF, K, 16V	1	
	C2602	F1J1A475A039	C 4.7UF, K, 10V	1	
	C2603	F1G1C104A116	C 0.10UF, K, 16V	1	
	C2604	F1G1C104A116	C 0.10UF, K, 16V	1	
	C2605	F1H1E104A129	C 0.1UF, 25V	1	
	C2606	F1K1E106A136	C 10UF, Z, 25V	1	
	C2607	F1K1E106A136	C 10UF, Z, 25V	1	
	C2608	F1K1E106A136	C 10UF, Z, 25V	1	
	C2609	F1K1E106A136	C 10UF, Z, 25V	1	
	C2610	F1K1E106A136	C 10UF, Z, 25V	1	
	C2612	F1G1E103A123	C 0.010UF, K, 25V	1	

Safety	Ref. No.	Part No.	Part Name & Description	Pcs	Remarks
	C2613	F1H1C105A145	C 0.01UF, K, 16V	1	
	C2614	F1G1A473A053	C 0.47UF, 10V	1	
	C2615	F1G1H472A571	C 4700PF, K, 25V	1	
	C2616	F1G1H272A571	C 2700UF, 50V	1	
	C2618	F1G1C104A116	C 0.10UF, K, 16V	1	
	C2620	ECGRL0G680ER	C 68UF, J, 4V	1	
	C2621	ECGRL0G680ER	C 68UF, J, 4V	1	
	C2622	F1J1E105A171	C 1 UF 25V	1	
	C2623	F2G1E470A021	C 47PF, J, 25V	1	
	C2635	F1G1C103A116	C 0.010UF, K, 16V	1	
	C2636	F1J1A475A039	C 4.7UF, K, 10V	1	
	C2637	F1H1A1050032	C 10UF, 50V	1	
	C2638	F1J0G2260001	C 0.001UF, 6.3V	1	
	C2639	ECGRL0G680ER	C 68UF, J, 4V	1	
	C2640	F1J1A475A039	C 4.7UF, K, 10V	1	
	C2641	F1G1C104A116	C 0.10UF, K, 16V	1	
	C2645	F1G1C104A116	C 0.10UF, K, 16V	1	
	C2646	F1J0G2260001	C 0.001UF, 6.3V	1	
	C2647	F1J0G2260001	C 0.001UF, 6.3V	1	
	C2649	F1G1C104A116	C 0.10UF, K, 16V	1	
	C2650	F1G1C104A116	C 0.10UF, K, 16V	1	
	C2651	F1G1C104A116	C 0.10UF, K, 16V	1	
	C2652	F1H1H120A971	C 12PF, K, 50V	1	
	C2653	F1G1C104A116	C 0.10UF, K, 16V	1	
	C2654	F1G1C104A116	C 0.10UF, K, 16V	1	
	C2655	F1H1H180A971	C 18PF, K, 50V	1	
	C2656	F1J1A106A043	C 0.010UF, K, 10V	1	
	C2657	F1G1C104A116	C 0.10UF, K, 16V	1	
	C2658	F1G1C104A116	C 0.10UF, K, 16V	1	
	C2659	F1G1C104A116	C 0.10UF, K, 16V	1	
	C2660	F1G1C104A116	C 0.10UF, K, 16V	1	
	C2661	F1J0G2260001	C 0.001UF, 6.3V	1	
	C2662	F1J1A475A039	C 4.7UF, K, 10V	1	
	C2663	F1H0J1050012	C 1UF, K, 16V	1	
	C2664	F1H0J1050012	C 1UF, K, 16V	1	
	C2665	F1G1C104A116	C 0.10UF, K, 16V	1	
	C2666	F1J1A475A039	C 4.7UF, K, 10V	1	
	C2667	F1G1C104A116	C 0.10UF, K, 16V	1	
	C2668	F1G1C104A116	C 0.10UF, K, 16V	1	
	C2669	F1G1C104A116	C 0.10UF, K, 16V	1	
	C2670	F1G1C104A116	C 0.10UF, K, 16V	1	
	C2671	F1G1C104A116	C 0.10UF, K, 16V	1	
	C2672	F1G1C104A116	C 0.10UF, K, 16V	1	
	C2673	F1G1C104A116	C 0.10UF, K, 16V	1	
	C2674	F1G1C104A116	C 0.10UF, K, 16V	1	
	C2675	F1J0G2260001	C 0.001UF, 6.3V	1	
	C2676	F1G1C104A116	C 0.10UF, K, 16V	1	
	C2677	F1G1C104A116	C 0.10UF, K, 16V	1	
	C2678	F1G1C104A116	C 0.10UF, K, 16V	1	
	C2679	F1G1C104A116	C 0.10UF, K, 16V	1	
	C2680	F1G1C104A116	C 0.10UF, K, 16V	1	
	C2681	F1G1C104A116	C 0.10UF, K, 16V	1	
	C2682	F1G1C104A116	C 0.10UF, K, 16V	1	
	C2683	F1G1C104A116	C 0.10UF, K, 16V	1	
	C2684	F1G1C104A116	C 0.10UF, K, 16V	1	
	C2685	ECGRL0G680ER	C 68UF, J, 4V	1	
	C2686	F1G1C104A116	C 0.10UF, K, 16V	1	
	C2687	F1G1C104A116	C 0.10UF, K, 16V	1	
	C2688	F1G1C104A116	C 0.10UF, K, 16V	1	
	C2689	F1G1C104A116	C 0.10UF, K, 16V	1	
	C2690	F1G1C104A116	C 0.10UF, K, 16V	1	
	C2691	F1G1C104A116	C 0.10UF, K, 16V	1	
	C2692	F1G1C104A116	C 0.10UF, K, 16V	1	
	C2693	F1G1C104A116	C 0.10UF, K, 16V	1	
	C2694	F1G1C104A116	C 0.10UF, K, 16V	1	
	C2695	F1G1C104A116	C 0.10UF, K, 16V	1	
	C2697	F1G1C104A116	C 0.10UF, K, 16V	1	
	C2698	F1G1C104A116	C 0.10UF, K, 16V	1	
	C2699	F1G1C104A116	C 0.10UF, K, 16V	1	
	C2700	F1G1C104A116	C 0.10UF, K, 16V	1	
	C2700	F1H1H103A970	C 0.001UF, K, 50V	1	

Safety	Ref. No.	Part No.	Part Name & Description	Pcs	Remarks
	C2701	F1G1C104A116	C 0.10UF, K, 16V	1	
	C2702	F1G1C104A116	C 0.10UF, K, 16V	1	
	C2703	F1G1C104A116	C 0.10UF, K, 16V	1	
	C2704	F1G1C104A116	C 0.10UF, K, 16V	1	
	C2705	F1G1C104A116	C 0.10UF, K, 16V	1	
	C2706	F1G1C104A116	C 0.10UF, K, 16V	1	
	C2707	F1G1H101A731	C 100PF, K, 50V	1	
	C2709	F1G1C104A116	C 0.10UF, K, 16V	1	
	C2710	F1G1E103A123	C 0.010UF, K, 25V	1	
	C2715	F1G1C104A116	C 0.10UF, K, 16V	1	
	C2717	F1G1C104A116	C 0.10UF, K, 16V	1	
	C2718	F1G1C104A116	C 0.10UF, K, 16V	1	
	C2719	ECGRL0G680ER	C 68UF, J, 4V	1	
	C2720	F1G1C104A116	C 0.10UF, K, 16V	1	
	C2721	F1G1C104A116	C 0.10UF, K, 16V	1	
	C2722	F1G1C104A116	C 0.10UF, K, 16V	1	
	C2723	F1G1C104A116	C 0.10UF, K, 16V	1	
	C2724	F1G1C104A116	C 0.10UF, K, 16V	1	
	C2725	F1J1A106A043	C 0.010UF, K, 10V	1	
	C2726	F1J1A106A043	C 0.010UF, K, 10V	1	
	C2727	F1G1C104A116	C 0.10UF, K, 16V	1	
	C2728	F1G1C104A116	C 0.10UF, K, 16V	1	
	C2729	F1G1C104A116	C 0.10UF, K, 16V	1	
	C2730	F1G1C104A116	C 0.10UF, K, 16V	1	
	C2731	F1G1C104A116	C 0.10UF, K, 16V	1	
	C2732	F1G1C104A116	C 0.10UF, K, 16V	1	
	C2733	F1G1C104A116	C 0.10UF, K, 16V	1	
	C2734	F1G1C104A116	C 0.10UF, K, 16V	1	
	C2735	F1G1C104A116	C 0.10UF, K, 16V	1	
	C2736	F1G1C104A116	C 0.10UF, K, 16V	1	
	C2737	F1G1C104A116	C 0.10UF, K, 16V	1	
	C2738	F1G1C104A116	C 0.10UF, K, 16V	1	
	C2739	F1G1C104A116	C 0.10UF, K, 16V	1	
	C2740	F1G1C104A116	C 0.10UF, K, 16V	1	
	C2741	F1G1C104A116	C 0.10UF, K, 16V	1	
	C2742	F1G1C104A116	C 0.10UF, K, 16V	1	
	C2743	F1G1C104A116	C 0.10UF, K, 16V	1	
	C2744	F1G1C104A116	C 0.10UF, K, 16V	1	
	C2745	F1G1C104A116	C 0.10UF, K, 16V	1	
	C2746	F1G1C104A116	C 0.10UF, K, 16V	1	
	C2747	F1G1C104A116	C 0.10UF, K, 16V	1	
	C2748	F1G1H101A731	C 100PF, K, 50V	1	
	C2749	F1G1H101A731	C 100PF, K, 50V	1	
	C2824	F2G1C100A022	C 10UF J 16V	1	
	C2825	F1K1E106A136	C 10UF, Z, 25V	1	
	C2826	F1K1E106A136	C 10UF, Z, 25V	1	
	C2827	F1H1E104A129	C 0.1UF, 25V	1	
	C2828	F1G1E103A123	C 0.010UF, K, 25V	1	
	C2830	F1H1H392A970	C 3900PF, K, 50V	1	
	C2831	F1H1E104A129	C 0.1UF, 25V	1	
	C2832	F1K1E106A136	C 10UF, Z, 25V	1	
	C2837	F1G1C104A116	C 0.10UF, K, 16V	1	
	C2838	F1G1C104A116	C 0.10UF, K, 16V	1	
	C2839	F1G1C104A116	C 0.10UF, K, 16V	1	
	C2840	F1G1C104A116	C 0.10UF, K, 16V	1	
	C2842	F1G1C104A116	C 0.10UF, K, 16V	1	
	C2847	F1G1C104A116	C 0.10UF, K, 16V	1	
	C2906	F1H1C104A143	C 0.1UF, K, 16V	1	
	C2907	F1H1C104A143	C 0.1UF, K, 16V	1	
	C2912	F2G0J101A019	E 100UF 6.3V	1	
	C2914	F1H1H104A970	C 0.1UF, K, 50V	1	
	C2916	F1H1C104A143	C 0.1UF, K, 16V	1	
	C2920	F1H1H103A970	C 0.001UF, K, 50V	1	
	C2922	F1H1C104A143	C 0.1UF, K, 16V	1	
	C2928	F1G1H101A731	C 100PF, K, 50V	1	
	C2929	F1G1H102A730	C 1000UF, 50V	1	
	C2937	F1H1H104A970	C 0.1UF, K, 50V	1	
	C2960	F1H1A1050032	C 10UF, 50V	1	
	C2961	F1G1H471A731	C 470UF, 50V	1	

Safety	Ref. No.	Part No.	Part Name & Description	Pcs	Remarks
	C2962	F1H0J1050012	C 1UF, K, 16V	1	
	C3002	F1G1H561A730	C 56UF, 50V	1	
	C3003	F1G1H561A730	C 56UF, 50V	1	
	C3007	F1G1H561A730	C 56UF, 50V	1	
	C3008	F1G1H561A730	C 56UF, 50V	1	
	C3010	F1G1H561A730	C 56UF, 50V	1	
	C3011	F1G1H561A730	C 56UF, 50V	1	
	C3013	F1G1H561A730	C 56UF, 50V	1	
	C3014	F1G1H561A730	C 56UF, 50V	1	
	C3022	F1H1A1050032	C 10UF, 50V	1	
	C3023	F1G1C104A116	C 0.10UF, K, 16V	1	
	C3024	F1H1A1050032	C 10UF, 50V	1	
	C3025	F1H1A1050032	C 10UF, 50V	1	
	C3026	F1H1A1050032	C 10UF, 50V	1	
	C3039	F1H1A1050032	C 10UF, 50V	1	
	C3041	F1H1A1050032	C 10UF, 50V	1	
	C3043	F1H1A1050032	C 10UF, 50V	1	
	C3044	F1H1A1050032	C 10UF, 50V	1	
	C3046	F1H1A1050032	C 10UF, 50V	1	
	C3047	F1H1A1050032	C 10UF, 50V	1	
	C3048	F1H1A1050032	C 10UF, 50V	1	
	C3049	F1H1A1050032	C 10UF, 50V	1	
	C3070	F1J1A106A043	C 0.010UF, K, 10V	1	
	C3071	F1J1A106A043	C 0.010UF, K, 10V	1	
	C3072	F1G1C104A116	C 0.10UF, K, 16V	1	
	C3073	F1J1A106A043	C 0.010UF, K, 10V	1	
	C3074	F1J1A106A043	C 0.010UF, K, 10V	1	
	C3075	F1H1A1050032	C 10UF, 50V	1	
	C3077	F1G1C104A116	C 0.10UF, K, 16V	1	
	C3078	F1J1A106A043	C 0.010UF, K, 10V	1	
	C3083	F1J1A106A043	C 0.010UF, K, 10V	1	
	C3084	F1J1A106A043	C 0.010UF, K, 10V	1	
	C3085	F1J1A106A043	C 0.010UF, K, 10V	1	
	C3086	F1J1A106A043	C 0.010UF, K, 10V	1	
	C3090	F1J1A106A043	C 0.010UF, K, 10V	1	
	C3091	F1J1A106A043	C 0.010UF, K, 10V	1	
	C3092	F1J1A106A043	C 0.010UF, K, 10V	1	
	C3095	F2G1A101A019	E 100UF, 10V	1	
	C3098	F1H1A1050032	C 10UF, 50V	1	
	C3099	F1G1C104A116	C 0.10UF, K, 16V	1	
	C3100	F1G1C104A116	C 0.10UF, K, 16V	1	
	C3103	F2G1A101A019	E 100UF, 10V	1	
	C3107	F1J1A106A043	C 0.010UF, K, 10V	1	
	C3108	F1J1A106A043	C 0.010UF, K, 10V	1	
	C3109	F1J1A106A043	C 0.010UF, K, 10V	1	
	C3114	F1J1A106A043	C 0.010UF, K, 10V	1	
	C3115	F1J1A106A043	C 0.010UF, K, 10V	1	
	C3116	F1J1A106A043	C 0.010UF, K, 10V	1	
	C3117	F1J1A106A043	C 0.010UF, K, 10V	1	
	C3118	F1H1A1050032	C 10UF, 50V	1	
	C3119	F1H1A1050032	C 10UF, 50V	1	
	C3139	F1G1C104A116	C 0.10UF, K, 16V	1	
	C3140	F1G1C104A116	C 0.10UF, K, 16V	1	
	C3141	F1G1C104A116	C 0.10UF, K, 16V	1	
	C3143	F1G1C104A116	C 0.10UF, K, 16V	1	
	C3144	F1J1A106A043	C 0.010UF, K, 10V	1	
	C3145	F1G1C104A116	C 0.10UF, K, 16V	1	

Safety	Ref. No.	Part No.	Part Name & Description	Pcs	Remarks
	C3146	F1J1A106A043	C 0.010UF, K, 10V	1	
	C3147	F1J1A106A043	C 0.010UF, K, 10V	1	
	C3501	F1H1H102A970	C 1000PF, K, 50V	1	
	C3707	F1J1H333A838	C 0.033UF, 50V	1	
	C3708	F1J1H333A838	C 0.033UF, 50V	1	
	C3717	ECJ1VC1H561J	C 560PF J 50V	1	
	C3718	ECJ1VC1H561J	C 560PF J 50V	1	
	C3781	F1H1H102A970	C 1000PF, K, 50V	1	
	C3801	F1G1C104A116	C 0.10UF, K, 16V	1	
	C3802	F1G1C104A116	C 0.10UF, K, 16V	1	
	C3804	F1G1C104A116	C 0.10UF, K, 16V	1	
	C3806	F1G1C104A116	C 0.10UF, K, 16V	1	
	C3807	F1G1C104A116	C 0.10UF, K, 16V	1	
	C3808	F1G1C104A116	C 0.10UF, K, 16V	1	
	C3809	F1G1C104A116	C 0.10UF, K, 16V	1	
	C3810	F1G1C104A116	C 0.10UF, K, 16V	1	
	C3811	F1G1C104A116	C 0.10UF, K, 16V	1	
	C3812	F1G1C104A116	C 0.10UF, K, 16V	1	
	C3813	F1J0J106A020	C 0.010UF, K, 16V	1	
	C3814	F1G1C104A116	C 0.10UF, K, 16V	1	
	C3815	F1G1C103A116	C 0.010UF, K, 16V	1	
	C3816	F1G1C103A116	C 0.010UF, K, 16V	1	
	C3817	F1G1C103A116	C 0.010UF, K, 16V	1	
	C3818	F1G1C103A116	C 0.010UF, K, 16V	1	
	C3819	F1G1C103A116	C 0.010UF, K, 16V	1	
	C3820	F1G1C103A116	C 0.010UF, K, 16V	1	
	C3823	F1G1C104A116	C 0.10UF, K, 16V	1	
	C3829	F1H1A1050032	C 10UF, 50V	1	
	C3901	F1G1C104A116	C 0.10UF, K, 16V	1	
	C3902	F1G1C104A116	C 0.10UF, K, 16V	1	
	C3903	F1H1A1050032	C 10UF, 50V	1	
	C3904	F1G1C104A116	C 0.10UF, K, 16V	1	
	C3906	F1G1C104A116	C 0.10UF, K, 16V	1	
	C3907	F1G1C104A116	C 0.10UF, K, 16V	1	
	C3908	F1G1C104A116	C 0.10UF, K, 16V	1	
	C3909	F1G1C104A116	C 0.10UF, K, 16V	1	
	C3910	F1G1C104A116	C 0.10UF, K, 16V	1	
	C3911	F1G1C104A116	C 0.10UF, K, 16V	1	
	C3912	F1G1C104A116	C 0.10UF, K, 16V	1	
	C3913	F1J0J106A020	C 0.010UF, K, 16V	1	
	C3914	F1G1C104A116	C 0.10UF, K, 16V	1	
	C3915	F1G1C103A116	C 0.010UF, K, 16V	1	
	C3916	F1G1C103A116	C 0.010UF, K, 16V	1	
	C3917	F1G1C103A116	C 0.010UF, K, 16V	1	
	C3918	F1G1C103A116	C 0.010UF, K, 16V	1	
	C3919	F1G1C103A116	C 0.010UF, K, 16V	1	
	C3920	F1G1C103A116	C 0.010UF, K, 16V	1	
	C3923	F1G1C104A116	C 0.10UF, K, 16V	1	
	C3929	F1H1A1050032	C 10UF, 50V	1	
	C3944	F1K1E106A136	C 10UF, Z, 25V	1	
	C3945	F1H1H104A970	C 0.1UF, K, 50V	1	
	C3946	F1G1E103A123	C 0.010UF, K, 25V	1	
	C3948	F1H1H392A970	C 3900PF, K, 50V	1	
	C3949	F1H1H104A970	C 0.1UF, K, 50V	1	
	C3950	F1K1E106A136	C 10UF, Z, 25V	1	
	C3952	F1K1E106A136	C 10UF, Z, 25V	1	
	C3956	F1H1A1050032	C 10UF, 50V	1	
	C3957	F1H1A1050032	C 10UF, 50V	1	
	C4005	F1G1C104A116	C 0.10UF, K, 16V	1	

Safety	Ref. No.	Part No.	Part Name & Description	Pcs	Remarks
	C4006	F1G1C104A116	C 0.10UF, K, 16V	1	
	C4008	F1G1C104A116	C 0.10UF, K, 16V	1	
	C4010	F1G1C104A116	C 0.10UF, K, 16V	1	
	C4011	F1G1C104A116	C 0.10UF, K, 16V	1	
	C4013	F1G1C104A116	C 0.10UF, K, 16V	1	
	C4014	F1G1C104A116	C 0.10UF, K, 16V	1	
	C4015	F1G1C104A116	C 0.10UF, K, 16V	1	
	C4016	F1J1C475A170	C 4.7UF, K, 16V	1	
	C4021	F1G1C104A116	C 0.10UF, K, 16V	1	
	C4025	F1G1C104A116	C 0.10UF, K, 16V	1	
	C4027	F1G1C104A116	C 0.10UF, K, 16V	1	
	C4028	F1G1C104A116	C 0.10UF, K, 16V	1	
	C4030	F1G1C104A116	C 0.10UF, K, 16V	1	
	C4032	F1G1C104A116	C 0.10UF, K, 16V	1	
	C4033	F1G1C104A116	C 0.10UF, K, 16V	1	
	C4034	F1G1C104A116	C 0.10UF, K, 16V	1	
	C4035	F1H1A1050032	C 10UF, 50V	1	
	C4036	F1H1A1050032	C 10UF, 50V	1	
	C4038	F1G1C104A116	C 0.10UF, K, 16V	1	
	C4039	F1G1E103A123	C 0.010UF, K, 25V	1	
	C4040	F1G1H150A731	C 15UF, 50V	1	
	C4045	F1G1C104A116	C 0.10UF, K, 16V	1	
	C4047	F1H1A1050032	C 10UF, 50V	1	
	C4049	F1G1C104A116	C 0.10UF, K, 16V	1	
	C4050	F1H1A1050032	C 10UF, 50V	1	
	C4051	F1G1C104A116	C 0.10UF, K, 16V	1	
	C4053	F1G1C104A116	C 0.10UF, K, 16V	1	
	C4054	F1K1C1060004	C 0.010UF, 16V	1	
	C4055	F1G1C104A116	C 0.10UF, K, 16V	1	
	C4056	F2G1C470A022	E 47UF, 16V	1	
	C4428	F1G1E103A123	C 0.010UF, K, 25V	1	
	C4500	F1G1C104A116	C 0.10UF, K, 16V	1	
	C4501	F1G1C104A116	C 0.10UF, K, 16V	1	
	C4502	F1G1C104A116	C 0.10UF, K, 16V	1	
	C4503	F1G1C104A116	C 0.10UF, K, 16V	1	
	C4533	F1G1H680A731	C 68UF, 50V	1	
	C4534	F1G1C104A116	C 0.10UF, K, 16V	1	
	C4535	F1G1C104A116	C 0.10UF, K, 16V	1	
	C4547	F1G1C104A116	C 0.10UF, K, 16V	1	
	C4548	F1G1C104A116	C 0.10UF, K, 16V	1	
	C4549	F1G1C104A116	C 0.10UF, K, 16V	1	
	C4550	F1G1C104A116	C 0.10UF, K, 16V	1	
	C4551	F1G1C104A116	C 0.10UF, K, 16V	1	
	C4552	F1G1C104A116	C 0.10UF, K, 16V	1	
	C4553	F1G1H102A730	C 1000UF, 50V	1	
	C4554	F2G1C470A022	E 47UF, 16V	1	
	C4555	F1J1A106A043	C 0.010UF, K, 10V	1	
	C4574	F1G1C104A116	C 0.10UF, K, 16V	1	
	C4575	F1G1C104A116	C 0.10UF, K, 16V	1	
	C4580	F1G1C104A116	C 0.10UF, K, 16V	1	
	C4585	F1G1C104A116	C 0.10UF, K, 16V	1	
	C4595	F1G1C104A116	C 0.10UF, K, 16V	1	
	C4596	F1G1C104A116	C 0.10UF, K, 16V	1	
	C4598	F1J1A106A043	C 0.010UF, K, 10V	1	
	C4599	F1J1A106A043	C 0.010UF, K, 10V	1	
	C4600	F1G1C104A116	C 0.10UF, K, 16V	1	
	C4601	F1J1A106A043	C 0.010UF, K, 10V	1	
	C4602	F1G1C104A116	C 0.10UF, K, 16V	1	
	C4603	F1H1A225A051	C 22UF, 50V	1	
	C4605	F1J1A475A039	C 4.7UF, K, 10V	1	
	C4606	F1J1A475A039	C 4.7UF, K, 10V	1	
	C4607	F1J1A475A039	C 4.7UF, K, 10V	1	
	C4608	F1G1C104A116	C 0.10UF, K, 16V	1	
	C4613	F1H0J1050012	C 1UF, K, 16V	1	
	C4616	F1J1A475A039	C 4.7UF, K, 10V	1	
	C4617	F1J1A475A039	C 4.7UF, K, 10V	1	
	C4624	F1G1C104A116	C 0.10UF, K, 16V	1	
	C4625	F1G1C104A116	C 0.10UF, K, 16V	1	

Safety	Ref. No.	Part No.	Part Name & Description	Pcs	Remarks
	C4626	F1G1C104A116	C 0.10UF, K, 16V	1	
	C4628	F1G1C104A116	C 0.10UF, K, 16V	1	
	C4629	F1G1C104A116	C 0.10UF, K, 16V	1	
	C4630	F1G1C104A116	C 0.10UF, K, 16V	1	
	C4631	F1J1A106A043	C 0.010UF, K, 10V	1	
	C4632	F1G1C104A116	C 0.10UF, K, 16V	1	
	C4633	F1J1A106A043	C 0.010UF, K, 10V	1	
	C4634	F1G1C104A116	C 0.10UF, K, 16V	1	
	C4635	F1J1A106A043	C 0.010UF, K, 10V	1	
	C4636	F1G1C104A116	C 0.10UF, K, 16V	1	
	C4637	F1G1C104A116	C 0.10UF, K, 16V	1	
	C4638	F1G1C104A116	C 0.10UF, K, 16V	1	
	C4640	F1G1C104A116	C 0.10UF, K, 16V	1	
	C4642	F1G1C104A116	C 0.10UF, K, 16V	1	
	C4643	F1G1C104A116	C 0.10UF, K, 16V	1	
	C4644	F1G1C104A116	C 0.10UF, K, 16V	1	
	C4645	F1G1C104A116	C 0.10UF, K, 16V	1	
	C4702	F1G1C104A116	C 0.10UF, K, 16V	1	
	C4703	F1G1C104A116	C 0.10UF, K, 16V	1	
	C5001	F1G1C104A116	C 0.10UF, K, 16V	1	
	C5002	F1G1C104A116	C 0.10UF, K, 16V	1	
	C5003	F1G1C104A116	C 0.10UF, K, 16V	1	
	C5004	F1G1C104A116	C 0.10UF, K, 16V	1	
	C5005	F1H0J1050012	C 1UF, K, 16V	1	
	C5006	F1H0J1050012	C 1UF, K, 16V	1	
	C5007	F1J1A106A043	C 0.010UF, K, 10V	1	
	C5008	F1G1C104A116	C 0.10UF, K, 16V	1	
	C5009	F1G1C104A116	C 0.10UF, K, 16V	1	
	C5010	F1G1C104A116	C 0.10UF, K, 16V	1	
	C5011	F1G1C104A116	C 0.10UF, K, 16V	1	
	C5012	F1G1C104A116	C 0.10UF, K, 16V	1	
	C5013	F1J1A106A043	C 0.010UF, K, 10V	1	
	C5014	F1G1C104A116	C 0.10UF, K, 16V	1	
	C5015	F1G1C104A116	C 0.10UF, K, 16V	1	
	C5016	F1J1A106A043	C 0.010UF, K, 10V	1	
	C5017	F1G1C104A116	C 0.10UF, K, 16V	1	
	C5018	F1G1C104A116	C 0.10UF, K, 16V	1	
	C5019	F1G1C104A116	C 0.10UF, K, 16V	1	
	C5020	F1G1C104A116	C 0.10UF, K, 16V	1	
	C5021	F1H0J1050012	C 1UF, K, 16V	1	
	C5022	F1H0J1050012	C 1UF, K, 16V	1	
	C5023	F1H0J1050012	C 1UF, K, 16V	1	
	C5024	F1H0J1050012	C 1UF, K, 16V	1	
	C5025	F1J1A106A043	C 0.010UF, K, 10V	1	
	C5026	F1J1A106A043	C 0.010UF, K, 10V	1	
	C5027	F1G1C104A116	C 0.10UF, K, 16V	1	
	C5028	F1G1C104A116	C 0.10UF, K, 16V	1	
	C5029	F1G1C104A116	C 0.10UF, K, 16V	1	
	C5030	F1G1C104A116	C 0.10UF, K, 16V	1	
	C5031	F1G1C104A116	C 0.10UF, K, 16V	1	
	C5032	F1G1C104A116	C 0.10UF, K, 16V	1	
	C5033	F1H0J1050012	C 1UF, K, 16V	1	
	C5034	F1H0J1050012	C 1UF, K, 16V	1	
	C5035	F1H0J1050012	C 1UF, K, 16V	1	
	C5036	F1H0J1050012	C 1UF, K, 16V	1	
	C5037	F1H0J1050012	C 1UF, K, 16V	1	
	C5038	F1H0J1050012	C 1UF, K, 16V	1	
	C5039	F1J1A106A043	C 0.010UF, K, 10V	1	
	C5040	F1J1A106A043	C 0.010UF, K, 10V	1	
	C5041	F1J1A106A043	C 0.010UF, K, 10V	1	
	C5042	F1G1C104A116	C 0.10UF, K, 16V	1	
	C5043	F1G1C104A116	C 0.10UF, K, 16V	1	
	C5044	F1H0J1050012	C 1UF, K, 16V	1	
	C5045	F1H0J1050012	C 1UF, K, 16V	1	

Safety	Ref. No.	Part No.	Part Name & Description	Pcs	Remarks
	C5046	F1J1A106A043	C 0.010UF, K, 10V	1	
	C5047	F1H0J1050012	C 1UF, K, 16V	1	
	C5048	F1H0J2250008	C 2.2UF, K, 16V	1	
	C5049	F1G1C104A116	C 0.10UF, K, 16V	1	
	C5050	F1H0J1050012	C 1UF, K, 16V	1	
	C5051	F1J1A106A043	C 0.010UF, K, 10V	1	
	C5052	F1J1A106A043	C 0.010UF, K, 10V	1	
	C5053	F1G1C104A116	C 0.10UF, K, 16V	1	
	C5054	F1G1C104A116	C 0.10UF, K, 16V	1	
	C5055	F1G1C104A116	C 0.10UF, K, 16V	1	
	C5056	F1G1C104A116	C 0.10UF, K, 16V	1	
	C5057	F1G1C104A116	C 0.10UF, K, 16V	1	
	C5058	ECGRL0G680ER	C 68UF, J, 4V	1	
	C5059	F1G1C104A116	C 0.10UF, K, 16V	1	
	C5060	F1G1C104A116	C 0.10UF, K, 16V	1	
	C5061	F1G1C104A116	C 0.10UF, K, 16V	1	
	C5062	F1G1C104A116	C 0.10UF, K, 16V	1	
	C5063	F1G1C104A116	C 0.10UF, K, 16V	1	
	C5064	F1G1C104A116	C 0.10UF, K, 16V	1	
	C5065	F1G1C104A116	C 0.10UF, K, 16V	1	
	C5066	F1G1C104A116	C 0.10UF, K, 16V	1	
	C5067	F1G1C104A116	C 0.10UF, K, 16V	1	
	C5072	F1G1C104A116	C 0.10UF, K, 16V	1	
	C5073	F1H0J2250008	C 2.2UF, K, 16V	1	
	C5075	F1G1C104A116	C 0.10UF, K, 16V	1	
	C5076	F1G1C104A116	C 0.10UF, K, 16V	1	
	C5077	F1G1C104A116	C 0.10UF, K, 16V	1	
	C5078	F1G1C104A116	C 0.10UF, K, 16V	1	
	C5079	F1J1A106A043	C 0.010UF, K, 10V	1	
	C5080	F1J1A106A043	C 0.010UF, K, 10V	1	
	C5081	F1J1A106A043	C 0.010UF, K, 10V	1	
	C5082	F1G1C104A116	C 0.10UF, K, 16V	1	
	C5083	F1G1C104A116	C 0.10UF, K, 16V	1	
	C5085	F1G1C104A116	C 0.10UF, K, 16V	1	
	C5086	F1G1E103A123	C 0.010UF, K, 25V	1	
	C5087	F1G1E103A123	C 0.010UF, K, 25V	1	
	C5088	F1J1A106A043	C 0.010UF, K, 10V	1	
	C5089	F1J1A106A043	C 0.010UF, K, 10V	1	
	C5200	F1H1H180A971	C 18PF, K, 50V	1	
	C5201	F1H1H180A971	C 18PF, K, 50V	1	
	C5202	F1G1C104A116	C 0.10UF, K, 16V	1	
	C5301	F1H1A1050032	C 10UF, 50V	1	
	C5302	F1G1C104A116	C 0.10UF, K, 16V	1	
	C5303	F1H1A1050032	C 10UF, 50V	1	
	C5311	F1K1E106A136	C 10UF, Z, 25V	1	
	C5312	F1K1E106A136	C 10UF, Z, 25V	1	
	C5316	F1G1C333A081	C 0.033UF, K, 16V	1	
	C5318	F1K1E106A136	C 10UF, Z, 25V	1	
	C5319	F1K1E106A136	C 10UF, Z, 25V	1	
	C5320	F1H1E104A129	C 0.1UF, 25V	1	
	C5321	F1G1E6820007	C 6800UF, Z, 25V	1	
	C5322	F1J1A475A039	C 4.7UF, K, 10V	1	
	C5323	F1G1H272A571	C 2700UF, 50V	1	
	C5324	F1G1H3320004	C 3300UF, 50V	1	
	C5326	F1G1C104A116	C 0.10UF, K, 16V	1	
	C5327	F1G1C104A116	C 0.10UF, K, 16V	1	
	C5328	ECGRL0E680ER	C 68UF, J, 2.5V	1	
	C5329	ECGRL0E680ER	C 68UF, J, 2.5V	1	
	C5331	F2G1E470A021	C 47PF, J, 25V	1	
	C5332	F1J1E105A171	C 1 UF 25V	1	
	C5341	F1G1C104A116	C 0.10UF, K, 16V	1	
	C5344	F1H1C105A145	C 0.01UF, K, 16V	1	
	C5401	F1K1E106A136	C 10UF, Z, 25V	1	
	C5402	F1K1E106A136	C 10UF, Z, 25V	1	

Safety	Ref. No.	Part No.	Part Name & Description	Pcs	Remarks
	C5415	F1G1C104A116	C 0.10UF, K, 16V	1	
	C5419	F1H1A334A084	C 0.33UF, K, 50V	1	
	C5423	F1G1H102A730	C 1000UF, 50V	1	
	C5424	F1J1H474A757	C 0.47UF, 50V	1	
	C5425	F1J1H474A757	C 0.47UF, 50V	1	
	C5426	F2G1V220A020	E 22UF, 35V	1	
	C5427	F1G1H820A731	C 82UF, 50V	1	
	C5428	F1H1A1050032	C 10UF, 50V	1	
	C5431	F1G1C104A116	C 0.10UF, K, 16V	1	
	C5432	F1G1C104A116	C 0.10UF, K, 16V	1	
	C5470	F1G1C103A116	C 0.010UF, K, 16V	1	
	C5471	F1G1A473A053	C 0.47UF, 10V	1	
	C5473	F1G1E103A123	C 0.010UF, K, 25V	1	
	C5480	F1K1E106A136	C 10UF, Z, 25V	1	
	C5482	F2G1A221A149	E 220UF, 10V	1	
	C5483	F1J1A106A043	C 0.010UF, K, 10V	1	
	C5484	F2G0J470A019	E 47UF 6.3V	1	
	C5485	F1G1C104A116	C 0.10UF, K, 16V	1	
	C5486	F1G1E392A123	C 3900UF, Z, 25V	1	
	C5487	F1H0J1050012	C 1UF, K, 16V	1	
	C5488	F1H0J1050012	C 1UF, K, 16V	1	
	C5490	F1J1A475A039	C 4.7UF, K, 10V	1	
	C5491	F1H1H104A970	C 0.1UF, K, 50V	1	
	C5492	F1G1E103A123	C 0.010UF, K, 25V	1	
	C5494	F1H1H392A970	C 3900PF, K, 50V	1	
	C5495	F1H1H104A970	C 0.1UF, K, 50V	1	
	C5496	F1K1E106A136	C 10UF, Z, 25V	1	
	C5497	F2G1A101A019	E 100UF, 10V	1	
	C5498	F1H1E104A129	C 0.1UF, 25V	1	
	C5499	F1G1E103A123	C 0.010UF, K, 25V	1	
	C5501	F1K1E106A136	C 10UF, Z, 25V	1	
	C5503	F1G1E103A123	C 0.010UF, K, 25V	1	
	C5504	F1G1E103A123	C 0.010UF, K, 25V	1	
	C5508	F1K1E106A136	C 10UF, Z, 25V	1	
	C5512	F1H1H472A970	C 4700PF, K, 50V	1	
	C5513	F1H1E223A129	C 0.022UF, K, 50V	1	
	C5531	F1H1A225A051	C 22UF, 50V	1	
	C5601	F1G1E103A123	C 0.010UF, K, 25V	1	
	C5602	ECGRL0G680ER	C 68UF, J, 4V	1	
	C5603	F1G1C104A116	C 0.10UF, K, 16V	1	
	C5604	F1G1E6820007	C 6800UF, Z, 25V	1	
	C5605	F1J1A475A039	C 4.7UF, K, 10V	1	
	C5606	F1H1C105A145	C 0.01UF, K, 16V	1	
	C5607	F1G1H272A571	C 2700UF, 50V	1	
	C5611	F1K1E106A136	C 10UF, Z, 25V	1	
	C5612	F1K1E106A136	C 10UF, Z, 25V	1	
	C5615	F1K1E106A136	C 10UF, Z, 25V	1	
	C5616	F1G1C273A081	C 0.027UF, K, 16V	1	
	C5618	F1K1E106A136	C 10UF, Z, 25V	1	
	C5619	F1K1E106A136	C 10UF, Z, 25V	1	
	C5620	F1H1E104A129	C 0.1UF, 25V	1	
	C5621	F1G1E103A123	C 0.010UF, K, 25V	1	
	C5622	F1J1A475A039	C 4.7UF, K, 10V	1	
	C5623	F1G1H272A571	C 2700UF, 50V	1	
	C5624	F1G1H3320004	C 3300UF, 50V	1	
	C5626	F1G1C104A116	C 0.10UF, K, 16V	1	
	C5627	F1G1C104A116	C 0.10UF, K, 16V	1	
	C5628	ECGRL0E680ER	C 68UF, J, 2.5V	1	
	C5629	ECGRL0E680ER	C 68UF, J, 2.5V	1	
	C5631	F2G1E470A021	C 47PF, J, 25V	1	
	C5632	F1J1E105A171	C 1 UF 25V	1	
	C5636	F1G1C104A116	C 0.10UF, K, 16V	1	
	C5637	F1G1C104A116	C 0.10UF, K, 16V	1	
	C5638	F1G1C104A116	C 0.10UF, K, 16V	1	

Safety	Ref. No.	Part No.	Part Name & Description	Pcs	Remarks
	C5639	F1G1C104A116	C 0.10UF, K, 16V	1	
	C5640	F1G1C104A116	C 0.10UF, K, 16V	1	
	C5641	F1G1C104A116	C 0.10UF, K, 16V	1	
	C5642	F1K1E106A136	C 10UF, Z, 25V	1	
	C5643	F1H1E104A129	C 0.1UF, 25V	1	
	C5644	F1H1C105A145	C 0.01UF, K, 16V	1	
	C5645	F1G1C104A116	C 0.10UF, K, 16V	1	
	C5646	F2H0J1010009	C 100UF, 6.3V	1	
	C5648	F1G1C104A116	C 0.10UF, K, 16V	1	
	C5650	F1G1H152A571	C 1500UF, 50V	1	
	C5651	F1H1A225A051	C 22UF, 50V	1	
	C5900	F1G1C104A116	C 0.10UF, K, 16V	1	
	C5901	F1K1E106A136	C 10UF, Z, 25V	1	
	C5902	F1K1E106A136	C 10UF, Z, 25V	1	
	C5903	F1G1E104A087	C 0.10UF, K, 25V	1	
	C5906	F1J1A106A043	C 0.010UF, K, 10V	1	
	C5907	F1H1E104A129	C 0.1UF, 25V	1	
	C5912	F1G1E103A123	C 0.010UF, K, 25V	1	
	C5914	F1H1H392A970	C 3900PF, K, 50V	1	
	C5915	F1H1E104A129	C 0.1UF, 25V	1	
	C5916	F1K1E106A136	C 10UF, Z, 25V	1	
	C5929	F1G1C104A116	C 0.10UF, K, 16V	1	
	C5930	F1G1C104A116	C 0.10UF, K, 16V	1	
	C5931	F1G1C104A116	C 0.10UF, K, 16V	1	
	C5932	F1G1E104A087	C 0.10UF, K, 25V	1	
	C5933	F1K1E106A136	C 10UF, Z, 25V	1	
	C5934	F1K1E106A136	C 10UF, Z, 25V	1	
	C5935	F1H1E104A129	C 0.1UF, 25V	1	
	C5936	F1G1E103A123	C 0.010UF, K, 25V	1	
	C5938	F1H1H392A970	C 3900PF, K, 50V	1	
	C5939	F1H1E104A129	C 0.1UF, 25V	1	
	C5940	F1K1E106A136	C 10UF, Z, 25V	1	
	C5943	F1G1C104A116	C 0.10UF, K, 16V	1	
	C5944	F1G1C104A116	C 0.10UF, K, 16V	1	
	C5945	F1G1E104A087	C 0.10UF, K, 25V	1	
	C7701	F1H1A225A051	C 22UF, 50V	1	
	C7702	F2G0G101A007	E 100UF 6.3V	1	
	C7704	F1H1A1050032	C 10UF, 50V	1	
	C7706	F1H1A1050032	C 10UF, 50V	1	
	C7708	F1H1A1050032	C 10UF, 50V	1	
	C7709	F1H1A225A051	C 22UF, 50V	1	
	C7710	F1J0J106A020	C 0.010UF, K, 16V	1	
	C7711	F1J0J106A020	C 0.010UF, K, 16V	1	
	C7712	F1H1C104A143	C 0.1UF, K, 16V	1	
	C7713	F1H1H180A971	C 18PF, K, 50V	1	
	C7714	F1H1C104A143	C 0.1UF, K, 16V	1	
	C7715	F1H1H180A971	C 18PF, K, 50V	1	
	C7716	F1J0J106A020	C 0.010UF, K, 16V	1	
	C7717	F1H1C104A143	C 0.1UF, K, 16V	1	
	C7718	F1J0J106A020	C 0.010UF, K, 16V	1	
	C7719	F1H1C104A143	C 0.1UF, K, 16V	1	
	C7720	F1H1C104A143	C 0.1UF, K, 16V	1	
	C7721	F1J0J106A020	C 0.010UF, K, 16V	1	
	C7724	F1H1H150A971	C 15PF, K, 50V	1	
	C7725	F1H1H150A971	C 15PF, K, 50V	1	
	C7729	F1H1H150A971	C 15PF, K, 50V	1	
	C7731	F1H1H150A971	C 15PF, K, 50V	1	
	C7732	F1H1C104A144	C 0.1UF, K, 16V	1	
	C7733	F1H1C104A144	C 0.1UF, K, 16V	1	
	C7736	F1H1C104A144	C 0.1UF, K, 16V	1	
	C7737	F1J0J106A020	C 0.010UF, K, 16V	1	
	C7738	F2G0G101A007	E 100UF 6.3V	1	
	C7742	F1J0J106A020	C 0.010UF, K, 16V	1	
	C7901	F1G1H330A731	C 33UF, 50V	1	

Safety	Ref. No.	Part No.	Part Name & Description	Pcs	Remarks
	C7902	F1J0J106A020	C 0.010UF, K, 16V	1	
	C7903	F1G1H330A731	C 33UF, 50V	1	
	C7905	F1G1C104A119	C 0.10UF, K, 16V	1	
	C7908	F1G1C104A119	C 0.10UF, K, 16V	1	
	C7909	F1G1C104A119	C 0.10UF, K, 16V	1	
	C7926	F1G1H330A731	C 33UF, 50V	1	
	C7927	F1G1H330A731	C 33UF, 50V	1	
	C7929	F1J0J106A020	C 0.010UF, K, 16V	1	
	C7930	F1G1C104A116	C 0.10UF, K, 16V	1	
	C8003	F1H0J1050012	C 1UF, K, 16V	1	
	C8005	F1H0J1050012	C 1UF, K, 16V	1	
	C8006	F1G1C104A116	C 0.10UF, K, 16V	1	
	C8007	F1G1C104A116	C 0.10UF, K, 16V	1	
	C8008	F1G1C104A116	C 0.10UF, K, 16V	1	
	C8009	F1J1A106A043	C 0.010UF, K, 10V	1	
	C8010	F1J1A106A043	C 0.010UF, K, 10V	1	
	C8011	F1G1C104A116	C 0.10UF, K, 16V	1	
	C8012	F1G1C104A116	C 0.10UF, K, 16V	1	
	C8013	F1G1C104A116	C 0.10UF, K, 16V	1	
	C8014	F1G1C104A116	C 0.10UF, K, 16V	1	
	C8015	F1H0J1050012	C 1UF, K, 16V	1	
	C8016	F1H0J1050012	C 1UF, K, 16V	1	
	C8017	F1J1A106A043	C 0.010UF, K, 10V	1	
	C8018	F1G1C104A116	C 0.10UF, K, 16V	1	
	C8019	F1G1C104A116	C 0.10UF, K, 16V	1	
	C8020	F1G1C104A116	C 0.10UF, K, 16V	1	
	C8021	F1G1C104A116	C 0.10UF, K, 16V	1	
	C8022	F1H0J1050012	C 1UF, K, 16V	1	
	C8023	F1J1A106A043	C 0.010UF, K, 10V	1	
	C8024	F1J1A106A043	C 0.010UF, K, 10V	1	
	C8025	F1G1C104A116	C 0.10UF, K, 16V	1	
	C8026	F1G1C104A116	C 0.10UF, K, 16V	1	
	C8027	F1G1C104A116	C 0.10UF, K, 16V	1	
	C8028	F1G1C104A116	C 0.10UF, K, 16V	1	
	C8029	F1G1C104A116	C 0.10UF, K, 16V	1	
	C8030	F1H0J1050012	C 1UF, K, 16V	1	
	C8031	F1H0J1050012	C 1UF, K, 16V	1	
	C8032	F1J1A106A043	C 0.010UF, K, 10V	1	
	C8033	F1G1C104A116	C 0.10UF, K, 16V	1	
	C8034	F1G1C104A116	C 0.10UF, K, 16V	1	
	C8035	F1J1A106A043	C 0.010UF, K, 10V	1	
	C8036	F1J1A106A043	C 0.010UF, K, 10V	1	
	C8037	F1G1C104A116	C 0.10UF, K, 16V	1	
	C8038	F1G1C104A116	C 0.10UF, K, 16V	1	
	C8039	F1G1C104A116	C 0.10UF, K, 16V	1	
	C8040	F1G1C104A116	C 0.10UF, K, 16V	1	
	C8041	F1G1C104A116	C 0.10UF, K, 16V	1	
	C8042	ECGRL0G680ER	C 68UF, J, 4V	1	
	C8043	F1G1C104A116	C 0.10UF, K, 16V	1	
	C8044	F1G1C104A116	C 0.10UF, K, 16V	1	
	C8045	F1G1C104A116	C 0.10UF, K, 16V	1	
	C8046	F1G1C104A116	C 0.10UF, K, 16V	1	
	C8047	F1G1C104A116	C 0.10UF, K, 16V	1	
	C8048	F1G1C104A116	C 0.10UF, K, 16V	1	
	C8049	F1G1C104A116	C 0.10UF, K, 16V	1	
	C8050	F1G1C104A116	C 0.10UF, K, 16V	1	
	C8051	F1G1C104A116	C 0.10UF, K, 16V	1	
	C8052	F1H0J1050012	C 1UF, K, 16V	1	
	C8053	F1G1C103A116	C 0.010UF, K, 16V	1	
	C8054	F1G1H120A731	C 12UF, 50V	1	
	C8055	F1G1HR50A577	C 0.50UF, 50V	1	
	C8056	F1G1C104A116	C 0.10UF, K, 16V	1	
	C8057	F1G1C104A116	C 0.10UF, K, 16V	1	

Safety	Ref. No.	Part No.	Part Name & Description	Pcs	Remarks
	C8058	F1J1A106A043	C 0.010UF, K, 10V	1	
	C8059	F1G1C104A116	C 0.010UF, K, 10V	1	
	C8060	F1G1C104A116	C 0.010UF, K, 10V	1	
	C8063	F1H0J1050012	C 1UF, K, 16V	1	
	C8064	F1H0J1050012	C 1UF, K, 16V	1	
	C8065	F1G1C104A116	C 0.10UF, K, 16V	1	
	C8067	F1G1C104A116	C 0.10UF, K, 16V	1	
	C8069	F1G1H102A730	C 1000UF, 50V	1	
	C8070	F1G1C104A116	C 0.10UF, K, 16V	1	
	C8071	F1G1C104A116	C 0.10UF, K, 16V	1	
	C8072	F1G1C104A116	C 0.10UF, K, 16V	1	
	C8073	F1G1C104A116	C 0.10UF, K, 16V	1	
	C8074	F1G1C104A116	C 0.10UF, K, 16V	1	
	C8075	F1J1A106A043	C 0.010UF, K, 10V	1	
	C8076	F1G1C104A116	C 0.10UF, K, 16V	1	
	C8077	F1G1C104A116	C 0.10UF, K, 16V	1	
	C8078	F1G1C104A116	C 0.10UF, K, 16V	1	
	C8079	F1G1C104A116	C 0.10UF, K, 16V	1	
	C8080	F1G1C104A116	C 0.10UF, K, 16V	1	
	C8081	F1G1C104A116	C 0.10UF, K, 16V	1	
	C8082	F1G1H102A730	C 1000UF, 50V	1	
	C8083	F1G1C104A116	C 0.10UF, K, 16V	1	
	C8084	F1G1H102A730	C 1000UF, 50V	1	
	C8085	F1G1C104A116	C 0.10UF, K, 16V	1	
	C8086	F1G1C104A116	C 0.10UF, K, 16V	1	
	C8087	F1G1C104A116	C 0.10UF, K, 16V	1	
	C8088	F1G1C104A116	C 0.10UF, K, 16V	1	
	C8089	F1G1C104A116	C 0.10UF, K, 16V	1	
	C8090	F1G1C104A116	C 0.10UF, K, 16V	1	
	C8092	F1G1C104A116	C 0.10UF, K, 16V	1	
	C8093	F1G1C104A116	C 0.10UF, K, 16V	1	
	C8094	F1G1C104A116	C 0.10UF, K, 16V	1	
	C8095	F1G1C104A116	C 0.10UF, K, 16V	1	
	C8096	F1G1C104A116	C 0.10UF, K, 16V	1	
	C8097	F1G1C104A116	C 0.10UF, K, 16V	1	
	C8098	F1G1C104A116	C 0.10UF, K, 16V	1	
	C8099	F1G1C104A116	C 0.10UF, K, 16V	1	
	C8100	F1G1C104A116	C 0.10UF, K, 16V	1	
	C8101	F1G1C104A116	C 0.10UF, K, 16V	1	
	C8102	F1G1C104A116	C 0.10UF, K, 16V	1	
	C8103	F1J1A106A043	C 0.010UF, K, 10V	1	
	C8104	F1G1C104A116	C 0.10UF, K, 16V	1	
	C8109	F1G1H100A731	C 10PF, K, 50V	1	
	C8110	F1G1H100A731	C 10PF, K, 50V	1	
	C8201	F1G1C104A116	C 0.10UF, K, 16V	1	
	C8202	F1G1C104A116	C 0.10UF, K, 16V	1	
	C8415	F1G1C104A116	C 0.10UF, K, 16V	1	
	C8508	F1G1C103A116	C 0.010UF, K, 16V	1	
	C8510	F1J1A106A043	C 0.010UF, K, 10V	1	
	C8580	F1G1C104A116	C 0.10UF, K, 16V	1	
	C8581	F1G1C104A116	C 0.10UF, K, 16V	1	
	C8582	F1G1C104A116	C 0.10UF, K, 16V	1	
	C8583	F1G1C104A116	C 0.10UF, K, 16V	1	
	C8584	F1G1C104A116	C 0.10UF, K, 16V	1	
	C8635	F1H0J1050012	C 1UF, K, 16V	1	
	C8636	F2G0J101A019	E 100UF 6.3V	1	
	C8637	F1J1A106A043	C 0.010UF, K, 10V	1	
	C8638	F1G1C104A116	C 0.10UF, K, 16V	1	
	C8639	F1J1A106A043	C 0.010UF, K, 10V	1	
	C8640	F1G1C104A116	C 0.10UF, K, 16V	1	
	C8951	F1K1E106A136	C 10UF, Z, 25V	1	
	C8952	F1K1E106A136	C 10UF, Z, 25V	1	
	C9024	F1G1H8R0A732	C 8.0UF, 50V	1	
	C9025	F1G1H100A731	C 10PF, K, 50V	1	
	C9026	F1G1C104A116	C 0.10UF, K, 16V	1	
	C9027	F1G1C104A116	C 0.10UF, K, 16V	1	

Safety	Ref. No.	Part No.	Part Name & Description	Pcs	Remarks
	C9028	F1G1C104A116	C 0.10UF, K, 16V	1	
	C9029	F1G1C104A116	C 0.10UF, K, 16V	1	
	C9030	F1G1C104A116	C 0.10UF, K, 16V	1	
	C9031	F1G1C104A116	C 0.10UF, K, 16V	1	
	C9032	F1G1C104A116	C 0.10UF, K, 16V	1	
	C9033	F1G1C104A116	C 0.10UF, K, 16V	1	
	C9034	F1G1C104A116	C 0.10UF, K, 16V	1	
	C9035	F1G1C104A116	C 0.10UF, K, 16V	1	
	C9036	F1G1C104A116	C 0.10UF, K, 16V	1	
	C9037	F1H0J1050012	C 1UF, K, 16V	1	
	C9038	F1H0J1050012	C 1UF, K, 16V	1	
	C9039	F1H0J1050012	C 1UF, K, 16V	1	
	C9040	F1H0J1050012	C 1UF, K, 16V	1	
	C9041	F1H0J1050012	C 1UF, K, 16V	1	
	C9042	F1G1C104A116	C 0.10UF, K, 16V	1	
	C9043	F1G1C104A116	C 0.10UF, K, 16V	1	
	C9044	F1G1C104A116	C 0.10UF, K, 16V	1	
	C9045	F1G1C104A116	C 0.10UF, K, 16V	1	
	C9046	F1G1C104A116	C 0.10UF, K, 16V	1	
	C9047	F1G1C104A116	C 0.10UF, K, 16V	1	
	C9048	F1G1C104A116	C 0.10UF, K, 16V	1	
	C9049	F1G1C104A116	C 0.10UF, K, 16V	1	
	C9050	F1G1C104A116	C 0.10UF, K, 16V	1	
	C9051	F1J1A106A043	C 0.010UF, K, 10V	1	
	C9052	F1H0J1050012	C 1UF, K, 16V	1	
	C9053	F1H0J1050012	C 1UF, K, 16V	1	
	C9054	F1H0J1050012	C 1UF, K, 16V	1	
	C9055	F1H0J1050012	C 1UF, K, 16V	1	
	C9056	F1G1C104A116	C 0.10UF, K, 16V	1	
	C9057	F1G1C104A116	C 0.10UF, K, 16V	1	
	C9058	F1G1C104A116	C 0.10UF, K, 16V	1	
	C9059	F1G1C104A116	C 0.10UF, K, 16V	1	
	C9060	F1G1C104A116	C 0.10UF, K, 16V	1	
	C9061	F1J1A106A043	C 0.010UF, K, 10V	1	
	C9062	F1H0J1050012	C 1UF, K, 16V	1	
	C9063	F1H0J1050012	C 1UF, K, 16V	1	
	C9064	F1J1A106A043	C 0.010UF, K, 10V	1	
	C9065	F1H0J1050012	C 1UF, K, 16V	1	
	C9066	F1H0J1050012	C 1UF, K, 16V	1	
	C9067	F1G1C104A116	C 0.10UF, K, 16V	1	
	C9068	F1J1A475A039	C 4.7UF, K, 10V	1	
	C9069	F1G1C104A116	C 0.10UF, K, 16V	1	
	C9070	F1J1A475A039	C 4.7UF, K, 10V	1	
	C9071	F1G1C104A116	C 0.10UF, K, 16V	1	
	C9072	F1G1C104A116	C 0.10UF, K, 16V	1	
	C9073	F1G1C104A116	C 0.10UF, K, 16V	1	
	C9074	F1G1C104A116	C 0.10UF, K, 16V	1	
	C9075	F1G1C104A116	C 0.10UF, K, 16V	1	
	C9076	F1G1C104A116	C 0.10UF, K, 16V	1	
	C9077	F1G1C104A116	C 0.10UF, K, 16V	1	
	C9078	F1G1C104A116	C 0.10UF, K, 16V	1	
	C9079	F1G1C104A116	C 0.10UF, K, 16V	1	
	C9080	F1G1C104A116	C 0.10UF, K, 16V	1	
	C9081	F1G1C104A116	C 0.10UF, K, 16V	1	
	C9082	F1G1C104A116	C 0.10UF, K, 16V	1	
	C9083	F1G1C104A116	C 0.10UF, K, 16V	1	
	C9084	F1G1C104A116	C 0.10UF, K, 16V	1	
	C9085	F1G1C104A116	C 0.10UF, K, 16V	1	
	C9086	F1G1C104A116	C 0.10UF, K, 16V	1	
	C9087	F1G1C104A116	C 0.10UF, K, 16V	1	
	C9088	F1G1C104A116	C 0.10UF, K, 16V	1	
	C9089	F1G1C104A116	C 0.10UF, K, 16V	1	
	C9090	F1G1C104A116	C 0.10UF, K, 16V	1	
	C9091	F1G1C104A116	C 0.10UF, K, 16V	1	
	C9092	F1G1C104A116	C 0.10UF, K, 16V	1	
	C9093	F1G1C104A116	C 0.10UF, K, 16V	1	
	C9094	F1H0J2250008	C 2.2UF, K, 16V	1	
	C9095	F1G1E103A123	C 0.010UF, K, 25V	1	
	C9099	F1G1C104A116	C 0.10UF, K, 16V	1	
	C9101	F1G1C104A116	C 0.10UF, K, 16V	1	

Safety	Ref. No.	Part No.	Part Name & Description	Pcs	Remarks
	C9102	F1G1C104A116	C 0.10UF, K, 16V	1	
	C9104	F1G1C104A116	C 0.10UF, K, 16V	1	
	C9105	F1G1C104A116	C 0.10UF, K, 16V	1	
	C9106	F1G1C104A116	C 0.10UF, K, 16V	1	
	C9107	F1G1C104A116	C 0.10UF, K, 16V	1	
	C9108	F1G1C104A116	C 0.10UF, K, 16V	1	
	C9109	F1G1C104A116	C 0.10UF, K, 16V	1	
	C9112	F1G1C104A116	C 0.10UF, K, 16V	1	
	C9114	F1G1C104A116	C 0.10UF, K, 16V	1	
	C9117	F1G1C104A116	C 0.10UF, K, 16V	1	
	C9118	F1G1C104A116	C 0.10UF, K, 16V	1	
	C9119	F1G1C104A116	C 0.10UF, K, 16V	1	
	C9120	F1G1C104A116	C 0.10UF, K, 16V	1	
	C9121	F1G1C104A116	C 0.10UF, K, 16V	1	
	C9133	ECGRL0G680ER	C 68UF, J, 4V	1	
	C9201	F1K1E106A136	C 10UF, Z, 25V	1	
	C9202	F1K1E106A136	C 10UF, Z, 25V	1	
	C9203	F1H1C683A143	C 0.068UF, K, 16V	1	
	C9204	F1K1E106A136	C 10UF, Z, 25V	1	
	C9205	F1K1E106A136	C 10UF, Z, 25V	1	
	C9206	F1H1H104A970	C 0.1UF, K, 50V	1	
	C9207	F1J1A475A039	C 4.7UF, K, 10V	1	
	C9208	ECJ0EB1E272K	C 2700UF, K, 16V	1	
	C9209	ECJ0EB1E332K	C 3300UF, K, 16V	1	
	C9210	F1G1C104A116	C 0.10UF, K, 16V	1	
	C9211	F1G1C104A116	C 0.10UF, K, 16V	1	
	C9212	ECGRL0G680ER	C 68UF, J, 4V	1	
	C9213	ECGRL0E680ER	C 68UF, J, 2.5V	1	
	C9214	F2G1E470A021	C 47PF, J, 25V	1	
	C9215	F1J1E105A171	C 1 UF 25V	1	
	C9217	F1G1C104A116	C 0.10UF, K, 16V	1	
	C9218	F1H1C105A145	C 0.01UF, K, 16V	1	
	C9221	F1H1A154A084	C 0.15UF, K, 50V	1	
	C9223	F1G1C104A116	C 0.10UF, K, 16V	1	
	C9302	F1H1A1050032	C 10UF, 50V	1	
	C9303	F1H1A1050032	C 10UF, 50V	1	
	C9304	F1G1C104A116	C 0.10UF, K, 16V	1	
	C9306	F1H1A1050032	C 10UF, 50V	1	
	C9307	F1H1A1050032	C 10UF, 50V	1	
	C9308	F1G1C104A116	C 0.10UF, K, 16V	1	
	C9309	F1G1C104A116	C 0.10UF, K, 16V	1	
	C9310	F1G1C104A116	C 0.10UF, K, 16V	1	
	C9401	F1J1A106A043	C 0.010UF, K, 10V	1	
	C9402	F1H0J1050012	C 1UF, K, 16V	1	
	C9403	F1G1C104A116	C 0.10UF, K, 16V	1	
	C9404	F1G1C104A116	C 0.10UF, K, 16V	1	
	C9405	F1G1C104A116	C 0.10UF, K, 16V	1	
	C9406	F1H0J1050012	C 1UF, K, 16V	1	
	C9407	F1G1C104A116	C 0.10UF, K, 16V	1	
	C9408	F1G1C104A116	C 0.10UF, K, 16V	1	
	C9409	F1G1C104A116	C 0.10UF, K, 16V	1	
	C9410	F1H0J1050012	C 1UF, K, 16V	1	
	C9411	F1G1C104A116	C 0.10UF, K, 16V	1	
	C9412	F1G1C104A116	C 0.10UF, K, 16V	1	
	C9413	F1G1C104A116	C 0.10UF, K, 16V	1	
	C9414	F1H0J1050012	C 1UF, K, 16V	1	
	C9415	F1G1C104A116	C 0.10UF, K, 16V	1	
	C9416	F1G1C104A116	C 0.10UF, K, 16V	1	
	C9417	F1G1C104A116	C 0.10UF, K, 16V	1	
	C9418	F1J1A106A043	C 0.010UF, K, 10V	1	
	C9419	F1H0J1050012	C 1UF, K, 16V	1	
	C9420	F1G1C104A116	C 0.10UF, K, 16V	1	
	C9421	F1G1C104A116	C 0.10UF, K, 16V	1	
	C9422	F1H0J1050012	C 1UF, K, 16V	1	
	C9423	F1J1A106A043	C 0.010UF, K, 10V	1	
	C9424	F1H0J1050012	C 1UF, K, 16V	1	
	C9425	F1G1C104A116	C 0.10UF, K, 16V	1	
	C9426	F1G1C104A116	C 0.10UF, K, 16V	1	
	C9427	F1H0J1050012	C 1UF, K, 16V	1	
	C9428	F1G1C104A116	C 0.10UF, K, 16V	1	

Safety	Ref. No.	Part No.	Part Name & Description	Pcs	Remarks
	C9429	F1G1C104A116	C 0.10UF, K, 16V	1	
	C9430	F1J1A106A043	C 0.010UF, K, 10V	1	
	C9431	F1G1C104A116	C 0.10UF, K, 16V	1	
	C9432	F1G1C104A116	C 0.10UF, K, 16V	1	
	C9433	F1H1C104A143	C 0.1UF, K, 16V	1	
	C9437	F1G1E103A123	C 0.010UF, K, 25V	1	
	C9438	F1G1E103A123	C 0.010UF, K, 25V	1	
	C9439	F1G1E103A123	C 0.010UF, K, 25V	1	
	C9440	F1G1E103A123	C 0.010UF, K, 25V	1	
	C9441	F1G1E103A123	C 0.010UF, K, 25V	1	
	C16004	F1L2J562A022	C 5600UF, K,6.3V	1	
	C16011	F0C2E115A260	E 0.011UF, 250V	1	
	C16012	F0C2E115A260	E 0.011UF, 250V	1	
	C16013	F0C2E115A260	E 0.011UF, 250V	1	
	C16014	F0C2E115A260	E 0.011UF, 250V	1	
	C16015	F0C2E115A260	E 0.011UF, 250V	1	
	C16016	F0C2E115A260	E 0.011UF, 250V	1	
	C16017	F0C2E115A260	E 0.011UF, 250V	1	
	C16022	F1L2J562A022	C 5600UF, K,6.3V	1	
	C16071	F1L2J1020001	C 1000UF, K,6.3V	1	
	C16072	F1L2J1520001	C 1500UF, K,6.3V	1	
	C16091	F1L2J1520001	C 1500UF, K,6.3V	1	
	C16092	F1L2J1020001	C 1000UF, K,6.3V	1	
	C16131	F1L1E4750004	C 4.7UF, 25V	1	
	C16133	F1L1E4750004	C 4.7UF, 25V	1	
	C16135	F1K1E105A029	C 1UF, Z, 25V	1	
	C16151	F1K1E105A029	C 1UF, Z, 25V	1	
	C16152	F1L1E4750004	C 4.7UF, 25V	1	
	C16153	F1L1E4750004	C 4.7UF, 25V	1	
	C16154	F1L1E4750004	C 4.7UF, 25V	1	
	C16181	F1L1E4750004	C 4.7UF, 25V	1	
	C16182	F1L1E4750004	C 4.7UF, 25V	1	
	C16183	F1L1E4750004	C 4.7UF, 25V	1	
	C16191	F1L1E4750004	C 4.7UF, 25V	1	
	C16192	F1H1E104A129	C 0.1UF, 25V	1	
	C16195	F1L1E4750004	C 4.7UF, 25V	1	
	C16198	F1K2J102A014	C 1000UF, K,6.3V	1	
	C16201	F0C2E115A260	E 0.011UF, 250V	1	
	C16202	F0C2E115A260	E 0.011UF, 250V	1	
	C16203	F0C2E115A260	E 0.011UF, 250V	1	
	C16204	F0C2E115A260	E 0.011UF, 250V	1	
	C16205	F0C2E115A260	E 0.011UF, 250V	1	
	C16206	F0C2E115A260	E 0.011UF, 250V	1	
	C16207	F0C2E115A260	E 0.011UF, 250V	1	
	C16208	F0C2E115A260	E 0.011UF, 250V	1	
	C16209	F0C2E115A260	E 0.011UF, 250V	1	
	C16210	F0C2E115A260	E 0.011UF, 250V	1	
	C16211	F0C2E115A260	E 0.011UF, 250V	1	
	C16241	F2A1A1010115	E 100UF, 10V	1	
	C16242	F1H1C105A008	C 1UF, K, 16V	1	
	C16243	F1H1H103A970	C 0.001UF, K, 50V	1	
	C16251	F1H1C105A008	C 1UF, K, 16V	1	
	C16252	F1K1E105A029	C 1UF, Z, 25V	1	
	C16271	F2A1E331B534	E 330UF, 25V	1	
	C16280	F1K1E105A029	C 1UF, Z, 25V	1	
	C16284	F1H1H104A970	C 0.1UF, K, 50V	1	
	C16285	F1H1H104A970	C 0.1UF, K, 50V	1	
	C16286	F1H1H104A970	C 0.1UF, K, 50V	1	
	C16287	F1H1H104A970	C 0.1UF, K, 50V	1	
	C16313	F0C2E115A260	E 0.011UF, 250V	1	
	C16314	F0C2E115A260	E 0.011UF, 250V	1	
	C16315	F1H1A1050032	C 10UF, 50V	1	
	C16316	F1H1C104A143	C 0.1UF, K, 16V	1	
	C16317	F1H1A1050032	C 10UF, 50V	1	
	C16318	F1J1H104A835	C 0.10UF, 50V	1	
	C16319	F1J1H104A835	C 0.10UF, 50V	1	
	C16328	F2A2C131A197	E 130UF, 160V	1	

Safety	Ref. No.	Part No.	Part Name & Description	Pcs	Remarks
	C16329	F2A2C131A197	E 130UF, 160V	1	
	C16330	F0C2E115A260	E 0.011UF, 250V	1	
	C16331	F0C2E115A260	E 0.011UF, 250V	1	
	C16375	F2A2T131A014	E 130UF, 220V	1	
	C16376	F2A2T131A014	E 130UF, 220V	1	
	C16377	F2A2T131A014	E 130UF, 220V	1	
	C16378	F2A2T131A014	E 130UF, 220V	1	
	C16379	F2A2T131A014	E 130UF, 220V	1	
	C16380	F2A2T131A014	E 130UF, 220V	1	
	C16381	F2A2T131A014	E 130UF, 220V	1	
	C16391	F2AZZ641A022	E 640UF, 80V	1	
	C16392	F2AZZ641A022	E 640UF, 80V	1	
	C16393	F2AZZ641A022	E 640UF, 80V	1	
	C16394	F2AZZ641A022	E 640UF, 80V	1	
	C16401	F1L2J562A022	C 5600UF, K,6.3V	1	
	C16411	F2A2T131A014	E 130UF, 220V	1	
	C16412	F2A2T131A014	E 130UF, 220V	1	
	C16413	F2A2T131A014	E 130UF, 220V	1	
	C16414	F2A2T131A014	E 130UF, 220V	1	
	C16415	F2A2T131A014	E 130UF, 220V	1	
	C16416	F2A2T131A014	E 130UF, 220V	1	
	C16417	F0C2E115A260	E 0.011UF, 250V	1	
	C16418	F0C2E115A260	E 0.011UF, 250V	1	
	C16419	F0C2E115A260	E 0.011UF, 250V	1	
	C16420	F2A2T131A014	E 130UF, 220V	1	
	C16421	F1L2J562A022	C 5600UF, K,6.3V	1	
	C16471	F1L2J1020001	C 1000UF, K,6.3V	1	
	C16472	F1K1E105A029	C 1UF, Z, 25V	1	
	C16490	F1H1C105A008	C 1UF, K, 16V	1	
	C16491	F1L2J1020001	C 1000UF, K,6.3V	1	
	C16501	F1K1E105A029	C 1UF, Z, 25V	1	
	C16502	F1L1E4750004	C 4.7UF, 25V	1	
	C16503	F2A1E471B534	E 470UF, 25V	1	
	C16504	F1L1E4750004	C 4.7UF, 25V	1	
	C16505	F1K1E105A029	C 1UF, Z, 25V	1	
	C16521	F1K1E105A029	C 1UF, Z, 25V	1	
	C16522	F1L1E4750004	C 4.7UF, 25V	1	
	C16523	F2A1E471B534	E 470UF, 25V	1	
	C16524	F1L1E4750004	C 4.7UF, 25V	1	
	C16525	F1L1E4750004	C 4.7UF, 25V	1	
	C16533	F1H1H104A970	C 0.1UF, K, 50V	1	
	C16535	F1H1H104A970	C 0.1UF, K, 50V	1	
	C16536	F1H1H104A970	C 0.1UF, K, 50V	1	
	C16562	F1H1C105A008	C 1UF, K, 16V	1	
	C16563	F2A1A1010115	E 100UF, 10V	1	
	C16564	F1H1C105A008	C 1UF, K, 16V	1	
	C16565	F1H1H103A970	C 0.001UF, K, 50V	1	
	C16566	F1H1H103A970	C 0.001UF, K, 50V	1	
	C16581	F1K1E105A029	C 1UF, Z, 25V	1	
	C16582	F1H1C105A008	C 1UF, K, 16V	1	
	C16593	F1H1H102A971	C 1000PF, K, 50V	1	
	C16602	F1H1H220A971	C 22PF, K, 50V	1	
	C16603	F1K2J102A014	C 1000UF, K,6.3V	1	
	C16604	F1K2J102A014	C 1000UF, K,6.3V	1	
	C16608	F1H1H221A971	C 220UF, K, 50V	1	
	C16628	F0C2E115A260	E 0.011UF, 250V	1	
	C16629	F0C2E115A260	E 0.011UF, 250V	1	
	C16631	F0C2E115A260	E 0.011UF, 250V	1	
	C16632	F0C2E115A260	E 0.011UF, 250V	1	
	C16633	F0C2E115A260	E 0.011UF, 250V	1	
	C16634	F0C2E115A260	E 0.011UF, 250V	1	
	C16635	F0C2E115A260	E 0.011UF, 250V	1	
	C16636	F0C2E115A260	E 0.011UF, 250V	1	
	C16637	F0C2E115A260	E 0.011UF, 250V	1	
	C16638	F0C2E115A260	E 0.011UF, 250V	1	
	C16639	F0C2E115A260	E 0.011UF, 250V	1	
	C16641	F1K2J222A014	C 2200UF, K,6.3V	1	
	C16645	F1K2J102A014	C 1000UF, K,6.3V	1	
	C16646	F1K2J102A014	C 1000UF, K,6.3V	1	
	C16661	F1K2J102A014	C 1000UF, K,6.3V	1	
	C16662	F1K2J102A014	C 1000UF, K,6.3V	1	
	C16664	F1H1H820A971	C 82UF, 50V	1	
	C16665	F1H1H820A971	C 82UF, 50V	1	
	C16666	F1H1H820A971	C 82UF, 50V	1	
	C16668	F1H1H221A971	C 220UF, K, 50V	1	
	C16675	F1H1H391A971	C 391UF, 50V	1	
	C16684	F1H1H104A970	C 0.1UF, K, 50V	1	
	C16685	F1H1H104A970	C 0.1UF, K, 50V	1	
	C16691	F2A2C131A197	E 130UF, 160V	1	
	C16692	F1H1H104A970	C 0.1UF, K, 50V	1	
	C16707	F1H1H220A971	C 22PF, K, 50V	1	
	C16708	F1H1H104A970	C 0.1UF, K, 50V	1	
	C16721	F2A1E221B534	E 220UF, 25V	1	
	C16723	F1L1E4750004	C 4.7UF, 25V	1	
	C16724	F1L1E4750004	C 4.7UF, 25V	1	
	C16725	F1L1E4750004	C 4.7UF, 25V	1	
	C16753	F1L1E4750004	C 4.7UF, 25V	1	
	C16755	F1L1E4750004	C 4.7UF, 25V	1	
	C16756	F1L1E4750004	C 4.7UF, 25V	1	
	C16771	F1H1C105A008	C 1UF, K, 16V	1	
	C16772	F1L1E4750004	C 4.7UF, 25V	1	
	C16773	F1L1E4750004	C 4.7UF, 25V	1	
	C16790	F1K1E105A029	C 1UF, Z, 25V	1	
	C16791	F2A1E221B534	E 220UF, 25V	1	
	C16795	F2A1E821B535	E 820UF, 25V	1	
	C16797	F1H1H104A970	C 0.1UF, K, 50V	1	
	C16806	F2A2T131A014	E 130UF, 220V	1	
	C16807	F0C2E115A260	E 0.011UF, 250V	1	
	C16813	F0C2E115A260	E 0.011UF, 250V	1	
	C16814	F1H1H561A971	C 560UF, 50V	1	
	C16821	F1J1H104A835	C 0.10UF, 50V	1	
	C16822	F2A2G340A226	E 340UF, 400V	1	
	C16823	F1L2J562A022	C 5600UF, K,6.3V	1	
	C16842	F2A2C131A197	E 130UF, 160V	1	
	C16843	F1J1H104A835	C 0.10UF, 50V	1	
	C16844	F1J1H104A835	C 0.10UF, 50V	1	
	C16856	F1H1A1050032	C 10UF, 50V	1	
	C16857	F1H1H472A970	C 4700PF, K, 50V	1	
	C16858	F1H1C104A143	C 0.1UF, K, 16V	1	
	C16860	F1H1A1050032	C 10UF, 50V	1	
	C16861	F1H1C104A143	C 0.1UF, K, 16V	1	
	C16862	F1H1A1050032	C 10UF, 50V	1	
	C16863	F1J1H104A835	C 0.10UF, 50V	1	
	C16864	F1J1H104A835	C 0.10UF, 50V	1	
	C16866	F1H1A1050032	C 10UF, 50V	1	
	C16867	F1H1A1050032	C 10UF, 50V	1	
	C16868	F1H1A1050032	C 10UF, 50V	1	
	C16869	F1J1H104A835	C 0.10UF, 50V	1	
	C16891	F1K1E105A029	C 1UF, Z, 25V	1	
	C16902	F1E2J272A002	C 2700PF, 600V	1	
	C16903	F1L2J1520001	C 1500UF, K,6.3V	1	
	C16904	F1E2J332A002	C 3300PF, 600V	1	
	C17101	F1H1A1050032	C 10UF, 50V	1	
	C17102	F1H1A1050032	C 10UF, 50V	1	
	C17103	F1H1A1050032	C 10UF, 50V	1	
	C17104	F1H1A1050032	C 10UF, 50V	1	
	C17105	F1H1A1050032	C 10UF, 50V	1	
	C17131	F1L2E154A028	E 1500UF, 25V	1	
	C17132	F1L2E154A028	E 1500UF, 25V	1	
	C17133	F1L2E154A028	E 1500UF, 25V	1	
	C17134	F1L2E154A028	E 1500UF, 25V	1	
	C17135	F1L2E154A028	E 1500UF, 25V	1	
	C17136	F1L2E154A028	E 1500UF, 25V	1	
	C17137	F1L2E154A028	E 1500UF, 25V	1	
	C17138	F1L2E154A028	E 1500UF, 25V	1	
	C17139	F1L2E154A028	E 1500UF, 25V	1	
	C17140	F1L2E154A028	E 1500UF, 25V	1	
	C17201	F1H1A1050032	C 10UF, 50V	1	
	C17204	F1H1A1050032	C 10UF, 50V	1	
	C17205	F1H1A1050032	C 10UF, 50V	1	
	C17206	F1H1A1050032	C 10UF, 50V	1	
	C17207	F1H1A1050032	C 10UF, 50V	1	
	C17213	F1H1C104A143	C 0.1UF, K, 16V	1	
	C17214	F1H1C104A143	C 0.1UF, K, 16V	1	
	C17215	F1H1C104A143	C 0.1UF, K, 16V	1	

Safety	Ref. No.	Part No.	Part Name & Description	Pcs	Remarks
	C17231	F1L2E154A028	E 1500UF, 25V	1	
	C17232	F1L2E154A028	E 1500UF, 25V	1	
	C17233	F1L2E154A028	E 1500UF, 25V	1	
	C17234	F1L2E154A028	E 1500UF, 25V	1	
	C17235	F1L2E154A028	E 1500UF, 25V	1	
	C17236	F1L2E154A028	E 1500UF, 25V	1	
	C17237	F1L2E154A028	E 1500UF, 25V	1	
	C17238	F1L2E154A028	E 1500UF, 25V	1	
	C17239	F1L2E154A028	E 1500UF, 25V	1	
	C17240	F1L2E154A028	E 1500UF, 25V	1	
	C17301	F1H1A1050032	C 10UF, 50V	1	
	C17304	F1H1A1050032	C 10UF, 50V	1	
	C17305	F1H1A1050032	C 10UF, 50V	1	
	C17306	F1H1A1050032	C 10UF, 50V	1	
	C17307	F1H1A1050032	C 10UF, 50V	1	
	C17331	F1L2E154A028	E 1500UF, 25V	1	
	C17332	F1L2E154A028	E 1500UF, 25V	1	
	C17333	F1L2E154A028	E 1500UF, 25V	1	
	C17334	F1L2E154A028	E 1500UF, 25V	1	
	C17335	F1L2E154A028	E 1500UF, 25V	1	
	C17336	F1L2E154A028	E 1500UF, 25V	1	
	C17337	F1L2E154A028	E 1500UF, 25V	1	
	C17338	F1L2E154A028	E 1500UF, 25V	1	
	C17339	F1L2E154A028	E 1500UF, 25V	1	
	C17340	F1L2E154A028	E 1500UF, 25V	1	
	C20730	F1G1E103A123	C 0.010UF, K, 25V	1	
	C20731	F2G0J470A019	E 47UF 6.3V	1	
	C21009	F1H1C104A143	C 0.1UF, K, 16V	1	
	C21010	F1J1E105A171	C 1 UF 25V	1	
	C21102	F1J1A106A043	C 0.010UF, K, 10V	1	
	C21103	F1G1C104A116	C 0.10UF, K, 16V	1	
	C21104	F1G1C104A116	C 0.10UF, K, 16V	1	
	C21106	F1H1H270A971	C 27UF, 50V	1	
	C21107	F1G1H180A731	C 18UF, 50V	1	
	C21108	F1G1C104A116	C 0.10UF, K, 16V	1	
	C21109	F1H1A1050032	C 10UF, 50V	1	
	C21111	F1H1A1050032	C 10UF, 50V	1	
	C21112	F1G1C104A116	C 0.10UF, K, 16V	1	
	C21114	F1G1C104A116	C 0.10UF, K, 16V	1	
	C21117	F1G1C104A116	C 0.10UF, K, 16V	1	
	C21122	F1G1E103A123	C 0.010UF, K, 25V	1	
	C21123	F1H1A1050032	C 10UF, 50V	1	
	C21129	F1G1H101A731	C 100PF, K, 50V	1	
	C21131	F1G1H101A731	C 100PF, K, 50V	1	
	C21133	F1G1H102A730	C 1000UF, 50V	1	
	C21136	F1G1H102A730	C 1000UF, 50V	1	
	C22023	F1G1C104A116	C 0.10UF, K, 16V	1	
	C22049	F1G1C104A116	C 0.10UF, K, 16V	1	
	C22050	F1G1C104A116	C 0.10UF, K, 16V	1	
	C22055	F1G1H150A731	C 15UF, 50V	1	
	C22056	F1G1H150A731	C 15UF, 50V	1	
	C22058	F1G1C104A116	C 0.10UF, K, 16V	1	
	C22059	F1J1A106A043	C 0.010UF, K, 10V	1	
	C22101	F1G1A473A053	C 0.47UF, 10V	1	
	C22102	F1G1C104A116	C 0.10UF, K, 16V	1	
	C22105	F1G1C104A116	C 0.10UF, K, 16V	1	
	C22106	F1G1C104A116	C 0.10UF, K, 16V	1	
	C22107	F1J1A106A043	C 0.010UF, K, 10V	1	
	C22108	F1J1A106A043	C 0.010UF, K, 10V	1	
	C22111	F1J1A475A039	C 4.7UF, K, 10V	1	
	C22118	F1J1A475A039	C 4.7UF, K, 10V	1	
	C22125	F1G1E103A123	C 0.010UF, K, 25V	1	
	C22127	F1G1E103A123	C 0.010UF, K, 25V	1	
	C22135	F1G1E103A123	C 0.010UF, K, 25V	1	
	C22136	F1G1E103A123	C 0.010UF, K, 25V	1	

Safety	Ref. No.	Part No.	Part Name & Description	Pcs	Remarks
	C22192	F1J1A106A043	C 0.010UF, K, 10V	1	
	C22216	F1G1C104A116	C 0.10UF, K, 16V	1	
	C22244	F1G1C104A116	C 0.10UF, K, 16V	1	
	C22245	F1G1H102A730	C 1000UF, 50V	1	
	C22251	F1J1A106A043	C 0.010UF, K, 10V	1	
	C22301	F1G1C104A116	C 0.10UF, K, 16V	1	
	C22302	F1G1C104A116	C 0.10UF, K, 16V	1	
	C22303	F1J1E105A171	C 1 UF 25V	1	
	C22304	F1J1E105A171	C 1 UF 25V	1	
	C22305	F1J1E105A171	C 1 UF 25V	1	
	C22306	F1J1E105A171	C 1 UF 25V	1	
	C22307	F1H1H104A970	C 0.1UF, K, 50V	1	
	C22308	F1H1H104A970	C 0.1UF, K, 50V	1	
	C22309	F1J1E105A171	C 1 UF 25V	1	
	C22310	F1J1E105A171	C 1 UF 25V	1	
	C22311	F1H1H104A970	C 0.1UF, K, 50V	1	
	C22312	F1H1H104A970	C 0.1UF, K, 50V	1	
	C22313	F1H1A1050032	C 10UF, 50V	1	
	C22314	F1H1A1050032	C 10UF, 50V	1	
	C22317	F1H1H104A970	C 0.1UF, K, 50V	1	
	C22319	F1H1H104A970	C 0.1UF, K, 50V	1	
	C22321	F1H1H104A970	C 0.1UF, K, 50V	1	
	C22323	F1H1H104A970	C 0.1UF, K, 50V	1	
	C22325	F1J1H474A757	C 0.47UF, 50V	1	
	C22331	F1J1H474A757	C 0.47UF, 50V	1	
	C22333	F1H1E104A129	C 0.1UF, 25V	1	
	C22335	F1H1E104A129	C 0.1UF, 25V	1	
	C22337	F1H1H223A970	C 0.22UF, K, 50V	1	
	C22339	F1H1H223A970	C 0.22UF, K, 50V	1	
	C22341	F1H1E104A129	C 0.1UF, 25V	1	
	C22342	F1J1H474A757	C 0.47UF, 50V	1	
	C22343	F1H1E104A129	C 0.1UF, 25V	1	
	C22345	F1H1H223A970	C 0.22UF, K, 50V	1	
	C22347	F1H1H223A970	C 0.22UF, K, 50V	1	
	C22348	F1J1H474A757	C 0.47UF, 50V	1	
	C22349	F1H1E104A129	C 0.1UF, 25V	1	
	C22350	F1H1E104A129	C 0.1UF, 25V	1	
	C22351	F1H1H223A970	C 0.22UF, K, 50V	1	
	C22352	F1H1H223A970	C 0.22UF, K, 50V	1	
	C22353	F1G1H102A730	C 1000UF, 50V	1	
	C22354	F1H1E104A129	C 0.1UF, 25V	1	
	C22355	F1H1E104A129	C 0.1UF, 25V	1	
	C22356	F1H1H223A970	C 0.22UF, K, 50V	1	
	C22357	F1H1H223A970	C 0.22UF, K, 50V	1	
	C22358	F1G1H102A730	C 1000UF, 50V	1	
	C22359	F1G1H102A730	C 1000UF, 50V	1	
	C22360	F1G1H102A730	C 1000UF, 50V	1	
	C22361	F2G1E101A186	E 100UF, 25V	1	
	C22362	F1K1E106A136	C 10UF, Z, 25V	1	
	C22363	F2G1E101A186	E 100UF, 25V	1	
	C22364	F1K1E106A136	C 10UF, Z, 25V	1	
	C22366	F1K1E106A136	C 10UF, Z, 25V	1	
	C22368	F1K1E106A136	C 10UF, Z, 25V	1	
	C22369	F1H1H223A970	C 0.22UF, K, 50V	1	
	C22370	F1H1H223A970	C 0.22UF, K, 50V	1	
	C22371	F1H1H223A970	C 0.22UF, K, 50V	1	
	C22372	F1H1H223A970	C 0.22UF, K, 50V	1	
	C22373	F1G1H102A730	C 1000UF, 50V	1	
	C22374	F1G1H102A730	C 1000UF, 50V	1	
	C22375	F1H1H223A970	C 0.22UF, K, 50V	1	
	C22376	F1G1H102A730	C 1000UF, 50V	1	
	C22377	F1H1H223A970	C 0.22UF, K, 50V	1	
	C22378	F1G1H102A730	C 1000UF, 50V	1	
	C22379	F1H1H223A970	C 0.22UF, K, 50V	1	
	C22381	F1H1H223A970	C 0.22UF, K, 50V	1	
	C22383	F1G1H102A730	C 1000UF, 50V	1	
	C22385	F1G1H102A730	C 1000UF, 50V	1	
	C22387	F1G1H102A730	C 1000UF, 50V	1	
	C22389	F1G1H102A730	C 1000UF, 50V	1	
	C22390	F1J1E105A171	C 1 UF 25V	1	
	C22391	F1J1E105A171	C 1 UF 25V	1	
	C22436	F2G1E101A186	E 100UF, 25V	1	

Safety	Ref. No.	Part No.	Part Name & Description	Pcs	Remarks
	C22437	F2G1E101A186	E 100UF, 25V	1	
	C22438	F1K1E106A136	C 10UF, Z, 25V	1	
	C22439	F1K1E106A136	C 10UF, Z, 25V	1	
	C22750	F1G1E103A123	C 0.010UF, K, 25V	1	
	C24547	F1G1C104A116	C 0.10UF, K, 16V	1	
	C24550	F1G1C104A116	C 0.10UF, K, 16V	1	
	C24555	F1J1A106A043	C 0.010UF, K, 10V	1	
	C24574	F1G1C104A116	C 0.10UF, K, 16V	1	
	C24575	F1G1C104A116	C 0.10UF, K, 16V	1	
	C24580	F1G1C104A116	C 0.10UF, K, 16V	1	
	C24585	F1G1C104A116	C 0.10UF, K, 16V	1	
	C24595	F1G1C104A116	C 0.10UF, K, 16V	1	
	C24596	F1G1C104A116	C 0.10UF, K, 16V	1	
	C24598	F1J1A106A043	C 0.010UF, K, 10V	1	
	C24599	F1J1A106A043	C 0.010UF, K, 10V	1	
	C24600	F1G1C104A116	C 0.10UF, K, 16V	1	
	C24601	F1J1A106A043	C 0.010UF, K, 10V	1	
	C24602	F1G1C104A116	C 0.10UF, K, 16V	1	
	C24603	F1J1A475A039	C 4.7UF, K, 10V	1	
	C24605	F1J1A475A039	C 4.7UF, K, 10V	1	
	C24606	F1J1A475A039	C 4.7UF, K, 10V	1	
	C24607	F1J1A475A039	C 4.7UF, K, 10V	1	
	C24608	F1G1C104A116	C 0.10UF, K, 16V	1	
	C24613	F1H1A1050032	C 10UF, 50V	1	
	C24614	F1G1C104A116	C 0.10UF, K, 16V	1	
	C24616	F1J1A475A039	C 4.7UF, K, 10V	1	
	C24617	F1J1A475A039	C 4.7UF, K, 10V	1	
	C24619	F1G1C104A116	C 0.10UF, K, 16V	1	
	C24626	F1G1C104A116	C 0.10UF, K, 16V	1	
	C24628	F1G1C104A116	C 0.10UF, K, 16V	1	
	C24629	F1G1C104A116	C 0.10UF, K, 16V	1	
	C24630	F1G1C104A116	C 0.10UF, K, 16V	1	
	C24631	F1J1A106A043	C 0.010UF, K, 10V	1	
	C24632	F1G1C104A116	C 0.10UF, K, 16V	1	
	C24633	F1J1A106A043	C 0.010UF, K, 10V	1	
	C24634	F1G1C104A116	C 0.10UF, K, 16V	1	
	C24635	F1J1A106A043	C 0.010UF, K, 10V	1	
	C24636	F1G1C104A116	C 0.10UF, K, 16V	1	
	C24637	F1G1C104A116	C 0.10UF, K, 16V	1	
	C24638	F1G1C104A116	C 0.10UF, K, 16V	1	
	C24640	F1G1C104A116	C 0.10UF, K, 16V	1	
	C24642	F1G1C104A116	C 0.10UF, K, 16V	1	
	C24643	F1G1C104A116	C 0.10UF, K, 16V	1	
	C24644	F1G1C104A116	C 0.10UF, K, 16V	1	
	C24645	F1G1C104A116	C 0.10UF, K, 16V	1	
	C25001	F1G1C104A116	C 0.10UF, K, 16V	1	
	C25002	F1G1C104A116	C 0.10UF, K, 16V	1	
	C25003	F1G1C104A116	C 0.10UF, K, 16V	1	
	C25004	F1G1C104A116	C 0.10UF, K, 16V	1	
	C25005	F1H0J1050012	C 1UF, K, 16V	1	
	C25006	F1H0J1050012	C 1UF, K, 16V	1	
	C25007	F1J1A106A043	C 0.010UF, K, 10V	1	
	C25008	F1G1C104A116	C 0.10UF, K, 16V	1	
	C25009	F1G1C104A116	C 0.10UF, K, 16V	1	
	C25010	F1G1C104A116	C 0.10UF, K, 16V	1	
	C25011	F1G1C104A116	C 0.10UF, K, 16V	1	
	C25012	F1G1C104A116	C 0.10UF, K, 16V	1	
	C25013	F1J1A106A043	C 0.010UF, K, 10V	1	
	C25014	F1G1C104A116	C 0.10UF, K, 16V	1	
	C25015	F1G1C104A116	C 0.10UF, K, 16V	1	
	C25016	F1J1A106A043	C 0.010UF, K, 10V	1	
	C25017	F1G1C104A116	C 0.10UF, K, 16V	1	
	C25018	F1G1C104A116	C 0.10UF, K, 16V	1	
	C25019	F1G1C104A116	C 0.10UF, K, 16V	1	

Safety	Ref. No.	Part No.	Part Name & Description	Pcs	Remarks
	C25020	F1G1C104A116	C 0.10UF, K, 16V	1	
	C25021	F1H0J1050012	C 1UF, K, 16V	1	
	C25022	F1H0J1050012	C 1UF, K, 16V	1	
	C25023	F1H0J1050012	C 1UF, K, 16V	1	
	C25024	F1H0J1050012	C 1UF, K, 16V	1	
	C25025	F1J1A106A043	C 0.010UF, K, 10V	1	
	C25026	F1J1A106A043	C 0.010UF, K, 10V	1	
	C25027	F1G1C104A116	C 0.10UF, K, 16V	1	
	C25028	F1G1C104A116	C 0.10UF, K, 16V	1	
	C25029	F1G1C104A116	C 0.10UF, K, 16V	1	
	C25030	F1G1C104A116	C 0.10UF, K, 16V	1	
	C25031	F1G1C104A116	C 0.10UF, K, 16V	1	
	C25032	F1G1C104A116	C 0.10UF, K, 16V	1	
	C25033	F1H0J1050012	C 1UF, K, 16V	1	
	C25034	F1H0J1050012	C 1UF, K, 16V	1	
	C25035	F1H0J1050012	C 1UF, K, 16V	1	
	C25036	F1H0J1050012	C 1UF, K, 16V	1	
	C25037	F1H0J1050012	C 1UF, K, 16V	1	
	C25038	F1H0J1050012	C 1UF, K, 16V	1	
	C25039	F1J1A106A043	C 0.010UF, K, 10V	1	
	C25040	F1J1A106A043	C 0.010UF, K, 10V	1	
	C25041	F1J1A106A043	C 0.010UF, K, 10V	1	
	C25042	F1G1C104A116	C 0.10UF, K, 16V	1	
	C25043	F1G1C104A116	C 0.10UF, K, 16V	1	
	C25044	F1H0J1050012	C 1UF, K, 16V	1	
	C25045	F1H0J1050012	C 1UF, K, 16V	1	
	C25046	F1J1A106A043	C 0.010UF, K, 10V	1	
	C25047	F1H0J1050012	C 1UF, K, 16V	1	
	C25048	F1H0J2250008	C 2.2UF, K, 16V	1	
	C25049	F1G1C104A116	C 0.10UF, K, 16V	1	
	C25050	F1H0J1050012	C 1UF, K, 16V	1	
	C25051	F1J1A106A043	C 0.010UF, K, 10V	1	
	C25052	F1J1A106A043	C 0.010UF, K, 10V	1	
	C25053	F1G1C104A116	C 0.10UF, K, 16V	1	
	C25054	F1G1C104A116	C 0.10UF, K, 16V	1	
	C25055	F1G1C104A116	C 0.10UF, K, 16V	1	
	C25056	F1G1C104A116	C 0.10UF, K, 16V	1	
	C25057	F1G1C104A116	C 0.10UF, K, 16V	1	
	C25058	ECGRL0G680ER	C 68UF, J, 4V	1	
	C25059	F1G1C104A116	C 0.10UF, K, 16V	1	
	C25060	F1G1C104A116	C 0.10UF, K, 16V	1	
	C25061	F1G1C104A116	C 0.10UF, K, 16V	1	
	C25062	F1G1C104A116	C 0.10UF, K, 16V	1	
	C25063	F1G1C104A116	C 0.10UF, K, 16V	1	
	C25064	F1G1C104A116	C 0.10UF, K, 16V	1	
	C25065	F1G1C104A116	C 0.10UF, K, 16V	1	
	C25066	F1G1C104A116	C 0.10UF, K, 16V	1	
	C25067	F1G1C104A116	C 0.10UF, K, 16V	1	
	C25072	F1G1C104A116	C 0.10UF, K, 16V	1	
	C25073	F1H0J2250008	C 2.2UF, K, 16V	1	
	C25075	F1G1C104A116	C 0.10UF, K, 16V	1	
	C25076	F1G1C104A116	C 0.10UF, K, 16V	1	
	C25077	F1G1C104A116	C 0.10UF, K, 16V	1	
	C25078	F1G1C104A116	C 0.10UF, K, 16V	1	
	C25079	F1J1A106A043	C 0.010UF, K, 10V	1	
	C25080	F1J1A106A043	C 0.010UF, K, 10V	1	
	C25081	F1J1A106A043	C 0.010UF, K, 10V	1	
	C25082	F1G1C104A116	C 0.10UF, K, 16V	1	
	C25083	F1G1C104A116	C 0.10UF, K, 16V	1	
	C25085	F1G1C104A116	C 0.10UF, K, 16V	1	
	C25086	F1G1C104A116	C 0.10UF, K, 16V	1	
	C25087	F1G1C104A116	C 0.10UF, K, 16V	1	
	C25200	F1G1H100A731	C 10PF, K, 50V	1	
	C25201	F1G1H100A731	C 10PF, K, 50V	1	

Safety	Ref. No.	Part No.	Part Name & Description	Pcs	Remarks
	C25202	F1G1C104A116	C 0.10UF, K, 16V	1	
	C25301	F1H1A1050032	C 10UF, 50V	1	
	C25302	F1G1C104A116	C 0.10UF, K, 16V	1	
	C25303	F1H1A1050032	C 10UF, 50V	1	
	C25311	F1K1E106A136	C 10UF, Z, 25V	1	
	C25312	F1K1E106A136	C 10UF, Z, 25V	1	
	C25316	F1G1A333A053	C 0.33UF, 10V	1	
	C25318	F1K1E106A136	C 10UF, Z, 25V	1	
	C25319	F1K1E106A136	C 10UF, Z, 25V	1	
	C25320	F1H1E104A129	C 0.1UF, 25V	1	
	C25321	F1G1E6820007	C 6800UF, Z, 25V	1	
	C25322	F1J1A475A039	C 4.7UF, K, 10V	1	
	C25323	F1G1E272A123	C 2700UF, 50V	1	
	C25324	F1G1E332A123	C 3300UF, Z, 25V	1	
	C25326	F1G1C104A116	C 0.10UF, K, 16V	1	
	C25327	F1G1C104A116	C 0.10UF, K, 16V	1	
	C25328	ECGRL0E680ER	C 68UF, J, 2.5V	1	
	C25329	ECGRL0E680ER	C 68UF, J, 2.5V	1	
	C25331	F2G1E470A021	C 47PF, J, 25V	1	
	C25332	F1J1E105A171	C 1 UF 25V	1	
	C25341	F1G1C104A116	C 0.10UF, K, 16V	1	
	C25344	F1H1C105A145	C 0.01UF, K, 16V	1	
	C25460	F1G1C104A116	C 0.10UF, K, 16V	1	
	C25470	F1G1C103A116	C 0.010UF, K, 16V	1	
	C25471	F1G1A473A053	C 0.47UF, 10V	1	
	C25473	F1G1E103A123	C 0.010UF, K, 25V	1	
	C25482	F2G1E101A186	E 100UF, 25V	1	
	C25485	F1G1C104A116	C 0.10UF, K, 16V	1	
	C25487	F1H0J1050012	C 1UF, K, 16V	1	
	C25488	F1H0J1050012	C 1UF, K, 16V	1	
	C25490	F1G1C104A116	C 0.10UF, K, 16V	1	
	C25520	F2G1C100A022	C 10UF J 16V	1	
	C25601	F1G1E103A123	C 0.010UF, K, 25V	1	
	C25602	ECGRL0G680ER	C 68UF, J, 4V	1	
	C25603	F1G1C104A116	C 0.10UF, K, 16V	1	
	C25604	F1G1E6820007	C 6800UF, Z, 25V	1	
	C25605	F1J1A475A039	C 4.7UF, K, 10V	1	
	C25606	F1H1C105A145	C 0.01UF, K, 16V	1	
	C25607	ECJ0EB1E272K	C 2700UF, K, 16V	1	
	C25609	F1K1E106A136	C 10UF, Z, 25V	1	
	C25611	F1K1E106A136	C 10UF, Z, 25V	1	
	C25612	F1K1E106A136	C 10UF, Z, 25V	1	
	C25615	F1K1E106A136	C 10UF, Z, 25V	1	
	C25616	F1G1C273A081	C 0.027UF, K, 16V	1	
	C25618	F1K1E106A136	C 10UF, Z, 25V	1	
	C25619	F1K1E106A136	C 10UF, Z, 25V	1	
	C25620	F1H1C104A143	C 0.1UF, K, 16V	1	
	C25621	F1G1E103A123	C 0.010UF, K, 25V	1	
	C25622	F1J1A475A039	C 4.7UF, K, 10V	1	
	C25623	ECJ0EB1E272K	C 2700UF, K, 16V	1	
	C25624	ECJ0EB1E332K	C 3300UF, K, 16V	1	
	C25626	F1G1C104A116	C 0.10UF, K, 16V	1	
	C25627	F1G1C104A116	C 0.10UF, K, 16V	1	
	C25628	ECGRL0E680ER	C 68UF, J, 2.5V	1	
	C25629	ECGRL0E680ER	C 68UF, J, 2.5V	1	
	C25630	F1K1E106A136	C 10UF, Z, 25V	1	
	C25631	F2G1E470A021	C 47PF, J, 25V	1	
	C25632	F1J1E105A171	C 1 UF 25V	1	
	C25636	F1G1C104A116	C 0.10UF, K, 16V	1	
	C25637	F1G1C104A116	C 0.10UF, K, 16V	1	
	C25638	F1G1C104A116	C 0.10UF, K, 16V	1	
	C25639	F1G1C104A116	C 0.10UF, K, 16V	1	
	C25640	F1G1C104A116	C 0.10UF, K, 16V	1	
	C25641	F1G1C104A116	C 0.10UF, K, 16V	1	
	C25642	F1K1E106A136	C 10UF, Z, 25V	1	
	C25643	F1H1C104A143	C 0.1UF, K, 16V	1	
	C25644	F1H1C105A145	C 0.01UF, K, 16V	1	
	C25646	F2H0J1010009	C 100UF, 6.3V	1	
	C25650	F1G1E152A123	C 1500UF, Z, 25V	1	

Safety	Ref. No.	Part No.	Part Name & Description	Pcs	Remarks
	C25688	F1H1A225A051	C 22UF, 50V	1	
	C25709	F1G1C104A116	C 0.10UF, K, 16V	1	
	C25731	F1G1C104A116	C 0.10UF, K, 16V	1	
	C28003	F1H0J1050012	C 1UF, K, 16V	1	
	C28005	F1H0J1050012	C 1UF, K, 16V	1	
	C28006	F1G1C104A116	C 0.10UF, K, 16V	1	
	C28007	F1G1C104A116	C 0.10UF, K, 16V	1	
	C28008	F1G1C104A116	C 0.10UF, K, 16V	1	
	C28009	F1J1A106A043	C 0.010UF, K, 10V	1	
	C28010	F1J1A106A043	C 0.010UF, K, 10V	1	
	C28011	F1G1C104A116	C 0.10UF, K, 16V	1	
	C28012	F1G1C104A116	C 0.10UF, K, 16V	1	
	C28013	F1G1C104A116	C 0.10UF, K, 16V	1	
	C28014	F1G1C104A116	C 0.10UF, K, 16V	1	
	C28015	F1H0J1050012	C 1UF, K, 16V	1	
	C28016	F1H0J1050012	C 1UF, K, 16V	1	
	C28017	F1J1A106A043	C 0.010UF, K, 10V	1	
	C28018	F1G1C104A116	C 0.10UF, K, 16V	1	
	C28019	F1G1C104A116	C 0.10UF, K, 16V	1	
	C28020	F1G1C104A116	C 0.10UF, K, 16V	1	
	C28021	F1G1C104A116	C 0.10UF, K, 16V	1	
	C28022	F1H0J1050012	C 1UF, K, 16V	1	
	C28023	F1J1A106A043	C 0.010UF, K, 10V	1	
	C28024	F1J1A106A043	C 0.010UF, K, 10V	1	
	C28025	F1G1C104A116	C 0.10UF, K, 16V	1	
	C28026	F1G1C104A116	C 0.10UF, K, 16V	1	
	C28027	F1G1C104A116	C 0.10UF, K, 16V	1	
	C28028	F1G1C104A116	C 0.10UF, K, 16V	1	
	C28029	F1G1C104A116	C 0.10UF, K, 16V	1	
	C28030	F1H0J1050012	C 1UF, K, 16V	1	
	C28031	F1H0J1050012	C 1UF, K, 16V	1	
	C28032	F1J1A106A043	C 0.010UF, K, 10V	1	
	C28033	F1G1C104A116	C 0.10UF, K, 16V	1	
	C28034	F1G1C104A116	C 0.10UF, K, 16V	1	
	C28035	F1J1A106A043	C 0.010UF, K, 10V	1	
	C28036	F1J1A106A043	C 0.010UF, K, 10V	1	
	C28037	F1G1C104A116	C 0.10UF, K, 16V	1	
	C28038	F1G1C104A116	C 0.10UF, K, 16V	1	
	C28039	F1G1C104A116	C 0.10UF, K, 16V	1	
	C28040	F1G1C104A116	C 0.10UF, K, 16V	1	
	C28041	F1G1C104A116	C 0.10UF, K, 16V	1	
	C28042	ECGRL0G680ER	C 68UF, J, 4V	1	
	C28043	F1G1C104A116	C 0.10UF, K, 16V	1	
	C28044	F1G1C104A116	C 0.10UF, K, 16V	1	
	C28045	F1G1C104A116	C 0.10UF, K, 16V	1	
	C28046	F1G1C104A116	C 0.10UF, K, 16V	1	
	C28047	F1G1C104A116	C 0.10UF, K, 16V	1	
	C28048	F1G1C104A116	C 0.10UF, K, 16V	1	
	C28049	F1G1C104A116	C 0.10UF, K, 16V	1	
	C28050	F1G1C104A116	C 0.10UF, K, 16V	1	
	C28051	F1G1C104A116	C 0.10UF, K, 16V	1	
	C28052	F1H0J1050012	C 1UF, K, 16V	1	
	C28053	F1G1C103A116	C 0.010UF, K, 16V	1	
	C28054	F1G1H150A731	C 15UF, 50V	1	
	C28055	F1G1HR50A577	C 0.50UF, 50V	1	
	C28056	F1G1C104A116	C 0.10UF, K, 16V	1	
	C28057	F1G1C104A116	C 0.10UF, K, 16V	1	
	C28058	F1J1A106A043	C 0.010UF, K, 10V	1	
	C28063	F1H0J1050012	C 1UF, K, 16V	1	
	C28064	F1H0J1050012	C 1UF, K, 16V	1	
	C28065	F1G1C104A116	C 0.10UF, K, 16V	1	
	C28067	F1G1C104A116	C 0.10UF, K, 16V	1	
	C28069	F1G1H102A730	C 1000UF, 50V	1	
	C28070	F1G1C104A116	C 0.10UF, K, 16V	1	
	C28071	F1G1C104A116	C 0.10UF, K, 16V	1	

Safety	Ref. No.	Part No.	Part Name & Description	Pcs	Remarks
	C28072	F1G1C104A116	C 0.10UF, K, 16V	1	
	C28073	F1G1C104A116	C 0.10UF, K, 16V	1	
	C28074	F1G1C104A116	C 0.10UF, K, 16V	1	
	C28075	F1J1A106A043	C 0.010UF, K, 10V	1	
	C28076	F1G1C104A116	C 0.10UF, K, 16V	1	
	C28077	F1G1C104A116	C 0.10UF, K, 16V	1	
	C28078	F1G1C104A116	C 0.10UF, K, 16V	1	
	C28079	F1G1C104A116	C 0.10UF, K, 16V	1	
	C28080	F1G1C104A116	C 0.10UF, K, 16V	1	
	C28081	F1G1C104A116	C 0.10UF, K, 16V	1	
	C28082	F1G1H102A730	C 1000UF, 50V	1	
	C28083	F1G1C104A116	C 0.10UF, K, 16V	1	
	C28084	F1G1H102A730	C 1000UF, 50V	1	
	C28085	F1G1C104A116	C 0.10UF, K, 16V	1	
	C28086	F1G1C104A116	C 0.10UF, K, 16V	1	
	C28087	F1G1C104A116	C 0.10UF, K, 16V	1	
	C28088	F1G1C104A116	C 0.10UF, K, 16V	1	
	C28089	F1G1C104A116	C 0.10UF, K, 16V	1	
	C28090	F1G1C104A116	C 0.10UF, K, 16V	1	
	C28092	F1G1C104A116	C 0.10UF, K, 16V	1	
	C28093	F1G1C104A116	C 0.10UF, K, 16V	1	
	C28094	F1G1C104A116	C 0.10UF, K, 16V	1	
	C28095	F1G1C104A116	C 0.10UF, K, 16V	1	
	C28096	F1G1C104A116	C 0.10UF, K, 16V	1	
	C28097	F1G1C104A116	C 0.10UF, K, 16V	1	
	C28098	F1G1C104A116	C 0.10UF, K, 16V	1	
	C28099	F1G1C104A116	C 0.10UF, K, 16V	1	
	C28100	F1G1C104A116	C 0.10UF, K, 16V	1	
	C28101	F1G1C104A116	C 0.10UF, K, 16V	1	
	C28102	F1G1C104A116	C 0.10UF, K, 16V	1	
	C28105	F1G1C104A116	C 0.10UF, K, 16V	1	
	C28201	F1G1C104A116	C 0.10UF, K, 16V	1	
	C28202	F1G1C104A116	C 0.10UF, K, 16V	1	
	C28508	F1G1C103A116	C 0.010UF, K, 16V	1	
	C28510	F1J1A106A043	C 0.010UF, K, 10V	1	
	C28580	F1G1C104A116	C 0.10UF, K, 16V	1	
	C28581	F1G1C104A116	C 0.10UF, K, 16V	1	
	C29033	F1G1C104A116	C 0.10UF, K, 16V	1	
	C29034	F1G1C104A116	C 0.10UF, K, 16V	1	
	C29035	F1J1A106A043	C 0.010UF, K, 10V	1	
	C29036	F1J1A106A043	C 0.010UF, K, 10V	1	
	C29037	F1G1E103A123	C 0.010UF, K, 25V	1	
	C29040	F1G1C104A116	C 0.10UF, K, 16V	1	
	C29044	F1J1A475A039	C 4.7UF, K, 10V	1	
	C29045	F1G1C104A116	C 0.10UF, K, 16V	1	
	C29046	F1G1C104A116	C 0.10UF, K, 16V	1	
	C29047	F1G1C104A116	C 0.10UF, K, 16V	1	
	C29048	F1G1C104A116	C 0.10UF, K, 16V	1	
	C29049	F1G1C104A116	C 0.10UF, K, 16V	1	
	C29052	F1G1C104A116	C 0.10UF, K, 16V	1	
	C29053	F1G1C104A116	C 0.10UF, K, 16V	1	
	C29055	F1G1C104A116	C 0.10UF, K, 16V	1	
	C29057	F1G1C104A116	C 0.10UF, K, 16V	1	
	C29061	F1G1C104A116	C 0.10UF, K, 16V	1	
	C29062	F1J1A475A039	C 4.7UF, K, 10V	1	
	C29063	F1G1C104A116	C 0.10UF, K, 16V	1	
	C29064	F1G1C104A116	C 0.10UF, K, 16V	1	
	C29065	F1G1C104A116	C 0.10UF, K, 16V	1	
	C29066	F1H1E104A129	C 0.1UF, 25V	1	
	C29067	F1K0J226A008	C 22UF, K,6.3V	1	
	C29068	F1K0J226A008	C 22UF, K,6.3V	1	
	C29069	F1G1H222A730	C 2200UF, 50V	1	
	C29071	F1H1E104A129	C 0.1UF, 25V	1	
	C29072	F1K0J226A008	C 22UF, K,6.3V	1	
	C29073	F1K0J226A008	C 22UF, K,6.3V	1	
	C29074	F1G1H222A730	C 2200UF, 50V	1	
	C29076	F1G1C153A116	C 0.015UF, K, 16V	1	

Safety	Ref. No.	Part No.	Part Name & Description	Pcs	Remarks
	C29077	F1K1E106A136	C 10UF, Z, 25V	1	
	C29078	F1K1E106A136	C 10UF, Z, 25V	1	
	C29079	F1G1H220A731	C 22UF, 50V	1	
	C29080	F1G1H201A731	C 200 UF, K, 50V	1	
	C29081	F1G1C104A116	C 0.10UF, K, 16V	1	
	C29082	F1H1E104A129	C 0.1UF, 25V	1	
	C29083	F1K0J226A008	C 22UF, K,6.3V	1	
	C29084	F1K0J226A008	C 22UF, K,6.3V	1	
	C29085	F1G1H222A730	C 2200UF, 50V	1	
	C29087	F1G1A563A053	C 0.56UF, 10V	1	
	C29088	F1K1E106A136	C 10UF, Z, 25V	1	
	C29089	F1K1E106A136	C 10UF, Z, 25V	1	
	C29091	F1G1H201A731	C 200 UF, K, 50V	1	
	C29100	F1G1C104A116	C 0.10UF, K, 16V	1	
	C29101	F1G1C104A116	C 0.10UF, K, 16V	1	
	C29102	F1G1C104A116	C 0.10UF, K, 16V	1	
	C29111	F1J1A106A043	C 0.010UF, K, 10V	1	
	C29112	F1J1A106A043	C 0.010UF, K, 10V	1	
	C29113	F1G1C104A116	C 0.10UF, K, 16V	1	
	C29114	F1G1C104A116	C 0.10UF, K, 16V	1	
	C29115	F1G1C104A116	C 0.10UF, K, 16V	1	
	C29123	F1J1A106A043	C 0.010UF, K, 10V	1	
	C29124	F1J1A106A043	C 0.010UF, K, 10V	1	
	C29134	F1G1C104A116	C 0.10UF, K, 16V	1	
	C29135	F1G1C104A116	C 0.10UF, K, 16V	1	
	C29136	F1G1C104A116	C 0.10UF, K, 16V	1	
	C29138	F1G1C104A116	C 0.10UF, K, 16V	1	
	C29139	F1J1A106A043	C 0.010UF, K, 10V	1	
	C29140	F1G1C104A116	C 0.10UF, K, 16V	1	
	C29141	F1J1A106A043	C 0.010UF, K, 10V	1	
	C29142	F1H1A1050032	C 10UF, 50V	1	
	C29143	F1H1A1050032	C 10UF, 50V	1	
	C29144	F1G1C104A116	C 0.10UF, K, 16V	1	
	C29145	F1H1A1050032	C 10UF, 50V	1	
	C29146	F1H1A1050032	C 10UF, 50V	1	
	C29147	F1H1A1050032	C 10UF, 50V	1	
	C29148	F1H1A1050032	C 10UF, 50V	1	
	C29149	F1H1A1050032	C 10UF, 50V	1	
	C29150	F1H1A1050032	C 10UF, 50V	1	
	C29151	F1H1A1050032	C 10UF, 50V	1	
	C29152	F1H1A1050032	C 10UF, 50V	1	
	C29153	F1H1A1050032	C 10UF, 50V	1	
	C29154	F1H1A1050032	C 10UF, 50V	1	
	C29155	F1H1A1050032	C 10UF, 50V	1	
	C29156	F1H1A1050032	C 10UF, 50V	1	
	C29157	F1H1A1050032	C 10UF, 50V	1	
	C29158	F1H1A1050032	C 10UF, 50V	1	
	C29159	F1H1A1050032	C 10UF, 50V	1	
	C29160	F1H1A1050032	C 10UF, 50V	1	
	C29161	F1H1A1050032	C 10UF, 50V	1	
	C29162	F1H1A1050032	C 10UF, 50V	1	
	C29163	F1H1A1050032	C 10UF, 50V	1	
	C29164	F1H1A1050032	C 10UF, 50V	1	
	C29165	F1H1A1050032	C 10UF, 50V	1	
	C29166	F1H1A1050032	C 10UF, 50V	1	
	C29167	F1H1A1050032	C 10UF, 50V	1	
	C29168	F1H1A1050032	C 10UF, 50V	1	
	C29169	F1H1A1050032	C 10UF, 50V	1	
	C29300	F1G1C104A116	C 0.10UF, K, 16V	1	
	C29302	F1G1C104A116	C 0.10UF, K, 16V	1	
	C29303	F1G1C104A116	C 0.10UF, K, 16V	1	
	C29305	F1G1C104A116	C 0.10UF, K, 16V	1	
	C29306	F1G1C104A116	C 0.10UF, K, 16V	1	
	C29310	F1G1C104A116	C 0.10UF, K, 16V	1	
	C29311	F1G1C104A116	C 0.10UF, K, 16V	1	
	C29312	F1G1C104A116	C 0.10UF, K, 16V	1	
	C29313	F1G1C104A116	C 0.10UF, K, 16V	1	
	C29314	F1G1C104A116	C 0.10UF, K, 16V	1	

Safety	Ref. No.	Part No.	Part Name & Description	Pcs	Remarks
	C29468	F1G1E103A123	C 0.010UF, K, 25V	1	
	C29469	F1G1C104A116	C 0.10UF, K, 16V	1	
	C29535	F1G1C104A116	C 0.10UF, K, 16V	1	
	C29536	F1G1C104A116	C 0.10UF, K, 16V	1	
	C29537	F1G1C104A116	C 0.10UF, K, 16V	1	
	C29538	F1G1C104A116	C 0.10UF, K, 16V	1	
	C29539	F1G1C104A116	C 0.10UF, K, 16V	1	
	C29540	F1G1C104A116	C 0.10UF, K, 16V	1	
	C29541	F1G1C104A116	C 0.10UF, K, 16V	1	
	C29542	F1G1C104A116	C 0.10UF, K, 16V	1	
	C29543	F1G1C104A116	C 0.10UF, K, 16V	1	
	C29544	F1G1C104A116	C 0.10UF, K, 16V	1	
	C29545	F1G1C104A116	C 0.10UF, K, 16V	1	
	C29546	F1G1C104A116	C 0.10UF, K, 16V	1	
	C29547	F1G1C104A116	C 0.10UF, K, 16V	1	
	C29548	F1G1C104A116	C 0.10UF, K, 16V	1	
	C29549	F1G1C104A116	C 0.10UF, K, 16V	1	
	C29550	F1G1C104A116	C 0.10UF, K, 16V	1	
	C29700	F1G1C104A116	C 0.10UF, K, 16V	1	
	C29701	F1G1C104A116	C 0.10UF, K, 16V	1	
	C29702	F1G1C104A116	C 0.10UF, K, 16V	1	
	C29703	F1G1C104A116	C 0.10UF, K, 16V	1	
	C29704	F1G1C104A116	C 0.10UF, K, 16V	1	
	C29706	F1G1C104A116	C 0.10UF, K, 16V	1	
	C29709	F1G1C104A116	C 0.10UF, K, 16V	1	
	C29713	F1G1C104A116	C 0.10UF, K, 16V	1	
	C29714	F1G1C104A116	C 0.10UF, K, 16V	1	
	C29715	F1G1C104A116	C 0.10UF, K, 16V	1	
	C29716	F1G1C104A116	C 0.10UF, K, 16V	1	
	C29823	F1K1E106A136	C 10UF, Z, 25V	1	
	C29825	F1G1H101A731	C 100PF, K, 50V	1	
	C29832	F1J1A106A043	C 0.010UF, K, 10V	1	
	C29837	F1J1A106A043	C 0.010UF, K, 10V	1	
	C29840	F1G1E103A123	C 0.010UF, K, 25V	1	
	C29844	F1G1E103A123	C 0.010UF, K, 25V	1	
	C29845	F1G1C104A116	C 0.10UF, K, 16V	1	
	C29846	F1G1C104A116	C 0.10UF, K, 16V	1	
	C29858	F1K1E106A136	C 10UF, Z, 25V	1	
	C29859	F1G1E103A123	C 0.010UF, K, 25V	1	
	C29863	F1G1E472A123	C 4200UF, Z, 25V	1	
	C29869	F1K1E106A136	C 10UF, Z, 25V	1	
	C29872	F1K1E106A136	C 10UF, Z, 25V	1	
	C29874	F1G1H101A731	C 100PF, K, 50V	1	
	C29882	F1G1H201A731	C 200 UF, K, 50V	1	
	C29889	F1J1A106A043	C 0.010UF, K, 10V	1	
	C29899	F1J1A106A043	C 0.010UF, K, 10V	1	
	C29900	F1G1C104A116	C 0.10UF, K, 16V	1	
	C29901	F1G1C104A116	C 0.10UF, K, 16V	1	
	C29902	F1G1C104A116	C 0.10UF, K, 16V	1	
	C29903	F1G1C104A116	C 0.10UF, K, 16V	1	
	C29904	F1G1C104A116	C 0.10UF, K, 16V	1	
	C29905	F1G1C104A116	C 0.10UF, K, 16V	1	
	C29906	F1G1C104A116	C 0.10UF, K, 16V	1	
	C29907	F1G1C104A116	C 0.10UF, K, 16V	1	
	C29908	F1G1C104A116	C 0.10UF, K, 16V	1	
	C29909	F1G1C104A116	C 0.10UF, K, 16V	1	
	C29910	F1G1C104A116	C 0.10UF, K, 16V	1	
	C29911	F1G1C104A116	C 0.10UF, K, 16V	1	
	C29912	F1G1C104A116	C 0.10UF, K, 16V	1	
	C29913	F1G1C104A116	C 0.10UF, K, 16V	1	
	C29914	F1G1C104A116	C 0.10UF, K, 16V	1	
	C29915	F1G1C104A116	C 0.10UF, K, 16V	1	
	C29916	F1G1C104A116	C 0.10UF, K, 16V	1	
	C29917	F1G1C104A116	C 0.10UF, K, 16V	1	
	C29918	F1G1C104A116	C 0.10UF, K, 16V	1	
	C29920	F1G1C104A116	C 0.10UF, K, 16V	1	
	C29921	F1G1C104A116	C 0.10UF, K, 16V	1	

Safety	Ref. No.	Part No.	Part Name & Description	Pcs	Remarks
	C29922	F1G1C104A116	C 0.10UF, K, 16V	1	
	C29923	F1G1C104A116	C 0.10UF, K, 16V	1	
	C29924	F1G1C104A116	C 0.10UF, K, 16V	1	
	C29925	F1G1C104A116	C 0.10UF, K, 16V	1	
	C29926	F1J1A106A043	C 0.010UF, K, 10V	1	
	C29949	F1G1C104A116	C 0.10UF, K, 16V	1	
	C29950	F1G1C104A116	C 0.10UF, K, 16V	1	
	C29952	F1G1C104A116	C 0.10UF, K, 16V	1	
	C29953	F1G1C104A116	C 0.10UF, K, 16V	1	
	C29954	F1G1C104A116	C 0.10UF, K, 16V	1	
	C29956	F1G1C104A116	C 0.10UF, K, 16V	1	
	C29957	F1G1C104A116	C 0.10UF, K, 16V	1	
	C29958	F1G1C104A116	C 0.10UF, K, 16V	1	
	C29960	F1J1A106A043	C 0.010UF, K, 10V	1	
	C29961	F1J1A106A043	C 0.010UF, K, 10V	1	
	C29962	F1J1A106A043	C 0.010UF, K, 10V	1	
	C29965	F1G1C104A116	C 0.10UF, K, 16V	1	
	C29966	F1J1A106A043	C 0.010UF, K, 10V	1	
	C29967	F1G1C104A116	C 0.10UF, K, 16V	1	
	C29968	F1G1C104A116	C 0.10UF, K, 16V	1	
	C29970	F1G1C104A116	C 0.10UF, K, 16V	1	
	C29971	F1G1H150A731	C 15UF, 50V	1	
	C29972	F1G1H180A731	C 18UF, 50V	1	
	C29973	F1G1C104A116	C 0.10UF, K, 16V	1	
	C29976	F1G1C104A116	C 0.10UF, K, 16V	1	
	C29977	F1G1C104A116	C 0.10UF, K, 16V	1	
	C29980	F1G1C104A116	C 0.10UF, K, 16V	1	
	C29984	F1J1A106A043	C 0.010UF, K, 10V	1	
	C29985	F1J1A106A043	C 0.010UF, K, 10V	1	
	C29986	F1G1C104A116	C 0.10UF, K, 16V	1	
	C29987	F1G1C104A116	C 0.10UF, K, 16V	1	
	C29988	F1G1C104A116	C 0.10UF, K, 16V	1	
	C29989	ECGRL0G680ER	C 68UF, J, 4V	1	
	C29990	F1G1C104A116	C 0.10UF, K, 16V	1	
	C29991	F1G1C104A116	C 0.10UF, K, 16V	1	
	C29992	F1G1C104A116	C 0.10UF, K, 16V	1	
	C29993	F1G1C104A116	C 0.10UF, K, 16V	1	
	C29994	F1G1C104A116	C 0.10UF, K, 16V	1	
	C29995	F1G1C104A116	C 0.10UF, K, 16V	1	
	C29996	F1G1C104A116	C 0.10UF, K, 16V	1	
	C29997	F1G1C104A116	C 0.10UF, K, 16V	1	
	CB1	K1MY55B00002	55P CONNECTOR	1	
	CB2	K1MY55B00002	55P CONNECTOR	1	
	CB3	K1MY55B00002	55P CONNECTOR	1	
	CB4	K1MY55B00002	55P CONNECTOR	1	
	CB5	K1MY55B00002	55P CONNECTOR	1	
	CB6	K1MY55B00002	55P CONNECTOR	1	
	CB7	K1MY55B00002	55P CONNECTOR	1	
	CB8	K1MY55B00002	55P CONNECTOR	1	
	CB9	K1MY55B00002	55P CONNECTOR	1	
	CB10	K1MY55B00002	55P CONNECTOR	1	
	CB11	K1MY55B00002	55P CONNECTOR	1	
	CB12	K1MY55B00002	55P CONNECTOR	1	
	CB13	K1MY55B00002	55P CONNECTOR	1	
	CB14	K1MY55B00002	55P CONNECTOR	1	
	CB15	K1MY55B00002	55P CONNECTOR	1	
	D1002	EZJZ0V120JA	VARISTOR	1	
	D1003	EZJZ0V120JA	VARISTOR	1	
	D1004	EZAEG2A50AX	DIODE	1	
	D1005	EZAEG2A50AX	DIODE	1	
	D1006	EZAEG2A50AX	DIODE	1	
	D1007	EZAEG2A50AX	DIODE	1	
	D1008	EZAEG2A50AX	DIODE	1	
	D1009	EZAEG2A50AX	DIODE	1	
	D1107	MA3X704A0L	ZENER DIODE	1	

Safety	Ref. No.	Part No.	Part Name & Description	Pcs	Remarks
	D1507	MA3X704A0L	ZENER DIODE	1	
	D2512	MAZ80560ML	ZENER DIODE	1	
	D2520	B3AGB0000057	LED	1	
	D2524	MAZ80560ML	ZENER DIODE	1	
	D2530	MAZ80560ML	ZENER DIODE	1	
	D2700	B3AGB0000057	LED	1	
	D2702	MAZ80560ML	ZENER DIODE	1	
	D2800	B0JCME000037	DIODE	1	
	D2801	B0BC4R700007	ZENER DIODE	1	
	D2802	B0BC4R700007	ZENER DIODE	1	
	D2803	B0BC01400017	ZENER DIODE	1	
	D2804	MA8120M	ZENER DIODE	1	
	D2805	MA2J11100L	DIODE	1	
	D2806	MAZ80330LL	ZENER DIODE	1	
	D2807	MA2J11100L	DIODE	1	
	D3001	MAZ81400ML	ZENER DIODE	1	
	D3015	K7JAAAB00001	DIODE	1	
	D3701	MAZ81400ML	ZENER DIODE	1	
	D3702	MAZ81400ML	ZENER DIODE	1	
	D3709	MAZ80510LL	ZENER DIODE	1	
	D3710	MAZ80510LL	ZENER DIODE	1	
	D3711	MAZ81400ML	ZENER DIODE	1	
	D3807	EZJZ0V80008B	VARISTOR	1	
	D3808	EZJZ0V80008B	VARISTOR	1	
	D3811	EZJZ0V80008B	VARISTOR	1	
	D3813	B0HCMM000014	DIODE	1	
	D3814	B0HCMM000014	DIODE	1	
	D3815	EZJZ0V120JA	VARISTOR	1	
	D3816	MA2J11100L	DIODE	1	
	D3901	EZAEG2A50AX	DIODE	1	
	D3902	EZAEG2A50AX	DIODE	1	
	D3903	EZAEG2A50AX	DIODE	1	
	D3904	EZAEG2A50AX	DIODE	1	
	D3905	EZAEG2A50AX	DIODE	1	
	D3906	EZAEG2A50AX	DIODE	1	
	D3907	EZJZ0V80008B	VARISTOR	1	
	D3908	EZJZ0V80008B	VARISTOR	1	
	D3909	EZAEG2A50AX	DIODE	1	
	D3910	EZAEG2A50AX	DIODE	1	
	D3911	EZJZ0V80008B	VARISTOR	1	
	D3913	B0HCMM000014	DIODE	1	
	D3914	B0HCMM000014	DIODE	1	
	D3915	EZJZ0V120JA	VARISTOR	1	
	D3916	B0JCME000037	DIODE	1	
	D3917	B0BC4R700007	ZENER DIODE	1	
	D3918	B0BC4R700007	ZENER DIODE	1	
	D3919	B0BC4R700007	ZENER DIODE	1	
	D3920	B0BC01400017	ZENER DIODE	1	
	D3921	MA2J11100L	DIODE	1	
	D3923	EZAEG2A50AX	DIODE	1	
	D3927	EZAEG2A50AX	DIODE	1	
	D3928	B0BC4R700007	ZENER DIODE	1	
	D4503	EZAEG2A50AX	DIODE	1	
	D4505	EZAEG2A50AX	DIODE	1	
	D4507	EZAEG2A50AX	DIODE	1	
	D4509	EZAEG2A50AX	DIODE	1	
	D4511	EZAEG2A50AX	DIODE	1	
	D4512	EZAEG2A50AX	DIODE	1	
	D4513	B0BC5R6A0275	DIODE	1	
	D4516	EZAEG2A50AX	DIODE	1	
	D4517	EZAEG2A50AX	DIODE	1	
	D4518	EZAEG2A50AX	DIODE	1	
	D4520	EZAEG2A50AX	DIODE	1	
	D4521	EZAEG2A50AX	DIODE	1	
	D4523	EZAEG2A50AX	DIODE	1	
	D4525	MA2J11100L	DIODE	1	
	D4526	MA2J11100L	DIODE	1	
	D4541	MA2J11100L	DIODE	1	
	D4542	MA2J11100L	DIODE	1	
	D4573	EZAEG2A50AX	DIODE	1	
	D4574	EZAEG2A50AX	DIODE	1	
	D4575	MA2J11100L	DIODE	1	
	D4576	B0HCMM000014	DIODE	1	

Safety	Ref. No.	Part No.	Part Name & Description	Pcs	Remarks
	D4577	B0HCMM000014	DIODE	1	
	D4583	B0HCMM000014	DIODE	1	
	D4587	EZAEG2A50AX	DIODE	1	
	D4588	EZAEG2A50AX	DIODE	1	
	D4589	EZAEG2A50AX	DIODE	1	
	D4590	EZAEG2A50AX	DIODE	1	
	D4591	EZAEG2A50AX	DIODE	1	
	D4592	EZAEG2A50AX	DIODE	1	
	D4593	EZAEG2A50AX	DIODE	1	
	D4594	EZAEG2A50AX	DIODE	1	
	D4595	EZAEG2A50AX	DIODE	1	
	D4596	EZAEG2A50AX	DIODE	1	
	D4597	EZAEG2A50AX	DIODE	1	
	D4598	EZAEG2A50AX	DIODE	1	
	D4599	EZAEG2A50AX	DIODE	1	
	D4600	EZAEG2A50AX	DIODE	1	
	D4601	EZAEG2A50AX	DIODE	1	
	D4602	EZAEG2A50AX	DIODE	1	
	D4611	B0BC5R6A0275	DIODE	1	
	D4615	MA2J11100L	DIODE	1	
	D4617	B0BC5R6A0275	DIODE	1	
	D5201	MA2J72800L	ZENER DIODE	1	
	D5421	B0BC03900015	ZENER DIODE	1	
	D5422	MAZ83600ML	ZENER DIODE	1	
	D5423	MA3X78900L	ZENER DIODE	1	
	D5431	MA3X152D0L	DIODE	1	
	D5432	MA3X152D0L	DIODE	1	
	D5433	MA3X152E0L	ZENER DIODE	1	
	D5434	MA3X152E0L	ZENER DIODE	1	
	D5435	MA3X152E0L	ZENER DIODE	1	
	D5436	MA3X152E0L	ZENER DIODE	1	
	D5437	MA2J11100L	DIODE	1	
	D5441	MA8120M	ZENER DIODE	1	
	D5442	MAZ80680LL	ZENER DIODE	1	
	D5443	MAZ80680LL	ZENER DIODE	1	
	D5444	MAZ80680LL	ZENER DIODE	1	
	D5445	MAZ80680LL	ZENER DIODE	1	
	D5446	MAZ80680LL	ZENER DIODE	1	
	D5447	MAZ80680LL	ZENER DIODE	1	
	D5448	MAZ80680LL	ZENER DIODE	1	
	D5449	MAZ80680LL	ZENER DIODE	1	
	D5481	B0HCMM000014	DIODE	1	
	D5482	B0HCMM000014	DIODE	1	
	D5486	MA2J72800L	ZENER DIODE	1	
	D5488	MA3X152D0L	DIODE	1	
	D5489	B0JCME000037	DIODE	1	
	D5490	B0BC4R700007	ZENER DIODE	1	
	D5491	B0BC4R700007	ZENER DIODE	1	
	D5492	B0JCME000037	DIODE	1	
	D5495	MA8120M	ZENER DIODE	1	
	D5496	B0BC4R700007	ZENER DIODE	1	
	D5497	B0BC01400017	ZENER DIODE	1	
	D5498	MA3X152E0L	ZENER DIODE	1	
	D5499	MA8120M	ZENER DIODE	1	
	D5500	MAZ81500ML	ZENER DIODE	1	
	D5501	B0BC4R700007	ZENER DIODE	1	
	D5641	MAZ80560LL	ZENER DIODE	1	
	D5900	B0JCME000037	DIODE	1	
	D5901	MA8120M	ZENER DIODE	1	
	D5902	MA2J11100L	DIODE	1	
	D5903	MAZ80330LL	ZENER DIODE	1	
	D5904	MA2J11100L	DIODE	1	
	D5905	MA2J11100L	DIODE	1	
	D5907	MA2J11100L	DIODE	1	
	D5908	B0BC4R700007	ZENER DIODE	1	
	D5909	B0BC4R700007	ZENER DIODE	1	
	D5910	B0BC01400017	ZENER DIODE	1	
	D5911	MA2J11100L	DIODE	1	
	D5913	MA2J11100L	DIODE	1	
	D5914	MA2J11100L	DIODE	1	
	D5915	MA2J11100L	DIODE	1	
	D5916	MA2J11100L	DIODE	1	
	D5917	MA2J11100L	DIODE	1	

Safety	Ref. No.	Part No.	Part Name & Description	Pcs	Remarks
	D5919	B0BC4R700007	ZENER DIODE	1	
	D5922	B0JCME000037	DIODE	1	
	D5923	B0BC4R700007	ZENER DIODE	1	
	D5924	B0BC4R700007	ZENER DIODE	1	
	D5925	B0BC01400017	ZENER DIODE	1	
	D5926	MAZ80330LL	ZENER DIODE	1	
	D7800	B3AEB0000107	LED	1	
	D7810	B3AEB0000107	LED	1	
	D9001	MAZ80560LL	ZENER DIODE	1	
	D9015	EZAEG2A50AX	DIODE	1	
	D9016	EZAEG2A50AX	DIODE	1	
	D9017	EZAEG2A50AX	DIODE	1	
	D9018	EZAEG2A50AX	DIODE	1	
	D9022	EZAEG2A50AX	DIODE	1	
	D9023	EZAEG2A50AX	DIODE	1	
	D9024	EZAEG2A50AX	DIODE	1	
	D9027	B0BC5R6A0275	DIODE	1	
	D9301	EZAEG2A50AX	DIODE	1	
	D9302	EZAEG2A50AX	DIODE	1	
	D16001	B0FCCN000002	DIODE	1	
	D16002	B0FCCN000002	DIODE	1	
	D16003	B0FCCN000002	DIODE	1	
	D16021	B0FCCN000002	DIODE	1	
	D16022	B0FCCN000002	DIODE	1	
	D16023	B0FCCN000002	DIODE	1	
	D16032	MA2J11100L	DIODE	1	
	D16041	B0FCCP000001	DIODE	1	
	D16042	B0FCCP000001	DIODE	1	
	D16043	B0FCCP000001	DIODE	1	
	D16044	B0FCCP000001	DIODE	1	
	D16050	B0ECKP000047	DIODE	1	
	D16051	B0FCCN000002	DIODE	1	
	D16052	B0FCCN000002	DIODE	1	
	D16053	B0FCCN000002	DIODE	1	
	D16054	B0FCCN000002	DIODE	1	
	D16101	MA22D3900L	DIODE	1	
	D16131	B0ECKP000047	DIODE	1	
	D16151	B0ECKP000047	DIODE	1	
	D16152	B0ECKP000047	DIODE	1	
	D16153	B0ECKP000047	DIODE	1	
	D16191	B0ECKP000047	DIODE	1	
	D16192	MA2J11100L	DIODE	1	
	D16193	B0ECKP000047	DIODE	1	
	D16194	B0ECKP000047	DIODE	1	
	D16195	B0ECKP000047	DIODE	1	
	D16253	B3ABB0000210	LED	1	
	D16255	MA2J11100L	DIODE	1	
	D16280	MA2J11100L	DIODE	1	
	D16281	MAZ80510LL	ZENER DIODE	1	
	D16282	MAZ80680ML	ZENER DIODE	1	
	D16284	MA3X152D0L	DIODE	1	
	D16285	MA3X152D0L	DIODE	1	
	D16315	MAZ81500ML	ZENER DIODE	1	
	D16316	B0ECKP000047	DIODE	1	
	D16317	B0ECKP000047	DIODE	1	
	D16401	B0FCCR000004	DIODE	1	
	D16402	B0FCCR000004	DIODE	1	
	D16403	B0FCCR000004	DIODE	1	
	D16407	MA22D3900L	DIODE	1	
	D16411	MA2J11100L	DIODE	1	
	D16421	B0FCCP000001	DIODE	1	
	D16422	B0FCCP000001	DIODE	1	
	D16423	B0FCCP000001	DIODE	1	
	D16451	B0ECKP000047	DIODE	1	
	D16461	B0FCCP000001	DIODE	1	
	D16462	B0FCCP000001	DIODE	1	
	D16463	B0FCCP000001	DIODE	1	
	D16464	B0FCCP000001	DIODE	1	
	D16466	MA2J11100L	DIODE	1	
	D16473	MA3X152D0L	DIODE	1	
	D16474	MA2J11100L	DIODE	1	
	D16475	MAZ80510LL	ZENER DIODE	1	
	D16476	MA2J11100L	DIODE	1	

Safety	Ref. No.	Part No.	Part Name & Description	Pcs	Remarks
	D16477	MA2J11100L	DIODE	1	
	D16478	B0HCKS000002	DIODE	1	
	D16480	MA2J11100L	DIODE	1	
	D16481	B0FCCP000001	DIODE	1	
	D16482	B0FCCP000001	DIODE	1	
	D16483	B0FCCP000001	DIODE	1	
	D16484	B0FCCP000001	DIODE	1	
	D16490	B0ECKP000047	DIODE	1	
	D16491	MA2J11100L	DIODE	1	
	D16492	MAZ80470ML	ZENER DIODE	1	
	D16493	MA3X152E0L	ZENER DIODE	1	
	D16503	B0ECHR000001	DIODE	1	
	D16522	B0ECKP000047	DIODE	1	
	D16523	B0ECHR000001	DIODE	1	
	D16524	B0ECKP000047	DIODE	1	
	D16534	B0ECHR000001	DIODE	1	
	D16536	B0ECHR000001	DIODE	1	
	D16583	B3ABB0000210	LED	1	
	D16602	MAZ81500ML	ZENER DIODE	1	
	D16604	MA3X152E0L	ZENER DIODE	1	
	D16605	MAZ80510LL	ZENER DIODE	1	
	D16606	B0ECKM000038	DIODE	1	
	D16607	MA2J11100L	DIODE	1	
	D16608	MA8120M	ZENER DIODE	1	
	D16610	MA2J11100L	DIODE	1	
	D16615	MA2J11100L	DIODE	1	
	D16616	MA3X152E0L	ZENER DIODE	1	
	D16618	B0ECKP000047	DIODE	1	
	D16619	B0ECKP000047	DIODE	1	
	D16620	B0FCCN000001	DIODE	1	
	D16621	B0FCCN000001	DIODE	1	
	D16622	B0FCCN000001	DIODE	1	
	D16623	B0FCCN000001	DIODE	1	
	D16624	B0ECKP000047	DIODE	1	
	D16625	MAZ82000ML	ZENER DIODE	1	
	D16641	B0FCCN000001	DIODE	1	
	D16642	B0FCCN000001	DIODE	1	
	D16643	B0FCCN000001	DIODE	1	
	D16644	B0FCCN000001	DIODE	1	
	D16645	MAZ81500ML	ZENER DIODE	1	
	D16646	MAZ81500ML	ZENER DIODE	1	
	D16647	MAZ81500ML	ZENER DIODE	1	
	D16648	MAZ80510LL	ZENER DIODE	1	
	D16649	MA2J11100L	DIODE	1	
	D16650	MA2J11100L	DIODE	1	
	D16652	B0ECKP000047	DIODE	1	
	D16653	MA2J11100L	DIODE	1	
	D16654	MA2J11100L	DIODE	1	
	D16662	MAZ81500ML	ZENER DIODE	1	
	D16663	MAZ81500ML	ZENER DIODE	1	
	D16664	MAZ81500ML	ZENER DIODE	1	
	D16669	MA2J11100L	DIODE	1	
	D16671	MA2J11100L	DIODE	1	
	D16672	B0ECHR000001	DIODE	1	
	D16673	B0ECHR000001	DIODE	1	
	D16674	B0ECHR000001	DIODE	1	
	D16677	MA3X152D0L	DIODE	1	
	D16678	MAZ815000L	ZENER DIODE	1	
	D16679	B0ECKP000047	DIODE	1	
	D16702	MA2J11100L	DIODE	1	
	D16710	MAZ815000L	ZENER DIODE	1	
	D16711	B0ECHR000001	DIODE	1	
	D16712	MAZ815000L	ZENER DIODE	1	
	D16713	B0ECHR000001	DIODE	1	
	D16714	MAZ815000L	ZENER DIODE	1	
	D16715	B0ECHR000001	DIODE	1	
	D16717	MAZ83300ML	ZENER DIODE	1	
	D16719	B0ECKP000047	DIODE	1	
	D16720	B0ECKP000047	DIODE	1	
	D16721	B0ECHR000001	DIODE	1	
	D16725	MA2J11100L	DIODE	1	
	D16765	B0ECHR000001	DIODE	1	
	D16791	MAZ82000ML	ZENER DIODE	1	

Safety	Ref. No.	Part No.	Part Name & Description	Pcs	Remarks
	D16792	MA2J11100L	DIODE	1	
	D16811	MA2J11100L	DIODE	1	
	D16820	MA3X152E0L	ZENER DIODE	1	
	D16821	MAZ83600ML	ZENER DIODE	1	
	D16824	MAZ83300ML	ZENER DIODE	1	
	D16825	MAZ83300ML	ZENER DIODE	1	
	D16859	B0HCKS000002	DIODE	1	
	D16860	B0HCKS000002	DIODE	1	
	D16865	B0ECKP000047	DIODE	1	
	D16871	MAZ81500ML	ZENER DIODE	1	
	D16874	MAZ80510LL	ZENER DIODE	1	
	D16875	MA2J11100L	DIODE	1	
	D16901	MA3X152E0L	ZENER DIODE	1	
	D16902	MA2J11100L	DIODE	1	
	D16920	MA3X152E0L	ZENER DIODE	1	
	D21107	MA3X704A0L	ZENER DIODE	1	
	D21112	MA2J72800L	ZENER DIODE	1	
	D22014	MA2J11100L	DIODE	1	
	D22017	MA2J11100L	DIODE	1	
	D22018	MA3X704A0L	ZENER DIODE	1	
	D24576	B0HCMM000014	DIODE	1	
	D24577	B0HCMM000014	DIODE	1	
	D25000	MA3X152D0L	DIODE	1	
	D25001	MA3X152E0L	ZENER DIODE	1	
	D25002	MA3X152E0L	ZENER DIODE	1	
	D25003	MA3X152E0L	ZENER DIODE	1	
	D25004	MAZ80680LL	ZENER DIODE	1	
	D25005	MAZ80680LL	ZENER DIODE	1	
	D25006	MAZ80680LL	ZENER DIODE	1	
	D25007	MAZ80680LL	ZENER DIODE	1	
	D25008	MAZ80680LL	ZENER DIODE	1	
	D25009	MAZ80680LL	ZENER DIODE	1	
	D25201	MA2J72800L	ZENER DIODE	1	
	D25460	MA3X152D0L	DIODE	1	
	D25481	B0HCMM000014	DIODE	1	
	D25482	B0HCMM000014	DIODE	1	
	D25692	MAZ80560LL	ZENER DIODE	1	
	D28001	EZJZ0V120JA	VARISTOR	1	
	D29000	B0JCCE000008	DIODE	1	
	D29110	B0JCGD000002	DIODE	1	
	D29800	B0JCPD000026	DIODE	1	
	DA1	K1KA08B00270	8P CONNECTOR	1	
	DA3	K1KA04BA0050	4P CONNECTOR	1	
	DA4	K1KA05BA0050	5P CONNECTOR	1	
	DA6	K1KA30B00078	30P CONNECTOR	1	
	DA10	K1KA14B00129	14P CONNECTOR	1	
	DA11	K1KY30B00006	30P CONNECTOR	1	
	DA20	K1MY35BA0345	35P CONNECTOR	1	
	DA21	K1KA20AA0009	20P CONNECTOR	1	
	DA22	K1KA11AA0715	11P CONNECTOR	1	
	DA30	K1KA07B00135	7P CONNECTOR	1	
	DA31	K1MY68BA0345	68P CONNECTOR	1	
	DA32	K1MY68BA0345	68P CONNECTOR	1	
	DA52	K1KA15B00074	15P CONNECTOR	1	
	DH5	K1KY30B00006	30P CONNECTOR	1	
	DH71	K1KA10B00218	10P CONNECTOR	1	
	DH72	K1KA15B00074	15P CONNECTOR	1	
	FL3713	J0ZZB0000097	FILTER	1	
	FL3714	J0ZZB0000097	FILTER	1	
	FL3715	J0HABB000004	LC FILTER	1	
	FL3716	J0HABB000004	LC FILTER	1	
	FL3717	J0HABB000004	LC FILTER	1	
	FL3718	J0HABB000003	LC FILTER	1	
	FL3719	J0HABB000003	LC FILTER	1	
	FL3906	J0HAYY000011	LC FILTER	1	
	FL3907	J0HAYY000011	LC FILTER	1	
	FL9401	J0HAYY000011	LC FILTER	1	
	FL9402	J0HAYY000011	LC FILTER	1	
	FL20731	J0HABH000013	LC FILTER	1	
	FL20733	J0HABH000013	LC FILTER	1	
	FL20734	J0HABH000013	LC FILTER	1	
	FL24800	J0JAD0000028	CHIP INDUCTOR	1	
	FL24801	J0JAD0000028	CHIP INDUCTOR	1	
	FL24802	J0JAD0000028	CHIP INDUCTOR	1	
	FL24803	J0JAD0000028	CHIP INDUCTOR	1	
	FL24804	J0JAD0000028	CHIP INDUCTOR	1	
	FL24805	J0JAD0000028	CHIP INDUCTOR	1	
	FL28000	J0HAAA000013	LC FILTER	1	
	FL28001	J0HAAA000013	LC FILTER	1	
	FL28002	J0MAB0000140	LC FILTER	1	
	FL29803	F1J1E104A148	C 0.10UF, Z, 25V	1	
	FL29805	F1J1E104A148	C 0.10UF, Z, 25V	1	
	FL29806	F1J1E104A148	C 0.10UF, Z, 25V	1	
	G51	K1KB19AA0032	19P CONNECTOR	1	
	G52	K1KB11AA0032	11P CONNECTOR	1	
	GH10	K1KA14B00129	14P CONNECTOR	1	
	GH11	K1KY30B00006	30P CONNECTOR	1	
	GL02	K1KA02B00294	2P CONNECTOR	1	
	GS09	K1KA06A00508	6P CONNECTOR	1	
	GS10	K1FY119E0005	CONNECTOR	1	
	GS11	K1KY30A00017	30P CONNECTOR	1	
	IC1000	C1ZBZ0003775	IC	1	
	IC1100	MNZSFH9GBM3	IC	1	
	IC1101	TVRQ767	IC	1	
	IC1500	MNZSFH9GBS3	IC	1	
	IC1501	TVRQ768	IC	1	
	IC1503	C0JBAE000321	IC	1	
	IC2008	C0DBGYY00578	IC	1	
	IC2600	C1AB00003090	IC	1	
	IC2601	C0DBAYY00480	IC	1	
	IC2604	C0CBCAG00039	IC	1	
	IC2605	TVRQ696	IC	1	
	IC2606	C0DBFYY00062	IC	1	
	IC2607	C0CBCAD00090	IC	1	
	IC2611	C3ABSY000036	IC	1	
	IC2800	C0DBAYY00183	IC	1	
	IC2801	C0BBBA000024	IC	1	
	IC2960	C0DBGHF00001	IC	1	
	IC3001	C1AB00002855	IC	1	
	IC3003	C0DBGYY00281	IC	1	
	IC3801	C1AB00003096	IC	1	
	IC3802	TVRQ779	IC	1	
	IC3901	C1AB00003096	IC	1	
	IC3902	TVRQ792	IC	1	
	IC3905	C0DBAYY00183	IC	1	
	IC3906	C0CBCCC00138	IC	1	
	IC4001	C1AB00002687	IC	1	
	IC4002	C0CBCAC00358	IC	1	
	IC4005	C0CBCBC00227	IC	1	
	IC4510	C1AB00003045	IC	1	
	IC4511	C0DBGYY00578	IC	1	
	IC4512	C0CBCAG00039	IC	1	
	IC4513	C0DBGYY00618	IC	1	
	IC5001	C3ABRY000038	IC	1	
	IC5002	C3ABRY000038	IC	1	
	IC5100	MN84527	IC	1	
	IC5110	C0JBCZ000519	IC	1	
	IC5300	C0CBCBD00062	IC	1	
	IC5312	C0DBAYY00480	IC	1	
	IC5320	C0JBAB000703	IC	1	
	IC5470	C0EBM0000026	IC	1	
	IC5480	C1ZBZ0003972	IC	1	
	IC5481	C0DBEJG00001	IC	1	
	IC5482	C0DBAYY00462	IC	1	
	IC5483	C0DBAYY00183	IC	1	
	IC5600	C0DBAYY00480	IC	1	
	IC5601	C0DBAYY00480	IC	1	
	IC5900	C0DBAYY00183	IC	1	

Safety	Ref. No.	Part No.	Part Name & Description	Pcs	Remarks
	IC5901	C0BBBA000024	IC	1	
	IC5902	C0DBAYY00183	IC	1	
	IC5903	C0BBBA000024	IC	1	
	IC7701	C0DBEHG00006	IC	1	
	IC7702	C1CB00003029	IC	1	
	IC7900	C1ZBZ0003775	IC	1	
	IC8001	MN2WS0053	IC	1	
	IC8002	C3ABTG000007	IC	1	
	IC8003	C3ABTG000007	IC	1	
	IC8004	C0ZBZ0001567	IC	1	
	IC8502	TVRQ772	IC	1	
	IC8508	C0DBZYY00266	IC	1	
	IC8581	TVRQ761	IC	1	
	IC9002	C0CBCAG00046	IC	1	
	IC9004	MN864707KP	IC	1	
	IC9005	C1AB00003092	IC	1	
	IC9006	C3ABQJ000055	IC	1	
	IC9201	C0DBAYY00480	IC	1	
	IC9301	C0CBCDD00004	IC	1	
	IC9302	C0CBCCC00138	IC	1	
	IC9401	C1ZBZ0004060	IC	1	
	IC9402	C3FBKY000068	IC	1	
	IC9403	C0EBD0000221	IC	1	
	IC16131	C0ZBZ0000895	IC	1	
	IC16151	C0ZBZ0001324	IC	1	
	IC16241	C0JBAZ002811	IC	1	
	IC16251	C0BBBA000024	IC	1	
	IC16304	MIP3900MSSCF	IC	1	
	IC16312	C0DBZMC00006	IC	1	
	IC16464	C0JBAB000715	IC	1	
	IC16465	C0JBAB000715	IC	1	
	IC16471	C0DBEKA00003	IC	1	
	IC16490	C0DBZMC00006	IC	1	
	IC16491	NJM2406F	LINEAR IC	1	
	IC16501	C0ZBZ0001324	IC	1	
	IC16521	C0ZBZ0001324	IC	1	
	IC16561	C0JBAZ001120	IC	1	
	IC16562	C0JBAZ001120	IC	1	
	IC16563	C0JBAB000388	IC	1	
	IC16564	C0JBAB000715	IC	1	
	IC16581	C0BBBA000024	IC	1	
	IC16661	C0BBBA000024	IC	1	
	IC16691	C0JBAC000363	IC	1	
	IC16692	C0DBZMC00006	IC	1	
	IC16724	C0CBADC00072	IC	1	
	IC16725	C0CBADC00072	IC	1	
	IC16771	C0CBADC00072	IC	1	
	IC16773	C0JBAB000715	IC	1	
	IC16784	MIP9L02MBS	IC	1	
	IC16786	MIP3900MSSCF	IC	1	
	IC16787	C0DBZMC00006	IC	1	
	IC16788	MIP3900MSSCF	IC	1	
	IC16789	C0DBZMC00006	IC	1	
	IC16791	EHMDD9922	LINEAR IC	1	
	IC16792	NJM2406F	LINEAR IC	1	
	IC16793	C0DBZMC00006	IC	1	
	IC16801	C0DBZMC00006	IC	1	
	IC16920	C0BBBA000024	IC	1	
	IC17201	C0JBAU000073	IC	1	
	IC17202	C0JBAU000073	IC	1	
	IC17203	C0JBAZ001120	IC	1	
	IC21000	C1ZBZ0003775	IC	1	
	IC21100	MNZSFH9GMZ3	IC	1	
	IC21101	TVRQ781	IC	1	
	IC22008	C0DBGYY00578	IC	1	
	IC22301	C1AB00002875	IC	1	
	IC22302	C1AB00002875	IC	1	
	IC24510	C1AB00003048	IC	1	
	IC24511	C0DBGYY00578	IC	1	
	IC24512	C0CBCAG00039	IC	1	
	IC24513	C0DBGYY00618	IC	1	
	IC25001	C3ABRY000038	IC	1	
	IC25002	C3ABRY000038	IC	1	

Safety	Ref. No.	Part No.	Part Name & Description	Pcs	Remarks
	IC25003	C0JBAB000703	IC	1	
	IC25100	MN84527	IC	1	
	IC25110	C0JBCZ000519	IC	1	
	IC25300	C0CBCBD00062	IC	1	
	IC25312	C0DBAYY00480	IC	1	
	IC25470	C0EBM0000026	IC	1	
	IC25480	C1ZBZ0003972	IC	1	
	IC25600	C0DBAYY00480	IC	1	
	IC25601	C0DBAYY00480	IC	1	
	IC28001	MN2WS0059	IC	1	
	IC28002	C3ABTY000015	IC	1	
	IC28003	C3ABTY000015	IC	1	
	IC28004	C0ZBZ0001567	IC	1	
	IC28502	TVRQ784	IC	1	
	IC28580	TVRQ804	IC	1	
	IC29001	TVRR032AA	IC	1	
	IC29003	MN103SH8HPF4	IC	1	
	IC29004	C1ZBZ0003983	IC	1	
	IC29300	MN84528	IC	1	
	IC29303	TVRR105	IC	1	
	IC29500	C1ZBZ0003760	IC	1	
	IC29805	C0DBAYY00477	IC	1	
	IC29806	C0DBAYY00478	IC	1	
	IC29807	C0DBAYY00477	IC	1	
	IC29808	C0CBCAC00365	IC	1	
	IC29902	C3ABRY000040	IC	1	
	IC29903	C3ABRY000040	IC	1	
	IC8580A	C3ZBN0000034	IC	1	
	J1	K1MN20BA0231	20P CONNECTOR	1	
	J2	K1KA03B00242	3P CONNECTOR	1	
	JK3005	K2HA9YYB0001	JACK	1	
	JK3007	K2HZ106B0011	JACK	1	
	JK3008	K2HA9YYB0002	JACK	1	
	JK3701	K4AK17B00005	TERMINAL	1	
	JK3702	K1FY115B0021	CONNECTOR	1	
	JK3901	K1FY119E0013	CONNECTOR	1	
	JK3902	K2YZ10000036	JACK	1	
	JK4500	K1FY119E0005	CONNECTOR	1	
	JK4501	K1FY119E0005	CONNECTOR	1	
	JK4502	K1FY119E0005	CONNECTOR	1	
	JK7702	K1NA09E00088	9P CONNECTOR	1	
	JK7901	K1NA09E00107	9P CONNECTOR	1	
	JK9001	K1FY119E0005	CONNECTOR	1	
	JK9002	K2YZ10000036	JACK	1	
	JS7700	D0GBR00Z0002	M 0 OHM J 1/16W	1	
	JS7901	ERJ3GEY0R00	M 0 OHM, 1/16W	1	
	JS21000	D0YAR0000007	M 0 OHM 1/4W	1	
	JS21018	D0YAR0000007	M 0 OHM 1/4W	1	
	K12	K1KA11B00092	11P CONNECTOR	1	
	KA1	K1KA08B00270	8P CONNECTOR	1	
	L1100	J0JYC0000068	CHIP INDUCTOR	1	
	L1500	J0JYC0000068	CHIP INDUCTOR	1	
	L2001	G1C150KA0038	INDUCTION COIL	1	
	L2251	J0JYC0000068	CHIP INDUCTOR	1	
	L2601	G1C100MA0203	INDUCTION COIL	1	
	L2602	J0JHC0000075	CHIP INDUCTOR	1	
	L2603	G1C2R2Z00007	INDUCTION COIL	1	
	L2604	G1C4R7Z00014	INDUCTION COIL	1	
	L2605	J0JHC0000045	CHIP INDUCTOR	1	
	L2608	J0JHC0000045	CHIP INDUCTOR	1	
	L2609	J0JHC0000045	CHIP INDUCTOR	1	
	L2610	J0JHC0000045	CHIP INDUCTOR	1	
	L2611	J0JHC0000045	CHIP INDUCTOR	1	
	L2612	J0JHC0000045	CHIP INDUCTOR	1	
	L2613	J0JHC0000045	CHIP INDUCTOR	1	
	L2615	J0JYC0000068	CHIP INDUCTOR	1	
	L2617	J0JHC0000045	CHIP INDUCTOR	1	

Safety	Ref. No.	Part No.	Part Name & Description	Pcs	Remarks
	L2618	J0JHC0000045	CHIP INDUCTOR	1	
	L2800	G1C330MA0234	INDUCTION COIL	1	
	L2901	J0JCC0000278	CHIP INDUCTOR	1	
	L2902	J0JCC0000269	CHIP INDUCTOR	1	
	L2904	J0JCC0000269	CHIP INDUCTOR	1	
	L3002	J0JCC0000287	CHIP INDUCTOR	1	
	L3003	J0JCC0000287	CHIP INDUCTOR	1	
	L3006	J0JCC0000287	CHIP INDUCTOR	1	
	L3007	J0JCC0000287	CHIP INDUCTOR	1	
	L3010	J0JCC0000287	CHIP INDUCTOR	1	
	L3011	J0JCC0000287	CHIP INDUCTOR	1	
	L3014	J0JCC0000287	CHIP INDUCTOR	1	
	L3015	J0JCC0000287	CHIP INDUCTOR	1	
	L3017	J0JCC0000287	CHIP INDUCTOR	1	
	L3018	J0JCC0000287	CHIP INDUCTOR	1	
	L3019	J0JCC0000287	CHIP INDUCTOR	1	
	L3023	J0JCC0000287	CHIP INDUCTOR	1	
	L3024	J0JCC0000287	CHIP INDUCTOR	1	
	L3025	G1C100MA0072	INDUCTION COIL	1	
	L3701	J0JCC0000100	CHIP INDUCTOR	1	
	L3702	J0JCC0000100	CHIP INDUCTOR	1	
	L3801	J0JHC0000117	CHIP INDUCTOR	1	
	L3804	J0JHC0000117	CHIP INDUCTOR	1	
	L3805	J0JHC0000117	CHIP INDUCTOR	1	
	L3901	J0JHC0000117	CHIP INDUCTOR	1	
	L3904	J0JHC0000117	CHIP INDUCTOR	1	
	L3905	J0JHC0000117	CHIP INDUCTOR	1	
	L3906	G1C330MA0234	INDUCTION COIL	1	
	L3907	J0JCC0000059	CHIP INDUCTOR	1	
	L3911	J0JCC0000059	CHIP INDUCTOR	1	
	L4002	J0JHC0000045	CHIP INDUCTOR	1	
	L4004	J0JYC0000068	CHIP INDUCTOR	1	
	L4006	J0JHC0000045	CHIP INDUCTOR	1	
	L4008	J0JYC0000068	CHIP INDUCTOR	1	
	L4009	J0JYC0000068	CHIP INDUCTOR	1	
	L4400	J0JHC0000035	CHIP INDUCTOR	1	
	L4401	J0JHC0000035	CHIP INDUCTOR	1	
	L4502	J0JYC0000068	CHIP INDUCTOR	1	
	L4503	J0JYC0000068	CHIP INDUCTOR	1	
	L4504	J0JYC0000068	CHIP INDUCTOR	1	
	L4505	J0JYC0000068	CHIP INDUCTOR	1	
	L4506	J0JYC0000068	CHIP INDUCTOR	1	
	L4507	J0JYC0000068	CHIP INDUCTOR	1	
	L4511	J0JYC0000068	CHIP INDUCTOR	1	
	L4512	J0JCC0000059	CHIP INDUCTOR	1	
	L4513	J0JCC0000059	CHIP INDUCTOR	1	
	L4514	J0JYC0000068	CHIP INDUCTOR	1	
	L4515	J0JYC0000068	CHIP INDUCTOR	1	
	L4516	J0JYC0000068	CHIP INDUCTOR	1	
	L4517	J0JYC0000068	CHIP INDUCTOR	1	
	L4518	J0JYC0000068	CHIP INDUCTOR	1	
	L4519	J0JYC0000068	CHIP INDUCTOR	1	
	L4521	J0JYC0000068	CHIP INDUCTOR	1	
	L4522	J0JYC0000068	CHIP INDUCTOR	1	
	L4523	J0JYC0000068	CHIP INDUCTOR	1	
	L4800	J0JYD0000033	CHIP INDUCTOR	1	
	L4801	J0JYD0000033	CHIP INDUCTOR	1	
	L4802	J0JYD0000033	CHIP INDUCTOR	1	
	L4803	J0JYD0000033	CHIP INDUCTOR	1	
	L4804	J0JYD0000033	CHIP INDUCTOR	1	
	L4805	J0JYD0000033	CHIP INDUCTOR	1	
	L5001	J0JHC0000045	CHIP INDUCTOR	1	
	L5002	J0JHC0000045	CHIP INDUCTOR	1	
	L5004	J0JHC0000045	CHIP INDUCTOR	1	
	L5005	J0JHC0000045	CHIP INDUCTOR	1	
	L5006	J0JHC0000045	CHIP INDUCTOR	1	
	L5007	J0JHC0000045	CHIP INDUCTOR	1	
	L5008	J0JHC0000045	CHIP INDUCTOR	1	
	L5009	J0JHC0000045	CHIP INDUCTOR	1	
	L5010	G1C100MA0072	INDUCTION COIL		
	L5301	G1C2R2Z00007	INDUCTION COIL	1	
	L5302	G1C2R2Z00007	INDUCTION COIL	1	
	L5303	J0JYC0000068	CHIP INDUCTOR	1	

Safety	Ref. No.	Part No.	Part Name & Description	Pcs	Remarks
	L5304	G1C100MA0203	INDUCTION COIL	1	
	L5305	J0JHC0000045	CHIP INDUCTOR	1	
	L5421	G1C100MA0072	INDUCTION COIL	1	
	L5480	J0JYC0000068	CHIP INDUCTOR	1	
	L5481	G1C330MA0234	INDUCTION COIL	1	
	L5482	G1C101M00029	INDUCTION COIL	1	
	L5544	G1C470MA0291	INDUCTION COIL	1	
	L5600	G1C2R2Z00007	INDUCTION COIL	1	
	L5601	G1C3R3Z00004	INDUCTION COIL	1	
	L5602	G1C4R7Z00014	INDUCTION COIL	1	
	L5604	G1C100MA0203	INDUCTION COIL	1	
	L5605	J0JHC0000045	CHIP INDUCTOR	1	
	L5608	G1C100MA0077	INDUCTION COIL	1	
	L5614	G1C6R8Z00010	INDUCTION COIL	1	
	L5900	G1C330MA0234	INDUCTION COIL	1	
	L5901	G1C330MA0234	INDUCTION COIL	1	
	L7704	J0JHC0000045	CHIP INDUCTOR	1	
	L7705	J0JHC0000045	CHIP INDUCTOR	1	
	L7921	J0JCC0000143	CHIP INDUCTOR	1	
	L8001	J0JHC0000045	CHIP INDUCTOR	1	
	L8002	J0JHC0000045	CHIP INDUCTOR	1	
	L8003	J0JHC0000045	CHIP INDUCTOR	1	
	L8004	J0JHC0000045	CHIP INDUCTOR	1	
	L8005	J0JHC0000045	CHIP INDUCTOR	1	
	L8007	J0JHC0000045	CHIP INDUCTOR	1	
	L8008	J0JHC0000045	CHIP INDUCTOR	1	
	L8009	J0JHC0000045	CHIP INDUCTOR	1	
	L8010	J0JHC0000045	CHIP INDUCTOR	1	
	L8011	J0JHC0000045	CHIP INDUCTOR	1	
	L8012	J0JHC0000045	CHIP INDUCTOR	1	
	L8013	J0JHC0000045	CHIP INDUCTOR	1	
	L8512	J0JHC0000045	CHIP INDUCTOR	1	
	L8580	J0JHC0000075	CHIP INDUCTOR	1	
	L9004	J0JYC0000068	CHIP INDUCTOR	1	
	L9005	J0JYC0000068	CHIP INDUCTOR	1	
	L9006	J0JYC0000068	CHIP INDUCTOR	1	
	L9007	J0JKC0000021	CHIP INDUCTOR	1	
	L9008	J0JYC0000068	CHIP INDUCTOR	1	
	L9009	J0JYC0000068	CHIP INDUCTOR	1	
	L9010	J0JYC0000068	CHIP INDUCTOR	1	
	L9011	J0JYC0000068	CHIP INDUCTOR	1	
	L9012	J0JYC0000068	CHIP INDUCTOR	1	
	L9013	J0JYC0000068	CHIP INDUCTOR	1	
	L9014	J0JYC0000068	CHIP INDUCTOR	1	
	L9015	J0JYC0000068	CHIP INDUCTOR	1	
	L9201	G1C3R3Z00005	INDUCTION COIL	1	
	L9202	G1C2R2Z00007	INDUCTION COIL	1	
	L9203	G1C100MA0203	INDUCTION COIL	1	
	L9204	J0JHC0000075	CHIP INDUCTOR	1	
	L9301	G1BYYYC00026	CHOKE COIL	1	
	L9302	G1BYYYC00026	CHOKE COIL	1	
	L9303	G1BYYYC00026	CHOKE COIL	1	
	L9304	G1BYYYC00026	CHOKE COIL	1	
	L9401	J0JYC0000068	CHIP INDUCTOR	1	
	L9402	J0JYC0000068	CHIP INDUCTOR	1	
	L9403	J0JYC0000068	CHIP INDUCTOR	1	
	L9404	J0JYC0000068	CHIP INDUCTOR	1	
	L9408	J0JCC0000059	CHIP INDUCTOR	1	
	L9409	J0JCC0000059	CHIP INDUCTOR	1	
	L16001	G0C1R5KA0208	PEAKING COIL	1	
	L16002	G0C1R5KA0208	PEAKING COIL	1	
	L16003	G0C1R5KA0208	PEAKING COIL	1	
	L16004	G0C1R5KA0208	PEAKING COIL	1	
	L16005	G0C1R5KA0208	PEAKING COIL	1	
	L16012	G0C1R5KA0208	PEAKING COIL	1	
	L16013	G0C1R5KA0208	PEAKING COIL	1	
	L16014	G0C1R5KA0208	PEAKING COIL	1	
	L16015	G0C1R5KA0208	PEAKING COIL	1	
	L16016	G0C1R5KA0208	PEAKING COIL	1	
	L16303	G0C471KA0167	PEAKING COIL	1	
	L16402	G0C1R5KA0208	PEAKING COIL	1	
	L16403	G0C1R5KA0208	PEAKING COIL	1	
	L16404	G0C1R5KA0208	PEAKING COIL	1	

Safety	Ref. No.	Part No.	Part Name & Description	Pcs	Remarks
	L16405	G0C1R5KA0208	PEAKING COIL	1	
	L16406	G0C1R5KA0208	PEAKING COIL	1	
	L16411	G0C1R5KA0208	PEAKING COIL	1	
	L16412	G0C1R5KA0208	PEAKING COIL	1	
	L16413	G0C1R5KA0208	PEAKING COIL	1	
	L16414	G0C1R5KA0208	PEAKING COIL	1	
	L16415	G0C1R5KA0208	PEAKING COIL	1	
	L16696	G0C331KA0167	PEAKING COIL	1	
	L16698	G0C331KA0167	PEAKING COIL	1	
	L16699	G0C471KA0167	PEAKING COIL	1	
	L20610	J0JHC0000035	CHIP INDUCTOR	1	
	L20611	J0JHC0000035	CHIP INDUCTOR	1	
	L20735	J0JYC0000068	CHIP INDUCTOR	1	
	L21100	J0JYC0000068	CHIP INDUCTOR	1	
	L22010	G1C220MA0291	INDUCTION COIL	1	
	L22011	G1C220MA0291	INDUCTION COIL	1	
	L22012	G1C220MA0291	INDUCTION COIL	1	
	L22013	G1C220MA0291	INDUCTION COIL	1	
	L22014	G1C220MA0291	INDUCTION COIL	1	
	L22015	G1C220MA0291	INDUCTION COIL	1	
	L22016	G1C220MA0291	INDUCTION COIL	1	
	L22017	G1C220MA0291	INDUCTION COIL	1	
	L22018	J0JHC0000042	CHIP INDUCTOR	1	
	L22019	J0JHC0000042	CHIP INDUCTOR	1	
	L22032	J0JYC0000068	CHIP INDUCTOR	1	
	L24512	J0JCC0000059	CHIP INDUCTOR	1	
	L24513	J0JCC0000059	CHIP INDUCTOR	1	
	L24514	J0JYC0000068	CHIP INDUCTOR	1	
	L24515	J0JYC0000068	CHIP INDUCTOR	1	
	L24516	J0JYC0000068	CHIP INDUCTOR	1	
	L24517	J0JYC0000068	CHIP INDUCTOR	1	
	L24518	J0JYC0000068	CHIP INDUCTOR	1	
	L24519	J0JYC0000068	CHIP INDUCTOR	1	
	L25001	J0JHC0000045	CHIP INDUCTOR	1	
	L25002	J0JHC0000045	CHIP INDUCTOR	1	
	L25004	J0JHC0000045	CHIP INDUCTOR	1	
	L25005	J0JHC0000045	CHIP INDUCTOR	1	
	L25006	J0JHC0000045	CHIP INDUCTOR	1	
	L25007	J0JHC0000045	CHIP INDUCTOR	1	
	L25008	J0JHC0000045	CHIP INDUCTOR	1	
	L25009	J0JHC0000045	CHIP INDUCTOR	1	
	L25301	G1C2R2Z00007	INDUCTION COIL	1	
	L25302	G1C2R2Z00007	INDUCTION COIL	1	
	L25303	J0JYC0000068	CHIP INDUCTOR	1	
	L25304	G1C100MA0203	INDUCTION COIL	1	
	L25305	J0JHC0000045	CHIP INDUCTOR	1	
	L25480	J0JYC0000068	CHIP INDUCTOR	1	
	L25600	G1C2R2Z00007	INDUCTION COIL	1	
	L25601	G1C3R3Z00004	INDUCTION COIL	1	
	L25602	G1C4R7Z00014	INDUCTION COIL	1	
	L25604	G1C100MA0203	INDUCTION COIL	1	
	L25605	J0JHC0000045	CHIP INDUCTOR	1	
	L25608	G1C100MA0077	INDUCTION COIL	1	
	L25614	G1C4R7Z00014	INDUCTION COIL	1	
	L28001	J0JHC0000045	CHIP INDUCTOR	1	
	L28002	J0JHC0000045	CHIP INDUCTOR	1	
	L28003	J0JHC0000045	CHIP INDUCTOR	1	
	L28004	J0JHC0000045	CHIP INDUCTOR	1	
	L28005	J0JHC0000045	CHIP INDUCTOR	1	
	L28007	J0JHC0000045	CHIP INDUCTOR	1	
	L28008	J0JHC0000045	CHIP INDUCTOR	1	
	L28009	J0JHC0000045	CHIP INDUCTOR	1	
	L28010	J0JHC0000045	CHIP INDUCTOR	1	
	L28011	J0JHC0000045	CHIP INDUCTOR	1	
	L28012	J0JHC0000045	CHIP INDUCTOR	1	
	L28013	J0JHC0000045	CHIP INDUCTOR	1	
	L28014	J0JYC0000065	CHIP INDUCTOR	1	
	L28501	J0JHC0000045	CHIP INDUCTOR	1	
	L28580	J0JHC0000075	CHIP INDUCTOR	1	
	L29001	G1C3R3Z00004	INDUCTION COIL	1	
	L29002	G1C6R8Z00008	INDUCTION COIL	1	
	L29700	J0JHC0000117	CHIP INDUCTOR	1	
	L29701	J0JHC0000117	CHIP INDUCTOR	1	
	L29802	G1C6R8Z00010	INDUCTION COIL	1	
	L29900	J0JHC0000117	CHIP INDUCTOR	1	
	L29901	J0JHC0000117	CHIP INDUCTOR	1	
	L29903	J0JHC0000117	CHIP INDUCTOR	1	
	L29904	J0JHC0000117	CHIP INDUCTOR	1	
	PA2601	K5H5022A0031	FUSE	1	
	PA2800	K5H312200006	IC PROTECTOR	1	
	PA5300	K5H5022A0031	FUSE	1	
	PA5400	K5H4022A0031	FUSE	1	
	PA5600	K5H5022A0031	FUSE	1	
	PA5900	K5H4022A0031	FUSE	1	
	PA5901	K5H4022A0031	FUSE	1	
	PA9201	K5H312200006	IC PROTECTOR	1	
	PA25300	K5H5022A0031	FUSE	1	
	PA25600	K5H5022A0031	FUSE	1	
	PB1	K1KA06BA0311	6P CONNECTOR	1	
	PB2	K1KA08BA0311	8P CONNECTOR	1	
	PB3	K1KA06BA0311	6P CONNECTOR	1	
	PB4	K1KA03BA0237	3P CONNECTOR	1	
	PB5	K1KA06BA0311	6P CONNECTOR	1	
	PB6	K1KA07BA0237	7P CONNECTOR	1	
	PC2511	B3JB00000046	IC	1	
	PC16191	B3PBA0000496	IC	1	
	PC16301	B3PBA0000498	IC	1	
	PC16461	B3PBA0000457	IC	1	
	PC16480	B3PBA0000498	IC	1	
	PC16601	B3PBA0000498	IC	1	
	PC16603	B3PBA0000498	IC	1	
	PC16684	B3PBA0000496	IC	1	
	PC16685	B3PBA0000496	IC	1	
	PC16722	B3PBA0000498	IC	1	
	PC16723	B3PBA0000498	IC	1	
	PC16896	B3PBA0000498	IC	1	
⚠	PCB	TZTNP02DKUM	CIRCUIT BOARD DA	1	(RTL)
⚠	PCB	TXNGH1DKUM	CIRCUIT BOARD GH	1	(RTL)
⚠	PCB	TNPA4864AE	CIRCUIT BOARD PB	1	(RTL)
⚠	PCB	ETX2MM718EAS	CIRCUIT BOARD P (SUS)	1	(RTL)
⚠	PCB	ETX2MM718EBS	CIRCUIT BOARD P (MULTI)	1	(RTL)
⚠	PCB	ETX2MM718ECS	CIRCUIT BOARD P (FILTER)	1	(RTL)
⚠	PCB	TNPA4770AC	CIRCUIT BOARD C1	1	(RTL)
⚠	PCB	TNPA4771AC	CIRCUIT BOARD C2	1	(RTL)
⚠	PCB	TNPA4772AC	CIRCUIT BOARD C3	1	(RTL)
⚠	PCB	TNPA4840AF	CIRCUIT BOARD SC	1	(RTL)
⚠	PCB	TNPA4791AB	CIRCUIT BOARD SD	1	
⚠	PCB	TNPA4841AD	CIRCUIT BOARD SS	1	(RTL)
⚠	PCB	TNPA4843	CIRCUIT BOARD SS2	1	(RTL)
⚠	PCB	TNPA4790AB	CIRCUIT BOARD SU	1	
⚠	PCB	N0AE2FF00001	CIRCUIT BOARD Q (TUNER)	1	
⚠	PCB	TNPA4869AD	CIRCUIT BOARD K (TUNER)	1	(RTL)
⚠	PCB	TXN/A1DKUM	CIRCUIT BOARD A (TUNER)	1	(RTL)
⚠	PCB	TNPA4897AC	CIRCUIT BOARD G (TUNER)	1	(RTL)
⚠	PCB	TXNDH1DKUU	CIRCUIT BOARD DH (TUNER)	1	(RTL)
⚠	PCB	TNPA4867AC	CIRCUIT BOARD GS (TUNER)	1	(RTL)
⚠	PCB	TNPA4860AB	CIRCUIT BOARD SG	1	(RTL)
⚠	PCB	TNPA4944	CIRCUIT BOARD J	1	(RTL)
⚠	PCB	TNPA4863	CIRCUIT BOARD S	1	(RTL)
⚠	PCB	TNPA4693AF	CIRCUIT BOARD GL	1	(RTL)
⚠	PCB	TNPA4862	CIRCUIT BOARD KA	1	(RTL)

Safety	Ref. No.	Part No.	Part Name & Description	Pcs	Remarks
	Q0900	B1CBHD000002	FET	1	
	Q0901	B1CBHD000002	FET	1	
	Q0903	2SD0601ASL	TRANSISTOR	1	
	Q0904	2SD0601ASL	TRANSISTOR	1	
	Q0905	2SD0601ASL	TRANSISTOR	1	
	Q2001	B1ABCF000231	TRANSISTOR	1	
	Q2063	2SD0601ASL	TRANSISTOR	1	
	Q2064	2SD0601ASL	TRANSISTOR	1	
	Q2065	2SB0709ASL	TRANSISTOR	1	
	Q2510	2SD0601ARL	TRANSISTOR	1	
	Q2511	2SD0601ARL	TRANSISTOR	1	
	Q2513	2SD0601ARL	TRANSISTOR	1	
	Q2602	B1MBEDA00015	FET	1	
	Q2603	B1MBEDA00015	FET	1	
	Q2604	2SD0601ARL	TRANSISTOR	1	
	Q2605	2SD0601ARL	TRANSISTOR	1	
	Q2700	2SD0601ARL	TRANSISTOR	1	
	Q2701	2SD0601ARL	TRANSISTOR	1	
	Q3000	B1ABCF000231	TRANSISTOR	1	
	Q3001	B1ABCF000231	TRANSISTOR	1	
	Q3300	2SB0709ARL	TRANSISTOR	1	
	Q3801	2SD0601ARL	TRANSISTOR	1	
	Q3804	2SD0601ARL	TRANSISTOR	1	
	Q3807	2SD0601ARL	TRANSISTOR	1	
	Q3901	2SD0601ARL	TRANSISTOR	1	
	Q3904	2SD0601ARL	TRANSISTOR	1	
	Q3905	2SD0601ARL	TRANSISTOR	1	
	Q3906	2SD0601ARL	TRANSISTOR	1	
	Q4000	2SA207700L	TRANSISTOR	1	
	Q4400	2SD0601ARL	TRANSISTOR	1	
	Q4401	2SB0709ARL	TRANSISTOR	1	
	Q4500	B1ABCF000231	TRANSISTOR	1	
	Q4501	B1ABCF000231	TRANSISTOR	1	
	Q4514	2SB0709ASL	TRANSISTOR	1	
	Q4515	2SB0709ASL	TRANSISTOR	1	
	Q4516	2SB0709ASL	TRANSISTOR	1	
	Q4517	2SB0709ASL	TRANSISTOR	1	
	Q4520	B1ABCF000231	TRANSISTOR	1	
	Q4533	B1ABCF000231	TRANSISTOR	1	
	Q4534	B1ABCF000231	TRANSISTOR	1	
	Q4535	B1ABCF000231	TRANSISTOR	1	
	Q5312	B1MBDDA00003	FET	1	
	Q5318	B1MBDDA00003	FET	1	
	Q5431	2SB0709ARL	TRANSISTOR	1	
	Q5432	2SD0601ASL	TRANSISTOR	1	
	Q5473	2SD0601ARL	TRANSISTOR	1	
	Q5474	2SD0601ARL	TRANSISTOR	1	
	Q5475	2SD0601ASL	TRANSISTOR	1	
	Q5476	2SD0601ASL	TRANSISTOR	1	
	Q5477	2SD0601ARL	TRANSISTOR	1	
	Q5478	2SD0601ARL	TRANSISTOR	1	
	Q5480	B1ADCE000022	TRANSISTOR	1	
	Q5600	B1MBDDA00003	FET	1	
	Q5601	B1MBDDA00003	FET	1	
	Q5602	B1MBDDA00003	FET	1	
	Q5605	2SD0601ARL	TRANSISTOR	1	
	Q5606	2SD0601ARL	TRANSISTOR	1	
	Q5609	B1MBDDA00003	FET	1	
	Q9001	2SD0601ARL	TRANSISTOR	1	
	Q9002	2SD0601ARL	TRANSISTOR	1	
	Q9201	B1MBDDA00003	FET	1	
	Q9202	B1MBDDA00003	FET	1	
	Q9301	2SD0601ARL	TRANSISTOR	1	
	Q9401	2SB0709ARL	TRANSISTOR	1	
	Q16001	B1JBEN000001	TRANSISTOR	1	
	Q16002	B1JBEN000001	TRANSISTOR	1	
	Q16003	B1JBEN000001	TRANSISTOR	1	
	Q16004	B1JBEN000001	TRANSISTOR	1	
	Q16005	B1JBEN000001	TRANSISTOR	1	
	Q16006	B1JBEN000001	TRANSISTOR	1	
	Q16021	B1JBEN000001	TRANSISTOR	1	
	Q16022	B1JBEN000001	TRANSISTOR	1	
	Q16023	B1JBEN000001	TRANSISTOR	1	

Safety	Ref. No.	Part No.	Part Name & Description	Pcs	Remarks
	Q16024	B1JBEN000001	TRANSISTOR	1	
	Q16025	B1JBEN000001	TRANSISTOR	1	
	Q16041	B1JBDN000002	TRANSISTOR	1	
	Q16042	B1JBDN000002	TRANSISTOR	1	
	Q16043	B1JBDN000002	TRANSISTOR	1	
	Q16044	B1JBDN000002	TRANSISTOR	1	
	Q16051	B1JBDN000002	TRANSISTOR	1	
	Q16052	B1JBDN000002	TRANSISTOR	1	
	Q16055	B1HFPFA00001	TRANSISTOR	1	
	Q16056	B1HFPFA00001	TRANSISTOR	1	
	Q16065	B1HFPFA00001	TRANSISTOR	1	
	Q16101	2SK417300L	FET	1	
	Q16102	2SK399500L	FET	1	
	Q16141	B1HFPFA00001	TRANSISTOR	1	
	Q16161	B1HFPFA00001	TRANSISTOR	1	
	Q16191	B1HFPFA00001	TRANSISTOR	1	
	Q16251	2SD0601ARL	TRANSISTOR	1	
	Q16280	2SD0601ARL	TRANSISTOR	1	
	Q16401	2PG013000L	TRANSISTOR	1	
	Q16402	2PG013000L	TRANSISTOR	1	
	Q16403	2PG013000L	TRANSISTOR	1	
	Q16404	2PG013000L	TRANSISTOR	1	
	Q16405	2PG013000L	TRANSISTOR	1	
	Q16406	2PG013000L	TRANSISTOR	1	
	Q16421	2PG014000L	TRANSISTOR	1	
	Q16422	2PG014000L	TRANSISTOR	1	
	Q16423	2PG014000L	TRANSISTOR	1	
	Q16424	2PG014000L	TRANSISTOR	1	
	Q16425	2PG014000L	TRANSISTOR	1	
	Q16426	2PG014000L	TRANSISTOR	1	
	Q16441	B1JBDP000001	TRANSISTOR	1	
	Q16442	B1JBDP000001	TRANSISTOR	1	
	Q16443	B1JBDP000001	TRANSISTOR	1	
	Q16444	B1JBDP000001	TRANSISTOR	1	
	Q16451	B1JBDP000001	TRANSISTOR	1	
	Q16452	B1JBDP000001	TRANSISTOR	1	
	Q16453	B1JBDP000001	TRANSISTOR	1	
	Q16454	B1JBDP000001	TRANSISTOR	1	
	Q16471	B1ABCF000231	TRANSISTOR	1	
	Q16490	B1CBGD000001	FET	1	
	Q16501	B1HFPFA00001	TRANSISTOR	1	
	Q16502	B1HFPFA00001	TRANSISTOR	1	
	Q16503	B1HFPFA00001	TRANSISTOR	1	
	Q16521	B1HFPFA00001	TRANSISTOR	1	
	Q16522	B1HFPFA00001	TRANSISTOR	1	
	Q16523	B1HFPFA00001	TRANSISTOR	1	
	Q16531	B1HFPFA00001	TRANSISTOR	1	
	Q16532	B1HFPFA00001	TRANSISTOR	1	
	Q16551	B1HFPFA00001	TRANSISTOR	1	
	Q16552	B1HFPFA00001	TRANSISTOR	1	
	Q16601	B1DFDR000001	FET	1	
	Q16602	2SD0601AQL	TRANSISTOR	1	
	Q16603	2SB0709ASL	TRANSISTOR	1	
	Q16604	B1CHPM000001	FET	1	
	Q16606	2SD0601AQL	TRANSISTOR	1	
	Q16607	B1CBGD000001	FET	1	
	Q16608	B1CBGD000001	FET	1	
	Q16621	B1JBDN000001	TRANSISTOR	1	
	Q16622	B1JBDN000001	TRANSISTOR	1	
	Q16623	B1JBDN000001	TRANSISTOR	1	
	Q16624	2SB0709ASL	TRANSISTOR	1	
	Q16645	2SD0601AQL	TRANSISTOR	1	
	Q16646	2SB0709ASL	TRANSISTOR	1	
	Q16647	B1CBGD000001	FET	1	
	Q16649	B1ABCN000007	TRANSISTOR	1	
	Q16660	B1DFDR000001	FET	1	
	Q16661	B1JBER000001	TRANSISTOR	1	
	Q16662	2SD0601AQL	TRANSISTOR	1	
	Q16663	2SB0709ASL	TRANSISTOR	1	
	Q16667	2SB0709ARL	TRANSISTOR	1	
	Q16668	2SD0601AQL	TRANSISTOR	1	
	Q16670	B1ADCN000007	TRANSISTOR	1	
	Q16671	B1ABCF000231	TRANSISTOR	1	

Safety	Ref. No.	Part No.	Part Name & Description	Pcs	Remarks
	Q16675	B1ADCN000007	TRANSISTOR	1	
	Q16676	B1ABCF000231	TRANSISTOR	1	
	Q16677	2SD0601AQL	TRANSISTOR	1	
	Q16678	B1ABCF000231	TRANSISTOR	1	
	Q16701	B1ADCN000007	TRANSISTOR	1	
	Q16702	B1ABCF000231	TRANSISTOR	1	
	Q16743	2SD0601ARL	TRANSISTOR	1	
	Q16762	B1HFPFA00001	TRANSISTOR	1	
	Q16801	B1ADCN000007	TRANSISTOR	1	
	Q16810	B1ABCF000231	TRANSISTOR	1	
	Q16815	B1ABCN000007	TRANSISTOR	1	
	Q16816	2SD0601AQL	TRANSISTOR	1	
	Q16817	B1CBGD000001	FET	1	
	Q16818	B1CBGD000001	FET	1	
	Q16874	B1CBGD000001	FET	1	
	Q16875	B1ABCF000231	TRANSISTOR	1	
	Q16876	B1ABCF000231	TRANSISTOR	1	
	Q16882	B1ABCF000231	TRANSISTOR	1	
	Q16884	2SD0601ARL	TRANSISTOR	1	
	Q16920	B1ABCN000007	TRANSISTOR	1	
	Q22022	2SB0709ARL	TRANSISTOR	1	
	Q24400	2SD0601ARL	TRANSISTOR	1	
	Q24401	2SB0709ARL	TRANSISTOR	1	
	Q25000	2SB0709ARL	TRANSISTOR	1	
	Q25001	2SD0601ARL	TRANSISTOR	1	
	Q25002	2SB0709ARL	TRANSISTOR	1	
	Q25003	2SD0601ARL	TRANSISTOR	1	
	Q25312	B1MBDDA00003	FET	1	
	Q25318	B1MBDDA00003	FET	1	
	Q25460	2SD0601ARL	TRANSISTOR	1	
	Q25600	B1MBDDA00003	FET	1	
	Q25601	B1MBDDA00003	FET	1	
	Q25602	B1MBDDA00003	FET	1	
	Q25605	2SD0601ARL	TRANSISTOR	1	
	Q25606	2SD0601ARL	TRANSISTOR	1	
	Q26601	B1MBDDA00003	FET	1	
	Q29000	2SD0601ARL	TRANSISTOR	1	
	Q29001	2SD0601ARL	TRANSISTOR	1	
	Q29002	2SD0601ARL	TRANSISTOR	1	
	Q29003	2SD0601ARL	TRANSISTOR	1	
	Q29004	2SD0601ARL	TRANSISTOR	1	
	Q29301	2SD0601ARL	TRANSISTOR	1	
	Q29302	2SD0601ARL	TRANSISTOR	1	
	Q29807	2SD0601ARL	TRANSISTOR	1	
	R0180	ERJ2GEJ101	M 100 OHM, J,0.063W	1	
	R0900	ERJ2GEJ680	M 68 OHM, J,0.063W	1	
	R0901	EXB28V680JX	RESISTOR ARRAY	1	
	R0902	ERJ2GEJ103	M 10KOHM, J,0.063W	1	
	R0903	ERJ2GEJ680	M 68 OHM, J,0.063W	1	
	R0904	EXB28V680JX	RESISTOR ARRAY	1	
	R0905	ERJ2GEJ473	M 47KOHM, J,0.063W	1	
	R0906	ERJ2GEJ103	M 10KOHM, J,0.063W	1	
	R0907	ERJ2GEJ103	M 10KOHM, J,0.063W	1	
	R0908	ERJ2GEJ680	M 68 OHM, J,0.063W	1	
	R0909	ERJ2GEJ220	M 22 OHM, J,0.063W	1	
	R0910	ERJ2GEJ220	M 22 OHM, J,0.063W	1	
	R0911	ERJ2GEJ220	M 22 OHM, J,0.063W	1	
	R0912	ERJ2GEJ220	M 22 OHM, J,0.063W	1	
	R0913	ERJ2GEJ220	M 22 OHM, J,0.063W	1	
	R0914	ERJ2GEJ220	M 22 OHM, J,0.063W	1	

Safety	Ref. No.	Part No.	Part Name & Description	Pcs	Remarks
	R0915	ERJ2GEJ472	M 4.7KOHM, J,0.063W	1	
	R0916	ERJ2GEJ472	M 4.7KOHM, J,0.063W	1	
	R0917	ERJ2GEJ220	M 22 OHM, J,0.063W	1	
	R0918	ERJ2GEJ220	M 22 OHM, J,0.063W	1	
	R0919	ERJ2GEJ220	M 22 OHM, J,0.063W	1	
	R0920	ERJ2GEJ220	M 22 OHM, J,0.063W	1	
	R0921	ERJ2GEJ220	M 22 OHM, J,0.063W	1	
	R0922	ERJ2GEJ220	M 22 OHM, J,0.063W	1	
	R0923	ERJ2RHD682X	M 6.8KOHM, J, 2W	1	
	R0924	ERJ2RHD682X	M 6.8KOHM, J, 2W	1	
	R0925	ERJ2GEJ220	M 22 OHM, J,0.063W	1	
	R0926	ERJ2GEJ220	M 22 OHM, J,0.063W	1	
	R0929	ERJ2GEJ220	M 22 OHM, J,0.063W	1	
	R0930	ERJ2GEJ220	M 22 OHM, J,0.063W	1	
	R0931	ERJ2GEJ680	M 68 OHM, J,0.063W	1	
	R0932	ERJ2GEJ680	M 68 OHM, J,0.063W	1	
	R0944	EXB28V680JX	RESISTOR ARRAY	1	
	R0945	ERJ2GEJ220	M 22 OHM, J,0.063W	1	
	R0946	ERJ2GEJ220	M 22 OHM, J,0.063W	1	
	R0947	ERJ2GEJ680	M 68 OHM, J,0.063W	1	
	R0948	ERJ2GEJ680	M 68 OHM, J,0.063W	1	
	R0949	ERJ2GEJ680	M 68 OHM, J,0.063W	1	
	R0950	ERJ2GEJ680	M 68 OHM, J,0.063W	1	
	R0951	ERJ2GEJ680	M 68 OHM, J,0.063W	1	
	R0952	ERJ2GEJ680	M 68 OHM, J,0.063W	1	
	R0953	ERJ2GEJ680	M 68 OHM, J,0.063W	1	
	R0954	ERJ2GEJ680	M 68 OHM, J,0.063W	1	
	R0955	ERJ2GEJ472	M 4.7KOHM, J,0.063W	1	
	R0956	ERJ2GEJ472	M 4.7KOHM, J,0.063W	1	
	R0957	ERJ2GEJ472	M 4.7KOHM, J,0.063W	1	
	R0958	ERJ2GEJ472	M 4.7KOHM, J,0.063W	1	
	R0959	ERJ2GEJ332	M 3.3KOHM, J,0.063W	1	
	R0960	ERJ2GEJ332	M 3.3KOHM, J,0.063W	1	
	R0961	ERJ2GEJ332	M 3.3KOHM, J,0.063W	1	
	R0962	ERJ2GEJ332	M 3.3KOHM, J,0.063W	1	
	R0963	ERJ2GEJ220	M 22 OHM, J,0.063W	1	
	R0964	ERJ2GEJ220	M 22 OHM, J,0.063W	1	
	R0967	ERJ2GEJ103	M 10KOHM, J,0.063W	1	
	R0968	ERJ2GEJ473	M 47KOHM, J,0.063W	1	
	R0969	ERJ2GEJ103	M 10KOHM, J,0.063W	1	
	R0970	ERJ2GEJ103	M 10KOHM, J,0.063W	1	

Safety	Ref. No.	Part No.	Part Name & Description	Pcs	Remarks
	R0971	ERJ2GEJ103	M 10KOHM, J,0.063W	1	
	R0972	ERJ2GEJ103	M 10KOHM, J,0.063W	1	
	R0974	ERJ2GEJ473	M 47KOHM, J,0.063W	1	
	R0975	ERJ2GEJ473	M 47KOHM, J,0.063W	1	
	R0977	ERJ2GEJ103	M 10KOHM, J,0.063W	1	
	R0979	ERJ2GEJ103	M 10KOHM, J,0.063W	1	
	R0981	ERJ2GEJ680	M 68 OHM, J,0.063W	1	
	R0982	EXB28V680JX	RESISTOR ARRAY	1	
	R0983	ERJ2GEJ103	M 10KOHM, J,0.063W	1	
	R0984	ERJ2GEJ103	M 10KOHM, J,0.063W	1	
	R0985	ERJ2GEJ103	M 10KOHM, J,0.063W	1	
	R0986	ERJ2GEJ473	M 47KOHM, J,0.063W	1	
	R0987	ERJ2GEJ103	M 10KOHM, J,0.063W	1	
	R0988	ERJ2RHD272	M 2.7KOHM, J, 2W	1	
	R0989	ERJ2GEJ103	M 10KOHM, J,0.063W	1	
	R0990	ERJ2GEJ103	M 10KOHM, J,0.063W	1	
	R0991	ERJ2GEJ103	M 10KOHM, J,0.063W	1	
	R0993	ERJ2GEJ103	M 10KOHM, J,0.063W	1	
	R0996	ERJ2GEJ472	M 4.7KOHM, J,0.063W	1	
	R0997	ERJ2GEJ472	M 4.7KOHM, J,0.063W	1	
	R0998	ERJ2GEJ220	M 22 OHM, J,0.063W	1	
	R0999	ERJ2GEJ220	M 22 OHM, J,0.063W	1	
	R1000	ERJ2GEJ220	M 22 OHM, J,0.063W	1	
	R1001	ERJ2GEJ220	M 22 OHM, J,0.063W	1	
	R1002	ERJ2GEJ220	M 22 OHM, J,0.063W	1	
	R1003	ERJ2GEJ220	M 22 OHM, J,0.063W	1	
	R1010	D0GB103JA041	M 10K OHM J 1/ 16W	1	
	R1130	ERJ2GEJ473	M 47KOHM, J,0.063W	1	
	R1135	ERJ2GEJ101	M 100 OHM, J,0.063W	1	
	R1150	ERJ2GEJ101	M 100 OHM, J,0.063W	1	
	R1151	ERJ2GEJ103	M 10KOHM, J,0.063W	1	
	R1153	ERJ2GEJ471	M 470 OHM, J,0.063W	1	
	R1163	ERJ2GEJ105	M 1MOHM, J,0.063W	1	
	R1164	ERJ2GEJ102X	M 1K OHM J 1/4W	1	
	R1177	ERJ2GEJ102X	M 1K OHM J 1/4W	1	
	R1182	ERJ2GED273X	M 27KOHM ,J,0.063W	1	
	R1192	ERJ2GEJ101	M 100 OHM, J,0.063W	1	
	R1203	ERJ2GEJ473	M 47KOHM, J,0.063W	1	
	R1209	ERJ2GEJ472	M 4.7KOHM, J,0.063W	1	
	R1221	D1BB7151A055	M7.15KOHM, 1/10W	1	
	R1224	ERJ2GEJ103	M 10KOHM, J,0.063W	1	
	R1225	ERJ2GEJ103	M 10KOHM, J,0.063W	1	

Safety	Ref. No.	Part No.	Part Name & Description	Pcs	Remarks
	R1236	ERJ2GEJ473	M 47KOHM, J,0.063W	1	
	R1237	ERJ2GEJ102X	M 1K OHM J 1/4W	1	
	R1243	ERJ2GEJ473	M 47KOHM, J,0.063W	1	
	R1255	ERJ2GEJ102X	M 1K OHM J 1/4W	1	
	R1261	ERJ2GEJ473	M 47KOHM, J,0.063W	1	
	R1262	ERJ2GEJ473	M 47KOHM, J,0.063W	1	
	R1401	ERJ2GEJ104	M 100KOHM, J,0.063W	1	
	R1404	ERJ2GEJ683	M 68KOHM, J,0.063W	1	
	R1405	ERJ2GEJ333	M 33KOHM, J,0.063W	1	
	R1406	ERJ2GEJ683	M 68KOHM, J,0.063W	1	
	R1407	ERJ2GEJ473	M 47KOHM, J,0.063W	1	
	R1408	ERJ2GEJ103	M 10KOHM, J,0.063W	1	
	R1410	ERJ2GEJ103	M 10KOHM, J,0.063W	1	
	R1411	ERJ2GEJ104	M 100KOHM, J,0.063W	1	
	R1414	ERJ2GEJ103	M 10KOHM, J,0.063W	1	
	R1415	ERJ2GEJ103	M 10KOHM, J,0.063W	1	
	R1416	ERJ2GEJ103	M 10KOHM, J,0.063W	1	
	R1553	ERJ2GEJ821	M 820 OHM, J,0.063W	1	
	R1582	ERJ2GED273X	M 27KOHM ,J,0.063W	1	
	R1597	ERJ2GEJ101	M 100 OHM, J,0.063W	1	
	R1599	D0YAR0000007	M 0 OHM 1/4W	1	
	R1605	ERJ2GEJ474	M 470KOHM, J,0.063W	1	
	R1606	ERJ2GEJ101	M 100 OHM, J,0.063W	1	
	R1608	ERJ2GEJ220	M 22 OHM, J,0.063W	1	
	R1609	ERJ2GEJ472	M 4.7KOHM, J,0.063W	1	
	R1614	ERJ2GEJ103	M 10KOHM, J,0.063W	1	
	R1615	ERJ2GEJ103	M 10KOHM, J,0.063W	1	
	R1629	ERJ2GEJ473	M 47KOHM, J,0.063W	1	
	R1630	ERJ2GEJ473	M 47KOHM, J,0.063W	1	
	R1631	ERJ2GEJ473	M 47KOHM, J,0.063W	1	
	R1632	ERJ2GEJ473	M 47KOHM, J,0.063W	1	
	R1633	ERJ2GEJ473	M 47KOHM, J,0.063W	1	
	R1635	ERJ2GEJ473	M 47KOHM, J,0.063W	1	
	R1636	ERJ2GEJ473	M 47KOHM, J,0.063W	1	
	R1637	ERJ2GEJ102X	M 1K OHM J 1/4W	1	
	R1639	ERJ2GEJ101	M 100 OHM, J,0.063W	1	
	R1641	ERJ2GEJ102X	M 1K OHM J 1/4W	1	
	R1643	ERJ2GEJ473	M 47KOHM, J,0.063W	1	
	R1654	ERJ2GEJ101	M 100 OHM, J,0.063W	1	
	R1655	ERJ2GEJ474	M 470KOHM, J,0.063W	1	
	R1715	ERJ2GEJ473	M 47KOHM, J,0.063W	1	
	R2002	ERJ2GEJ681	M 680 OHM, J,0.063W	1	

Safety	Ref. No.	Part No.	Part Name & Description	Pcs	Remarks
	R2003	ERJ2GEJ105	M 1MOHM, J,0.063W	1	
	R2006	ERJ2GEJ471	M 470 OHM, J,0.063W	1	
	R2007	ERJ2GEJ221	M 220 OHM, J,0.063W	1	
	R2008	ERJ2GEJ471	M 470 OHM, J,0.063W	1	
	R2015	ERJ2GEJ103	M 10KOHM, J,0.063W	1	
	R2016	ERJ2GEJ103	M 10KOHM, J,0.063W	1	
	R2017	ERJ2GEJ103	M 10KOHM, J,0.063W	1	
	R2018	ERJ2GEJ103	M 10KOHM, J,0.063W	1	
	R2019	D1BB2002A055	M 20KOHM, 1/10W	1	
	R2020	D1BB2001A055	M 2KOHM, 1/10W	1	
	R2023	ERJ2GEJ103	M 10KOHM, J,0.063W	1	
	R2032	D0YAR0000007	M 0 OHM 1/4W	1	
	R2047	D1BB2802A055	M 28KOHM, 1/10W	1	
	R2048	D1BB2802A055	M 28KOHM, 1/10W	1	
	R2050	D1BB2802A055	M 28KOHM, 1/10W	1	
	R2051	D1BB2802A055	M 28KOHM, 1/10W	1	
	R2092	ERJ2GEJ103	M 10KOHM, J,0.063W	1	
	R2093	ERJ2GEJ103	M 10KOHM, J,0.063W	1	
	R2110	ERJ2GEJ101	M 100 OHM, J,0.063W	1	
	R2111	ERJ2GEJ101	M 100 OHM, J,0.063W	1	
	R2119	ERJ2GEJ105	M 1MOHM, J,0.063W	1	
	R2120	ERJ2GEJ473	M 47KOHM, J,0.063W	1	
	R2122	ERJ2GEJ101	M 100 OHM, J,0.063W	1	
	R2124	ERJ2GEJ103	M 10KOHM, J,0.063W	1	
	R2132	ERJ2GEJ471	M 470 OHM, J,0.063W	1	
	R2172	ERJ2GEJ680	M 68 OHM, J,0.063W	1	
	R2190	ERJ2GEJ472	M 4.7KOHM, J,0.063W	1	
	R2516	ERJ3GEYJ223	M 22KOHM,J,1/16W	1	
	R2517	ERJ3GEYJ470	M 47 OHM,J,1/16W	1	
	R2520	ERJ3GEYJ224	M 220KOHM,J,1/16W	1	
	R2524	D0GB473JA057	M 47KOHM,J,1/16W	1	
	R2525	D1BB1271A055	M1.27KOHM, 1/10W	1	
	R2530	D0GB473JA057	M 47KOHM,J,1/16W	1	
	R2531	D1BB2000A055	M 200 OHM, 1/10W	1	
	R2542	D0GB473JA057	M 47KOHM,J,1/16W	1	
	R2556	D0GB103JA041	M 10K OHM J 1/16W	1	
	R2557	ERJ3GEYJ223	M 22KOHM,J,1/16W	1	
	R2607	ERJ2GEJ223	M 22KOHM, J,0.063W	1	
	R2608	ERJ2GEJ683	M 68KOHM, J,0.063W	1	
	R2609	D1BB1002A055	M 10KOHM, 1/10W	1	
	R2610	D1BB1502A055	M 15KOHM, 1/10W	1	
	R2611	ERJ2GEJ680	M 68 OHM, J,0.063W	1	
	R2612	D1BB3401A055	M 3.4KOHM, 1/10W	1	
	R2613	D1BB1801A055	M 1.8KOHM, 1/16W	1	
	R2614	D0GB100JA041	M 10 OHM J 1/16W	1	
	R2615	D1BB2201A055	M 2.2KOHM, 1/10W	1	
	R2616	D1BB3601A055	M 3.6KOHM, 1/10W	1	
	R2621	D1BB2700A055	M 270 OHM, 1/10W	1	
	R2622	ERJ2GEJ222	M 2.2KOHM, J,0.063W	1	
	R2629	ERJ2GEJ102X	M 1K OHM J 1/4W	1	
	R2632	ERJ6GEY0R00V	M 0 OHM J 1/10W	1	

Safety	Ref. No.	Part No.	Part Name & Description	Pcs	Remarks
	R2634	ERJ2GEJ473	M 47KOHM, J,0.063W	1	
	R2635	ERJ2GEJ103	M 10KOHM, J,0.063W	1	
	R2641	ERJ2GEJ101	M 100 OHM, J,0.063W	1	
	R2642	ERJ2GEJ101	M 100 OHM, J,0.063W	1	
	R2643	ERJ2GEJ101	M 100 OHM, J,0.063W	1	
	R2644	ERJ2GEJ101	M 100 OHM, J,0.063W	1	
	R2645	ERJ2GEJ101	M 100 OHM, J,0.063W	1	
	R2646	ERJ2GEJ101	M 100 OHM, J,0.063W	1	
	R2647	ERJ2GEJ101	M 100 OHM, J,0.063W	1	
	R2648	ERJ2GEJ101	M 100 OHM, J,0.063W	1	
	R2649	ERJ2GEJ101	M 100 OHM, J,0.063W	1	
	R2650	ERJ2GEJ101	M 100 OHM, J,0.063W	1	
	R2651	ERJ2GEJ101	M 100 OHM, J,0.063W	1	
	R2652	ERJ2GEJ101	M 100 OHM, J,0.063W	1	
	R2655	ERJ2GEJ470	M 47 OHM, J,0.063W	1	
	R2656	ERJ2GEJ220	M 22 OHM, J,0.063W	1	
	R2657	ERJ2GEJ220	M 22 OHM, J,0.063W	1	
	R2658	ERJ2GEJ222	M 2.2KOHM, J,0.063W	1	
	R2659	ERJ2GEJ222	M 2.2KOHM, J,0.063W	1	
	R2660	ERJ2GEJ680	M 68 OHM, J,0.063W	1	
	R2661	ERJ2GEJ472	M 4.7KOHM, J,0.063W	1	
	R2662	ERJ2GEJ222	M 2.2KOHM, J,0.063W	1	
	R2700	D0GB103JA041	M 10K OHM J 1/16W	1	
	R2701	D0GB473JA057	M 47KOHM,J,1/16W	1	
	R2702	D1BB2000A055	M 200 OHM, 1/10W	1	
	R2703	ERJ3GEYJ223	M 22KOHM,J,1/16W	1	
	R2704	D0GB473JA057	M 47KOHM,J,1/16W	1	
	R2705	D1BB1271A055	M1.27KOHM, 1/10W	1	
	R2713	ERJ2RKF1001	M 1KOHM, 0.063W	1	
	R2714	ERJ2RKF1001	M 1KOHM, 0.063W	1	
	R2715	ERJ2GEJ103	M 10KOHM, J,0.063W	1	
	R2716	ERJ2GEJ103	M 10KOHM, J,0.063W	1	
	R2717	ERJ2GEJ103	M 10KOHM, J,0.063W	1	
	R2718	ERJ2GEJ221	M 220 OHM, J,0.063W	1	
	R2719	ERJ2GEJ221	M 220 OHM, J,0.063W	1	
	R2720	ERJ2GEJ470	M 47 OHM, J,0.063W	1	
	R2721	ERJ2GEJ470	M 47 OHM, J,0.063W	1	
	R2722	ERJ2GEJ470	M 47 OHM, J,0.063W	1	
	R2723	ERJ2GEJ470	M 47 OHM, J,0.063W	1	
	R2724	ERJ2GEJ470	M 47 OHM, J,0.063W	1	
	R2725	ERJ2GEJ470	M 47 OHM, J,0.063W	1	
	R2726	ERJ2GEJ470	M 47 OHM, J,0.063W	1	
	R2727	ERJ2GEJ470	M 47 OHM, J,0.063W	1	

Safety	Ref. No.	Part No.	Part Name & Description	Pcs	Remarks
	R2728	ERJ2GEJ470	M 47 OHM, J,0.063W	1	
	R2729	ERJ2GEJ470	M 47 OHM, J,0.063W	1	
	R2730	ERJ2GEJ470	M 47 OHM, J,0.063W	1	
	R2731	ERJ2GEJ470	M 47 OHM, J,0.063W	1	
	R2732	ERJ2GEJ470	M 47 OHM, J,0.063W	1	
	R2733	ERJ2GEJ470	M 47 OHM, J,0.063W	1	
	R2734	ERJ2GEJ470	M 47 OHM, J,0.063W	1	
	R2735	ERJ2GEJ470	M 47 OHM, J,0.063W	1	
	R2736	ERJ2GEJ470	M 47 OHM, J,0.063W	1	
	R2737	ERJ2GEJ470	M 47 OHM, J,0.063W	1	
	R2738	ERJ2GEJ470	M 47 OHM, J,0.063W	1	
	R2739	ERJ2GEJ470	M 47 OHM, J,0.063W	1	
	R2740	ERJ2GEJ470	M 47 OHM, J,0.063W	1	
	R2741	ERJ2GEJ470	M 47 OHM, J,0.063W	1	
	R2742	ERJ2GEJ680	M 68 OHM, J,0.063W	1	
	R2832	ERJ2GEJ473	M 47KOHM, J,0.063W	1	
	R2841	D0GA4R7JA021	M 4.7OHM, J,0.063W	1	
	R2842	ERJ2GEJ103	M 10KOHM, J,0.063W	1	
	R2843	D1BB15030002	M 150KOHM, 1/10W	1	
	R2844	D1BB1872A055	M18.7KOHM, 1/10W	1	
	R2845	ERJ2GEJ102X	M 1K OHM J 1/4W	1	
	R2846	D1BB4751A055	M4.75KOHM, 1/10W	1	
	R2847	D1BB6651A055	M6.65KOHM, 1/10W	1	
	R2848	D1BB1002A055	M 10KOHM, 1/10W	1	
	R2849	D1BB1501A055	M1.50KOHM, 1/10W	1	
	R2850	D1BB1801A055	M 1.8KOHM, 1/16W	1	
	R2851	D1BB4702A055	M 47KOHM, 1/10W	1	
	R2852	D1BB1502A055	M 15KOHM, 1/10W	1	
	R2853	ERJ2GEJ472	M 4.7KOHM, J,0.063W	1	
	R2854	ERJ2GEJ222	M 2.2KOHM, J,0.063W	1	
	R2855	ERJ6GEYJ472V	M 4.7K OHM J 1/ 10W	1	
	R2905	D0YAR0000007	M 0 OHM 1/4W	1	
	R2909	D0YAR0000007	M 0 OHM 1/4W	1	
	R2915	ERJ2GEJ221	M 220 OHM, J,0.063W	1	
	R2927	D0YAR0000007	M 0 OHM 1/4W	1	
	R2930	ERJ2GEJ153	M 15KOHM ,J,0.063W	1	
	R2940	D0GBR00Z0002	M 0 OHM J 1/16W	1	
	R2960	ERJ2GEJ103	M 10KOHM, J,0.063W	1	
	R3000	ERJ2GEJ223	M 22KOHM, J,0.063W	1	
	R3001	ERJ2GEJ223	M 22KOHM, J,0.063W	1	
	R3002	ERJ2GEJ223	M 22KOHM, J,0.063W	1	
	R3003	ERJ2GEJ223	M 22KOHM, J,0.063W	1	
	R3004	ERJ2GEJ223	M 22KOHM, J,0.063W	1	
	R3005	ERJ2GEJ223	M 22KOHM, J,0.063W	1	
	R3014	ERJ2GEJ103	M 10KOHM, J,0.063W	1	
	R3019	ERJ2GEJ222	M 2.2KOHM, J,0.063W	1	

Safety	Ref. No.	Part No.	Part Name & Description	Pcs	Remarks
	R3021	ERJ2GEJ222	M 2.2KOHM, J,0.063W	1	
	R3024	ERJ2GEJ104	M 100KOHM, J,0.063W	1	
	R3025	ERJ2GEJ104	M 100KOHM, J,0.063W	1	
	R3033	ERJ2GEJ221	M 220 OHM, J,0.063W	1	
	R3034	ERJ2GEJ221	M 220 OHM, J,0.063W	1	
	R3037	ERJ2GEJ221	M 220 OHM, J,0.063W	1	
	R3038	ERJ2GEJ221	M 220 OHM, J,0.063W	1	
	R3043	ERJ2GEJ221	M 220 OHM, J,0.063W	1	
	R3045	ERJ2GEJ221	M 220 OHM, J,0.063W	1	
	R3047	ERJ2GEJ221	M 220 OHM, J,0.063W	1	
	R3048	ERJ2GEJ221	M 220 OHM, J,0.063W	1	
	R3049	ERJ2GEJ221	M 220 OHM, J,0.063W	1	
	R3050	ERJ2GEJ221	M 220 OHM, J,0.063W	1	
	R3051	ERJ2GEJ221	M 220 OHM, J,0.063W	1	
	R3052	ERJ2GEJ221	M 220 OHM, J,0.063W	1	
	R3072	D1BD75R0A044	M 75 OHM 1/10W	1	
	R3074	D1BD75R0A044	M 75 OHM 1/10W	1	
	R3075	D1BD75R0A044	M 75 OHM 1/10W	1	
	R3076	D1BD75R0A044	M 75 OHM 1/10W	1	
	R3077	D1BD75R0A044	M 75 OHM 1/10W	1	
	R3078	ERJ6RED750	M 75 OHM, 1/10W	1	
	R3084	ERJ6RED750	M 75 OHM, 1/10W	1	
	R3085	ERJ6RED750	M 75 OHM, 1/10W	1	
	R3086	ERJ6RED750	M 75 OHM, 1/10W	1	
	R3094	D0YAR0000007	M 0 OHM 1/4W	1	
	R3101	ERJ2GEJ472	M 4.7KOHM, J,0.063W	1	
	R3103	ERJ2GEJ472	M 4.7KOHM, J,0.063W	1	
	R3111	D0YAR0000007	M 0 OHM 1/4W	1	
	R3112	D0YAR0000007	M 0 OHM 1/4W	1	
	R3116	ERJ2GEJ221	M 220 OHM, J,0.063W	1	
	R3117	ERJ2GEJ221	M 220 OHM, J,0.063W	1	
	R3118	ERJ2GEJ221	M 220 OHM, J,0.063W	1	
	R3119	ERJ2GEJ221	M 220 OHM, J,0.063W	1	
	R3120	ERJ2GEJ331	M 330 OHM, J,0.063W	1	
	R3121	ERJ6RED750	M 75 OHM, 1/10W	1	
	R3122	ERJ2GEJ223	M 22KOHM, J,0.063W	1	
	R3123	ERJ2GEJ221	M 220 OHM, J,0.063W	1	
	R3124	ERJ2GEJ472	M 4.7KOHM, J,0.063W	1	
	R3125	ERJ2GEJ221	M 220 OHM, J,0.063W	1	
	R3127	ERJ2GEJ223	M 22KOHM, J,0.063W	1	
	R3128	ERJ2GEJ221	M 220 OHM, J,0.063W	1	
	R3132	ERJ2GEJ820	M 82 OHM, J,0.063W	1	
	R3133	ERJ2GEJ820	M 82 OHM, J,0.063W	1	
	R3134	ERJ2GEJ820	M 82 OHM, J,0.063W	1	
	R3138	ERJ2GEJ221	M 220 OHM, J,0.063W	1	
	R3139	ERJ2GEJ221	M 220 OHM, J,0.063W	1	

Safety	Ref. No.	Part No.	Part Name & Description	Pcs	Remarks
	R3140	ERJ2GEJ221	M 220 OHM, J,0.063W	1	
	R3146	ERJ2GEJ331	M 330 OHM, J,0.063W	1	
	R3147	ERJ2GEJ472	M 4.7KOHM, J,0.063W	1	
	R3148	ERJ6RED750	M 75 OHM, 1/10W	1	
	R3149	ERJ6RED750	M 75 OHM, 1/10W	1	
	R3151	ERJ2GEJ220	M 22 OHM, J,0.063W	1	
	R3152	ERJ2GEJ220	M 22 OHM, J,0.063W	1	
	R3167	ERJ6RED750	M 75 OHM, 1/10W	1	
	R3169	ERJ2GEJ104	M 100KOHM, J,0.063W	1	
	R3182	D0YAR0000007	M 0 OHM 1/4W	1	
	R3187	D1BD75R0A044	M 75 OHM 1/10W	1	
	R3189	ERJ2GEJ680	M 68 OHM, J,0.063W	1	
	R3190	ERJ2GEJ680	M 68 OHM, J,0.063W	1	
	R3191	ERJ2GEJ680	M 68 OHM, J,0.063W	1	
	R3201	ERJ2GEJ221	M 220 OHM, J,0.063W	1	
	R3212	D1BD75R0A044	M 75 OHM 1/10W	1	
	R3218	D0YAR0000007	M 0 OHM 1/4W	1	
	R3223	ERJ2GEJ680	M 68 OHM, J,0.063W	1	
	R3225	ERJ2GEJ680	M 68 OHM, J,0.063W	1	
	R3226	ERJ2GEJ472	M 4.7KOHM, J,0.063W	1	
	R3227	ERJ2GEJ472	M 4.7KOHM, J,0.063W	1	
	R3230	ERJ6RED750	M 75 OHM, 1/10W	1	
	R3232	ERJ6RED750	M 75 OHM, 1/10W	1	
	R3234	ERJ6RED750	M 75 OHM, 1/10W	1	
	R3236	ERJ2GEJ680	M 68 OHM, J,0.063W	1	
	R3237	ERJ2GEJ680	M 68 OHM, J,0.063W	1	
	R3240	ERJ2GEJ221	M 220 OHM, J,0.063W	1	
	R3289	D0YAR0000007	M 0 OHM 1/4W	1	
	R3300	ERJ3GEYJ361V	M 360 OHM,J,1/ 16W	1	
	R3301	D0YAR0000007	M 0 OHM 1/4W	1	
	R3307	ERJ2GEJ221	M 220 OHM, J,0.063W	1	
	R3501	D1BB1741A055	M 1.74KOHM, 1/ 16W	1	
	R3502	D1BB1621A055	M 1.62KOHM, 1/ 16W	1	
	R3503	D1BB2321A055	M2.32KOHM, 1/16W	1	
	R3701	ERJ6GEYJ184	M 180KOHM,J,1/ 10W	1	
	R3702	ERJ6GEYJ184	M 180KOHM,J,1/ 10W	1	
	R3706	D0GD103JA036	M 10KOHM,J,0.25W	1	
	R3721	ERJ6GEYJ101V	M 100 OHM,J,1/ 10W	1	
	R3722	ERJ6GEYJ101V	M 100 OHM,J,1/ 10W	1	
	R3781	ERJ3EKF1741	M 17.4 OHM, 1/ 16W	1	
	R3784	D1BB1432A055	M14.3KOHM, 1/10W	1	
	R3786	D1BB7151A055	M7.15KOHM, 1/10W	1	
	R3788	D0GBR00Z0002	M 0 OHM J 1/16W	1	
	R3789	ERJ3EKF6651	M 6.65KOHM, 1/ 16W	1	
	R3790	D0GBR00Z0002	M 0 OHM J 1/16W	1	
	R3802	ERJ2GEJ103	M 10KOHM, J,0.063W	1	
	R3803	ERJ2GEJ473	M 47KOHM, J,0.063W	1	
	R3805	ERJ2GEJ472	M 4.7KOHM, J,0.063W	1	

Safety	Ref. No.	Part No.	Part Name & Description	Pcs	Remarks
	R3806	ERJ2GEJ473	M 47KOHM, J,0.063W	1	
	R3807	ERJ2GEJ100	M 10 OHM, J,0.063W	1	
	R3808	ERJ2GEJ100	M 10 OHM, J,0.063W	1	
	R3809	ERJ2GEJ122	M 1.2KOHM, J,0.063W	1	
	R3810	ERJ2GEJ122	M 1.2KOHM, J,0.063W	1	
	R3811	D1BB4701A055	M 4.7KOHM, 1/10W	1	
	R3812	ERJ2GEJ103	M 10KOHM, J,0.063W	1	
	R3815	D0YAR0000007	M 0 OHM 1/4W	1	
	R3818	ERJ2GEJ103	M 10KOHM, J,0.063W	1	
	R3821	ERJ2RKD330	M 33 OHM, J, 2W	1	
	R3822	ERJ2GEJ102X	M 1K OHM J 1/4W	1	
	R3823	ERJ2GEJ473	M 47KOHM, J,0.063W	1	
	R3840	ERJ2GEJ100	M 10 OHM, J,0.063W	1	
	R3841	ERJ2GEJ100	M 10 OHM, J,0.063W	1	
	R3845	ERJ2GEJ472	M 4.7KOHM, J,0.063W	1	
	R3847	D0YAR0000007	M 0 OHM 1/4W	1	
	R3855	ERJ2GEJ473	M 47KOHM, J,0.063W	1	
	R3856	ERJ2GEJ473	M 47KOHM, J,0.063W	1	
	R3858	ERJ2GEJ473	M 47KOHM, J,0.063W	1	
	R3902	ERJ2GEJ103	M 10KOHM, J,0.063W	1	
	R3903	ERJ2GEJ473	M 47KOHM, J,0.063W	1	
	R3905	ERJ2GEJ472	M 4.7KOHM, J,0.063W	1	
	R3906	ERJ2GEJ473	M 47KOHM, J,0.063W	1	
	R3907	ERJ2GEJ100	M 10 OHM, J,0.063W	1	
	R3908	ERJ2GEJ100	M 10 OHM, J,0.063W	1	
	R3909	ERJ2GEJ122	M 1.2KOHM, J,0.063W	1	
	R3910	ERJ2GEJ122	M 1.2KOHM, J,0.063W	1	
	R3911	D1BB4701A055	M 4.7KOHM, 1/10W	1	
	R3912	ERJ2GEJ103	M 10KOHM, J,0.063W	1	
	R3915	D0YAR0000007	M 0 OHM 1/4W	1	
	R3918	ERJ2GEJ103	M 10KOHM, J,0.063W	1	
	R3921	ERJ2RKD330	M 33 OHM, J, 2W	1	
	R3922	ERJ2GEJ102X	M 1K OHM J 1/4W	1	
	R3940	ERJ2GEJ100	M 10 OHM, J,0.063W	1	
	R3941	ERJ2GEJ100	M 10 OHM, J,0.063W	1	
	R3947	D0YAR0000007	M 0 OHM 1/4W	1	
	R3961	D1BB1242A055	M12.4KOHM, 1/10W	1	
	R3962	D0GA4R7JA021	M 4.7OHM, J,0.063W	1	
	R3964	ERJ2GEJ103	M 10KOHM, J,0.063W	1	
	R3965	D1BB15030002	M 150KOHM, 1/10W	1	
	R3966	ERJ2GEJ101	M 100 OHM, J,0.063W	1	
	R3970	ERJ2GEJ473	M 47KOHM, J,0.063W	1	
	R3971	ERJ2GEJ473	M 47KOHM, J,0.063W	1	
	R3972	ERJ2GEJ473	M 47KOHM, J,0.063W	1	
	R3973	ERJ2GEJ473	M 47KOHM, J,0.063W	1	

Safety	Ref. No.	Part No.	Part Name & Description	Pcs	Remarks
	R3975	ERJ2GEJ104	M 100KOHM, J,0.063W	1	
	R3982	D0YAR0000007	M 0 OHM 1/4W	1	
	R3983	ERJ2GEJ184	M 180KOHM, J,0.063W	1	
	R3985	D0YAR0000007	M 0 OHM 1/4W	1	
	R3986	D0YAR0000007	M 0 OHM 1/4W	1	
	R3987	ERJ2GEJ184	M 180KOHM, J,0.063W	1	
	R4029	EXB2HV680J	RESISTOR ARRAY	1	
	R4030	EXB2HV680J	RESISTOR ARRAY	1	
	R4031	ERJ2GEJ680	M 68 OHM, J,0.063W	1	
	R4032	ERJ2GEJ680	M 68 OHM, J,0.063W	1	
	R4033	ERJ2GEJ680	M 68 OHM, J,0.063W	1	
	R4034	D1BB7500A055	M 750 OHM, 1/10W	1	
	R4035	D1BB1241A055	M1.24KOHM, 1/10W	1	
	R4039	ERJ2GEJ102X	M 1K OHM J 1/4W	1	
	R4043	D0GB202JA057	M 2KOHM,J,1/16W	1	
	R4044	ERJ2GEJ103	M 10KOHM, J,0.063W	1	
	R4045	ERJ2GEJ103	M 10KOHM, J,0.063W	1	
	R4046	ERJ2GEJ101	M 100 OHM, J,0.063W	1	
	R4047	ERJ2GEJ101	M 100 OHM, J,0.063W	1	
	R4049	ERJ2GEJ473	M 47KOHM, J,0.063W	1	
	R4423	ERJ2GEJ221	M 220 OHM, J,0.063W	1	
	R4451	ERJ2GEJ220	M 22 OHM, J,0.063W	1	
	R4452	ERJ2GEJ220	M 22 OHM, J,0.063W	1	
	R4455	ERJ2GEJ472	M 4.7KOHM, J,0.063W	1	
	R4456	ERJ2GEJ222	M 2.2KOHM, J,0.063W	1	
	R4457	ERJ2GEJ102X	M 1K OHM J 1/4W	1	
	R4458	ERJ2GEJ223	M 22KOHM, J,0.063W	1	
	R4459	ERJ3GEYJ220	M 22 OHM,J,1/16W	1	
	R4460	ERJ2GEJ472	M 4.7KOHM, J,0.063W	1	
	R4461	ERJ2GEJ220	M 22 OHM, J,0.063W	1	
	R4462	ERJ2GEJ220	M 22 OHM, J,0.063W	1	
	R4463	ERJ2GEJ220	M 22 OHM, J,0.063W	1	
	R4466	ERJ2GEJ220	M 22 OHM, J,0.063W	1	
	R4467	ERJ2GEJ220	M 22 OHM, J,0.063W	1	
	R4471	D0YAR0000007	M 0 OHM 1/4W	1	
	R4472	ERJ2GEJ220	M 22 OHM, J,0.063W	1	
	R4492	ERJ2GEJ103	M 10KOHM, J,0.063W	1	
	R4500	ERJ2GEJ103	M 10KOHM, J,0.063W	1	
	R4501	ERJ2GEJ103	M 10KOHM, J,0.063W	1	
	R4502	ERJ2RKD330	M 33 OHM, J, 2W	1	
	R4503	ERJ2RKD330	M 33 OHM, J, 2W	1	
	R4504	ERJ2GEJ102X	M 1K OHM J 1/4W	1	
	R4505	ERJ2GEJ102X	M 1K OHM J 1/4W	1	
	R4506	ERJ2GEJ473	M 47KOHM, J,0.063W	1	
	R4507	ERJ2GEJ473	M 47KOHM, J,0.063W	1	
	R4520	ERJ2GEJ220	M 22 OHM, J,0.063W	1	
	R4521	ERJ2GEJ220	M 22 OHM, J,0.063W	1	

Safety	Ref. No.	Part No.	Part Name & Description	Pcs	Remarks
	R4524	ERJ2GEJ103	M 10KOHM, J,0.063W	1	
	R4525	ERJ2GEJ103	M 10KOHM, J,0.063W	1	
	R4528	ERJ2GEJ103	M 10KOHM, J,0.063W	1	
	R4529	ERJ2GEJ103	M 10KOHM, J,0.063W	1	
	R4530	ERJ2GEJ103	M 10KOHM, J,0.063W	1	
	R4531	ERJ2GEJ103	M 10KOHM, J,0.063W	1	
	R4532	ERJ2GEJ473	M 47KOHM, J,0.063W	1	
	R4533	ERJ2GEJ473	M 47KOHM, J,0.063W	1	
	R4534	ERJ2GEJ473	M 47KOHM, J,0.063W	1	
	R4538	ERJ2GEJ473	M 47KOHM, J,0.063W	1	
	R4540	ERJ2GEJ473	M 47KOHM, J,0.063W	1	
	R4552	ERJ2GEJ220	M 22 OHM, J,0.063W	1	
	R4587	D1BB60400001	M 604 OHM, 1/10W	1	
	R4588	D1BB8060A055	M 806 OHM, 1/10W	1	
	R4589	D1BB8060A055	M 806 OHM, 1/10W	1	
	R4592	D1BB8060A055	M 806 OHM, 1/10W	1	
	R4593	D1BB2201A055	M 2.2KOHM, 1/10W	1	
	R4596	ERJ6GEYJ102V	M 1K OHM J 1/10W	1	
	R4597	ERJ6GEYJ102V	M 1K OHM J 1/10W	1	
	R4598	ERJ6GEYJ102V	M 1K OHM J 1/10W	1	
	R4601	ERJ6GEYJ102V	M 1K OHM J 1/10W	1	
	R4606	ERJ2GEJ220	M 22 OHM, J,0.063W	1	
	R4609	D0YAR0000007	M 0 OHM 1/4W	1	
	R4610	ERJ2GEJ473	M 47KOHM, J,0.063W	1	
	R4611	ERJ2GEJ473	M 47KOHM, J,0.063W	1	
	R4617	D0YAR0000007	M 0 OHM 1/4W	1	
	R4620	ERJ2GEJ473	M 47KOHM, J,0.063W	1	
	R4623	D0YAR0000007	M 0 OHM 1/4W	1	
	R4624	ERJ2GEJ103	M 10KOHM, J,0.063W	1	
	R4626	D1BB2200A055	M 220 OHM, 1/10W	1	
	R4627	D1BB2200A055	M 220 OHM, 1/10W	1	
	R4631	D1BB4990A055	M 499 OHM, 1/10W	1	
	R4634	D1BB2200A055	M 220 OHM, 1/10W	1	
	R4635	EXB28V680JX	RESISTOR ARRAY	1	
	R4636	ERJ2GEJ680	M 68 OHM, J,0.063W	1	
	R4637	ERJ2GEJ680	M 68 OHM, J,0.063W	1	
	R4638	ERJ2GEJ680	M 68 OHM, J,0.063W	1	
	R4639	EXB28V680JX	RESISTOR ARRAY	1	
	R4640	EXB28V680JX	RESISTOR ARRAY	1	
	R4642	ERJ2GEJ473	M 47KOHM, J,0.063W	1	
	R4645	EXB28V680JX	RESISTOR ARRAY	1	
	R4646	EXB28V680JX	RESISTOR ARRAY	1	
	R4648	EXB28V680JX	RESISTOR ARRAY	1	
	R4649	EXB28V680JX	RESISTOR ARRAY	1	
	R4650	ERJ2GEJ680	M 68 OHM, J,0.063W	1	
	R4651	ERJ2GEJ680	M 68 OHM, J,0.063W	1	
	R4652	ERJ2GEJ473	M 47KOHM, J,0.063W	1	
	R4656	ERJ2GEJ222	M 2.2KOHM, J,0.063W	1	
	R4658	ERJ2GEJ473	M 47KOHM, J,0.063W	1	
	R4659	D0YAR0000007	M 0 OHM 1/4W	1	
	R4665	ERJ2GEJ473	M 47KOHM, J,0.063W	1	

Safety	Ref. No.	Part No.	Part Name & Description	Pcs	Remarks
	R4666	ERJ2GEJ473	M 47KOHM, J,0.063W	1	
	R4674	ERJ2GEJ103	M 10KOHM, J,0.063W	1	
	R4677	ERJ2GEJ103	M 10KOHM, J,0.063W	1	
	R4678	EXB28V680JX	RESISTOR ARRAY	1	
	R4679	EXB28V680JX	RESISTOR ARRAY	1	
	R4698	ERJ2GEJ104	M 100KOHM, J,0.063W	1	
	R4699	ERJ2GEJ104	M 100KOHM, J,0.063W	1	
	R4707	ERJ2GEJ473	M 47KOHM, J,0.063W	1	
	R4728	ERJ2GEJ103	M 10KOHM, J,0.063W	1	
	R4729	ERJ2RKD330	M 33 OHM, J, 2W	1	
	R4732	ERJ2GEJ473	M 47KOHM, J,0.063W	1	
	R4733	ERJ2GEJ103	M 10KOHM, J,0.063W	1	
	R4734	ERJ2GEJ102X	M 1K OHM J 1/4W	1	
	R4735	ERJ2GEJ103	M 10KOHM, J,0.063W	1	
	R4736	ERJ2GEJ473	M 47KOHM, J,0.063W	1	
	R4738	ERJ2GEJ473	M 47KOHM, J,0.063W	1	
	R4739	ERJ2GEJ103	M 10KOHM, J,0.063W	1	
	R4740	ERJ2GEJ473	M 47KOHM, J,0.063W	1	
	R4799	EXB28V680JX	RESISTOR ARRAY	1	
	R5024	ERJ2GEJ101	M 100 OHM, J,0.063W	1	
	R5025	D1BB2700A055	M 270 OHM, 1/10W	1	
	R5026	D1BB2700A055	M 270 OHM, 1/10W	1	
	R5049	ERJ2GEJ470	M 47 OHM, J,0.063W	1	
	R5050	ERJ2GEJ470	M 47 OHM, J,0.063W	1	
	R5051	ERJ2GEJ470	M 47 OHM, J,0.063W	1	
	R5052	ERJ2GEJ470	M 47 OHM, J,0.063W	1	
	R5053	ERJ2GEJ470	M 47 OHM, J,0.063W	1	
	R5054	ERJ2GEJ470	M 47 OHM, J,0.063W	1	
	R5055	ERJ2GEJ470	M 47 OHM, J,0.063W	1	
	R5056	ERJ2GEJ470	M 47 OHM, J,0.063W	1	
	R5057	ERJ2GEJ470	M 47 OHM, J,0.063W	1	
	R5058	ERJ2GEJ470	M 47 OHM, J,0.063W	1	
	R5059	ERJ2GEJ470	M 47 OHM, J,0.063W	1	
	R5060	ERJ2GEJ470	M 47 OHM, J,0.063W	1	
	R5061	ERJ2GEJ470	M 47 OHM, J,0.063W	1	
	R5062	ERJ2GEJ470	M 47 OHM, J,0.063W	1	
	R5063	ERJ2GEJ470	M 47 OHM, J,0.063W	1	
	R5064	ERJ2GEJ470	M 47 OHM, J,0.063W	1	
	R5065	ERJ2GEJ470	M 47 OHM, J,0.063W	1	
	R5066	ERJ2GEJ470	M 47 OHM, J,0.063W	1	
	R5067	ERJ2GEJ221	M 220 OHM, J,0.063W	1	
	R5068	ERJ2GEJ470	M 47 OHM, J,0.063W	1	
	R5070	ERJ2GEJ470	M 47 OHM, J,0.063W	1	

Safety	Ref. No.	Part No.	Part Name & Description	Pcs	Remarks
	R5071	ERJ2GEJ470	M 47 OHM, J,0.063W	1	
	R5074	ERJ2GEJ103	M 10KOHM, J,0.063W	1	
	R5075	ERJ2RKF75R0	M 75 OHM, , 0.063W	1	
	R5076	ERJ2GEJ301	M 300 OHM, J,0.063W	1	
	R5078	ERJ2GEJ221	M 220 OHM, J,0.063W	1	
	R5079	ERJ2GEJ103	M 10KOHM, J,0.063W	1	
	R5080	ERJ2GEJ103	M 10KOHM, J,0.063W	1	
	R5082	ERJ2GEJ103	M 10KOHM, J,0.063W	1	
	R5087	EXB2HV680J	RESISTOR ARRAY	1	
	R5088	ERJ3GEYJ680	M 68 OHM,J,1/16W	1	
	R5089	ERJ2GEJ101	M 100 OHM, J,0.063W	1	
	R5095	ERJ2GEJ103	M 10KOHM, J,0.063W	1	
	R5096	ERJ2GEJ101	M 100 OHM, J,0.063W	1	
	R5097	ERJ2GEJ101	M 100 OHM, J,0.063W	1	
	R5098	ERJ2GEJ101	M 100 OHM, J,0.063W	1	
	R5099	ERJ2GEJ101	M 100 OHM, J,0.063W	1	
	R5100	ERJ2GEJ101	M 100 OHM, J,0.063W	1	
	R5101	ERJ2GEJ101	M 100 OHM, J,0.063W	1	
	R5102	D0GB103JA041	M 10K OHM J 1/ 16W	1	
	R5104	ERJ2GEJ472	M 4.7KOHM, J,0.063W	1	
	R5106	ERJ2GEJ101	M 100 OHM, J,0.063W	1	
	R5107	ERJ2GEJ101	M 100 OHM, J,0.063W	1	
	R5108	ERJ2GEJ101	M 100 OHM, J,0.063W	1	
	R5109	ERJ2GEJ101	M 100 OHM, J,0.063W	1	
	R5110	ERJ2GEJ103	M 10KOHM, J,0.063W	1	
	R5111	ERJ2GEJ680	M 68 OHM, J,0.063W	1	
	R5112	ERJ2GEJ103	M 10KOHM, J,0.063W	1	
	R5148	ERJ2GEJ470	M 47 OHM, J,0.063W	1	
	R5149	ERJ2GEJ470	M 47 OHM, J,0.063W	1	
	R5150	ERJ2GEJ470	M 47 OHM, J,0.063W	1	
	R5151	ERJ2GEJ103	M 10KOHM, J,0.063W	1	
	R5152	ERJ2GEJ470	M 47 OHM, J,0.063W	1	
	R5153	ERJ2GEJ470	M 47 OHM, J,0.063W	1	
	R5176	ERJ2GEJ680	M 68 OHM, J,0.063W	1	
	R5177	ERJ2GEJ680	M 68 OHM, J,0.063W	1	
	R5178	ERJ2GEJ680	M 68 OHM, J,0.063W	1	
	R5179	EXB2HV680J	RESISTOR ARRAY	1	
	R5180	EXB2HV680J	RESISTOR ARRAY	1	
	R5184	EXB2HV560JV	RESISTOR ARRAY	1	
	R5185	EXB2HV560JV	RESISTOR ARRAY	1	
	R5204	ERJ2GEJ472	M 4.7KOHM, J,0.063W	1	
	R5206	ERJ2GEJ472	M 4.7KOHM, J,0.063W	1	
	R5207	ERJ2GEJ472	M 4.7KOHM, J,0.063W	1	

Safety	Ref. No.	Part No.	Part Name & Description	Pcs	Remarks
	R5208	ERJ2GEJ105	M 1MOHM, J,0.063W	1	
	R5209	D0YAR0000007	M 0 OHM 1/4W	1	
	R5211	ERJ2GEJ103	M 10KOHM, J,0.063W	1	
	R5213	ERJ2GEJ222	M 2.2KOHM, J,0.063W	1	
	R5223	ERJ2GEJ101	M 100 OHM, J,0.063W	1	
	R5224	ERJ2GEJ333	M 33KOHM, J,0.063W	1	
	R5225	ERJ2GEJ680	M 68 OHM, J,0.063W	1	
	R5227	ERJ2GEJ103	M 10KOHM, J,0.063W	1	
	R5230	ERJ2GEJ103	M 10KOHM, J,0.063W	1	
	R5231	EXB2HV680J	RESISTOR ARRAY	1	
	R5232	EXB2HV680J	RESISTOR ARRAY	1	
	R5324	ERJ2GEJ473	M 47KOHM, J,0.063W	1	
	R5329	D1BB2101A055	M 2.1KOHM, 1/10W	1	
	R5330	D1BB3301A055	M 3.3KOHM, 1/16W	1	
	R5331	D1BB3901A055	M 3.9KOHM, 1/10W	1	
	R5332	D1BB4021A055	M 4.2KOHM, 1/16W	1	
	R5333	D1BB1202A055	M 12KOHM, 1/10W	1	
	R5334	D1BB1602A055	M 16KOHM, 1/10W	1	
	R5335	ERJ2GEJ5R6X	M 5.6 OHM, J,0.063W	1	
	R5336	ERJ3GEY0R00	M 0 OHM, 1/16W	1	
	R5337	ERJ3GEY0R00	M 0 OHM, 1/16W	1	
	R5410	ERJ2GEJ823	M 82KOHM, J,0.063W	1	
	R5411	ERJ2GEJ183	M 18KOHM ,J,0.063W	1	
	R5412	ERJ2GEJ333	M 33KOHM, J,0.063W	1	
	R5413	ERJ2GEJ103	M 10KOHM, J,0.063W	1	
	R5414	ERJ2GEJ153	M 15KOHM ,J,0.063W	1	
	R5415	ERJ2GEJ823	M 82KOHM, J,0.063W	1	
	R5416	ERJ2GEJ104	M 100KOHM, J,0.063W	1	
	R5417	ERJ2GEJ683	M 68KOHM, J,0.063W	1	
	R5418	ERJ2GEJ473	M 47KOHM, J,0.063W	1	
	R5419	ERJ2GEJ104	M 100KOHM, J,0.063W	1	
	R5420	ERJ2GEJ823	M 82KOHM, J,0.063W	1	
	R5421	ERJ6GEYJ153V	M 15KOHM,J,1/10W	1	
	R5422	D1BB1003A055	M 100KOHM, 1/10W	1	
	R5423	D1BB3401A055	M 3.4KOHM, 1/10W	1	
	R5424	ERJ2GEJ104	M 100KOHM, J,0.063W	1	
	R5425	ERJ2GEJ683	M 68KOHM, J,0.063W	1	
	R5426	ERJ2GEJ473	M 47KOHM, J,0.063W	1	
	R5427	ERJ2GEJ104	M 100KOHM, J,0.063W	1	
	R5431	ERJ2GEJ222	M 2.2KOHM, J,0.063W	1	
	R5432	ERJ2GEJ332	M 3.3KOHM, J,0.063W	1	
	R5433	ERJ2GEJ102X	M 1K OHM J 1/4W	1	
	R5434	ERJ2GEJ103	M 10KOHM, J,0.063W	1	
	R5437	ERJ2GEJ471	M 470 OHM, J,0.063W	1	
	R5439	ERJ6GEYJ471	M 470 OHM,J,1/ 10W	1	
	R5441	ERJ2GEJ221	M 220 OHM, J,0.063W	1	
	R5451	ERJ6GEYJ102V	M 1K OHM J 1/10W	1	

Safety	Ref. No.	Part No.	Part Name & Description	Pcs	Remarks
	R5452	ERJ6GEYJ104V	M 100KOHM,J,1/ 10W	1	
	R5453	ERJ6GEYJ472V	M 4.7K OHM J 1/ 10W	1	
	R5454	ERJ6GEYJ472V	M 4.7K OHM J 1/ 10W	1	
	R5455	ERJ6GEYJ472V	M 4.7K OHM J 1/ 10W	1	
	R5456	ERJ6GEYJ472V	M 4.7K OHM J 1/ 10W	1	
	R5457	ERJ6GEYJ472V	M 4.7K OHM J 1/ 10W	1	
	R5458	ERJ6GEYJ472V	M 4.7K OHM J 1/ 10W	1	
	R5459	ERJ6GEYJ472V	M 4.7K OHM J 1/ 10W	1	
	R5460	ERJ6GEYJ472V	M 4.7K OHM J 1/ 10W	1	
	R5461	ERJ6GEYJ472V	M 4.7K OHM J 1/ 10W	1	
	R5470	ERJ2GEJ222	M 2.2KOHM, J,0.063W	1	
	R5471	ERJ2GEJ101	M 100 OHM, J,0.063W	1	
	R5472	ERJ2GEJ470	M 47 OHM, J,0.063W	1	
	R5473	ERJ2GEJ473	M 47KOHM, J,0.063W	1	
	R5474	ERJ2GEJ103	M 10KOHM, J,0.063W	1	
	R5475	ERJ2GEJ123	M 12KOHM ,J,0.063W	1	
	R5480	ERJ2GEJ221	M 220 OHM, J,0.063W	1	
	R5482	ERJ6GEYJ150V	M 15 OHM,J,1/10W	1	
	R5484	D1BB3902A055	M 39KOHM, 1/10W	1	
	R5485	ERJ2GEJ101	M 100 OHM, J,0.063W	1	
	R5486	ERJ2GEJ103	M 10KOHM, J,0.063W	1	
	R5488	D0YAR0000007	M 0 OHM 1/4W	1	
	R5489	ERJ2GEJ103	M 10KOHM, J,0.063W	1	
	R5490	ERJ2GEJ473	M 47KOHM, J,0.063W	1	
	R5491	ERJ2GEJ473	M 47KOHM, J,0.063W	1	
	R5492	ERJ2GEJ105	M 1MOHM, J,0.063W	1	
	R5496	D1BB4702A055	M 47KOHM, 1/10W	1	
	R5497	ERJ2GEJ103	M 10KOHM, J,0.063W	1	
	R5498	ERJ2GEJ221	M 220 OHM, J,0.063W	1	
	R5499	D1BB2943A055	M294KOHM, 1/10W	1	
	R5500	D1BB1242A055	M12.4KOHM, 1/10W	1	
	R5501	D0GA4R7JA021	M 4.7OHM, J,0.063W	1	
	R5503	ERJ2GEJ103	M 10KOHM, J,0.063W	1	
	R5504	D1BB15030002	M 150KOHM, 1/10W	1	
	R5505	ERJ2GEJ101	M 100 OHM, J,0.063W	1	
	R5507	ERJ2GEJ222	M 2.2KOHM, J,0.063W	1	
	R5508	ERJ2GEJ683	M 68KOHM, J,0.063W	1	
	R5509	ERJ2GEJ103	M 10KOHM, J,0.063W	1	
	R5510	ERJ2GEJ390	M 39 OHM, J,0.063W	1	
	R5511	ERJ6GEYJ472V	M 4.7K OHM J 1/ 10W	1	
	R5512	ERJ6GEYJ472V	M 4.7K OHM J 1/ 10W	1	
	R5513	D0YAR0000007	M 0 OHM 1/4W	1	
	R5514	ERJ2GEJ103	M 10KOHM, J,0.063W	1	
	R5515	D0YAR0000007	M 0 OHM 1/4W	1	
	R5603	D1BB2002A055	M 20KOHM, 1/10W	1	

Safety	Ref. No.	Part No.	Part Name & Description	Pcs	Remarks
	R5604	D1BB3901A055	M 3.9KOHM, 1/10W	1	
	R5605	D1BB2201A055	M 2.2KOHM, 1/10W	1	
	R5610	ERJ2GEJ5R6X	M 5.6 OHM, J,0.063W	1	
	R5621	ERJ3GEY0R00	M 0 OHM, 1/16W	1	
	R5622	ERJ3GEY0R00	M 0 OHM, 1/16W	1	
	R5629	D1BB2101A055	M 2.1KOHM, 1/10W	1	
	R5630	D1BB3301A055	M 3.3KOHM, 1/16W	1	
	R5631	D1BB3901A055	M 3.9KOHM, 1/10W	1	
	R5632	D1BB4021A055	M 4.2KOHM, 1/16W	1	
	R5633	D1BB1202A055	M 12KOHM, 1/10W	1	
	R5634	D1BB1602A055	M 16KOHM, 1/10W	1	
	R5635	ERJ2GEJ5R6X	M 5.6 OHM, J,0.063W	1	
	R5638	D1BB2402A055	M 24KOHM, 1/10W	1	
	R5639	D1BB3901A055	M 3.9KOHM, 1/10W	1	
	R5649	ERJ2GEJ223	M 22KOHM, J,0.063W	1	
	R5650	ERJ2GEJ683	M 68KOHM, J,0.063W	1	
	R5651	ERJ2GEJ103	M 10KOHM, J,0.063W	1	
	R5652	ERJ2GEJ473	M 47KOHM, J,0.063W	1	
	R5653	ERJ2GEJ222	M 2.2KOHM, J,0.063W	1	
	R5654	ERJ2GEJ103	M 10KOHM, J,0.063W	1	
	R5655	ERJ2GEJ473	M 47KOHM, J,0.063W	1	
	R5656	ERJ3GEY0R00	M 0 OHM, 1/16W	1	
	R5657	ERJ3GEY0R00	M 0 OHM, 1/16W	1	
	R5658	D1BB1202A055	M 12KOHM, 1/10W	1	
	R5900	ERJ2GEJ472	M 4.7KOHM, J,0.063W	1	
	R5901	ERJ2GEJ222	M 2.2KOHM, J,0.063W	1	
	R5902	D1BB4641A055	M4.64KOHM, 1/10W	1	
	R5903	ERJ2GEJ102X	M 1K OHM J 1/4W	1	
	R5904	D1BB9531A055	M 9.53KOHM, 1/10W	1	
	R5905	D1BB1872A055	M18.7KOHM, 1/10W	1	
	R5906	D1BB1501A055	M1.50KOHM, 1/10W	1	
	R5907	D1BB1801A055	M 1.8KOHM, 1/16W	1	
	R5908	D1BB4702A055	M 47KOHM, 1/10W	1	
	R5909	D1BB7501A055	M7.50KOHM, 1/10W	1	
	R5911	ERJ2GEJ103	M 10KOHM, J,0.063W	1	
	R5912	D1BB15030002	M 150KOHM, 1/10W	1	
	R5913	D1BB1242A055	M12.4KOHM, 1/10W	1	
	R5914	D0GA4R7JA021	M 4.7OHM, J,0.063W	1	
	R5915	ERJ6GEYF822	M 8.2KOHM,F,1/10W	1	
	R5916	ERJ6GEYF822	M 8.2KOHM,F,1/10W	1	
	R5918	ERJ6GEYF822	M 8.2KOHM,F,1/10W	1	
	R5919	ERJ6GEYF822	M 8.2KOHM,F,1/10W	1	
	R5921	ERJ6GEYF822	M 8.2KOHM,F,1/10W	1	
	R5922	ERJ6GEYF822	M 8.2KOHM,F,1/10W	1	
	R5923	ERJ6GEYF822	M 8.2KOHM,F,1/10W	1	
	R5924	ERJ6GEYF822	M 8.2KOHM,F,1/10W	1	
	R5925	ERJ6GEYF822	M 8.2KOHM,F,1/10W	1	
	R5938	D1BB4641A055	M4.64KOHM, 1/10W	1	
	R5939	D1BB9531A055	M 9.53KOHM, 1/10W	1	
	R5940	ERJ2GEJ103	M 10KOHM, J,0.063W	1	
	R5941	D1BB15030002	M 150KOHM, 1/10W	1	
	R5942	D1BB1242A055	M12.4KOHM, 1/10W	1	

Safety	Ref. No.	Part No.	Part Name & Description	Pcs	Remarks
	R5943	D0GA4R7JA021	M 4.7OHM, J,0.063W	1	
	R5945	ERJ6GEY0R00V	M 0 OHM J 1/10W	1	
	R5947	ERJ6GEY0R00V	M 0 OHM J 1/10W	1	
	R5948	ERJ6GEY0R00V	M 0 OHM J 1/10W	1	
	R5949	ERJ6GEY0R00V	M 0 OHM J 1/10W	1	
	R5951	ERJ6GEY0R00V	M 0 OHM J 1/10W	1	
	R5955	ERJ6GEYJ332V	M 3.3K OHM J 1/10W	1	
	R5956	ERJ6ENF9100	M 910 OHM,J,1/10W	1	
	R5957	ERJ6GEYJ101V	M 100 OHM,J,1/10W	1	
	R7705	D0GB103JA041	M 10K OHM J 1/16W	1	
	R7709	D0GB104JA041	M 100KOHM J 1/16W	1	
	R7711	ERJ3GEYJ472	M 4.7KOHM,J,1/16W	1	
	R7712	D0GB104JA041	M 100KOHM J 1/16W	1	
	R7714	D1BB1202A055	M 12KOHM, 1/10W	1	
	R7715	ERJ3GEYJ222	M 2.2KOHM,J,1/16W	1	
	R7716	D0GB105JA041	M 1M OHM F 1/16W	1	
	R7717	D0GB103JA041	M 10K OHM J 1/16W	1	
	R7718	D0GB103JA041	M 10K OHM J 1/16W	1	
	R7719	D0GBR00Z0002	M 0 OHM J 1/16W	1	
	R7725	ERJ3GEYJ680	M 68 OHM,J,1/16W	1	
	R7726	D0GB103JA041	M 10K OHM J 1/16W	1	
	R7727	D0GB103JA041	M 10K OHM J 1/16W	1	
	R7733	ERJ3GEYJ680	M 68 OHM,J,1/16W	1	
	R7734	ERJ3GEYJ680	M 68 OHM,J,1/16W	1	
	R7735	ERJ3GEYJ680	M 68 OHM,J,1/16W	1	
	R7737	ERJ3GEYJ680	M 68 OHM,J,1/16W	1	
	R7738	ERJ3GEYJ680	M 68 OHM,J,1/16W	1	
	R7742	D0GB103JA041	M 10K OHM J 1/16W	1	
	R7744	D0GBR00Z0002	M 0 OHM J 1/16W	1	
	R7754	D0GB103JA041	M 10K OHM J 1/16W	1	
	R7777	D1BB3402A055	M 34KOHM, 1/10W	1	
	R7778	D1BB1002A055	M 10KOHM, 1/10W	1	
	R7779	EXB38VR000V	RESISTOR ARRAY	1	
	R7781	D0GBR00Z0002	M 0 OHM J 1/16W	1	
	R7782	D0GBR00Z0002	M 0 OHM J 1/16W	1	
	R7800	ERJ3GEYJ560	M 56 OHM,J,1/16W	1	
	R7810	ERJ3GEYJ560	M 56 OHM,J,1/16W	1	
	R7901	ERJ2GEJ680	M 68 OHM, J,0.063W	1	
	R7902	D0YAR0000007	M 0 OHM 1/4W	1	
	R7903	ERJ2GEJ680	M 68 OHM, J,0.063W	1	
	R7904	ERJ2GEJ680	M 68 OHM, J,0.063W	1	
	R7905	ERJ2GEJ680	M 68 OHM, J,0.063W	1	
	R7906	ERJ3GEY0R00	M 0 OHM, 1/16W	1	
	R7909	ERJ2GEJ680	M 68 OHM, J,0.063W	1	
	R7910	ERJ2GEJ101	M 100 OHM, J,0.063W	1	
	R7916	ERJ2GEJ103	M 10KOHM, J,0.063W	1	
	R7917	ERJ2GEJ220	M 22 OHM, J,0.063W	1	
	R7918	ERJ2GEJ220	M 22 OHM, J,0.063W	1	
	R8004	D1BB2402A055	M 24KOHM, 1/10W	1	
	R8005	D1BB1002A055	M 10KOHM, 1/10W	1	
	R8006	D1BB2402A055	M 24KOHM, 1/10W	1	
	R8026	D0YAR0000007	M 0 OHM 1/4W	1	
	R8027	D0YAR0000007	M 0 OHM 1/4W	1	

Safety	Ref. No.	Part No.	Part Name & Description	Pcs	Remarks
	R8030	ERJ2GEJ101	M 100 OHM, J,0.063W	1	
	R8031	ERJ2RKF1001	M 1KOHM, 0.063W	1	
	R8032	ERJ2RKF1001	M 1KOHM, 0.063W	1	
	R8056	ERJ2GEJ470	M 47 OHM, J,0.063W	1	
	R8057	ERJ2GEJ470	M 47 OHM, J,0.063W	1	
	R8058	ERJ2GEJ470	M 47 OHM, J,0.063W	1	
	R8059	ERJ2GEJ470	M 47 OHM, J,0.063W	1	
	R8060	ERJ2GEJ470	M 47 OHM, J,0.063W	1	
	R8061	ERJ2GEJ470	M 47 OHM, J,0.063W	1	
	R8062	ERJ2GEJ470	M 47 OHM, J,0.063W	1	
	R8063	ERJ2GEJ470	M 47 OHM, J,0.063W	1	
	R8064	ERJ2GEJ470	M 47 OHM, J,0.063W	1	
	R8065	ERJ2GEJ470	M 47 OHM, J,0.063W	1	
	R8066	ERJ2GEJ470	M 47 OHM, J,0.063W	1	
	R8067	ERJ2GEJ470	M 47 OHM, J,0.063W	1	
	R8068	ERJ2GEJ470	M 47 OHM, J,0.063W	1	
	R8069	ERJ2GEJ470	M 47 OHM, J,0.063W	1	
	R8070	ERJ2GEJ470	M 47 OHM, J,0.063W	1	
	R8071	ERJ2GEJ470	M 47 OHM, J,0.063W	1	
	R8072	ERJ2GEJ470	M 47 OHM, J,0.063W	1	
	R8073	ERJ2GEJ470	M 47 OHM, J,0.063W	1	
	R8074	ERJ2GEJ221	M 220 OHM, J,0.063W	1	
	R8075	ERJ2GEJ470	M 47 OHM, J,0.063W	1	
	R8076	ERJ2GEJ470	M 47 OHM, J,0.063W	1	
	R8077	ERJ2GEJ470	M 47 OHM, J,0.063W	1	
	R8078	ERJ2GEJ470	M 47 OHM, J,0.063W	1	
	R8081	ERJ2GEJ103	M 10KOHM, J,0.063W	1	
	R8082	ERJ2RKF75R0	M 75 OHM, , 0.063W	1	
	R8083	ERJ2GEJ301	M 300 OHM, J,0.063W	1	
	R8086	ERJ2GEJ104	M 100KOHM, J,0.063W	1	
	R8088	ERJ2GEJ103	M 10KOHM, J,0.063W	1	
	R8090	ERJ2GEJ103	M 10KOHM, J,0.063W	1	
	R8091	ERJ2GEJ470	M 47 OHM, J,0.063W	1	
	R8093	ERJ2GEJ470	M 47 OHM, J,0.063W	1	
	R8095	ERJ2GEJ103	M 10KOHM, J,0.063W	1	
	R8096	ERJ2GEJ820	M 82 OHM, J,0.063W	1	
	R8097	ERJ2GEJ221	M 220 OHM, J,0.063W	1	
	R8098	ERJ2GEJ103	M 10KOHM, J,0.063W	1	
	R8099	ERJ2GEJ680	M 68 OHM, J,0.063W	1	
	R8100	ERJ2GEJ470	M 47 OHM, J,0.063W	1	
	R8101	ERJ2GEJ103	M 10KOHM, J,0.063W	1	
	R8102	ERJ2GEJ105	M 1MOHM, J,0.063W	1	
	R8103	D0YAR0000007	M 0 OHM 1/4W	1	
	R8106	ERJ2GEJ103	M 10KOHM, J,0.063W	1	
	R8107	D1BB6201A055	M6.20KOHM, 1/10W	1	
	R8109	ERJ2GEJ222	M 2.2KOHM, J,0.063W	1	
	R8272	ERJ2GEJ103	M 10KOHM, J,0.063W	1	
	R8412	ERJ2GEJ103	M 10KOHM, J,0.063W	1	
	R8471	ERJ2GEJ103	M 10KOHM, J,0.063W	1	
	R8475	EXB28V103JX	RESISTOR ARRAY	1	
	R8493	ERJ2GEJ680	M 68 OHM, J,0.063W	1	
	R8494	ERJ2GEJ222	M 2.2KOHM, J,0.063W	1	
	R8496	ERJ2GEJ222	M 2.2KOHM, J,0.063W	1	
	R8501	ERJ2GEJ101	M 100 OHM, J,0.063W	1	
	R8502	ERJ2GEJ331	M 330 OHM, J,0.063W	1	
	R8503	ERJ2GEJ331	M 330 OHM, J,0.063W	1	
	R8504	ERJ2GEJ331	M 330 OHM, J,0.063W	1	
	R8508	ERJ2GEJ680	M 68 OHM, J,0.063W	1	
	R8510	D1BB1600A055	M 160 OHM, 1/10W	1	
	R8511	ERJ2GEJ472	M 4.7KOHM, J,0.063W	1	
	R8514	ERJ2GEJ680	M 68 OHM, J,0.063W	1	
	R8515	ERJ2GEJ222	M 2.2KOHM, J,0.063W	1	
	R8516	ERJ2GEJ222	M 2.2KOHM, J,0.063W	1	
	R8517	ERJ2GEJ103	M 10KOHM, J,0.063W	1	
	R8520	ERJ2GEJ103	M 10KOHM, J,0.063W	1	
	R8558	ERJ2GEJ680	M 68 OHM, J,0.063W	1	
	R8575	ERJ2GEJ680	M 68 OHM, J,0.063W	1	
	R8576	ERJ2GEJ680	M 68 OHM, J,0.063W	1	
	R8577	ERJ2GEJ680	M 68 OHM, J,0.063W	1	
	R8578	ERJ2GEJ680	M 68 OHM, J,0.063W	1	
	R8579	ERJ2GEJ680	M 68 OHM, J,0.063W	1	
	R8580	ERJ2GEJ680	M 68 OHM, J,0.063W	1	
	R8581	ERJ2GEJ103	M 10KOHM, J,0.063W	1	
	R8582	ERJ2GEJ680	M 68 OHM, J,0.063W	1	
	R8585	ERJ2GEJ680	M 68 OHM, J,0.063W	1	
	R8607	ERJ2GEJ680	M 68 OHM, J,0.063W	1	
	R8608	ERJ2GEJ680	M 68 OHM, J,0.063W	1	
	R8609	ERJ2GEJ103	M 10KOHM, J,0.063W	1	
	R8610	ERJ2GEJ680	M 68 OHM, J,0.063W	1	
	R8611	ERJ2GEJ680	M 68 OHM, J,0.063W	1	
	R8612	ERJ2GEJ680	M 68 OHM, J,0.063W	1	
	R8613	ERJ2GEJ680	M 68 OHM, J,0.063W	1	
	R8614	ERJ2GEJ680	M 68 OHM, J,0.063W	1	

Safety	Ref. No.	Part No.	Part Name & Description	Pcs	Remarks
	R8615	ERJ2GEJ680	M 68 OHM, J,0.063W	1	
	R8616	ERJ2GEJ680	M 68 OHM, J,0.063W	1	
	R8617	ERJ2GEJ680	M 68 OHM, J,0.063W	1	
	R8618	ERJ2GEJ103	M 10KOHM, J,0.063W	1	
	R8619	ERJ2GEJ103	M 10KOHM, J,0.063W	1	
	R8622	EXB2HVR000	RESISTOR ARRAY	1	
	R8623	ERJ2GEJ680	M 68 OHM, J,0.063W	1	
	R8624	ERJ2GEJ680	M 68 OHM, J,0.063W	1	
	R8625	ERJ2GEJ680	M 68 OHM, J,0.063W	1	
	R8627	ERJ2GEJ680	M 68 OHM, J,0.063W	1	
	R8628	ERJ2GEJ103	M 10KOHM, J,0.063W	1	
	R8629	ERJ2GEJ103	M 10KOHM, J,0.063W	1	
	R8630	ERJ2GEJ103	M 10KOHM, J,0.063W	1	
	R8637	ERJ2GEJ680	M 68 OHM, J,0.063W	1	
	R8638	ERJ2GEJ680	M 68 OHM, J,0.063W	1	
	R8639	ERJ2GEJ680	M 68 OHM, J,0.063W	1	
	R8640	ERJ2GEJ103	M 10KOHM, J,0.063W	1	
	R8641	ERJ2GEJ103	M 10KOHM, J,0.063W	1	
	R8642	ERJ2GEJ103	M 10KOHM, J,0.063W	1	
	R8647	ERJ2GEJ680	M 68 OHM, J,0.063W	1	
	R8651	ERJ2GEJ680	M 68 OHM, J,0.063W	1	
	R8652	ERJ2GEJ680	M 68 OHM, J,0.063W	1	
	R8653	ERJ2GEJ680	M 68 OHM, J,0.063W	1	
	R8654	ERJ2GEJ103	M 10KOHM, J,0.063W	1	
	R8655	ERJ2GEJ680	M 68 OHM, J,0.063W	1	
	R8659	EXB28V103JX	RESISTOR ARRAY	1	
	R8660	ERJ2GEJ103	M 10KOHM, J,0.063W	1	
	R8661	ERJ2GEJ103	M 10KOHM, J,0.063W	1	
	R8663	ERJ2GEJ103	M 10KOHM, J,0.063W	1	
	R8665	ERJ2GEJ222	M 2.2KOHM, J,0.063W	1	
	R8667	ERJ2GEJ680	M 68 OHM, J,0.063W	1	
	R8672	EXB2HV680J	RESISTOR ARRAY	1	
	R8673	EXB2HV680J	RESISTOR ARRAY	1	
	R8674	ERJ2GEJ680	M 68 OHM, J,0.063W	1	
	R8676	ERJ2GEJ103	M 10KOHM, J,0.063W	1	
	R8677	ERJ2GEJ222	M 2.2KOHM, J,0.063W	1	
	R8683	ERJ2GEJ680	M 68 OHM, J,0.063W	1	
	R8688	EXB2HV680J	RESISTOR ARRAY	1	
	R8689	EXB2HV680J	RESISTOR ARRAY	1	
	R8690	EXB2HV680J	RESISTOR ARRAY	1	
	R8691	ERJ2GEJ103	M 10KOHM, J,0.063W	1	
	R8697	ERJ2GEJ222	M 2.2KOHM, J,0.063W	1	
	R8698	ERJ2GEJ103	M 10KOHM, J,0.063W	1	

Safety	Ref. No.	Part No.	Part Name & Description	Pcs	Remarks
	R8699	ERJ2GEJ680	M 68 OHM, J,0.063W	1	
	R8703	EXB28V680JX	RESISTOR ARRAY	1	
	R8706	ERJ2GEJ104	M 100KOHM, J,0.063W	1	
	R8707	ERJ2GEJ103	M 10KOHM, J,0.063W	1	
	R8715	ERJ2GEJ103	M 10KOHM, J,0.063W	1	
	R8716	ERJ2GEJ103	M 10KOHM, J,0.063W	1	
	R8718	ERJ2GEJ103	M 10KOHM, J,0.063W	1	
	R8719	EXB28V103JX	RESISTOR ARRAY	1	
	R8721	ERJ2GEJ103	M 10KOHM, J,0.063W	1	
	R8722	EXB28V103JX	RESISTOR ARRAY	1	
	R8723	ERJ2GEJ103	M 10KOHM, J,0.063W	1	
	R8724	ERJ2GEJ680	M 68 OHM, J,0.063W	1	
	R8726	ERJ2GEJ680	M 68 OHM, J,0.063W	1	
	R8729	ERJ2GEJ121	M 120 OHM, J,0.063W	1	
	R8730	ERJ2GEJ121	M 120 OHM, J,0.063W	1	
	R8732	ERJ2GEJ121	M 120 OHM, J,0.063W	1	
	R8733	ERJ2GEJ121	M 120 OHM, J,0.063W	1	
	R8734	ERJ2GEJ121	M 120 OHM, J,0.063W	1	
	R8735	ERJ2GEJ121	M 120 OHM, J,0.063W	1	
	R8736	ERJ2GEJ121	M 120 OHM, J,0.063W	1	
	R8738	ERJ2GEJ121	M 120 OHM, J,0.063W	1	
	R8739	ERJ2GEJ121	M 120 OHM, J,0.063W	1	
	R8740	ERJ2GEJ121	M 120 OHM, J,0.063W	1	
	R8742	D1HG1218A002	NETWORK RESISTER	1	
	R8745	D1HG1218A002	NETWORK RESISTER	1	
	R8746	ERJ2GEJ103	M 10KOHM, J,0.063W	1	
	R8747	ERJ2GEJ103	M 10KOHM, J,0.063W	1	
	R8750	ERJ2GEJ103	M 10KOHM, J,0.063W	1	
	R8751	ERJ2GEJ103	M 10KOHM, J,0.063W	1	
	R8765	ERJ2GEJ103	M 10KOHM, J,0.063W	1	
	R8767	ERJ2GEJ103	M 10KOHM, J,0.063W	1	
	R8768	ERJ2GEJ103	M 10KOHM, J,0.063W	1	
	R8798	ERJ2GEJ680	M 68 OHM, J,0.063W	1	
	R8804	ERJ2GEJ680	M 68 OHM, J,0.063W	1	
	R8805	ERJ2GEJ680	M 68 OHM, J,0.063W	1	
	R8807	ERJ2GEJ101	M 100 OHM, J,0.063W	1	
	R8808	ERJ2GEJ680	M 68 OHM, J,0.063W	1	
	R8860	ERJ2GEJ680	M 68 OHM, J,0.063W	1	
	R8898	ERJ2GEJ103	M 10KOHM, J,0.063W	1	
	R8959	ERJ2GEJ680	M 68 OHM, J,0.063W	1	
	R8960	ERJ2GEJ680	M 68 OHM, J,0.063W	1	
	R8963	ERJ2GEJ103	M 10KOHM, J,0.063W	1	
	R9001	ERJ8GEY0R00	M 0 OHM, 1/8W	1	

Safety	Ref. No.	Part No.	Part Name & Description	Pcs	Remarks
	R9002	ERJ8GEY0R00	M 0 OHM, 1/8W	1	
	R9029	ERJ2GEJ220	M 22 OHM, J,0.063W	1	
	R9030	ERJ2GEJ220	M 22 OHM, J,0.063W	1	
	R9031	ERJ2GEJ220	M 22 OHM, J,0.063W	1	
	R9032	ERJ2GEJ220	M 22 OHM, J,0.063W	1	
	R9034	ERJ2GEJ220	M 22 OHM, J,0.063W	1	
	R9035	ERJ2GEJ220	M 22 OHM, J,0.063W	1	
	R9036	ERJ2GEJ220	M 22 OHM, J,0.063W	1	
	R9048	ERJ2GEJ105	M 1MOHM, J,0.063W	1	
	R9049	ERJ2GEJ101	M 100 OHM, J,0.063W	1	
	R9050	ERJ2GEJ472	M 4.7KOHM, J,0.063W	1	
	R9051	ERJ2GEJ472	M 4.7KOHM, J,0.063W	1	
	R9053	ERJ2GEJ472	M 4.7KOHM, J,0.063W	1	
	R9054	ERJ2GEJ472	M 4.7KOHM, J,0.063W	1	
	R9055	ERJ2GEJ472	M 4.7KOHM, J,0.063W	1	
	R9056	ERJ2GEJ472	M 4.7KOHM, J,0.063W	1	
	R9057	ERJ2GEJ472	M 4.7KOHM, J,0.063W	1	
	R9058	ERJ2GEJ472	M 4.7KOHM, J,0.063W	1	
	R9059	ERJ2GEJ472	M 4.7KOHM, J,0.063W	1	
	R9060	ERJ2GEJ220	M 22 OHM, J,0.063W	1	
	R9061	ERJ2GEJ220	M 22 OHM, J,0.063W	1	
	R9062	ERJ2GEJ220	M 22 OHM, J,0.063W	1	
	R9063	EXB28V820JX	RESISTOR ARRAY	1	
	R9064	EXB28V820JX	RESISTOR ARRAY	1	
	R9065	EXB28V820JX	RESISTOR ARRAY	1	
	R9066	EXB28V820JX	RESISTOR ARRAY	1	
	R9067	EXB28V820JX	RESISTOR ARRAY	1	
	R9068	EXB28V820JX	RESISTOR ARRAY	1	
	R9069	ERJ2GEJ820	M 82 OHM, J,0.063W	1	
	R9070	ERJ2GEJ820	M 82 OHM, J,0.063W	1	
	R9071	ERJ2GEJ820	M 82 OHM, J,0.063W	1	
	R9072	ERJ2GEJ820	M 82 OHM, J,0.063W	1	
	R9073	ERJ2GEJ820	M 82 OHM, J,0.063W	1	
	R9074	ERJ2GEJ820	M 82 OHM, J,0.063W	1	
	R9075	ERJ2GEJ470	M 47 OHM, J,0.063W	1	
	R9076	ERJ2GEJ820	M 82 OHM, J,0.063W	1	
	R9077	ERJ2GEJ820	M 82 OHM, J,0.063W	1	
	R9078	ERJ2GEJ220	M 22 OHM, J,0.063W	1	
	R9079	D1BB1001A055	M 1KOHM, 1/16W	1	
	R9080	D1BB1001A055	M 1KOHM, 1/16W	1	
	R9082	ERJ2GEJ470	M 47 OHM, J,0.063W	1	
	R9083	EXB28V470JX	RESISTOR ARRAY	1	
	R9084	EXB28V470JX	RESISTOR ARRAY	1	
	R9085	ERJ2GEJ470	M 47 OHM, J,0.063W	1	
	R9086	EXB28V470JX	RESISTOR ARRAY	1	
	R9087	EXB28V470JX	RESISTOR ARRAY	1	

Safety	Ref. No.	Part No.	Part Name & Description	Pcs	Remarks
	R9088	ERJ2GEJ470	M 47 OHM, J,0.063W	1	
	R9089	EXB28V470JX	RESISTOR ARRAY	1	
	R9090	EXB28V470JX	RESISTOR ARRAY	1	
	R9091	ERJ2GEJ470	M 47 OHM, J,0.063W	1	
	R9092	EXB28V470JX	RESISTOR ARRAY	1	
	R9093	EXB28V470JX	RESISTOR ARRAY	1	
	R9094	ERJ2GEJ470	M 47 OHM, J,0.063W	1	
	R9095	ERJ2GEJ472	M 4.7KOHM, J,0.063W	1	
	R9096	EXB2HV470JV	RESISTOR ARRAY	1	
	R9097	ERJ2RKD330	M 33 OHM, J, 2W	1	
	R9098	ERJ2RKD330	M 33 OHM, J, 2W	1	
	R9099	EXB2HV470JV	RESISTOR ARRAY	1	
	R9100	EXB28V470JX	RESISTOR ARRAY	1	
	R9102	D1BB1001A055	M 1KOHM, 1/16W	1	
	R9103	D1BB1001A055	M 1KOHM, 1/16W	1	
	R9104	ERJ2GEJ222	M 2.2KOHM, J,0.063W	1	
	R9105	ERJ2GEJ473	M 47KOHM, J,0.063W	1	
	R9106	ERJ2GEJ103	M 10KOHM, J,0.063W	1	
	R9107	ERJ2GEJ103	M 10KOHM, J,0.063W	1	
	R9108	ERJ2GEJ473	M 47KOHM, J,0.063W	1	
	R9109	ERJ2GEJ223	M 22KOHM, J,0.063W	1	
	R9110	ERJ2GEJ683	M 68KOHM, J,0.063W	1	
	R9124	ERJ2GEJ472	M 4.7KOHM, J,0.063W	1	
	R9126	ERJ2GEJ220	M 22 OHM, J,0.063W	1	
	R9128	ERJ2GEJ220	M 22 OHM, J,0.063W	1	
	R9129	ERJ2GEJ220	M 22 OHM, J,0.063W	1	
	R9130	ERJ2GEJ102X	M 1K OHM J 1/4W	1	
	R9131	D1BB5100A055	M 510 OHM, 1/10W	1	
	R9135	ERJ2GEJ220	M 22 OHM, J,0.063W	1	
	R9136	ERJ2GEJ220	M 22 OHM, J,0.063W	1	
	R9137	ERJ2GEJ220	M 22 OHM, J,0.063W	1	
	R9139	ERJ2GEJ182	M 1.8KOHM, J,0.063W	1	
	R9140	ERJ2GEJ182	M 1.8KOHM, J,0.063W	1	
	R9142	D0YAR0000007	M 0 OHM 1/4W	1	
	R9143	ERJ2RHD682X	M 6.8KOHM, J, 2W	1	
	R9147	ERJ2GEJ472	M 4.7KOHM, J,0.063W	1	
	R9159	ERJ8GEY0R00	M 0 OHM, 1/8W	1	
	R9201	ERJ2GEJ680	M 68 OHM, J,0.063W	1	
	R9202	D1BB3901A055	M 3.9KOHM, 1/10W	1	
	R9203	D1BB3161A055	M3.16KOHM, 1/16W	1	
	R9204	D1BB2201A055	M 2.2KOHM, 1/10W	1	
	R9205	D1BB4301A055	M4.30KOHM, 1/10W	1	
	R9206	D1BB2002A055	M 20KOHM, 1/10W	1	
	R9207	D1BB2202A055	M 22KOHM, 1/10W	1	
	R9208	ERJ2GEJ5R6X	M 5.6 OHM, J,0.063W	1	
	R9210	ERJ2GEJ220	M 22 OHM, J,0.063W	1	
	R9303	ERJ2GEJ220	M 22 OHM, J,0.063W	1	
	R9305	ERJ8GEY0R00	M 0 OHM, 1/8W	1	
	R9306	ERJ2GEJ104	M 100KOHM, J,0.063W	1	
	R9401	ERJ2GEJ101	M 100 OHM, J,0.063W	1	

Safety	Ref. No.	Part No.	Part Name & Description	Pcs	Remarks
	R9402	ERJ2GEJ101	M 100 OHM, J,0.063W	1	
	R9403	ERJ2GEJ101	M 100 OHM, J,0.063W	1	
	R9404	ERJ2GEJ101	M 100 OHM, J,0.063W	1	
	R9405	ERJ2GEJ101	M 100 OHM, J,0.063W	1	
	R9406	ERJ2GEJ101	M 100 OHM, J,0.063W	1	
	R9407	ERJ2GEJ101	M 100 OHM, J,0.063W	1	
	R9408	ERJ2GEJ101	M 100 OHM, J,0.063W	1	
	R9409	ERJ2GEJ101	M 100 OHM, J,0.063W	1	
	R9410	ERJ2GEJ101	M 100 OHM, J,0.063W	1	
	R9411	ERJ2GEJ101	M 100 OHM, J,0.063W	1	
	R9412	ERJ2GEJ101	M 100 OHM, J,0.063W	1	
	R9413	ERJ2GEJ472	M 4.7KOHM, J,0.063W	1	
	R9414	ERJ2GEJ220	M 22 OHM, J,0.063W	1	
	R9415	ERJ2GEJ220	M 22 OHM, J,0.063W	1	
	R9416	ERJ2GEJ220	M 22 OHM, J,0.063W	1	
	R9418	ERJ2GEJ472	M 4.7KOHM, J,0.063W	1	
	R9419	ERJ2GEJ331	M 330 OHM, J,0.063W	1	
	R9420	ERJ2GEJ472	M 4.7KOHM, J,0.063W	1	
	R9421	ERJ2GEJ220	M 22 OHM, J,0.063W	1	
	R9423	ERJ2GEJ220	M 22 OHM, J,0.063W	1	
	R9424	ERJ2GEJ220	M 22 OHM, J,0.063W	1	
	R9425	ERJ2GEJ472	M 4.7KOHM, J,0.063W	1	
	R9426	ERJ2GEJ472	M 4.7KOHM, J,0.063W	1	
	R9427	ERJ2GEJ472	M 4.7KOHM, J,0.063W	1	
	R9428	ERJ2GEJ472	M 4.7KOHM, J,0.063W	1	
	R9429	EXB2HV680J	RESISTOR ARRAY	1	
	R9430	EXB2HV680J	RESISTOR ARRAY	1	
	R9431	EXB2HV680J	RESISTOR ARRAY	1	
	R9432	ERJ2GEJ680	M 68 OHM, J,0.063W	1	
	R9433	ERJ2GEJ680	M 68 OHM, J,0.063W	1	
	R9434	ERJ2GEJ680	M 68 OHM, J,0.063W	1	
	R9435	ERJ2GEJ680	M 68 OHM, J,0.063W	1	
	R9436	ERJ2GEJ680	M 68 OHM, J,0.063W	1	
	R9437	ERJ2GEJ680	M 68 OHM, J,0.063W	1	
	R9438	ERJ2GEJ680	M 68 OHM, J,0.063W	1	
	R9439	ERJ2GEJ680	M 68 OHM, J,0.063W	1	
	R9440	ERJ2GEJ680	M 68 OHM, J,0.063W	1	
	R9441	ERJ2GEJ470	M 47 OHM, J,0.063W	1	
	R9442	ERJ6GEYJ101V	M 100 OHM,J,1/ 10W	1	
	R9443	ERJ6GEYJ101V	M 100 OHM,J,1/ 10W	1	
	R9444	ERJ2GEJ103	M 10KOHM, J,0.063W	1	
	R9445	ERJ2GEJ103	M 10KOHM, J,0.063W	1	
	R9446	ERJ2GEJ103	M 10KOHM, J,0.063W	1	
	R9447	ERJ2GEJ680	M 68 OHM, J,0.063W	1	
	R9448	ERJ2GEJ472	M 4.7KOHM, J,0.063W	1	
	R9460	ERJ2GEJ472	M 4.7KOHM, J,0.063W	1	
	R9471	D0YAR0000007	M 0 OHM 1/4W	1	
	R9472	ERJ2GEJ220	M 22 OHM, J,0.063W	1	
	R9477	ERJ2GEJ184	M 180KOHM, J,0.063W	1	
	R9478	ERJ2GEJ184	M 180KOHM, J,0.063W	1	
	R16001	D0GF7R5JA047	M 7.5 OHM,J, 0.33W	1	
	R16002	D0GF7R5JA047	M 7.5 OHM,J, 0.33W	1	
	R16003	D0GF7R5JA047	M 7.5 OHM,J, 0.33W	1	
	R16004	D0GF7R5JA047	M 7.5 OHM,J, 0.33W	1	
	R16005	D0GF7R5JA047	M 7.5 OHM,J, 0.33W	1	
	R16006	D0GF7R5JA047	M 7.5 OHM,J, 0.33W	1	
	R16021	D0GF7R5JA047	M 7.5 OHM,J, 0.33W	1	
	R16022	D0GF7R5JA047	M 7.5 OHM,J, 0.33W	1	
	R16023	D0GF7R5JA047	M 7.5 OHM,J, 0.33W	1	
	R16024	D0GF7R5JA047	M 7.5 OHM,J, 0.33W	1	
	R16025	D0GF7R5JA047	M 7.5 OHM,J, 0.33W	1	
	R16031	ERJ6ENF8202	M 82KOHM, 1/10W	1	
	R16032	ERJ6ENF8202	M 82KOHM, 1/10W	1	
	R16033	D1BD5602A044	M 56KOHM, 1/10W	1	
	R16034	D1BD2702A044	M 27KOHM, 1/10W	1	
	R16041	D0GF5R6JA047	M 5.6 OHM,J, 0.33W	1	
	R16042	D0GF5R6JA047	M 5.6 OHM,J, 0.33W	1	
	R16043	D0GF5R6JA047	M 5.6 OHM,J, 0.33W	1	
	R16044	D0GF5R6JA047	M 5.6 OHM,J, 0.33W	1	
	R16051	D0GF5R6JA047	M 5.6 OHM,J, 0.33W	1	
	R16052	D0GF5R6JA047	M 5.6 OHM,J, 0.33W	1	
	R16101	D0GD221JA059	M 220 OHM,J,1/ 10W	1	
	R16102	D0GD221JA059	M 220 OHM,J,1/ 10W	1	
	R16103	D0GD100JA059	M 10 OHM,J,0.25W	1	
	R16104	D0GD100JA059	M 10 OHM,J,0.25W	1	
	R16105	ERJ8GEYJ474	M 470KOHM, J,1/ 8W	1	
	R16109	D0GD100JA059	M 10 OHM,J,0.25W	1	
	R16110	ERJ6GEYF473	M 47KOHM,J,1/10W	1	
	R16116	ERJ6GEYF473	M 47KOHM,J,1/10W	1	
	R16131	D0GD101JA036	M 100 OHM,J,0.25W	1	
	R16132	D0GD101JA036	M 100 OHM,J,0.25W	1	
	R16134	D0GD750JA059	M 75 OHM,J,0.25W	1	
	R16137	D0GF1R0JA047	M 1.0 OHM,J, 0.33W	1	
	R16141	D0GD100JA059	M 10 OHM,J,0.25W	1	
	R16142	ERJ6GEYF473	M 47KOHM,J,1/10W	1	
	R16143	ERJ6GEYF473	M 47KOHM,J,1/10W	1	
	R16151	D0GD101JA036	M 100 OHM,J,0.25W	1	

Safety	Ref. No.	Part No.	Part Name & Description	Pcs	Remarks
	R16152	D0GD101JA036	M 100 OHM,J,0.25W	1	
	R16154	D0GD750JA059	M 75 OHM,J,0.25W	1	
	R16155	D0GF1R0JA047	M 1.0 OHM,J, 0.33W	1	
	R16159	D0GF1R0JA047	M 1.0 OHM,J, 0.33W	1	
	R16161	D0GD100JA059	M 10 OHM,J,0.25W	1	
	R16162	ERJ6GEYF473	M 47KOHM,J,1/10W	1	
	R16163	ERJ6GEYF473	M 47KOHM,J,1/10W	1	
	R16171	D0GD100JA059	M 10 OHM,J,0.25W	1	
	R16172	ERJ6GEYF473	M 47KOHM,J,1/10W	1	
	R16173	ERJ6GEYF473	M 47KOHM,J,1/10W	1	
	R16174	D0GD100JA059	M 10 OHM,J,0.25W	1	
	R16175	ERJ6GEYF473	M 47KOHM,J,1/10W	1	
	R16176	ERJ6GEYF473	M 47KOHM,J,1/10W	1	
	R16181	D0GD100JA059	M 10 OHM,J,0.25W	1	
	R16182	ERJ6GEYF473	M 47KOHM,J,1/10W	1	
	R16183	ERJ6GEYF473	M 47KOHM,J,1/10W	1	
	R16191	ERJ6GEYJ151V	M 150 OHM,J,1/ 10W	1	
	R16192	ERJ6GEYJ103V	M 10K OHM J 1/ 10W	1	
	R16193	ERJ6GEYJ750	M 75 OHM,J,1/10W	1	
	R16194	D0GF7R5JA047	M 7.5 OHM,J, 0.33W	1	
	R16195	D0GF1R0JA047	M 1.0 OHM,J, 0.33W	1	
	R16196	D0GF7R5JA047	M 7.5 OHM,J, 0.33W	1	
	R16230	ERJ6GEYJ470V	M 47 OHM,J,1/10W	1	
	R16231	ERJ6GEYJ472V	M 4.7K OHM J 1/ 10W	1	
	R16241	EXB38V470J	RESISTOR ARRAY	1	
	R16242	EXB38V472JV	RESISTOR ARRAY	1	
	R16251	D1BD1401A044	M 1.4KOHM, 1/10W	1	
	R16252	D1BD3902A044	M 39KOHM, 1/10W	1	
	R16253	D1BD3902A044	M 39KOHM, 1/10W	1	
	R16254	D1BD6801A044	M 6.8KOHM, 1/10W	1	
	R16255	D1BD1201A044	M 1.2KOHM, 1/10W	1	
	R16256	D1BD1501A044	M 1.4KOHM, 1/10W	1	
	R16257	ERJ6GEYJ273	M 27KOHM,J,1/10W	1	
	R16258	ERJ6GEYJ103V	M 10K OHM J 1/ 10W	1	
	R16260	ERJ6GEYJ222V	M 2.2K OHM J 1/ 10W	1	
	R16280	ERJ6GEYJ222V	M 2.2K OHM J 1/ 10W	1	
	R16281	D0GD103JA036	M 10KOHM,J,0.25W	1	
	R16282	ERJ6GEYJ221V	M 220 OHM,J,1/ 10W	1	
	R16283	ERJ6GEYF473	M 47KOHM,J,1/10W	1	
	R16284	ERJ6GEYJ224	M 220KOHM,J,1/ 10W	1	
	R16285	EXB38V623J	RESISTOR ARRAY	1	
	R16287	D0GF334JA047	M 330KOHM,F,0.33W	1	
	R16288	D0GF334JA047	M 330KOHM,F,0.33W	1	
	R16289	D0GF334JA047	M 330KOHM,F,0.33W	1	
	R16290	D0GF334JA047	M 330KOHM,F,0.33W	1	
	R16302	ERJ8GEYJ333	M 33KOHM, J,1/8W	1	
	R16307	ERJ6RBD683	M 68KOHM,J,1/10W	1	
	R16309	ERJ8GEYJ333	M 33KOHM, J,1/8W	1	
	R16310	ERJ8GEYJ333	M 33KOHM, J,1/8W	1	
	R16311	ERJ8GEYJ333	M 33KOHM, J,1/8W	1	
	R16317	ERJ6RBD272	M 2.7KOHM 1/10W	1	
	R16318	ERJ6RBD623	M 62KOHM,J,1/10W	1	
	R16319	ERJ6RBD2491	M 2.49KOHM, 1/ 10W	1	
	R16320	ERJ14YJ683	M 68KOHM, 1/2W	1	
	R16330	ERJ6GEYJ102V	M 1K OHM J 1/10W	1	
	R16332	ERJ6GEYJ474	M 470KOHM,J,1/ 10W	1	

Safety	Ref. No.	Part No.	Part Name & Description	Pcs	Remarks
	R16334	ERJ6GEYJ472V	M 4.7K OHM J 1/ 10W	1	
	R16335	ERJ6GEYJ102V	M 1K OHM J 1/10W	1	
	R16401	ERJT08J7R5V	M 7.5OHM,J, 0.33W	1	
	R16402	ERJT08J7R5V	M 7.5OHM,J, 0.33W	1	
	R16403	ERJT08J7R5V	M 7.5OHM,J, 0.33W	1	
	R16404	ERJT08J7R5V	M 7.5OHM,J, 0.33W	1	
	R16405	ERJT08J7R5V	M 7.5OHM,J, 0.33W	1	
	R16406	ERJT08J7R5V	M 7.5OHM,J, 0.33W	1	
	R16410	ERJ6GEYG391	M 390 OHM,F,1/ 10W	1	
	R16411	D1BD2700A044	M 270 OHM, 1/10W	1	
	R16414	ERJ6GEYJ331V	M 330 OHM J 1/ 10W	1	
	R16415	ERJ6GEYJ331V	M 330 OHM J 1/ 10W	1	
	R16416	D0GD103JA036	M 10KOHM,J,0.25W	1	
	R16421	ERJT08J7R5V	M 7.5OHM,J, 0.33W	1	
	R16422	ERJT08J7R5V	M 7.5OHM,J, 0.33W	1	
	R16423	ERJT08J7R5V	M 7.5OHM,J, 0.33W	1	
	R16424	ERJT08J7R5V	M 7.5OHM,J, 0.33W	1	
	R16425	ERJT08J7R5V	M 7.5OHM,J, 0.33W	1	
	R16426	ERJT08J7R5V	M 7.5OHM,J, 0.33W	1	
	R16441	ERJT08J5R6V	M 5.6 OHM,F,0.33W	1	
	R16442	ERJT08J5R6V	M 5.6 OHM,F,0.33W	1	
	R16443	ERJT08J5R6V	M 5.6 OHM,F,0.33W	1	
	R16444	ERJT08J5R6V	M 5.6 OHM,F,0.33W	1	
	R16451	ERJT08J5R6V	M 5.6 OHM,F,0.33W	1	
	R16452	ERJT08J5R6V	M 5.6 OHM,F,0.33W	1	
	R16453	ERJT08J5R6V	M 5.6 OHM,F,0.33W	1	
	R16454	ERJT08J5R6V	M 5.6 OHM,F,0.33W	1	
	R16465	D1BD2702A044	M 27KOHM, 1/10W	1	
	R16466	D1BD5602A044	M 56KOHM, 1/10W	1	
	R16467	ERJ6ENF8202	M 82KOHM, 1/10W	1	
	R16468	ERJ6ENF8202	M 82KOHM, 1/10W	1	
	R16471	ERJ6GEYG392	M 3.9KOHM,J,1/ 10W	1	
	R16472	ERJ6GEYJ222V	M 2.2K OHM J 1/ 10W	1	
	R16473	ERJ6GEYF561	M 560 OHM,F,1/ 10W	1	
	R16474	ERJ6GEYJ102V	M 1K OHM J 1/10W	1	
	R16475	ERJ6GEYJ472V	M 4.7K OHM J 1/ 10W	1	
	R16476	ERJ6GEYJ472V	M 4.7K OHM J 1/ 10W	1	
	R16478	ERJ6GEYJ562V	M 5.6KOHM,J,1/ 10W	1	
	R16479	D0GD103JA036	M 10KOHM,J,0.25W	1	
	R16480	ERJ6GEYJ472V	M 4.7K OHM J 1/ 10W	1	
	R16490	ERJ6RED124	M 120KOHM, 1/10W	1	
	R16491	ERJ6RED134V	M 130KOHM, 1/10W	1	
	R16492	ERJ6RED134V	M 130KOHM, 1/10W	1	
	R16493	ERJ6RBD103V	M 10KOHM,J,1/10W	1	
	R16494	D1BD2001A044	M 2KOHM, 1/10W	1	
	R16495	D1BD7500A044	M 750 OHM, 1/10W	1	
	R16496	ERJ6GEYJ470V	M 47 OHM,J,1/10W	1	
	R16497	ERJ6GEYF473	M 47KOHM,J,1/10W	1	

Safety	Ref. No.	Part No.	Part Name & Description	Pcs	Remarks
	R16498	D0GD103JA036	M 10KOHM,J,0.25W	1	
	R16501	D0GD101JA036	M 100 OHM,J,0.25W	1	
	R16502	D0GD101JA036	M 100 OHM,J,0.25W	1	
	R16503	ERJT06J100V	M 10 OHM,F,0.25W	1	
	R16504	ERJT06J750V	M 75 OHM,F,0.25W	1	
	R16505	ERJT06J100V	M 10 OHM,F,0.25W	1	
	R16506	ERJT06J100V	M 10 OHM,F,0.25W	1	
	R16507	ERJT06J100V	M 10 OHM,F,0.25W	1	
	R16508	ERJT06J100V	M 10 OHM,F,0.25W	1	
	R16509	ERJT08J1R0V	M 1.8OHM,J, 0.33W	1	
	R16511	ERJ6GEYF473	M 47KOHM,J,1/10W	1	
	R16512	ERJ6GEYF473	M 47KOHM,J,1/10W	1	
	R16513	ERJ6GEYF473	M 47KOHM,J,1/10W	1	
	R16514	ERJ6GEYF473	M 47KOHM,J,1/10W	1	
	R16515	ERJ6GEYF473	M 47KOHM,J,1/10W	1	
	R16516	ERJ6GEYF473	M 47KOHM,J,1/10W	1	
	R16517	ERJ6GEYF473	M 47KOHM,J,1/10W	1	
	R16518	ERJ6GEYF473	M 47KOHM,J,1/10W	1	
	R16519	ERJ6GEYF473	M 47KOHM,J,1/10W	1	
	R16520	ERJ6GEYF473	M 47KOHM,J,1/10W	1	
	R16521	D0GD101JA036	M 100 OHM,J,0.25W	1	
	R16522	D0GD101JA036	M 100 OHM,J,0.25W	1	
	R16523	ERJT06J750V	M 75 OHM,F,0.25W	1	
	R16524	ERJT06J100V	M 10 OHM,F,0.25W	1	
	R16525	ERJ6GEYF473	M 47KOHM,J,1/10W	1	
	R16526	ERJ6GEYF473	M 47KOHM,J,1/10W	1	
	R16531	ERJT06J100V	M 10 OHM,F,0.25W	1	
	R16532	ERJ6GEYF473	M 47KOHM,J,1/10W	1	
	R16533	ERJ6GEYF473	M 47KOHM,J,1/10W	1	
	R16534	ERJT08J1R0V	M 1.8OHM,J, 0.33W	1	
	R16536	ERJT08J1R0V	M 1.8OHM,J, 0.33W	1	
	R16537	ERJT06J100V	M 10 OHM,F,0.25W	1	
	R16538	ERJ6GEYF473	M 47KOHM,J,1/10W	1	
	R16539	ERJ6GEYF473	M 47KOHM,J,1/10W	1	
	R16551	ERJT06J100V	M 10 OHM,F,0.25W	1	
	R16552	ERJ6GEYF473	M 47KOHM,J,1/10W	1	
	R16553	ERJ6GEYF473	M 47KOHM,J,1/10W	1	
	R16554	ERJT06J100V	M 10 OHM,F,0.25W	1	
	R16555	ERJ6GEYF473	M 47KOHM,J,1/10W	1	
	R16556	ERJ6GEYF473	M 47KOHM,J,1/10W	1	
	R16561	EXB38V470J	RESISTOR ARRAY	1	
	R16562	EXB38V470J	RESISTOR ARRAY	1	
	R16563	EXB38V470J	RESISTOR ARRAY	1	
	R16564	EXB38V470J	RESISTOR ARRAY	1	
	R16565	EXB38V472JV	RESISTOR ARRAY	1	
	R16566	EXB38V472JV	RESISTOR ARRAY	1	
	R16567	EXB38V472JV	RESISTOR ARRAY	1	
	R16568	EXB38V472JV	RESISTOR ARRAY	1	
	R16570	EXB38V472JV	RESISTOR ARRAY	1	
	R16573	ERJ6GEYJ220	M 22 OHM,J,1/10W	1	
	R16579	EXB38V470J	RESISTOR ARRAY	1	
	R16582	D1BD3902A044	M 39KOHM, 1/10W	1	
	R16583	D1BD3902A044	M 39KOHM, 1/10W	1	
	R16584	D1BD6801A044	M 6.8KOHM, 1/10W	1	
	R16585	D1BD1001A044	M 1KOHM, 1/10W	1	
	R16586	D1BD2151A044	M2.15KOHM, 1/10W	1	
	R16587	ERJ6GEYJ222V	M 2.2K OHM J 1/ 10W	1	
	R16588	D0GD103JA036	M 10KOHM,J,0.25W	1	
	R16590	ERJ6GEYJ221V	M 220 OHM,J,1/ 10W	1	
	R16591	EXB38V472JV	RESISTOR ARRAY	1	
	R16592	ERJ6GEYJ472V	M 4.7K OHM J 1/ 10W	1	
	R16593	D1BD1401A044	M 1.4KOHM, 1/10W	1	
	R16602	ERJ6GEYJ102V	M 1K OHM J 1/10W	1	
	R16604	ERJ6GEYJ331V	M 330 OHM J 1/ 10W	1	

Safety	Ref. No.	Part No.	Part Name & Description	Pcs	Remarks
	R16605	ERJ6GEYG182	M 1.8KOHM,J,1/ 10W	1	
	R16606	D0GD103JA036	M 10KOHM,J,0.25W	1	
	R16607	D1BD6651A044	M6.65KOHM, 1/10W	1	
	R16608	ERJT08J102V	M 1KOHM,J, 0.33W	1	
	R16609	ERJT08J102V	M 1KOHM,J, 0.33W	1	
	R16610	ERJ6GEYJ104V	M 100KOHM,J,1/ 10W	1	
	R16611	ERJ8GEYJ683	M 68KOHM, J,1/8W	1	
	R16612	ERJT06J470V	M 47 OHM,F,0.25W	1	
	R16613	ERJ8GEYJ473	M 47KOHM, J,1/8W	1	
	R16614	ERJ8GEYJ683	M 68KOHM, J,1/8W	1	
	R16615	D1BD1101A044	M1.41KOHM, 1/10W	1	
	R16617	ERJ6GEYJ222V	M 2.2K OHM J 1/ 10W	1	
	R16621	ERJ6GEYJ221V	M 220 OHM,J,1/ 10W	1	
	R16622	ERJ6GEYJ221V	M 220 OHM,J,1/ 10W	1	
	R16623	ERJ6GEYJ221V	M 220 OHM,J,1/ 10W	1	
	R16627	ERJ6GEYJ220	M 22 OHM,J,1/10W	1	
	R16628	ERJ6GEYF473	M 47KOHM,J,1/10W	1	
	R16631	D0GD103JA036	M 10KOHM,J,0.25W	1	
	R16633	ERJ6GEYJ223	M 22KOHM,J,1/10W	1	
	R16634	ERJ6GEYJ471	M 470 OHM,J,1/ 10W	1	
	R16646	D1BD1181A044	M1.18KOHM, 1/10W	1	
	R16648	ERJT08J202V	M 2KOHM,J, 0.33W	1	
	R16649	ERJT06J330V	M 33 OHM,F,0.25W	1	
	R16650	ERJ6GEYJ104V	M 100KOHM,J,1/ 10W	1	
	R16651	ERJT08J202V	M 2KOHM,J, 0.33W	1	
	R16652	ERJ6GEYF822	M 8.2KOHM,F,1/ 10W	1	
	R16653	ERJ8GEYJ182	M 1.8KOHM, J,1/ 8W	1	
	R16654	ERJ6GEYJ470V	M 47 OHM,J,1/10W	1	
	R16655	ERJ6GEYJ103V	M 10K OHM J 1/ 10W	1	
	R16656	ERJ8GEYJ472V	M 4.7KOHM, J,1/ 8W	1	
	R16657	ERJ6GEYJ103V	M 10K OHM J 1/ 10W	1	
	R16658	D1BD6491A044	M6.49KOHM, 1/10W	1	
	R16660	ERJ6GEYJ222V	M 2.2K OHM J 1/ 10W	1	
	R16661	ERJ6GEYJ122V	M 1.2KOHM,J,1/ 10W	1	
	R16662	D1BD1002A044	M10.0KOHM, 1/10W	1	
	R16663	D1BD6801A044	M 6.8KOHM, 1/10W	1	
	R16664	ERJT08J202V	M 2KOHM,J, 0.33W	1	
	R16665	ERJT06J330V	M 33 OHM,F,0.25W	1	
	R16666	ERJ6GEYJ223	M 22KOHM,J,1/10W	1	
	R16667	ERJT08J202V	M 2KOHM,J, 0.33W	1	
	R16668	ERJT08J202V	M 2KOHM,J, 0.33W	1	
	R16673	ERJ6GEYJ472V	M 4.7K OHM J 1/ 10W	1	
	R16674	ERJT08J202V	M 2KOHM,J, 0.33W	1	
	R16675	ERJ6GEYJ472V	M 4.7K OHM J 1/ 10W	1	
	R16677	ERJT08J202V	M 2KOHM,J, 0.33W	1	
	R16678	ERJT08J202V	M 2KOHM,J, 0.33W	1	
	R16679	D1BD7501A044	M 7.5KOHM, 1/10W	1	
	R16680	ERJ6GEYJ472V	M 4.7K OHM J 1/ 10W	1	
	R16681	ERJT06J100V	M 10 OHM,F,0.25W	1	
	R16682	ERJT06J100V	M 10 OHM,F,0.25W	1	
	R16683	ERJT06J100V	M 10 OHM,F,0.25W	1	
	R16684	ERJ6GEYJ221V	M 220 OHM,J,1/ 10W	1	
	R16685	ERJ6GEYJ221V	M 220 OHM,J,1/ 10W	1	
	R16686	D0GD103JA036	M 10KOHM,J,0.25W	1	
	R16687	D1BD2702A044	M 27KOHM, 1/10W	1	
	R16688	D1BD1272A044	M12.7KOHM, 1/10W	1	

Safety	Ref. No.	Part No.	Part Name & Description	Pcs	Remarks
	R16690	ERJ6GEYJ472V	M 4.7K OHM J 1/10W	1	
	R16691	ERJ8GEYJ563	M 56KOHM, J,1/8W	1	
	R16692	ERJ6RBD152	M 1.5KOHM,J,1/10W	1	
	R16694	ERJ8GEYJ563	M 56KOHM, J,1/8W	1	
	R16695	ERJ6RBD152	M 1.5KOHM,J,1/10W	1	
	R16696	D0D26R2JA034	M 2.6 OHM,J,2W	1	
	R16697	D0D26R2JA034	M 2.6 OHM,J,2W	1	
	R16698	D0D26R2JA034	M 2.6 OHM,J,2W	1	
	R16699	D0GD103JA036	M 10KOHM,J,0.25W	1	
	R16707	ERJ6GEYG392	M 3.9KOHM,J,1/10W	1	
	R16711	ERJ6GEYJ472V	M 4.7K OHM J 1/10W	1	
	R16712	ERJ6GEYJ102V	M 1K OHM J 1/10W	1	
	R16713	ERG1FJX104	M 100KOHM, J, 1W	1	
	R16714	ERJ6GEYF473	M 47KOHM,J,1/10W	1	
	R16715	ERJ6GEYJ103V	M 10K OHM J 1/10W	1	
	R16717	ERJ6GEYJ102V	M 1K OHM J 1/10W	1	
	R16719	ERJ3GEYJ220	M 22 OHM,J,1/16W	1	
	R16720	ERJ3GEYJ220	M 22 OHM,J,1/16W	1	
	R16721	ERJ3GEYJ220	M 22 OHM,J,1/16W	1	
	R16722	ERJ3GEYJ220	M 22 OHM,J,1/16W	1	
	R16723	ERJ3GEYJ220	M 22 OHM,J,1/16W	1	
	R16731	ERG2FJX104	M 100KOHM, J, 1W	1	
	R16733	ERJ6GEYJ474	M 470KOHM,J,1/10W	1	
	R16734	D1BD4991A044	M4.99KOHM, 1/10W	1	
	R16735	D1BD1873A044	M 187KOHM, 1/10W	1	
	R16736	D1BD1873A044	M 187KOHM, 1/10W	1	
	R16737	D1BD2053A044	M 205KOHM, 1/10W	1	
	R16742	D0GD103JA036	M 10KOHM,J,0.25W	1	
	R16744	D1BD1273A044	M 127KOHM, 1/10W	1	
	R16745	D1BD2202A044	M 2.2KOHM, 1/10W	1	
	R16746	ERJT06J473V	M 47KOHM,F,0.25W	1	
	R16747	ERJT06J103V	M 10KOHM,F,0.25W	1	
	R16749	D0GD103JA036	M 10KOHM,J,0.25W	1	
	R16750	ERJT06J123	M 12KOHM,F,0.25W	1	
	R16751	ERJT06J154V	M 150KOHM,F,0.25W	1	
	R16752	ERJ6GEYJ472V	M 4.7K OHM J 1/10W	1	
	R16753	ERJ6GEYJ224	M 220KOHM,J,1/10W	1	
	R16755	ERJT06J123	M 12KOHM,F,0.25W	1	
	R16756	ERJT06J123	M 12KOHM,F,0.25W	1	
	R16761	ERJT06J100V	M 10 OHM,F,0.25W	1	
	R16762	ERJ6GEYF473	M 47KOHM,J,1/10W	1	
	R16763	ERJ6GEYF473	M 47KOHM,J,1/10W	1	
	R16765	ERJT08J1R0V	M 1.8OHM,J,0.33W	1	
	R16766	D0GDR00Z0002	M 0 OHM, 1/10W	1	
	R16769	ERJT06J750V	M 75 OHM,F,0.25W	1	
	R16772	ERJ6GEYJ472V	M 4.7K OHM J 1/10W	1	
	R16773	ERJ6GEYJ102V	M 1K OHM J 1/10W	1	
	R16774	ERG1FJX273	M 27KOHM, J, 1W	1	
	R16775	ERJ6GEYJ472V	M 4.7K OHM J 1/10W	1	
	R16776	ERJ6GEYJ470V	M 47 OHM,J,1/10W	1	
	R16777	ERJ6GEYJ103V	M 10K OHM J 1/10W	1	
	R16783	ERJT06J154V	M 150KOHM,F,0.25W	1	
	R16785	D1BD1003A044	M 100KOHM, 1/10W	1	
	R16786	D1BD1003A044	M 100KOHM, 1/10W	1	
	R16787	D1BD3302A044	M 33KOHM, 1/10W	1	
	R16789	D0GD103JA036	M 10KOHM,J,0.25W	1	
	R16791	ERJ6GEYJ102V	M 1K OHM J 1/10W	1	
	R16794	D1BD2003A044	M 200KOHM, 1/10W	1	
	R16795	D1BD2003A044	M 200KOHM, 1/10W	1	
	R16796	D1BD5602A044	M 56KOHM, 1/10W	1	
	R16797	ERJ6GEYJ220	M 22 OHM,J,1/10W	1	
	R16798	ERJ6GEYJ222V	M 2.2K OHM J 1/10W	1	
	R16799	ERJ6GEYJ102V	M 1K OHM J 1/10W	1	
	R16801	D1BD4702A044	M 47KOHM, 1/10W	1	
	R16802	D1BD4702A044	M 47KOHM, 1/10W	1	
	R16804	ERJ8GEYJ104V	M 100KOHM, J,1/8W	1	
	R16806	ERJ6GEYJ102V	M 1K OHM J 1/10W	1	
	R16812	ERJ6GEYG182	M 1.8KOHM,J,1/10W	1	
	R16813	ERJ8GEYJ222V	M 2.2KOHM, J,1/8W	1	
	R16814	D1BD1962A044	M19.6KOHM, 1/10W	1	
	R16815	D1BD2491A044	M2.49KOHM, 1/10W	1	
	R16818	D1BD3302A044	M 33KOHM, 1/10W	1	
	R16819	D1BD1003A044	M 100KOHM, 1/10W	1	
	R16820	D1BD1003A044	M 100KOHM, 1/10W	1	
	R16821	D1BD1003A044	M 100KOHM, 1/10W	1	
	R16822	ERJ6ENF8202	M 82KOHM, 1/10W	1	
	R16823	ERJ6ENF8202	M 82KOHM, 1/10W	1	
	R16824	D1BD3302A044	M 33KOHM, 1/10W	1	
	R16825	ERJT06J154V	M 150KOHM,F,0.25W	1	
	R16826	D0GD103JA036	M 10KOHM,J,0.25W	1	
	R16829	ERJ6GEYJ102V	M 1K OHM J 1/10W	1	
	R16831	D1BD7152A044	M71.5KOHM, 1/10W	1	
	R16832	D1BD7152A044	M71.5KOHM, 1/10W	1	
	R16833	D0GD103JA036	M 10KOHM,J,0.25W	1	
	R16838	ERJ14YJ563U	M 56KOHM, 1/2W	1	
	R16841	ERJ14YJ563U	M 56KOHM, 1/2W	1	
	R16844	D1BD1241A044	M1.24KOHM, 1/10W	1	
	R16845	D1BD6812A044	M68.1KOHM, 1/10W	1	
	R16846	D1BD8202A044	M 82KOHM, 1/10W	1	
	R16847	ERJ6GEYJ472V	M 4.7K OHM J 1/10W	1	
	R16848	ERJ6GEYJ472V	M 4.7K OHM J 1/10W	1	
	R16851	ERJ6GEYJ474	M 470KOHM,J,1/10W	1	
	R16860	D0D28R2JA034	M 8.2 OHM,J,2W	1	
	R16869	ERJ8GEYJ473	M 47KOHM, J,1/8W	1	
	R16870	ERJ14YJ683	M 68KOHM, 1/2W	1	
	R16873	D1BD2491A044	M2.49KOHM, 1/10W	1	
	R16877	ERJ6GEYG681	M 680 OHM,J,1/10W	1	
	R16891	D1BD4702A044	M 47KOHM, 1/10W	1	
	R16892	D1BD4702A044	M 47KOHM, 1/10W	1	
	R16893	D1BD4702A044	M 47KOHM, 1/10W	1	
	R16894	D1BD4702A044	M 47KOHM, 1/10W	1	
	R16895	D1BD4702A044	M 47KOHM, 1/10W	1	
	R16896	D1BD3302A044	M 33KOHM, 1/10W	1	
	R16897	D1BD1541A044	M1.54KOHM, 1/10W	1	
	R16898	D1BD2611A044	M2.61KOHM, 1/10W	1	
	R16899	D1BD2211A044	M2.21KOHM, 1/10W	1	
	R16900	D0GD103JA036	M 10KOHM,J,0.25W	1	
	R16901	ERJ6GEYJ472V	M 4.7K OHM J 1/10W	1	
	R16904	ERJ6GEYJ223	M 22KOHM,J,1/10W	1	
	R16919	D1BD9311A044	M9.31KOHM, 1/10W	1	
	R16920	D0GD103JA036	M 10KOHM,J,0.25W	1	
	R16921	D1BD2611A044	M2.61KOHM, 1/10W	1	
	R16922	D1BD2001A044	M 2KOHM, 1/10W	1	
	R16923	ERJ6GEYJ103V	M 10K OHM J 1/10W	1	
	R16926	ERJ6GEYJ222V	M 2.2K OHM J 1/10W	1	
	R16927	ERJ6GEYJ223	M 22KOHM,J,1/10W	1	
	R17111	ERJ3GEYJ101	M 100 OHM,J,1/16W	1	
	R17112	ERJ3GEYJ101	M 100 OHM,J,1/16W	1	
	R17113	ERJ3GEYJ101	M 100 OHM,J,1/16W	1	
	R17114	ERJ3GEYJ101	M 100 OHM,J,1/16W	1	

Safety	Ref. No.	Part No.	Part Name & Description	Pcs	Remarks
	R17115	ERJ3GEYJ101	M 100 OHM,J,1/16W	1	
	R17116	ERJ3GEYJ101	M 100 OHM,J,1/16W	1	
	R17117	ERJ3GEYJ101	M 100 OHM,J,1/16W	1	
	R17118	ERJ3GEYJ101	M 100 OHM,J,1/16W	1	
	R17119	ERJ3GEYJ101	M 100 OHM,J,1/16W	1	
	R17120	ERJ3GEYJ101	M 100 OHM,J,1/16W	1	
	R17121	ERJ3GEYJ101	M 100 OHM,J,1/16W	1	
	R17122	ERJ3GEYJ201	M 200 OHM,J,1/16W	1	
	R17123	ERJ3GEYJ201	M 200 OHM,J,1/16W	1	
	R17124	ERJ3GEYJ201	M 200 OHM,J,1/16W	1	
	R17125	ERJ3GEYJ201	M 200 OHM,J,1/16W	1	
	R17126	ERJ6GEYJ102V	M 1K OHM J 1/10W	1	
	R17127	ERJ6GEYJ224	M 220KOHM,J,1/10W	1	
	R17131	ERJT14J6R8U	C6.8 OHM, J,1/4W	1	
	R17132	ERJT14J6R8U	C6.8 OHM, J,1/4W	1	
	R17133	ERJT14J6R8U	C6.8 OHM, J,1/4W	1	
	R17134	ERJT14J6R8U	C6.8 OHM, J,1/4W	1	
	R17135	ERJT14J6R8U	C6.8 OHM, J,1/4W	1	
	R17136	ERJT14J6R8U	C6.8 OHM, J,1/4W	1	
	R17137	ERJT14J6R8U	C6.8 OHM, J,1/4W	1	
	R17138	ERJT14J6R8U	C6.8 OHM, J,1/4W	1	
	R17139	ERJT14J6R8U	C6.8 OHM, J,1/4W	1	
	R17140	ERJT14J6R8U	C6.8 OHM, J,1/4W	1	
	R17142	EXB38V470J	RESISTOR ARRAY	1	
	R17199	ERJT08J472V	M4.7KOHM,J, 0.33W	1	
	R17204	D0GDR00Z0002	M 0 OHM, 1/10W	1	
	R17211	ERJ3GEYJ101	M 100 OHM,J,1/16W	1	
	R17212	ERJ3GEYJ101	M 100 OHM,J,1/16W	1	
	R17213	ERJ3GEYJ101	M 100 OHM,J,1/16W	1	
	R17214	ERJ3GEYJ101	M 100 OHM,J,1/16W	1	
	R17215	ERJ3GEYJ101	M 100 OHM,J,1/16W	1	
	R17216	ERJ3GEYJ101	M 100 OHM,J,1/16W	1	
	R17217	ERJ3GEYJ101	M 100 OHM,J,1/16W	1	
	R17218	ERJ3GEYJ101	M 100 OHM,J,1/16W	1	
	R17219	ERJ3GEYJ101	M 100 OHM,J,1/16W	1	
	R17220	ERJ3GEYJ101	M 100 OHM,J,1/16W	1	
	R17221	ERJ3GEYJ201	M 200 OHM,J,1/16W	1	
	R17222	ERJ3GEYJ201	M 200 OHM,J,1/16W	1	
	R17223	ERJ3GEYJ201	M 200 OHM,J,1/16W	1	
	R17224	ERJ3GEYJ101	M 100 OHM,J,1/16W	1	
	R17225	ERJ3GEYJ201	M 200 OHM,J,1/16W	1	
	R17226	ERJ3GEYJ681	M 680 OHM,J,1/16W	1	
	R17227	ERJ3GEYJ681	M 680 OHM,J,1/16W	1	
	R17228	ERJ6GEYJ224	M 220KOHM,J,1/10W	1	
	R17231	ERJT14J6R8U	C6.8 OHM, J,1/4W	1	
	R17232	ERJT14J6R8U	C6.8 OHM, J,1/4W	1	
	R17233	ERJT14J6R8U	C6.8 OHM, J,1/4W	1	
	R17234	ERJT14J6R8U	C6.8 OHM, J,1/4W	1	

Safety	Ref. No.	Part No.	Part Name & Description	Pcs	Remarks
	R17235	ERJT14J6R8U	C6.8 OHM, J,1/4W	1	
	R17236	ERJT14J6R8U	C6.8 OHM, J,1/4W	1	
	R17237	ERJT14J6R8U	C6.8 OHM, J,1/4W	1	
	R17238	ERJT14J6R8U	C6.8 OHM, J,1/4W	1	
	R17239	ERJT14J6R8U	C6.8 OHM, J,1/4W	1	
	R17240	ERJT14J6R8U	C6.8 OHM, J,1/4W	1	
	R17241	EXB38V470J	RESISTOR ARRAY	1	
	R17242	EXB38V470J	RESISTOR ARRAY	1	
	R17243	EXB38V470J	RESISTOR ARRAY	1	
	R17244	EXB38V470J	RESISTOR ARRAY	1	
	R17245	EXB38V470J	RESISTOR ARRAY	1	
	R17246	EXB38V470J	RESISTOR ARRAY	1	
	R17247	EXB38V681J	RESISTOR ARRAY	1	
	R17248	EXB38V681J	RESISTOR ARRAY	1	
	R17249	EXB38V681J	RESISTOR ARRAY	1	
	R17250	EXB38V681J	RESISTOR ARRAY	1	
	R17293	D0GDR00Z0002	M 0 OHM, 1/10W	1	
	R17311	ERJ3GEYJ101	M 100 OHM,J,1/16W	1	
	R17312	ERJ3GEYJ101	M 100 OHM,J,1/16W	1	
	R17313	ERJ3GEYJ101	M 100 OHM,J,1/16W	1	
	R17314	ERJ3GEYJ101	M 100 OHM,J,1/16W	1	
	R17315	ERJ3GEYJ101	M 100 OHM,J,1/16W	1	
	R17316	ERJ3GEYJ101	M 100 OHM,J,1/16W	1	
	R17317	ERJ3GEYJ101	M 100 OHM,J,1/16W	1	
	R17318	ERJ3GEYJ101	M 100 OHM,J,1/16W	1	
	R17319	ERJ3GEYJ101	M 100 OHM,J,1/16W	1	
	R17320	ERJ3GEYJ101	M 100 OHM,J,1/16W	1	
	R17321	ERJ3GEYJ101	M 100 OHM,J,1/16W	1	
	R17322	ERJ3GEYJ201	M 200 OHM,J,1/16W	1	
	R17323	ERJ3GEYJ201	M 200 OHM,J,1/16W	1	
	R17324	ERJ3GEYJ201	M 200 OHM,J,1/16W	1	
	R17325	ERJ3GEYJ201	M 200 OHM,J,1/16W	1	
	R17326	ERJ6GEYJ224	M 220KOHM,J,1/10W	1	
	R17331	ERJT14J6R8U	C6.8 OHM, J,1/4W	1	
	R17332	ERJT14J6R8U	C6.8 OHM, J,1/4W	1	
	R17333	ERJT14J6R8U	C6.8 OHM, J,1/4W	1	
	R17334	ERJT14J6R8U	C6.8 OHM, J,1/4W	1	
	R17335	ERJT14J6R8U	C6.8 OHM, J,1/4W	1	
	R17336	ERJT14J6R8U	C6.8 OHM, J,1/4W	1	
	R17337	ERJT14J6R8U	C6.8 OHM, J,1/4W	1	
	R17338	ERJT14J6R8U	C6.8 OHM, J,1/4W	1	
	R17339	ERJT14J6R8U	C6.8 OHM, J,1/4W	1	
	R17340	ERJT14J6R8U	C6.8 OHM, J,1/4W	1	
	R17345	EXB38V470J	RESISTOR ARRAY	1	
	R17399	ERJT08J472V	M4.7KOHM,J, 0.33W	1	
	R20732	ERJ2GEJ153	M 15KOHM ,J,0.063W	1	
	R20733	ERJ2GEJ333	M 33KOHM, J,0.063W	1	
	R20900	ERJ2GEJ680	M 68 OHM, J,0.063W	1	
	R20901	EXB28V680JX	RESISTOR ARRAY	1	
	R20902	ERJ2GEJ103	M 10KOHM, J,0.063W	1	
	R20903	ERJ2GEJ103	M 10KOHM, J,0.063W	1	
	R20904	ERJ2GEJ103	M 10KOHM, J,0.063W	1	
	R20905	ERJ2GEJ473	M 47KOHM, J,0.063W	1	

Safety	Ref. No.	Part No.	Part Name & Description	Pcs	Remarks
	R20906	ERJ2GEJ680	M 68 OHM, J,0.063W	1	
	R20907	EXB28V680JX	RESISTOR ARRAY	1	
	R20908	ERJ2GEJ103	M 10KOHM, J,0.063W	1	
	R20909	ERJ2GEJ220	M 22 OHM, J,0.063W	1	
	R20910	ERJ2GEJ220	M 22 OHM, J,0.063W	1	
	R20911	ERJ2GEJ220	M 22 OHM, J,0.063W	1	
	R20912	ERJ2GEJ220	M 22 OHM, J,0.063W	1	
	R20913	D0YAR0000007	M 0 OHM 1/4W	1	
	R20914	D0YAR0000007	M 0 OHM 1/4W	1	
	R20915	ERJ2GEJ472	M 4.7KOHM, J,0.063W	1	
	R20916	ERJ2GEJ472	M 4.7KOHM, J,0.063W	1	
	R20917	ERJ2GEJ220	M 22 OHM, J,0.063W	1	
	R20918	ERJ2GEJ220	M 22 OHM, J,0.063W	1	
	R20919	ERJ2GEJ220	M 22 OHM, J,0.063W	1	
	R20920	ERJ2GEJ220	M 22 OHM, J,0.063W	1	
	R20933	D0YAR0000007	M 0 OHM 1/4W	1	
	R20934	D0YAR0000007	M 0 OHM 1/4W	1	
	R20945	ERJ2GEJ220	M 22 OHM, J,0.063W	1	
	R20946	ERJ2GEJ220	M 22 OHM, J,0.063W	1	
	R20947	ERJ2GEJ680	M 68 OHM, J,0.063W	1	
	R20948	ERJ2GEJ680	M 68 OHM, J,0.063W	1	
	R20949	ERJ2GEJ680	M 68 OHM, J,0.063W	1	
	R20950	ERJ2GEJ680	M 68 OHM, J,0.063W	1	
	R20951	ERJ2GEJ680	M 68 OHM, J,0.063W	1	
	R20952	ERJ2GEJ680	M 68 OHM, J,0.063W	1	
	R20953	ERJ2GEJ680	M 68 OHM, J,0.063W	1	
	R20954	ERJ2GEJ680	M 68 OHM, J,0.063W	1	
	R20957	ERJ2GEJ472	M 4.7KOHM, J,0.063W	1	
	R20958	ERJ2GEJ472	M 4.7KOHM, J,0.063W	1	
	R20959	ERJ2GEJ472	M 4.7KOHM, J,0.063W	1	
	R20960	ERJ2GEJ472	M 4.7KOHM, J,0.063W	1	
	R20961	ERJ2GEJ472	M 4.7KOHM, J,0.063W	1	
	R20962	ERJ2GEJ472	M 4.7KOHM, J,0.063W	1	
	R20981	ERJ2GEJ103	M 10KOHM, J,0.063W	1	
	R20982	ERJ2GEJ103	M 10KOHM, J,0.063W	1	
	R20983	ERJ2GEJ103	M 10KOHM, J,0.063W	1	
	R20990	ERJ2GEJ103	M 10KOHM, J,0.063W	1	
	R20991	ERJ2GEJ103	M 10KOHM, J,0.063W	1	
	R21002	D0GBR00Z0002	M 0 OHM J 1/16W	1	
	R21010	D0GB103JA041	M 10K OHM J 1/ 16W	1	
	R21012	ERJ2GEJ473	M 47KOHM, J,0.063W	1	
	R21100	ERJ2GEJ101	M 100 OHM, J,0.063W	1	
	R21101	ERJ2GEJ101	M 100 OHM, J,0.063W	1	

Safety	Ref. No.	Part No.	Part Name & Description	Pcs	Remarks
	R21102	ERJ2GEJ101	M 100 OHM, J,0.063W	1	
	R21103	ERJ2RKD330	M 33 OHM, J, 2W	1	
	R21105	ERJ2GEJ101	M 100 OHM, J,0.063W	1	
	R21106	ERJ2GEJ101	M 100 OHM, J,0.063W	1	
	R21107	ERJ2GEJ101	M 100 OHM, J,0.063W	1	
	R21108	ERJ2GEJ101	M 100 OHM, J,0.063W	1	
	R21109	ERJ2GEJ101	M 100 OHM, J,0.063W	1	
	R21124	ERJ2GEJ473	M 47KOHM, J,0.063W	1	
	R21125	ERJ2GEJ473	M 47KOHM, J,0.063W	1	
	R21146	D0YAR0000007	M 0 OHM 1/4W	1	
	R21153	ERJ2GEJ821	M 820 OHM, J,0.063W	1	
	R21163	ERJ2GEJ105	M 1MOHM, J,0.063W	1	
	R21164	ERJ2GEJ103	M 10KOHM, J,0.063W	1	
	R21166	ERJ2GEJ104	M 100KOHM, J,0.063W	1	
	R21167	ERJ2GEJ103	M 10KOHM, J,0.063W	1	
	R21168	ERJ2GEJ104	M 100KOHM, J,0.063W	1	
	R21169	ERJ2GEJ103	M 10KOHM, J,0.063W	1	
	R21170	ERJ2GEJ104	M 100KOHM, J,0.063W	1	
	R21171	ERJ2GEJ473	M 47KOHM, J,0.063W	1	
	R21173	ERJ2GEJ331	M 330 OHM, J,0.063W	1	
	R21179	D0YAR0000007	M 0 OHM 1/4W	1	
	R21181	D0YAR0000007	M 0 OHM 1/4W	1	
	R21182	ERJ2GED273X	M 27KOHM ,J,0.063W	1	
	R21194	ERJ2GEJ683	M 68KOHM, J,0.063W	1	
	R21196	ERJ2GEJ473	M 47KOHM, J,0.063W	1	
	R21197	D0YAR0000007	M 0 OHM 1/4W	1	
	R21200	D0YAR0000007	M 0 OHM 1/4W	1	
	R21201	ERJ2GEJ473	M 47KOHM, J,0.063W	1	
	R21203	ERJ2GEJ473	M 47KOHM, J,0.063W	1	
	R21209	ERJ2GEJ472	M 4.7KOHM, J,0.063W	1	
	R21216	ERJ2GEJ103	M 10KOHM, J,0.063W	1	
	R21217	ERJ2GEJ104	M 100KOHM, J,0.063W	1	
	R21221	D1BB7151A055	M7.15KOHM, 1/10W	1	
	R21224	ERJ2GEJ103	M 10KOHM, J,0.063W	1	
	R21225	ERJ2GEJ103	M 10KOHM, J,0.063W	1	
	R21236	ERJ2GEJ473	M 47KOHM, J,0.063W	1	
	R21237	ERJ2GEJ102X	M 1K OHM J 1/4W	1	
	R21243	ERJ2GEJ473	M 47KOHM, J,0.063W	1	
	R21255	ERJ2GEJ102X	M 1K OHM J 1/4W	1	
	R22002	ERJ2GEJ102X	M 1K OHM J 1/4W	1	
	R22003	ERJ2GEJ105	M 1MOHM, J,0.063W	1	
	R22008	ERJ2GEJ331	M 330 OHM, J,0.063W	1	
	R22009	ERJ2GEJ331	M 330 OHM, J,0.063W	1	
	R22010	ERJ2GEJ331	M 330 OHM, J,0.063W	1	
	R22012	ERJ2GEJ220	M 22 OHM, J,0.063W	1	

Safety	Ref. No.	Part No.	Part Name & Description	Pcs	Remarks
	R22019	D1BB2002A055	M 20KOHM, 1/10W	1	
	R22020	D1BB2001A055	M 2KOHM, 1/10W	1	
	R22056	ERJ2GEJ220	M 22 OHM, J,0.063W	1	
	R22057	ERJ2GEJ220	M 22 OHM, J,0.063W	1	
	R22097	ERJ2GEJ102X	M 1K OHM J 1/4W	1	
	R22098	ERJ2GEJ220	M 22 OHM, J,0.063W	1	
	R22114	ERJ2GEJ222	M 2.2KOHM, J,0.063W	1	
	R22115	ERJ2GEJ222	M 2.2KOHM, J,0.063W	1	
	R22118	ERJ2GEJ471	M 470 OHM, J,0.063W	1	
	R22121	ERJ8GEYJ3R3V	M 3.3 OHM, J,1/ 8W	1	
	R22122	ERJ8GEYJ3R3V	M 3.3 OHM, J,1/ 8W	1	
	R22123	ERJ8GEYJ3R3V	M 3.3 OHM, J,1/ 8W	1	
	R22124	ERJ8GEYJ3R3V	M 3.3 OHM, J,1/ 8W	1	
	R22125	ERJ8GEYJ3R3V	M 3.3 OHM, J,1/ 8W	1	
	R22126	ERJ8GEYJ3R3V	M 3.3 OHM, J,1/ 8W	1	
	R22127	ERJ8GEYJ3R3V	M 3.3 OHM, J,1/ 8W	1	
	R22128	ERJ8GEYJ3R3V	M 3.3 OHM, J,1/ 8W	1	
	R22129	ERJ2GEJ100	M 10 OHM, J,0.063W	1	
	R22130	ERJ2GEJ100	M 10 OHM, J,0.063W	1	
	R22131	ERJ2GEJ100	M 10 OHM, J,0.063W	1	
	R22137	ERJ2GEJ100	M 10 OHM, J,0.063W	1	
	R22141	ERJ2GEJ392	M 3.9KOHM, J,0.063W	1	
	R22142	ERJ2GEJ221	M 220 OHM, J,0.063W	1	
	R22172	ERJ2GEJ680	M 68 OHM, J,0.063W	1	
	R22190	ERJ2GEJ103	M 10KOHM, J,0.063W	1	
	R22316	EXB28V220J	RESISTOR ARRAY	1	
	R22317	EXB28V220J	RESISTOR ARRAY	1	
	R22325	D0YAR0000007	M 0 OHM 1/4W	1	
	R22326	D0YAR0000007	M 0 OHM 1/4W	1	
	R22755	ERJ2GEJ103	M 10KOHM, J,0.063W	1	
	R22756	ERJ2GEJ101	M 100 OHM, J,0.063W	1	
	R22757	ERJ2GEJ101	M 100 OHM, J,0.063W	1	
	R22759	ERJ2GEJ220	M 22 OHM, J,0.063W	1	
	R22760	ERJ2GEJ220	M 22 OHM, J,0.063W	1	
	R22761	ERJ2GEJ220	M 22 OHM, J,0.063W	1	
	R22764	J0JCC0000286	CHIP INDUCTOR	1	
	R22765	J0JCC0000286	CHIP INDUCTOR	1	
	R22766	ERJ2GEJ220	M 22 OHM, J,0.063W	1	
	R22767	ERJ2GEJ220	M 22 OHM, J,0.063W	1	
	R22768	ERJ2GEJ220	M 22 OHM, J,0.063W	1	
	R22769	ERJ2GEJ220	M 22 OHM, J,0.063W	1	
	R22770	ERJ2GEJ102X	M 1K OHM J 1/4W	1	
	R22771	ERJ2GEJ473	M 47KOHM, J,0.063W	1	
	R22772	ERJ2GEJ473	M 47KOHM, J,0.063W	1	
	R22773	D0GBR00Z0002	M 0 OHM J 1/16W	1	

Safety	Ref. No.	Part No.	Part Name & Description	Pcs	Remarks
	R24000	ERJ2GEJ103	M 10KOHM, J,0.063W	1	
	R24001	D0YAR0000007	M 0 OHM 1/4W	1	
	R24002	D0YAR0000007	M 0 OHM 1/4W	1	
	R24003	D0YAR0000007	M 0 OHM 1/4W	1	
	R24006	D0YAR0000007	M 0 OHM 1/4W	1	
	R24007	D0YAR0000007	M 0 OHM 1/4W	1	
	R24008	D0YAR0000007	M 0 OHM 1/4W	1	
	R24455	ERJ2GEJ472	M 4.7KOHM, J,0.063W	1	
	R24456	ERJ2GEJ222	M 2.2KOHM, J,0.063W	1	
	R24457	ERJ2GEJ102X	M 1K OHM J 1/4W	1	
	R24458	ERJ2GEJ223	M 22KOHM, J,0.063W	1	
	R24459	ERJ3GEYJ220	M 22 OHM,J,1/16W	1	
	R24460	ERJ2GEJ472	M 4.7KOHM, J,0.063W	1	
	R24461	ERJ2GEJ473	M 47KOHM, J,0.063W	1	
	R24552	ERJ2GEJ220	M 22 OHM, J,0.063W	1	
	R24553	ERJ2GEJ473	M 47KOHM, J,0.063W	1	
	R24554	ERJ2GEJ473	M 47KOHM, J,0.063W	1	
	R24555	ERJ2GEJ473	M 47KOHM, J,0.063W	1	
	R24556	ERJ2GEJ473	M 47KOHM, J,0.063W	1	
	R24557	ERJ2GEJ473	M 47KOHM, J,0.063W	1	
	R24558	ERJ2GEJ473	M 47KOHM, J,0.063W	1	
	R24559	ERJ2GEJ473	M 47KOHM, J,0.063W	1	
	R24560	ERJ2GEJ473	M 47KOHM, J,0.063W	1	
	R24562	ERJ2GEJ473	M 47KOHM, J,0.063W	1	
	R24563	ERJ2GEJ473	M 47KOHM, J,0.063W	1	
	R24564	ERJ2RHD682X	M 6.8KOHM, J, 2W	1	
	R24565	ERJ2RHD682X	M 6.8KOHM, J, 2W	1	
	R24571	ERJ2GEJ220	M 22 OHM, J,0.063W	1	
	R24572	ERJ2GEJ220	M 22 OHM, J,0.063W	1	
	R24613	D0YAR0000007	M 0 OHM 1/4W	1	
	R24614	D0YAR0000007	M 0 OHM 1/4W	1	
	R24620	ERJ2GEJ473	M 47KOHM, J,0.063W	1	
	R24624	ERJ2GEJ103	M 10KOHM, J,0.063W	1	
	R24625	ERJ2GEJ103	M 10KOHM, J,0.063W	1	
	R24631	D1BB4990A055	M 499 OHM, 1/10W	1	
	R24635	EXB28V680JX	RESISTOR ARRAY	1	
	R24636	ERJ2GEJ680	M 68 OHM, J,0.063W	1	
	R24637	ERJ2GEJ680	M 68 OHM, J,0.063W	1	
	R24638	ERJ2GEJ680	M 68 OHM, J,0.063W	1	
	R24639	EXB28V680JX	RESISTOR ARRAY	1	
	R24640	EXB28V680JX	RESISTOR ARRAY	1	
	R24642	ERJ2GEJ473	M 47KOHM, J,0.063W	1	
	R24645	EXB28V680JX	RESISTOR ARRAY	1	
	R24646	EXB28V680JX	RESISTOR ARRAY	1	
	R24648	EXB28V330J	RESISTOR ARRAY	1	
	R24649	EXB28V680JX	RESISTOR ARRAY	1	
	R24650	ERJ2GEJ680	M 68 OHM, J,0.063W	1	
	R24651	ERJ2GEJ680	M 68 OHM, J,0.063W	1	
	R24652	ERJ2GEJ473	M 47KOHM, J,0.063W	1	

Safety	Ref. No.	Part No.	Part Name & Description	Pcs	Remarks
	R24653	ERJ2GEJ473	M 47KOHM, J,0.063W	1	
	R24654	ERJ2GEJ473	M 47KOHM, J,0.063W	1	
	R24657	ERJ2GEJ220	M 22 OHM, J,0.063W	1	
	R24658	ERJ2GEJ220	M 22 OHM, J,0.063W	1	
	R24665	ERJ2GEJ473	M 47KOHM, J,0.063W	1	
	R24666	ERJ2GEJ473	M 47KOHM, J,0.063W	1	
	R24672	ERJ2GEJ473	M 47KOHM, J,0.063W	1	
	R24674	ERJ2GEJ103	M 10KOHM, J,0.063W	1	
	R24677	ERJ2GEJ103	M 10KOHM, J,0.063W	1	
	R24678	EXB28V680JX	RESISTOR ARRAY	1	
	R24679	EXB28V680JX	RESISTOR ARRAY	1	
	R24680	D0YAR0000007	M 0 OHM 1/4W	1	
	R24681	D0YAR0000007	M 0 OHM 1/4W	1	
	R24683	D0YAR0000007	M 0 OHM 1/4W	1	
	R24696	D0YAR0000007	M 0 OHM 1/4W	1	
	R24697	D0YAR0000007	M 0 OHM 1/4W	1	
	R24698	D0YAR0000007	M 0 OHM 1/4W	1	
	R24699	ERJ2GEJ104	M 100KOHM, J,0.063W	1	
	R24700	ERJ2GEJ222	M 2.2KOHM, J,0.063W	1	
	R24707	ERJ2GEJ473	M 47KOHM, J,0.063W	1	
	R24708	D0YAR0000007	M 0 OHM 1/4W	1	
	R24709	ERJ2GEJ104	M 100KOHM, J,0.063W	1	
	R24799	EXB28V680JX	RESISTOR ARRAY	1	
	R24832	ERJ2GEJ101	M 100 OHM, J,0.063W	1	
	R24833	ERJ2GEJ104	M 100KOHM, J,0.063W	1	
	R24834	ERJ2GEJ102X	M 1K OHM J 1/4W	1	
	R24835	ERJ2GEJ104	M 100KOHM, J,0.063W	1	
	R24841	ERJ2GEJ104	M 100KOHM, J,0.063W	1	
	R24842	ERJ2GEJ102X	M 1K OHM J 1/4W	1	
	R24844	ERJ2GEJ101	M 100 OHM, J,0.063W	1	
	R25024	ERJ2GEJ101	M 100 OHM, J,0.063W	1	
	R25025	D1BB2700A055	M 270 OHM, 1/10W	1	
	R25026	D1BB2700A055	M 270 OHM, 1/10W	1	
	R25049	ERJ2GEJ470	M 47 OHM, J,0.063W	1	
	R25050	ERJ2GEJ470	M 47 OHM, J,0.063W	1	
	R25051	ERJ2GEJ470	M 47 OHM, J,0.063W	1	
	R25052	ERJ2GEJ470	M 47 OHM, J,0.063W	1	
	R25053	ERJ2GEJ470	M 47 OHM, J,0.063W	1	
	R25054	ERJ2GEJ470	M 47 OHM, J,0.063W	1	
	R25055	ERJ2GEJ470	M 47 OHM, J,0.063W	1	
	R25056	ERJ2GEJ470	M 47 OHM, J,0.063W	1	
	R25057	ERJ2GEJ470	M 47 OHM, J,0.063W	1	
	R25058	ERJ2GEJ470	M 47 OHM, J,0.063W	1	
	R25059	ERJ2GEJ470	M 47 OHM, J,0.063W	1	
	R25060	ERJ2GEJ470	M 47 OHM, J,0.063W	1	
	R25061	ERJ2GEJ470	M 47 OHM, J,0.063W	1	

Safety	Ref. No.	Part No.	Part Name & Description	Pcs	Remarks
	R25062	ERJ2GEJ470	M 47 OHM, J,0.063W	1	
	R25063	ERJ2GEJ470	M 47 OHM, J,0.063W	1	
	R25064	ERJ2GEJ470	M 47 OHM, J,0.063W	1	
	R25065	ERJ2GEJ470	M 47 OHM, J,0.063W	1	
	R25066	ERJ2GEJ470	M 47 OHM, J,0.063W	1	
	R25067	ERJ2GEJ221	M 220 OHM, J,0.063W	1	
	R25068	ERJ2GEJ470	M 47 OHM, J,0.063W	1	
	R25070	ERJ2GEJ470	M 47 OHM, J,0.063W	1	
	R25071	ERJ2GEJ470	M 47 OHM, J,0.063W	1	
	R25074	ERJ2GEJ103	M 10KOHM, J,0.063W	1	
	R25075	ERJ2RKF75R0	M 75 OHM, , 0.063W	1	
	R25076	ERJ2GEJ301	M 300 OHM, J,0.063W	1	
	R25077	D0YAR0000007	M 0 OHM 1/4W	1	
	R25078	ERJ2GEJ221	M 220 OHM, J,0.063W	1	
	R25079	ERJ2GEJ103	M 10KOHM, J,0.063W	1	
	R25080	ERJ2GEJ103	M 10KOHM, J,0.063W	1	
	R25082	ERJ2GEJ103	M 10KOHM, J,0.063W	1	
	R25087	EXB2HV680J	RESISTOR ARRAY	1	
	R25088	ERJ3GEYJ680	M 68 OHM,J,1/16W	1	
	R25089	ERJ2GEJ101	M 100 OHM, J,0.063W	1	
	R25092	D0GBR00Z0002	M 0 OHM J 1/16W	1	
	R25093	ERJ2GEJ680	M 68 OHM, J,0.063W	1	
	R25094	ERJ2GEJ101	M 100 OHM, J,0.063W	1	
	R25096	ERJ2GEJ101	M 100 OHM, J,0.063W	1	
	R25097	ERJ2GEJ101	M 100 OHM, J,0.063W	1	
	R25098	ERJ2GEJ101	M 100 OHM, J,0.063W	1	
	R25099	ERJ2GEJ101	M 100 OHM, J,0.063W	1	
	R25100	ERJ2GEJ101	M 100 OHM, J,0.063W	1	
	R25101	ERJ2GEJ101	M 100 OHM, J,0.063W	1	
	R25102	D0GB103JA041	M 10K OHM J 1/ 16W	1	
	R25103	D0YAR0000007	M 0 OHM 1/4W	1	
	R25104	ERJ2GEJ472	M 4.7KOHM, J,0.063W	1	
	R25105	ERJ2GEJ472	M 4.7KOHM, J,0.063W	1	
	R25106	ERJ2GEJ101	M 100 OHM, J,0.063W	1	
	R25107	ERJ2GEJ101	M 100 OHM, J,0.063W	1	
	R25108	ERJ2GEJ101	M 100 OHM, J,0.063W	1	
	R25109	ERJ2GEJ101	M 100 OHM, J,0.063W	1	
	R25110	D0GB103JA041	M 10K OHM J 1/ 16W	1	
	R25111	ERJ2GEJ222	M 2.2KOHM, J,0.063W	1	
	R25112	ERJ2GEJ472	M 4.7KOHM, J,0.063W	1	
	R25113	ERJ2GEJ152	M 1.5KOHM, J,0.063W	1	
	R25114	ERJ2GEJ222	M 2.2KOHM, J,0.063W	1	

Safety	Ref. No.	Part No.	Part Name & Description	Pcs	Remarks
	R25117	ERJ2GEJ221	M 220 OHM, J,0.063W	1	
	R25119	ERJ6GEYJ102V	M 1K OHM J 1/10W	1	
	R25120	ERJ6GEYJ104V	M 100KOHM,J,1/ 10W	1	
	R25121	ERJ6GEYJ472V	M 4.7K OHM J 1/ 10W	1	
	R25122	ERJ6GEYJ472V	M 4.7K OHM J 1/ 10W	1	
	R25123	ERJ6GEYJ472V	M 4.7K OHM J 1/ 10W	1	
	R25124	ERJ6GEYJ472V	M 4.7K OHM J 1/ 10W	1	
	R25125	ERJ6GEYJ472V	M 4.7K OHM J 1/ 10W	1	
	R25126	ERJ6GEYJ472V	M 4.7K OHM J 1/ 10W	1	
	R25127	D0GB103JA041	M 10K OHM J 1/ 16W	1	
	R25128	ERJ2GEJ560X	M 56 OHM, J,0.063W	1	
	R25130	ERJ2GEJ222	M 2.2KOHM, J,0.063W	1	
	R25131	ERJ2GEJ472	M 4.7KOHM, J,0.063W	1	
	R25132	D0GB103JA041	M 10K OHM J 1/ 16W	1	
	R25133	ERJ2GEJ473	M 47KOHM, J,0.063W	1	
	R25148	ERJ2GEJ470	M 47 OHM, J,0.063W	1	
	R25149	ERJ2GEJ470	M 47 OHM, J,0.063W	1	
	R25150	ERJ2GEJ470	M 47 OHM, J,0.063W	1	
	R25151	ERJ2GEJ103	M 10KOHM, J,0.063W	1	
	R25152	ERJ2GEJ470	M 47 OHM, J,0.063W	1	
	R25153	ERJ2GEJ470	M 47 OHM, J,0.063W	1	
	R25176	ERJ2GEJ680	M 68 OHM, J,0.063W	1	
	R25177	ERJ2GEJ680	M 68 OHM, J,0.063W	1	
	R25178	ERJ2GEJ560X	M 56 OHM, J,0.063W	1	
	R25179	EXB2HV680J	RESISTOR ARRAY	1	
	R25180	EXB2HV680J	RESISTOR ARRAY	1	
	R25184	EXB2HV560JV	RESISTOR ARRAY	1	
	R25185	EXB2HV560JV	RESISTOR ARRAY	1	
	R25187	ERJ2GEJ104	M 100KOHM, J,0.063W	1	
	R25188	ERJ2GEJ104	M 100KOHM, J,0.063W	1	
	R25189	ERJ2GEJ104	M 100KOHM, J,0.063W	1	
	R25200	ERJ2GEJ680	M 68 OHM, J,0.063W	1	
	R25201	ERJ2GEJ680	M 68 OHM, J,0.063W	1	
	R25202	ERJ2GEJ680	M 68 OHM, J,0.063W	1	
	R25203	ERJ2GEJ680	M 68 OHM, J,0.063W	1	
	R25204	ERJ2GEJ472	M 4.7KOHM, J,0.063W	1	
	R25206	ERJ2GEJ472	M 4.7KOHM, J,0.063W	1	
	R25207	ERJ2GEJ472	M 4.7KOHM, J,0.063W	1	
	R25208	ERJ2GEJ105	M 1MOHM, J,0.063W	1	
	R25209	ERJ2GEJ221	M 220 OHM, J,0.063W	1	
	R25210	ERJ2GEJ103	M 10KOHM, J,0.063W	1	
	R25211	ERJ2GEJ103	M 10KOHM, J,0.063W	1	

Safety	Ref. No.	Part No.	Part Name & Description	Pcs	Remarks
	R25213	ERJ2GEJ222	M 2.2KOHM, J,0.063W	1	
	R25223	ERJ2GEJ101	M 100 OHM, J,0.063W	1	
	R25224	ERJ2GEJ103	M 10KOHM, J,0.063W	1	
	R25225	ERJ2GEJ680	M 68 OHM, J,0.063W	1	
	R25227	ERJ2GEJ103	M 10KOHM, J,0.063W	1	
	R25230	ERJ2GEJ103	M 10KOHM, J,0.063W	1	
	R25231	EXB2HV680J	RESISTOR ARRAY	1	
	R25232	EXB2HV680J	RESISTOR ARRAY	1	
	R25324	ERJ2GEJ473	M 47KOHM, J,0.063W	1	
	R25329	D1BB2101A055	M 2.1KOHM, 1/10W	1	
	R25330	D1BB3301A055	M 3.3KOHM, 1/16W	1	
	R25331	D1BB3901A055	M 3.9KOHM, 1/10W	1	
	R25332	D1BB4021A055	M 4.2KOHM, 1/16W	1	
	R25333	D1BB1602A055	M 16KOHM, 1/10W	1	
	R25334	D1BB1602A055	M 16KOHM, 1/10W	1	
	R25335	ERJ2GEJ5R6X	M 5.6 OHM, J,0.063W	1	
	R25336	D0GBR00Z0002	M 0 OHM J 1/16W	1	
	R25337	D0GBR00Z0002	M 0 OHM J 1/16W	1	
	R25460	ERJ2GEJ101	M 100 OHM, J,0.063W	1	
	R25461	ERJ2GEJ103	M 10KOHM, J,0.063W	1	
	R25462	ERJ2GEJ104	M 100KOHM, J,0.063W	1	
	R25463	ERJ2GEJ473	M 47KOHM, J,0.063W	1	
	R25470	ERJ2GEJ222	M 2.2KOHM, J,0.063W	1	
	R25471	ERJ2GEJ101	M 100 OHM, J,0.063W	1	
	R25472	ERJ2GEJ470	M 47 OHM, J,0.063W	1	
	R25473	ERJ2GEJ473	M 47KOHM, J,0.063W	1	
	R25474	ERJ2GEJ103	M 10KOHM, J,0.063W	1	
	R25475	ERJ2GEJ123	M 12KOHM ,J,0.063W	1	
	R25485	ERJ2GEJ101	M 100 OHM, J,0.063W	1	
	R25486	ERJ2GEJ103	M 10KOHM, J,0.063W	1	
	R25493	ERJ2GEJ472	M 4.7KOHM, J,0.063W	1	
	R25494	ERJ2GEJ103	M 10KOHM, J,0.063W	1	
	R25496	ERJ2RKD330	M 33 OHM, J, 2W	1	
	R25497	ERJ2GEJ680	M 68 OHM, J,0.063W	1	
	R25581	ERJ2GEJ473	M 47KOHM, J,0.063W	1	
	R25603	D1BB2002A055	M 20KOHM, 1/10W	1	
	R25604	D1BB3901A055	M 3.9KOHM, 1/10W	1	
	R25605	D1BB2201A055	M 2.2KOHM, 1/10W	1	
	R25610	ERJ2GEJ5R6X	M 5.6 OHM, J,0.063W	1	
	R25629	D1BB2101A055	M 2.1KOHM, 1/10W	1	
	R25630	D1BB3301A055	M 3.3KOHM, 1/16W	1	
	R25631	D1BB3901A055	M 3.9KOHM, 1/10W	1	
	R25632	D1BB4021A055	M 4.2KOHM, 1/16W	1	
	R25633	D1BB1602A055	M 16KOHM, 1/10W	1	
	R25634	D1BB1602A055	M 16KOHM, 1/10W	1	
	R25635	ERJ2GEJ5R6X	M 5.6 OHM, J,0.063W	1	
	R25636	D0GB104JA041	M 100KOHM J 1/ 16W	1	
	R25638	D1BB2402A055	M 24KOHM, 1/10W	1	
	R25639	D1BB3901A055	M 3.9KOHM, 1/10W	1	
	R25649	ERJ2GEJ223	M 22KOHM, J,0.063W	1	

Safety	Ref. No.	Part No.	Part Name & Description	Pcs	Remarks
	R25650	ERJ2GEJ683	M 68KOHM, J,0.063W	1	
	R25651	ERJ2GEJ103	M 10KOHM, J,0.063W	1	
	R25652	ERJ2GEJ473	M 47KOHM, J,0.063W	1	
	R25653	ERJ2GEJ222	M 2.2KOHM, J,0.063W	1	
	R25654	ERJ2GEJ103	M 10KOHM, J,0.063W	1	
	R25655	ERJ2GEJ473	M 47KOHM, J,0.063W	1	
	R25656	D0GBR00Z0002	M 0 OHM J 1/16W	1	
	R25658	D1BB1202A055	M 12KOHM, 1/10W	1	
	R28004	D1BB2402A055	M 24KOHM, 1/10W	1	
	R28005	D1BB1002A055	M 10KOHM, 1/10W	1	
	R28006	D1BB2402A055	M 24KOHM, 1/10W	1	
	R28007	D0GBR00Z0002	M 0 OHM J 1/16W	1	
	R28026	D0YAR0000007	M 0 OHM 1/4W	1	
	R28027	D0YAR0000007	M 0 OHM 1/4W	1	
	R28030	ERJ2GEJ101	M 100 OHM, J,0.063W	1	
	R28031	ERJ2RKF2700	M 270 OHM, 0.063W	1	
	R28032	ERJ2RKF2700	M 270 OHM, 0.063W	1	
	R28056	ERJ2GEJ470	M 47 OHM, J,0.063W	1	
	R28057	ERJ2GEJ470	M 47 OHM, J,0.063W	1	
	R28058	ERJ2GEJ470	M 47 OHM, J,0.063W	1	
	R28059	ERJ2GEJ470	M 47 OHM, J,0.063W	1	
	R28060	ERJ2GEJ470	M 47 OHM, J,0.063W	1	
	R28061	ERJ2GEJ470	M 47 OHM, J,0.063W	1	
	R28062	ERJ2GEJ470	M 47 OHM, J,0.063W	1	
	R28063	ERJ2GEJ470	M 47 OHM, J,0.063W	1	
	R28064	ERJ2GEJ470	M 47 OHM, J,0.063W	1	
	R28065	ERJ2GEJ470	M 47 OHM, J,0.063W	1	
	R28066	ERJ2GEJ470	M 47 OHM, J,0.063W	1	
	R28067	ERJ2GEJ470	M 47 OHM, J,0.063W	1	
	R28068	ERJ2GEJ470	M 47 OHM, J,0.063W	1	
	R28069	ERJ2GEJ470	M 47 OHM, J,0.063W	1	
	R28070	ERJ2GEJ470	M 47 OHM, J,0.063W	1	
	R28071	ERJ2GEJ470	M 47 OHM, J,0.063W	1	
	R28072	ERJ2GEJ470	M 47 OHM, J,0.063W	1	
	R28073	ERJ2GEJ470	M 47 OHM, J,0.063W	1	
	R28074	ERJ2GEJ221	M 220 OHM, J,0.063W	1	
	R28075	ERJ2GEJ470	M 47 OHM, J,0.063W	1	
	R28076	ERJ2GEJ470	M 47 OHM, J,0.063W	1	
	R28077	ERJ2GEJ470	M 47 OHM, J,0.063W	1	
	R28078	ERJ2GEJ470	M 47 OHM, J,0.063W	1	
	R28081	ERJ2GEJ102X	M 1K OHM J 1/4W	1	
	R28082	ERJ2RKF75R0	M 75 OHM, , 0.063W	1	
	R28083	ERJ2GEJ301	M 300 OHM, J,0.063W	1	
	R28086	ERJ2GEJ104	M 100KOHM, J,0.063W	1	

Safety	Ref. No.	Part No.	Part Name & Description	Pcs	Remarks
	R28088	ERJ2GEJ103	M 10KOHM, J,0.063W	1	
	R28090	ERJ2GEJ103	M 10KOHM, J,0.063W	1	
	R28091	ERJ2GEJ470	M 47 OHM, J,0.063W	1	
	R28092	ERJ2GEJ820	M 82 OHM, J,0.063W	1	
	R28093	ERJ2GEJ470	M 47 OHM, J,0.063W	1	
	R28095	ERJ2GEJ103	M 10KOHM, J,0.063W	1	
	R28096	ERJ2GEJ820	M 82 OHM, J,0.063W	1	
	R28097	ERJ2GEJ221	M 220 OHM, J,0.063W	1	
	R28100	ERJ2GEJ470	M 47 OHM, J,0.063W	1	
	R28101	ERJ2GEJ103	M 10KOHM, J,0.063W	1	
	R28105	ERJ2GEJ103	M 10KOHM, J,0.063W	1	
	R28106	ERJ2GEJ103	M 10KOHM, J,0.063W	1	
	R28107	ERJ2GEJ103	M 10KOHM, J,0.063W	1	
	R28109	ERJ2GEJ222	M 2.2KOHM, J,0.063W	1	
	R28114	ERJ2GEJ473	M 47KOHM, J,0.063W	1	
	R28115	ERJ2GEJ473	M 47KOHM, J,0.063W	1	
	R28260	ERJ2GEJ222	M 2.2KOHM, J,0.063W	1	
	R28412	ERJ2GEJ103	M 10KOHM, J,0.063W	1	
	R28413	ERJ2GEJ103	M 10KOHM, J,0.063W	1	
	R28493	ERJ2GEJ680	M 68 OHM, J,0.063W	1	
	R28494	ERJ2GEJ222	M 2.2KOHM, J,0.063W	1	
	R28496	ERJ2GEJ222	M 2.2KOHM, J,0.063W	1	
	R28501	ERJ2GEJ101	M 100 OHM, J,0.063W	1	
	R28502	ERJ2GEJ331	M 330 OHM, J,0.063W	1	
	R28503	ERJ2GEJ331	M 330 OHM, J,0.063W	1	
	R28504	ERJ2GEJ331	M 330 OHM, J,0.063W	1	
	R28506	ERJ2GEJ331	M 330 OHM, J,0.063W	1	
	R28508	ERJ2GEJ680	M 68 OHM, J,0.063W	1	
	R28510	D1BB1600A055	M 160 OHM, 1/10W	1	
	R28511	ERJ2GEJ472	M 4.7KOHM, J,0.063W	1	
	R28514	ERJ2GEJ680	M 68 OHM, J,0.063W	1	
	R28515	ERJ2GEJ222	M 2.2KOHM, J,0.063W	1	
	R28516	ERJ2GEJ222	M 2.2KOHM, J,0.063W	1	
	R28517	ERJ2GEJ103	M 10KOHM, J,0.063W	1	
	R28520	ERJ2GEJ103	M 10KOHM, J,0.063W	1	
	R28558	ERJ2GEJ680	M 68 OHM, J,0.063W	1	
	R28575	ERJ2GEJ680	M 68 OHM, J,0.063W	1	
	R28576	ERJ2GEJ680	M 68 OHM, J,0.063W	1	
	R28577	ERJ2GEJ680	M 68 OHM, J,0.063W	1	
	R28578	ERJ2GEJ680	M 68 OHM, J,0.063W	1	
	R28579	ERJ2GEJ680	M 68 OHM, J,0.063W	1	

Safety	Ref. No.	Part No.	Part Name & Description	Pcs	Remarks
	R28580	ERJ2GEJ680	M 68 OHM, J,0.063W	1	
	R28581	ERJ2GEJ103	M 10KOHM, J,0.063W	1	
	R28582	ERJ2GEJ680	M 68 OHM, J,0.063W	1	
	R28585	ERJ2GEJ680	M 68 OHM, J,0.063W	1	
	R28608	ERJ2GEJ680	M 68 OHM, J,0.063W	1	
	R28609	ERJ2GEJ103	M 10KOHM, J,0.063W	1	
	R28610	ERJ2GEJ680	M 68 OHM, J,0.063W	1	
	R28611	ERJ2GEJ680	M 68 OHM, J,0.063W	1	
	R28612	ERJ2GEJ680	M 68 OHM, J,0.063W	1	
	R28613	ERJ2GEJ680	M 68 OHM, J,0.063W	1	
	R28614	ERJ2GEJ680	M 68 OHM, J,0.063W	1	
	R28615	ERJ2GEJ680	M 68 OHM, J,0.063W	1	
	R28616	ERJ2GEJ680	M 68 OHM, J,0.063W	1	
	R28617	ERJ2GEJ680	M 68 OHM, J,0.063W	1	
	R28618	ERJ2GEJ103	M 10KOHM, J,0.063W	1	
	R28619	ERJ2GEJ103	M 10KOHM, J,0.063W	1	
	R28620	ERJ2GEJ103	M 10KOHM, J,0.063W	1	
	R28626	ERJ2GEJ680	M 68 OHM, J,0.063W	1	
	R28627	ERJ2GEJ680	M 68 OHM, J,0.063W	1	
	R28628	ERJ2GEJ103	M 10KOHM, J,0.063W	1	
	R28629	ERJ2GEJ103	M 10KOHM, J,0.063W	1	
	R28630	ERJ2GEJ103	M 10KOHM, J,0.063W	1	
	R28637	ERJ2GEJ680	M 68 OHM, J,0.063W	1	
	R28638	ERJ2GEJ680	M 68 OHM, J,0.063W	1	
	R28639	ERJ2GEJ680	M 68 OHM, J,0.063W	1	
	R28640	ERJ2GEJ103	M 10KOHM, J,0.063W	1	
	R28641	ERJ2GEJ103	M 10KOHM, J,0.063W	1	
	R28642	ERJ2GEJ103	M 10KOHM, J,0.063W	1	
	R28644	D0YAR0000007	M 0 OHM 1/4W	1	
	R28645	ERJ2GEJ680	M 68 OHM, J,0.063W	1	
	R28646	ERJ2GEJ680	M 68 OHM, J,0.063W	1	
	R28647	ERJ2GEJ680	M 68 OHM, J,0.063W	1	
	R28648	EXB2HV103JV	RESISTOR ARRAY	1	
	R28649	EXB2HV103JV	RESISTOR ARRAY	1	
	R28650	ERJ2GEJ222	M 2.2KOHM, J,0.063W	1	
	R28651	ERJ2GEJ680	M 68 OHM, J,0.063W	1	
	R28653	ERJ2GEJ680	M 68 OHM, J,0.063W	1	
	R28654	ERJ2GEJ103	M 10KOHM, J,0.063W	1	
	R28658	ERJ2GEJ103	M 10KOHM, J,0.063W	1	
	R28661	ERJ2GEJ103	M 10KOHM, J,0.063W	1	
	R28663	ERJ2GEJ103	M 10KOHM, J,0.063W	1	

Safety	Ref. No.	Part No.	Part Name & Description	Pcs	Remarks
	R28666	ERJ2GEJ103	M 10KOHM, J,0.063W	1	
	R28667	ERJ2GEJ680	M 68 OHM, J,0.063W	1	
	R28672	EXB2HV680J	RESISTOR ARRAY	1	
	R28673	EXB2HV680J	RESISTOR ARRAY	1	
	R28674	EXB2HV103JV	RESISTOR ARRAY	1	
	R28676	ERJ2GEJ103	M 10KOHM, J,0.063W	1	
	R28677	ERJ2GEJ222	M 2.2KOHM, J,0.063W	1	
	R28683	ERJ2GEJ680	M 68 OHM, J,0.063W	1	
	R28688	EXB2HV680J	RESISTOR ARRAY	1	
	R28689	EXB2HV680J	RESISTOR ARRAY	1	
	R28690	EXB2HV680J	RESISTOR ARRAY	1	
	R28692	ERJ2GEJ680	M 68 OHM, J,0.063W	1	
	R28716	ERJ2GEJ103	M 10KOHM, J,0.063W	1	
	R28718	ERJ2GEJ103	M 10KOHM, J,0.063W	1	
	R28723	ERJ2GEJ103	M 10KOHM, J,0.063W	1	
	R28746	ERJ2GEJ103	M 10KOHM, J,0.063W	1	
	R28747	ERJ2GEJ103	M 10KOHM, J,0.063W	1	
	R28751	ERJ2GEJ103	M 10KOHM, J,0.063W	1	
	R28765	ERJ2GEJ103	M 10KOHM, J,0.063W	1	
	R28767	ERJ2GEJ103	M 10KOHM, J,0.063W	1	
	R28771	ERJ2GEJ103	M 10KOHM, J,0.063W	1	
	R28776	ERJ2GEJ103	M 10KOHM, J,0.063W	1	
	R28777	ERJ2GEJ103	M 10KOHM, J,0.063W	1	
	R28778	ERJ2GEJ103	M 10KOHM, J,0.063W	1	
	R28802	D0GBR00Z0002	M 0 OHM J 1/16W	1	
	R28803	D0GBR00Z0002	M 0 OHM J 1/16W	1	
	R28804	D0GBR00Z0002	M 0 OHM J 1/16W	1	
	R28805	D0GBR00Z0002	M 0 OHM J 1/16W	1	
	R28806	D0GBR00Z0002	M 0 OHM J 1/16W	1	
	R28807	D0GBR00Z0002	M 0 OHM J 1/16W	1	
	R28898	ERJ2GEJ103	M 10KOHM, J,0.063W	1	
	R28959	ERJ2GEJ680	M 68 OHM, J,0.063W	1	
	R28960	ERJ2GEJ680	M 68 OHM, J,0.063W	1	
	R28963	ERJ2GEJ103	M 10KOHM, J,0.063W	1	
	R29070	ERJ2GEJ103	M 10KOHM, J,0.063W	1	
	R29071	ERJ2GEJ223	M 22KOHM, J,0.063W	1	
	R29072	ERJ2GEJ102X	M 1K OHM J 1/4W	1	
	R29073	ERJ2GEJ472	M 4.7KOHM, J,0.063W	1	
	R29077	D1BB1102A055	M 11KOHM, 1/10W	1	
	R29078	D1BB4302A055	M 43KOHM, 1/10W	1	
	R29079	D1BB2702A055	M 27KOHM, 1/10W	1	
	R29080	D1BB1502A055	M 15KOHM, 1/10W	1	
	R29081	D1BB4702A055	M 47KOHM, 1/10W	1	
	R29083	D0YAR0000007	M 0 OHM 1/4W	1	
	R29084	D0YAR0000007	M 0 OHM 1/4W	1	
	R29085	ERJ2GEJ470	M 47 OHM, J,0.063W	1	
	R29086	ERJ2GEJ470	M 47 OHM, J,0.063W	1	
	R29087	ERJ2GEJ101	M 100 OHM, J,0.063W	1	
	R29088	D1BB1802A055	M 18KOHM, 1/10W	1	
	R29089	D1BB1502A055	M 15KOHM, 1/10W	1	

Safety	Ref. No.	Part No.	Part Name & Description	Pcs	Remarks
	R29091	D1BB2702A055	M 27KOHM, 1/10W	1	
	R29092	D1BB1202A055	M 12KOHM, 1/10W	1	
	R29095	ERJ2GEJ103	M 10KOHM, J,0.063W	1	
	R29096	ERJ2GEJ472	M 4.7KOHM, J,0.063W	1	
	R29097	ERJ2GEJ472	M 4.7KOHM, J,0.063W	1	
	R29098	ERJ2GEJ472	M 4.7KOHM, J,0.063W	1	
	R29099	ERJ2GEJ101	M 100 OHM, J,0.063W	1	
	R29100	ERJ2GEJ473	M 47KOHM, J,0.063W	1	
	R29101	ERJ2GEJ333	M 33KOHM, J,0.063W	1	
	R29102	ERJ2GEJ101	M 100 OHM, J,0.063W	1	
	R29103	ERJ2GEJ473	M 47KOHM, J,0.063W	1	
	R29104	ERJ2GEJ472	M 4.7KOHM, J,0.063W	1	
	R29105	ERJ2GEJ103	M 10KOHM, J,0.063W	1	
	R29106	ERJ2GEJ104	M 100KOHM, J,0.063W	1	
	R29107	ERJ2GEJ332	M 3.3KOHM, J,0.063W	1	
	R29108	ERJ2GEJ103	M 10KOHM, J,0.063W	1	
	R29109	ERJ2GEJ103	M 10KOHM, J,0.063W	1	
	R29110	ERJ2GEJ101	M 100 OHM, J,0.063W	1	
	R29113	ERJ2GEJ104	M 100KOHM, J,0.063W	1	
	R29115	ERJ2GEJ101	M 100 OHM, J,0.063W	1	
	R29116	ERJ2GEJ101	M 100 OHM, J,0.063W	1	
	R29119	EXB38V470J	RESISTOR ARRAY	1	
	R29120	ERJ2GEJ101	M 100 OHM, J,0.063W	1	
	R29121	ERJ2GEJ104	M 100KOHM, J,0.063W	1	
	R29122	ERJ2RKF4300	M 430 OHM, 0.063W	1	
	R29124	ERJ2GEJ470	M 47 OHM, J,0.063W	1	
	R29129	ERJ2GEJ683	M 68KOHM, J,0.063W	1	
	R29130	ERJ2GEJ470	M 47 OHM, J,0.063W	1	
	R29142	ERJ2GEJ101	M 100 OHM, J,0.063W	1	
	R29145	ERJ2GEJ101	M 100 OHM, J,0.063W	1	
	R29149	ERJ2GEJ472	M 4.7KOHM, J,0.063W	1	
	R29152	ERJ2GEJ103	M 10KOHM, J,0.063W	1	
	R29153	ERJ2GEJ103	M 10KOHM, J,0.063W	1	
	R29154	ERJ2RHD272	M 2.7KOHM, J, 2W	1	
	R29155	ERJ2RHD272	M 2.7KOHM, J, 2W	1	
	R29164	ERJ2GEJ103	M 10KOHM, J,0.063W	1	
	R29166	ERJ2GEJ103	M 10KOHM, J,0.063W	1	
	R29187	ERJ2RHD272	M 2.7KOHM, J, 2W	1	
	R29188	ERJ2RHD272	M 2.7KOHM, J, 2W	1	
	R29189	ERJ2GEJ103	M 10KOHM, J,0.063W	1	
	R29202	ERJ2GEJ101	M 100 OHM, J,0.063W	1	
	R29203	ERJ2GEJ223	M 22KOHM, J,0.063W	1	
	R29205	ERJ2GEJ333	M 33KOHM, J,0.063W	1	

Safety	Ref. No.	Part No.	Part Name & Description	Pcs	Remarks
	R29206	ERJ2GED563X	M 56KOHM ,J,0.063W	1	
	R29207	ERJ2GEJ243	M 24KOHM, J,0.063W	1	
	R29208	EXB2HVR000	RESISTOR ARRAY	1	
	R29209	EXB2HVR000	RESISTOR ARRAY	1	
	R29211	D0GDR00Z0002	M 0 OHM, 1/10W	1	
	R29212	ERJ2GEJ470	M 47 OHM, J,0.063W	1	
	R29213	ERJ2GEJ470	M 47 OHM, J,0.063W	1	
	R29215	ERJ2GEJ104	M 100KOHM, J,0.063W	1	
	R29216	D0YAR0000007	M 0 OHM 1/4W	1	
	R29222	D0GDR00Z0002	M 0 OHM, 1/10W	1	
	R29223	ERJ2RHD272	M 2.7KOHM, J, 2W	1	
	R29225	ERJ2RHD272	M 2.7KOHM, J, 2W	1	
	R29226	D0YAR0000007	M 0 OHM 1/4W	1	
	R29227	D0YAR0000007	M 0 OHM 1/4W	1	
	R29228	ERJ2GEJ470	M 47 OHM, J,0.063W	1	
	R29229	ERJ2GEJ470	M 47 OHM, J,0.063W	1	
	R29234	ERJ2GEJ101	M 100 OHM, J,0.063W	1	
	R29235	ERJ2GEJ101	M 100 OHM, J,0.063W	1	
	R29236	ERJ2GEJ101	M 100 OHM, J,0.063W	1	
	R29237	ERJ2GEJ101	M 100 OHM, J,0.063W	1	
	R29238	ERJ2GEJ101	M 100 OHM, J,0.063W	1	
	R29239	ERJ2GEJ101	M 100 OHM, J,0.063W	1	
	R29240	ERJ2GEJ101	M 100 OHM, J,0.063W	1	
	R29241	ERJ2GEJ101	M 100 OHM, J,0.063W	1	
	R29242	ERJ2GEJ101	M 100 OHM, J,0.063W	1	
	R29243	ERJ2GEJ101	M 100 OHM, J,0.063W	1	
	R29245	ERJ2GEJ101	M 100 OHM, J,0.063W	1	
	R29246	ERJ2GEJ101	M 100 OHM, J,0.063W	1	
	R29249	ERJ2RHD272	M 2.7KOHM, J, 2W	1	
	R29250	ERJ2RHD272	M 2.7KOHM, J, 2W	1	
	R29369	ERJ2GEJ472	M 4.7KOHM, J,0.063W	1	
	R29370	ERJ2GEJ103	M 10KOHM, J,0.063W	1	
	R29371	ERJ2GEJ104	M 100KOHM, J,0.063W	1	
	R29385	ERJ2GEJ472	M 4.7KOHM, J,0.063W	1	
	R29391	ERJ2GEJ104	M 100KOHM, J,0.063W	1	
	R29398	ERJ2GEJ301	M 300 OHM, J,0.063W	1	
	R29399	ERJ2RKF75R0	M 75 OHM, , 0.063W	1	
	R29400	ERJ2GEJ472	M 4.7KOHM, J,0.063W	1	
	R29401	ERJ2GEJ221	M 220 OHM, J,0.063W	1	
	R29402	ERJ2GEJ470	M 47 OHM, J,0.063W	1	
	R29403	ERJ2GEJ103	M 10KOHM, J,0.063W	1	
	R29404	ERJ2GEJ470	M 47 OHM, J,0.063W	1	
	R29405	ERJ2GEJ470	M 47 OHM, J,0.063W	1	
	R29406	ERJ2GEJ470	M 47 OHM, J,0.063W	1	
	R29407	ERJ2GEJ470	M 47 OHM, J,0.063W	1	

Safety	Ref. No.	Part No.	Part Name & Description	Pcs	Remarks
	R29408	ERJ2GEJ470	M 47 OHM, J,0.063W	1	
	R29409	ERJ2GEJ470	M 47 OHM, J,0.063W	1	
	R29410	ERJ2GEJ470	M 47 OHM, J,0.063W	1	
	R29411	ERJ2GEJ470	M 47 OHM, J,0.063W	1	
	R29412	ERJ2GEJ470	M 47 OHM, J,0.063W	1	
	R29413	ERJ2GEJ470	M 47 OHM, J,0.063W	1	
	R29414	ERJ2GEJ470	M 47 OHM, J,0.063W	1	
	R29415	ERJ2GEJ470	M 47 OHM, J,0.063W	1	
	R29416	ERJ2GEJ470	M 47 OHM, J,0.063W	1	
	R29417	ERJ2GEJ470	M 47 OHM, J,0.063W	1	
	R29418	ERJ2GEJ470	M 47 OHM, J,0.063W	1	
	R29419	ERJ2GEJ470	M 47 OHM, J,0.063W	1	
	R29420	ERJ2GEJ470	M 47 OHM, J,0.063W	1	
	R29421	ERJ2GEJ470	M 47 OHM, J,0.063W	1	
	R29422	ERJ2GEJ470	M 47 OHM, J,0.063W	1	
	R29423	ERJ2GEJ470	M 47 OHM, J,0.063W	1	
	R29424	ERJ2GEJ470	M 47 OHM, J,0.063W	1	
	R29425	EXB2HV151J	RESISTOR ARRAY	1	
	R29426	EXB2HV151J	RESISTOR ARRAY	1	
	R29578	ERJ2GEJ472	M 4.7KOHM, J,0.063W	1	
	R29586	ERJ2GEJ470	M 47 OHM, J,0.063W	1	
	R29587	ERJ2GEJ470	M 47 OHM, J,0.063W	1	
	R29592	ERJ2GEJ103	M 10KOHM, J,0.063W	1	
	R29594	ERJ2GEJ103	M 10KOHM, J,0.063W	1	
	R29598	ERJ2GEJ470	M 47 OHM, J,0.063W	1	
	R29604	ERJ2GEJ103	M 10KOHM, J,0.063W	1	
	R29608	EXB2HV470JV	RESISTOR ARRAY	1	
	R29609	EXB2HV470JV	RESISTOR ARRAY	1	
	R29610	EXB2HV470JV	RESISTOR ARRAY	1	
	R29611	ERJ2GEJ680	M 68 OHM, J,0.063W	1	
	R29616	ERJ2GEJ470	M 47 OHM, J,0.063W	1	
	R29618	ERJ2GEJ331	M 330 OHM, J,0.063W	1	
	R29839	EXB38V101JV	RESISTOR ARRAY	1	
	R29848	EXB2HV470JV	RESISTOR ARRAY	1	
	R29849	EXB2HV470JV	RESISTOR ARRAY	1	
	R29868	ERJ2GEJ104	M 100KOHM, J,0.063W	1	
	R29871	ERJ2GEJ103	M 10KOHM, J,0.063W	1	
	R29872	D1BB1002A055	M 10KOHM, 1/10W	1	
	R29873	ERJ14YJ220U	M 22 OHM, J,1/4W	1	
	R29874	ERJ14YJ220U	M 22 OHM, J,1/4W	1	
	R29893	D1BB5602A055	M 56KOHM, 1/10W	1	
	R29894	D1BB1802A055	M 18KOHM, 1/10W	1	
	R29897	ERJ2GEJ103	M 10KOHM, J,0.063W	1	
	R29898	ERJ2GEJ103	M 10KOHM, J,0.063W	1	
	R29899	ERJ2GEJ103	M 10KOHM, J,0.063W	1	
	R29900	ERJ14YJ220U	M 22 OHM, J,1/4W	1	
	R29902	ERJ14YJ220U	M 22 OHM, J,1/4W	1	

Safety	Ref. No.	Part No.	Part Name & Description	Pcs	Remarks
	R29966	ERJ2GEJ391	M 390 OHM, J,0.063W	1	
	R29967	ERJ2GEJ470	M 47 OHM, J,0.063W	1	
	R29968	ERJ2GEJ470	M 47 OHM, J,0.063W	1	
	R29969	ERJ2GEJ470	M 47 OHM, J,0.063W	1	
	R29970	ERJ2GEJ470	M 47 OHM, J,0.063W	1	
	R29975	ERJ2GEJ470	M 47 OHM, J,0.063W	1	
	R29977	ERJ2GEJ470	M 47 OHM, J,0.063W	1	
	R29983	ERJ2GEJ470	M 47 OHM, J,0.063W	1	
	R29987	ERJ2GEJ470	M 47 OHM, J,0.063W	1	
	R29988	ERJ2GEJ470	M 47 OHM, J,0.063W	1	
	R29989	ERJ2GEJ470	M 47 OHM, J,0.063W	1	
	R29996	ERJ2RKF1001	M 1KOHM, 0.063W	1	
	R29997	ERJ2RKF1001	M 1KOHM, 0.063W	1	
	R29998	ERJ2GEJ221	M 220 OHM, J,0.063W	1	
	R29999	ERJ2GEJ103	M 10KOHM, J,0.063W	1	
	RM2501	B3RAD0000160	REMOTE SENSOR	1	
	S1	K1KA03BA0061	3P CONNECTOR	1	
	SC2	K1KY02B00012	2P CONNECTOR	1	
	SC20	K1MY35BA0345	35P CONNECTOR	1	
	SC41	K1KA09A00210	9P CONNECTOR	1	
	SC42	K1KA09A00210	9P CONNECTOR	1	
	SC46	K1KA09A00210	9P CONNECTOR	1	
	SC50	K1KA02AA0193	2P CONNECTOR	1	
	SG1	K1KA03B00242	3P CONNECTOR	1	
	SG52	K1KA12B00151	12P CONNECTOR	1	
	SMM21	TMME351	CLAMPER	1	
	SMM22	TMME351	CLAMPER	1	
	SMM23	TMME261	CLAMPER	1	
	SS11	K1KY02B00012	2P CONNECTOR	1	
	SS12	K1KA02BA0107	2P CONNECTOR	1	
	SS21	K1KY23AA0606	23P CONNECTOR	1	
	SS22	K1KB23A00004	23P CONNECTOR	1	
	SS33	K1KA08B00270	8P CONNECTOR	1	
	SS35	K1KA04BA0237	4P CONNECTOR	1	
	SS36	K1KA04BA0237	4P CONNECTOR	1	
	SS53	K1MY13BA0343	13P CONNECTOR	1	
	SS55	K1MY13BA0343	13P CONNECTOR	1	
	SS56	K1MY13BA0343	13P CONNECTOR	1	
	SS58	K1MY13BA0343	13P CONNECTOR	1	
	SSMM1	TMME261	CLAMPER	1	
	SW2500	VSP0145	SWITCH	1	
	SW3780	EVQ11G05R	SWITCH	1	
	SW3782	EVQ11G05R	SWITCH	1	
	SW3783	EVQ11G05R	SWITCH	1	
	SW3784	EVQ11G05R	SWITCH	1	
	SW3785	EVQ11G05R	SWITCH	1	
	SW3786	EVQ11G05R	SWITCH	1	
	T16697	ETS19BD119AC	TRANSFORMER	1	
⚠	TU2901C	ENGF9706GF	TUNER	1	
	VR16600	EVMEASA00B54	CONTROL 50KOHMB 0.3W	1	

Safety	Ref. No.	Part No.	Part Name & Description	Pcs	Remarks
	VR16601	EVMEASA00B53	CONTROL 5KOHMB 0.3W	1	
	X1100	H0J100500035	CRYSTAL	1	
	X1500	H0J100500035	CRYSTAL	1	
	X2010	H0J245500089	CRYSTAL	1	
	X2600	H0J270500113	CRYSTAL	1	
	X5200	H0J270500113	CRYSTAL	1	
	X7700	H0J240500037	CRYSTAL	1	
	X8001	H0J270500120	CRYSTAL	1	
	X8002	H0J240500052	CRYSTAL	1	
	X9001	H0J200500080	CRYSTAL	1	
	X21100	H0J100500035	CRYSTAL	1	
	X22010	H0J245500089	CRYSTAL	1	
	X25200	H0J270500121	CRYSTAL	1	
	X28001	H0J270500120	CRYSTAL	1	
	X29900	H0J200500076	CRYSTAL	1	
	ZA3901	K4AZ01D00004	TERMINAL	1	
	ZA3902	K4AZ01D00004	TERMINAL	1	
	ZA3903	K4AZ01D00004	TERMINAL	1	
	ZA3904	K4AZ01D00004	TERMINAL	1	
	ZA5900	K4AZ01D00004	TERMINAL	1	
	ZA5901	K4AZ01D00004	TERMINAL	1	
	ZA5902	K4AZ01D00004	TERMINAL	1	
	ZA5903	K4AZ01D00004	TERMINAL	1	
	ZA7701	K4CD01000011	AV TERMINAL	1	
	ZA16001	K4CD01000011	AV TERMINAL	1	
	ZA16002	K4CD01000011	AV TERMINAL	1	
	ZA16003	K4CD01000011	AV TERMINAL	1	
	ZA16011	K4CD01000011	AV TERMINAL	1	
	ZA16012	K4CD01000011	AV TERMINAL	1	
	ZA16401	K4CD01000011	AV TERMINAL	1	
	ZA16402	K4CD01000011	AV TERMINAL	1	
	ZA16403	K4CD01000011	AV TERMINAL	1	
	ZA17101	K4AD01Z00001	TERMINAL	1	
	ZA17102	K4AD01Z00001	TERMINAL	1	
	ZA17103	K4AD01Z00001	TERMINAL	1	
	ZA17104	K4AD01Z00001	TERMINAL	1	
	ZA17201	K4AD01Z00001	TERMINAL	1	
	ZA17202	K4AD01Z00001	TERMINAL	1	
	ZA17203	K4AD01Z00001	TERMINAL	1	
	ZA17204	K4AD01Z00001	TERMINAL	1	
	ZA17301	K4AD01Z00001	TERMINAL	1	
	ZA17302	K4AD01Z00001	TERMINAL	1	
	ZA17303	K4AD01Z00001	TERMINAL	1	
	ZA17304	K4AD01Z00001	TERMINAL	1	
	C201	ACKZE1H220	50V 22	1	
	C202	ACMEB104K5T	50V 0.1	1	
	C203	ECJ1VB1H103K	C 0.001UF, K, 50V	1	
	C204	ACMEB224K2T	25V 0.22	1	
	C206	ECJ2FB1E224K	C 22UF, K, 25V	1	
	C207	ACMBB335K1T	16V 3.3	1	
	C208	ACMEB105K1T	16V 1	1	
	C209	F1H1H221A832	C 220UF, K, 50V	1	
	C210	ECJ1XC1H102J	C 1000PF, J, 50V	1	
	C211	ACMEB224K2T	25V 0.22	1	
	C212	ECJ1VB1H472K	C 4700PF, K, 50V	1	
	C213	ACCC3FD470JP	3kV 47PF	1	
	C214	ACCC3FD470JP	3kV 47PF	1	
	C215	ACMAU331J2JT	630V 330p	1	
	C216	ACMAU471J2JT	630V 470p	1	
	C217	ECWH8273HA	800V 0.027	1	
	C218	ECWH8273HA	800V 0.027	1	
⚠	C219	ACKX101KY	250V 100p	1	
	C220	ECJ2FB1E224K	C 22UF, K, 25V	1	
	C221	ACMEB474K1T	16V 0.47	1	
	C223	ECQE2223SKF	250V 0.022PF	1	
⚠	C225	ACCST220181	200V 180	1	
⚠	C226	ACCST220181	200V 180	1	
⚠	C227	ACCST220131	220V 130	1	

Safety	Ref. No.	Part No.	Part Name & Description	Pcs	Remarks
⚠	C228	ACCST220131	220V 130	1	
⚠	C229	ACCST220131	220V 130	1	
	C230	ECQE2473SKF	C 0.047U 250V	1	
	C301	ACKZE1H220	50V 22	1	
	C302	ACMEB224K2T	25V 0.22	1	
	C303	ACMEB473K5T	50V 0.047	1	
	C304	ACMEB224K2T	25V 0.22	1	
	C306	ECJ2FB1E224K	C 22UF, K, 25V	1	
	C307	ACMBB335K1T	16V 3.3	1	
	C308	ACMEB104K5T	50V 0.1	1	
	C309	F1H1H221A832	C 220UF, K, 50V	1	
	C310	ACMEB473K5T	50V 0.047	1	
	C311	ACMEB224K2T	25V 0.22	1	
	C312	ECJ1VB1H472K	C 4700PF, K, 50V	1	
	C313	ACRR3DD101K7	2kV 100PF	1	
	C314	ACRR3DD101K7	2kV 100PF	1	
	C315	ACMAU471J2JT	630V 470p	1	
	C316	ACMAU471J2JT	630V 470p	1	
	C317	ECWH8333HA	P 0.033PF, J, 8KV	1	
	C318	ECWH8333HA	P 0.033PF, J, 8KV	1	
	C352	ACKZE1E821L	25V 820	1	
	C354	ACMEB104K5T	50V 0.1	1	
	C355	ACMEB224K2T	25V 0.22	1	
	C356	ECJ2FB1E224K	C 22UF, K, 25V	1	
	C357	ACMEB104K5T	50V 0.1	1	
	C358	ECJ1VB1H103K	C 0.001UF, K, 50V	1	
	C359	ECJ1VB1H103K	C 0.001UF, K, 50V	1	
	C360	ACMBB475K1T	16V 4.7	1	
	C361	ACKZE1E471L	25V 470	1	
	C362	ACKZE1E101S	25V 100	1	
	C363	ACKZE1E101S	25V 100	1	
⚠	C401	ACCST120181	120V 180	1	
⚠	C402	ACCST120181	120V 180	1	
	C403	ECQE2104SKF	250V 0.1PF	1	
	C404	ECQE2104SKF	250V 0.1PF	1	
	C405	ACKZE1H220	50V 22	1	
	C406	ECJ1VB1H103K	C 0.001UF, K, 50V	1	
	C407	ECJ1VB1H103K	C 0.001UF, K, 50V	1	
	C408	ECJ1VB1H103K	C 0.001UF, K, 50V	1	
	C409	ACMBB105K2T	25V 1	1	
	C410	ECJ1VB1H222K	C 2200PF, K, 50V	1	
	C411	ECJ1VB1H103K	C 0.001UF, K, 50V	1	
	C412	ACMEB224K2T	25V 0.22	1	
	C413	ACMEB104K5T	50V 0.1	1	
	C414	ACMEB224K2T	25V 0.22	1	
	C415	ECJ1VB1H222K	C 2200PF, K, 50V	1	
	C416	ACMEB473K5T	50V 0.047	1	
	C417	ACMAB104K2ET	250V 0.1	1	
⚠	C421	ACKZE1K341	50V 340	1	
⚠	C422	ACKZE1K341	50V 340	1	
	C423	ECQV1H154JL	P 0.15UF, J, 50V	1	
	C451	ACMBB225K2T	25V 2.2	1	
	C452	ACMBB225K2T	25V 2.2	1	
	C453	ACMEB104K5T	50V 0.1	1	
	C454	ACMEC220J5T	50V 22p	1	
	C455	ECJ1VB1H102K	C 1000PF, K, 50V	1	
	C456	ACMEB333K5T	50V 0.033	1	
	C457	ECJ1VB1H102K	C 1000PF, K, 50V	1	
	C458	ECJ1VB1H102K	C 1000PF, K, 50V	1	
	C460	ACMEB104K5T	50V 0.1	1	
	C461	ACKZE0J221S	6.3V 220	1	
	C462	ACKZE0J221S	6.3V 220	1	
	C500	ACKZE1H221	50V 220	1	
⚠	C501	ACLE103KS	0.01	1	
⚠	C502	ACPAG2W270Z	450V 27	1	
	C503	ACMEB224K2T	25V 0.22	1	

Safety	Ref. No.	Part No.	Part Name & Description	Pcs	Remarks
	C504	ACKZE1H100	50V 10	1	
	C505	ACKZE1H220SP	50V 22	1	
	C506	ECJ1VB1H103K	C 0.001UF, K, 50V	1	
	C507	ECJ1VB1H103K	C 0.001UF, K, 50V	1	
	C508	ACKZE1H221	50V 220	1	
⚠	C509	ACKX331KY	250V 330p	1	
	C521	ECJ1XC1H102J	C 1000PF, J, 50V	1	
	C522	ECJ1VB1H103K	C 0.001UF, K, 50V	1	
	C523	ECJ1XC1H102J	C 1000PF, J, 50V	1	
	C524	ECJ1VB1H103K	C 0.001UF, K, 50V	1	
	C525	ECJ1XC1H102J	C 1000PF, J, 50V	1	
	C526	ACMEB224K2T	25V 0.22	1	
	C527	ACMEB224K2T	25V 0.22	1	
	C551	ACKZE0J221S	6.3V 220	1	
	C552	ACKZE0J221S	6.3V 220	1	
	C553	ACMEB474K1T	16V 0.47	1	
	C554	ACMEB104K5T	50V 0.1	1	
	C556	ECJ1VB1H103K	C 0.001UF, K, 50V	1	
	C557	ACMEB104K5T	50V 0.1	1	
	C558	ECQV1473JM2	100V 0.047	1	
	C559	ACYCB106K1T	16V 10	1	
	C560	ACYCB106K1T	16V 10	1	
	C561	ECJ2XB1H104K	C 0.1UF, K, 50V	1	
	C603	ECWF2W105KA	450V 1	1	
	C604	ECWF2W105KA	450V 1	1	
	C605	ECQV1H154JL	P 0.15UF, J, 50V	1	
	C606	ECQV1H154JL	P 0.15UF, J, 50V	1	
	C607	ECQV1H154JL	P 0.15UF, J, 50V	1	
	C608	ECQV1H154JL	P 0.15UF, J, 50V	1	
	C612	ACKZE1H220	50V 22	1	
	C613	ECJ1VB1H103K	C 0.001UF, K, 50V	1	
	C614	ACKZE1H101	50V 100	1	
⚠	C615	ACCST2W420Z	450V 42	1	
⚠	C616	ACCST2W420Z	450V 42	1	
⚠	C617	ACCST2W420Z	450V 42	1	
⚠	C618	ACCST2W420Z	450V 42	1	
⚠	C621	ACKX101KY	250V 100p	1	
	C622	ECJ1VB1H103K	C 0.001UF, K, 50V	1	
⚠	C630	ACKX221KY	250V 220p	1	
⚠	C631	ACKX221KY	250V 220p	1	
	C633	ECJ1VB1H103K	C 0.001UF, K, 50V	1	
	C634	ACMEB104K5T	50V 0.1	1	
	C635	ECJ1VB1H332K	C 3300PF, K, 50V	1	
	C638	ACMEB104K5T	50V 0.1	1	
	C639	ECJ2FB1E224K	C 22UF, K, 25V	1	
	C642	ECJ1VB1H222K	C 2200PF, K, 50V	1	
	C648	ECKD3A102KRP	C 1000PF, K, 1KV	1	
	C653	ACRR3DD101KR	2kV 100p	1	
	C654	ACRR3DD101KR	2kV 100p	1	
	C655	ECJ2XB1H104K	C 0.1UF, K, 50V	1	
	C656	ACMAC101J3AT	1kV 100p	1	
	C657	ACMAC101J3AT	1kV 100p	1	
	C658	ACMAC101J3AT	1kV 100p	1	
	C659	ACMAC101J3AT	1kV 100p	1	
	C701	ACKZE0J221S	6.3V 220	1	
	C702	ACMEB104K5T	50V 0.1	1	
	C703	ECJ1VB1H103K	C 0.001UF, K, 50V	1	
	C704	ACMEB104K5T	50V 0.1	1	
	C705	ECJ1VB1H103K	C 0.001UF, K, 50V	1	
	C706	ECJ1VB1H103K	C 0.001UF, K, 50V	1	
	C707	ECJ1VB1H103K	C 0.001UF, K, 50V	1	
	C708	ECJ1VB1H103K	C 0.001UF, K, 50V	1	

Safety	Ref. No.	Part No.	Part Name & Description	Pcs	Remarks
	C709	ECJ1VB1H103K	C 0.001UF, K, 50V	1	
	C710	ECJ1VB1H103K	C 0.001UF, K, 50V	1	
	C711	ACMEB104K5T	50V 0.1	1	
	C712	ECJ1VB1H103K	C 0.001UF, K, 50V	1	
	C717	ACMEB224K2T	25V 0.22	1	
	C718	ECJ1XC1H102J	C 1000PF, J, 50V	1	
⚠	C801	ACLE334KS	PLASTIC FILM CAPACITOR	1	
⚠	C802	ACLEMX104KS	0.1	1	
	C803	ECWF2W105KA	450V 1	1	
⚠	C804	ACLE334KS	PLASTIC FILM CAPACITOR	1	
⚠	C805	ACLE334KS	PLASTIC FILM CAPACITOR	1	
⚠	C807	ACKX221KY	250V 220p	1	
⚠	C808	ACKX221KY	250V 220p	1	
⚠	C810	ACLE334KS	PLASTIC FILM CAPACITOR	1	
⚠	C811	ACLE334KS	PLASTIC FILM CAPACITOR	1	
⚠	C812	ACKZE1H220	50V 22 (Multi)	1	
	C812	ACLE334KS	PLASTIC FILM CAPACITOR (Filter)	1	
⚠	C815	ACCST2W420Z	450V 42	1	
⚠	C816	ACCST2W420Z	450V 42	1	
⚠	C817	ACCST2W420Z	450V 42	1	
⚠	C824	ACKX101KY	250V 100p	1	
	C833	ECJ1VB1H103K	C 0.001UF, K, 50V	1	
	C834	ACMEB104K5T	50V 0.1	1	
	C835	ECJ1VB1H103K	C 0.001UF, K, 50V	1	
	C838	ACMEB104K5T	50V 0.1	1	
	C839	ECJ2FB1E224K	C 22UF, K, 25V	1	
	C842	ECJ1VB1H222K	C 2200PF, K, 50V	1	
	C843	ACMEB104K5T	50V 0.1	1	
	C845	ACRR3DD101K7	2kV 100PF	1	
	C848	ECKD3A102KRP	C 1000PF, K, 1KV	1	
	C849	ACRR3DD101KR	2kV 100p	1	
	CN701	AKSM06BSRSS	CONNECTOR	1	
	D201	MA165TAKU	DIODE	1	
	D202	MA165TAKU	DIODE	1	
	D203	MA165TAKU	DIODE	1	
	D204	MA165TAKU	DIODE	1	
	D270	MA165TAKU	DIODE	1	
	D271	MA165TAKU	DIODE	1	
	D301	MA165TAKU	DIODE	1	
	D302	MA165TAKU	DIODE	1	
	D303	MA165TAKU	DIODE	1	
	D351	ERDS2FJ220	C 22 OHM, J,1/4W	1	
	D352	VDAG01AT	DIODE	1	
	D353	VDAG01AT	DIODE	1	
	D402	VDAG01AT	DIODE	1	
	D403	MA165TAKU	DIODE	1	
	D451	VDD1FM3R15	DIODE	1	
	D452	MA165TAKU	DIODE	1	
⚠	D501	VDS1WBA80	DIODE	1	
	D502	VXST3D82BL3	DIODE	1	
	D503	VDAG01AT	DIODE	1	
	D504	VDAG01AT	DIODE	1	
	D505	VDAG01AT	DIODE	1	
	D506	VDAP01CT	DIODE	1	
	D507	VDRF101A2S	DIODE	1	
	D521	MA165TAKU	DIODE	1	
	D522	MA165TAKU	DIODE	1	
	D551	VDRK19V1	DIODE	1	
	D552	VDRF101A2S	DIODE	1	
	D603	VDS3V60L1	DIODE	1	

Safety	Ref. No.	Part No.	Part Name & Description	Pcs	Remarks
	D605	VDS3V60L1	DIODE	1	
	D620	VDCMF04E12L	DIODE	1	
	D621	VDCMF04E12L	DIODE	1	
	D622	VDCMF04E12L	DIODE	1	
	D623	VDCMF04E12L	DIODE	1	
	D701	VDRB550VA-30	DIODE	1	
	D801	MA165TAKU	DIODE	1	
	D802	MA165TAKU	DIODE	1	
	D803	VDS3V60L1	DIODE	1	
	D805	VDS3V60L1	DIODE	1	
	D809	VDCMF04E12L	DIODE	1	
	D810	VDCMF04E12L	DIODE	1	
	D811	VDCMF04E12L	DIODE	1	
	D812	VDCMF04E12L	DIODE	1	
⚠	F201	HU216005BEP	FUSE	1	
⚠	F301	HU216005BEP	FUSE	1	
⚠	F501	HU382T2P	FUSE	1	
⚠	F801	HU215010BEP	FUSE	1	
⚠	F802	HU215010BEP	FUSE	1	
	IC201	VITEA1611T	IC	1	
	IC202	VIJM1431AF	IC	1	
	IC301	VITEA1611T	IC	1	
	IC351	VIJM1431AF	IC	1	
	IC401	VISC2603SKT	IC	1	
	IC402	VIJM1431AF	IC	1	
	IC403	VINJM2904VE1	IC	1	
	IC404	VIJM1431AF	IC	1	
	IC451	VISC4525AT	IC	1	
⚠	IC501	MIP3E10MSSCF	IC	1	
	IC551	VIJM1431AF	IC	1	
	IC601	VIFA5501ANE1	IC	1	
	IC701	VITM41N07T	IC	1	
	IC702	VIR3111N40AT	IC	1	
	IC801	VIFA5501ANE1	IC	1	
	JP1	ERJ3GEY0R00	M 0 OHM, 1/16W	1	
⚠	K801	ALKF3Q4H18	RELAY	1	
⚠	K802	ALKF3Q4H18	RELAY	1	
⚠	K803	ALKF3Q4H18	RELAY	1	
	L201	ETB23CZ12GAU	CHOKE COIL	1	
	L301	ETB23CZ12GAU	CHOKE COIL	1	
	L401	AYLH8TB681K	FILTER CHOKE	1	
	L402	AYJ2312105Z	5A 120uH	1	
	L451	AYNR8040T6R8	CHOKE	1	
	L501	EXCELSA35T	BEAD CHOKE	1	
	L502	EXCELDR35V	BEAD CHOKE	1	
	L503	EXCELDR35V	BEAD CHOKE	1	
	L504	EXCELDR35V	BEAD CHOKE	1	
	L551	EXCELDR35V	BEAD CHOKE	1	
	L605	EXCELSA35T	BEAD CHOKE	1	
⚠	L801	AYJ3812305Z	FILTERCHOKE	1	
⚠	L802	AYJ3812305Z	FILTERCHOKE	1	
⚠	L803	ETB23CZ11GAU	CHOKE COIL	1	
⚠	L804	ETB23CZ11GAU	CHOKE COIL	1	
	L805	EXCELSA35T	BEAD CHOKE	1	
⚠	MC203	MP26R3	MODULE	1	
⚠	MC302	MP26R2	MODULE	1	
	MC303	MP00Z45	MODULE	1	
⚠	MC601	MP26P1N	MODULE	1	
⚠	MC801	MP00P44	MODULE	1	
	P2	AKS2P3-VH32	CONNECTOR	1	
	P6	AKS14B-PASK2	CONNECTOR	1	
	P7	AKS12B-PASK2	CONNECTOR	1	
⚠	P9	AKS02B-VTL32	CONNECTOR	1	
	P11	AKS2P3-VH32	CONNECTOR	1	

Safety	Ref. No.	Part No.	Part Name & Description	Pcs	Remarks
	P12	AKS02B-PASK2	CONNECTOR	1	
	P34	AKS03B-PASK2	CONNECTOR	1	
	P35	AKS04B-PASK2	CONNECTOR	1	
⚠	P51	AKS2P3-VH32	CONNECTOR	1	
⚠	P52	AKS02B-VTL32	CONNECTOR	1	
⚠	P53	AKS2P-VH32	CONNECTOR	1	
⚠	P54	AKS2P-VH32	CONNECTOR	1	
	P55	AKS05B-PASK2	CONNECTOR	1	
	P56	AKS05B-PASK2	CONNECTOR	1	
⚠	P57	AKS2P3-VH32	CONNECTOR	1	
⚠	P58	AKS02B-VTL32	CONNECTOR	1	
⚠	PC201	VPS2581AL2HE	OPTOISOLATOR	1	
⚠	PC202	VPS2581AL2HE	OPTOISOLATOR	1	
⚠	PC301	VPS2581AL2HE	OPTOISOLATOR	1	
⚠	PC401	VPS2581AL2HE	OPTOISOLATOR	1	
⚠	PC501	VPS2581AL2HE	OPTOISOLATOR	1	
⚠	PC502	VPS2581AL2HE	OPTOISOLATOR	1	
⚠	PC503	VPS2581AL2HE	OPTOISOLATOR	1	
⚠	PC521	VPS2581AL2HE	OPTOISOLATOR	1	
⚠	PC522	VPS2581AL2HE	OPTOISOLATOR	1	
⚠	PC601	VPS2581AL2HE	OPTOISOLATOR	1	
	Q202	2SD2216JR	TRANSISTOR	1	
	Q203	2SB1462JRTX	TRANSISTOR	1	
	Q270	2SK2040HDT	FET	1	
	Q271	2SK2040HDT	FET	1	
	Q272	2SA2184T	TRANSISTOR	1	
	Q273	2SK3018TL	FET	1	
	Q302	2SD2216JR	TRANSISTOR	1	
	Q303	2SB1462JRTX	TRANSISTOR	1	
	Q351	2SK3704	FET	1	
	Q352	2SD2216JR	TRANSISTOR	1	
	Q353	2SB1462JRTX	TRANSISTOR	1	
	Q354	2SB1462JRTX	TRANSISTOR	1	
	Q402	2SC5866T	TRANSISTOR	1	
	Q403	2SD2216JR	TRANSISTOR	1	
	Q404	2SK3019TL	FET	1	
	Q405	2SC5866T	TRANSISTOR	1	
	Q406	2SA2094T	TRANSISTOR	1	
	Q407	2SA17670Q2TV	TRANSISTOR	1	
	Q408	2SA17670Q2TV	TRANSISTOR	1	
	Q409	2SB1462JRTX	TRANSISTOR	1	
	Q501	2SC5866T	TRANSISTOR	1	
	Q502	2SB1462JRTX	TRANSISTOR	1	
	Q503	2SC5866T	TRANSISTOR	1	
	Q504	2SB1462JRTX	TRANSISTOR	1	
	Q521	2SK3019TL	FET	1	
	Q522	2SK3019TL	FET	1	
	Q523	2SB1462JRTX	TRANSISTOR	1	
	Q524	2SB1462JRTX	TRANSISTOR	1	
	Q525	2SD2216JR	TRANSISTOR	1	
	Q551	VKHAT1130R	FET	1	
	Q552	2SK3018TL	FET	1	
	Q605	2SC5866T	TRANSISTOR	1	
	Q606	2SB1462JRTX	TRANSISTOR	1	
	Q607	2SC5866T	TRANSISTOR	1	
	Q608	2SB1462JRTX	TRANSISTOR	1	
	Q609	2SD2185R	TRANSISTOR	1	
	Q610	2SB1440RTX	TRANSISTOR	1	
	Q611	2SA1235AX	TRANSISTOR	1	
	Q612	2SA1235AX	TRANSISTOR	1	
	Q613	2SA1235AX	TRANSISTOR	1	
	Q614	2SA1235AX	TRANSISTOR	1	
	Q615	2SA1235AX	TRANSISTOR	1	
	Q616	2SA1235AX	TRANSISTOR	1	
	Q617	2SK3018TL	FET	1	
	Q701	2SK3546J0L	FET	1	
	Q702	2SK3546J0L	FET	1	
	Q703	2SK3546J0L	FET	1	
	Q704	2SB1219KRTX	TRANSISTOR	1	
	Q705	2SB1219KRTX	TRANSISTOR	1	

Safety	Ref. No.	Part No.	Part Name & Description	Pcs	Remarks
	Q809	2SD2185R	TRANSISTOR	1	
	Q810	2SB1440RTX	TRANSISTOR	1	
	Q811	2SA1235AX	TRANSISTOR	1	
	Q812	2SA1235AX	TRANSISTOR	1	
	Q813	2SA1235AX	TRANSISTOR	1	
	R201	ERJ6GEYJ680V	M 68 OHM,J,1/10W	1	
	R204	ERJ3EKF4751	M 4.75KOHM, 1/16W	1	
	R205	ERJ3EKF2211	M2.21KOHM, 1/16W	1	
	R206	D0GB183JA057	M 18K OHM J 1/16W	1	
	R207	ERJ3GEYJ222	M 2.2KOHM,J,1/16W	1	
	R208	D0GB103JA057	M 10K OHM J 1/16W	1	
	R209	D0GB103JA057	M 10K OHM J 1/16W	1	
	R210	ERJ3GEYJ304	M 300KOHM,J,1/16W	1	
	R211	ERJ3GEYJ822	M 8.2KOHM,J,1/16W	1	
	R212	ERJ3GEYJ333	M 33KOHM,J,1/16W	1	
	R214	ERJ3EKF1133	M 103KOHM, 1/16W	1	
	R215	ERJ3EKF4122	M41.2KOHM, 1/16W	1	
	R216	ERJ3EKF1072	M10.7KOHM, 1/16W	1	
	R218	ERG12SJ220J	M 22 OHM, J,1/2W	1	
	R221	ERJ3GEYJ301	M 300 OHM,J,1/16W	1	
	R222	D0GB243JA057	M 24K OHM J 1/16W	1	
	R223	ERJ6ENF1540	M 154 OHM, 1/10W	1	
	R224	ERJ6ENF1000	M 100 OHM, 1/10W	1	
	R225	ERG12SJ220J	M 22 OHM, J,1/2W	1	
	R226	ERQ14AJ4R7J	F 4.7 OHM, J,1/4W	1	
	R228	ERJ6ENF3303	M 330KOHM, 1/10W	1	
	R229	ERJ6ENF3303	M 330KOHM, 1/10W	1	
	R230	ERJ6GEYJ220	M 22 OHM,J,1/10W	1	
	R231	ERJ6GEYJ331V	M 330 OHM J 1/10W	1	
	R232	D0GB102JA057	M 1KOHM,J,1/16W	1	
	R233	ERJ6GEYJ102V	M 1K OHM J 1/10W	1	
	R234	ERJ6ENF2433	M 243KOHM, 1/10W	1	
	R235	ERJ6ENF1743	M 174KOHM, 1/10W	1	
	R236	ERJ6ENF1743	M 174KOHM, 1/10W	1	
	R237	ERJ6ENF1743	M 174KOHM, 1/10W	1	
	R238	ERJ6ENF1002	M 10KOHM, 1/10W	1	
	R239	ERJ6GEYJ562V	M 5.6KOHM,J,1/10W	1	
	R240	ERJ6ENF1743	M 174KOHM, 1/10W	1	
	R241	ERJ6GEYJ562V	M 5.6KOHM,J,1/10W	1	
	R242	ERJ6GEYJ562V	M 5.6KOHM,J,1/10W	1	
	R253	ERJ3GEYJ222	M 2.2KOHM,J,1/16W	1	
	R254	ERJ3GEYJ222	M 2.2KOHM,J,1/16W	1	
	R255	D0GB152JA057	M 1.5KOHM J 1/16W	1	
	R256	D0GB152JA057	M 1.5KOHM J 1/16W	1	
	R259	ARRCR2F1243T	0.25W 124k	1	
	R260	ARRCR2F1243T	0.25W 124k	1	
	R270	ERJ6GEYJ103V	M 10K OHM J 1/10W	1	
	R271	ERJ6GEYJ103V	M 10K OHM J 1/10W	1	
	R272	ERJ6GEYJ104V	M 100KOHM,J,1/10W	1	
	R273	ERJ6GEYJ104V	M 100KOHM,J,1/10W	1	
	R274	ERJ6GEYJ472V	M 4.7K OHM J 1/10W	1	
	R275	ERJ6GEYJ472V	M 4.7K OHM J 1/10W	1	

Safety	Ref. No.	Part No.	Part Name & Description	Pcs	Remarks
	R276	ERJ6GEYJ472V	M 4.7K OHM J 1/10W	1	
	R277	ERJ6GEYJ472V	M 4.7K OHM J 1/10W	1	
	R278	ERJ6GEYJ472V	M 4.7K OHM J 1/10W	1	
	R279	ERJ6GEYJ103V	M 10K OHM J 1/10W	1	
	R280	ERJ6GEYJ103V	M 10K OHM J 1/10W	1	
	R281	ERJ6GEYJ104V	M 100KOHM,J,1/10W	1	
	R282	ARSG732K820U	0.5W 82	1	
	R283	ARSG732K820U	0.5W 82	1	
	R284	ARSG732K820U	0.5W 82	1	
	R285	ARSG732K820U	0.5W 82	1	
	R286	ARSG732K820U	0.5W 82	1	
	R287	ARSG732K820U	0.5W 82	1	
	R288	ARSG732K820U	0.5W 82	1	
	R289	ARSG732K820U	0.5W 82	1	
	R290	ERJ6GEYJ474	M 470KOHM,J,1/10W	1	
	R291	ERJ6GEYJ474	M 470KOHM,J,1/10W	1	
	R292	ERJ6GEYJ104V	M 100KOHM,J,1/10W	1	
	R293	ERJ6GEYG681	M 680 OHM,J,1/10W	1	
	R301	ERJ6GEYJ680V	M 68 OHM,J,1/10W	1	
	R304	ERJ3EKF2211	M2.21KOHM, 1/16W	1	
	R305	ERJ3EKF4701	M 4.7KOHM, 1/16W	1	
	R306	D0GB393JA041	M 39KOHM,J,1/16W	1	
	R307	ERJ3GEYJ222	M 2.2KOHM,J,1/16W	1	
	R308	D0GB103JA057	M 10K OHM J 1/16W	1	
	R309	D0GB103JA057	M 10K OHM J 1/16W	1	
	R310	ERJ3GEYJ824	M 820KOHM,J,1/16W	1	
	R311	ERJ3GEYJ822	M 8.2KOHM,J,1/16W	1	
	R312	ERJ3GEYJ333	M 33KOHM,J,1/16W	1	
	R314	ERJ6ENF1133	M 113KOHM, 1/10W	1	
	R315	ERJ3EKF4992	M 49.9KOHM, 1/16W	1	
	R316	ERJ3EKF1072	M10.7KOHM, 1/16W	1	
	R318	ERJ14YJ220U	M 22 OHM, J,1/4W	1	
	R321	ERJ3GEYJ301	M 300 OHM,J,1/16W	1	
	R322	ERJ3GEYJ822	M 8.2KOHM,J,1/16W	1	
	R323	ERJ6ENF2200	M 220 OHM, 1/10W	1	
	R324	ERJ6ENF1000	M 100 OHM, 1/10W	1	
	R325	ERJ14YJ220U	M 22 OHM, J,1/4W	1	
	R326	ERQ14AJ4R7J	F 4.7 OHM, J,1/4W	1	
	R328	ERJ6ENF3303	M 330KOHM, 1/10W	1	
	R329	ERJ6ENF3303	M 330KOHM, 1/10W	1	
	R351	ERJ3EKF8871	M8.87KOHM, 1/16W	1	
	R352	ARMPC2WR03JD	2W 0.03	1	
	R353	ERJ3GEY0R00	M 0 OHM, 1/16W	1	
	R355	ERJ3EKF1182	M11.8KOHM, 1/16W	1	
	R356	ERJ3GEYJ332	M 3.3KOHM,J,1/16W	1	
	R357	ERJ3GEYJ332	M 3.3KOHM,J,1/16W	1	
	R358	ERJ3GEYJ561	M 560 OHM,J,1/16W	1	
	R359	ERJ3GEYJ222	M 2.2KOHM,J,1/16W	1	
	R360	ERJ3GEYJ682	M 6.8KOHM,J,1/16W	1	
	R361	ERJ3EKF7500	M 750 OHM, 1/16W	1	
	R362	ERJ3EKF5362V	M 53.6KOHM, 1/16W	1	
	R363	ERJ3EKF1002	M 10KOHM, 1/16W	1	

Safety	Ref. No.	Part No.	Part Name & Description	Pcs	Remarks
	R364	ERG12SJ332J	M 3.3KOHM, J,1/2W	1	
	R365	ARSG734K4R7U	0.25W 4.7	1	
	R366	D0GB103JA057	M 10K OHM J 1/16W	1	
	R367	ERJ3GEYD153V	M 15KOHM,J,1/16W	1	
	R368	D0GB124JA057	M 120KOHM J 1/16W	1	
	R369	D0GB124JA057	M 120KOHM J 1/16W	1	
	R370	D0GB103JA057	M 10K OHM J 1/16W	1	
	R371	ERJ3GEYJ472	M 4.7KOHM,J,1/16W	1	
	R372	ERJ3GEYJ472	M 4.7KOHM,J,1/16W	1	
	R373	ERJ3EKF6981	M6.98KOHM, 1/16W	1	
	R374	ERJ3EKF6981	M6.98KOHM, 1/16W	1	
	R375	ERJ3EKF8451	M8.45KOHM, 1/16W	1	
	R376	ARSG734K4R7U	0.25W 4.7	1	
	R401	ER0S2CHF10R0	M 10 OHM, F,1/4W	1	
	R402	ERJ3GEYJ682	M 6.8KOHM,J,1/16W	1	
	R403	ERJ3GEYJ682	M 6.8KOHM,J,1/16W	1	
	R404	D0GB103JA057	M 10K OHM J 1/16W	1	
	R405	D0GB103JA057	M 10K OHM J 1/16W	1	
	R406	D0GB103JA057	M 10K OHM J 1/16W	1	
	R407	ERJ3GEYJ682	M 6.8KOHM,J,1/16W	1	
	R408	ERJ3GEYJ333	M 33KOHM,J,1/16W	1	
	R409	D0GB103JA057	M 10K OHM J 1/16W	1	
	R411	ERJ3GEYD153V	M 15KOHM,J,1/16W	1	
	R412	ERJ3GEYD153V	M 15KOHM,J,1/16W	1	
	R413	ERJ3GEYJ223	M 22KOHM,J,1/16W	1	
	R414	ERJ3GEYJ470	M 47 OHM,J,1/16W	1	
	R415	ERJ3EKF2050	M 205 OHM, 1/16W	1	
	R416	ERJ3EKF4530	M 453 OHM, 1/16W	1	
	R417	ERJ3EKF1241	M1.24KOHM, 1/16W	1	
	R418	ERJ3EKF2002	M 20KOHM, 1/16W	1	
	R419	ERJ3EKF2002	M 20KOHM, 1/16W	1	
	R420	ERJ3GEYJ333	M 33KOHM,J,1/16W	1	
	R421	ERJ3EKF5111	M5.11KOHM, 1/16W	1	
	R422	ERJ3GEYJ514	M 510KOHM,J,1/16W	1	
	R423	ERJ3GEYJ223	M 22KOHM,J,1/16W	1	
	R424	ERJ3GEYJ101	M 100 OHM,J,1/16W	1	
	R425	ERJ3EKF2430	M243 OHM, 1/16W	1	
	R426	D0GB102JA057	M 1KOHM,J,1/16W	1	
	R427	ERJ3EKF8250	M 825 OHM, 1/16W	1	
	R428	ARMPC2WR10JD	2W 0.1	1	
	R429	ERJ6GEYJ101V	M 100 OHM,J,1/10W	1	
	R430	ERJ14YJ220U	M 22 OHM, J,1/4W	1	
	R431	D0GB154JA057	M 150KOHM J 1/16W	1	
	R432	ARSG734K390U	0.25W 39	1	
	R433	ERDS2FJ473	C 47KOHM, J,1/4W	1	
	R434	ERJ3EKF2001	M 2KOHM, 1/16W	1	
	R435	ERJ3EKF2001	M 2KOHM, 1/16W	1	
	R436	ERJ3EKF4422	M44.2KOHM, 1/16W	1	
	R437	ERJ3EKF2492	M2.49KOHM, 1/16W	1	
	R438	ERJ3EKF1333	M13.3KOHM, 1/16W	1	
	R439	ERJ3EKF1272	M12.7KOHM, 1/16W	1	
	R440	ERJ6ENF3322	M33.2KOHM, 1/10W	1	
	R441	ERJ6ENF3322	M33.2KOHM, 1/10W	1	
	R451	ERJ3GEYJ471	M 470 OHM,J,1/16W	1	
	R452	ERJ3EKF1132	M11.3KOHM, 1/16W	1	
	R453	ERJ3EKF6342	M6.34KOHM, 1/16W	1	
	R454	ARSG731K220U	1W 22	1	
	R455	ERJ3EKF4021	M 4.2KOHM, 1/16W	1	
	R456	ERJ3EKF1001	M 1KOHM, 1/16W	1	
	R458	ERJ3EKF1332	M13.3KOHM, 1/16W	1	
	R459	ERJ3GEYJ333	M 33KOHM,J,1/16W	1	
	R460	ERJ3EKF2052	M20.5KOHM, 1/16W	1	
	R501	ARMPC2W1R2JD	2W 1.2	1	
	R502	ERJ3GEYJ561	M 560 OHM,J,1/16W	1	
	R503	D0GB180JA057	M 180 OHM J 1/16W	1	
	R504	D0GB102JA057	M 1KOHM,J,1/16W	1	
	R505	D0GB103JA057	M 10K OHM J 1/16W	1	
	R506	D0GB473JA057	M 47KOHM,J,1/16W	1	
	R507	D0GB102JA057	M 1KOHM,J,1/16W	1	
	R508	D0GB103JA057	M 10K OHM J 1/16W	1	
	R509	D0GB473JA057	M 47KOHM,J,1/16W	1	
	R510	ERJ14YJ470	M 47 OHM,J, 1/4W	1	
	R511	ERJ14YJ470	M 47 OHM,J, 1/4W	1	
⚠	R512	ARRCR6J825MT	1W 8.2M	1	
	R513	D0GB103JA057	M 10K OHM J 1/16W	1	
	R514	D0GB103JA057	M 10K OHM J 1/16W	1	
	R521	ARRCR2F1304T	0.25W 1.3M	1	
	R522	ARRCR2F1184T	0.25W 1.18M	1	
	R523	ARRCR2F1304T	0.25W 1.3M	1	
	R524	ARRCR2F1184T	0.25W 1.18M	1	
	R525	ERJ3EKF1303	M 130KOHM, 1/16W	1	
	R526	ERJ3GEYJ224	M 220KOHM,J,1/16W	1	
	R527	ERJ3GEYJ223	M 22KOHM,J,1/16W	1	
	R528	ERJ3EKF1303	M 130KOHM, 1/16W	1	
	R529	ERJ3GEYJ224	M 220KOHM,J,1/16W	1	
	R530	ERJ3GEYJ223	M 22KOHM,J,1/16W	1	
	R531	ERJ3GEYJ223	M 22KOHM,J,1/16W	1	
	R532	ERJ3GEYJ472	M 4.7KOHM,J,1/16W	1	
	R533	ERJ3GEYJ472	M 4.7KOHM,J,1/16W	1	
	R535	ERJ3GEYJ472	M 4.7KOHM,J,1/16W	1	
	R536	D0GB152JA057	M 1.5KOHM J 1/16W	1	
	R537	D0GB152JA057	M 1.5KOHM J 1/16W	1	
	R538	ERJ3GEYJ472	M 4.7KOHM,J,1/16W	1	
	R551	ERJ3GEYJ100	M 10 OHM,J,1/16W	1	
	R552	ERJ3GEYJ222	M 2.2KOHM,J,1/16W	1	
	R553	ERJ3GEYJ121	M 120 OHM,J,1/16W	1	
	R554	ERJ6GEY0R00V	M 0 OHM J 1/10W	1	
	R555	ERJ3EKF1052	M10.5KOHM, 1/16W	1	
	R556	ERJ3EKF1002	M 10KOHM, 1/16W	1	
	R557	ERJ3GEYJ100	M 10 OHM,J,1/16W	1	
	R558	D0GB102JA057	M 1KOHM,J,1/16W	1	
	R559	D0GB473JA057	M 47KOHM,J,1/16W	1	
	R560	ERJ3EKF1503	M 150KOHM, 1/16W	1	
	R561	ERJ3EKF1623	M16.2KOHM, 1/16W	1	
	R562	ERJ3GEYJ332	M 3.3KOHM,J,1/16W	1	
	R563	D0GB473JA057	M 47KOHM,J,1/16W	1	
	R564	D0GB151JA057	M 150 OHM J 1/16W	1	
	R601	ERJ6GEYJ223	M 22KOHM,J,1/10W	1	
	R602	ERJ6GEYJ223	M 22KOHM,J,1/10W	1	
	R603	ERJ6ENF3403	M 340KOHM, 1/10W	1	
	R604	ERJ6ENF3403	M 340KOHM, 1/10W	1	
	R605	ERJ14YJ101	M 100 OHM, J,1/4W	1	
	R606	ERJ14YJ101	M 100 OHM, J,1/4W	1	
	R607	ERJ6ENF3403	M 340KOHM, 1/10W	1	
	R609	ERJ6ENF3403	M 340KOHM, 1/10W	1	

Safety	Ref. No.	Part No.	Part Name & Description	Pcs	Remarks
	R610	ERJ3EKF5901	62.5mW 5.9k	1	
	R611	ERJ6GEYJ393V	M 39KOHM,J,1/10W	1	
	R612	D0GB473JA057	M 47KOHM,J,1/16W	1	
	R614	ARMPC5WR15JD	5W 0.15	1	
	R615	D0GB150JA057	M 150 OHM J 1/16W	1	
	R616	ERJ6GEYJ914	M 910KOHM,J,1/10W	1	
	R618	ERJ6ENF3403	M 340KOHM, 1/10W	1	
	R619	ERJ6ENF3403	M 340KOHM, 1/10W	1	
	R621	ERJ14YJ101	M 100 OHM, J,1/4W	1	
	R622	ERJ6ENF1002	M 10KOHM, 1/10W	1	
	R623	ERJ3EKF3161	M3.16KOHM, 1/16W	1	
	R626	ERJ6GEYJ101V	M 100 OHM,J,1/10W	1	
	R627	D0GB473JA057	M 47KOHM,J,1/16W	1	
	R628	ERJ14YJ100H	M 10 OHM, J,1/4W	1	
	R630	D0GB102JA057	M 1KOHM,J,1/16W	1	
	R631	D0GB103JA057	M 10K OHM J 1/16W	1	
	R632	D0GB473JA057	M 47KOHM,J,1/16W	1	
	R633	D0GB102JA057	M 1KOHM,J,1/16W	1	
	R634	D0GB103JA057	M 10K OHM J 1/16W	1	
	R635	D0GB473JA057	M 47KOHM,J,1/16W	1	
	R636	ERJ14YJ470	M 47 OHM,J, 1/4W	1	
	R637	ERJ14YJ470	M 47 OHM,J, 1/4W	1	
	R645	ERJ6ENF5232	M52.3KOHM, 1/10W	1	
	R646	ERJ6ENF5232	M52.3KOHM, 1/10W	1	
	R647	ERJ6ENF5232	M52.3KOHM, 1/10W	1	
	R648	ERJ6ENF5232	M52.3KOHM, 1/10W	1	
	R649	ERJ6ENF5232	M52.3KOHM, 1/10W	1	
	R650	ERJ6ENF5232	M52.3KOHM, 1/10W	1	
	R651	ERJ6ENF5232	M52.3KOHM, 1/10W	1	
	R652	ERJ6GEYJ223	M 22KOHM,J,1/10W	1	
	R653	ERJ6GEYJ223	M 22KOHM,J,1/10W	1	
	R654	ERJ14YJ101	M 100 OHM, J,1/4W	1	
	R655	ARMPC5WR18JD	5W 0.18	1	
	R656	ERJ6ENF2003	M 200KOHM, 1/10W	1	
	R657	D0GB150JA057	M 150 OHM J 1/16W	1	
	R658	D0GB150JA057	M 150 OHM J 1/16W	1	
	R659	ERJ6ENF2003	M 200KOHM, 1/10W	1	
	R660	D0GB151JA057	M 150 OHM J 1/16W	1	
	R661	D0GB473JA057	M 47KOHM,J,1/16W	1	
	R662	ERJ6ENF2003	M 200KOHM, 1/10W	1	
	R663	ERJ6ENF2003	M 200KOHM, 1/10W	1	
	R701	D0GB103JA057	M 10K OHM J 1/16W	1	
	R702	ERJ3GEYJ224	M 220KOHM,J,1/16W	1	
	R703	D0GB103JA057	M 10K OHM J 1/16W	1	
	R704	D0GB103JA057	M 10K OHM J 1/16W	1	
	R705	D0GB103JA057	M 10K OHM J 1/16W	1	
	R706	ERJ3GEYJ221	M 220 OHM,J,1/16W	1	
	R707	ERJ3GEYJ104	M 100KOHM,J,1/16W	1	
	R708	D0GB103JA057	M 10K OHM J 1/16W	1	
	R709	ERJ3GEYJ821	M820 OHM,J,1/16W	1	
	R710	D0GB103JA057	M 10K OHM J 1/16W	1	
	R711	ERJ3GEYJ221	M 220 OHM,J,1/16W	1	
	R712	D0GB103JA057	M 10K OHM J 1/16W	1	
	R714	ERJ3EKF4991	M4.99KOHM, 1/16W	1	
	R715	ERJ3EKF2052	M20.5KOHM, 1/16W	1	
	R717	ERJ3EKF4991	M4.99KOHM, 1/16W	1	
	R718	ERJ3GEYJ392	M 3.9KOHM,J,1/16W	1	
	R719	ERJ3GEYJ224	M 220KOHM,J,1/16W	1	
	R720	ERJ3EKF4991	M4.99KOHM, 1/16W	1	
	R721	ERJ3EKF4992	M 49.9KOHM, 1/16W	1	
	R722	ERJ3EKF4991	M4.99KOHM, 1/16W	1	
	R723	ERJ3EKF4991	M4.99KOHM, 1/16W	1	
	R724	ERJ3GEYJ224	M 220KOHM,J,1/16W	1	
	R725	D0GB103JA057	M 10K OHM J 1/16W	1	
	R726	ERJ3GEY0R00	M 0 OHM, 1/16W	1	
	R727	ERJ3GEYJ101	M 100 OHM,J,1/16W	1	
	R728	ERJ3GEYJ224	M 220KOHM,J,1/16W	1	
	R729	ERJ3GEYJ474	M 470KOHM,J,1/16W	1	
	R730	D0GB103JA057	M 10K OHM J 1/16W	1	
	R731	D0GB103JA057	M 10K OHM J 1/16W	1	
	R732	ERJ3GEYJ474	M 470KOHM,J,1/16W	1	
	R733	D0GB103JA057	M 10K OHM J 1/16W	1	
	R734	D0GB103JA057	M 10K OHM J 1/16W	1	
	R735	ERJ3GEYJ474	M 470KOHM,J,1/16W	1	
	R736	D0GB103JA057	M 10K OHM J 1/16W	1	
	R737	D0GB152JA057	M 1.5KOHM J 1/16W	1	
	R738	D0GB152JA057	M 1.5KOHM J 1/16W	1	
	R739	D0GB152JA057	M 1.5KOHM J 1/16W	1	
	R740	ERJ3GEYJ821	M820 OHM,J,1/16W	1	
	R741	ERJ3GEYJ821	M820 OHM,J,1/16W	1	
	R742	D0GB102JA057	M 1KOHM,J,1/16W	1	
	R743	ERJ3GEYJ821	M820 OHM,J,1/16W	1	
	R744	ERJ3GEYJ821	M820 OHM,J,1/16W	1	
	R745	D0GB102JA057	M 1KOHM,J,1/16W	1	
	R746	ERJ3GEYJ821	M820 OHM,J,1/16W	1	
	R747	ERJ3GEYJ821	M820 OHM,J,1/16W	1	
	R748	D0GB102JA057	M 1KOHM,J,1/16W	1	
	R749	ERJ3GEYJ221	M 220 OHM,J,1/16W	1	
	R750	ERJ3GEYJ221	M 220 OHM,J,1/16W	1	
	R751	ERJ3EKF4991	M4.99KOHM, 1/16W	1	
	R752	D0GB102JA057	M 1KOHM,J,1/16W	1	
	R760	ERJ3GEYJ221	M 220 OHM,J,1/16W	1	
⚠	R801	ARRCR5J624M	0.5W 620K	1	
	R802	ERJ6GEYJ223	M 22KOHM,J,1/10W	1	
	R803	ERJ6ENF3403	M 340KOHM, 1/10W	1	
	R804	ERJ6ENF3403	M 340KOHM, 1/10W	1	
	R805	ERJ14YJ820	M 82 OHM, J,1/4W	1	
	R806	ERJ14YJ820	M 82 OHM, J,1/4W	1	
	R807	ERJ6ENF3403	M 340KOHM, 1/10W	1	
	R808	ERJ6GEYJ223	M 22KOHM,J,1/10W	1	
	R809	ERJ6ENF3403	M 340KOHM, 1/10W	1	
	R810	ERJ3EKF5901	M 5.9KOHM, 1/16W	1	
	R811	ERJ6GEYJ393V	M 39KOHM,J,1/10W	1	
	R812	D0GB103JA057	M 10KOHM,J,1/16W	1	
	R814	ARMPC5WR18JD	5W 0.18	1	
	R815	D0GB150JA057	M 150 OHM J 1/16W	1	
	R816	ERJ6GEYJ914	M 910KOHM,J,1/10W	1	
	R817	ERDS2FJ824	C 820KOHM, J,1/4W	1	
	R818	ERJ6ENF3403	M 340KOHM, 1/10W	1	

Safety	Ref. No.	Part No.	Part Name & Description	Pcs	Remarks
	R819	ERJ6ENF3403	M 340KOHM, 1/10W	1	
	R822	ERJ6ENF5902	M 59KOHM, 1/10W	1	
	R823	ERJ3EKF3161	M3.16KOHM, 1/16W	1	
	R826	ERJ6GEYJ101V	M 100 OHM,J,1/ 10W	1	
	R827	D0GB473JA057	M 47KOHM,J,1/16W	1	
	R828	ERJ14YJ100H	M 10 OHM, J,1/4W	1	
	R843	ERG12SJ470J	M 47 OHM, J,1/2W	1	
	R844	ERG12SJ470J	M 47 OHM, J,1/2W	1	
	R845	ERJ6ENF5902	M 59KOHM, 1/10W	1	
	R846	ERJ6ENF5902	M 59KOHM, 1/10W	1	
	R847	ERJ6ENF5902	M 59KOHM, 1/10W	1	
	R848	ERJ6ENF5902	M 59KOHM, 1/10W	1	
	R849	ERJ6ENF5902	M 59KOHM, 1/10W	1	
	R850	ERJ6ENF5902	M 59KOHM, 1/10W	1	
	R851	ERJ6ENF5902	M 59KOHM, 1/10W	1	
	R852	ERJ6ENF1002	M 10KOHM, 1/10W	1	
	R853	D0GB150JA057	M 150 OHM J 1/ 16W	1	
	R854	D0GB150JA057	M 150 OHM J 1/ 16W	1	
⚠	RF801	HUY5JA200JPT	145K 20	1	
⚠	T501	ETB17BA128AH	TRANSFORMER	1	
	VR201	EVMEASA01B55	VARIABLE RESIS- TOR	1	
	VR401	EVMEASA01B14	VARIABLE RESIS- TOR	1	
	VR601	EVMEASA01B55	VARIABLE RESIS- TOR	1	
	X701	AYCSTE800MGT	CERAMICRESONATOR	1	
⚠	Z501	ERZV07D471	VARISTOR	1	
⚠	Z502	ERZV07D471	VARISTOR	1	
⚠	Z801	ERZV14D751	VARISTOR	1	
	ZD202	MA4047NL	ZENERDIODE	1	
	ZD204	MA4270NMTA	ZENER DIODE	1	
	ZD205	MA4270NMTA	ZENER DIODE	1	
	ZD206	MA4270NMTA	ZENER DIODE	1	
	ZD207	MA4150NMTA	ZENER DIODE	1	
	ZD302	MA4047NL	ZENERDIODE	1	
	ZD304	MA4270NMTA	ZENER DIODE	1	
	ZD305	MA4270NMTA	ZENER DIODE	1	
	ZD306	MA4270NMTA	ZENER DIODE	1	
	ZD351	MA4150NMTA	ZENER DIODE	1	
	ZD352	MA4150NMTA	ZENER DIODE	1	
	ZD401	MA4150NMTA	ZENER DIODE	1	
	ZD402	MAZ4068NMF	ZENER DIODE	1	
	ZD403	MA4360NM	ZENER DIODE	1	
	ZD451	MAZ4068NMF	ZENER DIODE	1	
	ZD501	MA4082NM	ZENER DIODE	1	
	ZD502	MA4180NMTA	ZENERDIODE	1	
	ZD503	MA4180NMTA	ZENERDIODE	1	
	ZD504	MA4270NMTA	ZENER DIODE	1	
	ZD505	MA4270NMTA	ZENER DIODE	1	
	ZD521	MA4300NMTA	ZENER DIODE	1	
	ZD522	MA4300NMTA	ZENER DIODE	1	
	ZD523	MA4300NMTA	ZENER DIODE	1	
	ZD524	MA4300NMTA	ZENER DIODE	1	
	ZD525	MA4150NMTA	ZENER DIODE	1	
	ZD526	MA4150NMTA	ZENER DIODE	1	
	ZD530	MA4300NMTA	ZENER DIODE	1	
	ZD531	MA4300NMTA	ZENER DIODE	1	
	ZD532	MA4300NMTA	ZENER DIODE	1	
	ZD533	MA4300NMTA	ZENER DIODE	1	
	ZD534	MA4300NMTA	ZENER DIODE	1	
	ZD551	MA4056NM	ZENERDIODE	1	
	ZD552	MA4120NM	ZENER DIODE	1	
	ZD601	MA4180NMTA	ZENERDIODE	1	
	ZD602	MA4180NMTA	ZENERDIODE	1	
	ZD603	MA4120NM	ZENER DIODE	1	
	ZD701	MA4036L	ZENER DIODE	1	
	ZD702	MA4036L	ZENER DIODE	1	
	ZD703	MA4036L	ZENER DIODE	1	
	ZD535	MA4300NMTA	ZENER DIODE	1	