

Service Manual

LCD TV



TX-32LX70X
TX-32LX70A
TX-32LX70Y
TX-32LE7X
TX-32LE7Y
TX-26LX70X
TX-26LX70A
TX-26LX70Y
TX-26LE7X
TX-26LE7Y

LH60 Chassis

Specifications

	TX-26LX70X/Y/A TX-26LE7X/Y	TX-32LX70X/Y/A TX-32LE7X/Y
Power Source	AC 110-240 V, 50 / 60 Hz (TX-26LX70X/Y) AC 110-240 V, 50 / 60 Hz (TX-26LE7X/Y) AC 230V,50Hz (TX-26LX70A)	AC 110-240 V, 50 / 60 Hz (TX-32LX70X/Y) AC 110-240 V, 50 / 60 Hz (TX-32LE7X/Y) AC 230V,50Hz (TX-32LX70A)
Power Consumption	Average use : 122W Standby condition: 0.9W	Average use : 178W Standby condition: 0.9W
LCD	66.1cm Wide XGA (1366 × 768 pixels) 16:9 aspect ratio LCD panel.	80.0cm
Screen Size	576mm(W) × 324mm(H)	698mm(W) × 392mm(H)
Sound		
Speaker	12cm × 6cm × 2 pcs, 4Ω	12cm × 6cm × 2 pcs, 4Ω
Audio Output	20 W (10W + 10W) , 10%THD	20 W (10W + 10W), 10%THD
Headphones	M3 (3.5 mm) Jack × 1	M3 (3.5 mm) Jack × 1
Receiving System/Band name		

17 Systems		Function
1	PAL B, G, H	Reception of broadcast transmissions and Playback from Video Cassette Tape Recorders
2	PAL I	
3	PAL D, K	
4	SECAM B, G	
5	SECAM D, K	
6	SECAM K1	
7	NTSC M (NTSC 3.58/ 4.5 MHz)	
8	NTSC 4.43/ 5.5 MHz	Playback from Special VCR's or DVD
9	NTSC 4.43/ 6.0 MHz	
10	NTSC 4.43/ 6.5 MHz	
11	NTSC 3.58/ 5.5 MHz	
12	NTSC 3.58/ 6.0 MHz	
13	NTSC 3.58/ 6.5 MHz	
14	SECAM I	
15	PAL 60 Hz/ 5.5 MHz	Playback from Special Disc Players and Special VCR's or DVD
16	PAL 60 Hz/ 6.0 MHz	
17	PAL 60 Hz/ 6.5 MHz	

Receiving Channels

Regular TV

VHF BAND

2-12 (PAL /SECAM B, K1)

0-12 (PAL B AUST.)

1-9 (PAL B N.Z)

1-12 (PAL/SECAM D)

1-12 (NTSC M Japan)

2-13 (NTSC M U.S.A)

UHF BAND

21-69 (PAL G, H, I/SECAM G, K, K1)

28-69 (PAL AUST.)

13-57 (PAL D, K)

13-62 (NTSC M Japan)

14-69 (NTSC M U.S.A)

CATV

S1-S20 (OSCAR)

1-125 (U.S.A CATV)

C13-C49 (JAPAN)

S21-S41 (HYPER)

Z1-Z37 (CHINA)

5A, 9A (AUST.)

Aerial-Rear

UHF/ VHF

Operating Conditions

Temperature : 0°C - 40°C

Humidity : 20 % - 90 % RH (non-condensing)

Connection Terminals**AV1**

VIDEO (RCA Pin Type)

1.0 Vp-p (75 Ω)

S-VIDEO (MINI DIN 4-pin)

Y: 1.0 Vp-p (75 Ω), C: 0.286 Vp-p (75 Ω)

AUDIO L-R (RCA Pin Type × 2)

0.5 Vrms

AV2

VIDEO (RCA Pin Type)

1.0 Vp-p (75 Ω)

AUDIO L-R (RCA Pin Type × 2)

0.5 Vrms

Y

1.0 Vp-p (including synchronization)

 $P_B C_B / P_R C_R$

±0.35 Vp-p

AV3

VIDEO (RCA Pin Type)

1.0 Vp-p (75 Ω)

S-VIDEO (MINI DIN 4-pin)

Y: 1.0 Vp-p (75 Ω), C: 0.286 Vp-p (75 Ω)

AUDIO L-R (RCA Pin Type × 2)

0.5 Vrms

HDMI 1/2

TYPE A Connectors

Audio Input for HDMI1

RCA PIN Type × 2

0.5 Vrms

MONITOR OUT

VIDEO (RCA Pin Type)

1.0 Vp-p (75 Ω)

AUDIO L-R (RCA Pin Type × 2)

0.5 Vrms

Dimensions (W x H x D)**Including TV Stand**

657mm × 525mm × 239mm

791mm × 615mm × 239mm

TV Set Only

657mm × 473mm × 127mm (TX-26LX70X/A/Y) 791mm × 563mm × 127mm (TX-32LX70X/A/Y)

	657mm × 473mm × 128mm (TX-26LE7X/Y)	791mm × 563mm × 128mm (TX-32LE7X/Y)
Weight	13.5 kg Net (TX-26LX70X/A/Y)	17.5 kg Net (TX-32LX70X/A/Y)
	14.0 kg Net (TX-26LE7X/Y)	18.0 kg Net (TX-32LE7X/Y)

Note:

Design and specifications are subject to change without notice. Weight and Dimensions shown are approximate.

⚠ WARNING

This service information is designed for experienced repair technicians only and is not designed for use by the general public. It does not contain warnings or cautions to advise non-technical individuals of potential dangers in attempting to service a product. Products powered by electricity should be serviced or repaired only by experienced professional technicians. Any attempt to service or repair the product or products dealt with in this service information by anyone else could result in serious injury or death.

CONTENTS

	Page		Page
1 Safety Precautions	4	11.2. Voltage chart of AP-Board	26
1.1. General Guidelines	4	11.3. Voltage chart of P-Board	26
2 Prevention of Electrostatic Discharge (ESD) to Electrostatically Sensitive (ES) Devices	4	11.4. DVCO adjustment	27
3 About lead free solder (PbF)	5	12 Conductor Views	29
4 Input signal that can be displayed	6	12.1. P-Board	29
5 Self-check function	7	12.2. AP-Board	31
5.1. How to access	7	12.3. A-Board	33
5.2. Screen display	7	12.4. V and G-Board	39
6 Chassis Board Layout	8	13 Block and Schematic Diagram	41
7 Disassembly for Service	9	13.1. Schematic Diagram Notes	41
7.1. Pedestal ass'y	9	13.2. Main Block Diagram	42
7.2. Rear cover	9	13.3. P.C.B. Block Diagram	43
7.3. Rear Support MTG (Left and right)	9	13.4. Power Block Diagram	44
7.4. AC cord	10	13.5. Signal Block Diagram	45
7.5. Tuner Cover Ass'y	11	13.6. Interconnection Schematic Diagram	46
7.6. Power Button Bracket Ass'y	11	13.7. P-Board Schematic Diagram (TX-26/32LX70A/X and TX-26/32LE7X)	47
7.7. Control Panel Ass'y	12	13.8. P-Board Schematic Diagram (TX-26/32LX70Y and TX-26/32LE7Y)	48
7.8. P-Board	12	13.9. AP-Board Schematic Diagram	49
7.9. A-Board	13	13.10. A-Board (1 of 5) Schematic Diagram	50
7.10. AP-Board	13	13.11. A-Board (2 of 5) Schematic Diagram	51
7.11. G-Board	13	13.12. A-Board (3 of 5) Schematic Diagram	52
7.12. V-Board and Led Panel	15	13.13. A-Board (4 of 5) Schematic Diagram	53
7.13. Speaker	16	13.14. A-Board (5 of 5) Schematic Diagram	54
7.14. Main Chassis Ass'y	16	13.15. G-Board Schematic Diagram	55
7.15. LCD Panel	17	13.16. V-Board Schematic Diagram	56
8 Location of Lead Wiring	18	14 Parts Location	57
9 EMI Processing	20	15 Packing Exploded View	59
10 Service Mode Function	22	16 Mechanical Replacement Parts List	61
10.1. How to enter SERVICE 1	22	17 Electrical Replacement Parts List	66
10.2. How to enter SERVICE 2	22	17.1. Replacement Parts List Notes	66
10.3. Option Description	24	17.2. Electrical Replacement Parts List	67
10.4. Option Code Setting	25		
11 Adjustment	26		
11.1. Voltage chart of A-Board	26		

1 Safety Precautions

1.1. General Guidelines

1. When servicing, observe the original lead dress. If a short circuit is found, replace all parts which have been overheated or damaged by the short circuit.
2. After servicing, see to it that all the protective devices such as insulation barriers, insulation papers shields are properly installed.
3. After servicing, make the following leakage current checks to prevent the customer from being exposed to shock hazards.

1.1.1. Leakage Current Cold Check

1. Unplug the AC cord and connect a jumper between the two prongs on the plug.
2. Measure the resistance value, with an ohmmeter, between the jumpered AC plug and each exposed metallic cabinet part on the equipment such as screwheads, connectors, control shafts, etc. When the exposed metallic part has a return path to the chassis, the reading should be between $1M\Omega$ and $5.2M\Omega$.

When the exposed metal does not have a return path to the chassis, the reading must be ∞ .

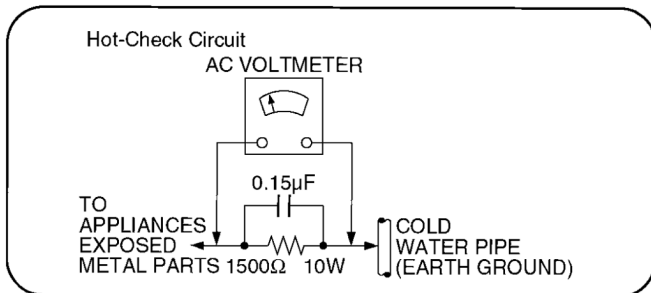


Figure 1

1.1.2. LEAKAGE CURRENT HOT CHECK (See Figure 1.)

1. Plug the AC cord directly into the AC outlet. Do not use an isolation transformer for this check.
2. Connect a $1.5k\Omega$, 10 watts resistor, in parallel with a $0.15\mu F$ capacitors, between each exposed metallic part on the set and a good earth ground such as a water pipe, as shown in Figure 1.
3. Use an AC voltmeter, with 1000 ohms/volt or more sensitivity, to measure the potential across the resistor.
4. Check each exposed metallic part, and measure the voltage at each point.
5. Reverse the AC plug in the AC outlet and repeat each of the above measurements.
6. The potential at any point should not exceed 0.75 volts RMS. A leakage current tester (Simpson Model 229 or equivalent) may be used to make the hot checks, leakage current must not exceed 1/2 milliamp. In case a measurement is outside of the limits specified, there is a possibility of a shock hazard, and the equipment should be repaired and rechecked before it is returned to the customer.

2 Prevention of Electrostatic Discharge (ESD) to Electrostatically Sensitive (ES) Devices

Some semiconductor (solid state) devices can be damaged easily by static electricity. Such components commonly are called Electrostatically Sensitive (ES) Devices. Examples of typical ES devices are integrated circuits and some field-effect transistors and semiconductor "chip" components. The following techniques should be used to help reduce the incidence of component damage caused by electrostatic discharge (ESD).

1. Immediately before handling any semiconductor component or semiconductor-equipped assembly, drain off any ESD on your body by touching a known earth ground. Alternatively, obtain and wear a commercially available discharging ESD wrist strap, which should be removed for potential shock reasons prior to applying power to the unit under test.
2. After removing an electrical assembly equipped with ES devices, place the assembly on a conductive surface such as aluminum foil, to prevent electrostatic charge buildup or exposure of the assembly.
3. Use only a grounded-tip soldering iron to solder or unsolder ES devices.
4. Use only an anti-static solder removal device. Some solder removal devices not classified as "anti-static (ESD protected)" can generate electrical charge sufficient to damage ES devices.
5. Do not use freon-propelled chemicals. These can generate electrical charges sufficient to damage ES devices.
6. Do not remove a replacement ES device from its protective package until immediately before you are ready to install it. (Most replacement ES devices are packaged with leads electrically shorted together by conductive foam, aluminum foil or comparable conductive material).
7. Immediately before removing the protective material from the leads of a replacement ES device, touch the protective material to the chassis or circuit assembly into which the device will be installed.

Caution

Be sure no power is applied to the chassis or circuit, and observe all other safety precautions.

8. Minimize bodily motions when handling unpackaged replacement ES devices. (Otherwise harmless motion such as the brushing together of your clothes fabric or the lifting of your foot from a carpeted floor can generate static electricity (ESD) sufficient to damage an ES device).

IMPORTANT SAFETY NOTICE

There are special components used in this equipment which are important for safety. These parts are marked by Δ in the schematic diagrams, Exploded Views and replacement parts list. It is essential that these critical parts should be replaced with manufacturer's specified parts to prevent shock, fire, or other hazards. Do not modify the original design without permission of manufacturer.

3 About lead free solder (PbF)


Note: Lead is listed as (Pb) in the periodic table of elements. In the information below, Pb will refer to Lead solder, and PbF will refer to Lead Free Solder. The Lead Free Solder used in our manufacturing process and discussed below is (Sn+Ag+Cu). That is Tin (Sn), Silver (Ag) and Copper (Cu) although other types are available.

This model uses Pb Free solder in its manufacture due to environmental conservation issues. For service and repair work, we suggest the use of Pb free solder as well, although Pb solder may be used.

PCBs manufactured using lead free solder will have the PbF within a leaf Symbol PbF stamped on the back of PCB.

Caution

- Pb free solder has a higher melting point than standard solder. Typically the melting point is 50 ~ 70°F (30~40°C) higher. Please use a high temperature soldering iron and set it to 700 ± 20°F (370 ± 10°C).
- Free solder will tend to splash when heated too high (about 1100°F or 600°C).
If you must use Pb solder, please completely remove all of the Pb free solder on the pins or solder area before applying Pb solder. If this is not practical, be sure to heat the Pb free solder until it melts, before applying Pb solder.
- After applying PbF solder to double layered boards, please check the component side for excess solder which may flow onto the opposite side. (see figure below)

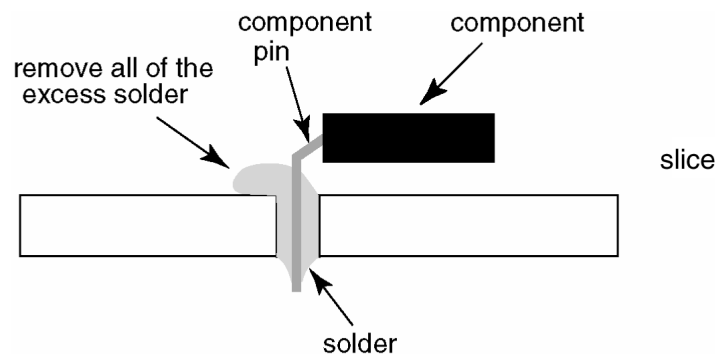

Suggested Pb free solder

There are several kinds of Pb free solder available for purchase. This product uses Sn+Ag+Cu (tin, silver, copper) solder. However, Sn+Cu (tin, copper), Sn+Zn+Bi (tin, zinc, bismuth) solder can also be used.

0.3mm X 100g	0.6mm X 100g	1.0mm X 100g

4 Input signal that can be displayed

*Mark:Applicable input signal for Component(Y,P_B/C_B,P_R/C_R)and HDMI

Signal name	Horizontal frequency(kHz)	Vertical frequency(Hz)	Component	HDMI
480i(525)/60Hz	15.73	59.94	*	*
480p(525)/60Hz	31.47	59.94	*	*
576i(625)/50Hz	15.63	50.00	*	*
576p(625)/50Hz	31.25	50.00	*	*
720p(750)/60Hz	45.00	60.00	*	*
720p(750)/50Hz	37.50	50.00	*	*
1080i(1125)/60Hz	33.75	60.00	*	*
1080i(1125)/50Hz	28.13	50.00	*	*

Note

- Signals other than above may not be displayed properly.
- The above signals are reformatted for optimal viewing on your display.

5 Self-check function

When phenomena like "the power fails from time to time" or "the video/audio fails from time to time" can not be confirmed at the time of servicing, the self-check function can be used to confirm the occurrence and to limit the scope for the defective circuits. Also, when "the power fails from time to time", display on the screen can be used to confirm the occurrence and to limit the scope for the defective circuits.

Any programmed channels, channels caption data and some other user defined settings will be erased and return to factory setting.

5.1. How to access


5.1.1. Access

Produce TV reception screen and, while pressing [VOLUME-] button on the main unit, press [OFF TIMER] button on the remote controller unit simultaneously.

5.1.2. Exit


To exit, turn off the TV.

5.2. Screen display

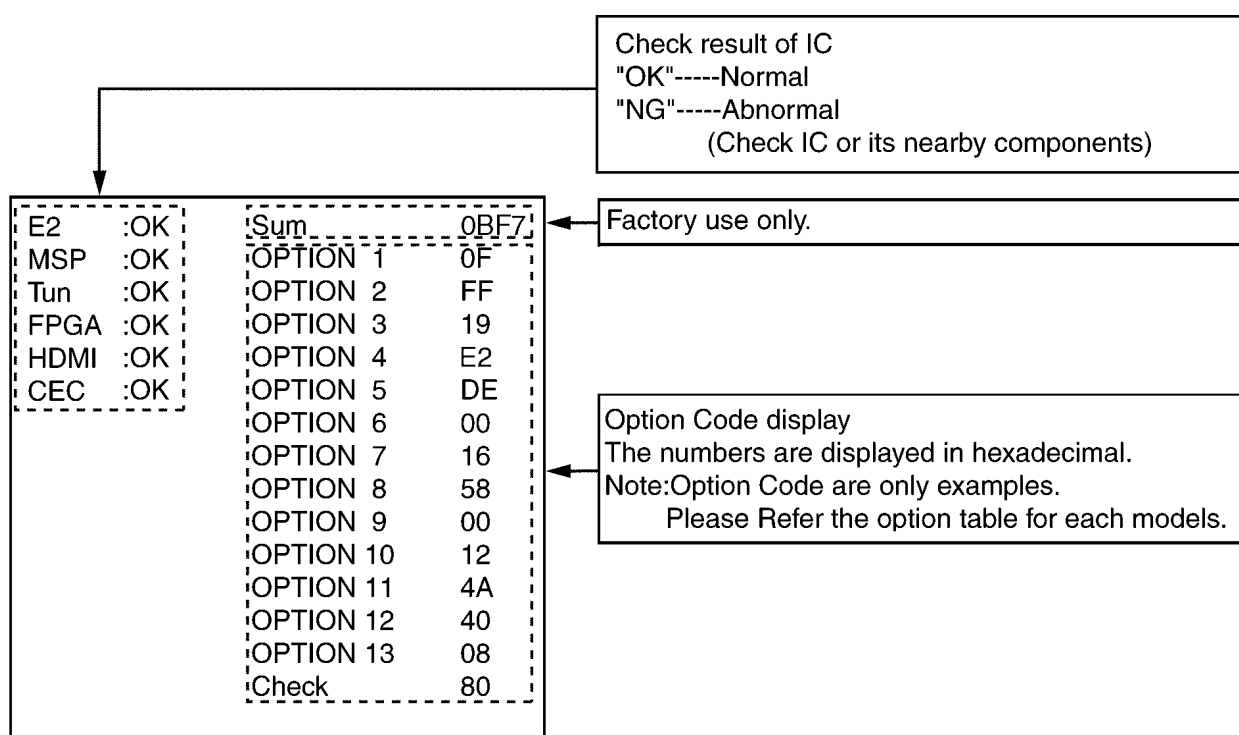

Display	Ref No.	Description	P.C.B.
E2	IC1102	EEPROM	A-Board
MSP	IC2001	TV Sound Power Amplifier	A-Board
Tun	TU101	Tuner	A-Board
FPGA	IC4004	LCD Driver and Display Control	A-Board
HDMI	IC5004	HDMI Processor	A-Board
CEC	IC5001/IC5002	CEC Control	A-Board

6 Chassis Board Layout

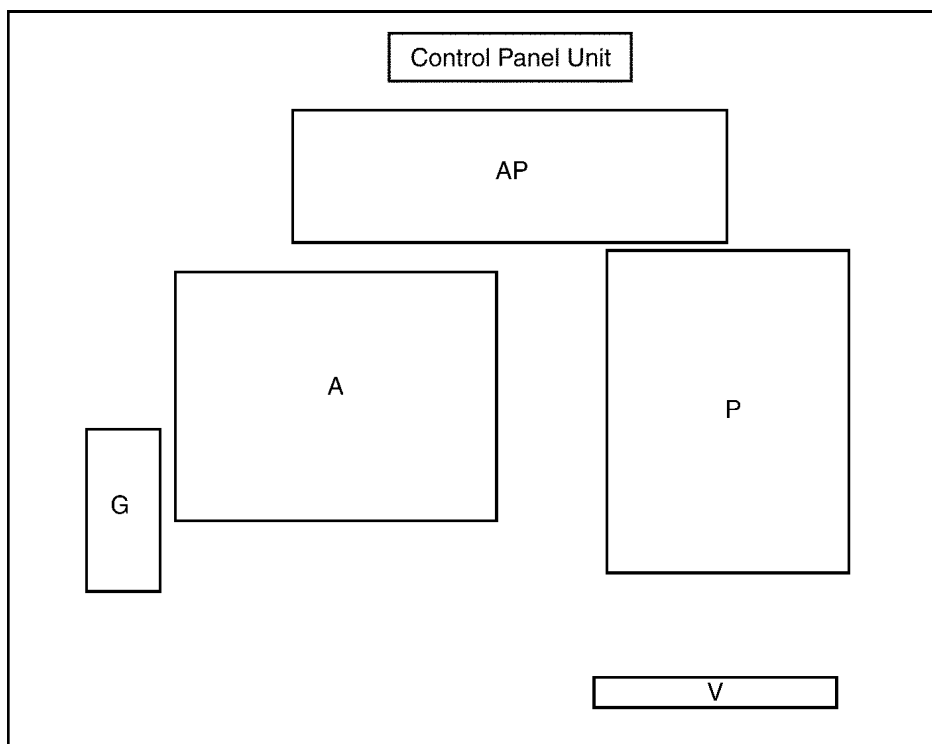


Board Name	Function
A-Board	Main (AV connector, AV Switch, Tuner, Audio & Video Processor, MCU, LCD Driver, LVDS)
V-Board	Remote Receiver, LED, B.A.T.S.
G-Board	AV3, Headphone jack
AP-Board	Power Supply, Power Regulator
P-Board	Power (AC/DC)
Control Panel Unit	None serviceable. Control Panel Unit should be exchanged for service.



7 Disassembly for Service

7.1. Pedestal ass'y

1. Lay down the main unit so that the rear cover faces upward.
2. Remove the fixing screw (2 pcs).(For LE7 only)
3. Remove the hinge cover.(For LE7 only)

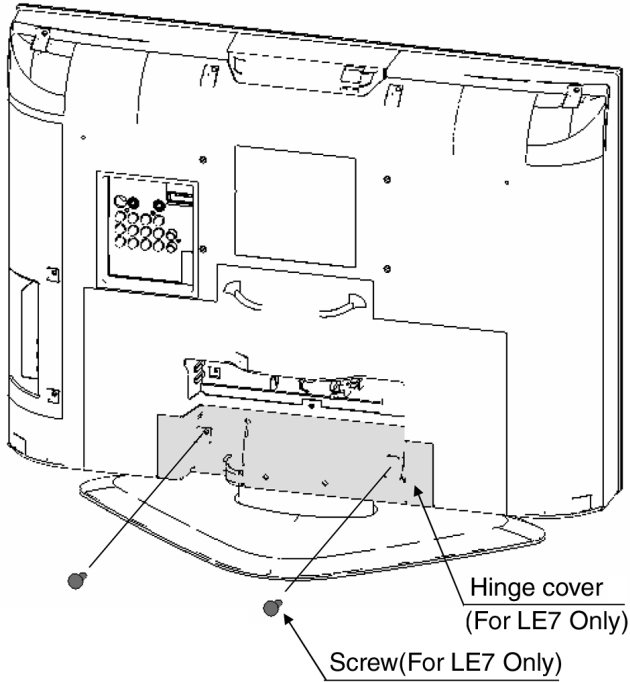


4. Remove the fixing screws (4 pcs).
5. Remove the pedestal ass'y.

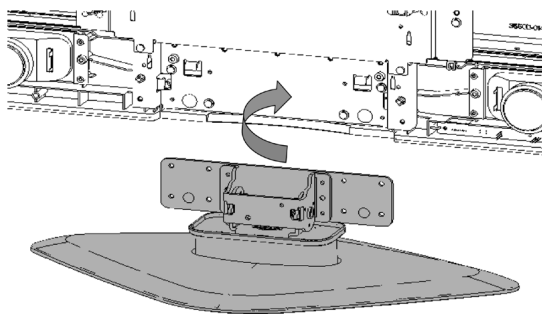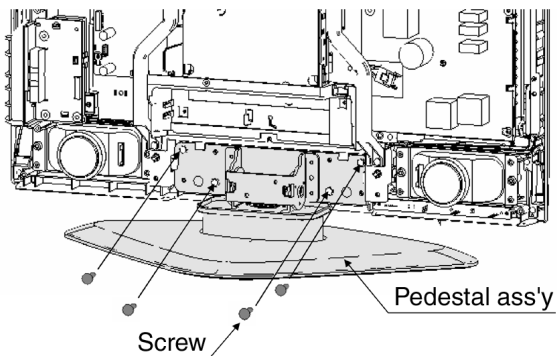

7.2. Rear cover


1. Remove the fixing screws (12 pcs for 26" or 14 pcs for 32" and 3 pcs).

2. Remove the rear cover.

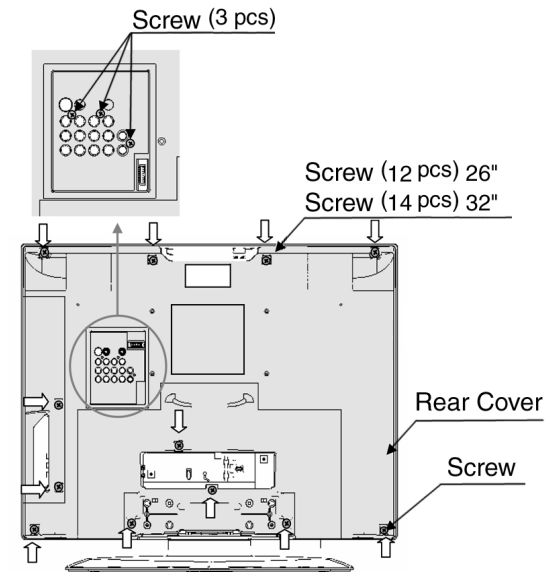


7.3. Rear Support MTG (Left and right)

1. Remove the rear cover. (See 7.2)
2. Remove the fixing screws (4 pcs).
3. Put Rear Support MTG lightly, while moving upper.

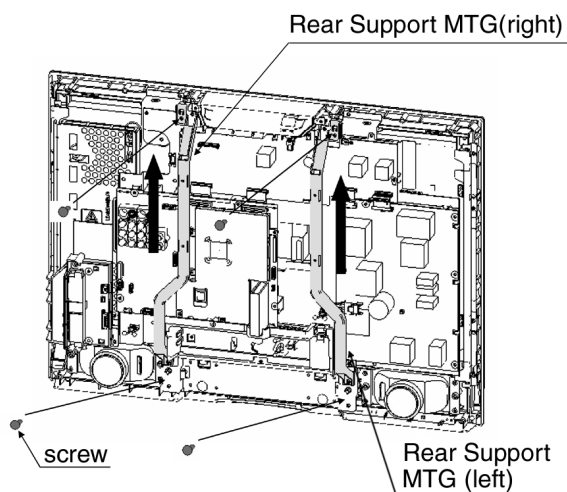


Note for re-installing:

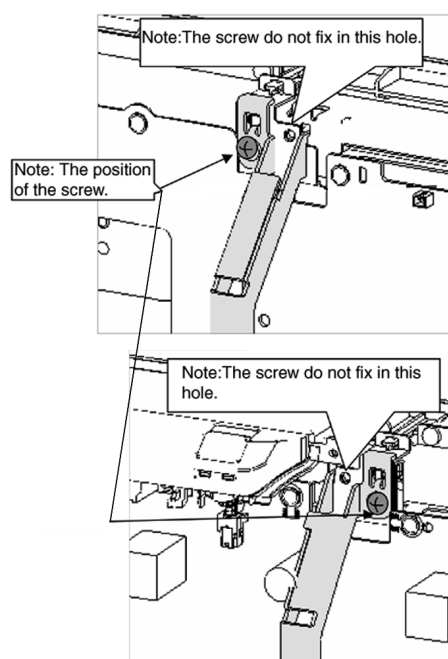


7.4. AC cord

AC cord (26")

1. Remove the rear cover (See 7.2) and the rear support MTG. (See 7.3)
2. Take out the groove of the AC cord from the slot of the Tuner cover.
3. Disconnect the couplers of AC cord.

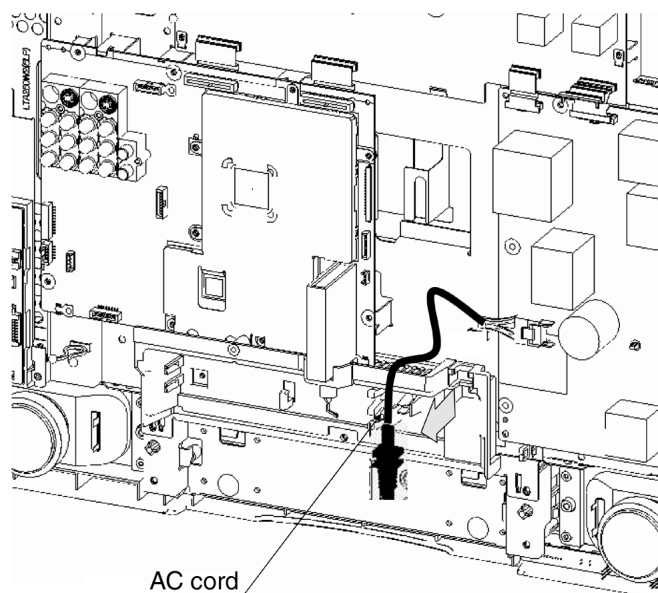


The direction of taking out




AC cord (32")

1. Remove the rear cover (See 7.2) and the rear support MTG. (See 7.3)
2. Take out the groove of the AC cord from the slot of the Tuner cover.
3. Unlock the cable clamber.
4. Disconnect the couplers of AC cord.

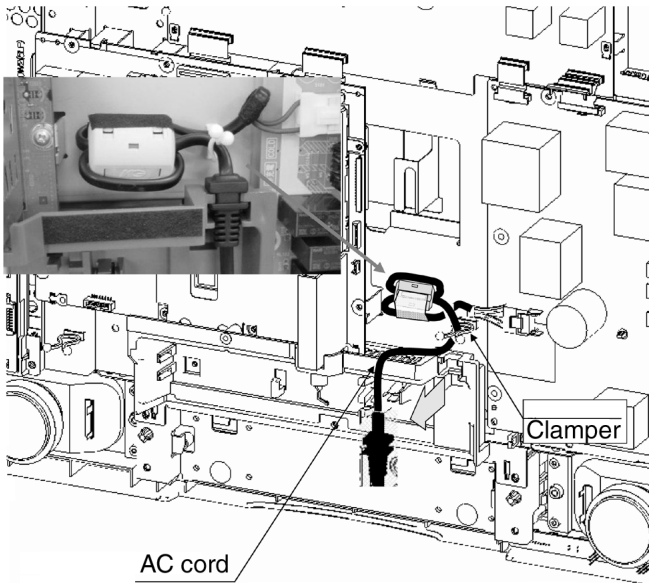


The direction of taking out

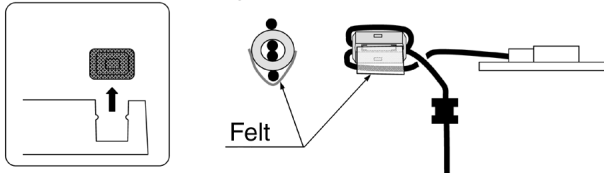

7.5. Tuner Cover Ass'y



1. Remove the rear cover (See 7.2) and the rear support MTG. (See 7.3)
2. Remove the fixing screws (2 pcs).
3. Remove the Tuner Cover Ass'y.

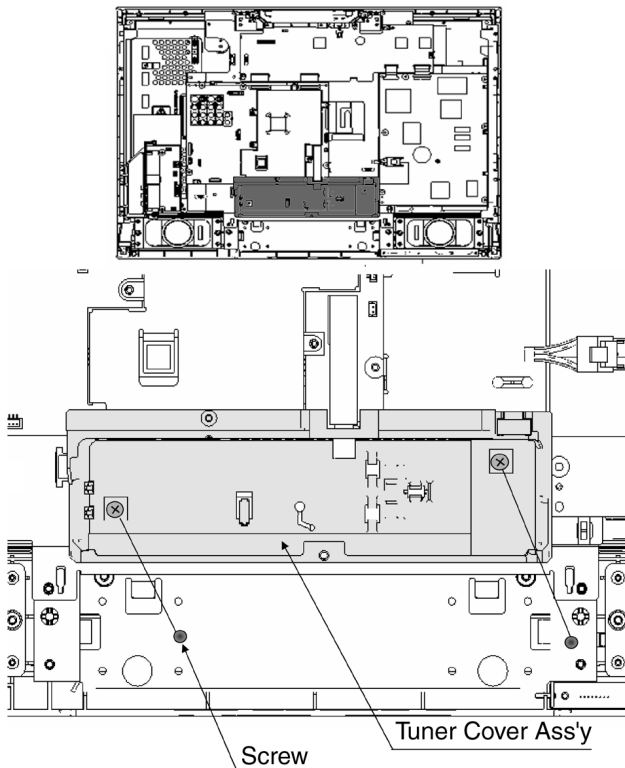

7.6. Power Button Bracket Ass'y



LX70

1. Remove the rear cover (See 7.2) and the rear support MTG. (See 7.3)
2. Remove the fixing screws (3 pcs).
3. Remove the Power Button Bracket Ass'y.

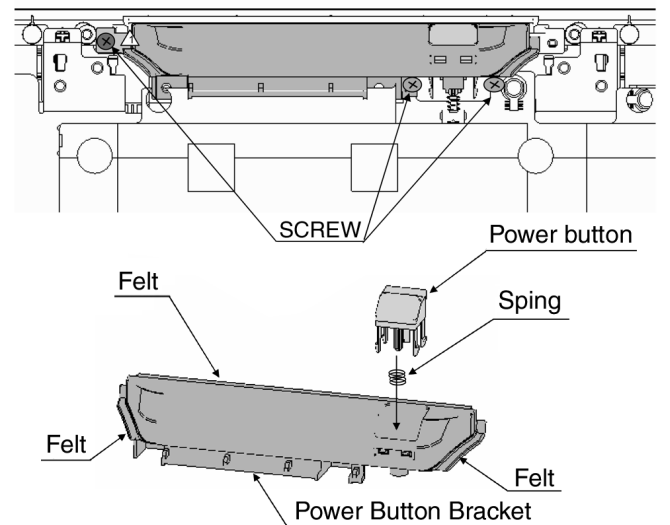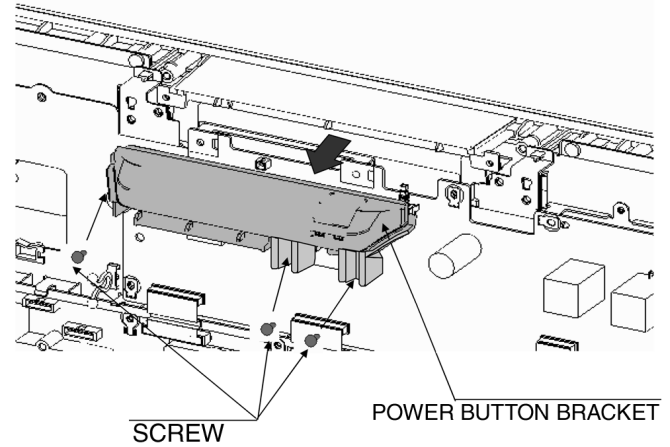

LE7

1. Remove the rear cover (See 7.2) and the rear support MTG. (See 7.3)
2. Remove the fixing screws (2 pcs).
3. Remove the Power Button Bracket Ass'y.

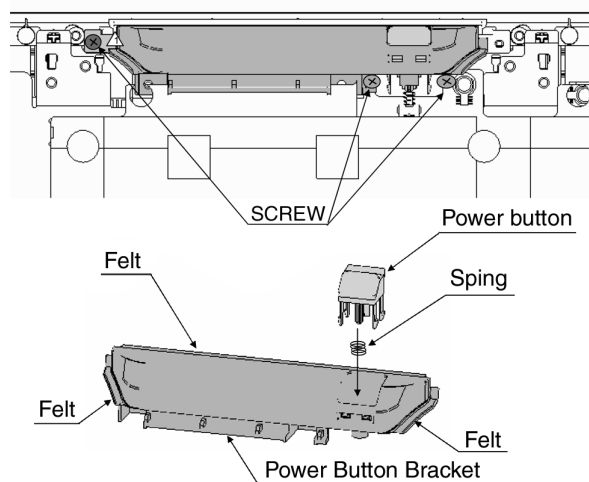
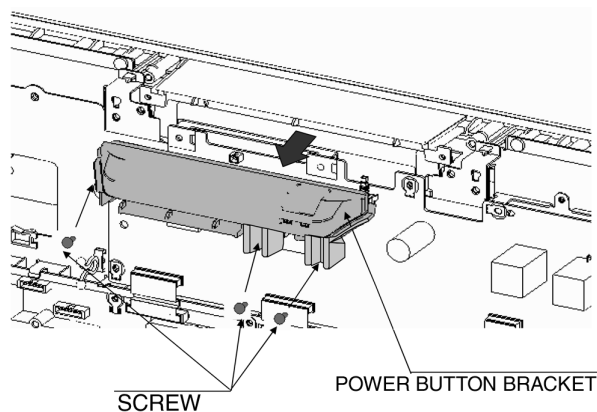


7.7. Control Panel Ass'y

LX70

1. Remove the Power Button Bracket Ass'y. (See 7.5)
2. Remove the fixing screws (1 pcs).
3. Disconnect the coupler (AP6).
4. Remove the Control Panel Ass'y.



CONTROL PANEL ASSY

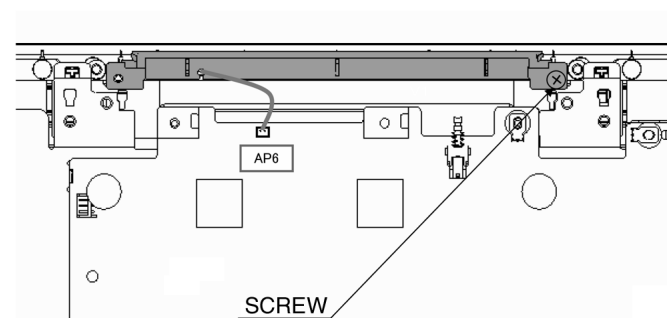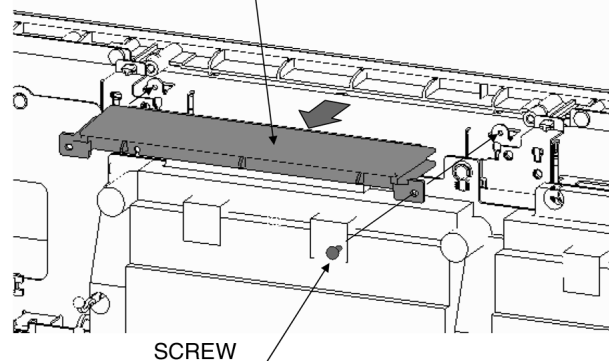

LE7



1. Remove the Power Button Bracket Ass'y. (See 7.5)
2. Remove the fixing screws (2 pcs).
3. Disconnect the coupler (AP6).
4. Remove the Control Panel Ass'y.

Control Panel Ass'y

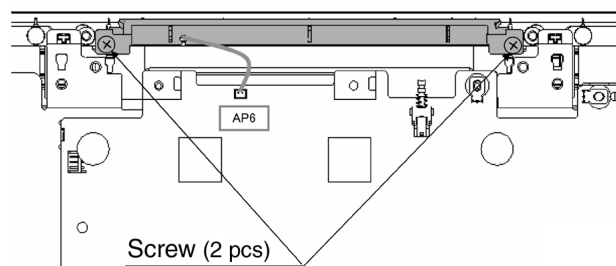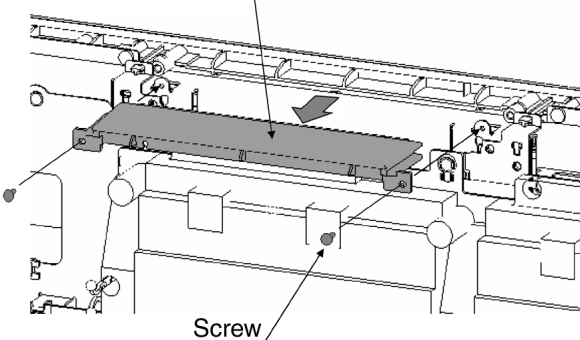


7.8. P-Board

1. Disconnect the couplers (P301~AP2 and P302~AP1).
2. Remove the fixing screws (6 pcs).
3. Remove the P-Board.

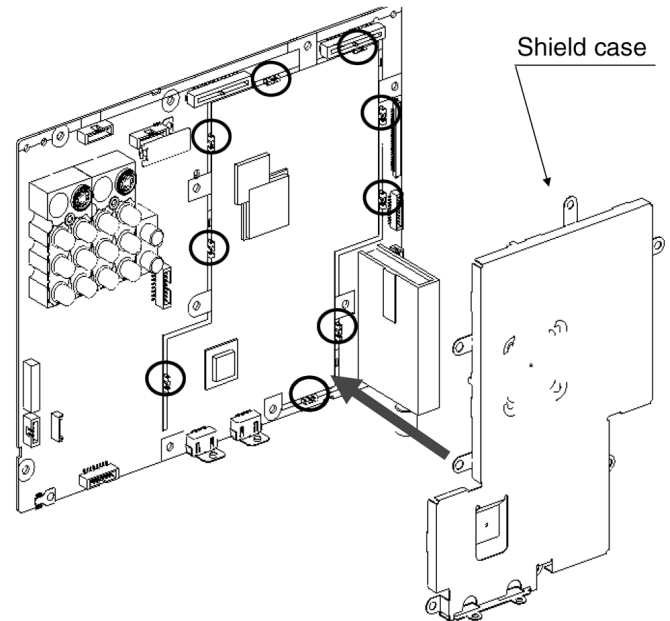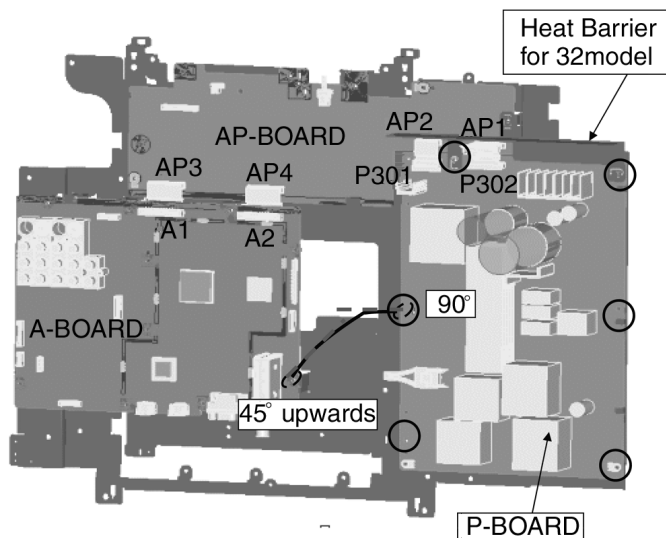

7.9. A-Board

1. Remove the Tuner Cover Ass'y. (See 7.5)
2. Remove the fixing screws (11 pcs).
3. Disconnect the couplers (A1, A2.....A7).
4. Remove the A-Board.

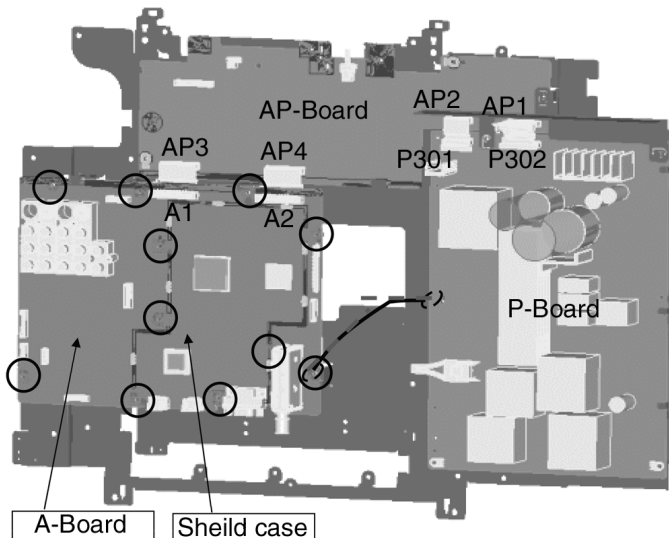


Fix the A shield case to A-Board as follow:

Caution

Fix carefully shield case to shield clip (ZA4001-ZA4008, and ZA4030).

7.10. AP-Board



1. Disconnect the couplers (AP1-AP6).
2. Remove the fixing screws (4 pcs).
3. Remove the AP-Board.

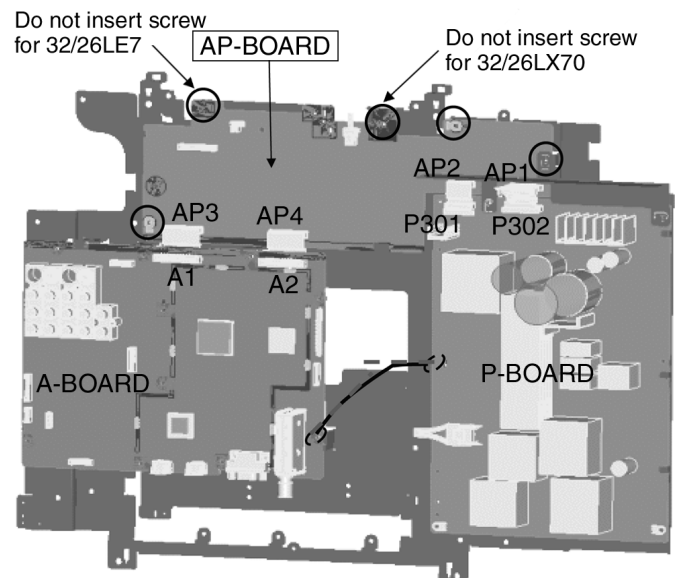


7.11. G-Board

G-Board (26")


1. Remove the Rear Cover. (See 7.2)
2. Disconnect the couplers (G1 and G2).
3. Remove the fixing screws (1pcs for 26LE7 or 2pcs for 26LX70).
4. Remove the G-Board Ass'y.

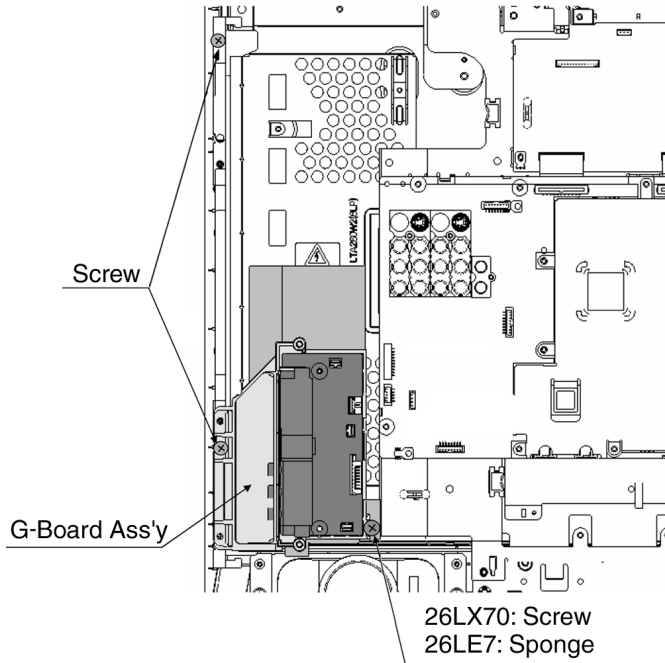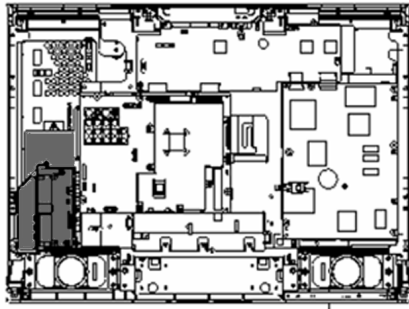

5. Remove the fixing screws (2 pcs).
6. Remove the G-Board.


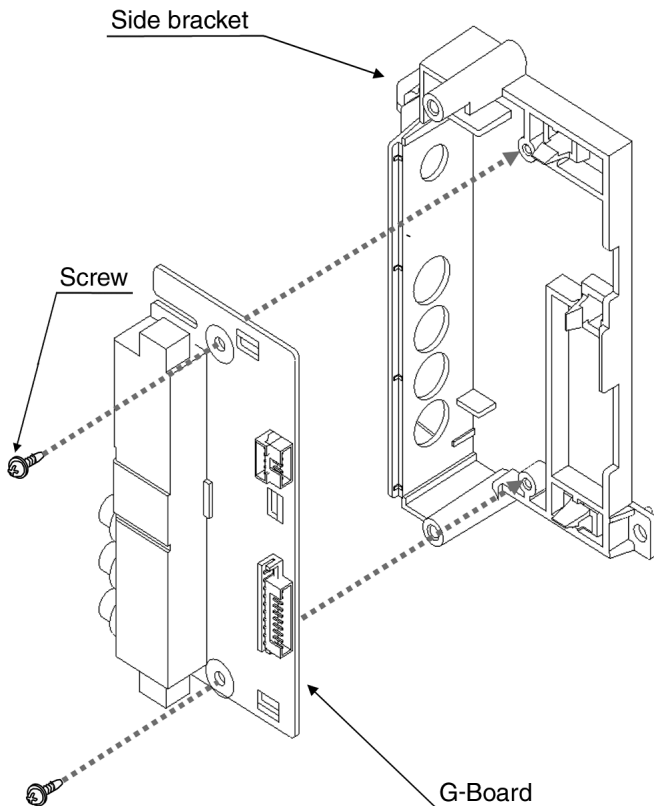


7. Remove the fixing screws (2 pcs).
8. Remove the Shield case.

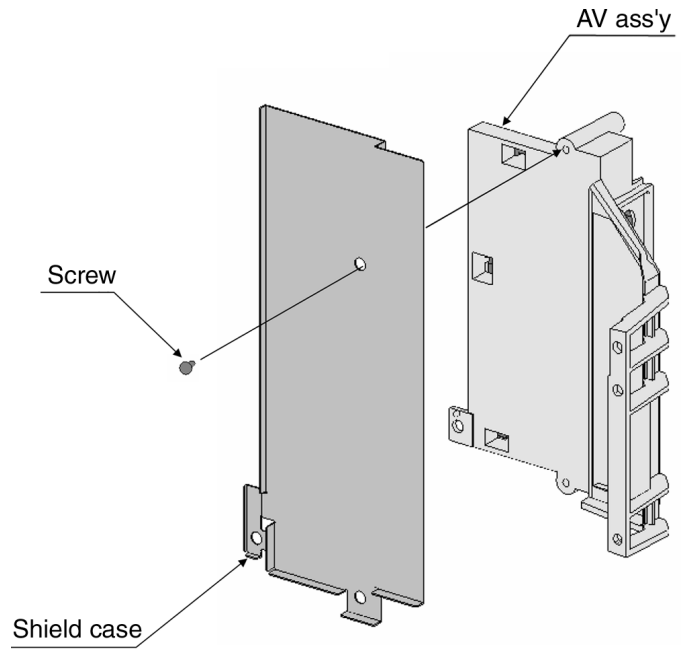


G-Board (32")

1. Remove the Rear Cover. (See 7.2)
2. Disconnect the couplers (G1 and G2).
3. Remove the fixing screws (1pcs for 32LE7 or 2pcs for 32LX70).
4. Remove the G-Board Ass'y.

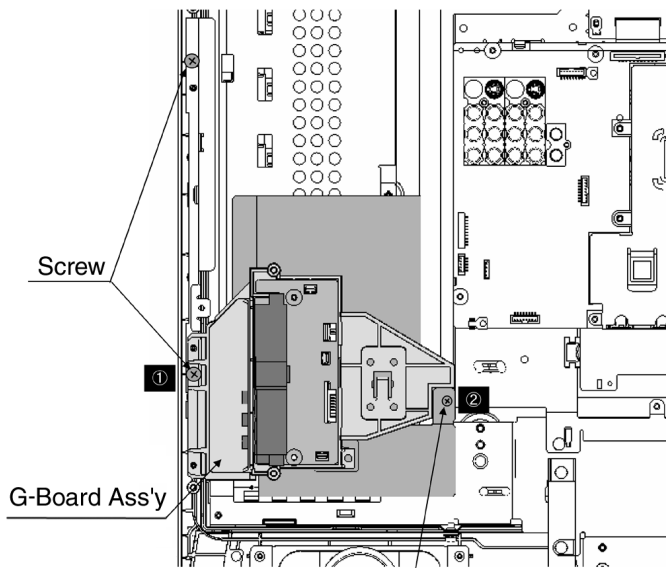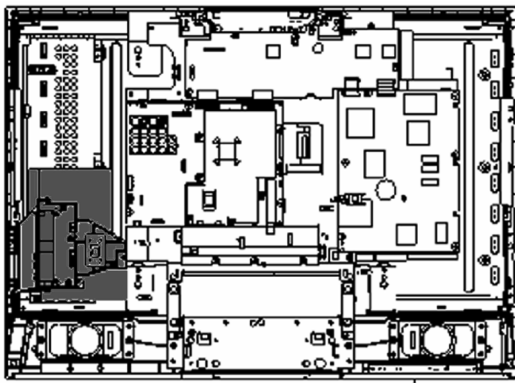


32LX70: Screw
32LE7: Sponge

5. Remove the fixing screws (2 pcs).
6. Remove the G-Board.

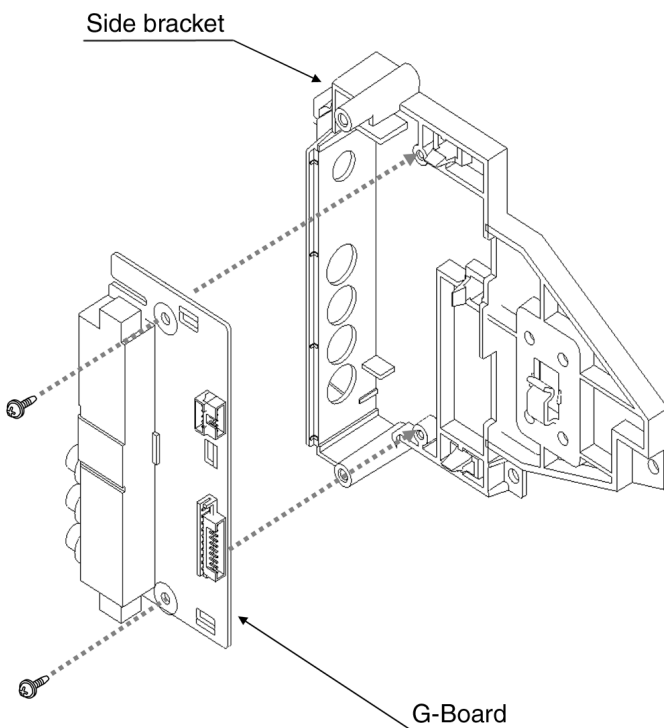


7. Remove the fixing screws (2 pcs).
8. Remove the Shield case.

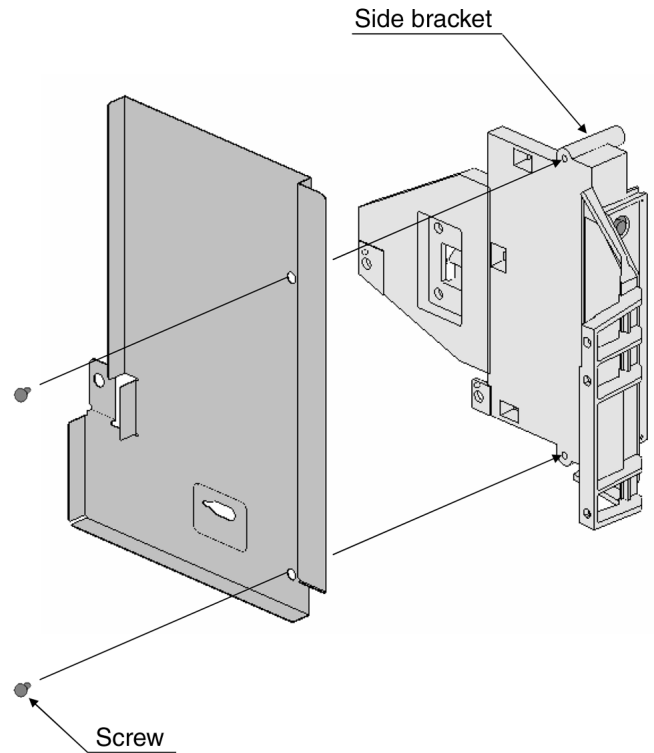


7.12. V-Board and Led Panel

1. Remove the fixing screws (2 pcs).
2. Disconnect the couplers (V1).
3. Remove the V-Board.

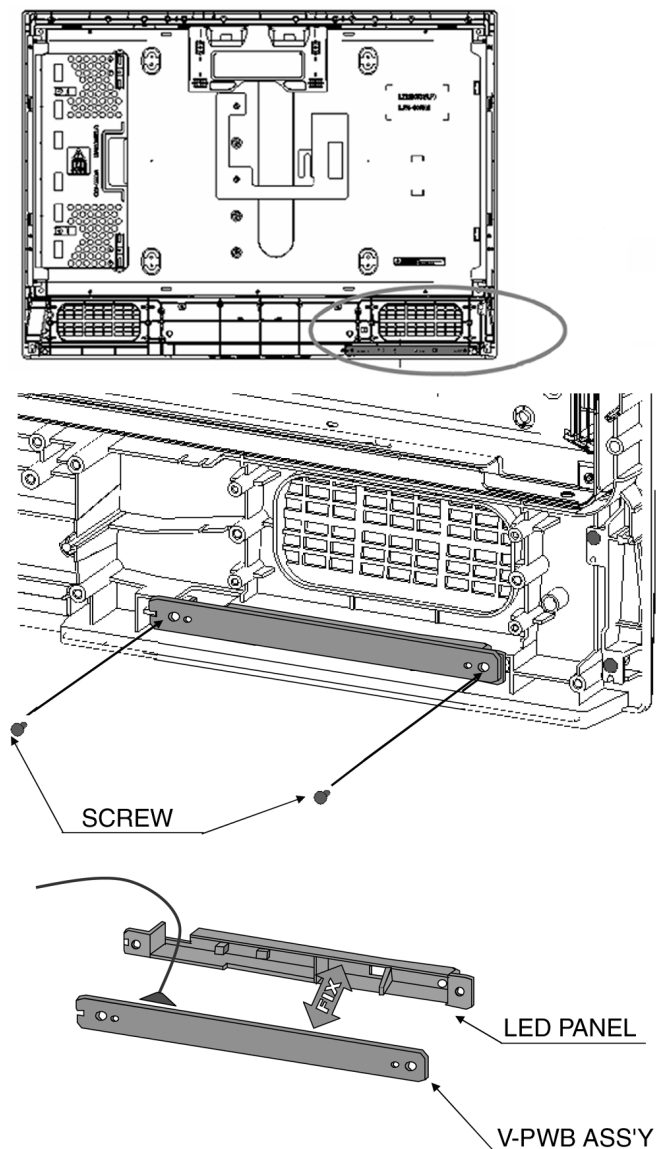


7.13. Speaker

1. Remove the fixing screws (4pcs).
2. Remove the Speakers (left and right).

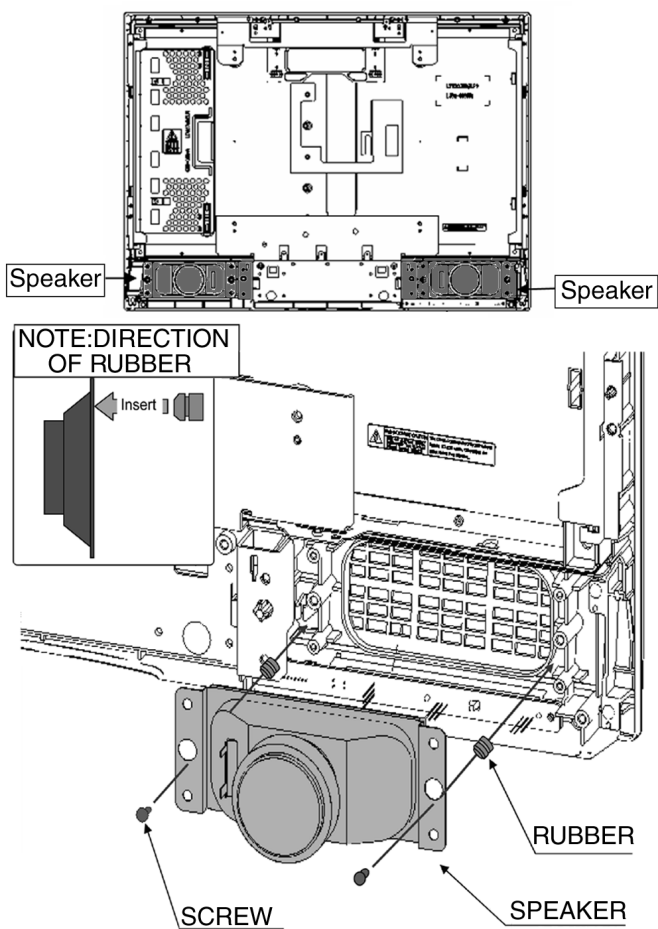

7.14. Main Chassis Ass'y


1. Remove the fixing screws (3 pcs).
2. Disconnect the couplers.
3. Remove the Main Chassis Ass'y.

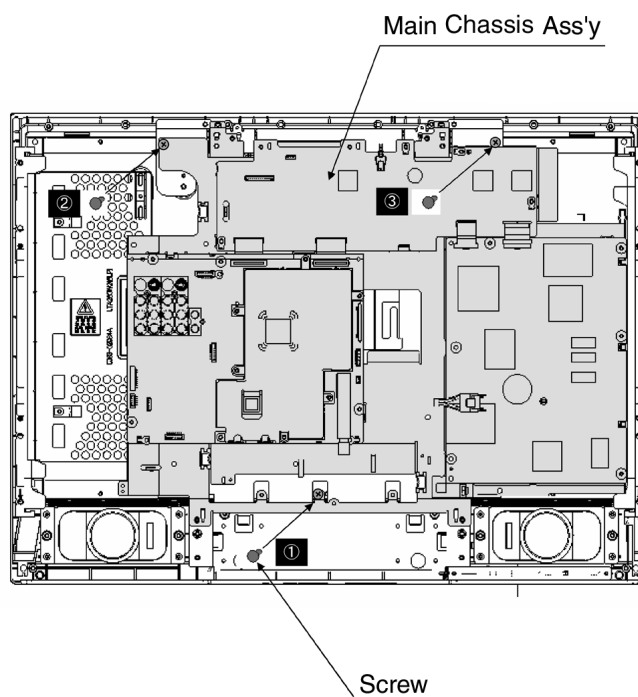

7.15. LCD Panel

LCD Panel (26")


1. Remove the Main Chassis Ass'y. (See 7.13)
2. Remove the fixing screws (9 pcs).
3. Remove the LCD mount MTG (top, bottom, left, right).
4. Disconnect the couplers.
5. Remove the LCD Panel.

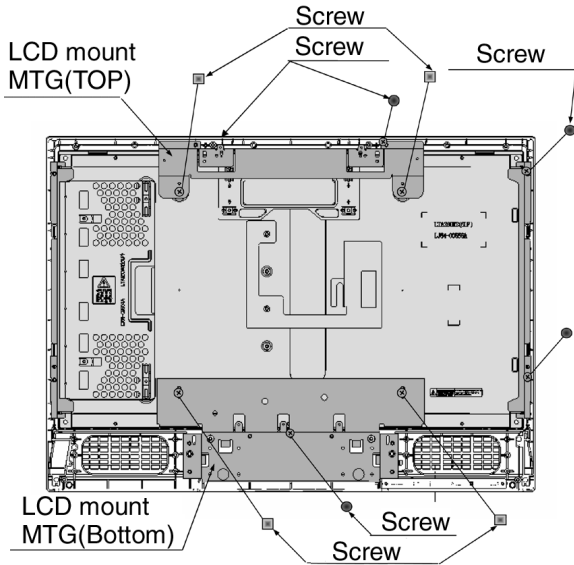

LCD Panel (32")


1. Remove the Main Chassis Ass'y. (See 7.13)

2. Remove the fixing screws (11pcs for 32LE7 or 12pcs for 32LX70).
3. Remove the LCD mount MTG (top, bottom, left, right).
4. Disconnect the couplers.
5. Remove the LCD Panel.

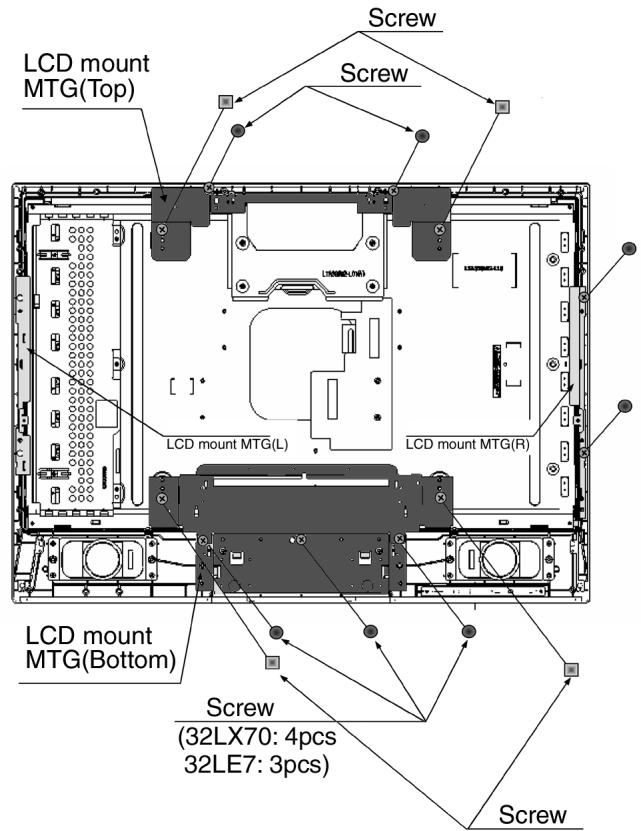


8 Location of Lead Wiring

Location of Lead Wiring (26")

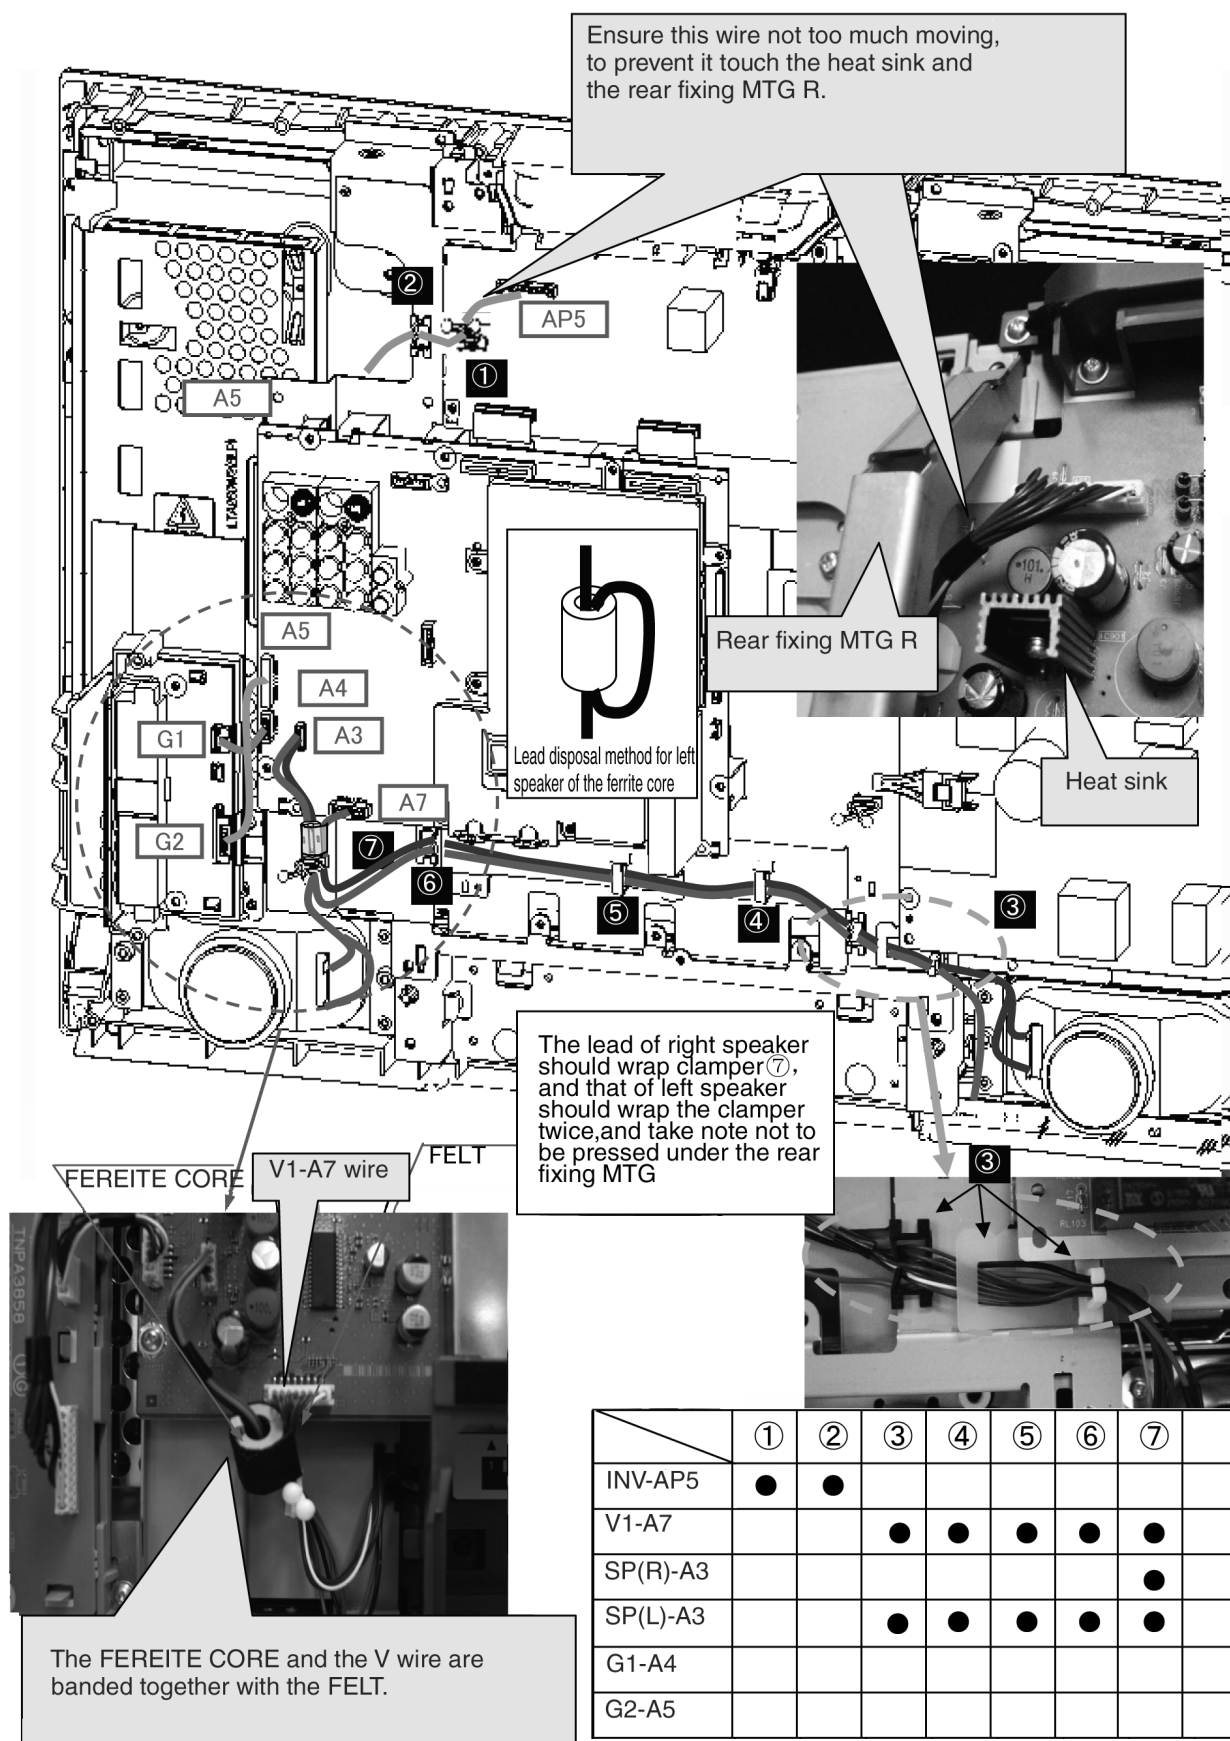

Location of Lead Wiring (32")

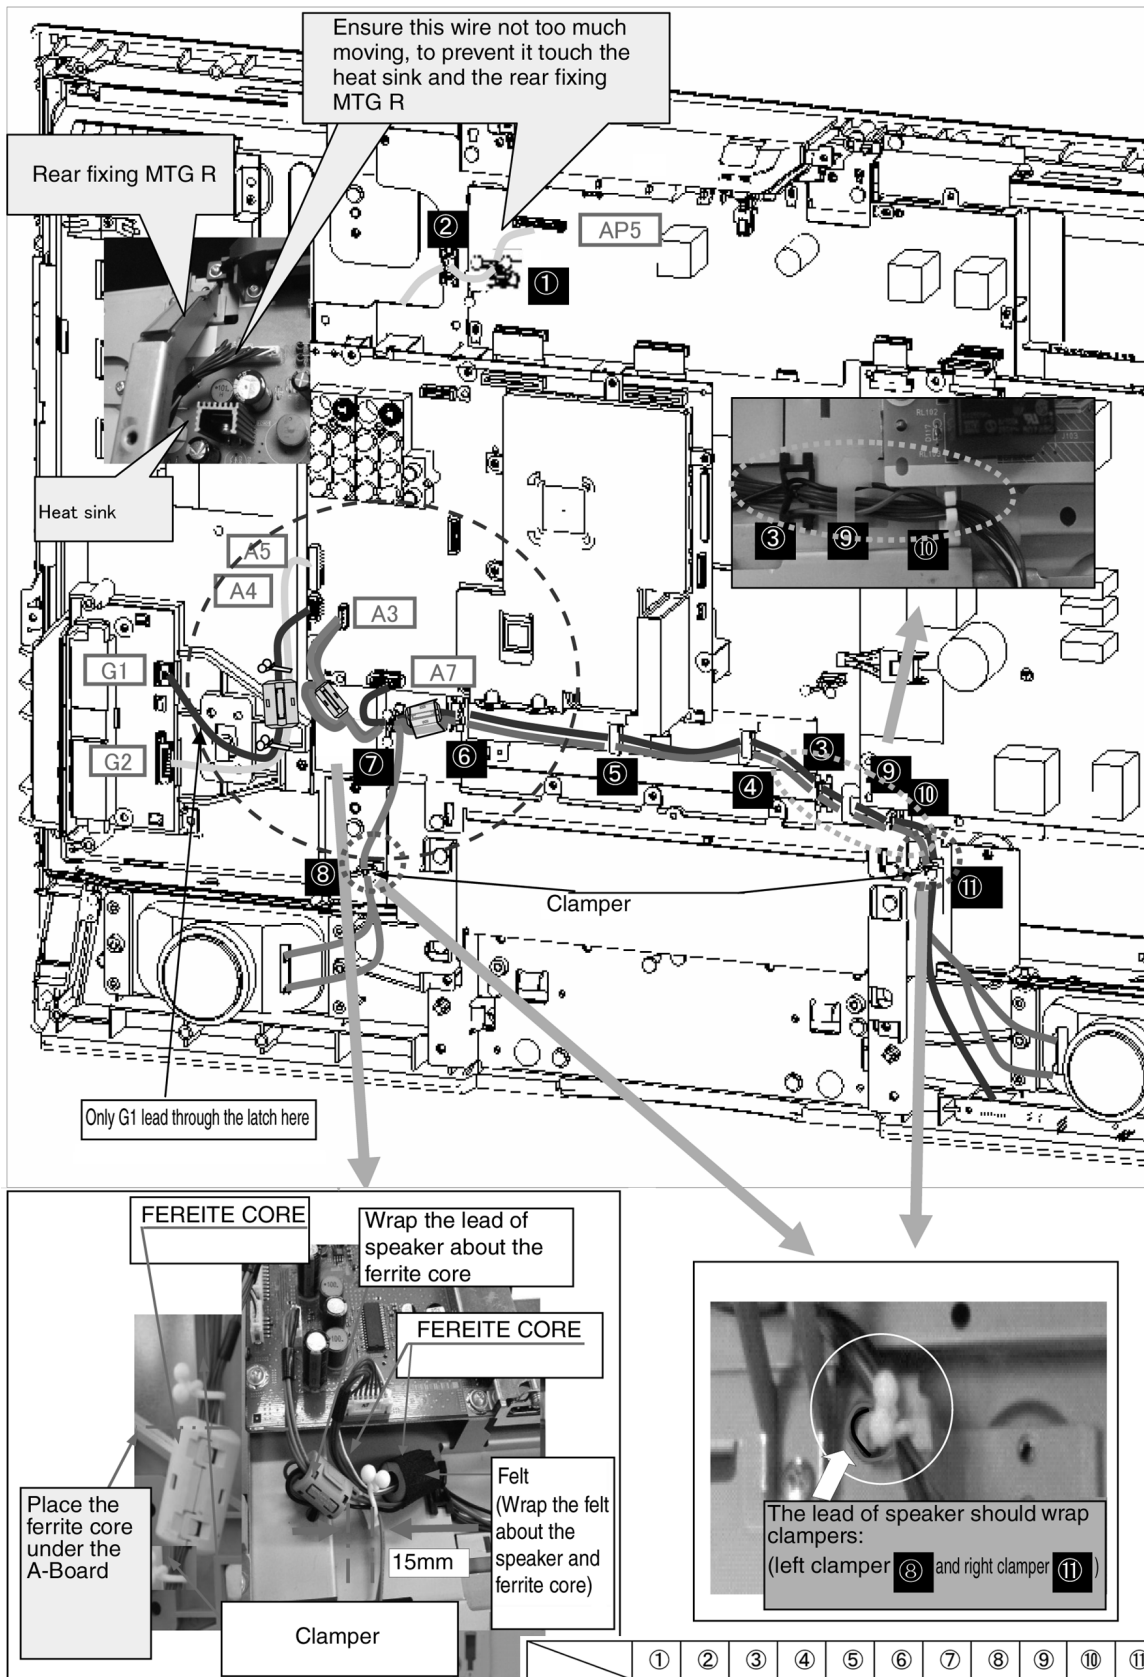



< SAFETY CAUTION POINTS >

- (1) ALL LEAD MUST NOT TOUCH THE HIGH TEMPERATURE PARTS AS SPECIFIED IN PRODUCT SAFETY SPECS.
(HEAT SINK / POWER CIRCUIT / ETC)


	①	②	③	④	⑤	⑥	⑦	⑧	⑨	⑩	⑪
INV-AP5	●	●									
V1-A7			●	●	●	●	●		●		●
SP(R)-A3							●	●			
SP(L)-A3			●	●	●	●	●		●	●	●
G1-A4											
G2-A5											

9 EMI Processing

EMI Processing (26")

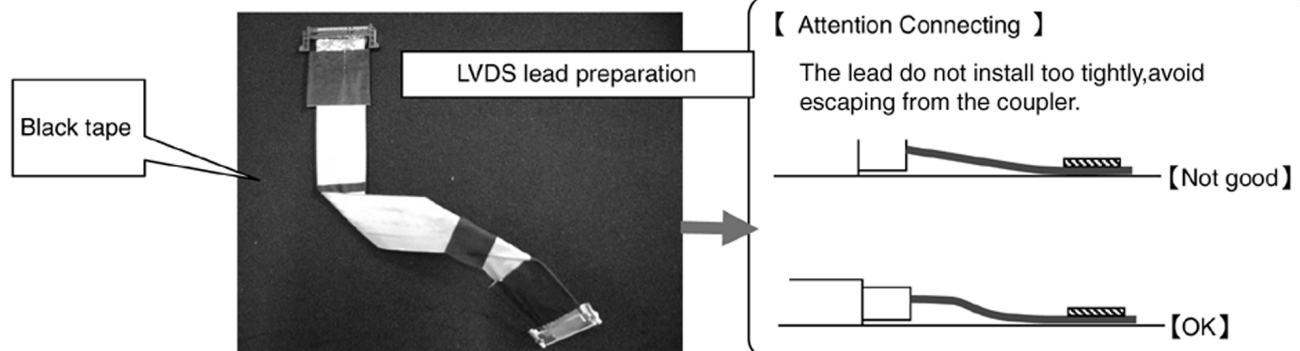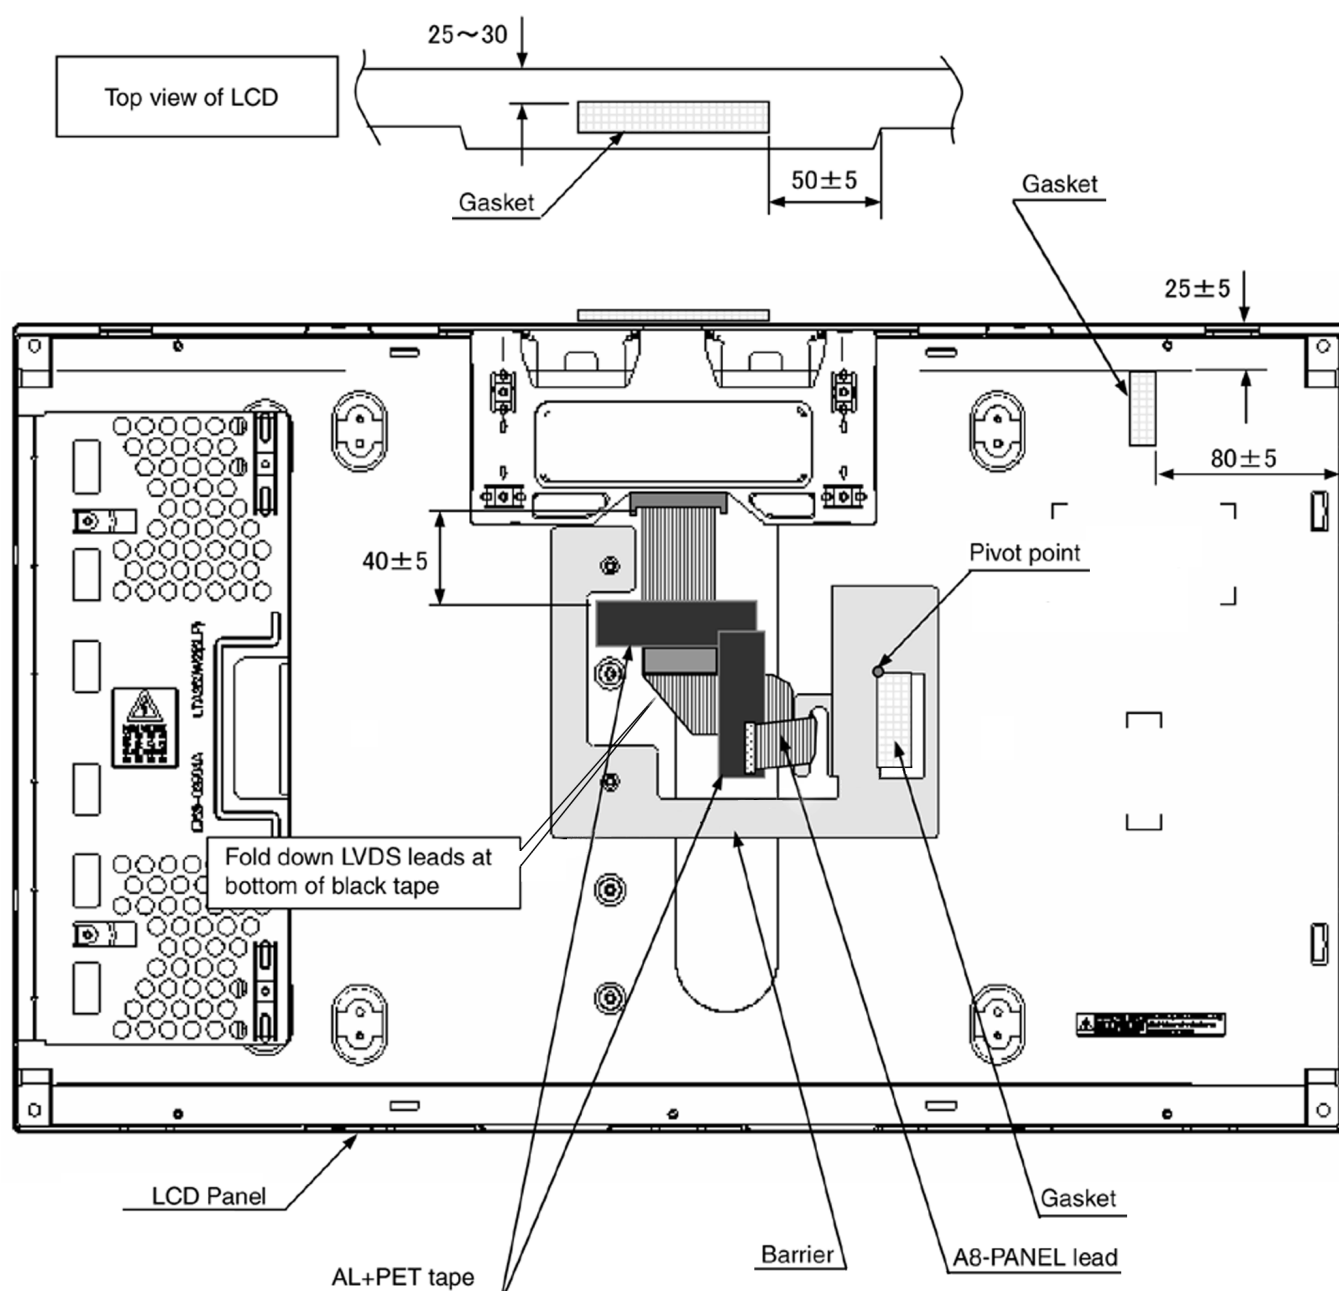

EMI Processing (32")

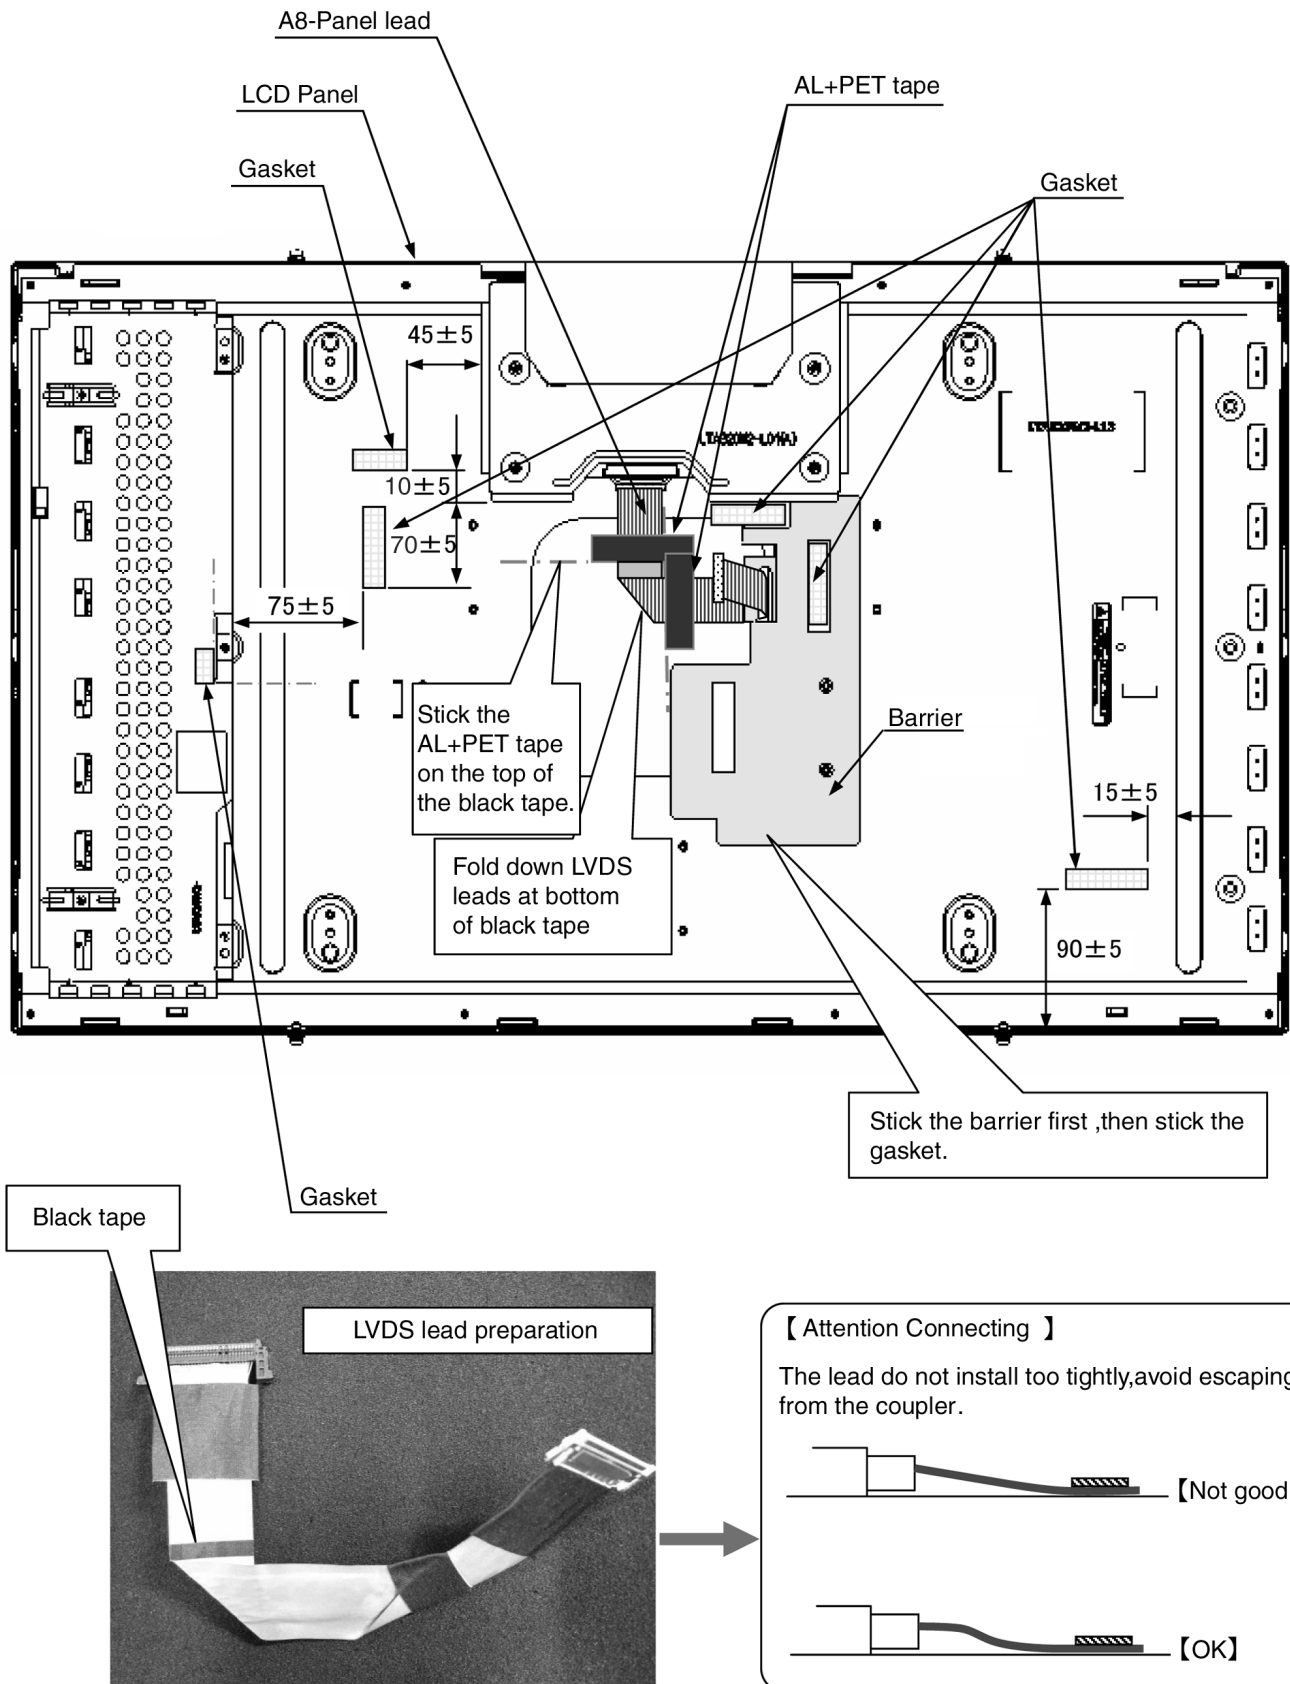

10 Service Mode Function

MPU controls the functions switching for each IC through IIC bus in this chassis. The following setting and adjustment can be adjusted by remote control in Service Mode.

10.1. How to enter SERVICE 1

1. Set OFF TIMER to 15,30.....
2. Set VOLUME to MINIMUM. Press the F button on the TV set to select VOLUME, simultaneously press RECALL button on remote control and DOWN button [-/v] on the TV set.


10.2. How to enter SERVICE 2

1. Select the "Sub-Brightness" under Service 1.
2. Simultaneously press MUTE button on remote control and DOWN button on the TV set.

Note:


To exit to Service mode, press N button or POWER button on remote control.

SERVICE 1

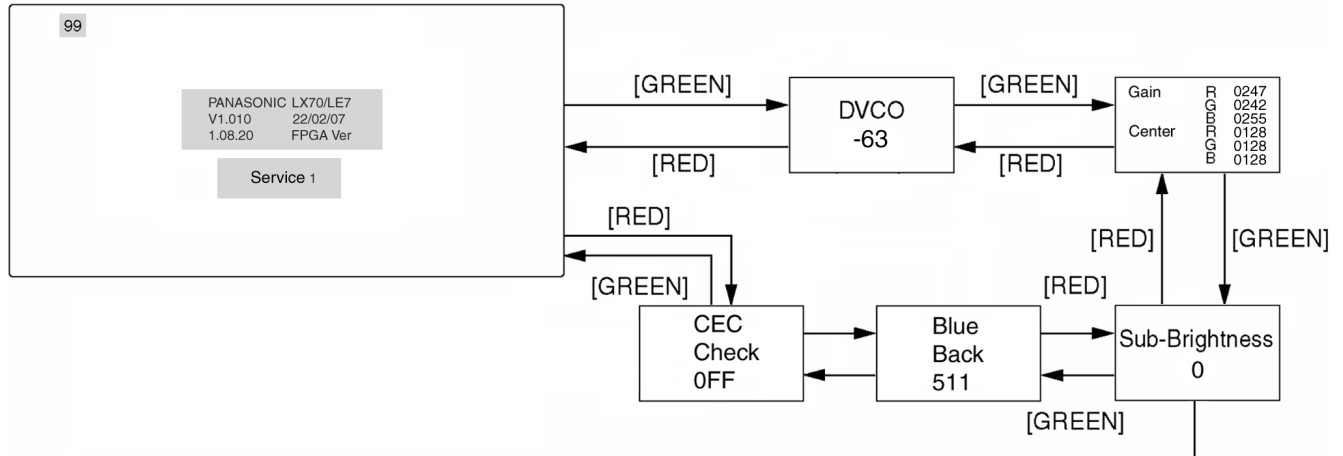

DOWN "-" + MUTE

SERVICE 2

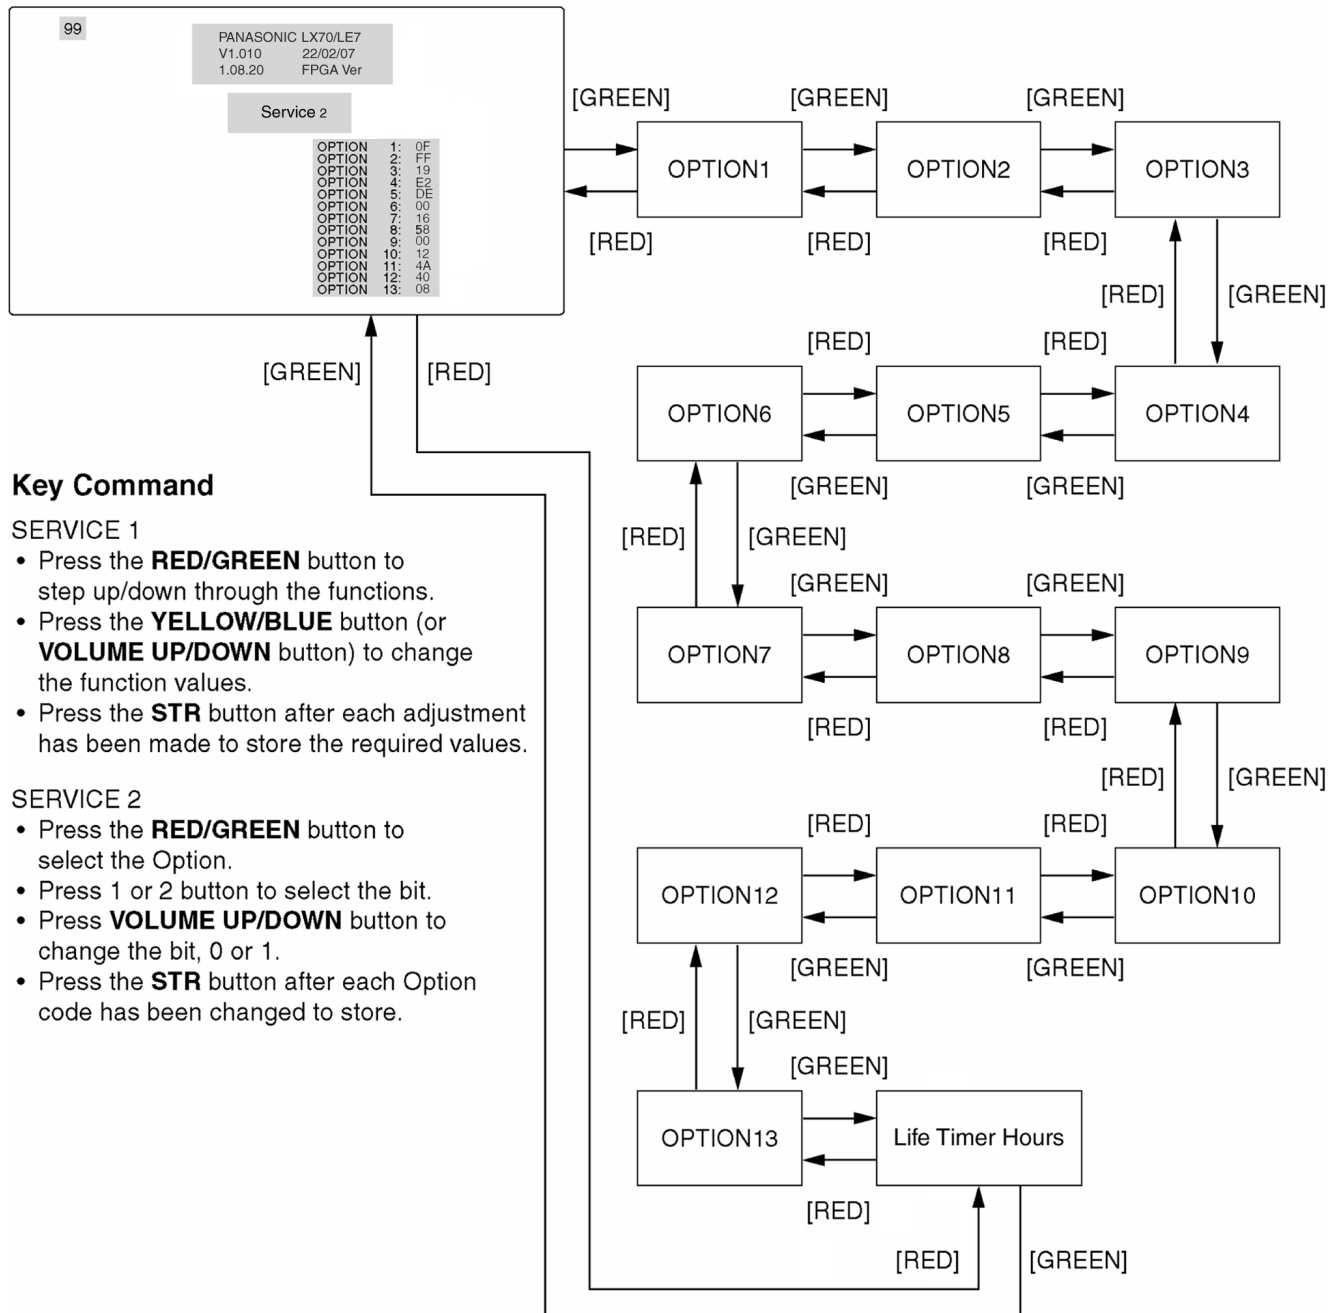

Key Command

SERVICE 1

- Press the **RED/GREEN** button to step up/down through the functions.
- Press the **YELLOW/BLUE** button (or **VOLUME UP/DOWN** button) to change the function values.
- Press the **STR** button after each adjustment has been made to store the required values.

SERVICE 2

- Press the **RED/GREEN** button to select the Option.
- Press 1 or 2 button to select the bit.
- Press **VOLUME UP/DOWN** button to change the bit, 0 or 1.
- Press the **STR** button after each Option code has been changed to store.

10.3. Option Description

option1		
b0	Colour system	Auto(1)
b1		SECAM(1)
b2		NTSC(1)
b3		M.NTSC(1)
b4	free	
b5	free	
b6	free	
b7	free	
option2		
b0	CH Plan	ASIA / M.E. / HK/UK / CHINA(1)
b1		NZ/INDNES(1)
b2		AUSTRALIA(1)
b3		E.EUROPE(1)
b4		SPECIAL(1)
b5		AMERICA(1)
b6		CATV(1)
b7		JAPAN(1)
option3		
b0	sub picture	not use
b1	2 tuner	not use
b2	VGA	not use
b3	YUV	not use
b4	Wide (16:9)	not use
b5	HYPER	UHF only (0), UHF/VHF (1)
b6	SIF	4.5 / 5.5 / 6.0 / 6.5 (0), 5.5 / 6.0 / 6.5 (1)
b7		5.5 / 6.5 (2), 6.0 / 6.5 (3)
option4		
b0	A2 enable	4.5(1)
b1		5.5(1)
b2		6.0(1)
b3		6.5(1)
b4	NICAM enable	4.5(1)
b5		5.5(1)
b6		6.0(1)
b7		6.5(1)
option5		
b0	A2 select 6.5MHz	5.742MHz(0) 6.742MHz(1)
b1	NICAM priority	ASIA/M.E.(1)
b2		HK/UK(1)
b3		CHINA(1)
b4		NZ/INDN(1)
b5		AUSTRA(1)
b6		E.EURO(1)
b7		SPECIAL(1)
option6		
b0	IF 38.9MHz	
b1	SASO enable	SASO enable(1)
b2	IF I2C	I2C controlled Tuner IF module (1)
b3	Monitor out AV1 mute	Monitor out AV1 mute(1)
b4	Tuner Slave	C2(1), C0(0)
b5	Tuner	ALPS(1), ECOM (0)
b6	free	
b7	Noise mute	Noise mute enable(0)
option7		
b0	Power up EC-Mode	Power on EC enable (1)
b1	CH Blanking	Blanking enable (1)
b2	AV Blanking	Blanking enable (1)
b3	Auto WIDE	WSS enable only in aspect Auto (0), WSS always enable (1)
b4	Volume correction	TV Volume coorrection enable (1)
b5	AVLink	Q-Link off selectable in menu (1)
b6	MPX/NICAM display	Display NICAM (0), Display MPX (1)
b7	free	

option8		
b0	ACI auto MP	not use
b1	free	
b2	Geomagnetic Sensor	Geomagnetic polarity +(0), -(1)
b3	free	
b4	Fine tuning	Enable(1)
b5	Search speed	Slow(1) Fast(0)
b6	TEXT FLOF	FLOF enable (1)
b7	TEXT TOP	TOP enable (1)
option9		
b0	free	
b1	free	
b2	free	
b3	free	
b4	free	
b5	free	
b6	free	
b7	free	
option10		
b0	OSD language	English/Chinese(0),English/Russian(1)
b1		English/Chinese/Arabic(2),English/Persian/French/Arabic(3)
b2	free	
b3	User aspect	JUST enable (1)
b4	Blue Back	BLUE BACK on/off selection in menu(0)
b5	Auto Aspect	AspectAuto disable(1)
b6	User aspect	ZOOM3 enable (2)
b7	free	
option11		
b0	Shop mode	enable(1)
b1	shipping Sound menu	MUSIC(0) / CINEMA(1)
b2	Sub HP	enable(1)
b3	Scan Blank	enable(1)
b4	User aspect 14:9	enable(1)
b5	NICAM C4 bit	enable(1)
b6	free	enable(1)
b7	free	enable(1)
option12		
b0	free	
b1	Australia	Australia(1)
b2	Ireland/India	not use
b3	UK/Korea	not use
b4	MELCOA	MELCOA(1)
b5	free	
b6	free	
b7	free	
option13		
Temporary		
b0	ACI all country	not use
b1	ACI offset	not use
b2	free	
b3	Text	enable(1)
b4	free	
b5	free	
b6	free	
b7	Viewing ModeMain Menu	not use

10.4. Option Code Setting

If the memory IC (IC1102) or A Board is replaced, option code should be re-memorized.

Spare part of IC1102 is already memorized all Data.

If you use for other model, you should re-memorized the different option code in SERVICE 2 mode.

Option No.	TX-32LE7X	TX-26LE7X	TX-32LX70A	TX-32LX70X	TX-26LX70A	TX-26LX70X
OPTION 1	0F	0F	0F	0F	0F	0F
OPTION 2	FF	FF	FF	FF	FF	FF
OPTION 3	19	19	19	19	19	19
OPTION 4	E2	E2	E2	E2	E2	E2
OPTION 5	DE	DE	DE	DE	DE	DE
OPTION 6	C0	40	80	C0	00	40
OPTION 7	16	16	16	16	16	16
OPTION 8	58	58	58	58	58	58
OPTION 9	00	00	00	00	00	00
OPTION 10	13	13	11	13	11	13
OPTION 11	4A	4A	4A	4A	4A	4A
OPTION 12	40	40	42	40	42	40
OPTION 13	08	08	08	08	08	08

Option No.	TX-32LE7Y	TX-26LE7Y	TX-32LX70Y	TX-26LX70Y
OPTION 1	0F	0F	0F	0F
OPTION 2	FF	FF	FF	FF
OPTION 3	19	19	19	19
OPTION 4	E2	E2	E2	E2
OPTION 5	DE	DE	DE	DE
OPTION 6	C0	40	C0	40
OPTION 7	16	16	16	16
OPTION 8	58	58	58	58
OPTION 9	00	00	00	00
OPTION 10	12	12	12	12
OPTION 11	4A	4A	4A	4A
OPTION 12	40	40	40	40
OPTION 13	08	08	08	08

11 Adjustment

11.1. Voltage chart of A-Board

Power Name	Test point	Specification	
		ON	STANDBY
MAIN_5V	TP1823	5.10±0.25V	—
PANEL_5V	TP1815	5.10±0.25V	—
BT_30V	TP1820	30.0V±1.5V	—
24V	TP1818	24.0±1.2V	—
SUB_8V	TP1821	8.1V±0.4V	—
STB_6V	TP1805	6.2±0.35V	6.3±0.35V
STB_3.3V	TP1835	3.30±0.17V	3.30±0.17V
STB_1.8V	TP1837	1.89±0.09V	1.89±0.09V
SOUND_21V	TP1816	21.0±1.5V/-1.0V	—

11.2. Voltage chart of AP-Board

Power Name	Test point	Specification	
		ON	STANDBY
MAIN_5V	TP921	5.10±0.25V	—
PANEL_5V	TP981	5.10±0.25V	—
BT_30V	TP915	30.0V±1.5V	—
24V	TP916	24.0±1.2V	—
MAIN_8V	TP920	8.1V±0.4V	—
STB_6V	TP914	6.2V±0.35V	6.3V±0.35V
STB_3.3V	TP922	3.30±0.17V	3.30±0.17V
STB_1.8V	TP923	1.89±0.09V	1.89±0.09V
SOUND_21V	TP918	21.0±1.5V/-1.0V	—

11.3. Voltage chart of P-Board

Power Name	Test point	Specification	
		ON	STANDBY
STB-6V	TPP014	6.2V±0.35V	6.3V±0.35V
24V	TPP003	24.0±1.2V	
SOUND-21V	TPP010	21.0±1.5V/-1.0V	
7V	TPP018	7.9±0.4V(32") 7.5±0.4V(26")	

11.4. DVCO adjustment

Instrument Name	Connection	Remarks
Remote controller		
Internal signal (studio color bar)	RF input	
Procedure		
DVCO Adjustment 1. Receive the color bar pattern at AV1 composite video. Signal generator : PAL/ fp =4.43361875MHz (ref.) 2. Go to "DVCO" under Service 1. 3. Make automatic adjustment of DVCO by the blue key. (About 3sec.) The display color of DVCO serves as black (START) - red (under adjustment) - black (completion).		

F

E


D

C


B

A

P-BOARD (FOIL SIDE)
TNP4G404

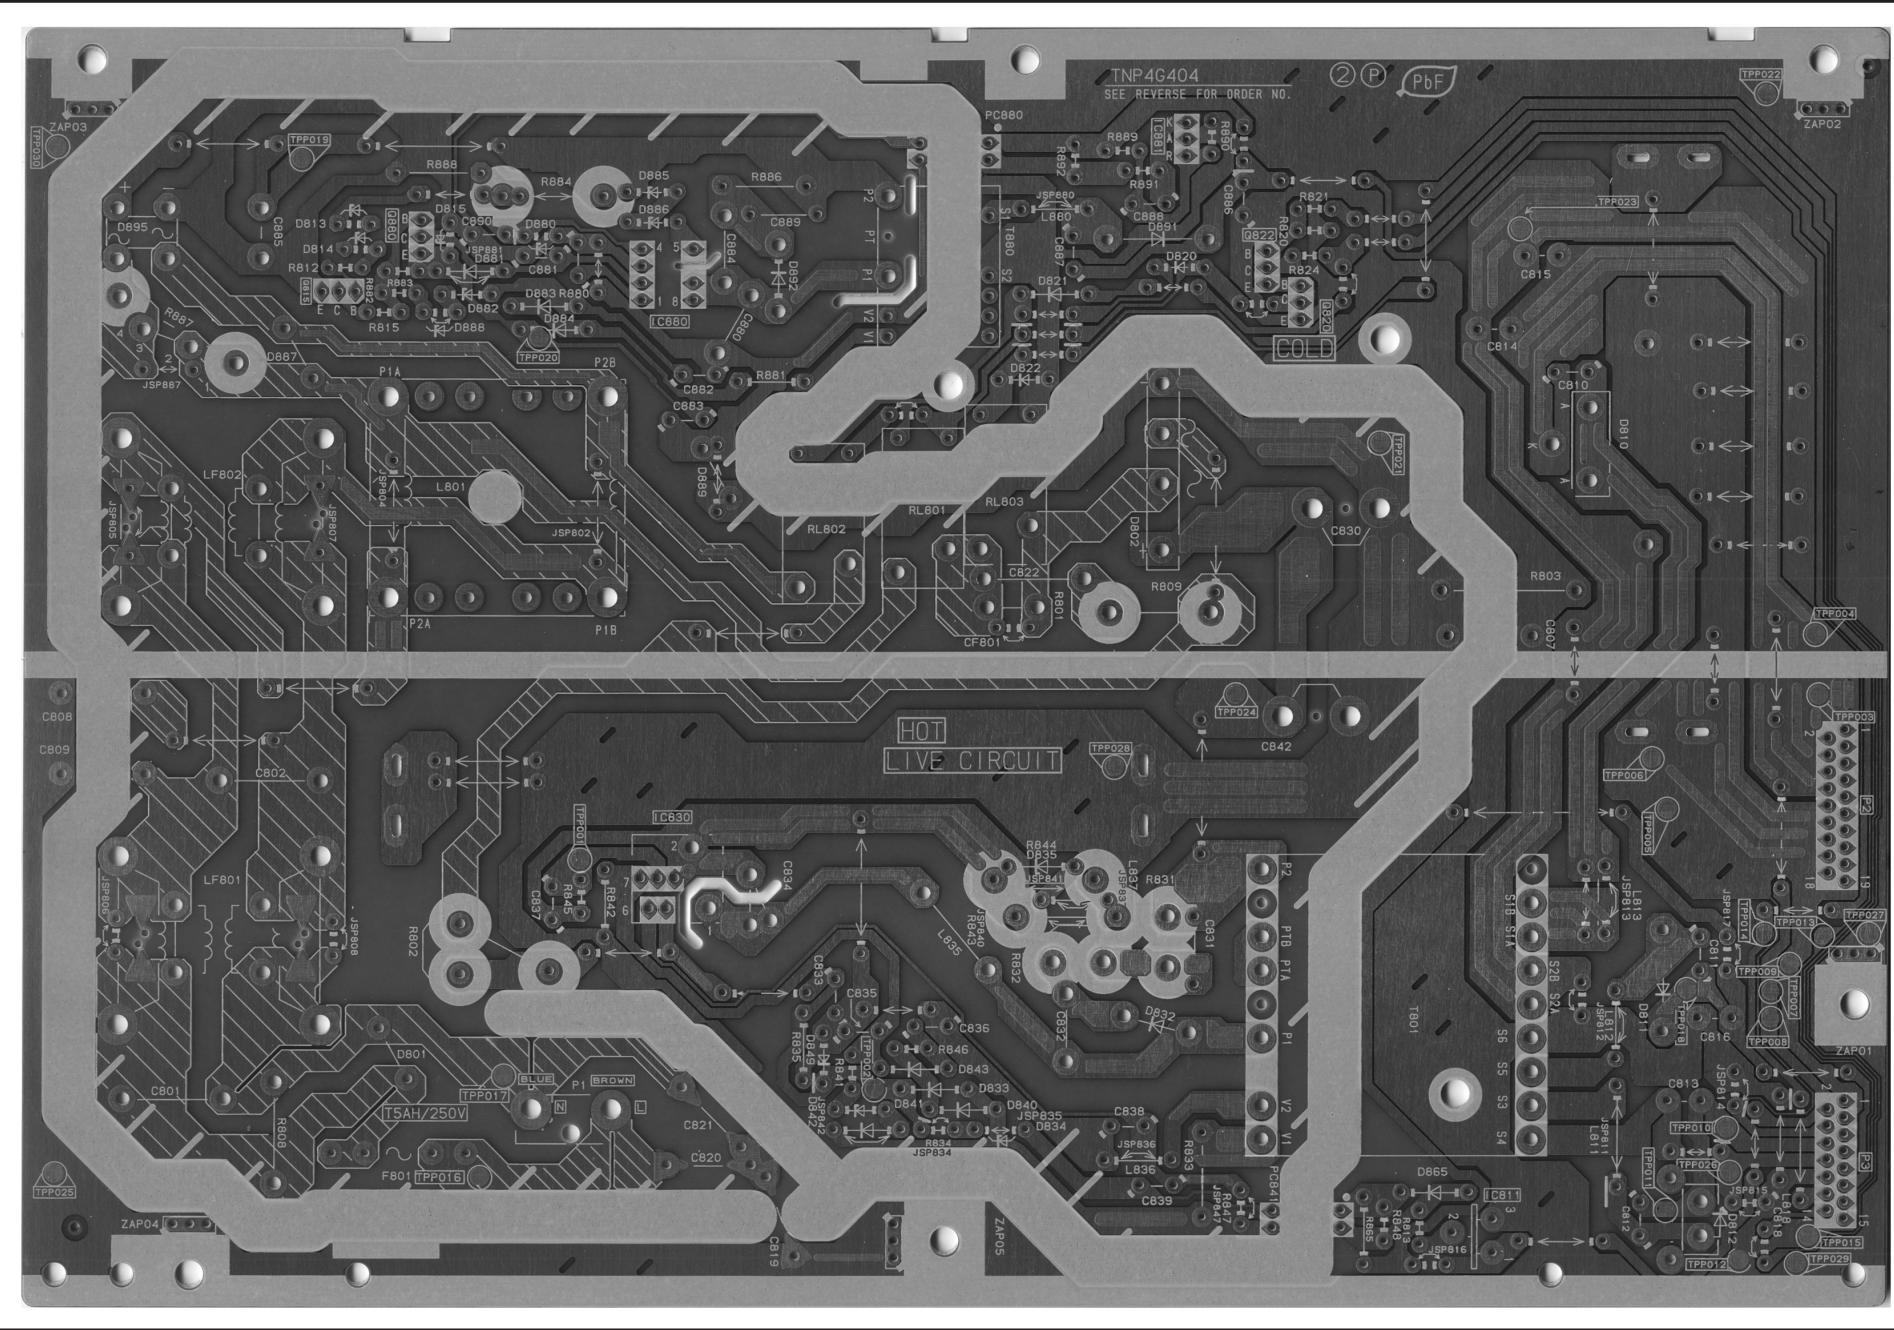

TX-26/32LE7X/Y
TX-26/32LX70A/X/Y
P-BOARD TNP4G404

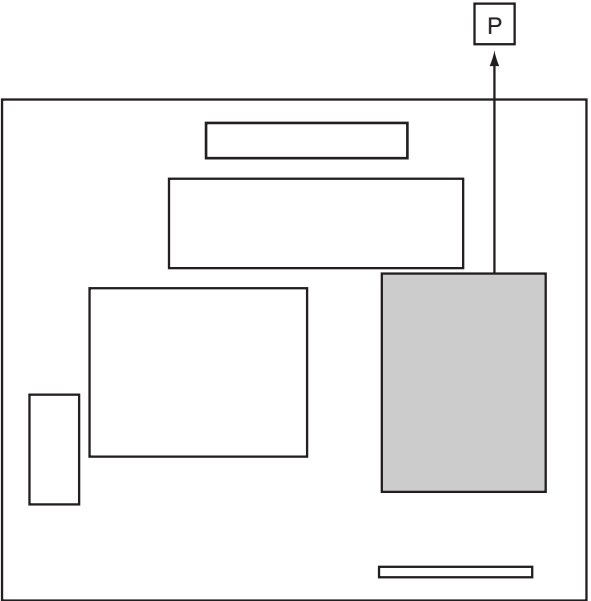

Parts Location

P-BOARD (FOIL SIDE)			
IC		TRANSISTOR	
IC811	B-6	Q820	E-5
IC830	C-3	Q822	E-2
IC880	E-3	Q880	E-2
IC881	E-5		

TX-26/32LE7X/Y
TX-26/32LX70A/X/Y
P-BOARD TNP4G404

1 2 3 4 5 6 7 8 9

12.2. AP-Board

F

E

D

C



B

A

AP-BOARD (FOIL SIDE)
TNP4G401

Parts Location

AP-BOARD (FOIL SIDE)					
IC		TP918	B-7	TP953	A-3
IC902	B-4	TP920	B-7	TP954	C-1
IC903	B-4	TP921	B-5	TP960	A-6
IC904	B-5	TP922	B-5	TP961	B-6
IC905	B-5	TP923	B-6	TP968	B-7
IC906	B-7	TP924	C-5	TP969	B-7
TRANSISTOR		TP925	C-2	TP970	B-6
Q900	B-7	TP926	C-2	TP981	B-5
Q902	B-4	TP927	B-6	TP985	B-4
Q903	B-7	TP928	B-6	TP986	C-2
Q904	B-6	TP929	B-6	TP987	C-2
Q905	B-6	TP930	B-6	TP988	C-2
TP		TP931	C-6	TP989	C-2
TP901	C-2	TP932	C-6		
TP902	B-4	TP933	C-5		
TP903	B-6	TP934	C-4		
TP904	B-7	TP935	C-3		
TP905	C-4	TP936	C-7		
TP906	B-4	TP937	C-7		
TP907	B-6	TP938	C-7		
TP909	B-5	TP939	C-7		
TP910	B-6	TP940	B-2		
TP911	B-5	TP941	B-3		
TP912	B-5	TP942	C-4		
TP913	B-5	TP943	B-2		
TP914	A-7	TP944	C-4		
TP915	B-6	TP945	C-4		
TP916	B-7	TP946	C-4		
TP917	B-2	TP947	C-5		
		TP948	B-6		
		TP949	C-8		
		TP952	C-1		
		TP950	C-1		

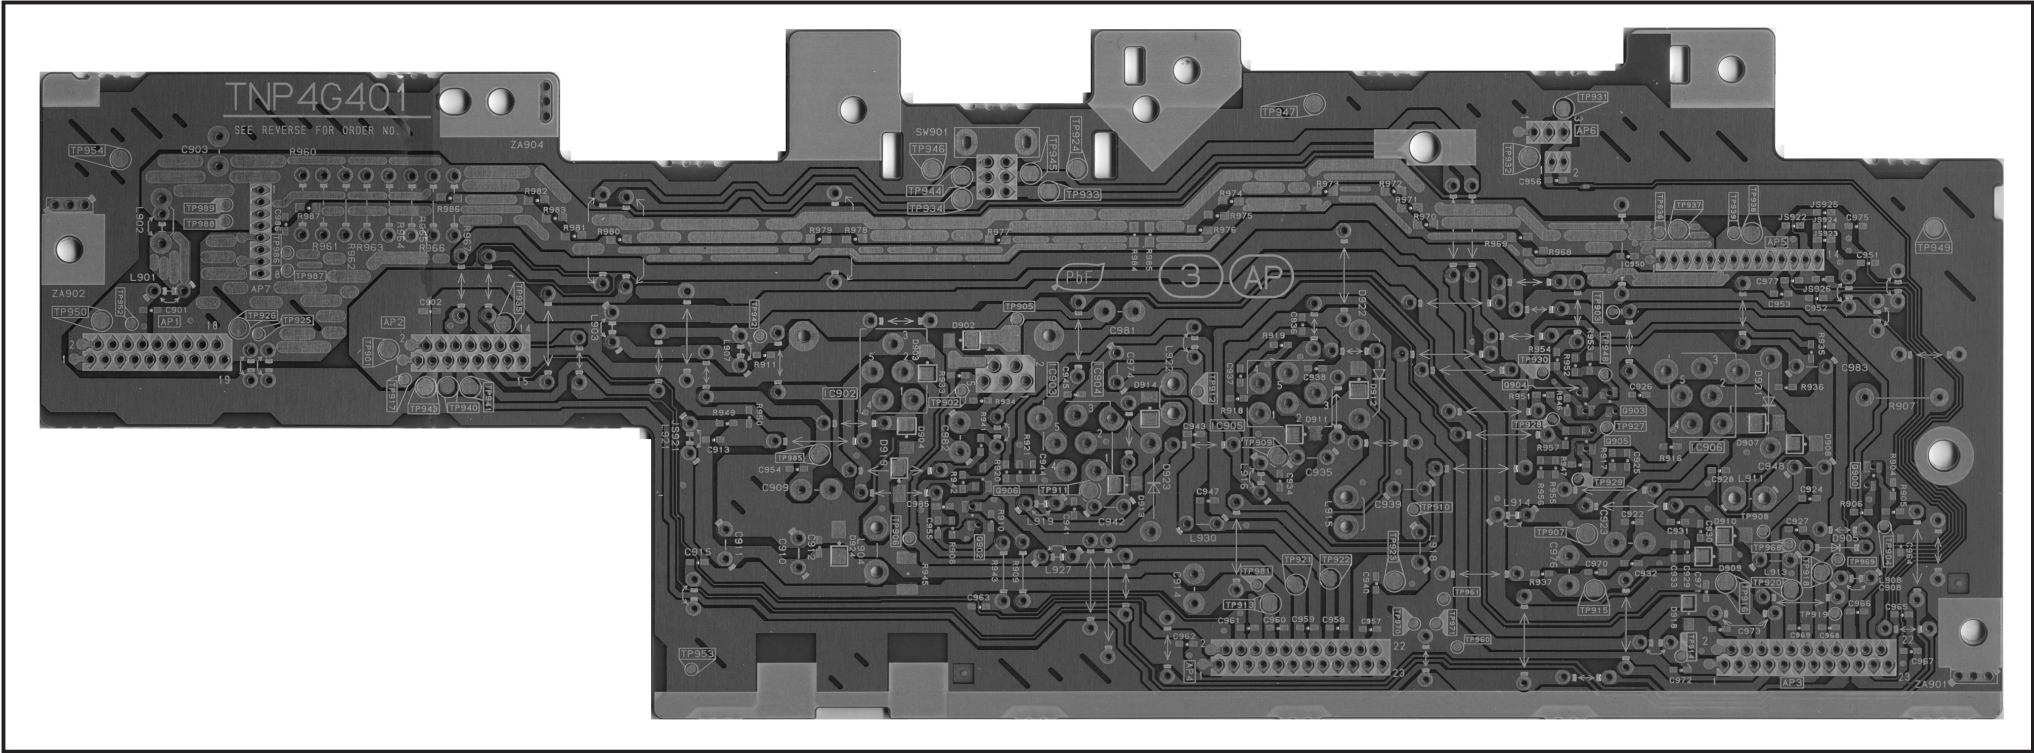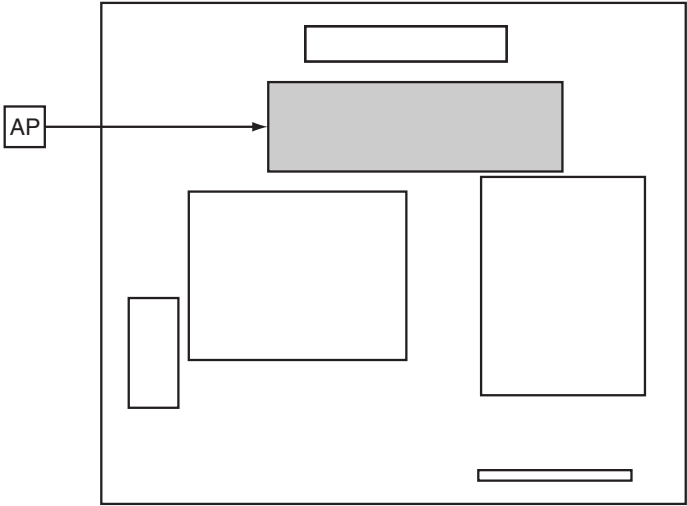


TX-26/32LE7X/Y
TX-26/32LX70A/X/Y
AP-BOARD TNP4G401

TX-26/32LE7X/Y
TX-26/32LX70A/X/Y
AP-BOARD TNP4G401

1 2 3 4 5 6 7 8 9

A


TX-26/32LE7X/Y
TX-26/32LX70A/X/Y
AP-BOARD TNP4G401

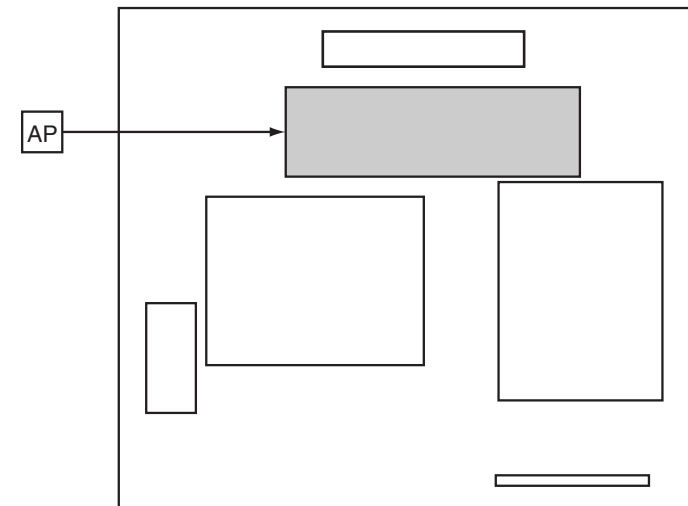


12.3. A-Board

A-BOARD (A SIDE)
TNP4G399

F
E
D
C
B
A

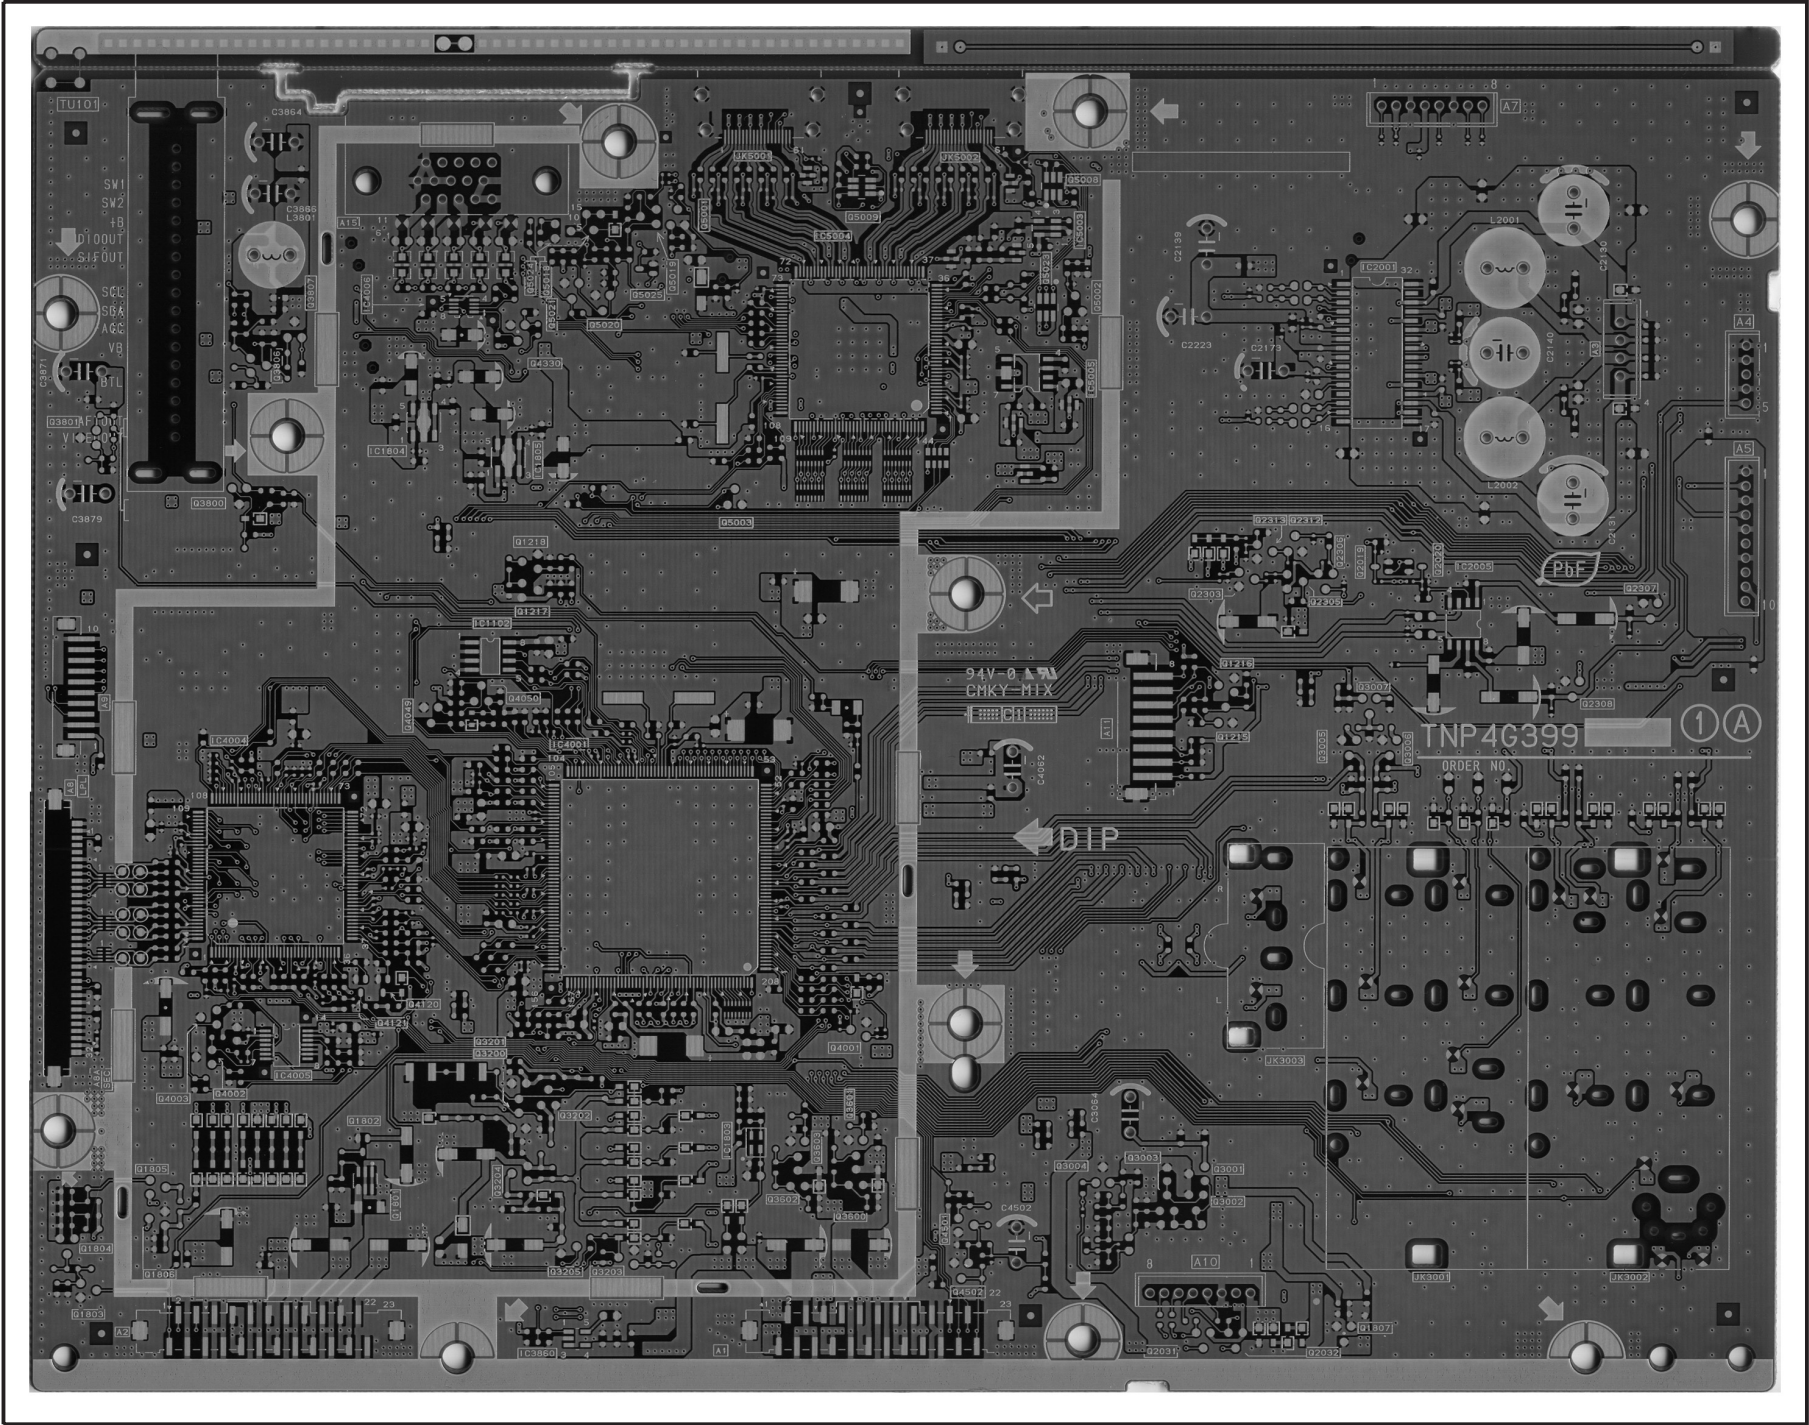

TX-26/32LE7X/Y
TX-26/32LX70A/X/Y
A-BOARD TNP4G399

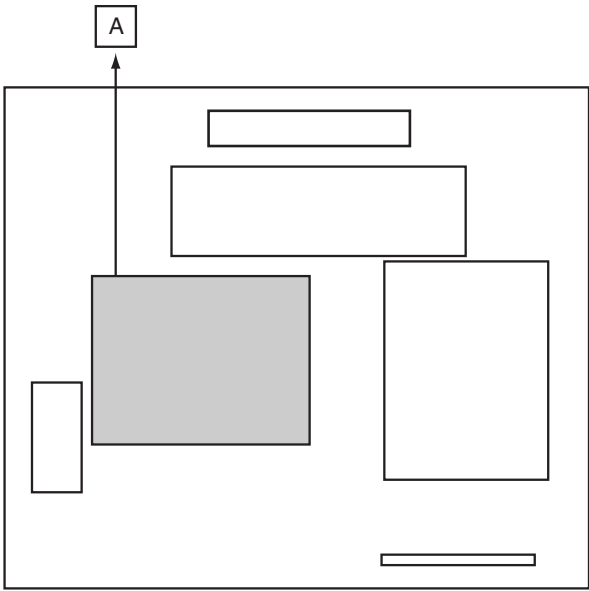


Parts Location

A-BOARD (A SIDE)			
IC			
IC1102	D-3	Q3005	C-5
IC1803	B-3	Q3006	C-5
IC1804	D-3	Q3007	C-5
IC1805	D-4	Q3200	B-2
IC2001	E-6	Q3201	B-2
IC2005	D-6	Q3202	B-3
IC4001	C-3	Q3203	A-3
IC4004	C-2	Q3204	B-2
IC4005	B-2	Q3205	A-3
IC5001	E-4	Q3600	B-4
IC5002	E-4	Q3801	E-1
IC5004	E-4	Q3806	D-1
IC5005	E-5	Q3807	D-2
TRANSISTOR		Q4001	B-4
Q1217	D-2	Q4002	B-1
Q1218	D-2	Q4003	B-1
Q1801	B-2	Q4049	C-2
Q1802	B-2	Q4050	D-2
Q1803	A-1	Q4120	C-2
Q1804	B-1	Q4121	B-2
Q1805	B-1	Q4501	B-4
Q1806	B-1	Q4502	A-4
Q2019	D-5	Q5001	E-3
Q2020	D-6	Q5002	E-4
Q2031	A-5	Q5003	D-3
Q2032	A-5	Q5008	E-4
Q2303	D-5	Q5009	E-4
Q2305	D-5	Q5019	E-3
Q2306	D-5	Q5020	E-3
Q2312	D-5	Q5021	E-2
Q2313	D-5	Q5023	E-4
Q3001	B-5	Q5024	E-2
Q3002	B-5	Q5025	E-3
Q3003	B-5		

TX-26/32LE7X/Y
TX-26/32LX70A/X/Y
A-BOARD TNP4G399

1 2 3 4 5 6 7 8 9

The picture is used as reference for ref. no. of A-Board (A Side (1/4))

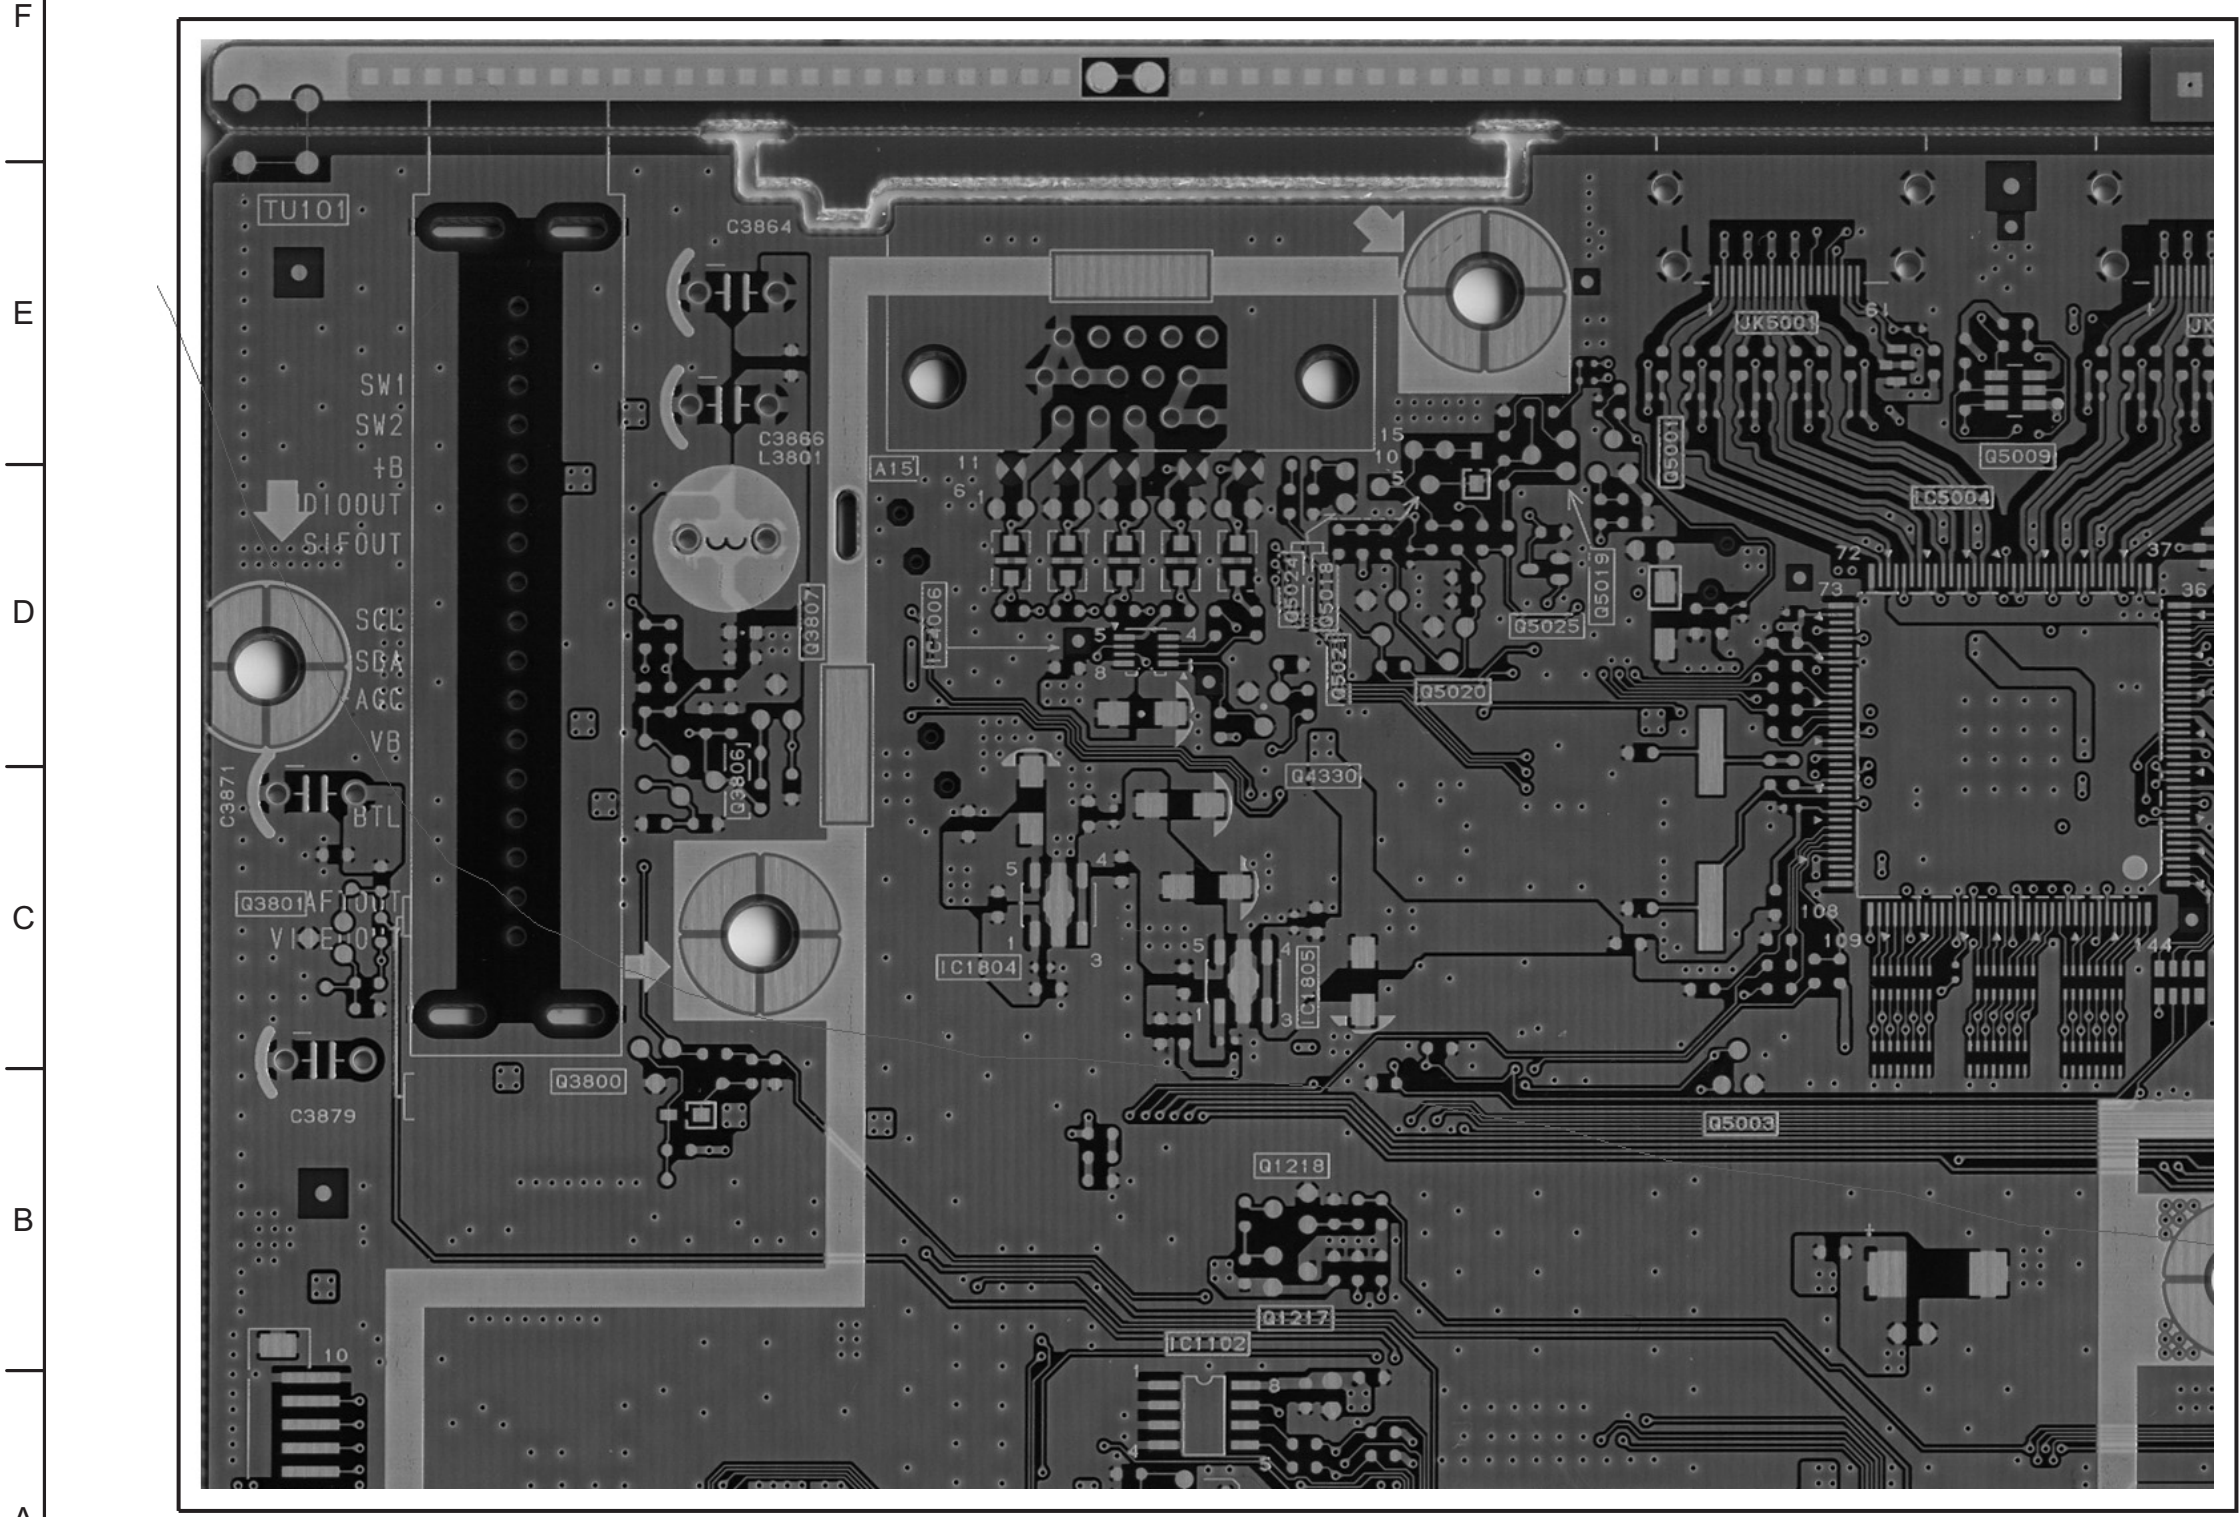


TX-26/32LE7X/Y
TX-26/32LX70A/X/Y

TX-26/32LE7X/Y
TX-26/32LX70A/X/Y

The picture is used as reference for ref. no. of A-Board (A Side (2/4))

F
E
D
C
B
A

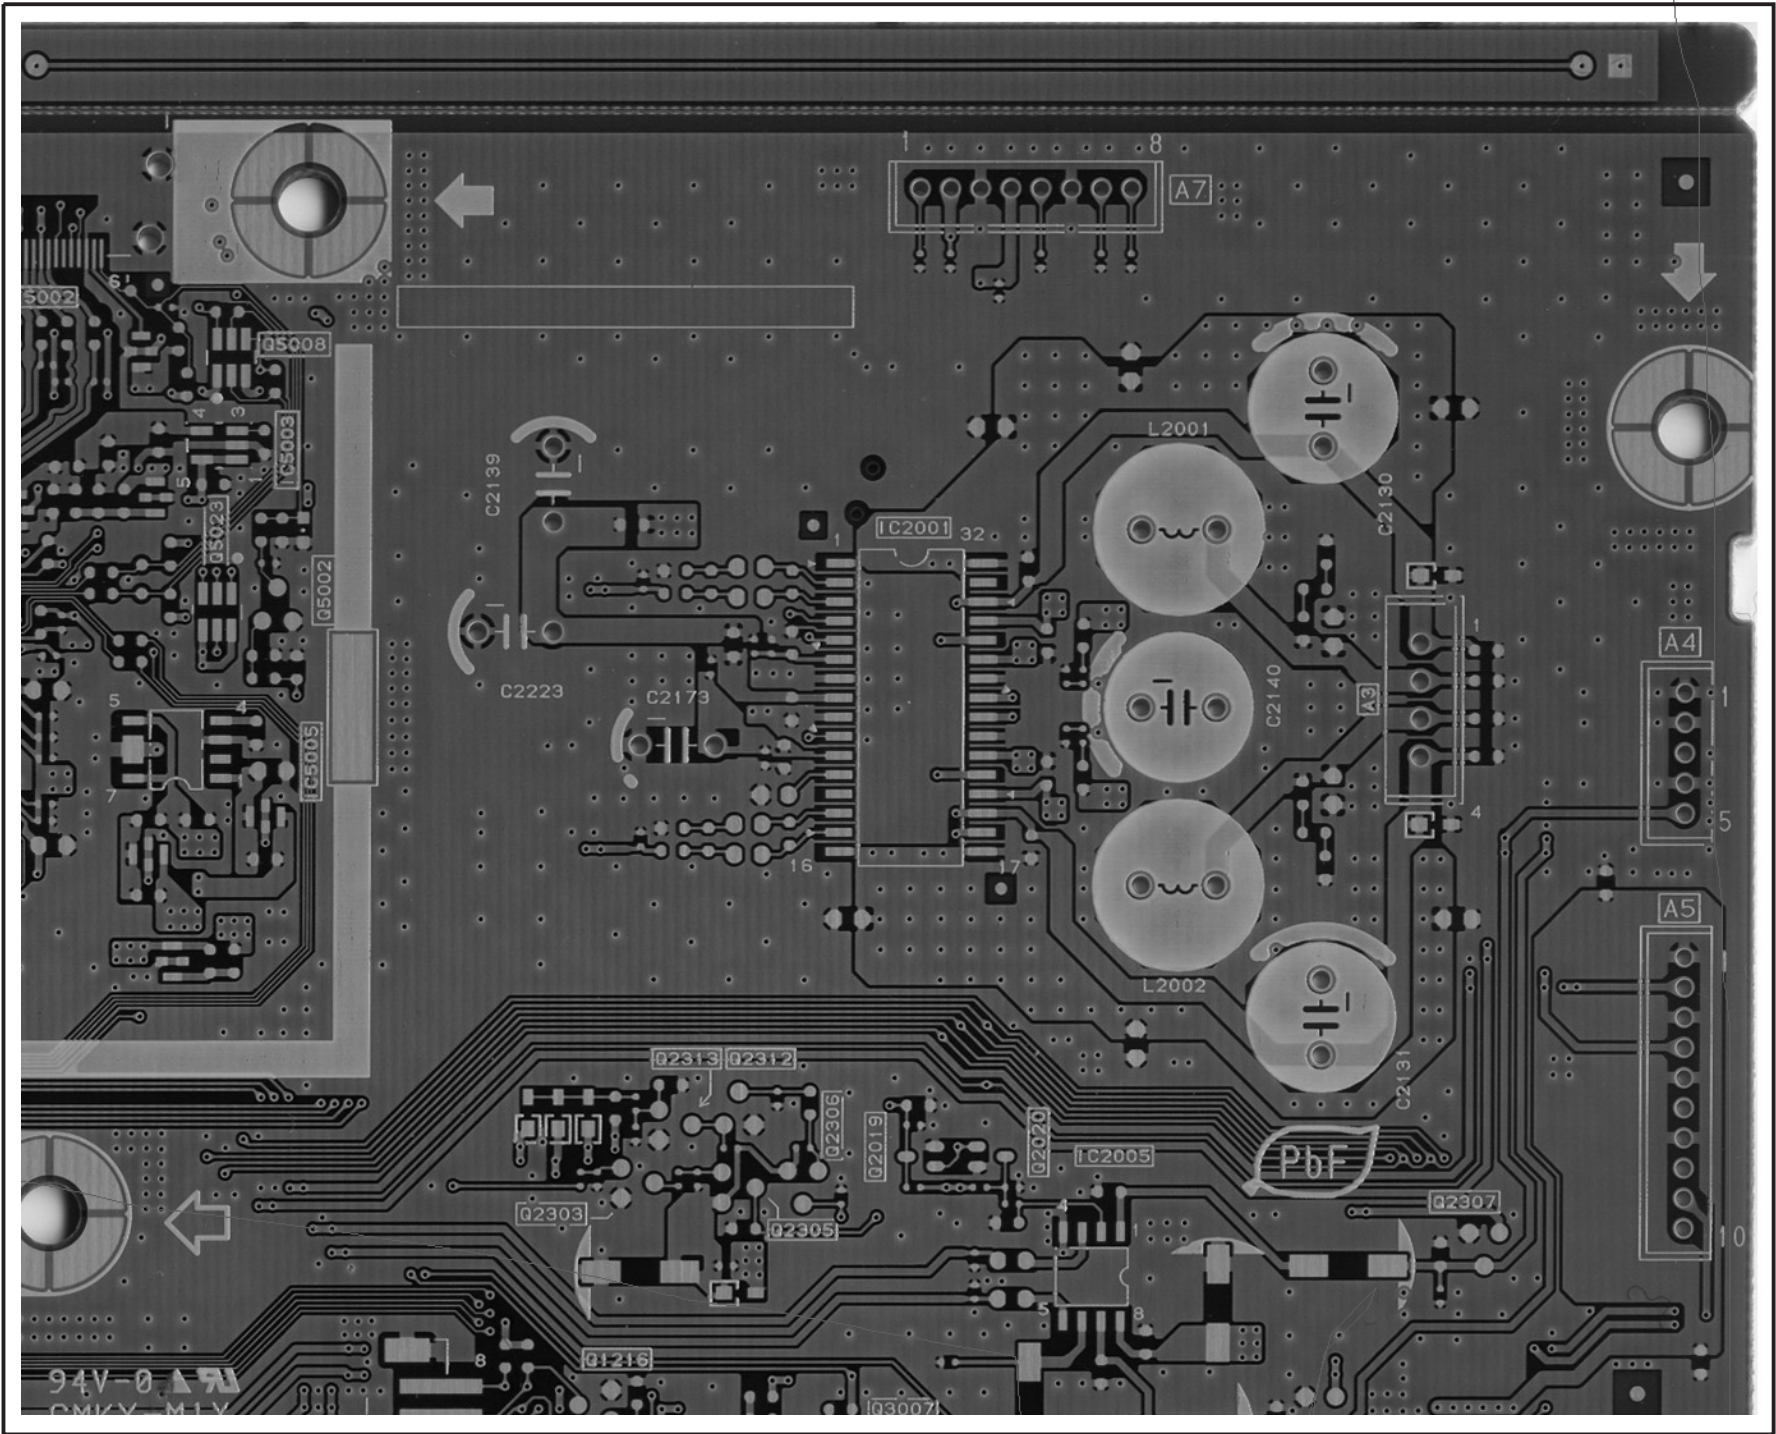

TX-26/32LE7X/Y
TX-26/32LX70A/X/Y

TX-26/32LE7X/Y
TX-26/32LX70A/X/Y

1 2 3 4 5 6 7 8 9

The picture is used as reference for ref. no. of A-Board (A Side (3/4))

F


E

D

C

B

A

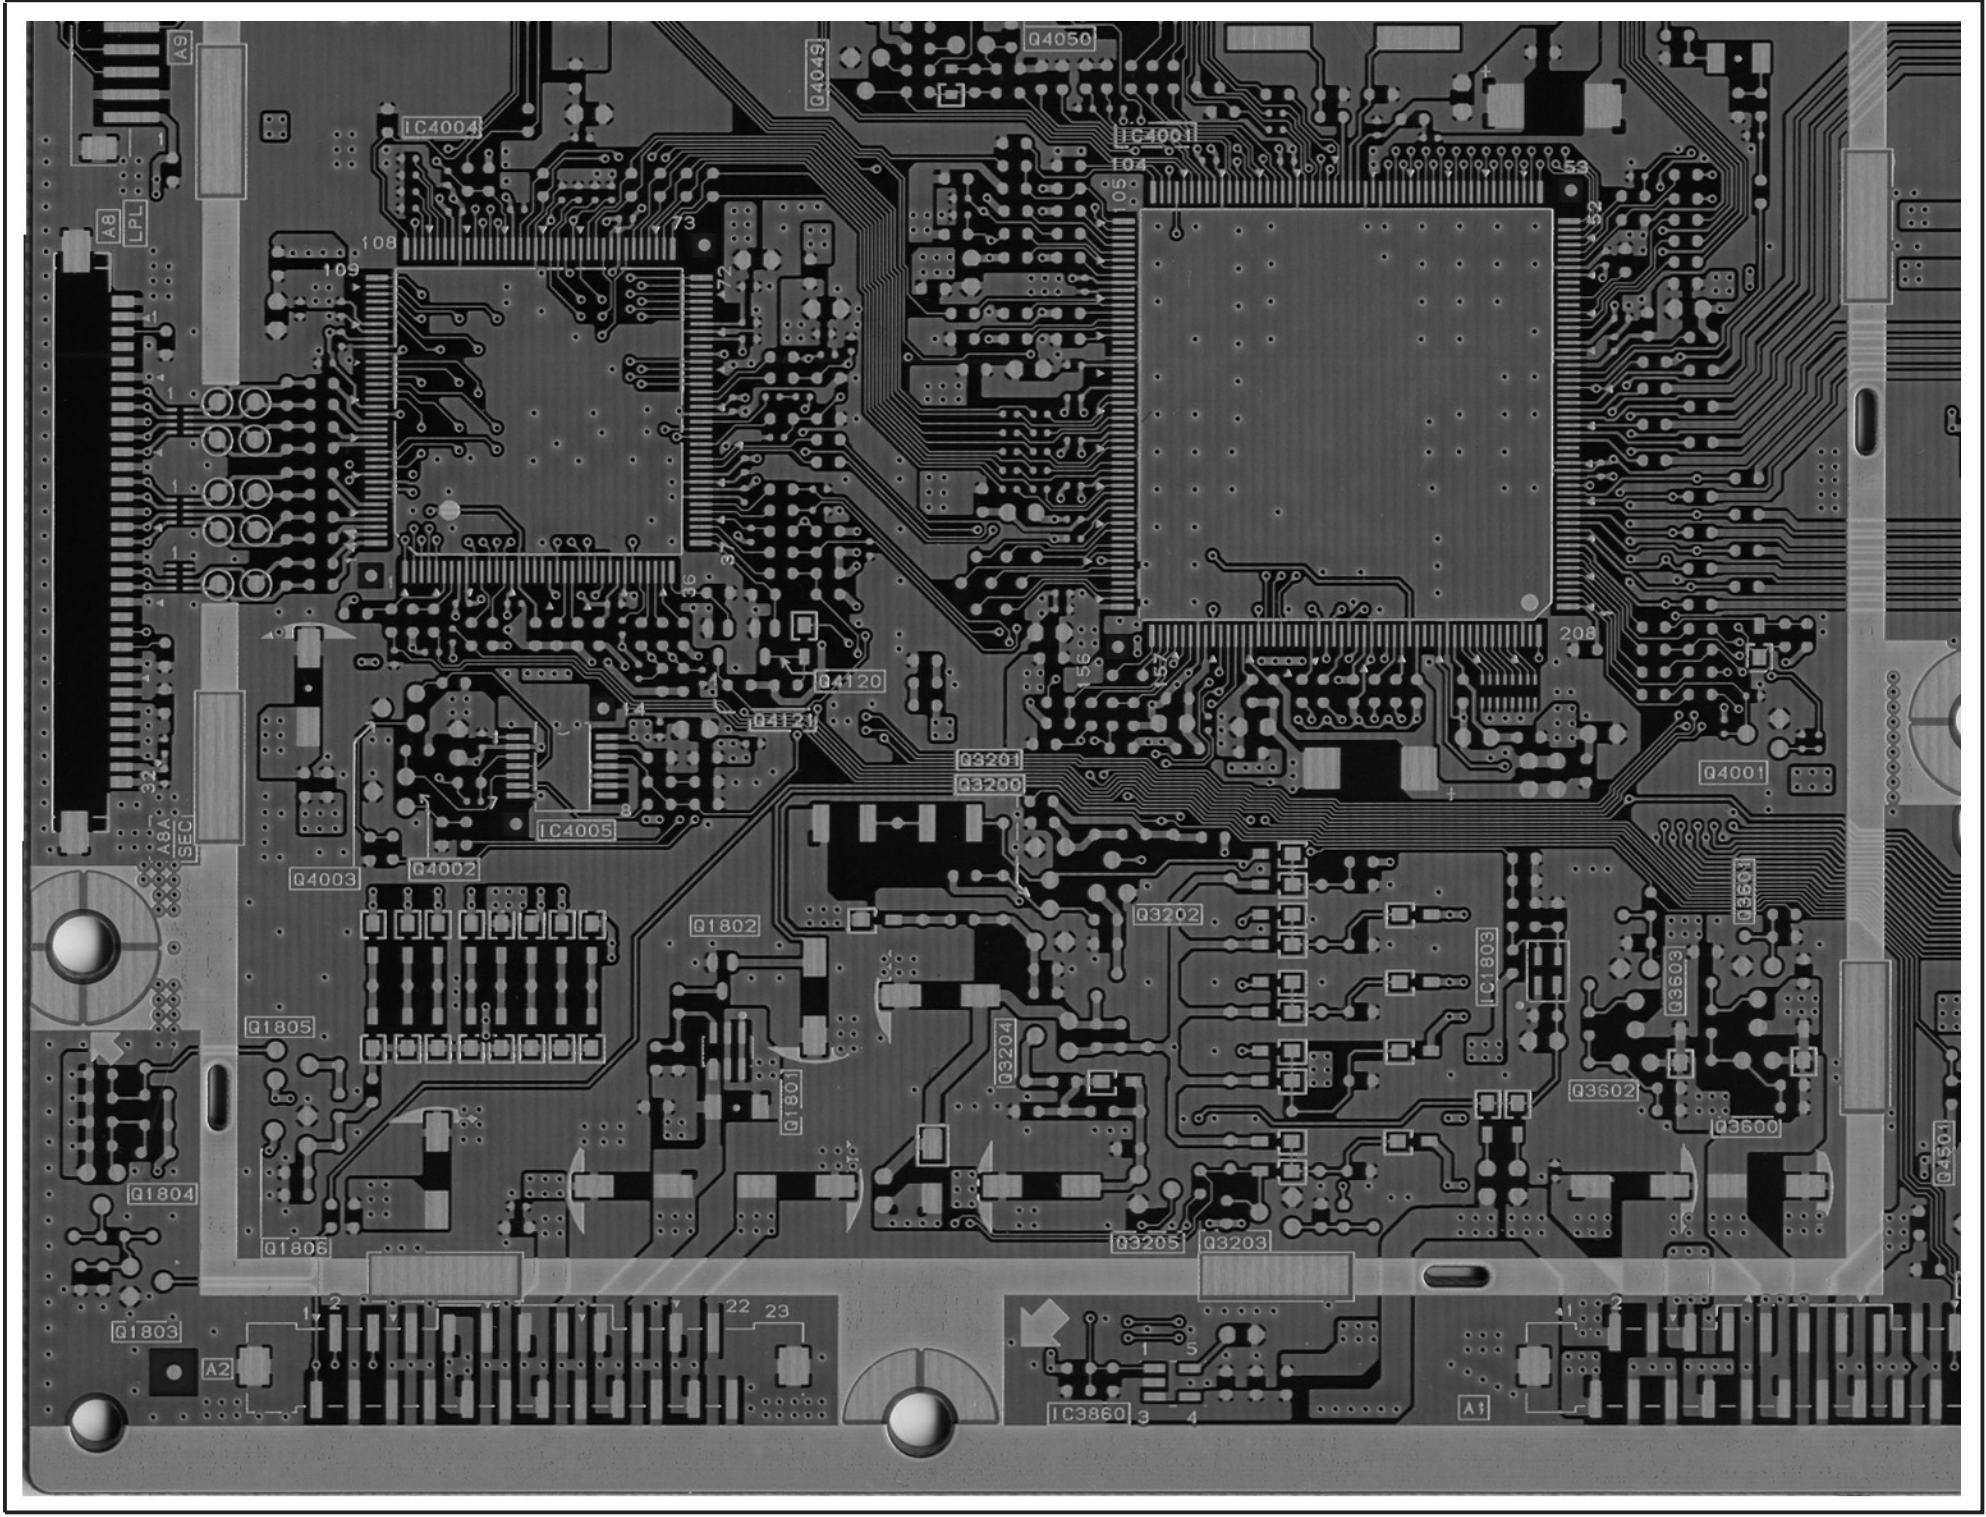

(3/4)


TX-26/32LE7X/Y
TX-26/32LX70A/X/Y

TX-26/32LE7X/Y
TX-26/32LX70A/X/Y

1 2 3 4 5 6 7 8 9

The picture is used as reference for ref. no. of A-Board (A Side (4/4))

F
E
D
C
B
A

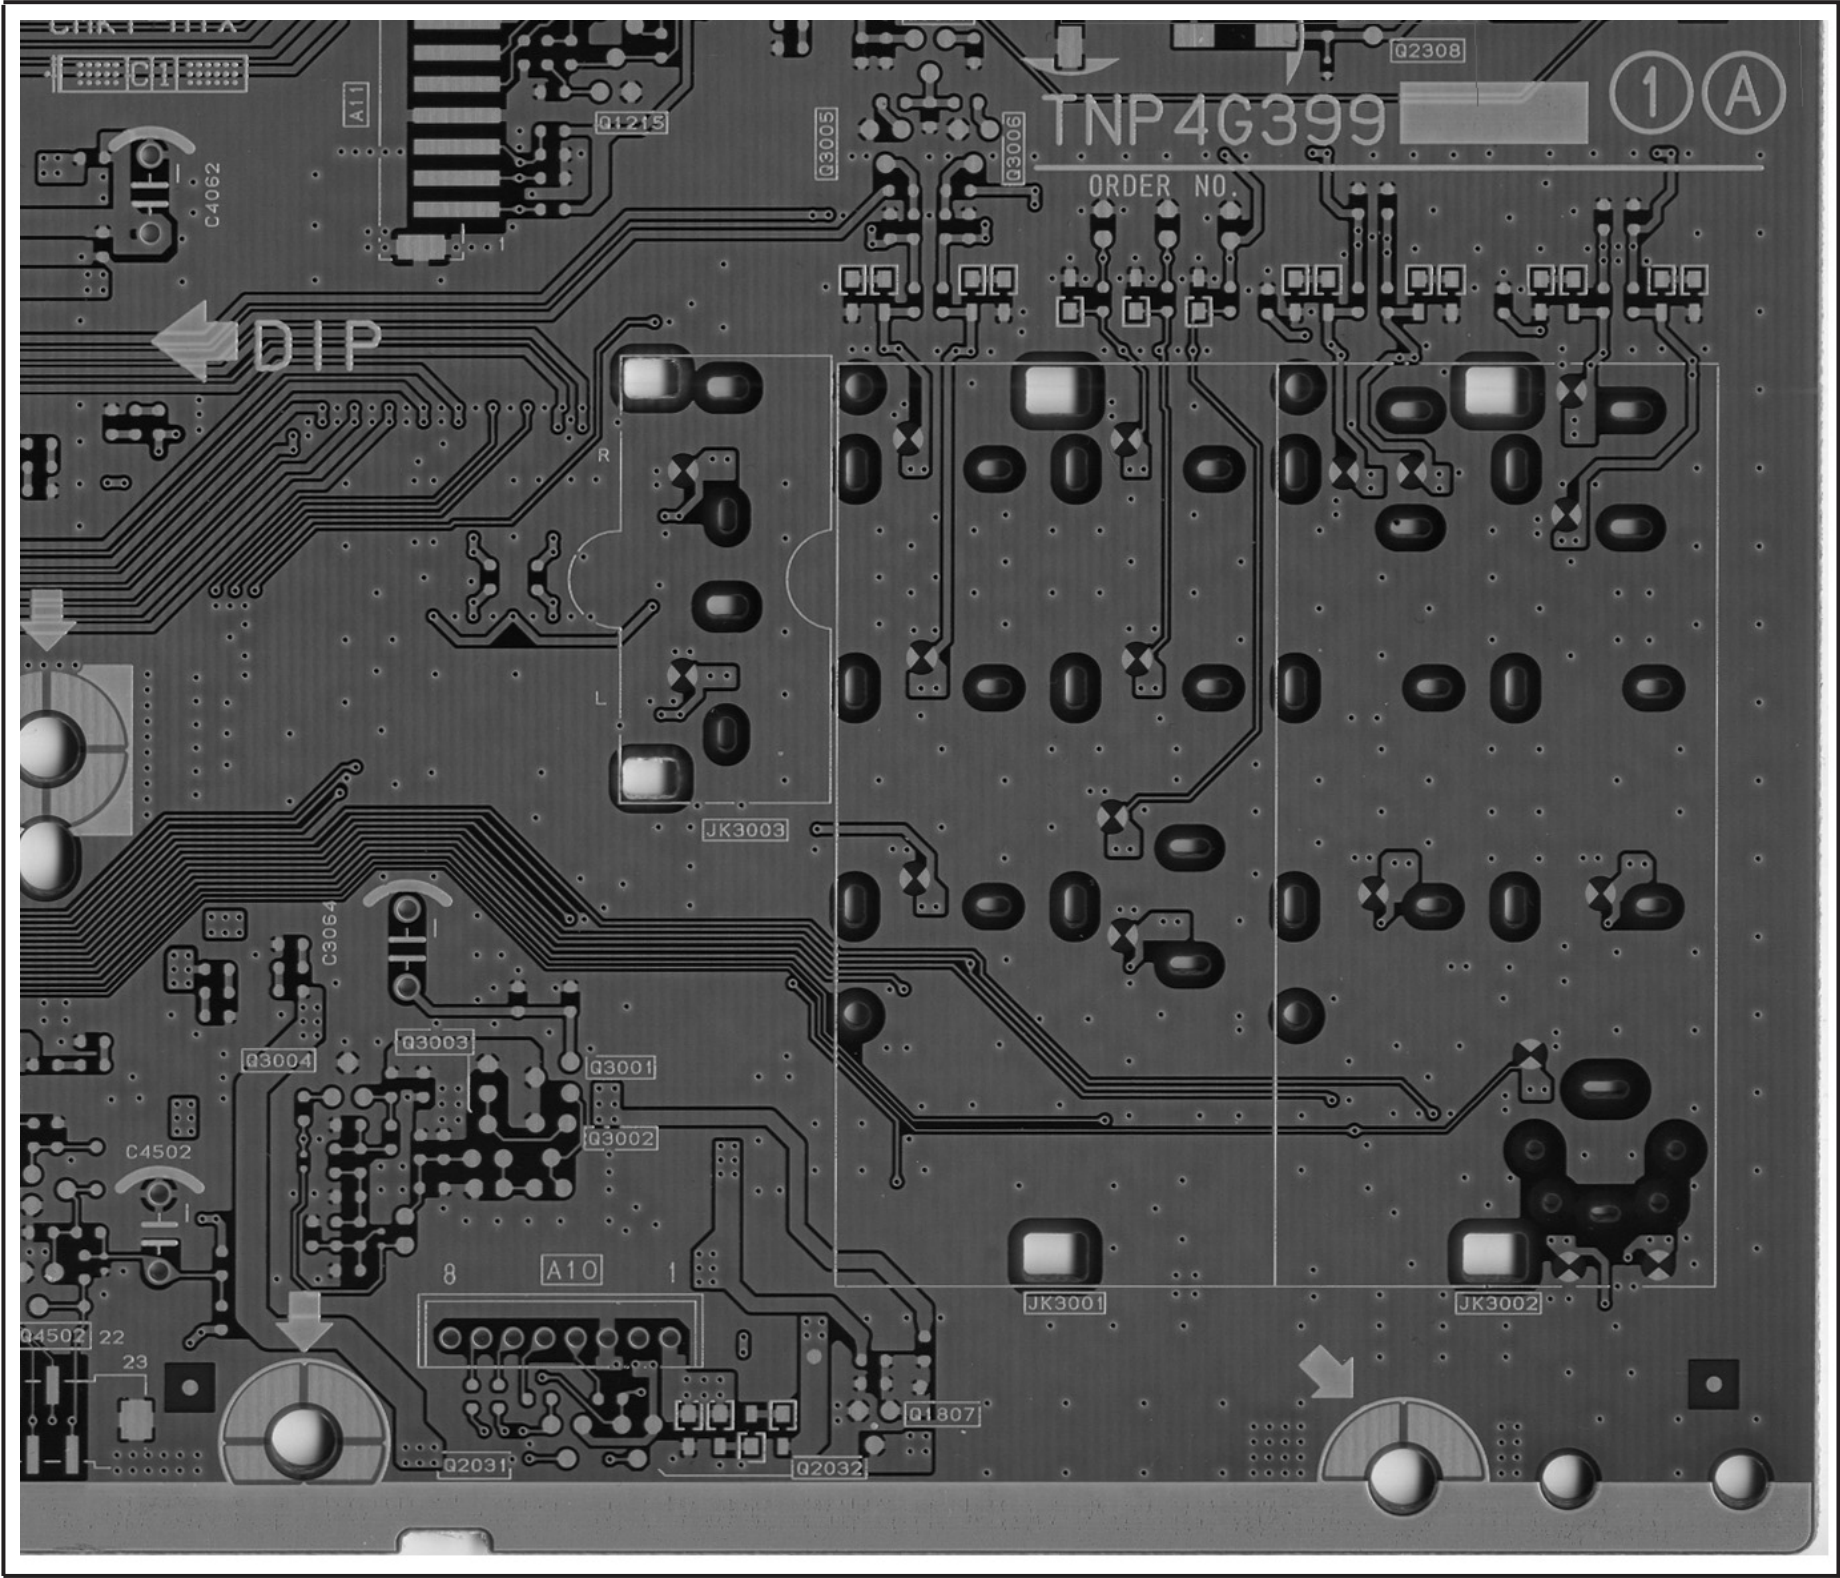


TX-26/32LE7X/Y
TX-26/32LX70A/X/Y


TX-26/32LE7X/Y
TX-26/32LX70A/X/Y

1 2 3 4 5 6 7 8 9

A-BOARD (B SIDE)
TNP4G399

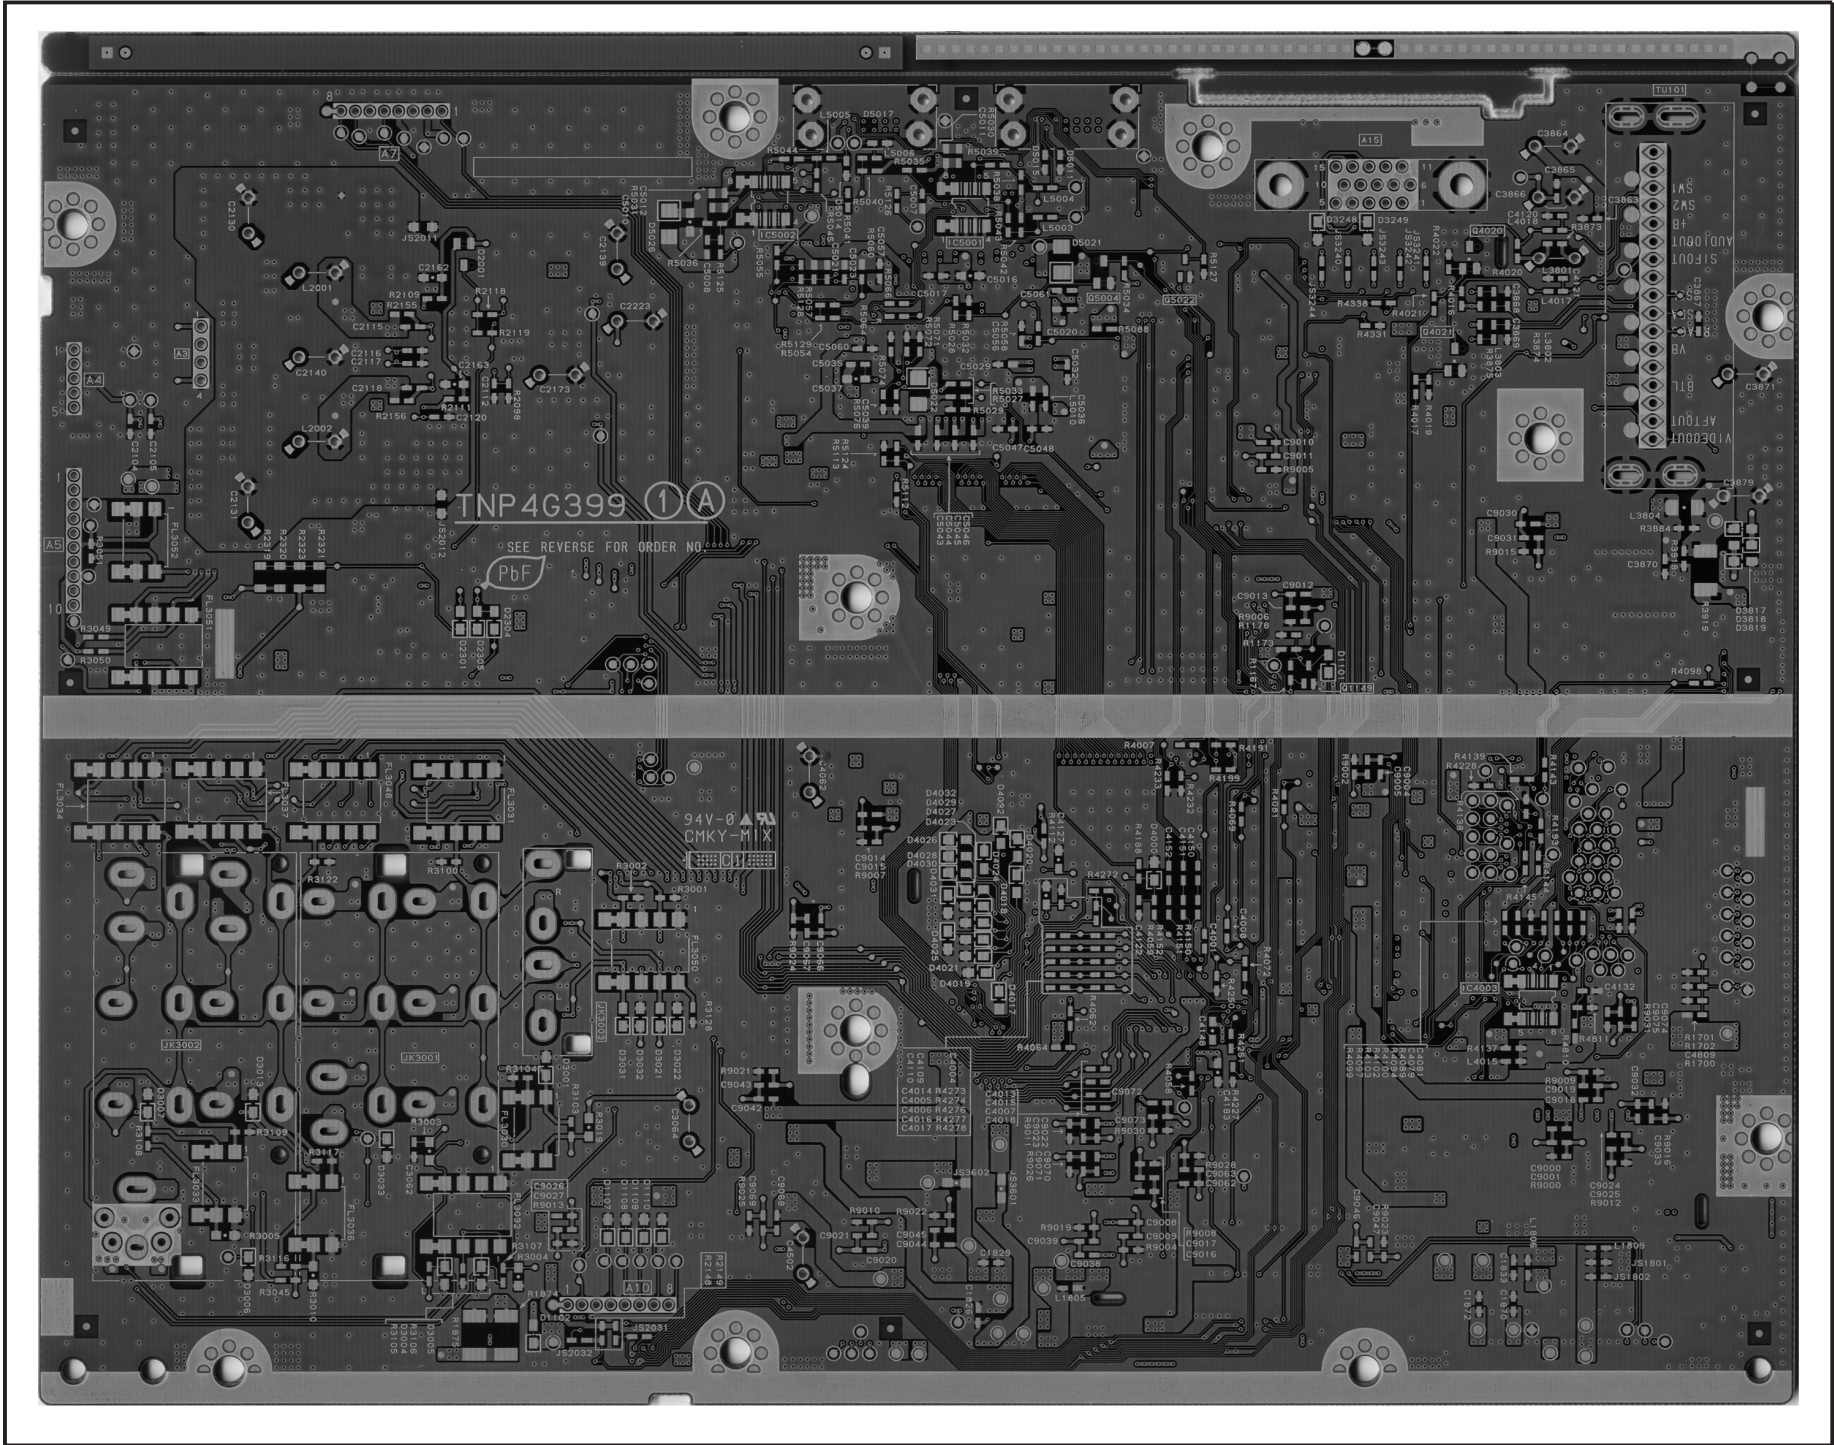

TX-26/32LE7X/Y
TX-26/32LX70A/X/Y
A-BOARD TNP4G399

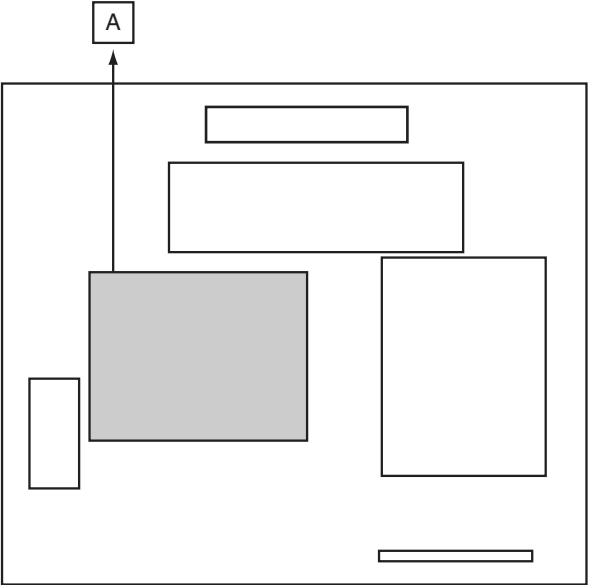

Parts Location

A-BOARD (B SIDE)			
IC		TRANSISTOR	
IC4003	C-6	Q4020	E-6
IC5001	E-4	Q4021	E-6
IC5002	E-4	Q5004	E-5
		Q5022	E-5

TX-26/32LE7X/Y
TX-26/32LX70A/X/Y
A-BOARD TNP4G399

12.4. V and G-Board

F

E

D

C

B

A

V-BOARD (COMPONENT SIDE)
TNP4G400

V-BOARD (FOIL SIDE)
TNP4G400

G-BOARD (COMPONENT SIDE)
TNP4G402

G-BOARD (FOIL SIDE)
TNP4G402

Parts Location			
V-BOARD (FOIL SIDE)			
IC		TP	
Q1002	D-4	TP1001	D-1
Q1004	D-4	TP1002	D-1
Q1006	D-4	TP1003	D-2
Q1007	D-4	TP1004	D-3
		TP1005	D-2
		TP1006	D-3
		TP1007	D-2
		TP1008	D-3
		TPV001	D-3

Parts Location			
G-BOARD (FOIL SIDE)			
TP			
TP3501	B-6	TP3530	B-5
TP3502	B-6	TP3531	B-5
TP3504	B-5	TP3532	B-4
TP3505	B-5	TP3533	B-4
TP3506	B-5	TP3534	B-5
TP3507	B-5	TP3535	B-4
TP3508	B-5	TP3536	B-5
TP3509	B-4	TP3537	B-5
TP3510	B-4	TP3538	B-5
TP3521	B-6	TP3539	B-5
TP3522	B-6	TP3540	B-5
TP3523	B-6	TP3541	B-5
TP3524	B-6	TP3542	B-5
TP3525	B-6	TP3543	B-4
TP3526	B-6	TP3544	B-5
TP3527	B-5	TP3545	B-4
TP3528	B-5	TP3546	B-4
TP3529	B-5		

A schematic diagram showing the layout of the V and G boards. It includes rectangular boxes representing components, with arrows pointing from labels 'G' and 'V' to specific locations on the boards.

TX-26/32LE7X/Y
TX-26/32LX70A/X/Y
G-BOARD TNP4G402
V-BOARD TNP4G400

TX-26/32LE7X/Y
TX-26/32LX70A/X/Y
G-BOARD TNP4G402
V-BOARD TNP4G400

1

2

3

4

5

6

7

8

9

13 Block and Schematic Diagram

13.1. Schematic Diagram Notes

Important Safety Notice

Components identified by $\triangle$ mark have special characteristics important for safety.
When replacing any of these components, use only manufacture's specified parts.

Notes:

1. **Resistor**

All resistors are cabon 1/4W resistor, unless marked as follows:
Unit of resistance is OHM [Ω] (K=1,000, M=1,000,000).

$\bigcirc$	: Nonflammable	$\boxtimes$	: Metal Oxide
$\triangle$	: Solid	$\odot$	: Metal Film
$\boxplus$	: Wire Wound	$\otimes$	: Fuse:

2. **Capacitor**

All capacitors are ceramic 50V capacitor, unless marked as follows:
Unit of capacitance is μ F, unless otherwise noted.

$\otimes$	: Temperature Compensation	$\text{---} \text{H} \text{---}$	: Electrolytic
$\textcircled{M}$	: Polyester	$\text{NP} \text{---} \text{H} \text{---}$	: Bipolar
$\textcircled{m}$	: Metalized Polyester	$\textcircled{T}$	: Dipped Tantalum
$\boxtimes$	: Polypropylene	$\textcircled{Z}$	: Z-Type

3. Coil

Unit of inductance is μ F, unless otherwise noted.

4. Test Point

$\bigcirc$: Test Point position

5. Earth Symbol

$\text{---} \text{H} \text{---}$: Chassis Earth (Cold) $\downarrow$: Line Earth (Hot)

6. Voltage Measurement

Voltage is measured by a DC voltmeter.

Conditions of the measurement are the following:

Power Source	AC 220V-240V, 50/60Hz
Receiving Signal	Colour Bar signal (RF)
All customer's controls	Maximum positions

7. Number in red circle indicates waveform number.

(See waveform pattern table.)

8. When arrow mark ($\nearrow$) is found, connection is easily found from the direction of arrow

9. Indicates the major signal flow. : Video $\Rightarrow$ Audio $\Rightarrow$

10. This schematic diagram is the latest at the time of printing and subject to change without notice.

Remarks:

1. The Power Circuit contains a circuit area which uses a separate power supply to isolate the earth connection.


The circuit is defined by HOT and COLD indications in the schematic diagram. Take the follwing precautions.

All circuits, except the Power Circuit, are cold.

Precautions

- Do not touch the hot part or the hot and cold parts at the same time or you may be shocked.
 - Do not short- circuit the hot and cold circuits or a fuse may blow and parts may break.
 - Do not connect an instrument, such as an oscilloscope, to the hot and cold circuits simultaneously or a fuse may blow.
Connect the earth of instruments to the earth connection of the circuit being measured.
 - Make sure to disconnect the power plug before removing the chassis.
2. Following diodes are interchangeable.
MA150- MA162 (Replacement part)


13.2. Main Block Diagram

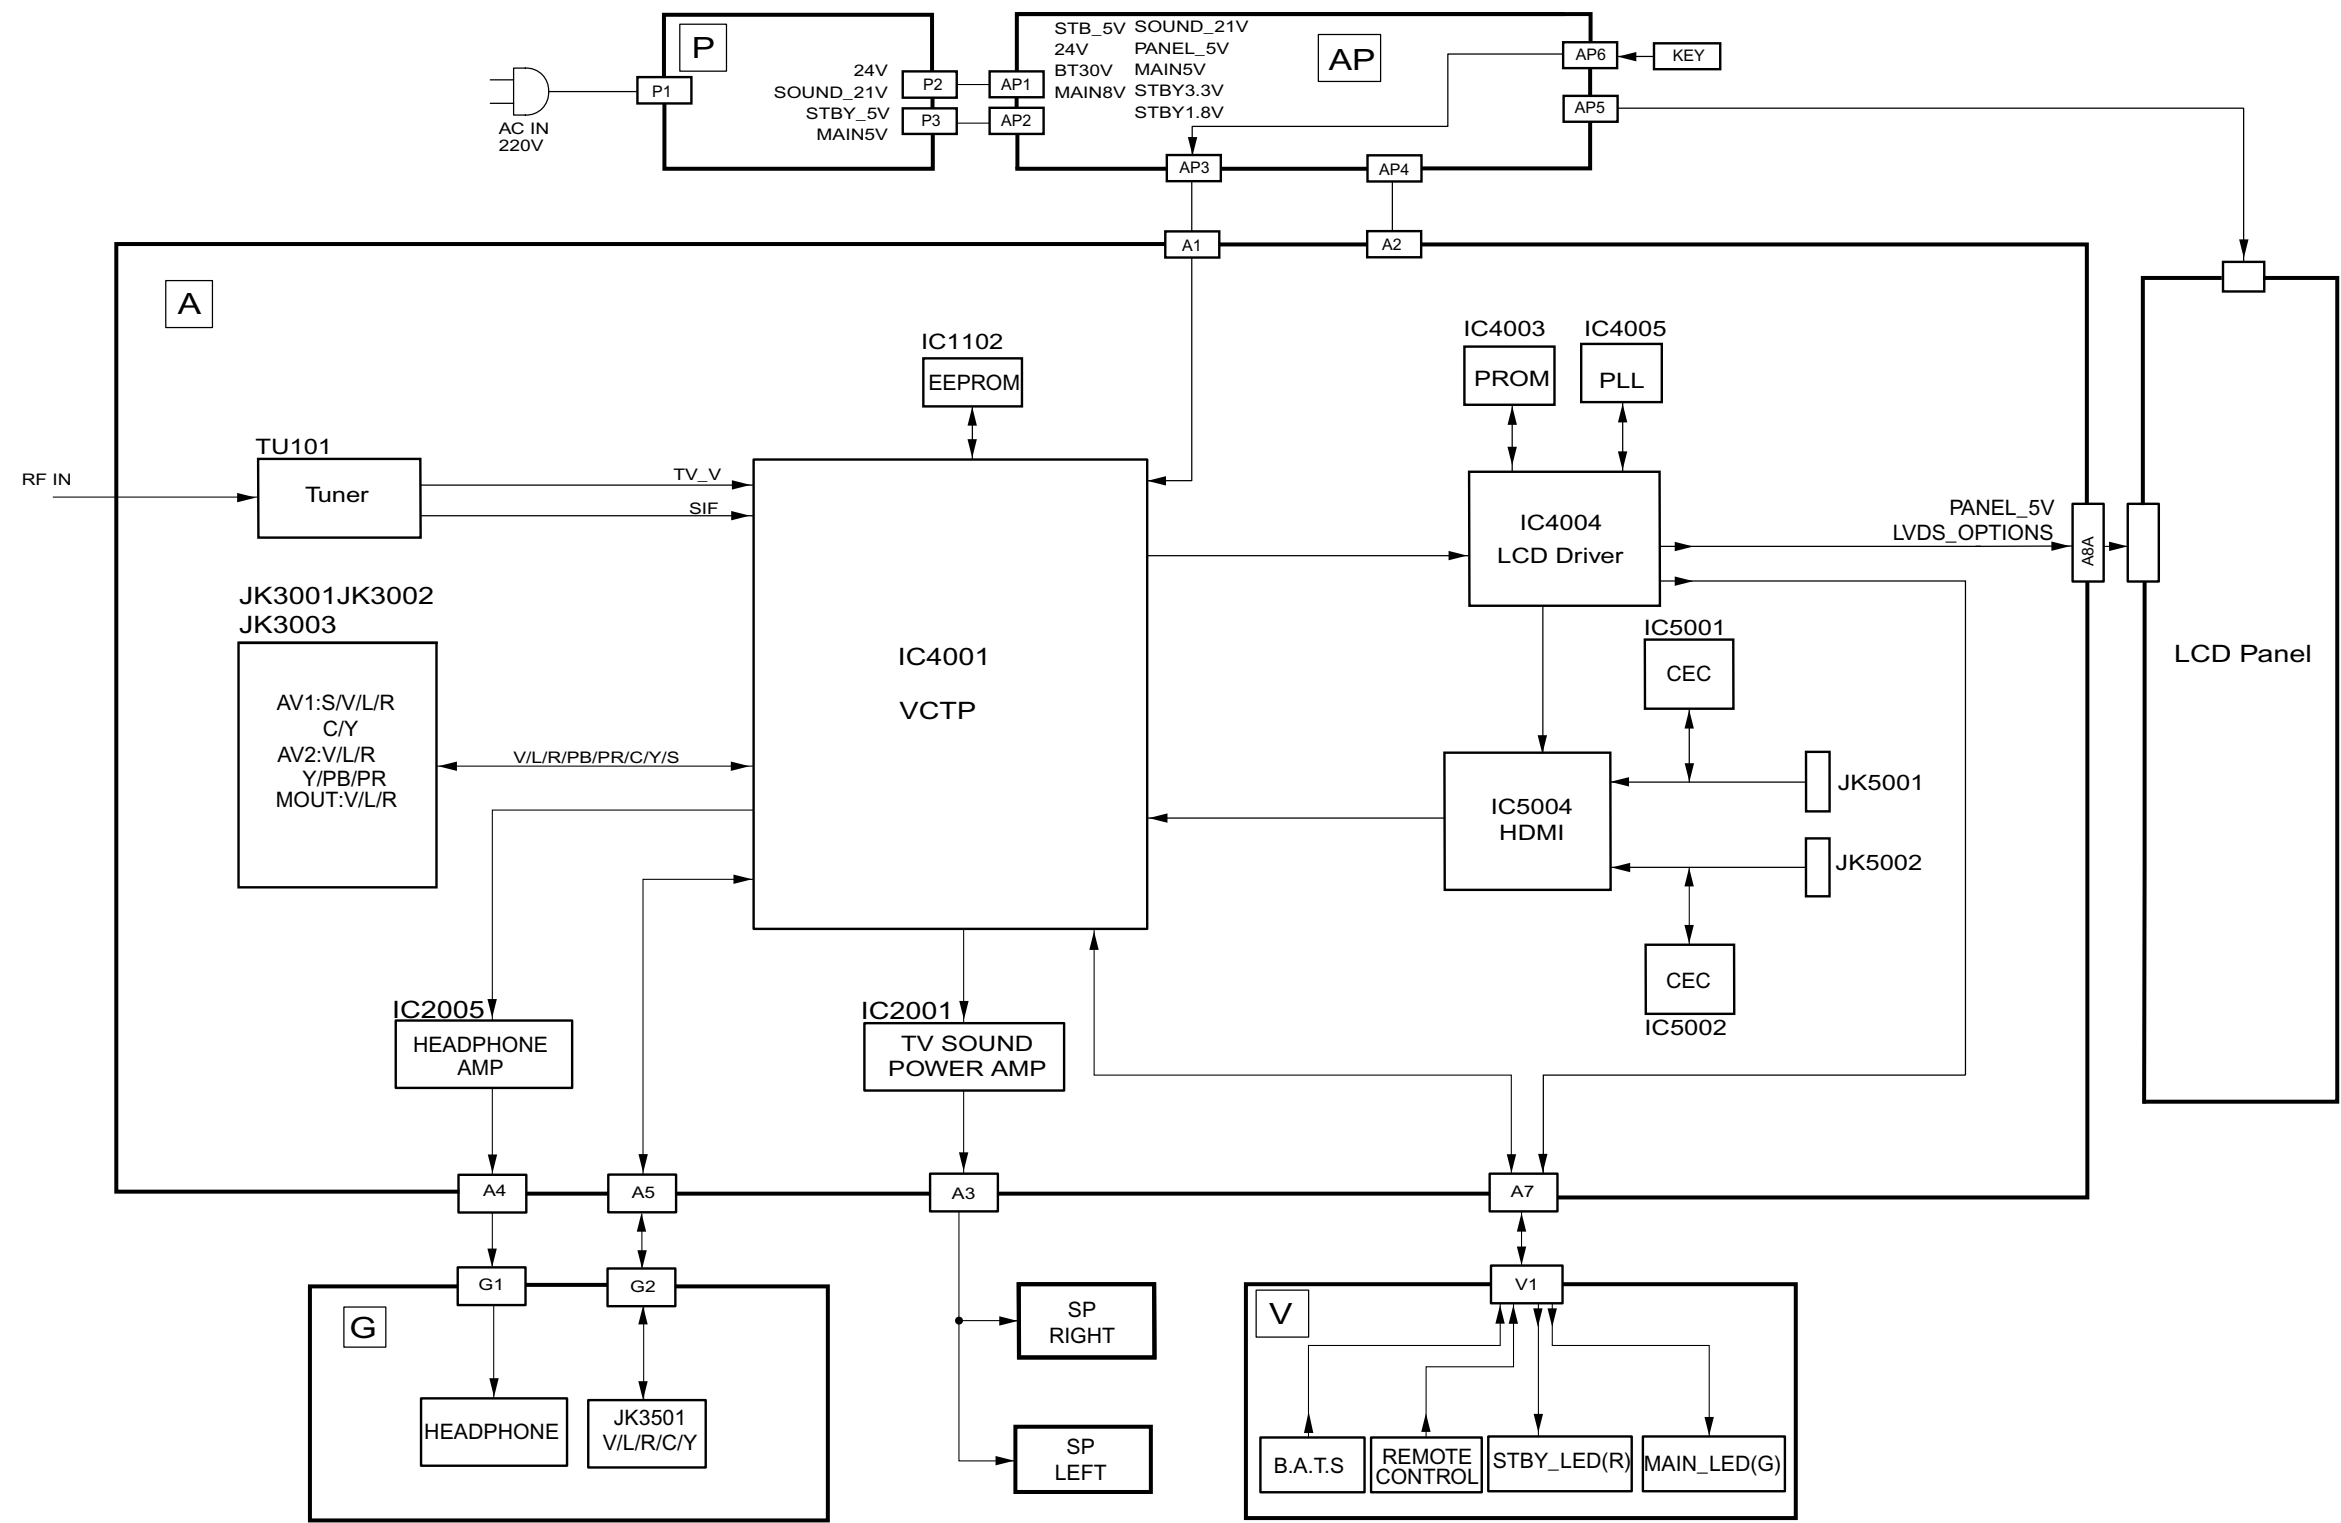


TX-26/32LE7X/Y
TX-26/32LX70A/X/Y
Main Block Diagram

TX-26/32LE7X/Y
TX-26/32LX70A/X/Y
Main Block Diagram

13.3. P.C.B. Block Diagram

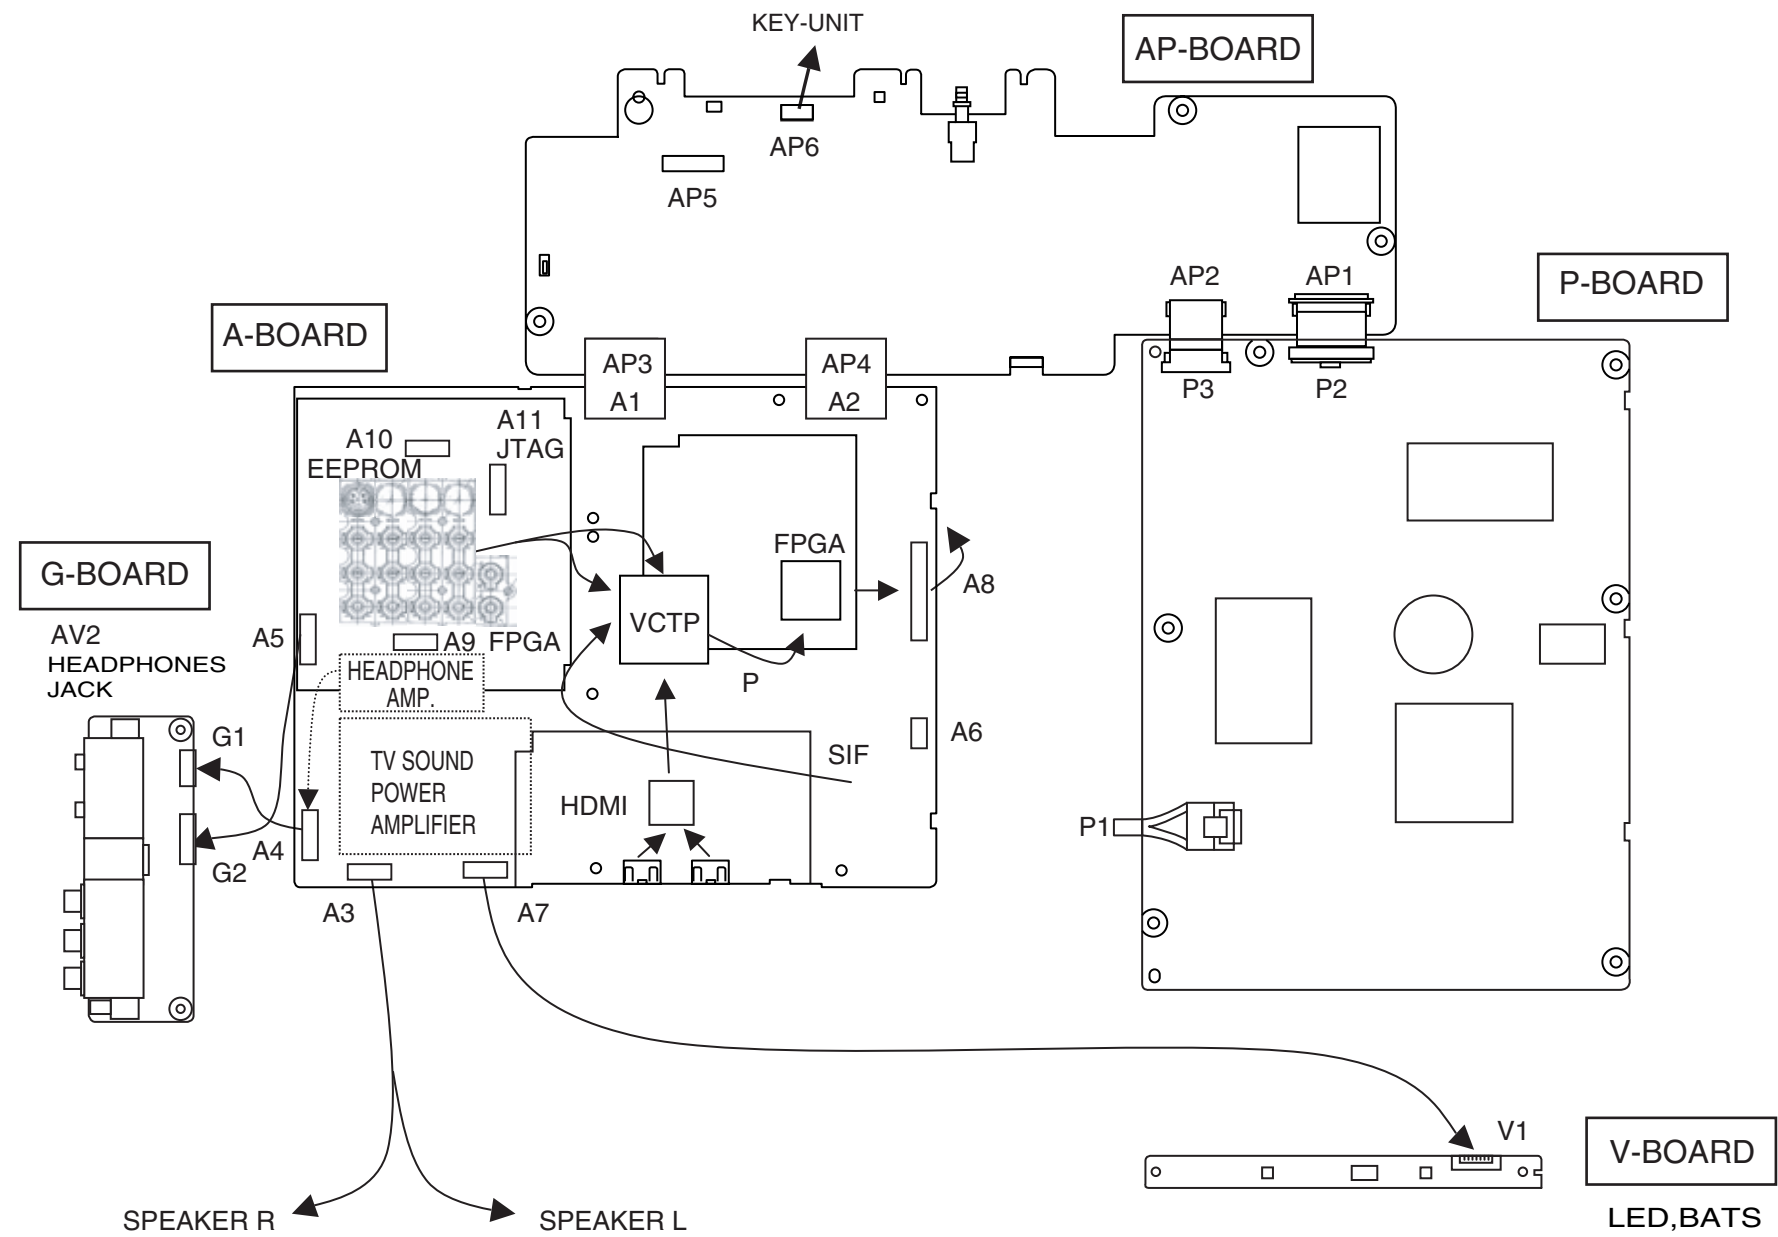


13.4. Power Block Diagram

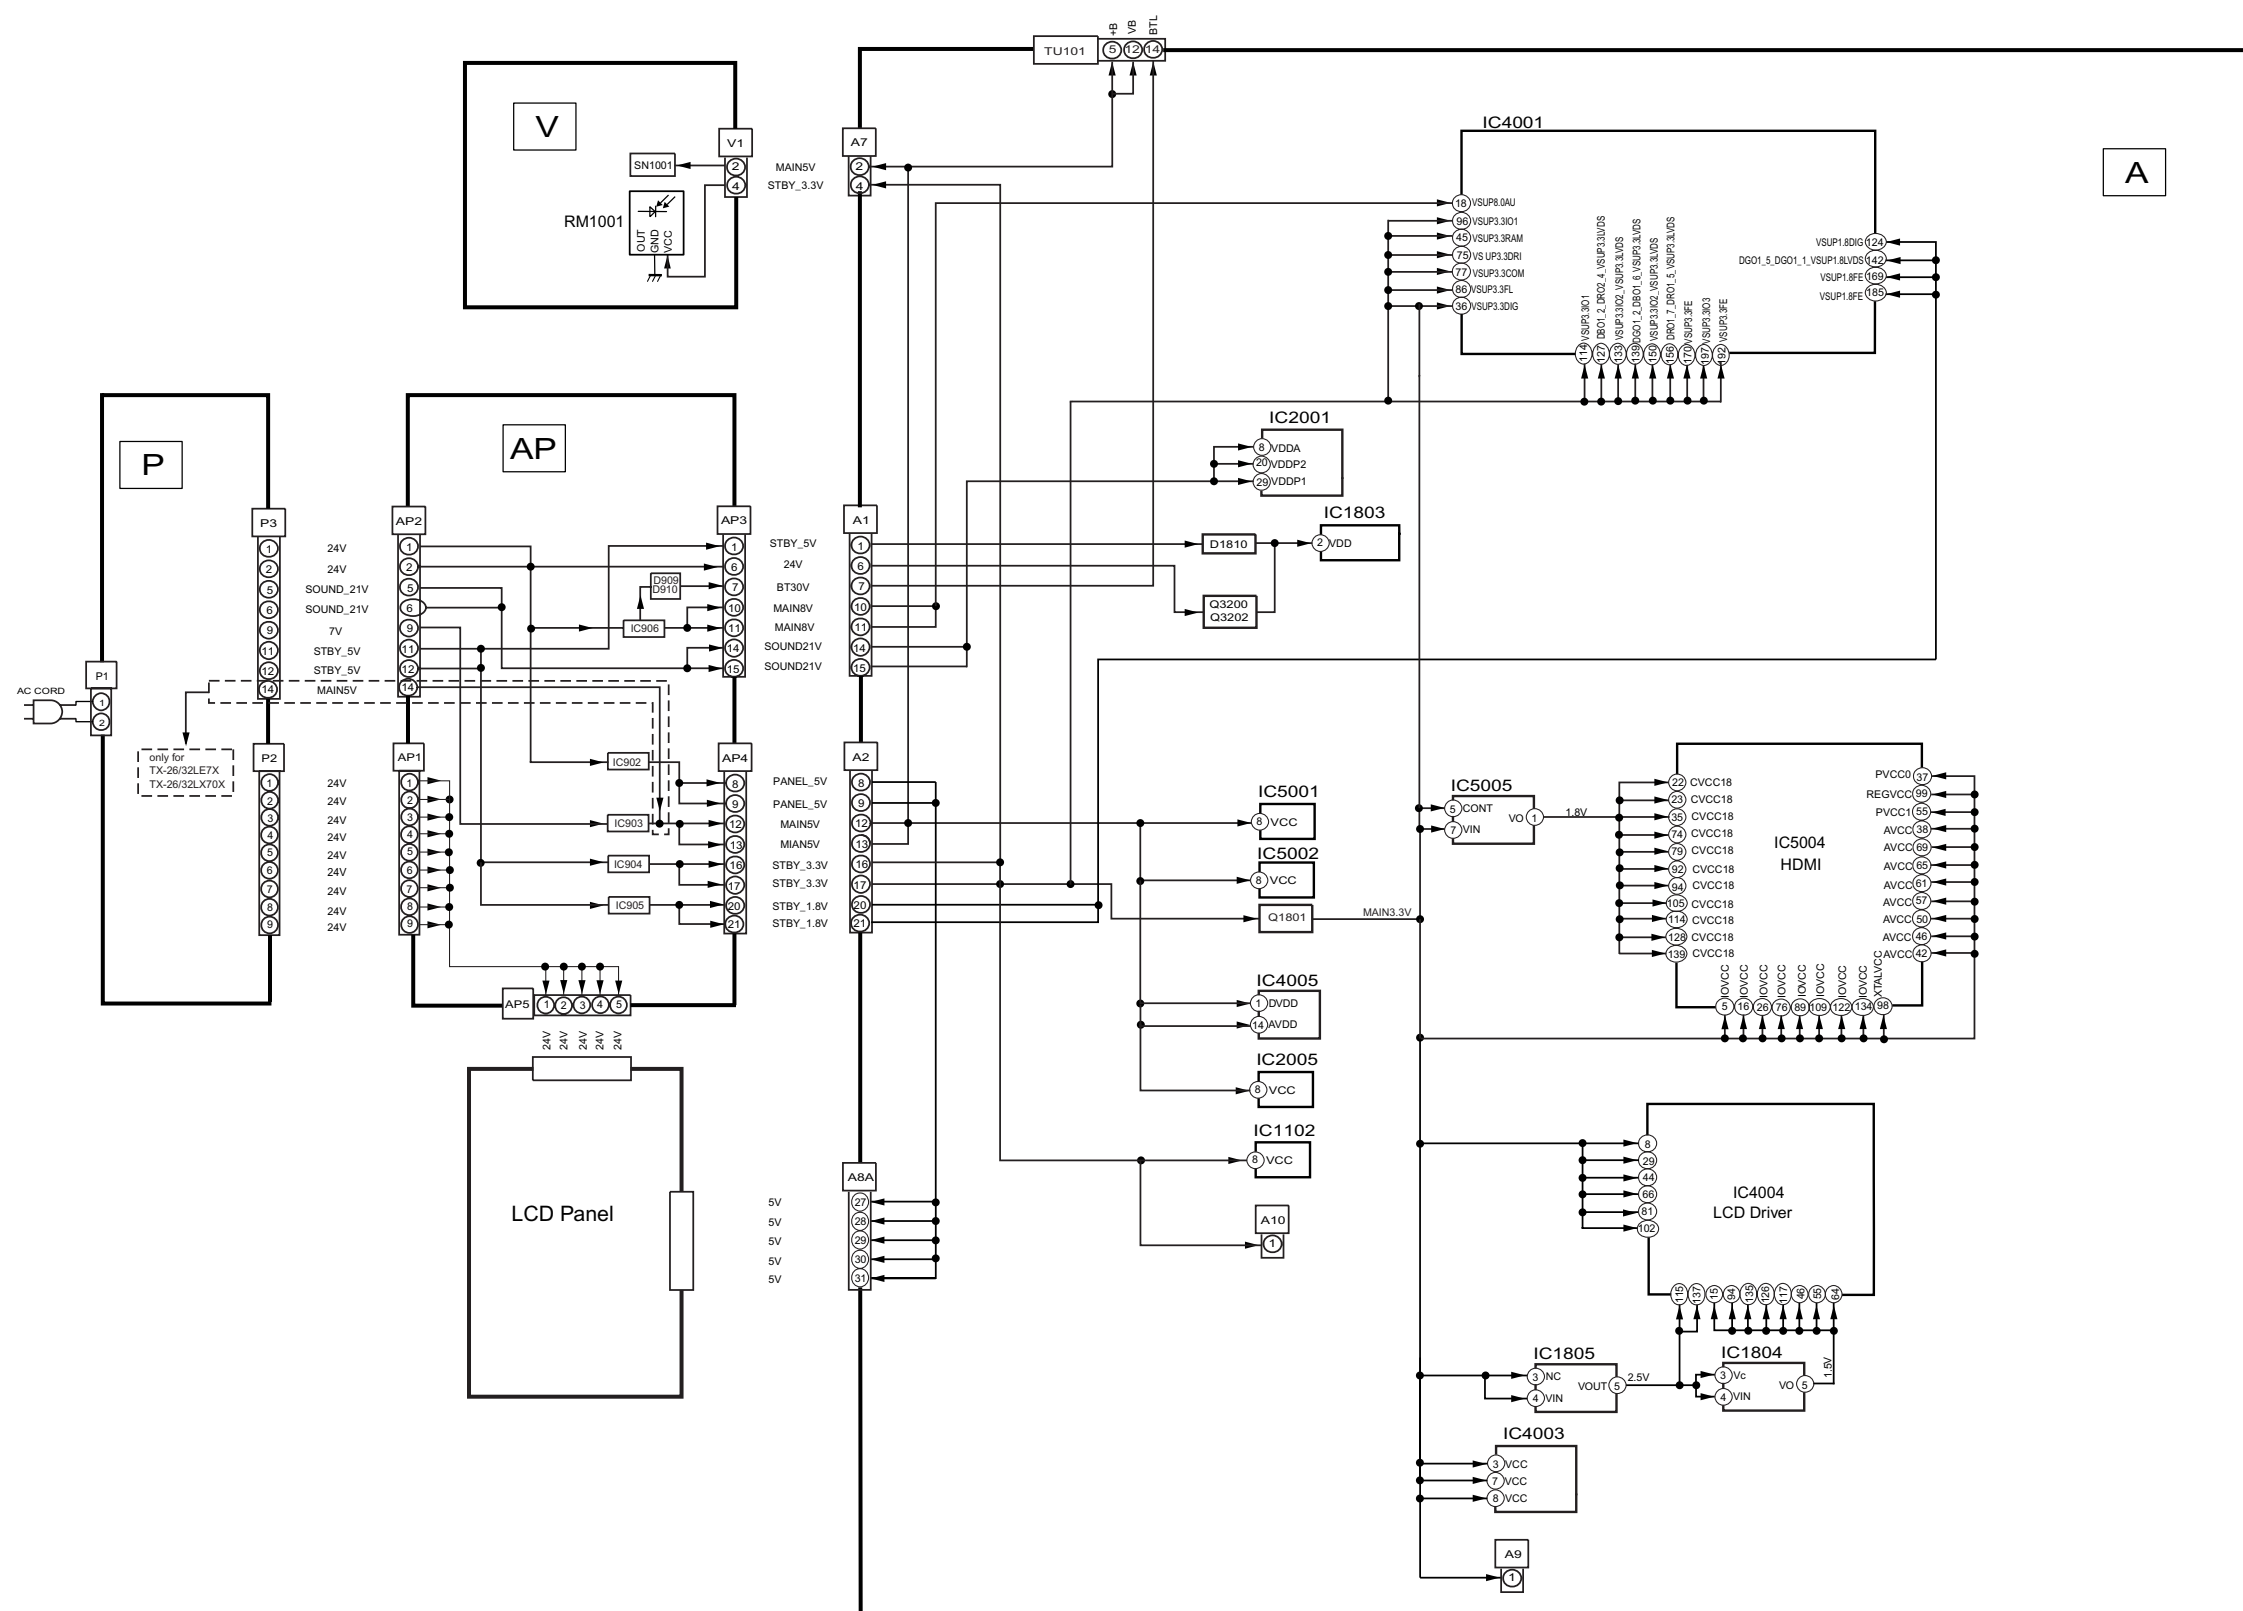

TX-26/32LE7X/Y
TX-26/32LX70A/X/Y
Power Block Diagram

TX-26/32LE7X/Y
TX-26/32LX70A/X/Y
Power Block Diagram


13.5. Signal Block Diagram

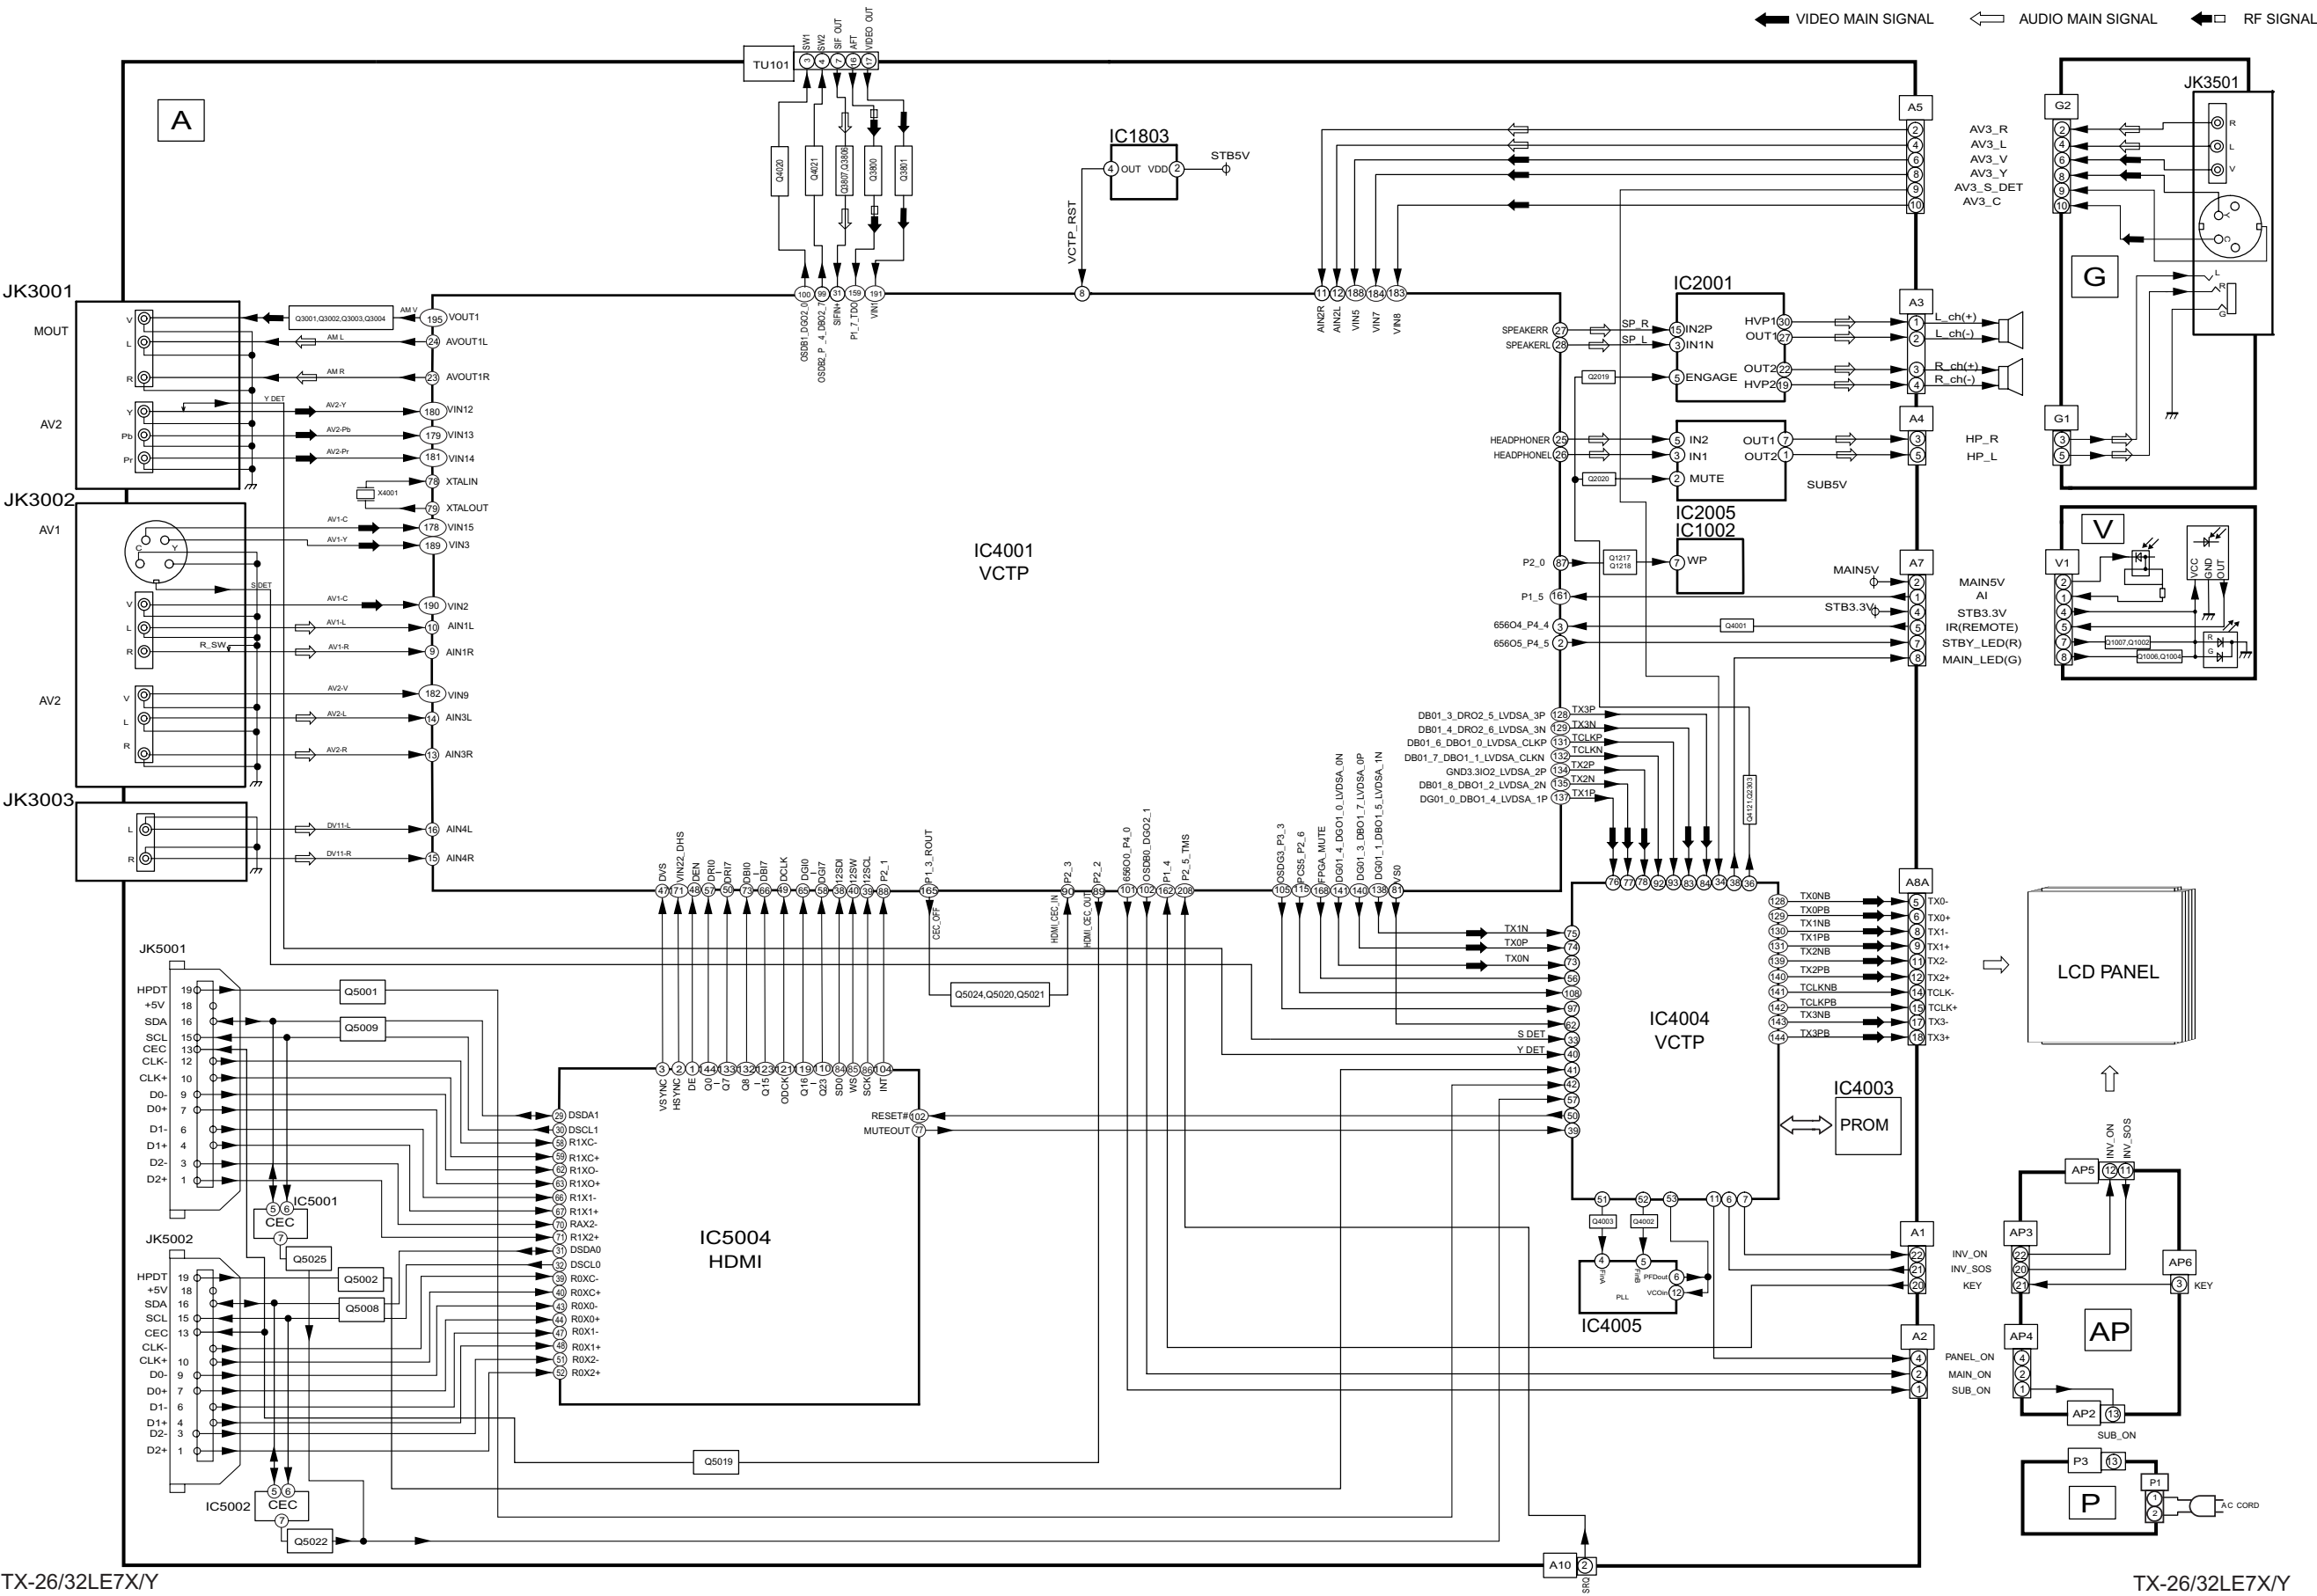


TX-26/32LE7X/Y
TX-26/32LX70A/X/Y
Signal Block Diagram

TX-26/32LE7X/Y
TX-26/32LX70A/X/Y
Signal Block Diagram


13.6. Interconnection Schematic Diagram

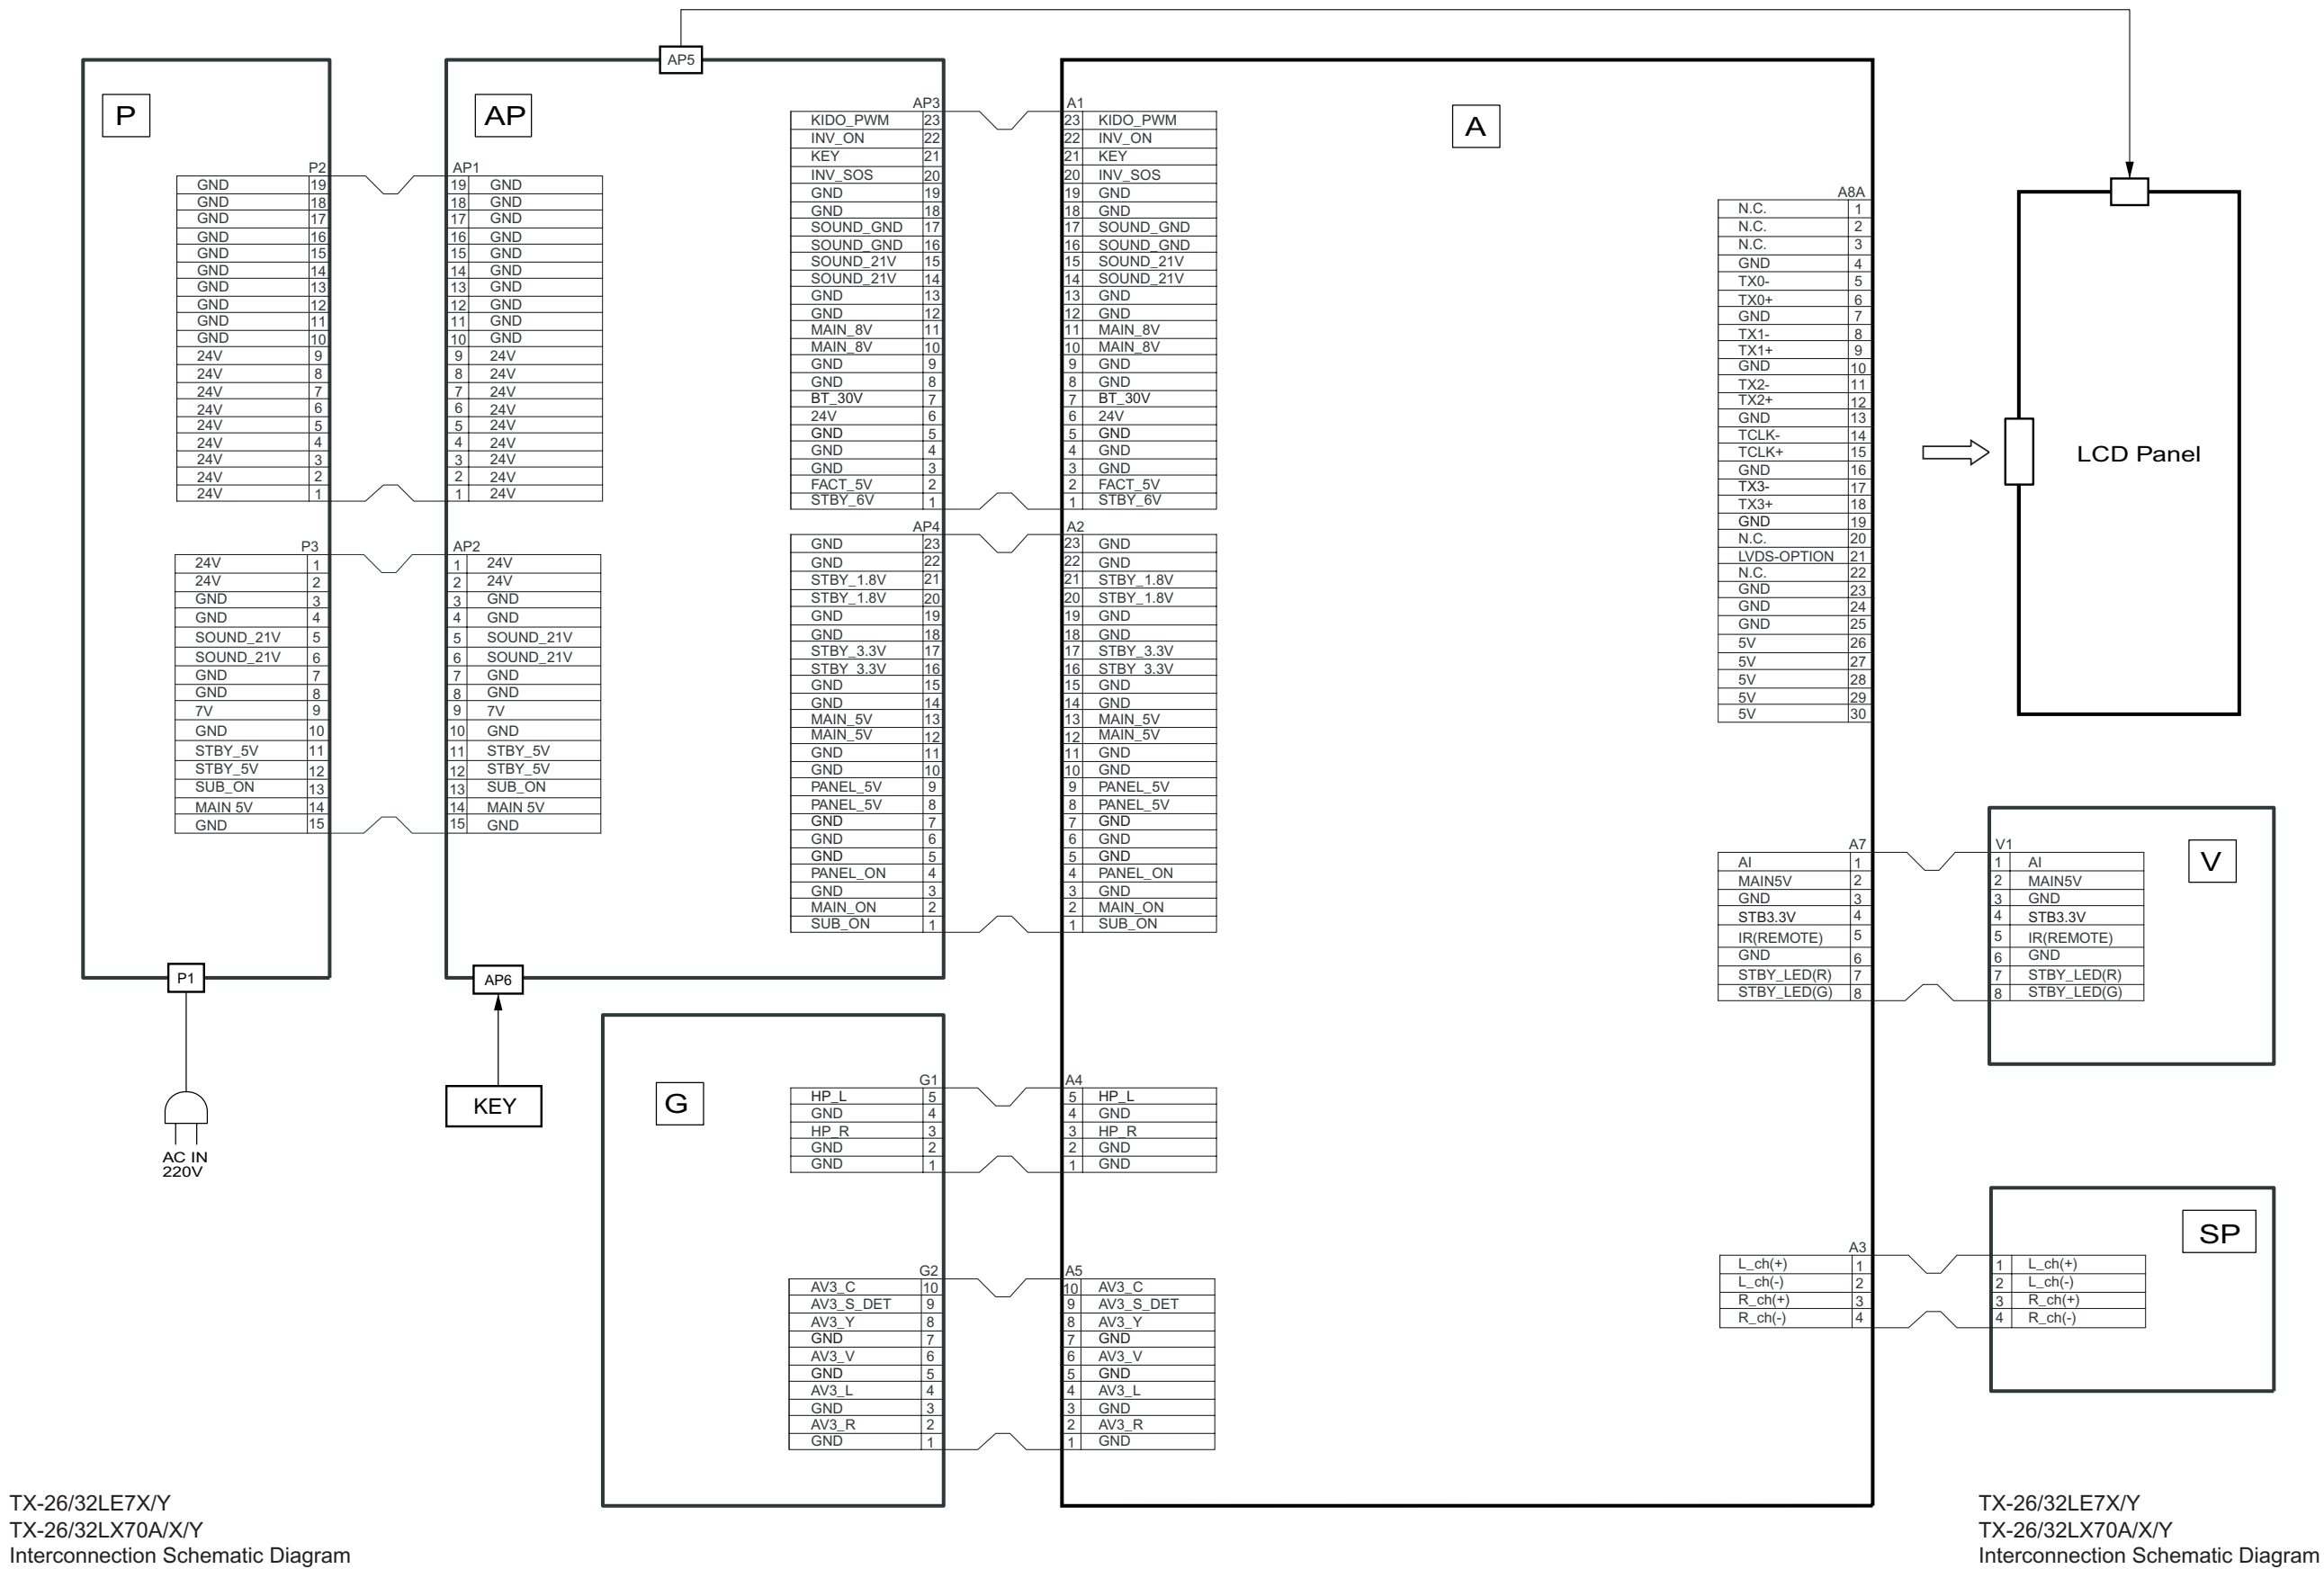


13.8. P-Board Schematic Diagram (TX-26/32LX70Y and TX-26/32LE7Y)

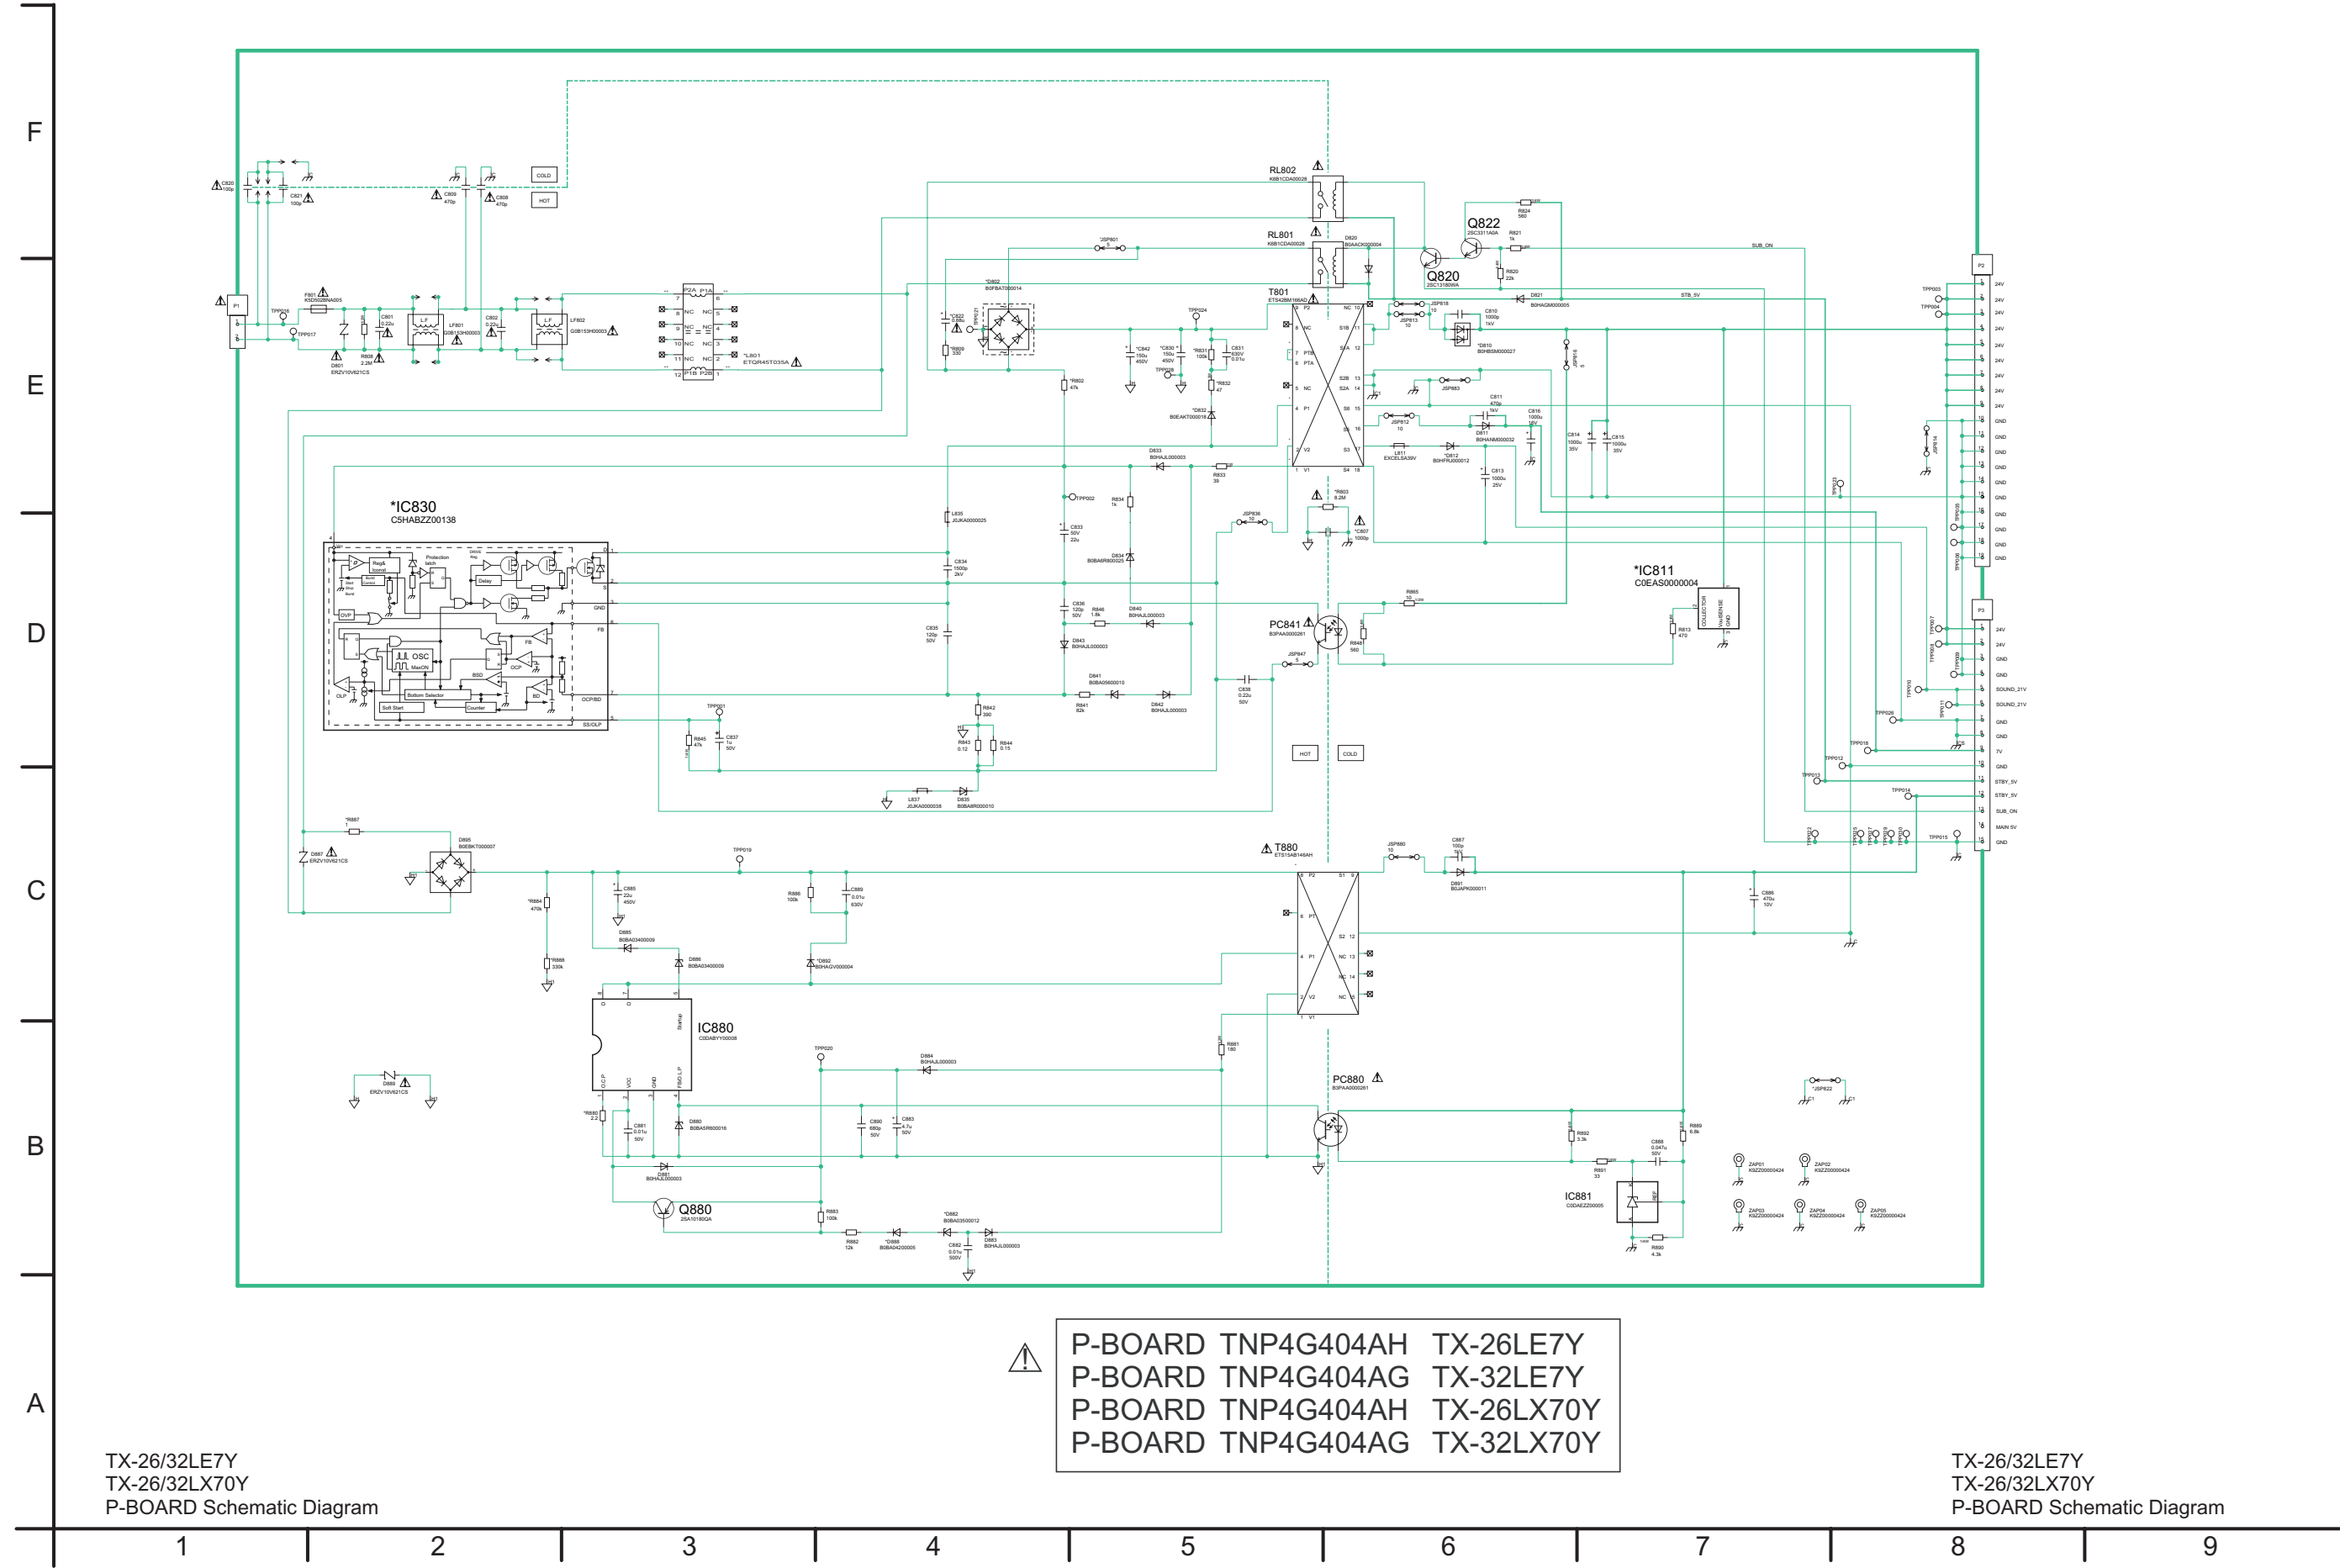


13.9. AP-Board Schematic Diagram

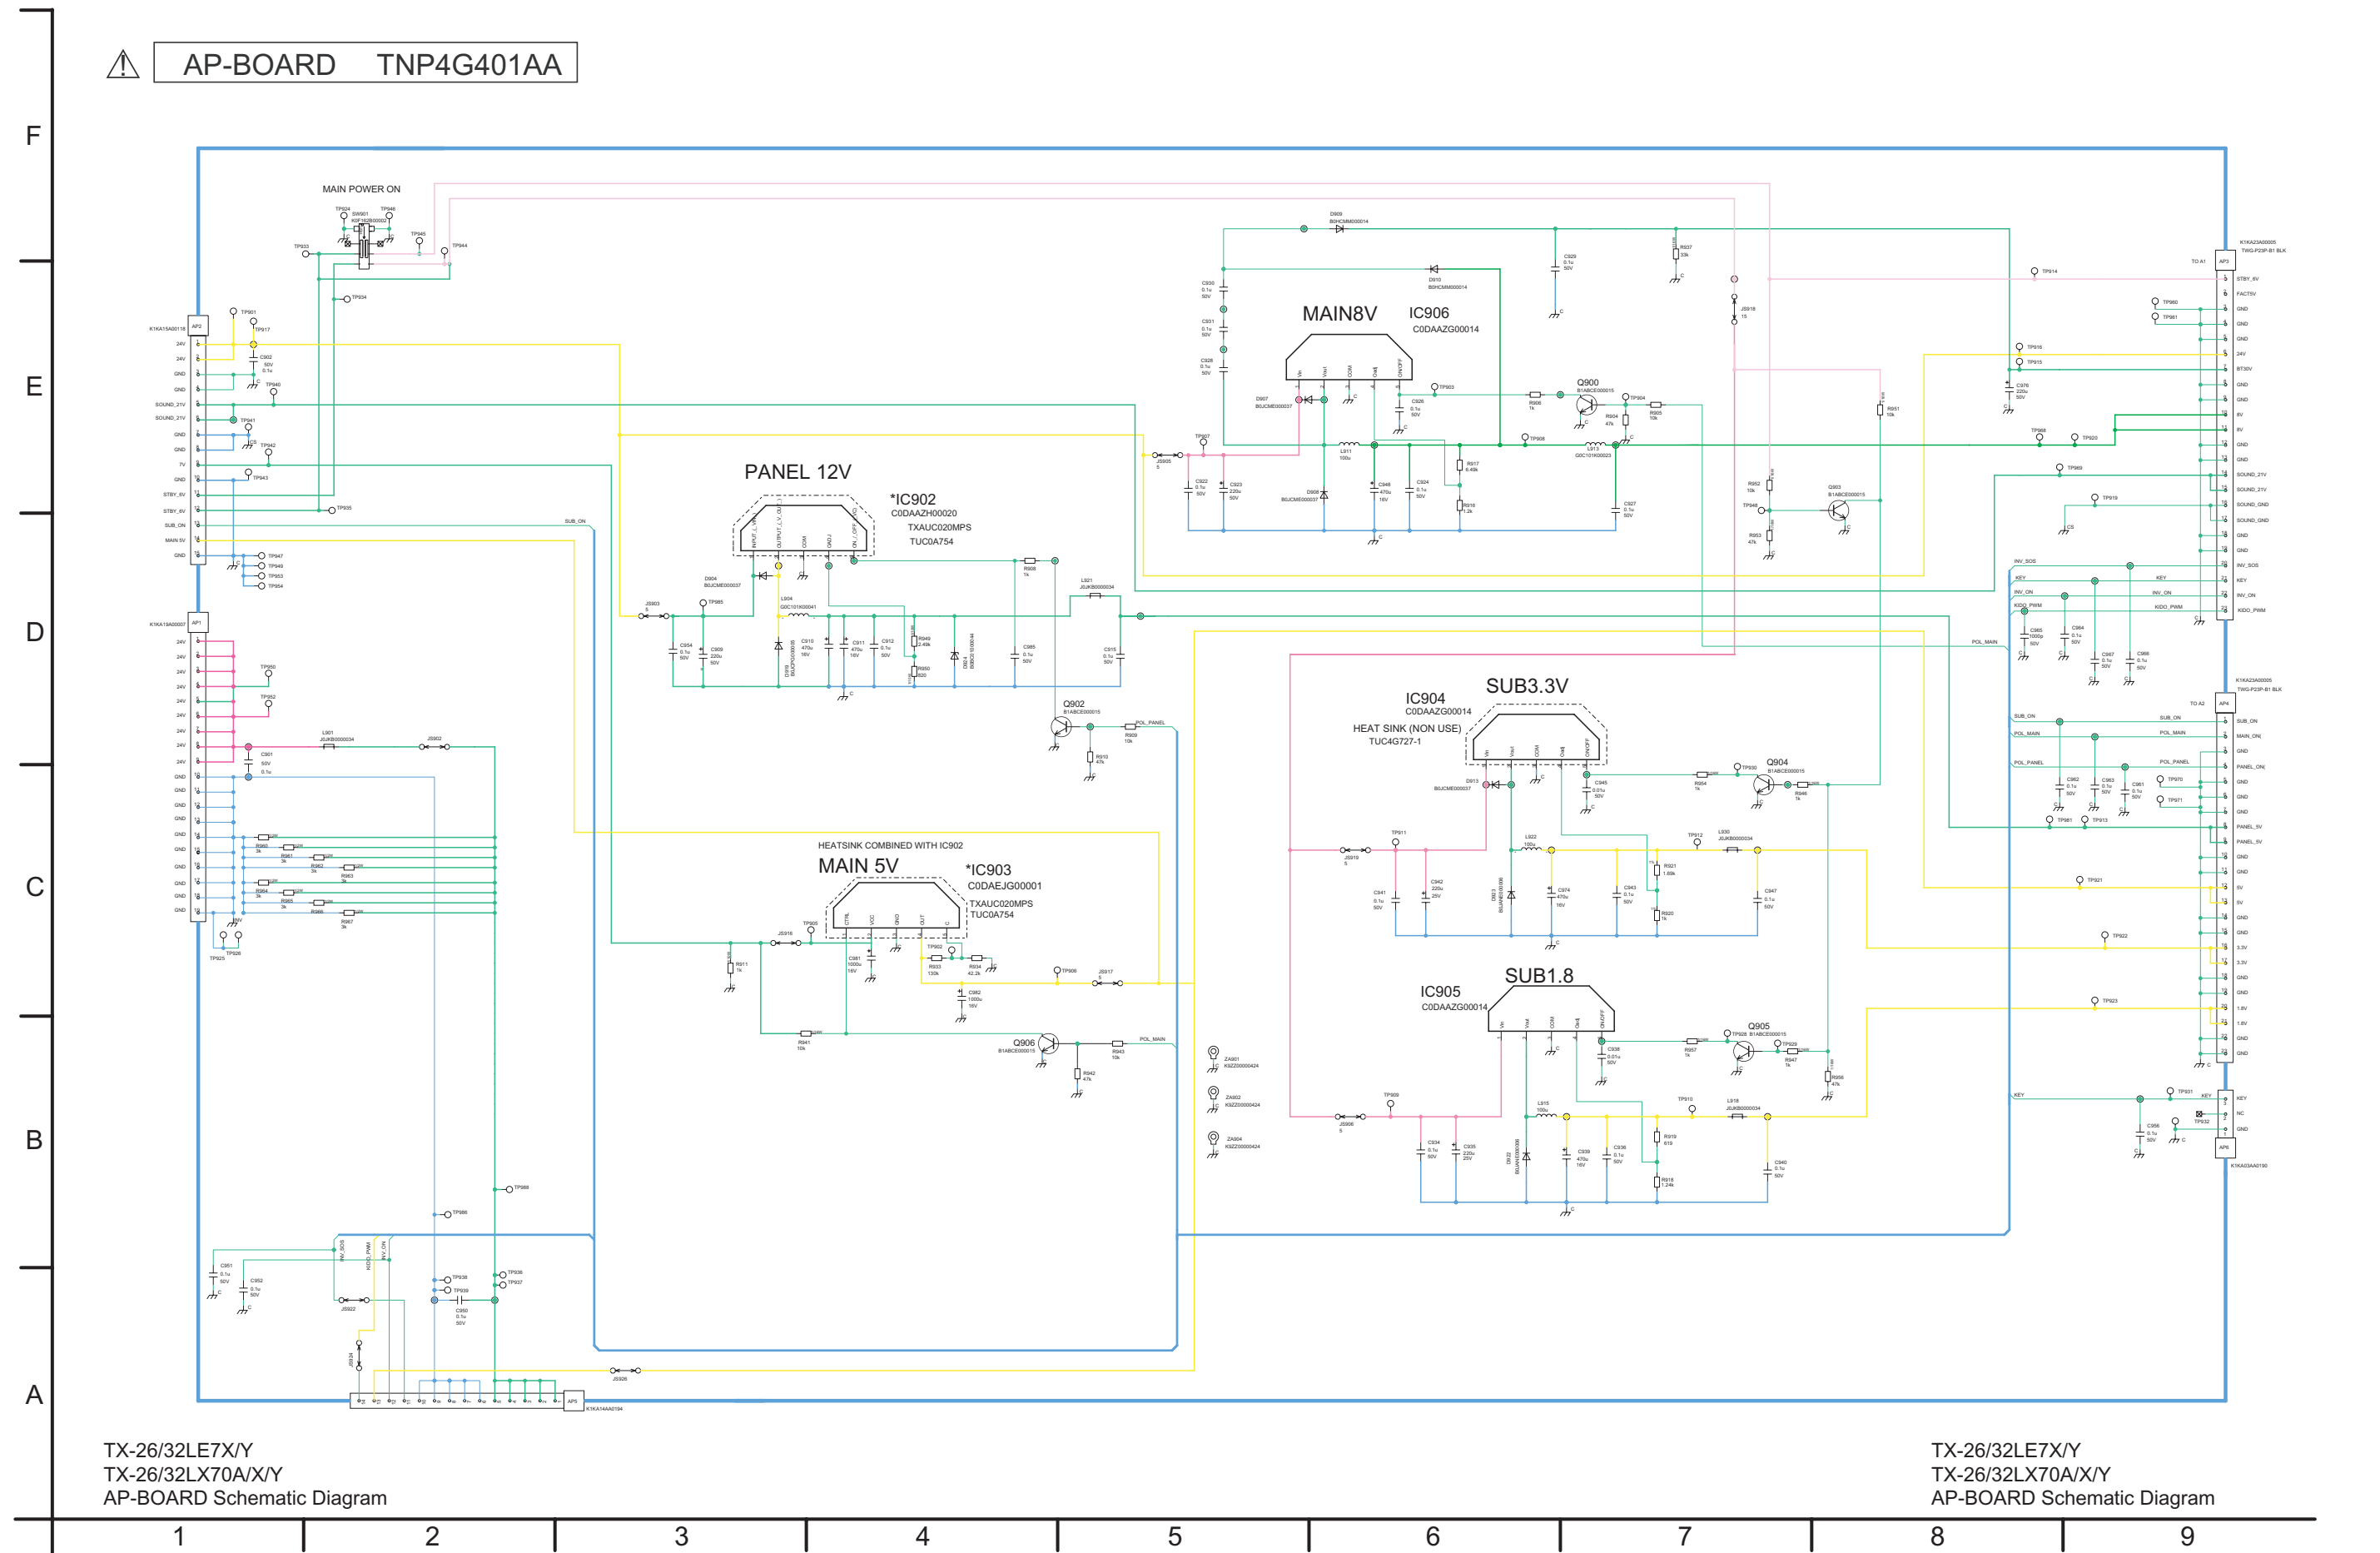


13.10. A-Board (1 of 5) Schematic Diagram

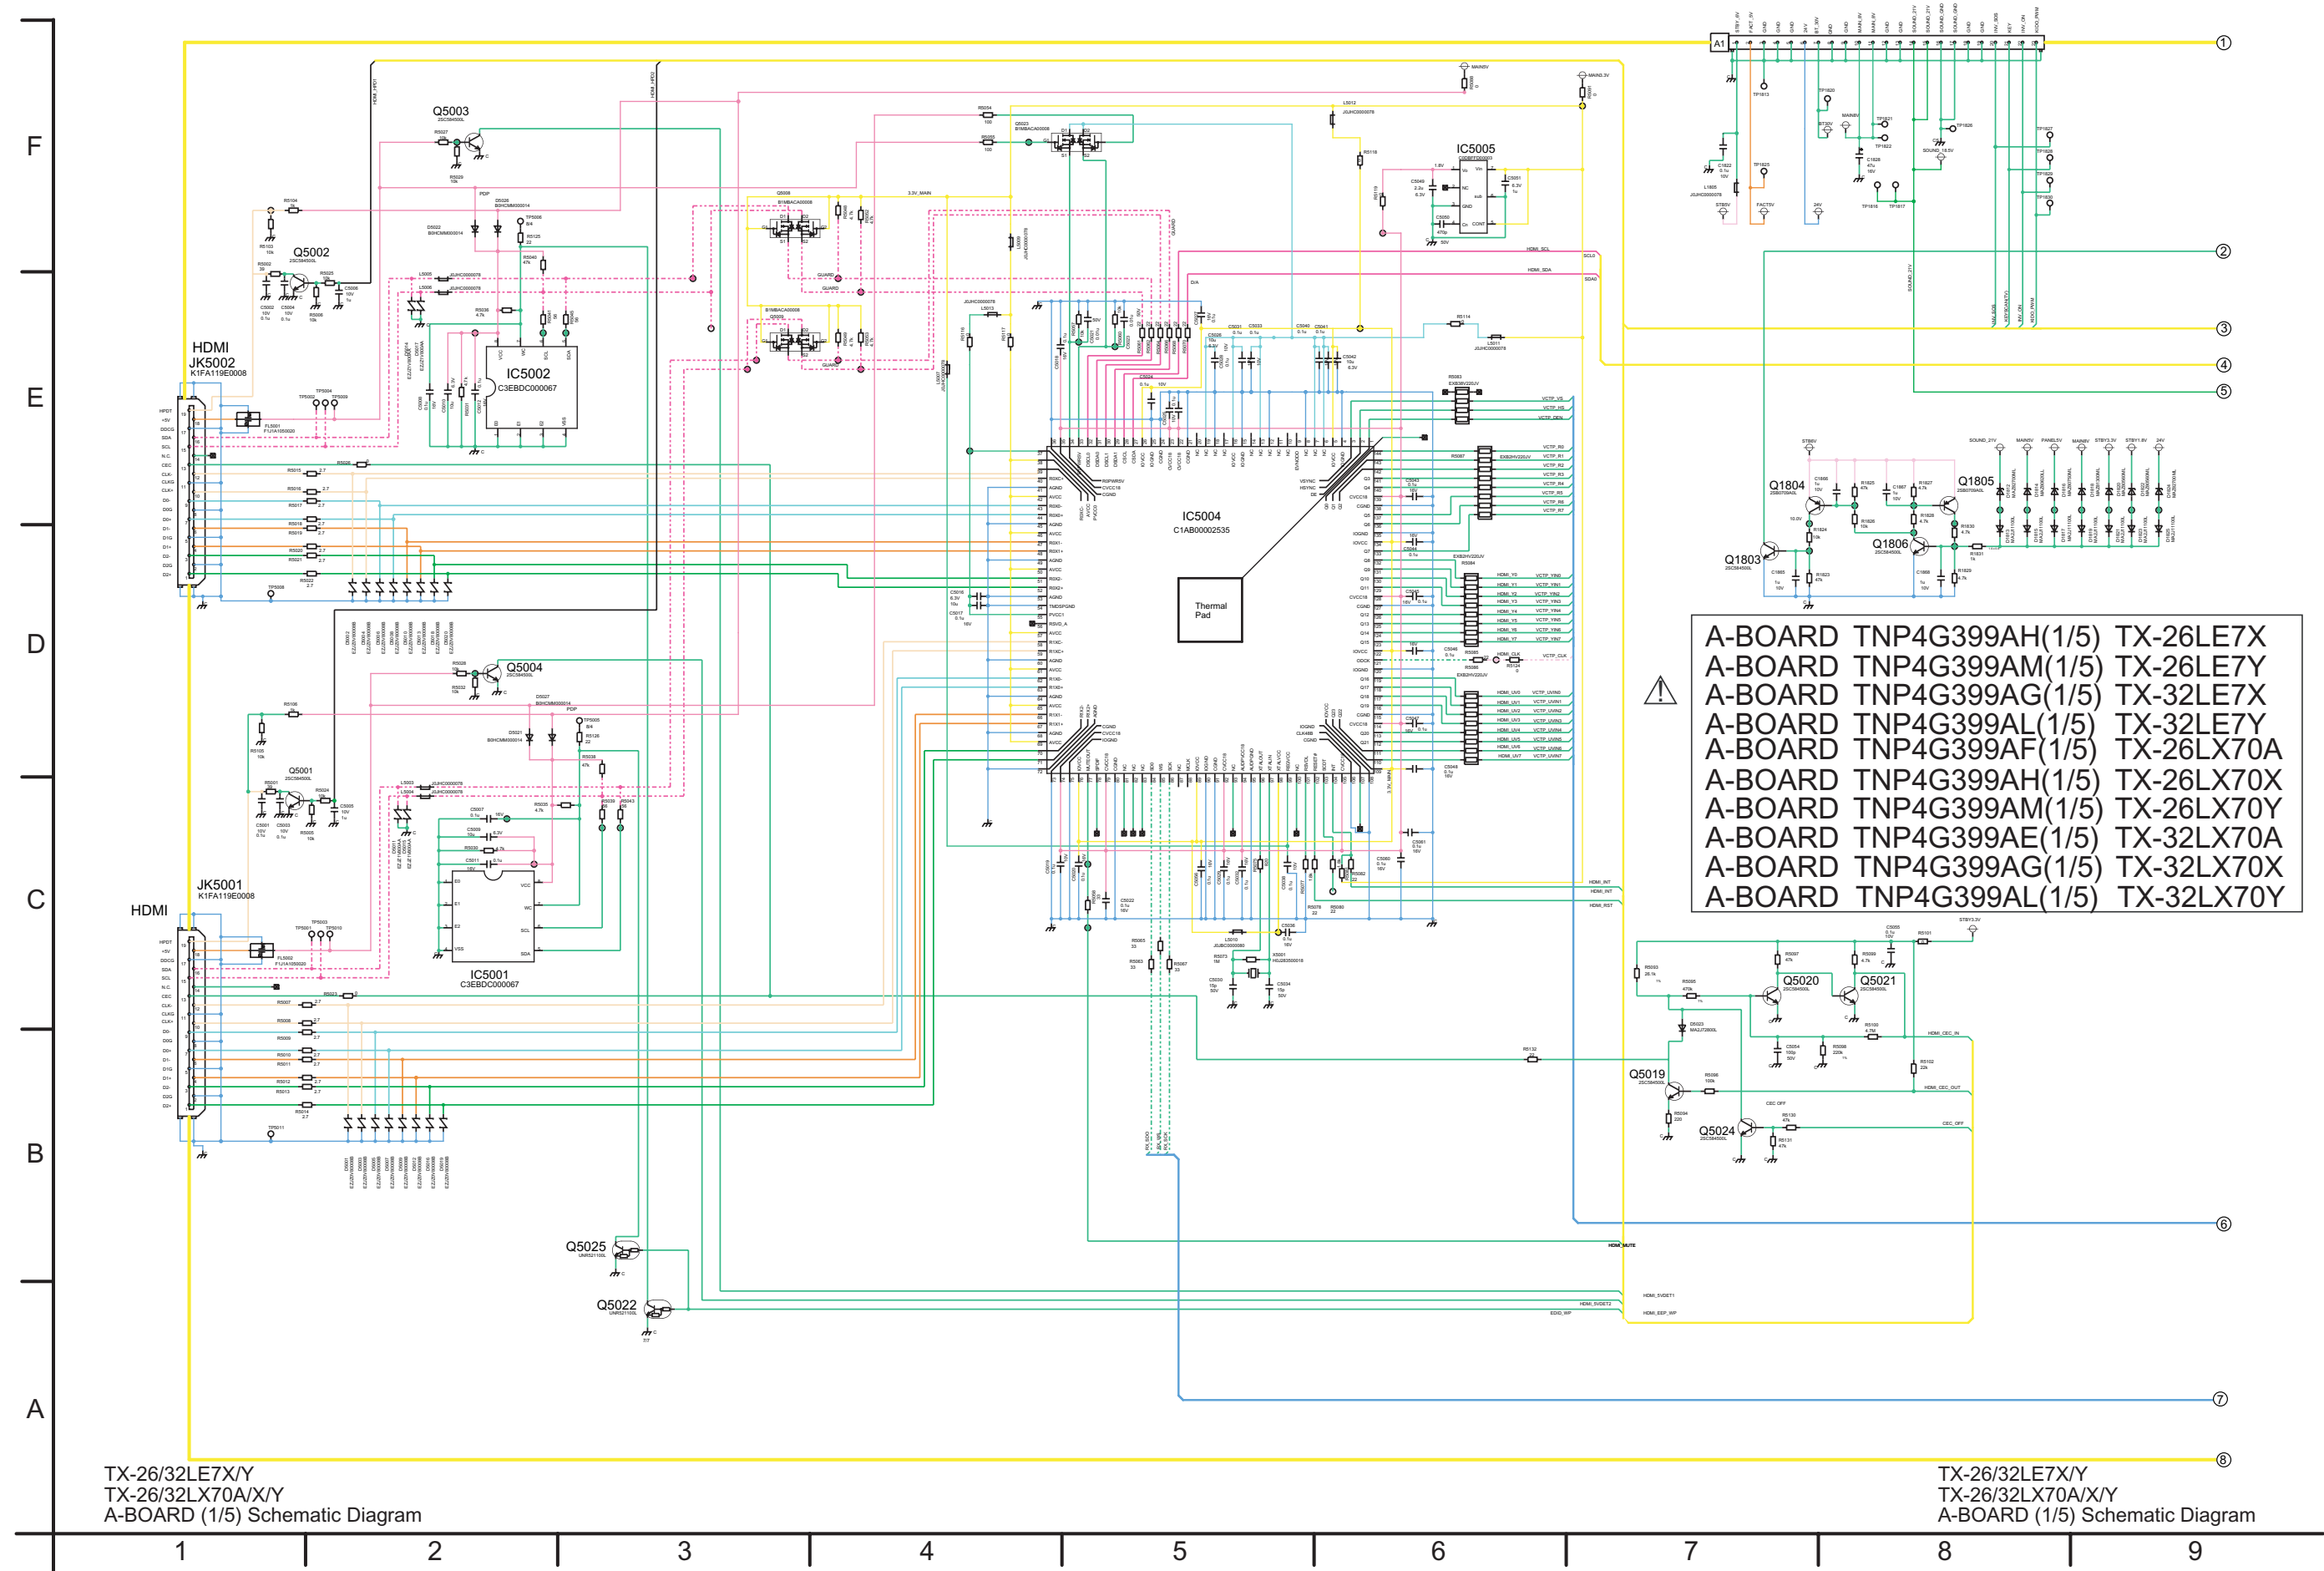

13.11. A-Board (2 of 5) Schematic Diagram

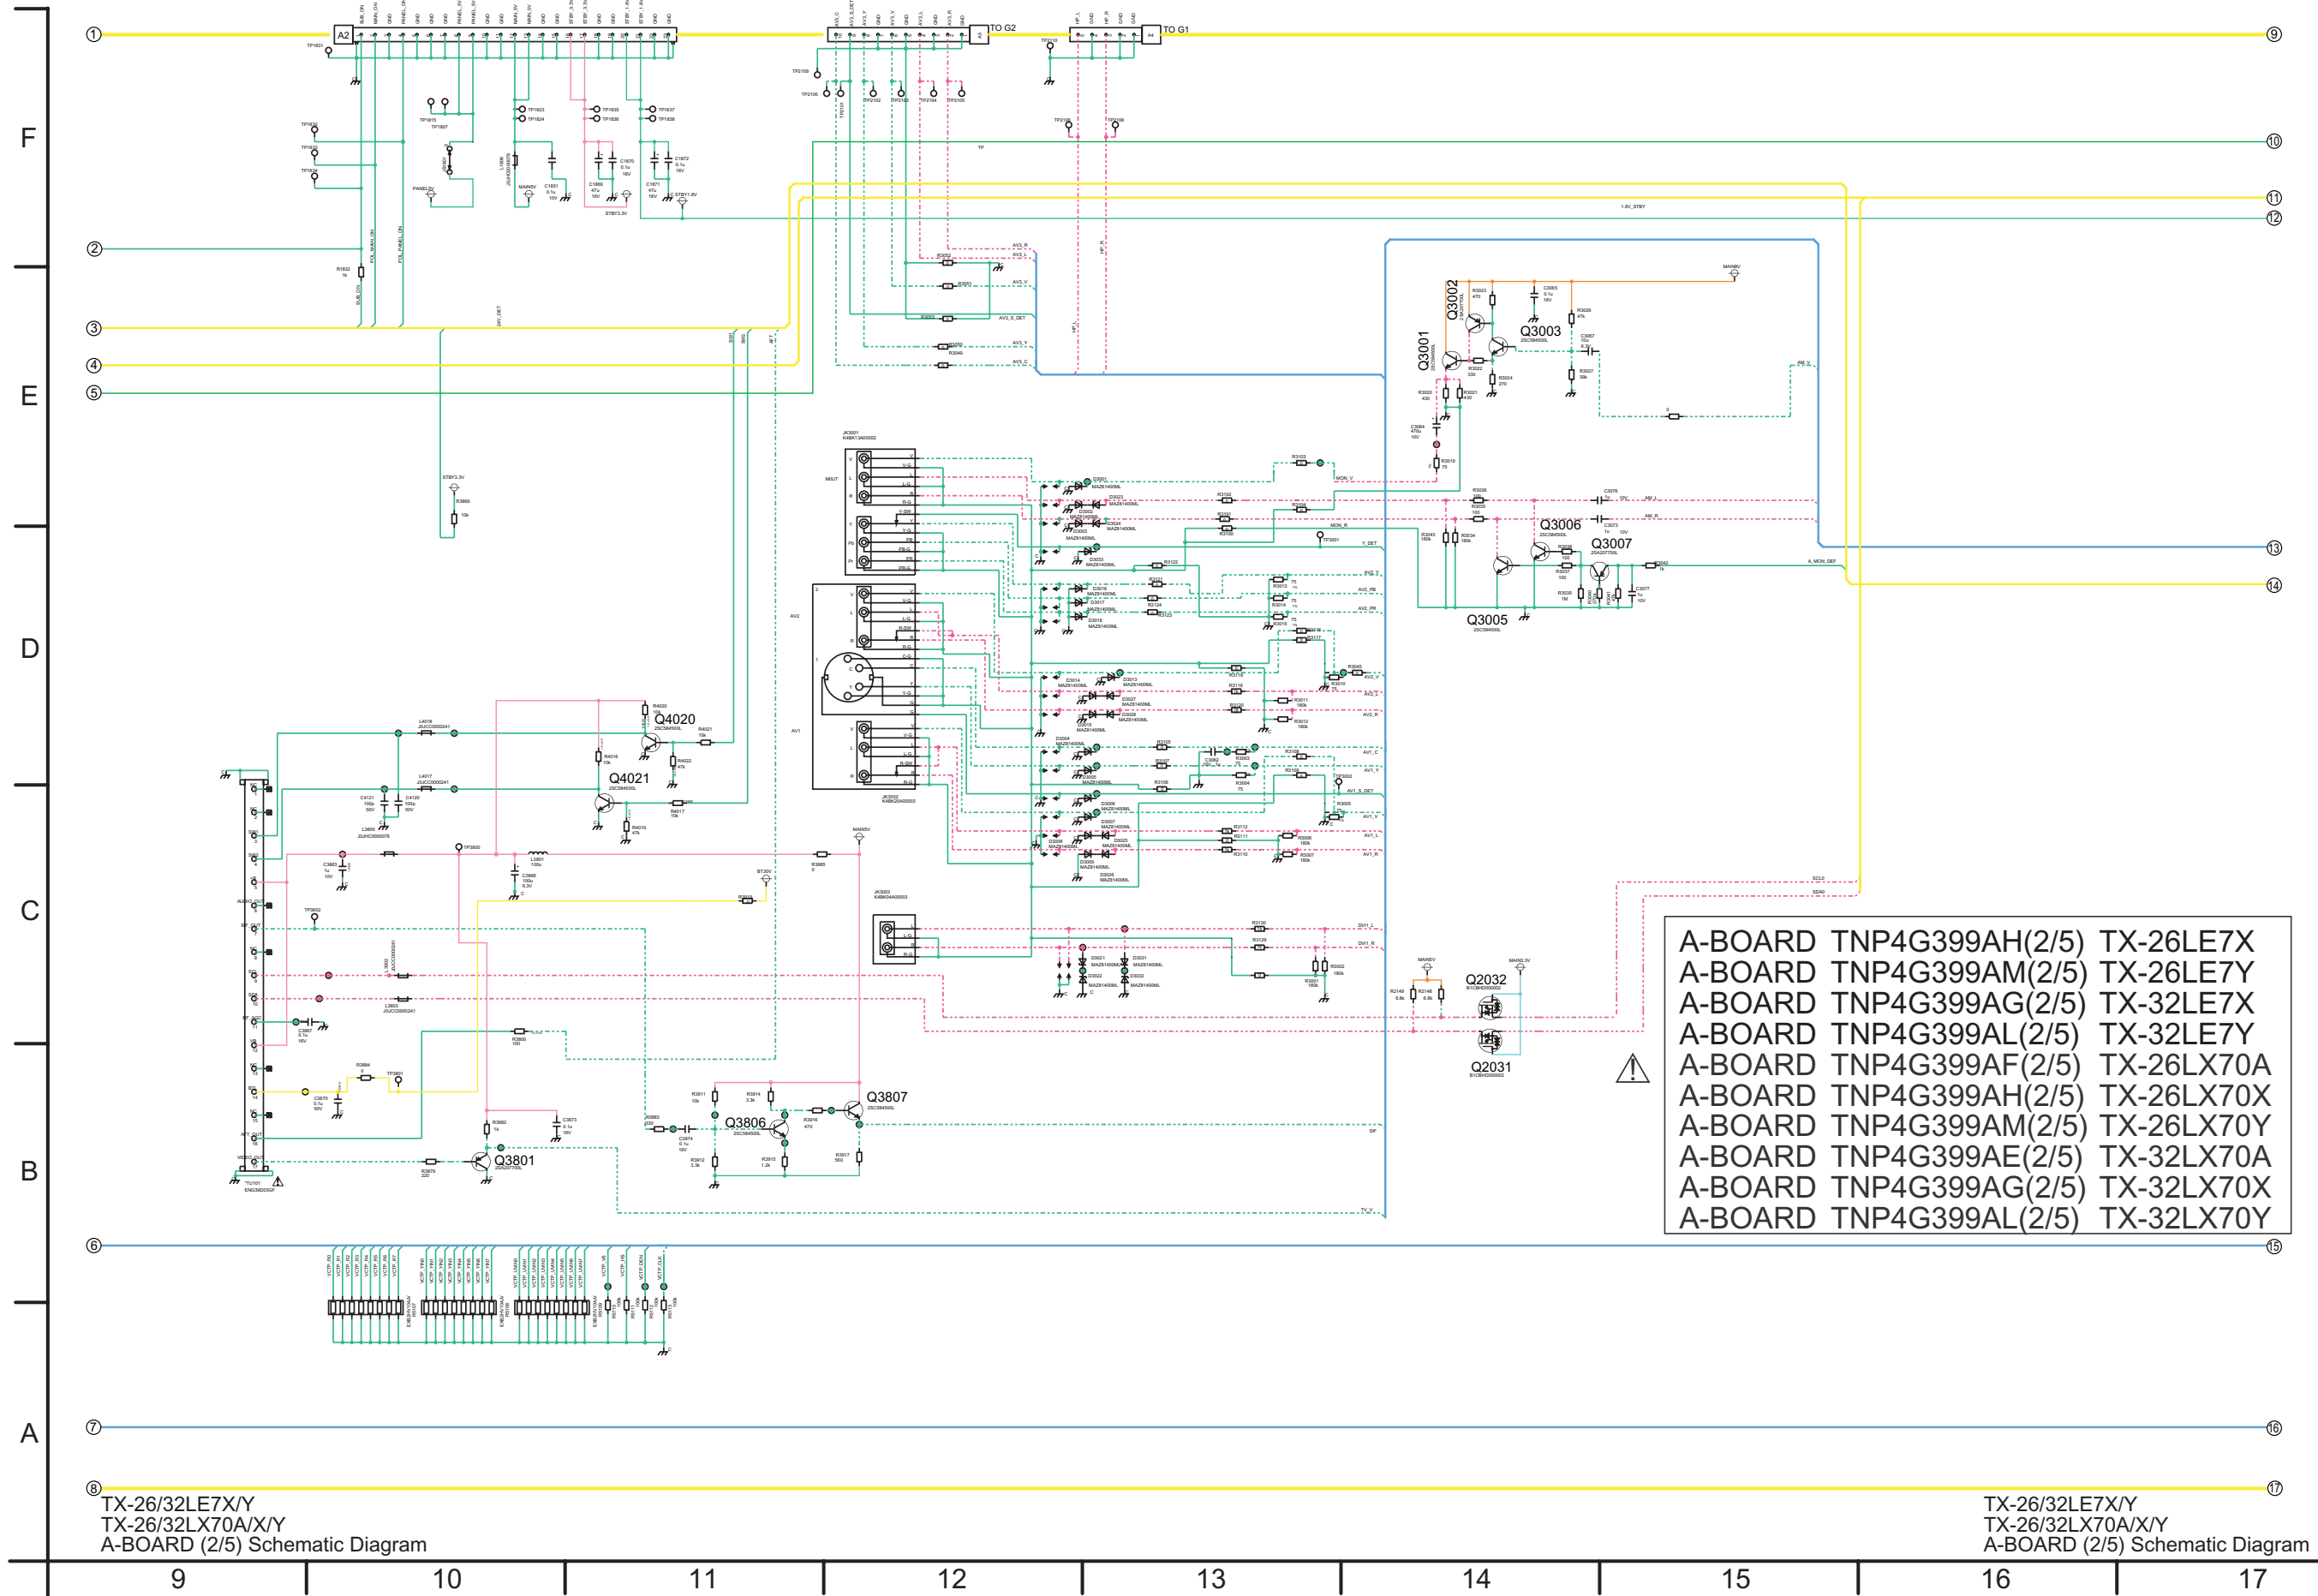


13.12. A-Board (3 of 5) Schematic Diagram

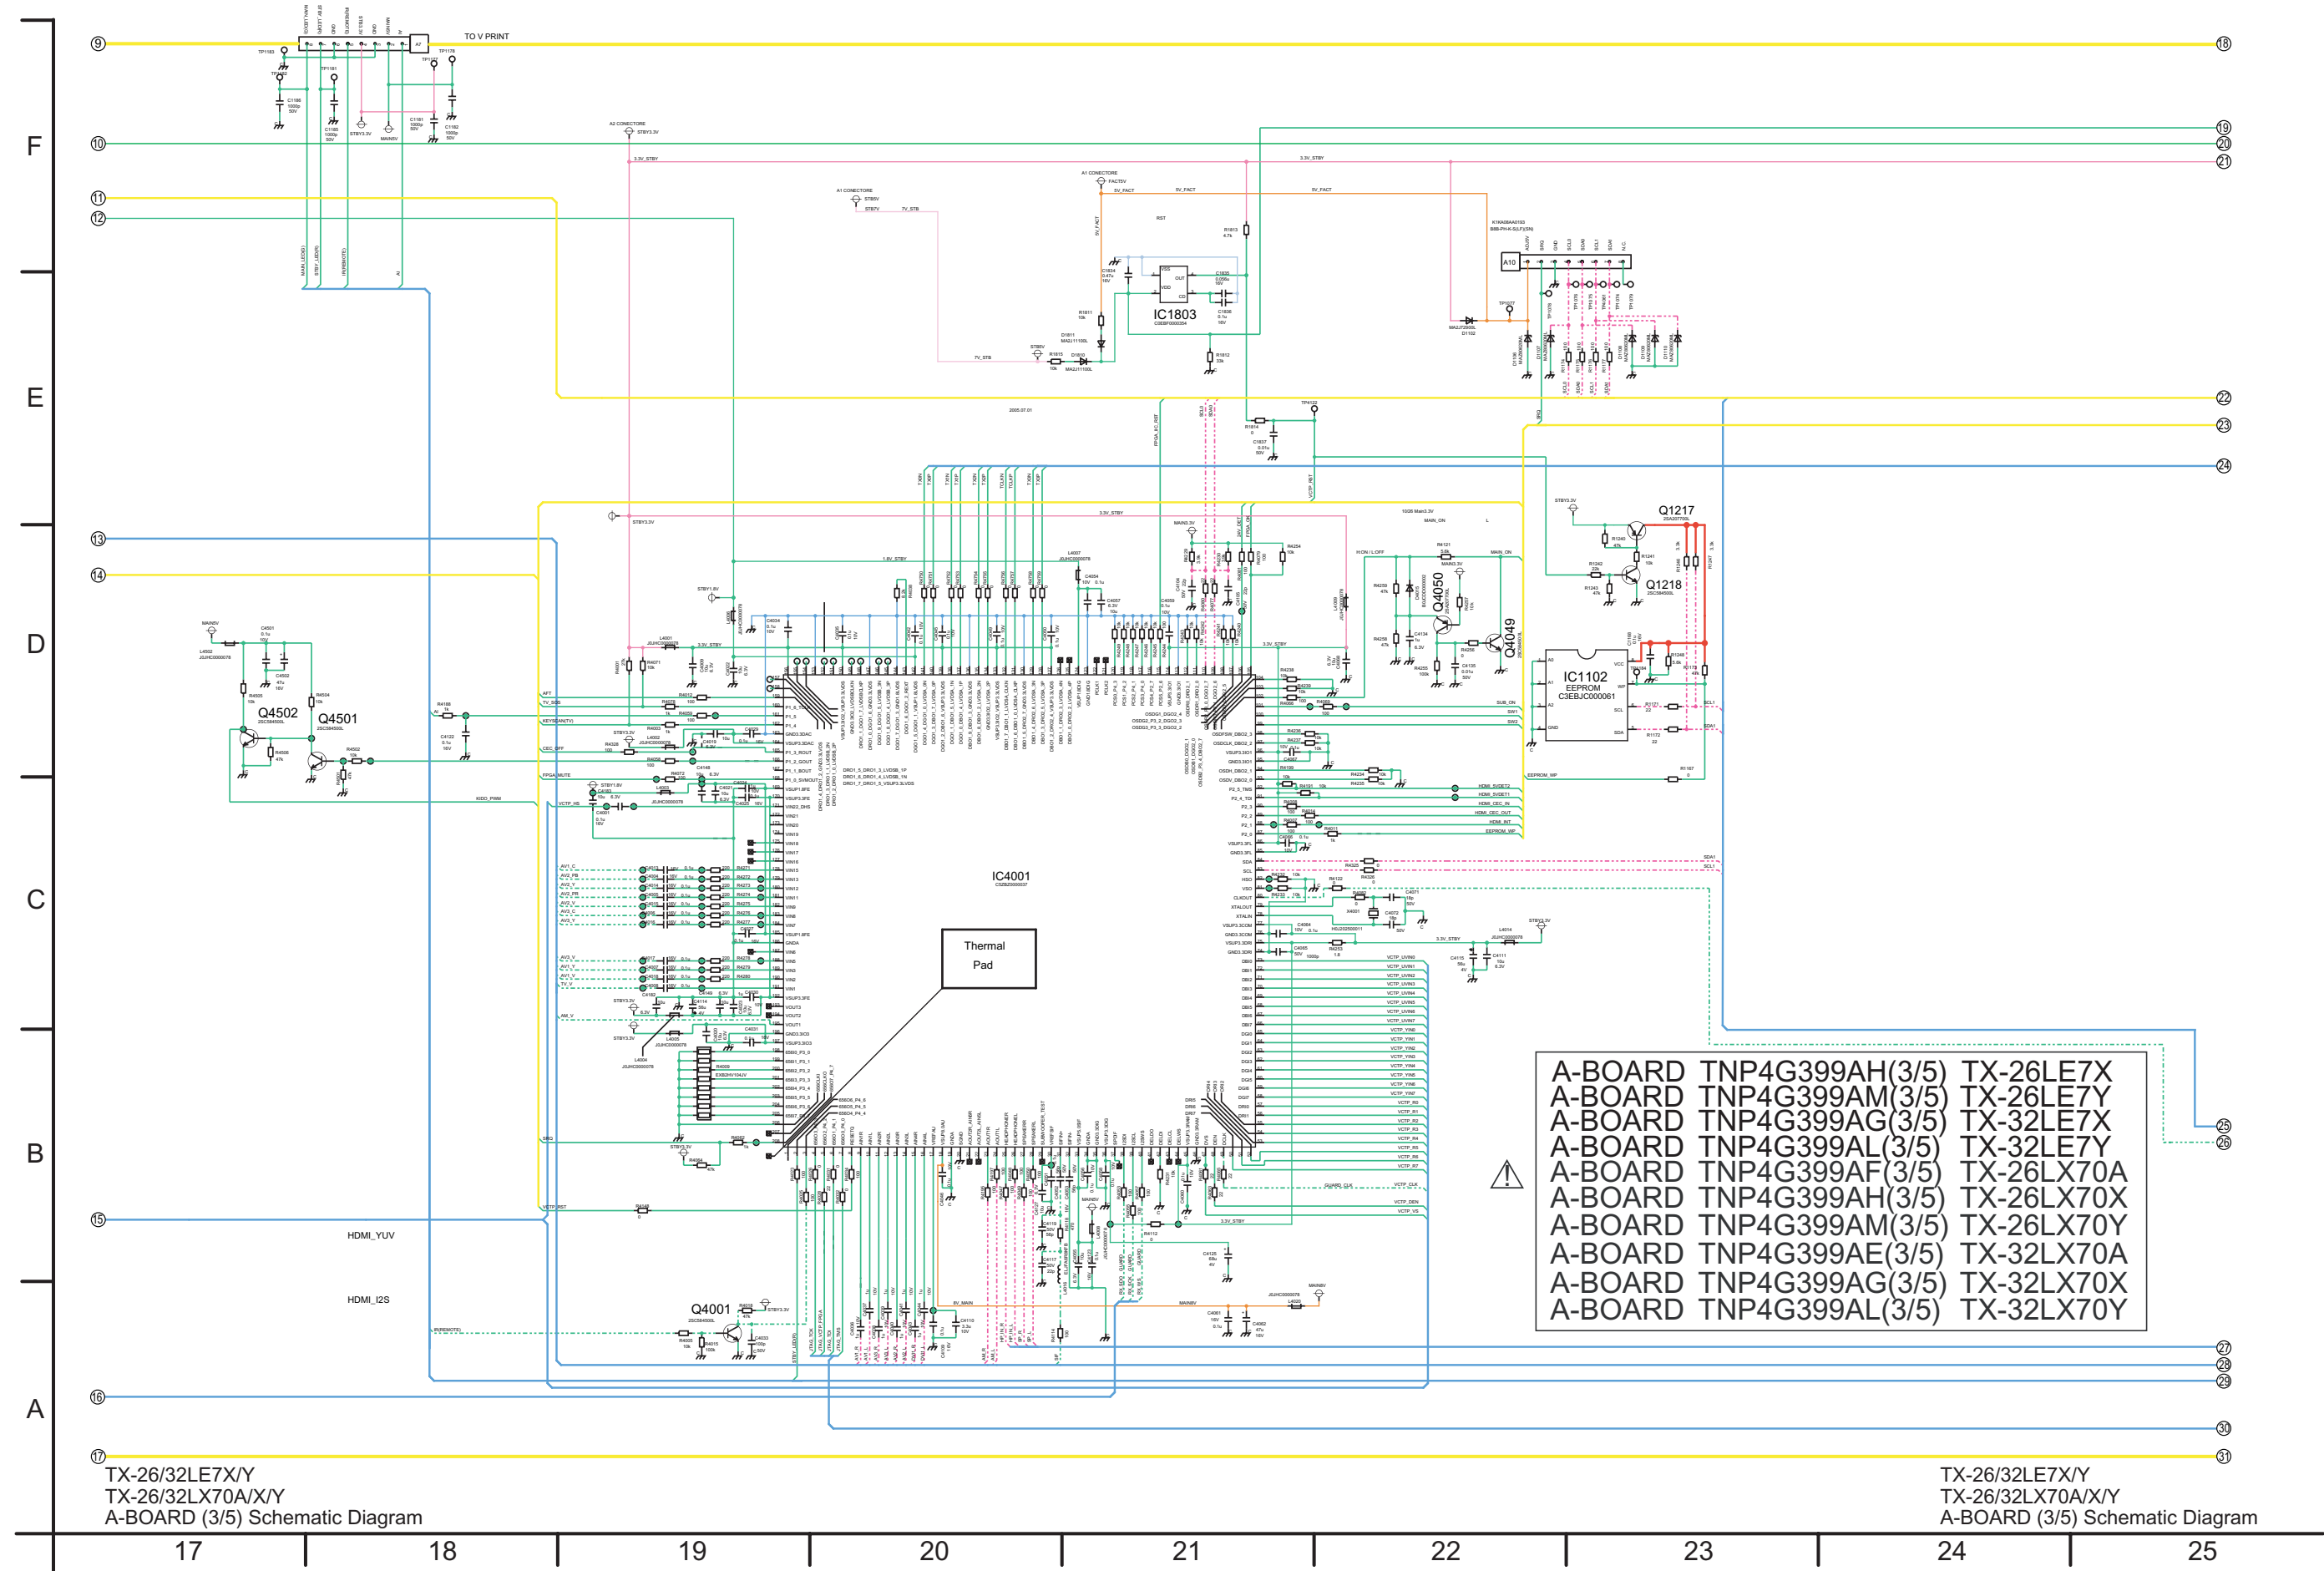





13.14. A-Board (5 of 5) Schematic Diagram

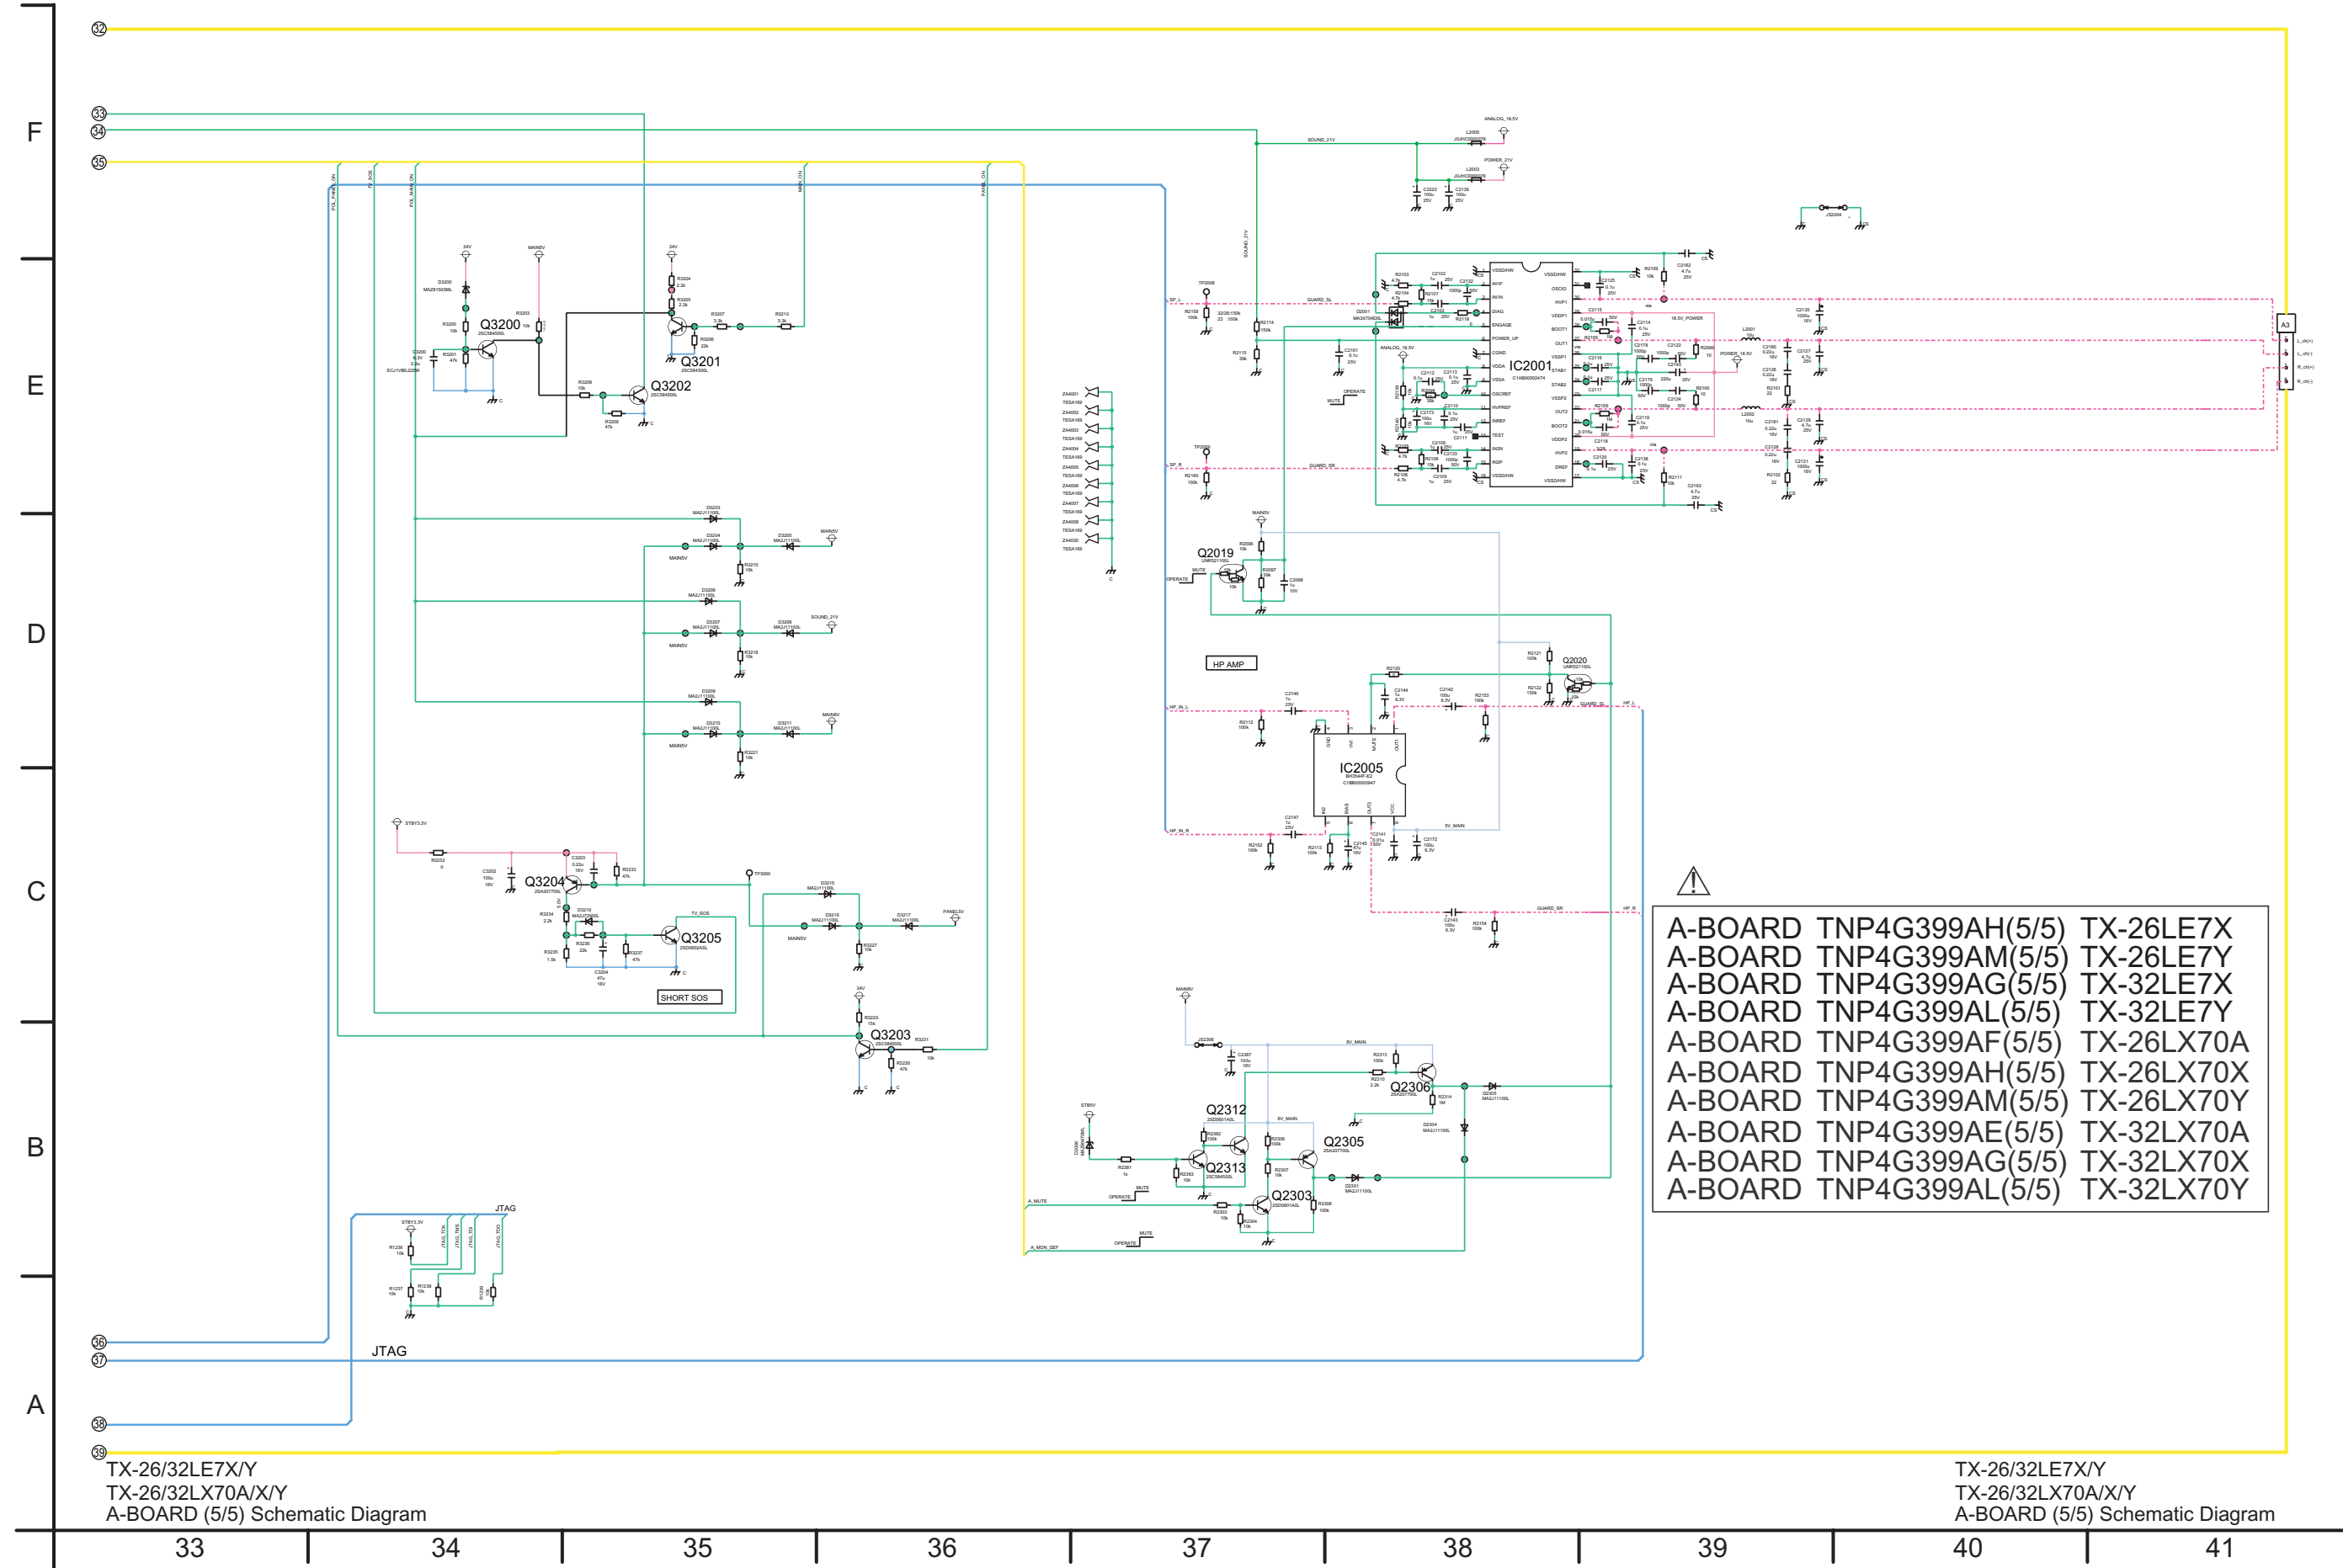


13.15. G-Board Schematic Diagram

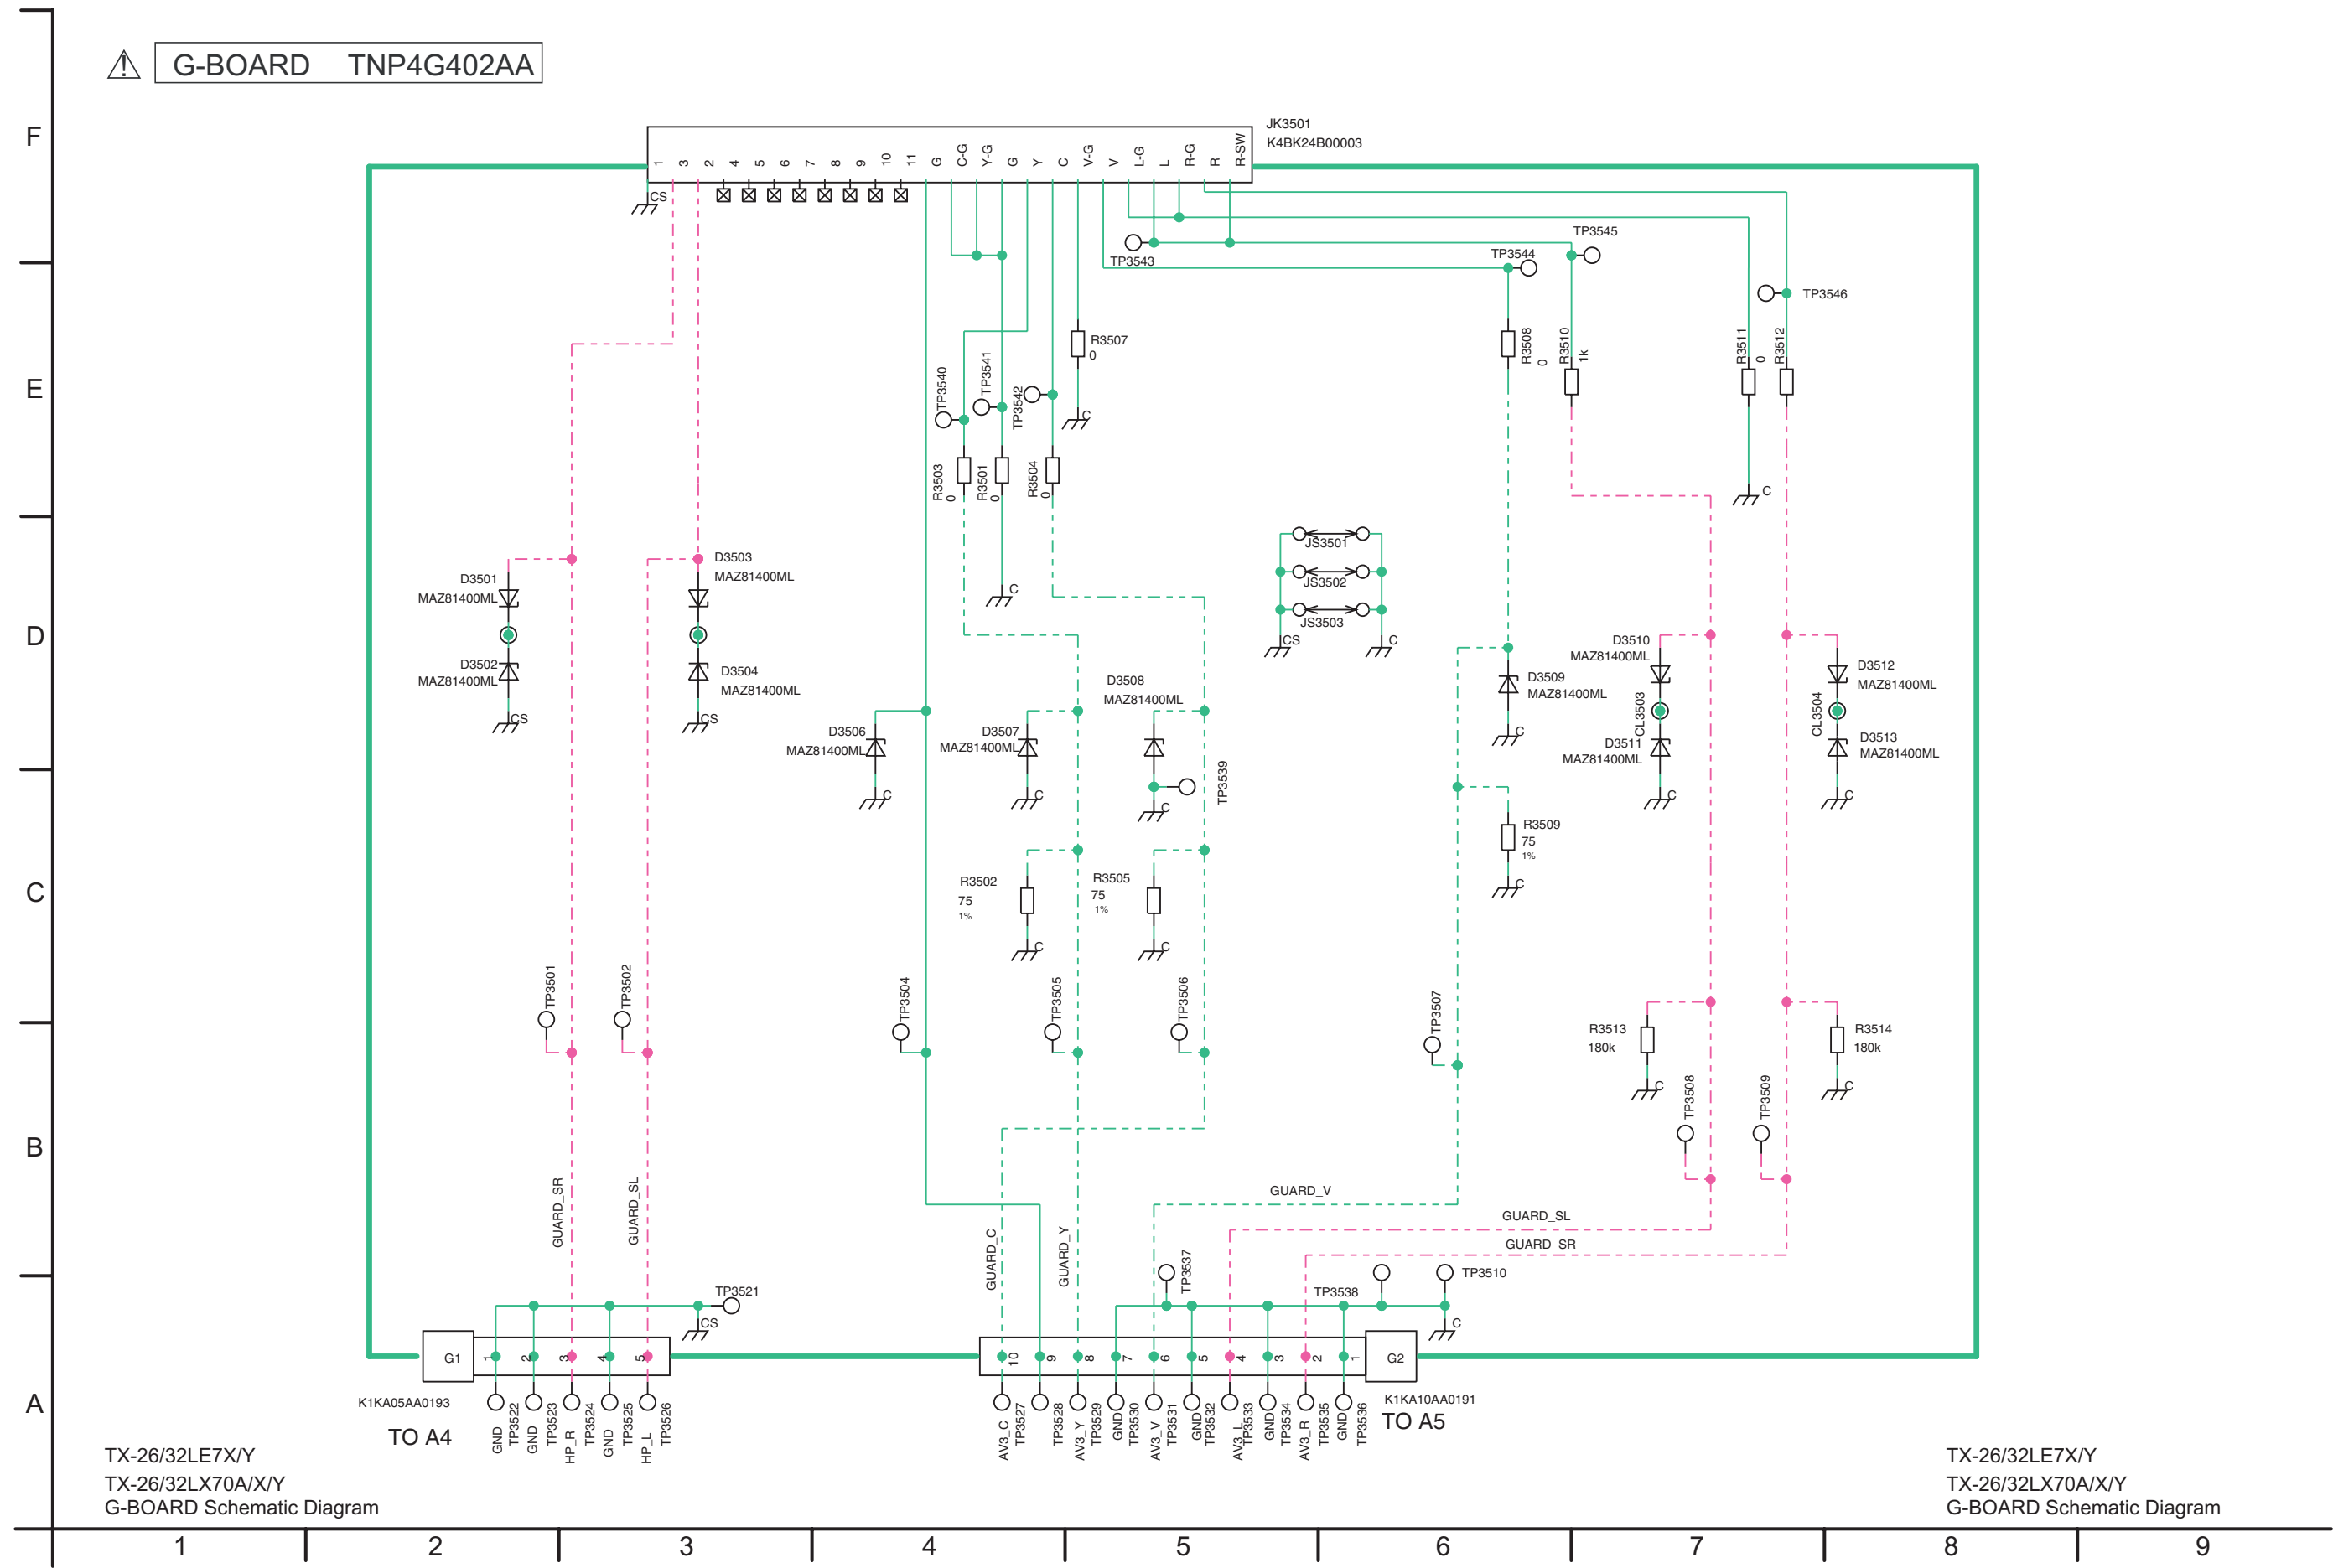




14 Parts Location

26"

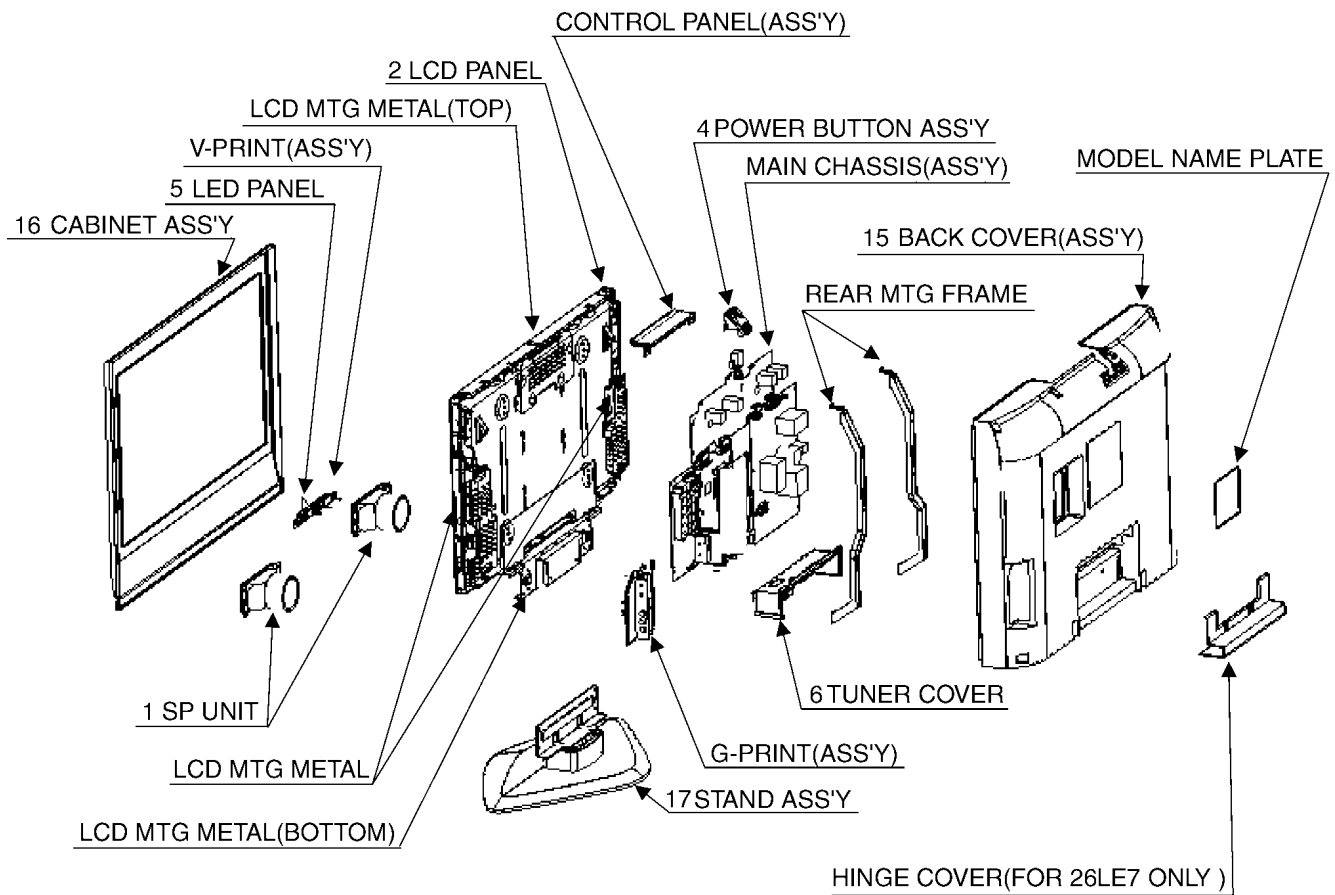


32"

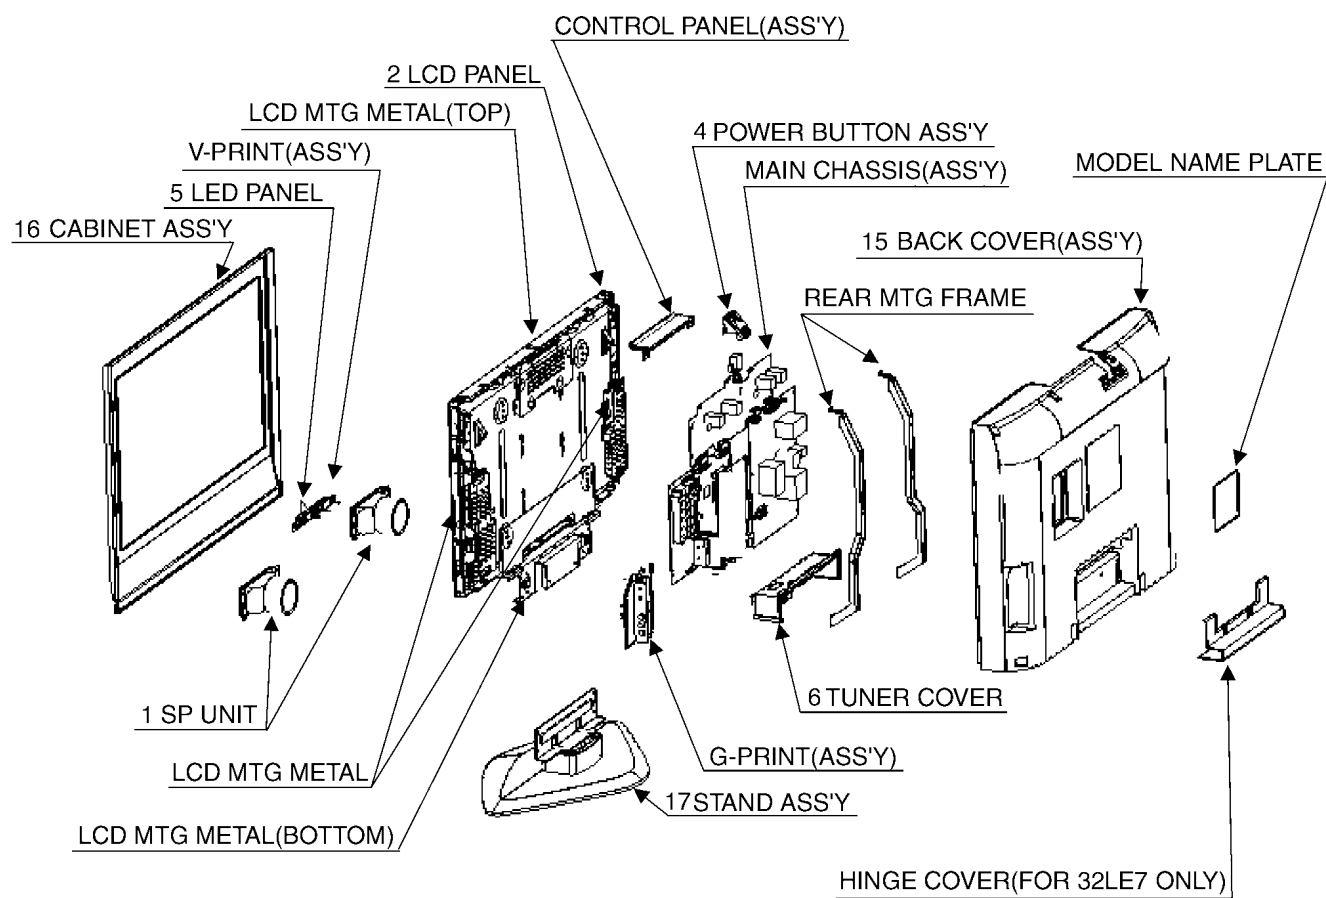


15 Packing Exploded View

26"

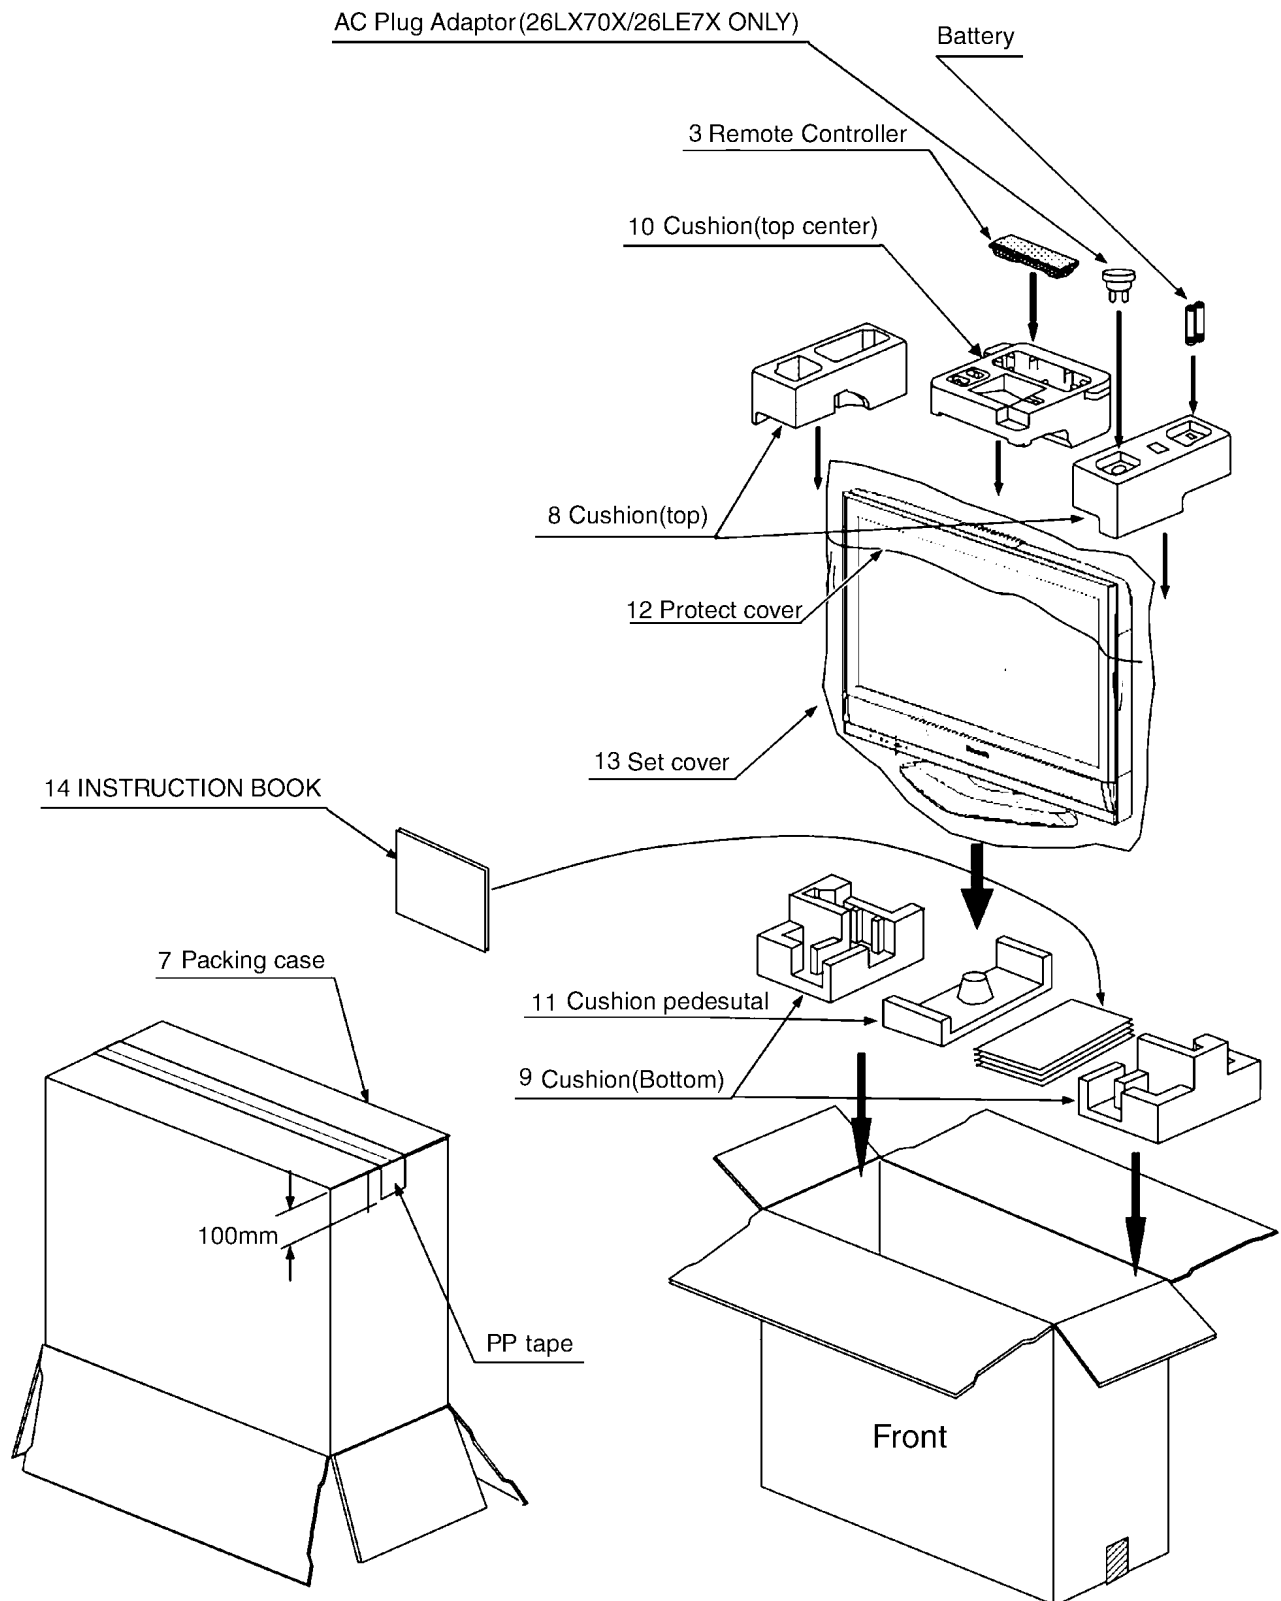

32"

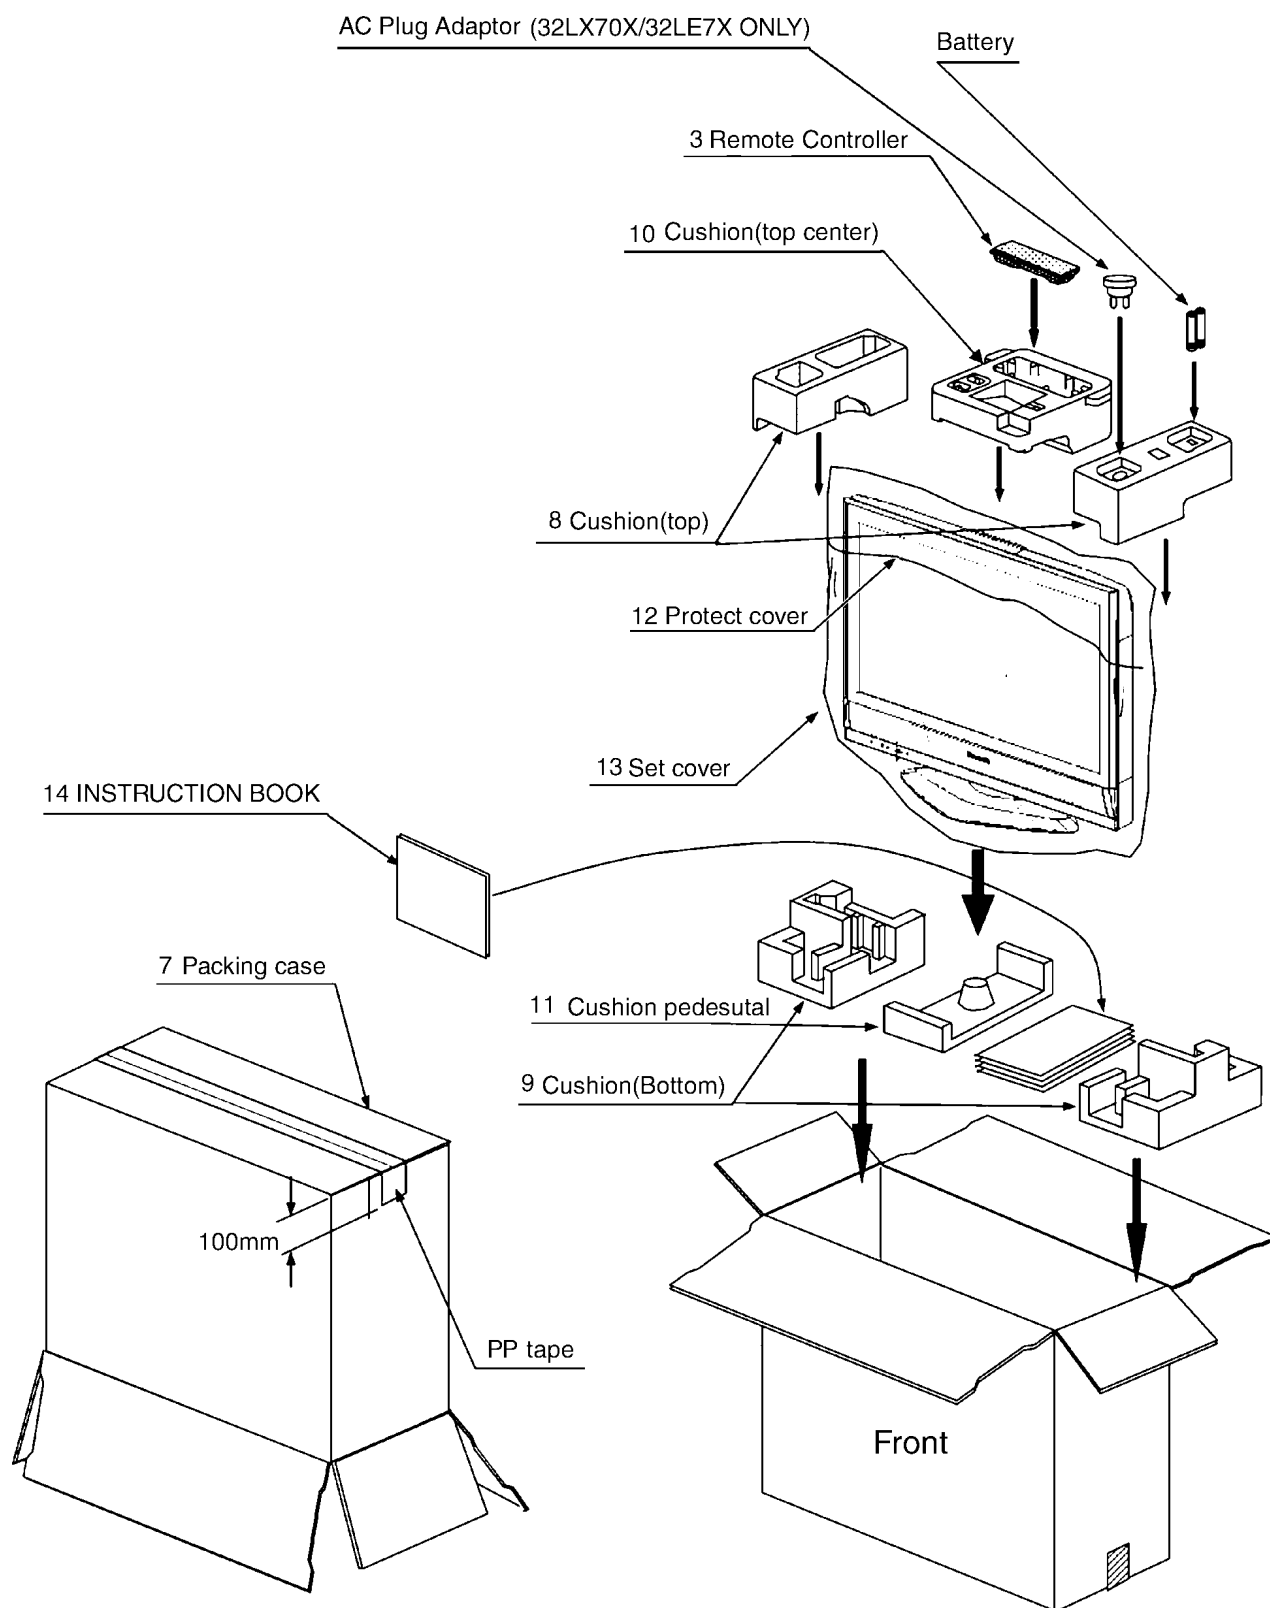

16 Mechanical Replacement Parts List

16.1. TX-26LE7X

Note:

All parts except parts mentioned [PAVCKM] in the Remarks column are supplied by PAVC-CSG.

Parts mentioned [PAVCKM] are supplied by PAVCKM.

Ref. No.	Part No.	Part Name & Description	Remarks
1	EAS12S11E	SPEAKER	PAVCKM
	J0KG00000011	FERRITE CORE	
	K0RB00500015	CONTROL PANEL SUBASSEMBLY	PAVCKM
	K2CT2YY00002	AC POWER CORD	△
	K2DR53D00001	TRANSFORM SOCKET	
2	L5EDD6Q00022	LCD PANEL	△
3	N2QAYB000043	REMOTE CONTROLLER	
	TBM0A0360	SIDE AV INDICATION SHEET	
	TBM0A0361	TUNER INDICATION SHEET	
4	TBX0A84202	POWER BUTTON	
	TES0A204	POWER BUTTON SPRING	
	TEW0A105	SPONGE	
	TEW0A108	SPONGE	
	TEW0A109	SPONGE	
	TEWF095	GASKET	
	TKK0A8533-1	TERMINAL COVER	
5	TKK0A8541	LED PANEL	
	TKP0AB5102	POWER BUTTON BRACKET	
6	TKP0AB5202	TUNER BRACKET	△
	TKX0A3102	REAR COVER BOARD	
7	TPC0A50802	PACKING CASE	△
8	TPD0A1077	CUSHION	
9	TPD0A2072	CUSHION	
10	TPD0A5034	CUSHION	
11	TPD0A5035	CUSHION	
12	TPE0A4027	BAG	
13	TPE0A4045	BAG	
14	TQB0A0188	INSTRUCTION BOOK	△
14	TQB0A0190	INSTRUCTION BOOK	△
14	TQB0A0192	INSTRUCTION BOOK	△
15	TTU0A0118	REAR COVER	△
16	TTY0A0127	CABINET	△
17	TXFUX010MES	PEDESTAL ASS'Y	
	TXJ/A80MPS	LVDS CABLE	PAVCKM
	XSS4+6FJ	SCREW	
	XTB4+18JFJK	SCREW	
	XTV3+10GFJK	SCREW	
	XTV3+10JFJK	SCREW	
	XYN3+J12FJ	SCREW	
	XYN4+F10FJ	SCREW	
	XYN4+F6FJ	SCREW	

16.2. TX-26LE7Y

Note:

All parts except parts mentioned [PAVCKM] in the Remarks column are supplied by PAVC-CSG.

Parts mentioned [PAVCKM] are supplied by PAVCKM.

Ref. No.	Part No.	Part Name & Description	Remarks
1	EAS12S11E	SPEAKER	PAVCKM
	J0KG00000011	FERRITE CORE	
	K0RB00500015	CONTROL PANEL SUBASSEMBLY	PAVCKM
	K2CQ2YY00003	AC POWER CORD	△
2	L5EDD6Q00022	LCD PANEL	△
3	N2QAYB000043	REMOTE CONTROLLER	
4	TBX0A84202	POWER BUTTON	
	TES0A204	POWER BUTTON SPRING	
	TKK0A8533-1	TERMINAL COVER	
5	TKK0A8541	LED PANEL	
6	TKP0AB5202	TUNER BRACKET	△
7	TPC0A50802	PACKING CASE	
8	TPD0A1077	CUSHION	
9	TPD0A2072	CUSHION	
10	TPD0A5034	CUSHION	
11	TPD0A5035	CUSHION	
12	TPE0A4027	BAG	
13	TPE0A4045	BAG	
14	TQB0A0188	INSTRUCTION BOOK	△
14	TQB0A0190	INSTRUCTION BOOK	△
14	TQB0A0192	INSTRUCTION BOOK	△
15	TTU0A0118	REAR COVER	△
16	TTY0A0127	CABINET	△
17	TXFUX010MES	PEDESTAL ASS'Y	
	TXJ/A80MPS	LVDS CABLE	PAVCKM
	XSS4+6FJ	SCREW	
	XTB4+18JFJK	SCREW	
	XTV3+10GFJK	SCREW	
	XTV3+10JFJK	SCREW	
	XYN3+F10FJ	SCREW	
	XYN3+J8FJ	SCREW	
	XYN4+F10FJ	SCREW	

16.3. TX-32LE7X

Note:

All parts except parts mentioned [PAVCKM] in the Remarks column are supplied by PAVC-CSG.

Parts mentioned [PAVCKM] are supplied by PAVCKM.

Ref. No.	Part No.	Part Name & Description	Remarks
1	EAS12S11E	SPEAKER	PAVCKM
	J0KF00000018	FERRITE CORE	
	J0KG00000011	FERRITE CORE	
	K0RB00500015	CONTROL PANEL SUBASSEMBLY	PAVCKM
	K2CT2YY00004	AC POWER CORD	△
	K2DR53D00001	TRANSFORM SOCKET	
2	L5EDD8Q00028	LCD PANEL	△
3	N2QAYB000043	REMOTE CONTROLLER	
	TBM0A0360	SIDE AV INDICATION SHEET	
	TBM0A0361	TUNER INDICATION SHEET	
4	TBX0A84202	POWER BUTTON	
	TES0A204	POWER BUTTON SPRING	
	TEW0A104	SPONGE	
	TEW0A105	SPONGE	
	TEWF095	GASKET	
	TKK0A8533-1	TERMINAL COVER	
5	TKK0A8541	LED PANEL	
	TKP0AB5102	POWER BUTTON BRACKET	
6	TKP0AB5202	TUNER BRACKET	△
	TKX0A3102	REAR COVER BOARD	
7	TPCOA50903	PACKING CASE	△
8	TPD0A1077	CUSHION	
9	TPD0A2072	CUSHION	
10	TPD0A5034	CUSHION	
11	TPD0A5035	CUSHION	
12	TPE0A4027	BAG	
13	TPE0A4045	BAG	
14	TQB0A0188	INSTRUCTION BOOK	△
14	TQB0A0190	INSTRUCTION BOOK	△
14	TQB0A0192	INSTRUCTION BOOK	△
15	TTU0A0114	REAR COVER	△
16	TTY0A0126	CABINET	△
17	TXFUX010MES	PEDESTAL ASS'Y	
	TXJ/A80MNS	LVDS CABLE	PAVCKM
	XSS4+6FJ	SCREW	
	XTB4+15JFJ	SCREW	
	XTB4+18JFJK	SCREW	
	XTV3+10GFJK	SCREW	
	XYN3+J12FJ	SCREW	
	XYN4+F10FJ	SCREW	
	XYN4+F6FJ	SCREW	

16.4. TX-32LE7Y

Note:

All parts except parts mentioned [PAVCKM] in the Remarks column are supplied by PAVC-CSG.

Parts mentioned [PAVCKM] are supplied by PAVCKM.

Ref. No.	Part No.	Part Name & Description	Remarks
1	EAS12S11E	SPEAKER	PAVCKM
	J0KF00000018	FERRITE CORE	
	J0KG00000011	FERRITE CORE	
	K0RB00500015	CONTROL PANEL SUBASSEMBLY	PAVCKM
	K2CQ2YY00002	AC POWER CORD	△
2	L5EDD8Q00028	LCD PANEL	△
3	N2QAYB000043	REMOTE CONTROLLER	
4	TBX0A84202	POWER BUTTON	
	TES0A204	POWER BUTTON SPRING	
	TKP0AB5102	POWER BUTTON BRACKET	
5	TKP0AB5202	TUNER BRACKET	△
6	TKK0A8541	LED PANEL	
7	TPCOA50903	PACKING CASE	
8	TPD0A1077	CUSHION	
9	TPD0A2072	CUSHION	
10	TPD0A5034	CUSHION	
11	TPD0A5035	CUSHION	
12	TPE0A4027	BAG	
13	TPE0A4045	BAG	
14	TQB0A0188	INSTRUCTION BOOK	△
14	TQB0A0190	INSTRUCTION BOOK	△
14	TQB0A0192	INSTRUCTION BOOK	△
15	TTU0A0115	REAR COVER	△
16	TTY0A0126	CABINET	△
17	TXFUX010MES	PEDESTAL ASS'Y	
	TXJ/A80MNS	LVDS CABLE	PAVCKM
	XSS4+6FJ	SCREW	
	XTB4+18JFJK	SCREW	
	XTV3+10GFJK	SCREW	
	XTV3+10JFJK	SCREW	
	XYN3+J12FJ	SCREW	
	XYN4+F10FJ	SCREW	
	XYN4+F6FJ	SCREW	

16.5. TX-26LX70A

Note:

All parts except parts mentioned [PAVCKM] in the Remarks column are supplied by PAVC-CSG.

Parts mentioned [PAVCKM] are supplied by PAVCKM.

Ref. No.	Part No.	Part Name & Description	Remarks
1	EAS12S11E	SPEAKER	PAVCKM
	J0KGD0000011	FERRITE CORE	
	K0RB00500011	CONTROL PANEL SUBASSEMBLY	PAVCKM
	K2CJ2YY00002	AC POWER CORD	△
2	L5EDD6Q00022	LCD PANEL	△
3	N2QAYB000043	REMOTE CONTROLLER	
	TBM0A0360	SIDE AV INDICATION SHEET	
	TBM0A0361	TUNER INDICATION SHEET	
4	TBX0A84202	POWER BUTTON	
	TES0A204	POWER BUTTON SPRING	
	TEW0A106	SPONGE	
	TEW0A107	SPONGE	
	TEW0A109	SPONGE	
	TKK0A8533-1	TERMINAL COVER	
5	TKK0A8538	LED PANEL	
6	TKP0AB5202	TUNER BRACKET	△
	TKP0AB6701	POWER BUTTON BRACKET	
7	TPC0A50803	PACKING CASE	
8	TPD0A1079	CUSHION	
9	TPD0A2074	CUSHION	
10	TPD0A5035	CUSHION	
11	TPD0A5039	CUSHION	
12	TPE0A4027	BAG	
13	TPE0A4045	BAG	
14	TQB0A0179	INSTRUCTION BOOK	△
15	TTU0A0103	REAR COVER	△
16	TTY0A0118	CABINET	△
17	TXFUX010MDT	PEDESTAL ASS'Y	
	TXJ/A80MPS	LVDS CABLE	PAVCKM
	XSS4+6FJ	SCREW	
	XTB4+18JFJK	SCREW	
	XTV3+10GFJK	SCREW	
	XTV3+10JFJK	SCREW	
	XYN3+J12FJ	SCREW	
	XYN4+F10FJ	SCREW	
	XYN4+F6FJ	SCREW	

16.6. TX-26LX70X

Note:

All parts except parts mentioned [PAVCKM] in the Remarks column are supplied by PAVC-CSG.

Parts mentioned [PAVCKM] are supplied by PAVCKM.

Ref. No.	Part No.	Part Name & Description	Remarks
1	EAS12S11E	SPEAKER	PAVCKM
	J0KGD0000011	FERRITE CORE	
	K0RB00500011	CONTROL PANEL SUBASSEMBLY	PAVCKM
	K2CT2YY00002	AC POWER CORD	△
	K2DR53D00001	TRANSFORM SOCKET	
2	L5EDD6Q00022	LCD PANEL	△
3	N2QAYB000043	REMOTE CONTROLLER	
	TBM0A0360	SIDE AV INDICATION SHEET	
	TBM0A0361	TUNER INDICATION SHEET	
4	TBX0A84202	POWER BUTTON	
	TES0A204	POWER BUTTON SPRING	
	TEW0A106	SPONGE	
	TEW0A107	SPONGE	
	TEW0A109	SPONGE	
	TKK0A8533-1	TERMINAL COVER	
5	TKK0A8538	LED PANEL	
6	TKP0AB5202	TUNER BRACKET	△
	TKP0AB6701	POWER BUTTON BRACKET	
7	TPC0A50803	PACKING CASE	
8	TPD0A1079	CUSHION	
9	TPD0A2074	CUSHION	
10	TPD0A5035	CUSHION	
11	TPD0A5039	CUSHION	
12	TPE0A4027	BAG	
13	TPE0A4045	BAG	
14	TQB0A0178	INSTRUCTION BOOK	△
14	TQB0A0180	INSTRUCTION BOOK	△
14	TQB0A0182	INSTRUCTION BOOK	△
15	TTU0A0104	REAR COVER	△
16	TTY0A0118	CABINET	△
17	TXFUX010MDT	PEDESTAL ASS'Y	
	TXJ/A80MPS	LVDS CABLE	PAVCKM
	XSS4+6FJ	SCREW	
	XTB4+18JFJK	SCREW	
	XTV3+10GFJK	SCREW	
	XTV3+10JFJK	SCREW	
	XYN3+J12FJ	SCREW	
	XYN4+F10FJ	SCREW	
	XYN4+F6FJ	SCREW	

16.7. TX-26LX70Y

Note:

All parts except parts mentioned [PAVCKM] in the Remarks column are supplied by PAVC-CSG.

Parts mentioned [PAVCKM] are supplied by PAVCKM.

Ref. No.	Part No.	Part Name & Description	Remarks
1	EAS12S11E	SPEAKER	PAVCKM
	J0KG00000011	FERRITE CORE	
	K0RB00500011	CONTROL PANEL SUBASSEMBLY	PAVCKM
	K2CQ2YY00003	AC POWER CORD	△
2	L5EDD6Q00022	LCD PANEL	△
3	N2QAYB000043	REMOTE CONTROLLER	
4	TBX0A84202	POWER BUTTON	
	TES0A204	SPRING	
	TKK0A8533-1	TERMINAL COVER	
5	TKK0A8538	LED PANEL	
6	TKPOAB5202	TUNER BRACKET	△
7	TPC0A50803	PACKING CASE	
8	TPD0A1079	CUSHION	
9	TPD0A2074	CUSHION	
10	TPD0A5035	CUSHION	
11	TPD0A5039	CUSHION	
12	TPE0A4027	BAG	
13	TPE0A4045	BAG	
14	TQB0A0178	INSTRUCTION BOOK	△
14	TQB0A0180	INSTRUCTION BOOK	△
14	TQB0A0182	INSTRUCTION BOOK	△
15	TTU0A0105	REAR COVER	△
16	TTY0A0118	CABINET	△
17	TXFUX010MDT	PEDESTAL ASS'Y	
	TXJ/A80MPS	LVDS CABLE	PAVCKM
	XSS4+6FJ	SCREW	
	XTB4+18JFJK	SCREW	
	XTV3+10GFJK	SCREW	
	XTV3+10JFJK	SCREW	
	XYN3+J12FJ	SCREW	
	XYN4+F10FJ	SCREW	
	XYN4+F6FJ	SCREW	

16.8. TX-32LX70A

Note:

All parts except parts mentioned [PAVCKM] in the Remarks column are supplied by PAVC-CSG.

Parts mentioned [PAVCKM] are supplied by PAVCKM.

Ref. No.	Part No.	Part Name & Description	Remarks
1	EAS12S11E	SPEAKER	PAVCKM
	J0KF00000018	FERRITE CORE	
	J0KG00000011	FERRITE CORE	
	K0RB00500011	CONTROL PANEL SUBASSEMBLY	PAVCKM
	K2CJ2YY00003	AC POWER CORD	△
2	L5EDD8Q00028	LCD PANEL	△
3	N2QAYB000043	REMOTE CONTROLLER	
	TBM0A0360	SIDE AV INDICATION SHEET	
	TBM0A0361	TUNER INDICATION SHEET	
4	TBX0A84202	POWER BUTTON	
	TES0A204	POWER BUTTON SPRING	
	TEW0A104	SPONGE	
	TEW0A106	SPONGE	
	TEW0A107	SPONGE	
	TKK0A8533-1	TERMINAL COVER	
5	TKK0A8538	LED PANEL	
6	TKPOAB5202	TUNER BRACKET	△
	TKPOAB6701	POWER BUTTON BRACKET	
7	TPC0A50904	PACKING CASE	
8	TPD0A1079	CUSHION	
9	TPD0A2074	CUSHION	
10	TPD0A5035	CUSHION	
11	TPD0A5039	CUSHION	
12	TPE0A4027	BAG	
13	TPE0A4045	BAG	
14	TQB0A0179	INSTRUCTION BOOK	△
15	TTU0A0107	REAR COVER	△
16	TTY0A0121	CABINET	△
17	TXFUX010MDT	PEDESTAL ASS'Y	
	TXJ/A80MNS	LVDS CABLE	PAVCKM
	XSS4+6FJ	SCREW	
	XTB4+15JFJ	SCREW	
	XTB4+18JFJK	SCREW	
	XTV3+10GFJK	SCREW	
	XYN3+J12FJ	SCREW	
	XYN4+F10FJ	SCREW	
	XYN4+F6FJ	SCREW	

16.9. TX-32LX70X

Note:

All parts except parts mentioned [PAVCKM] in the Remarks column are supplied by PAVC-CSG.

Parts mentioned [PAVCKM] are supplied by PAVCKM.

Ref. No.	Part No.	Part Name & Description	Remarks
1	EAS12S11E	SPEAKER	PAVCKM
	J0KF00000018	FERRITE CORE	
	J0KG00000011	FERRITE CORE	
	K0RB00500011	CONTROL PANEL SUBASSEMBLY	PAVCKM
	K2CT2YY00004	AC POWER CORD	△
	K2DR53D00001	TRANSFORM SOCKET	
2	L5EDD8Q00028	LCD PANEL	△
3	N2QAYB000043	REMOTE CONTROLLER	
	TBM0A0360	SIDE AV INDICATION SHEET	
	TBM0A0361	TUNER INDICATION SHEET	
4	TBX0A84202	POWER BUTTON	
	TES0A204	POWER BUTTON SPRING	
	TEW0A104	SPONGE	
	TEW0A106	SPONGE	
	TEW0A107	SPONGE	
	TEWF095	GASKET	
	TKK0A8533-1	TERMINAL COVER	
5	TKK0A8538	LED PANEL	
6	TKP0AB5202	TUNER BRACKET	△
	TKP0AB6701	POWER BUTTON BRACKET	
7	TPC0A50904	PACKING CASE	
8	TPD0A1079	CUSHION	
9	TPD0A2074	CUSHION	
10	TPD0A5035	CUSHION	
11	TPD0A5039	CUSHION	
12	TPE0A4027	BAG	
13	TPE0A4045	BAG	
14	TQB0A0178	INSTRUCTION BOOK	△
14	TQB0A0180	INSTRUCTION BOOK	△
14	TQB0A0182	INSTRUCTION BOOK	△
15	TTU0A0108	REAR COVER	△
16	TTY0A0121	CABINET	△
17	TXFUX010MDT	PEDESTAL ASS'Y	
	TXJ/A80MNS	LVDS CABLE	PAVCKM
	XSS4+6FJ	SCREW	
	XTB4+18JFJK	SCREW	
	XTV3+10GFJK	SCREW	
	XTV3+10JFJK	SCREW	
	XYN3+J12FJ	SCREW	
	XYN4+F10FJ	SCREW	
	XYN4+F6FJ	SCREW	

16.10. TX-32LX70Y

Note:

All parts except parts mentioned [PAVCKM] in the Remarks column are supplied by PAVC-CSG.

Parts mentioned [PAVCKM] are supplied by PAVCKM.

Ref. No.	Part No.	Part Name & Description	Remarks
1	EAS12S11E	SPEAKER	PAVCKM
	J0KF00000018	FERRITE CORE	
	J0KG00000011	FERRITE CORE	
	K0RB00500011	CONTROL PANEL SUBASSEMBLY	PAVCKM
	K2CQ2YY00002	AC POWER CORD	△
2	L5EDD8Q00028	LCD PANEL	△
3	N2QAYB000043	REMOTE CONTROLLER	
4	TBX0A84202	POWER BUTTON	
	TES0A204	SPRING	
	TKK0A8533-1	TERMINAL COVER	△
5	TKK0A8538	LED PANEL	
6	TKP0AB5202	TUNER BRACKET	
7	TPC0A50904	PACKING CASE	
8	TPD0A1079	CUSHION	
9	TPD0A2074	CUSHION	
10	TPD0A5035	CUSHION	
11	TPD0A5039	CUSHION	
12	TPE0A4027	BAG	
13	TPE0A4045	BAG	
14	TQB0A0178	INSTRUCTION BOOK	△
14	TQB0A0180	INSTRUCTION BOOK	△
14	TQB0A0182	INSTRUCTION BOOK	△
15	TTU0A0109	REAR COVER	△
16	TTY0A0121	CABINET	△
17	TXFUX010MDT	PEDESTAL ASS'Y	
	TXJ/A80MNS	LVDS CABLE	PAVCKM
	XSS4+6FJ	SCREW	
	XTB4+18JFJK	SCREW	
	XTV3+10GFJK	SCREW	
	XTV3+10JFJK	SCREW	
	XYN3+J12FJ	SCREW	
	XYN4+F10FJ	SCREW	
	XYN4+F6FJ	SCREW	

17 Electrical Replacement Parts List

17.1. Replacement Parts List Notes

Important Safety Notice

*Components identified by Δ mark have special characteristics important for safety.
When replacing any of these components, use only manufacturer's specified parts.*

RTL (Retention Time Limited)

Note: The marking (RTL) indicates that the Retention Time is Limited for this item.

After the discontinuation of this assembly in production, the item will continue to be available for a specific period of time. The retention period of availability is dependant on the type of assembly, and in accordance with the laws governing part and product retention. After the end of this period, the assembly will no longer be available.

Abbreviation of part name and description

1. Resistor

2. Capacitor

Example:

Example:

ERD25TJ104 C 100KOHM, J, 1/4W
Type Allowance

ECKF1H103ZF C 0.01UF, Z, 50V
Type Allowance

Type	Allowance
C : Carbon	F : $\pm 1\%$
F : Fuse	G : $\pm 2\%$
M : Metal Oxide	J : $\pm 5\%$
Metal Film	K : $\pm 10\%$
S : Solid	M : $\pm 20\%$
W : Wire Wound	

Type	Allowance
C : Ceramic	C : $\pm 0.25\text{pF}$
E : Electrolytic	D : $\pm 0.5\text{pF}$
P : Polyester	F : $\pm 1\text{pF}$
Polypropylene	G : $\pm 3\text{pF}$
T : Tantalum	J : $\pm 5\text{pF}$
	K : $\pm 10\text{pF}$
	L : $\pm 15\text{pF}$
	M : $\pm 20\text{pF}$
	P : $+100\%, -0\%$
	Z : $+80\%, -20\%$

17.2. TX-26LE7X/Y, TX-26LX70X/Y

Note:

All parts except parts mentioned [PAVCKM] in the Remarks column are supplied by PAVC-CSG.

Parts mentioned [PAVCKM] are supplied by PAVCKM.

Ref. No.	Part No.	Part Name & Description	Remarks
IC811	C0EAS0000004	IC	PAVCKM
IC830	C5HABZZ00138	IC	PAVCKM
IC880	C0DABYY00008	IC	
IC881	C0DAEZZ00005	IC	PAVCKM
IC902	C0DAAZH00020	IC	
IC903	C0DAEJG00001	IC	PAVCKM
IC904	C0DAAZG00014	IC	
IC905	C0DAAZG00014	IC	
IC906	C0DAAZG00014	IC	
IC1102	C3EBJC000061	IC	
IC1803	C0EBF0000354	IC	
IC1804	C0CBCYE00001	IC	
IC1805	C0DBAFF00026	IC	
IC2001	C1AB00002474	IC	
IC2005	C1BB00000947	IC	
IC4001	TVR4G27-1	IC (TX-26LE7X, TX-26LX70X)	
IC4001	TVR4G27-2	IC (TX-26LE7Y, TX-26LX70Y)	PAVCKM
IC4003	C1ZBZ0003426	IC	
IC4004	C1ZBZ0003191	IC	
IC4005	C0ABFA000012	IC	
IC5001	TVR4GAS652	IC	PAVCKM
IC5002	TVR4GAS653	IC	PAVCKM
IC5004	C1AB00002535	IC	
IC5005	C0DBFFD00003	IC	
PC841	B3PAA0000261	IC	△
PC880	B3PAA0000261	IC	△
RM1001	PNA4701M05TV	REMOTE CONTROL RECEIVER	
SN1001	B3L000000020	PHOTOELECTRIC COUPLER	
Q820	2SC13180WA	TRANSISTOR	
Q822	2SC3311A0A	TRANSISTOR	
Q880	2SA10180QA	TRANSISTOR	
Q900	B1ABCE000015	TRANSISTOR	
Q902	B1ABCE000015	TRANSISTOR	
Q903	B1ABCE000015	TRANSISTOR	
Q904	B1ABCE000015	TRANSISTOR	
Q905	B1ABCE000015	TRANSISTOR	
Q906	B1ABCE000015	TRANSISTOR	
Q1002	2SA207700L	TRANSISTOR	
Q1004	2SA207700L	TRANSISTOR	
Q1006	2SC584500L	TRANSISTOR	
Q1007	2SC584500L	TRANSISTOR	
Q1217	2SA207700L	TRANSISTOR	
Q1218	2SC584500L	TRANSISTOR	
Q1801	B1DHDC000028	TRANSISTOR	
Q1802	UNR521100L	TRANSISTOR	
Q1803	2SC584500L	TRANSISTOR	
Q1804	2SA207700L	TRANSISTOR	
Q1805	2SA207700L	TRANSISTOR	
Q1806	2SC584500L	TRANSISTOR	
Q2019	UNR521100L	TRANSISTOR	
Q2020	UNR521100L	TRANSISTOR	
Q2031	B1CBHD000002	TRANSISTOR	
Q2032	B1CBHD000002	TRANSISTOR	
Q2303	2SD0601A0L	TRANSISTOR	
Q2305	2SA207700L	TRANSISTOR	
Q2306	2SA207700L	TRANSISTOR	
Q2312	2SD0601A0L	TRANSISTOR	
Q2313	2SC584500L	TRANSISTOR	
Q3001	2SC584500L	TRANSISTOR	
Q3002	2SA207700L	TRANSISTOR	
Q3003	2SC584500L	TRANSISTOR	
Q3005	2SC584500L	TRANSISTOR	

Ref. No.	Part No.	Part Name & Description	Remarks
Q3006	2SC584500L	TRANSISTOR	
Q3007	2SA207700L	TRANSISTOR	
Q3200	2SC584500L	TRANSISTOR	
Q3201	2SC584500L	TRANSISTOR	
Q3202	2SC584500L	TRANSISTOR	
Q3203	2SC584500L	TRANSISTOR	
Q3204	2SA207700L	TRANSISTOR	
Q3205	2SD0602ASL	TRANSISTOR	
Q3801	2SA207700L	TRANSISTOR	
Q3806	2SC584500L	TRANSISTOR	
Q3807	2SC584500L	TRANSISTOR	
Q4001	2SC584500L	TRANSISTOR	
Q4002	2SA207700L	TRANSISTOR	
Q4003	2SA207700L	TRANSISTOR	
Q4020	2SC584500L	TRANSISTOR	
Q4021	2SC584500L	TRANSISTOR	
Q4049	2SC584500L	TRANSISTOR	
Q4050	2SA207700L	TRANSISTOR	
Q4120	UNR521100L	TRANSISTOR	
Q4121	UNR521100L	TRANSISTOR	
Q4501	2SC584500L	TRANSISTOR	
Q4502	2SC584500L	TRANSISTOR	
Q5001	2SC584500L	TRANSISTOR	
Q5002	2SC584500L	TRANSISTOR	
Q5003	2SC584500L	TRANSISTOR	
Q5004	2SC584500L	TRANSISTOR	
Q5008	B1MBACA00008	TRANSISTOR	
Q5009	B1MBACA00008	TRANSISTOR	
Q5019	2SC584500L	TRANSISTOR	
Q5020	2SC584500L	TRANSISTOR	
Q5021	2SC584500L	TRANSISTOR	
Q5022	UNR521100L	TRANSISTOR	
Q5023	B1MBACA00008	TRANSISTOR	
Q5024	2SC584500L	TRANSISTOR	
Q5025	UNR521100L	TRANSISTOR	
D801	ERZV10V621CS	DIODE	△
D802	B0FBAT000014	DIODE	PAVCKM
D810	B0HBSM000027	DIODE	
D811	B0HANM000032	DIODE	
D812	B0HFRJ000012	DIODE	
D820	B0AACK000004	DIODE	
D821	B0HAGM000005	DIODE	
D822	B0AACK000004	DIODE (TX-26LE7X, TX-26LX70X)	
D832	B0EAKT000018	DIODE	
D833	B0HAJL000003	DIODE	PAVCKM
D834	B0BA6R800025	DIODE	PAVCKM
D835	B0BA8R000010	DIODE	PAVCKM
D840	B0HAJL000003	DIODE	PAVCKM
D841	B0BA05600010	DIODE	PAVCKM
D842	B0HAJL000003	DIODE	PAVCKM
D843	B0HAJL000003	DIODE	PAVCKM
D880	B0BA5R600016	DIODE	
D881	B0HAJL000003	DIODE	PAVCKM
D882	B0BA03500012	DIODE (TX-26LE7X, TX-26LX70X)	
D882	B0BA02200015	DIODE (TX-26LE7Y, TX-26LX70Y)	
D883	B0HAJL000003	DIODE	PAVCKM
D884	B0HAJL000003	DIODE	PAVCKM
D885	B0BA03400009	DIODE	
D886	B0BA03400009	DIODE	
D887	ERZV10V621CS	DIODE	△
D888	B0BA04200005	DIODE	
D889	ERZV10V621CS	DIODE	△
D891	B0JAPK000011	DIODE	PAVCKM
D892	B0HAGV000004	DIODE	
D895	B0EBKT000007	DIODE	
D904	B0JCME000037	DIODE	
D907	B0JCME000037	DIODE	

Ref. No.	Part No.	Part Name & Description	Remarks
D908	B0JCME000037	DIODE	
D909	B0HCMM000014	DIODE	
D910	B0HCMM000014	DIODE	
D913	B0JCME000037	DIODE	
D919	B0JCPG000005	DIODE	
D922	B0JANE000006	DIODE	
D923	B0JANE000006	DIODE	
D924	B0BC01000044	DIODE	
D1001	B3CKE0000007	DIODE	
D1102	MA2J72900L	DIODE	
D1106	MAZ80620ML	DIODE	
D1107	MAZ80620ML	DIODE	
D1108	MAZ80620ML	DIODE	
D1109	MAZ80620ML	DIODE	
D1110	MAZ80620ML	DIODE	
D1810	MA2J11100L	DIODE	
D1811	MA2J11100L	DIODE	
D1812	MAZ82700ML	DIODE	
D1813	MA2J11100L	DIODE	
D1814	MAZ80620LL	DIODE	
D1815	MA2J11100L	DIODE	
D1816	MAZ80750ML	DIODE	
D1817	MA2J11100L	DIODE	
D1818	MAZ81300ML	DIODE	
D1819	MA2J11100L	DIODE	
D1820	MAZ80560ML	DIODE	
D1821	MA2J11100L	DIODE	
D1822	MAZ80560ML	DIODE	
D1823	MA2J11100L	DIODE	
D1824	MAZ82700ML	DIODE	
D1825	MA2J11100L	DIODE	
D2001	MA3X704D0L	DIODE	
D2006	MAZ80470ML	DIODE	
D2301	MA2J11100L	DIODE	
D2304	MA2J11100L	DIODE	
D2305	MA2J11100L	DIODE	
D3001	MAZ81400ML	DIODE	
D3002	MAZ81400ML	DIODE	
D3003	MAZ81400ML	DIODE	
D3004	MAZ81400ML	DIODE	
D3005	MAZ81400ML	DIODE	
D3006	MAZ81400ML	DIODE	
D3007	MAZ81400ML	DIODE	
D3008	MAZ81400ML	DIODE	
D3009	MAZ81400ML	DIODE	
D3013	MAZ81400ML	DIODE	
D3014	MAZ81400ML	DIODE	
D3015	MAZ81400ML	DIODE	
D3016	MAZ81400ML	DIODE	
D3017	MAZ81400ML	DIODE	
D3018	MAZ81400ML	DIODE	
D3021	MAZ81400ML	DIODE	
D3022	MAZ81400ML	DIODE	
D3023	MAZ81400ML	DIODE	
D3024	MAZ81400ML	DIODE	
D3025	MAZ81400ML	DIODE	
D3026	MAZ81400ML	DIODE	
D3027	MAZ81400ML	DIODE	
D3028	MAZ81400ML	DIODE	
D3031	MAZ81400ML	DIODE	
D3032	MAZ81400ML	DIODE	
D3033	MAZ81400ML	DIODE	
D3200	MAZ81500ML	DIODE	
D3203	MA2J11100L	DIODE	
D3204	MA2J11100L	DIODE	
D3205	MA2J11100L	DIODE	
D3206	MA2J11100L	DIODE	
D3207	MA2J11100L	DIODE	
D3208	MA2J11100L	DIODE	
D3209	MA2J11100L	DIODE	
D3210	MA2J11100L	DIODE	
D3211	MA2J11100L	DIODE	
D3215	MA2J11100L	DIODE	

Ref. No.	Part No.	Part Name & Description	Remarks
D3216	MA2J11100L	DIODE	
D3217	MA2J11100L	DIODE	
D3219	MA2J72900L	DIODE	
D3501	MAZ81400ML	DIODE	
D3502	MAZ81400ML	DIODE	
D3503	MAZ81400ML	DIODE	
D3504	MAZ81400ML	DIODE	
D3506	MAZ81400ML	DIODE	
D3507	MAZ81400ML	DIODE	
D3508	MAZ81400ML	DIODE	
D3509	MAZ81400ML	DIODE	
D3510	MAZ81400ML	DIODE	
D3511	MAZ81400ML	DIODE	
D3512	MAZ81400ML	DIODE	
D3513	MAZ81400ML	DIODE	
D4015	B0JCDD000002	DIODE	
D4121	MA2J11100L	DIODE	
D5001	EZJZ0V80008B	DIODE	
D5002	EZJZ0V80008B	DIODE	
D5003	EZJZ0V80008B	DIODE	
D5004	EZJZ0V80008B	DIODE	
D5005	EZJZ0V80008B	DIODE	
D5006	EZJZ0V80008B	DIODE	
D5007	EZJZ0V80008B	DIODE	
D5008	EZJZ0V80008B	DIODE	
D5009	EZJZ0V80008B	DIODE	
D5010	EZJZ0V80008B	DIODE	
D5011	EZJZ1V8000AA	DIODE	
D5012	EZJZ0V80008B	DIODE	
D5013	EZJZ0V80008B	DIODE	
D5014	EZJZ1V8000AA	DIODE	
D5015	EZJZ1V8000AA	DIODE	
D5016	EZJZ0V80008B	DIODE	
D5017	EZJZ1V8000AA	DIODE	
D5018	EZJZ0V80008B	DIODE	
D5019	EZJZ0V80008B	DIODE	
D5020	EZJZ0V80008B	DIODE	
D5021	B0HCMM000014	DIODE	
D5022	B0HCMM000014	DIODE	
D5023	MA2J72800L	DIODE	
D5026	B0HCMM000014	DIODE	
D5027	B0HCMM000014	DIODE	
L801	ETQR45T036A	COIL (TX-26LE7Y, TX-26LX70Y)	△
L811	BDC0309T-998	COIL	
L835	EXCELSA39E	COIL	
L837	J0JKA0000038	COIL	
L901	BDC0306V-902	COIL	
L904	G0C101K00041	COIL	
L911	G0A101ZA0034	COIL	
L913	G0C101K00023	COIL	
L915	G0A101ZA0041	COIL	
L918	BDC0306V-902	COIL	
L921	BDC0306V-902	COIL	
L922	G0A101ZA0041	COIL	
L930	BDC0306V-902	COIL	
L1805	J0JHC0000078	COIL	
L1806	J0JHC0000078	COIL	
L2001	G0A100ZA0033	COIL	
L2002	G0A100ZA0033	COIL	
L2003	J0JHC0000078	COIL	
L2005	J0JHC0000078	COIL	
L3800	J0JHC0000078	COIL	
L3801	G0A101EA0008	COIL	
L3802	J0JCC0000241	COIL	
L3803	J0JCC0000241	COIL	
L4001	J0JHC0000078	COIL	
L4002	J0JHC0000078	COIL	
L4003	J0JHC0000078	COIL	
L4004	J0JHC0000078	COIL	
L4005	J0JHC0000078	COIL	
L4006	J0JHC0000078	COIL	

Ref. No.	Part No.	Part Name & Description	Remarks
L4007	J0JHC0000078	COIL	
L4008	J0JHC0000078	COIL	
L4009	J0JHC0000078	COIL	
L4010	J0JHC0000078	COIL	
L4011	J0JHC0000078	COIL	
L4012	J0JHC0000078	COIL	
L4014	J0JHC0000078	COIL	
L4015	J0JHC0000078	COIL	
L4016	ELJFA6R8KFB	COIL	
L4017	J0JCC0000241	COIL	
L4018	J0JCC0000241	COIL	
L4020	J0JHC0000078	COIL	
L4022	J0JHC0000078	COIL	
L4502	J0JHC0000078	COIL	
L4904	J0JHC0000078	COIL	
L5003	J0JHC0000078	COIL	
L5004	J0JHC0000078	COIL	
L5005	J0JHC0000078	COIL	
L5006	J0JHC0000078	COIL	
L5007	J0JHC0000078	COIL	
L5009	J0JHC0000078	COIL	
L5010	J0JBC0000080	COIL	
L5011	J0JHC0000078	COIL	
L5012	J0JHC0000078	COIL	
L5013	J0JHC0000078	COIL	
FL4001	J0MAB0000169	COIL	
FL4002	J0MAB0000169	COIL	
FL4003	J0MAB0000169	COIL	
FL5001	FLJ1A1050020	FILTER C 1UF Z 50V	
FL5002	FLJ1A1050020	FILTER C 1UF Z 50V	
LF801	G0B153H00008	COIL (TX-26LE7X, TX-26LX70X)	PAVCKM △
LF801	G0B153H00003	COIL (TX-26LE7Y, TX-26LX70Y)	△
LF802	G0B153H00008	COIL (TX-26LE7X, TX-26LX70X)	PAVCKM △
LF802	G0B153H00003	COIL (TX-26LE7Y, TX-26LX70Y)	△
T801	ETS42BM166AD	TRANSFORMER	PAVCKM △
T880	ETS15AB146AH	TRANSFORMER	PAVCKM △
R801	D1F5100E0002	SAFETY RESISTOR (TX-26LE7X, TX-26LX70X)	
R802	ERG2SJW473E	M 47K OHM J 2W	PAVCKM
R803	D0AW825JA001	C 8.2OHM J 3/4W	PAVCKM △
R808	ERC12ZGK225D	S 2.2M OHM K 1/2W	△
R809	ERG2FJ331H	M 330 OHM J 2W (TX-26LE7Y, TX-26LX70Y)	
R813	RD16ST471J	C 470 OHM J 1/4W	
R820	RD16ST223J	C 22K OHM J 1/4W	
R821	RD16ST102J	C 1K OHM J 1/4W	
R824	RD16ST561J	C 560 OHM J 1/4W	
R831	ERG2SJW104E	M 100K OHM J 2W	
R832	RSS3GT470J	M 47 OHM J 3W	
R833	D0C1390JA051	39 OHM 1W	PAVCKM
R834	RD16ST102J	C 1K OHM J 1/4W	
R841	RD16ST823J	C 82K OHM J 1/4W	
R842	RD16ST391J	C 390 OHM J 1/4W	
R843	ERX2FZJR12H	M 0.12 OHM J 2W	PAVCKM
R844	ERX2FZJR15H	M 0.15 OHM J 2W	PAVCKM
R845	RD16ST473J	C 47K OHM J 1/4W	
R846	RD16ST182J	C 1.8K OHM J 1/4W	
R848	RD16ST561J	C 560 OHM J 1/4W	
R865	RD50SST100J	C 10 OHM J 1/2W	
R880	ERX12SJ1R5E	M 1.5 OHM J 1/2W (TX-26LE7X, TX-26LX70X)	
R880	ERX12SJ2R2E	M 2.2 OHM J 1/2W (TX-26LE7Y, TX-26LX70Y)	
R881	RD50SST181J	C 180 OHM J 1/2W	
R882	RD16ST123J	C 12K OHM J 1/4W	
R883	RD16ST104J	C 100K OHM J 1/4W	
R884	ERG2DJ474P	M 470K OHM J 2W	PAVCKM
R886	RSS1L104J	M 100K OHM J 1W	

Ref. No.	Part No.	Part Name & Description	Remarks
R887	D0DK1R0JA019	SAFETY RESISTOR (TX-26LE7X, TX-26LX70X)	PAVCKM
R887	D1F5100E0002	SAFETY RESISTOR (TX-26LE7Y, TX-26LX70Y)	
R888	ERG1DJ334P	M 330 OHM J 1W	PAVCKM
R889	EROS2THF6801	M 6.8K OHM F 1/4W	
R890	EROS2CHF4301	M 4.3K OHM F 1/4W	PAVCKM
R891	RD16ST330J	C 33 OHM J 1/4W	
R892	RD16ST332J	C 3.3K OHM J 1/4W	
R904	D0GB473JA041	M 47K OHM J 1/16W	
R905	D0GB103JA041	M 10K OHM J 1/16W	
R906	D0GB102JA041	M 1K OHM J 1/16W	
R908	D0GB102JA041	M 1K OHM J 1/16W	
R909	RD16ST103J	C 10K OHM J 1/4W	
R910	D0GB473JA041	M 47K OHM J 1/16W	
R911	ERJ6GEYJ102V	M 1K OHM J 1/10W	
R916	ERJ3EKF1201V	M 1.2K OHM F 1/16W	
R917	ERJ3EKF6491	M 6.49K OHM F 1/16W	PAVCKM
R918	ERJ3EKF1241V	M 1.24K OHM F 1/16W	
R919	ERJ3EKF6190	M 619 OHM F 1/16W	PAVCKM
R920	ERJ3EKF1001V	M 1K OHM F 1/16W	
R921	ERJ3EKF1691V	M 1.69K OHM F 1/16W	
R933	ERJ3EKF1303V	M 130K OHM F 1/16W	
R934	ERJ3EKF4222V	M 42.2K OHM F 1/16W	
R937	D0GB333JA041	M 33K OHM J 1/16W	
R941	D0GB103JA041	M 10K OHM J 1/16W	
R942	D0GB473JA041	M 47K OHM J 1/16W	
R943	RD16ST103J	C 10K OHM J 1/4W	
R946	D0GB102JA041	M 1K OHM J 1/16W	
R947	D0GB102JA041	M 1K OHM J 1/16W	
R949	ERJ3EKF2491V	M 2.49K OHM F 1/16W	
R950	ERJ3EKF8200V	M 8.2K OHM F 1/16W	
R951	D0GB103JA041	M 10K OHM J 1/16W	
R952	D0GB103JA041	M 10K OHM J 1/16W	
R953	D0GB473JA041	M 47K OHM J 1/16W	
R954	D0GB102JA041	M 1K OHM J 1/16W	
R956	D0GB473JA041	M 47K OHM J 1/16W	
R957	D0GB102JA041	M 1K OHM J 1/16W	
R960	RD50SST302J	C 3K OHM J 1/2W	
R961	RD50SST302J	C 3K OHM J 1/2W	
R962	RD50SST302J	C 3K OHM J 1/2W	
R963	RD50SST302J	C 3K OHM J 1/2W	
R964	RD50SST302J	C 3K OHM J 1/2W	
R965	RD50SST302J	C 3K OHM J 1/2W	
R966	RD50SST302J	C 3K OHM J 1/2W	
R967	RD50SST302J	C 3K OHM J 1/2W	
R1002	D0GB473JA041	M 47K OHM J 1/16W	
R1003	D0GB102JA041	M 1K OHM J 1/16W	
R1006	D0GB221JA041	M 220 OHM J 1/16W	
R1008	D0GB473JA041	M 47K OHM J 1/16W	
R1010	D0GB473JA041	M 47K OHM J 1/16W	
R1015	D0GB103JA041	M 10K OHM J 1/16W	
R1017	D0GB103JA041	M 10K OHM J 1/16W	
R1019	D0GB103JA041	M 10K OHM J 1/16W	
R1020	D0GB103JA041	M 10K OHM J 1/16W	
R1022	D0GB152JA041	M 1.5K OHM J 1/16W	
R1025	D0GB273JA041	M 27K OHM J 1/16W	
R1026	D0GB273JA041	M 27K OHM J 1/16W	
R1028	D0GB470JA041	M 47 OHM J 1/16W	
R1029	D0GB102JA041	M 1K OHM J 1/16W	
R1171	D0GB220JA041	M 22 OHM J 1/16W	
R1172	D0GB220JA041	M 22 OHM J 1/16W	
R1173	D0GB473JA041	M 47K OHM J 1/16W	
R1174	D0GB101JA041	M 100 OHM J 1/16W	
R1175	D0GB101JA041	M 100 OHM J 1/16W	
R1176	D0GB101JA041	M 100 OHM J 1/16W	
R1177	D0GB101JA041	M 100 OHM J 1/16W	
R1236	D0GB103JA041	M 10K OHM J 1/16W	
R1237	D0GB103JA041	M 10K OHM J 1/16W	
R1238	D0GB103JA041	M 10K OHM J 1/16W	
R1239	D0GB103JA041	M 10K OHM J 1/16W	
R1240	D0GB473JA041	M 47K OHM J 1/16W	
R1241	D0GB103JA041	M 10K OHM J 1/16W	

Ref. No.	Part No.	Part Name & Description	Remarks
R1242	D0GB223JA041	M 22K OHM J 1/16W	
R1243	D0GB473JA041	M 47K OHM J 1/16W	
R1246	D0GB332JA041	M 3.3K OHM J 1/16W	
R1247	D0GB332JA041	M 3.3K OHM J 1/16W	
R1248	D0GB562JA041	M 5.6K OHM J 1/16W	
R1700	D0GB103JA041	M 10K OHM J 1/16W	
R1701	D0GB393JA041	M 39K OHM J 1/16W	
R1702	D0GB393JA041	M 39K OHM J 1/16W	
R1811	ERJ6GEYJ103V	M 10K OHM J 1/10W	
R1812	D0GB333JA041	M 33K OHM J 1/16W	
R1813	D0GB472JA041	M 4.7K OHM J 1/16W	
R1815	ERJ6GEYJ103V	M 10K OHM J 1/10W	
R1816	D0GB223JA041	M 22K OHM J 1/16W	
R1818	D0GB102JA041	M 1K OHM J 1/16W	
R1819	ERJ3EKF5231V	M 5.23K OHM F 1/16W	
R1820	ERJ3EKF2202V	M 22K OHM F 1/16W	
R1823	D0GB473JA041	M 47K OHM J 1/16W	
R1824	D0GB103JA041	M 10K OHM J 1/16W	
R1825	D0GB473JA041	M 47K OHM J 1/16W	
R1826	D0GB103JA041	M 10K OHM J 1/16W	
R1827	D0GB472JA041	M 4.7K OHM J 1/16W	
R1828	D0GB472JA041	M 4.7K OHM J 1/16W	
R1829	D0GB472JA041	M 4.7K OHM J 1/16W	
R1830	D0GB472JA041	M 4.7K OHM J 1/16W	
R1831	D0GB102JA041	M 1K OHM J 1/16W	
R1832	D0GB102JA041	M 1K OHM J 1/16W	
R2096	ERJ2GEJ103X	M 10K OHM J 1/4W	
R2097	ERJ2GEJ393X	M 39K OHM 1/4W	
R2098	ERJ3EKF3902V	M 39K OHM F 1/16W	
R2099	D0GB100JA041	M 10 OHM J 1/16W	
R2100	D0GB100JA041	M 10 OHM J 1/16W	
R2101	D0GB220JA041	M 22 OHM J 1/16W	
R2102	D0GB220JA041	M 22 OHM J 1/16W	
R2103	D0GB472JA041	M 4.7K OHM J 1/16W	
R2104	D0GB472JA041	M 4.7K OHM J 1/16W	
R2105	D0GB472JA041	M 4.7K OHM J 1/16W	
R2106	D0GB472JA041	M 4.7K OHM J 1/16W	
R2107	D0GB153JA041	M 15K OHM J 1/16W	
R2108	D0GB153JA041	M 15K OHM J 1/16W	
R2109	D0GB103JA041	M 10K OHM J 1/16W	
R2111	D0GB103JA041	M 10K OHM J 1/16W	
R2112	ERJ2GEJ104X	M 100K OHM J 1/4W	
R2113	ERJ2GEJ104X	M 100K OHM J 1/4W	
R2114	ERJ2GEJ154X	M 150K OHM J 1/4W	
R2115	ERJ2GEJ393X	M 39K OHM 1/4W	
R2121	ERJ2GEJ104X	M 100K OHM J 1/4W	
R2122	ERJ2GEJ154X	M 150K OHM J 1/4W	
R2139	ERJ2GEJ103X	M 10K OHM J 1/4W	
R2140	ERJ2GEJ103X	M 10K OHM J 1/4W	
R2148	D0GB682JA041	M 6.8K OHM J 1/16W	
R2149	D0GB682JA041	M 6.8K OHM J 1/16W	
R2152	ERJ2GEJ104X	M 100K OHM J 1/4W	
R2153	ERJ2GEJ104X	M 100K OHM J 1/4W	
R2154	ERJ2GEJ104X	M 100K OHM J 1/4W	
R2155	D0GB105JA041	M 1M OHM F 1/16W	
R2156	D0GB105JA041	M 1M OHM F 1/16W	
R2159	ERJ2GEJ104X	M 100K OHM J 1/4W	
R2160	ERJ2GEJ104X	M 100K OHM J 1/4W	
R2303	ERJ2GEJ103X	M 10K OHM J 1/4W	
R2304	ERJ2GEJ103X	M 10K OHM J 1/4W	
R2306	ERJ2GEJ104X	M 100K OHM J 1/4W	
R2307	ERJ2GEJ103X	M 10K OHM J 1/4W	
R2308	D0GB104JA041	M 100K OHM J 1/16W	
R2310	D0GB222JA041	M 2.2K OHM J 1/16W	
R2313	ERJ2GEJ104X	M 100K OHM J 1/4W	
R2314	ERJ2GEJ105X	M 1M OHM J 1/4W	
R2381	ERJ2GEJ102X	M 1K OHM J 1/4W	
R2382	ERJ2GEJ104X	M 100K OHM J 1/4W	
R2383	ERJ2GEJ103X	M 10K OHM J 1/4W	
R3001	D0GB184JA041	M 180K OHM J 1/16W	
R3002	D0GB184JA041	M 180K OHM J 1/16W	
R3003	D1BD75R0A044	M 75 OHM 1/10W	
R3004	D1BD75R0A044	M 75 OHM 1/10W	

Ref. No.	Part No.	Part Name & Description	Remarks
R3005	D1BD75R0A044	M 75 OHM 1/10W	
R3006	D0GB184JA041	M 180K OHM J 1/16W	
R3007	D0GB184JA041	M 180K OHM J 1/16W	
R3010	D1BD75R0A044	M 75 OHM 1/10W	
R3011	D0GB184JA041	M 180K OHM J 1/16W	
R3012	D0GB184JA041	M 180K OHM J 1/16W	
R3013	D1BD75R0A044	M 75 OHM 1/10W	
R3014	D1BD75R0A044	M 75 OHM 1/10W	
R3015	D1BD75R0A044	M 75 OHM 1/10W	
R3019	D1BD75R0A044	M 75 OHM 1/10W	
R3020	D0GB431JA041	M 430 OHM J 1/16W	
R3021	D0GB431JA041	M 430 OHM J 1/16W	
R3022	ERJ6GEYJ331V	M 330 OHM J 1/10W	
R3023	ERJ6GEYJ471V	M 470 OHM J 1/10W	
R3024	ERJ6GEYJ271V	M 270 OHM J 1/10W	
R3026	D0GB473JA041	M 47K OHM J 1/16W	
R3027	D0GB393JA041	M 39K OHM J 1/16W	
R3034	D0GB184JA041	M 180K OHM J 1/16W	
R3035	D0GB101JA041	M 100 OHM J 1/16W	
R3036	D0GB101JA041	M 100 OHM J 1/16W	
R3037	D0GB101JA041	M 100 OHM J 1/16W	
R3038	D0GB101JA041	M 100 OHM J 1/16W	
R3039	D0GB105JA041	M 1M OHM F 1/16W	
R3040	D0GB274JA041	M 270K OHM J 1/16W	
R3041	D0GB473JA041	M 47K OHM J 1/16W	
R3042	D0GB102JA041	M 1K OHM J 1/16W	
R3043	D0GB184JA041	M 180K OHM J 1/16W	
R3110	D0GB102JA041	M 1K OHM J 1/16W	
R3112	D0GB102JA041	M 1K OHM J 1/16W	
R3118	D0GB102JA041	M 1K OHM J 1/16W	
R3120	D0GB102JA041	M 1K OHM J 1/16W	
R3129	D0GB102JA041	M 1K OHM J 1/16W	
R3130	D0GB102JA041	M 1K OHM J 1/16W	
R3200	D0GB103JA041	M 10K OHM J 1/16W	
R3201	D0GB473JA041	M 47K OHM J 1/16W	
R3203	D0GB103JA041	M 10K OHM J 1/16W	
R3204	ERJ14YJ222U	M 22K OHM J 1/4W	
R3205	ERJ14YJ222U	M 22K OHM J 1/4W	
R3206	D0GB223JA041	M 22K OHM J 1/16W	
R3207	D0GB332JA041	M 3.3K OHM J 1/16W	
R3208	D0GB103JA041	M 10K OHM J 1/16W	
R3209	D0GB473JA041	M 47K OHM J 1/16W	
R3210	D0GB332JA041	M 3.3K OHM J 1/16W	
R3215	D0GB103JA041	M 10K OHM J 1/16W	
R3218	D0GB103JA041	M 10K OHM J 1/16W	
R3221	D0GB103JA041	M 10K OHM J 1/16W	
R3227	D0GB103JA041	M 10K OHM J 1/16W	
R3229	D0GB153JA041	M 15K OHM J 1/16W	
R3230	D0GB473JA041	M 47K OHM J 1/16W	
R3231	D0GB103JA041	M 10K OHM J 1/16W	
R3233	D0GB473JA041	M 47K OHM J 1/16W	
R3234	D0GB222JA041	M 2.2K OHM J 1/16W	
R3235	D0GB152JA041	M 1.5K OHM J 1/16W	
R3236	D0GB223JA041	M 22K OHM J 1/16W	
R3237	D0GB473JA041	M 47K OHM J 1/16W	
R3502	D1BD75R0A044	M 75 OHM 1/10W	
R3505	D1BD75R0A044	M 75 OHM 1/10W	
R3509	D1BD75R0A044	M 75 OHM 1/10W	
R3510	ERJ6GEYJ102V	M 1K OHM J 1/10W	
R3512	ERJ6GEYJ102V	M 1K OHM J 1/10W	
R3513	ERJ6GEYJ184V	M 180K OHM J 1/10W	
R3514	ERJ6GEYJ184V	M 180K OHM J 1/10W	
R3800	D0GB101JA041	M 100 OHM J 1/16W	
R3869	D0GB103JA041	M 10K OHM J 1/16W	
R3879	D0GB221JA041	M 220 OHM J 1/16W	
R3882	D0GB102JA041	M 1K OHM J 1/16W	
R3883	D0GB331JA041	M 330 OHM J 1/16W	
R3911	D0GB103JA041	M 10K OHM J 1/16W	
R3912	D0GB332JA041	M 3.3K OHM J 1/16W	
R3914	D0GB332JA041	M 3.3K OHM J 1/16W	
R3915	D0GB122JA041	N 1.2K OHM J 1/16W	
R3916	D0GB471JA041	M 470 OHM J 1/16W	
R3917	D0GB561JA041	M 560 OHM J 1/16W	

Ref. No.	Part No.	Part Name & Description	Remarks
R4001	D0GB273JA041	M 27K OHM J 1/16W	
R4003	D0GB102JA041	M 1K OHM J 1/16W	
R4005	ERJ2GEJ103X	M 10K OHM J 1/4W	
R4007	D0GB101JA041	M 100 OHM J 1/16W	
R4008	D0GB101JA041	M 100 OHM J 1/16W	
R4009	EXB2HV104JV	RESISTOR 100K OHM	
R4011	D0GB102JA041	M 1K OHM J 1/16W	
R4012	D0GB101JA041	M 100 OHM J 1/16W	
R4014	D0GB101JA041	M 100 OHM J 1/16W	
R4015	ERJ2GEJ104X	M 100K OHM J 1/4W	
R4016	D0GB103JA041	M 10K OHM J 1/16W	
R4017	D0GB103JA041	M 10K OHM J 1/16W	
R4018	ERJ2GEJ473X	M 47K OHM J	
R4019	D0GB473JA041	M 47K OHM J 1/16W	
R4020	D0GB103JA041	M 10K OHM J 1/16W	
R4021	D0GB103JA041	M 10K OHM J 1/16W	
R4022	D0GB473JA041	M 47K OHM J 1/16W	
R4023	D0GB101JA041	M 100 OHM J 1/16W	
R4025	D0GB101JA041	M 100 OHM J 1/16W	
R4028	D0GB220JA041	M 22 OHM J 1/16W	
R4034	D0GB101JA041	M 100 OHM J 1/16W	
R4038	ERJ2GEJ822X	M 8.2K OHM J	
R4047	D0GB101JA041	M 100 OHM J 1/16W	
R4048	D0GB101JA041	M 100 OHM J 1/16W	
R4049	D0GB101JA041	M 100 OHM J 1/16W	
R4050	D0GB101JA041	M 100 OHM J 1/16W	
R4053	D0GB101JA041	M 100 OHM J 1/16W	
R4055	D0GB101JA041	M 100 OHM J 1/16W	
R4057	D0GB101JA041	M 100 OHM J 1/16W	
R4058	D0GB101JA041	M 100 OHM J 1/16W	
R4059	D0GB101JA041	M 100 OHM J 1/16W	
R4061	D0GB220JA041	M 22 OHM J 1/16W	
R4062	D0GB102JA041	M 1K OHM J 1/16W	
R4063	D0GB220JA041	M 22 OHM J 1/16W	
R4064	D0GB473JA041	M 47K OHM J 1/16W	
R4065	D0GB220JA041	M 22 OHM J 1/16W	
R4066	D0GB101JA041	M 100 OHM J 1/16W	
R4069	D0GB101JA041	M 100 OHM J 1/16W	
R4071	D0GB103JA041	M 10K OHM J 1/16W	
R4072	D0GB101JA041	M 100 OHM J 1/16W	
R4077	D0GB220JA041	M 22 OHM J 1/16W	
R4078	D0GB102JA041	M 1K OHM J 1/16W	
R4079	D0GB101JA041	M 100 OHM J 1/16W	
R4080	D0GB220JA041	M 22 OHM J 1/16W	
R4081	D0GB101JA041	M 100 OHM J 1/16W	
R4089	D0GB151JA041	M 150 OHM J 1/16W	
R4092	D0GB102JA041	M 1K OHM J 1/16W	
R4093	D0GB103JA041	M 10K OHM J 1/16W	
R4094	D0GB151JA041	M 150 OHM J 1/16W	
R4097	D0GB151JA041	M 150 OHM J 1/16W	
R4098	D0GB151JA041	M 150 OHM J 1/16W	
R4099	D0GB151JA041	M 150 OHM J 1/16W	
R4100	D0GB151JA041	M 150 OHM J 1/16W	
R4101	D0GB103JA041	M 10K OHM J 1/16W	
R4102	D0GB151JA041	M 150 OHM J 1/16W	
R4103	D0GB103JA041	M 10K OHM J 1/16W	
R4104	D0GB332JA041	M 3.3K OHM J 1/16W	
R4105	D0GB103JA041	M 10K OHM J 1/16W	
R4106	D0GB103JA041	M 10K OHM J 1/16W	
R4107	D0GB151JA041	M 150 OHM J 1/16W	
R4108	D0GB102JA041	M 1K OHM J 1/16W	
R4109	D0GB151JA041	M 150 OHM J 1/16W	
R4110	D0GB102JA041	M 1K OHM J 1/16W	
R4111	D0GB151JA041	M 150 OHM J 1/16W	
R4113	D0GB151JA041	M 150 OHM J 1/16W	
R4114	D0GB101JA041	M 100 OHM J 1/16W	
R4115	D0GB151JA041	M 150 OHM J 1/16W	
R4116	D0GB102JA041	M 1K OHM J 1/16W	
R4117	D0GB151JA041	M 150 OHM J 1/16W	
R4118	D0GB471JA041	M 470 OHM J 1/16W	
R4121	D0GB562JA041	M 5.6K OHM J 1/16W	
R4123	D0GB151JA041	M 150 OHM J 1/16W	
R4125	D0GB151JA041	M 150 OHM J 1/16W	

Ref. No.	Part No.	Part Name & Description	Remarks
R4126	D0GB151JA041	M 150 OHM J 1/16W	
R4127	D0GB151JA041	M 150 OHM J 1/16W	
R4128	ERJ2GEJ103X	M 10K OHM J 1/4W	
R4129	D0GB182JA041	M 1.8K OHM J 1/16W	
R4131	D0GB221JA041	M 220 OHM J 1/16W	
R4132	D0GB221JA041	M 220 OHM J 1/16W	
R4134	D0GB331JA041	M 330 OHM J 1/16W	
R4135	D0GB331JA041	M 330 OHM J 1/16W	
R4136	D0GB223JA041	M 22K OHM J 1/16W	
R4138	D0GB103JA041	M 10K OHM J 1/16W	
R4139	D0GB103JA041	M 10K OHM J 1/16W	
R4140	D0GB272JA041	M 2.7K OHM J 1/16W	
R4141	D0GB121JA041	M 120 OHM J 1/16W	
R4188	D0GB102JA041	M 1K OHM J 1/16W	
R4189	D0GB101JA041	M 100 OHM J 1/16W	
R4191	D0GB103JA041	M 10K OHM J 1/16W	
R4192	D0GB103JA041	M 10K OHM J 1/16W	
R4193	D0GB103JA041	M 10K OHM J 1/16W	
R4194	ERJ3EKF1000V	M 100 OHM F 1/16W	
R4195	D0GB101JA041	M 100 OHM J 1/16W	
R4196	ERJ3EKF1000V	M 100 OHM F 1/16W	
R4197	D0GB101JA041	M 100 OHM J 1/16W	
R4198	ERJ3EKF1000V	M 100 OHM F 1/16W	
R4199	D0GB103JA041	M 10K OHM J 1/16W	
R4200	ERJ3EKF1000V	M 100 OHM F 1/16W	
R4201	D0GB103JA041	M 10K OHM J 1/16W	
R4202	ERJ3EKF1000V	M 100 OHM F 1/16W	
R4203	D0GB102JA041	M 1K OHM J 1/16W	
R4204	ERJ3EKF1600V	M 160 OHM F 1/16W	
R4205	ERJ3EKF1600V	M 160 OHM F 1/16W	
R4206	ERJ3EKF1600V	M 160 OHM F 1/16W	
R4207	ERJ3EKF1600V	M 160 OHM F 1/16W	
R4208	ERJ3EKF1600V	M 160 OHM F 1/16W	
R4214	D0GB101JA041	M 100 OHM J 1/16W	
R4215	D0GB101JA041	M 100 OHM J 1/16W	
R4216	D0GB103JA041	M 10K OHM J 1/16W	
R4217	D0GB101JA041	M 100 OHM J 1/16W	
R4218	D0GB101JA041	M 100 OHM J 1/16W	
R4219	D0GB102JA041	M 1K OHM J 1/16W	
R4220	D0GB102JA041	M 1K OHM J 1/16W	
R4221	D0GB102JA041	M 1K OHM J 1/16W	
R4222	D0GB103JA041	M 10K OHM J 1/16W	
R4225	D0GB103JA041	M 10K OHM J 1/16W	
R4226	D0GB332JA041	M 3.3K OHM J 1/16W	
R4228	D0GB102JA041	M 1K OHM J 1/16W	
R4229	D0GB392JA041	M 3.9K OHM J 1/16W	
R4230	D0GB392JA041	M 3.9K OHM J 1/16W	
R4231	D0GB103JA041	M 10K OHM J 1/16W	
R4232	D0GB103JA041	M 10K OHM J 1/16W	
R4233	D0GB103JA041	M 10K OHM J 1/16W	
R4234	D0GB103JA041	M 10K OHM J 1/16W	
R4235	D0GB103JA041	M 10K OHM J 1/16W	
R4236	D0GB103JA041	M 10K OHM J 1/16W	
R4237	D0GB103JA041	M 10K OHM J 1/16W	
R4238	D0GB103JA041	M 10K OHM J 1/16W	
R4239	D0GB103JA041	M 10K OHM J 1/16W	
R4240	D0GB103JA041	M 10K OHM J 1/16W	
R4241	D0GB103JA041	M 10K OHM J 1/16W	
R4242	D0GB103JA041	M 10K OHM J 1/16W	
R4243	D0GB103JA041	M 10K OHM J 1/16W	
R4244	D0GB101JA041	M 100 OHM J 1/16W	
R4245	D0GB103JA041	M 10K OHM J 1/16W	
R4246	D0GB103JA041	M 10K OHM J 1/16W	
R4247	D0GB103JA041	M 10K OHM J 1/16W	
R4248	D0GB103JA041	M 10K OHM J 1/16W	
R4249	D0GB103JA041	M 10K OHM J 1/16W	
R4253	D0GB1R8JA040	M 1.8 OHM J 1/16W	
R4254	D0GB103JA041	M 10K OHM J 1/16W	
R4255	D0GB104JA041	M 100K OHM J 1/16W	
R4257	D0GB103JA041	M 10K OHM J 1/16W	
R4258	D0GB473JA041	M 47K OHM J 1/16W	
R4259	D0GB473JA041	M 47K OHM J 1/16W	
R4271	D0GB221JA041	M 220 OHM J 1/16W	

Ref. No.	Part No.	Part Name & Description	Remarks
R4272	D0GB221JA041	M 220 OHM J 1/16W	
R4273	D0GB221JA041	M 220 OHM J 1/16W	
R4274	D0GB221JA041	M 220 OHM J 1/16W	
R4275	D0GB221JA041	M 220 OHM J 1/16W	
R4276	D0GB221JA041	M 220 OHM J 1/16W	
R4277	D0GB221JA041	M 220 OHM J 1/16W	
R4278	D0GB221JA041	M 220 OHM J 1/16W	
R4279	D0GB221JA041	M 220 OHM J 1/16W	
R4280	D0GB221JA041	M 220 OHM J 1/16W	
R4281	D0GB332JA041	M 3.3K OHM J 1/16W	
R4282	D0GB332JA041	M 3.3K OHM J 1/16W	
R4328	D0GB101JA041	M 100 OHM J 1/16W	
R4501	D0GB473JA041	M 47K OHM J 1/16W	
R4502	D0GB103JA041	M 10K OHM J 1/16W	
R4504	D0GB103JA041	M 10K OHM J 1/16W	
R4505	D0GB103JA041	M 10K OHM J 1/16W	
R4506	D0GB473JA041	M 47K OHM J 1/16W	
R4810	D0GB223JA041	M 22K OHM J 1/16W	
R4811	D0GB333JA041	M 33K OHM J 1/16W	
R5001	D0GB390JA041	M 39 OHM J 1/16W	
R5002	D0GB390JA041	M 39 OHM J 1/16W	
R5005	D0GB103JA041	M 10K OHM J 1/16W	
R5006	D0GB103JA041	M 10K OHM J 1/16W	
R5007	D0GB2R7JA040	M 2.7 OHM J 1/16W	
R5008	D0GB2R7JA040	M 2.7 OHM J 1/16W	
R5009	D0GB2R7JA040	M 2.7 OHM J 1/16W	
R5010	D0GB2R7JA040	M 2.7 OHM J 1/16W	
R5011	D0GB2R7JA040	M 2.7 OHM J 1/16W	
R5012	D0GB2R7JA040	M 2.7 OHM J 1/16W	
R5013	D0GB2R7JA040	M 2.7 OHM J 1/16W	
R5014	D0GB2R7JA040	M 2.7 OHM J 1/16W	
R5015	D0GB2R7JA040	M 2.7 OHM J 1/16W	
R5016	D0GB2R7JA040	M 2.7 OHM J 1/16W	
R5017	D0GB2R7JA040	M 2.7 OHM J 1/16W	
R5018	D0GB2R7JA040	M 2.7 OHM J 1/16W	
R5019	D0GB2R7JA040	M 2.7 OHM J 1/16W	
R5020	D0GB2R7JA040	M 2.7 OHM J 1/16W	
R5021	D0GB2R7JA040	M 2.7 OHM J 1/16W	
R5022	D0GB2R7JA040	M 2.7 OHM J 1/16W	
R5024	D0GB103JA041	M 10K OHM J 1/16W	
R5025	D0GB103JA041	M 10K OHM J 1/16W	
R5027	D0GB103JA041	M 10K OHM J 1/16W	
R5028	D0GB103JA041	M 10K OHM J 1/16W	
R5029	D0GB103JA041	M 10K OHM J 1/16W	
R5030	D0GB472JA041	M 4.7K OHM J 1/16W	
R5031	D0GB472JA041	M 4.7K OHM J 1/16W	
R5032	D0GB103JA041	M 10K OHM J 1/16W	
R5035	D0GB472JA041	M 4.7K OHM J 1/16W	
R5036	D0GB472JA041	M 4.7K OHM J 1/16W	
R5038	D0GB473JA041	M 47K OHM J 1/16W	
R5039	D0GB560JA041	M 56 OHM J 1/16W	
R5040	D0GB473JA041	M 47K OHM J 1/16W	
R5041	D0GB560JA041	M 56 OHM J 1/16W	
R5043	D0GB560JA041	M 56 OHM J 1/16W	
R5045	D0GB560JA041	M 56 OHM J 1/16W	
R5048	D0GB472JA041	M 4.7K OHM J 1/16W	
R5049	D0GB472JA041	M 4.7K OHM J 1/16W	
R5052	D0GB472JA041	M 4.7K OHM J 1/16W	
R5053	D0GB472JA041	M 4.7K OHM J 1/16W	
R5054	D0GB101JA041	M 100 OHM J 1/16W	
R5055	D0GB101JA041	M 100 OHM J 1/16W	
R5057	D0GB103JA041	M 10K OHM J 1/16W	
R5058	D0GB330JA041	M 33 OHM J 1/16W	
R5060	D0GB103JA041	M 10K OHM J 1/16W	
R5061	D0GB220JA041	M 22 OHM J 1/16W	
R5062	D0GB220JA041	M 22 OHM J 1/16W	
R5063	D0GB330JA041	M 33 OHM J 1/16W	
R5064	D0GB220JA041	M 22 OHM J 1/16W	
R5065	D0GB330JA041	M 33 OHM J 1/16W	
R5066	D0GB220JA041	M 22 OHM J 1/16W	
R5067	D0GB330JA041	M 33 OHM J 1/16W	
R5068	D0GB220JA041	M 22 OHM J 1/16W	
R5070	D0GB220JA041	M 22 OHM J 1/16W	

Ref. No.	Part No.	Part Name & Description	Remarks
R5073	D0GB105JA041	M 1M OHM F 1/16W	
R5075	D0GB821JA041	M 820 OHM J 1/16W	
R5077	D0GB182JA041	M 1.8K OHM J 1/16W	
R5078	D0GB220JA041	M 22 OHM J 1/16W	
R5080	D0GB220JA041	M 22 OHM J 1/16W	
R5081	D0GB182JA041	M 1.8K OHM J 1/16W	
R5082	D0GB220JA041	M 22 OHM J 1/16W	
R5083	EXB38V220JV	M 22 OHM J 1/16W	
R5084	EXB2HV220JV	RESISTOR 22 OHM	
R5085	ERJ2GEJ220X	M 22 OHM J 1/4W	
R5086	EXB2HV220JV	RESISTOR 22 OHM	
R5087	EXB2HV220JV	RESISTOR 22 OHM	
R5093	ERJ3EKF2612V	M 26.1K OHM F 1/16W	
R5094	D0GB221JA041	M 220 OHM J 1/16W	
R5095	ERJ3EKF4703V	M 470K OHM F 1/16W	
R5096	D0GB104JA041	M 100K OHM J 1/16W	
R5097	D0GB473JA041	M 47K OHM J 1/16W	
R5098	ERJ3EKF2203V	M 220K OHM F 1/16W	
R5099	D0GB472JA041	M 4.7K OHM J 1/16W	
R5100	D0GB475JA040	M 4700K OHM J 1/16W	
R5102	D0GB223JA041	M 22K OHM J 1/16W	
R5103	D0GB103JA041	M 10K OHM J 1/16W	
R5104	D0GB102JA041	M 1K OHM J 1/16W	
R5105	D0GB103JA041	M 10K OHM J 1/16W	
R5106	D0GB102JA041	M 1K OHM J 1/16W	
R5107	EXB2HV104JV	RESISTOR 100K OHM	
R5108	EXB2HV104JV	RESISTOR 100K OHM	
R5109	EXB2HV104JV	RESISTOR 100K OHM	
R5110	D0GB104JA041	M 100K OHM J 1/16W	
R5111	D0GB104JA041	M 100K OHM J 1/16W	
R5112	D0GB104JA041	M 100K OHM J 1/16W	
R5113	D0GB104JA041	M 100K OHM J 1/16W	
R5125	D0GB220JA041	M 22 OHM J 1/16W	
R5126	D0GB220JA041	M 22 OHM J 1/16W	
R5130	D0GB473JA041	M 47K OHM J 1/16W	
R5131	D0GB473JA041	M 47K OHM J 1/16W	
R5132	D0GB220JA041	M 22 OHM J 1/16W	
R1024	D0GBR00Z0002	M 0 OHM J 1/16W	
R1167	D0GBR00Z0002	M 0 OHM J 1/16W	
R1814	D0GBR00Z0002	M 0 OHM J 1/16W	
R1834	D0GBR00Z0002	M 0 OHM J 1/16W	
R2118	D0GBR00Z0002	M 0 OHM J 1/16W	
R2120	ERJ2GE0R00X	M 0 OHM 1/4W	
R3030	ERJ2GE0R00X	M 0 OHM 1/4W	
R3045	D0GBR00Z0002	M 0 OHM J 1/16W	
R3049	D0GBR00Z0002	M 0 OHM J 1/16W	
R3050	D0GBR00Z0002	M 0 OHM J 1/16W	
R3051	D0GBR00Z0002	M 0 OHM J 1/16W	
R3052	D0GBR00Z0002	M 0 OHM J 1/16W	
R3053	D0GBR00Z0002	M 0 OHM J 1/16W	
R3100	D0GBR00Z0002	M 0 OHM J 1/16W	
R3101	D0GBR00Z0002	M 0 OHM J 1/16W	
R3102	D0GBR00Z0002	M 0 OHM J 1/16W	
R3103	D0GBR00Z0002	M 0 OHM J 1/16W	
R3104	D0GBR00Z0002	M 0 OHM J 1/16W	
R3105	D0GBR00Z0002	M 0 OHM J 1/16W	
R3106	D0GBR00Z0002	M 0 OHM J 1/16W	
R3107	D0GBR00Z0002	M 0 OHM J 1/16W	
R3108	D0GBR00Z0002	M 0 OHM J 1/16W	
R3109	D0GBR00Z0002	M 0 OHM J 1/16W	
R3111	D0GBR00Z0002	M 0 OHM J 1/16W	
R3116	D0GBR00Z0002	M 0 OHM J 1/16W	
R3117	D0GBR00Z0002	M 0 OHM J 1/16W	
R3119	D0GBR00Z0002	M 0 OHM J 1/16W	
R3121	D0GBR00Z0002	M 0 OHM J 1/16W	
R3122	D0GBR00Z0002	M 0 OHM J 1/16W	
R3123	D0GBR00Z0002	M 0 OHM J 1/16W	
R3124	D0GBR00Z0002	M 0 OHM J 1/16W	
R3128	D0GBR00Z0002	M 0 OHM J 1/16W	
R3232	ERJ6GEY0R00V	M 0 OHM J 1/10W	
R3501	ERJ6GEY0R00V	M 0 OHM J 1/10W	
R3503	ERJ6GEY0R00V	M 0 OHM J 1/10W	

Ref. No.	Part No.	Part Name & Description	Remarks
R3504	ERJ6GEY0R00V	M 0 OHM J 1/10W	
R3507	ERJ6GEY0R00V	M 0 OHM J 1/10W	
R3508	ERJ6GEY0R00V	M 0 OHM J 1/10W	
R3511	ERJ6GEY0R00V	M 0 OHM J 1/10W	
R3884	D0GBR00Z0002	M 0 OHM J 1/16W	
R3885	D0GBR00Z0002	M 0 OHM J 1/16W	
R3919	ERJ12Y0R00U	M 0 OHM J 1/2W	
R4026	D0GBR00Z0002	M 0 OHM J 1/16W	
R4031	D0GBR00Z0002	M 0 OHM J 1/16W	
R4032	D0GBR00Z0002	M 0 OHM J 1/16W	
R4082	D0GBR00Z0002	M 0 OHM J 1/16W	
R4112	D0GBR00Z0002	M 0 OHM J 1/16W	
R4119	D0GBR00Z0002	M 0 OHM J 1/16W	
R4120	D0GBR00Z0002	M 0 OHM J 1/16W	
R4122	D0GBR00Z0002	M 0 OHM J 1/16W	
R4124	D0GBR00Z0002	M 0 OHM J 1/16W	
R4130	D0GBR00Z0002	M 0 OHM J 1/16W	
R4133	D0GBR00Z0002	M 0 OHM J 1/16W	
R4146	D0GBR00Z0002	M 0 OHM J 1/16W	
R4148	D0GBR00Z0002	M 0 OHM J 1/16W	
R4209	D0GBR00Z0002	M 0 OHM J 1/16W	
R4210	D0GBR00Z0002	M 0 OHM J 1/16W	
R4256	D0GBR00Z0002	M 0 OHM J 1/16W	
R4325	ERJ2GE0R00X	M 0 OHM 1/4W	
R4326	ERJ2GE0R00X	M 0 OHM 1/4W	
R4750	ERJ2GE0R00X	M 0 OHM 1/4W	
R4751	ERJ2GE0R00X	M 0 OHM 1/4W	
R4752	ERJ2GE0R00X	M 0 OHM 1/4W	
R4753	ERJ2GE0R00X	M 0 OHM 1/4W	
R4754	ERJ2GE0R00X	M 0 OHM 1/4W	
R4755	ERJ2GE0R00X	M 0 OHM 1/4W	
R4756	ERJ2GE0R00X	M 0 OHM 1/4W	
R4757	ERJ2GE0R00X	M 0 OHM 1/4W	
R4758	ERJ2GE0R00X	M 0 OHM 1/4W	
R4759	ERJ2GE0R00X	M 0 OHM 1/4W	
R5023	ERJ2GE0R00X	M 0 OHM 1/4W	
R5026	ERJ2GE0R00X	M 0 OHM 1/4W	
R5088	D0GBR00Z0002	M 0 OHM J 1/16W	
R5091	D0GBR00Z0002	M 0 OHM J 1/16W	
R5101	D0GBR00Z0002	M 0 OHM J 1/16W	
R5114	D0GBR00Z0002	M 0 OHM J 1/16W	
R5116	D0GBR00Z0002	M 0 OHM J 1/16W	
R5117	D0GBR00Z0002	M 0 OHM J 1/16W	
R5118	D0GBR00Z0002	M 0 OHM J 1/16W	
R5119	D0GBR00Z0002	M 0 OHM J 1/16W	
R5124	D0GBR00Z0002	M 0 OHM J 1/16W	
JA1	ERJ6GEY0R00V	M 0 OHM J 1/10W	
JA1	ERJ8GEY0R00V	M 0 OHM 1/10W	
JA2	ERJ6GEY0R00V	M 0 OHM J 1/10W	
JA2	ERJ8GEY0R00V	M 0 OHM 1/10W	
JA3	ERJ8GEY0R00V	M 0 OHM 1/10W	
JA3	ERJ8GEY0R00V	M 0 OHM 1/10W	
JA4	ERJ8GEY0R00V	M 0 OHM 1/10W	
JA5	ERJ8GEY0R00V	M 0 OHM 1/10W	
JA6	ERJ8GEY0R00V	M 0 OHM 1/10W	
JA7	ERJ8GEY0R00V	M 0 OHM 1/10W	
JA8	ERJ8GEY0R00V	M 0 OHM 1/10W	
JA9	ERJ8GEY0R00V	M 0 OHM 1/10W	
JA10	ERJ8GEY0R00V	M 0 OHM 1/10W	
JS922	D0GBR00Z0002	M 0 OHM J 1/16W	
JS924	D0GBR00Z0002	M 0 OHM J 1/16W	
JS926	D0GBR00Z0002	M 0 OHM J 1/16W	
JS1801	D0GBR00Z0002	M 0 OHM J 1/16W	
JS1809	ERJ2GE0R00X	M 0 OHM 1/4W	
JS2004	ERJ6GEY0R00V	M 0 OHM J 1/10W	
JS2306	ERJ2GE0R00X	M 0 OHM 1/4W	
JS3501	ERJ6GEY0R00V	M 0 OHM J 1/10W	
JS3502	ERJ6GEY0R00V	M 0 OHM J 1/10W	
JS3503	ERJ6GEY0R00V	M 0 OHM J 1/10W	
JS3601	ERJ6GEY0R00V	M 0 OHM J 1/10W	
JS3602	ERJ6GEY0R00V	M 0 OHM J 1/10W	

Ref. No.	Part No.	Part Name & Description	Remarks
C801	F0CAF2240003	C 0.22UF	PAVCKM △
C802	F0CAF2240003	C 0.22UF	PAVCKM △
C807	ECKCNA152ME7	C 1500 PF M (TX-26LE7X, TX-26LX70X)	△
C807	ECKCNA102MB7	C 1000 PF M (TX-26LE7Y, TX-26LX70Y)	△
C808	ECKCNA471MB7	C 470PF M 250V	△
C809	ECKCNA471MB7	C 470PF M 250V	△
C810	ECKR3A102KBP	C 1000 PF K 1KV	
C811	ECKR3A471KBP	C 470PF K 1KV	
C813	F2A1E102A223	E 1000UF 25V	
C814	F2A1V1020043	E 1000UF 35V	PAVCKM
C815	F2A1V1020043	E 1000UF 35V	PAVCKM
C816	F2A1C102A252	E 1000UF 16V	
C820	ECKCNA101MB7	C 100PF M 250V	△
C821	ECKCNA101MB7	C 100PF M 250V	△
C822	F0CAF684A066	C 0.68UF (TX-26LE7Y, TX-26LX70Y)	△
C830	F2B2W2210005	E 220UF 450V (TX-26LE7X, TX-26LX70X)	PAVCKM
C830	F2B2W1510005	E 150UF 450V (TX-26LE7Y, TX-26LX70Y)	
C831	ECQE6103KFB	P 0.06UF K 100V	
C833	F2A1H220A536	E 22UF 50V	PAVCKM
C834	ECKW3D152KBP	C 1500PF K 2KV	
C835	ECQB1H121JF	P 120PF J 50V	PAVCKM
C836	ECQB1H121JF	P 120PF J 50V	PAVCKM
C837	F2A1H1R0A317	E 1UF 50V	PAVCKM
C838	ECQB1H224JF3	P 0.22UF J 50V	
C842	F2B2W2210005	E 220UF 450V (TX-26LE7X, TX-26LX70X)	PAVCKM
C842	F2B2W1510005	E 150UF 450V (TX-26LE7Y, TX-26LX70Y)	
C881	ECQB1H103JF3	P 0.01UF J 50V	
C882	F1B2H1030029	C 0.01UF 200V	PAVCKM
C883	F2A1H4R7B204	E 4.7UF 50V	PAVCKM
C885	F2A2W2200020	E 22UF 160V	PAVCKM
C886	F2A1A471A476	E 470UF 10V	PAVCKM
C887	ECKR3A101KBP	C 100 PF K 1 KV	
C888	ECQB1H473JF3	P 0.047UF J 50V	
C889	ECQE6103KFB	P 0.06UF K 100V	
C890	ECQB1H681JF3	P 680PF J 50V	
C901	ECJ1VB1H104K	C 0.1UF K 50V	
C902	ECJ1VB1H104K	C 0.1UF K 50V	
C909	F2A1H221A115	E 220UF 50V	
C910	F2A1C471A256	E 470UF 16V	
C911	F2A1C471A256	E 470UF 16V	
C912	ECJ1VB1H104K	C 0.1UF K 50V	
C915	ECJ1VB1H104K	C 0.1UF K 50V	
C922	ECJ1VB1H104K	C 0.1UF K 50V	
C923	F2A1H221A115	E 220UF 50V	
C924	ECJ1VB1H104K	C 0.1UF K 50V	
C926	ECJ1VB1H104K	C 0.1UF K 50V	
C927	ECJ1VB1H104K	C 0.1UF K 50V	
C928	ECJ1VB1E105K	C 1UF K 25V	PAVCKM
C929	ECJ1VB1H104K	C 0.1UF K 50V	
C930	ECJ1VB1E105K	C 1UF K 25V	PAVCKM
C931	ECJ1VB1E105K	C 1UF K 25V	PAVCKM
C934	ECJ1VB1H104K	C 0.1UF K 50V	PAVCKM
C935	F2A1E221A225	E 220UF 25V	PAVCKM
C936	ECJ1VB1H104K	C 0.1UF K 50V	
C938	ECJ1VB1H103K	C 0.01UF K 50V	
C939	F2A1C471A256	E 470UF 16V	
C940	ECJ1VB1H104K	C 0.1UF K 50V	
C941	ECJ1VB1H104K	C 0.1UF K 50V	
C942	F2A1E221A487	E 220UF 25V	
C943	ECJ1VB1H104K	C 0.1UF K 50V	
C945	ECJ1VB1H103K	C 0.01UF K 50V	
C947	ECJ1VB1H104K	C 0.1UF K 50V	
C948	F2A1C471A256	E 470UF 16V	
C950	ECJ1VB1H104K	C 0.1UF K 50V	
C951	ECJ1VB1H104K	C 0.1UF K 50V	
C952	ECJ1VB1H104K	C 0.1UF K 50V	
C954	ECJ1VB1H104K	C 0.1UF K 50V	

Ref. No.	Part No.	Part Name & Description	Remarks
C956	ECJ1VB1H104K	C 0.1UF K 50V	
C961	ECJ1VB1H104K	C 0.1UF K 50V	
C962	ECJ1VB1H104K	C 0.1UF K 50V	
C963	ECJ1VB1H104K	C 0.1UF K 50V	
C964	ECJ1VB1H104K	C 0.1UF K 50V	
C965	ECJ1VB1H102K	C 1000PF K 50V	
C966	ECJ1VB1H104K	C 0.1UF K 50V	
C967	ECJ1VB1H104K	C 0.1UF K 50V	
C974	F2A1C471A256	E 470UF 16V	
C976	F2A1H221A115	E 220UF 50V	
C981	F2A1C102A252	E 1000UF 16V	
C982	F2A1C102A252	E 1000UF 16V	
C985	ECJ1VB1H104K	C 0.1UF K 50V	
C1003	ECEA1CKS220B	E 22UF 16V	
C1006	ECEA0JKS470B	E 47UF 6.3V	
C1007	ECJ1VB1H103K	C 0.01UF K 50V	
C1168	ECJ1VB1C104K	C 0.1UF K 16V	
C1181	ECJ0EB1H102K	C 1000PF K 10V	
C1182	ECJ0EB1H102K	C 1000PF K 10V	
C1185	ECJ0EB1H102K	C 1000PF K 10V	
C1186	ECJ0EB1H102K	C 1000PF K 10V	
C1822	F1G1A1040006	P 0.1UF 10V	
C1828	F2H1C470A009	E 47UF 16V	
C1831	F1G1A1040006	P 0.1UF 10V	
C1834	ECJ2FB1C474K	C 0.47UF K 16V	
C1835	ECJ1VB1C563K	C 0.056UF K 16V	
C1836	ECJ1VB1C104K	C 0.1UF K 16V	
C1837	ECJ1VB1H103K	C 0.01UF K 50V	
C1839	ECJ1VC1H101J	C 100PF J 50V	
C1840	ECJ1VF1A105Z	C 1UF Z 10V	
C1842	F1H0J1050013	P 1UF 10V	
C1843	F1H0J1050013	P 1UF 10V	
C1844	EEEBH0G470R	E 47UF 6.3V	
C1845	EEEBH0G470R	E 47UF 6.3V	
C1850	F1G1A1040006	P 0.1UF 10V	
C1851	F1G1A1040006	P 0.1UF 10V	
C1852	EEEBH0G470R	E 47UF 6.3V	
C1853	EEEBH0G470R	E 47UF 6.3V	
C1865	ECJ1VF1A105Z	C 1UF Z 10V	
C1866	ECJ1VF1A105Z	C 1UF Z 10V	
C1867	ECJ1VF1A105Z	C 1UF Z 10V	
C1868	ECJ1VF1A105Z	C 1UF Z 10V	
C1869	F2H1C470A009	E 47UF 16V	
C1870	ECJ1VB1C104K	C 0.1UF K 16V	
C1871	F2H1C470A009	E 47UF 16V	
C1872	ECJ1VB1C104K	C 0.1UF K 16V	
C2068	ECJ1VB1A105K	C 1UF K 10V	
C2101	ECJ1VB1E104K	C 0.1UF K 25V	
C2102	ECJ2FB1E105K	C 1UF 16V	
C2103	ECJ2FB1E105K	C 1UF 16V	
C2106	ECJ2FB1E105K	C 1UF 16V	
C2109	ECJ2FB1E105K	C 1UF 16V	
C2110	ECJ1VB1E104K	C 0.1UF K 25V	
C2111	ECJ2FB1E105K	C 1UF 16V	
C2112	ECJ1VB1E104K	C 0.1UF K 25V	
C2113	ECJ1VB1E104K	C 0.1UF K 25V	
C2114	ECJ1VB1E104K	C 0.1UF K 25V	
C2115	ECJ1VB1H153K	C 0.012UF K 50V	
C2116	ECJ1VB1E104K	C 0.1UF K 25V	
C2117	ECJ1VB1E104K	C 0.1UF K 25V	
C2118	ECJ1VB1H153K	C 0.012UF K 50V	
C2119	ECJ1VB1E104K	C 0.1UF K 25V	
C2120	ECJ1VB1E104K	C 0.1UF K 25V	
C2122	ECJ0EB1H102K	C 1000PF K 10V	
C2124	ECJ0EB1H102K	C 1000PF K 10V	
C2125	ECJ1VB1E104K	C 0.1UF K 25V	
C2126	ECJ1VB1C224K	C 0.22UF K 16V	
C2127	ECJ2FB1E475M	C 4.7UF 16V	
C2128	ECJ1VB1C224K	C 0.22UF K 16V	
C2129	ECJ2FB1E475M	C 4.7UF 16V	
C2130	F2A1C102A530	E 1000 UF 16V	
C2131	F2A1C102A530	E 1000 UF 16V	
C2132	ECJ1VB1H102K	C 1000PF K 50V	

Ref. No.	Part No.	Part Name & Description	Remarks
C2133	ECJ1VB1H102K	C 1000PF K 50V	
C2138	ECJ1VB1E104K	C 0.1UF K 25V	
C2139	F2A1E1010073	E 100UF 25V	
C2140	EEUFC1V221E	E 220UF 25V	
C2141	ECJ1VB1H103K	C 0.01UF K 50V	
C2142	F2H0J101A010	E 100UF 6.3V	
C2143	F2H0J101A010	E 100UF 6.3V	
C2144	F1H0J1050013	P 1UF 10V	
C2145	F2H1C470A009	E 47UF 16V	
C2146	ECJ2FB1E105K	C 1UF 16V	
C2147	ECJ2FB1E105K	C 1UF 16V	
C2162	ECJ2FB1E475M	C 4.7UF 16V	
C2163	ECJ2FB1E475M	C 4.7UF 16V	
C2172	F2H0J101A010	E 100UF 6.3V	
C2173	F2A1C101A244	E 100 UF 16V	
C2178	ECJ0EB1H102K	C 1000PF K 10V	
C2179	ECJ0EB1H102K	C 1000PF K 10V	
C2180	ECJ1VB1C224K	C 0.22UF K 16V	
C2181	ECJ1VB1C224K	C 0.22UF K 16V	
C2223	F2A1E1010073	E 100UF 25V	
C2367	EEEBH1C101UP	E 100UF J 16V	
C3062	ECJ1VF1A105Z	C 1UF Z 10V	
C3064	F2A1A471A994	E 470UF 10V	PAVCKM
C3065	ECJ1VB1C104K	C 0.1UF K 16V	
C3067	F1J0J1060004	C 0.01UF K 16V	
C3073	ECJ1VB1A105K	C 1UF K 10V	
C3076	ECJ1VB1A105K	C 1UF K 10V	
C3077	ECJ1VB1A105K	C 1UF K 10V	
C3200	ECJ1VB0J225K	C 1UF K 6.3V	
C3202	EEEBH1C101UP	E 100UF J 16V	
C3203	ECJ1VB1C224K	C 0.22UF K 16V	
C3204	F2H1C470A009	E 47UF 16V	
C3863	ECJ1VF1A105Z	C 1UF Z 10V	
C3866	F2A0J101A240	E 100UF 6.3V	
C3867	ECJ1VB1C104K	C 0.1UF K 16V	
C3870	ECJ1VF1H104Z	C 0.1UF Z 50V	
C3873	ECJ1VB1C104K	C 0.1UF K 16V	
C3874	ECJ1VB1C104K	C 0.1UF K 16V	
C4001	ECJ1VB1C104K	C 0.1UF K 16V	
C4004	ECJ1VB1C104K	C 0.1UF K 16V	
C4005	ECJ1VB1C104K	C 0.1UF K 16V	
C4006	ECJ1VB1C104K	C 0.1UF K 16V	
C4007	ECJ1VB1C104K	C 0.1UF K 16V	
C4008	ECJ1VB1C104K	C 0.1UF K 16V	
C4009	F1J0J1060004	C 0.01UF K 16V	
C4013	ECJ1VB1C104K	C 0.1UF K 16V	
C4014	ECJ1VB1C104K	C 0.1UF K 16V	
C4015	ECJ1VB1C104K	C 0.1UF K 16V	
C4016	ECJ1VB1C104K	C 0.1UF K 16V	
C4017	ECJ1VB1C104K	C 0.1UF K 16V	
C4018	ECJ1VB1C104K	C 0.1UF K 16V	
C4019	F1J0J1060004	C 0.01UF K 16V	
C4020	F1J0J1060004	C 0.01UF K 16V	
C4021	F1J0J1060004	C 0.01UF K 16V	
C4022	F1J0J1060004	C 0.01UF K 16V	
C4023	F1J0J1060004	C 0.01UF K 16V	
C4024	ECJ1VF1A105Z	C 1UF Z 10V	
C4025	ECJ1VB1C104K	C 0.1UF K 16V	
C4027	ECJ1VB1C104K	C 0.1UF K 16V	
C4029	ECJ1VB1C104K	C 0.1UF K 16V	
C4030	ECJ1VF1A105Z	C 1UF Z 10V	
C4031	ECJ1VB1C104K	C 0.1UF K 16V	
C4033	ECJ0EC1H101J	C 100PF J 10V	
C4034	F1G1A1040006	P 0.1UF 10V	
C4035	F1G1A1040006	P 0.1UF 10V	
C4036	ECJ1VB1A105K	C 1UF K 10V	
C4037	ECJ1VB1A105K	C 1UF K 10V	
C4038	ECJ1VB1A105K	C 1UF K 10V	
C4039	ECJ1VB1A105K	C 1UF K 10V	
C4040	ECJ1VB1A105K	C 1UF K 10V	
C4041	ECJ1VB1A105K	C 1UF K 10V	
C4042	F1G1A1040006	P 0.1UF 10V	
C4043	ECJ1VB1A105K	C 1UF K 10V	

Ref. No.	Part No.	Part Name & Description	Remarks
C4044	ECJ1VB1A105K	C 1UF K 10V	
C4045	FIG1A1040006	P 0.1UF 10V	
C4046	FIG1A1040006	P 0.1UF 10V	
C4049	FIG1A1040006	P 0.1UF 10V	
C4050	FIG1A1040006	P 0.1UF 10V	
C4051	ECJ1VB1C104K	C 0.1UF K 16V	
C4052	ECJ1VC1H560J	C 56PF J 50V	
C4053	ECJ1VC1H560J	C 56PF J 50V	
C4054	FIG1A1040006	P 0.1UF 10V	
C4055	FLJ0J1060004	C 0.01UF K 16V	
C4056	FIG1A1040006	P 0.1UF 10V	
C4057	FLJ0J1060004	C 0.01UF K 16V	
C4058	FIG1A1040006	P 0.1UF 10V	
C4059	FIG1A1040006	P 0.1UF 10V	
C4060	FIG1A1040006	P 0.1UF 10V	
C4061	ECJ1VB1C104K	C 0.1UF K 16V	
C4062	TKP470M1CD11	E 47UF 16V OR F2A1C470A244	
C4064	FIG1A1040006	P 0.1UF 10V	
C4065	ECJ0EB1H102K	C 1000PF K 10V	
C4066	FIG1A1040006	P 0.1UF 10V	
C4067	FIG1A1040006	P 0.1UF 10V	
C4068	FLJ0J1060004	C 0.01UF K 16V	
C4071	ECJ1VC1H180J	C 18PF J 50V	
C4072	ECJ1VC1H180J	C 18PF J 50V	
C4074	FIG1A1040006	P 0.1UF 10V	
C4075	FLJ0J1060004	C 0.01UF K 16V	
C4076	FIG1A1040006	P 0.1UF 10V	
C4077	FIG1A1040006	P 0.1UF 10V	
C4078	FIG1A1040006	P 0.1UF 10V	
C4079	ECJ1VB1C104K	C 0.1UF K 16V	
C4080	FIG1A1040006	P 0.1UF 10V	
C4081	ECJ1VB1C104K	C 0.1UF K 16V	
C4082	FIG1A1040006	P 0.1UF 10V	
C4083	ECJ0EB1H102K	C 1000PF K 10V	
C4084	FIG1A1040006	P 0.1UF 10V	
C4085	FIG1A1040006	P 0.1UF 10V	
C4086	FIG1A1040006	P 0.1UF 10V	
C4087	FIG1A1040006	P 0.1UF 10V	
C4088	FIG1A1040006	P 0.1UF 10V	
C4089	FIG1A1040006	P 0.1UF 10V	
C4090	FIG1A1040006	P 0.1UF 10V	
C4091	FIG1A1040006	P 0.1UF 10V	
C4092	FIG1A1040006	P 0.1UF 10V	
C4093	FIG1A1040006	P 0.1UF 10V	
C4094	FIG1A1040006	P 0.1UF 10V	
C4095	FLJ0J1060004	C 0.01UF K 16V	
C4096	ECJ1VB1C104K	C 0.1UF K 16V	
C4097	FIG1A1040006	P 0.1UF 10V	
C4098	ECJ1VB1H102K	C 1000PF K 50V	
C4099	FLJ0J1060004	C 0.01UF K 16V	
C4100	FIG1A1040006	P 0.1UF 10V	
C4101	FIG1A1040006	P 0.1UF 10V	
C4102	FLJ0J1060004	C 0.01UF K 16V	
C4103	ECJ0EC1H120J	C 12PF J 10V	
C4104	ECJ0EC1H220J	C 22PF J 10V	
C4105	ECJ0EC1H220J	C 22PF J 10V	
C4109	ECJ1VB1C104K	C 0.1UF K 16V	
C4110	ECJ2FB1A335K	C 3.3UF 16V	PAVCKM
C4111	FLJ0J1060004	C 0.01UF K 16V	
C4112	ECJ1VB1C104K	C 0.1UF K 16V	
C4114	EEFCD0G560ER	E 56UF 4V	
C4115	EEFCD0G560ER	E 56UF 4V	
C4117	ECJ1VC1H220J	C 22PF J 50V	
C4118	FLJ0J1060004	C 0.01UF K 16V	
C4119	ECJ0EC1H560J	C 56PF J 10V	
C4120	ECJ1VC1H101J	C 100PF J 50V	
C4121	ECJ1VC1H101J	C 100PF J 50V	
C4122	ECJ1VF1C104Z	C 0.1UF Z 16V	
C4123	ECJ1VB1C104K	C 0.1UF K 16V	
C4125	F4Z0G6860002	E 68UF 4V	
C4127	FLJ0J1060004	C 0.01UF K 16V	
C4128	F2H1C470A009	E 47UF 16V	

Ref. No.	Part No.	Part Name & Description	Remarks
C4129	FLJ0J1060004	C 0.01UF K 16V	
C4130	ECJ1VC1H120J	C 12PF J 50V	
C4131	ECJ1VC1H120J	C 12PF J 50V	
C4132	ECJ1VB1H102K	C 1000PF K 50V	
C4133	FIG1A1040006	P 0.1UF 10V	
C4134	ECJ1VB0J105K	C 1UF K 6.3V	
C4135	ECJ1VB1H103K	C 0.01UF K 50V	
C4148	ECJ2FB0J106M	C 10UF 6.3V	
C4149	ECJ2FB0J106M	C 10UF 6.3V	
C4182	ECJ2FB0J106M	C 10UF 6.3V	
C4183	ECJ2FB0J106M	C 10UF 6.3V	
C4501	FIG1A1040006	P 0.1UF 10V	
C4502	TKP470M1CD11	E 47UF 16V OR F2A1C470A244	
C4807	ECJ1VB1C104K	C 0.1UF K 16V	
C4808	ECJ1VB1C104K	C 0.1UF K 16V	
C5001	FIG1A1040006	P 0.1UF 10V	
C5002	FIG1A1040006	P 0.1UF 10V	
C5003	FIG1A1040006	P 0.1UF 10V	
C5004	FIG1A1040006	P 0.1UF 10V	
C5005	ECJ1VF1A105Z	C 1UF Z 10V	
C5006	ECJ1VF1A105Z	C 1UF Z 10V	
C5007	ECJ1VF1C104Z	C 0.1UF Z 16V	
C5008	ECJ1VB1C104K	C 0.1UF K 16V	
C5009	FLJ0J1060004	C 0.01UF K 16V	
C5010	FLJ0J1060004	C 0.01UF K 16V	
C5011	ECJ1VB1C104K	C 0.1UF K 16V	
C5012	ECJ1VB1C104K	C 0.1UF K 16V	
C5016	FLJ0J1060004	C 0.01UF K 16V	
C5017	ECJ1VB1C104K	C 0.1UF K 16V	
C5018	ECJ1VF1C104Z	C 0.1UF Z 16V	
C5019	FIG1A1040006	P 0.1UF 10V	
C5020	ECJ1VF1C104Z	C 0.1UF Z 16V	
C5021	ECJ1VF1H103Z	C 0.01UF Z 50V	
C5022	ECJ1VF1C104Z	C 0.1UF Z 16V	
C5023	ECJ1VF1H103Z	C 0.01UF Z 50V	
C5024	FIG1A1040006	P 0.1UF 10V	
C5025	FIG1A1040006	P 0.1UF 10V	
C5026	FLJ0J1060004	C 0.01UF K 16V	
C5027	ECJ1VF1C104Z	C 0.1UF Z 16V	
C5028	FIG1A1040006	P 0.1UF 10V	
C5029	ECJ1VB1C104K	C 0.1UF K 16V	
C5030	ECJ1VC1H150J	C 15PF J 50V	
C5031	FIG1A1040006	P 0.1UF 10V	
C5032	ECJ1VB1C104K	C 0.1UF K 16V	
C5033	FIG1A1040006	P 0.1UF 10V	
C5034	ECJ1VC1H150J	C 15PF J 50V	
C5036	ECJ1VF1C104Z	C 0.1UF Z 16V	
C5038	FIG1A1040006	P 0.1UF 10V	
C5040	FIG1A1040006	P 0.1UF 10V	
C5041	FIG1A1040006	P 0.1UF 10V	
C5042	FLJ0J1060004	C 0.01UF K 16V	
C5043	ECJ1VB1C104K	C 0.1UF K 16V	
C5044	ECJ1VB1C104K	C 0.1UF K 16V	
C5045	ECJ1VB1C104K	C 0.1UF K 16V	
C5046	ECJ1VB1C104K	C 0.1UF K 16V	
C5047	ECJ1VB1C104K	C 0.1UF K 16V	
C5048	ECJ1VB1C104K	C 0.1UF K 16V	
C5049	ECJ2FB0J225K	C 2.2UF 6.3V	
C5050	ECJ1VC1H471J	C 470PF J 50V	
C5051	FIH0J1050013	P 1UF 10V	
C5054	ECJ1VC1H101J	C 100PF J 50V	
C5055	FIG1A1040006	P 0.1UF 10V	
C5056	ECJ1VF1C104Z	C 0.1UF Z 16V	
C5060	ECJ1VB1C104K	C 0.1UF K 16V	
C5061	ECJ1VB1C104K	C 0.1UF K 16V	
SW901	K0F162B00002	POWER SWITCH	
X4001	H0J202500011	CRYSTAL OSCILLATOR	
X5001	H0J283500018	CRYSTAL OSCILLATOR	
F801	K5D502BNA005	FUSE	△

Ref. No.	Part No.	Part Name & Description	Remarks
F801-1	EYF52BC/L	FUSE BRACKET	
F801-2	EYF52BC/L	FUSE BRACKET	
TU101	ENG39D03GF	TUNER	PAVCKM ⚠
JK3001	K4BK13A00002	REAR AV TERMINAL	PAVCKM
JK3002	K4BK20A00003	REAR AV TERMINAL	PAVCKM
JK3003	K4BK04A00003	HDMI AUDIO TERMINAL	PAVCKM
JK3501	K4BK24B00003	SIDE AV TERMINAL	PAVCKM
JK5001	K1FA119E0008	HDMI TERMINAL	
JK5002	K1FA119E0008	HDMI TERMINAL	
RL801	K6B1CDA00028	RELAY	PAVCKM ⚠
RL802	K6B1CDA00028	RELAY	PAVCKM ⚠
RL803	K6B1CDA00028	RELAY (TX-26LE7X, TX-26LX70X)	PAVCKM ⚠
A1	K1KB23A00003	CONNECTOR	
A2	K1KB23A00003	CONNECTOR	
A3	K1KA04AA0190	CONNECTOR	
A4	K1KA05AA0193	CONNECTOR	
A5	K1KA10AA0194	CONNECTOR	
A7	K1KA08AA0193	CONNECTOR	
A8A	K1KB30B00044	CONNECTOR	
A9	K1KA10AA0105	CONNECTOR	
A10	K1KA08AA0193	CONNECTOR	
AP1	K1KA19A00007	CONNECTOR	
AP2	K1KA15A00118	CONNECTOR	
AP3	K1KA23A00005	CONNECTOR	
AP4	K1KA23A00005	CONNECTOR	
AP5	K1KA14AA0194	CONNECTOR	
AP6	K1KA03AA0190	CONNECTOR	
G1	K1KA05AA0193	CONNECTOR	
G2	K1KA10AA0191	CONNECTOR	
P1	K1KA02BA0073	CONNECTOR	PAVCKM ⚠
P2	K1KB19AA0032	CONNECTOR	
P3	K1KB15AA0032	CONNECTOR	
V1	K1KA08BA0061	CONNECTOR	
	TXN/A10MWS (TNP4G399AH)	CIRCUIT BOARD A (TX-26LE7X, TX-26LX70X)	⚠
	TXN/A10MWS (TNP4G399AM)	CIRCUIT BOARD A (TX-26LE7Y, TX-26LX70Y)	⚠
	TXN/G10MUS (TNP4G402AA)	CIRCUIT BOARD G	⚠
	TXN/P10MUS (TNP4G404AD)	CIRCUIT BOARD P (TX-26LE7X, TX-26LX70X)	⚠
	TXN/P10MUS (TNP4G404AH)	CIRCUIT BOARD P (TX-26LE7Y, TX-26LX70Y)	⚠
	TXN/V10MPS (TNP4G400AA)	CIRCUIT BOARD V	⚠
	TXNAP10MPS (TNP4G401AA)	CIRCUIT BOARD AP	⚠

17.3. TX-32LE7X/Y, TX-32LX70X/Y

Note:

All parts except parts mentioned [PAVCKM] in the Remarks column are supplied by PAVC-CSG.

Parts mentioned [PAVCKM] are supplied by PAVCKM.

Ref. No.	Part No.	Part Name & Description	Remarks
IC811	C0EAS0000004	IC	PAVCKM
IC830	C5HABZZ00138	IC	PAVCKM
IC880	C0DABYY00008	IC	
IC881	C0DAEZZ00005	IC	PAVCKM
IC902	C0DAAZH00020	IC	
IC903	C0DAEJG00001	IC	PAVCKM
IC904	C0DAAZG00014	IC	
IC905	C0DAAZG00014	IC	
IC906	C0DAAZG00014	IC	
IC1102	C3EBJC000061	IC	
IC1803	C0EBF0000354	IC	
IC1804	C0CBCYE00001	IC	
IC1805	C0DBAFF00026	IC	
IC2001	C1AB00002474	IC	
IC2005	C1BB00000947	IC	
IC4001	TVR4G27-1	IC (TX-32LX70X, TX-32LE7X)	
IC4001	TVR4G27-2	IC (TX-32LX70Y, TX-32LE7Y)	PAVCKM
IC4003	C1ZBZ0003426	IC	
IC4004	C1ZBZ0003191	IC	
IC4005	C0ABFA000012	IC	
IC5001	TVR4GAS652	IC	PAVCKM
IC5002	TVR4GAS653	IC	PAVCKM
IC5004	C1AB00002535	IC	
IC5005	C0DBFFD00003	IC	
PC841	B3PAA0000261	IC	△
PC880	B3PAA0000261	IC	△
RM1001	PNA4701M05TV	REMOTE CONTROL RECEIVER	
SN1001	B3L000000020	PHOTOELECTRIC COUPLER	
Q820	2SC13180WA	TRANSISTOR	
Q822	2SC3311A0A	TRANSISTOR	
Q880	2SA10180QA	TRANSISTOR	
Q900	B1ABCE000015	TRANSISTOR	
Q902	B1ABCE000015	TRANSISTOR	
Q903	B1ABCE000015	TRANSISTOR	
Q904	B1ABCE000015	TRANSISTOR	
Q905	B1ABCE000015	TRANSISTOR	
Q906	B1ABCE000015	TRANSISTOR	
Q1002	2SA207700L	TRANSISTOR	
Q1004	2SA207700L	TRANSISTOR	
Q1006	2SC584500L	TRANSISTOR	
Q1007	2SC584500L	TRANSISTOR	
Q1217	2SA207700L	TRANSISTOR	
Q1218	2SC584500L	TRANSISTOR	
Q1801	B1DHDC000028	TRANSISTOR	
Q1802	UNR521100L	TRANSISTOR	
Q1803	2SC584500L	TRANSISTOR	
Q1804	2SA207700L	TRANSISTOR	
Q1805	2SA207700L	TRANSISTOR	
Q1806	2SC584500L	TRANSISTOR	
Q2019	UNR521100L	TRANSISTOR	
Q2020	UNR521100L	TRANSISTOR	
Q2031	B1CBHD000002	TRANSISTOR	
Q2032	B1CBHD000002	TRANSISTOR	
Q2303	2SD0601A0L	TRANSISTOR	
Q2305	2SA207700L	TRANSISTOR	
Q2306	2SA207700L	TRANSISTOR	
Q2312	2SD0601A0L	TRANSISTOR	
Q2313	2SC584500L	TRANSISTOR	
Q3001	2SC584500L	TRANSISTOR	
Q3002	2SA207700L	TRANSISTOR	
Q3003	2SC584500L	TRANSISTOR	
Q3005	2SC584500L	TRANSISTOR	

Ref. No.	Part No.	Part Name & Description	Remarks
Q3006	2SC584500L	TRANSISTOR	
Q3007	2SA207700L	TRANSISTOR	
Q3200	2SC584500L	TRANSISTOR	
Q3201	2SC584500L	TRANSISTOR	
Q3202	2SC584500L	TRANSISTOR	
Q3203	2SC584500L	TRANSISTOR	
Q3204	2SA207700L	TRANSISTOR	
Q3205	2SD0602ASL	TRANSISTOR	
Q3801	2SA207700L	TRANSISTOR	
Q3806	2SC584500L	TRANSISTOR	
Q3807	2SC584500L	TRANSISTOR	
Q4001	2SC584500L	TRANSISTOR	
Q4002	2SA207700L	TRANSISTOR	
Q4003	2SA207700L	TRANSISTOR	
Q4020	2SC584500L	TRANSISTOR	
Q4021	2SC584500L	TRANSISTOR	
Q4049	2SC584500L	TRANSISTOR	
Q4050	2SA207700L	TRANSISTOR	
Q4120	UNR521100L	TRANSISTOR	
Q4121	UNR521100L	TRANSISTOR	
Q4501	2SC584500L	TRANSISTOR	
Q4502	2SC584500L	TRANSISTOR	
Q5001	2SC584500L	TRANSISTOR	
Q5002	2SC584500L	TRANSISTOR	
Q5003	2SC584500L	TRANSISTOR	
Q5004	2SC584500L	TRANSISTOR	
Q5008	B1MBACA00008	TRANSISTOR	
Q5009	B1MBACA00008	TRANSISTOR	
Q5019	2SC584500L	TRANSISTOR	
Q5020	2SC584500L	TRANSISTOR	
Q5021	2SC584500L	TRANSISTOR	
Q5022	UNR521100L	TRANSISTOR	
Q5023	B1MBACA00008	TRANSISTOR	
Q5024	2SC584500L	TRANSISTOR	
Q5025	UNR521100L	TRANSISTOR	
D801	ERZV10V621CS	DIODE	△
D802	BOFBAT000014	DIODE	PAVCKM
D810	BOHBSM000027	DIODE	
D811	BOHANM000032	DIODE	
D812	BOHFRJ000012	DIODE	
D820	B0AACK000004	DIODE	
D821	B0HAGM000005	DIODE	
D822	B0AACK000004	DIODE (TX-32LX70X, TX-32LE7X)	
D832	B0EAKT000018	DIODE	
D833	B0HAJL000003	DIODE	PAVCKM
D834	B0BA6R800025	DIODE	PAVCKM
D835	B0BA8R000010	DIODE	PAVCKM
D840	B0HAJL000003	DIODE	PAVCKM
D841	B0BA05600010	DIODE	PAVCKM
D842	B0HAJL000003	DIODE	PAVCKM
D843	B0HAJL000003	DIODE	PAVCKM
D880	B0BA5R600016	DIODE	
D881	B0HAJL000003	DIODE	PAVCKM
D882	B0BA03500012	DIODE (TX-32LX70X, TX-32LE7X)	
D882	B0BA02200015	DIODE (TX-32LX70Y, TX-32LE7Y)	
D883	B0HAJL000003	DIODE	PAVCKM
D884	B0HAJL000003	DIODE	PAVCKM
D885	B0BA03400009	DIODE	
D886	B0BA03400009	DIODE	
D887	ERZV10V621CS	DIODE	△
D888	B0BA04200005	DIODE	
D889	ERZV10V621CS	DIODE	△
D891	B0JAPK000011	DIODE	PAVCKM
D892	B0HAGV000004	DIODE	
D895	B0EBKT000007	DIODE	
D904	B0JCME000037	DIODE	
D907	B0JCME000037	DIODE	
D908	B0JCME000037	DIODE	
D909	B0HCMM000014	DIODE	
D910	B0HCMM000014	DIODE	

Ref. No.	Part No.	Part Name & Description	Remarks
D913	B0JCME000037	DIODE	
D919	B0JCPG000005	DIODE	
D922	B0JANE000006	DIODE	
D923	B0JANE000006	DIODE	
D924	B0BC01000044	DIODE	
D1001	B3CKE0000007	DIODE	
D1102	MA2J72900L	DIODE	
D1106	MAZ80620ML	DIODE	
D1107	MAZ80620ML	DIODE	
D1108	MAZ80620ML	DIODE	
D1109	MAZ80620ML	DIODE	
D1110	MAZ80620ML	DIODE	
D1810	MA2J11100L	DIODE	
D1811	MA2J11100L	DIODE	
D1812	MAZ82700ML	DIODE	
D1813	MA2J11100L	DIODE	
D1814	MAZ80620LL	DIODE	
D1815	MA2J11100L	DIODE	
D1816	MAZ80750ML	DIODE	
D1817	MA2J11100L	DIODE	
D1818	MAZ81300ML	DIODE	
D1819	MA2J11100L	DIODE	
D1820	MAZ80560ML	DIODE	
D1821	MA2J11100L	DIODE	
D1822	MAZ80560ML	DIODE	
D1823	MA2J11100L	DIODE	
D1824	MAZ82700ML	DIODE	
D1825	MA2J11100L	DIODE	
D2001	MA3X704D0L	DIODE	
D2006	MAZ80470ML	DIODE	
D2301	MA2J11100L	DIODE	
D2304	MA2J11100L	DIODE	
D2305	MA2J11100L	DIODE	
D3001	MAZ81400ML	DIODE	
D3002	MAZ81400ML	DIODE	
D3003	MAZ81400ML	DIODE	
D3004	MAZ81400ML	DIODE	
D3005	MAZ81400ML	DIODE	
D3006	MAZ81400ML	DIODE	
D3007	MAZ81400ML	DIODE	
D3008	MAZ81400ML	DIODE	
D3009	MAZ81400ML	DIODE	
D3013	MAZ81400ML	DIODE	
D3014	MAZ81400ML	DIODE	
D3015	MAZ81400ML	DIODE	
D3016	MAZ81400ML	DIODE	
D3017	MAZ81400ML	DIODE	
D3018	MAZ81400ML	DIODE	
D3021	MAZ81400ML	DIODE	
D3022	MAZ81400ML	DIODE	
D3023	MAZ81400ML	DIODE	
D3024	MAZ81400ML	DIODE	
D3025	MAZ81400ML	DIODE	
D3026	MAZ81400ML	DIODE	
D3027	MAZ81400ML	DIODE	
D3028	MAZ81400ML	DIODE	
D3031	MAZ81400ML	DIODE	
D3032	MAZ81400ML	DIODE	
D3033	MAZ81400ML	DIODE	
D3200	MAZ81500ML	DIODE	
D3203	MA2J11100L	DIODE	
D3204	MA2J11100L	DIODE	
D3205	MA2J11100L	DIODE	
D3206	MA2J11100L	DIODE	
D3207	MA2J11100L	DIODE	
D3208	MA2J11100L	DIODE	
D3209	MA2J11100L	DIODE	
D3210	MA2J11100L	DIODE	
D3211	MA2J11100L	DIODE	
D3215	MA2J11100L	DIODE	
D3216	MA2J11100L	DIODE	
D3217	MA2J11100L	DIODE	
D3219	MA2J72900L	DIODE	

Ref. No.	Part No.	Part Name & Description	Remarks
D3501	MAZ81400ML	DIODE	
D3502	MAZ81400ML	DIODE	
D3503	MAZ81400ML	DIODE	
D3504	MAZ81400ML	DIODE	
D3506	MAZ81400ML	DIODE	
D3507	MAZ81400ML	DIODE	
D3508	MAZ81400ML	DIODE	
D3509	MAZ81400ML	DIODE	
D3510	MAZ81400ML	DIODE	
D3511	MAZ81400ML	DIODE	
D3512	MAZ81400ML	DIODE	
D3513	MAZ81400ML	DIODE	
D4015	B0JCDD000002	DIODE	
D4121	MA2J11100L	DIODE	
D5001	EZJZ0V80008B	DIODE	
D5002	EZJZ0V80008B	DIODE	
D5003	EZJZ0V80008B	DIODE	
D5004	EZJZ0V80008B	DIODE	
D5005	EZJZ0V80008B	DIODE	
D5006	EZJZ0V80008B	DIODE	
D5007	EZJZ0V80008B	DIODE	
D5008	EZJZ0V80008B	DIODE	
D5009	EZJZ0V80008B	DIODE	
D5010	EZJZ0V80008B	DIODE	
D5011	EZJZ1V800AA	DIODE	
D5012	EZJZ0V80008B	DIODE	
D5013	EZJZ0V80008B	DIODE	
D5014	EZJZ1V800AA	DIODE	
D5015	EZJZ1V800AA	DIODE	
D5016	EZJZ0V80008B	DIODE	
D5017	EZJZ1V800AA	DIODE	
D5018	EZJZ0V80008B	DIODE	
D5019	EZJZ0V80008B	DIODE	
D5020	EZJZ0V80008B	DIODE	
D5021	B0HCMM000014	DIODE	
D5022	B0HCMM000014	DIODE	
D5023	MA2J72800L	DIODE	
D5026	B0HCMM000014	DIODE	
D5027	B0HCMM000014	DIODE	
L801	ETQR45T035A	COIL (TX-32LX70Y, TX-32LE7Y)	△
L811	BDC0309T-998	COIL	
L835	EXCELSA39E	COIL	
L837	J0JKA0000038	COIL	
L901	BDC0306V-902	COIL	
L904	G0C101K00041	COIL	
L911	G0A101ZA0034	COIL	
L913	G0C101K00023	COIL	
L915	G0A101ZA0041	COIL	
L918	BDC0306V-902	COIL	
L921	BDC0306V-902	COIL	
L922	G0A101ZA0041	COIL	
L930	BDC0306V-902	COIL	
L1805	J0JHC0000078	COIL	
L1806	J0JHC0000078	COIL	
L2001	G0A100ZA0033	COIL	
L2002	G0A100ZA0033	COIL	
L2003	J0JHC0000078	COIL	
L2005	J0JHC0000078	COIL	
L3800	J0JHC0000078	COIL	
L3801	G0A101EA0008	COIL	
L3802	J0JCC0000241	COIL	
L3803	J0JCC0000241	COIL	
L4001	J0JHC0000078	COIL	
L4002	J0JHC0000078	COIL	
L4003	J0JHC0000078	COIL	
L4004	J0JHC0000078	COIL	
L4005	J0JHC0000078	COIL	
L4006	J0JHC0000078	COIL	
L4007	J0JHC0000078	COIL	
L4008	J0JHC0000078	COIL	
L4009	J0JHC0000078	COIL	

Ref. No.	Part No.	Part Name & Description	Remarks
L4010	J0JHC0000078	COIL	
L4011	J0JHC0000078	COIL	
L4012	J0JHC0000078	COIL	
L4014	J0JHC0000078	COIL	
L4015	J0JHC0000078	COIL	
L4016	ELJFA6R8KFB	COIL	
L4017	J0JCC0000241	COIL	
L4018	J0JCC0000241	COIL	
L4020	J0JHC0000078	COIL	
L4022	J0JHC0000078	COIL	
L4502	J0JHC0000078	COIL	
L4904	J0JHC0000078	COIL	
L5003	J0JHC0000078	COIL	
L5004	J0JHC0000078	COIL	
L5005	J0JHC0000078	COIL	
L5006	J0JHC0000078	COIL	
L5007	J0JHC0000078	COIL	
L5009	J0JHC0000078	COIL	
L5010	J0JBC0000080	COIL	
L5011	J0JHC0000078	COIL	
L5012	J0JHC0000078	COIL	
L5013	J0JHC0000078	COIL	
FL4001	J0MAB0000169	COIL	
FL4002	J0MAB0000169	COIL	
FL4003	J0MAB0000169	COIL	
FL5001	FLJ1A1050020	FILTER	
FL5002	FLJ1A1050020	FILTER	
LF801	G0B153H00008	COIL (TX-32LX70X, TX-32LE7X)	PAVCKM △
LF801	G0B153H00003	COIL (TX-32LX70Y, TX-32LE7Y)	△
LF802	G0B153H00008	COIL (TX-32LX70X, TX-32LE7X)	PAVCKM △
LF802	G0B153H00003	COIL (TX-32LX70Y, TX-32LE7Y)	△
T801	ETS42BM166AD	TRANSFORMER	PAVCKM △
T880	ETS15AB146AH	TRANSFORMER	PAVCKM △
R801	D1F5100E0002	SAFETY RESISTOR (TX-32LX70X, TX-32LE7X)	
R802	ERG2SJW473E	M 47K OHM J 2W	PAVCKM
R803	DOAW825JA001	C 8.2OHM J 3/4W	PAVCKM △
R808	ERC12ZGK225D	S 2.2M OHM K 1/2W	△
R809	ERG2FJ331H	M 330 OHM J 2W (TX-32LX70Y, TX-32LE7Y)	
R813	RD16ST471J	C 470 OHM J 1/4W	
R820	RD16ST223J	C 22K OHM J 1/4W	
R821	RD16ST102J	C 1K OHM J 1/4W	
R824	RD16ST561J	C 560 OHM J 1/4W	
R831	ERG2SJW104E	M 100K OHM J 2W	
R832	RSS3GT470J	M 47 OHM J 3W	
R833	D0C1390JA051	39 OHM 1W	PAVCKM
R834	RD16ST102J	C 1K OHM J 1/4W	
R841	RD16ST823J	C 82K OHM J 1/4W	
R842	RD16ST391J	C 390 OHM J 1/4W	
R843	ERX2F2JR12H	M 0.12 OHM J 2W	PAVCKM
R844	ERX2F2JR15H	M 0.15 OHM J 2W	PAVCKM
R845	RD16ST473J	C 47K OHM J 1/4W	
R846	RD16ST182J	C 1.8K OHM J 1/4W	
R848	RD16ST561J	C 560 OHM J 1/4W	
R865	RD50SST100J	C 10 OHM J 1/2W	
R880	ERX12SJ1R5E	M 1.5 OHM J 1/2W (TX-32LX70X, TX-32LE7X)	
R880	ERX12SJ2R2E	M 2.2 OHM J 1/2W (TX-32LX70Y, TX-32LE7Y)	
R881	RD50SST181J	C 180 OHM J 1/2W	
R882	RD16ST123J	C 12K OHM J 1/4W	
R883	RD16ST104J	C 100K OHM J 1/4W	
R884	ERG2DJ474P	M 470K OHM J 2W	PAVCKM
R886	RSS1L104J	M 100K OHM J 1W	
R887	D0DK1R0JA019	SAFETY RESISTOR (TX-32LX70X, TX-32LE7X)	PAVCKM
R887	D1F5100E0002	SAFETY RESISTOR (TX-32LX70Y, TX-32LE7Y)	PAVCKM
R888	ERG1DJ334P	M 330 OHM J 1W	PAVCKM

Ref. No.	Part No.	Part Name & Description	Remarks
R889	EROS2THF6801	M 6.8K OHM F 1/4W	
R890	EROS2CHF4301	M 4.3K OHM F 1/4W	PAVCKM
R891	RD16ST330J	C 33 OHM J 1/4W	
R892	RD16ST332J	C 3.3K OHM J 1/4W	
R904	D0GB473JA041	M 47K OHM J 1/16W	
R905	D0GB103JA041	M 10K OHM J 1/16W	
R906	D0GB102JA041	M 1K OHM J 1/16W	
R908	D0GB102JA041	M 1K OHM J 1/16W	
R909	RD16ST103J	C 10K OHM J 1/4W	
R910	D0GB473JA041	M 47K OHM J 1/16W	
R911	ERJ6GEYJ102V	M 1K OHM J 1/10W	
R916	ERJ3EKF1201V	M 1.2K OHM F 1/16W	
R917	ERJ3EKF6491	M 6.49K OHM F 1/16W	PAVCKM
R918	ERJ3EKF1241V	M 1.24K OHM F 1/16W	
R919	ERJ3EKF6190	M 619 OHM F 1/16W	PAVCKM
R920	ERJ3EKF1001V	M 1K OHM F 1/16W	
R921	ERJ3EKF1691V	M 1.69K OHM F 1/16W	
R933	ERJ3EKF1303V	M 130K OHM F 1/16W	
R934	ERJ3EKF4222V	M 42.2K OHM F 1/16W	
R937	D0GB333JA041	M 33K OHM J 1/16W	
R941	D0GB103JA041	M 10K OHM J 1/16W	
R942	D0GB473JA041	M 47K OHM J 1/16W	
R943	RD16ST103J	C 10K OHM J 1/4W	
R946	D0GB102JA041	M 1K OHM J 1/16W	
R947	D0GB102JA041	M 1K OHM J 1/16W	
R949	ERJ3EKF2491V	M 2.49K OHM F 1/16W	
R950	ERJ3EKF8200V	M 8.2K OHM F 1/16W	
R951	D0GB103JA041	M 10K OHM J 1/16W	
R952	D0GB103JA041	M 10K OHM J 1/16W	
R953	D0GB473JA041	M 47K OHM J 1/16W	
R954	D0GB102JA041	M 1K OHM J 1/16W	
R956	D0GB473JA041	M 47K OHM J 1/16W	
R957	D0GB102JA041	M 1K OHM J 1/16W	
R960	RD50SST302J	C 3K OHM J 1/2W	
R961	RD50SST302J	C 3K OHM J 1/2W	
R962	RD50SST302J	C 3K OHM J 1/2W	
R963	RD50SST302J	C 3K OHM J 1/2W	
R964	RD50SST302J	C 3K OHM J 1/2W	
R965	RD50SST302J	C 3K OHM J 1/2W	
R966	RD50SST302J	C 3K OHM J 1/2W	
R967	RD50SST302J	C 3K OHM J 1/2W	
R1002	D0GB473JA041	M 47K OHM J 1/16W	
R1003	D0GB102JA041	M 1K OHM J 1/16W	
R1006	D0GB221JA041	M 220 OHM J 1/16W	
R1008	D0GB473JA041	M 47K OHM J 1/16W	
R1010	D0GB473JA041	M 47K OHM J 1/16W	
R1015	D0GB103JA041	M 10K OHM J 1/16W	
R1017	D0GB103JA041	M 10K OHM J 1/16W	
R1019	D0GB103JA041	M 10K OHM J 1/16W	
R1020	D0GB103JA041	M 10K OHM J 1/16W	
R1022	D0GB152JA041	M 1.5K OHM J 1/16W	
R1024	D0GBR00Z0002	M 0 OHM J 1/16W	
R1025	D0GB273JA041	M 27K OHM J 1/16W	
R1026	D0GB273JA041	M 27K OHM J 1/16W	
R1028	D0GB470JA041	M 47 OHM J 1/16W	
R1029	D0GB102JA041	M 1K OHM J 1/16W	
R1167	D0GBR00Z0002	M 0 OHM J 1/16W	
R1171	D0GB220JA041	M 22 OHM J 1/16W	
R1172	D0GB220JA041	M 22 OHM J 1/16W	
R1173	D0GB473JA041	M 47K OHM J 1/16W	
R1174	D0GB101JA041	M 100 OHM J 1/16W	
R1175	D0GB101JA041	M 100 OHM J 1/16W	
R1176	D0GB101JA041	M 100 OHM J 1/16W	
R1177	D0GB101JA041	M 100 OHM J 1/16W	
R1236	D0GB103JA041	M 10K OHM J 1/16W	
R1237	D0GB103JA041	M 10K OHM J 1/16W	
R1238	D0GB103JA041	M 10K OHM J 1/16W	
R1239	D0GB103JA041	M 10K OHM J 1/16W	
R1240	D0GB473JA041	M 47K OHM J 1/16W	
R1241	D0GB103JA041	M 10K OHM J 1/16W	
R1242	D0GB223JA041	M 22K OHM J 1/16W	
R1243	D0GB473JA041	M 47K OHM J 1/16W	
R1246	D0GB332JA041	M 3.3K OHM J 1/16W	

Ref. No.	Part No.	Part Name & Description	Remarks
R1247	D0GB332JA041	M 3.3K OHM J 1/16W	
R1248	D0GB562JA041	M 5.6K OHM J 1/16W	
R1700	D0GB103JA041	M 10K OHM J 1/16W	
R1701	D0GB393JA041	M 39K OHM J 1/16W	
R1702	D0GB393JA041	M 39K OHM J 1/16W	
R1811	ERJ6GEYJ103V	M 10K OHM J 1/10W	
R1812	D0GB333JA041	M 33K OHM J 1/16W	
R1813	D0GB472JA041	M 4.7K OHM J 1/16W	
R1814	D0GBR00Z0002	M 0 OHM J 1/16W	
R1815	ERJ6GEYJ103V	M 10K OHM J 1/10W	
R1816	D0GB223JA041	M 22K OHM J 1/16W	
R1818	D0GB102JA041	M 1K OHM J 1/16W	
R1819	ERJ3EKF5231V	M 5.23K OHM F 1/16W	
R1820	ERJ3EKF2202V	M 22K OHM F 1/16W	
R1823	D0GB473JA041	M 47K OHM J 1/16W	
R1824	D0GB103JA041	M 10K OHM J 1/16W	
R1825	D0GB473JA041	M 47K OHM J 1/16W	
R1826	D0GB103JA041	M 10K OHM J 1/16W	
R1827	D0GB472JA041	M 4.7K OHM J 1/16W	
R1828	D0GB472JA041	M 4.7K OHM J 1/16W	
R1829	D0GB472JA041	M 4.7K OHM J 1/16W	
R1830	D0GB472JA041	M 4.7K OHM J 1/16W	
R1831	D0GB102JA041	M 1K OHM J 1/16W	
R1832	D0GB102JA041	M 1K OHM J 1/16W	
R1834	D0GBR00Z0002	M 0 OHM J 1/16W	
R2096	ERJ2GEJ103X	M 10K OHM J 1/4W	
R2097	ERJ2GEJ393X	M 39K OHM 1/4W	
R2098	ERJ3EKF3902V	M 39K OHM F 1/16W	
R2099	D0GB100JA041	M 10 OHM J 1/16W	
R2100	D0GB100JA041	M 10 OHM J 1/16W	
R2101	D0GB220JA041	M 22 OHM J 1/16W	
R2102	D0GB220JA041	M 22 OHM J 1/16W	
R2103	D0GB472JA041	M 4.7K OHM J 1/16W	
R2104	D0GB472JA041	M 4.7K OHM J 1/16W	
R2105	D0GB472JA041	M 4.7K OHM J 1/16W	
R2106	D0GB472JA041	M 4.7K OHM J 1/16W	
R2107	D0GB153JA041	M 15K OHM J 1/16W	
R2108	D0GB153JA041	M 15K OHM J 1/16W	
R2109	D0GB103JA041	M 10K OHM J 1/16W	
R2111	D0GB103JA041	M 10K OHM J 1/16W	
R2112	ERJ2GEJ104X	M 100K OHM J 1/4W	
R2113	ERJ2GEJ104X	M 100K OHM J 1/4W	
R2114	ERJ2GEJ154X	M 150K OHM J 1/4W	
R2115	ERJ2GEJ393X	M 39K OHM 1/4W	
R2118	D0GBR00Z0002	M 0 OHM J 1/16W	
R2121	ERJ2GEJ104X	M 100K OHM J 1/4W	
R2122	ERJ2GEJ154X	M 150K OHM J 1/4W	
R2139	ERJ2GEJ103X	M 10K OHM J 1/4W	
R2140	ERJ2GEJ103X	M 10K OHM J 1/4W	
R2148	D0GB682JA041	M 6.8K OHM J 1/16W	
R2149	D0GB682JA041	M 6.8K OHM J 1/16W	
R2152	ERJ2GEJ104X	M 100K OHM J 1/4W	
R2153	ERJ2GEJ104X	M 100K OHM J 1/4W	
R2154	ERJ2GEJ104X	M 100K OHM J 1/4W	
R2155	D0GB105JA041	M 1M OHM F 1/16W	
R2156	D0GB105JA041	M 1M OHM F 1/16W	
R2159	ERJ2GEJ104X	M 100K OHM J 1/4W	
R2160	ERJ2GEJ104X	M 100K OHM J 1/4W	
R2303	ERJ2GEJ103X	M 10K OHM J 1/4W	
R2304	ERJ2GEJ103X	M 10K OHM J 1/4W	
R2306	ERJ2GEJ104X	M 100K OHM J 1/4W	
R2307	ERJ2GEJ103X	M 10K OHM J 1/4W	
R2308	D0GB104JA041	M 100K OHM J 1/16W	
R2310	D0GB222JA041	M 2.2K OHM J 1/16W	
R2313	ERJ2GEJ104X	M 100K OHM J 1/4W	
R2314	ERJ2GEJ105X	M 1M OHM J 1/4W	
R2381	ERJ2GEJ102X	M 1K OHM J 1/4W	
R2382	ERJ2GEJ104X	M 100K OHM J 1/4W	
R2383	ERJ2GEJ103X	M 10K OHM J 1/4W	
R3001	D0GB184JA041	M 180K OHM J 1/16W	
R3002	D0GB184JA041	M 180K OHM J 1/16W	
R3003	D1BD75R0A044	M 75 OHM 1/10W	
R3004	D1BD75R0A044	M 75 OHM 1/10W	

Ref. No.	Part No.	Part Name & Description	Remarks
R3005	D1BD75R0A044	M 75 OHM 1/10W	
R3006	D0GB184JA041	M 180K OHM J 1/16W	
R3007	D0GB184JA041	M 180K OHM J 1/16W	
R3010	D1BD75R0A044	M 75 OHM 1/10W	
R3011	D0GB184JA041	M 180K OHM J 1/16W	
R3012	D0GB184JA041	M 180K OHM J 1/16W	
R3013	D1BD75R0A044	M 75 OHM 1/10W	
R3014	D1BD75R0A044	M 75 OHM 1/10W	
R3015	D1BD75R0A044	M 75 OHM 1/10W	
R3019	D1BD75R0A044	M 75 OHM 1/10W	
R3020	D0GB431JA041	M 430 OHM J 1/16W	
R3021	D0GB431JA041	M 430 OHM J 1/16W	
R3022	ERJ6GEYJ331V	M 330 OHM J 1/10W	
R3023	ERJ6GEYJ471V	M 470 OHM J 1/10W	
R3024	ERJ6GEYJ271V	M 270 OHM J 1/10W	
R3026	D0GB473JA041	M 47K OHM J 1/16W	
R3027	D0GB393JA041	M 39K OHM J 1/16W	
R3034	D0GB184JA041	M 180K OHM J 1/16W	
R3035	D0GB101JA041	M 100 OHM J 1/16W	
R3036	D0GB101JA041	M 100 OHM J 1/16W	
R3037	D0GB101JA041	M 100 OHM J 1/16W	
R3038	D0GB101JA041	M 100 OHM J 1/16W	
R3039	D0GB105JA041	M 1M OHM F 1/16W	
R3040	D0GB274JA041	M 270K OHM J 1/16W	
R3041	D0GB473JA041	M 47K OHM J 1/16W	
R3042	D0GB102JA041	M 1K OHM J 1/16W	
R3043	D0GB184JA041	M 180K OHM J 1/16W	
R3045	D0GBR00Z0002	M 0 OHM J 1/16W	
R3049	D0GBR00Z0002	M 0 OHM J 1/16W	
R3050	D0GBR00Z0002	M 0 OHM J 1/16W	
R3051	D0GBR00Z0002	M 0 OHM J 1/16W	
R3052	D0GBR00Z0002	M 0 OHM J 1/16W	
R3053	D0GBR00Z0002	M 0 OHM J 1/16W	
R3100	D0GBR00Z0002	M 0 OHM J 1/16W	
R3101	D0GBR00Z0002	M 0 OHM J 1/16W	
R3102	D0GBR00Z0002	M 0 OHM J 1/16W	
R3103	D0GBR00Z0002	M 0 OHM J 1/16W	
R3104	D0GBR00Z0002	M 0 OHM J 1/16W	
R3105	D0GBR00Z0002	M 0 OHM J 1/16W	
R3106	D0GBR00Z0002	M 0 OHM J 1/16W	
R3107	D0GBR00Z0002	M 0 OHM J 1/16W	
R3108	D0GBR00Z0002	M 0 OHM J 1/16W	
R3109	D0GBR00Z0002	M 0 OHM J 1/16W	
R3110	D0GB102JA041	M 1K OHM J 1/16W	
R3111	D0GBR00Z0002	M 0 OHM J 1/16W	
R3112	D0GB102JA041	M 1K OHM J 1/16W	
R3116	D0GBR00Z0002	M 0 OHM J 1/16W	
R3117	D0GBR00Z0002	M 0 OHM J 1/16W	
R3118	D0GB102JA041	M 1K OHM J 1/16W	
R3119	D0GBR00Z0002	M 0 OHM J 1/16W	
R3120	D0GB102JA041	M 1K OHM J 1/16W	
R3121	D0GBR00Z0002	M 0 OHM J 1/16W	
R3122	D0GBR00Z0002	M 0 OHM J 1/16W	
R3123	D0GBR00Z0002	M 0 OHM J 1/16W	
R3124	D0GBR00Z0002	M 0 OHM J 1/16W	
R3128	D0GBR00Z0002	M 0 OHM J 1/16W	
R3129	D0GB102JA041	M 1K OHM J 1/16W	
R3130	D0GB102JA041	M 1K OHM J 1/16W	
R3200	D0GB103JA041	M 10K OHM J 1/16W	
R3201	D0GB473JA041	M 47K OHM J 1/16W	
R3203	D0GB103JA041	M 10K OHM J 1/16W	
R3204	ERJ14YJ222U	M 22K OHM J 1/4W	
R3205	ERJ14YJ222U	M 22K OHM J 1/4W	
R3206	D0GB223JA041	M 22K OHM J 1/16W	
R3207	D0GB332JA041	M 3.3K OHM J 1/16W	
R3208	D0GB103JA041	M 10K OHM J 1/16W	
R3209	D0GB473JA041	M 47K OHM J 1/16W	
R3210	D0GB332JA041	M 3.3K OHM J 1/16W	
R3215	D0GB103JA041	M 10K OHM J 1/16W	
R3218	D0GB103JA041	M 10K OHM J 1/16W	
R3221	D0GB103JA041	M 10K OHM J 1/16W	
R3227	D0GB103JA041	M 10K OHM J 1/16W	
R3229	D0GB153JA041	M 15K OHM J 1/16W	

Ref. No.	Part No.	Part Name & Description	Remarks
R3230	D0GB473JA041	M 47K OHM J 1/16W	
R3231	D0GB103JA041	M 10K OHM J 1/16W	
R3233	D0GB473JA041	M 47K OHM J 1/16W	
R3234	D0GB222JA041	M 2.2K OHM J 1/16W	
R3235	D0GB152JA041	M 1.5K OHM J 1/16W	
R3236	D0GB223JA041	M 22K OHM J 1/16W	
R3237	D0GB473JA041	M 47K OHM J 1/16W	
R3502	D1BD75R0A044	M 75 OHM 1/10W	
R3505	D1BD75R0A044	M 75 OHM 1/10W	
R3509	D1BD75R0A044	M 75 OHM 1/10W	
R3510	ERJ6GEYJ102V	M 1K OHM J 1/10W	
R3512	ERJ6GEYJ102V	M 1K OHM J 1/10W	
R3513	ERJ6GEYJ184V	M 180K OHM J 1/10W	
R3514	ERJ6GEYJ184V	M 180K OHM J 1/10W	
R3800	D0GB101JA041	M 100 OHM J 1/16W	
R3869	D0GB103JA041	M 10K OHM J 1/16W	
R3879	D0GB221JA041	M 220 OHM J 1/16W	
R3882	D0GB102JA041	M 1K OHM J 1/16W	
R3883	D0GB331JA041	M 330 OHM J 1/16W	
R3884	D0GBR00Z0002	M 0 OHM J 1/16W	
R3885	D0GBR00Z0002	M 0 OHM J 1/16W	
R3911	D0GB103JA041	M 10K OHM J 1/16W	
R3912	D0GB332JA041	M 3.3K OHM J 1/16W	
R3914	D0GB332JA041	M 3.3K OHM J 1/16W	
R3915	D0GB122JA041	N 1.2K OHM J 1/16W	
R3916	D0GB471JA041	M 470 OHM J 1/16W	
R3917	D0GB561JA041	M 560 OHM J 1/16W	
R4001	D0GB273JA041	M 27K OHM J 1/16W	
R4003	D0GB102JA041	M 1K OHM J 1/16W	
R4005	ERJ2GEJ103X	M 10K OHM J 1/4W	
R4007	D0GB101JA041	M 100 OHM J 1/16W	
R4008	D0GB101JA041	M 100 OHM J 1/16W	
R4009	EXB2HV104JV	100K OHM	
R4011	D0GB102JA041	M 1K OHM J 1/16W	
R4012	D0GB101JA041	M 100 OHM J 1/16W	
R4014	D0GB101JA041	M 100 OHM J 1/16W	
R4015	ERJ2GEJ104X	M 100K OHM J 1/4W	
R4016	D0GB103JA041	M 10K OHM J 1/16W	
R4017	D0GB103JA041	M 10K OHM J 1/16W	
R4018	ERJ2GEJ473X	M 47K OHM J	
R4019	D0GB473JA041	M 47K OHM J 1/16W	
R4020	D0GB103JA041	M 10K OHM J 1/16W	
R4021	D0GB103JA041	M 10K OHM J 1/16W	
R4022	D0GB473JA041	M 47K OHM J 1/16W	
R4023	D0GB101JA041	M 100 OHM J 1/16W	
R4025	D0GB101JA041	M 100 OHM J 1/16W	
R4026	D0GBR00Z0002	M 0 OHM J 1/16W	
R4028	D0GB220JA041	M 22 OHM J 1/16W	
R4031	D0GBR00Z0002	M 0 OHM J 1/16W	
R4032	D0GBR00Z0002	M 0 OHM J 1/16W	
R4034	D0GB101JA041	M 100 OHM J 1/16W	
R4038	ERJ2GEJ822X	M 8.2K OHM J	
R4047	D0GB101JA041	M 100 OHM J 1/16W	
R4048	D0GB101JA041	M 100 OHM J 1/16W	
R4049	D0GB101JA041	M 100 OHM J 1/16W	
R4050	D0GB101JA041	M 100 OHM J 1/16W	
R4053	D0GB101JA041	M 100 OHM J 1/16W	
R4055	D0GB101JA041	M 100 OHM J 1/16W	
R4057	D0GB101JA041	M 100 OHM J 1/16W	
R4058	D0GB101JA041	M 100 OHM J 1/16W	
R4059	D0GB101JA041	M 100 OHM J 1/16W	
R4061	D0GB220JA041	M 22 OHM J 1/16W	
R4062	D0GB102JA041	M 1K OHM J 1/16W	
R4063	D0GB220JA041	M 22 OHM J 1/16W	
R4064	D0GB473JA041	M 47K OHM J 1/16W	
R4065	D0GB220JA041	M 22 OHM J 1/16W	
R4066	D0GB101JA041	M 100 OHM J 1/16W	
R4069	D0GB101JA041	M 100 OHM J 1/16W	
R4071	D0GB103JA041	M 10K OHM J 1/16W	
R4072	D0GB101JA041	M 100 OHM J 1/16W	
R4077	D0GB220JA041	M 22 OHM J 1/16W	
R4078	D0GB102JA041	M 1K OHM J 1/16W	
R4079	D0GB101JA041	M 100 OHM J 1/16W	

Ref. No.	Part No.	Part Name & Description	Remarks
R4080	D0GB220JA041	M 22 OHM J 1/16W	
R4081	D0GB101JA041	M 100 OHM J 1/16W	
R4082	D0GBR00Z0002	M 0 OHM J 1/16W	
R4089	D0GB151JA041	M 150 OHM J 1/16W	
R4092	D0GB102JA041	M 1K OHM J 1/16W	
R4093	D0GB103JA041	M 10K OHM J 1/16W	
R4094	D0GB151JA041	M 150 OHM J 1/16W	
R4097	D0GB151JA041	M 150 OHM J 1/16W	
R4098	D0GB151JA041	M 150 OHM J 1/16W	
R4099	D0GB151JA041	M 150 OHM J 1/16W	
R4100	D0GB151JA041	M 150 OHM J 1/16W	
R4101	D0GB103JA041	M 10K OHM J 1/16W	
R4102	D0GB151JA041	M 150 OHM J 1/16W	
R4103	D0GB103JA041	M 10K OHM J 1/16W	
R4104	D0GB332JA041	M 3.3K OHM J 1/16W	
R4105	D0GB103JA041	M 10K OHM J 1/16W	
R4106	D0GB103JA041	M 10K OHM J 1/16W	
R4107	D0GB151JA041	M 150 OHM J 1/16W	
R4108	D0GB102JA041	M 1K OHM J 1/16W	
R4109	D0GB151JA041	M 150 OHM J 1/16W	
R4110	D0GB102JA041	M 1K OHM J 1/16W	
R4111	D0GB151JA041	M 150 OHM J 1/16W	
R4112	D0GBR00Z0002	M 0 OHM J 1/16W	
R4113	D0GB151JA041	M 150 OHM J 1/16W	
R4114	D0GB101JA041	M 100 OHM J 1/16W	
R4115	D0GB151JA041	M 150 OHM J 1/16W	
R4116	D0GB102JA041	M 1K OHM J 1/16W	
R4117	D0GB151JA041	M 150 OHM J 1/16W	
R4118	D0GB471JA041	M 470 OHM J 1/16W	
R4119	D0GBR00Z0002	M 0 OHM J 1/16W	
R4120	D0GBR00Z0002	M 0 OHM J 1/16W	
R4121	D0GB562JA041	M 5.6K OHM J 1/16W	
R4122	D0GBR00Z0002	M 0 OHM J 1/16W	
R4123	D0GB151JA041	M 150 OHM J 1/16W	
R4124	D0GBR00Z0002	M 0 OHM J 1/16W	
R4125	D0GB151JA041	M 150 OHM J 1/16W	
R4126	D0GB151JA041	M 150 OHM J 1/16W	
R4127	D0GB151JA041	M 150 OHM J 1/16W	
R4128	ERJ2GEJ103X	M 10K OHM J 1/4W	
R4129	D0GB182JA041	M 1.8K OHM J 1/16W	
R4130	D0GBR00Z0002	M 0 OHM J 1/16W	
R4131	D0GB221JA041	M 220 OHM J 1/16W	
R4132	D0GB221JA041	M 220 OHM J 1/16W	
R4133	D0GBR00Z0002	M 0 OHM J 1/16W	
R4134	D0GB331JA041	M 330 OHM J 1/16W	
R4135	D0GB331JA041	M 330 OHM J 1/16W	
R4136	D0GB223JA041	M 22K OHM J 1/16W	
R4138	D0GB103JA041	M 10K OHM J 1/16W	
R4139	D0GB103JA041	M 10K OHM J 1/16W	
R4140	D0GB272JA041	M 2.7K OHM J 1/16W	
R4141	D0GB121JA041	M 120 OHM J 1/16W	
R4146	D0GBR00Z0002	M 0 OHM J 1/16W	
R4148	D0GBR00Z0002	M 0 OHM J 1/16W	
R4188	D0GB102JA041	M 1K OHM J 1/16W	
R4189	D0GB101JA041	M 100 OHM J 1/16W	
R4191	D0GB103JA041	M 10K OHM J 1/16W	
R4192	D0GB103JA041	M 10K OHM J 1/16W	
R4193	D0GB103JA041	M 10K OHM J 1/16W	
R4194	ERJ3EKF1000V	M 100 OHM F 1/16W	
R4195	D0GB101JA041	M 100 OHM J 1/16W	
R4196	ERJ3EKF1000V	M 100 OHM F 1/16W	
R4197	D0GB101JA041	M 100 OHM J 1/16W	
R4198	ERJ3EKF1000V	M 100 OHM F 1/16W	
R4199	D0GB103JA041	M 10K OHM J 1/16W	
R4200	ERJ3EKF1000V	M 100 OHM F 1/16W	
R4201	D0GB103JA041	M 10K OHM J 1/16W	
R4202	ERJ3EKF1000V	M 100 OHM F 1/16W	
R4203	D0GB102JA041	M 1K OHM J 1/16W	
R4204	ERJ3EKF1600V	M 160 OHM F 1/16W	
R4205	ERJ3EKF1600V	M 160 OHM F 1/16W	
R4206	ERJ3EKF1600V	M 160 OHM F 1/16W	
R4207	ERJ3EKF1600V	M 160 OHM F 1/16W	
R4208	ERJ3EKF1600V	M 160 OHM F 1/16W	

Ref. No.	Part No.	Part Name & Description	Remarks
R4209	D0GBR00Z0002	M 0 OHM J 1/16W	
R4210	D0GBR00Z0002	M 0 OHM J 1/16W	
R4214	D0GB101JA041	M 100 OHM J 1/16W	
R4215	D0GB101JA041	M 100 OHM J 1/16W	
R4216	D0GB103JA041	M 10K OHM J 1/16W	
R4217	D0GB101JA041	M 100 OHM J 1/16W	
R4218	D0GB101JA041	M 100 OHM J 1/16W	
R4219	D0GB102JA041	M 1K OHM J 1/16W	
R4220	D0GB102JA041	M 1K OHM J 1/16W	
R4221	D0GB102JA041	M 1K OHM J 1/16W	
R4222	D0GB103JA041	M 10K OHM J 1/16W	
R4225	D0GB103JA041	M 10K OHM J 1/16W	
R4226	D0GB332JA041	M 3.3K OHM J 1/16W	
R4228	D0GB102JA041	M 1K OHM J 1/16W	
R4229	D0GB392JA041	M 3.9K OHM J 1/16W	
R4230	D0GB392JA041	M 3.9K OHM J 1/16W	
R4231	D0GB103JA041	M 10K OHM J 1/16W	
R4232	D0GB103JA041	M 10K OHM J 1/16W	
R4233	D0GB103JA041	M 10K OHM J 1/16W	
R4234	D0GB103JA041	M 10K OHM J 1/16W	
R4235	D0GB103JA041	M 10K OHM J 1/16W	
R4236	D0GB103JA041	M 10K OHM J 1/16W	
R4237	D0GB103JA041	M 10K OHM J 1/16W	
R4238	D0GB103JA041	M 10K OHM J 1/16W	
R4239	D0GB103JA041	M 10K OHM J 1/16W	
R4240	D0GB103JA041	M 10K OHM J 1/16W	
R4241	D0GB103JA041	M 10K OHM J 1/16W	
R4242	D0GB103JA041	M 10K OHM J 1/16W	
R4243	D0GB103JA041	M 10K OHM J 1/16W	
R4244	D0GB101JA041	M 100 OHM J 1/16W	
R4245	D0GB103JA041	M 10K OHM J 1/16W	
R4246	D0GB103JA041	M 10K OHM J 1/16W	
R4247	D0GB103JA041	M 10K OHM J 1/16W	
R4248	D0GB103JA041	M 10K OHM J 1/16W	
R4249	D0GB103JA041	M 10K OHM J 1/16W	
R4253	D0GB1R8JA040	M 1.8 OHM J 1/16W	
R4254	D0GB103JA041	M 10K OHM J 1/16W	
R4255	D0GB104JA041	M 100K OHM J 1/16W	
R4256	D0GBR00Z0002	M 0 OHM J 1/16W	
R4257	D0GB103JA041	M 10K OHM J 1/16W	
R4258	D0GB473JA041	M 47K OHM J 1/16W	
R4259	D0GB473JA041	M 47K OHM J 1/16W	
R4271	D0GB221JA041	M 220 OHM J 1/16W	
R4272	D0GB221JA041	M 220 OHM J 1/16W	
R4273	D0GB221JA041	M 220 OHM J 1/16W	
R4274	D0GB221JA041	M 220 OHM J 1/16W	
R4275	D0GB221JA041	M 220 OHM J 1/16W	
R4276	D0GB221JA041	M 220 OHM J 1/16W	
R4277	D0GB221JA041	M 220 OHM J 1/16W	
R4278	D0GB221JA041	M 220 OHM J 1/16W	
R4279	D0GB221JA041	M 220 OHM J 1/16W	
R4280	D0GB221JA041	M 220 OHM J 1/16W	
R4281	D0GB332JA041	M 3.3K OHM J 1/16W	
R4282	D0GB332JA041	M 3.3K OHM J 1/16W	
R4328	D0GB101JA041	M 100 OHM J 1/16W	
R4501	D0GB473JA041	M 47K OHM J 1/16W	
R4502	D0GB103JA041	M 10K OHM J 1/16W	
R4504	D0GB103JA041	M 10K OHM J 1/16W	
R4505	D0GB103JA041	M 10K OHM J 1/16W	
R4506	D0GB473JA041	M 47K OHM J 1/16W	
R4810	D0GB223JA041	M 22K OHM J 1/16W	
R4811	D0GB333JA041	M 33K OHM J 1/16W	
R5001	D0GB390JA041	M 39 OHM J 1/16W	
R5002	D0GB390JA041	M 39 OHM J 1/16W	
R5005	D0GB103JA041	M 10K OHM J 1/16W	
R5006	D0GB103JA041	M 10K OHM J 1/16W	
R5007	D0GB2R7JA040	M 2.7 OHM J 1/16W	
R5008	D0GB2R7JA040	M 2.7 OHM J 1/16W	
R5009	D0GB2R7JA040	M 2.7 OHM J 1/16W	
R5010	D0GB2R7JA040	M 2.7 OHM J 1/16W	
R5011	D0GB2R7JA040	M 2.7 OHM J 1/16W	
R5012	D0GB2R7JA040	M 2.7 OHM J 1/16W	
R5013	D0GB2R7JA040	M 2.7 OHM J 1/16W	

Ref. No.	Part No.	Part Name & Description	Remarks
R5014	D0GB2R7JA040	M 2.7 OHM J 1/16W	
R5015	D0GB2R7JA040	M 2.7 OHM J 1/16W	
R5016	D0GB2R7JA040	M 2.7 OHM J 1/16W	
R5017	D0GB2R7JA040	M 2.7 OHM J 1/16W	
R5018	D0GB2R7JA040	M 2.7 OHM J 1/16W	
R5019	D0GB2R7JA040	M 2.7 OHM J 1/16W	
R5020	D0GB2R7JA040	M 2.7 OHM J 1/16W	
R5021	D0GB2R7JA040	M 2.7 OHM J 1/16W	
R5022	D0GB2R7JA040	M 2.7 OHM J 1/16W	
R5024	D0GB103JA041	M 10K OHM J 1/16W	
R5025	D0GB103JA041	M 10K OHM J 1/16W	
R5027	D0GB103JA041	M 10K OHM J 1/16W	
R5028	D0GB103JA041	M 10K OHM J 1/16W	
R5029	D0GB103JA041	M 10K OHM J 1/16W	
R5030	D0GB472JA041	M 4.7K OHM J 1/16W	
R5031	D0GB472JA041	M 4.7K OHM J 1/16W	
R5032	D0GB103JA041	M 10K OHM J 1/16W	
R5035	D0GB472JA041	M 4.7K OHM J 1/16W	
R5036	D0GB472JA041	M 4.7K OHM J 1/16W	
R5038	D0GB473JA041	M 47K OHM J 1/16W	
R5039	D0GB560JA041	M 56 OHM J 1/16W	
R5040	D0GB473JA041	M 47K OHM J 1/16W	
R5041	D0GB560JA041	M 56 OHM J 1/16W	
R5043	D0GB560JA041	M 56 OHM J 1/16W	
R5045	D0GB560JA041	M 56 OHM J 1/16W	
R5048	D0GB472JA041	M 4.7K OHM J 1/16W	
R5049	D0GB472JA041	M 4.7K OHM J 1/16W	
R5052	D0GB472JA041	M 4.7K OHM J 1/16W	
R5053	D0GB472JA041	M 4.7K OHM J 1/16W	
R5054	D0GB101JA041	M 100 OHM J 1/16W	
R5055	D0GB101JA041	M 100 OHM J 1/16W	
R5057	D0GB103JA041	M 10K OHM J 1/16W	
R5058	D0GB330JA041	M 33 OHM J 1/16W	
R5060	D0GB103JA041	M 10K OHM J 1/16W	
R5061	D0GB220JA041	M 22 OHM J 1/16W	
R5062	D0GB220JA041	M 22 OHM J 1/16W	
R5063	D0GB330JA041	M 33 OHM J 1/16W	
R5064	D0GB220JA041	M 22 OHM J 1/16W	
R5065	D0GB330JA041	M 33 OHM J 1/16W	
R5066	D0GB220JA041	M 22 OHM J 1/16W	
R5067	D0GB330JA041	M 33 OHM J 1/16W	
R5068	D0GB220JA041	M 22 OHM J 1/16W	
R5070	D0GB220JA041	M 22 OHM J 1/16W	
R5073	D0GB105JA041	M 1M OHM F 1/16W	
R5075	D0GB821JA041	M 820 OHM J 1/16W	
R5077	D0GB182JA041	M 1.8K OHM J 1/16W	
R5078	D0GB220JA041	M 22 OHM J 1/16W	
R5080	D0GB220JA041	M 22 OHM J 1/16W	
R5081	D0GB182JA041	M 1.8K OHM J 1/16W	
R5082	D0GB220JA041	M 22 OHM J 1/16W	
R5083	EXB38V220JV	M 22 OHM J 1/16W	
R5084	EXB2HV220JV	22 OHM	
R5085	ERJ2GEJ220X	M 22 OHM J 1/4W	
R5086	EXB2HV220JV	22 OHM	
R5087	EXB2HV220JV	22 OHM	
R5088	D0GBR00Z0002	M 0 OHM J 1/16W	
R5091	D0GBR00Z0002	M 0 OHM J 1/16W	
R5093	ERJ3EKF2612V	M 26.1K OHM F 1/16W	
R5094	D0GB221JA041	M 220 OHM J 1/16W	
R5095	ERJ3EKF4703V	M 470K OHM F 1/16W	
R5096	D0GB104JA041	M 100K OHM J 1/16W	
R5097	D0GB473JA041	M 47K OHM J 1/16W	
R5098	ERJ3EKF2203V	M 220K OHM F 1/16W	
R5099	D0GB472JA041	M 4.7K OHM J 1/16W	
R5100	D0GB475JA040	M 4700K OHM J 1/16W	
R5101	D0GBR00Z0002	M 0 OHM J 1/16W	
R5102	D0GB223JA041	M 22K OHM J 1/16W	
R5103	D0GB103JA041	M 10K OHM J 1/16W	
R5104	D0GB102JA041	M 1K OHM J 1/16W	
R5105	D0GB103JA041	M 10K OHM J 1/16W	
R5106	D0GB102JA041	M 1K OHM J 1/16W	
R5107	EXB2HV104JV	100K OHM	
R5108	EXB2HV104JV	100K OHM	

Ref. No.	Part No.	Part Name & Description	Remarks
R5109	EXB2HV104JV	100K OHM	
R5110	D0GB104JA041	M 100K OHM J 1/16W	
R5111	D0GB104JA041	M 100K OHM J 1/16W	
R5112	D0GB104JA041	M 100K OHM J 1/16W	
R5113	D0GB104JA041	M 100K OHM J 1/16W	
R5114	D0GBR00Z0002	M 0 OHM J 1/16W	
R5116	D0GBR00Z0002	M 0 OHM J 1/16W	
R5117	D0GBR00Z0002	M 0 OHM J 1/16W	
R5118	D0GBR00Z0002	M 0 OHM J 1/16W	
R5119	D0GBR00Z0002	M 0 OHM J 1/16W	
R5124	D0GBR00Z0002	M 0 OHM J 1/16W	
R5125	D0GB220JA041	M 22 OHM J 1/16W	
R5126	D0GB220JA041	M 22 OHM J 1/16W	
R5130	D0GB473JA041	M 47K OHM J 1/16W	
R5131	D0GB473JA041	M 47K OHM J 1/16W	
R5132	D0GB220JA041	M 22 OHM J 1/16W	
R2120	ERJ2GE0R00X	M 0 OHM 1/4W	
R3030	ERJ2GE0R00X	M 0 OHM 1/4W	
R3232	ERJ6GEY0R00V	M 0 OHM J 1/10W	
R3501	ERJ6GEY0R00V	M 0 OHM J 1/10W	
R3503	ERJ6GEY0R00V	M 0 OHM J 1/10W	
R3504	ERJ6GEY0R00V	M 0 OHM J 1/10W	
R3507	ERJ6GEY0R00V	M 0 OHM J 1/10W	
R3508	ERJ6GEY0R00V	M 0 OHM J 1/10W	
R3511	ERJ6GEY0R00V	M 0 OHM J 1/10W	
R3919	ERJ12Y0R00U	M 0 OHM J 1/2W	
R4325	ERJ2GE0R00X	M 0 OHM 1/4W	
R4326	ERJ2GE0R00X	M 0 OHM 1/4W	
R4750	ERJ2GE0R00X	M 0 OHM 1/4W	
R4751	ERJ2GE0R00X	M 0 OHM 1/4W	
R4752	ERJ2GE0R00X	M 0 OHM 1/4W	
R4753	ERJ2GE0R00X	M 0 OHM 1/4W	
R4754	ERJ2GE0R00X	M 0 OHM 1/4W	
R4755	ERJ2GE0R00X	M 0 OHM 1/4W	
R4756	ERJ2GE0R00X	M 0 OHM 1/4W	
R4757	ERJ2GE0R00X	M 0 OHM 1/4W	
R4758	ERJ2GE0R00X	M 0 OHM 1/4W	
R4759	ERJ2GE0R00X	M 0 OHM 1/4W	
R5023	ERJ2GE0R00X	M 0 OHM 1/4W	
R5026	ERJ2GE0R00X	M 0 OHM 1/4W	
JA1	ERJ6GEY0R00V	M 0 OHM J 1/10W	
JA1	ERJ8GEY0R00V	M 0 OHM 1/10W	
JA2	ERJ6GEY0R00V	M 0 OHM J 1/10W	
JA2	ERJ8GEY0R00V	M 0 OHM 1/10W	
JA3	ERJ8GEY0R00V	M 0 OHM 1/10W	
JA3	ERJ8GEY0R00V	M 0 OHM 1/10W	
JA4	ERJ8GEY0R00V	M 0 OHM 1/10W	
JA5	ERJ8GEY0R00V	M 0 OHM 1/10W	
JA6	ERJ8GEY0R00V	M 0 OHM 1/10W	
JA7	ERJ8GEY0R00V	M 0 OHM 1/10W	
JA8	ERJ8GEY0R00V	M 0 OHM 1/10W	
JA9	ERJ8GEY0R00V	M 0 OHM 1/10W	
JA10	ERJ8GEY0R00V	M 0 OHM 1/10W	
JS922	D0GBR00Z0002	M 0 OHM J 1/16W	
JS924	D0GBR00Z0002	M 0 OHM J 1/16W	
JS926	D0GBR00Z0002	M 0 OHM J 1/16W	
JS1801	D0GBR00Z0002	M 0 OHM J 1/16W	
JS1809	ERJ2GE0R00X	M 0 OHM 1/4W	
JS2004	ERJ6GEY0R00V	M 0 OHM J 1/10W	
JS2306	ERJ2GE0R00X	M 0 OHM 1/4W	
JS3501	ERJ6GEY0R00V	M 0 OHM J 1/10W	
JS3502	ERJ6GEY0R00V	M 0 OHM J 1/10W	
JS3503	ERJ6GEY0R00V	M 0 OHM J 1/10W	
JS3601	ERJ6GEY0R00V	M 0 OHM J 1/10W	
JS3602	ERJ6GEY0R00V	M 0 OHM J 1/10W	
C801	F0CAF2240003	C 0.22UF	PAVCKM △
C802	F0CAF2240003	C 0.22UF	PAVCKM △
C807	ECKCNA152ME7	C 1500 PF M (TX-32LX70X, TX-32LE7X)	△

Ref. No.	Part No.	Part Name & Description	Remarks
C807	ECKCNA102MB7	C 1000 PF M (TX-32LX70Y, TX-32LE7Y)	△
C808	ECKCNA471MB7	C 470PF M 250V	△
C809	ECKCNA471MB7	C 470PF M 250V	△
C810	ECKR3A102KBP	C 1000 PF K 1KV	
C811	ECKR3A471KBP	C 470PF K 1KV	
C813	F2A1E102A223	E 1000UF 25V	
C814	F2A1V1020043	E 1000UF 35V	PAVCKM
C815	F2A1V1020043	E 1000UF 35V	PAVCKM
C816	F2A1C102A252	E 1000UF 16V	
C820	ECKCNA101MB7	C 100PF M 250V	△
C821	ECKCNA101MB7	C 100PF M 250V	△
C822	F0CAF684A066	C 0.68UF (TX-32LX70Y, TX-32LE7Y)	△
C830	F2B2W2210005	E 220UF 450V (TX-32LX70X, TX-32LE7X)	PAVCKM
C830	F2B2W1510005	E 150UF 450V (TX-32LX70Y, TX-32LE7Y)	
C831	ECQE6103KFB	P 0.06UF K 100V	
C833	F2A1H220A536	E 22UF 50V	PAVCKM
C834	ECKW3D152KBP	C 1500PF K 2KV	
C835	ECQB1H121JF	P 120PF J 50V	PAVCKM
C836	ECQB1H121JF	P 120PF J 50V	PAVCKM
C837	F2A1H1R0A317	E 1UF 50V	PAVCKM
C838	ECQB1H224JF3	P 0.22UF J 50V	
C842	F2B2W2210005	E 220UF 450V (TX-32LX70X, TX-32LE7X)	PAVCKM
C842	F2B2W1510005	E 150UF 450V (TX-32LX70Y, TX-32LE7Y)	
C881	ECQB1H103JF3	P 0.01UF J 50V	
C882	F1B2H1030029	C 0.01UF 200V	PAVCKM
C883	F2A1H4R7B204	E 4.7UF 50V	PAVCKM
C885	F2A2W2200020	E 22UF 160V	PAVCKM
C886	F2A1A471A476	E 470UF 10V	PAVCKM
C887	ECKR3A101KBP	C 100 PF K 1 KV	
C888	ECQB1H473JF3	P 0.047UF J 50V	
C889	ECQE6103KFB	P 0.06UF K 100V	
C890	ECQB1H681JF3	P 680PF J 50V	
C901	ECJ1VB1H104K	C 0.1UF K 50V	
C902	ECJ1VB1H104K	C 0.1UF K 50V	
C909	F2A1H221A115	E 220UF 50V	
C910	F2A1C471A256	E 470UF 16V	
C911	F2A1C471A256	E 470UF 16V	
C912	ECJ1VB1H104K	C 0.1UF K 50V	
C915	ECJ1VB1H104K	C 0.1UF K 50V	
C922	ECJ1VB1H104K	C 0.1UF K 50V	
C923	F2A1H221A115	E 220UF 50V	
C924	ECJ1VB1H104K	C 0.1UF K 50V	
C926	ECJ1VB1H104K	C 0.1UF K 50V	
C927	ECJ1VB1H104K	C 0.1UF K 50V	
C928	ECJ1VB1E105K	C 1UF K 25V	PAVCKM
C929	ECJ1VB1H104K	C 0.1UF K 50V	
C930	ECJ1VB1E105K	C 1UF K 25V	PAVCKM
C931	ECJ1VB1E105K	C 1UF K 25V	PAVCKM
C934	ECJ1VB1H104K	C 0.1UF K 50V	
C935	F2A1E221A225	E 220UF 25V	PAVCKM
C936	ECJ1VB1H104K	C 0.1UF K 50V	
C938	ECJ1VB1H103K	C 0.01UF K 50V	
C939	F2A1C471A256	E 470UF 16V	
C940	ECJ1VB1H104K	C 0.1UF K 50V	
C941	ECJ1VB1H104K	C 0.1UF K 50V	
C942	F2A1E221A487	E 220UF 25V	
C943	ECJ1VB1H104K	C 0.1UF K 50V	
C945	ECJ1VB1H103K	C 0.01UF K 50V	
C947	ECJ1VB1H104K	C 0.1UF K 50V	
C948	F2A1C471A256	E 470UF 16V	
C950	ECJ1VB1H104K	C 0.1UF K 50V	
C951	ECJ1VB1H104K	C 0.1UF K 50V	
C952	ECJ1VB1H104K	C 0.1UF K 50V	
C954	ECJ1VB1H104K	C 0.1UF K 50V	
C956	ECJ1VB1H104K	C 0.1UF K 50V	
C961	ECJ1VB1H104K	C 0.1UF K 50V	
C962	ECJ1VB1H104K	C 0.1UF K 50V	
C963	ECJ1VB1H104K	C 0.1UF K 50V	

Ref. No.	Part No.	Part Name & Description	Remarks
C964	ECJ1VB1H104K	C 0.1UF K 50V	
C965	ECJ1VB1H102K	C 1000PF K 50V	
C966	ECJ1VB1H104K	C 0.1UF K 50V	
C967	ECJ1VB1H104K	C 0.1UF K 50V	
C974	F2A1C471A256	E 470UF 16V	
C976	F2A1H221A115	E 220UF 50V	
C981	F2A1C102A252	E 1000UF 16V	
C982	F2A1C102A252	E 1000UF 16V	
C985	ECJ1VB1H104K	C 0.1UF K 50V	
C1003	ECEA1CKS220B	E 22UF 16V	
C1006	ECEA0JKS470B	E 47UF 6.3V	
C1007	ECJ1VB1H103K	C 0.01UF K 50V	
C1168	ECJ1VB1C104K	C 0.1UF K 16V	
C1181	ECJ0EB1H102K	C 1000PF K 10V	
C1182	ECJ0EB1H102K	C 1000PF K 10V	
C1185	ECJ0EB1H102K	C 1000PF K 10V	
C1186	ECJ0EB1H102K	C 1000PF K 10V	
C1822	F1G1A1040006	P 0.1UF 10V	
C1828	F2H1C470A009	E 47UF 16V	
C1831	F1G1A1040006	P 0.1UF 10V	
C1834	ECJ2FB1C474K	C 0.47UF K 16V	
C1835	ECJ1VB1C563K	C 0.056UF K 16V	
C1836	ECJ1VB1C104K	C 0.1UF K 16V	
C1837	ECJ1VB1H103K	C 0.01UF K 50V	
C1839	ECJ1VC1H101J	C 100PF J 50V	
C1840	ECJ1VF1A105Z	C 1UF Z 10V	
C1842	F1H0J1050013	P 1UF 10V	
C1843	F1H0J1050013	P 1UF 10V	
C1844	EEH0B0G470R	E 47UF 6.3V	
C1845	EEH0B0G470R	E 47UF 6.3V	
C1850	F1G1A1040006	P 0.1UF 10V	
C1851	F1G1A1040006	P 0.1UF 10V	
C1852	EEH0B0G470R	E 47UF 6.3V	
C1853	EEH0B0G470R	E 47UF 6.3V	
C1865	ECJ1VF1A105Z	C 1UF Z 10V	
C1866	ECJ1VF1A105Z	C 1UF Z 10V	
C1867	ECJ1VF1A105Z	C 1UF Z 10V	
C1868	ECJ1VF1A105Z	C 1UF Z 10V	
C1869	F2H1C470A009	E 47UF 16V	
C1870	ECJ1VB1C104K	C 0.1UF K 16V	
C1871	F2H1C470A009	E 47UF 16V	
C1872	ECJ1VB1C104K	C 0.1UF K 16V	
C2068	ECJ1VB1A105K	C 1UF K 10V	
C2101	ECJ1VB1E104K	C 0.1UF K 25V	
C2102	ECJ2FB1E105K	C 1UF 16V	
C2103	ECJ2FB1E105K	C 1UF 16V	
C2106	ECJ2FB1E105K	C 1UF 16V	
C2109	ECJ2FB1E105K	C 1UF 16V	
C2110	ECJ1VB1E104K	C 0.1UF K 25V	
C2111	ECJ2FB1E105K	C 1UF 16V	
C2112	ECJ1VB1E104K	C 0.1UF K 25V	
C2113	ECJ1VB1E104K	C 0.1UF K 25V	
C2114	ECJ1VB1E104K	C 0.1UF K 25V	
C2115	ECJ1VB1H153K	C 0.012UF K 50V	
C2116	ECJ1VB1E104K	C 0.1UF K 25V	
C2117	ECJ1VB1E104K	C 0.1UF K 25V	
C2118	ECJ1VB1H153K	C 0.012UF K 50V	
C2119	ECJ1VB1E104K	C 0.1UF K 25V	
C2120	ECJ1VB1E104K	C 0.1UF K 25V	
C2122	ECJ0EB1H102K	C 1000PF K 10V	
C2124	ECJ0EB1H102K	C 1000PF K 10V	
C2125	ECJ1VB1E104K	C 0.1UF K 25V	
C2126	ECJ1VB1C224K	C 0.22UF K 16V	
C2127	ECJ2FB1E475M	C 4.7UF 16V	
C2128	ECJ1VB1C224K	C 0.22UF K 16V	
C2129	ECJ2FB1E475M	C 4.7UF 16V	
C2130	F2A1C102A530	E 1000 UF 16V	
C2131	F2A1C102A530	E 1000 UF 16V	
C2132	ECJ1VB1H102K	C 1000PF K 50V	
C2133	ECJ1VB1H102K	C 1000PF K 50V	
C2138	ECJ1VB1E104K	C 0.1UF K 25V	
C2139	F2A1E1010073	E 100UF 25V	
C2140	EEUFC1V221E	E 220UF 25V	

Ref. No.	Part No.	Part Name & Description	Remarks
C2141	ECJ1VB1H103K	C 0.01UF K 50V	
C2142	F2H0J101A010	E 100UF 6.3V	
C2143	F2H0J101A010	E 100UF 6.3V	
C2144	F1H0J1050013	P 1UF 10V	
C2145	F2H1C470A009	E 47UF 16V	
C2146	ECJ2FB1E105K	C 1UF 16V	
C2147	ECJ2FB1E105K	C 1UF 16V	
C2162	ECJ2FB1E475M	C 4.7UF 16V	
C2163	ECJ2FB1E475M	C 4.7UF 16V	
C2172	F2H0J101A010	E 100UF 6.3V	
C2173	F2A1C101A244	E 100 UF 16V	
C2178	ECJ0EB1H102K	C 1000PF K 10V	
C2179	ECJ0EB1H102K	C 1000PF K 10V	
C2180	ECJ1VB1C224K	C 0.22UF K 16V	
C2181	ECJ1VB1C224K	C 0.22UF K 16V	
C2223	F2A1E1010073	E 100UF 25V	
C2367	EEH0B1C101UP	E 100UF J 16V	
C3062	ECJ1VF1A105Z	C 1UF Z 10V	
C3064	F2A1A471A994	E 470UF 10V	PAVCKM
C3065	ECJ1VB1C104K	C 0.1UF K 16V	
C3067	F1J0J1060004	C 0.01UF K 16V	
C3073	ECJ1VB1A105K	C 1UF K 10V	
C3076	ECJ1VB1A105K	C 1UF K 10V	
C3077	ECJ1VB1A105K	C 1UF K 10V	
C3200	ECJ1VB0J225K	C 1UF K 6.3V	
C3202	EEH0B1C101UP	E 100UF J 16V	
C3203	ECJ1VB1C224K	C 0.22UF K 16V	
C3204	F2H1C470A009	E 47UF 16V	
C3863	ECJ1VF1A105Z	C 1UF Z 10V	
C3866	F2A0J101A240	E 100UF 6.3V	
C3867	ECJ1VB1C104K	C 0.1UF K 16V	
C3870	ECJ1VF1H104Z	C 0.1UF Z 50V	
C3873	ECJ1VB1C104K	C 0.1UF K 16V	
C3874	ECJ1VB1C104K	C 0.1UF K 16V	
C4001	ECJ1VB1C104K	C 0.1UF K 16V	
C4004	ECJ1VB1C104K	C 0.1UF K 16V	
C4005	ECJ1VB1C104K	C 0.1UF K 16V	
C4006	ECJ1VB1C104K	C 0.1UF K 16V	
C4007	ECJ1VB1C104K	C 0.1UF K 16V	
C4008	ECJ1VB1C104K	C 0.1UF K 16V	
C4009	F1J0J1060004	C 0.01UF K 16V	
C4013	ECJ1VB1C104K	C 0.1UF K 16V	
C4014	ECJ1VB1C104K	C 0.1UF K 16V	
C4015	ECJ1VB1C104K	C 0.1UF K 16V	
C4016	ECJ1VB1C104K	C 0.1UF K 16V	
C4017	ECJ1VB1C104K	C 0.1UF K 16V	
C4018	ECJ1VB1C104K	C 0.1UF K 16V	
C4019	F1J0J1060004	C 0.01UF K 16V	
C4020	F1J0J1060004	C 0.01UF K 16V	
C4021	F1J0J1060004	C 0.01UF K 16V	
C4022	F1J0J1060004	C 0.01UF K 16V	
C4023	F1J0J1060004	C 0.01UF K 16V	
C4024	ECJ1VF1A105Z	C 1UF Z 10V	
C4025	ECJ1VB1C104K	C 0.1UF K 16V	
C4027	ECJ1VB1C104K	C 0.1UF K 16V	
C4029	ECJ1VB1C104K	C 0.1UF K 16V	
C4030	ECJ1VF1A105Z	C 1UF Z 10V	
C4031	ECJ1VB1C104K	C 0.1UF K 16V	
C4033	ECJ0EC1H101J	C 100PF J 10V	
C4034	F1G1A1040006	P 0.1UF 10V	
C4035	F1G1A1040006	P 0.1UF 10V	
C4036	ECJ1VB1A105K	C 1UF K 10V	
C4037	ECJ1VB1A105K	C 1UF K 10V	
C4038	ECJ1VB1A105K	C 1UF K 10V	
C4039	ECJ1VB1A105K	C 1UF K 10V	
C4040	ECJ1VB1A105K	C 1UF K 10V	
C4041	ECJ1VB1A105K	C 1UF K 10V	
C4042	F1G1A1040006	P 0.1UF 10V	
C4043	ECJ1VB1A105K	C 1UF K 10V	
C4044	ECJ1VB1A105K	C 1UF K 10V	
C4045	F1G1A1040006	P 0.1UF 10V	
C4046	F1G1A1040006	P 0.1UF 10V	
C4049	F1G1A1040006	P 0.1UF 10V	

Ref. No.	Part No.	Part Name & Description	Remarks
C4050	FlG1A1040006	P 0.1UF 10V	
C4051	ECJ1VB1C104K	C 0.1UF K 16V	
C4052	ECJ1VC1H560J	C 56PF J 50V	
C4053	ECJ1VC1H560J	C 56PF J 50V	
C4054	FlG1A1040006	P 0.1UF 10V	
C4055	FlJ0J1060004	C 0.01UF K 16V	
C4056	FlG1A1040006	P 0.1UF 10V	
C4057	FlJ0J1060004	C 0.01UF K 16V	
C4058	FlG1A1040006	P 0.1UF 10V	
C4059	FlG1A1040006	P 0.1UF 10V	
C4060	FlG1A1040006	P 0.1UF 10V	
C4061	ECJ1VB1C104K	C 0.1UF K 16V	
C4062	TKP470M1CD11	E 47UF 16V OR F2A1C470A244	
C4064	FlG1A1040006	P 0.1UF 10V	
C4065	ECJ0EB1H102K	C 1000PF K 10V	
C4066	FlG1A1040006	P 0.1UF 10V	
C4067	FlG1A1040006	P 0.1UF 10V	
C4068	FlJ0J1060004	C 0.01UF K 16V	
C4071	ECJ1VC1H180J	C 18PF J 50V	
C4072	ECJ1VC1H180J	C 18PF J 50V	
C4074	FlG1A1040006	P 0.1UF 10V	
C4075	FlJ0J1060004	C 0.01UF K 16V	
C4076	FlG1A1040006	P 0.1UF 10V	
C4077	FlG1A1040006	P 0.1UF 10V	
C4078	FlG1A1040006	P 0.1UF 10V	
C4079	ECJ1VB1C104K	C 0.1UF K 16V	
C4080	FlG1A1040006	P 0.1UF 10V	
C4081	ECJ1VB1C104K	C 0.1UF K 16V	
C4082	FlG1A1040006	P 0.1UF 10V	
C4083	ECJ0EB1H102K	C 1000PF K 10V	
C4084	FlG1A1040006	P 0.1UF 10V	
C4085	FlG1A1040006	P 0.1UF 10V	
C4086	FlG1A1040006	P 0.1UF 10V	
C4087	FlG1A1040006	P 0.1UF 10V	
C4088	FlG1A1040006	P 0.1UF 10V	
C4089	FlG1A1040006	P 0.1UF 10V	
C4090	FlG1A1040006	P 0.1UF 10V	
C4091	FlG1A1040006	P 0.1UF 10V	
C4092	FlG1A1040006	P 0.1UF 10V	
C4093	FlG1A1040006	P 0.1UF 10V	
C4094	FlG1A1040006	P 0.1UF 10V	
C4095	FlJ0J1060004	C 0.01UF K 16V	
C4096	ECJ1VB1C104K	C 0.1UF K 16V	
C4097	FlG1A1040006	P 0.1UF 10V	
C4098	ECJ1VB1H102K	C 1000PF K 50V	
C4099	FlJ0J1060004	C 0.01UF K 16V	
C4100	FlG1A1040006	P 0.1UF 10V	
C4101	FlG1A1040006	P 0.1UF 10V	
C4102	FlJ0J1060004	C 0.01UF K 16V	
C4103	ECJ0EC1H120J	C 12PF J 10V	
C4104	ECJ0EC1H220J	C 22PF J 10V	
C4105	ECJ0EC1H220J	C 22PF J 10V	
C4109	ECJ1VB1C104K	C 0.1UF K 16V	
C4110	ECJ2FB1A335K	C 3.3UF 16V	PAVCKM
C4111	FlJ0J1060004	C 0.01UF K 16V	
C4112	ECJ1VB1C104K	C 0.1UF K 16V	
C4114	EEFCD0G560ER	E 56UF 4V	
C4115	EEFCD0G560ER	E 56UF 4V	
C4117	ECJ1VC1H220J	C 22PF J 50V	
C4118	FlJ0J1060004	C 0.01UF K 16V	
C4119	ECJ0EC1H560J	C 56PF J 10V	
C4120	ECJ1VC1H101J	C 100PF J 50V	
C4121	ECJ1VC1H101J	C 100PF J 50V	
C4122	ECJ1VF1C104Z	C 0.1UF Z 16V	
C4123	ECJ1VB1C104K	C 0.1UF K 16V	
C4125	F4Z0G6860002	E 68UF 4V	
C4127	FlJ0J1060004	C 0.01UF K 16V	
C4128	F2H1C470A009	E 47UF 16V	
C4129	FlJ0J1060004	C 0.01UF K 16V	
C4130	ECJ1VC1H120J	C 12PF J 50V	
C4131	ECJ1VC1H120J	C 12PF J 50V	
C4132	ECJ1VB1H102K	C 1000PF K 50V	

Ref. No.	Part No.	Part Name & Description	Remarks
C4133	FlG1A1040006	P 0.1UF 10V	
C4134	ECJ1VB0J105K	C 1UF K 6.3V	
C4135	ECJ1VB1H103K	C 0.01UF K 50V	
C4148	ECJ2FB0J106M	C 10UF 6.3V	
C4149	ECJ2FB0J106M	C 10UF 6.3V	
C4182	ECJ2FB0J106M	C 10UF 6.3V	
C4183	ECJ2FB0J106M	C 10UF 6.3V	
C4501	FlG1A1040006	P 0.1UF 10V	
C4502	TKP470M1CD11	E 47UF 16V OR F2A1C470A244	
C4807	ECJ1VB1C104K	C 0.1UF K 16V	
C4808	ECJ1VB1C104K	C 0.1UF K 16V	
C5001	FlG1A1040006	P 0.1UF 10V	
C5002	FlG1A1040006	P 0.1UF 10V	
C5003	FlG1A1040006	P 0.1UF 10V	
C5004	FlG1A1040006	P 0.1UF 10V	
C5005	ECJ1VF1A105Z	C 1UF Z 10V	
C5006	ECJ1VF1A105Z	C 1UF Z 10V	
C5007	ECJ1VF1C104Z	C 0.1UF Z 16V	
C5008	ECJ1VB1C104K	C 0.1UF K 16V	
C5009	FlJ0J1060004	C 0.01UF K 16V	
C5010	FlJ0J1060004	C 0.01UF K 16V	
C5011	ECJ1VB1C104K	C 0.1UF K 16V	
C5012	ECJ1VB1C104K	C 0.1UF K 16V	
C5016	FlJ0J1060004	C 0.01UF K 16V	
C5017	ECJ1VB1C104K	C 0.1UF K 16V	
C5018	ECJ1VF1C104Z	C 0.1UF Z 16V	
C5019	FlG1A1040006	P 0.1UF 10V	
C5020	ECJ1VF1C104Z	C 0.1UF Z 16V	
C5021	ECJ1VF1H103Z	C 0.01UF Z 50V	
C5022	ECJ1VF1C104Z	C 0.1UF Z 16V	
C5023	ECJ1VF1H103Z	C 0.01UF Z 50V	
C5024	FlG1A1040006	P 0.1UF 10V	
C5025	FlG1A1040006	P 0.1UF 10V	
C5026	FlJ0J1060004	C 0.01UF K 16V	
C5027	ECJ1VF1C104Z	C 0.1UF Z 16V	
C5028	FlG1A1040006	P 0.1UF 10V	
C5029	ECJ1VB1C104K	C 0.1UF K 16V	
C5030	ECJ1VC1H150J	C 15PF J 50V	
C5031	FlG1A1040006	P 0.1UF 10V	
C5032	ECJ1VB1C104K	C 0.1UF K 16V	
C5033	FlG1A1040006	P 0.1UF 10V	
C5034	ECJ1VC1H150J	C 15PF J 50V	
C5036	ECJ1VF1C104Z	C 0.1UF Z 16V	
C5038	FlG1A1040006	P 0.1UF 10V	
C5040	FlG1A1040006	P 0.1UF 10V	
C5041	FlG1A1040006	P 0.1UF 10V	
C5042	FlJ0J1060004	C 0.01UF K 16V	
C5043	ECJ1VB1C104K	C 0.1UF K 16V	
C5044	ECJ1VB1C104K	C 0.1UF K 16V	
C5045	ECJ1VB1C104K	C 0.1UF K 16V	
C5046	ECJ1VB1C104K	C 0.1UF K 16V	
C5047	ECJ1VB1C104K	C 0.1UF K 16V	
C5048	ECJ1VB1C104K	C 0.1UF K 16V	
C5049	ECJ2FB0J225K	C 2.2UF 6.3V	
C5050	ECJ1VC1H471J	C 470PF J 50V	
C5051	FlH0J1050013	P 1UF 10V	
C5054	ECJ1VC1H101J	C 100PF J 50V	
C5055	FlG1A1040006	P 0.1UF 10V	
C5056	ECJ1VF1C104Z	C 0.1UF Z 16V	
C5060	ECJ1VB1C104K	C 0.1UF K 16V	
C5061	ECJ1VB1C104K	C 0.1UF K 16V	
SW901	K0F162B00002	POWER SWITCH	
X4001	H0J202500011	CRYSTAL OSCILLATOR	
X5001	H0J283500018	CRYSTAL OSCILLATOR	
TU101	ENG39D03GF	TUNER	PAVCKM △
F801	K5D502BNA005	FUSE	△
F801-1	EYF52BC/L	FUSE BRACKET	
F801-2	EYF52BC/L	FUSE BRACKET	
JK3001	K4BK13A00002	REAR AV TERMINAL	PAVCKM

Ref. No.	Part No.	Part Name & Description	Remarks
JK3002	K4BK20A00003	REAR AV TERMINAL	PAVCKM
JK3003	K4BK04A00003	HDMI AUDIO TERMINAL	PAVCKM
JK3501	K4BK24B00003	SIDE AV TERMINAL	PAVCKM
JK5001	K1FA119E0008	HDMI TERMINAL	
JK5002	K1FA119E0008	HDMI TERMINAL	
RL801	K6B1CDA00028	RELAY	PAVCKM △
RL802	K6B1CDA00028	RELAY	PAVCKM △
RL803	K6B1CDA00028	RELAY (TX-32LX70X, TX-32LE7X)	PAVCKM △
A1	K1KB23A00003	CONNECTOR	
A2	K1KB23A00003	CONNECTOR	
A3	K1KA04AA0190	CONNECTOR	
A4	K1KA05AA0193	CONNECTOR	
A5	K1KA10AA0194	CONNECTOR	
A7	K1KA08AA0193	CONNECTOR	
A8A	K1KB30B00044	CONNECTOR	
A9	K1KA10AA0105	CONNECTOR	
A10	K1KA08AA0193	CONNECTOR	
AP1	K1KA19A00007	CONNECTOR	
AP2	K1KA15A00118	CONNECTOR	
AP3	K1KA23A00005	CONNECTOR	
AP4	K1KA23A00005	CONNECTOR	
AP5	K1KA14AA0194	CONNECTOR	
AP6	K1KA03AA0190	CONNECTOR	
G1	K1KA05AA0193	CONNECTOR	
G2	K1KA10AA0191	CONNECTOR	
P1	K1KA02BA0073	CONNECTOR	PAVCKM △
P2	K1KB19AA0032	CONNECTOR	
P3	K1KB15AA0032	CONNECTOR	
V1	K1KA08BA0061	CONNECTOR	
	TXN/A10MSS (TNP4G399AG)	CIRCUIT BOARD A (TX-32LX70X, TX-32LE7X)	△
	TXN/A10MSS (TNP4G399AL)	CIRCUIT BOARD A (TX-32LX70Y, TX-32LE7Y)	△
	TXN/G10MUS (TNP4G402AA)	CIRCUIT BOARD G	△
	TXN/P10MQS (TNP4G404AC)	CIRCUIT BOARD P (TX-32LX70X, TX-32LE7X)	△
	TXN/P10MQS (TNP4G404AG)	CIRCUIT BOARD P (TX-32LX70Y, TX-32LE7Y)	△
	TXN/V10MPS (TNP4G400AA)	CIRCUIT BOARD V	△
	TXNAP10MPS (TNP4G401AA)	CIRCUIT BOARD AP	△

17.4. TX-26LX70A

Note:

All parts except parts mentioned [PAVCKM] in the Remarks column are supplied by PAVC-CSG.

Parts mentioned [PAVCKM] are supplied by PAVCKM.

Ref. No.	Part No.	Part Name & Description	Remarks
IC811	C0EAS0000004	IC	PAVCKM
IC830	C5HABZZ00138	IC	PAVCKM
IC880	C0DABYY00008	IC	
IC881	C0DAEZZ00005	IC	PAVCKM
IC902	C0DAAZH00020	IC	
IC903	C0DAEJG00001	IC	PAVCKM
IC904	C0DAAZG00014	IC	
IC905	C0DAAZG00014	IC	
IC906	C0DAAZG00014	IC	
IC1102	C3EBJC000061	IC	
IC1803	C0EBF0000354	IC	
IC1804	C0CBCYE00001	IC	
IC1805	C0DBAFF00026	IC	
IC2001	C1AB00002474	IC	
IC2005	C1BB00000947	IC	
IC4001	TVR4G27-1	IC	
IC4003	C1ZBZ0003426	IC	
IC4004	C1ZBZ0003191	IC	
IC4005	C0ABFA000012	IC	
IC5001	TVR4GAS652	IC	PAVCKM
IC5002	TVR4GAS653	IC	PAVCKM
IC5004	C1AB00002535	IC	
IC5005	C0DBFFD00003	IC	
PC841	B3PAA0000261	IC	△
PC880	B3PAA0000261	IC	△
RM1001	PNA4701M05TV	REMOTE CONTROL RECEIVER	
SN1001	B3L000000020	PHOTOELECTRIC COUPLER	
Q820	2SC13180WA	TRANSISTOR	
Q822	2SC3311A0A	TRANSISTOR	
Q880	2SA10180QA	TRANSISTOR	
Q900	B1ABCE000015	TRANSISTOR	
Q902	B1ABCE000015	TRANSISTOR	
Q903	B1ABCE000015	TRANSISTOR	
Q904	B1ABCE000015	TRANSISTOR	
Q905	B1ABCE000015	TRANSISTOR	
Q906	B1ABCE000015	TRANSISTOR	
Q1002	2SA207700L	TRANSISTOR	
Q1004	2SA207700L	TRANSISTOR	
Q1006	2SC584500L	TRANSISTOR	
Q1007	2SC584500L	TRANSISTOR	
Q1217	2SA207700L	TRANSISTOR	
Q1218	2SC584500L	TRANSISTOR	
Q1801	B1DHDC000028	TRANSISTOR	
Q1802	UNR521100L	TRANSISTOR	
Q1803	2SC584500L	TRANSISTOR	
Q1804	2SA207700L	TRANSISTOR	
Q1805	2SA207700L	TRANSISTOR	
Q1806	2SC584500L	TRANSISTOR	
Q2019	UNR521100L	TRANSISTOR	
Q2020	UNR521100L	TRANSISTOR	
Q2031	B1CBHD000002	TRANSISTOR	
Q2032	B1CBHD000002	TRANSISTOR	
Q2303	2SD0601A0L	TRANSISTOR	
Q2305	2SA207700L	TRANSISTOR	
Q2306	2SA207700L	TRANSISTOR	
Q2312	2SD0601A0L	TRANSISTOR	
Q2313	2SC584500L	TRANSISTOR	
Q3001	2SC584500L	TRANSISTOR	
Q3002	2SA207700L	TRANSISTOR	
Q3003	2SC584500L	TRANSISTOR	
Q3005	2SC584500L	TRANSISTOR	
Q3006	2SC584500L	TRANSISTOR	
Q3007	2SA207700L	TRANSISTOR	

Ref. No.	Part No.	Part Name & Description	Remarks
Q3200	2SC584500L	TRANSISTOR	
Q3201	2SC584500L	TRANSISTOR	
Q3202	2SC584500L	TRANSISTOR	
Q3203	2SC584500L	TRANSISTOR	
Q3204	2SA207700L	TRANSISTOR	
Q3205	2SD0602ASL	TRANSISTOR	
Q3801	2SA207700L	TRANSISTOR	
Q3806	2SC584500L	TRANSISTOR	
Q3807	2SC584500L	TRANSISTOR	
Q4001	2SC584500L	TRANSISTOR	
Q4002	2SA207700L	TRANSISTOR	
Q4003	2SA207700L	TRANSISTOR	
Q4020	2SC584500L	TRANSISTOR	
Q4021	2SC584500L	TRANSISTOR	
Q4049	2SC584500L	TRANSISTOR	
Q4050	2SA207700L	TRANSISTOR	
Q4120	UNR521100L	TRANSISTOR	
Q4121	UNR521100L	TRANSISTOR	
Q4501	2SC584500L	TRANSISTOR	
Q4502	2SC584500L	TRANSISTOR	
Q5001	2SC584500L	TRANSISTOR	
Q5002	2SC584500L	TRANSISTOR	
Q5003	2SC584500L	TRANSISTOR	
Q5004	2SC584500L	TRANSISTOR	
Q5008	B1MBACA00008	TRANSISTOR	
Q5009	B1MBACA00008	TRANSISTOR	
Q5019	2SC584500L	TRANSISTOR	
Q5020	2SC584500L	TRANSISTOR	
Q5021	2SC584500L	TRANSISTOR	
Q5022	UNR521100L	TRANSISTOR	
Q5023	B1MBACA00008	TRANSISTOR	
Q5024	2SC584500L	TRANSISTOR	
Q5025	UNR521100L	TRANSISTOR	
D801	ERZV10V621CS	DIODE	△
D802	B0FBAT000014	DIODE	PAVCKM
D810	B0HBSM000027	DIODE	
D811	B0HANM000032	DIODE	
D812	B0HFRJ000012	DIODE	
D820	B0AACK000004	DIODE	
D821	B0HAGM000005	DIODE	
D822	B0AACK000004	DIODE	
D832	B0EAKT000018	DIODE	
D833	B0HAJL000003	DIODE	PAVCKM
D834	B0BA6R800025	DIODE	PAVCKM
D835	B0BA8R000010	DIODE	PAVCKM
D840	B0HAJL000003	DIODE	PAVCKM
D841	B0BA05600010	DIODE	PAVCKM
D842	B0HAJL000003	DIODE	PAVCKM
D843	B0HAJL000003	DIODE	PAVCKM
D880	B0BA5R600016	DIODE	
D881	B0HAJL000003	DIODE	PAVCKM
D882	B0BA03500012	DIODE	
D883	B0HAJL000003	DIODE	PAVCKM
D884	B0HAJL000003	DIODE	PAVCKM
D885	B0BA03400009	DIODE	
D886	B0BA03400009	DIODE	
D887	ERZV10V621CS	DIODE	△
D888	B0BA04200005	DIODE	
D889	ERZV10V621CS	DIODE	△
D891	B0JAPK000011	DIODE	PAVCKM
D892	B0HAGV000004	DIODE	
D895	B0EBKT000007	DIODE	
D904	B0JCME000037	DIODE	
D907	B0JCME000037	DIODE	
D908	B0JCME000037	DIODE	
D909	B0HCMM000014	DIODE	
D910	B0HCMM000014	DIODE	
D913	B0JCME000037	DIODE	
D919	B0JCPG000005	DIODE	
D922	B0JANE000006	DIODE	
D923	B0JANE000006	DIODE	
D924	B0BC01000044	DIODE	

Ref. No.	Part No.	Part Name & Description	Remarks
D1001	B3CKE0000007	DIODE	
D1102	MA2J72900L	DIODE	
D1106	MAZ80620ML	DIODE	
D1107	MAZ80620ML	DIODE	
D1108	MAZ80620ML	DIODE	
D1109	MAZ80620ML	DIODE	
D1110	MAZ80620ML	DIODE	
D1810	MA2J11100L	DIODE	
D1811	MA2J11100L	DIODE	
D1812	MAZ82700ML	DIODE	
D1813	MA2J11100L	DIODE	
D1814	MAZ80620LL	DIODE	
D1815	MA2J11100L	DIODE	
D1816	MAZ80750ML	DIODE	
D1817	MA2J11100L	DIODE	
D1818	MAZ81300ML	DIODE	
D1819	MA2J11100L	DIODE	
D1820	MAZ80560ML	DIODE	
D1821	MA2J11100L	DIODE	
D1822	MAZ80560ML	DIODE	
D1823	MA2J11100L	DIODE	
D1824	MAZ82700ML	DIODE	
D1825	MA2J11100L	DIODE	
D2001	MA3X704D0L	DIODE	
D2006	MAZ80470ML	DIODE	
D2301	MA2J11100L	DIODE	
D2304	MA2J11100L	DIODE	
D2305	MA2J11100L	DIODE	
D3001	MAZ81400ML	DIODE	
D3002	MAZ81400ML	DIODE	
D3003	MAZ81400ML	DIODE	
D3004	MAZ81400ML	DIODE	
D3005	MAZ81400ML	DIODE	
D3006	MAZ81400ML	DIODE	
D3007	MAZ81400ML	DIODE	
D3008	MAZ81400ML	DIODE	
D3009	MAZ81400ML	DIODE	
D3013	MAZ81400ML	DIODE	
D3014	MAZ81400ML	DIODE	
D3015	MAZ81400ML	DIODE	
D3016	MAZ81400ML	DIODE	
D3017	MAZ81400ML	DIODE	
D3018	MAZ81400ML	DIODE	
D3021	MAZ81400ML	DIODE	
D3022	MAZ81400ML	DIODE	
D3023	MAZ81400ML	DIODE	
D3024	MAZ81400ML	DIODE	
D3025	MAZ81400ML	DIODE	
D3026	MAZ81400ML	DIODE	
D3027	MAZ81400ML	DIODE	
D3028	MAZ81400ML	DIODE	
D3031	MAZ81400ML	DIODE	
D3032	MAZ81400ML	DIODE	
D3033	MAZ81400ML	DIODE	
D3200	MAZ81500ML	DIODE	
D3203	MA2J11100L	DIODE	
D3204	MA2J11100L	DIODE	
D3205	MA2J11100L	DIODE	
D3206	MA2J11100L	DIODE	
D3207	MA2J11100L	DIODE	
D3208	MA2J11100L	DIODE	
D3209	MA2J11100L	DIODE	
D3210	MA2J11100L	DIODE	
D3211	MA2J11100L	DIODE	
D3215	MA2J11100L	DIODE	
D3216	MA2J11100L	DIODE	
D3217	MA2J11100L	DIODE	
D3219	MA2J72900L	DIODE	
D3501	MAZ81400ML	DIODE	
D3502	MAZ81400ML	DIODE	
D3503	MAZ81400ML	DIODE	
D3504	MAZ81400ML	DIODE	
D3506	MAZ81400ML	DIODE	

Ref. No.	Part No.	Part Name & Description	Remarks
D3507	MAZ81400ML	DIODE	
D3508	MAZ81400ML	DIODE	
D3509	MAZ81400ML	DIODE	
D3510	MAZ81400ML	DIODE	
D3511	MAZ81400ML	DIODE	
D3512	MAZ81400ML	DIODE	
D3513	MAZ81400ML	DIODE	
D4015	B0JCDD000002	DIODE	
D4121	MA2J11100L	DIODE	
D5001	EZJZ0V80008B	DIODE	
D5002	EZJZ0V80008B	DIODE	
D5003	EZJZ0V80008B	DIODE	
D5004	EZJZ0V80008B	DIODE	
D5005	EZJZ0V80008B	DIODE	
D5006	EZJZ0V80008B	DIODE	
D5007	EZJZ0V80008B	DIODE	
D5008	EZJZ0V80008B	DIODE	
D5009	EZJZ0V80008B	DIODE	
D5010	EZJZ0V80008B	DIODE	
D5011	EZJZ1V8000AA	DIODE	
D5012	EZJZ0V80008B	DIODE	
D5013	EZJZ0V80008B	DIODE	
D5014	EZJZ1V8000AA	DIODE	
D5015	EZJZ1V8000AA	DIODE	
D5016	EZJZ0V80008B	DIODE	
D5017	EZJZ1V8000AA	DIODE	
D5018	EZJZ0V80008B	DIODE	
D5019	EZJZ0V80008B	DIODE	
D5020	EZJZ0V80008B	DIODE	
D5021	B0HCMM000014	DIODE	
D5022	B0HCMM000014	DIODE	
D5023	MA2J72800L	DIODE	
D5026	B0HCMM000014	DIODE	
D5027	B0HCMM000014	DIODE	
L811	BDC0309T-998	COIL	
L835	EXCELSA39E	COIL	
L837	J0JKA0000038	COIL	
L901	BDC0306V-902	COIL	
L904	G0C101K00041	COIL	
L911	G0A101ZA0034	COIL	
L913	G0C101K00023	COIL	
L915	G0A101ZA0041	COIL	
L918	BDC0306V-902	COIL	
L921	BDC0306V-902	COIL	
L922	G0A101ZA0041	COIL	
L930	BDC0306V-902	COIL	
L1805	J0JHC0000078	COIL	
L1806	J0JHC0000078	COIL	
L2001	G0A100ZA0033	COIL	
L2002	G0A100ZA0033	COIL	
L2003	J0JHC0000078	COIL	
L2005	J0JHC0000078	COIL	
L3800	J0JHC0000078	COIL	
L3801	G0A101EA0008	COIL	
L3802	J0JCC0000241	COIL	
L3803	J0JCC0000241	COIL	
L4001	J0JHC0000078	COIL	
L4002	J0JHC0000078	COIL	
L4003	J0JHC0000078	COIL	
L4004	J0JHC0000078	COIL	
L4005	J0JHC0000078	COIL	
L4006	J0JHC0000078	COIL	
L4007	J0JHC0000078	COIL	
L4008	J0JHC0000078	COIL	
L4009	J0JHC0000078	COIL	
L4010	J0JHC0000078	COIL	
L4011	J0JHC0000078	COIL	
L4012	J0JHC0000078	COIL	
L4014	J0JHC0000078	COIL	
L4015	J0JHC0000078	COIL	
L4016	ELJFA6R8KFB	COIL	
L4017	J0JCC0000241	COIL	

Ref. No.	Part No.	Part Name & Description	Remarks
L4018	J0JCC0000241	COIL	
L4020	J0JHC0000078	COIL	
L4022	J0JHC0000078	COIL	
L4502	J0JHC0000078	COIL	
L4904	J0JHC0000078	COIL	
L5003	J0JHC0000078	COIL	
L5004	J0JHC0000078	COIL	
L5005	J0JHC0000078	COIL	
L5006	J0JHC0000078	COIL	
L5007	J0JHC0000078	COIL	
L5009	J0JHC0000078	COIL	
L5010	J0JBC0000080	COIL	
L5011	J0JHC0000078	COIL	
L5012	J0JHC0000078	COIL	
L5013	J0JHC0000078	COIL	
FL4001	J0MAB0000169	COIL	
FL4002	J0MAB0000169	COIL	
FL4003	J0MAB0000169	COIL	
FL5001	FLJ1A1050020	FILTER C 1UF Z 50V	
FL5002	FLJ1A1050020	FILTER C 1UF Z 50V	
LF801	G0B153H00003	COIL	△
LF802	G0B153H00003	COIL	△
T801	ETS42BM166AD	TRANSFORMER	PAVCKM △
T880	ETS15AB146AH	TRANSFORMER	PAVCKM △
R801	D1F5100E0002	SAFETY RESISTOR	
R802	ERG2SJW473E	M 47K OHM J 2W	PAVCKM
R803	D0AW825JA001	C 8.2OHM J 3/4W	PAVCKM △
R808	ERC12ZGK225D	S 2.2M OHM K 1/2W	△
R813	RD16ST471J	C 470 OHM J 1/4W	
R820	RD16ST223J	C 22K OHM J 1/4W	
R821	RD16ST102J	C 1K OHM J 1/4W	
R824	RD16ST561J	C 560 OHM J 1/4W	
R831	ERG2SJW104E	M 100K OHM J 2W	
R832	RSS3GT470J	M 47 OHM J 3W	
R833	DOC1390JA051	39 OHM 1W	PAVCKM
R834	RD16ST102J	C 1K OHM J 1/4W	
R841	RD16ST823J	C 82K OHM J 1/4W	
R842	RD16ST391J	C 390 OHM J 1/4W	
R843	ERX2FZJR12H	M 0.12 OHM J 2W	PAVCKM
R844	ERX2FZJR15H	M 0.15 OHM J 2W	PAVCKM
R845	RD16ST473J	C 47K OHM J 1/4W	
R846	RD16ST182J	C 1.8K OHM J 1/4W	
R848	RD16ST561J	C 560 OHM J 1/4W	
R865	RD50SST100J	C 10 OHM J 1/2W	
R880	ERX12SJ2R2E	M 2.2 OHM J 1/2W	
R881	RD50SST181J	C 180 OHM J 1/2W	
R882	RD16ST123J	C 12K OHM J 1/4W	
R883	RD16ST104J	C 100K OHM J 1/4W	
R884	ERG2DJ474P	M 470K OHM J 2W	PAVCKM
R886	RSS1L104J	M 100K OHM J 1W	
R887	D0DK1R0JA019	SAFETY RESISTOR	PAVCKM
R888	ERG1DJ334P	M 330 OHM J 1W	PAVCKM
R889	EROS2THF6801	M 6.8K OHM F 1/4W	
R890	EROS2CHF4301	M 4.3K OHM F 1/4W	PAVCKM
R891	RD16ST330J	C 33 OHM J 1/4W	
R892	RD16ST332J	C 3.3K OHM J 1/4W	
R904	D0GB473JA041	M 47K OHM J 1/16W	
R905	D0GB103JA041	M 10K OHM J 1/16W	
R906	D0GB102JA041	M 1K OHM J 1/16W	
R908	D0GB102JA041	M 1K OHM J 1/16W	
R909	RD16ST103J	C 10K OHM J 1/4W	
R910	D0GB473JA041	M 47K OHM J 1/16W	
R911	ERJ6GEYJ102V	M 1K OHM J 1/10W	
R916	ERJ3EKF1201V	M 1.2K OHM F 1/16W	
R917	ERJ3EKF6491	M 6.49K OHM F 1/16W	PAVCKM
R918	ERJ3EKF1241V	M 1.24K OHM F 1/16W	
R919	ERJ3EKF6190	M 619 OHM F 1/16W	PAVCKM
R920	ERJ3EKF1001V	M 1K OHM F 1/16W	
R921	ERJ3EKF1691V	M 1.69K OHM F 1/16W	
R933	ERJ3EKF1303V	M 130K OHM F 1/16W	
R934	ERJ3EKF4222V	M 42.2K OHM F 1/16W	

Ref. No.	Part No.	Part Name & Description	Remarks
R937	D0GB333JA041	M 33K OHM J 1/16W	
R941	D0GB103JA041	M 10K OHM J 1/16W	
R942	D0GB473JA041	M 47K OHM J 1/16W	
R943	RD16ST103J	C 10K OHM J 1/4W	
R946	D0GB102JA041	M 1K OHM J 1/16W	
R947	D0GB102JA041	M 1K OHM J 1/16W	
R949	ERJ3EKF2491V	M 2.49K OHM F 1/16W	
R950	ERJ3EKF8200V	M 8.2K OHM F 1/16W	
R951	D0GB103JA041	M 10K OHM J 1/16W	
R952	D0GB103JA041	M 10K OHM J 1/16W	
R953	D0GB473JA041	M 47K OHM J 1/16W	
R954	D0GB102JA041	M 1K OHM J 1/16W	
R956	D0GB473JA041	M 47K OHM J 1/16W	
R957	D0GB102JA041	M 1K OHM J 1/16W	
R960	RD50SST302J	C 3K OHM J 1/2W	
R961	RD50SST302J	C 3K OHM J 1/2W	
R962	RD50SST302J	C 3K OHM J 1/2W	
R963	RD50SST302J	C 3K OHM J 1/2W	
R964	RD50SST302J	C 3K OHM J 1/2W	
R965	RD50SST302J	C 3K OHM J 1/2W	
R966	RD50SST302J	C 3K OHM J 1/2W	
R967	RD50SST302J	C 3K OHM J 1/2W	
R1002	D0GB473JA041	M 47K OHM J 1/16W	
R1003	D0GB102JA041	M 1K OHM J 1/16W	
R1006	D0GB221JA041	M 220 OHM J 1/16W	
R1008	D0GB473JA041	M 47K OHM J 1/16W	
R1010	D0GB473JA041	M 47K OHM J 1/16W	
R1015	D0GB103JA041	M 10K OHM J 1/16W	
R1017	D0GB103JA041	M 10K OHM J 1/16W	
R1019	D0GB103JA041	M 10K OHM J 1/16W	
R1020	D0GB103JA041	M 10K OHM J 1/16W	
R1022	D0GB152JA041	M 1.5K OHM J 1/16W	
R1025	D0GB273JA041	M 27K OHM J 1/16W	
R1026	D0GB273JA041	M 27K OHM J 1/16W	
R1028	D0GB470JA041	M 47 OHM J 1/16W	
R1029	D0GB102JA041	M 1K OHM J 1/16W	
R1171	D0GB220JA041	M 22 OHM J 1/16W	
R1172	D0GB220JA041	M 22 OHM J 1/16W	
R1173	D0GB473JA041	M 47K OHM J 1/16W	
R1174	D0GB101JA041	M 100 OHM J 1/16W	
R1175	D0GB101JA041	M 100 OHM J 1/16W	
R1176	D0GB101JA041	M 100 OHM J 1/16W	
R1177	D0GB101JA041	M 100 OHM J 1/16W	
R1236	D0GB103JA041	M 10K OHM J 1/16W	
R1237	D0GB103JA041	M 10K OHM J 1/16W	
R1238	D0GB103JA041	M 10K OHM J 1/16W	
R1239	D0GB103JA041	M 10K OHM J 1/16W	
R1240	D0GB473JA041	M 47K OHM J 1/16W	
R1241	D0GB103JA041	M 10K OHM J 1/16W	
R1242	D0GB223JA041	M 22K OHM J 1/16W	
R1243	D0GB473JA041	M 47K OHM J 1/16W	
R1246	D0GB332JA041	M 3.3K OHM J 1/16W	
R1247	D0GB332JA041	M 3.3K OHM J 1/16W	
R1248	D0GB562JA041	M 5.6K OHM J 1/16W	
R1700	D0GB103JA041	M 10K OHM J 1/16W	
R1701	D0GB393JA041	M 39K OHM J 1/16W	
R1702	D0GB393JA041	M 39K OHM J 1/16W	
R1811	ERJ6GEYJ103V	M 10K OHM J 1/10W	
R1812	D0GB333JA041	M 33K OHM J 1/16W	
R1813	D0GB472JA041	M 4.7K OHM J 1/16W	
R1815	ERJ6GEYJ103V	M 10K OHM J 1/10W	
R1816	D0GB223JA041	M 22K OHM J 1/16W	
R1818	D0GB102JA041	M 1K OHM J 1/16W	
R1819	ERJ3EKF5231V	M 5.23K OHM F 1/16W	
R1820	ERJ3EKF2202V	M 22K OHM F 1/16W	
R1823	D0GB473JA041	M 47K OHM J 1/16W	
R1824	D0GB103JA041	M 10K OHM J 1/16W	
R1825	D0GB473JA041	M 47K OHM J 1/16W	
R1826	D0GB103JA041	M 10K OHM J 1/16W	
R1827	D0GB472JA041	M 4.7K OHM J 1/16W	
R1828	D0GB472JA041	M 4.7K OHM J 1/16W	
R1829	D0GB472JA041	M 4.7K OHM J 1/16W	
R1830	D0GB472JA041	M 4.7K OHM J 1/16W	

Ref. No.	Part No.	Part Name & Description	Remarks
R1831	D0GB102JA041	M 1K OHM J 1/16W	
R1832	D0GB102JA041	M 1K OHM J 1/16W	
R2096	ERJ2GEJ103X	M 10K OHM J 1/4W	
R2097	ERJ2GEJ393X	M 39K OHM 1/4W	
R2098	ERJ3EKF3902V	M 39K OHM F 1/16W	
R2099	D0GB100JA041	M 10 OHM J 1/16W	
R2100	D0GB100JA041	M 10 OHM J 1/16W	
R2101	D0GB220JA041	M 22 OHM J 1/16W	
R2102	D0GB220JA041	M 22 OHM J 1/16W	
R2103	D0GB472JA041	M 4.7K OHM J 1/16W	
R2104	D0GB472JA041	M 4.7K OHM J 1/16W	
R2105	D0GB472JA041	M 4.7K OHM J 1/16W	
R2106	D0GB472JA041	M 4.7K OHM J 1/16W	
R2107	D0GB153JA041	M 15K OHM J 1/16W	
R2108	D0GB153JA041	M 15K OHM J 1/16W	
R2109	D0GB103JA041	M 10K OHM J 1/16W	
R2111	D0GB103JA041	M 10K OHM J 1/16W	
R2112	ERJ2GEJ104X	M 100K OHM J 1/4W	
R2113	ERJ2GEJ104X	M 100K OHM J 1/4W	
R2114	ERJ2GEJ154X	M 150K OHM J 1/4W	
R2115	ERJ2GEJ393X	M 39K OHM 1/4W	
R2121	ERJ2GEJ104X	M 100K OHM J 1/4W	
R2122	ERJ2GEJ154X	M 150K OHM J 1/4W	
R2139	ERJ2GEJ103X	M 10K OHM J 1/4W	
R2140	ERJ2GEJ103X	M 10K OHM J 1/4W	
R2148	D0GB682JA041	M 6.8K OHM J 1/16W	
R2149	D0GB682JA041	M 6.8K OHM J 1/16W	
R2152	ERJ2GEJ104X	M 100K OHM J 1/4W	
R2153	ERJ2GEJ104X	M 100K OHM J 1/4W	
R2154	ERJ2GEJ104X	M 100K OHM J 1/4W	
R2155	D0GB105JA041	M 1M OHM F 1/16W	
R2156	D0GB105JA041	M 1M OHM F 1/16W	
R2159	ERJ2GEJ104X	M 100K OHM J 1/4W	
R2160	ERJ2GEJ104X	M 100K OHM J 1/4W	
R2303	ERJ2GEJ103X	M 10K OHM J 1/4W	
R2304	ERJ2GEJ103X	M 10K OHM J 1/4W	
R2306	ERJ2GEJ104X	M 100K OHM J 1/4W	
R2307	ERJ2GEJ103X	M 10K OHM J 1/4W	
R2308	D0GB104JA041	M 100K OHM J 1/16W	
R2310	D0GB222JA041	M 2.2K OHM J 1/16W	
R2313	ERJ2GEJ104X	M 100K OHM J 1/4W	
R2314	ERJ2GEJ105X	M 1M OHM J 1/4W	
R2381	ERJ2GEJ102X	M 1K OHM J 1/4W	
R2382	ERJ2GEJ104X	M 100K OHM J 1/4W	
R2383	ERJ2GEJ103X	M 10K OHM J 1/4W	
R3001	D0GB184JA041	M 180K OHM J 1/16W	
R3002	D0GB184JA041	M 180K OHM J 1/16W	
R3003	D1BD75R0A044	M 75 OHM 1/10W	
R3004	D1BD75R0A044	M 75 OHM 1/10W	
R3005	D1BD75R0A044	M 75 OHM 1/10W	
R3006	D0GB184JA041	M 180K OHM J 1/16W	
R3007	D0GB184JA041	M 180K OHM J 1/16W	
R3010	D1BD75R0A044	M 75 OHM 1/10W	
R3011	D0GB184JA041	M 180K OHM J 1/16W	
R3012	D0GB184JA041	M 180K OHM J 1/16W	
R3013	D1BD75R0A044	M 75 OHM 1/10W	
R3014	D1BD75R0A044	M 75 OHM 1/10W	
R3015	D1BD75R0A044	M 75 OHM 1/10W	
R3019	D1BD75R0A044	M 75 OHM 1/10W	
R3020	D0GB431JA041	M 430 OHM J 1/16W	
R3021	D0GB431JA041	M 430 OHM J 1/16W	
R3022	ERJ6GEYJ331V	M 330 OHM J 1/10W	
R3023	ERJ6GEYJ471V	M 470 OHM J 1/10W	
R3024	ERJ6GEYJ271V	M 270 OHM J 1/10W	
R3026	D0GB473JA041	M 47K OHM J 1/16W	
R3027	D0GB393JA041	M 39K OHM J 1/16W	
R3034	D0GB184JA041	M 180K OHM J 1/16W	
R3035	D0GB101JA041	M 100 OHM J 1/16W	
R3036	D0GB101JA041	M 100 OHM J 1/16W	
R3037	D0GB101JA041	M 100 OHM J 1/16W	
R3038	D0GB101JA041	M 100 OHM J 1/16W	
R3039	D0GB105JA041	M 1M OHM F 1/16W	
R3040	D0GB274JA041	M 270K OHM J 1/16W	

Ref. No.	Part No.	Part Name & Description	Remarks
R3041	D0GB473JA041	M 47K OHM J 1/16W	
R3042	D0GB102JA041	M 1K OHM J 1/16W	
R3043	D0GB184JA041	M 180K OHM J 1/16W	
R3110	D0GB102JA041	M 1K OHM J 1/16W	
R3112	D0GB102JA041	M 1K OHM J 1/16W	
R3118	D0GB102JA041	M 1K OHM J 1/16W	
R3120	D0GB102JA041	M 1K OHM J 1/16W	
R3129	D0GB102JA041	M 1K OHM J 1/16W	
R3130	D0GB102JA041	M 1K OHM J 1/16W	
R3200	D0GB103JA041	M 10K OHM J 1/16W	
R3201	D0GB473JA041	M 47K OHM J 1/16W	
R3203	D0GB103JA041	M 10K OHM J 1/16W	
R3204	ERJ14YJ222U	M 22K OHM J 1/4W	
R3205	ERJ14YJ222U	M 22K OHM J 1/4W	
R3206	D0GB223JA041	M 22K OHM J 1/16W	
R3207	D0GB332JA041	M 3.3K OHM J 1/16W	
R3208	D0GB103JA041	M 10K OHM J 1/16W	
R3209	D0GB473JA041	M 47K OHM J 1/16W	
R3210	D0GB332JA041	M 3.3K OHM J 1/16W	
R3215	D0GB103JA041	M 10K OHM J 1/16W	
R3218	D0GB103JA041	M 10K OHM J 1/16W	
R3221	D0GB103JA041	M 10K OHM J 1/16W	
R3227	D0GB103JA041	M 10K OHM J 1/16W	
R3229	D0GB153JA041	M 15K OHM J 1/16W	
R3230	D0GB473JA041	M 47K OHM J 1/16W	
R3231	D0GB103JA041	M 10K OHM J 1/16W	
R3233	D0GB473JA041	M 47K OHM J 1/16W	
R3234	D0GB222JA041	M 2.2K OHM J 1/16W	
R3235	D0GB152JA041	M 1.5K OHM J 1/16W	
R3236	D0GB223JA041	M 22K OHM J 1/16W	
R3237	D0GB473JA041	M 47K OHM J 1/16W	
R3502	D1BD75R0A044	M 75 OHM 1/10W	
R3505	D1BD75R0A044	M 75 OHM 1/10W	
R3509	D1BD75R0A044	M 75 OHM 1/10W	
R3510	ERJ6GEYJ102V	M 1K OHM J 1/10W	
R3512	ERJ6GEYJ102V	M 1K OHM J 1/10W	
R3513	ERJ6GEYJ184V	M 180K OHM J 1/10W	
R3514	ERJ6GEYJ184V	M 180K OHM J 1/10W	
R3800	D0GB101JA041	M 100 OHM J 1/16W	
R3869	D0GB103JA041	M 10K OHM J 1/16W	
R3879	D0GB221JA041	M 220 OHM J 1/16W	
R3882	D0GB102JA041	M 1K OHM J 1/16W	
R3883	D0GB331JA041	M 330 OHM J 1/16W	
R3911	D0GB103JA041	M 10K OHM J 1/16W	
R3912	D0GB332JA041	M 3.3K OHM J 1/16W	
R3914	D0GB332JA041	M 3.3K OHM J 1/16W	
R3915	D0GB122JA041	N 1.2K OHM J 1/16W	
R3916	D0GB471JA041	M 470 OHM J 1/16W	
R3917	D0GB561JA041	M 560 OHM J 1/16W	
R4001	D0GB273JA041	M 27K OHM J 1/16W	
R4003	D0GB102JA041	M 1K OHM J 1/16W	
R4005	ERJ2GEJ103X	M 10K OHM J 1/4W	
R4007	D0GB101JA041	M 100 OHM J 1/16W	
R4008	D0GB101JA041	M 100 OHM J 1/16W	
R4009	EXB2HV104JV	RESISTOR 100K OHM	
R4011	D0GB102JA041	M 1K OHM J 1/16W	
R4012	D0GB101JA041	M 100 OHM J 1/16W	
R4014	D0GB101JA041	M 100 OHM J 1/16W	
R4015	ERJ2GEJ104X	M 100K OHM J 1/4W	
R4016	D0GB103JA041	M 10K OHM J 1/16W	
R4017	D0GB103JA041	M 10K OHM J 1/16W	
R4018	ERJ2GEJ473X	M 47K OHM J	
R4019	D0GB473JA041	M 47K OHM J 1/16W	
R4020	D0GB103JA041	M 10K OHM J 1/16W	
R4021	D0GB103JA041	M 10K OHM J 1/16W	
R4022	D0GB473JA041	M 47K OHM J 1/16W	
R4023	D0GB101JA041	M 100 OHM J 1/16W	
R4025	D0GB101JA041	M 100 OHM J 1/16W	
R4028	D0GB220JA041	M 22 OHM J 1/16W	
R4034	D0GB101JA041	M 100 OHM J 1/16W	
R4038	ERJ2GEJ822X	M 8.2K OHM J	
R4047	D0GB101JA041	M 100 OHM J 1/16W	
R4048	D0GB101JA041	M 100 OHM J 1/16W	

Ref. No.	Part No.	Part Name & Description	Remarks
R4049	D0GB101JA041	M 100 OHM J 1/16W	
R4050	D0GB101JA041	M 100 OHM J 1/16W	
R4053	D0GB101JA041	M 100 OHM J 1/16W	
R4055	D0GB101JA041	M 100 OHM J 1/16W	
R4057	D0GB101JA041	M 100 OHM J 1/16W	
R4058	D0GB101JA041	M 100 OHM J 1/16W	
R4059	D0GB101JA041	M 100 OHM J 1/16W	
R4061	D0GB220JA041	M 22 OHM J 1/16W	
R4062	D0GB102JA041	M 1K OHM J 1/16W	
R4063	D0GB220JA041	M 22 OHM J 1/16W	
R4064	D0GB473JA041	M 47K OHM J 1/16W	
R4065	D0GB220JA041	M 22 OHM J 1/16W	
R4066	D0GB101JA041	M 100 OHM J 1/16W	
R4069	D0GB101JA041	M 100 OHM J 1/16W	
R4071	D0GB103JA041	M 10K OHM J 1/16W	
R4072	D0GB101JA041	M 100 OHM J 1/16W	
R4077	D0GB220JA041	M 22 OHM J 1/16W	
R4078	D0GB102JA041	M 1K OHM J 1/16W	
R4079	D0GB101JA041	M 100 OHM J 1/16W	
R4080	D0GB220JA041	M 22 OHM J 1/16W	
R4081	D0GB101JA041	M 100 OHM J 1/16W	
R4089	D0GB151JA041	M 150 OHM J 1/16W	
R4092	D0GB102JA041	M 1K OHM J 1/16W	
R4093	D0GB103JA041	M 10K OHM J 1/16W	
R4094	D0GB151JA041	M 150 OHM J 1/16W	
R4097	D0GB151JA041	M 150 OHM J 1/16W	
R4098	D0GB151JA041	M 150 OHM J 1/16W	
R4099	D0GB151JA041	M 150 OHM J 1/16W	
R4100	D0GB151JA041	M 150 OHM J 1/16W	
R4101	D0GB103JA041	M 10K OHM J 1/16W	
R4102	D0GB151JA041	M 150 OHM J 1/16W	
R4103	D0GB103JA041	M 10K OHM J 1/16W	
R4104	D0GB332JA041	M 3.3K OHM J 1/16W	
R4105	D0GB103JA041	M 10K OHM J 1/16W	
R4106	D0GB103JA041	M 10K OHM J 1/16W	
R4107	D0GB151JA041	M 150 OHM J 1/16W	
R4108	D0GB102JA041	M 1K OHM J 1/16W	
R4109	D0GB151JA041	M 150 OHM J 1/16W	
R4110	D0GB102JA041	M 1K OHM J 1/16W	
R4111	D0GB151JA041	M 150 OHM J 1/16W	
R4113	D0GB151JA041	M 150 OHM J 1/16W	
R4114	D0GB101JA041	M 100 OHM J 1/16W	
R4115	D0GB151JA041	M 150 OHM J 1/16W	
R4116	D0GB102JA041	M 1K OHM J 1/16W	
R4117	D0GB151JA041	M 150 OHM J 1/16W	
R4118	D0GB471JA041	M 470 OHM J 1/16W	
R4121	D0GB562JA041	M 5.6K OHM J 1/16W	
R4123	D0GB151JA041	M 150 OHM J 1/16W	
R4125	D0GB151JA041	M 150 OHM J 1/16W	
R4126	D0GB151JA041	M 150 OHM J 1/16W	
R4127	D0GB151JA041	M 150 OHM J 1/16W	
R4128	ERJ2GEJ103X	M 10K OHM J 1/4W	
R4129	D0GB182JA041	M 1.8K OHM J 1/16W	
R4131	D0GB221JA041	M 220 OHM J 1/16W	
R4132	D0GB221JA041	M 220 OHM J 1/16W	
R4134	D0GB331JA041	M 330 OHM J 1/16W	
R4135	D0GB331JA041	M 330 OHM J 1/16W	
R4136	D0GB223JA041	M 22K OHM J 1/16W	
R4138	D0GB103JA041	M 10K OHM J 1/16W	
R4139	D0GB103JA041	M 10K OHM J 1/16W	
R4140	D0GB272JA041	M 2.7K OHM J 1/16W	
R4141	D0GB121JA041	M 120 OHM J 1/16W	
R4188	D0GB102JA041	M 1K OHM J 1/16W	
R4189	D0GB101JA041	M 100 OHM J 1/16W	
R4191	D0GB103JA041	M 10K OHM J 1/16W	
R4192	D0GB103JA041	M 10K OHM J 1/16W	
R4193	D0GB103JA041	M 10K OHM J 1/16W	
R4194	ERJ3EKF1000V	M 100 OHM F 1/16W	
R4195	D0GB101JA041	M 100 OHM J 1/16W	
R4196	ERJ3EKF1000V	M 100 OHM F 1/16W	
R4197	D0GB101JA041	M 100 OHM J 1/16W	
R4198	ERJ3EKF1000V	M 100 OHM F 1/16W	
R4199	D0GB103JA041	M 10K OHM J 1/16W	

Ref. No.	Part No.	Part Name & Description	Remarks
R4200	ERJ3EKF1000V	M 100 OHM F 1/16W	
R4201	D0GB103JA041	M 10K OHM J 1/16W	
R4202	ERJ3EKF1000V	M 100 OHM F 1/16W	
R4203	D0GB102JA041	M 1K OHM J 1/16W	
R4204	ERJ3EKF1600V	M 160 OHM F 1/16W	
R4205	ERJ3EKF1600V	M 160 OHM F 1/16W	
R4206	ERJ3EKF1600V	M 160 OHM F 1/16W	
R4207	ERJ3EKF1600V	M 160 OHM F 1/16W	
R4208	ERJ3EKF1600V	M 160 OHM F 1/16W	
R4214	D0GB101JA041	M 100 OHM J 1/16W	
R4215	D0GB101JA041	M 100 OHM J 1/16W	
R4216	D0GB103JA041	M 10K OHM J 1/16W	
R4217	D0GB101JA041	M 100 OHM J 1/16W	
R4218	D0GB101JA041	M 100 OHM J 1/16W	
R4219	D0GB102JA041	M 1K OHM J 1/16W	
R4220	D0GB102JA041	M 1K OHM J 1/16W	
R4221	D0GB102JA041	M 1K OHM J 1/16W	
R4222	D0GB103JA041	M 10K OHM J 1/16W	
R4225	D0GB103JA041	M 10K OHM J 1/16W	
R4226	D0GB332JA041	M 3.3K OHM J 1/16W	
R4228	D0GB102JA041	M 1K OHM J 1/16W	
R4229	D0GB392JA041	M 3.9K OHM J 1/16W	
R4230	D0GB392JA041	M 3.9K OHM J 1/16W	
R4231	D0GB103JA041	M 10K OHM J 1/16W	
R4232	D0GB103JA041	M 10K OHM J 1/16W	
R4233	D0GB103JA041	M 10K OHM J 1/16W	
R4234	D0GB103JA041	M 10K OHM J 1/16W	
R4235	D0GB103JA041	M 10K OHM J 1/16W	
R4236	D0GB103JA041	M 10K OHM J 1/16W	
R4237	D0GB103JA041	M 10K OHM J 1/16W	
R4238	D0GB103JA041	M 10K OHM J 1/16W	
R4239	D0GB103JA041	M 10K OHM J 1/16W	
R4240	D0GB103JA041	M 10K OHM J 1/16W	
R4241	D0GB103JA041	M 10K OHM J 1/16W	
R4242	D0GB103JA041	M 10K OHM J 1/16W	
R4243	D0GB103JA041	M 10K OHM J 1/16W	
R4244	D0GB101JA041	M 100 OHM J 1/16W	
R4245	D0GB103JA041	M 10K OHM J 1/16W	
R4246	D0GB103JA041	M 10K OHM J 1/16W	
R4247	D0GB103JA041	M 10K OHM J 1/16W	
R4248	D0GB103JA041	M 10K OHM J 1/16W	
R4249	D0GB103JA041	M 10K OHM J 1/16W	
R4253	D0GB1R8JA040	M 1.8 OHM J 1/16W	
R4254	D0GB103JA041	M 10K OHM J 1/16W	
R4255	D0GB104JA041	M 100K OHM J 1/16W	
R4257	D0GB103JA041	M 10K OHM J 1/16W	
R4258	D0GB473JA041	M 47K OHM J 1/16W	
R4259	D0GB473JA041	M 47K OHM J 1/16W	
R4271	D0GB221JA041	M 220 OHM J 1/16W	
R4272	D0GB221JA041	M 220 OHM J 1/16W	
R4273	D0GB221JA041	M 220 OHM J 1/16W	
R4274	D0GB221JA041	M 220 OHM J 1/16W	
R4275	D0GB221JA041	M 220 OHM J 1/16W	
R4276	D0GB221JA041	M 220 OHM J 1/16W	
R4277	D0GB221JA041	M 220 OHM J 1/16W	
R4278	D0GB221JA041	M 220 OHM J 1/16W	
R4279	D0GB221JA041	M 220 OHM J 1/16W	
R4280	D0GB221JA041	M 220 OHM J 1/16W	
R4281	D0GB332JA041	M 3.3K OHM J 1/16W	
R4282	D0GB332JA041	M 3.3K OHM J 1/16W	
R4328	D0GB101JA041	M 100 OHM J 1/16W	
R4501	D0GB473JA041	M 47K OHM J 1/16W	
R4502	D0GB103JA041	M 10K OHM J 1/16W	
R4504	D0GB103JA041	M 10K OHM J 1/16W	
R4505	D0GB103JA041	M 10K OHM J 1/16W	
R4506	D0GB473JA041	M 47K OHM J 1/16W	
R4810	D0GB223JA041	M 22K OHM J 1/16W	
R4811	D0GB333JA041	M 33K OHM J 1/16W	
R5001	D0GB390JA041	M 39 OHM J 1/16W	
R5002	D0GB390JA041	M 39 OHM J 1/16W	
R5005	D0GB103JA041	M 10K OHM J 1/16W	
R5006	D0GB103JA041	M 10K OHM J 1/16W	
R5007	D0GB2R7JA040	M 2.7 OHM J 1/16W	

Ref. No.	Part No.	Part Name & Description	Remarks
R5008	D0GB2R7JA040	M 2.7 OHM J 1/16W	
R5009	D0GB2R7JA040	M 2.7 OHM J 1/16W	
R5010	D0GB2R7JA040	M 2.7 OHM J 1/16W	
R5011	D0GB2R7JA040	M 2.7 OHM J 1/16W	
R5012	D0GB2R7JA040	M 2.7 OHM J 1/16W	
R5013	D0GB2R7JA040	M 2.7 OHM J 1/16W	
R5014	D0GB2R7JA040	M 2.7 OHM J 1/16W	
R5015	D0GB2R7JA040	M 2.7 OHM J 1/16W	
R5016	D0GB2R7JA040	M 2.7 OHM J 1/16W	
R5017	D0GB2R7JA040	M 2.7 OHM J 1/16W	
R5018	D0GB2R7JA040	M 2.7 OHM J 1/16W	
R5019	D0GB2R7JA040	M 2.7 OHM J 1/16W	
R5020	D0GB2R7JA040	M 2.7 OHM J 1/16W	
R5021	D0GB2R7JA040	M 2.7 OHM J 1/16W	
R5022	D0GB2R7JA040	M 2.7 OHM J 1/16W	
R5024	D0GB103JA041	M 10K OHM J 1/16W	
R5025	D0GB103JA041	M 10K OHM J 1/16W	
R5027	D0GB103JA041	M 10K OHM J 1/16W	
R5028	D0GB103JA041	M 10K OHM J 1/16W	
R5029	D0GB103JA041	M 10K OHM J 1/16W	
R5030	D0GB472JA041	M 4.7K OHM J 1/16W	
R5031	D0GB472JA041	M 4.7K OHM J 1/16W	
R5032	D0GB103JA041	M 10K OHM J 1/16W	
R5035	D0GB472JA041	M 4.7K OHM J 1/16W	
R5036	D0GB472JA041	M 4.7K OHM J 1/16W	
R5038	D0GB473JA041	M 47K OHM J 1/16W	
R5039	D0GB560JA041	M 56 OHM J 1/16W	
R5040	D0GB473JA041	M 47K OHM J 1/16W	
R5041	D0GB560JA041	M 56 OHM J 1/16W	
R5043	D0GB560JA041	M 56 OHM J 1/16W	
R5045	D0GB560JA041	M 56 OHM J 1/16W	
R5048	D0GB472JA041	M 4.7K OHM J 1/16W	
R5049	D0GB472JA041	M 4.7K OHM J 1/16W	
R5052	D0GB472JA041	M 4.7K OHM J 1/16W	
R5053	D0GB472JA041	M 4.7K OHM J 1/16W	
R5054	D0GB101JA041	M 100 OHM J 1/16W	
R5055	D0GB101JA041	M 100 OHM J 1/16W	
R5057	D0GB103JA041	M 10K OHM J 1/16W	
R5058	D0GB330JA041	M 33 OHM J 1/16W	
R5060	D0GB103JA041	M 10K OHM J 1/16W	
R5061	D0GB220JA041	M 22 OHM J 1/16W	
R5062	D0GB220JA041	M 22 OHM J 1/16W	
R5063	D0GB330JA041	M 33 OHM J 1/16W	
R5064	D0GB220JA041	M 22 OHM J 1/16W	
R5065	D0GB330JA041	M 33 OHM J 1/16W	
R5066	D0GB220JA041	M 22 OHM J 1/16W	
R5067	D0GB330JA041	M 33 OHM J 1/16W	
R5068	D0GB220JA041	M 22 OHM J 1/16W	
R5070	D0GB220JA041	M 22 OHM J 1/16W	
R5073	D0GB105JA041	M 1M OHM F 1/16W	
R5075	D0GB821JA041	M 820 OHM J 1/16W	
R5077	D0GB182JA041	M 1.8K OHM J 1/16W	
R5078	D0GB220JA041	M 22 OHM J 1/16W	
R5080	D0GB220JA041	M 22 OHM J 1/16W	
R5081	D0GB182JA041	M 1.8K OHM J 1/16W	
R5082	D0GB220JA041	M 22 OHM J 1/16W	
R5083	EXB38V220JV	M 22 OHM J 1/16W	
R5084	EXB2HV220JV	RESISTOR 22 OHM	
R5085	ERJ2GEJ220X	M 22 OHM J 1/4W	
R5086	EXB2HV220JV	RESISTOR 22 OHM	
R5087	EXB2HV220JV	RESISTOR 22 OHM	
R5093	ERJ3EKF2612V	M 26.1K OHM F 1/16W	
R5094	D0GB221JA041	M 220 OHM J 1/16W	
R5095	ERJ3EKF4703V	M 470K OHM F 1/16W	
R5096	D0GB104JA041	M 100K OHM J 1/16W	
R5097	D0GB473JA041	M 47K OHM J 1/16W	
R5098	ERJ3EKF2203V	M 220K OHM F 1/16W	
R5099	D0GB472JA041	M 4.7K OHM J 1/16W	
R5100	D0GB475JA040	M 4700K OHM J 1/16W	
R5102	D0GB223JA041	M 22K OHM J 1/16W	
R5103	D0GB103JA041	M 10K OHM J 1/16W	
R5104	D0GB102JA041	M 1K OHM J 1/16W	
R5105	D0GB103JA041	M 10K OHM J 1/16W	

Ref. No.	Part No.	Part Name & Description	Remarks
R5106	D0GB102JA041	M 1K OHM J 1/16W	
R5107	EXB2HV104JV	RESISTOR 100K OHM	
R5108	EXB2HV104JV	RESISTOR 100K OHM	
R5109	EXB2HV104JV	RESISTOR 100K OHM	
R5110	D0GB104JA041	M 100K OHM J 1/16W	
R5111	D0GB104JA041	M 100K OHM J 1/16W	
R5112	D0GB104JA041	M 100K OHM J 1/16W	
R5113	D0GB104JA041	M 100K OHM J 1/16W	
R5125	D0GB220JA041	M 22 OHM J 1/16W	
R5126	D0GB220JA041	M 22 OHM J 1/16W	
R5130	D0GB473JA041	M 47K OHM J 1/16W	
R5131	D0GB473JA041	M 47K OHM J 1/16W	
R5132	D0GB220JA041	M 22 OHM J 1/16W	
R1024	D0GBR00Z0002	M 0 OHM J 1/16W	
R1167	D0GBR00Z0002	M 0 OHM J 1/16W	
R1814	D0GBR00Z0002	M 0 OHM J 1/16W	
R1834	D0GBR00Z0002	M 0 OHM J 1/16W	
R2118	D0GBR00Z0002	M 0 OHM J 1/16W	
R2120	ERJ2GE0R00X	M 0 OHM 1/4W	
R3030	ERJ2GE0R00X	M 0 OHM 1/4W	
R3045	D0GBR00Z0002	M 0 OHM J 1/16W	
R3049	D0GBR00Z0002	M 0 OHM J 1/16W	
R3050	D0GBR00Z0002	M 0 OHM J 1/16W	
R3051	D0GBR00Z0002	M 0 OHM J 1/16W	
R3052	D0GBR00Z0002	M 0 OHM J 1/16W	
R3053	D0GBR00Z0002	M 0 OHM J 1/16W	
R3100	D0GBR00Z0002	M 0 OHM J 1/16W	
R3101	D0GBR00Z0002	M 0 OHM J 1/16W	
R3102	D0GBR00Z0002	M 0 OHM J 1/16W	
R3103	D0GBR00Z0002	M 0 OHM J 1/16W	
R3104	D0GBR00Z0002	M 0 OHM J 1/16W	
R3105	D0GBR00Z0002	M 0 OHM J 1/16W	
R3106	D0GBR00Z0002	M 0 OHM J 1/16W	
R3107	D0GBR00Z0002	M 0 OHM J 1/16W	
R3108	D0GBR00Z0002	M 0 OHM J 1/16W	
R3109	D0GBR00Z0002	M 0 OHM J 1/16W	
R3111	D0GBR00Z0002	M 0 OHM J 1/16W	
R3116	D0GBR00Z0002	M 0 OHM J 1/16W	
R3117	D0GBR00Z0002	M 0 OHM J 1/16W	
R3119	D0GBR00Z0002	M 0 OHM J 1/16W	
R3121	D0GBR00Z0002	M 0 OHM J 1/16W	
R3122	D0GBR00Z0002	M 0 OHM J 1/16W	
R3123	D0GBR00Z0002	M 0 OHM J 1/16W	
R3124	D0GBR00Z0002	M 0 OHM J 1/16W	
R3128	D0GBR00Z0002	M 0 OHM J 1/16W	
R3232	ERJ6GEY0R00V	M 0 OHM J 1/10W	
R3501	ERJ6GEY0R00V	M 0 OHM J 1/10W	
R3503	ERJ6GEY0R00V	M 0 OHM J 1/10W	
R3504	ERJ6GEY0R00V	M 0 OHM J 1/10W	
R3507	ERJ6GEY0R00V	M 0 OHM J 1/10W	
R3508	ERJ6GEY0R00V	M 0 OHM J 1/10W	
R3511	ERJ6GEY0R00V	M 0 OHM J 1/10W	
R3884	D0GBR00Z0002	M 0 OHM J 1/16W	
R3885	D0GBR00Z0002	M 0 OHM J 1/16W	
R3919	ERJ12Y0R00U	M 0 OHM J 1/2W	
R4026	D0GBR00Z0002	M 0 OHM J 1/16W	
R4031	D0GBR00Z0002	M 0 OHM J 1/16W	
R4032	D0GBR00Z0002	M 0 OHM J 1/16W	
R4082	D0GBR00Z0002	M 0 OHM J 1/16W	
R4112	D0GBR00Z0002	M 0 OHM J 1/16W	
R4119	D0GBR00Z0002	M 0 OHM J 1/16W	
R4120	D0GBR00Z0002	M 0 OHM J 1/16W	
R4122	D0GBR00Z0002	M 0 OHM J 1/16W	
R4124	D0GBR00Z0002	M 0 OHM J 1/16W	
R4130	D0GBR00Z0002	M 0 OHM J 1/16W	
R4133	D0GBR00Z0002	M 0 OHM J 1/16W	
R4146	D0GBR00Z0002	M 0 OHM J 1/16W	
R4148	D0GBR00Z0002	M 0 OHM J 1/16W	
R4209	D0GBR00Z0002	M 0 OHM J 1/16W	
R4210	D0GBR00Z0002	M 0 OHM J 1/16W	
R4256	D0GBR00Z0002	M 0 OHM J 1/16W	
R4325	ERJ2GE0R00X	M 0 OHM 1/4W	

Ref. No.	Part No.	Part Name & Description	Remarks
R4326	ERJ2GE0R00X	M 0 OHM 1/4W	
R4750	ERJ2GE0R00X	M 0 OHM 1/4W	
R4751	ERJ2GE0R00X	M 0 OHM 1/4W	
R4752	ERJ2GE0R00X	M 0 OHM 1/4W	
R4753	ERJ2GE0R00X	M 0 OHM 1/4W	
R4754	ERJ2GE0R00X	M 0 OHM 1/4W	
R4755	ERJ2GE0R00X	M 0 OHM 1/4W	
R4756	ERJ2GE0R00X	M 0 OHM 1/4W	
R4757	ERJ2GE0R00X	M 0 OHM 1/4W	
R4758	ERJ2GE0R00X	M 0 OHM 1/4W	
R4759	ERJ2GE0R00X	M 0 OHM 1/4W	
R5023	ERJ2GE0R00X	M 0 OHM 1/4W	
R5026	ERJ2GE0R00X	M 0 OHM 1/4W	
R5088	D0GBR00Z0002	M 0 OHM J 1/16W	
R5091	D0GBR00Z0002	M 0 OHM J 1/16W	
R5101	D0GBR00Z0002	M 0 OHM J 1/16W	
R5114	D0GBR00Z0002	M 0 OHM J 1/16W	
R5116	D0GBR00Z0002	M 0 OHM J 1/16W	
R5117	D0GBR00Z0002	M 0 OHM J 1/16W	
R5118	D0GBR00Z0002	M 0 OHM J 1/16W	
R5119	D0GBR00Z0002	M 0 OHM J 1/16W	
R5124	D0GBR00Z0002	M 0 OHM J 1/16W	
JA1	ERJ6GEY0R00V	M 0 OHM J 1/10W	
JA1	ERJ8GEY0R00V	M 0 OHM 1/10W	
JA2	ERJ6GEY0R00V	M 0 OHM J 1/10W	
JA2	ERJ8GEY0R00V	M 0 OHM 1/10W	
JA3	ERJ8GEY0R00V	M 0 OHM 1/10W	
JA3	ERJ8GEY0R00V	M 0 OHM 1/10W	
JA4	ERJ8GEY0R00V	M 0 OHM 1/10W	
JA5	ERJ8GEY0R00V	M 0 OHM 1/10W	
JA6	ERJ8GEY0R00V	M 0 OHM 1/10W	
JA7	ERJ8GEY0R00V	M 0 OHM 1/10W	
JA8	ERJ8GEY0R00V	M 0 OHM 1/10W	
JA9	ERJ8GEY0R00V	M 0 OHM 1/10W	
JA10	ERJ8GEY0R00V	M 0 OHM 1/10W	
JS922	D0GBR00Z0002	M 0 OHM J 1/16W	
JS924	D0GBR00Z0002	M 0 OHM J 1/16W	
JS926	D0GBR00Z0002	M 0 OHM J 1/16W	
JS1801	D0GBR00Z0002	M 0 OHM J 1/16W	
JS1809	ERJ2GE0R00X	M 0 OHM 1/4W	
JS2004	ERJ6GEY0R00V	M 0 OHM J 1/10W	
JS2306	ERJ2GE0R00X	M 0 OHM 1/4W	
JS3501	ERJ6GEY0R00V	M 0 OHM J 1/10W	
JS3502	ERJ6GEY0R00V	M 0 OHM J 1/10W	
JS3503	ERJ6GEY0R00V	M 0 OHM J 1/10W	
JS3601	ERJ6GEY0R00V	M 0 OHM J 1/10W	
JS3602	ERJ6GEY0R00V	M 0 OHM J 1/10W	
C801	F0CAF2240003	C 0.22UF	PAVCKM △
C802	F0CAF2240003	C 0.22UF	PAVCKM △
C807	ECKCNA152ME7	C 1500 PF M	△
C808	ECKCNA471MB7	C 470PF M 250V	△
C809	ECKCNA471MB7	C 470PF M 250V	△
C810	ECKR3A102KBP	C 1000 PF K 1KV	
C811	ECKR3A471KBP	C 470PF K 1KV	
C813	F2A1E102A223	E 1000UF 25V	
C814	F2A1V1020043	E 1000UF 35V	PAVCKM
C815	F2A1V1020043	E 1000UF 35V	PAVCKM
C816	F2A1C102A252	E 1000UF 16V	
C820	ECKCNA101MB7	C 100PF M 250V	△
C821	ECKCNA101MB7	C 100PF M 250V	△
C830	F2B2W1510005	E 150UF 450V	
C831	ECQE6103KFB	P 0.06UF K 100V	
C833	F2A1H220A536	E 22UF 50V	PAVCKM
C834	ECKW3D152KBP	C 1500PF K 2KV	
C835	ECQB1H121JF	P 120PF J 50V	PAVCKM
C836	ECQB1H121JF	P 120PF J 50V	PAVCKM
C837	F2A1H10A317	E 1UF 50V	PAVCKM
C838	ECQB1H224JF3	P 0.22UF J 50V	△
C842	F2B2W1510005	E 150UF 450V	
C881	ECQB1H103JF3	P 0.01UF J 50V	
C882	F1B2H1030029	C 0.01UF 200V	PAVCKM

Ref. No.	Part No.	Part Name & Description	Remarks
C883	F2A1H4R7B204	E 4.7UF 50V	PAVCKM
C885	F2A2W2200020	E 22UF 160V	PAVCKM
C886	F2A1A471A476	E 470UF 10V	PAVCKM
C887	ECKR3A101KBP	C 100 PF K 1 KV	
C888	ECQB1H473JF3	P 0.047UF J 50V	
C889	ECQE6103KFB	P 0.06UF K 100V	
C890	ECQB1H681JF3	P 680PF J 50V	
C901	ECJ1VB1H104K	C 0.1UF K 50V	
C902	ECJ1VB1H104K	C 0.1UF K 50V	
C909	F2A1H221A115	E 220UF 50V	
C910	F2A1C471A256	E 470UF 16V	
C911	F2A1C471A256	E 470UF 16V	
C912	ECJ1VB1H104K	C 0.1UF K 50V	
C915	ECJ1VB1H104K	C 0.1UF K 50V	
C922	ECJ1VB1H104K	C 0.1UF K 50V	
C923	F2A1H221A115	E 220UF 50V	
C924	ECJ1VB1H104K	C 0.1UF K 50V	
C926	ECJ1VB1H104K	C 0.1UF K 50V	
C927	ECJ1VB1H104K	C 0.1UF K 50V	
C928	ECJ1VB1E105K	C 1UF K 25V	PAVCKM
C929	ECJ1VB1H104K	C 0.1UF K 50V	
C930	ECJ1VB1E105K	C 1UF K 25V	PAVCKM
C931	ECJ1VB1E105K	C 1UF K 25V	PAVCKM
C934	ECJ1VB1H104K	C 0.1UF K 50V	
C935	F2A1E221A225	E 220UF 25V	PAVCKM
C936	ECJ1VB1H104K	C 0.1UF K 50V	
C938	ECJ1VB1H103K	C 0.01UF K 50V	
C939	F2A1C471A256	E 470UF 16V	
C940	ECJ1VB1H104K	C 0.1UF K 50V	
C941	ECJ1VB1H104K	C 0.1UF K 50V	
C942	F2A1E221A487	E 220UF 25V	
C943	ECJ1VB1H104K	C 0.1UF K 50V	
C945	ECJ1VB1H103K	C 0.01UF K 50V	
C947	ECJ1VB1H104K	C 0.1UF K 50V	
C948	F2A1C471A256	E 470UF 16V	
C950	ECJ1VB1H104K	C 0.1UF K 50V	
C951	ECJ1VB1H104K	C 0.1UF K 50V	
C952	ECJ1VB1H104K	C 0.1UF K 50V	
C954	ECJ1VB1H104K	C 0.1UF K 50V	
C956	ECJ1VB1H104K	C 0.1UF K 50V	
C961	ECJ1VB1H104K	C 0.1UF K 50V	
C962	ECJ1VB1H104K	C 0.1UF K 50V	
C963	ECJ1VB1H104K	C 0.1UF K 50V	
C964	ECJ1VB1H104K	C 0.1UF K 50V	
C965	ECJ1VB1H102K	C 1000PF K 50V	
C966	ECJ1VB1H104K	C 0.1UF K 50V	
C967	ECJ1VB1H104K	C 0.1UF K 50V	
C974	F2A1C471A256	E 470UF 16V	
C976	F2A1H221A115	E 220UF 50V	
C981	F2A1C102A252	E 1000UF 16V	
C982	F2A1C102A252	E 1000UF 16V	
C985	ECJ1VB1H104K	C 0.1UF K 50V	
C1003	ECEA1CKS220B	E 22UF 16V	
C1006	ECEA0JKS470B	E 47UF 6.3V	
C1007	ECJ1VB1H103K	C 0.01UF K 50V	
C1168	ECJ1VB1C104K	C 0.1UF K 16V	
C1181	ECJ0EB1H102K	C 1000PF K 10V	
C1182	ECJ0EB1H102K	C 1000PF K 10V	
C1185	ECJ0EB1H102K	C 1000PF K 10V	
C1186	ECJ0EB1H102K	C 1000PF K 10V	
C1822	F1G1A1040006	P 0.1UF 10V	
C1828	F2H1C470A009	E 47UF 16V	
C1831	F1G1A1040006	P 0.1UF 10V	
C1834	ECJ2FB1C474K	C 0.47UF K 16V	
C1835	ECJ1VB1C563K	C 0.056UF K 16V	
C1836	ECJ1VB1C104K	C 0.1UF K 16V	
C1837	ECJ1VB1H103K	C 0.01UF K 50V	
C1839	ECJ1VC1H101J	C 100PF J 50V	
C1840	ECJ1VF1A105Z	C 1UF Z 10V	
C1842	F1H0J1050013	P 1UF 10V	
C1843	F1H0J1050013	P 1UF 10V	
C1844	EEHB0G470R	E 47UF 6.3V	
C1845	EEHB0G470R	E 47UF 6.3V	

Ref. No.	Part No.	Part Name & Description	Remarks
C1850	F1G1A1040006	P 0.1UF 10V	
C1851	F1G1A1040006	P 0.1UF 10V	
C1852	EEEBB0G470R	E 47UF 6.3V	
C1853	EEEBB0G470R	E 47UF 6.3V	
C1865	ECJ1VFB1A105Z	C 1UF Z 10V	
C1866	ECJ1VFB1A105Z	C 1UF Z 10V	
C1867	ECJ1VFB1A105Z	C 1UF Z 10V	
C1868	ECJ1VFB1A105Z	C 1UF Z 10V	
C1869	F2H1C470A009	E 47UF 16V	
C1870	ECJ1VB1C104K	C 0.1UF K 16V	
C1871	F2H1C470A009	E 47UF 16V	
C1872	ECJ1VB1C104K	C 0.1UF K 16V	
C2068	ECJ1VB1A105K	C 1UF K 10V	
C2101	ECJ1VB1E104K	C 0.1UF K 25V	
C2102	ECJ2FB1E105K	C 1UF 16V	
C2103	ECJ2FB1E105K	C 1UF 16V	
C2106	ECJ2FB1E105K	C 1UF 16V	
C2109	ECJ2FB1E105K	C 1UF 16V	
C2110	ECJ1VB1E104K	C 0.1UF K 25V	
C2111	ECJ2FB1E105K	C 1UF 16V	
C2112	ECJ1VB1E104K	C 0.1UF K 25V	
C2113	ECJ1VB1E104K	C 0.1UF K 25V	
C2114	ECJ1VB1E104K	C 0.1UF K 25V	
C2115	ECJ1VB1H153K	C 0.012UF K 50V	
C2116	ECJ1VB1E104K	C 0.1UF K 25V	
C2117	ECJ1VB1E104K	C 0.1UF K 25V	
C2118	ECJ1VB1H153K	C 0.012UF K 50V	
C2119	ECJ1VB1E104K	C 0.1UF K 25V	
C2120	ECJ1VB1E104K	C 0.1UF K 25V	
C2122	ECJ0EB1H102K	C 1000PF K 10V	
C2124	ECJ0EB1H102K	C 1000PF K 10V	
C2125	ECJ1VB1E104K	C 0.1UF K 25V	
C2126	ECJ1VB1C224K	C 0.22UF K 16V	
C2127	ECJ2FB1E475M	C 4.7UF 16V	
C2128	ECJ1VB1C224K	C 0.22UF K 16V	
C2129	ECJ2FB1E475M	C 4.7UF 16V	
C2130	F2A1C102A530	E 1000 UF 16V	
C2131	F2A1C102A530	E 1000 UF 16V	
C2132	ECJ1VB1H102K	C 1000PF K 50V	
C2133	ECJ1VB1H102K	C 1000PF K 50V	
C2138	ECJ1VB1E104K	C 0.1UF K 25V	
C2139	F2A1E1010073	E 100UF 25V	
C2140	EEUFC1V221E	E 220UF 25V	
C2141	ECJ1VB1H103K	C 0.01UF K 50V	
C2142	F2H0J101A010	E 100UF 6.3V	
C2143	F2H0J101A010	E 100UF 6.3V	
C2144	F1H0J1050013	P 1UF 10V	
C2145	F2H1C470A009	E 47UF 16V	
C2146	ECJ2FB1E105K	C 1UF 16V	
C2147	ECJ2FB1E105K	C 1UF 16V	
C2162	ECJ2FB1E475M	C 4.7UF 16V	
C2163	ECJ2FB1E475M	C 4.7UF 16V	
C2172	F2H0J101A010	E 100UF 6.3V	
C2173	F2A1C101A244	E 100 UF 16V	
C2178	ECJ0EB1H102K	C 1000PF K 10V	
C2179	ECJ0EB1H102K	C 1000PF K 10V	
C2180	ECJ1VB1C224K	C 0.22UF K 16V	
C2181	ECJ1VB1C224K	C 0.22UF K 16V	
C2223	F2A1E1010073	E 100UF 25V	
C2367	EEEBB1C101UP	E 100UF J 16V	
C3062	ECJ1VFB1A105Z	C 1UF Z 10V	
C3064	F2A1A471A994	E 470UF 10V	PAVCKM
C3065	ECJ1VB1C104K	C 0.1UF K 16V	
C3067	F1J0J1060004	C 0.01UF K 16V	
C3073	ECJ1VB1A105K	C 1UF K 10V	
C3076	ECJ1VB1A105K	C 1UF K 10V	
C3077	ECJ1VB1A105K	C 1UF K 10V	
C3200	ECJ1VB0J225K	C 1UF K 6.3V	
C3202	EEEBB1C101UP	E 100UF J 16V	
C3203	ECJ1VB1C224K	C 0.22UF K 16V	
C3204	F2H1C470A009	E 47UF 16V	
C3863	ECJ1VFB1A105Z	C 1UF Z 10V	
C3866	F2A0J101A240	E 100UF 6.3V	

Ref. No.	Part No.	Part Name & Description	Remarks
C3867	ECJ1VB1C104K	C 0.1UF K 16V	
C3870	ECJ1VFB1H104Z	C 0.1UF Z 50V	
C3873	ECJ1VB1C104K	C 0.1UF K 16V	
C3874	ECJ1VB1C104K	C 0.1UF K 16V	
C4001	ECJ1VB1C104K	C 0.1UF K 16V	
C4004	ECJ1VB1C104K	C 0.1UF K 16V	
C4005	ECJ1VB1C104K	C 0.1UF K 16V	
C4006	ECJ1VB1C104K	C 0.1UF K 16V	
C4007	ECJ1VB1C104K	C 0.1UF K 16V	
C4008	ECJ1VB1C104K	C 0.1UF K 16V	
C4009	F1J0J1060004	C 0.01UF K 16V	
C4013	ECJ1VB1C104K	C 0.1UF K 16V	
C4014	ECJ1VB1C104K	C 0.1UF K 16V	
C4015	ECJ1VB1C104K	C 0.1UF K 16V	
C4016	ECJ1VB1C104K	C 0.1UF K 16V	
C4017	ECJ1VB1C104K	C 0.1UF K 16V	
C4018	ECJ1VB1C104K	C 0.1UF K 16V	
C4019	F1J0J1060004	C 0.01UF K 16V	
C4020	F1J0J1060004	C 0.01UF K 16V	
C4021	F1J0J1060004	C 0.01UF K 16V	
C4022	F1J0J1060004	C 0.01UF K 16V	
C4023	F1J0J1060004	C 0.01UF K 16V	
C4024	ECJ1VFB1A105Z	C 1UF Z 10V	
C4025	ECJ1VB1C104K	C 0.1UF K 16V	
C4027	ECJ1VB1C104K	C 0.1UF K 16V	
C4029	ECJ1VB1C104K	C 0.1UF K 16V	
C4030	ECJ1VFB1A105Z	C 1UF Z 10V	
C4031	ECJ1VB1C104K	C 0.1UF K 16V	
C4033	ECJ0EC1H101J	C 100PF J 10V	
C4034	F1G1A1040006	P 0.1UF 10V	
C4035	F1G1A1040006	P 0.1UF 10V	
C4036	ECJ1VB1A105K	C 1UF K 10V	
C4037	ECJ1VB1A105K	C 1UF K 10V	
C4038	ECJ1VB1A105K	C 1UF K 10V	
C4039	ECJ1VB1A105K	C 1UF K 10V	
C4040	ECJ1VB1A105K	C 1UF K 10V	
C4041	ECJ1VB1A105K	C 1UF K 10V	
C4042	F1G1A1040006	P 0.1UF 10V	
C4043	ECJ1VB1A105K	C 1UF K 10V	
C4044	ECJ1VB1A105K	C 1UF K 10V	
C4045	F1G1A1040006	P 0.1UF 10V	
C4046	F1G1A1040006	P 0.1UF 10V	
C4049	F1G1A1040006	P 0.1UF 10V	
C4050	F1G1A1040006	P 0.1UF 10V	
C4051	ECJ1VB1C104K	C 0.1UF K 16V	
C4052	ECJ1VC1H560J	C 56PF J 50V	
C4053	ECJ1VC1H560J	C 56PF J 50V	
C4054	F1G1A1040006	P 0.1UF 10V	
C4055	F1J0J1060004	C 0.01UF K 16V	
C4056	F1G1A1040006	P 0.1UF 10V	
C4057	F1J0J1060004	C 0.01UF K 16V	
C4058	F1G1A1040006	P 0.1UF 10V	
C4059	F1G1A1040006	P 0.1UF 10V	
C4060	F1G1A1040006	P 0.1UF 10V	
C4061	ECJ1VB1C104K	C 0.1UF K 16V	
C4062	TKP470M1CD11	E 47UF 16V	
C4064	F1G1A1040006	P 0.1UF 10V	
C4065	ECJ0EB1H102K	C 1000PF K 10V	
C4066	F1G1A1040006	P 0.1UF 10V	
C4067	F1G1A1040006	P 0.1UF 10V	
C4068	F1J0J1060004	C 0.01UF K 16V	
C4071	ECJ1VC1H180J	C 18PF J 50V	
C4072	ECJ1VC1H180J	C 18PF J 50V	
C4074	F1G1A1040006	P 0.1UF 10V	
C4075	F1J0J1060004	C 0.01UF K 16V	
C4076	F1G1A1040006	P 0.1UF 10V	
C4077	F1G1A1040006	P 0.1UF 10V	
C4078	F1G1A1040006	P 0.1UF 10V	
C4079	ECJ1VB1C104K	C 0.1UF K 16V	
C4080	F1G1A1040006	P 0.1UF 10V	
C4081	ECJ1VB1C104K	C 0.1UF K 16V	
C4082	F1G1A1040006	P 0.1UF 10V	
C4083	ECJ0EB1H102K	C 1000PF K 10V	

Ref. No.	Part No.	Part Name & Description	Remarks
C4084	FlG1A1040006	P 0.1UF 10V	
C4085	FlG1A1040006	P 0.1UF 10V	
C4086	FlG1A1040006	P 0.1UF 10V	
C4087	FlG1A1040006	P 0.1UF 10V	
C4088	FlG1A1040006	P 0.1UF 10V	
C4089	FlG1A1040006	P 0.1UF 10V	
C4090	FlG1A1040006	P 0.1UF 10V	
C4091	FlG1A1040006	P 0.1UF 10V	
C4092	FlG1A1040006	P 0.1UF 10V	
C4093	FlG1A1040006	P 0.1UF 10V	
C4094	FlG1A1040006	P 0.1UF 10V	
C4095	FlJ0J1060004	C 0.01UF K 16V	
C4096	ECJ1VB1C104K	C 0.1UF K 16V	
C4097	FlG1A1040006	P 0.1UF 10V	
C4098	ECJ1VB1H102K	C 100PF K 50V	
C4099	FlJ0J1060004	C 0.01UF K 16V	
C4100	FlG1A1040006	P 0.1UF 10V	
C4101	FlG1A1040006	P 0.1UF 10V	
C4102	FlJ0J1060004	C 0.01UF K 16V	
C4103	ECJ0EC1H120J	C 12PF J 10V	
C4104	ECJ0EC1H220J	C 22PF J 10V	
C4105	ECJ0EC1H220J	C 22PF J 10V	
C4109	ECJ1VB1C104K	C 0.1UF K 16V	
C4110	ECJ2FB1A335K	C 3.3UF 16V	PAVCKM
C4111	FlJ0J1060004	C 0.01UF K 16V	
C4112	ECJ1VB1C104K	C 0.1UF K 16V	
C4114	EEFCD0G560ER	E 56UF 4V	
C4115	EEFCD0G560ER	E 56UF 4V	
C4117	ECJ1VC1H220J	C 22PF J 50V	
C4118	FlJ0J1060004	C 0.01UF K 16V	
C4119	ECJ0EC1H560J	C 56PF J 10V	
C4120	ECJ1VC1H101J	C 100PF J 50V	
C4121	ECJ1VC1H101J	C 100PF J 50V	
C4122	ECJ1VF1C104Z	C 0.1UF Z 16V	
C4123	ECJ1VB1C104K	C 0.1UF K 16V	
C4125	F4Z0G6860002	E 68UF 4V	
C4127	FlJ0J1060004	C 0.01UF K 16V	
C4128	F2H1C470A009	E 47UF 16V	
C4129	FlJ0J1060004	C 0.01UF K 16V	
C4130	ECJ1VC1H120J	C 12PF J 50V	
C4131	ECJ1VC1H120J	C 12PF J 50V	
C4132	ECJ1VB1H102K	C 100PF K 50V	
C4133	FlG1A1040006	P 0.1UF 10V	
C4134	ECJ1VB0J105K	C 1UF K 6.3V	
C4135	ECJ1VB1H103K	C 0.01UF K 50V	
C4148	ECJ2FB0J106M	C 10UF 6.3V	
C4149	ECJ2FB0J106M	C 10UF 6.3V	
C4182	ECJ2FB0J106M	C 10UF 6.3V	
C4183	ECJ2FB0J106M	C 10UF 6.3V	
C4501	FlG1A1040006	P 0.1UF 10V	
C4502	TKP470MCD11	E 47UF 16V	
C4807	ECJ1VB1C104K	C 0.1UF K 16V	
C4808	ECJ1VB1C104K	C 0.1UF K 16V	
C5001	FlG1A1040006	P 0.1UF 10V	
C5002	FlG1A1040006	P 0.1UF 10V	
C5003	FlG1A1040006	P 0.1UF 10V	
C5004	FlG1A1040006	P 0.1UF 10V	
C5005	ECJ1VF1A105Z	C 1UF Z 10V	
C5006	ECJ1VF1A105Z	C 1UF Z 10V	
C5007	ECJ1VF1C104Z	C 0.1UF Z 16V	
C5008	ECJ1VB1C104K	C 0.1UF K 16V	
C5009	FlJ0J1060004	C 0.01UF K 16V	
C5010	FlJ0J1060004	C 0.01UF K 16V	
C5011	ECJ1VB1C104K	C 0.1UF K 16V	
C5012	ECJ1VB1C104K	C 0.1UF K 16V	
C5016	FlJ0J1060004	C 0.01UF K 16V	
C5017	ECJ1VB1C104K	C 0.1UF K 16V	
C5018	ECJ1VF1C104Z	C 0.1UF Z 16V	
C5019	FlG1A1040006	P 0.1UF 10V	
C5020	ECJ1VF1C104Z	C 0.1UF Z 16V	
C5021	ECJ1VF1H103Z	C 0.01UF Z 50V	
C5022	ECJ1VF1C104Z	C 0.1UF Z 16V	
C5023	ECJ1VF1H103Z	C 0.01UF Z 50V	

Ref. No.	Part No.	Part Name & Description	Remarks
C5024	FlG1A1040006	P 0.1UF 10V	
C5025	FlG1A1040006	P 0.1UF 10V	
C5026	FlJ0J1060004	C 0.01UF K 16V	
C5027	ECJ1VF1C104Z	C 0.1UF Z 16V	
C5028	FlG1A1040006	P 0.1UF 10V	
C5029	ECJ1VB1C104K	C 0.1UF K 16V	
C5030	ECJ1VC1H150J	C 15PF J 50V	
C5031	FlG1A1040006	P 0.1UF 10V	
C5032	ECJ1VB1C104K	C 0.1UF K 16V	
C5033	FlG1A1040006	P 0.1UF 10V	
C5034	ECJ1VC1H150J	C 15PF J 50V	
C5036	ECJ1VF1C104Z	C 0.1UF Z 16V	
C5038	FlG1A1040006	P 0.1UF 10V	
C5040	FlG1A1040006	P 0.1UF 10V	
C5041	FlG1A1040006	P 0.1UF 10V	
C5042	FlJ0J1060004	C 0.01UF K 16V	
C5043	ECJ1VB1C104K	C 0.1UF K 16V	
C5044	ECJ1VB1C104K	C 0.1UF K 16V	
C5045	ECJ1VB1C104K	C 0.1UF K 16V	
C5046	ECJ1VB1C104K	C 0.1UF K 16V	
C5047	ECJ1VB1C104K	C 0.1UF K 16V	
C5048	ECJ1VB1C104K	C 0.1UF K 16V	
C5049	ECJ2FB0J225K	C 2.2UF 6.3V	
C5050	ECJ1VC1H471J	C 470PF J 50V	
C5051	FlH0J1050013	P 1UF 10V	
C5054	ECJ1VC1H101J	C 100PF J 50V	
C5055	FlG1A1040006	P 0.1UF 10V	
C5056	ECJ1VF1C104Z	C 0.1UF Z 16V	
C5060	ECJ1VB1C104K	C 0.1UF K 16V	
C5061	ECJ1VB1C104K	C 0.1UF K 16V	
SW901	K0F162B00002	POWER SWITCH	
X4001	H0J202500011	CRYSTAL OSCILLATOR	
X5001	H0J283500018	CRYSTAL OSCILLATOR	
TU101	ENG39D03GF	TUNER	PAVCKM ⚠
F801	K5D502BNA005	FUSE	⚠
F801-1	EYF52BC/L	FUSE BRACKET	
F801-2	EYF52BC/L	FUSE BRACKET	
JK3001	K4BK13A00002	REAR AV TERMINAL	PAVCKM
JK3002	K4BK20A00003	REAR AV TERMINAL	PAVCKM
JK3003	K4BK04A00003	HDMI AUDIO TERMINAL	PAVCKM
JK3501	K4BK24B00003	SIDE AV TERMINAL	PAVCKM
JK5001	K1FA119E0008	HDMI TERMINAL	PAVCKM
JK5002	K1FA119E0008	HDMI TERMINAL	PAVCKM
RL801	K6B1CDA00028	RELAY	PAVCKM ⚠
RL802	K6B1CDA00028	RELAY	PAVCKM ⚠
RL803	K6B1CDA00028	RELAY	PAVCKM ⚠
A1	K1KB23A00003	CONNECTOR	
A2	K1KB23A00003	CONNECTOR	
A3	K1KA04AA0190	CONNECTOR	
A4	K1KA05AA0193	CONNECTOR	
A5	K1KA10AA0194	CONNECTOR	
A7	K1KA08AA0193	CONNECTOR	
A8A	K1KB30B00044	CONNECTOR	
A9	K1KA10AA0105	CONNECTOR	
A10	K1KA08AA0193	CONNECTOR	
AP1	K1KA19A00007	CONNECTOR	
AP2	K1KA15A00118	CONNECTOR	
AP3	K1KA23A00005	CONNECTOR	
AP4	K1KA23A00005	CONNECTOR	
AP5	K1KA14AA0194	CONNECTOR	
AP6	K1KA03AA0190	CONNECTOR	
G1	K1KA05AA0193	CONNECTOR	
G2	K1KA10AA0191	CONNECTOR	
P1	K1KA02BA0073	CONNECTOR	PAVCKM ⚠
P2	K1KB19AA0032	CONNECTOR	
P3	K1KB15AA0032	CONNECTOR	
V1	K1KA08BA0061	CONNECTOR	
	TXN/A10MVS (T NP4G399AF)	CIRCUIT BOARD A	⚠

Ref. No.	Part No.	Part Name & Description	Remarks
	TXN/G10MUS (TNP4G402AA)	CIRCUIT BOARD G	⚠
	TXN/P10MVS (TNP4G404AF)	CIRCUIT BOARD P	⚠
	TXN/V10MPS (TNP4G400AA)	CIRCUIT BOARD V	⚠
	TXNAP10MPS (TNP4G401AA)	CIRCUIT BOARD AP	⚠

17.5. TX-32LX70A

Note:

All parts except parts mentioned [PAVCKM] in the Remarks column are supplied by PAVC-CSG.

Parts mentioned [PAVCKM] are supplied by PAVCKM.

Ref. No.	Part No.	Part Name & Description	Remarks
IC811	C0EAS0000004	IC	PAVCKM
IC830	C5HABZZ00138	IC	PAVCKM
IC880	C0DABYY00008	IC	
IC881	C0DAEZZ00005	IC	PAVCKM
IC902	C0DAAZH00020	IC	
IC903	C0DAEJG00001	IC	PAVCKM
IC904	C0DAAZG00014	IC	
IC905	C0DAAZG00014	IC	
IC906	C0DAAZG00014	IC	
IC1102	C3EBJC000061	IC	
IC1803	C0EBF0000354	IC	
IC1804	C0CBCYE00001	IC	
IC1805	C0DBAFF00026	IC	
IC2001	C1AB00002474	IC	
IC2005	C1BB00000947	IC	
IC4001	TVR4G27-1	IC	
IC4003	C1ZBZ0003426	IC	
IC4004	C1ZBZ0003191	IC	
IC4005	C0ABFA000012	IC	
IC5001	TVR4GAS652	IC	PAVCKM
IC5002	TVR4GAS653	IC	PAVCKM
IC5004	C1AB00002535	IC	
IC5005	C0DBFFD00003	IC	
PC841	B3PAA0000261	IC	△
PC880	B3PAA0000261	IC	△
RM1001	PNA4701M05TV	REMOTE CONTROL RECEIVER	
SN1001	B3L000000020	PHOTOELECTRIC COUPLER	
Q820	2SC13180WA	TRANSISTOR	
Q822	2SC3311A0A	TRANSISTOR	
Q880	2SA10180QA	TRANSISTOR	
Q900	B1ABCE000015	TRANSISTOR	
Q902	B1ABCE000015	TRANSISTOR	
Q903	B1ABCE000015	TRANSISTOR	
Q904	B1ABCE000015	TRANSISTOR	
Q905	B1ABCE000015	TRANSISTOR	
Q906	B1ABCE000015	TRANSISTOR	
Q1002	2SA207700L	TRANSISTOR	
Q1004	2SA207700L	TRANSISTOR	
Q1006	2SC584500L	TRANSISTOR	
Q1007	2SC584500L	TRANSISTOR	
Q1217	2SA207700L	TRANSISTOR	
Q1218	2SC584500L	TRANSISTOR	
Q1801	B1DHDC000028	TRANSISTOR	
Q1802	UNR521100L	TRANSISTOR	
Q1803	2SC584500L	TRANSISTOR	
Q1804	2SA207700L	TRANSISTOR	
Q1805	2SA207700L	TRANSISTOR	
Q1806	2SC584500L	TRANSISTOR	
Q2019	UNR521100L	TRANSISTOR	
Q2020	UNR521100L	TRANSISTOR	
Q2031	B1CBHD000002	TRANSISTOR	
Q2032	B1CBHD000002	TRANSISTOR	
Q2303	2SD0601A0L	TRANSISTOR	
Q2305	2SA207700L	TRANSISTOR	
Q2306	2SA207700L	TRANSISTOR	
Q2312	2SD0601A0L	TRANSISTOR	
Q2313	2SC584500L	TRANSISTOR	
Q3001	2SC584500L	TRANSISTOR	
Q3002	2SA207700L	TRANSISTOR	
Q3003	2SC584500L	TRANSISTOR	
Q3005	2SC584500L	TRANSISTOR	
Q3006	2SC584500L	TRANSISTOR	
Q3007	2SA207700L	TRANSISTOR	

Ref. No.	Part No.	Part Name & Description	Remarks
Q3200	2SC584500L	TRANSISTOR	
Q3201	2SC584500L	TRANSISTOR	
Q3202	2SC584500L	TRANSISTOR	
Q3203	2SC584500L	TRANSISTOR	
Q3204	2SA207700L	TRANSISTOR	
Q3205	2SD0602ASL	TRANSISTOR	
Q3801	2SA207700L	TRANSISTOR	
Q3806	2SC584500L	TRANSISTOR	
Q3807	2SC584500L	TRANSISTOR	
Q4001	2SC584500L	TRANSISTOR	
Q4002	2SA207700L	TRANSISTOR	
Q4003	2SA207700L	TRANSISTOR	
Q4020	2SC584500L	TRANSISTOR	
Q4021	2SC584500L	TRANSISTOR	
Q4049	2SC584500L	TRANSISTOR	
Q4050	2SA207700L	TRANSISTOR	
Q4120	UNR521100L	TRANSISTOR	
Q4121	UNR521100L	TRANSISTOR	
Q4501	2SC584500L	TRANSISTOR	
Q4502	2SC584500L	TRANSISTOR	
Q5001	2SC584500L	TRANSISTOR	
Q5002	2SC584500L	TRANSISTOR	
Q5003	2SC584500L	TRANSISTOR	
Q5004	2SC584500L	TRANSISTOR	
Q5008	B1MBACA00008	TRANSISTOR	
Q5009	B1MBACA00008	TRANSISTOR	
Q5019	2SC584500L	TRANSISTOR	
Q5020	2SC584500L	TRANSISTOR	
Q5021	2SC584500L	TRANSISTOR	
Q5022	UNR521100L	TRANSISTOR	
Q5023	B1MBACA00008	TRANSISTOR	
Q5024	2SC584500L	TRANSISTOR	
Q5025	UNR521100L	TRANSISTOR	
D801	ERZV10V621CS	DIODE	△
D802	B0FBAT000014	DIODE	PAVCKM
D810	B0HBSM000027	DIODE	
D811	B0HANM000032	DIODE	
D812	B0HFRJ000012	DIODE	
D820	B0AACK000004	DIODE	
D821	B0HAGM000005	DIODE	
D822	B0AACK000004	DIODE	
D832	B0EAKT000018	DIODE	
D833	B0HAJL000003	DIODE	PAVCKM
D834	B0BA6R800025	DIODE	PAVCKM
D835	B0BA8R000010	DIODE	PAVCKM
D840	B0HAJL000003	DIODE	PAVCKM
D841	B0BA05600010	DIODE	PAVCKM
D842	B0HAJL000003	DIODE	PAVCKM
D843	B0HAJL000003	DIODE	PAVCKM
D880	B0BA5R600016	DIODE	
D881	B0HAJL000003	DIODE	PAVCKM
D882	B0BA03500012	DIODE	
D883	B0HAJL000003	DIODE	PAVCKM
D884	B0HAJL000003	DIODE	PAVCKM
D885	B0BA03400009	DIODE	
D886	B0BA03400009	DIODE	
D887	ERZV10V621CS	DIODE	△
D888	B0BA04200005	DIODE	
D889	ERZV10V621CS	DIODE	△
D891	B0JAPK000011	DIODE	PAVCKM
D892	B0HAGV000004	DIODE	
D895	B0EBKT000007	DIODE	
D904	B0JCME000037	DIODE	
D907	B0JCME000037	DIODE	
D908	B0JCME000037	DIODE	
D909	B0HCMM000014	DIODE	
D910	B0HCMM000014	DIODE	
D913	B0JCME000037	DIODE	
D919	B0JCPG000005	DIODE	
D922	B0JANE000006	DIODE	
D923	B0JANE000006	DIODE	
D924	B0BC01000044	DIODE	

Ref. No.	Part No.	Part Name & Description	Remarks
D1001	B3CKE0000007	DIODE	
D1102	MA2J72900L	DIODE	
D1106	MAZ80620ML	DIODE	
D1107	MAZ80620ML	DIODE	
D1108	MAZ80620ML	DIODE	
D1109	MAZ80620ML	DIODE	
D1110	MAZ80620ML	DIODE	
D1810	MA2J11100L	DIODE	
D1811	MA2J11100L	DIODE	
D1812	MAZ82700ML	DIODE	
D1813	MA2J11100L	DIODE	
D1814	MAZ80620LL	DIODE	
D1815	MA2J11100L	DIODE	
D1816	MAZ80750ML	DIODE	
D1817	MA2J11100L	DIODE	
D1818	MAZ81300ML	DIODE	
D1819	MA2J11100L	DIODE	
D1820	MAZ80560ML	DIODE	
D1821	MA2J11100L	DIODE	
D1822	MAZ80560ML	DIODE	
D1823	MA2J11100L	DIODE	
D1824	MAZ82700ML	DIODE	
D1825	MA2J11100L	DIODE	
D2001	MA3X704D0L	DIODE	
D2006	MAZ80470ML	DIODE	
D2301	MA2J11100L	DIODE	
D2304	MA2J11100L	DIODE	
D2305	MA2J11100L	DIODE	
D3001	MAZ81400ML	DIODE	
D3002	MAZ81400ML	DIODE	
D3003	MAZ81400ML	DIODE	
D3004	MAZ81400ML	DIODE	
D3005	MAZ81400ML	DIODE	
D3006	MAZ81400ML	DIODE	
D3007	MAZ81400ML	DIODE	
D3008	MAZ81400ML	DIODE	
D3009	MAZ81400ML	DIODE	
D3013	MAZ81400ML	DIODE	
D3014	MAZ81400ML	DIODE	
D3015	MAZ81400ML	DIODE	
D3016	MAZ81400ML	DIODE	
D3017	MAZ81400ML	DIODE	
D3018	MAZ81400ML	DIODE	
D3021	MAZ81400ML	DIODE	
D3022	MAZ81400ML	DIODE	
D3023	MAZ81400ML	DIODE	
D3024	MAZ81400ML	DIODE	
D3025	MAZ81400ML	DIODE	
D3026	MAZ81400ML	DIODE	
D3027	MAZ81400ML	DIODE	
D3028	MAZ81400ML	DIODE	
D3031	MAZ81400ML	DIODE	
D3032	MAZ81400ML	DIODE	
D3033	MAZ81400ML	DIODE	
D3200	MAZ81500ML	DIODE	
D3203	MA2J11100L	DIODE	
D3204	MA2J11100L	DIODE	
D3205	MA2J11100L	DIODE	
D3206	MA2J11100L	DIODE	
D3207	MA2J11100L	DIODE	
D3208	MA2J11100L	DIODE	
D3209	MA2J11100L	DIODE	
D3210	MA2J11100L	DIODE	
D3211	MA2J11100L	DIODE	
D3215	MA2J11100L	DIODE	
D3216	MA2J11100L	DIODE	
D3217	MA2J11100L	DIODE	
D3219	MA2J72900L	DIODE	
D3501	MAZ81400ML	DIODE	
D3502	MAZ81400ML	DIODE	
D3503	MAZ81400ML	DIODE	
D3504	MAZ81400ML	DIODE	
D3506	MAZ81400ML	DIODE	

Ref. No.	Part No.	Part Name & Description	Remarks
D3507	MAZ81400ML	DIODE	
D3508	MAZ81400ML	DIODE	
D3509	MAZ81400ML	DIODE	
D3510	MAZ81400ML	DIODE	
D3511	MAZ81400ML	DIODE	
D3512	MAZ81400ML	DIODE	
D3513	MAZ81400ML	DIODE	
D4015	B0JCDD000002	DIODE	
D4121	MA2J11100L	DIODE	
D5001	EZJZ0V80008B	DIODE	
D5002	EZJZ0V80008B	DIODE	
D5003	EZJZ0V80008B	DIODE	
D5004	EZJZ0V80008B	DIODE	
D5005	EZJZ0V80008B	DIODE	
D5006	EZJZ0V80008B	DIODE	
D5007	EZJZ0V80008B	DIODE	
D5008	EZJZ0V80008B	DIODE	
D5009	EZJZ0V80008B	DIODE	
D5010	EZJZ0V80008B	DIODE	
D5011	EZJZ1V8000AA	DIODE	
D5012	EZJZ0V80008B	DIODE	
D5013	EZJZ0V80008B	DIODE	
D5014	EZJZ1V8000AA	DIODE	
D5015	EZJZ1V8000AA	DIODE	
D5016	EZJZ0V80008B	DIODE	
D5017	EZJZ1V8000AA	DIODE	
D5018	EZJZ0V80008B	DIODE	
D5019	EZJZ0V80008B	DIODE	
D5020	EZJZ0V80008B	DIODE	
D5021	B0HCMM000014	DIODE	
D5022	B0HCMM000014	DIODE	
D5023	MA2J72800L	DIODE	
D5026	B0HCMM000014	DIODE	
D5027	B0HCMM000014	DIODE	
L811	BDC0309T-998	COIL	
L835	EXCELSA39E	COIL	
L837	J0JKA0000038	COIL	
L901	BDC0306V-902	COIL	
L904	G0C101K00041	COIL	
L911	G0A101ZA0034	COIL	
L913	G0C101K00023	COIL	
L915	G0A101ZA0041	COIL	
L918	BDC0306V-902	COIL	
L921	BDC0306V-902	COIL	
L922	G0A101ZA0041	COIL	
L930	BDC0306V-902	COIL	
L1805	J0JHC0000078	COIL	
L1806	J0JHC0000078	COIL	
L2001	G0A100ZA0033	COIL	
L2002	G0A100ZA0033	COIL	
L2003	J0JHC0000078	COIL	
L2005	J0JHC0000078	COIL	
L3800	J0JHC0000078	COIL	
L3801	G0A101EA0008	COIL	
L3802	J0JCC0000241	COIL	
L3803	J0JCC0000241	COIL	
L4001	J0JHC0000078	COIL	
L4002	J0JHC0000078	COIL	
L4003	J0JHC0000078	COIL	
L4004	J0JHC0000078	COIL	
L4005	J0JHC0000078	COIL	
L4006	J0JHC0000078	COIL	
L4007	J0JHC0000078	COIL	
L4008	J0JHC0000078	COIL	
L4009	J0JHC0000078	COIL	
L4010	J0JHC0000078	COIL	
L4011	J0JHC0000078	COIL	
L4012	J0JHC0000078	COIL	
L4014	J0JHC0000078	COIL	
L4015	J0JHC0000078	COIL	
L4016	ELJFA6R8KFB	COIL	
L4017	J0JCC0000241	COIL	

Ref. No.	Part No.	Part Name & Description	Remarks
L4018	J0JCC0000241	COIL	
L4020	J0JHC0000078	COIL	
L4022	J0JHC0000078	COIL	
L4502	J0JHC0000078	COIL	
L4904	J0JHC0000078	COIL	
L5003	J0JHC0000078	COIL	
L5004	J0JHC0000078	COIL	
L5005	J0JHC0000078	COIL	
L5006	J0JHC0000078	COIL	
L5007	J0JHC0000078	COIL	
L5009	J0JHC0000078	COIL	
L5010	J0JBC0000080	COIL	
L5011	J0JHC0000078	COIL	
L5012	J0JHC0000078	COIL	
L5013	J0JHC0000078	COIL	
FL4001	J0MAB0000169	COIL	
FL4002	J0MAB0000169	COIL	
FL4003	J0MAB0000169	COIL	
FL5001	FLJ1A1050020	FILTER C 1UF Z 50V	
FL5002	FLJ1A1050020	FILTER C 1UF Z 50V	
LF801	G0B153H00003	COIL	PAVCKM △
LF802	G0B153H00003	COIL	PAVCKM △
T801	ETS42BM166AD	TRANSFORMER	PAVCKM △
T880	ETS15AB146AH	TRANSFORMER	PAVCKM △
R801	D1F5100E0002	SAFETY RESISTOR	
R802	ERG2SJW473E	M 47K OHM J 2W	PAVCKM
R803	D0AW825JA001	C 8.2OHM J 3/4W	PAVCKM △
R808	ERC12ZGK225D	S 2.2M OHM K 1/2W	△
R813	RD16ST471J	C 470 OHM J 1/4W	
R820	RD16ST223J	C 22K OHM J 1/4W	
R821	RD16ST102J	C 1K OHM J 1/4W	
R824	RD16ST561J	C 560 OHM J 1/4W	
R831	ERG2SJW104E	M 100K OHM J 2W	
R832	RSS3GT470J	M 47 OHM J 3W	
R833	D0C1390JA051	39 OHM 1W	PAVCKM
R834	RD16ST102J	C 1K OHM J 1/4W	
R841	RD16ST823J	C 82K OHM J 1/4W	
R842	RD16ST391J	C 390 OHM J 1/4W	
R843	ERX2FZJR12H	M 0.12 OHM J 2W	PAVCKM
R844	ERX2FZJR15H	M 0.15 OHM J 2W	PAVCKM
R845	RD16ST473J	C 47K OHM J 1/4W	
R846	RD16ST182J	C 1.8K OHM J 1/4W	
R848	RD16ST561J	C 560 OHM J 1/4W	
R865	RD50SST100J	C 10 OHM J 1/2W	
R880	ERX12SJ2R2E	M 2.2 OHM J 1/2W	
R881	RD50SST181J	C 180 OHM J 1/2W	
R882	RD16ST123J	C 12K OHM J 1/4W	
R883	RD16ST104J	C 100K OHM J 1/4W	
R884	ERG2DJ474P	M 470K OHM J 2W	PAVCKM
R886	RSS1L104J	M 100K OHM J 1W	
R887	D0DK1R0JA019	SAFETY RESISTOR	PAVCKM
R888	ERG1DJ334P	M 330 OHM J 1W	PAVCKM
R889	EROS2THF6801	M 6.8K OHM F 1/4W	
R890	EROS2CHF4301	M 4.3K OHM F 1/4W	PAVCKM
R891	RD16ST330J	C 33 OHM J 1/4W	
R892	RD16ST332J	C 3.3K OHM J 1/4W	
R904	D0GB473JA041	M 47K OHM J 1/16W	
R905	D0GB103JA041	M 10K OHM J 1/16W	
R906	D0GB102JA041	M 1K OHM J 1/16W	
R908	D0GB102JA041	M 1K OHM J 1/16W	
R909	RD16ST103J	C 10K OHM J 1/4W	
R910	D0GB473JA041	M 47K OHM J 1/16W	
R911	ERJ6GEYJ102V	M 1K OHM J 1/10W	
R916	ERJ3EKF1201V	M 1.2K OHM F 1/16W	
R917	ERJ3EKF6491	M 6.49K OHM F 1/16W	PAVCKM
R918	ERJ3EKF1241V	M 1.24K OHM F 1/16W	
R919	ERJ3EKF6190	M 619 OHM F 1/16W	PAVCKM
R920	ERJ3EKF1001V	M 1K OHM F 1/16W	
R921	ERJ3EKF1691V	M 1.69K OHM F 1/16W	
R933	ERJ3EKF1303V	M 130K OHM F 1/16W	
R934	ERJ3EKF4222V	M 42.2K OHM F 1/16W	

Ref. No.	Part No.	Part Name & Description	Remarks
R937	D0GB333JA041	M 33K OHM J 1/16W	
R941	D0GB103JA041	M 10K OHM J 1/16W	
R942	D0GB473JA041	M 47K OHM J 1/16W	
R943	RD16ST103J	C 10K OHM J 1/4W	
R946	D0GB102JA041	M 1K OHM J 1/16W	
R947	D0GB102JA041	M 1K OHM J 1/16W	
R949	ERJ3EKF2491V	M 2.49K OHM F 1/16W	
R950	ERJ3EKF8200V	M 8.2K OHM F 1/16W	
R951	D0GB103JA041	M 10K OHM J 1/16W	
R952	D0GB103JA041	M 10K OHM J 1/16W	
R953	D0GB473JA041	M 47K OHM J 1/16W	
R954	D0GB102JA041	M 1K OHM J 1/16W	
R956	D0GB473JA041	M 47K OHM J 1/16W	
R957	D0GB102JA041	M 1K OHM J 1/16W	
R960	RD50SST302J	C 3K OHM J 1/2W	
R961	RD50SST302J	C 3K OHM J 1/2W	
R962	RD50SST302J	C 3K OHM J 1/2W	
R963	RD50SST302J	C 3K OHM J 1/2W	
R964	RD50SST302J	C 3K OHM J 1/2W	
R965	RD50SST302J	C 3K OHM J 1/2W	
R966	RD50SST302J	C 3K OHM J 1/2W	
R967	RD50SST302J	C 3K OHM J 1/2W	
R1002	D0GB473JA041	M 47K OHM J 1/16W	
R1003	D0GB102JA041	M 1K OHM J 1/16W	
R1006	D0GB221JA041	M 220 OHM J 1/16W	
R1008	D0GB473JA041	M 47K OHM J 1/16W	
R1010	D0GB473JA041	M 47K OHM J 1/16W	
R1015	D0GB103JA041	M 10K OHM J 1/16W	
R1017	D0GB103JA041	M 10K OHM J 1/16W	
R1019	D0GB103JA041	M 10K OHM J 1/16W	
R1020	D0GB103JA041	M 10K OHM J 1/16W	
R1022	D0GB152JA041	M 1.5K OHM J 1/16W	
R1024	D0GBR00Z0002	M 0 OHM J 1/16W	
R1025	D0GB273JA041	M 27K OHM J 1/16W	
R1026	D0GB273JA041	M 27K OHM J 1/16W	
R1028	D0GB470JA041	M 47 OHM J 1/16W	
R1029	D0GB102JA041	M 1K OHM J 1/16W	
R1167	D0GBR00Z0002	M 0 OHM J 1/16W	
R1171	D0GB220JA041	M 22 OHM J 1/16W	
R1172	D0GB220JA041	M 22 OHM J 1/16W	
R1173	D0GB473JA041	M 47K OHM J 1/16W	
R1174	D0GB101JA041	M 100 OHM J 1/16W	
R1175	D0GB101JA041	M 100 OHM J 1/16W	
R1176	D0GB101JA041	M 100 OHM J 1/16W	
R1177	D0GB101JA041	M 100 OHM J 1/16W	
R1236	D0GB103JA041	M 10K OHM J 1/16W	
R1237	D0GB103JA041	M 10K OHM J 1/16W	
R1238	D0GB103JA041	M 10K OHM J 1/16W	
R1239	D0GB103JA041	M 10K OHM J 1/16W	
R1240	D0GB473JA041	M 47K OHM J 1/16W	
R1241	D0GB103JA041	M 10K OHM J 1/16W	
R1242	D0GB223JA041	M 22K OHM J 1/16W	
R1243	D0GB473JA041	M 47K OHM J 1/16W	
R1246	D0GB332JA041	M 3.3K OHM J 1/16W	
R1247	D0GB332JA041	M 3.3K OHM J 1/16W	
R1248	D0GB562JA041	M 5.6K OHM J 1/16W	
R1700	D0GB103JA041	M 10K OHM J 1/16W	
R1701	D0GB393JA041	M 39K OHM J 1/16W	
R1702	D0GB393JA041	M 39K OHM J 1/16W	
R1811	ERJ6GEYJ103V	M 10K OHM J 1/10W	
R1812	D0GB333JA041	M 33K OHM J 1/16W	
R1813	D0GB472JA041	M 4.7K OHM J 1/16W	
R1814	D0GBR00Z0002	M 0 OHM J 1/16W	
R1815	ERJ6GEYJ103V	M 10K OHM J 1/10W	
R1816	D0GB223JA041	M 22K OHM J 1/16W	
R1818	D0GB102JA041	M 1K OHM J 1/16W	
R1819	ERJ3EKF5231V	M 5.23K OHM F 1/16W	
R1820	ERJ3EKF2202V	M 22K OHM F 1/16W	
R1823	D0GB473JA041	M 47K OHM J 1/16W	
R1824	D0GB103JA041	M 10K OHM J 1/16W	
R1825	D0GB473JA041	M 47K OHM J 1/16W	
R1826	D0GB103JA041	M 10K OHM J 1/16W	
R1827	D0GB472JA041	M 4.7K OHM J 1/16W	

Ref. No.	Part No.	Part Name & Description	Remarks
R1828	D0GB472JA041	M 4.7K OHM J 1/16W	
R1829	D0GB472JA041	M 4.7K OHM J 1/16W	
R1830	D0GB472JA041	M 4.7K OHM J 1/16W	
R1831	D0GB102JA041	M 1K OHM J 1/16W	
R1832	D0GB102JA041	M 1K OHM J 1/16W	
R1834	D0GBR00Z0002	M 0 OHM J 1/16W	
R2096	ERJ2GEJ103X	M 10K OHM J 1/4W	
R2097	ERJ2GEJ393X	M 39K OHM 1/4W	
R2098	ERJ3EKF3902V	M 39K OHM F 1/16W	
R2099	D0GB100JA041	M 10 OHM J 1/16W	
R2100	D0GB100JA041	M 10 OHM J 1/16W	
R2101	D0GB220JA041	M 22 OHM J 1/16W	
R2102	D0GB220JA041	M 22 OHM J 1/16W	
R2103	D0GB472JA041	M 4.7K OHM J 1/16W	
R2104	D0GB472JA041	M 4.7K OHM J 1/16W	
R2105	D0GB472JA041	M 4.7K OHM J 1/16W	
R2106	D0GB472JA041	M 4.7K OHM J 1/16W	
R2107	D0GB153JA041	M 15K OHM J 1/16W	
R2108	D0GB153JA041	M 15K OHM J 1/16W	
R2109	D0GB103JA041	M 10K OHM J 1/16W	
R2111	D0GB103JA041	M 10K OHM J 1/16W	
R2112	ERJ2GEJ104X	M 100K OHM J 1/4W	
R2113	ERJ2GEJ104X	M 100K OHM J 1/4W	
R2114	ERJ2GEJ154X	M 150K OHM J 1/4W	
R2115	ERJ2GEJ393X	M 39K OHM 1/4W	
R2118	D0GBR00Z0002	M 0 OHM J 1/16W	
R2120	ERJ2GE0R00X	M 0 OHM 1/4W	
R2121	ERJ2GEJ104X	M 100K OHM J 1/4W	
R2122	ERJ2GEJ154X	M 150K OHM J 1/4W	
R2139	ERJ2GEJ103X	M 10K OHM J 1/4W	
R2140	ERJ2GEJ103X	M 10K OHM J 1/4W	
R2148	D0GB682JA041	M 6.8K OHM J 1/16W	
R2149	D0GB682JA041	M 6.8K OHM J 1/16W	
R2152	ERJ2GEJ104X	M 100K OHM J 1/4W	
R2153	ERJ2GEJ104X	M 100K OHM J 1/4W	
R2154	ERJ2GEJ104X	M 100K OHM J 1/4W	
R2155	D0GB105JA041	M 1M OHM F 1/16W	
R2156	D0GB105JA041	M 1M OHM F 1/16W	
R2159	ERJ2GEJ104X	M 100K OHM J 1/4W	
R2160	ERJ2GEJ104X	M 100K OHM J 1/4W	
R2303	ERJ2GEJ103X	M 10K OHM J 1/4W	
R2304	ERJ2GEJ103X	M 10K OHM J 1/4W	
R2306	ERJ2GEJ104X	M 100K OHM J 1/4W	
R2307	ERJ2GEJ103X	M 10K OHM J 1/4W	
R2308	D0GB104JA041	M 100K OHM J 1/16W	
R2310	D0GB222JA041	M 2.2K OHM J 1/16W	
R2313	ERJ2GEJ104X	M 100K OHM J 1/4W	
R2314	ERJ2GEJ105X	M 1M OHM J 1/4W	
R2381	ERJ2GEJ102X	M 1K OHM J 1/4W	
R2382	ERJ2GEJ104X	M 100K OHM J 1/4W	
R2383	ERJ2GEJ103X	M 10K OHM J 1/4W	
R3001	D0GB184JA041	M 180K OHM J 1/16W	
R3002	D0GB184JA041	M 180K OHM J 1/16W	
R3003	D1BD75R0A044	M 75 OHM 1/10W	
R3004	D1BD75R0A044	M 75 OHM 1/10W	
R3005	D1BD75R0A044	M 75 OHM 1/10W	
R3006	D0GB184JA041	M 180K OHM J 1/16W	
R3007	D0GB184JA041	M 180K OHM J 1/16W	
R3010	D1BD75R0A044	M 75 OHM 1/10W	
R3011	D0GB184JA041	M 180K OHM J 1/16W	
R3012	D0GB184JA041	M 180K OHM J 1/16W	
R3013	D1BD75R0A044	M 75 OHM 1/10W	
R3014	D1BD75R0A044	M 75 OHM 1/10W	
R3015	D1BD75R0A044	M 75 OHM 1/10W	
R3019	D1BD75R0A044	M 75 OHM 1/10W	
R3020	D0GB431JA041	M 430 OHM J 1/16W	
R3021	D0GB431JA041	M 430 OHM J 1/16W	
R3022	ERJ6GEYJ331V	M 330 OHM J 1/10W	
R3023	ERJ6GEYJ471V	M 470 OHM J 1/10W	
R3024	ERJ6GEYJ271V	M 270 OHM J 1/10W	
R3026	D0GB473JA041	M 47K OHM J 1/16W	
R3027	D0GB393JA041	M 39K OHM J 1/16W	
R3030	ERJ2GE0R00X	M 0 OHM 1/4W	

Ref. No.	Part No.	Part Name & Description	Remarks
R3034	D0GB184JA041	M 180K OHM J 1/16W	
R3035	D0GB101JA041	M 100 OHM J 1/16W	
R3036	D0GB101JA041	M 100 OHM J 1/16W	
R3037	D0GB101JA041	M 100 OHM J 1/16W	
R3038	D0GB101JA041	M 100 OHM J 1/16W	
R3039	D0GB105JA041	M 1M OHM F 1/16W	
R3040	D0GB274JA041	M 270K OHM J 1/16W	
R3041	D0GB473JA041	M 47K OHM J 1/16W	
R3042	D0GB102JA041	M 1K OHM J 1/16W	
R3043	D0GB184JA041	M 180K OHM J 1/16W	
R3045	D0GBR00Z0002	M 0 OHM J 1/16W	
R3049	D0GBR00Z0002	M 0 OHM J 1/16W	
R3050	D0GBR00Z0002	M 0 OHM J 1/16W	
R3051	D0GBR00Z0002	M 0 OHM J 1/16W	
R3052	D0GBR00Z0002	M 0 OHM J 1/16W	
R3053	D0GBR00Z0002	M 0 OHM J 1/16W	
R3100	D0GBR00Z0002	M 0 OHM J 1/16W	
R3101	D0GBR00Z0002	M 0 OHM J 1/16W	
R3102	D0GBR00Z0002	M 0 OHM J 1/16W	
R3103	D0GBR00Z0002	M 0 OHM J 1/16W	
R3104	D0GBR00Z0002	M 0 OHM J 1/16W	
R3105	D0GBR00Z0002	M 0 OHM J 1/16W	
R3106	D0GBR00Z0002	M 0 OHM J 1/16W	
R3107	D0GBR00Z0002	M 0 OHM J 1/16W	
R3108	D0GBR00Z0002	M 0 OHM J 1/16W	
R3109	D0GBR00Z0002	M 0 OHM J 1/16W	
R3110	D0GB102JA041	M 1K OHM J 1/16W	
R3111	D0GBR00Z0002	M 0 OHM J 1/16W	
R3112	D0GB102JA041	M 1K OHM J 1/16W	
R3116	D0GBR00Z0002	M 0 OHM J 1/16W	
R3117	D0GBR00Z0002	M 0 OHM J 1/16W	
R3118	D0GB102JA041	M 1K OHM J 1/16W	
R3119	D0GBR00Z0002	M 0 OHM J 1/16W	
R3120	D0GB102JA041	M 1K OHM J 1/16W	
R3121	D0GBR00Z0002	M 0 OHM J 1/16W	
R3122	D0GBR00Z0002	M 0 OHM J 1/16W	
R3123	D0GBR00Z0002	M 0 OHM J 1/16W	
R3124	D0GBR00Z0002	M 0 OHM J 1/16W	
R3128	D0GBR00Z0002	M 0 OHM J 1/16W	
R3129	D0GB102JA041	M 1K OHM J 1/16W	
R3130	D0GB102JA041	M 1K OHM J 1/16W	
R3200	D0GB103JA041	M 10K OHM J 1/16W	
R3201	D0GB473JA041	M 47K OHM J 1/16W	
R3203	D0GB103JA041	M 10K OHM J 1/16W	
R3204	ERJ14YJ222U	M 22K OHM J 1/4W	
R3205	ERJ14YJ222U	M 22K OHM J 1/4W	
R3206	D0GB223JA041	M 22K OHM J 1/16W	
R3207	D0GB332JA041	M 3.3K OHM J 1/16W	
R3208	D0GB103JA041	M 10K OHM J 1/16W	
R3209	D0GB473JA041	M 47K OHM J 1/16W	
R3210	D0GB332JA041	M 3.3K OHM J 1/16W	
R3215	D0GB103JA041	M 10K OHM J 1/16W	
R3218	D0GB103JA041	M 10K OHM J 1/16W	
R3221	D0GB103JA041	M 10K OHM J 1/16W	
R3227	D0GB103JA041	M 10K OHM J 1/16W	
R3229	D0GB153JA041	M 15K OHM J 1/16W	
R3230	D0GB473JA041	M 47K OHM J 1/16W	
R3231	D0GB103JA041	M 10K OHM J 1/16W	
R3232	ERJ6GEY0R00V	M 0 OHM J 1/10W	
R3233	D0GB473JA041	M 47K OHM J 1/16W	
R3234	D0GB222JA041	M 2.2K OHM J 1/16W	
R3235	D0GB152JA041	M 1.5K OHM J 1/16W	
R3236	D0GB223JA041	M 22K OHM J 1/16W	
R3237	D0GB473JA041	M 47K OHM J 1/16W	
R3501	ERJ6GEY0R00V	M 0 OHM J 1/10W	
R3502	D1BD75R0A044	M 75 OHM 1/10W	
R3503	ERJ6GEY0R00V	M 0 OHM J 1/10W	
R3504	ERJ6GEY0R00V	M 0 OHM J 1/10W	
R3505	D1BD75R0A044	M 75 OHM 1/10W	
R3507	ERJ6GEY0R00V	M 0 OHM J 1/10W	
R3508	ERJ6GEY0R00V	M 0 OHM J 1/10W	
R3509	D1BD75R0A044	M 75 OHM 1/10W	
R3510	ERJ6GEYJ102V	M 1K OHM J 1/10W	

Ref. No.	Part No.	Part Name & Description	Remarks
R3511	ERJ6GEY0R00V	M 0 OHM J 1/10W	
R3512	ERJ6GEYJ102V	M 1K OHM J 1/10W	
R3513	ERJ6GEYJ184V	M 180K OHM J 1/10W	
R3514	ERJ6GEYJ184V	M 180K OHM J 1/10W	
R3800	D0GB101JA041	M 100 OHM J 1/16W	
R3869	D0GB103JA041	M 10K OHM J 1/16W	
R3879	D0GB221JA041	M 220 OHM J 1/16W	
R3882	D0GB102JA041	M 1K OHM J 1/16W	
R3883	D0GB331JA041	M 330 OHM J 1/16W	
R3884	D0GBR00Z0002	M 0 OHM J 1/16W	
R3885	D0GBR00Z0002	M 0 OHM J 1/16W	
R3911	D0GB103JA041	M 10K OHM J 1/16W	
R3912	D0GB332JA041	M 3.3K OHM J 1/16W	
R3914	D0GB332JA041	M 3.3K OHM J 1/16W	
R3915	D0GB122JA041	N 1.2K OHM J 1/16W	
R3916	D0GB471JA041	M 470 OHM J 1/16W	
R3917	D0GB561JA041	M 560 OHM J 1/16W	
R3919	ERJ12Y0R00U	M 0 OHM J 1/2W	
R4001	D0GB273JA041	M 27K OHM J 1/16W	
R4003	D0GB102JA041	M 1K OHM J 1/16W	
R4005	ERJ2GEJ103X	M 10K OHM J 1/4W	
R4007	D0GB101JA041	M 100 OHM J 1/16W	
R4008	D0GB101JA041	M 100 OHM J 1/16W	
R4009	EXB2HV104JV	RESISTOR 100K OHM	
R4011	D0GB102JA041	M 1K OHM J 1/16W	
R4012	D0GB101JA041	M 100 OHM J 1/16W	
R4014	D0GB101JA041	M 100 OHM J 1/16W	
R4015	ERJ2GEJ104X	M 100K OHM J 1/4W	
R4016	D0GB103JA041	M 10K OHM J 1/16W	
R4017	D0GB103JA041	M 10K OHM J 1/16W	
R4018	ERJ2GEJ473X	M 47K OHM J	
R4019	D0GB473JA041	M 47K OHM J 1/16W	
R4020	D0GB103JA041	M 10K OHM J 1/16W	
R4021	D0GB103JA041	M 10K OHM J 1/16W	
R4022	D0GB473JA041	M 47K OHM J 1/16W	
R4023	D0GB101JA041	M 100 OHM J 1/16W	
R4025	D0GB101JA041	M 100 OHM J 1/16W	
R4026	D0GBR00Z0002	M 0 OHM J 1/16W	
R4028	D0GB220JA041	M 22 OHM J 1/16W	
R4031	D0GBR00Z0002	M 0 OHM J 1/16W	
R4032	D0GBR00Z0002	M 0 OHM J 1/16W	
R4034	D0GB101JA041	M 100 OHM J 1/16W	
R4038	ERJ2GEJ822X	M 8.2K OHM J	
R4047	D0GB101JA041	M 100 OHM J 1/16W	
R4048	D0GB101JA041	M 100 OHM J 1/16W	
R4049	D0GB101JA041	M 100 OHM J 1/16W	
R4050	D0GB101JA041	M 100 OHM J 1/16W	
R4053	D0GB101JA041	M 100 OHM J 1/16W	
R4055	D0GB101JA041	M 100 OHM J 1/16W	
R4057	D0GB101JA041	M 100 OHM J 1/16W	
R4058	D0GB101JA041	M 100 OHM J 1/16W	
R4059	D0GB101JA041	M 100 OHM J 1/16W	
R4061	D0GB220JA041	M 22 OHM J 1/16W	
R4062	D0GB102JA041	M 1K OHM J 1/16W	
R4063	D0GB220JA041	M 22 OHM J 1/16W	
R4064	D0GB473JA041	M 47K OHM J 1/16W	
R4065	D0GB220JA041	M 22 OHM J 1/16W	
R4066	D0GB101JA041	M 100 OHM J 1/16W	
R4069	D0GB101JA041	M 100 OHM J 1/16W	
R4071	D0GB103JA041	M 10K OHM J 1/16W	
R4072	D0GB101JA041	M 100 OHM J 1/16W	
R4077	D0GB220JA041	M 22 OHM J 1/16W	
R4078	D0GB102JA041	M 1K OHM J 1/16W	
R4079	D0GB101JA041	M 100 OHM J 1/16W	
R4080	D0GB220JA041	M 22 OHM J 1/16W	
R4081	D0GB101JA041	M 100 OHM J 1/16W	
R4082	D0GBR00Z0002	M 0 OHM J 1/16W	
R4089	D0GB151JA041	M 150 OHM J 1/16W	
R4092	D0GB102JA041	M 1K OHM J 1/16W	
R4093	D0GB103JA041	M 10K OHM J 1/16W	
R4094	D0GB151JA041	M 150 OHM J 1/16W	
R4097	D0GB151JA041	M 150 OHM J 1/16W	
R4098	D0GB151JA041	M 150 OHM J 1/16W	

Ref. No.	Part No.	Part Name & Description	Remarks
R4099	D0GB151JA041	M 150 OHM J 1/16W	
R4100	D0GB151JA041	M 150 OHM J 1/16W	
R4101	D0GB103JA041	M 10K OHM J 1/16W	
R4102	D0GB151JA041	M 150 OHM J 1/16W	
R4103	D0GB103JA041	M 10K OHM J 1/16W	
R4104	D0GB332JA041	M 3.3K OHM J 1/16W	
R4105	D0GB103JA041	M 10K OHM J 1/16W	
R4106	D0GB103JA041	M 10K OHM J 1/16W	
R4107	D0GB151JA041	M 150 OHM J 1/16W	
R4108	D0GB102JA041	M 1K OHM J 1/16W	
R4109	D0GB151JA041	M 150 OHM J 1/16W	
R4110	D0GB102JA041	M 1K OHM J 1/16W	
R4111	D0GB151JA041	M 150 OHM J 1/16W	
R4112	D0GBR00Z0002	M 0 OHM J 1/16W	
R4113	D0GB151JA041	M 150 OHM J 1/16W	
R4114	D0GB101JA041	M 100 OHM J 1/16W	
R4115	D0GB151JA041	M 150 OHM J 1/16W	
R4116	D0GB102JA041	M 1K OHM J 1/16W	
R4117	D0GB151JA041	M 150 OHM J 1/16W	
R4118	D0GB471JA041	M 470 OHM J 1/16W	
R4119	D0GBR00Z0002	M 0 OHM J 1/16W	
R4120	D0GBR00Z0002	M 0 OHM J 1/16W	
R4121	D0GB562JA041	M 5.6K OHM J 1/16W	
R4122	D0GBR00Z0002	M 0 OHM J 1/16W	
R4123	D0GB151JA041	M 150 OHM J 1/16W	
R4124	D0GBR00Z0002	M 0 OHM J 1/16W	
R4125	D0GB151JA041	M 150 OHM J 1/16W	
R4126	D0GB151JA041	M 150 OHM J 1/16W	
R4127	D0GB151JA041	M 150 OHM J 1/16W	
R4128	ERJ2GEJ103X	M 10K OHM J 1/4W	
R4129	D0GB182JA041	M 1.8K OHM J 1/16W	
R4130	D0GBR00Z0002	M 0 OHM J 1/16W	
R4131	D0GB221JA041	M 220 OHM J 1/16W	
R4132	D0GB221JA041	M 220 OHM J 1/16W	
R4133	D0GBR00Z0002	M 0 OHM J 1/16W	
R4134	D0GB331JA041	M 330 OHM J 1/16W	
R4135	D0GB331JA041	M 330 OHM J 1/16W	
R4136	D0GB223JA041	M 22K OHM J 1/16W	
R4138	D0GB103JA041	M 10K OHM J 1/16W	
R4139	D0GB103JA041	M 10K OHM J 1/16W	
R4140	D0GB272JA041	M 2.7K OHM J 1/16W	
R4141	D0GB121JA041	M 120 OHM J 1/16W	
R4146	D0GBR00Z0002	M 0 OHM J 1/16W	
R4148	D0GBR00Z0002	M 0 OHM J 1/16W	
R4188	D0GB102JA041	M 1K OHM J 1/16W	
R4189	D0GB101JA041	M 100 OHM J 1/16W	
R4191	D0GB103JA041	M 10K OHM J 1/16W	
R4192	D0GB103JA041	M 10K OHM J 1/16W	
R4193	D0GB103JA041	M 10K OHM J 1/16W	
R4194	ERJ3EKF1000V	M 100 OHM F 1/16W	
R4195	D0GB101JA041	M 100 OHM J 1/16W	
R4196	ERJ3EKF1000V	M 100 OHM F 1/16W	
R4197	D0GB101JA041	M 100 OHM J 1/16W	
R4198	ERJ3EKF1000V	M 100 OHM F 1/16W	
R4199	D0GB103JA041	M 10K OHM J 1/16W	
R4200	ERJ3EKF1000V	M 100 OHM F 1/16W	
R4201	D0GB103JA041	M 10K OHM J 1/16W	
R4202	ERJ3EKF1000V	M 100 OHM F 1/16W	
R4203	D0GB102JA041	M 1K OHM J 1/16W	
R4204	ERJ3EKF1600V	M 160 OHM F 1/16W	
R4205	ERJ3EKF1600V	M 160 OHM F 1/16W	
R4206	ERJ3EKF1600V	M 160 OHM F 1/16W	
R4207	ERJ3EKF1600V	M 160 OHM F 1/16W	
R4208	ERJ3EKF1600V	M 160 OHM F 1/16W	
R4209	D0GBR00Z0002	M 0 OHM J 1/16W	
R4210	D0GBR00Z0002	M 0 OHM J 1/16W	
R4214	D0GB101JA041	M 100 OHM J 1/16W	
R4215	D0GB101JA041	M 100 OHM J 1/16W	
R4216	D0GB103JA041	M 10K OHM J 1/16W	
R4217	D0GB101JA041	M 100 OHM J 1/16W	
R4218	D0GB101JA041	M 100 OHM J 1/16W	
R4219	D0GB102JA041	M 1K OHM J 1/16W	
R4220	D0GB102JA041	M 1K OHM J 1/16W	

Ref. No.	Part No.	Part Name & Description	Remarks
R4221	D0GB102JA041	M 1K OHM J 1/16W	
R4222	D0GB103JA041	M 10K OHM J 1/16W	
R4225	D0GB103JA041	M 10K OHM J 1/16W	
R4226	D0GB332JA041	M 3.3K OHM J 1/16W	
R4228	D0GB102JA041	M 1K OHM J 1/16W	
R4229	D0GB392JA041	M 3.9K OHM J 1/16W	
R4230	D0GB392JA041	M 3.9K OHM J 1/16W	
R4231	D0GB103JA041	M 10K OHM J 1/16W	
R4232	D0GB103JA041	M 10K OHM J 1/16W	
R4233	D0GB103JA041	M 10K OHM J 1/16W	
R4234	D0GB103JA041	M 10K OHM J 1/16W	
R4235	D0GB103JA041	M 10K OHM J 1/16W	
R4236	D0GB103JA041	M 10K OHM J 1/16W	
R4237	D0GB103JA041	M 10K OHM J 1/16W	
R4238	D0GB103JA041	M 10K OHM J 1/16W	
R4239	D0GB103JA041	M 10K OHM J 1/16W	
R4240	D0GB103JA041	M 10K OHM J 1/16W	
R4241	D0GB103JA041	M 10K OHM J 1/16W	
R4242	D0GB103JA041	M 10K OHM J 1/16W	
R4243	D0GB103JA041	M 10K OHM J 1/16W	
R4244	D0GB101JA041	M 100 OHM J 1/16W	
R4245	D0GB103JA041	M 10K OHM J 1/16W	
R4246	D0GB103JA041	M 10K OHM J 1/16W	
R4247	D0GB103JA041	M 10K OHM J 1/16W	
R4248	D0GB103JA041	M 10K OHM J 1/16W	
R4249	D0GB103JA041	M 10K OHM J 1/16W	
R4253	D0GB1R8JA040	M 1.8 OHM J 1/16W	
R4254	D0GB103JA041	M 10K OHM J 1/16W	
R4255	D0GB104JA041	M 100K OHM J 1/16W	
R4256	D0GBR00Z0002	M 0 OHM J 1/16W	
R4257	D0GB103JA041	M 10K OHM J 1/16W	
R4258	D0GB473JA041	M 47K OHM J 1/16W	
R4259	D0GB473JA041	M 47K OHM J 1/16W	
R4271	D0GB221JA041	M 220 OHM J 1/16W	
R4272	D0GB221JA041	M 220 OHM J 1/16W	
R4273	D0GB221JA041	M 220 OHM J 1/16W	
R4274	D0GB221JA041	M 220 OHM J 1/16W	
R4275	D0GB221JA041	M 220 OHM J 1/16W	
R4276	D0GB221JA041	M 220 OHM J 1/16W	
R4277	D0GB221JA041	M 220 OHM J 1/16W	
R4278	D0GB221JA041	M 220 OHM J 1/16W	
R4279	D0GB221JA041	M 220 OHM J 1/16W	
R4280	D0GB221JA041	M 220 OHM J 1/16W	
R4281	D0GB332JA041	M 3.3K OHM J 1/16W	
R4282	D0GB332JA041	M 3.3K OHM J 1/16W	
R4325	ERJ2GE0R00X	M 0 OHM 1/4W	
R4326	ERJ2GE0R00X	M 0 OHM 1/4W	
R4328	D0GB101JA041	M 100 OHM J 1/16W	
R4501	D0GB473JA041	M 47K OHM J 1/16W	
R4502	D0GB103JA041	M 10K OHM J 1/16W	
R4504	D0GB103JA041	M 10K OHM J 1/16W	
R4505	D0GB103JA041	M 10K OHM J 1/16W	
R4506	D0GB473JA041	M 47K OHM J 1/16W	
R4750	ERJ2GE0R00X	M 0 OHM 1/4W	
R4751	ERJ2GE0R00X	M 0 OHM 1/4W	
R4752	ERJ2GE0R00X	M 0 OHM 1/4W	
R4753	ERJ2GE0R00X	M 0 OHM 1/4W	
R4754	ERJ2GE0R00X	M 0 OHM 1/4W	
R4755	ERJ2GE0R00X	M 0 OHM 1/4W	
R4756	ERJ2GE0R00X	M 0 OHM 1/4W	
R4757	ERJ2GE0R00X	M 0 OHM 1/4W	
R4758	ERJ2GE0R00X	M 0 OHM 1/4W	
R4759	ERJ2GE0R00X	M 0 OHM 1/4W	
R4810	D0GB223JA041	M 22K OHM J 1/16W	
R4811	D0GB333JA041	M 33K OHM J 1/16W	
R5001	D0GB390JA041	M 39 OHM J 1/16W	
R5002	D0GB390JA041	M 39 OHM J 1/16W	
R5005	D0GB103JA041	M 10K OHM J 1/16W	
R5006	D0GB103JA041	M 10K OHM J 1/16W	
R5007	D0GB2R7JA040	M 2.7 OHM J 1/16W	
R5008	D0GB2R7JA040	M 2.7 OHM J 1/16W	
R5009	D0GB2R7JA040	M 2.7 OHM J 1/16W	
R5010	D0GB2R7JA040	M 2.7 OHM J 1/16W	

Ref. No.	Part No.	Part Name & Description	Remarks
R5011	D0GB2R7JA040	M 2.7 OHM J 1/16W	
R5012	D0GB2R7JA040	M 2.7 OHM J 1/16W	
R5013	D0GB2R7JA040	M 2.7 OHM J 1/16W	
R5014	D0GB2R7JA040	M 2.7 OHM J 1/16W	
R5015	D0GB2R7JA040	M 2.7 OHM J 1/16W	
R5016	D0GB2R7JA040	M 2.7 OHM J 1/16W	
R5017	D0GB2R7JA040	M 2.7 OHM J 1/16W	
R5018	D0GB2R7JA040	M 2.7 OHM J 1/16W	
R5019	D0GB2R7JA040	M 2.7 OHM J 1/16W	
R5020	D0GB2R7JA040	M 2.7 OHM J 1/16W	
R5021	D0GB2R7JA040	M 2.7 OHM J 1/16W	
R5022	D0GB2R7JA040	M 2.7 OHM J 1/16W	
R5023	ERJ2GE0R00X	M 0 OHM 1/4W	
R5024	D0GB103JA041	M 10K OHM J 1/16W	
R5025	D0GB103JA041	M 10K OHM J 1/16W	
R5026	ERJ2GE0R00X	M 0 OHM 1/4W	
R5027	D0GB103JA041	M 10K OHM J 1/16W	
R5028	D0GB103JA041	M 10K OHM J 1/16W	
R5029	D0GB103JA041	M 10K OHM J 1/16W	
R5030	D0GB472JA041	M 4.7K OHM J 1/16W	
R5031	D0GB472JA041	M 4.7K OHM J 1/16W	
R5032	D0GB103JA041	M 10K OHM J 1/16W	
R5035	D0GB472JA041	M 4.7K OHM J 1/16W	
R5036	D0GB472JA041	M 4.7K OHM J 1/16W	
R5038	D0GB473JA041	M 47K OHM J 1/16W	
R5039	D0GB560JA041	M 56 OHM J 1/16W	
R5040	D0GB473JA041	M 47K OHM J 1/16W	
R5041	D0GB560JA041	M 56 OHM J 1/16W	
R5043	D0GB560JA041	M 56 OHM J 1/16W	
R5045	D0GB560JA041	M 56 OHM J 1/16W	
R5048	D0GB472JA041	M 4.7K OHM J 1/16W	
R5049	D0GB472JA041	M 4.7K OHM J 1/16W	
R5052	D0GB472JA041	M 4.7K OHM J 1/16W	
R5053	D0GB472JA041	M 4.7K OHM J 1/16W	
R5054	D0GB101JA041	M 100 OHM J 1/16W	
R5055	D0GB101JA041	M 100 OHM J 1/16W	
R5057	D0GB103JA041	M 10K OHM J 1/16W	
R5058	D0GB330JA041	M 33 OHM J 1/16W	
R5060	D0GB103JA041	M 10K OHM J 1/16W	
R5061	D0GB220JA041	M 22 OHM J 1/16W	
R5062	D0GB220JA041	M 22 OHM J 1/16W	
R5063	D0GB330JA041	M 33 OHM J 1/16W	
R5064	D0GB220JA041	M 22 OHM J 1/16W	
R5065	D0GB330JA041	M 33 OHM J 1/16W	
R5066	D0GB220JA041	M 22 OHM J 1/16W	
R5067	D0GB330JA041	M 33 OHM J 1/16W	
R5068	D0GB220JA041	M 22 OHM J 1/16W	
R5070	D0GB220JA041	M 22 OHM J 1/16W	
R5073	D0GB105JA041	M 1M OHM F 1/16W	
R5075	D0GB821JA041	M 820 OHM J 1/16W	
R5077	D0GB182JA041	M 1.8K OHM J 1/16W	
R5078	D0GB220JA041	M 22 OHM J 1/16W	
R5080	D0GB220JA041	M 22 OHM J 1/16W	
R5081	D0GB182JA041	M 1.8K OHM J 1/16W	
R5082	D0GB220JA041	M 22 OHM J 1/16W	
R5083	EXB38V220JV	M 22 OHM J 1/16W	
R5084	EXB2HV220JV	RESISTOR 22 OHM	
R5085	ERJ2GEJ220X	M 22 OHM J 1/4W	
R5086	EXB2HV220JV	RESISTOR 22 OHM	
R5087	EXB2HV220JV	RESISTOR 22 OHM	
R5088	D0GBR00Z0002	M 0 OHM J 1/16W	
R5091	D0GBR00Z0002	M 0 OHM J 1/16W	
R5093	ERJ3EKF2612V	M 26.1K OHM F 1/16W	
R5094	D0GB221JA041	M 220 OHM J 1/16W	
R5095	ERJ3EKF4703V	M 470K OHM F 1/16W	
R5096	D0GB104JA041	M 100K OHM J 1/16W	
R5097	D0GB473JA041	M 47K OHM J 1/16W	
R5098	ERJ3EKF2203V	M 220K OHM F 1/16W	
R5099	D0GB472JA041	M 4.7K OHM J 1/16W	
R5100	D0GB475JA040	M 4700K OHM J 1/16W	
R5101	D0GBR00Z0002	M 0 OHM J 1/16W	
R5102	D0GB223JA041	M 22K OHM J 1/16W	
R5103	D0GB103JA041	M 10K OHM J 1/16W	

Ref. No.	Part No.	Part Name & Description	Remarks
R5104	D0GB102JA041	M 1K OHM J 1/16W	
R5105	D0GB103JA041	M 10K OHM J 1/16W	
R5106	D0GB102JA041	M 1K OHM J 1/16W	
R5107	EXB2HV104JV	RESISTOR 100K OHM	
R5108	EXB2HV104JV	RESISTOR 100K OHM	
R5109	EXB2HV104JV	RESISTOR 100K OHM	
R5110	D0GB104JA041	M 100K OHM J 1/16W	
R5111	D0GB104JA041	M 100K OHM J 1/16W	
R5112	D0GB104JA041	M 100K OHM J 1/16W	
R5113	D0GB104JA041	M 100K OHM J 1/16W	
R5114	D0GBR00Z0002	M 0 OHM J 1/16W	
R5116	D0GBR00Z0002	M 0 OHM J 1/16W	
R5117	D0GBR00Z0002	M 0 OHM J 1/16W	
R5118	D0GBR00Z0002	M 0 OHM J 1/16W	
R5119	D0GBR00Z0002	M 0 OHM J 1/16W	
R5124	D0GBR00Z0002	M 0 OHM J 1/16W	
R5125	D0GB220JA041	M 22 OHM J 1/16W	
R5126	D0GB220JA041	M 22 OHM J 1/16W	
R5130	D0GB473JA041	M 47K OHM J 1/16W	
R5131	D0GB473JA041	M 47K OHM J 1/16W	
R5132	D0GB220JA041	M 22 OHM J 1/16W	
JA1	ERJ6GEY0R00V	M 0 OHM J 1/10W	
JA1	ERJ8GEY0R00V	M 0 OHM 1/10W	
JA2	ERJ6GEY0R00V	M 0 OHM J 1/10W	
JA2	ERJ8GEY0R00V	M 0 OHM 1/10W	
JA3	ERJ8GEY0R00V	M 0 OHM 1/10W	
JA3	ERJ8GEY0R00V	M 0 OHM 1/10W	
JA4	ERJ8GEY0R00V	M 0 OHM 1/10W	
JA5	ERJ8GEY0R00V	M 0 OHM 1/10W	
JA6	ERJ8GEY0R00V	M 0 OHM 1/10W	
JA7	ERJ8GEY0R00V	M 0 OHM 1/10W	
JA8	ERJ8GEY0R00V	M 0 OHM 1/10W	
JA9	ERJ8GEY0R00V	M 0 OHM 1/10W	
JA10	ERJ8GEY0R00V	M 0 OHM 1/10W	
JS922	D0GBR00Z0002	M 0 OHM J 1/16W	
JS924	D0GBR00Z0002	M 0 OHM J 1/16W	
JS926	D0GBR00Z0002	M 0 OHM J 1/16W	
JS1801	D0GBR00Z0002	M 0 OHM J 1/16W	
JS1809	ERJ2GE0R00X	M 0 OHM 1/4W	
JS2004	ERJ6GEY0R00V	M 0 OHM J 1/10W	
JS2306	ERJ2GE0R00X	M 0 OHM 1/4W	
JS3501	ERJ6GEY0R00V	M 0 OHM J 1/10W	
JS3502	ERJ6GEY0R00V	M 0 OHM J 1/10W	
JS3503	ERJ6GEY0R00V	M 0 OHM J 1/10W	
JS3601	ERJ6GEY0R00V	M 0 OHM J 1/10W	
JS3602	ERJ6GEY0R00V	M 0 OHM J 1/10W	
C801	F0CAF2240003	C 0.22UF	PAVCKM △
C802	F0CAF2240003	C 0.22UF	PAVCKM △
C807	ECKCNA152ME7	C 1500 PF M	△
C808	ECKCNA471MB7	C 470PF M 250V	△
C809	ECKCNA471MB7	C 470PF M 250V	△
C810	ECKR3A102KBP	C 1000 PF K 1KV	
C811	ECKR3A471KBP	C 470PF K 1KV	
C813	F2A1E102A223	E 1000UF 25V	
C814	F2A1V1020043	E 1000UF 35V	PAVCKM
C815	F2A1V1020043	E 1000UF 35V	PAVCKM
C816	F2A1C102A252	E 1000UF 16V	
C820	ECKCNA101MB7	C 100PF M 250V	△
C821	ECKCNA101MB7	C 100PF M 250V	△
C830	F2B2W1510005	E 150UF 450V	
C831	ECQE6103KFB	P 0.06UF K 100V	
C833	F2A1H220A536	E 22UF 50V	PAVCKM
C834	ECKW3D152KBP	C 1500PF K 2KV	
C835	ECQB1H121JF	P 120PF J 50V	PAVCKM
C836	ECQB1H121JF	P 120PF J 50V	PAVCKM
C837	F2A1H1R0A317	E 1UF 50V	PAVCKM
C838	ECQB1H224JF3	P 0.22UF J 50V	
C842	F2B2W1510005	E 150UF 450V	
C881	ECQB1H103JF3	P 0.01UF J 50V	
C882	F1B2H1030029	C 0.01UF 200V	PAVCKM

Ref. No.	Part No.	Part Name & Description	Remarks
C883	F2A1H4R7B204	E 4.7UF 50V	PAVCKM
C885	F2A2W2200020	E 22UF 160V	PAVCKM
C886	F2A1A471A476	E 470UF 10V	PAVCKM
C887	ECKR3A101KBP	C 100 PF K 1 KV	
C888	ECQB1H473JF3	P 0.047UF J 50V	
C889	ECQE6103KFB	P 0.06UF K 100V	
C890	ECQB1H681JF3	P 680PF J 50V	
C901	ECJ1VB1H104K	C 0.1UF K 50V	
C902	ECJ1VB1H104K	C 0.1UF K 50V	
C909	F2A1H221A115	E 220UF 50V	
C910	F2A1C471A256	E 470UF 16V	
C911	F2A1C471A256	E 470UF 16V	
C912	ECJ1VB1H104K	C 0.1UF K 50V	
C915	ECJ1VB1H104K	C 0.1UF K 50V	
C922	ECJ1VB1H104K	C 0.1UF K 50V	
C923	F2A1H221A115	E 220UF 50V	
C924	ECJ1VB1H104K	C 0.1UF K 50V	
C926	ECJ1VB1H104K	C 0.1UF K 50V	
C927	ECJ1VB1H104K	C 0.1UF K 50V	
C928	ECJ1VB1E105K	C 1UF K 25V	PAVCKM
C929	ECJ1VB1H104K	C 0.1UF K 50V	
C930	ECJ1VB1E105K	C 1UF K 25V	PAVCKM
C931	ECJ1VB1E105K	C 1UF K 25V	PAVCKM
C934	ECJ1VB1H104K	C 0.1UF K 50V	
C935	F2A1E221A225	E 220UF 25V	PAVCKM
C936	ECJ1VB1H104K	C 0.1UF K 50V	
C938	ECJ1VB1H103K	C 0.01UF K 50V	
C939	F2A1C471A256	E 470UF 16V	
C940	ECJ1VB1H104K	C 0.1UF K 50V	
C941	ECJ1VB1H104K	C 0.1UF K 50V	
C942	F2A1E221A487	E 220UF 25V	
C943	ECJ1VB1H104K	C 0.1UF K 50V	
C945	ECJ1VB1H103K	C 0.01UF K 50V	
C947	ECJ1VB1H104K	C 0.1UF K 50V	
C948	F2A1C471A256	E 470UF 16V	
C950	ECJ1VB1H104K	C 0.1UF K 50V	
C951	ECJ1VB1H104K	C 0.1UF K 50V	
C952	ECJ1VB1H104K	C 0.1UF K 50V	
C954	ECJ1VB1H104K	C 0.1UF K 50V	
C956	ECJ1VB1H104K	C 0.1UF K 50V	
C961	ECJ1VB1H104K	C 0.1UF K 50V	
C962	ECJ1VB1H104K	C 0.1UF K 50V	
C963	ECJ1VB1H104K	C 0.1UF K 50V	
C964	ECJ1VB1H104K	C 0.1UF K 50V	
C965	ECJ1VB1H102K	C 1000PF K 50V	
C966	ECJ1VB1H104K	C 0.1UF K 50V	
C967	ECJ1VB1H104K	C 0.1UF K 50V	
C974	F2A1C471A256	E 470UF 16V	
C976	F2A1H221A115	E 220UF 50V	
C981	F2A1C102A252	E 1000UF 16V	
C982	F2A1C102A252	E 1000UF 16V	
C985	ECJ1VB1H104K	C 0.1UF K 50V	
C1003	ECEA1CKS220B	E 22UF 16V	
C1006	ECEA0JKS470B	E 47UF 6.3V	
C1007	ECJ1VB1H103K	C 0.01UF K 50V	
C1168	ECJ1VB1C104K	C 0.1UF K 16V	
C1181	ECJ0EB1H102K	C 1000PF K 10V	
C1182	ECJ0EB1H102K	C 1000PF K 10V	
C1185	ECJ0EB1H102K	C 1000PF K 10V	
C1186	ECJ0EB1H102K	C 1000PF K 10V	
C1822	F1G1A1040006	P 0.1UF 10V	
C1828	F2H1C470A009	E 47UF 16V	
C1831	F1G1A1040006	P 0.1UF 10V	
C1834	ECJ2FB1C474K	C 0.47UF K 16V	
C1835	ECJ1VB1C563K	C 0.056UF K 16V	
C1836	ECJ1VB1C104K	C 0.1UF K 16V	
C1837	ECJ1VB1H103K	C 0.01UF K 50V	
C1839	ECJ1VC1H101J	C 100PF J 50V	
C1840	ECJ1VF1A105Z	C 1UF Z 10V	
C1842	F1H0J1050013	P 1UF 10V	
C1843	F1H0J1050013	P 1UF 10V	
C1844	EEHB0G470R	E 47UF 6.3V	
C1845	EEHB0G470R	E 47UF 6.3V	

Ref. No.	Part No.	Part Name & Description	Remarks
C1850	F1G1A1040006	P 0.1UF 10V	
C1851	F1G1A1040006	P 0.1UF 10V	
C1852	EEEBB0G470R	E 47UF 6.3V	
C1853	EEEBB0G470R	E 47UF 6.3V	
C1865	ECJ1VFB1A105Z	C 1UF Z 10V	
C1866	ECJ1VFB1A105Z	C 1UF Z 10V	
C1867	ECJ1VFB1A105Z	C 1UF Z 10V	
C1868	ECJ1VFB1A105Z	C 1UF Z 10V	
C1869	F2H1C470A009	E 47UF 16V	
C1870	ECJ1VB1C104K	C 0.1UF K 16V	
C1871	F2H1C470A009	E 47UF 16V	
C1872	ECJ1VB1C104K	C 0.1UF K 16V	
C2068	ECJ1VB1A105K	C 1UF K 10V	
C2101	ECJ1VB1E104K	C 0.1UF K 25V	
C2102	ECJ2FB1E105K	C 1UF 16V	
C2103	ECJ2FB1E105K	C 1UF 16V	
C2106	ECJ2FB1E105K	C 1UF 16V	
C2109	ECJ2FB1E105K	C 1UF 16V	
C2110	ECJ1VB1E104K	C 0.1UF K 25V	
C2111	ECJ2FB1E105K	C 1UF 16V	
C2112	ECJ1VB1E104K	C 0.1UF K 25V	
C2113	ECJ1VB1E104K	C 0.1UF K 25V	
C2114	ECJ1VB1E104K	C 0.1UF K 25V	
C2115	ECJ1VB1H153K	C 0.012UF K 50V	
C2116	ECJ1VB1E104K	C 0.1UF K 25V	
C2117	ECJ1VB1E104K	C 0.1UF K 25V	
C2118	ECJ1VB1H153K	C 0.012UF K 50V	
C2119	ECJ1VB1E104K	C 0.1UF K 25V	
C2120	ECJ1VB1E104K	C 0.1UF K 25V	
C2122	ECJ0EB1H102K	C 1000PF K 10V	
C2124	ECJ0EB1H102K	C 1000PF K 10V	
C2125	ECJ1VB1E104K	C 0.1UF K 25V	
C2126	ECJ1VB1C224K	C 0.22UF K 16V	
C2127	ECJ2FB1E475M	C 4.7UF 16V	
C2128	ECJ1VB1C224K	C 0.22UF K 16V	
C2129	ECJ2FB1E475M	C 4.7UF 16V	
C2130	F2A1C102A530	E 1000 UF 16V	
C2131	F2A1C102A530	E 1000 UF 16V	
C2132	ECJ1VB1H102K	C 1000PF K 50V	
C2133	ECJ1VB1H102K	C 1000PF K 50V	
C2138	ECJ1VB1E104K	C 0.1UF K 25V	
C2139	F2A1E1010073	E 100UF 25V	
C2140	EEUFC1V221E	E 220UF 25V	
C2141	ECJ1VB1H103K	C 0.01UF K 50V	
C2142	F2H0J101A010	E 100UF 6.3V	
C2143	F2H0J101A010	E 100UF 6.3V	
C2144	F1H0J1050013	P 1UF 10V	
C2145	F2H1C470A009	E 47UF 16V	
C2146	ECJ2FB1E105K	C 1UF 16V	
C2147	ECJ2FB1E105K	C 1UF 16V	
C2162	ECJ2FB1E475M	C 4.7UF 16V	
C2163	ECJ2FB1E475M	C 4.7UF 16V	
C2172	F2H0J101A010	E 100UF 6.3V	
C2173	F2A1C101A244	E 100 UF 16V	
C2178	ECJ0EB1H102K	C 1000PF K 10V	
C2179	ECJ0EB1H102K	C 1000PF K 10V	
C2180	ECJ1VB1C224K	C 0.22UF K 16V	
C2181	ECJ1VB1C224K	C 0.22UF K 16V	
C2223	F2A1E1010073	E 100UF 25V	
C2367	EEEBB1C101UP	E 100UF J 16V	
C3062	ECJ1VFB1A105Z	C 1UF Z 10V	
C3064	F2A1A471A994	E 470UF 10V	PAVCKM
C3065	ECJ1VB1C104K	C 0.1UF K 16V	
C3067	F1J0J1060004	C 0.01UF K 16V	
C3073	ECJ1VB1A105K	C 1UF K 10V	
C3076	ECJ1VB1A105K	C 1UF K 10V	
C3077	ECJ1VB1A105K	C 1UF K 10V	
C3200	ECJ1VB0J225K	C 1UF K 6.3V	
C3202	EEEBB1C101UP	E 100UF J 16V	
C3203	ECJ1VB1C224K	C 0.22UF K 16V	
C3204	F2H1C470A009	E 47UF 16V	
C3863	ECJ1VFB1A105Z	C 1UF Z 10V	
C3866	F2A0J101A240	E 100UF 6.3V	

Ref. No.	Part No.	Part Name & Description	Remarks
C3867	ECJ1VB1C104K	C 0.1UF K 16V	
C3870	ECJ1VFB1H104Z	C 0.1UF Z 50V	
C3873	ECJ1VB1C104K	C 0.1UF K 16V	
C3874	ECJ1VB1C104K	C 0.1UF K 16V	
C4001	ECJ1VB1C104K	C 0.1UF K 16V	
C4004	ECJ1VB1C104K	C 0.1UF K 16V	
C4005	ECJ1VB1C104K	C 0.1UF K 16V	
C4006	ECJ1VB1C104K	C 0.1UF K 16V	
C4007	ECJ1VB1C104K	C 0.1UF K 16V	
C4008	ECJ1VB1C104K	C 0.1UF K 16V	
C4009	F1J0J1060004	C 0.01UF K 16V	
C4013	ECJ1VB1C104K	C 0.1UF K 16V	
C4014	ECJ1VB1C104K	C 0.1UF K 16V	
C4015	ECJ1VB1C104K	C 0.1UF K 16V	
C4016	ECJ1VB1C104K	C 0.1UF K 16V	
C4017	ECJ1VB1C104K	C 0.1UF K 16V	
C4018	ECJ1VB1C104K	C 0.1UF K 16V	
C4019	F1J0J1060004	C 0.01UF K 16V	
C4020	F1J0J1060004	C 0.01UF K 16V	
C4021	F1J0J1060004	C 0.01UF K 16V	
C4022	F1J0J1060004	C 0.01UF K 16V	
C4023	F1J0J1060004	C 0.01UF K 16V	
C4024	ECJ1VFB1A105Z	C 1UF Z 10V	
C4025	ECJ1VB1C104K	C 0.1UF K 16V	
C4027	ECJ1VB1C104K	C 0.1UF K 16V	
C4029	ECJ1VB1C104K	C 0.1UF K 16V	
C4030	ECJ1VFB1A105Z	C 1UF Z 10V	
C4031	ECJ1VB1C104K	C 0.1UF K 16V	
C4033	ECJ0EC1H101J	C 100PF J 10V	
C4034	F1G1A1040006	P 0.1UF 10V	
C4035	F1G1A1040006	P 0.1UF 10V	
C4036	ECJ1VB1A105K	C 1UF K 10V	
C4037	ECJ1VB1A105K	C 1UF K 10V	
C4038	ECJ1VB1A105K	C 1UF K 10V	
C4039	ECJ1VB1A105K	C 1UF K 10V	
C4040	ECJ1VB1A105K	C 1UF K 10V	
C4041	ECJ1VB1A105K	C 1UF K 10V	
C4042	F1G1A1040006	P 0.1UF 10V	
C4043	ECJ1VB1A105K	C 1UF K 10V	
C4044	ECJ1VB1A105K	C 1UF K 10V	
C4045	F1G1A1040006	P 0.1UF 10V	
C4046	F1G1A1040006	P 0.1UF 10V	
C4049	F1G1A1040006	P 0.1UF 10V	
C4050	F1G1A1040006	P 0.1UF 10V	
C4051	ECJ1VB1C104K	C 0.1UF K 16V	
C4052	ECJ1VC1H560J	C 56PF J 50V	
C4053	ECJ1VC1H560J	C 56PF J 50V	
C4054	F1G1A1040006	P 0.1UF 10V	
C4055	F1J0J1060004	C 0.01UF K 16V	
C4056	F1G1A1040006	P 0.1UF 10V	
C4057	F1J0J1060004	C 0.01UF K 16V	
C4058	F1G1A1040006	P 0.1UF 10V	
C4059	F1G1A1040006	P 0.1UF 10V	
C4060	F1G1A1040006	P 0.1UF 10V	
C4061	ECJ1VB1C104K	C 0.1UF K 16V	
C4062	TKP470M1CD11	E 47UF 16V	
C4064	F1G1A1040006	P 0.1UF 10V	
C4065	ECJ0EB1H102K	C 1000PF K 10V	
C4066	F1G1A1040006	P 0.1UF 10V	
C4067	F1G1A1040006	P 0.1UF 10V	
C4068	F1J0J1060004	C 0.01UF K 16V	
C4071	ECJ1VC1H180J	C 18PF J 50V	
C4072	ECJ1VC1H180J	C 18PF J 50V	
C4074	F1G1A1040006	P 0.1UF 10V	
C4075	F1J0J1060004	C 0.01UF K 16V	
C4076	F1G1A1040006	P 0.1UF 10V	
C4077	F1G1A1040006	P 0.1UF 10V	
C4078	F1G1A1040006	P 0.1UF 10V	
C4079	ECJ1VB1C104K	C 0.1UF K 16V	
C4080	F1G1A1040006	P 0.1UF 10V	
C4081	ECJ1VB1C104K	C 0.1UF K 16V	
C4082	F1G1A1040006	P 0.1UF 10V	
C4083	ECJ0EB1H102K	C 1000PF K 10V	

Ref. No.	Part No.	Part Name & Description	Remarks
C4084	FlG1A1040006	P 0.1UF 10V	
C4085	FlG1A1040006	P 0.1UF 10V	
C4086	FlG1A1040006	P 0.1UF 10V	
C4087	FlG1A1040006	P 0.1UF 10V	
C4088	FlG1A1040006	P 0.1UF 10V	
C4089	FlG1A1040006	P 0.1UF 10V	
C4090	FlG1A1040006	P 0.1UF 10V	
C4091	FlG1A1040006	P 0.1UF 10V	
C4092	FlG1A1040006	P 0.1UF 10V	
C4093	FlG1A1040006	P 0.1UF 10V	
C4094	FlG1A1040006	P 0.1UF 10V	
C4095	FlJ0J1060004	C 0.01UF K 16V	
C4096	ECJ1VB1C104K	C 0.1UF K 16V	
C4097	FlG1A1040006	P 0.1UF 10V	
C4098	ECJ1VB1H102K	C 100PF K 50V	
C4099	FlJ0J1060004	C 0.01UF K 16V	
C4100	FlG1A1040006	P 0.1UF 10V	
C4101	FlG1A1040006	P 0.1UF 10V	
C4102	FlJ0J1060004	C 0.01UF K 16V	
C4103	ECJ0EC1H120J	C 12PF J 10V	
C4104	ECJ0EC1H220J	C 22PF J 10V	
C4105	ECJ0EC1H220J	C 22PF J 10V	
C4109	ECJ1VB1C104K	C 0.1UF K 16V	
C4110	ECJ2FB1A335K	C 3.3UF 16V	PAVCKM
C4111	FlJ0J1060004	C 0.01UF K 16V	
C4112	ECJ1VB1C104K	C 0.1UF K 16V	
C4114	EEFCD0G560ER	E 56UF 4V	
C4115	EEFCD0G560ER	E 56UF 4V	
C4117	ECJ1VC1H220J	C 22PF J 50V	
C4118	FlJ0J1060004	C 0.01UF K 16V	
C4119	ECJ0EC1H560J	C 56PF J 10V	
C4120	ECJ1VC1H101J	C 100PF J 50V	
C4121	ECJ1VC1H101J	C 100PF J 50V	
C4122	ECJ1VF1C104Z	C 0.1UF Z 16V	
C4123	ECJ1VB1C104K	C 0.1UF K 16V	
C4125	F4Z0G6860002	E 68UF 4V	
C4127	FlJ0J1060004	C 0.01UF K 16V	
C4128	F2H1C470A009	E 47UF 16V	
C4129	FlJ0J1060004	C 0.01UF K 16V	
C4130	ECJ1VC1H120J	C 12PF J 50V	
C4131	ECJ1VC1H120J	C 12PF J 50V	
C4132	ECJ1VB1H102K	C 100PF K 50V	
C4133	FlG1A1040006	P 0.1UF 10V	
C4134	ECJ1VB0J105K	C 1UF K 6.3V	
C4135	ECJ1VB1H103K	C 0.01UF K 50V	
C4148	ECJ2FB0J106M	C 10UF 6.3V	
C4149	ECJ2FB0J106M	C 10UF 6.3V	
C4182	ECJ2FB0J106M	C 10UF 6.3V	
C4183	ECJ2FB0J106M	C 10UF 6.3V	
C4501	FlG1A1040006	P 0.1UF 10V	
C4502	TKP470MCD11	E 47UF 16V	
C4807	ECJ1VB1C104K	C 0.1UF K 16V	
C4808	ECJ1VB1C104K	C 0.1UF K 16V	
C5001	FlG1A1040006	P 0.1UF 10V	
C5002	FlG1A1040006	P 0.1UF 10V	
C5003	FlG1A1040006	P 0.1UF 10V	
C5004	FlG1A1040006	P 0.1UF 10V	
C5005	ECJ1VF1A105Z	C 1UF Z 10V	
C5006	ECJ1VF1A105Z	C 1UF Z 10V	
C5007	ECJ1VF1C104Z	C 0.1UF Z 16V	
C5008	ECJ1VB1C104K	C 0.1UF K 16V	
C5009	FlJ0J1060004	C 0.01UF K 16V	
C5010	FlJ0J1060004	C 0.01UF K 16V	
C5011	ECJ1VB1C104K	C 0.1UF K 16V	
C5012	ECJ1VB1C104K	C 0.1UF K 16V	
C5016	FlJ0J1060004	C 0.01UF K 16V	
C5017	ECJ1VB1C104K	C 0.1UF K 16V	
C5018	ECJ1VF1C104Z	C 0.1UF Z 16V	
C5019	FlG1A1040006	P 0.1UF 10V	
C5020	ECJ1VF1C104Z	C 0.1UF Z 16V	
C5021	ECJ1VF1H103Z	C 0.01UF Z 50V	
C5022	ECJ1VF1C104Z	C 0.1UF Z 16V	
C5023	ECJ1VF1H103Z	C 0.01UF Z 50V	

Ref. No.	Part No.	Part Name & Description	Remarks
C5024	FlG1A1040006	P 0.1UF 10V	
C5025	FlG1A1040006	P 0.1UF 10V	
C5026	FlJ0J1060004	C 0.01UF K 16V	
C5027	ECJ1VF1C104Z	C 0.1UF Z 16V	
C5028	FlG1A1040006	P 0.1UF 10V	
C5029	ECJ1VB1C104K	C 0.1UF K 16V	
C5030	ECJ1VC1H150J	C 15PF J 50V	
C5031	FlG1A1040006	P 0.1UF 10V	
C5032	ECJ1VB1C104K	C 0.1UF K 16V	
C5033	FlG1A1040006	P 0.1UF 10V	
C5034	ECJ1VC1H150J	C 15PF J 50V	
C5036	ECJ1VF1C104Z	C 0.1UF Z 16V	
C5038	FlG1A1040006	P 0.1UF 10V	
C5040	FlG1A1040006	P 0.1UF 10V	
C5041	FlG1A1040006	P 0.1UF 10V	
C5042	FlJ0J1060004	C 0.01UF K 16V	
C5043	ECJ1VB1C104K	C 0.1UF K 16V	
C5044	ECJ1VB1C104K	C 0.1UF K 16V	
C5045	ECJ1VB1C104K	C 0.1UF K 16V	
C5046	ECJ1VB1C104K	C 0.1UF K 16V	
C5047	ECJ1VB1C104K	C 0.1UF K 16V	
C5048	ECJ1VB1C104K	C 0.1UF K 16V	
C5049	ECJ2FB0J225K	C 2.2UF 6.3V	
C5050	ECJ1VC1H471J	C 470PF J 50V	
C5051	FlH0J1050013	P 1UF 10V	
C5054	ECJ1VC1H101J	C 100PF J 50V	
C5055	FlG1A1040006	P 0.1UF 10V	
C5056	ECJ1VF1C104Z	C 0.1UF Z 16V	
C5060	ECJ1VB1C104K	C 0.1UF K 16V	
C5061	ECJ1VB1C104K	C 0.1UF K 16V	
SW901	K0F162B00002	POWER SWITCH	
X4001	H0J202500011	CRYSTAL OSCILLATOR	
X5001	H0J283500018	CRYSTAL OSCILLATOR	
TU101	ENG39D03GF	TUNER	PAVCKM ⚠
F801	K5D502BNA005	FUSE	⚠
F801-1	EYF52BC/L	FUSE BRACKET	
F801-2	EYF52BC/L	FUSE BRACKET	
JK3001	K4BK13A00002	REAR AV TERMINAL	PAVCKM
JK3002	K4BK20A00003	REAR AV TERMINAL	PAVCKM
JK3003	K4BK04A00003	HDMI AUDIO TERMINAL	PAVCKM
JK3501	K4BK24B00003	SIDE AV TERMINAL	PAVCKM
JK5001	K1FA119E0008	HDMI TERMINAL	
JK5002	K1FA119E0008	HDMI TERMINAL	
RL801	K6B1CDA00028	RELAY	PAVCKM ⚠
RL802	K6B1CDA00028	RELAY	PAVCKM ⚠
RL803	K6B1CDA00028	RELAY	PAVCKM ⚠
A1	K1KB23A00003	CONNECTOR	
A2	K1KB23A00003	CONNECTOR	
A3	K1KA04AA0190	CONNECTOR	
A4	K1KA05AA0193	CONNECTOR	
A5	K1KA10AA0194	CONNECTOR	
A7	K1KA08AA0193	CONNECTOR	
A8A	K1KB30B00044	CONNECTOR	
A9	K1KA10AA0105	CONNECTOR	
A10	K1KA08AA0193	CONNECTOR	
AP1	K1KA19A00007	CONNECTOR	
AP2	K1KA15A00118	CONNECTOR	
AP3	K1KA23A00005	CONNECTOR	
AP4	K1KA23A00005	CONNECTOR	
AP5	K1KA14AA0194	CONNECTOR	
AP6	K1KA03AA0190	CONNECTOR	
G1	K1KA05AA0193	CONNECTOR	
G2	K1KA10AA0191	CONNECTOR	
P1	K1KA02BA0073	CONNECTOR	PAVCKM ⚠
P2	K1KB19AA0032	CONNECTOR	
P3	K1KB15AA0032	CONNECTOR	
V1	K1KA08BA0061	CONNECTOR	
	TXN/A10MRS (T NP4G399AE)	CIRCUIT BOARD A	⚠

Ref. No.	Part No.	Part Name & Description	Remarks
	TXN/G10MUS (TNP4G402AA)	CIRCUIT BOARD G	⚠
	TXN/P10MRS (TNP4G404AE)	CIRCUIT BOARD P	⚠
	TXN/V10MPS (TNP4G400AA)	CIRCUIT BOARD V	⚠
	TXNAP10MPS (TNP4G401AA)	CIRCUIT BOARD AP	⚠