

Service Manual

LCD TV



TX-37LZ800Y

LH69 Chassis

Specifications

Power Source :	AC 220-240 V, 50/60 Hz
Power Consumption	
Average Use	196 W
Standby condition	0.3 W
Display panel	
Aspect Ratio	16:9
Visible screen size	819 mm (W) × 460 mm (H)
(No. of pixels)	2,073,600 (1,920 (W) × 1,080 (H))
Sound	
Speaker	160 mm × 42 mm × 2 pcs, 8 Ω
Audio Output	20 W (10 W + 10 W), 10% THD
Headphones	M3 (3.5 mm) stereo mini Jack × 1
PC signals	VGA, SVGA, XGA, SXGA
	Horizontal scanning frequency 31 - 69 kHz
	Vertical scanning frequency 59 - 86 Hz

Receiving Systems / Band name

SYSTEMS

FUNCTIONS

1	PAL B, G, H	
2	PAL I	
3	PAL D, K	
4	SECAM B, G	
5	SECAM D, K	
6	SECAM K1	
7	NTSC M (NTSC 3.58 / 4.5 MHz)	
8	NTSC 4.43 / 5.5 MHz	Reception of broadcast transmission and playback from video cassette tape recorders.
9	NTSC 4.43 / 6.0 MHz	Playback from special VCR's or DVD.

- 10 NTSC 4.43 / 6.5 MHz
 11 NTSC 3.58 / 5.5 MHz
 12 NTSC 3.58 / 6.0 MHz
 13 NTSC 3.58 / 6.5 MHz
 14 SECAM I

Playback from
special VCR's or DVD.

- 15 PAL 60 Hz / 5.5 MHz
 16 PAL 60 Hz / 6.0 MHz
 17 PAL 60 Hz / 6.5 MHz

Playback from
Special Disc Players
and Special VCR's or DVD.

Aerial - Rear

VHF / UHF

Operation Conditions

Temperature : 0°C - 40°C

Humidity : 20% -- 80% RH (non-condensing)

Connection Terminals :

AV1 Input	AUDIO L-R	RCA PIN Type × 2	0.5 V[rms]
	VIDEO	RCA PIN Type × 1	1.0 V[p-p] (75 Ω)
	COMPONENT	Y P _B / C _B , P _R / C _R	1.0 V[p-p] (including synchronization) ±0.35 V[p-p]
AV2 Input	AUDIO L-R	RCA PIN Type × 2	0.5 V[rms]
	VIDEO	RCA PIN Type × 1	1.0 V[p-p] (75 Ω)
	COMPONENT	Y P _B / C _B , P _R / C _R	1.0 V[p-p] (including synchronization) ±0.35 V[p-p]
AV3 Input	AUDIO L-R	RCA PIN Type × 2	0.5 V[rms]
	VIDEO	RCA PIN Type × 1	1.0 V[p-p] (75 Ω)
	S VIDEO	Mini DIN 4-pin	Y: 1.0 V[p-p] (75 Ω) C: 0.286 V[p-p] (75 Ω)
AV4 Input	AUDIO L-R	RCA PIN Type × 2	0.5 V[rms]
	VIDEO	RCA PIN Type × 1	1.0 V[p-p] (75 Ω)
	S VIDEO	Mini DIN 4-pin	Y: 1.0 V[p-p] (75 Ω) C: 0.286 V[p-p] (75 Ω)
Others	HDMI 1 / 2 / 3 Input	TYPE A Connectors	● This TV supports "HDAVI Control 3" function.
	PC Input	HIGH-DENSITY D-SUB 15 PIN	R, G, B / 0.7 V[p-p] (75 Ω) HD, VD / TTL LEVEL 2.0-5.0 V[rms] (high impedance)
	DIGITAL AUDIO OUT	PCM, Fiber optic	
Monitor Output	Card Slot	SD CARD slot × 1	
	AUDIO L-R	RCA PIN Type × 2	0.5 V[rms] (high impedance)
	VIDEO	RCA PIN Type × 1	1.0 V[p-p] (75Ω)
Dimensions (W × H × D)		933 mm × 650 mm × 295 mm (With TV Stand)	
		933 mm × 608 mm × 105 mm (TV only)	
Mass		23.0 kg (Net)	

Design and specifications are subject to change without notice. Mass and dimensions shown are approximate.

WARNING

This service information is designed for experienced repair technicians only and is not designed for use by the general public. It does not contain warnings or cautions to advise non-technical individuals of potential dangers in attempting to service a product. Products powered by electricity should be serviced or repaired only by experienced professional technicians. Any attempt to service or repair the product or products dealt with in this service information by anyone else could result in serious injury or death.

CONTENTS


	Page		Page
1 Location of Lead Wiring	4	1.1. Wire Dressing	4

1.2. Wire Dressing and Connections	6	4.3. Voltage Chart of A Board	17
2 Disassembly for Service	7	4.4. Voltage Chart of P board	17
2.1. VESA and Rear Center Cover Installation	7	5 Schematic Diagram	18
2.2. Pedestal Assembly Preparation	8	5.1. DG Board	18
2.3. LCD Panel Assembly Installation	9	5.2. H Board	72
2.4. LED Panel and V-PWB Assembly Installation	10	5.3. K Board	85
2.5. LCD MTG Installation	11	5.4. P Board	86
2.6. EMI Installation	12	5.5. S Board	93
2.7. Control Panel Installation	14	5.6. V Board	94
2.8. Power Button Assembly Installation	15	6 Parts Location & Mechanical Replacement Parts List	97
3 Chassis Board	16	6.1. Parts Location	97
3.1. Chassis Installation	16	7 Packing Exploded View	98
4 Adjustment	17	8 Replacement Parts List	99
4.1. Voltage Chart of DG-Board	17	8.1. Replacement Parts List Notes	99
4.2. Voltage Chart of H board	17	8.2. Electrical Replacement Parts List	100

1 Location of Lead Wiring


1.1. Wire Dressing

ASSEMBLY ORDER : ①⇒②⇒③⇒④⇒⑤⇒⑥⇒⑦ Refer below to confirm the wire No.

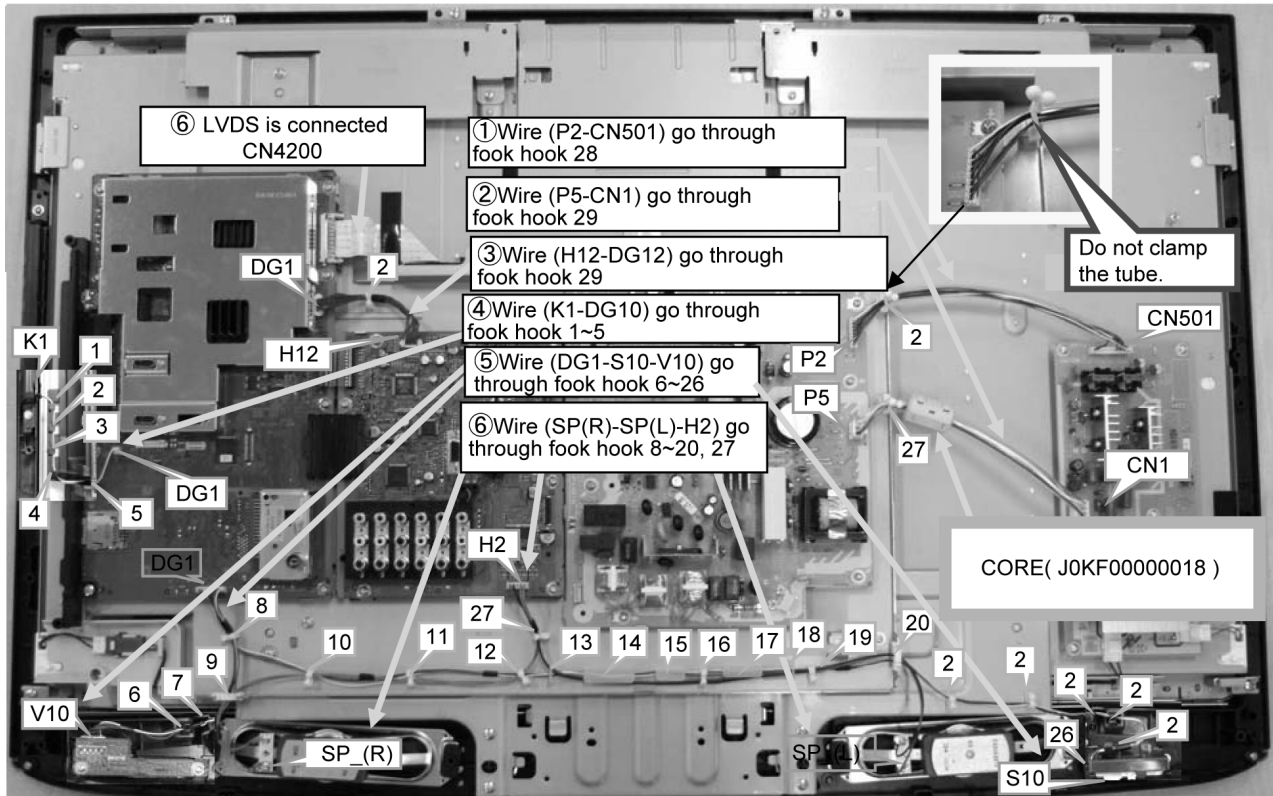

ASSEMBLY ORDER : ①⇒②⇒③⇒④⇒⑤⇒⑥⇒⑦ Refer below to confirm the clamber part No.

- | | |
|--------------------------|-------------------|
| 1. Wire (P2-CN501) | < No. 29 >. |
| 2. Wire (P5-CN1) | < No. 28 >. |
| 3. Wire (A1-K1) | < No. 1~5 >. |
| 4. Wire (A10-V10-S10) | < No. 6~26 >. |
| 5. Wire (SP(R)-SP(L)-P3) | < No. 8~20, 27 >. |

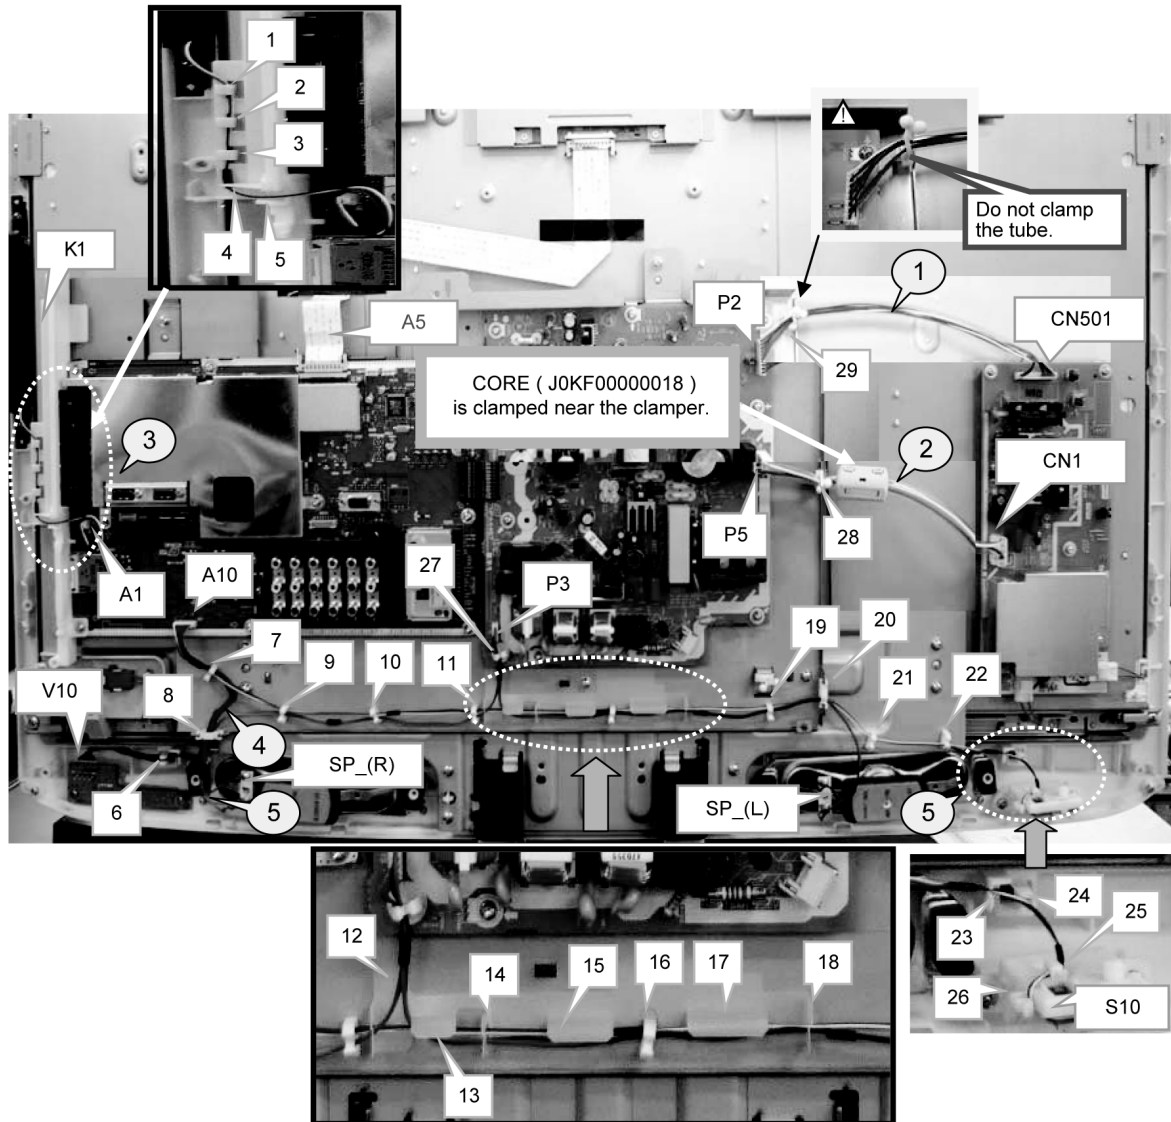

1.2. Wire Dressing and Connections

	CONNECTION	1	2	3	4	5	6	7	8	9	10	11				
1	CN 2 ~ P 2	●	●													
2	A 2 ~ P 4			●												
3	A 1 ~ P 3			●												
4	CN 2 ~ A 6				●											
5	G 1 ~ A 4				●	●										
6	G 2 ~ A 5				●	●										
7	V 1 ~ A 7							●								
8	A 12 ~ SPEAKER (L)								●	●	●	●				
9	A 12 ~ SPEAKER (R)					●	●									
10	P 1 ~ SW 2									●	●					

< CAUTION POINT 1 - CONNECTING >
 GIVE ATTENTION WHEN CONNECTING
 THE CONNECTOR SO IT WILL NOT
 COME OFF.



(NG)




(OK)

2 Disassembly for Service


2.1. VESA and Rear Center Cover Installation

1. Put the VESA/L/R on the LCD panel and fix them with the screws.
2. Put the rear center cover on the LCD bottom mtg and fix it with the screws.

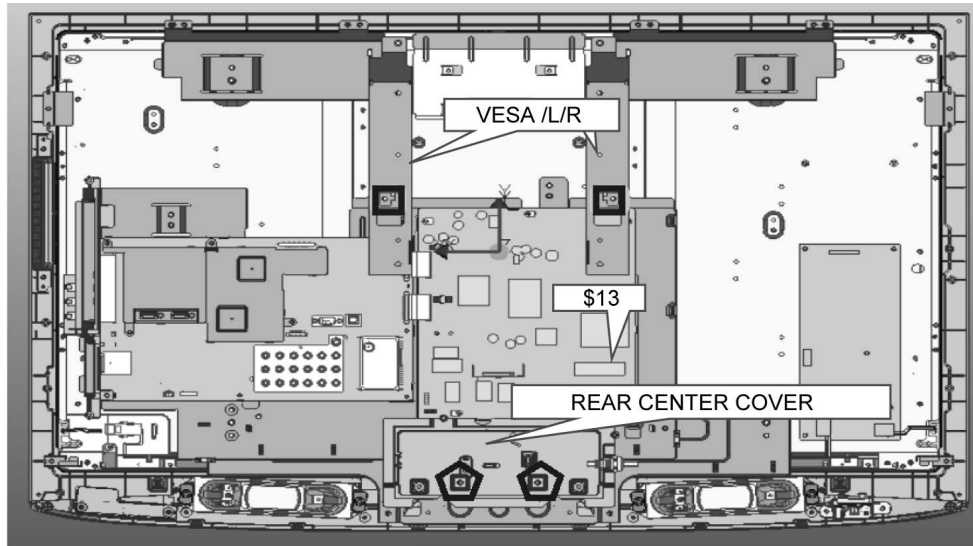


2.2. Pedestal Assembly Preparation

1. Put pedestal assembly to set with four (4) screws.

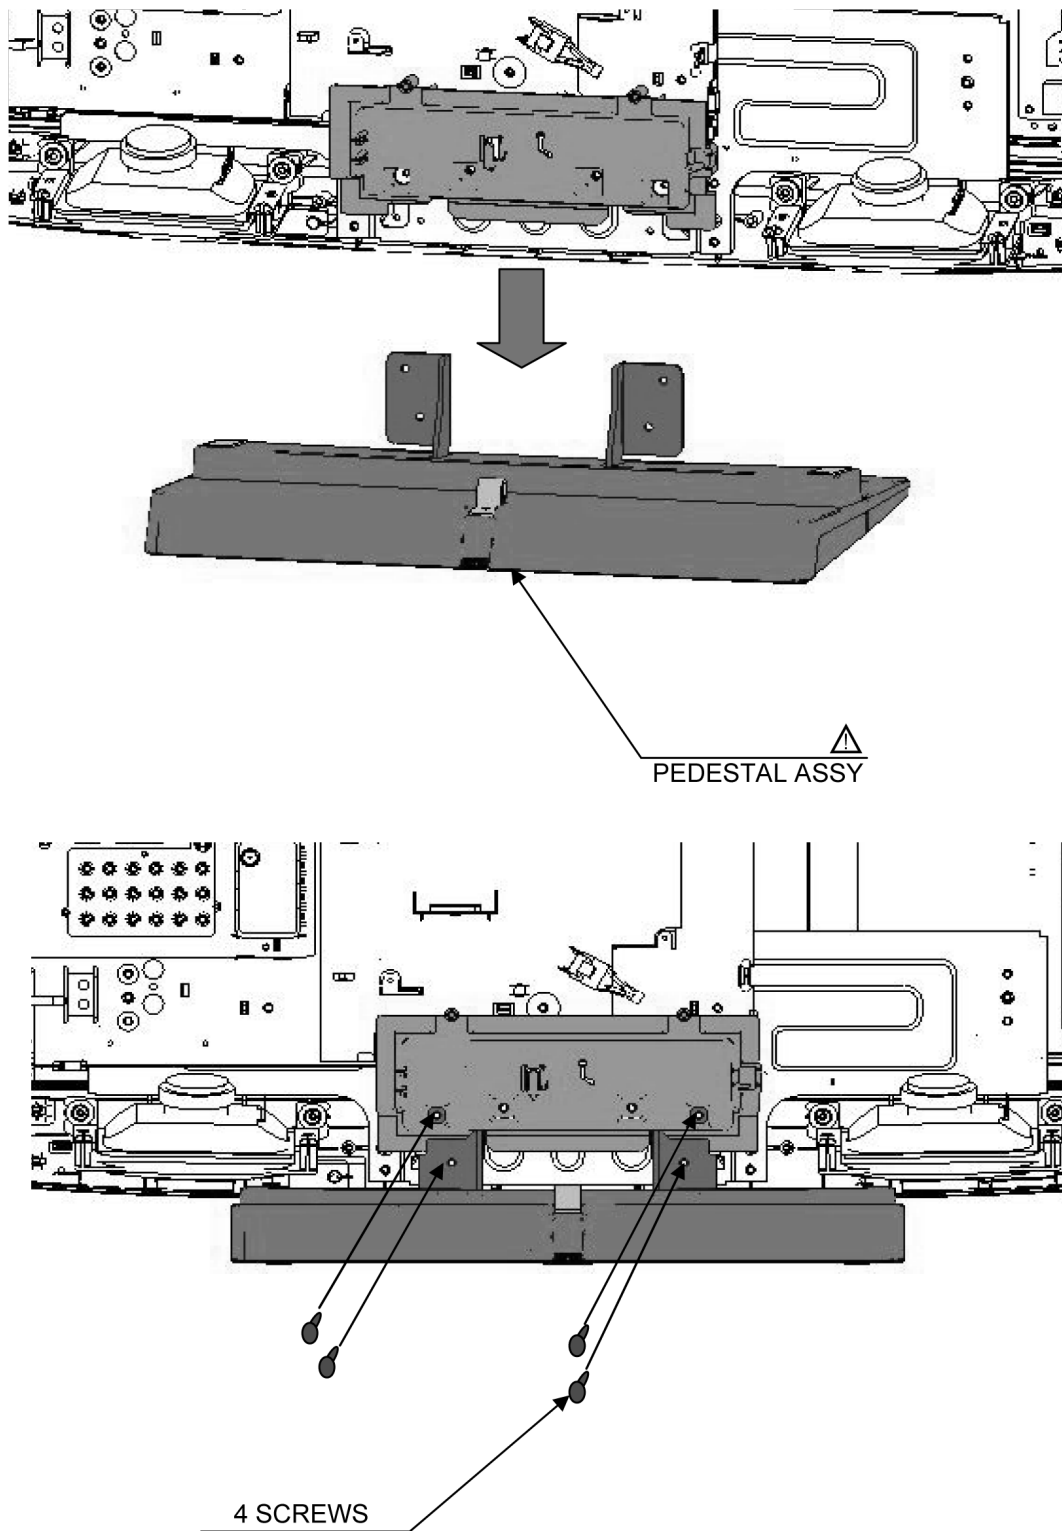

2.3. LCD Panel Assembly Installation

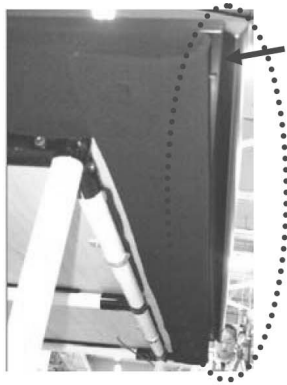


1. Ornament should not touch the table when CAB Assy is put on the table




【IMPORTANCE】

2. Put LCD panel on the CAB so that the bottom LCD surface touches CAB's bottom RIB. (Refer to Fig.1)
Take care not to leave a gap between LCD panel and CAB at the bottom position.
※ Do not touch LCD panel corner to the CAB to prevent peeling of CAB's painting.

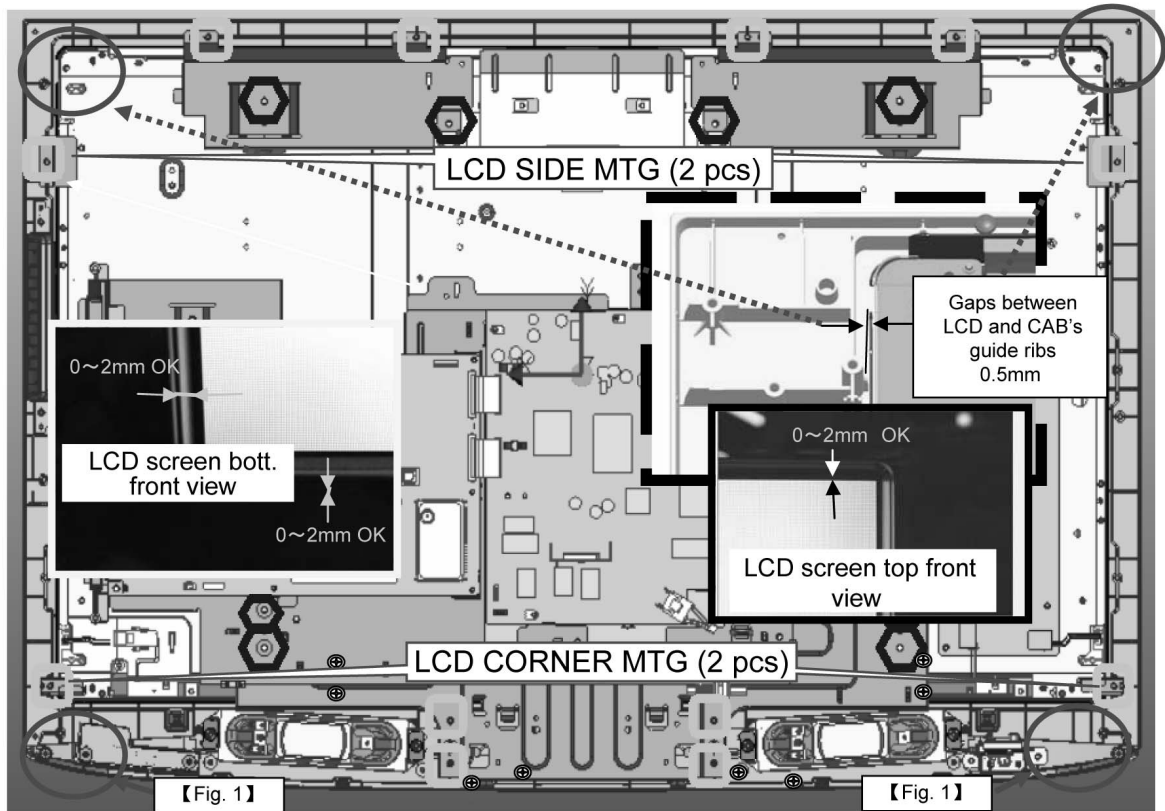

3. You need to adjust the gap depending on LCD screen's black frame.
Spec:
0 - 1.0mm.


4. Put LCD fixing metals on the panel and fix them with screws.

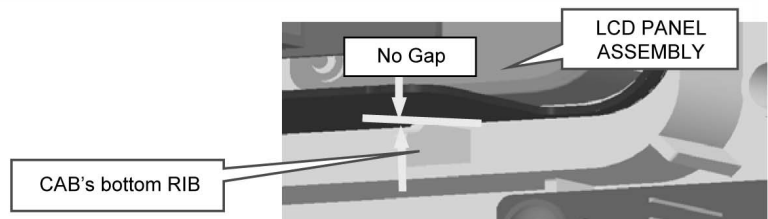

2.4. LED Panel and V-PWB Assembly Installation

1. Put LED panel and V-PWB assembly to cabinet assembly with two (2) screws.


Tightening torque should be : 60 (-10/+20) N.cm. or 6 (-1/+2) Kgfc.m.

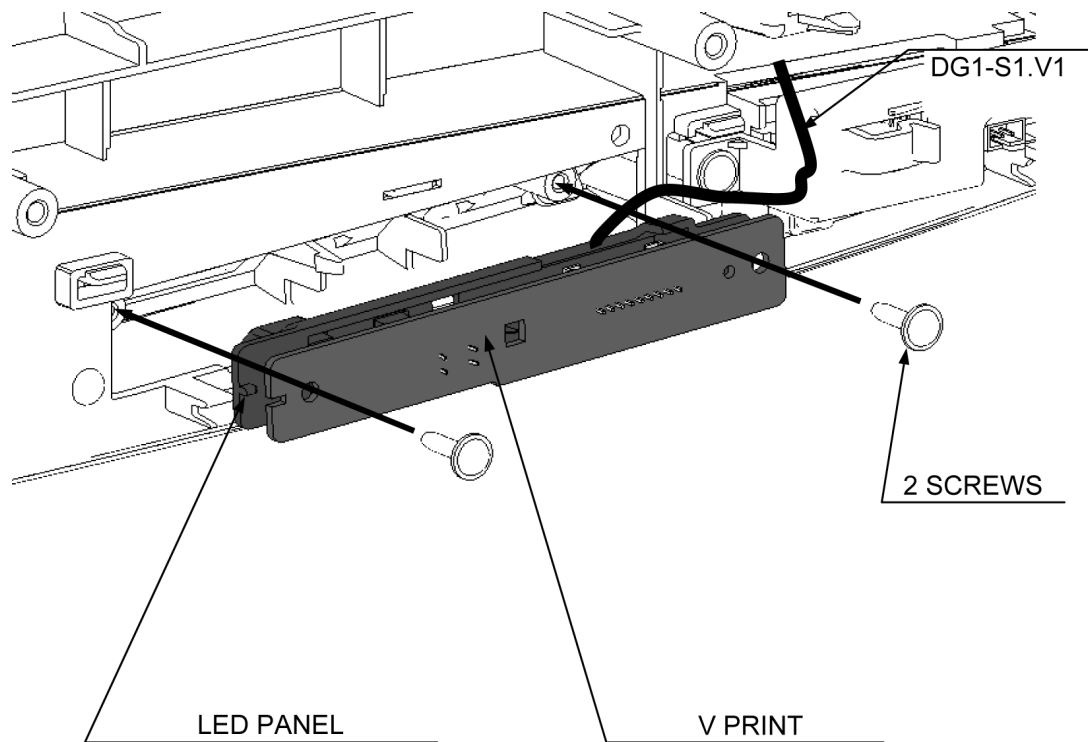

HD, VD/TTL Level 2.0 - 5.0 V[p-p] (high impedance)

2.5. LCD MTG Installation

1. Put LCD MTG (Side and Corner) to cabinet assembly with screws.
2. Put LCD MTG (Top and Bottom) to LCD panel (8) screws.
3. Put LCD MTG (Top and Bottom) to cabinet assembly with (8) screws.

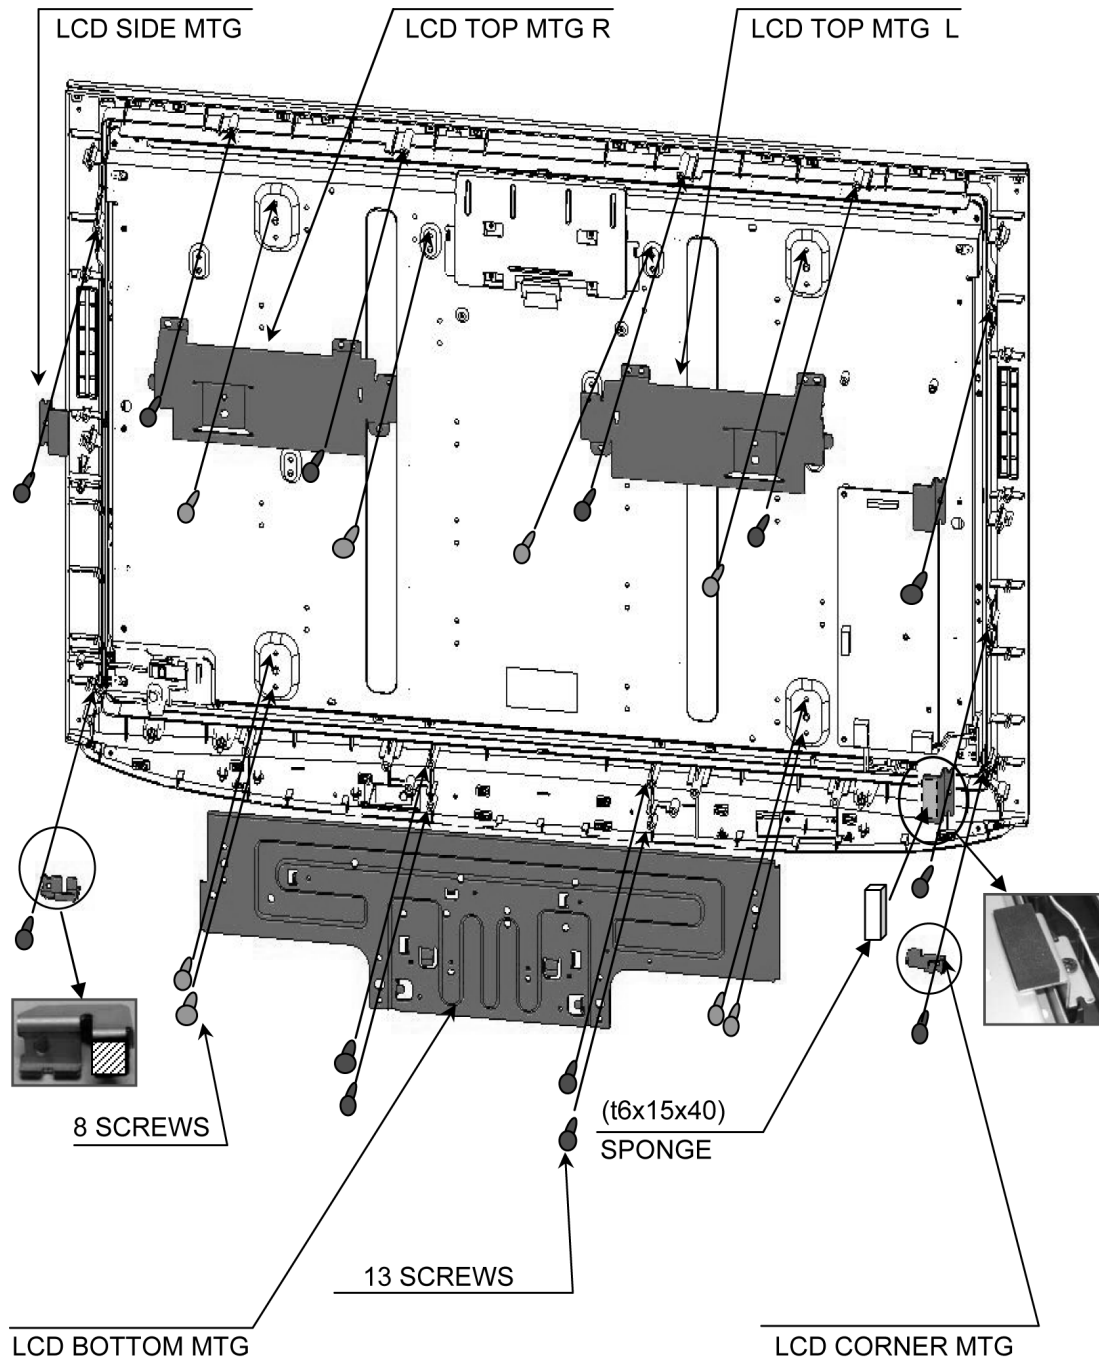


2.6. EMI Installation

2.6.1. EMI 1

Assembly contents:

1. Insert LVDS into T-connector.
2. Stick tape to fix LVDS.
3. Stick the gaskets on LCD panel.

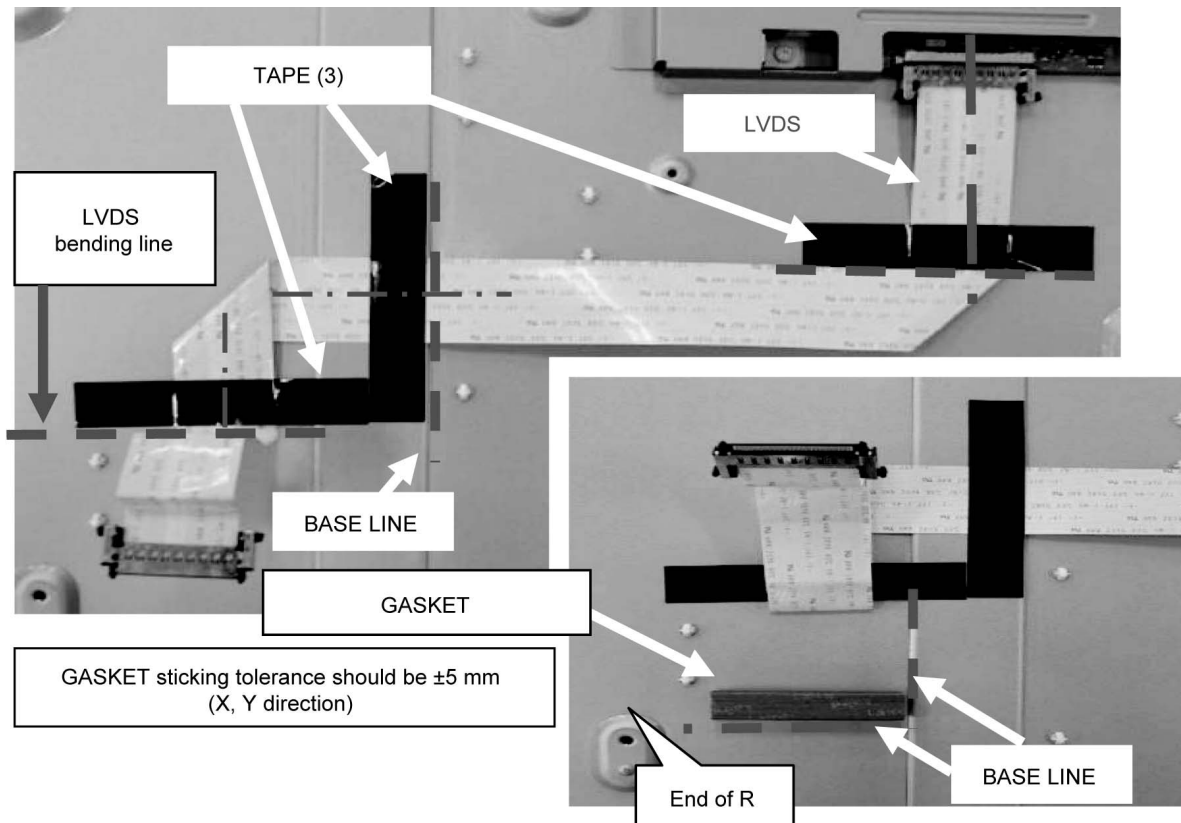


4. Stick the sponges at LCD panel.

2.6.2. EMI 2

Assembly Contents:


1. Insert LVDS into T-connector.
2. Stick tape to fix LVDS.
3. Stick the gaskets on LCD panel.

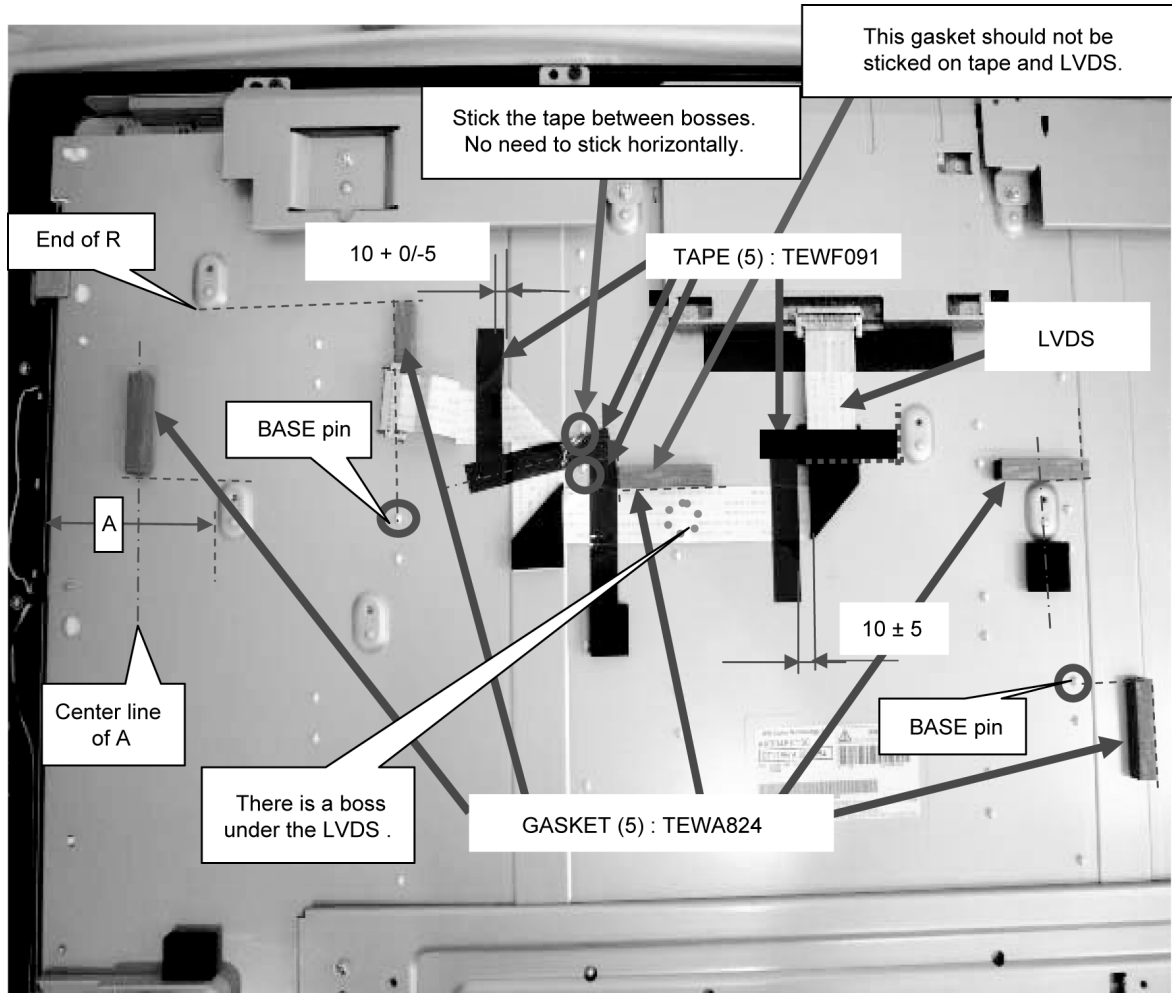



GASKET sticking tolerance
should be ± 5 mm (X, Y direction)

2.7. Control Panel Installation

1. Put control panel to cabinet assembly with (2) screws.
Tightening torque should be : 60 (-10/+20) N.cm.

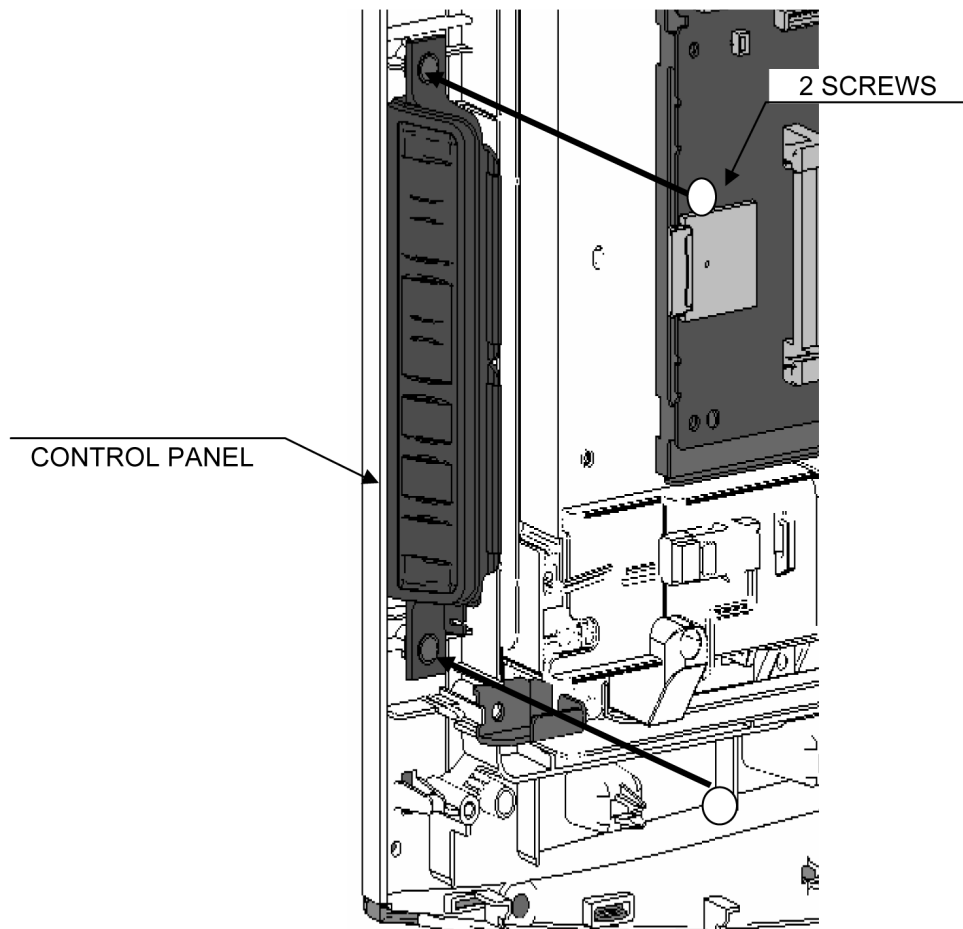


2. Insert connector of control panel to DG10.
Do not let wires come into contact with this boss

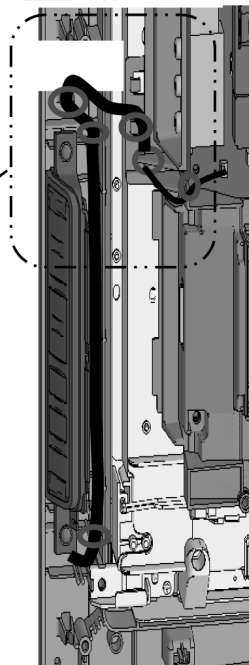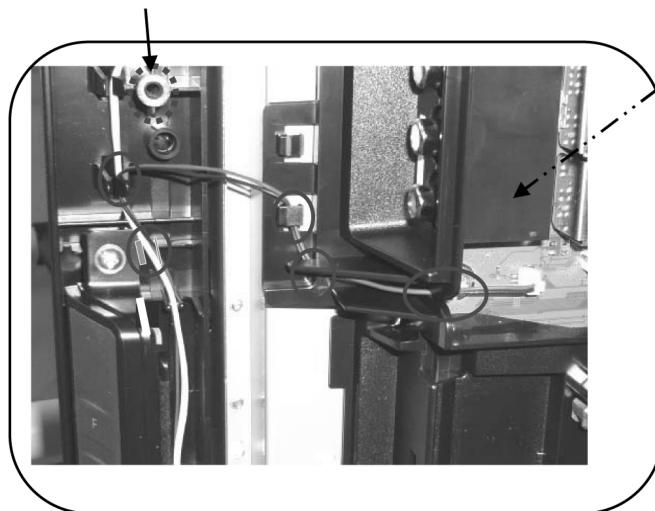


2.8. Power Button Assembly Installation

1. Put S-PCB holder and S-PCB to cabinet assembly with (2) screws.
Tightening torque should be : 60 (-10/+20) N.cm.

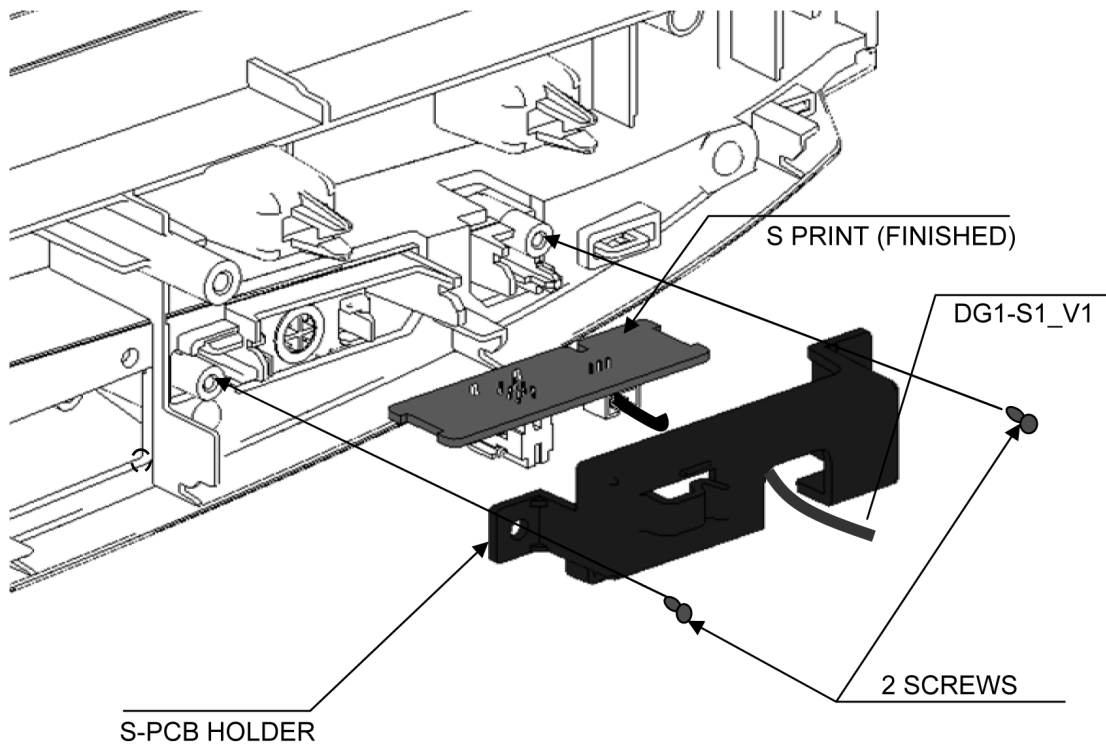

- 2.S-PCB wire is hung on hook ① ② of S-PCB holder.
- 3.V1 lead is clamped HOOK on S-PCB HOLDER (2).
- 4.V1 lead and S10 lead are clamped HOOK on CABINET (1).

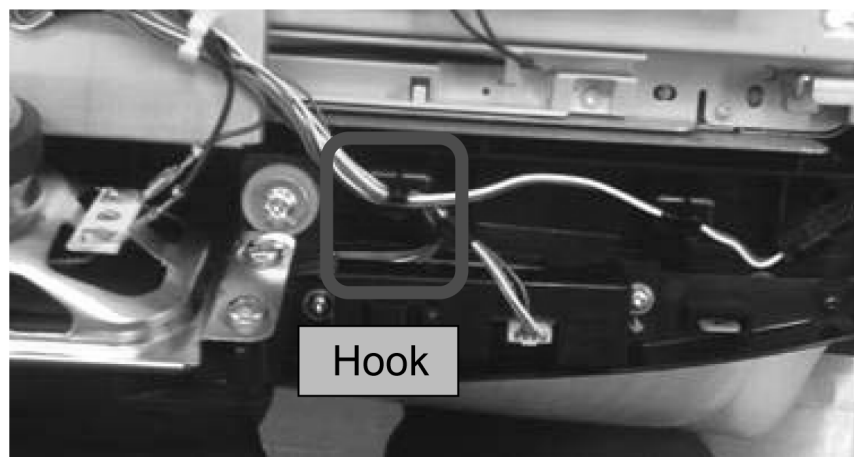

3 Chassis Board

3.1. Chassis Installation

1. Put the chassis frame on the LCD and fix it with screws (No. 31~55).
2. Put the DG-pcb P-pcb on the chassis frame and fix them with screws (No. 1~21).
3. Insert the clampers to the chassis frame.
4. Insert the side AV bracket from the side position of the DG-pcb and fix it with a screw (No. 21).
5. Joint DG-pcb and H-pcb with 80PIN CONNECTOR.



Refer to the parts list to confirm the PCB No.

Clamper

TMM15481 (No.1~10) n = 10

TMME287 (No.11~12) n = 2

TMME047 (No.21~23) n = 3

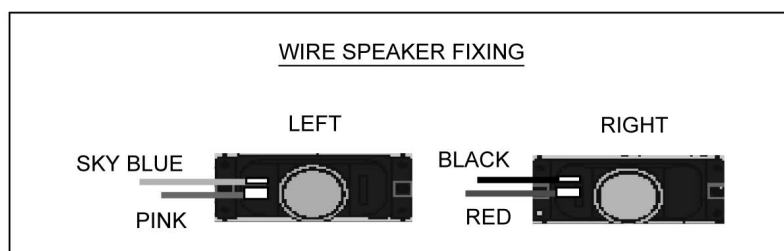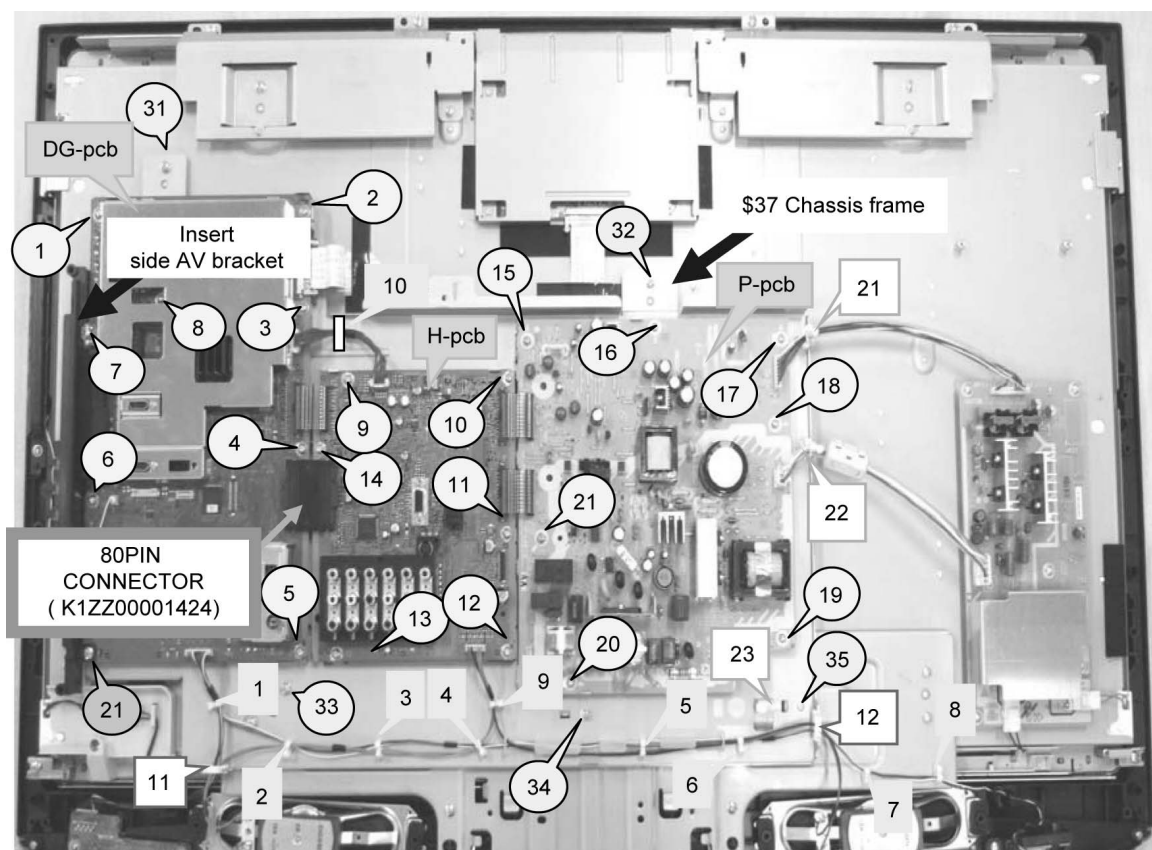

4 Adjustment

4.1. Voltage Chart of DG-Board

- Set A-Board to a dummy set and check the compliance with the specified voltage as following table.

Power Supply Name	Measurement Point	Specification (V)
SUB1.8V	TP5602	1.76 - 1.85
SUB1.2V	TP5601	1.22 - 1.27
SUB3.3V	TP5600	3.19 - 3.39
DVDDIO3.3V/TVDD3.3V	TP4531	3.23 - 3.37
HQLV3.3V	TP4240	3.24 - 3.41
HQDDR2.5V	TP4207	2.44 - 2.56
HQ3.3V	TP5433	3.18 - 3.47
HQVD1.2V	TP5412	1.19 - 1.26

4.2. Voltage Chart of H board

- Set H-Board to a dummy set and check the compliance with the specified voltage as following table.

Power Supply Name	Measurement Point	Specification (V)
AUD3.3V	TP2031	3.24 - 3.38
DVDD1.8V	TP2032	1.77 - 1.83

4.3. Voltage Chart of A Board

Power Supply Name	Measurement Point	Specification (V)
SUB 1.8 V	TP5602	1.76 - 1.85
SUB 1.2 V	TP5601	1.22 - 1.27
SUB 3.3V	TP5600	3.19 - 3.39
DVDDIO 3.3 V/TVDD 3.3 V	TP4531	3.23 - 3.37


4.4. Voltage Chart of P board

Power Supply Name	Measurement Point	Normal condition (V)	Normal condition (V)
SOUND_VCC	TP7050	17.0 - 20.5	< 3.0
BT-30V	TP7060	28.5 - 31.5	< 3.0
SUB_5V	TP7059	4.9 - 5.3	< 1.0
SUB_9V	TP7055	8.8 - 9.4	< 1.0
DTV_12V	TP7057	11.6 - 12.4	< 1.0
PANEL_12V	TP7058	11.6 - 12.4	< 2.0
5VS	TP7061	4.8 - 5.2	4.8 - 5.2
STB_5V	TP7062	4.8 - 5.2	4.8 - 5.2
SUB_6V	TP7064	5.7 - 6.5	< 1.0
V+ - V-	TP7025 - TP7026	370 - 395	no care
12V	TP7070	11.6 - 12.4	< 3.0


5 Schematic Diagram

5.1. DG Board


5.1.1. DG Board - Sheet : 001 (1 / 10)

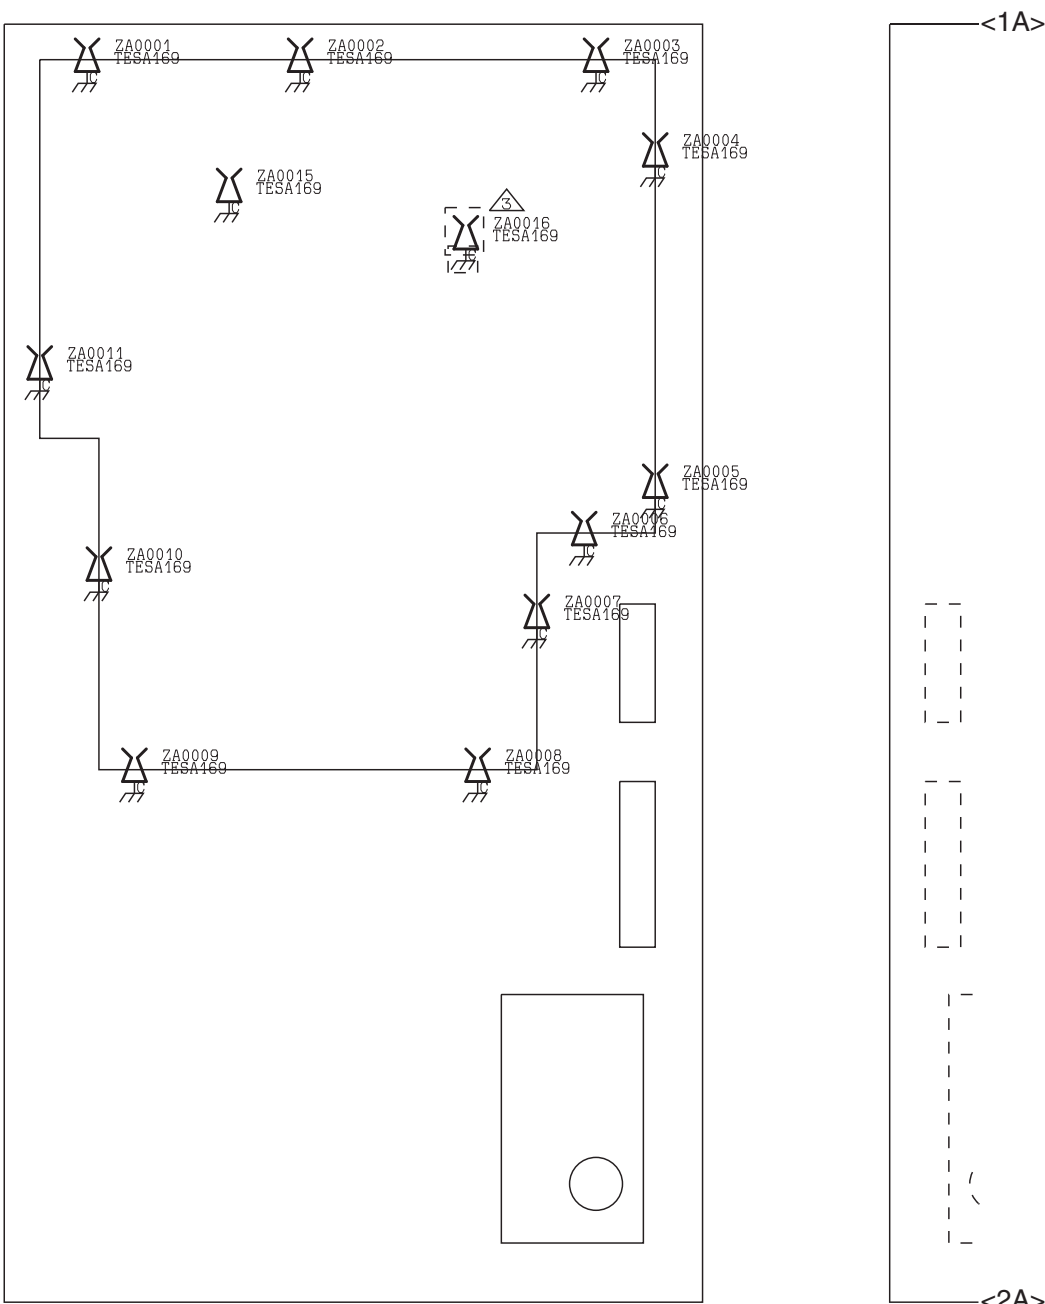

5.1.2. DG Board - Sheet : 001 (2 / 10)

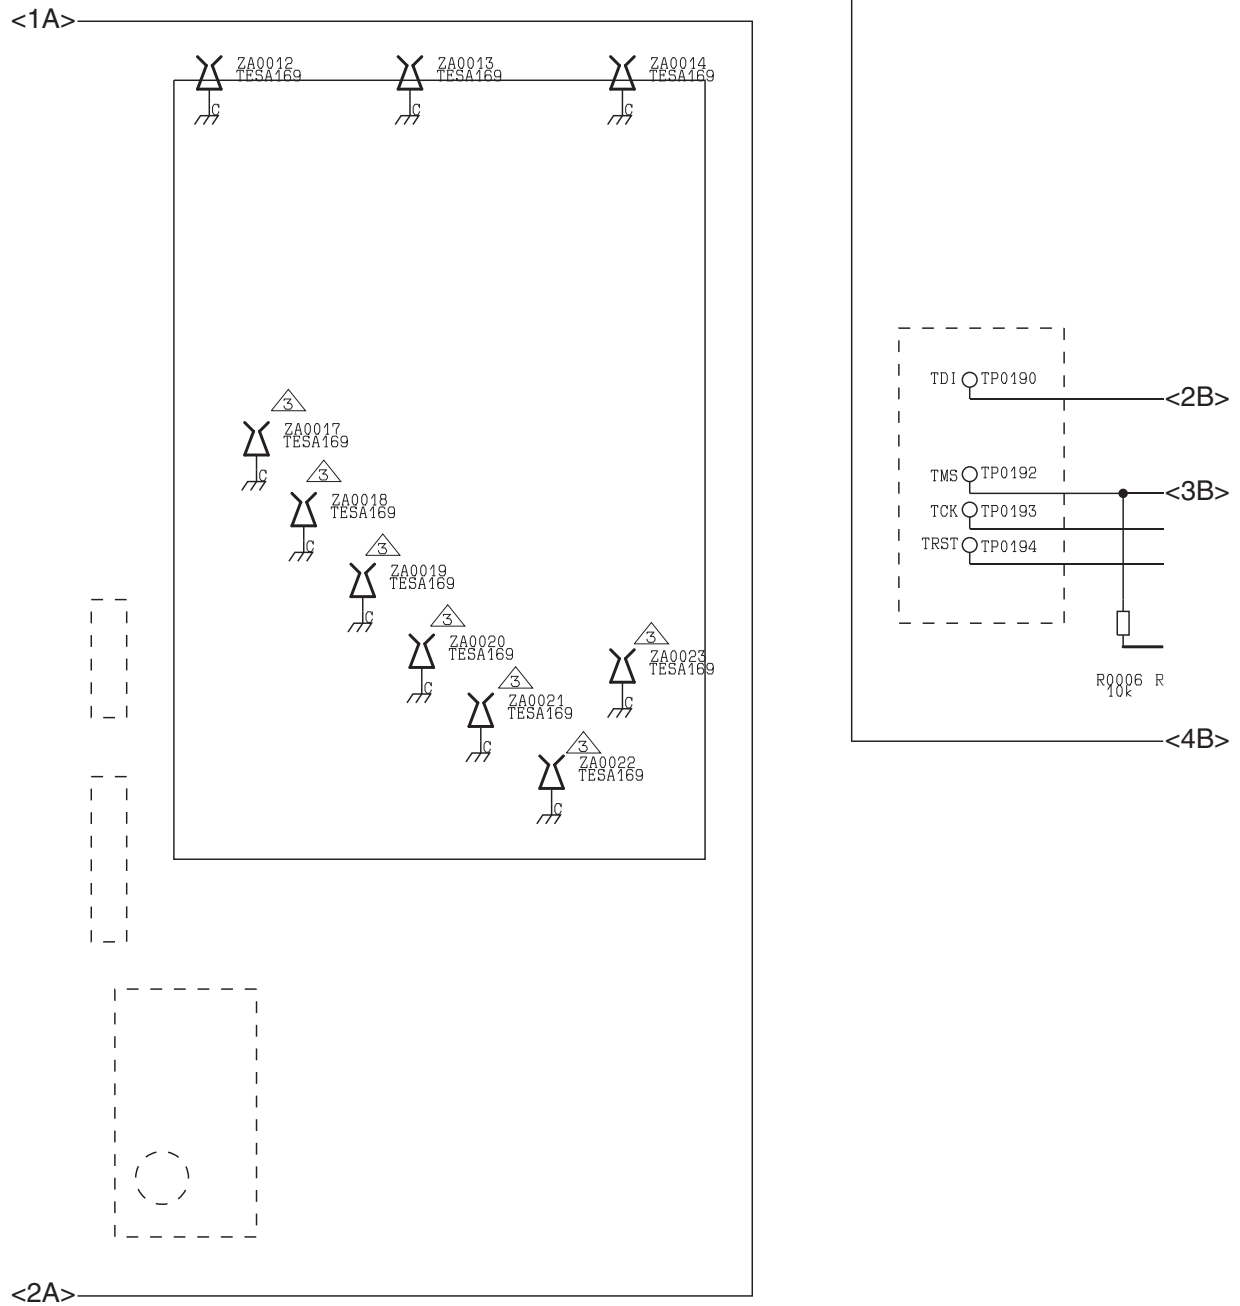


5.1.3. DG Board - Sheet : 001 (3 / 10)

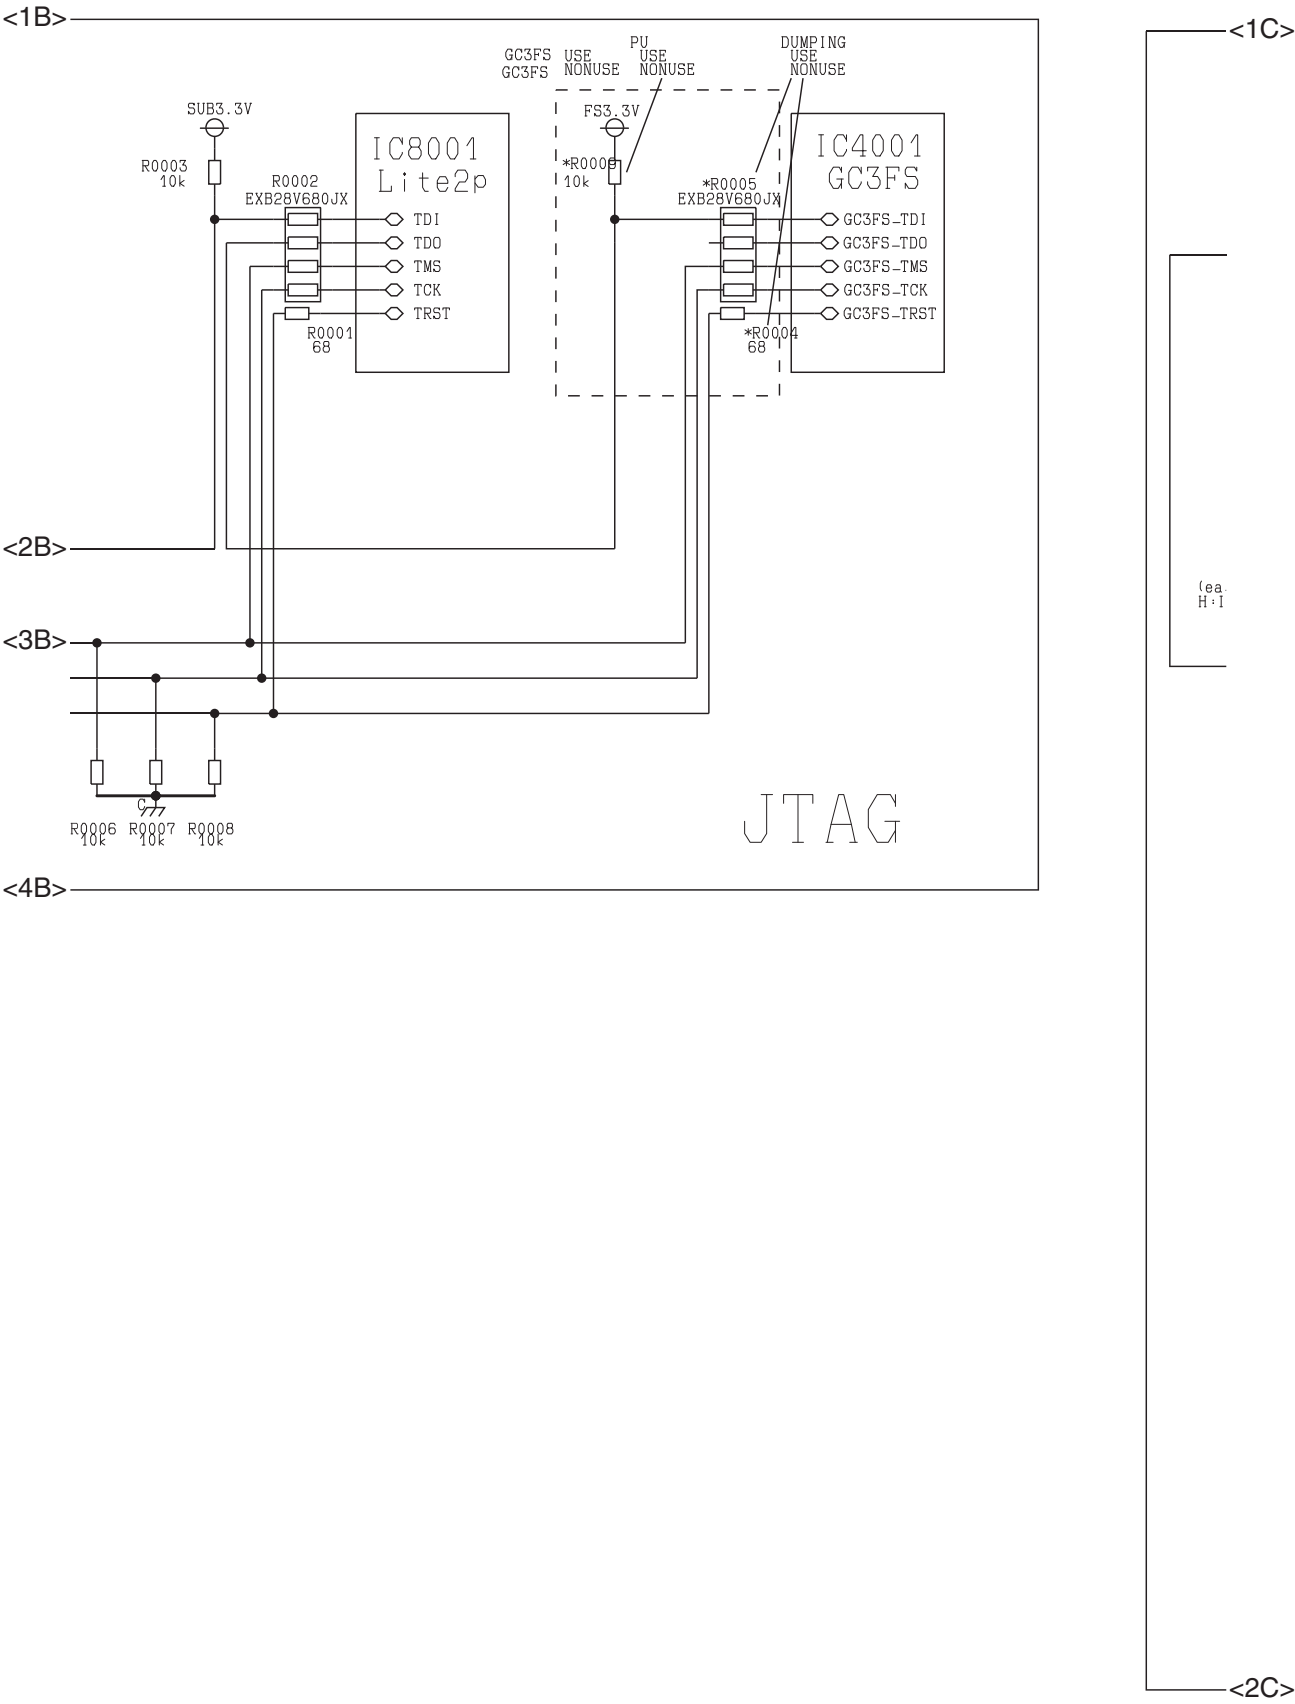


5.1.4. DG Board - Sheet : 001 (4 / 10)

<1C>-----<1D>

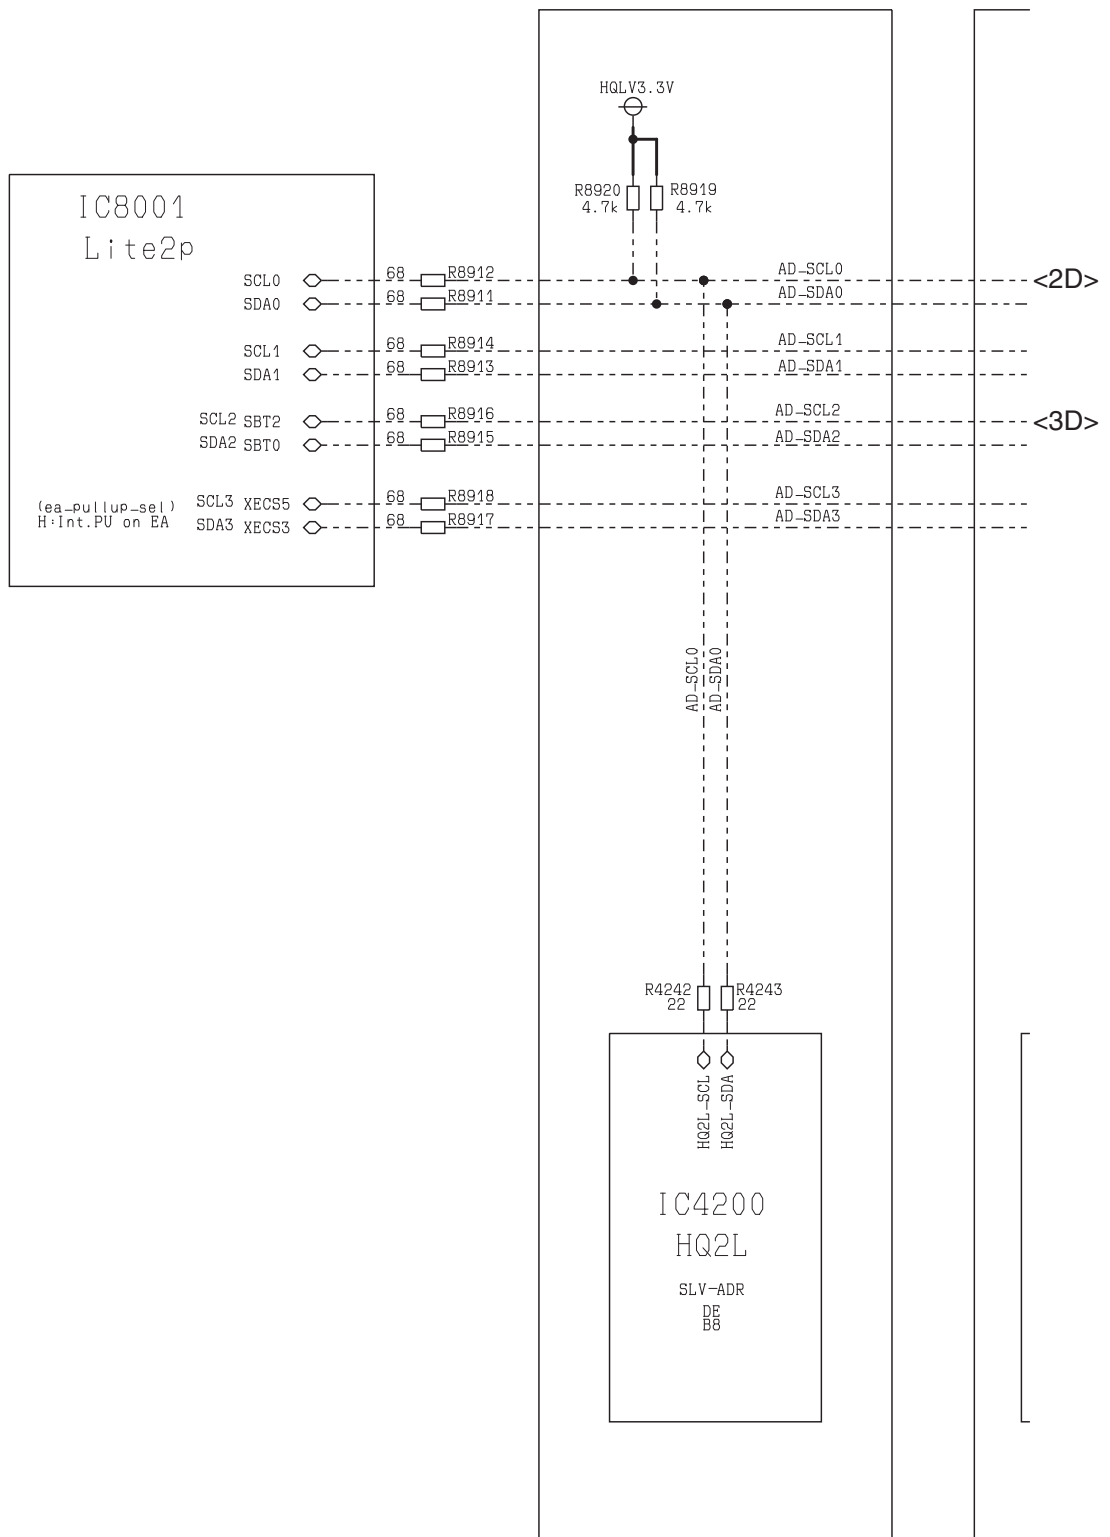


<2C>-----<4D>


5.1.5. DG Board - Sheet : 001 (5 / 10)

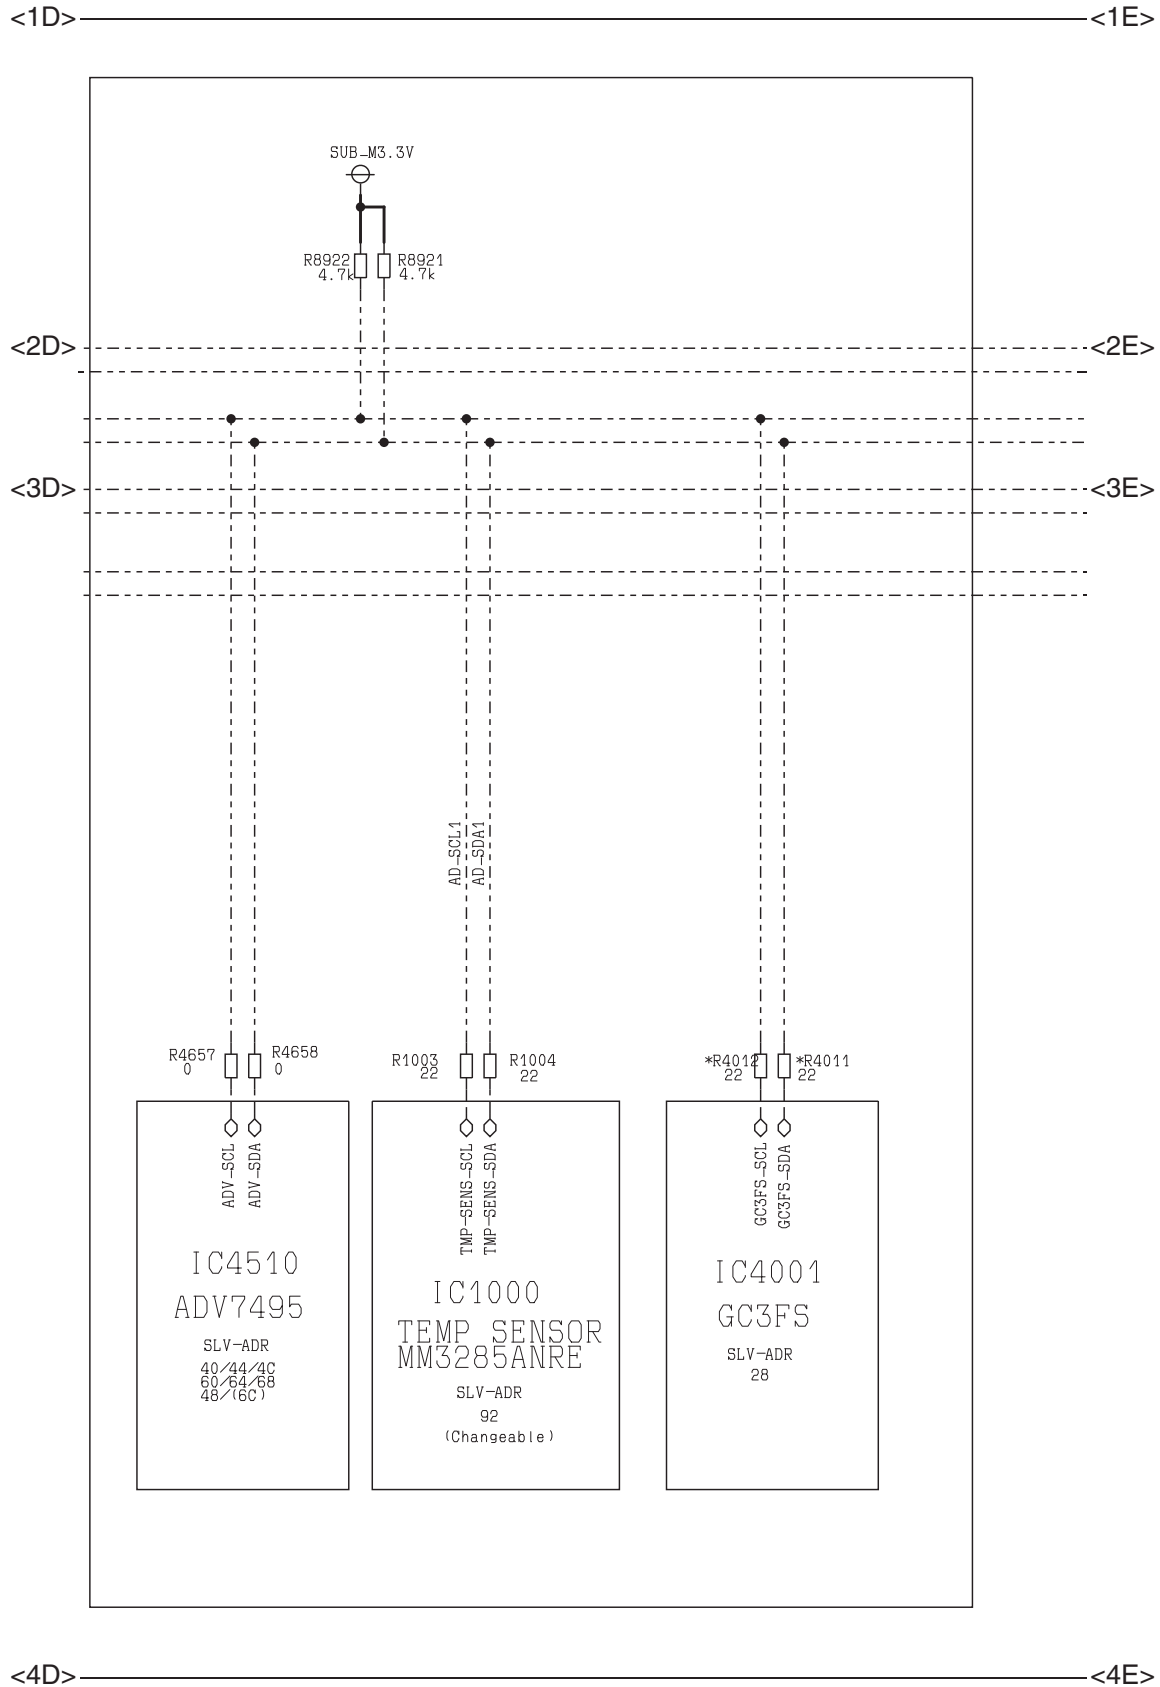


5.1.6. DG Board - Sheet : 001 (6 / 10)

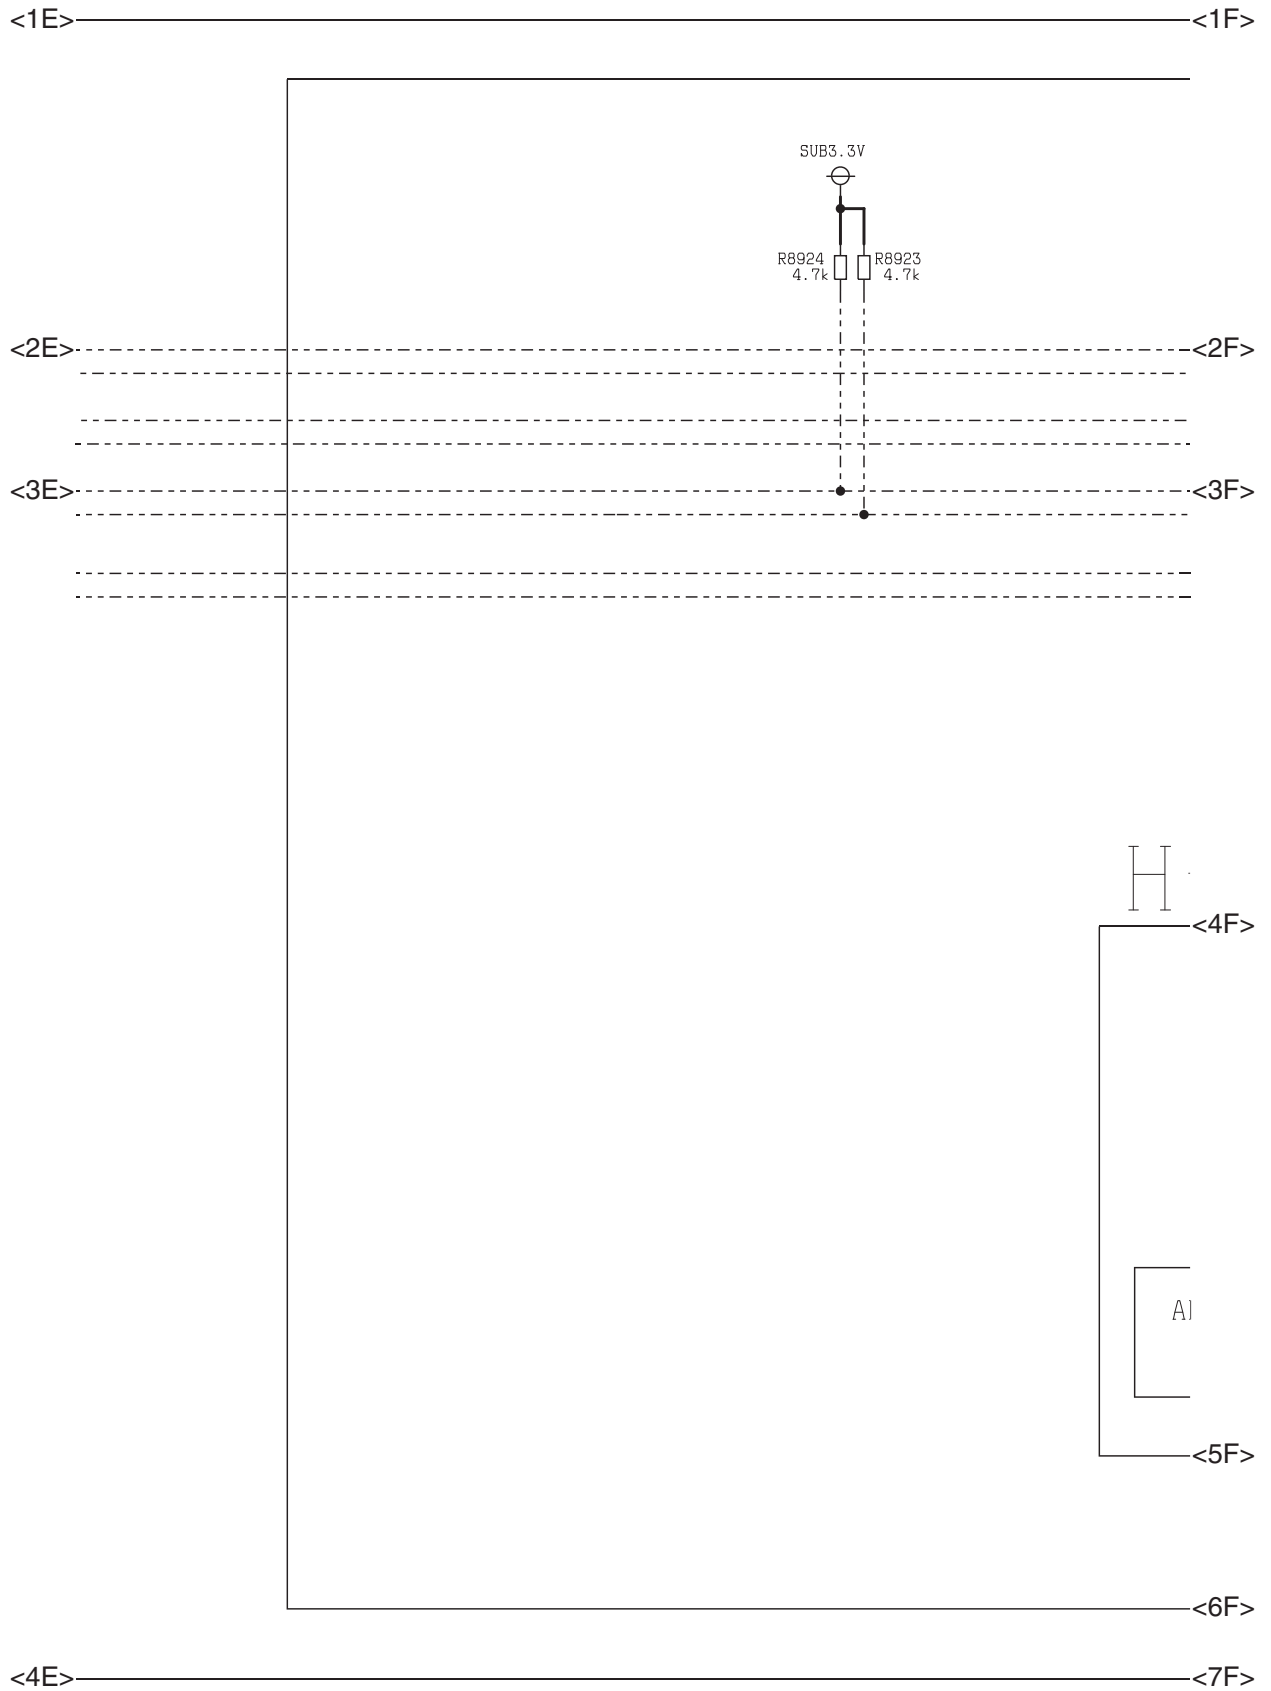


5.1.7. DG Board - Sheet : 001 (7 / 10)

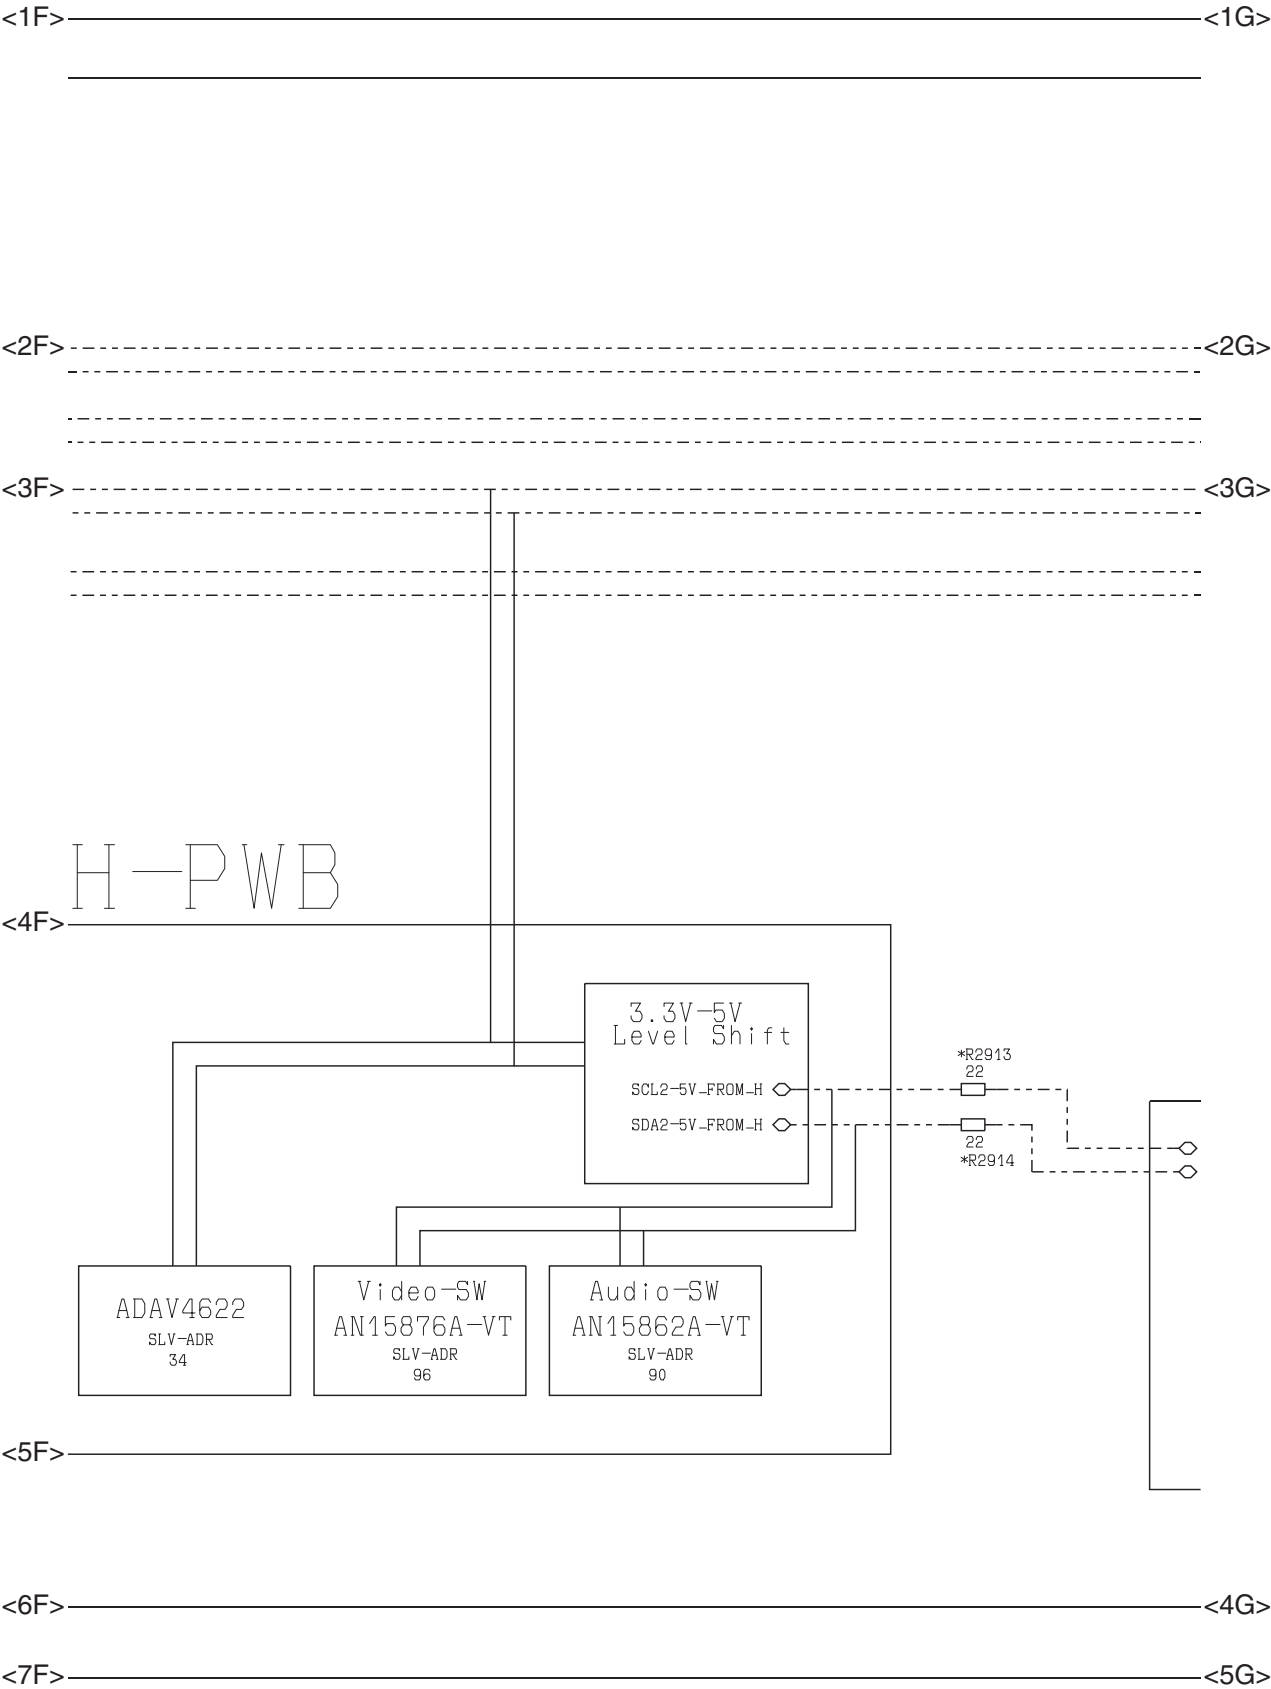


5.1.8. DG Board - Sheet : 001 (8 / 10)

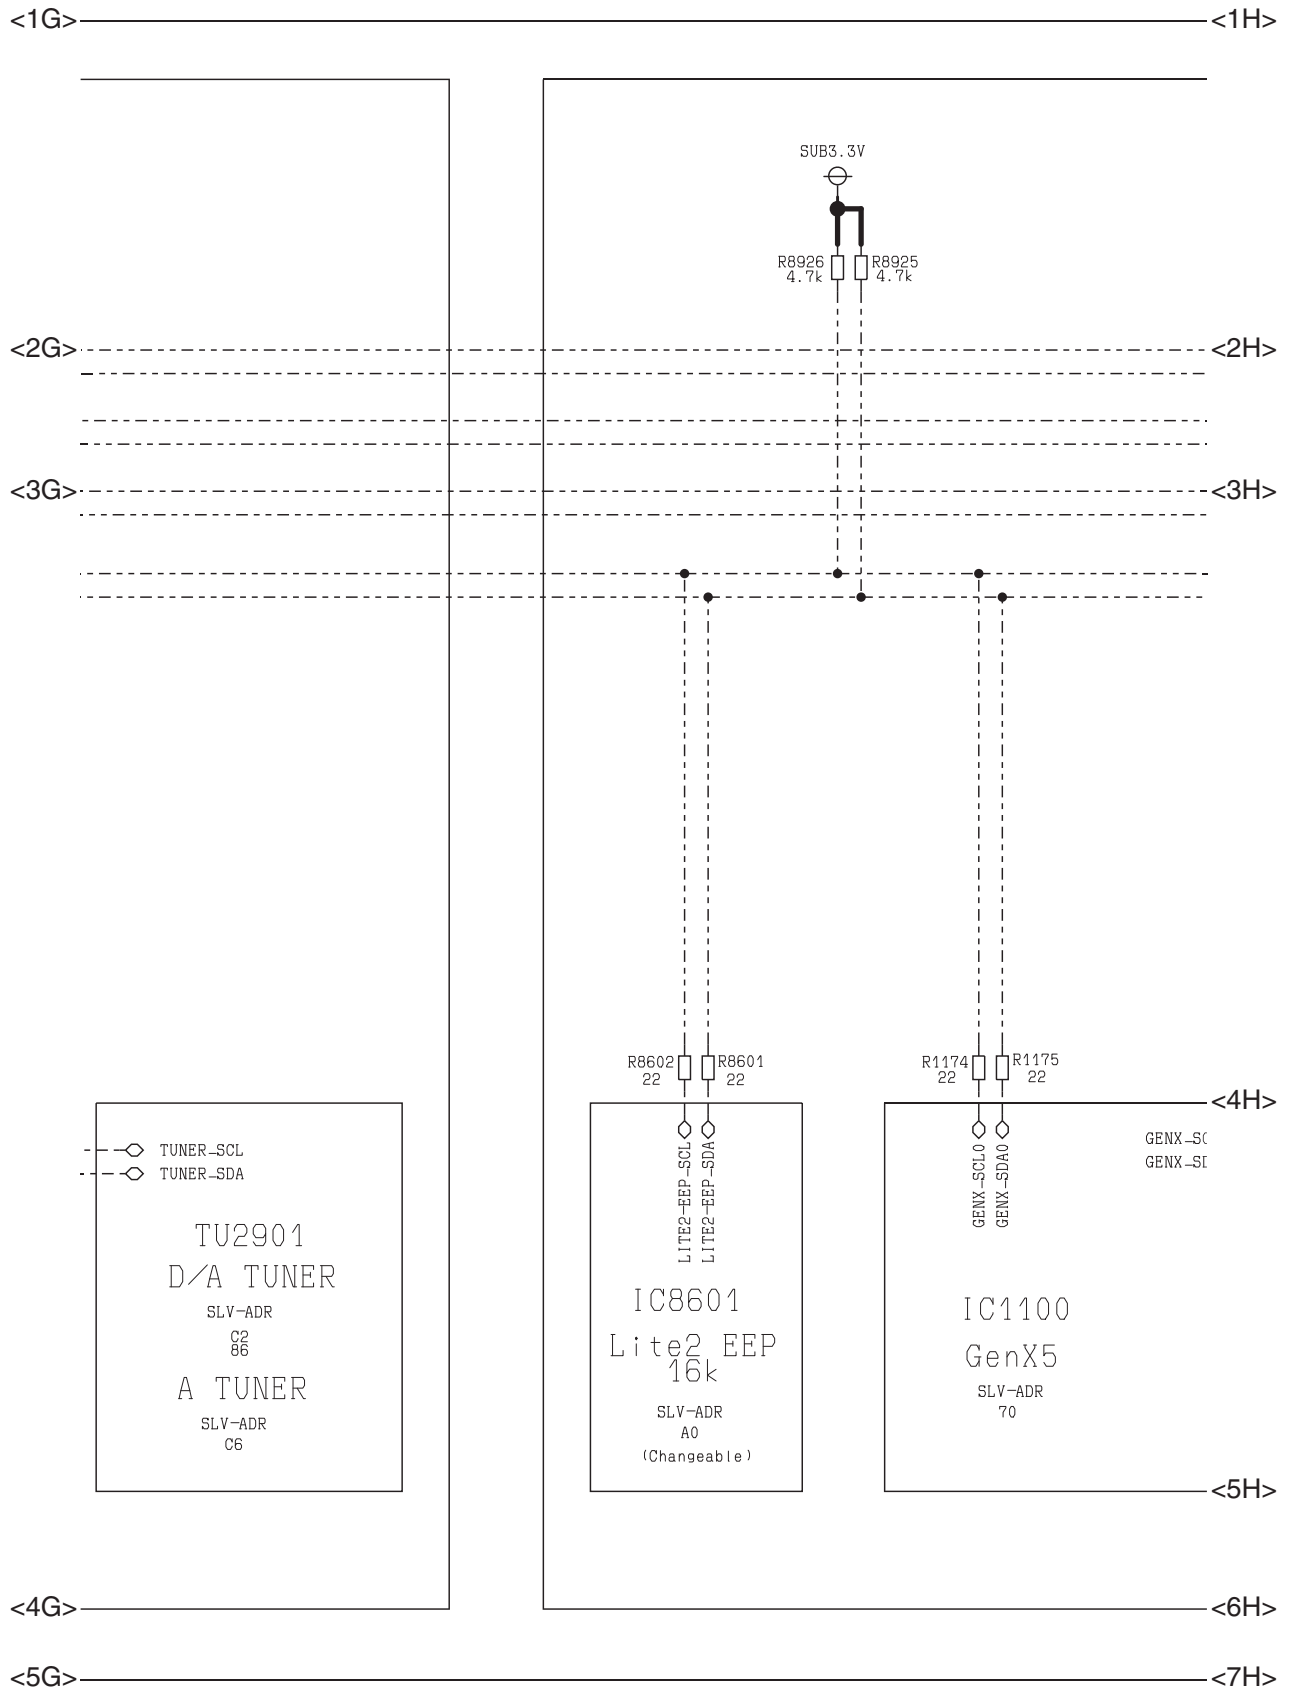


5.1.9. DG Board - Sheet : 001 (9 / 10)

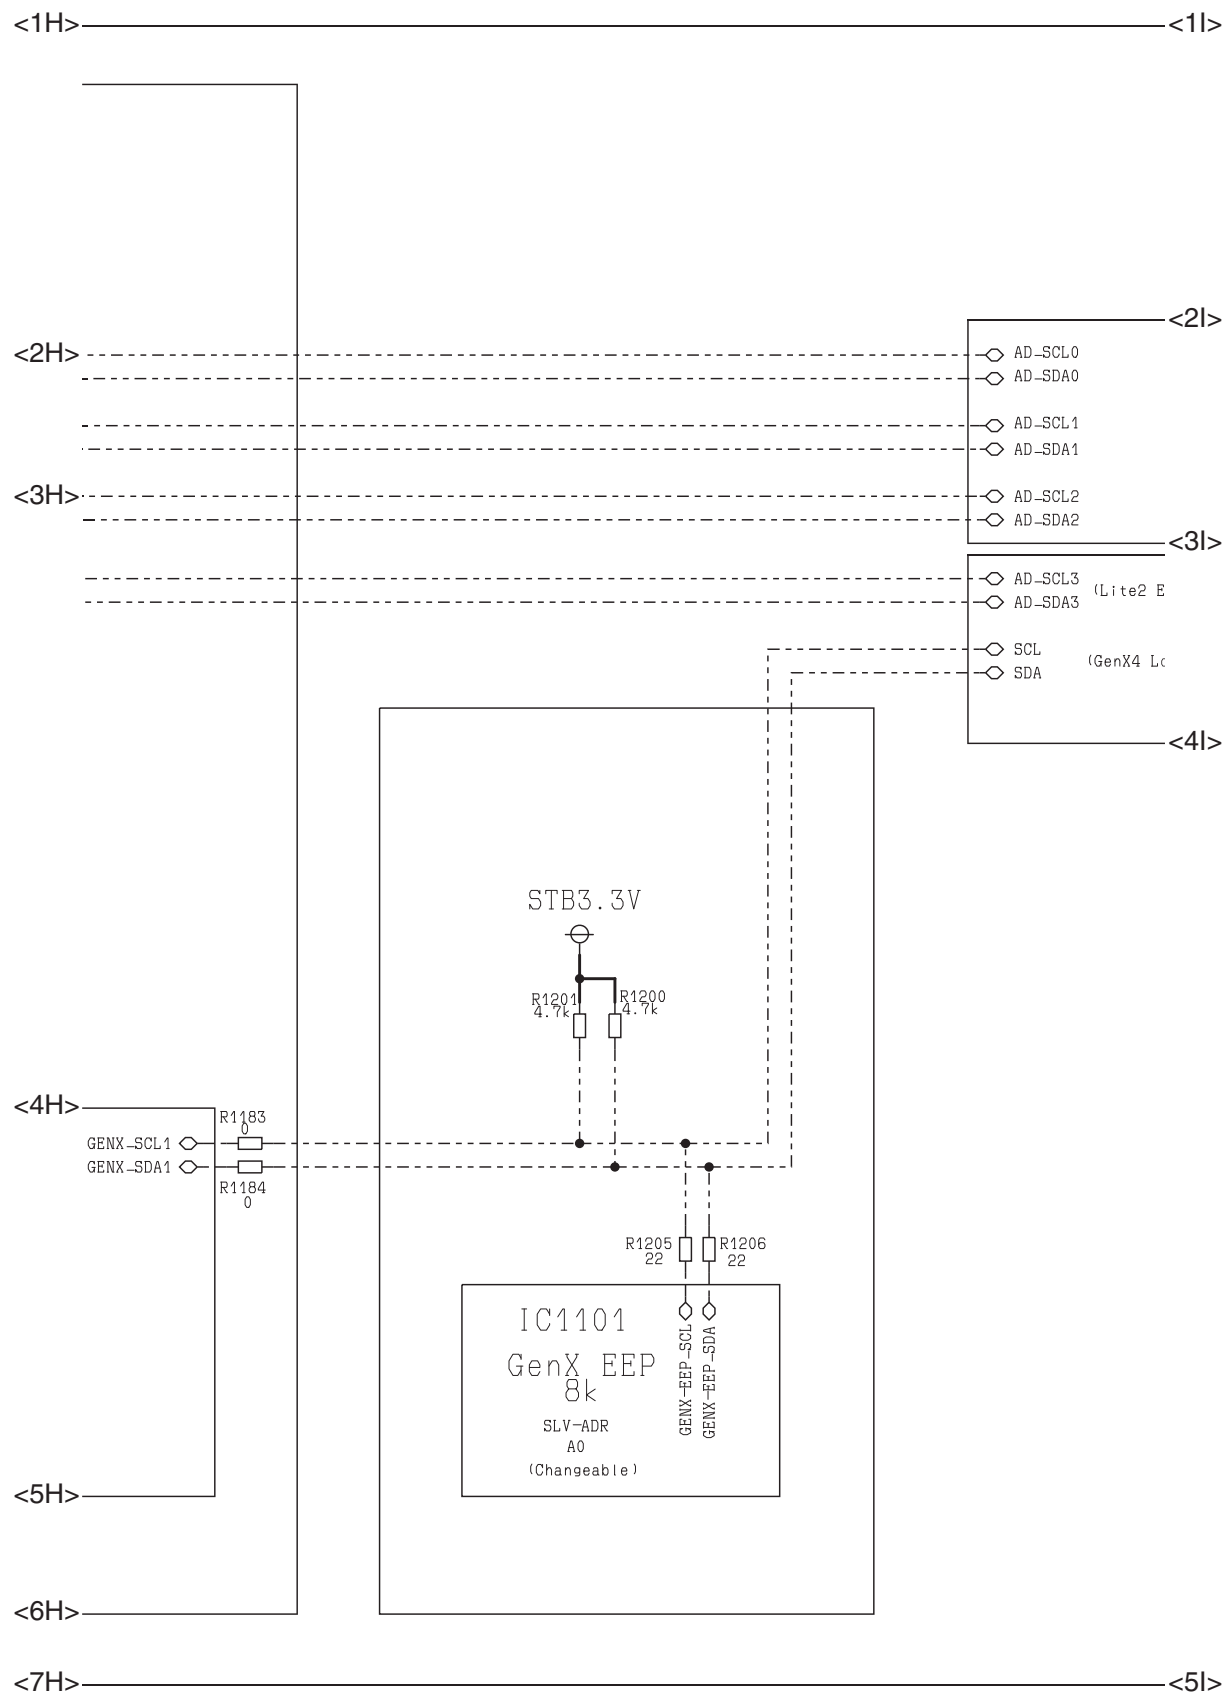

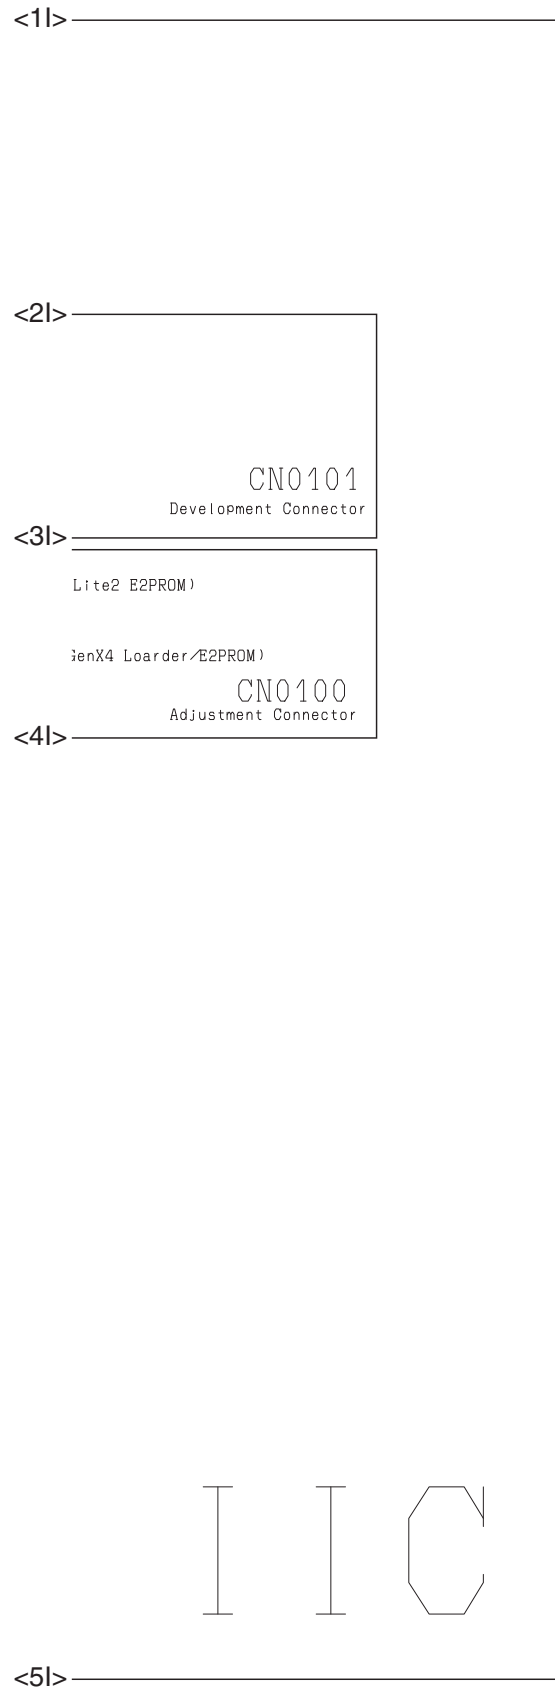
5.1.10. DG Board - Sheet : 001 (10 / 10)

5.1.11. DG Board - Sheet : 002 (1 / 4)

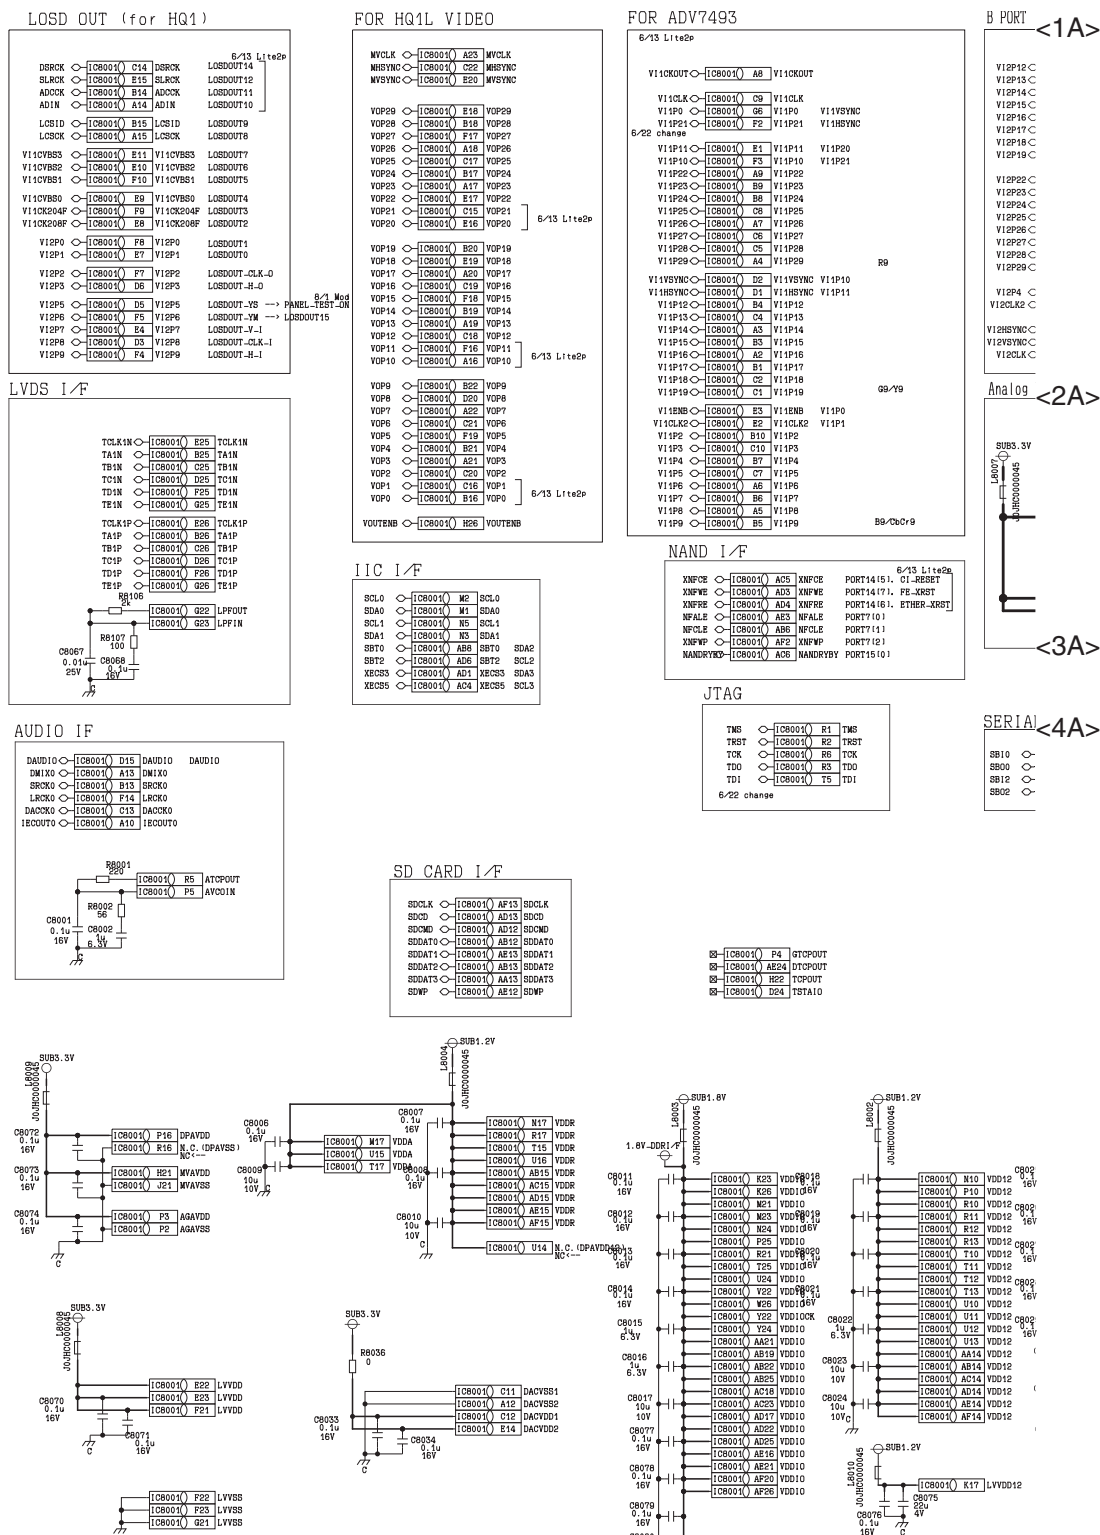


5.1.12. DG Board - Sheet : 002 (2 / 4)

<1A> PORT (Sub Video Input or Address)




<2A> analog Video I/F




<3A>


<4A> ERIAL I/F



CPU BUS I/F

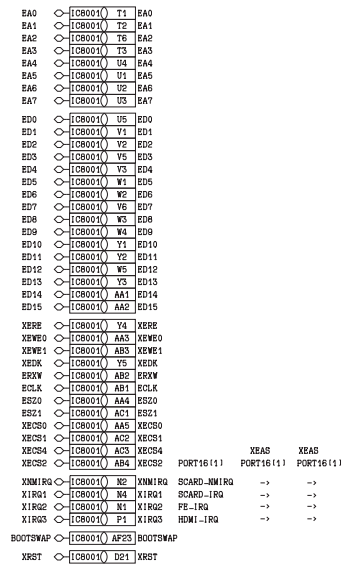


POD, CI 1/F

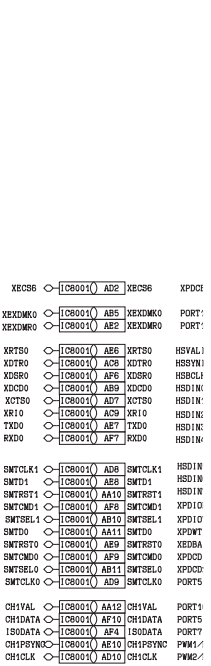


<1B>

CH. IS IF



<3B>

CLOCK GEN

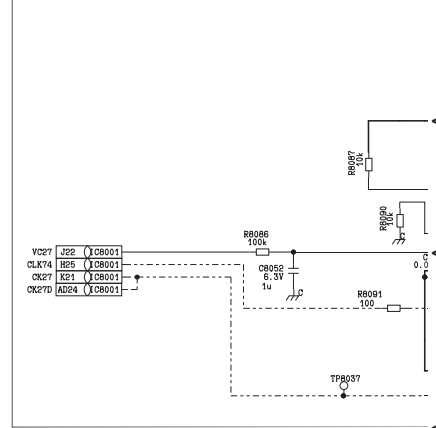

<6B>

5.1.13. DG Board - Sheet : 002 (3 / 4)

<1B>

```

XPDCE2
PORT14(13). XPDWE
PORT14(14). XPDWE

HVALIN
HSSYNIN
HSSCLKIN
HSDI_W0
HSDI_W1
HSDI_W2
HSDI_W3
HSDI_W4


HSDI_W5
HSDI_W6
HSDI_W7
XPDI0RD. (PORT10(16))
XPDI0WR. (PORT10(17))
XPDI_W7
XEDBA
XPDCD1
XPDCD2
PORT15(4). C1_POWER_ON

PORT16(6). C1_IRQ
PORT17(7). XEAB
PORT17(16). XETS
PWN1:PORT5(6)
PWN2:PORT5(5)

```


<2B>

COMMON PORT .etc




<3B>

<4B>

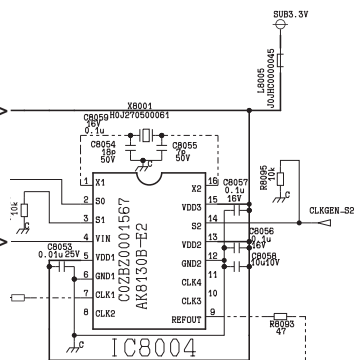

<5B>

<6B>

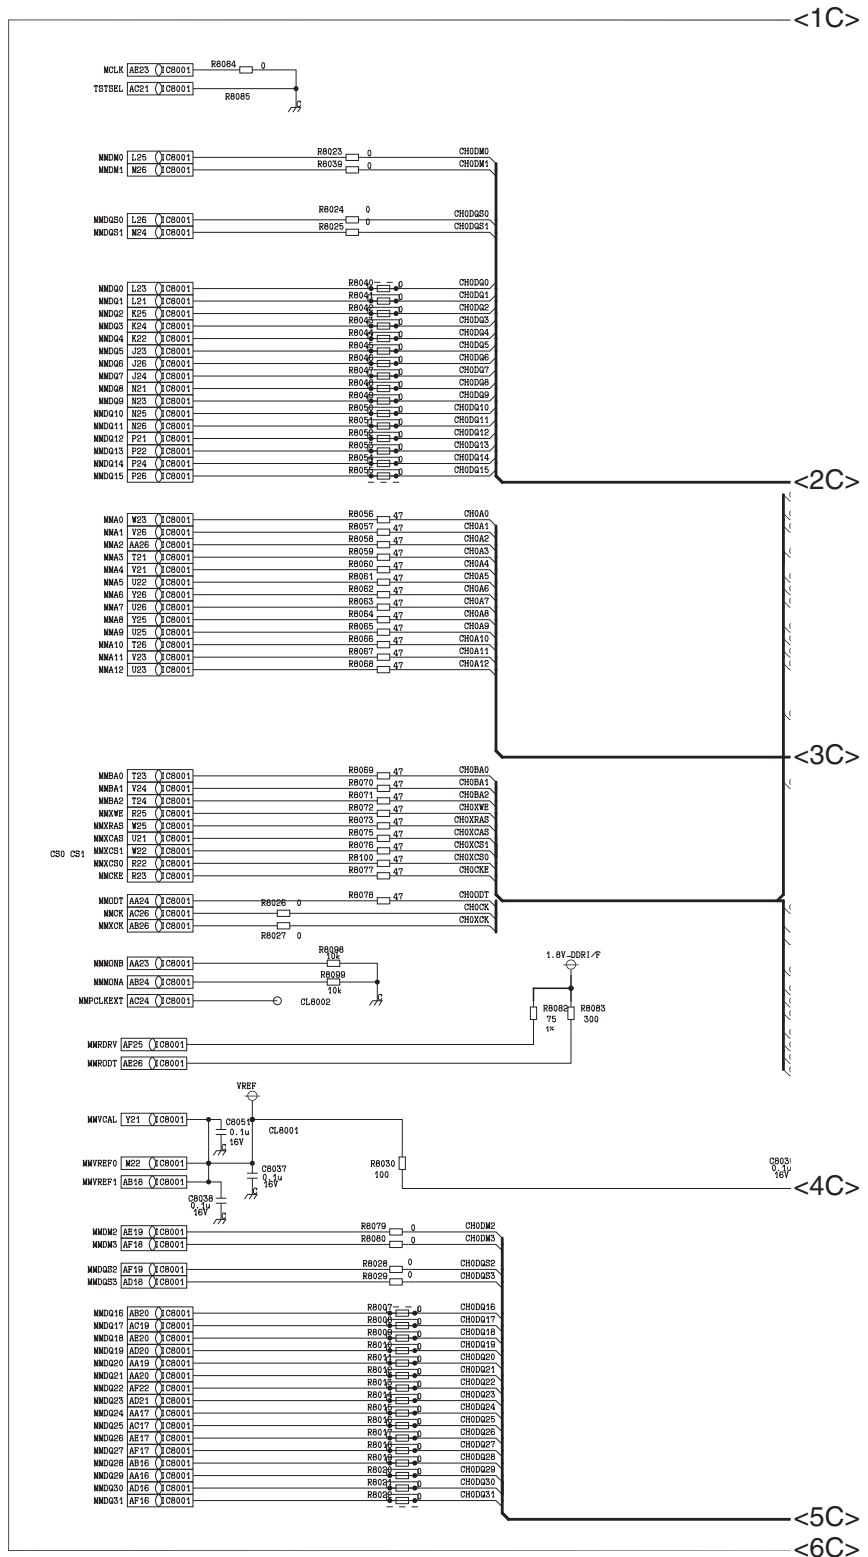

-<1C>

-<2C>


-<3C>

 γ -<4C>


-<5C>

- <6C>


5.1.14. DG Board - Sheet : 002 (4 / 4)

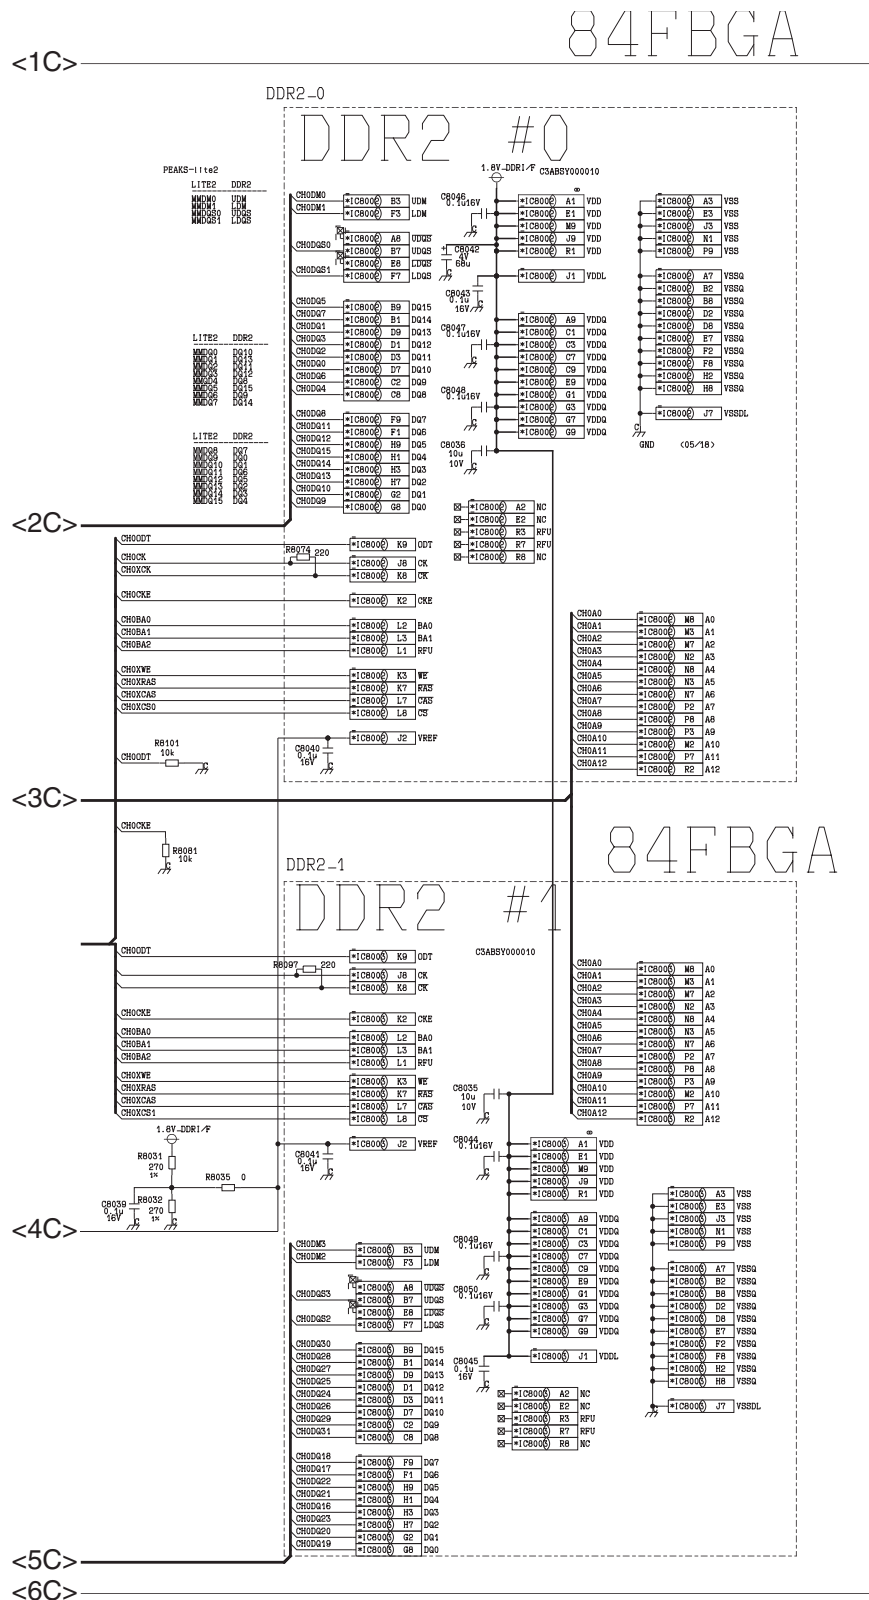


5.1.15. DG Board - Sheet : 003 (1 / 8)

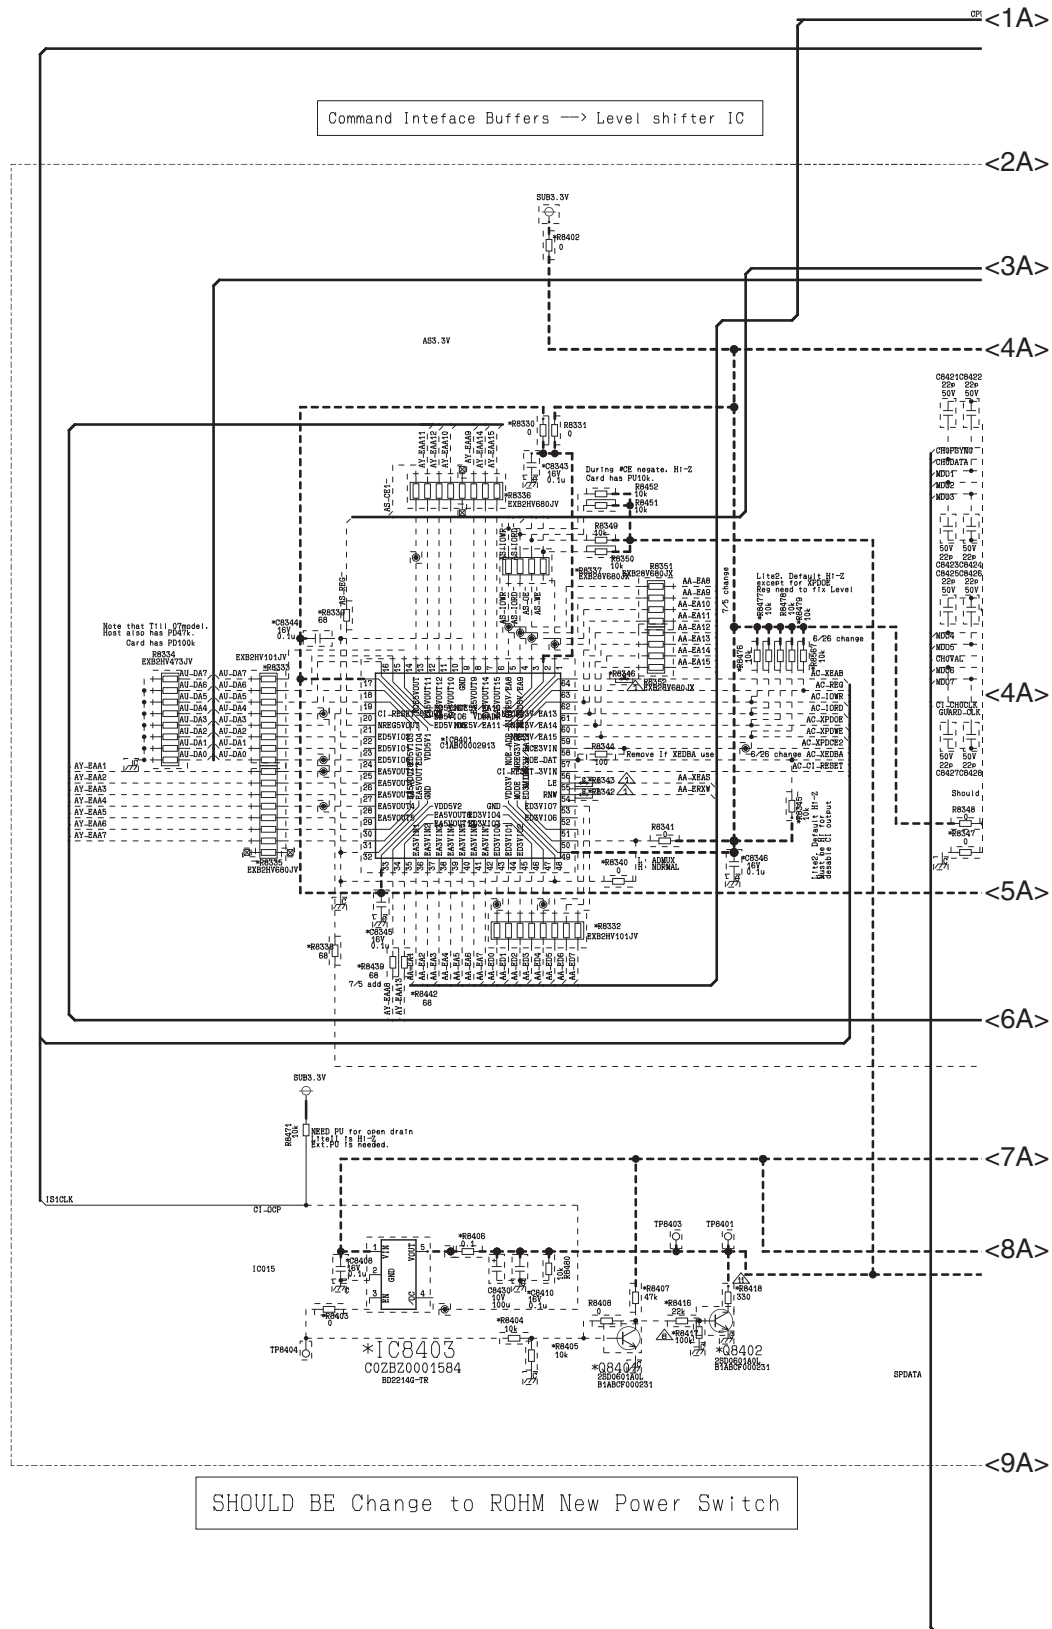


5.1.16. DG Board - Sheet : 003 (2 / 8)

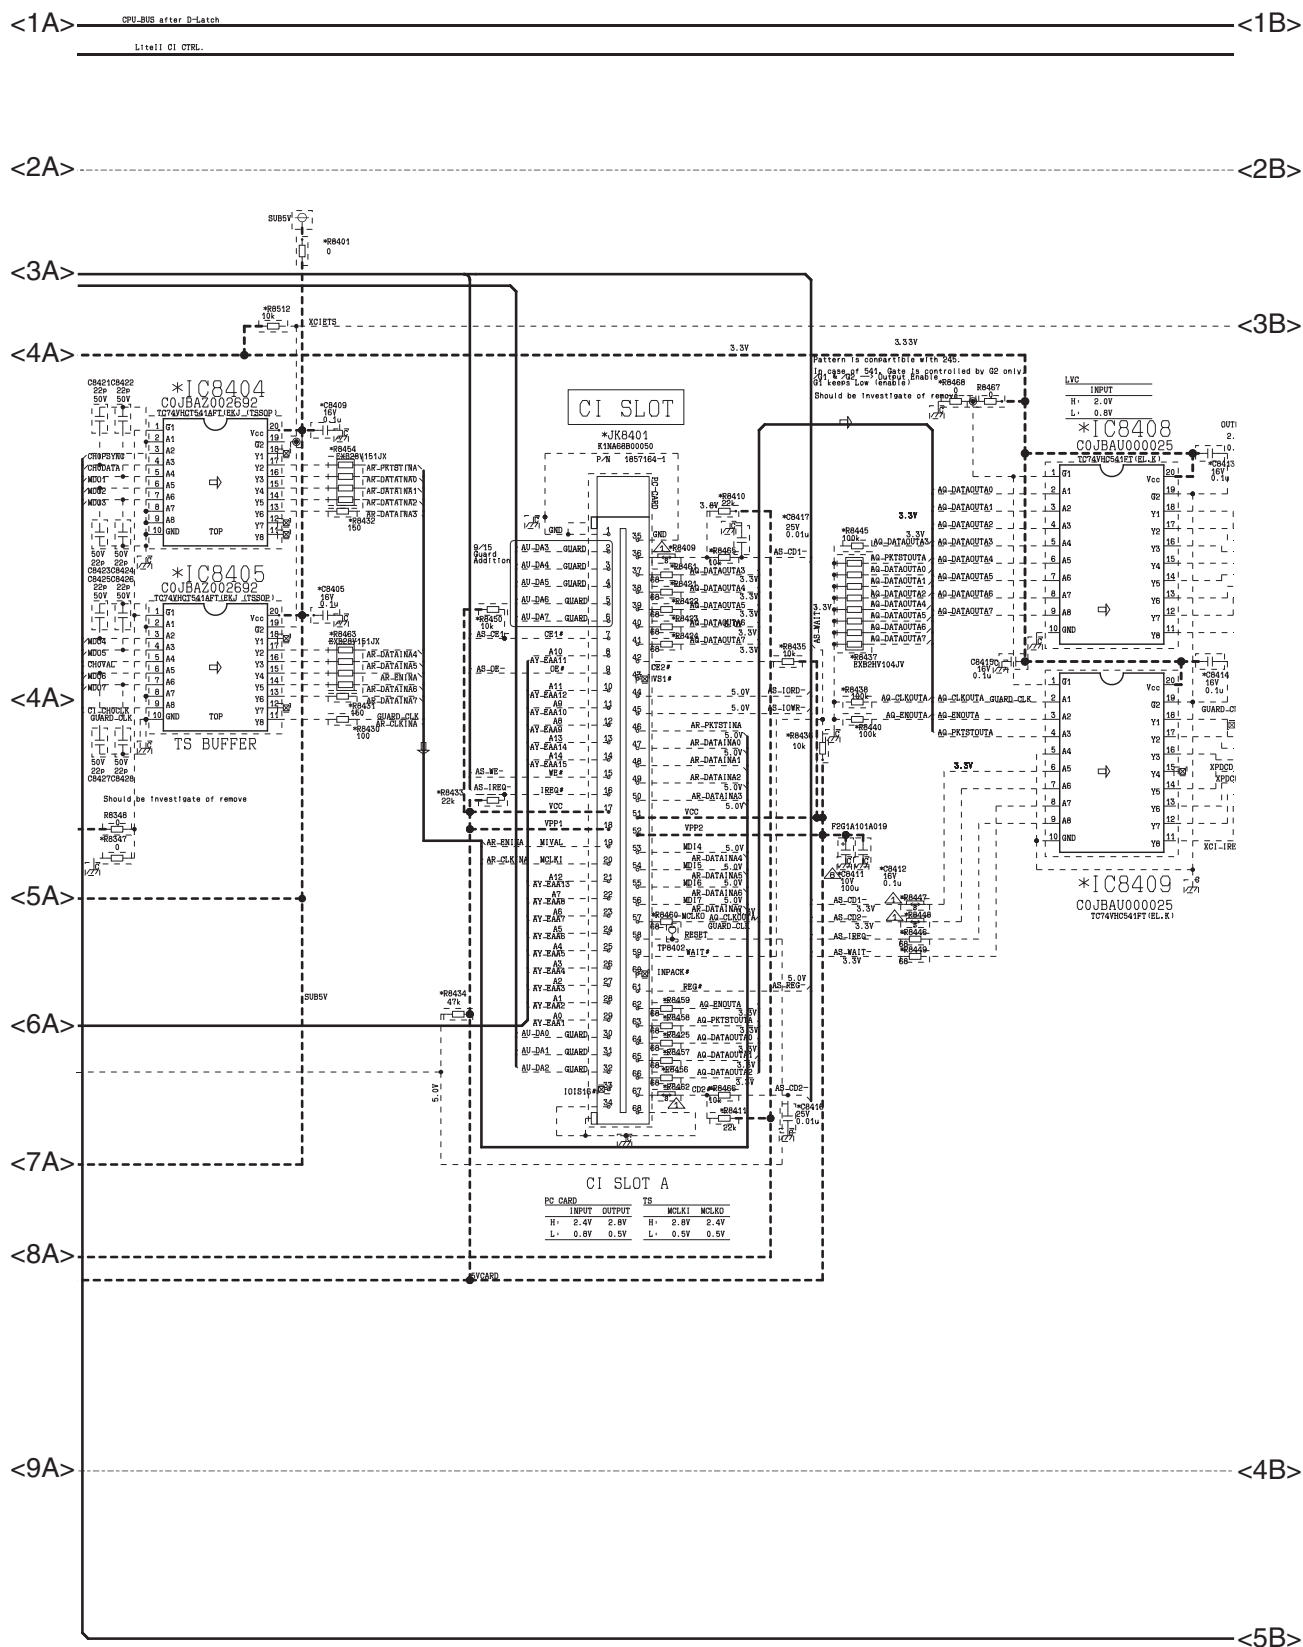


5.1.18. DG Board - Sheet : 003 (4 / 8)

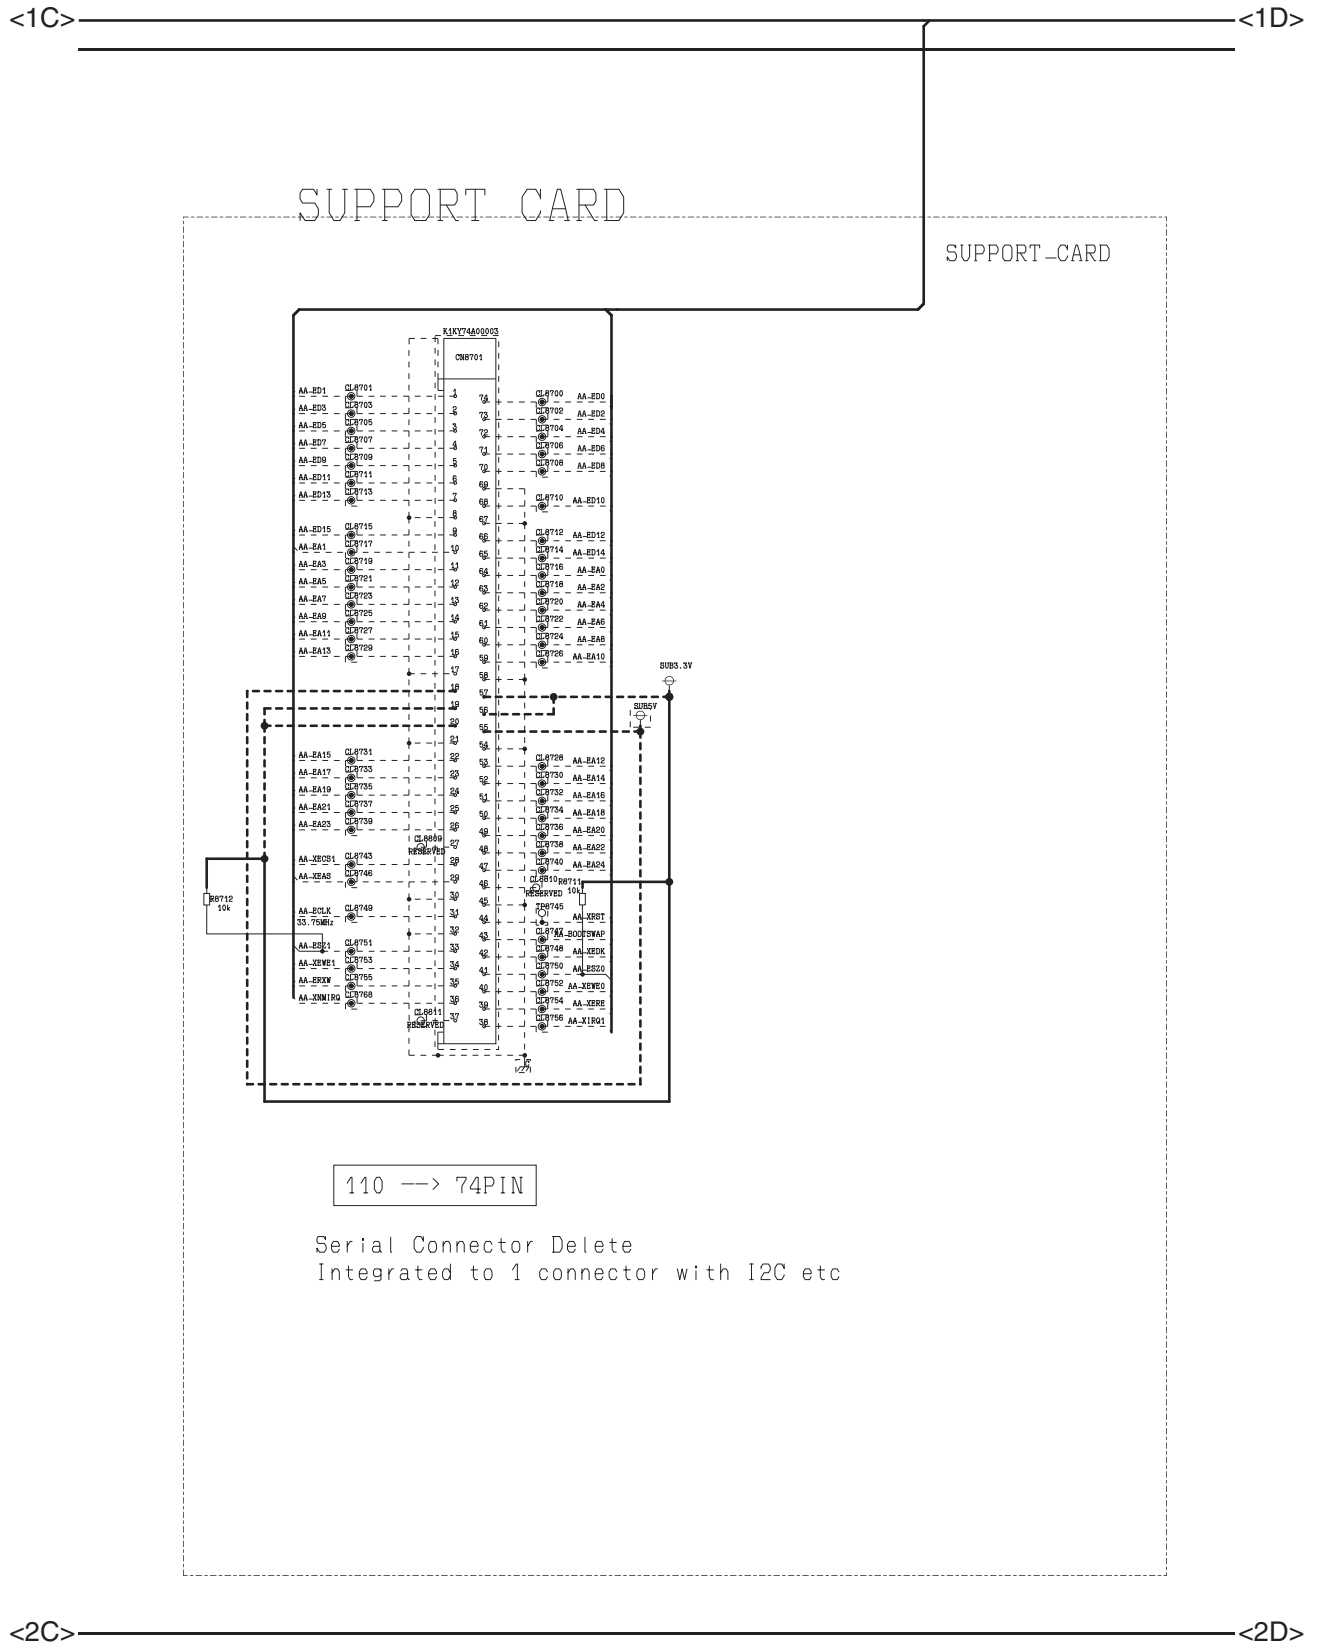


5.1.19. DG Board - Sheet : 003 (5 / 8)

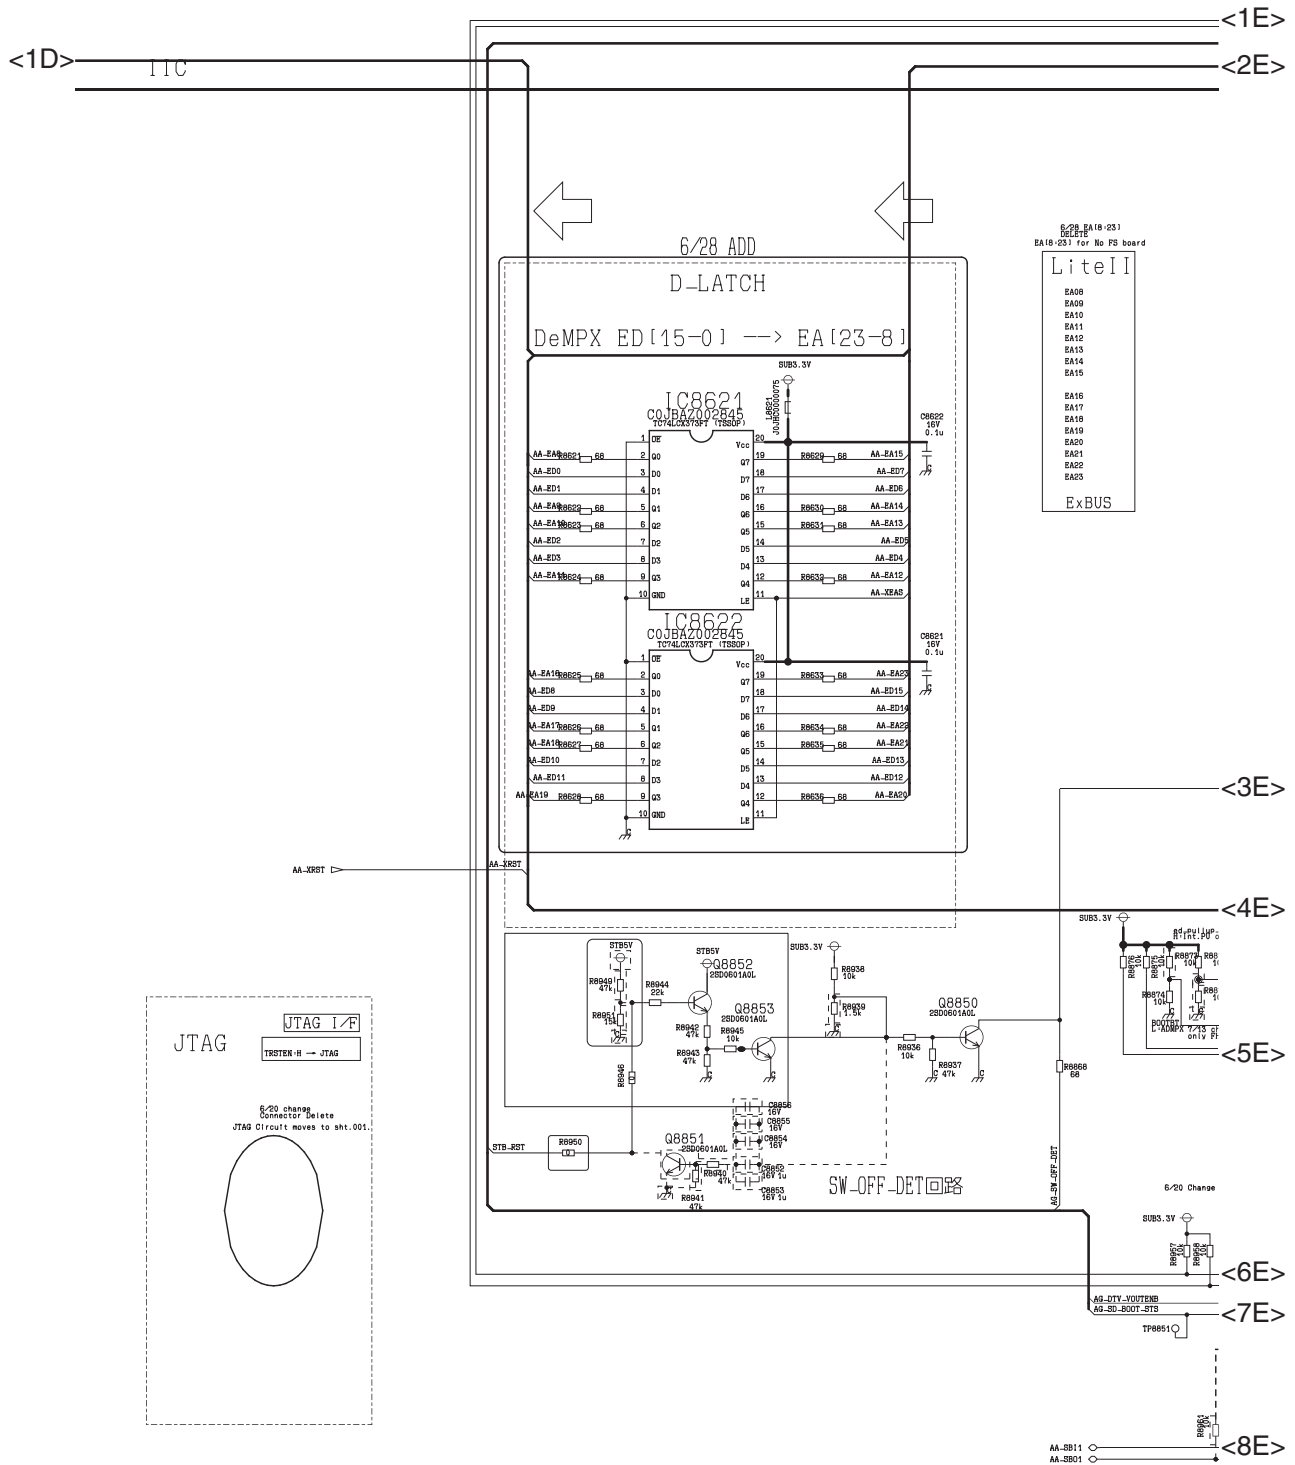


5.1.21. DG Board - Sheet : 003 (7 / 8)

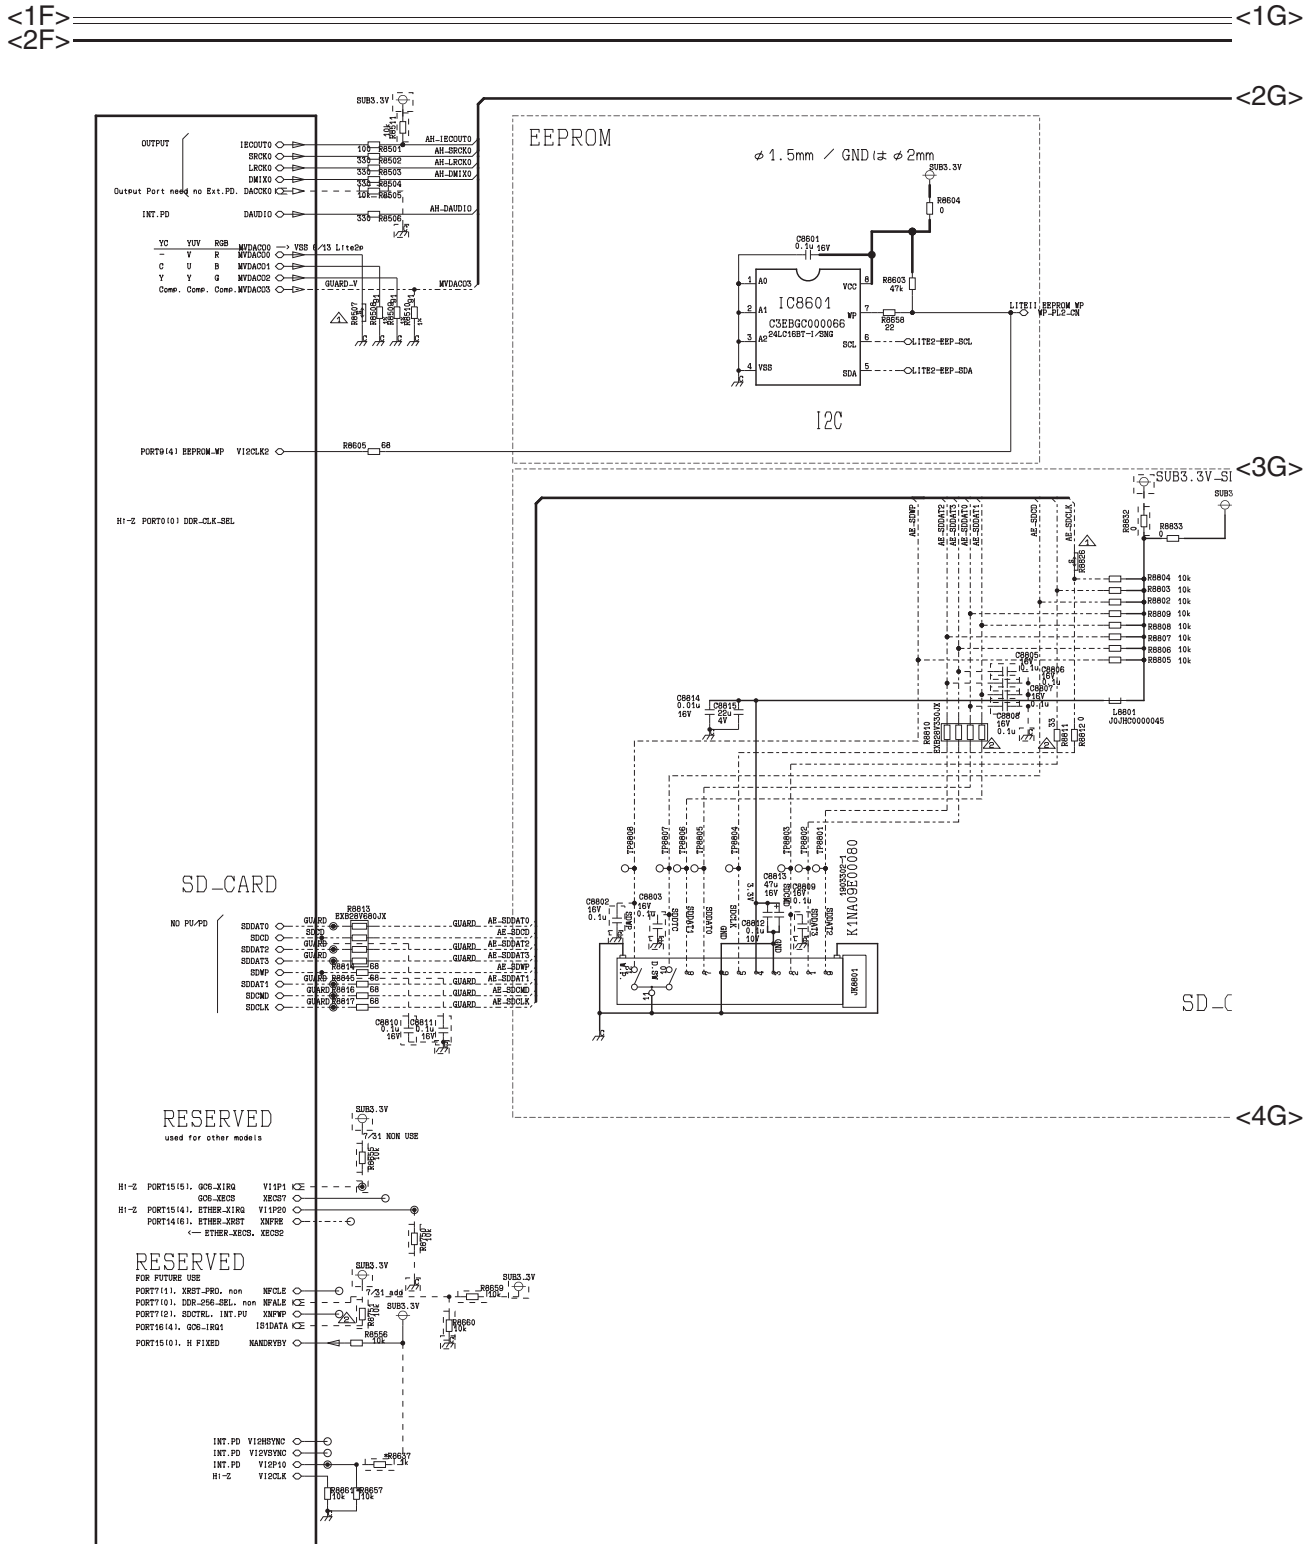


5.1.22. DG Board - Sheet : 003 (8 / 8)

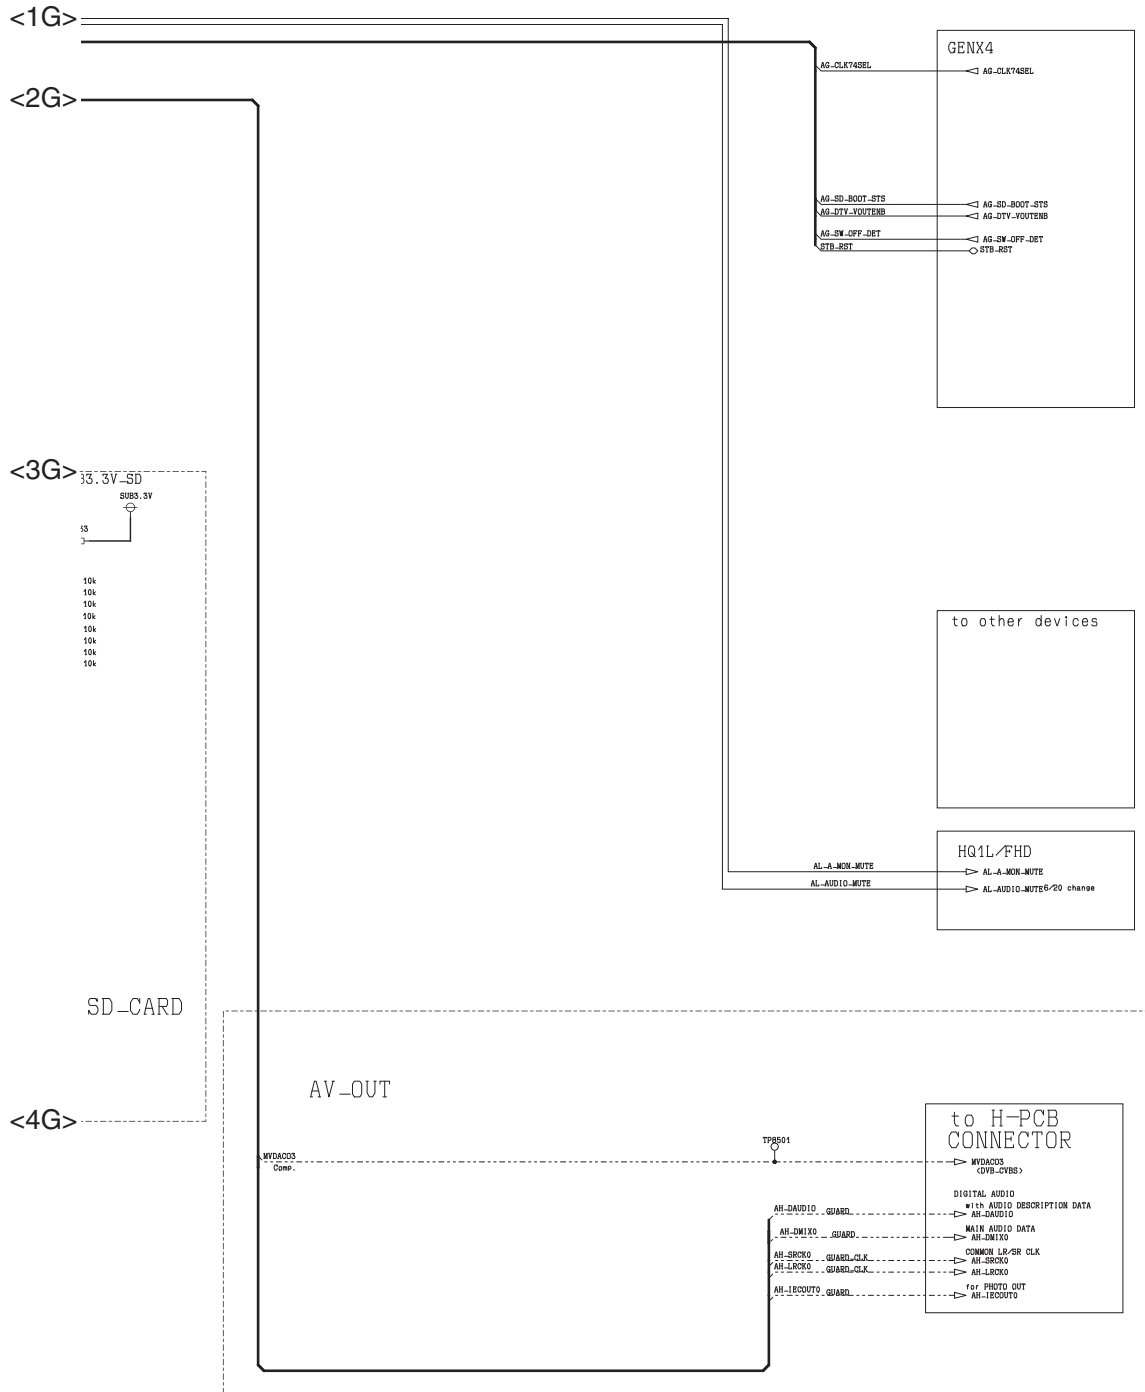



5.1.23. DG Board - Sheet : 004 (1 / 2)

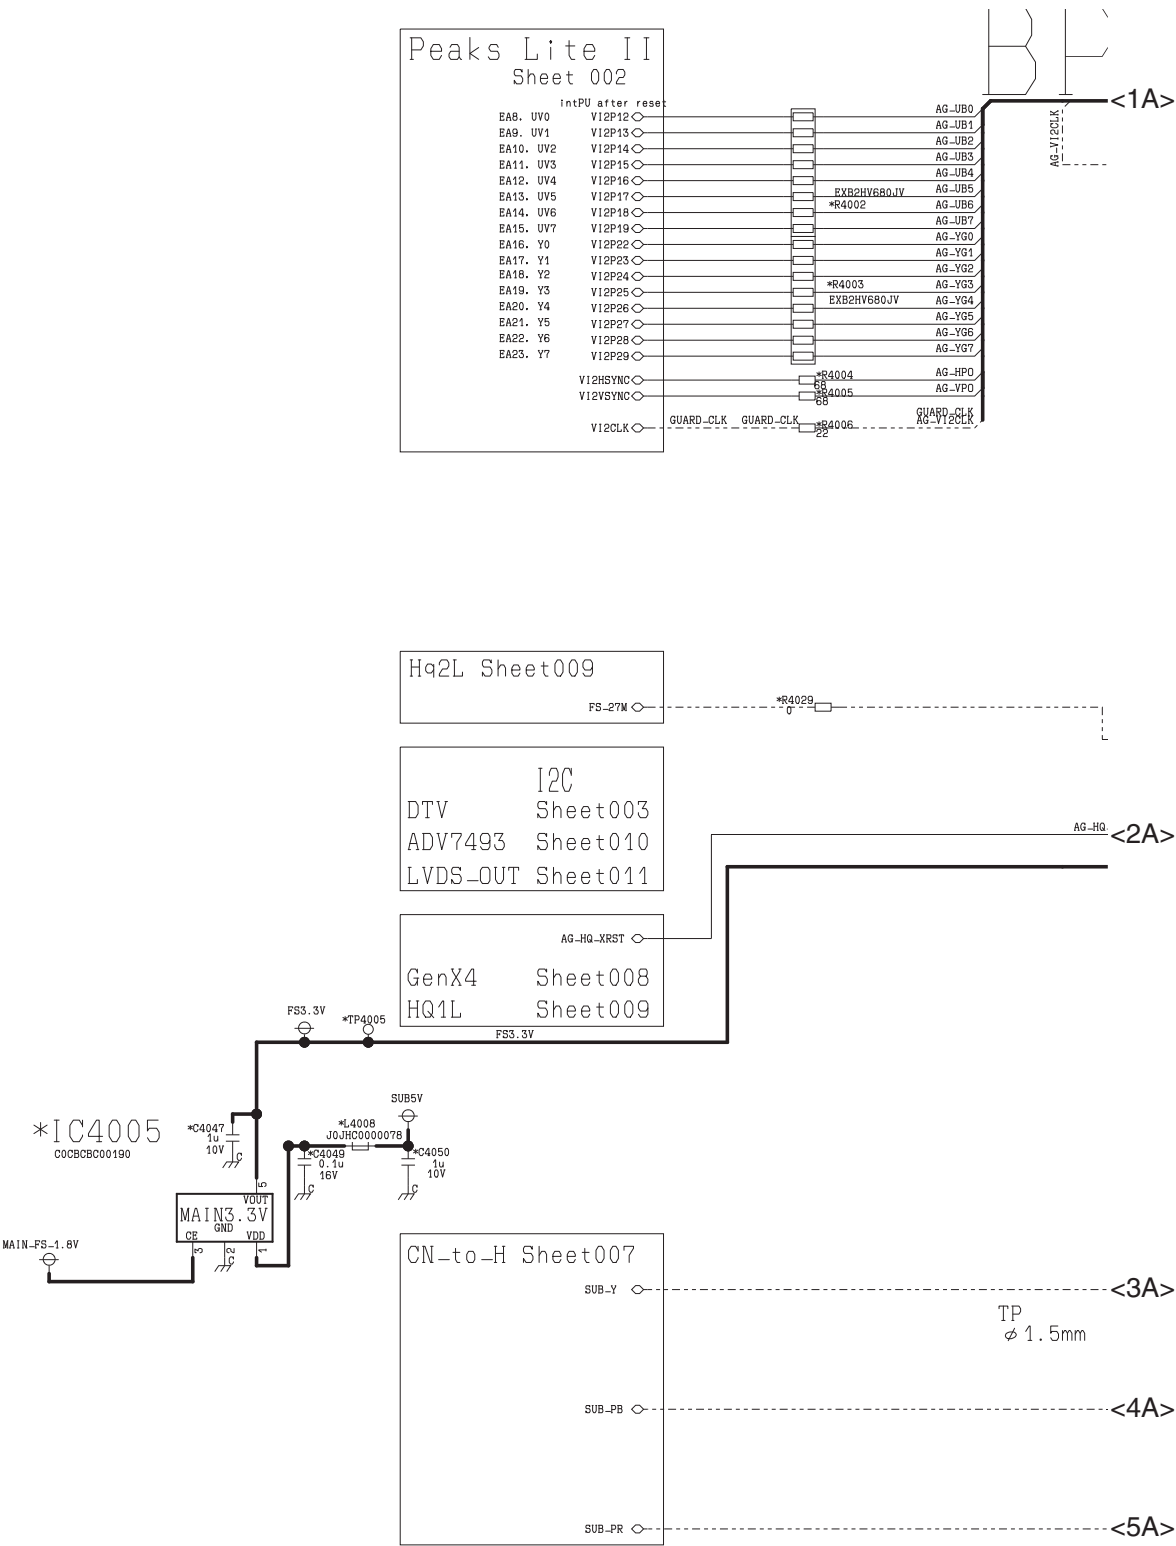


5.1.24. DG Board - Sheet : 004 (2 / 2)

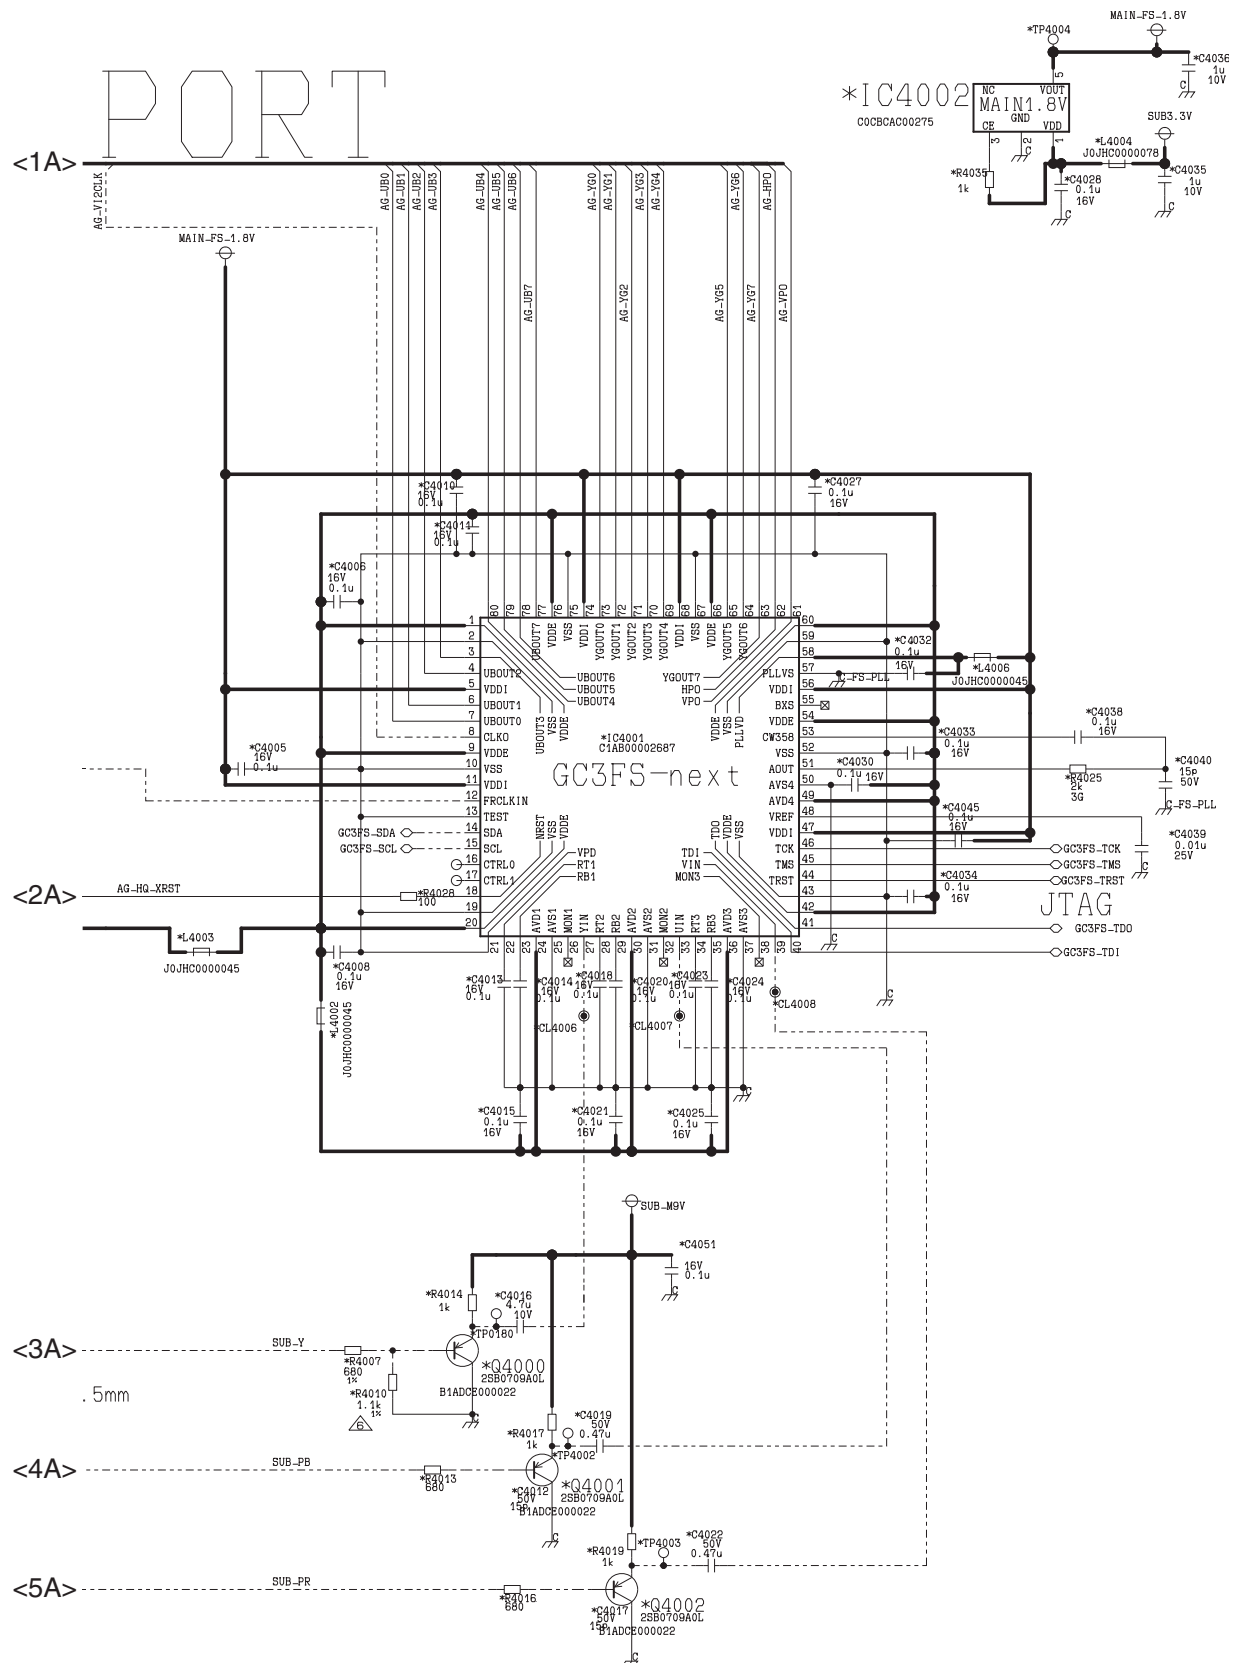


5.1.25. DG Board - Sheet : 005 (1 / 3)

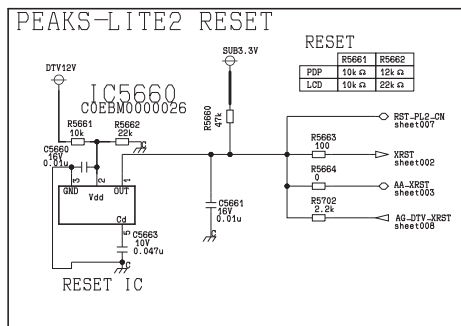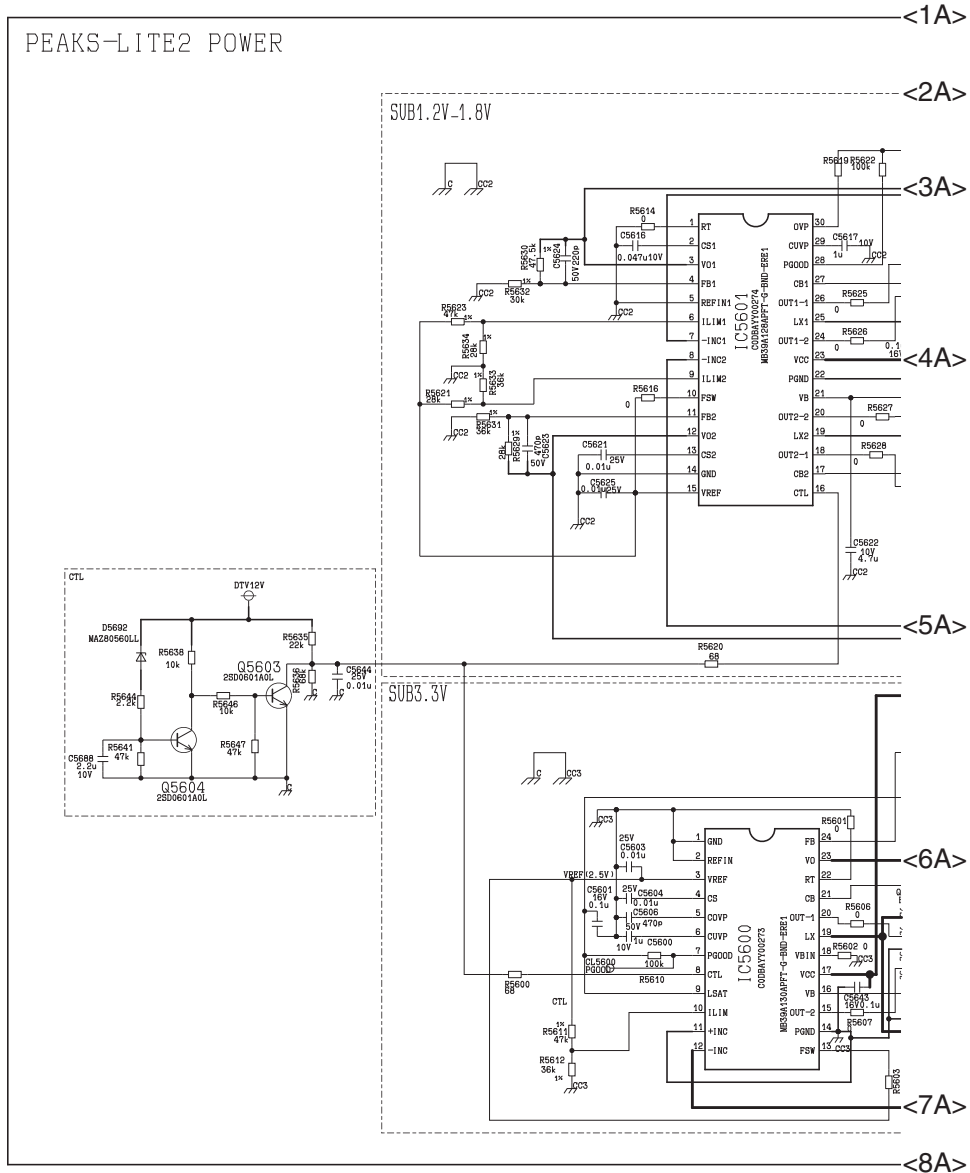

5.1.26. DG Board - Sheet : 005 (2 / 3)

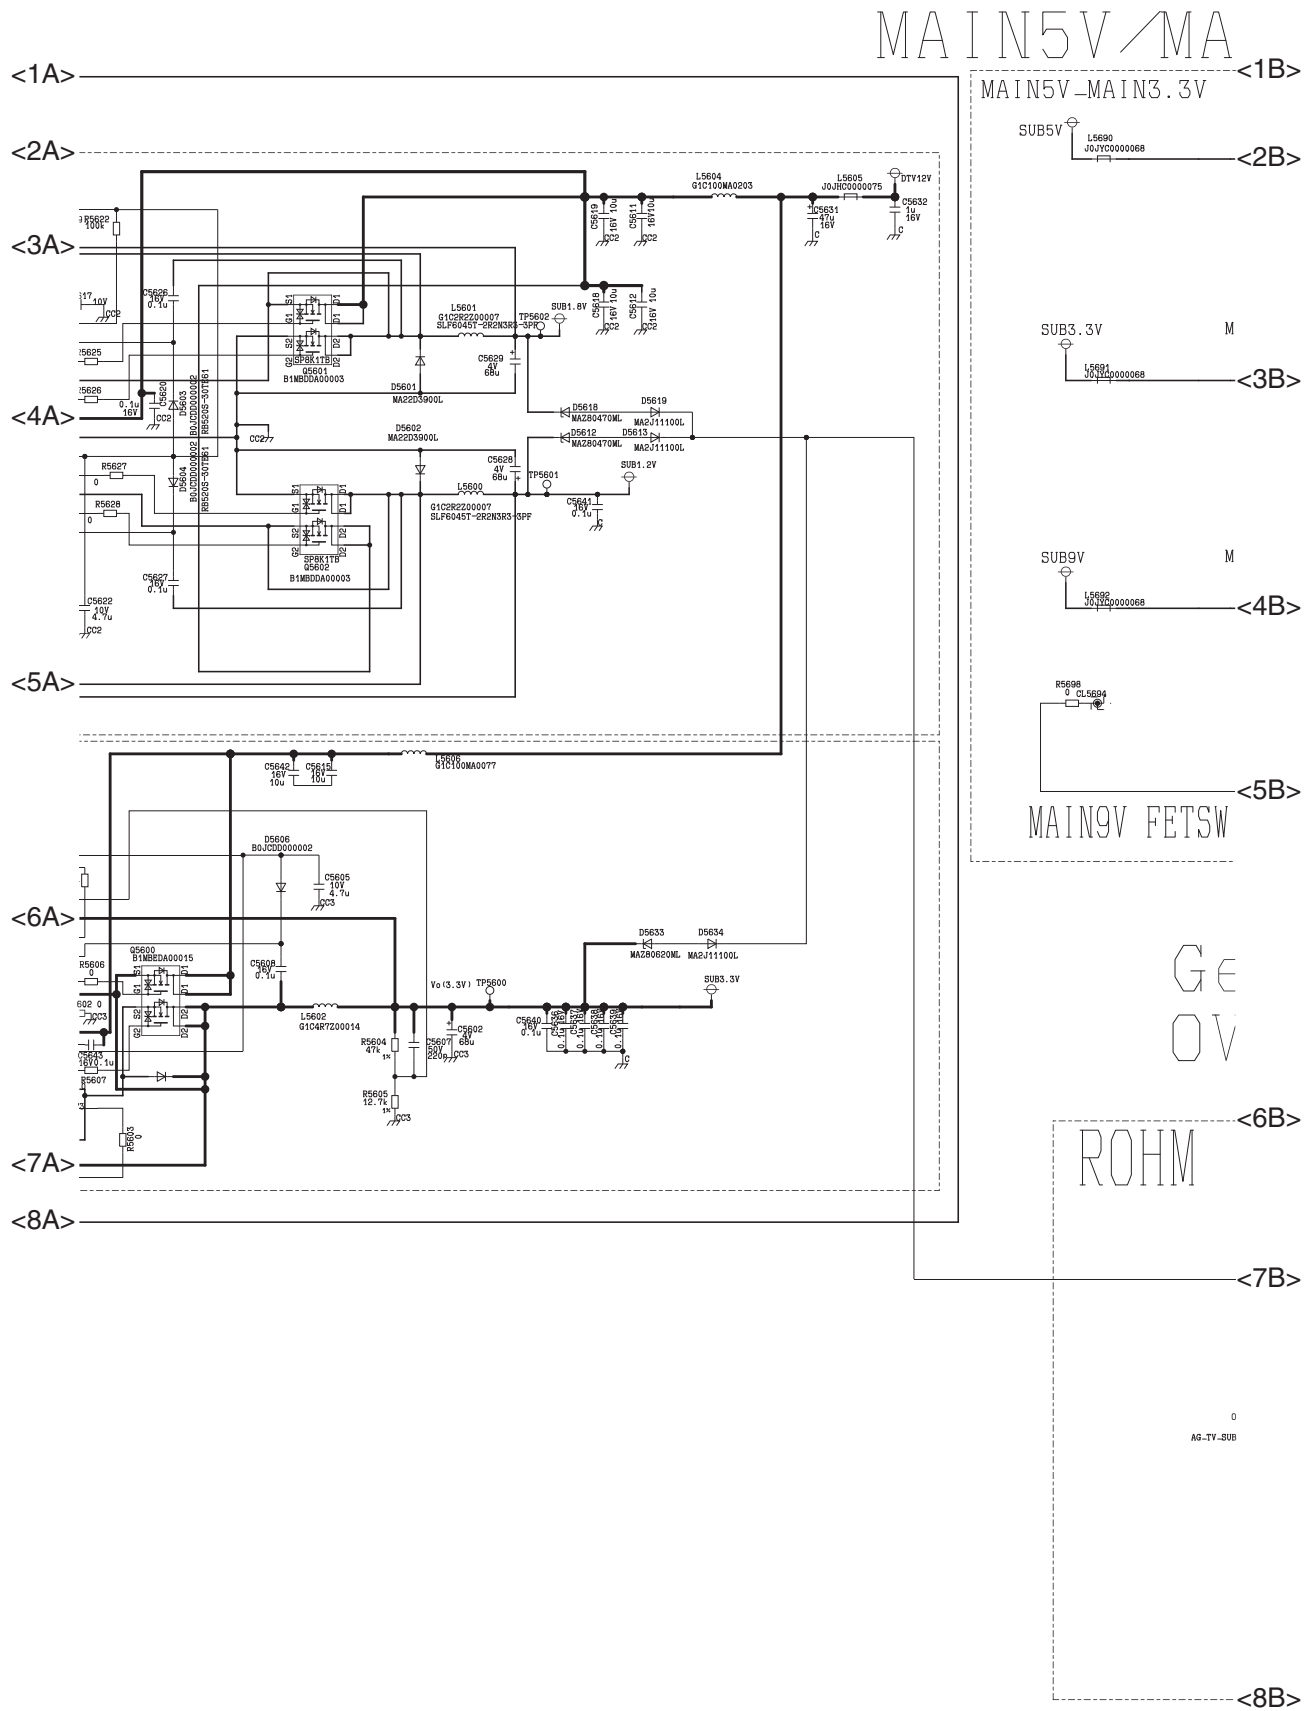

5.1.28. DG Board - Sheet : 006 (1 / 1)

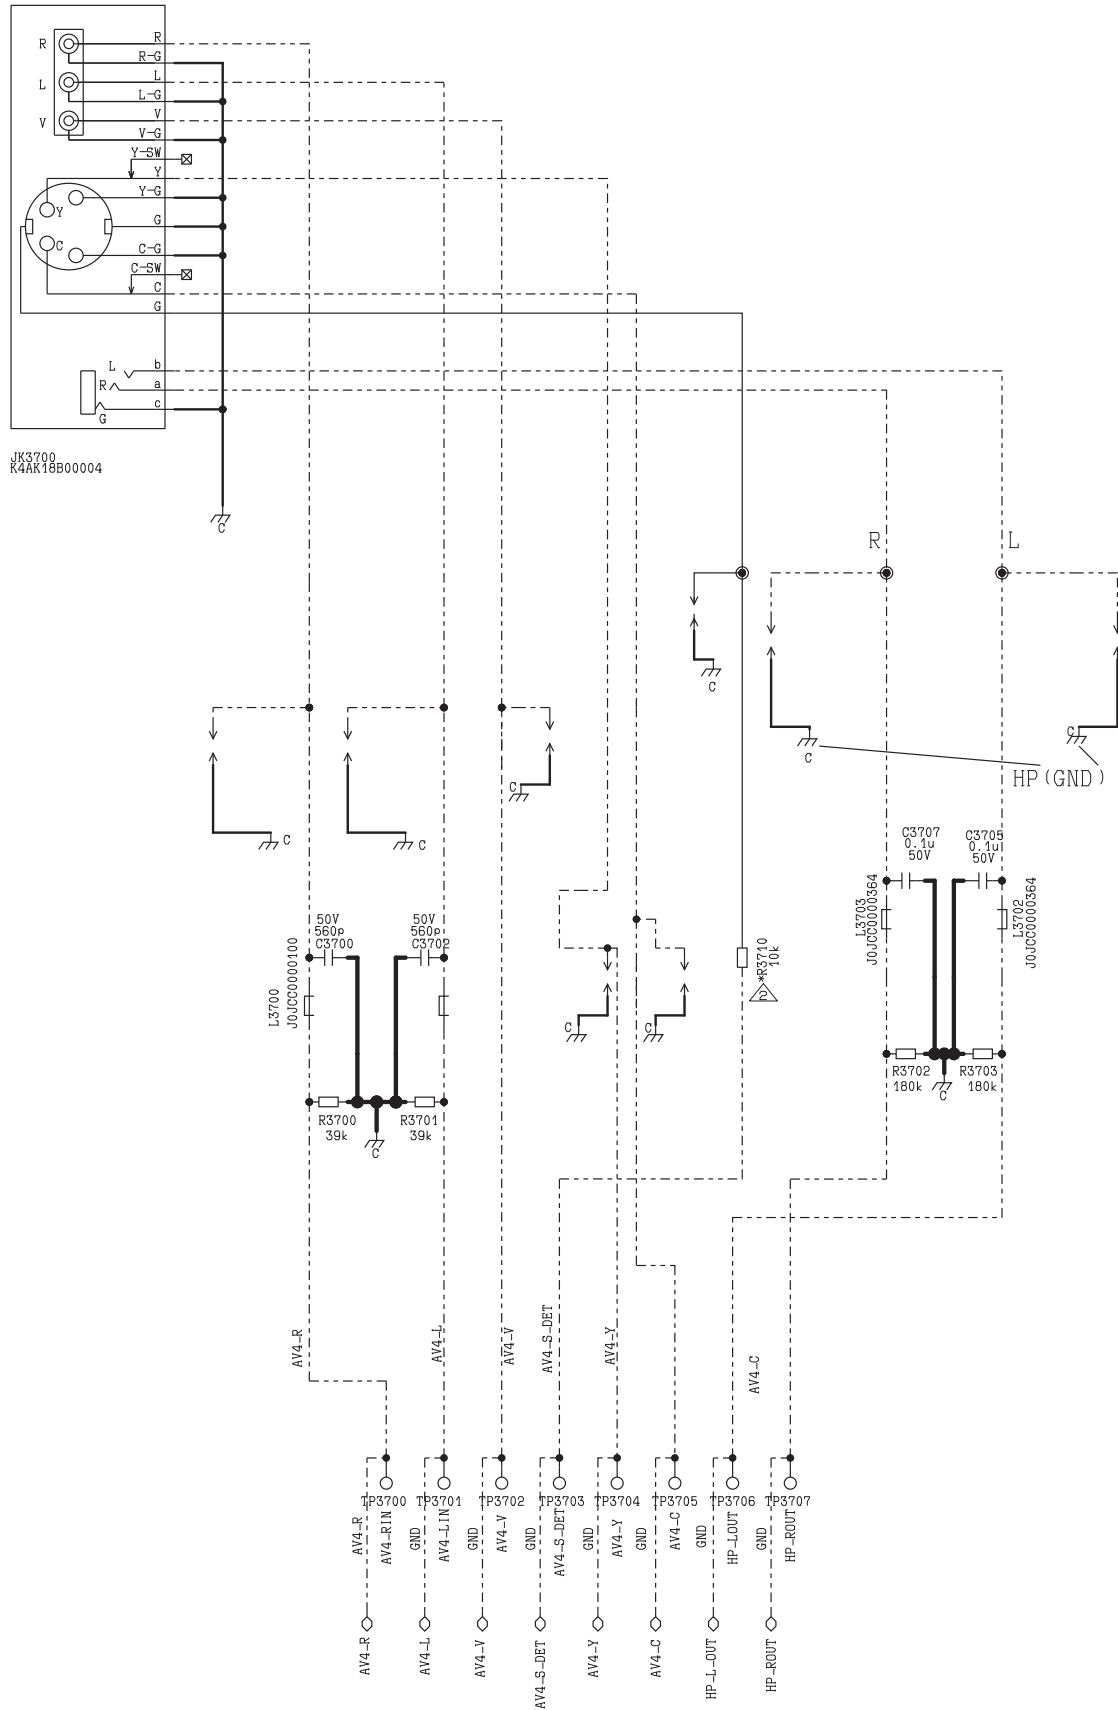


5.1.29. DG Board - Sheet : 007 (1 / 4)

FOR_<1A>

DG-FRONT-CONNECTOR

-<2A>


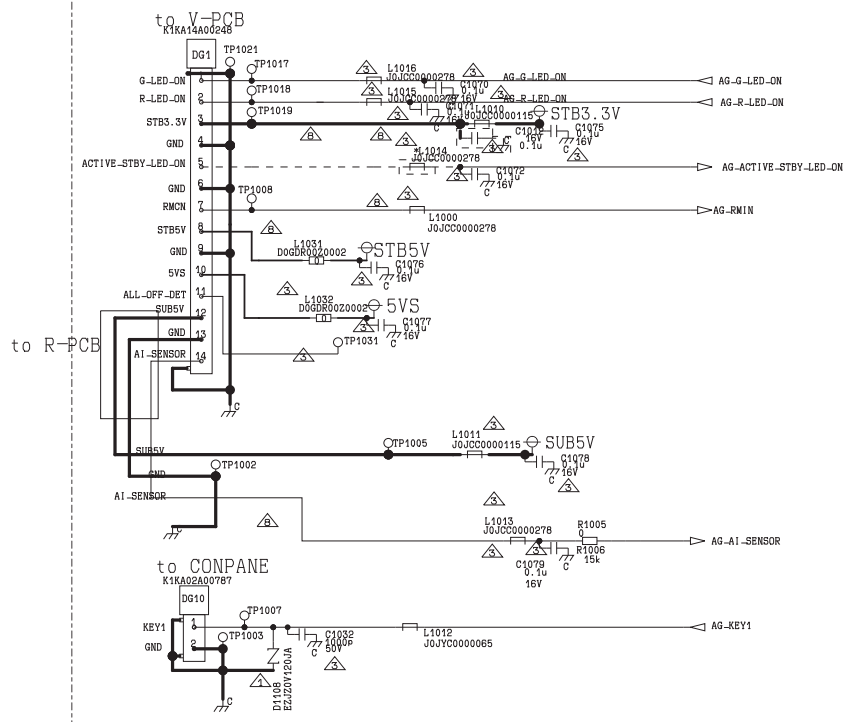


5.1.31. DG Board - Sheet : 007 (3 / 4)

<1B>


<2B>

<3B>

IIC
to Sheet 003GenX4
to Sheet 008

DG-H-CONNECTOR



<1C>

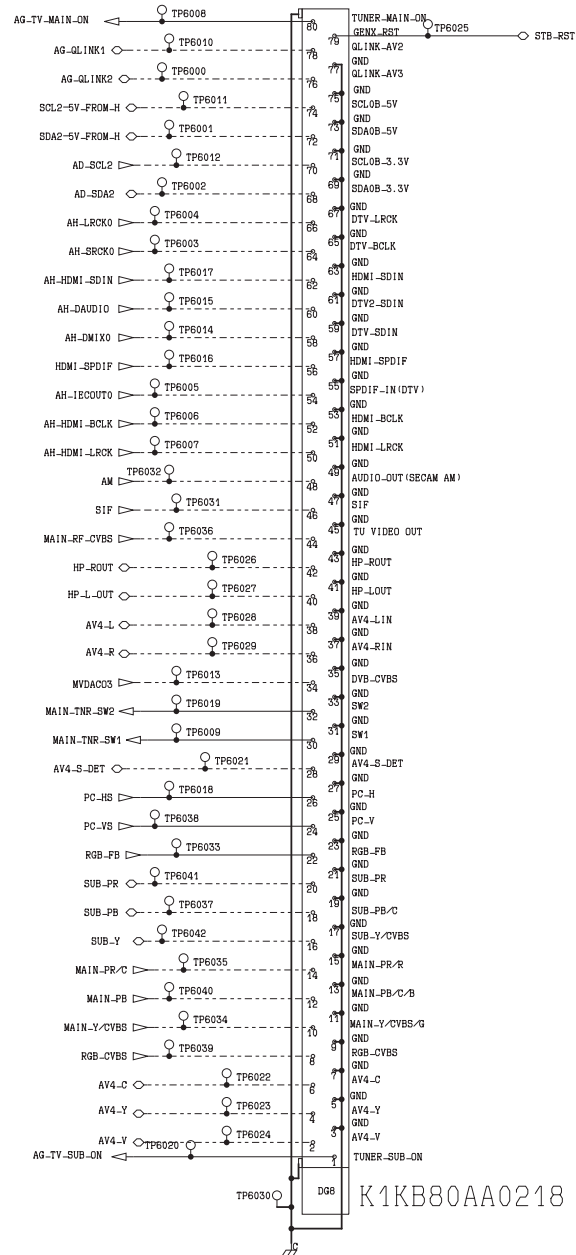

<2C>

5.1.32. DG Board - Sheet : 007 (4 / 4)


<1C>

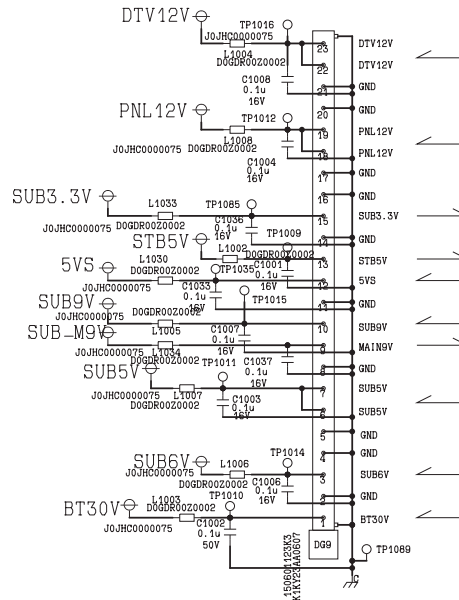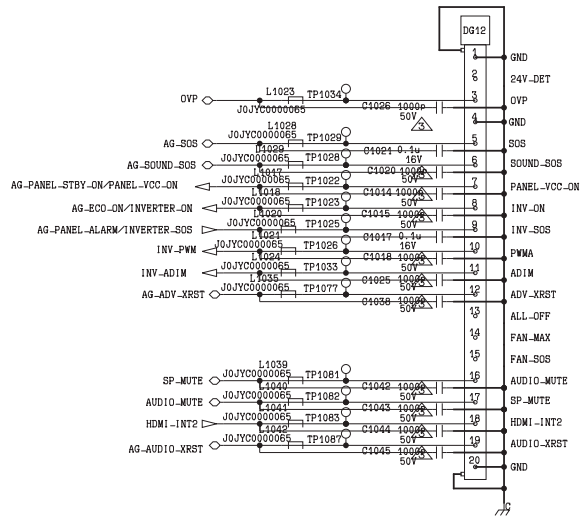

<2C>

5.1.33. DG Board - Sheet : 008 (1 / 3)

for Debugger

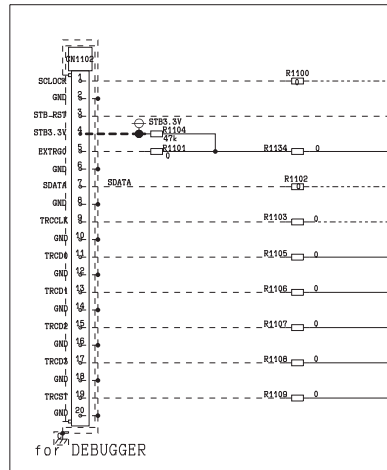

for DEBUGGER


STB3
J0.7Y00

<1A>

IIC


GenX5 EEPROM

<2A>




<3A>


for Factory




SD COIN DET

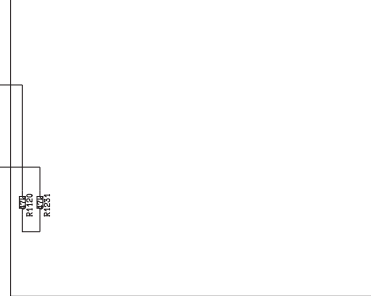

POWER DET

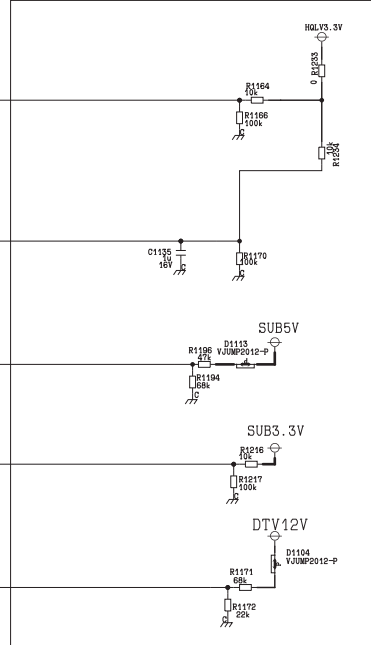

5.1.34. DG Board - Sheet : 008 (2 / 3)

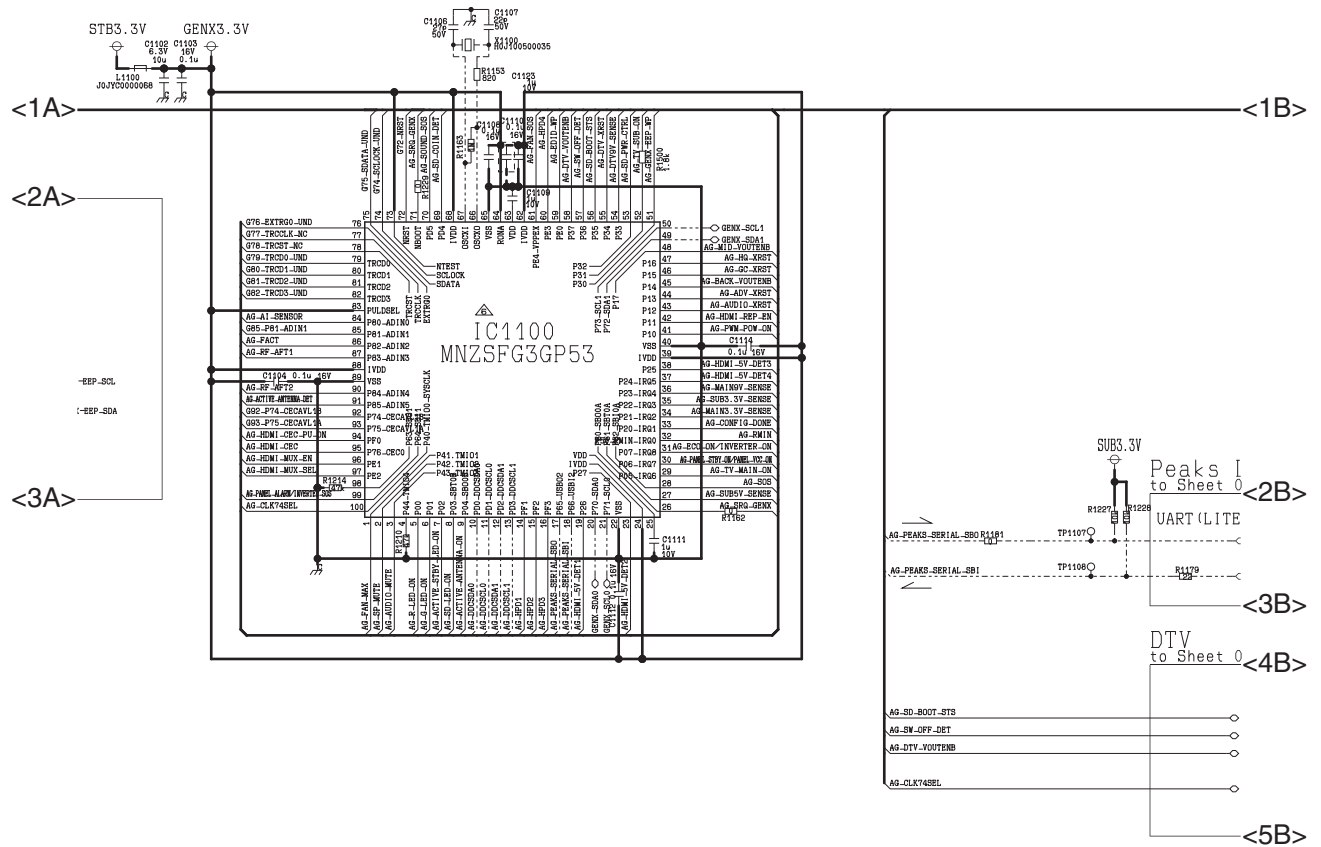

5.1.35. DG Board - Sheet : 008 (3 / 3)

<1B>

<2B>

<3B>

<4B>

<5B>

ks Lite Iip
heet 002

(LITE2p-GenX5)

-----○ SB12







9.-----○ SB02

-----○ AG-SD-BOOT-STS


-----○ AG-SW-OFF-DET

-----○ AG-DTV-YOUTENB


-----○ AG-CLK748EL

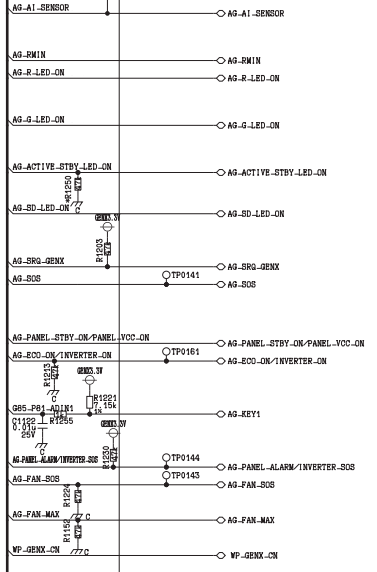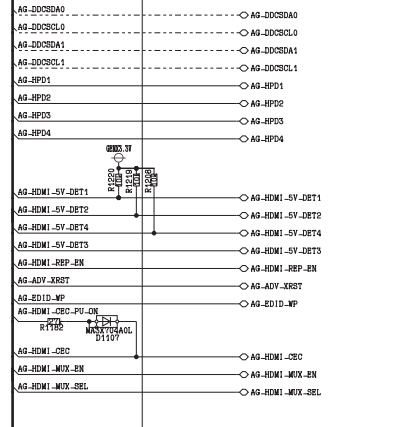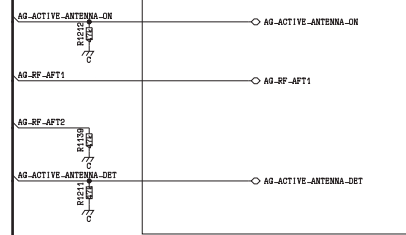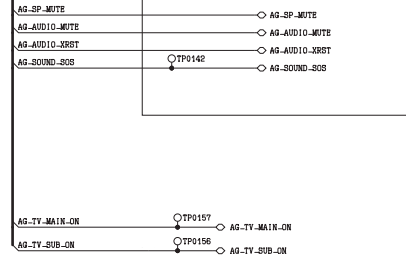Power Supply
to Sheet 005Connector
to Sheet 007FHD
to Sheet 009ADV7495
to Sheet 010AVSW
to Sheet 012Tuner
to Sheet 014Sound
to Sheet 015


5.1.36. DG Board - Sheet : 009 (1 / 9)

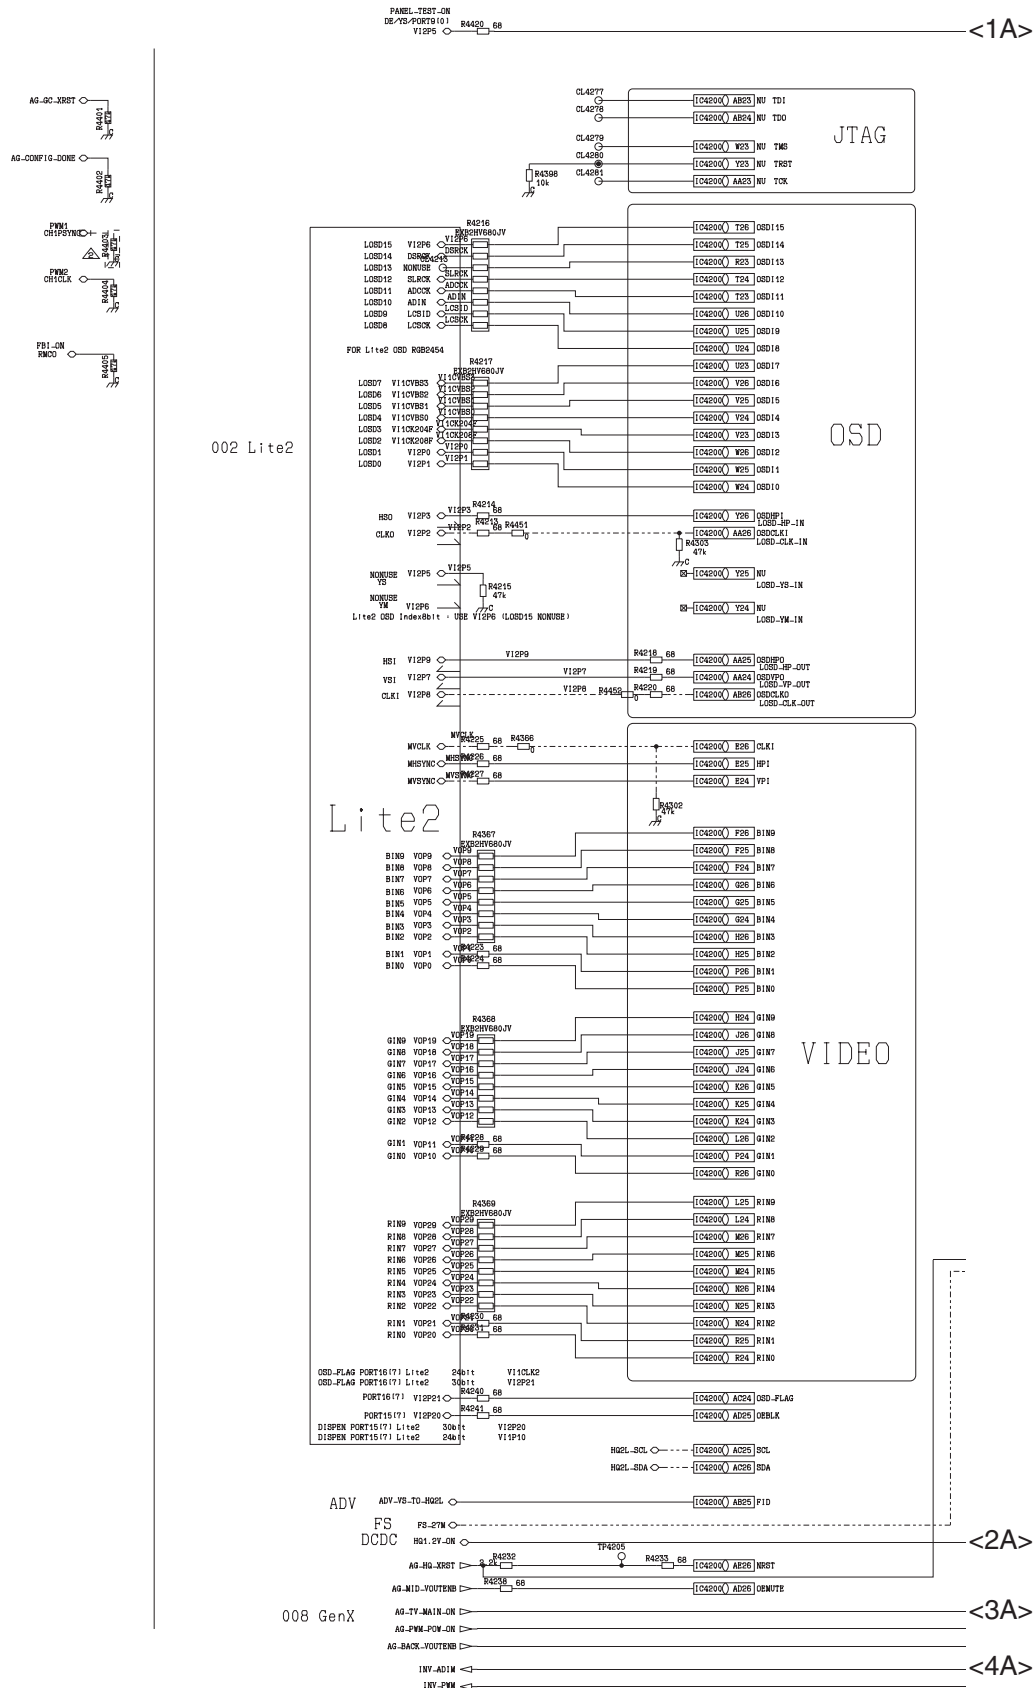

5.1.40. DG Board - Sheet : 009 (5 / 9)

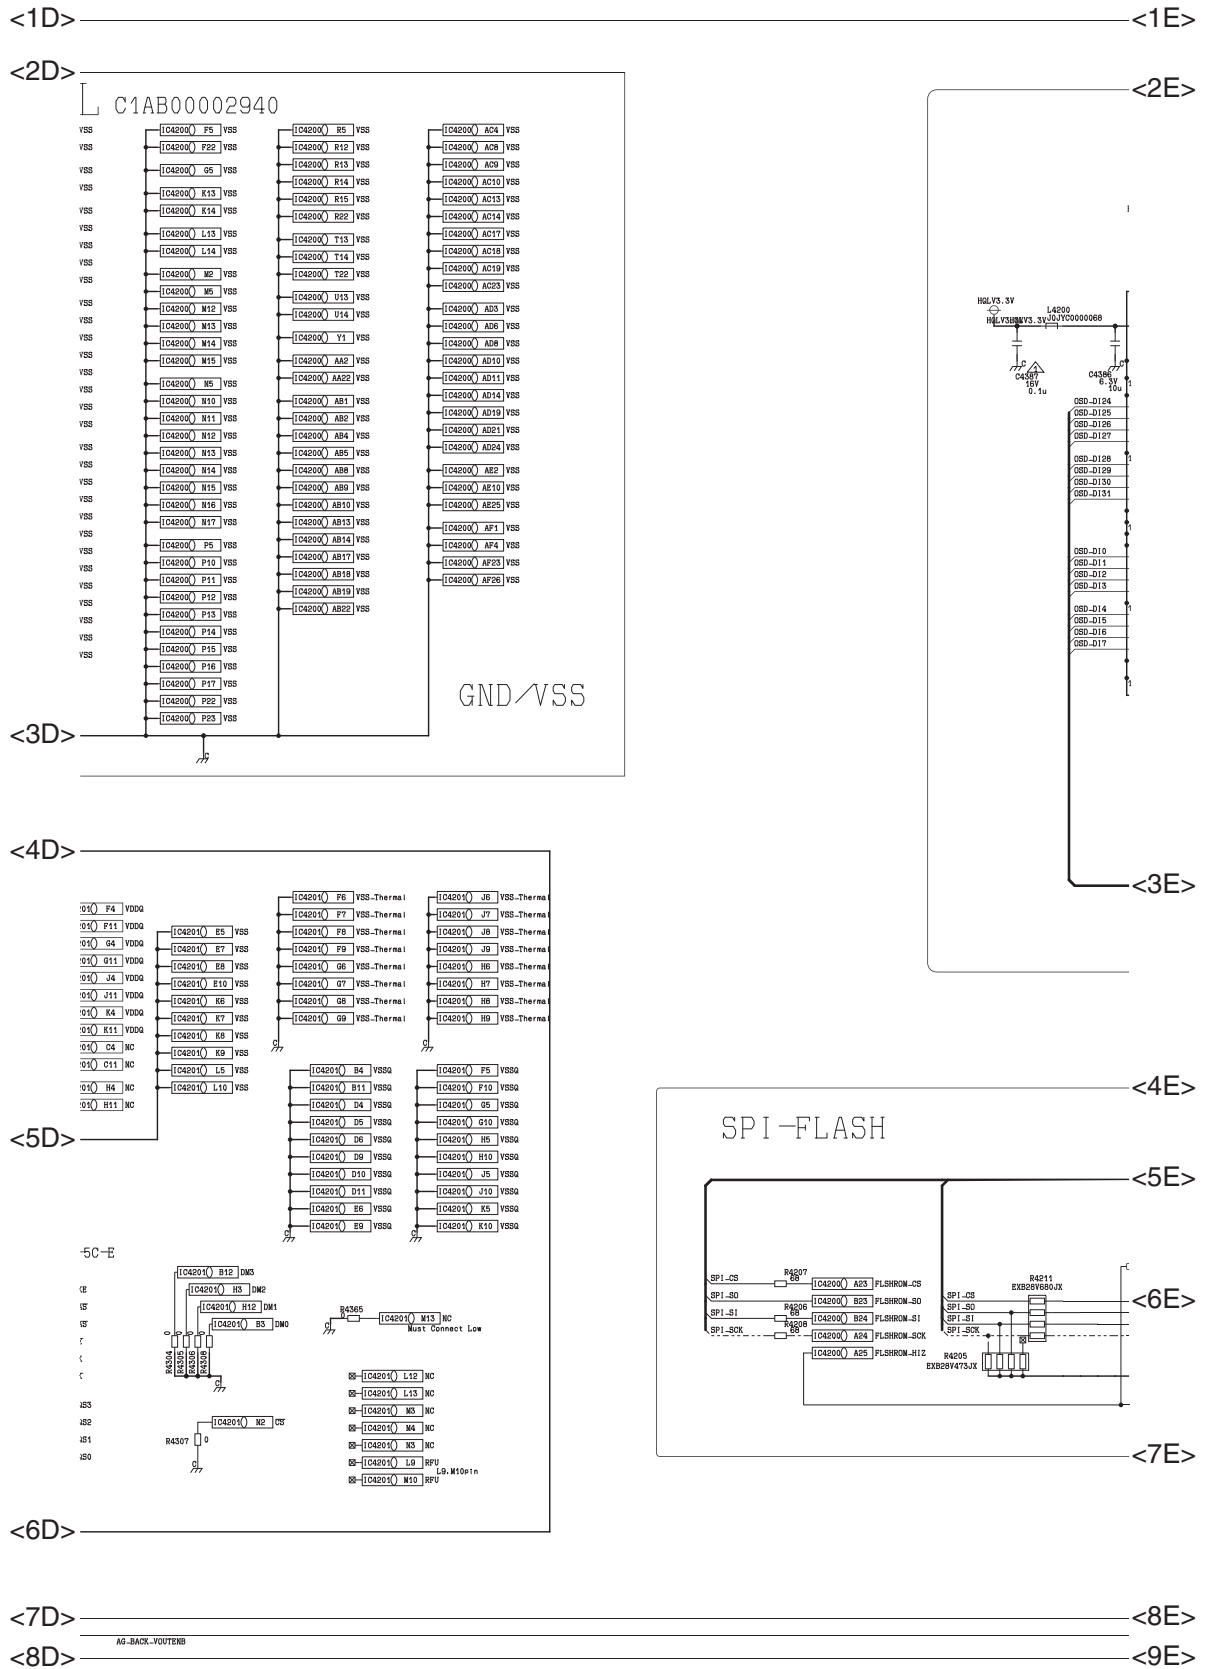

5.1.41. DG Board - Sheet : 009 (6 / 9)

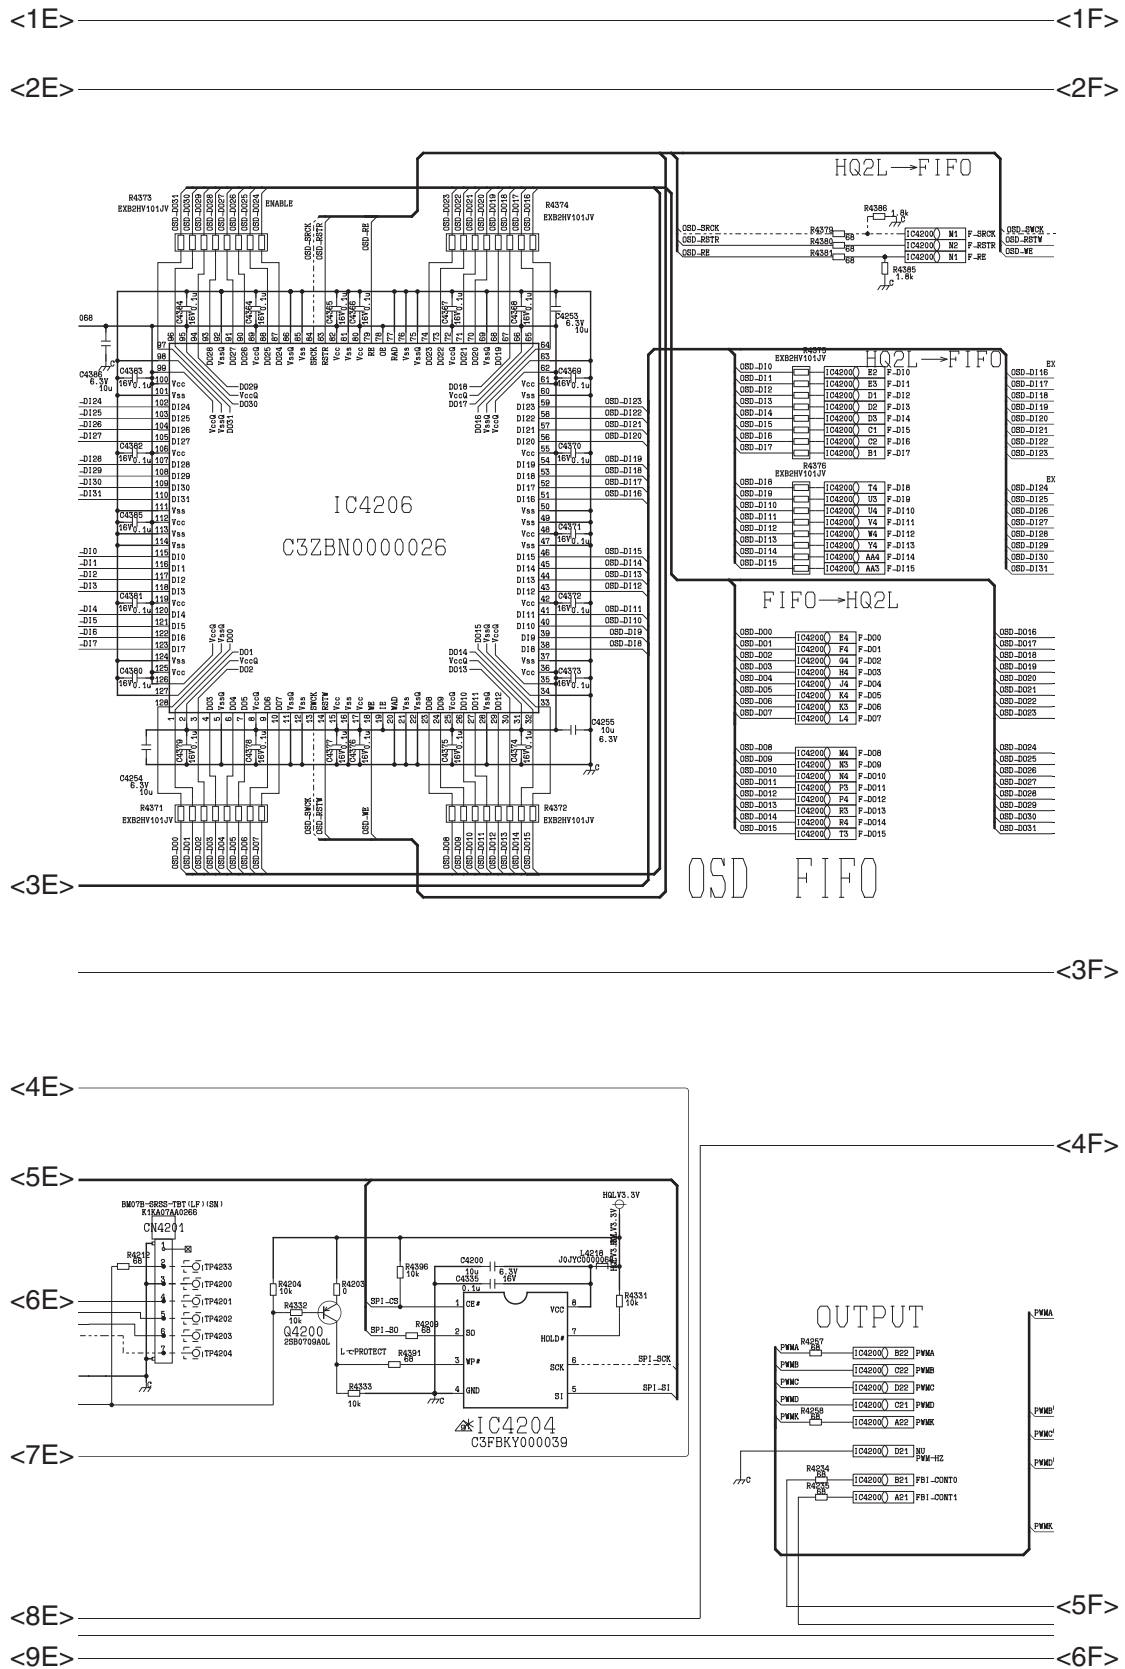


5.1.43. DG Board - Sheet : 009 (8 / 9)

<1G>

-<1H>


<2G>

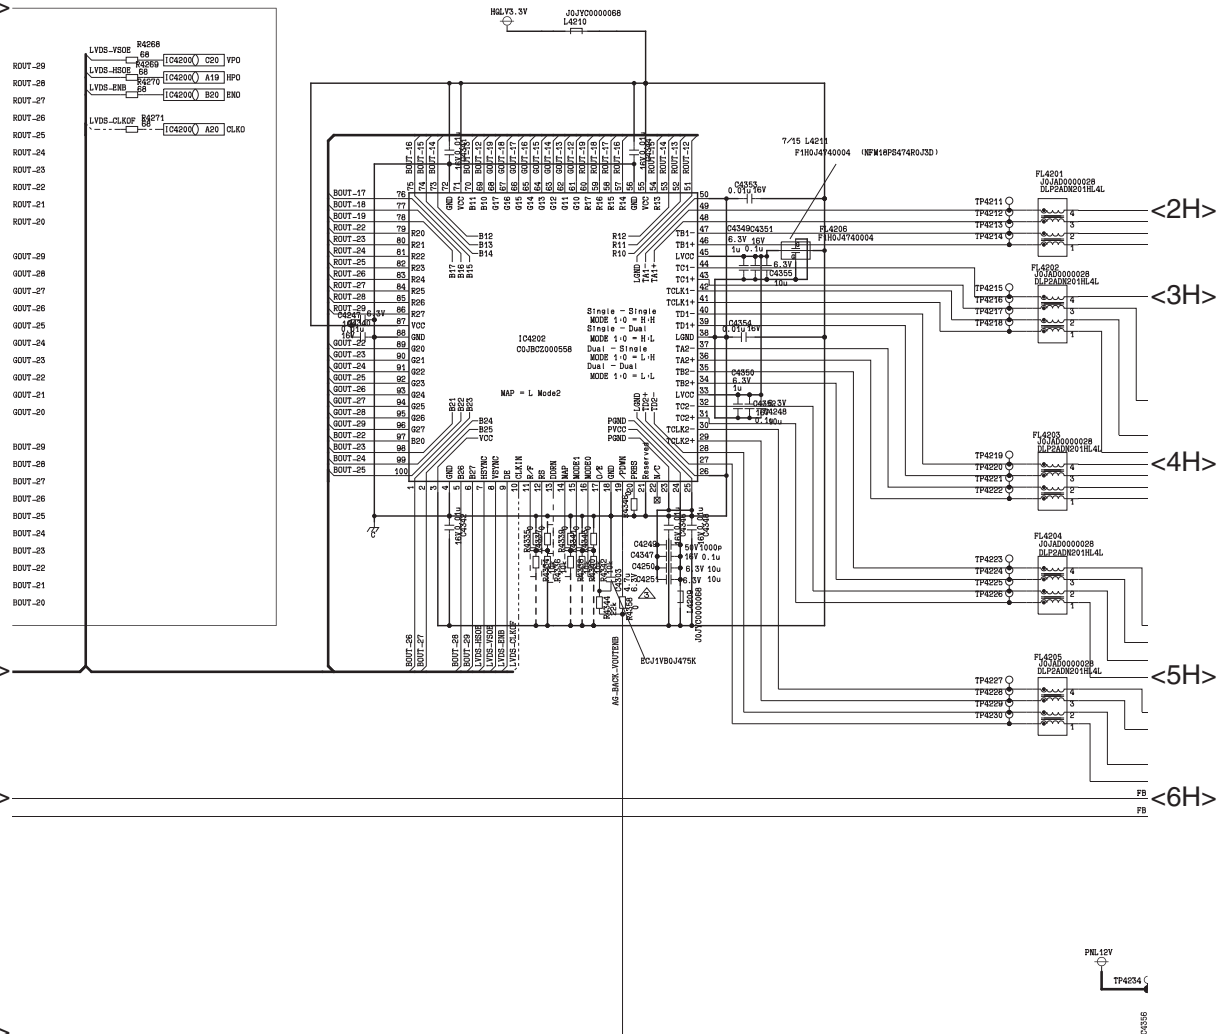


<4G>

<5G>


5.1.45. DG Board - Sheet : 010 (1 / 6)

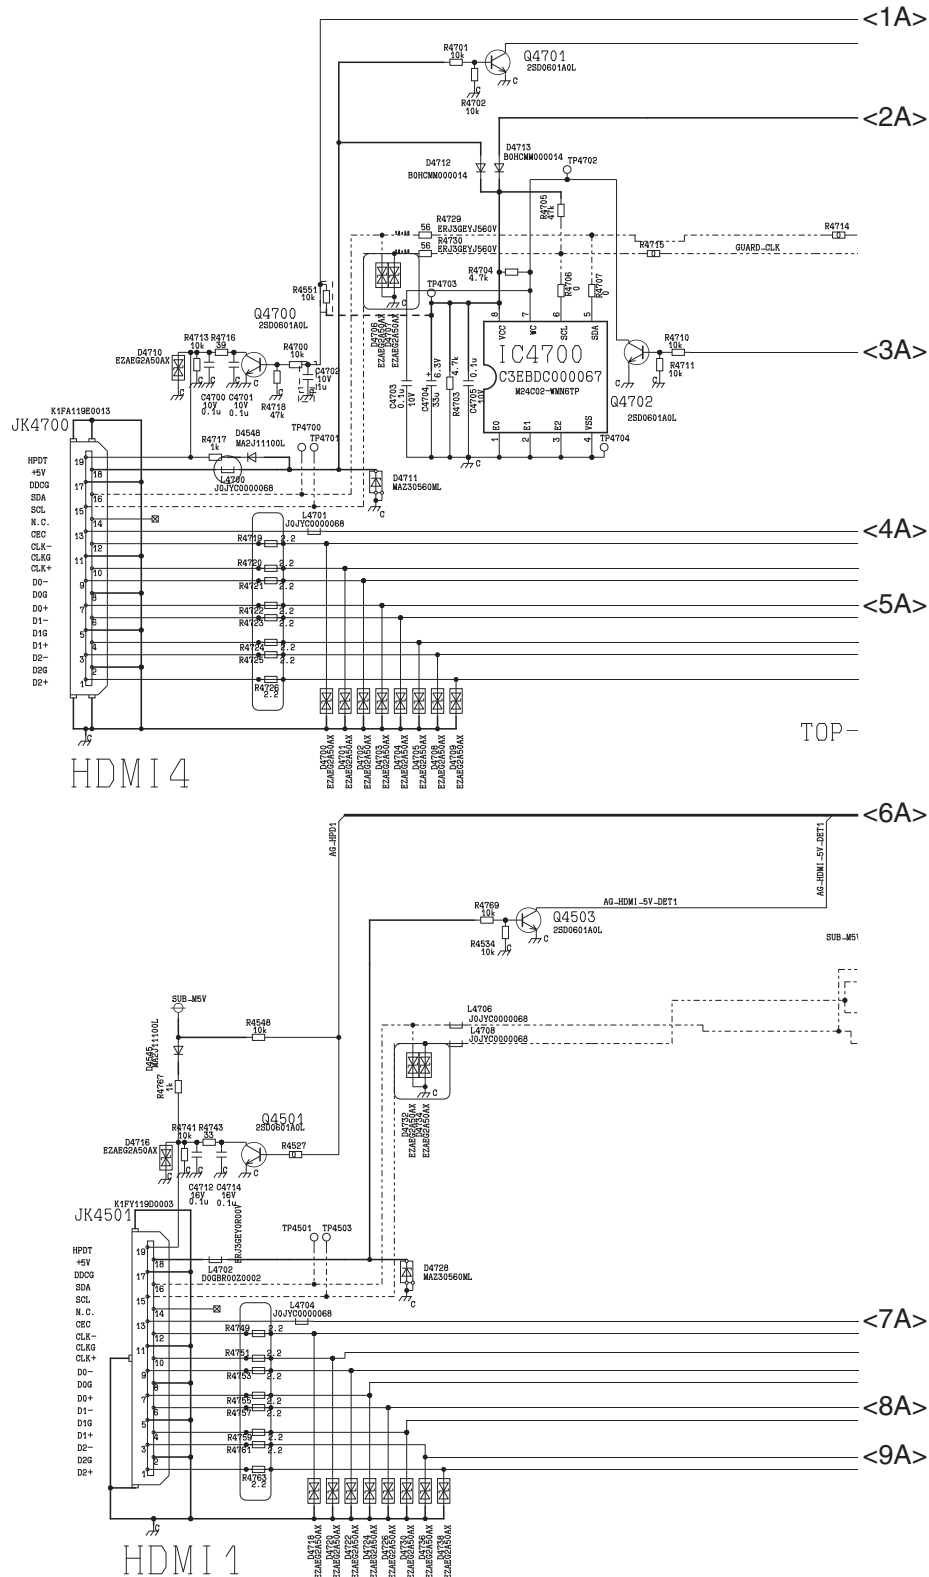


5.1.46. DG Board - Sheet : 010 (2 / 6)

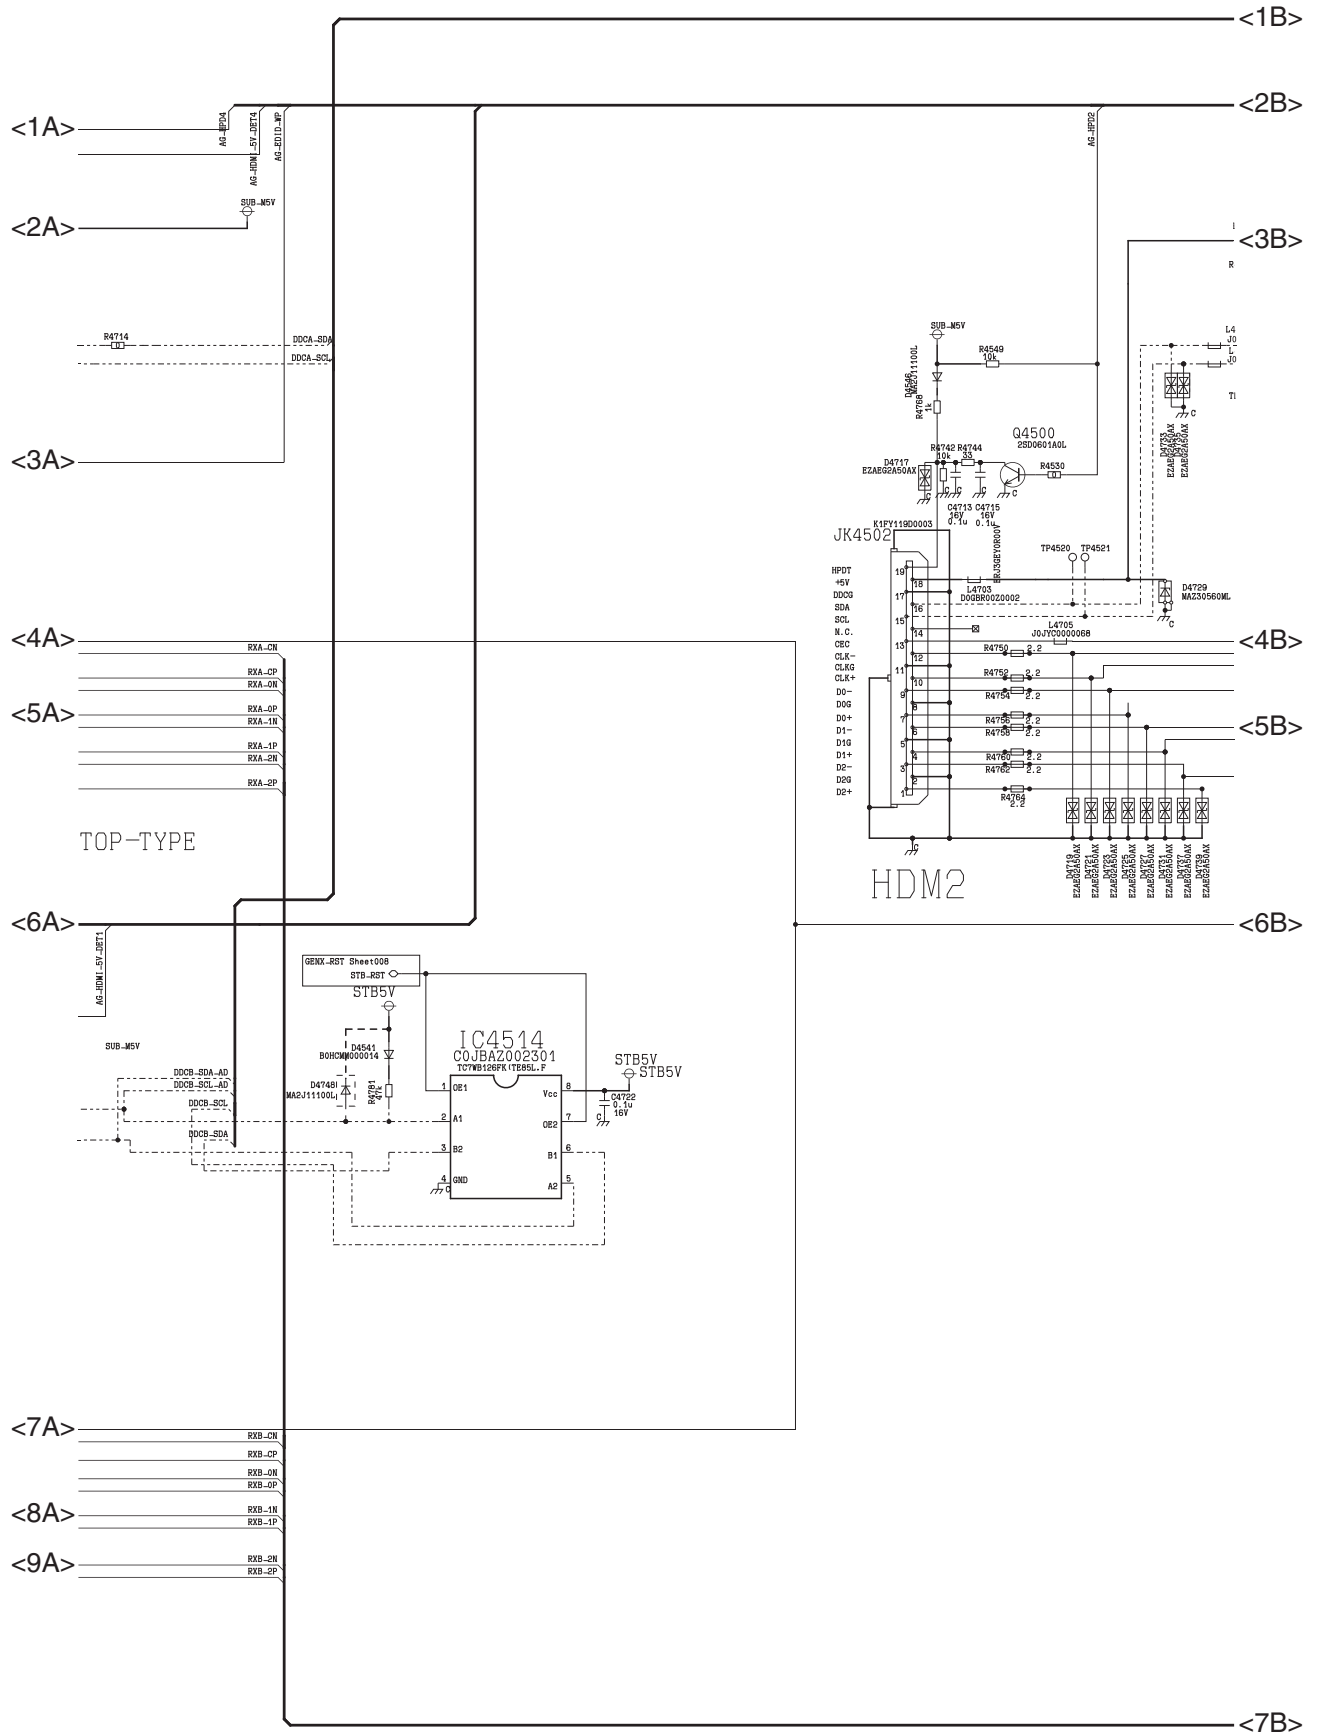


5.1.47. DG Board - Sheet : 010 (3 / 6)

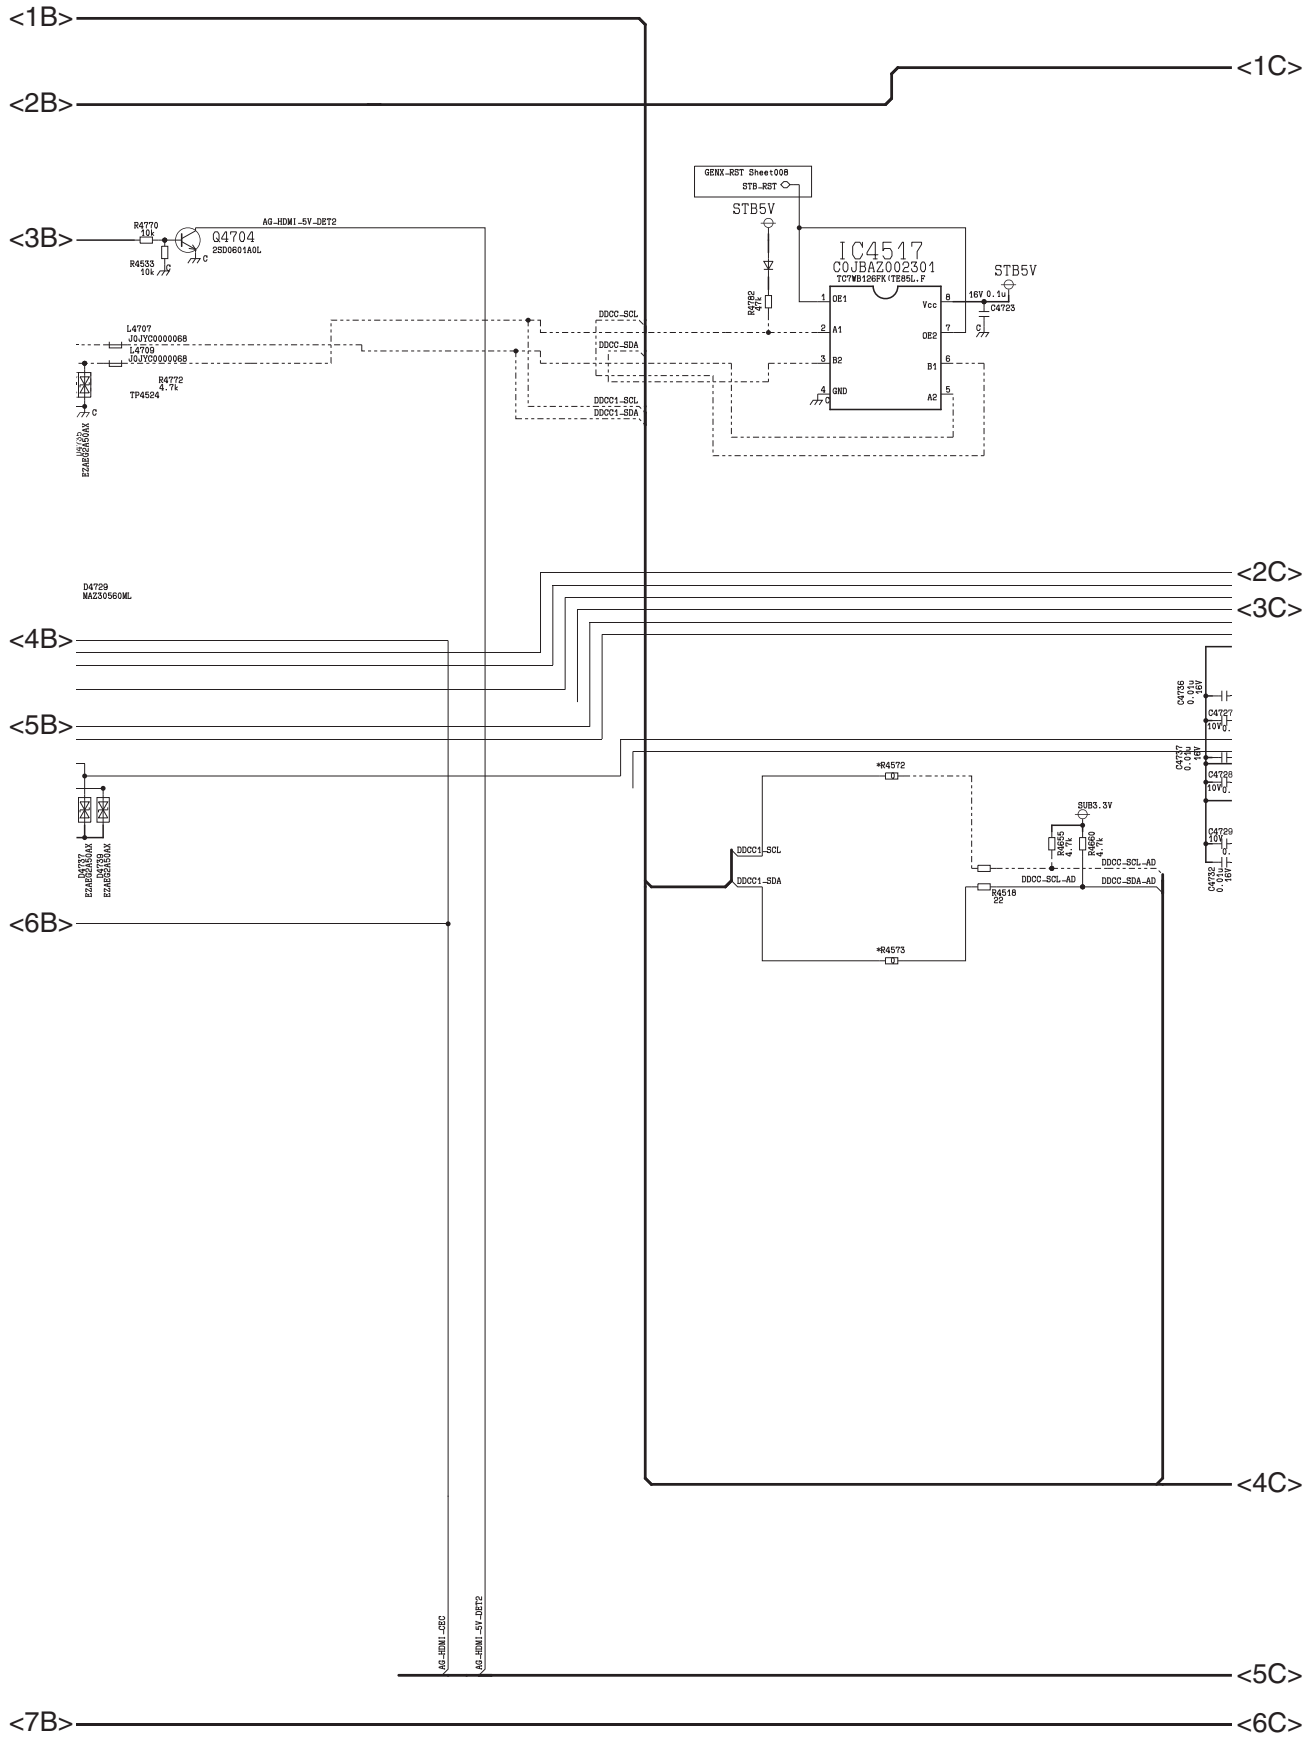


5.1.48. DG Board - Sheet : 010 (4 / 6)

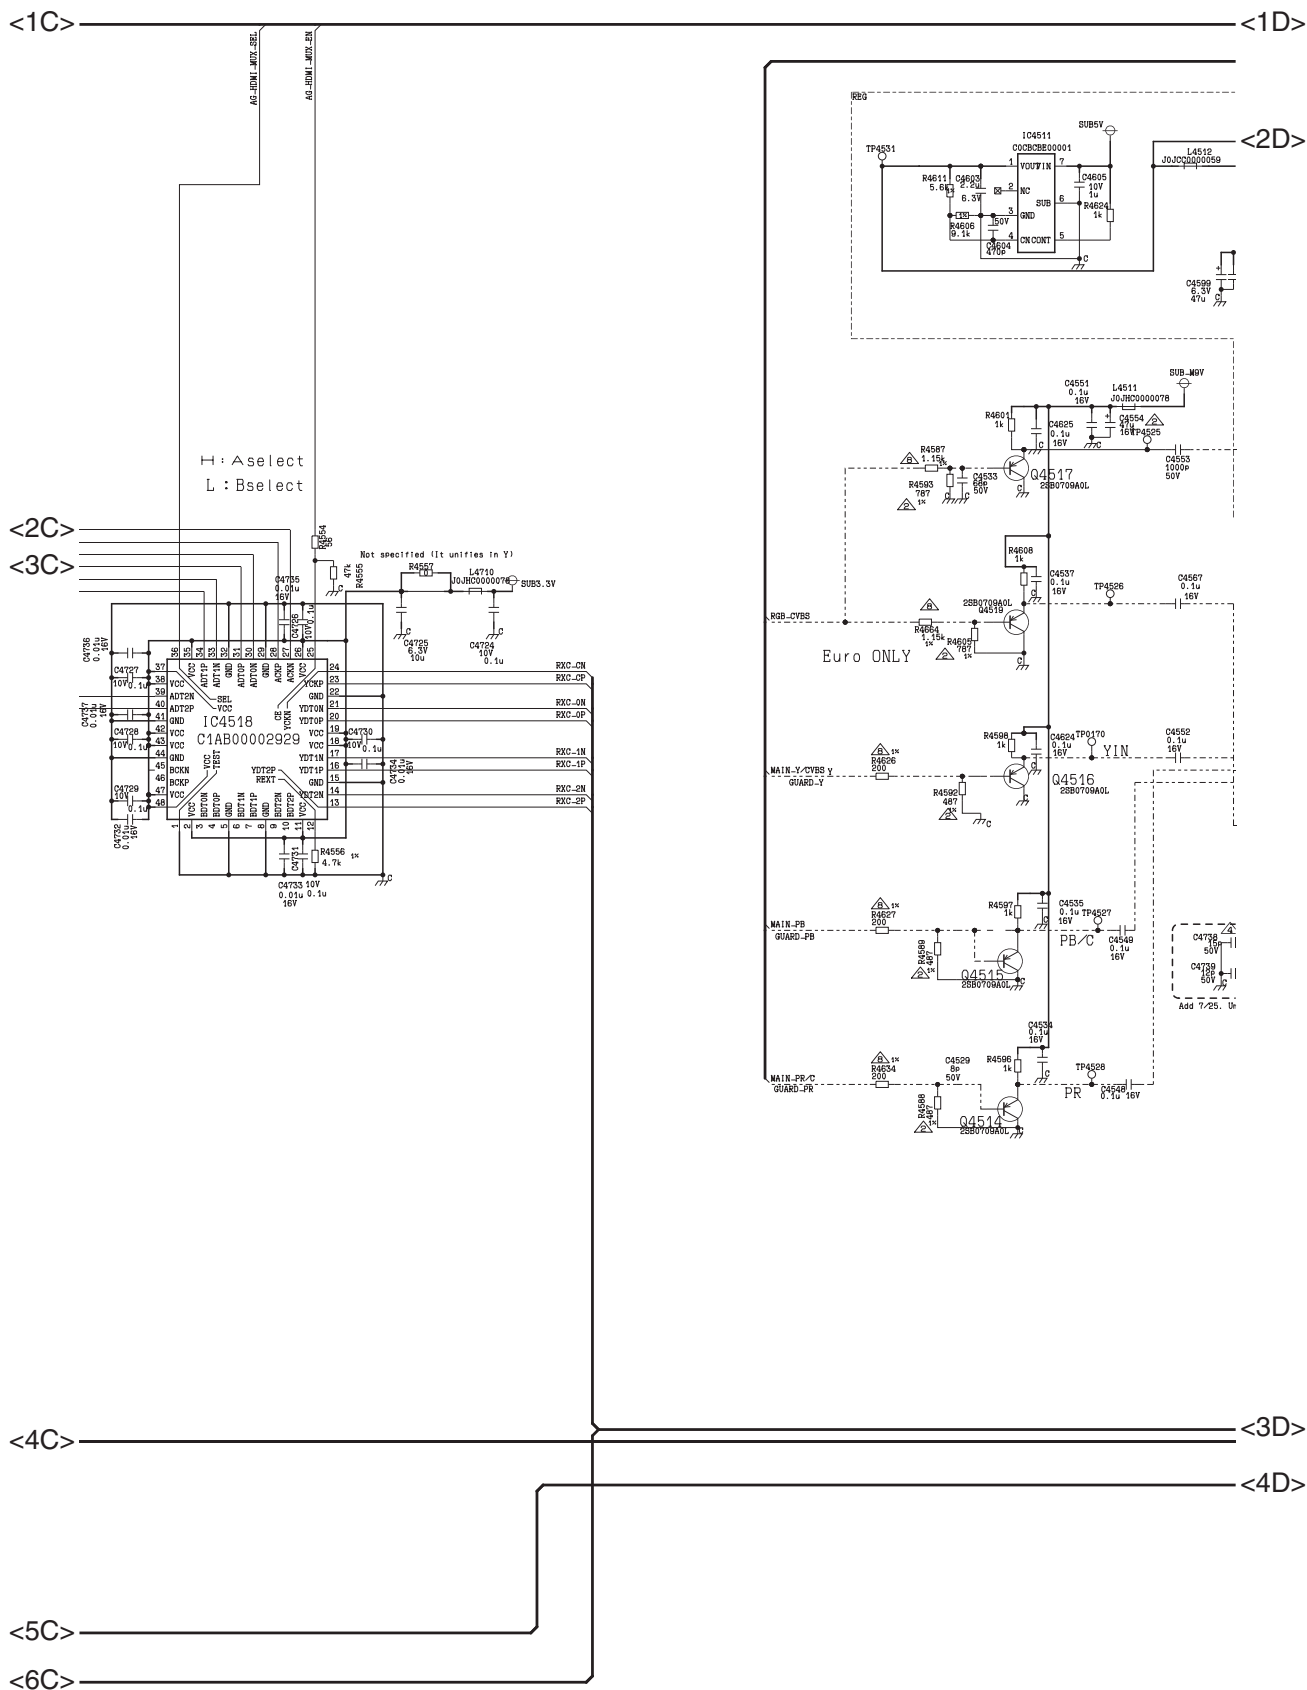


5.1.49. DG Board - Sheet : 010 (5 / 6)

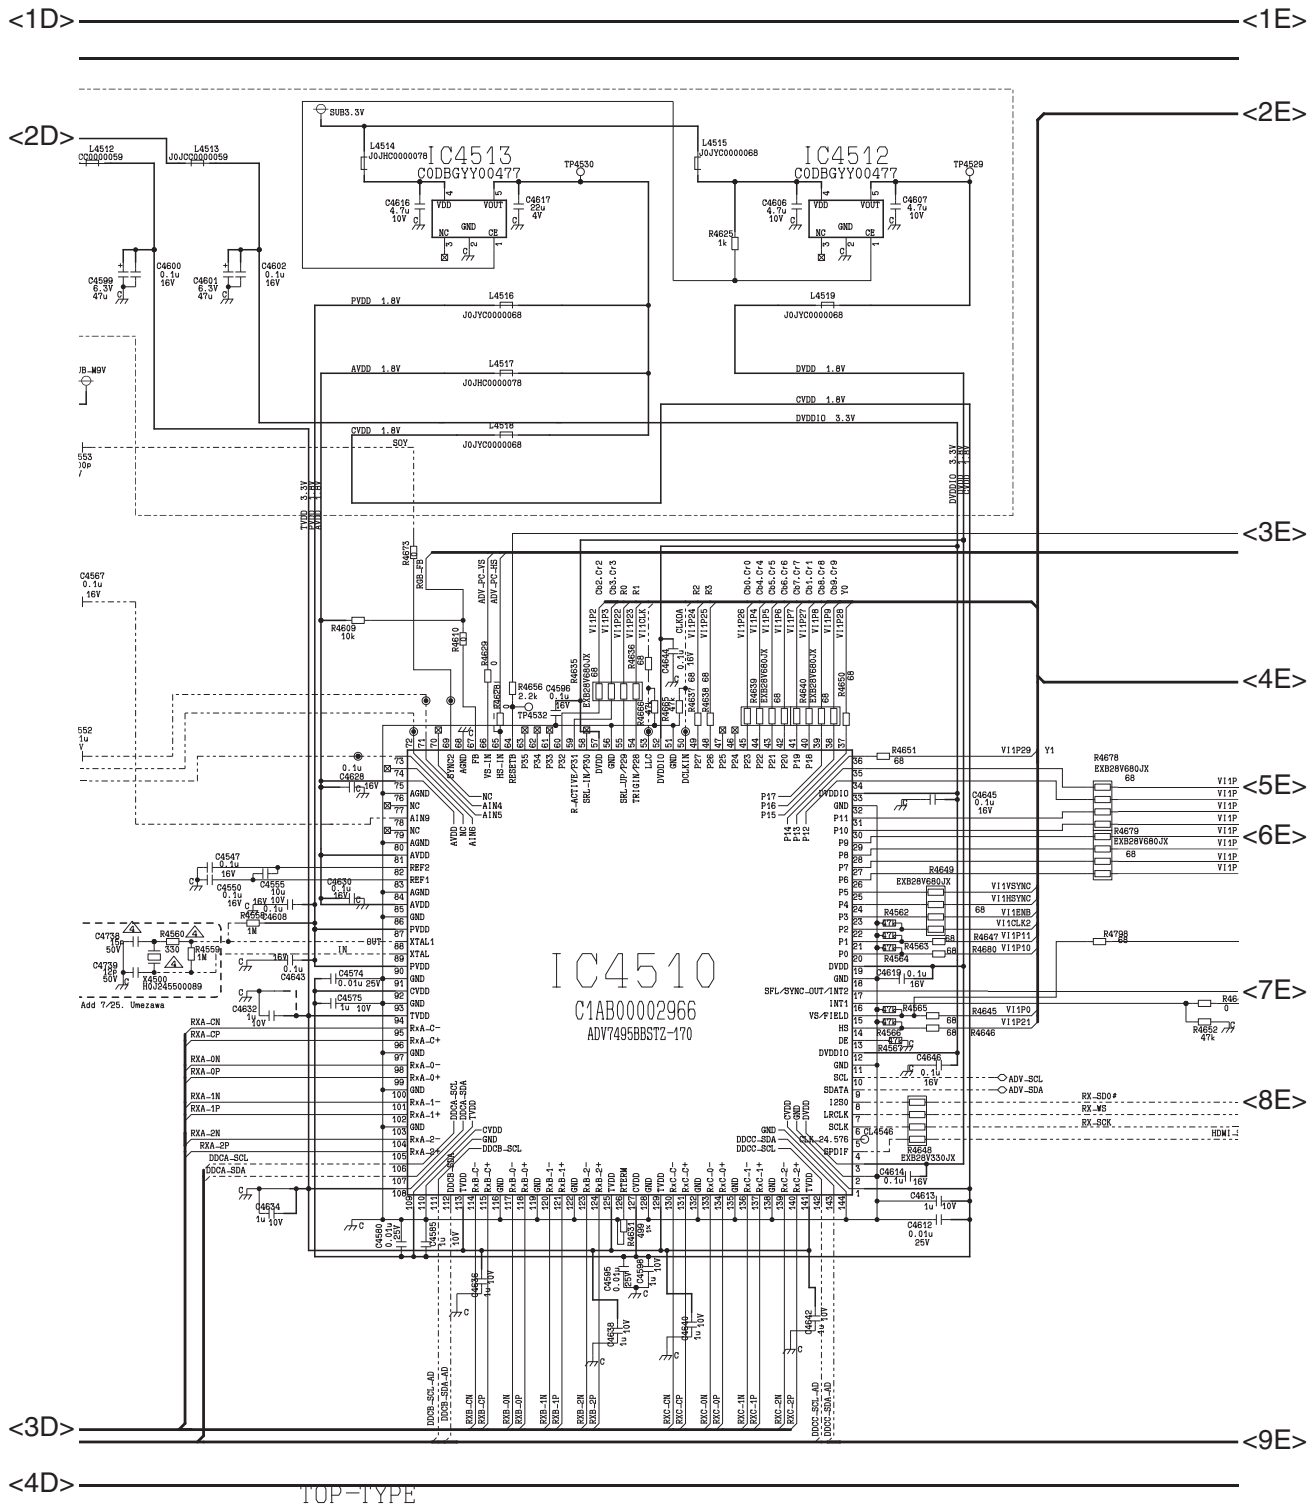



5.1.50. DG Board - Sheet : 010 (6 / 6)

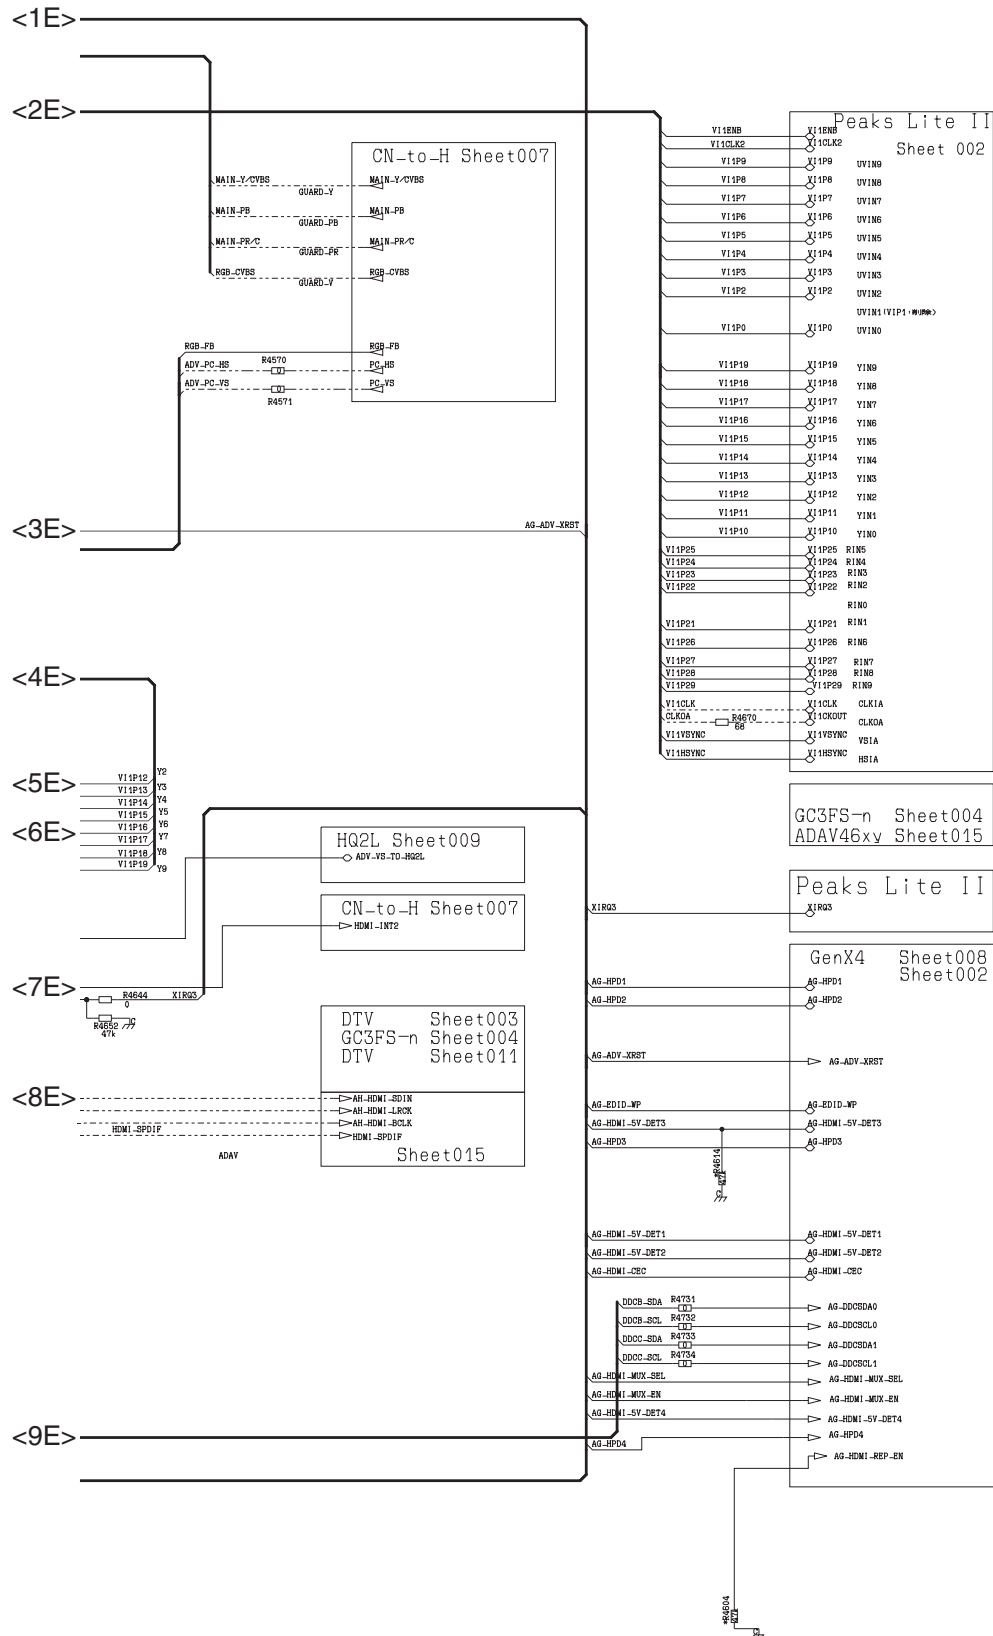


5.1.51. DG Board - Sheet : 011 (1 / 2)

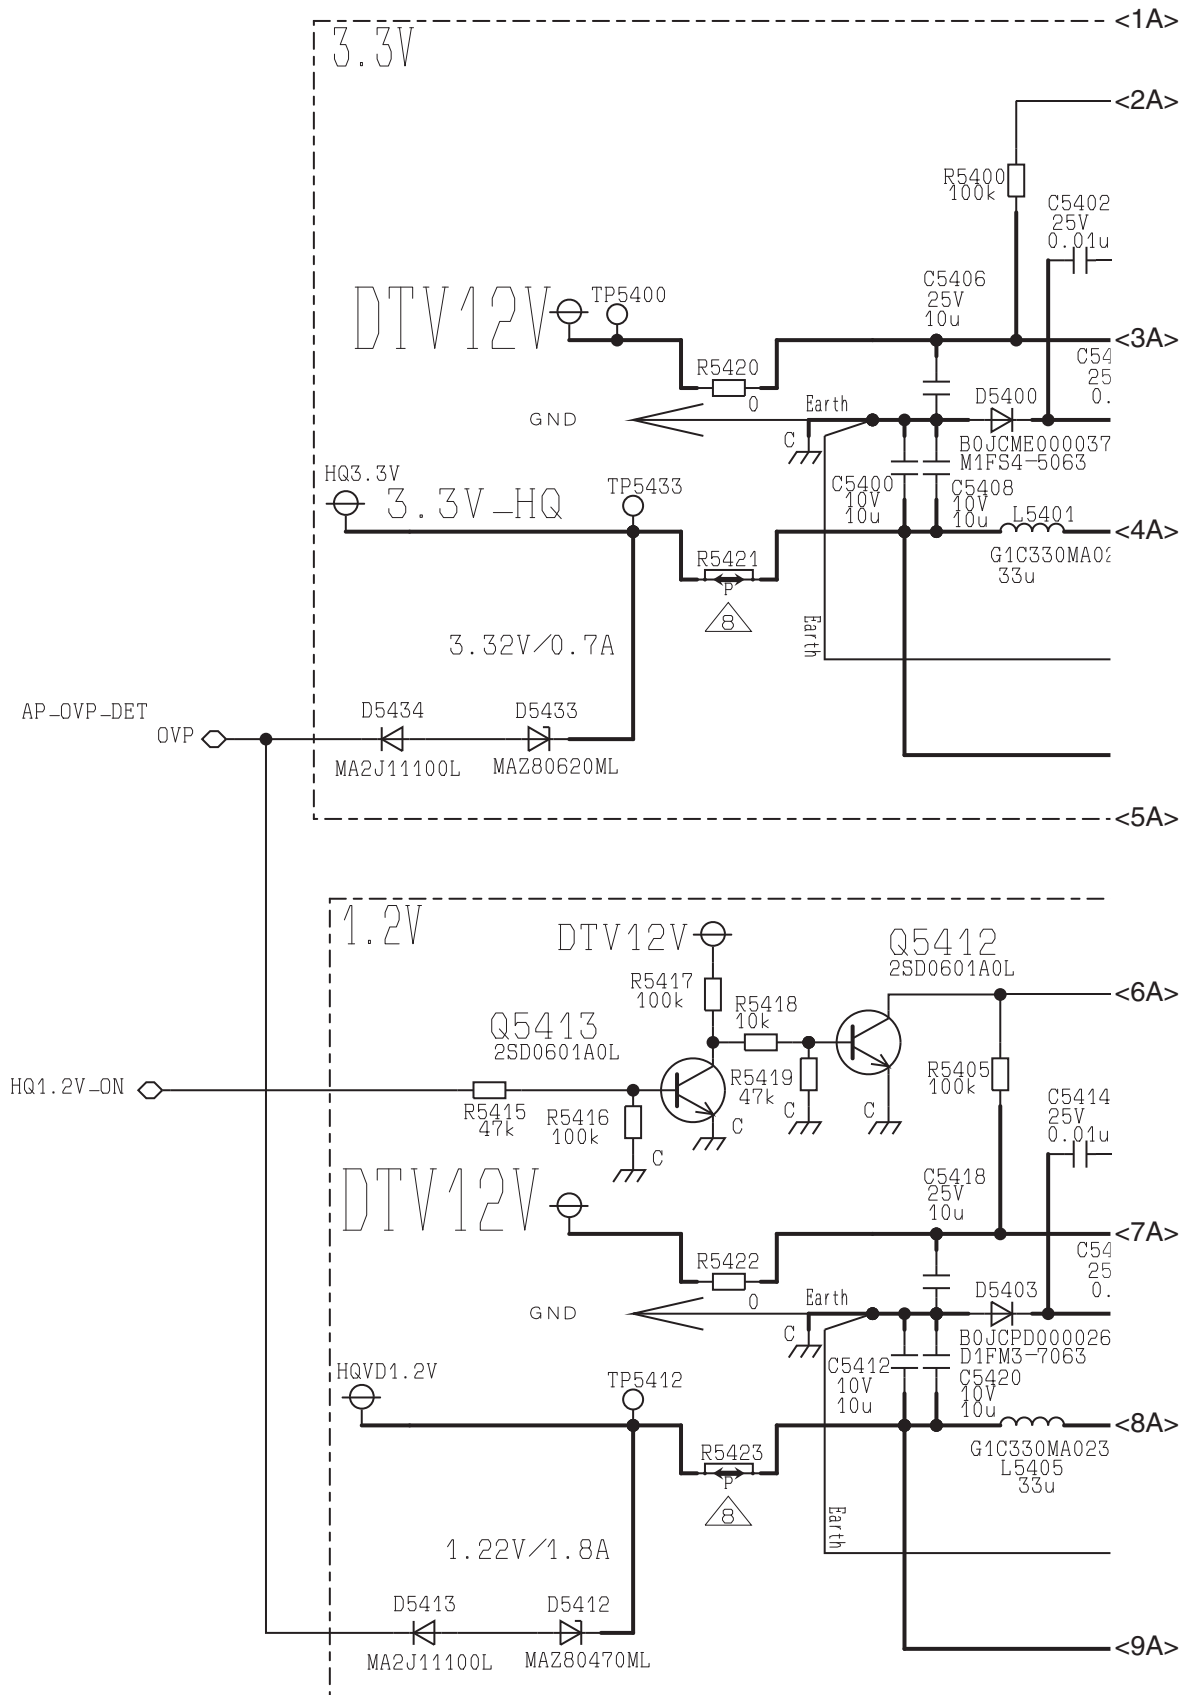


5.1.52. DG Board - Sheet : 011 (2 / 2)

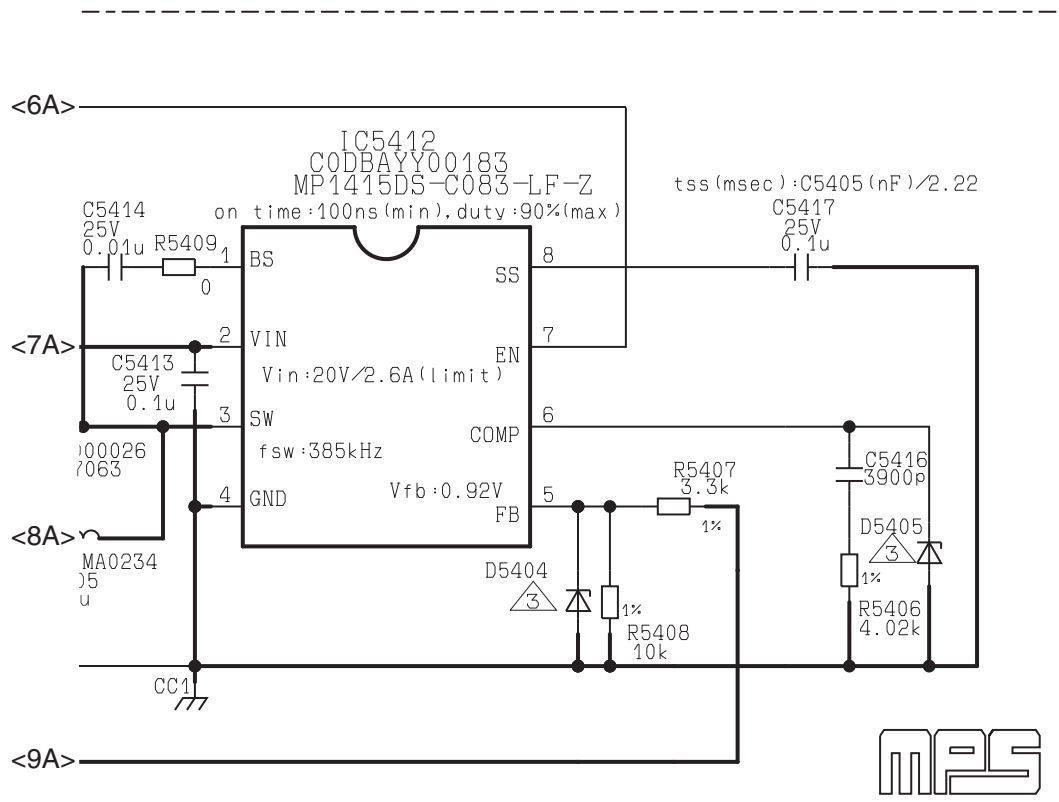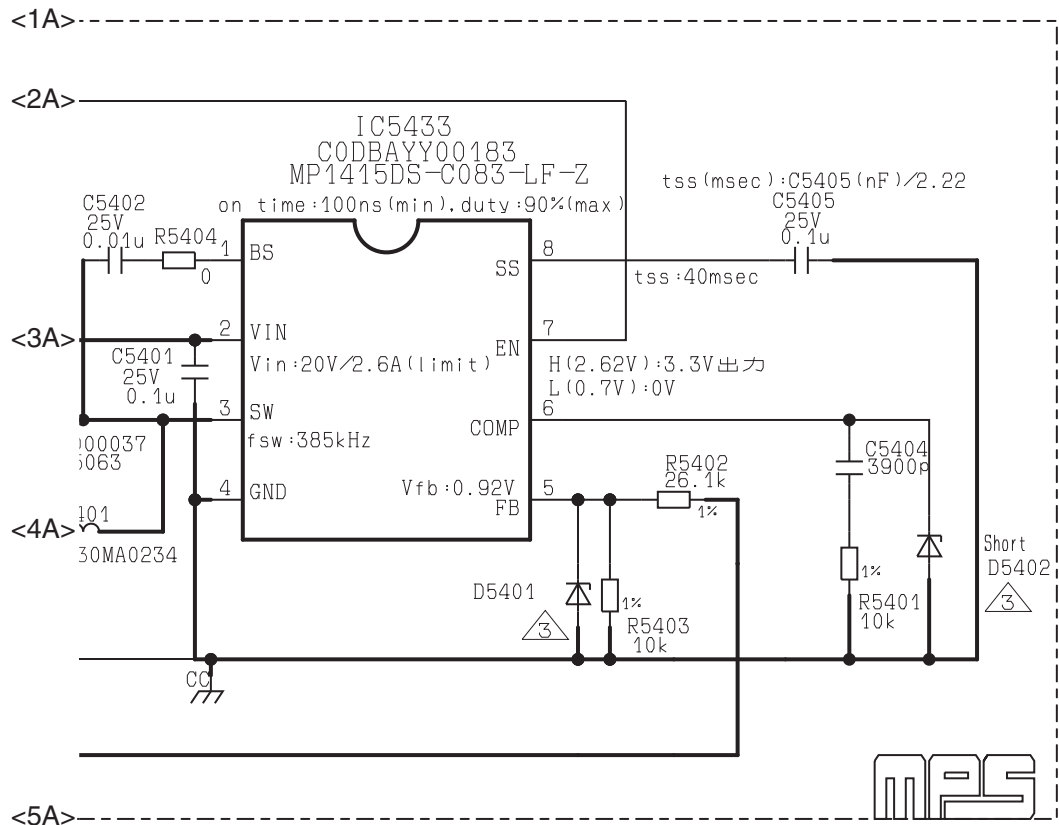

5.1.53. DG Board - Sheet : 012 (1 / 2)

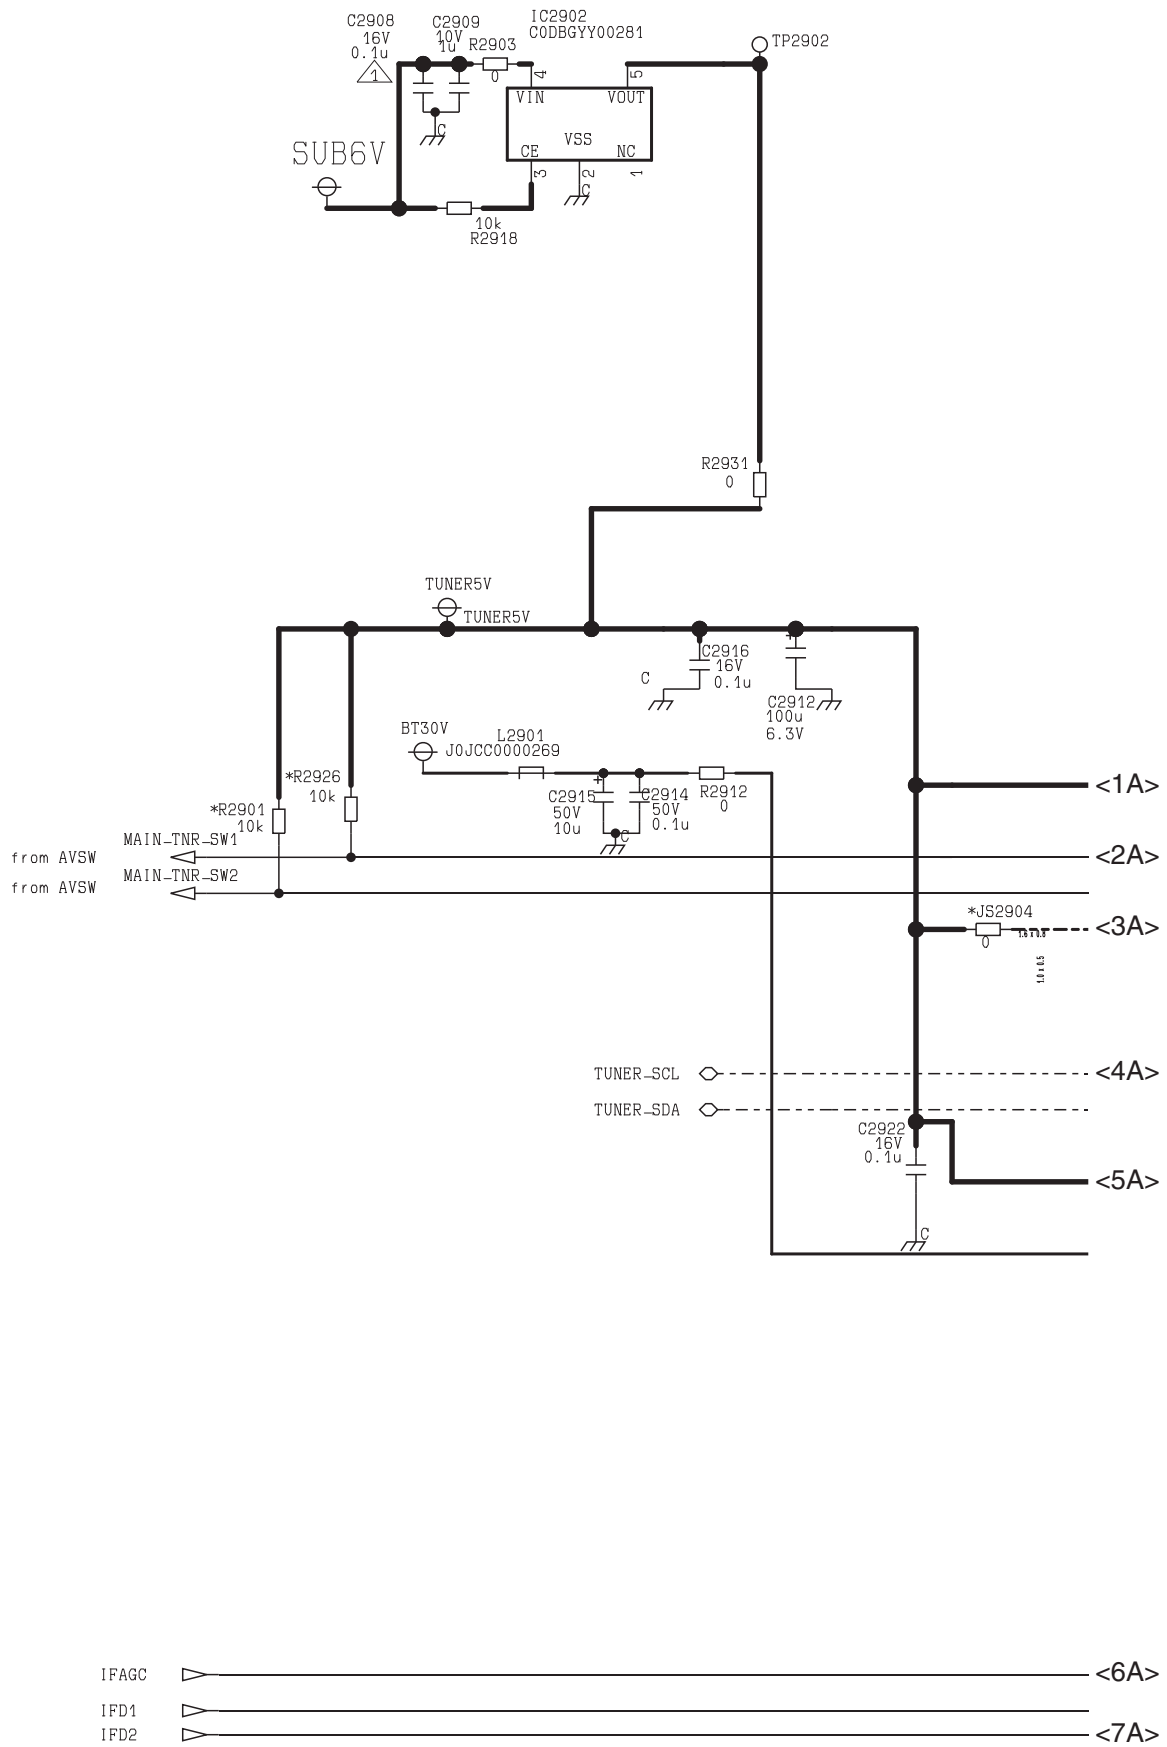


5.1.54. DG Board - Sheet : 012 (2 / 2)

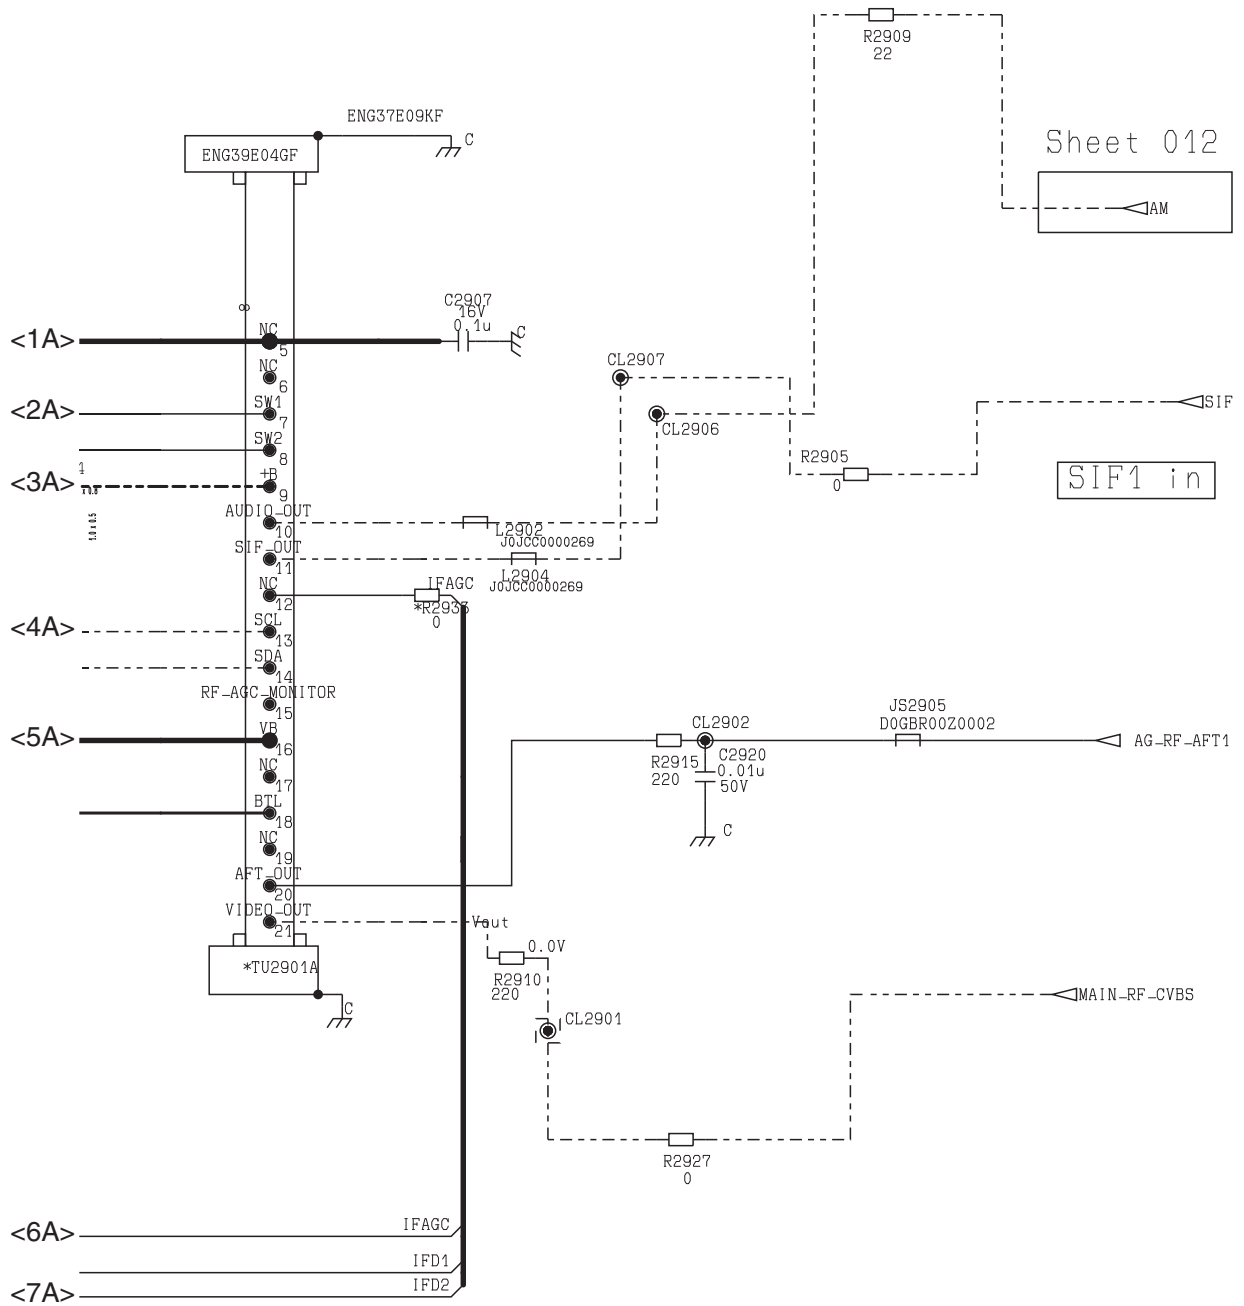


5.2. H Board

5.2.1. H Board - Sheet : 001 (1 / 5)

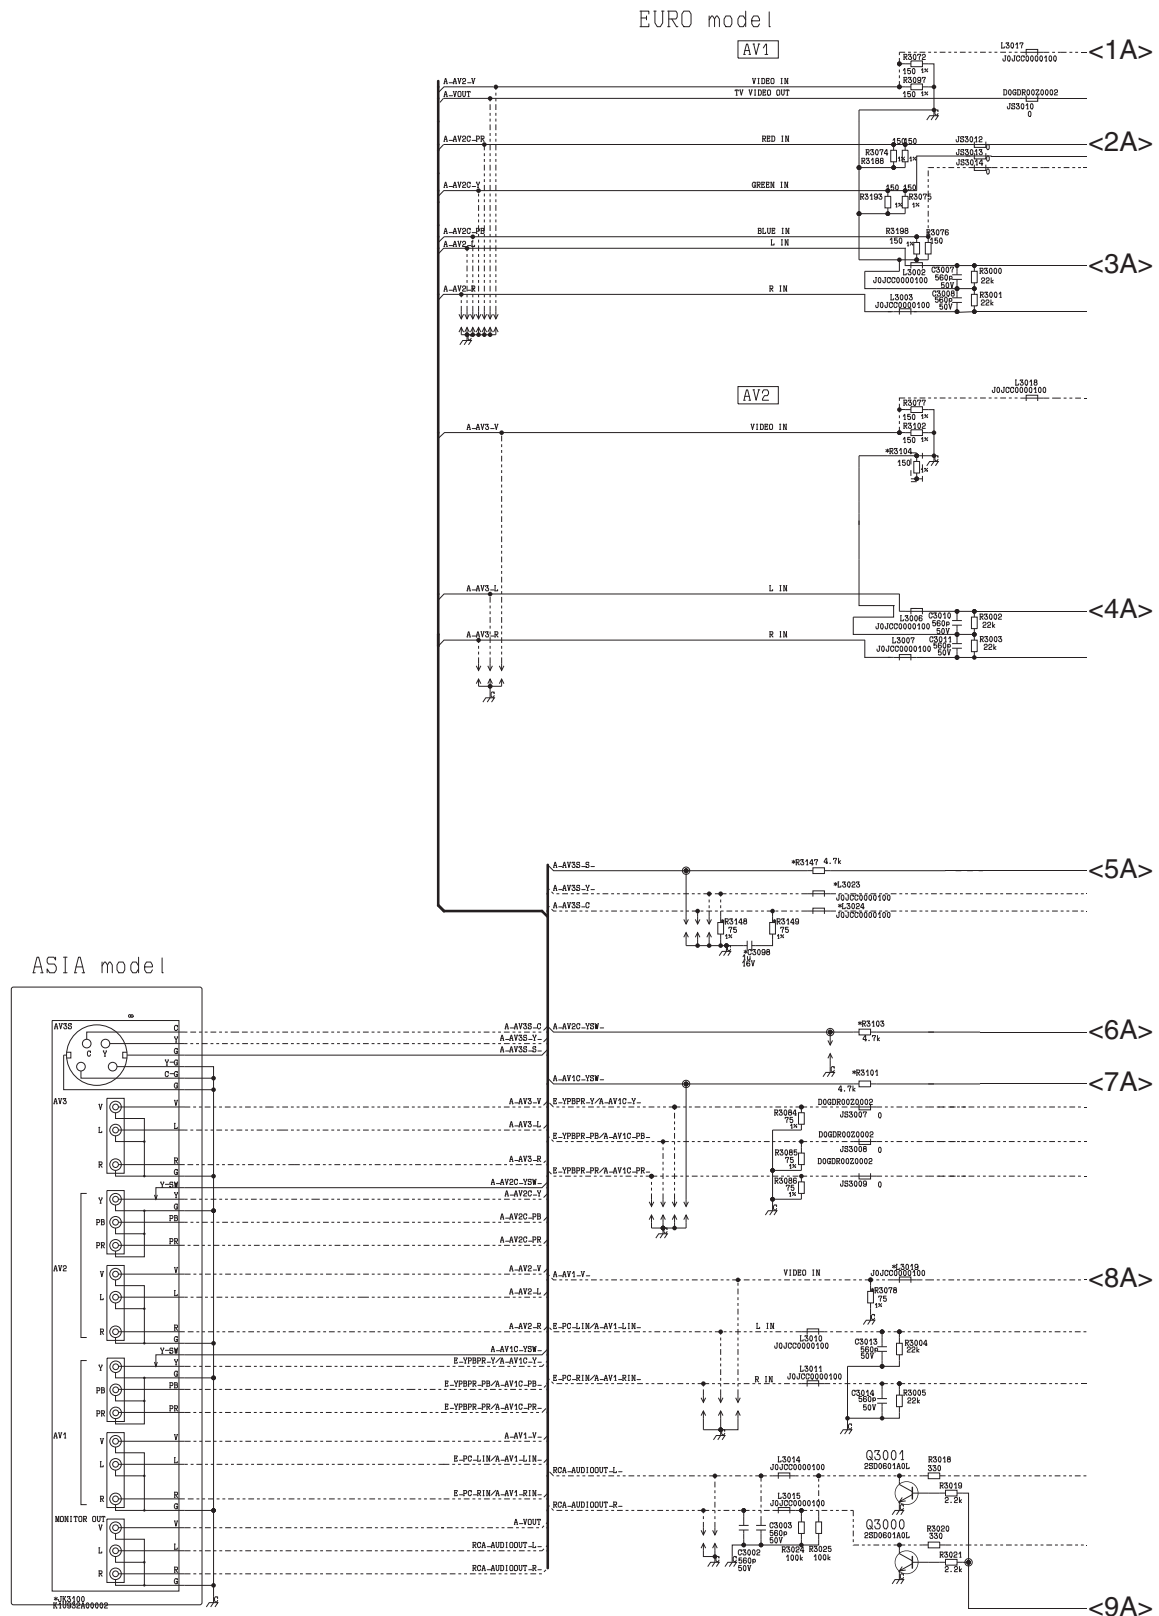


5.2.2. H Board - Sheet : 001 (2 / 5)

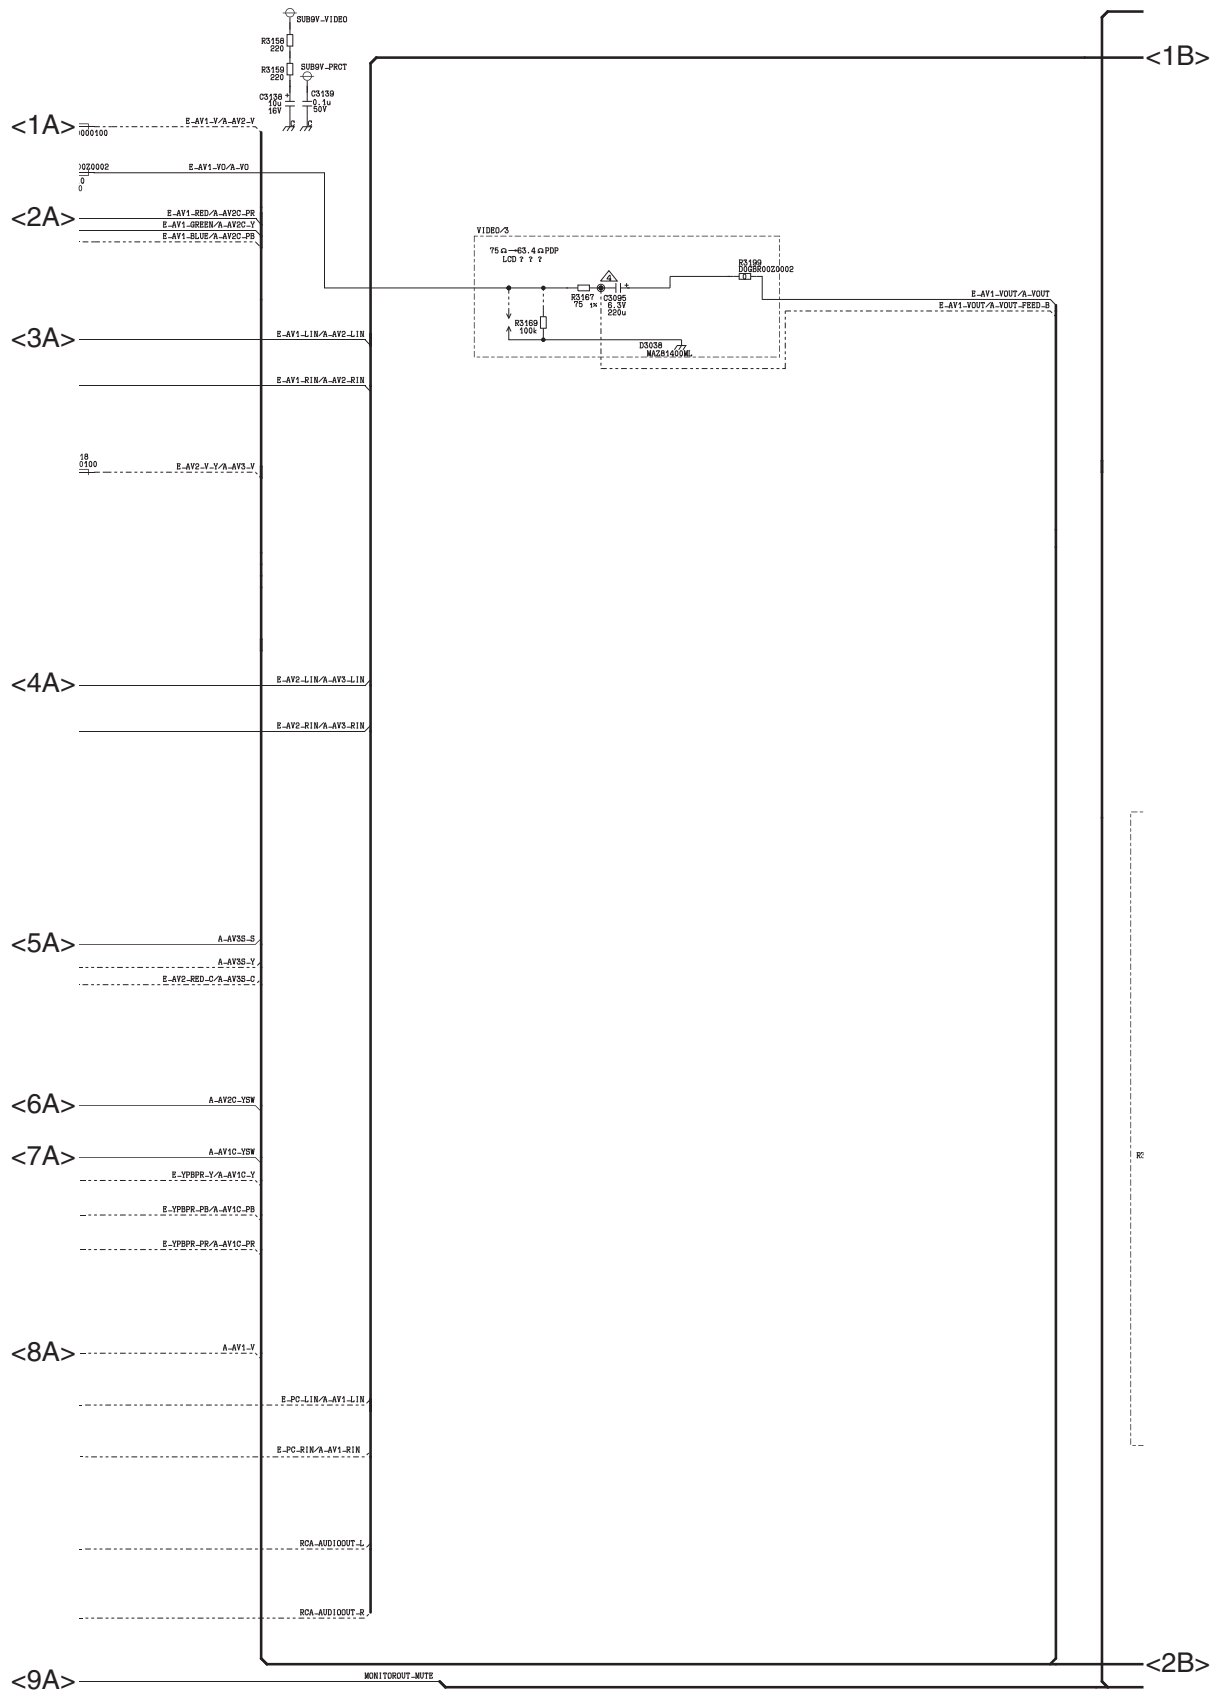





5.2.5. H Board - Sheet : 001 (5 / 5)

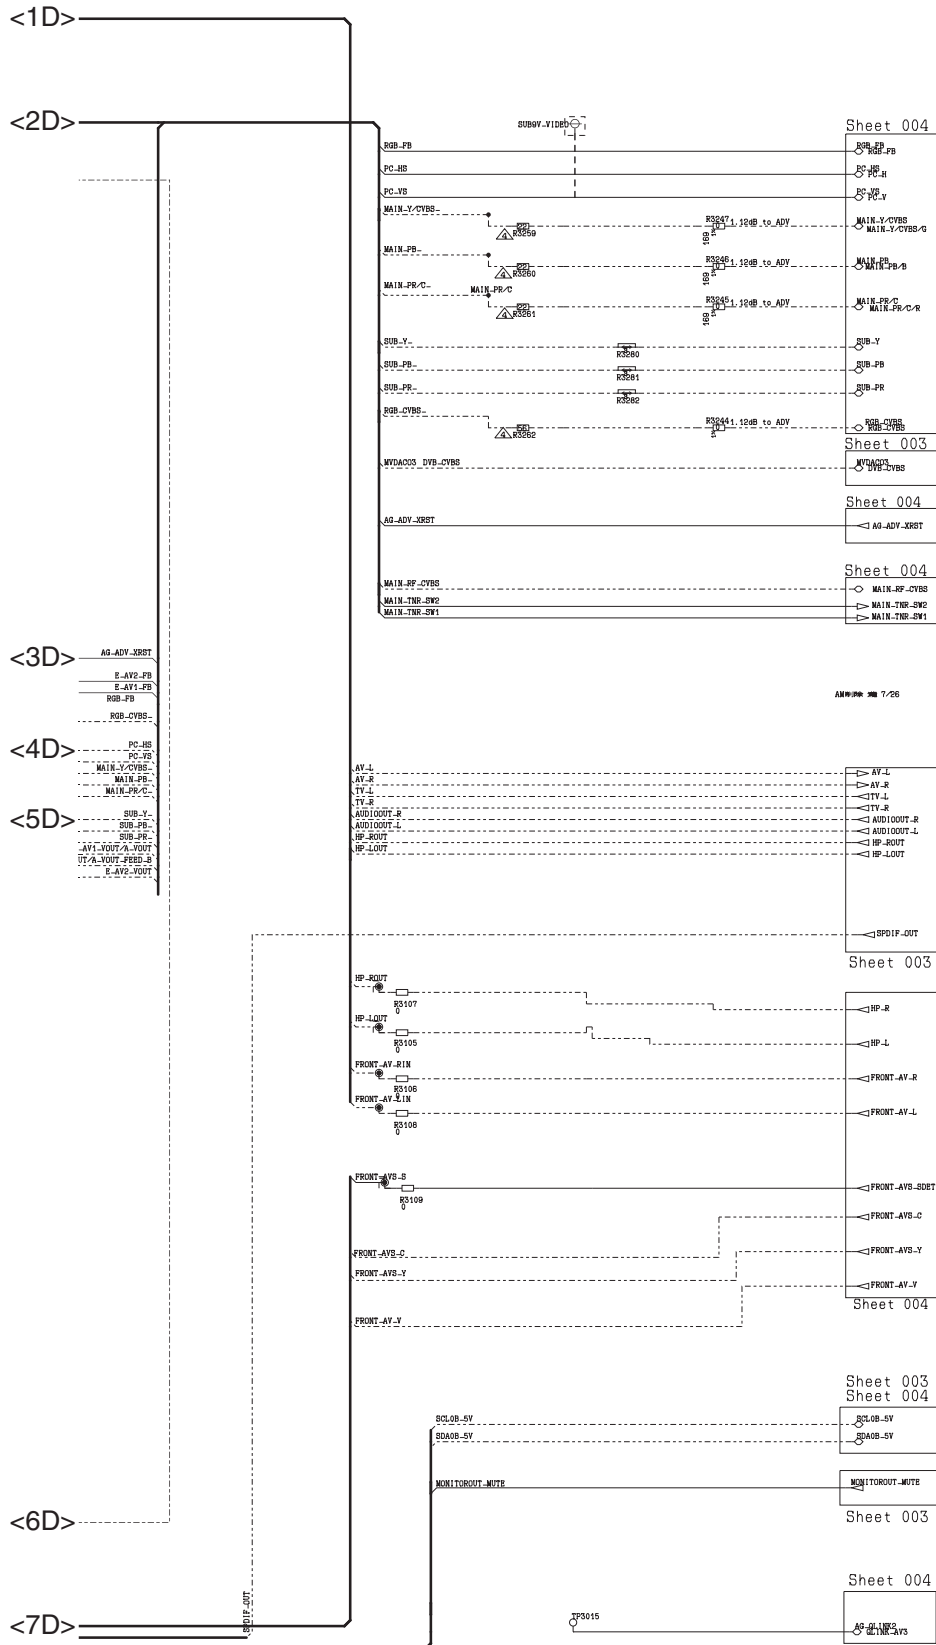


5.2.6. H Board - Sheet : 002 (1 / 5)

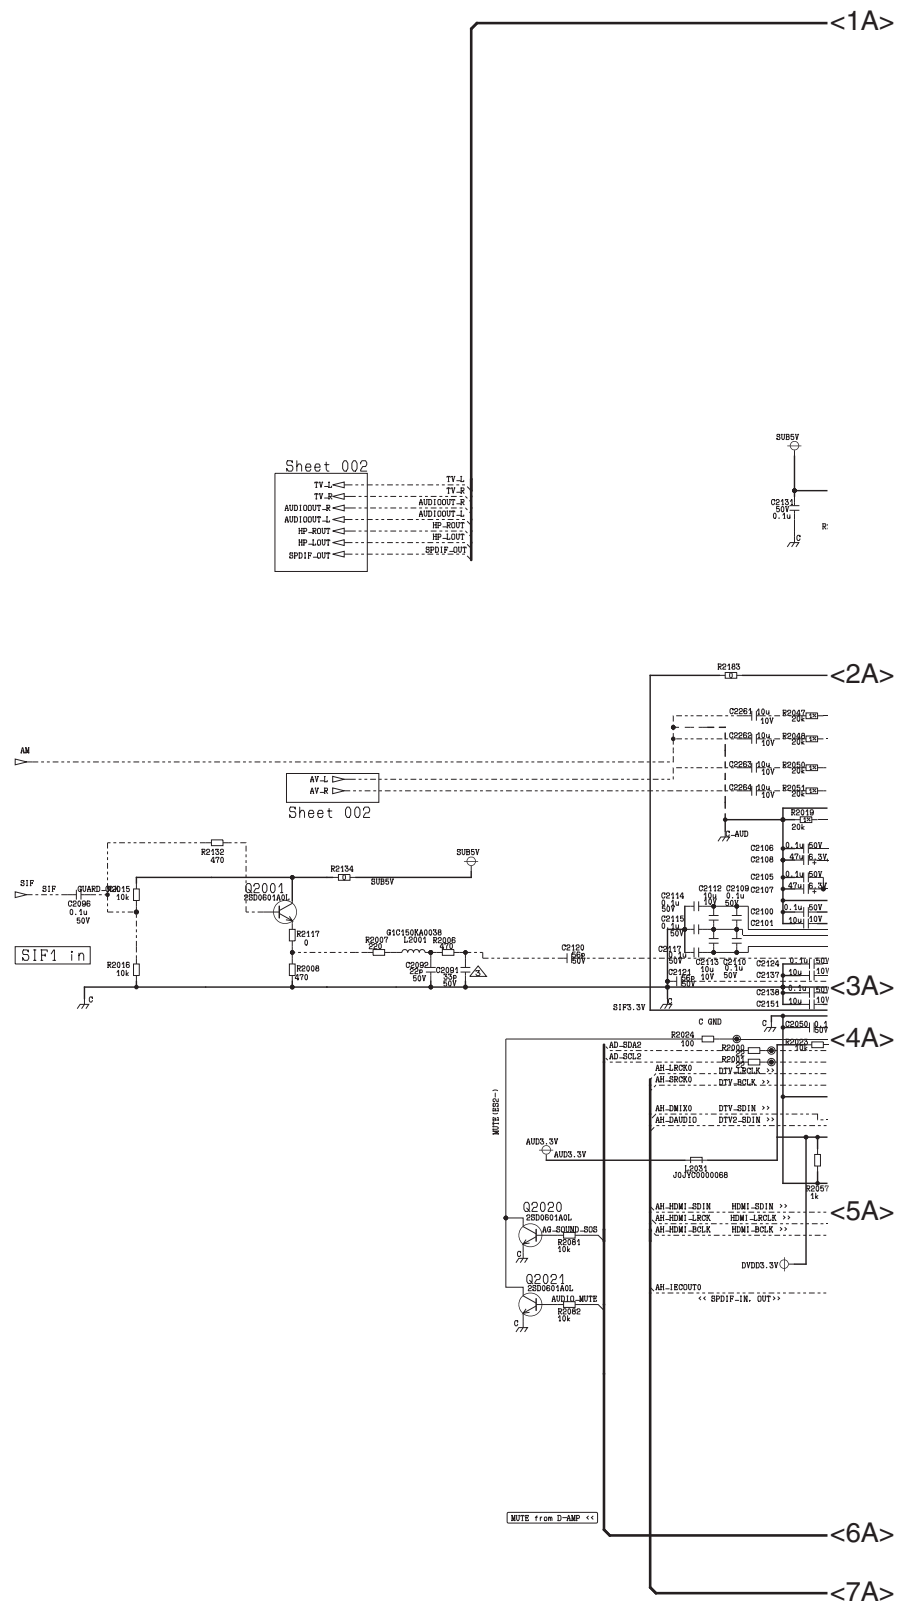


5.2.7. H Board - Sheet : 002 (2 / 5)

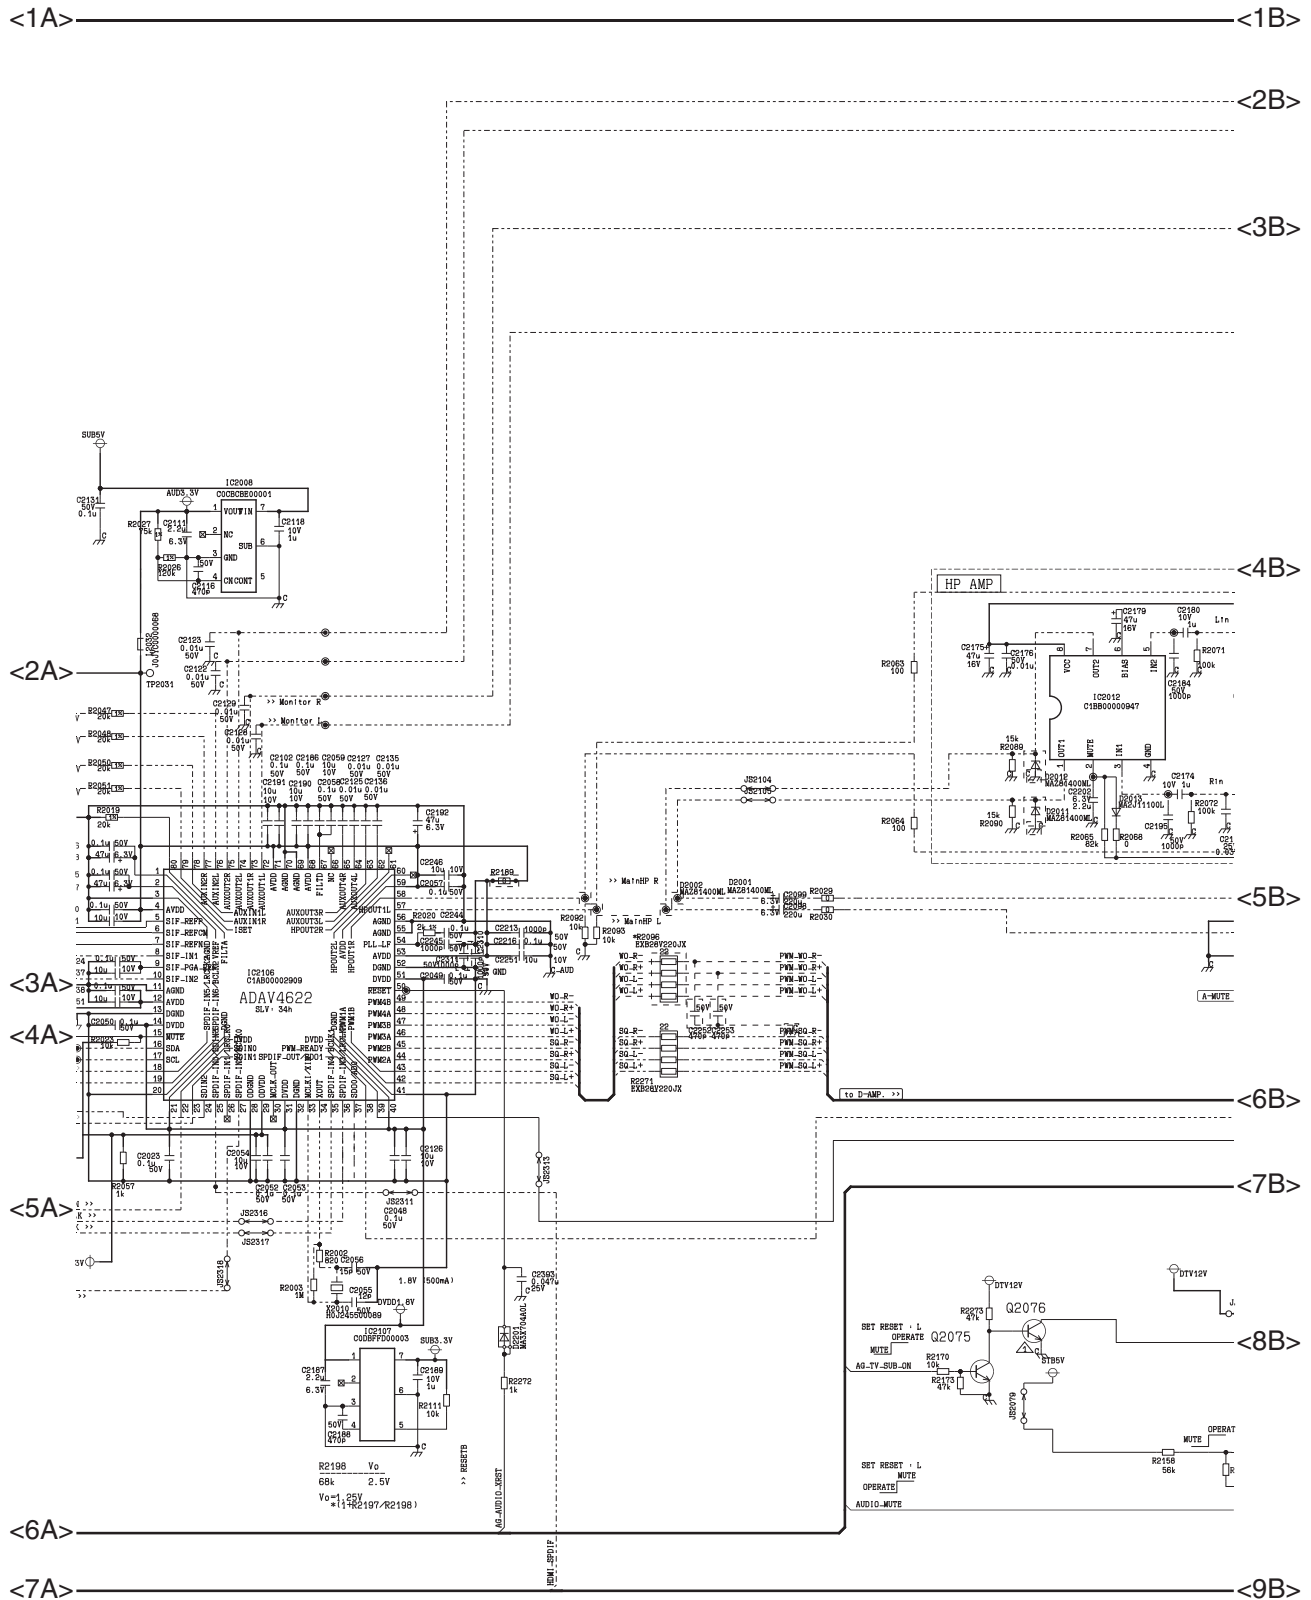


5.2.9. H Board - Sheet : 002 (4 / 5)

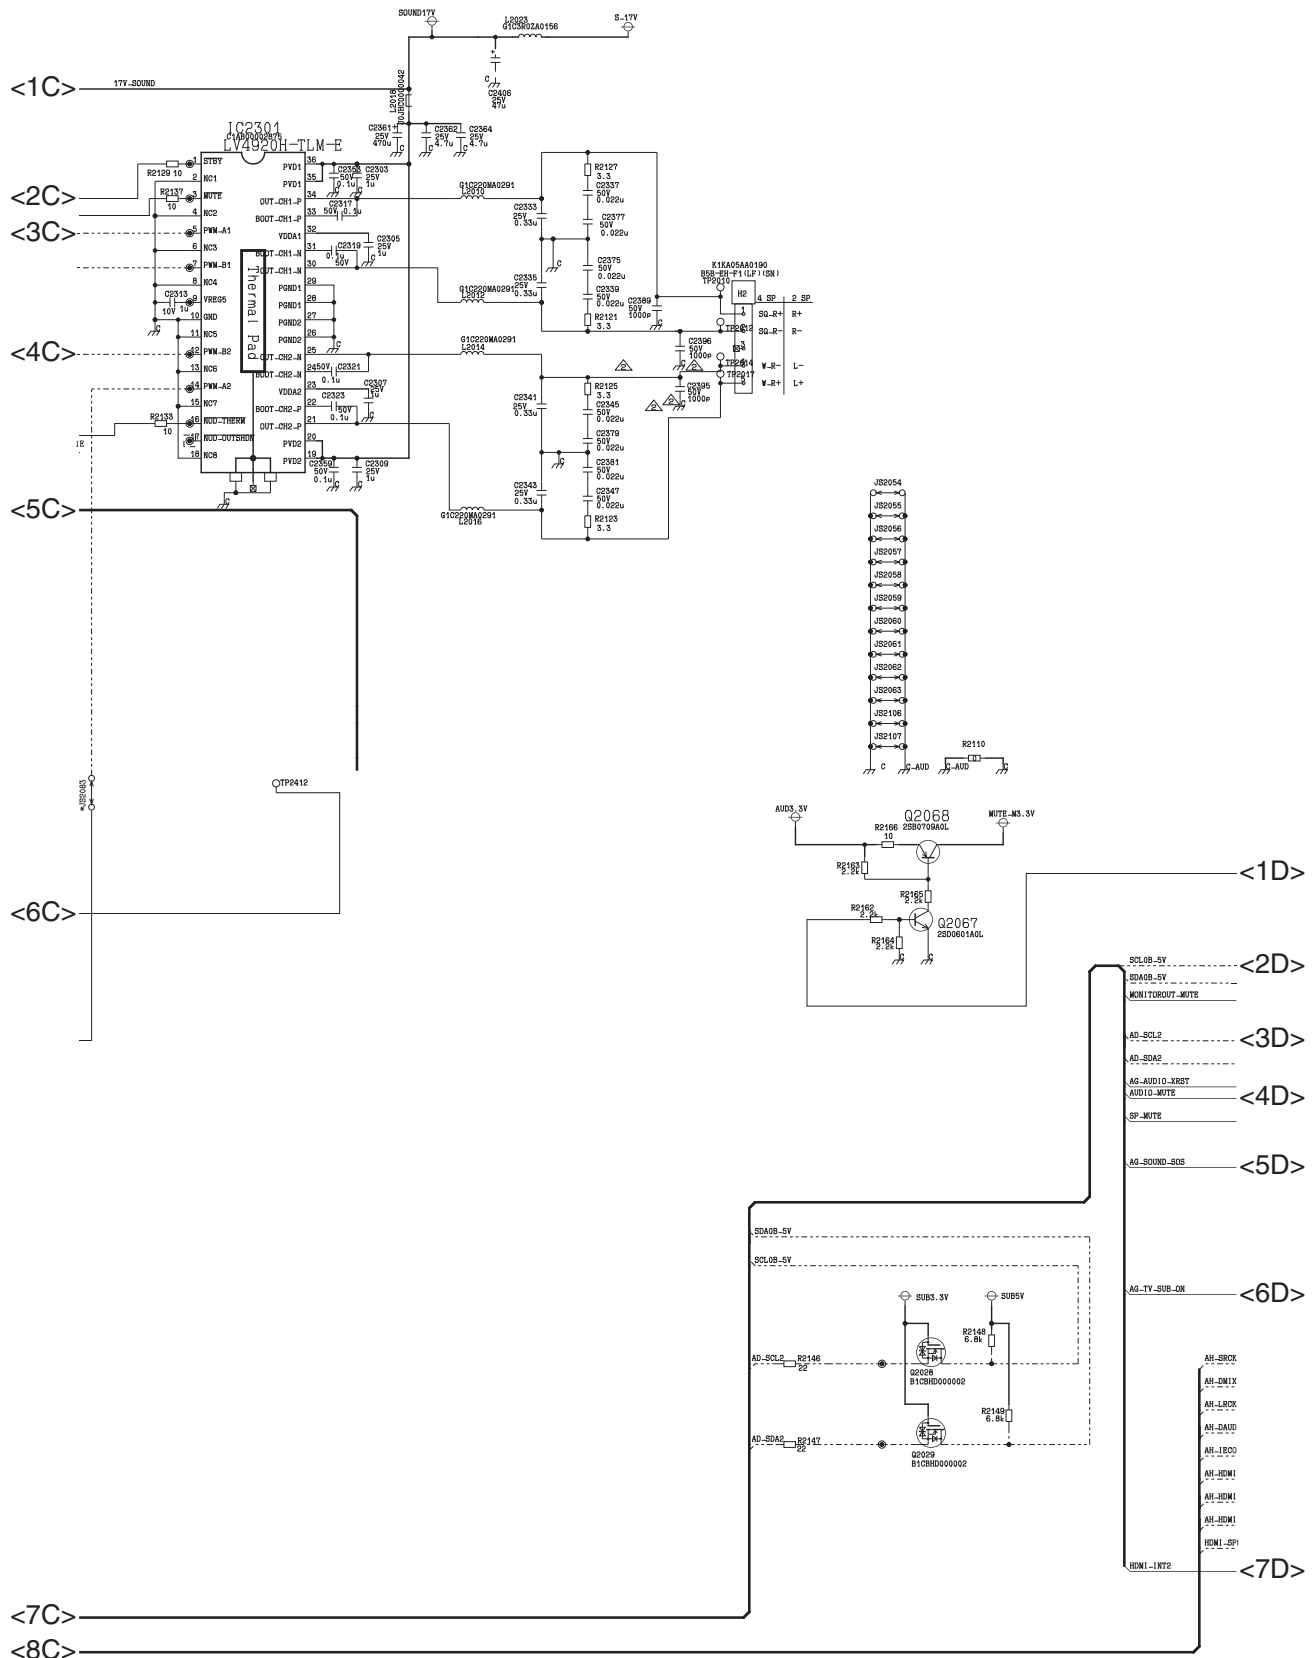

5.2.10. H Board - Sheet : 002 (5 / 5)

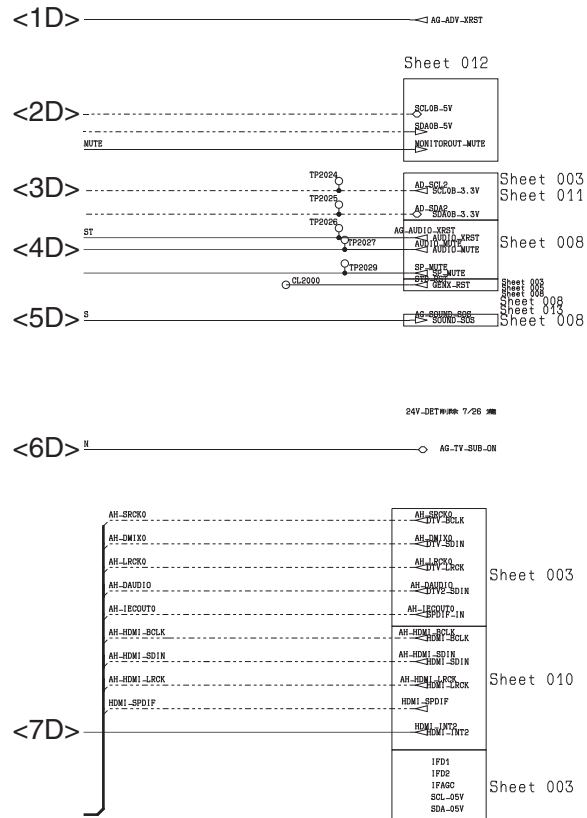


5.2.11. H Board - Sheet : 003 (1 / 3)

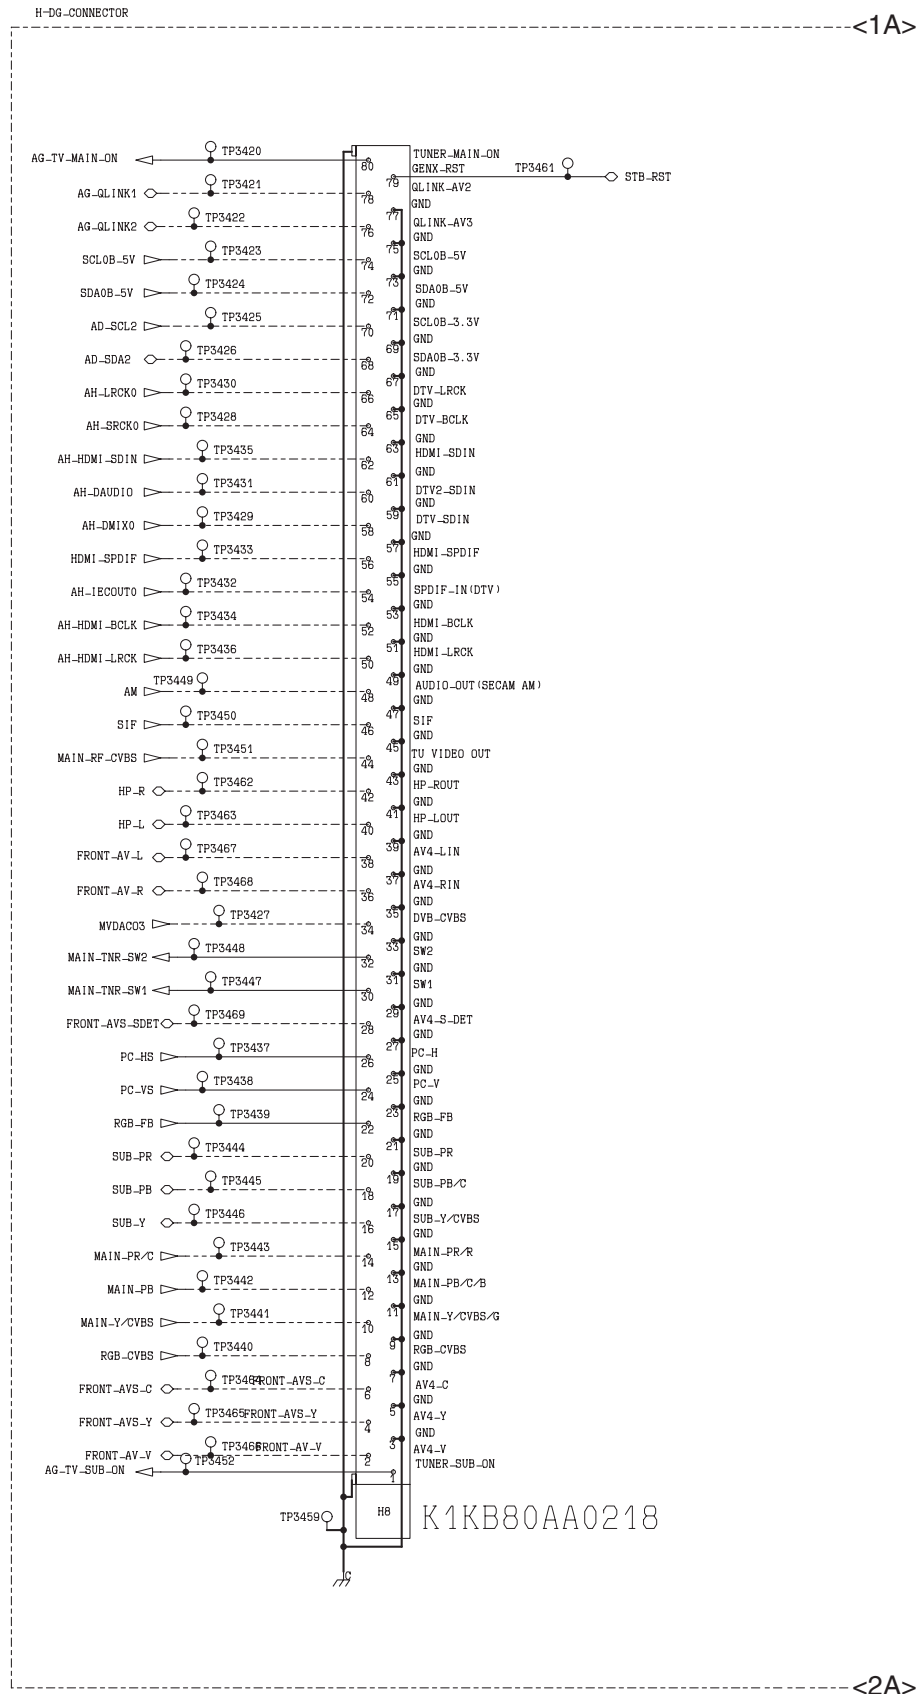


5.2.12. H Board - Sheet : 003 (2 / 3)

<1A>

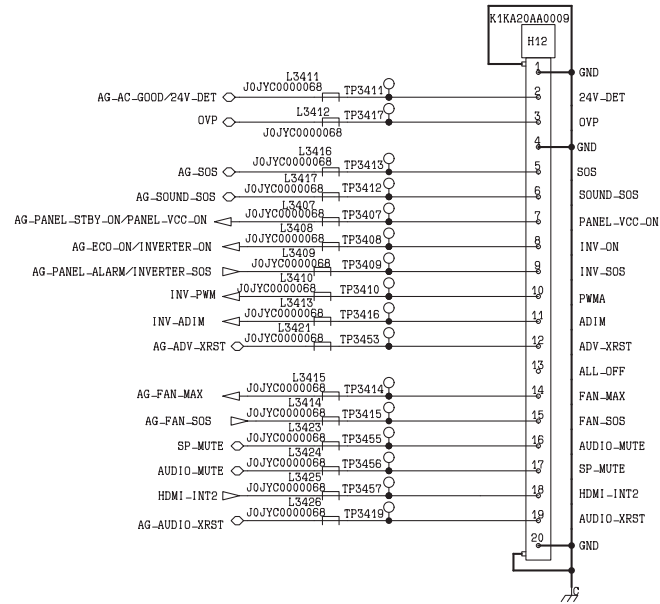

H-P_CONNECTOR

<1B>


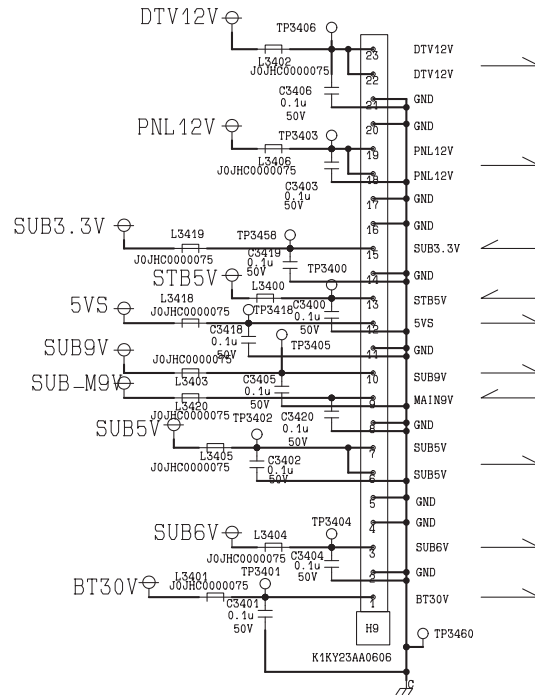


<2A>

<2B>

5.2.13. H Board - Sheet : 003 (3 / 3)


<1B>

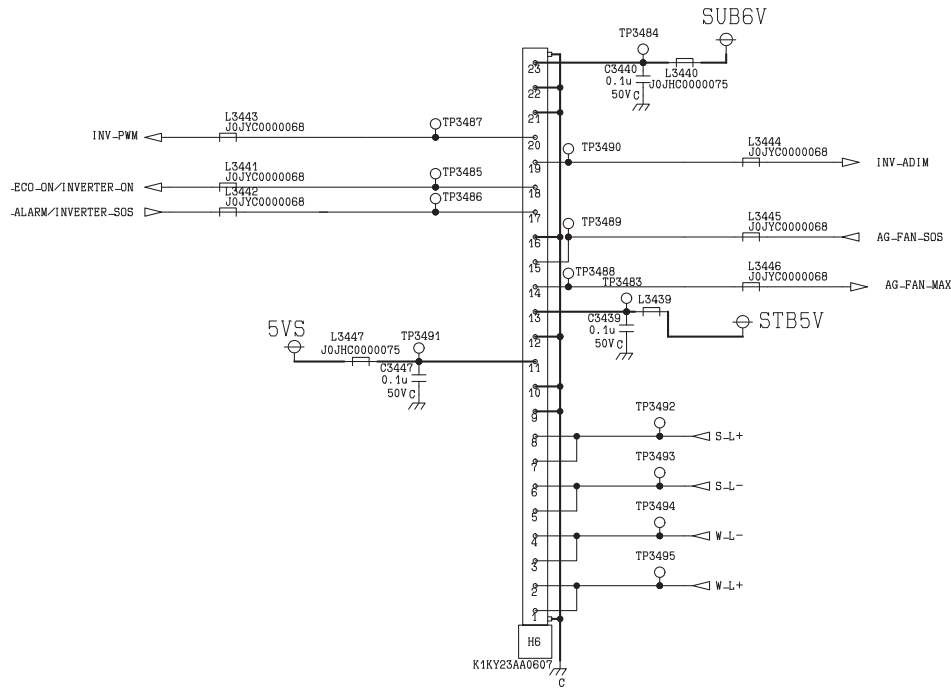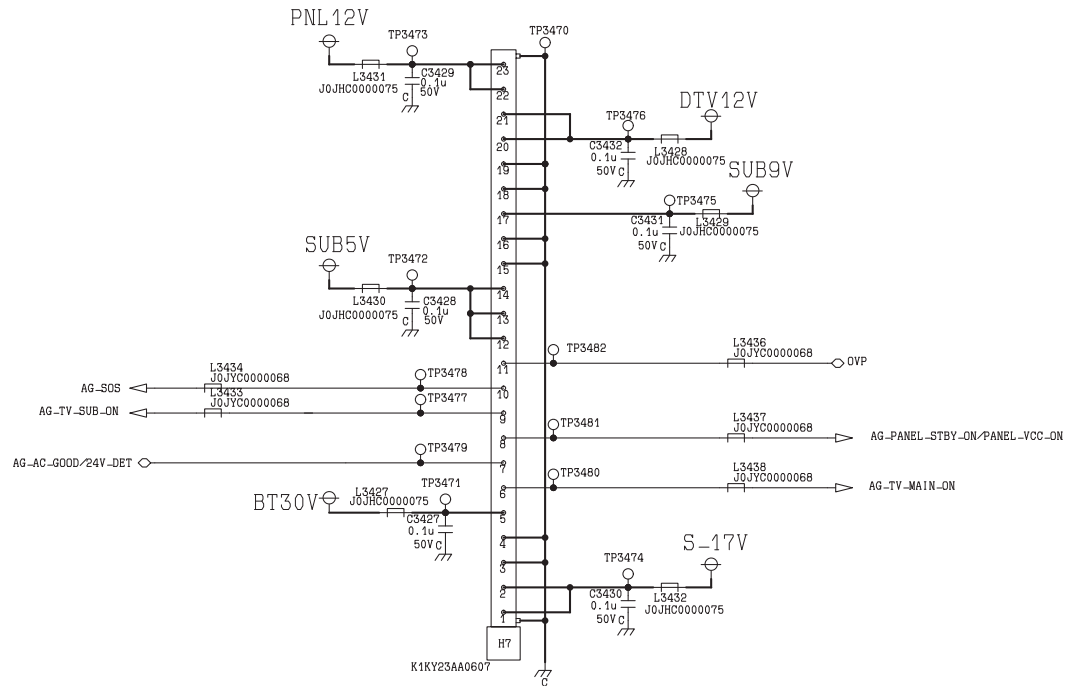

<2B>


5.3. K Board

5.3.1. K Board (1 / 1)

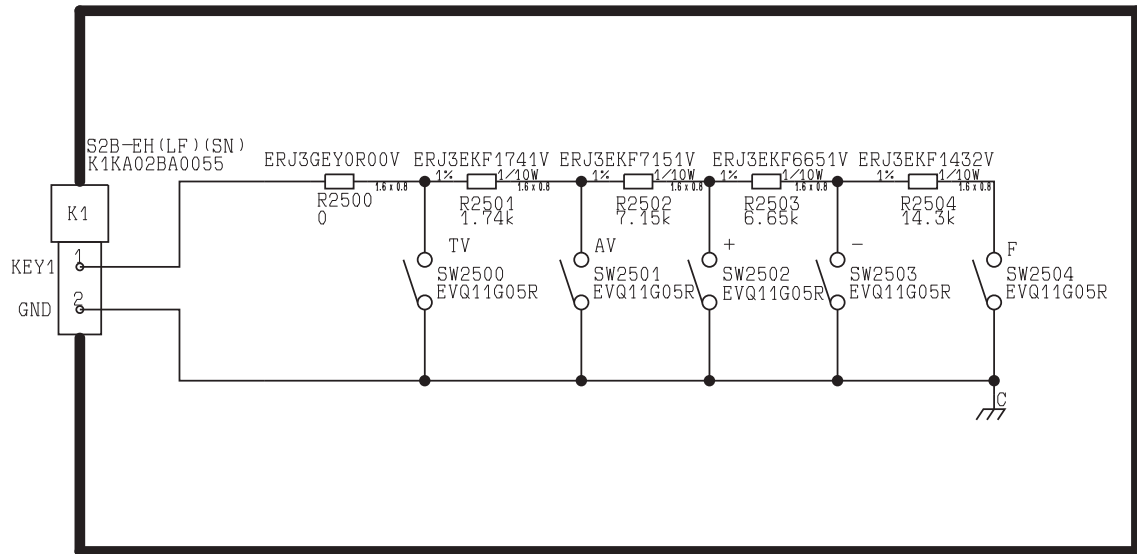


5.4. P Board


5.4.1. P Board (1 / 7)

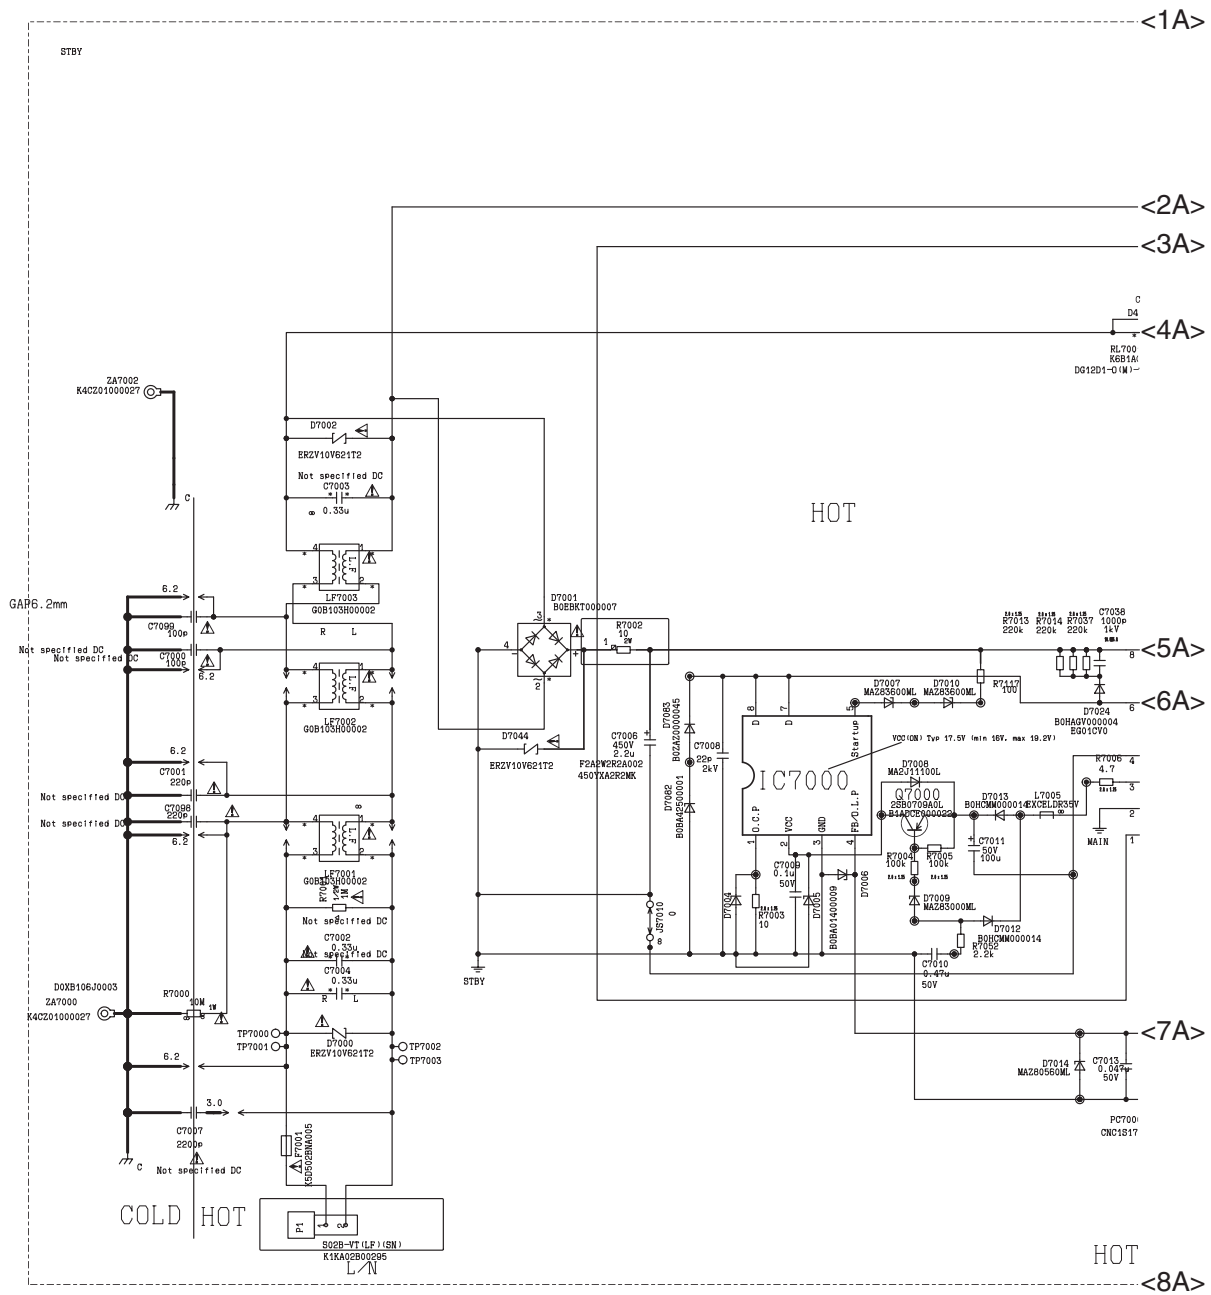


5.4.2. P Board (2 / 7)

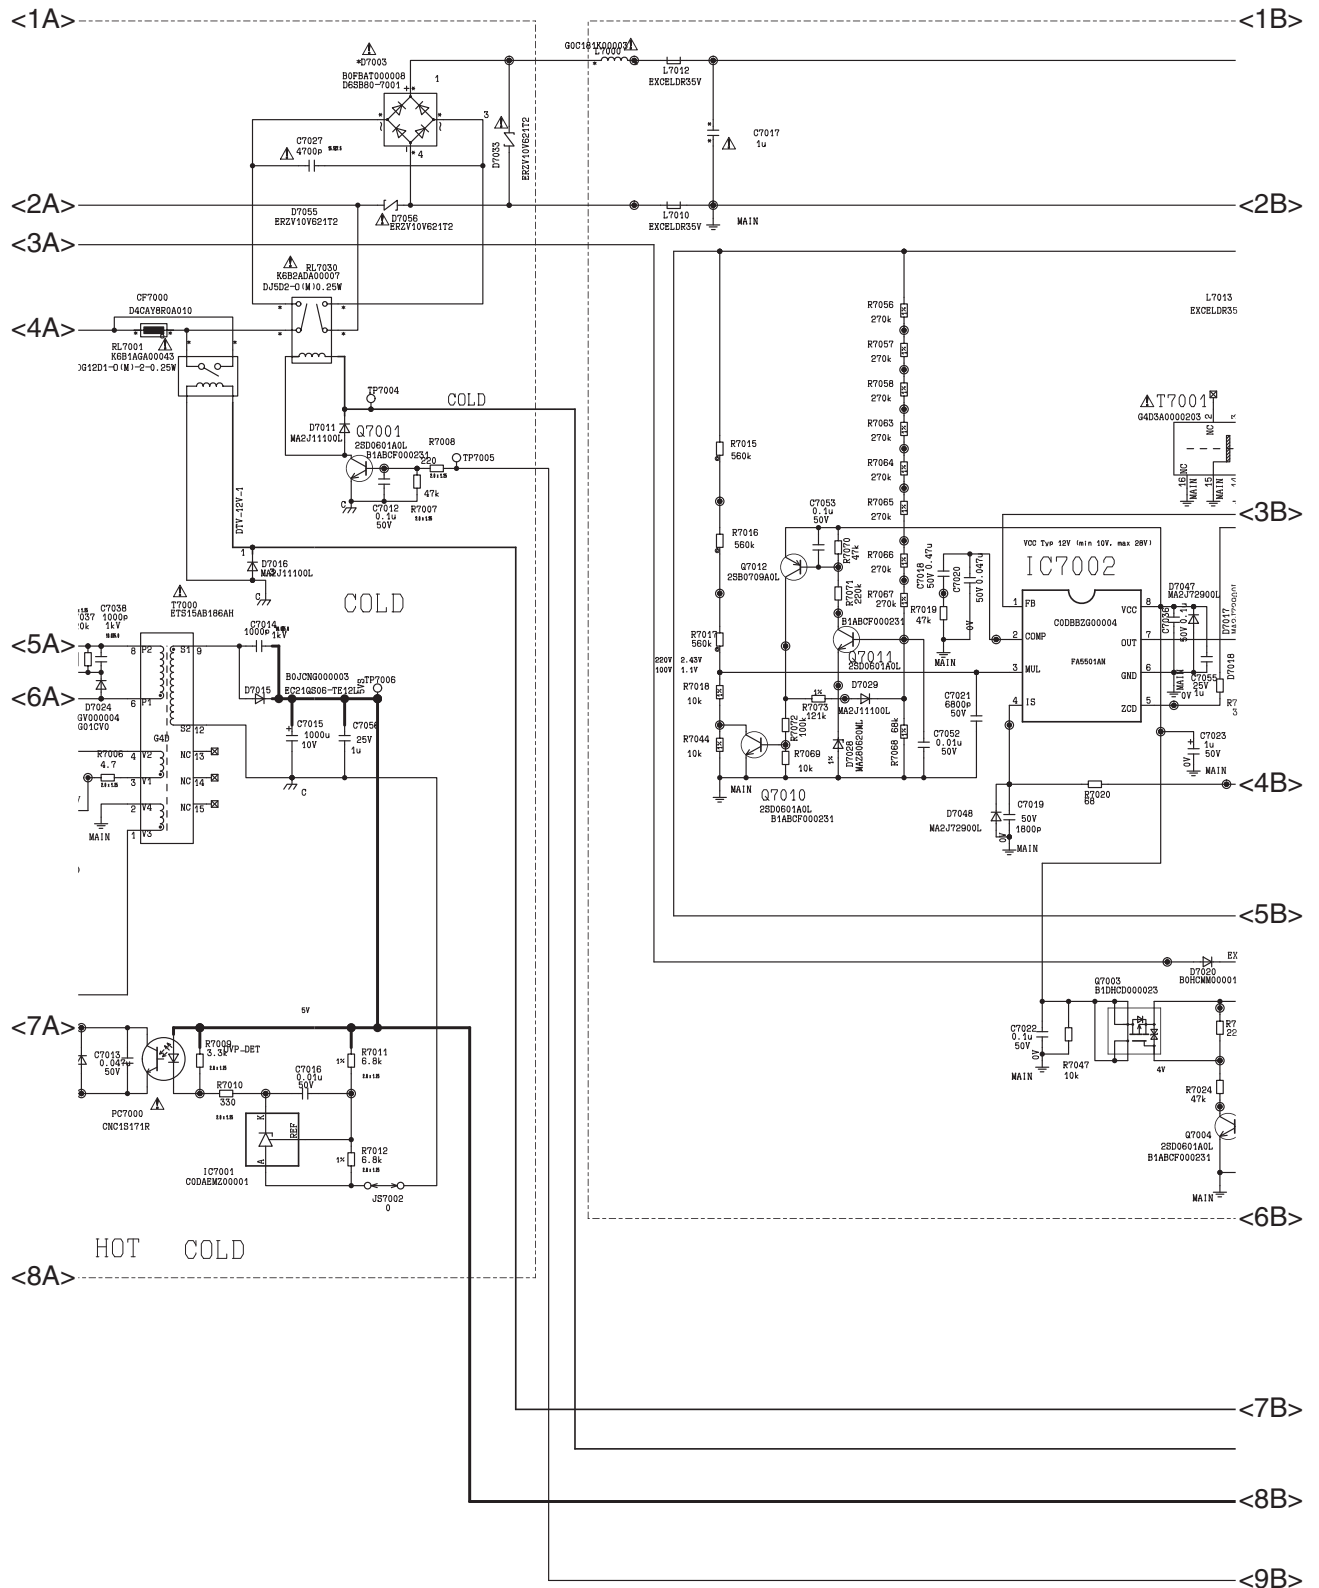


5.4.3. P Board (3 / 7)

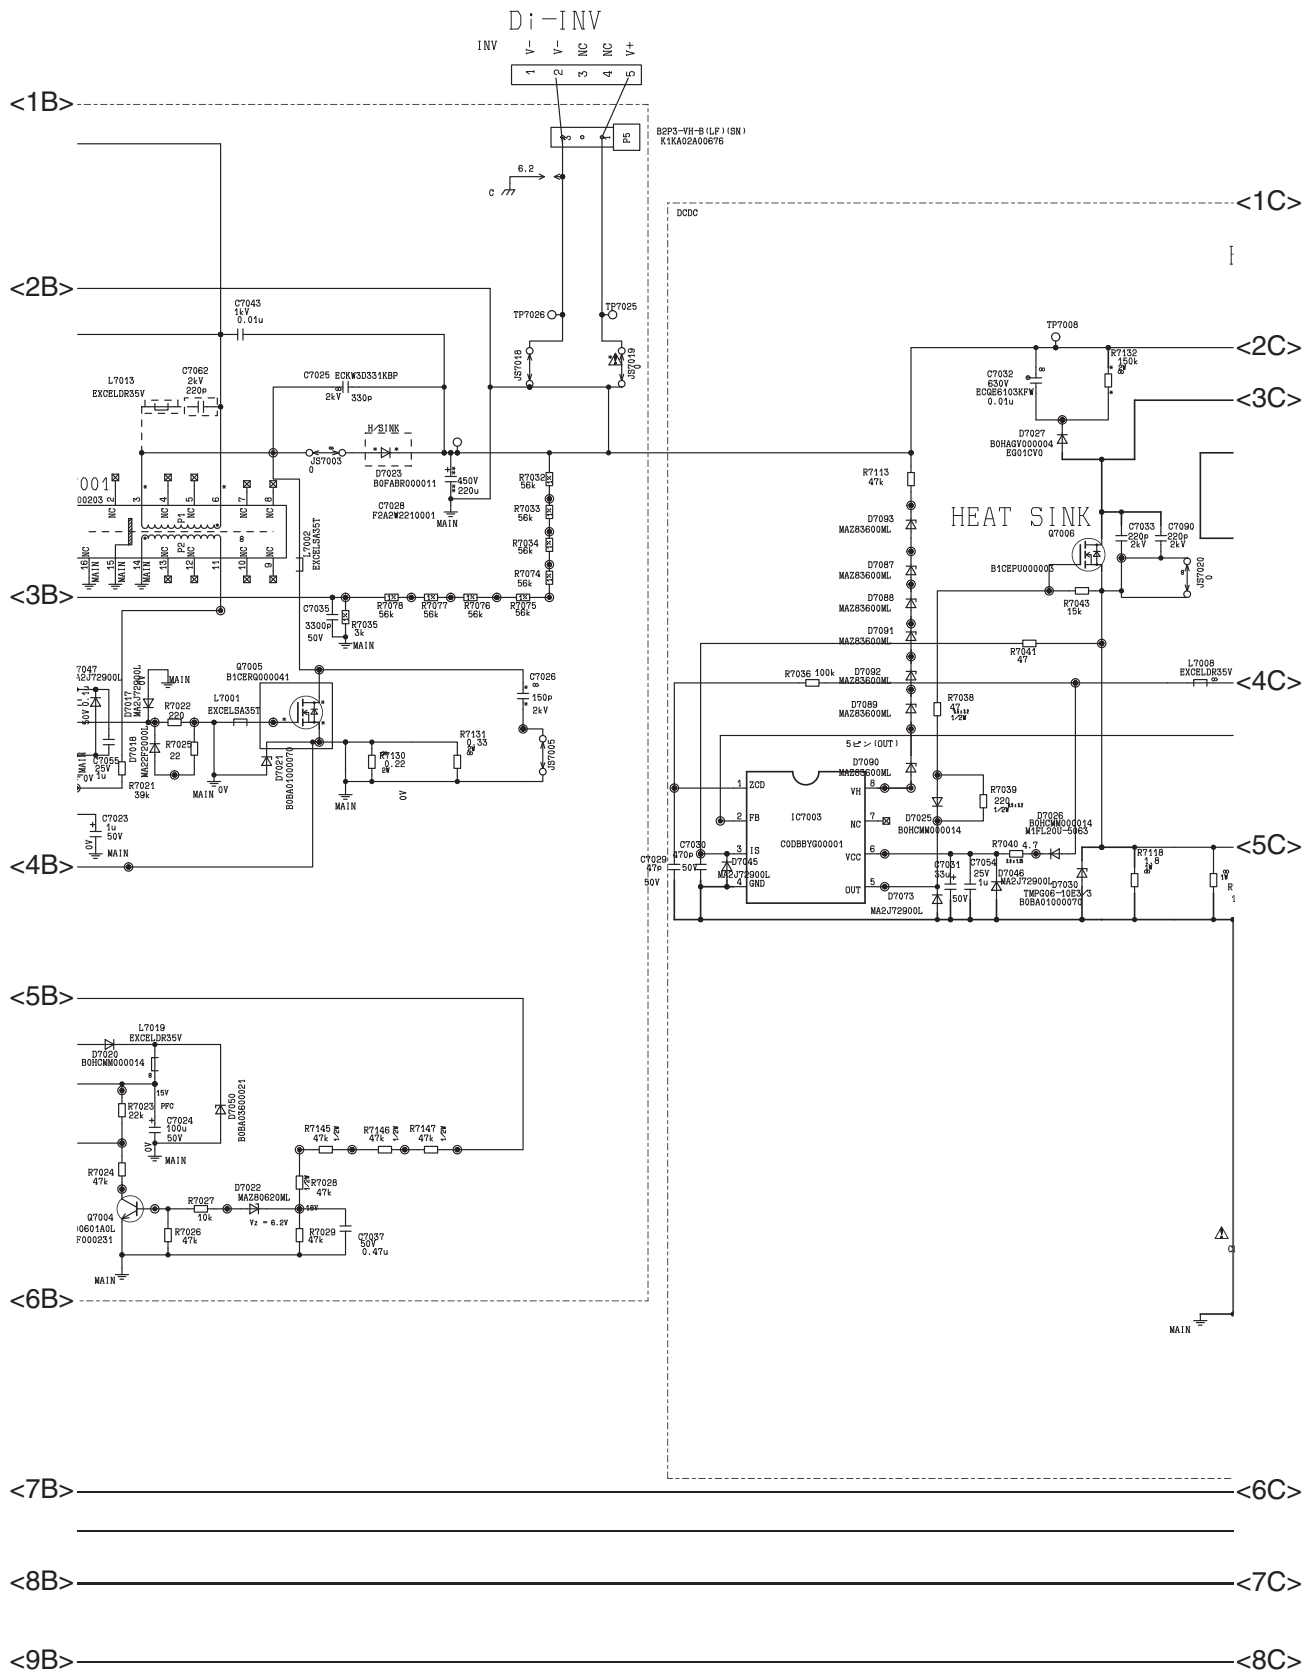


5.4.4. P Board (4 / 7)

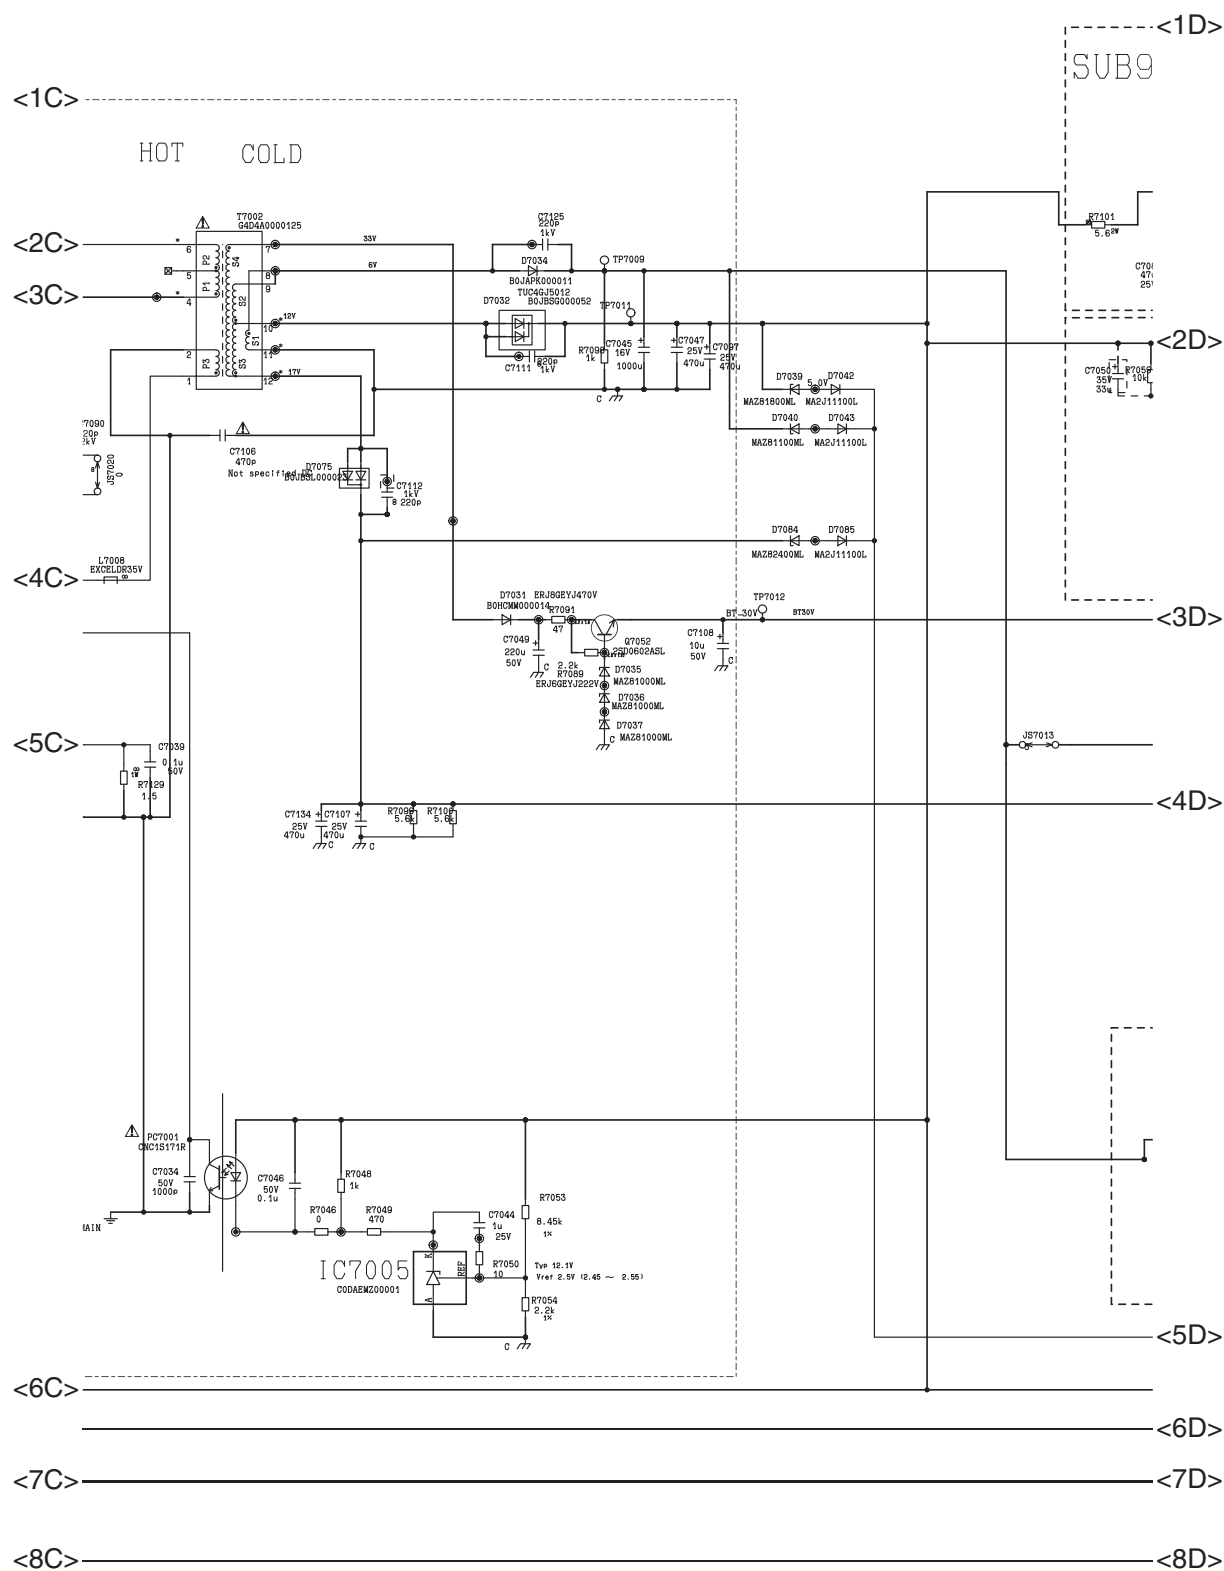


5.4.5. P Board (5 / 7)

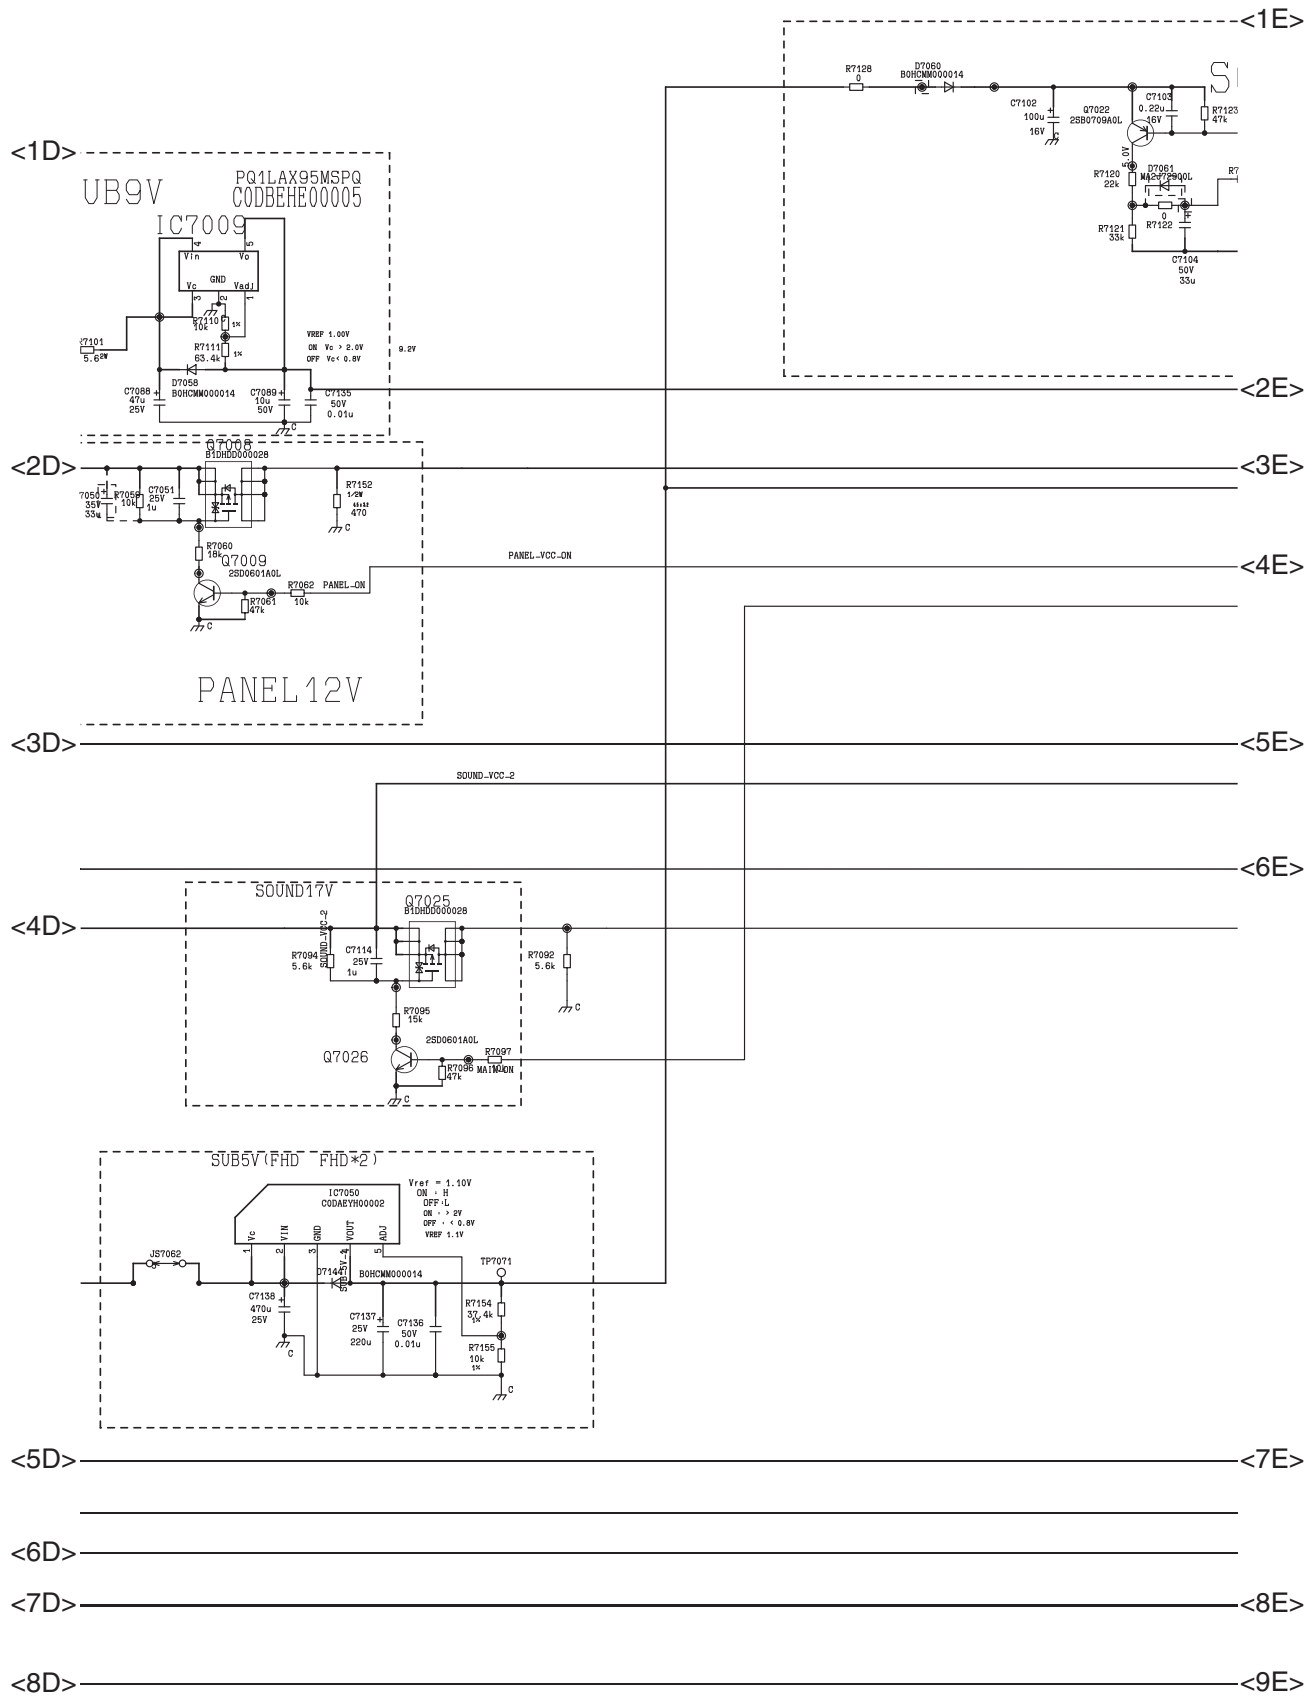

5.4.6. P Board (6 / 7)

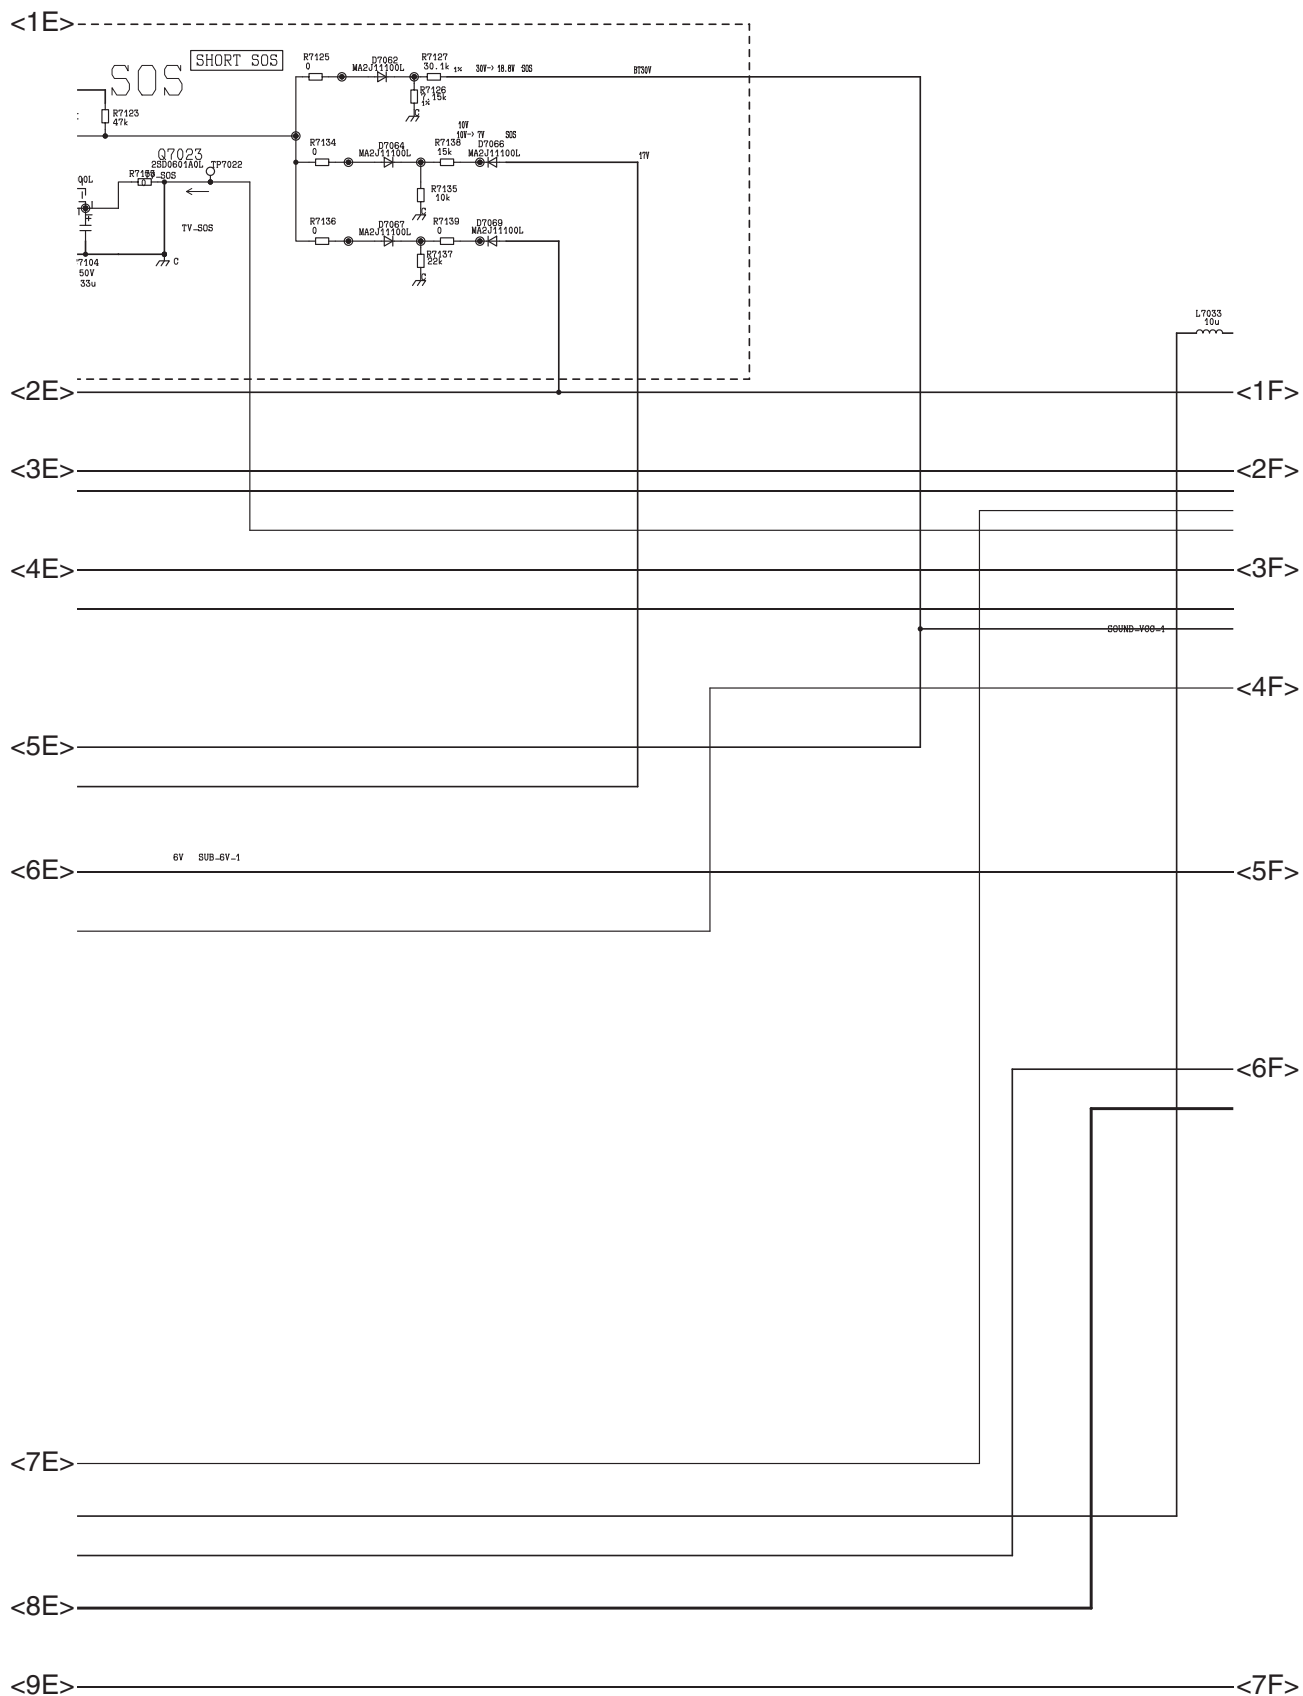


5.4.7. P Board (7 / 7)

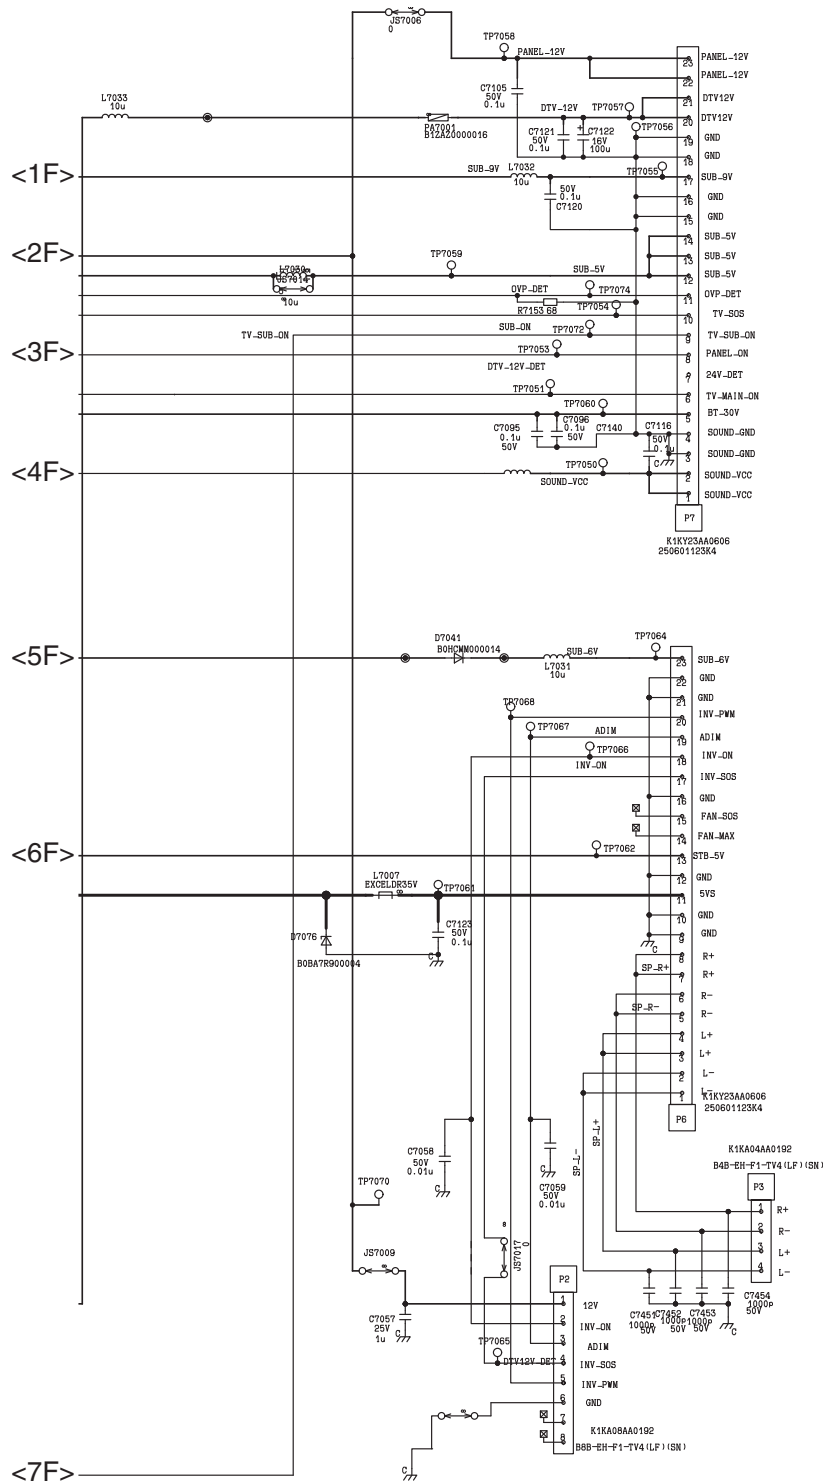


5.5. S Board

5.5.1. S Board (1 / 1)

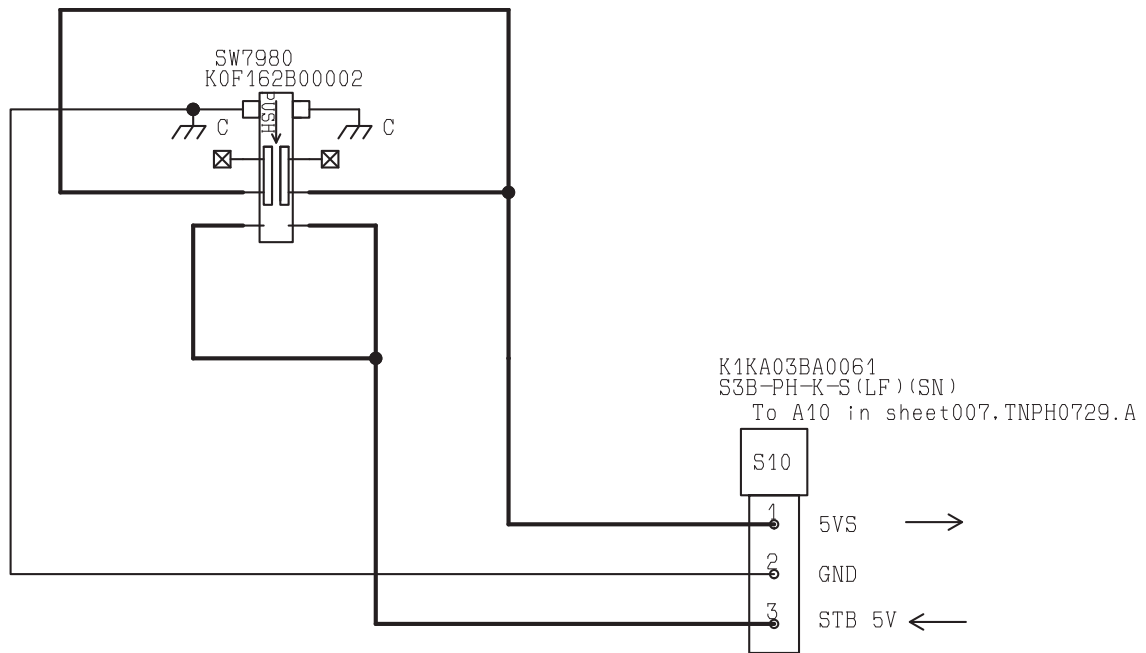


5.6. V Board


5.6.1. V Board (1 / 3)

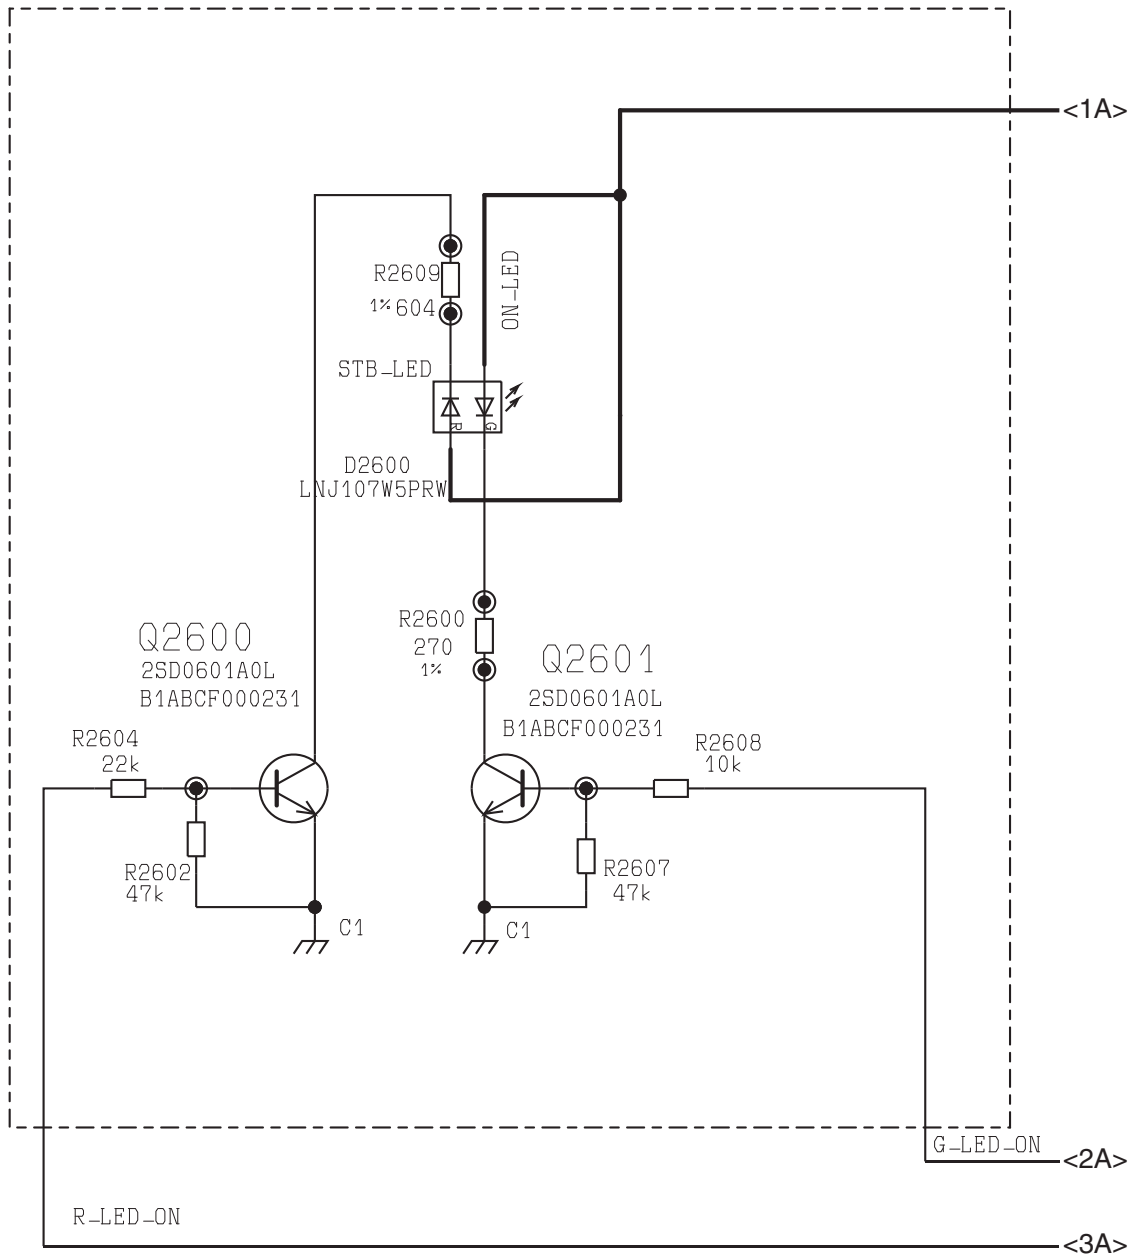

5.6.2. V Board (2 / 3)

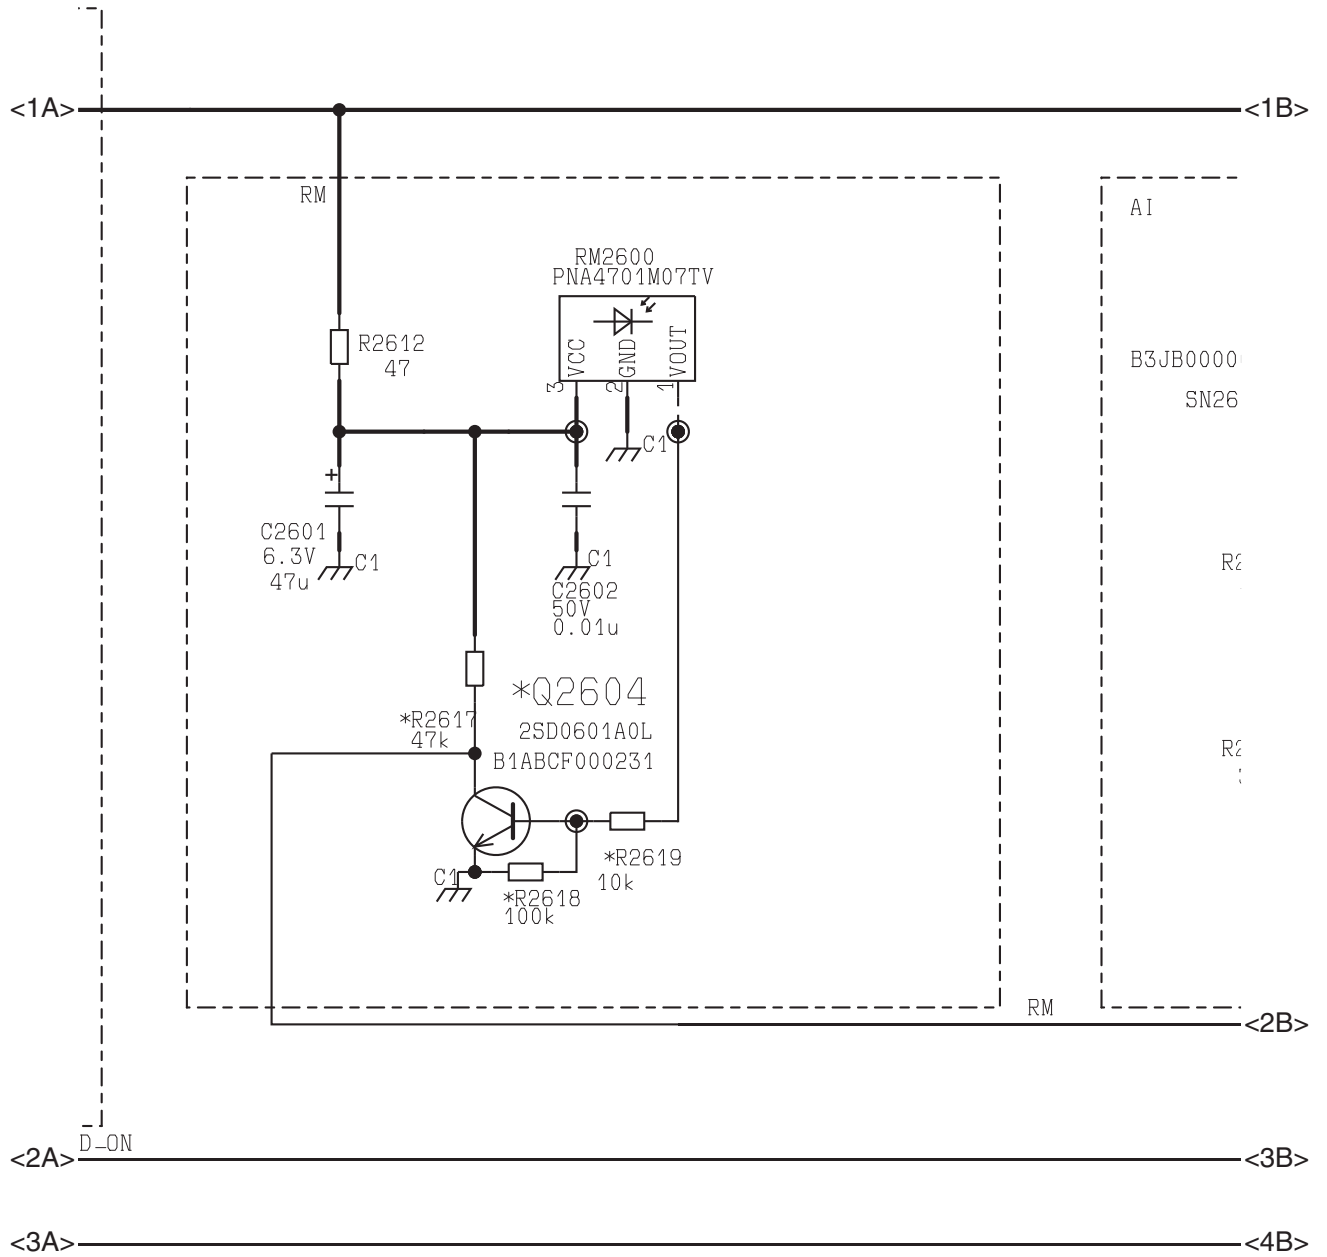


5.6.3. V Board (3 / 3)

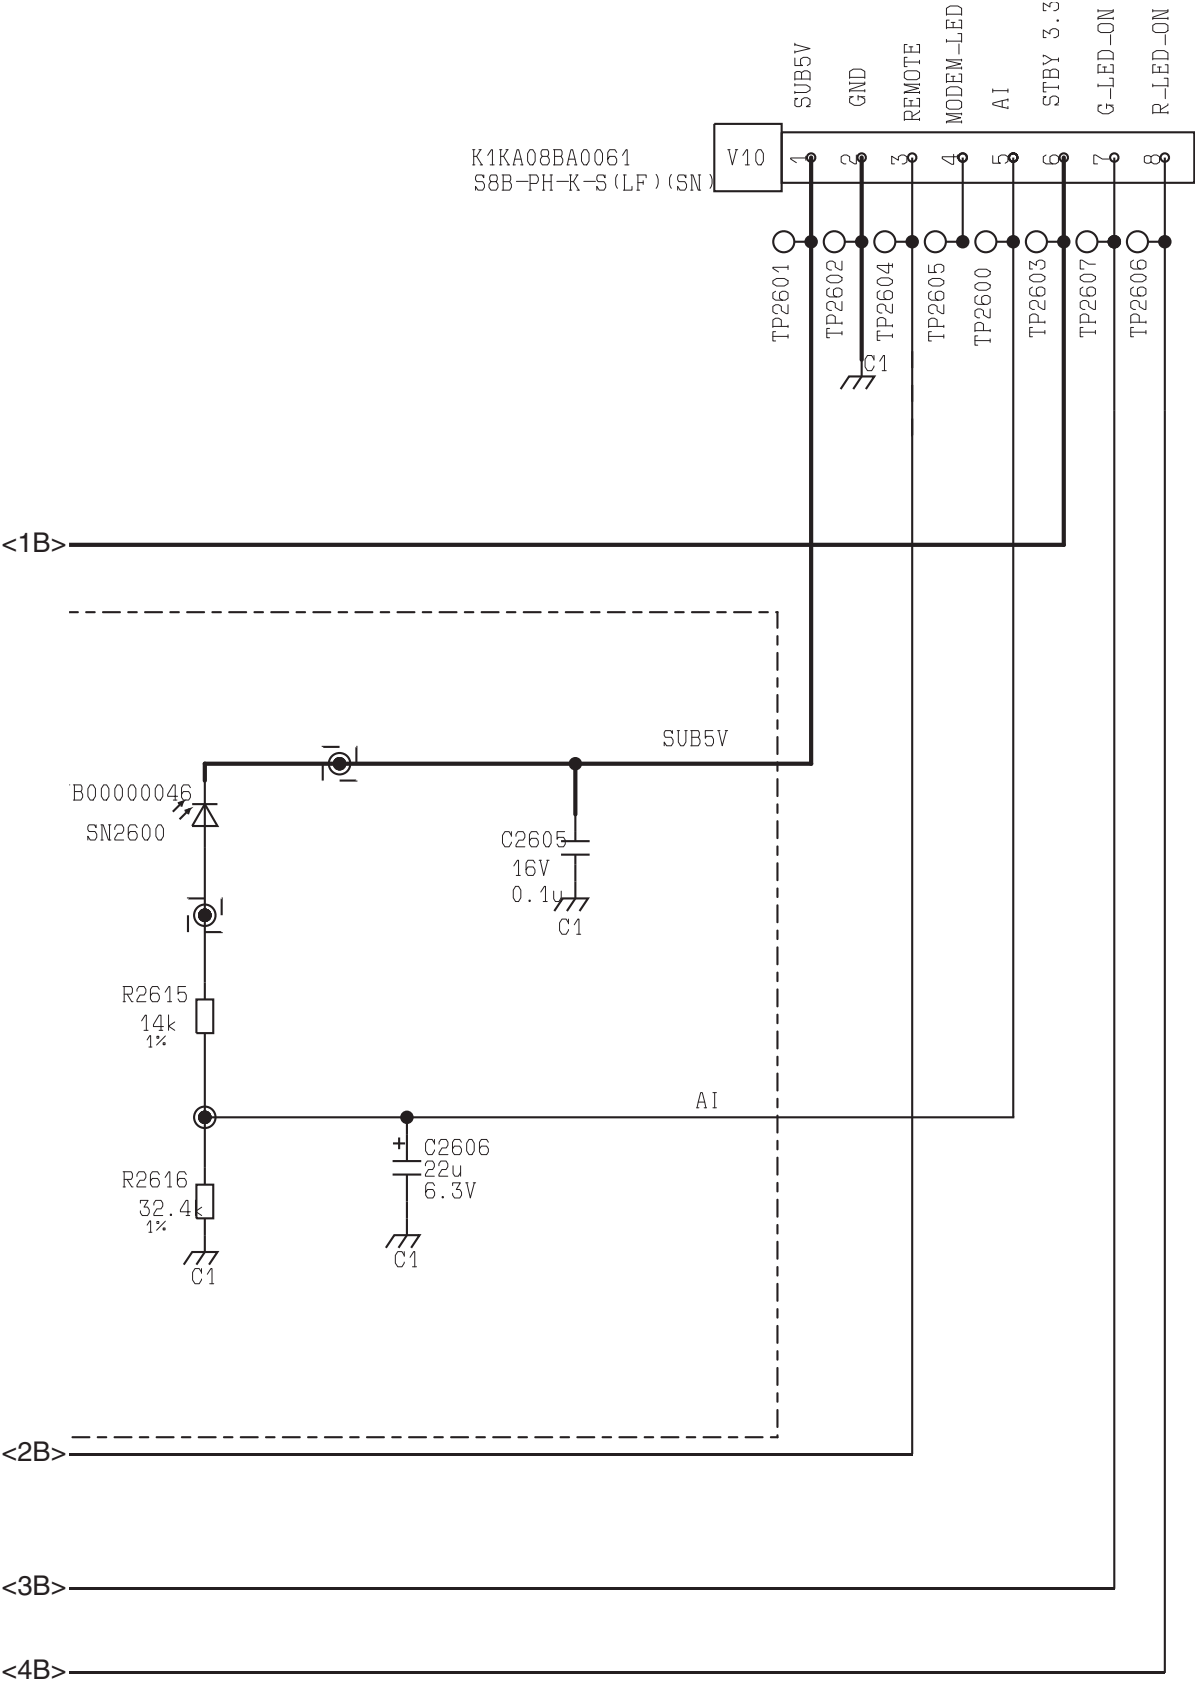


6 Parts Location & Mechanical Replacement Parts List

6.1. Parts Location

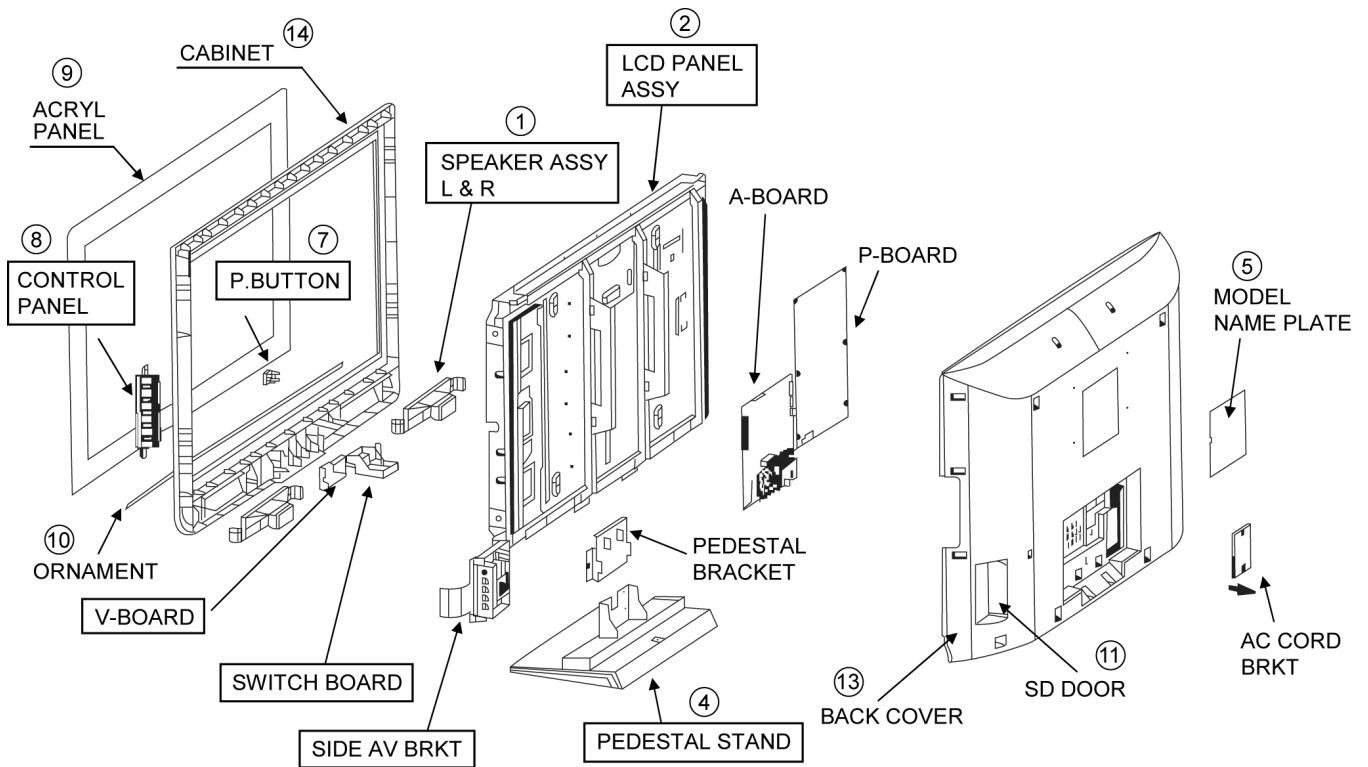

7 Packing Exploded View

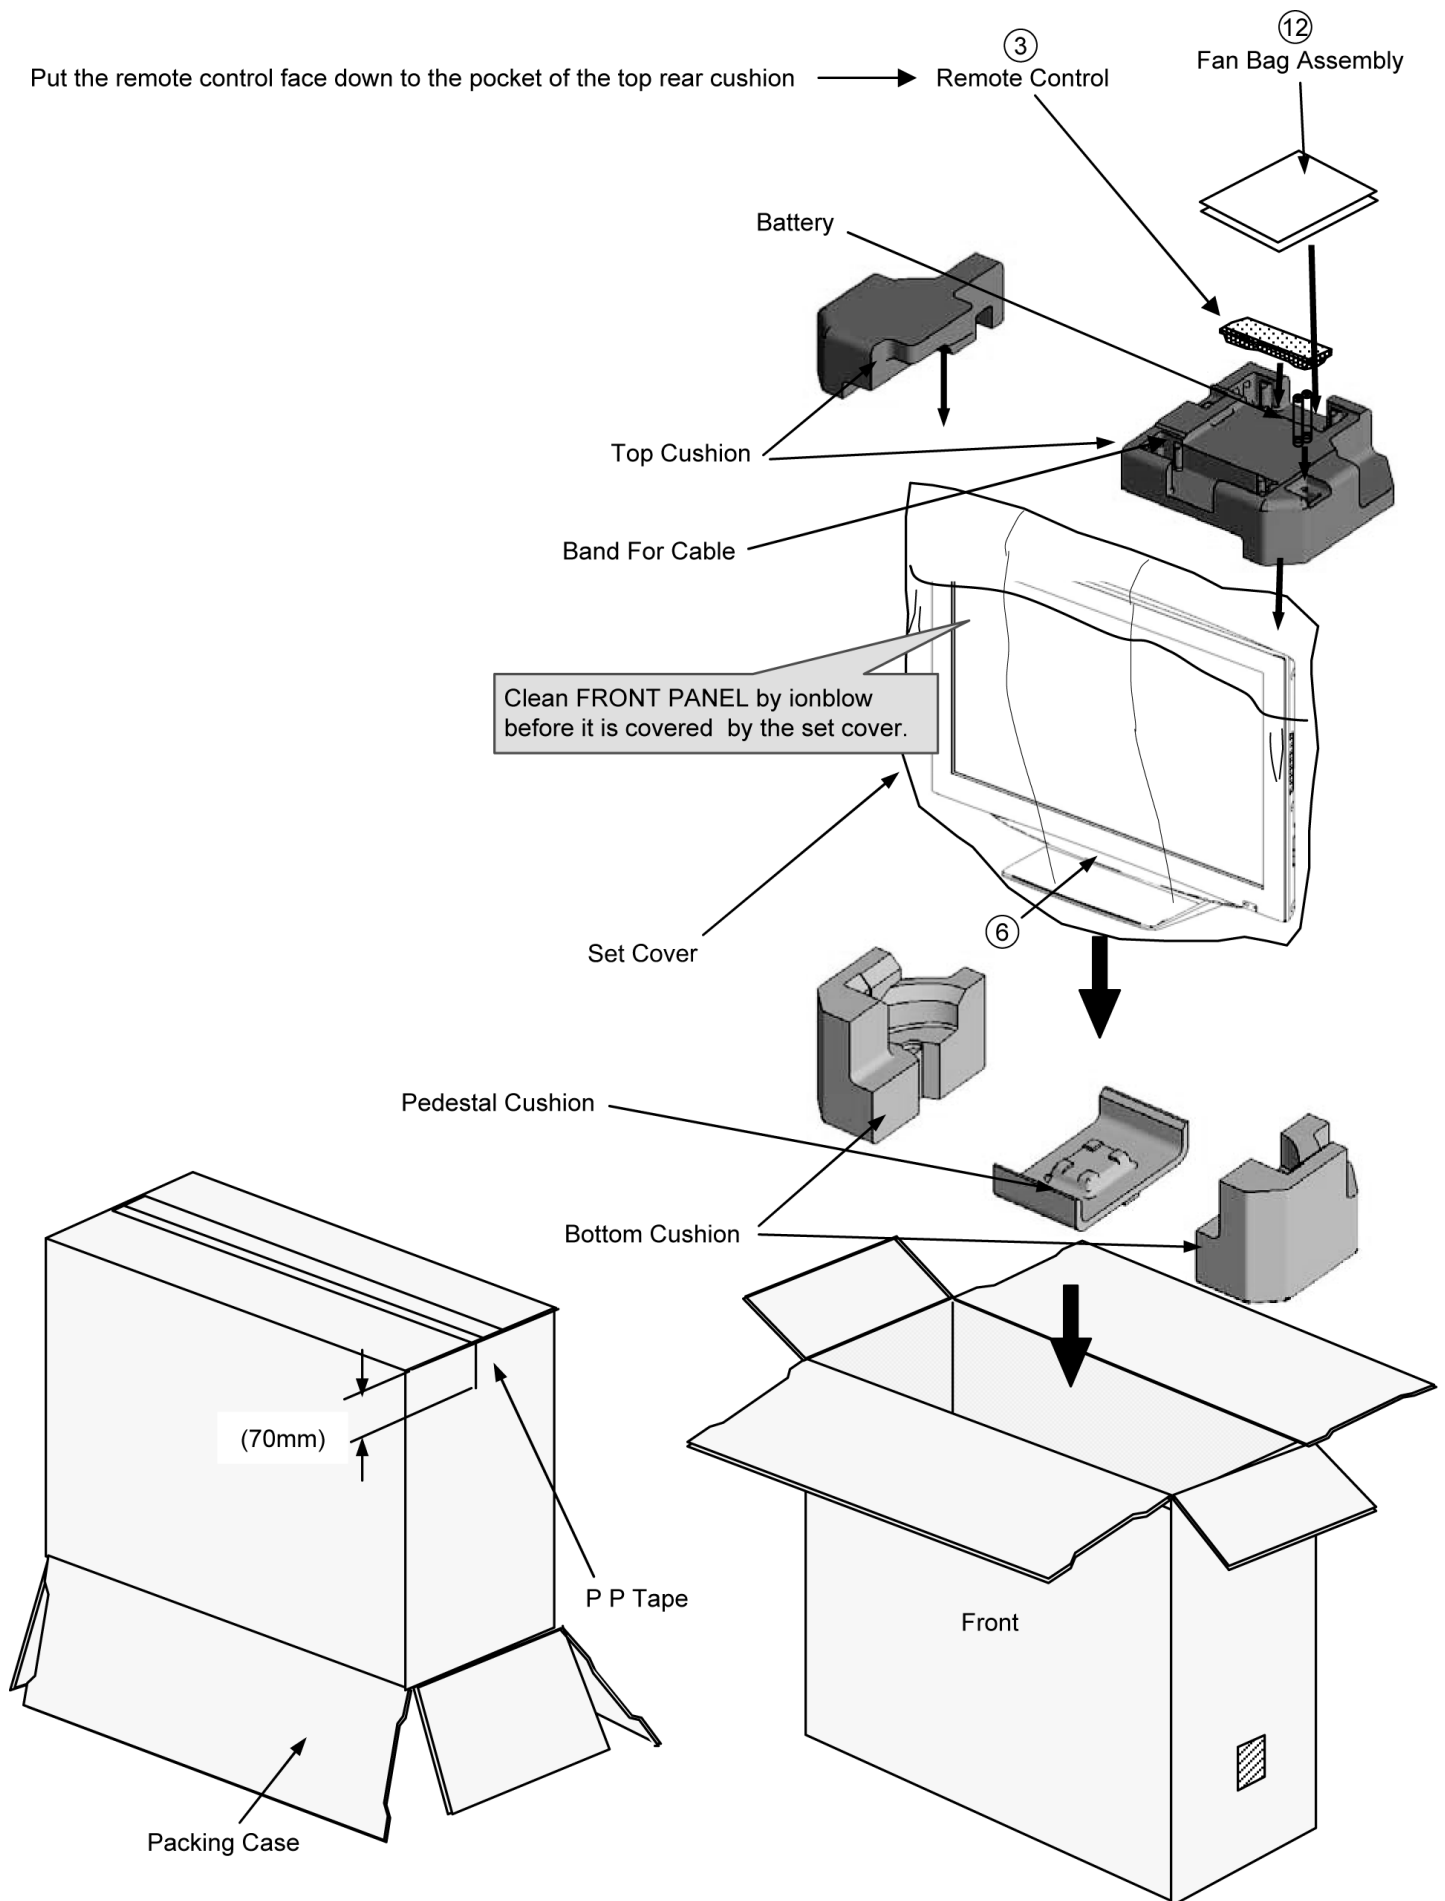

8 Replacement Parts List

8.1. Replacement Parts List Notes

Important Safety Notice

*Components identified by $\triangle$ mark have special characteristics important for safety.
When replacing any of these components, use only manufacturer's specified parts.*

RTL (Retention Time Limited)

Note: The marking (RTL) indicates that the Retention Time is Limited for this item.

After the discontinuation of this assembly in production, the item will continue to be available for a specific period of time. The retention period of availability is dependant on the type of assembly, and in accordance with the laws governing part and product retention. After the end of this period, the assembly will no longer be available.

Abbreviation of part name and description

1. Resistor

Example:

ERD25TJ104 $\triangle$ 100KOHM, $\triangle$ 1/4W
 Type Allowance

2. Capacitor

Example:

ECKF1H103ZF $\triangle$ 0.01UF, $\triangle$ 50V
 Type Allowance

Type	Allowance
C : Carbon	F : $\pm 1\%$
F : Fuse	G : $\pm 2\%$
M : Metal Oxide	J : $\pm 5\%$
Metal Film	K : $\pm 10\%$
S : Solid	M : $\pm 20\%$
W : Wire Wound	

Type	Allowance
C : Ceramic	C : $\pm 0.25\text{pF}$
E : Electrolytic	D : $\pm 0.5\text{pF}$
P : Polyester	F : $\pm 1\text{pF}$
Polypropylene	G : $\pm 3\text{pF}$
T : Tantalum	J : $\pm 5\text{pF}$
	K : $\pm 10\text{pF}$
	L : $\pm 15\text{pF}$
	M : $\pm 20\text{pF}$
	P : +100%, -0%
	Z : +80%, -20%

8.2. Electrical Replacement Parts List

Ref. No.	Part No.	Part Name & Description	Remarks
1	EAS16S07B	SPEAKER	
	J0KF00000018	FERRITE CORE	
	K1PY51Y00004	LVDS FFC	
	K2CT2YY00021	AC CORD	△
2	L5EDD9T00006	LCD PANEL 37FHD	
3	N2QAYB000120	REMOTE CONTROL	
4	TBL4GA0003	PEDESTAL ASSY	
5	TBM4GC036	MODEL NAME PLATE	△
6	TBMA264	PANASONIC BADGE	
	TBX4GA00202	CONTROL BUTTON	
7	TBXA54402	POWER BUTTON	
	TKK4G8611	COVER	
	TKK4GC5008	LED PANEL	
8	TKP4GA00201	CONTROL PANEL	
9	TKP4GA00502	ACRYLIC PANEL	
10	TKP4GA00703	ORNAMENT SHEET (BOTTOM)	
11	TKP4GA00901	SD DOOR	
	TKP4GA01301	REAR CENTER COVER	
	TKP4GA01901	SIDE AV BRACKET	
NLA	TNPA4465CC	DG BOARD	△
NLA	TNPA4480AB	V BOARD	△
NLA	TNPA4586AA	S BOARD	△
NLA	TNPA4587AA	K BOARD	△
NLA	TNPA4616AA	P BOARD	△
NLA	TNPH0723CC	H BOARD	△
	TPD4GA0008	CUSHION PEDESTAL	
	TPD4GA0011	CUSHION (TOP)	
	TPD4GA0013	CUSHION (BOTTOM)	
	TPE4G14046	SET COVER	
12	TQZ4GB0074-1	FAN BAG	
13	TTU4GA0075	BACK COVER	
14	TTY4GA0019	CABINET	
	TXFPC020NWD	CARTON	
	TXFPE01RLTU	CLEANING CLOTH	
	CAPACITORS		
C1001	F1G1C104A116	C 0.1UF, 16V	
C1002	ECJ1VB1H104K	C 0.1UF,K, 50V	
C1003	F1G1C104A116	C 0.1UF, 16V	
C1004	F1G1C104A116	C 0.1UF, 16V	
C1006	F1G1C104A116	C 0.1UF, 16V	
C1007	F1G1C104A116	C 0.1UF, 16V	
C1008	F1G1C104A116	C 0.1UF, 16V	
C1009	F1G1C104A116	C 0.1UF, 16V	
C1010	F1G1C104A116	C 0.1UF, 16V	
C1014	F1G1H102A730	C 1000PF, 50V	
C1015	F1G1H102A730	C 1000PF, 50V	
C1017	F1G1C104A116	C 0.1UF, 16V	
C1018	F1G1H102A730	C 1000PF, 50V	
C1020	F1G1H102A730	C 1000PF, 50V	
C1021	F1G1C104A116	C 0.1UF, 16V	
C1025	F1G1H102A730	C 1000PF, 50V	
C1026	F1G1H102A730	C 1000PF, 50V	
C1032	F1G1H102A730	C 1000PF, 50V	
C1033	F1G1C104A116	C 0.1UF, 16V	
C1036	F1G1C104A116	C 0.1UF, 16V	
C1037	F1G1C104A116	C 0.1UF, 16V	
C1038	F1G1H102A730	C 1000PF, 50V	
C1042	F1G1H102A730	C 1000PF, 50V	
C1043	F1G1H102A730	C 1000PF, 50V	
C1044	F1G1H102A730	C 1000PF, 50V	
C1045	F1G1H102A730	C 1000PF, 50V	
C1070	F1G1C104A116	C 0.1UF, 16V	
C1071	F1G1C104A116	C 0.1UF, 16V	
C1072	F1G1C104A116	C 0.1UF, 16V	
C1075	F1G1C104A116	C 0.1UF, 16V	
C1076	F1G1C104A116	C 0.1UF, 16V	
C1077	F1G1C104A116	C 0.1UF, 16V	
C1078	F1G1C104A116	C 0.1UF, 16V	
C1079	F1G1C104A116	C 0.1UF, 16V	
C1081	F1G1C104A116	C 0.1UF, 16V	
C1102	F1J0J106A021	C 10UF, 6.3V	

Ref. No.	Part No.	Part Name & Description	Remarks
C1103	F1G1C104A116	C 0.1UF, 16V	
C1104	F1G1C104A116	C 0.1UF, 16V	
C1106	F1G1H270A731	C 27PF, 50V	
C1107	F1G1H220A731	C 27PF, 50V	
C1108	F1G1C104A116	C 0.1UF, 16V	
C1109	F1H1A1050032	C 1UF, 10V	
C1111	F1H1A1050032	C 1UF, 10V	
C1112	F1G1C104A116	C 0.1UF, 16V	
C1114	F1G1C104A116	C 0.1UF, 16V	
C1117	F1G1C104A116	C 0.1UF, 16V	
C1122	F1G1E103A123	C 0.01UF, 25V	
C1123	F1H1A1050032	C 1UF, 10V	
C1135	F1J1C1050030	C 1UF, 16V	
C2023	ECJ1VB1H104K	C 0.1UF,K, 50V	
C2048	ECJ1VB1H104K	C 0.1UF,K, 50V	
C2049	ECJ1VB1H104K	C 0.1UF,K, 50V	
C2050	ECJ1VB1H104K	C 0.1UF,K, 50V	
C2052	ECJ1VB1H104K	C 0.1UF,K, 50V	
C2053	ECJ1VB1H104K	C 0.1UF,K, 50V	
C2054	F1J1A106A043	C 10UF,J, 10V	
C2055	F1G1H120A731	C 12PF,J, 50V	
C2056	F1G1H150A731	C 12PF,J, 50V	
C2057	ECJ1VB1H104K	C 0.1UF,K, 50V	
C2058	ECJ1VB1H104K	C 0.1UF,K, 50V	
C2059	F1J1A106A043	C 10UF,J, 50V	
C2091	ECJ1VC1H330J	C 33PF, J, 50V	
C2092	F1H1H220A971	C 22PF, J, 50V	
C2096	ECJ1VB1H104K	C 0.1UF,K, 50V	
C2098	F2G0J2210013	E 220UF, 6.3V	
C2099	F2G0J2210013	E 220UF, 6.3V	
C2100	ECJ1VB1H104K	C 0.1UF,K, 50V	
C2101	F1J1A106A043	C 10UF,J, 10V	
C2102	ECJ1VB1H104K	C 0.1UF,K, 50V	
C2103	F2G1C1010034	E 100UF, 16V	
C2105	ECJ1VB1H104K	C 0.1UF,K, 50V	
C2106	ECJ1VB1H104K	C 0.1UF,K, 50V	
C2107	F2G0J470A019	E 47UF, 6.3V	
C2108	F2G0J470A019	E 47UF, 6.3V	
C2109	ECJ1VB1H104K	C 0.1UF,K, 50V	
C2110	ECJ1VB1H104K	C 0.1UF,K, 50V	
C2111	F1H0J2250008	C 2.2UF,J, 6.3V	
C2112	F1J1A106A043	C 10UF,J, 10V	
C2113	F1J1A106A043	C 10UF,J, 10V	
C2114	ECJ1VB1H104K	C 0.1UF,K, 50V	
C2115	ECJ1VB1H104K	C 0.1UF,K, 50V	
C2116	F1H1H471A971	C 470PF, 50V	
C2117	ECJ1VB1H104K	C 0.1UF,K, 50V	
C2118	F1H1A1050032	C 1UF, 50V	
C2120	F1H1H560A971	C 56PF, 50V	
C2121	F1H1H560A971	C 56PF, 50V	
C2122	F1H1H103A970	C 0.01UF, 50V	
C2123	F1H1H103A970	C 0.01UF, 50V	
C2124	ECJ1VB1H104K	C 0.1UF,K, 50V	
C2125	F1H1H103A970	C 0.01UF, 50V	
C2126	F1J1A106A043	C 10UF, 10V	
C2127	F1H1H103A970	C 0.01UF, 50V	
C2128	F1H1H103A970	C 0.01UF, 50V	
C2129	F1H1H103A970	C 0.01UF, 50V	
C2131	ECJ1VB1H104K	C 0.1UF,K, 50V	
C2135	F1H1H103A970	C 0.01UF, 50V	
C2136	F1H1H103A970	C 0.01UF, 50V	
C2137	F1J1A106A043	C 10UF, 10V	
C2138	ECJ1VB1H104K	C 0.1UF,K, 50V	
C2151	F1J1A106A043	C 10UF, 10V	
C2174	F1H1A1050032	C 1UF, 10V	
C2175	EEH1B1C470P	E 47UF, 16V	
C2176	F1H1H103A970	C 0.01UF, 50V	
C2179	EEH1B1C470P	E 47UF, 16V	
C2180	F1H1A1050032	C 1UF, 10V	
C2184	F1H1H102A219	C 1000PF, 50V	
C2186	ECJ1VB1H104K	C 0.1UF,K, 50V	

Ref. No.	Part No.	Part Name & Description	Remarks
C2187	FIH0J2250008	C 2.2UF, 6.3V	
C2188	FIH1H471A971	C 470PF, 50V	
C2189	FIH1A1050032	C 1UF, 10V	
C2190	FIJ1A106A043	E 10UF, 10V	
C2191	FIJ1A106A043	E 10UF, 10V	
C2192	F2G0J470A019	E 47UF, 6.3V	
C2195	FIH1H102A219	C 1000PF, 50V	
C2197	FIH1E333A129	C 0.33UF, 25V	
C2198	FIH1E333A129	C 0.33UF, 25V	
C2202	FIH0J2250008	C 2.2UF, 6.3V	
C2203	FIH1A1050032	C 1UF, 10V	
C2204	ECJ1VB1C105K	C 1UF,K, 16V	
C2213	FIH1H102A219	C 1000PF, 50V	
C2216	ECJ1VB1H104K	C 0.1UF,K, 50V	
C2244	ECJ1VB1H104K	C 0.1UF,K, 50V	
C2245	FIH1H102A219	C 1000PF, 50V	
C2246	FIJ1A106A043	C 10UF, 10V	
C2251	FIJ1A106A043	C 10UF, 10V	
C2261	FIJ1A106A043	C 10UF, 10V	
C2262	FIJ1A106A043	C 10UF, 10V	
C2263	FIJ1A106A043	C 10UF, 10V	
C2264	FIJ1A106A043	C 10UF, 10V	
C2270	FIH1H471A971	C 470PF, 50V	
C2271	FIH1H471A971	C 470PF, 50V	
C2301	FIH1E104A129	C 0.1UF, 25V	
C2302	FIH1E104A129	C 0.1UF, 25V	
C2303	FIJ1E105A171	C 1UF, 25V	
C2305	FIJ1E105A171	C 1UF, 25V	
C2307	FIJ1E105A171	C 1UF, 25V	
C2309	FIJ1E105A171	C 1UF, 25V	
C2313	FIH1A1050032	C 1UF, 10V	
C2317	ECJ1VB1H104K	C 0.1UF,K, 50V	
C2319	ECJ1VB1H104K	C 0.1UF,K, 50V	
C2321	ECJ1VB1H104K	C 0.1UF,K, 50V	
C2323	ECJ1VB1H104K	C 0.1UF,K, 50V	
C2333	FIJ1E3340003	C 0.33UF, 25V	
C2335	FIJ1E3340003	C 0.33UF, 25V	
C2337	FIH1H223A970	C 0.022UF, 50V	
C2339	FIH1H223A970	C 0.022UF, 50V	
C2341	FIJ1E3340003	C 0.33UF, 25V	
C2343	FIJ1E3340003	C 0.33UF, 25V	
C2345	FIH1H223A970	C 0.022UF, 50V	
C2347	FIH1H223A970	C 0.022UF, 50V	
C2353	ECJ1VB1H104K	C 0.1UF,K, 50V	
C2359	ECJ1VB1H104K	C 0.1UF,K, 50V	
C2361	EEFGL1E471P	E 470UF, 25V	
C2362	FI1L1E4750012	C 4.7UF, 25V	
C2364	FI1L1E4750012	C 4.7UF, 25V	
C2375	FIH1H223A970	C 0.022UF, 50V	
C2377	FIH1H223A970	C 0.022UF, 50V	
C2379	FIH1H223A970	C 0.022UF, 50V	
C2381	FIH1H223A970	C 0.022UF, 50V	
C2383	FIH1H102A219	C 1000PF, 50V	
C2389	FIH1H102A219	C 1000PF, 50V	
C2393	FIH1E473A129	C 0.047UF, 25V	
C2395	FIH1H102A219	C 1000PF, 50V	
C2396	FIH1H102A219	C 1000PF, 50V	
C2406	EEHBL1E470P	E 47UF, 25V	
C2601	F2G0J470A019	E 47UF, 6.3V	
C2602	FIH1H103A970	C 0.01UF,K, 50V	
C2605	FIH1C104A143	C 0.1UF,K, 16V	
C2606	F2G0J220A019	E 22UF, 6.3V	
C2902	FIH1H222A970	C 2200PF, 50V	
C2906	FIH1C104A143	C 0.1UF,K, 16V	
C2908	FI1G1C104A116	C 0.1UF, 16V	
C2909	FIH1A1050032	C 1UF, 10V	
C2912	EEHBL0J101P	E 100UF, 6.3V	
C2914	ECJ1VB1H104K	C 0.1UF,K, 50V	
C2915	F2G1H100A031	E 10UF, 50V	
C2916	FIH1C104A143	C 0.1UF,K, 16V	
C2919	FI1G1C104A116	C 0.1UF, 16V	
C2920	FIH1H103A970	C 0.01UF, 50V	
C2922	FIH1C104A143	C 0.1UF,K, 16V	

Ref. No.	Part No.	Part Name & Description	Remarks
C3002	FIH1H561A971	C 560PF, 50V	
C3003	FIH1H561A971	C 560PF, 50V	
C3007	FIH1H561A971	C 560PF, 50V	
C3008	FIH1H561A971	C 560PF, 50V	
C3010	FIH1H561A971	C 560PF, 50V	
C3011	FIH1H561A971	C 560PF, 50V	
C3013	FIH1H561A971	C 560PF, 50V	
C3014	FIH1H561A971	C 560PF, 50V	
C3022	ECJ1VB1C105K	C 1UF,K, 16V	
C3023	ECJ1VB1H104K	C 1UF,K, 50V	
C3024	ECJ1VB1C105K	C 1UF,K, 16V	
C3025	ECJ1VB1C105K	C 1UF,K, 16V	
C3026	ECJ1VB1C105K	C 1UF,K, 16V	
C3039	ECJ1VB1C105K	C 1UF,K, 16V	
C3040	ECJ1VB1H104K	C 1UF,K, 50V	
C3041	ECJ1VB1C105K	C 1UF,K, 16V	
C3043	ECJ1VB1C105K	C 1UF,K, 16V	
C3044	ECJ1VB1C105K	C 1UF,K, 16V	
C3046	ECJ1VB1C105K	C 1UF,K, 16V	
C3047	ECJ1VB1C105K	C 1UF,K, 16V	
C3048	ECJ1VB1C105K	C 1UF,K, 16V	
C3049	ECJ1VB1C105K	C 1UF,K, 16V	
C3054	FIH1A1050032	C 1UF, 10V	
C3070	FIH1A1050032	C 1UF, 10V	
C3071	FIH1A1050032	C 1UF, 10V	
C3072	ECJ1VB1H104K	C 1UF,K, 50V	
C3073	FIH1A1050032	C 1UF, 10V	
C3074	FIH1A1050032	C 1UF, 10V	
C3075	ECJ1VB1C105K	C 1UF,K, 16V	
C3076	EEHBL1C221UP	E 220UF, 16V	
C3077	ECJ1VB1H104K	C 1UF,K, 50V	
C3078	FIH1A1050032	C 1UF, 10V	
C3083	FIH1A1050032	C 1UF, 10V	
C3084	FIH1A1050032	C 1UF, 10V	
C3085	FIH1A1050032	C 1UF, 10V	
C3086	FIH1A1050032	C 1UF, 10V	
C3088	FIH1A1050032	C 1UF, 10V	
C3091	FIH1A1050032	C 1UF, 10V	
C3092	FIH1A1050032	C 1UF, 10V	
C3095	F2G0J2210013	E 220UF, 6.3V	
C3098	ECJ1VB1C105K	C 1UF,K, 16V	
C3101	ECJ1VB1H104K	C 1UF,K, 50V	
C3103	FIK0J226A008	C 22UF, 6.3V	
C3107	FIH1A1050032	C 1UF, 10V	
C3108	FIH1A1050032	C 1UF, 10V	
C3109	FIH1A1050032	C 1UF, 10V	
C3114	FIJ1A106A043	C 10UF, 10V	
C3115	FIJ1A106A043	C 10UF, 10V	
C3116	FIJ1A106A043	C 10UF, 10V	
C3117	FIJ1A106A043	C 10UF, 10V	
C3119	EEHBL1C221UP	E 220UF, 16V	
C3125	F2G1C100A022	E 10UF, 16V	
C3127	ECJ1VB1H104K	C 1UF,K, 50V	
C3128	ECJ1VB1H104K	C 1UF,K, 50V	
C3136	ECJ1VB1H104K	C 1UF,K, 50V	
C3137	EEHBL1C470P	E 47UF, 16V	
C3138	F2G1C100A022	E 10UF, 16V	
C3139	ECJ1VB1H104K	C 1UF,K, 50V	
C3140	F2G1C220A022	E 22UF, 16V	
C3144	FIH1A1050032	C 1UF, 10V	
C3148	ECJ1VB1H104K	C 1UF,K, 50V	
C3149	F2G1C1010034	E 100UF, 16V	
C3400	FIJ1H104A838	C 0.1UF, 50V	
C3401	FIJ1H104A838	C 0.1UF, 50V	
C3402	FIJ1H104A838	C 0.1UF, 50V	
C3403	FIJ1H104A838	C 0.1UF, 50V	
C3404	FIJ1H104A838	C 0.1UF, 50V	
C3405	FIJ1H104A838	C 0.1UF, 50V	
C3406	FIJ1H104A838	C 0.1UF, 50V	
C3418	FIJ1H104A838	C 0.1UF, 50V	
C3419	FIJ1H104A838	C 0.1UF, 50V	
C3420	FIJ1H104A838	C 0.1UF, 50V	
C3427	FIJ1H104A838	C 0.1UF, 50V	

Ref. No.	Part No.	Part Name & Description	Remarks
C3428	F1J1H104A838	C 0.1UF, 50V	
C3429	F1J1H104A838	C 0.1UF, 50V	
C3430	F1J1H104A838	C 0.1UF, 50V	
C3431	F1J1H104A838	C 0.1UF, 50V	
C3432	F1J1H104A838	C 0.1UF, 50V	
C3439	F1J1H104A838	C 0.1UF, 50V	
C3440	F1J1H104A838	C 0.1UF, 50V	
C3447	F1J1H104A838	C 0.1UF, 50V	
C3700	F1J1H561A836	C 560F, 50V	
C3702	F1J1H561A836	C 560F, 50V	
C3705	ECJ1VF1H104Z	C 0.1UF, Z, 50V	
C3707	ECJ1VF1H104Z	C 0.1UF, Z, 50V	
C4005	F1G1C104A116	C 0.1UF, 16V	
C4006	F1G1C104A116	C 0.1UF, 16V	
C4008	F1G1C104A116	C 0.1UF, 16V	
C4010	F1G1C104A116	C 0.1UF, 16V	
C4011	F1G1C104A116	C 0.1UF, 16V	
C4013	F1G1C104A116	C 0.1UF, 16V	
C4014	F1G1C104A116	C 0.1UF, 16V	
C4015	F1G1C104A116	C 0.1UF, 16V	
C4016	F1J1A475A039	C 4.7UF, 10V	
C4018	F1G1C104A116	C 0.1UF, 16V	
C4019	F1J1H474A757	C 0.47UF, 50V	
C4020	F1G1C104A116	C 0.1UF, 16V	
C4021	F1G1C104A116	C 0.1UF, 16V	
C4022	F1J1H474A757	C 0.47UF, 50V	
C4023	F1G1C104A116	C 0.1UF, 16V	
C4024	F1G1C104A116	C 0.1UF, 16V	
C4025	F1G1C104A116	C 0.1UF, 16V	
C4027	F1G1C104A116	C 0.1UF, 16V	
C4028	F1G1C104A116	C 0.1UF, 16V	
C4030	F1G1C104A116	C 0.1UF, 16V	
C4032	F1G1C104A116	C 0.1UF, 16V	
C4033	F1G1C104A116	C 0.1UF, 16V	
C4034	F1G1C104A116	C 0.1UF, 16V	
C4035	F1H1A1050032	C 1UF, 10V	
C4036	F1H1A1050032	C 1UF, 10V	
C4038	F1G1C104A116	C 0.1UF, 16V	
C4039	F1G1E103A123	C 0.01UF, 25V	
C4040	F1G1H150A731	C 15PF, 50V	
C4045	F1G1C104A116	C 0.1UF, 16V	
C4047	F1H1A1050032	C 1UF, 10V	
C4049	F1G1C104A116	C 0.1UF, 16V	
C4050	F1H1A1050032	C 1UF, 10V	
C4051	F1G1C104A116	C 0.1UF, 16V	
C4200	F1J0J106A020	C 10UF, 6.3V	
C4201	F1G1H102A730	C 1000PF, 50V	
C4202	F1G1C104A116	C 0.1UF, 16V	
C4203	F1J0J106A020	C 10UF, 6.3V	
C4204	F1G1C104A116	C 0.1UF, 16V	
C4205	F1G1C104A116	C 0.1UF, 16V	
C4206	F1G1C104A116	C 0.1UF, 16V	
C4207	F1G1C104A116	C 0.1UF, 16V	
C4209	F1J0J106A020	C 10UF, 6.3V	
C4210	F1G1H102A730	C 1000PF, 50V	
C4211	F1G1H102A730	C 1000PF, 50V	
C4212	F1J0J106A020	C 10UF, 6.3V	
C4214	F1G1C104A116	C 0.1UF, 16V	
C4215	F1G1C104A116	C 0.1UF, 16V	
C4216	F1G1H102A730	C 1000PF, 50V	
C4218	F1J0J106A020	C 10UF, 6.3V	
C4219	F1G1H102A730	C 1000PF, 50V	
C4220	F1G1H102A730	C 1000PF, 50V	
C4221	F1J0J106A020	C 10UF, 6.3V	
C4223	F1G1C104A116	C 0.1UF, 16V	
C4224	F1G1C104A116	C 0.1UF, 16V	
C4225	F1G1H102A730	C 1000PF, 50V	
C4226	F1J0J106A020	C 10UF, 6.3V	
C4227	F1G1H102A730	C 1000PF, 50V	
C4228	F1G1C104A116	C 0.1UF, 16V	
C4229	F1G1C104A116	C 0.1UF, 16V	
C4232	F1H0J2250008	C 2.2UF, 6.3V	
C4233	F1H0J2250008	C 2.2UF, 6.3V	

Ref. No.	Part No.	Part Name & Description	Remarks
C4234	F1G1C1030008	C 0.01UF, 16V	
C4235	F1H0J1050012	C 1UF, 6.3V	
C4237	F1G1C104A116	C 0.1UF, 16V	
C4238	F1G1C104A116	C 0.1UF, 16V	
C4239	F1J1A106A043	C 10UF, 10V	
C4240	F1J1A106A043	C 10UF, 10V	
C4241	F2G0J220A019	E 22UF, 6.3V	
C4243	F1G1C104A116	C 0.1UF, 16V	
C4244	F1J1A106A043	C 10UF, 10V	
C4245	F1J1A106A043	C 10UF, 10V	
C4246	F1J0J106A020	C 10UF, 6.3V	
C4247	F1J0J106A020	C 10UF, 6.3V	
C4248	F1J0J106A020	C 10UF, 6.3V	
C4249	F1G1H102A730	C 1000PF, 50V	
C4250	F1J0J106A020	C 10UF, 6.3V	
C4251	F1J0J106A020	C 10UF, 6.3V	
C4253	F1J0J106A020	C 10UF, 6.3V	
C4254	F1J0J106A020	C 10UF, 6.3V	
C4255	F1J0J106A020	C 10UF, 6.3V	
C4256	F1H1E104A129	C 0.1UF, 25V	
C4257	F1G1E331A123	C 330PF, 25V	
C4258	F1G1C1030008	C 0.01UF, 16V	
C4259	F1G1C104A116	C 0.1UF, 16V	
C4260	ECGRL0G680ER	C 68UF, 4V	
C4261	F1G1H220A731	C 22PF, 50V	
C4262	F1G1H180A731	C 18PF, 50V	
C4263	F1G1H102A730	C 1000UF, 50V	
C4264	F1G1C104A116	C 0.1UF, 16V	
C4265	F1G1H120A731	C 12PF, 50V	
C4266	F1G1H150A731	C 15PF, 50V	
C4267	F1G1C104A116	C 0.1UF, 16V	
C4268	F1H0J1050012	C 1UF, 6.3V	
C4269	F1G1C104A116	C 0.1UF, 16V	
C4270	ECGRL0G680ER	C 68UF, 4V	
C4272	F1J0J106A020	C 10UF, 6.3V	
C4273	F1G1H102A730	C 1000UF, 50V	
C4274	F1G1H102A730	C 1000UF, 50V	
C4275	F1J0J106A020	C 10UF, 6.3V	
C4276	F1H0J1050012	C 1UF, 6.3V	
C4277	F1H0J1050012	C 1UF, 6.3V	
C4278	F1H0J1050012	C 1UF, 6.3V	
C4280	F1G1C104A116	C 0.1UF, 16V	
C4281	F1G1C104A116	C 0.1UF, 16V	
C4282	F1H0J1050012	C 1UF, 6.3V	
C4283	F1H0J1050012	C 1UF, 6.3V	
C4284	F1G1H102A730	C 1000UF, 50V	
C4286	F1J0J106A020	C 10UF, 6.3V	
C4287	F1G1C1030008	C 0.01UF, 16V	
C4288	F1G1C104A116	C 0.1UF, 16V	
C4289	F1G1C104A116	C 0.1UF, 16V	
C4290	F1G1C1030008	C 0.01UF, 16V	
C4291	F1G1H102A730	C 1000UF, 50V	
C4292	F1G1H102A730	C 1000UF, 50V	
C4293	F1G1C104A116	C 0.1UF, 16V	
C4296	F1G1C104A116	C 0.1UF, 16V	
C4297	F1J1A106A043	C 10UF, 10V	
C4298	F1G1H102A730	C 1000UF, 50V	
C4299	F1J0J106A020	C 10UF, 6.3V	
C4300	F1G1C104A116	C 0.1UF, 16V	
C4301	F1G1C104A116	C 0.1UF, 16V	
C4302	F1G1C1030008	C 0.01UF, 16V	
C4303	ECJ1VB0J475K	C 4.7UF,K,6.3V	
C4305	F1G1C104A116	C 0.1UF, 16V	
C4306	F1G1C104A116	C 0.1UF, 16V	
C4307	F1J1A106A043	C 10UF, 10V	
C4308	F2G0G101A007	E 100UF, 4V	
C4309	F1G1H102A730	C 1000UF, 50V	
C4310	F1G1C104A116	C 0.1UF, 16V	
C4311	F1J0J106A020	C 10UF, 6.3V	
C4312	F1G1H102A730	C 1000UF, 50V	
C4313	F1G1C104A116	C 0.1UF, 16V	
C4314	F1J0J106A020	C 10UF, 6.3V	
C4315	F1G1C104A116	C 0.1UF, 16V	

Ref. No.	Part No.	Part Name & Description	Remarks
C4316	FlG1C104A116	C 0.1UF, 16V	
C4320	FlH0J1050012	C 1UF, 6.3V	
C4322	FlG1C1030008	C 0.01UF, 16V	
C4324	FlH0J1050012	C 1UF, 6.3V	
C4325	FlG1H102A730	C 1000UF, 50V	
C4326	FlG1C104A116	C 0.1UF, 16V	
C4328	FlG1H102A730	C 1000UF, 50V	
C4329	FlG1H102A730	C 1000UF, 50V	
C4330	FlG1C104A116	C 0.1UF, 16V	
C4331	FlG1C104A116	C 0.1UF, 16V	
C4332	FlG1C104A116	C 0.1UF, 16V	
C4333	FlG1H102A730	C 1000UF, 50V	
C4334	FlH0J1050012	C 1UF, 6.3V	
C4335	FlG1C104A116	C 0.1UF, 16V	
C4338	FlH0J1050012	C 1UF, 6.3V	
C4340	FlG1C1030008	C 0.01UF, 16V	
C4341	FlG1C1030008	C 0.01UF, 16V	
C4342	FlG1C1030008	C 0.01UF, 16V	
C4343	FlJ0J106A020	C 10UF, 6.3V	
C4344	FlG1C1030008	C 0.01UF, 16V	
C4345	FlG1C104A116	C 0.1UF, 16V	
C4346	FlG1C1030008	C 0.01UF, 16V	
C4347	FlG1C104A116	C 0.1UF, 16V	
C4348	FlG1C1030008	C 0.01UF, 16V	
C4349	FlH0J1050012	C 1UF, 6.3V	
C4350	FlH0J1050012	C 1UF, 6.3V	
C4351	FlG1C104A116	C 0.1UF, 16V	
C4352	FlG1C104A116	C 0.1UF, 16V	
C4353	FlG1C1030008	C 0.01UF, 16V	
C4354	FlG1C1030008	C 0.01UF, 16V	
C4355	FlJ0J106A020	C 10UF, 6.3V	
C4356	FlH1H103A970	C 0.01UF, 50V	
C4357	FlH1H103A970	C 0.01UF, 50V	
C4358	EEHBL1C470P	E 47UF, 16V	
C4361	FlJ0J106A020	C 10UF, 6.3V	
C4362	FlJ1A106A043	C 10UF, 10V	
C4364	FlG1C104A116	C 0.1UF, 16V	
C4365	FlG1C104A116	C 0.1UF, 16V	
C4366	FlG1C104A116	C 0.1UF, 16V	
C4367	FlG1C104A116	C 0.1UF, 16V	
C4368	FlG1C104A116	C 0.1UF, 16V	
C4369	FlG1C104A116	C 0.1UF, 16V	
C4370	FlG1C104A116	C 0.1UF, 16V	
C4371	FlG1C104A116	C 0.1UF, 16V	
C4372	FlG1C104A116	C 0.1UF, 16V	
C4373	FlG1C104A116	C 0.1UF, 16V	
C4374	FlG1C104A116	C 0.1UF, 16V	
C4375	FlG1C104A116	C 0.1UF, 16V	
C4376	FlG1C104A116	C 0.1UF, 16V	
C4377	FlG1C104A116	C 0.1UF, 16V	
C4378	FlG1C104A116	C 0.1UF, 16V	
C4379	FlG1C104A116	C 0.1UF, 16V	
C4380	FlG1C104A116	C 0.1UF, 16V	
C4381	FlG1C104A116	C 0.1UF, 16V	
C4382	FlG1C104A116	C 0.1UF, 16V	
C4383	FlG1C104A116	C 0.1UF, 16V	
C4384	FlG1C104A116	C 0.1UF, 16V	
C4385	FlG1C104A116	C 0.1UF, 16V	
C4386	FlJ0J106A020	C 10UF, 6.3V	
C4387	FlG1C104A116	C 0.1UF, 16V	
C4388	FlG1C104A116	C 0.1UF, 16V	
C4440	FlG1C104A116	C 0.1UF, 16V	
C4441	FlJ1A106A043	C 10UF, 10V	
C4442	F2G0G101A007	E 100UF, 4V	
C4454	FlG1C104A116	C 0.1UF, K, 16V	
C4533	FlG1H680A731	C 68PF, 50V	
C4534	FlH1C104A143	C 0.1UF, K, 16V	
C4535	FlH1C104A143	C 0.1UF, K, 16V	
C4537	FlH1C104A143	C 0.1UF, K, 16V	
C4547	FlG1C104A116	C 0.1UF, 16V	
C4548	FlH1C104A143	C 0.1UF, K, 16V	
C4549	FlH1C104A143	C 0.1UF, K, 16V	
C4550	FlG1C104A116	C 0.1UF, 16V	

Ref. No.	Part No.	Part Name & Description	Remarks
C4551	FlH1C104A143	C 0.1UF, K, 16V	
C4552	FlH1C104A143	C 0.1UF, K, 16V	
C4553	FlG1H102A730	C 1000UF, 50V	
C4554	EEHBL1C470P	E 47UF, 16V	
C4555	FlJ1A106A043	C 10UF, 10V	
C4567	FlH1C104A143	C 0.1UF, K, 16V	
C4574	FlG1E103A123	C 0.1UF, 25V	
C4575	FlH1A1050032	C 1UF, 10V	
C4576	FlG1C104A116	C 0.1UF, 16V	
C4580	FlG1E103A123	C 0.1UF, 25V	
C4585	FlH1A1050032	C 1UF, 10V	
C4595	FlG1E103A123	C 0.1UF, 25V	
C4596	FlG1C104A116	C 0.1UF, 16V	
C4598	FlH1A1050032	C 1UF, 10V	
C4599	F2G0J470A019	E 47UF, 6.3V	
C4600	FlG1C104A116	C 0.1UF, 16V	
C4601	F2G0J470A019	E 47UF, 6.3V	
C4602	FlG1C104A116	C 0.1UF, 16V	
C4603	FlH0J2250008	C 2.2UF, 6.3V	
C4604	FlG1H471A459	C 470PF, 50V	
C4605	FlH1A1050032	C 1UF, 10V	
C4606	FlJ1A475A039	C 4.7UF, 10V	
C4607	FlJ1A475A039	C 4.7UF, 10V	
C4608	FlG1C104A116	C 0.1UF, 16V	
C4612	FlG1E103A123	C 0.1UF, 25V	
C4613	FlH1A1050032	C 1UF, 10V	
C4614	FlG1C104A116	C 0.1UF, 16V	
C4616	FlJ1A475A039	C 4.7UF, 10V	
C4617	FlJ0G2260001	C 22UF, 4V	
C4619	FlG1C104A116	C 0.1UF, 16V	
C4624	FlH1C104A143	C 0.1UF, K, 16V	
C4625	FlH1C104A143	C 0.1UF, K, 16V	
C4628	FlG1C104A116	C 0.1UF, 16V	
C4630	FlG1C104A116	C 0.1UF, 16V	
C4632	FlH1A1050032	C 1UF, 10V	
C4634	FlH1A1050032	C 1UF, 10V	
C4636	FlH1A1050032	C 1UF, 10V	
C4638	FlH1A1050032	C 1UF, 10V	
C4640	FlH1A1050032	C 1UF, 10V	
C4642	FlH1A1050032	C 1UF, 10V	
C4643	FlG1C104A116	C 0.1UF, 16V	
C4644	FlG1C104A116	C 0.1UF, 16V	
C4645	FlG1C104A116	C 0.1UF, 16V	
C4646	FlG1C104A116	C 0.1UF, 16V	
C4700	FlG1A104A012	C 0.1UF, 10V	
C4701	FlG1A104A012	C 0.1UF, 10V	
C4703	FlG1A104A012	C 0.1UF, 10V	
C4704	F2G0J330A019	E 0.1UF, 10V	
C4705	FlG1A104A012	C 0.1UF, 10V	
C4712	FlG1C104A116	C 0.1UF, 16V	
C4713	FlG1C104A116	C 0.1UF, 16V	
C4714	FlG1C104A116	C 0.1UF, 16V	
C4715	FlG1C104A116	C 0.1UF, 16V	
C4722	FlG1C104A116	C 0.1UF, 16V	
C4723	FlG1C104A116	C 0.1UF, 16V	
C4724	FlG1A104A012	C 0.1UF, 10V	
C4725	FlJ0J106A020	C 10UF, 6.3V	
C4726	FlG1A104A012	C 0.1UF, 10V	
C4727	FlG1A104A012	C 0.1UF, 10V	
C4728	FlG1A104A012	C 0.1UF, 10V	
C4729	FlG1A104A012	C 0.1UF, 10V	
C4730	FlG1A104A012	C 0.1UF, 10V	
C4731	FlG1A104A012	C 0.1UF, 10V	
C4732	FlG1C103A048	C 0.01UF, 16V	
C4733	FlG1C103A048	C 0.01UF, 16V	
C4734	FlG1C103A048	C 0.01UF, 16V	
C4735	FlG1C103A048	C 0.01UF, 16V	
C4736	FlG1C103A048	C 0.01UF, 16V	
C4737	FlG1C103A048	C 0.01UF, 16V	
C4738	FlG1H150A731	C 15PF, 50V	
C4739	FlG1H120A731	C 15PF, 50V	
C5400	FlK1A106A021	C 10UF, 10V	
C5401	FlH1E104A129	C 0.1UF, 25V	

Ref. No.	Part No.	Part Name & Description	Remarks
C5402	F1G1E103A123	C 0.01UF, 25V	
C5404	F1H1H392A970	C 3900PF	
C5405	F1H1E104A129	C 0.1UF, 25V	
C5406	ECJ3YB1E106M	C 10UF, 25V	
C5408	F1K1A106A021	C 10UF, 10V	
C5412	F1K1A106A021	C 10UF, 10V	
C5413	F1H1E104A129	C 0.1UF, 25V	
C5414	F1G1E103A123	C 0.01UF, 25V	
C5416	F1H1H392A970	C 3900PF	
C5417	F1H1E104A129	C 0.1UF, 25V	
C5418	ECJ3YB1E106M	C 10UF, 25V	
C5420	F1K1A106A021	C 10UF, 10V	
C5600	F1H1A1050032	C 1UF, 10V	
C5601	F1G1C104A116	C 0.1UF, 16V	
C5602	ECGRL0G680ER	C 68UF, 4V	
C5603	F1G1E103A123	C 0.01UF, 25V	
C5604	F1G1E103A123	C 0.01UF, 25V	
C5605	F1J1A475A039	C 4.7UF, 10V	
C5606	F1G1H471A459	C 470PF, 50V	
C5607	F1G1H221A459	C 220PF, 50V	
C5608	F1G1C104A116	C 0.1UF, 16V	
C5611	F1K1C1060004	C 10UF, 16V	
C5612	F1K1C1060004	C 10UF, 16V	
C5615	F1K1C1060004	C 10UF, 16V	
C5616	F1G1A473A053	C 0.047UF, 10V	
C5617	F1H1A1050032	C 1UF, 10V	
C5618	F1K1C1060004	C 10UF, 16V	
C5619	F1K1C1060004	C 10UF, 16V	
C5620	F1H1C104A143	C 0.1UF,K, 16V	
C5621	F1G1E103A123	C 0.01UF, 25V	
C5622	F1J1A475A039	C 4.7UF, 10V	
C5623	F1G1H471A459	C 470PF, 50V	
C5624	F1G1H221A459	C 220PF, 50V	
C5625	F1G1E103A123	C 0.01UF, 25V	
C5626	F1G1C104A116	C 0.1UF, 16V	
C5627	F1G1C104A116	C 0.1UF, 16V	
C5628	ECGRL0G680ER	C 68UF, 4V	
C5629	ECGRL0G680ER	C 68UF, 4V	
C5631	EEH1B1C470P	C 47UF, 16V	
C5632	ECJ1VB1C105K	C 1UF, 16V	
C5636	F1G1C104A116	C 0.1UF, 16V	
C5637	F1G1C104A116	C 0.1UF, 16V	
C5638	F1G1C104A116	C 0.1UF, 16V	
C5639	F1G1C104A116	C 0.1UF, 16V	
C5640	F1G1C104A116	C 0.1UF, 16V	
C5641	F1G1C104A116	C 0.1UF, 16V	
C5642	F1K1C1060004	C 10UF, 16V	
C5643	F1H1C104A143	C 0.1UF,K, 16V	
C5644	F1G1E103A123	C 0.01UF, 25V	
C5660	F1G1C1030008	C 0.01UF, 16V	
C5661	F1G1C1030008	C 0.01UF, 16V	
C5663	F1G1A473A053	C 0.047UF, 10V	
C5688	F1H1A225A051	C 2.2UF, 10V	
C7000	ECKCNA101MB7	C 100PF, M,	△
C7001	ECKCNA221MB7	C 220PF, M,	△
C7002	ECQU2A334BN9	C 0.33UF ,	
C7003	ECQU2A334BN9	C 0.33UF ,	
C7004	ECQU2A334BN9	C 0.33UF ,	
C7006	F2A2W2R2A002	E 2.2UF, 450V	
C7007	ECKCNA222ME7	C 2200PF, M,	
C7008	ECED3WD220KG	C 22PF, 2KV	
C7009	F1J1H104A835	C 0.1UF, 50V	
C7010	F1J1H474A757	C 0.47UF, 50V	
C7011	F2A1H1010047	E 100UF, 50V	
C7012	F1J1H104A835	C 0.1UF, 50V	
C7013	F1J1H473A835	C 0.047UF, 50V	
C7014	ECKR3A102KBP	C 1000PF, K, 1KV	
C7015	F2A1A102A214	E 1000UF, 10V	
C7016	F1J1H103A834	C 0.01UF, 50V	
C7017	F0CZZ105A121	C 1UF, 50V	△
C7018	F1J1H474A757	C 0.47UF, 50V	
C7019	ECJ2VB1H182K	C 1800PF, K, 50V	
C7020	F1J1H473A835	C 0.47UF, 50V	

Ref. No.	Part No.	Part Name & Description	Remarks
C7021	F1J1H682A834	C 6800PF, 50V	
C7022	F1J1H104A835	C 0.1UF, 50V	
C7023	ECA1HHG010	E 1UF, 50V	
C7024	F2A1H1010047	E 100UF, 50V	
C7025	ECKW3D331KBP	C 330PF, K, 2KV	
C7026	ECKW3D151KBP	C 150PF, K, 2KV	
C7027	ECKCNA472ME7	C 4700PF, M,	
C7028	F2A2W2210001	E 220UF, 450V	
C7029	F1J1H470A836	C 47PF, 50V	
C7030	F1J1H471A836	C 470PF, 50V	
C7031	F2A1H330A122	E 33UF, 50V	
C7032	ECQE6103KF	P 0.01UF , 630V	
C7033	ECKW3D221KBP	C 220PF, 2kv	
C7034	F1J1H102A836	C 1000PF, 50V	
C7035	F1J1H332A834	C 3000PF, 50V	
C7036	F1J1H104A835	C 0.1UF, 50V	
C7037	F1J1H474A757	C 0.47UF, 50V	
C7038	ECKR3A102KBP	C 1000PF, K, 1KV	
C7039	F1J1H104A835	C 0.1UF, 50V	
C7044	F1J1E105A171	C 1UF, 25V	
C7045	F2A1C1020027	E 1000UF, 16V	
C7046	F1J1H104A835	C 0.1UF, 50V	
C7047	F2A1E471A102	E 470UF, 25V	
C7049	F2A1H221A253	E 220UF, 50V	
C7051	F1J1E105A171	C 1UF, 25V	
C7052	F1J1H103A834	C 0.01UF, 50V	
C7053	F1J1H104A835	C 0.1UF, 50V	
C7054	F1J1E105A171	C 1UF, 25V	
C7055	F1J1E105A171	C 1UF, 25V	
C7056	F1J1E105A171	C 1UF, 25V	
C7057	F1J1E105A171	C 1UF, 25V	
C7058	F1J1H103A834	C 0.01UF, 50V	
C7059	F1J1H103A834	C 0.01UF, 50V	
C7062	ECKW3D221KBP	C 220PF, 2kv	
C7088	F2A1E470A454	E 47UF, 25V	△
C7089	F2A1H100A122	E 10UF, 50V	
C7090	ECKW3D221KBP	C 220PF, 2kv	
C7095	F1J1H104A835	C 0.1UF, 50V	
C7096	F1J1H104A835	C 0.1UF, 50V	
C7097	F2A1E471A102	E 470UF, 25V	
C7098	ECKCNA221MB7	C 220PF, M,	△
C7099	ECKCNA101MB7	C 100PF, M,	△
C7102	F2A1C101A121	E 100UF, 16V	
C7103	F1J1C224A194	C 0.22UF, 16V	
C7104	F2A1H330A118	E 33UF, 50V	
C7105	F1J1H104A835	C 0.1UF, 50V	
C7106	ECKCNA471MB7	C 470PF, M,	
C7107	F2A1E471A102	E 470UF, 25V	
C7108	F2A1H100A118	E 10UF, 50V	
C7111	ECKR3A221KBP	C 220PF, 1kv	
C7112	ECKR3A221KBP	C 220PF, 1kv	
C7114	F1J1E105A171	C 1UF, 25V	
C7116	F1J1H104A835	C 0.1UF, 50V	
C7120	F1J1H104A835	C 0.1UF, 50V	
C7121	F1J1H104A835	C 0.1UF, 50V	
C7122	F2A1C101A244	E 100UF, 16V	
C7123	F1J1H104A835	C 0.1UF, 50V	
C7125	ECKR3A221KBP	C 220PF, 1kv	
C7134	F2A1E471A102	E 470UF, 25V	
C7135	F1J1H103A834	C 0.01UF, 50V	
C7136	F1J1H103A834	C 0.01UF, 50V	
C7137	F2A1E221A487	E 220UF, 25V	
C7138	F2A1E471A218	E 470UF, 25V	
C7451	F1J1H102A834	C 1000PF, 50V	
C7452	F1J1H102A834	C 1000PF, 50V	
C7453	F1J1H102A834	C 1000PF, 50V	
C7454	F1J1H102A834	C 1000PF, 50V	
C7601	F1G1A104A053	C 0.1UF, 10V	
C7603	F1J1A106A043	C 10UF, 10V	
C7604	F1J1A106A043	C 10UF, 10V	
C7605	F1J1A106A043	C 10UF, 10V	
C7606	F1J1A106A043	C 10UF, 10V	
C7607	EEH1B1C470P	E 47UF, 16V	

Ref. No.	Part No.	Part Name & Description	Remarks
C8001	FlG1C104A116	C 0.1UF, 16V	
C8002	FlH0J1050012	C 1UF, 6.3V	
C8003	FlH0J1050012	C 1UF, 6.3V	
C8004	FlH0J1050012	C 1UF, 6.3V	
C8005	FlH0J1050012	C 1UF, 6.3V	
C8006	FlG1C104A116	C 0.1UF, 16V	
C8007	FlG1C104A116	C 0.1UF, 16V	
C8008	FlG1C104A116	C 0.1UF, 16V	
C8009	FlJ1A106A043	C 10UF, 10V	
C8010	FlJ1A106A043	C 10UF, 10V	
C8011	FlG1C104A116	C 0.1UF, 16V	
C8012	FlG1C104A116	C 0.1UF, 16V	
C8013	FlG1C104A116	C 0.1UF, 16V	
C8014	FlG1C104A116	C 0.1UF, 16V	
C8015	FlH0J1050012	C 1UF, 6.3V	
C8016	FlH0J1050012	C 1UF, 6.3V	
C8017	FlJ1A106A043	C 10UF, 10V	
C8018	FlG1C104A116	C 0.1UF, 16V	
C8019	FlG1C104A116	C 0.1UF, 16V	
C8020	FlG1C104A116	C 0.1UF, 16V	
C8021	FlG1C104A116	C 0.1UF, 16V	
C8022	FlH0J1050012	C 1UF, 6.3V	
C8023	FlJ1A106A043	C 10UF, 10V	
C8024	FlJ1A106A043	C 10UF, 10V	
C8025	FlG1C104A116	C 0.1UF, 16V	
C8026	FlG1C104A116	C 0.1UF, 16V	
C8027	FlG1C104A116	C 0.1UF, 16V	
C8028	FlG1C104A116	C 0.1UF, 16V	
C8029	FlG1C104A116	C 0.1UF, 16V	
C8030	FlH0J1050012	C 1UF, 6.3V	
C8031	FlH0J1050012	C 1UF, 6.3V	
C8032	FlJ1A106A043	C 10UF, 10V	
C8033	FlG1C104A116	C 0.1UF, 16V	
C8034	FlG1C104A116	C 0.1UF, 16V	
C8035	FlJ1A106A043	C 10UF, 10V	
C8036	FlJ1A106A043	C 10UF, 10V	
C8037	FlG1C104A116	C 0.1UF, 16V	
C8038	FlG1C104A116	C 0.1UF, 16V	
C8039	FlG1C104A116	C 0.1UF, 16V	
C8040	FlG1C104A116	C 0.1UF, 16V	
C8041	FlG1C104A116	C 0.1UF, 16V	
C8042	ECGRLOG680ER	C 68UF, 4V	
C8043	FlG1C104A116	C 0.1UF, 16V	
C8044	FlG1C104A116	C 0.1UF, 16V	
C8045	FlG1C104A116	C 0.1UF, 16V	
C8046	FlG1C104A116	C 0.1UF, 16V	
C8047	FlG1C104A116	C 0.1UF, 16V	
C8048	FlG1C104A116	C 0.1UF, 16V	
C8049	FlG1C104A116	C 0.1UF, 16V	
C8050	FlG1C104A116	C 0.1UF, 16V	
C8051	FlG1C104A116	C 0.1UF, 16V	
C8052	FlH0J1050012	C 1UF, 6.3V	
C8053	FlG1E103A123	C 0.01UF, 25V	
C8054	FlG1H180A731	C 18PF, 50V	
C8055	FlG1H7R0A732	C 7PF, 50V	
C8056	FlG1C104A116	C 0.1UF, 16V	
C8057	FlG1C104A116	C 0.1UF, 16V	
C8058	FlJ1A106A043	C 10UF, 10V	
C8067	FlG1E103A123	C 0.01UF, 25V	
C8068	FlG1C104A116	C 0.1UF, 16V	
C8070	FlG1C104A116	C 0.1UF, 16V	
C8071	FlG1C104A116	C 0.1UF, 16V	
C8072	FlG1C104A116	C 0.1UF, 16V	
C8073	FlG1C104A116	C 0.1UF, 16V	
C8074	FlG1C104A116	C 0.1UF, 16V	
C8075	FlJ0G2260001	C 22UF, 4V	
C8076	FlG1C104A116	C 0.1UF, 16V	
C8077	FlG1C104A116	C 0.1UF, 16V	
C8078	FlG1C104A116	C 0.1UF, 16V	
C8079	FlG1C104A116	C 0.1UF, 16V	
C8080	FlG1C104A116	C 0.1UF, 16V	
C8555	FlG1C104A116	C 0.1UF, 16V	
C8601	FlG1C104A116	C 0.1UF, 16V	

Ref. No.	Part No.	Part Name & Description	Remarks
C8621	FlG1C104A116	C 0.1UF, 16V	
C8622	FlG1C104A116	C 0.1UF, 16V	
C8812	FlG1A104A012	C 1UF, 6.3V	
C8813	EEEB1C470P	E 47UF, 16V	
C8814	FlG1C1030008	C 0.01UF, 16V	
C8815	FlJ0G2260001	C 22UF, 4V	
		DIODES	
D1002	EZJZ0V120JA	VARISTOR	
D1003	EZJZ0V120JA	VARISTOR	
D1004	EZAEG2A50AX	FILTER	
D1005	EZAEG2A50AX	FILTER	
D1006	EZAEG2A50AX	FILTER	
D1007	EZAEG2A50AX	FILTER	
D1107	MA704ATX	DIODE	
D1108	EZJZ0V120JA	VARISTOR	
D1112	MA2J72800L	DIODE	
D2013	MA2J11100L	DIODE	
D2014	MA2J11100L	DIODE	
D2020	MA2J11100L	DIODE	
D2021	MA2J11100L	DIODE	
D2022	MA2J11100L	DIODE	
D2024	MA2J11100L	DIODE	
D2025	MA2J11100L	DIODE	
D2026	MA2J11100L	DIODE	
D2027	MA2J11100L	DIODE	
D2201	MA704ATX	DIODE	
D2600	LNJ107W5PRW	DIODE	
D3015	K7AAAY000005	DIODE	
D3041	MAZ81400ML	DIODE	
D3043	MAZ81400ML	DIODE	
D3044	B0BC01100001	DIODE	
D3052	B0BC01100001	DIODE	
D4200	MA2J11100L	DIODE	
D4202	MA152KTX	DIODE	
D4541	B0HCMM000014	DIODE	
D4543	B0HCMM000014	DIODE	
D4545	MA2J11100L	DIODE	
D4546	MA2J11100L	DIODE	
D4547	MA2J11100L	DIODE	
D4548	MA2J11100L	DIODE	
D4700	EZAEG2A50AX	FILTER	
D4701	EZAEG2A50AX	FILTER	
D4702	EZAEG2A50AX	FILTER	
D4703	EZAEG2A50AX	FILTER	
D4704	EZAEG2A50AX	FILTER	
D4705	EZAEG2A50AX	FILTER	
D4706	EZAEG2A50AX	FILTER	
D4707	EZAEG2A50AX	FILTER	
D4708	EZAEG2A50AX	FILTER	
D4709	EZAEG2A50AX	FILTER	
D4710	EZAEG2A50AX	FILTER	
D4711	MA3056MTX	DIODE	
D4712	B0HCMM000014	DIODE	
D4713	B0HCMM000014	DIODE	
D4716	EZAEG2A50AX	FILTER	
D4717	EZAEG2A50AX	FILTER	
D4718	EZAEG2A50AX	FILTER	
D4719	EZAEG2A50AX	FILTER	
D4720	EZAEG2A50AX	FILTER	
D4721	EZAEG2A50AX	FILTER	
D4722	EZAEG2A50AX	FILTER	
D4723	EZAEG2A50AX	FILTER	
D4724	EZAEG2A50AX	FILTER	
D4725	EZAEG2A50AX	FILTER	
D4726	EZAEG2A50AX	FILTER	
D4727	EZAEG2A50AX	FILTER	
D4728	MA3056MTX	DIODE	
D4729	MA3056MTX	DIODE	
D4730	EZAEG2A50AX	FILTER	
D4731	EZAEG2A50AX	FILTER	
D4732	EZAEG2A50AX	FILTER	
D4733	EZAEG2A50AX	FILTER	

Ref. No.	Part No.	Part Name & Description	Remarks
D4734	EZAEG2A50AX	FILTER	
D4735	EZAEG2A50AX	FILTER	
D4736	EZAEG2A50AX	FILTER	
D4737	EZAEG2A50AX	FILTER	
D4738	EZAEG2A50AX	FILTER	
D4739	EZAEG2A50AX	FILTER	
D5400	B0JCME000037	DIODE	
D5401	B0BC4R700007	DIODE	
D5402	B0BC4R700007	DIODE	
D5403	B0JCPD000026	DIODE	
D5404	B0BC4R700007	DIODE	
D5405	B0BC4R700007	DIODE	
D5412	MAZ80470ML	DIODE	
D5413	MA2J11100L	DIODE	
D5433	MAZ80620ML	DIODE	
D5434	MA2J11100L	DIODE	
D5601	B0JCME000037	DIODE	
D5602	B0JCME000037	DIODE	
D5603	B0JCDD000002	DIODE	
D5604	B0JCDD000002	DIODE	
D5605	B0JCME000037	DIODE	
D5606	B0JCDD000002	DIODE	
D5612	MAZ80470ML	DIODE	
D5613	MA2J11100L	DIODE	
D5618	MAZ80470ML	DIODE	
D5619	MA2J11100L	DIODE	
D5633	MAZ80620ML	DIODE	
D5634	MA2J11100L	DIODE	
D5692	MAZ80560LL	DIODE	
D7000	ERZV10V621T2	VARISTOR	△
D7001	B0EBKT000007	DIODE	
D7002	ERZV10V621T2	VARISTOR	△
D7003	B0FBAT000008	DIODE	△
D7004	B0BA01600007	ZENER DIODE	
D7005	B0BA03600021	DIODE	
D7006	MTZJ15B	ZENER DIODE	
D7007	MAZ83600ML	DIODE	
D7008	MA2J11100L	DIODE	
D7009	MAZ83000ML	DIODE	
D7010	MAZ83600ML	DIODE	
D7011	MA2J11100L	DIODE	
D7012	B0HCMM000014	DIODE	
D7013	B0HCMM000014	DIODE	
D7014	MAZ80560ML	DIODE	
D7015	B0JCNG000003	DIODE	
D7016	MA2J11100L	DIODE	
D7017	MA2J72900L	DIODE	△
D7018	MA22F2000L	DIODE	
D7020	B0HCMM000014	DIODE	
D7021	B0BA01000070	DIODE	
D7022	MAZ80620ML	DIODE	
D7023	B0FABR000011	DIODE	
D7024	B0HAGV000004	DIODE	
D7025	B0HCMM000014	DIODE	
D7026	B0HCMM000014	DIODE	
D7027	B0HAGV000004	DIODE	△
D7028	MAZ80620ML	DIODE	
D7029	MA2J11100L	DIODE	
D7030	B0BA01000070	DIODE	
D7031	B0HCMM000014	DIODE	
D7032	B0JBSG000052	DIODE	
D7033	ERZV10V621T2	VARISTOR	△
D7034	B0JAPK000011	DIODE	
D7035	MAZ81000ML	DIODE	
D7036	MAZ81000ML	DIODE	
D7037	MAZ81000ML	DIODE	
D7039	MAZ81800ML	DIODE	
D7040	MAZ81100ML	DIODE	
D7041	B0HCMM000014	DIODE	
D7042	MA2J11100L	DIODE	
D7043	MA2J11100L	DIODE	
D7044	ERZV10V621T2	VARISTOR	
D7045	MA2J72900L	DIODE	

Ref. No.	Part No.	Part Name & Description	Remarks
D7046	MA2J72900L	DIODE	
D7047	MA2J72900L	DIODE	
D7048	MA2J72900L	DIODE	
D7050	B0BA03600021	DIODE	
D7056	ERZV10V621T2	VARISTOR	
D7058	B0HCMM000014	DIODE	
D7060	B0HCMM000014	DIODE	
D7062	MA2J11100L	DIODE	
D7064	MA2J11100L	DIODE	
D7066	MA2J11100L	DIODE	
D7067	MA2J11100L	DIODE	
D7069	MA2J11100L	DIODE	
D7073	MA2J72900L	DIODE	
D7075	B0JBSL000023	DIODE	
D7076	B0BA7R900004	ZENER DIODE	
D7082	RY24	DIODE	
D7083	TVSSR2KL	DIODE	
D7084	MAZ82400ML	DIODE	
D7085	MA2J11100L	DIODE	
D7087	MAZ83600ML	DIODE	
D7088	MAZ83600ML	DIODE	
D7089	MAZ83600ML	DIODE	
D7090	MAZ83600ML	DIODE	
D7091	MAZ83600ML	DIODE	
D7092	MAZ83600ML	DIODE	
D7093	MAZ83600ML	DIODE	
D7144	B0HCMM000014	DIODE	
D7601	MA2J11100L	DIODE	
	INTEGRATED CIRCUITS		
IC1000	C1ZBZ0003577	IC	
IC1100	MN103SG3FPA1	IC	
IC1101	TVRQ291	ROM IC	
IC2008	C0CBCBE00001	IC	
IC2012	C1BB00000947	IC	
IC2013	C0DBGYY00281	IC	
IC2106	C1AB00002909	IC	
IC2107	C0DBFFD00003	IC, POWER SUPPLY	
IC2301	C1AB00002875	IC	
IC2902	C0DBGYY00281	IC	
IC3001	AN15876A-VT	IC	
IC3101	AN15862A-VT	IC	
IC4001	C1AB00002687	IC	
IC4002	C0CBCAC00275	IC	
IC4005	C0CBCBC00190	IC	
IC4200	C1AB00002940	IC	
IC4201	C3ABQJ000055	IC	
IC4202	C0JBCZ000058	IC	
IC4203	C0DBEHG00006	IC	
IC4204	C3FBKY000039	IC	
IC4206	C3ZBN0000026	IC	
IC4207	C0CBCAC00269	IC	
IC4208	C0CBCAC00269	IC	
IC4212	C0DBEHG00006	IC	
IC4213	C0JBAZ002261	IC	
IC4510	C1AB00002966	IC	
IC4511	C0CBCBE00001	IC	
IC4512	C0DBGYY00477	IC	
IC4513	C0DBGYY00477	IC	
IC4514	C0JBAZ002301	IC	
IC4517	C0JBAZ002301	IC	
IC4518	C1AB00002929	IC	
IC4700	TVRQ292	IC	
IC5412	C0DBAYY00183	IC	
IC5433	C0DBAYY00183	IC	
IC5600	C0DBAYY00273	IC	
IC5601	C0DBAYY00274	IC	
IC5660	C0EBM0000026	IC	
IC7000	C0DABYY00008	IC, POWER SUPPLY	
IC7001	C0DAEMZ00001	IC	
IC7002	C0DBBZG00004	IC	
IC7003	C0DBBYG00001	IC	
IC7005	C0DAEMZ00001	IC	

Ref. No.	Part No.	Part Name & Description	Remarks
IC7009	C0DBEHE00005	IC, POWER SUPPLY	
IC7050	C0DAEYH00002	IC	
IC7601	C1ZBZ0003725	IC	
IC8001	MN2WS0047	IC	
IC8002	C3ABSY000010	IC (IC8002)	
IC8003	C3ABSY000010	IC (IC8002)	
IC8004	C0ZBZ0001567	IC	
IC8554	TVRP795-3	IC	
IC8601	TVRQ287	IC	
IC8621	C0JBAZ002845	IC	
IC8622	C0JBAZ002845	IC	
	COILS		
L1000	J0JCC0000278	COIL	
L1002	D0GDR00Z0002	CHIP RESISTOR	
L1003	D0GDR00Z0002	CHIP RESISTOR	
L1004	D0GDR00Z0002	CHIP RESISTOR	
L1005	D0GDR00Z0002	CHIP RESISTOR	
L1006	D0GDR00Z0002	CHIP RESISTOR	
L1007	D0GDR00Z0002	CHIP RESISTOR	
L1008	D0GDR00Z0002	CHIP RESISTOR	
L1010	J0JCC0000115	COIL	
L1011	J0JCC0000115	COIL	
L1012	J0JYC0000065	COIL	
L1013	J0JCC0000278	COIL	
L1015	J0JCC0000278	COIL	
L1016	J0JCC0000278	COIL	
L1017	J0JYC0000065	COIL	
L1018	J0JYC0000065	COIL	
L1020	J0JYC0000065	COIL	
L1021	J0JYC0000065	COIL	
L1023	J0JYC0000065	COIL	
L1024	J0JYC0000065	COIL	
L1028	J0JYC0000065	COIL	
L1029	J0JYC0000065	COIL	
L1030	D0GDR00Z0002	CHIP RESISTOR	
L1031	D0GDR00Z0002	CHIP RESISTOR	
L1032	D0GDR00Z0002	CHIP RESISTOR	
L1033	D0GDR00Z0002	CHIP RESISTOR	
L1034	D0GDR00Z0002	CHIP RESISTOR	
L1035	J0JYC0000065	COIL	
L1039	J0JYC0000065	COIL	
L1040	J0JYC0000065	COIL	
L1041	J0JYC0000065	COIL	
L1042	J0JYC0000065	COIL	
L1100	J0JYC0000068	COIL	
L2001	G1C150KA0038	COIL	
L2005	J0JCC0000284	COIL	
L2006	J0JCC0000284	COIL	
L2010	G1C220MA0291	COIL	
L2012	G1C220MA0291	COIL	
L2014	G1C220MA0291	COIL	
L2016	G1C220MA0291	COIL	
L2018	J0JHC0000042	COIL	
L2023	G1C3R0ZA0156	COIL	
L2031	J0JYC0000068	COIL	
L2032	J0JYC0000068	COIL	
L2901	J0JCC0000269	COIL	
L2902	J0JCC0000269	COIL	
L2904	J0JCC0000269	COIL	
L3002	TSK1032	BEAD CORE	
L3003	TSK1032	BEAD CORE	
L3006	TSK1032	BEAD CORE	
L3007	TSK1032	BEAD CORE	
L3010	TSK1032	BEAD CORE	
L3011	TSK1032	BEAD CORE	
L3014	TSK1032	BEAD CORE	
L3015	TSK1032	BEAD CORE	
L3017	TSK1032	BEAD CORE	
L3018	TSK1032	BEAD CORE	
L3019	TSK1032	BEAD CORE	
L3023	TSK1032	BEAD CORE	
L3024	TSK1032	BEAD CORE	
L3027	G1C101M00018	COIL	

Ref. No.	Part No.	Part Name & Description	Remarks
L3400	J0JHC0000075	BEAD COIL	
L3401	J0JHC0000075	BEAD COIL	
L3402	J0JHC0000075	BEAD COIL	
L3403	J0JHC0000075	BEAD COIL	
L3404	J0JHC0000075	BEAD COIL	
L3405	J0JHC0000075	BEAD COIL	
L3406	J0JHC0000075	BEAD COIL	
L3407	J0JYC0000068	COIL	
L3408	J0JYC0000068	COIL	
L3409	J0JYC0000068	COIL	
L3410	J0JYC0000068	COIL	
L3411	J0JYC0000068	COIL	
L3412	J0JYC0000068	COIL	
L3413	J0JYC0000068	COIL	
L3414	J0JYC0000068	COIL	
L3415	J0JYC0000068	COIL	
L3416	J0JYC0000068	COIL	
L3417	J0JYC0000068	COIL	
L3418	J0JHC0000075	BEAD COIL	
L3419	J0JHC0000075	BEAD COIL	
L3420	J0JHC0000075	BEAD COIL	
L3421	J0JYC0000068	COIL	
L3423	J0JYC0000068	COIL	
L3424	J0JYC0000068	COIL	
L3425	J0JYC0000068	COIL	
L3426	J0JYC0000068	COIL	
L3427	J0JHC0000075	BEAD COIL	
L3428	J0JHC0000075	BEAD COIL	
L3429	J0JHC0000075	BEAD COIL	
L3430	J0JHC0000075	BEAD COIL	
L3431	J0JHC0000075	BEAD COIL	
L3432	J0JHC0000075	BEAD COIL	
L3433	J0JYC0000068	COIL	
L3434	J0JYC0000068	COIL	
L3436	J0JYC0000068	COIL	
L3437	J0JYC0000068	COIL	
L3438	J0JYC0000068	COIL	
L3439	J0JHC0000075	BEAD COIL	
L3440	J0JHC0000075	BEAD COIL	
L3441	J0JYC0000068	COIL	
L3442	J0JYC0000068	COIL	
L3443	J0JYC0000068	COIL	
L3444	J0JYC0000068	COIL	
L3445	J0JYC0000068	COIL	
L3446	J0JYC0000068	COIL	
L3447	J0JHC0000075	BEAD COIL	
L3700	TSK1032	BEAD CORE	
L3701	TSK1032	BEAD CORE	
L3702	J0JCC0000364	BEAD COIL	
L3703	J0JCC0000364	BEAD COIL	
L4002	J0JHC0000045	COIL	
L4003	J0JHC0000045	COIL	
L4004	J0JHC0000078	BEAD CORE	
L4006	J0JHC0000045	COIL	
L4008	J0JHC0000078	BEAD CORE	
L4200	J0JYC0000068	COIL	
L4201	J0JYC0000068	COIL	
L4202	J0JHC0000078	BEAD CORE	
L4203	J0JYC0000068	COIL	
L4204	J0JHC0000078	BEAD CORE	
L4206	J0JHC0000078	BEAD CORE	
L4207	J0JHC0000078	BEAD CORE	
L4208	TALC325T100K	CHIP INDUCTOR COIL	
L4209	J0JYC0000068	COIL	
L4210	J0JYC0000068	COIL	
L4211	J0JHC0000078	BEAD CORE	
L4213	J0JYC0000068	COIL	
L4214	J0JYC0000068	COIL	
L4215	J0JYC0000068	COIL	
L4216	J0JYC0000068	COIL	
L4217	ERJ2GE0R00X	FIXED RESISTOR	
L4218	J0JYC0000068	COIL	
L4223	J0JYC0000068	COIL	

Ref. No.	Part No.	Part Name & Description	Remarks
L4224	J0JYC0000068	COIL	
L4225	J0JHC0000078	BEAD CORE	
L4511	J0JHC0000078	BEAD CORE	
L4512	J0JCC0000059	COIL	
L4513	J0JCC0000059	COIL	
L4514	J0JHC0000078	BEAD CORE	
L4515	J0JYC0000068	COIL	
L4516	J0JYC0000068	COIL	
L4517	J0JHC0000078	BEAD CORE	
L4518	J0JYC0000068	COIL	
L4519	J0JYC0000068	COIL	
L4700	J0JYC0000068	COIL	
L4701	J0JYC0000068	COIL	
L4702	D0GBR00Z0002	CHIP RESISTOR	
L4703	D0GBR00Z0002	CHIP RESISTOR	
L4704	J0JYC0000068	COIL	
L4705	J0JYC0000068	COIL	
L4706	J0JYC0000068	COIL	
L4707	J0JYC0000068	COIL	
L4708	J0JYC0000068	COIL	
L4709	J0JYC0000068	COIL	
L4710	J0JHC0000078	BEAD CORE	
L5401	G1C330MA0234	COIL	
L5405	G1C330MA0234	COIL	
L5600	G1C2R2Z00007	COIL	
L5601	G1C2R2Z00007	COIL	
L5602	G1C4R7Z00014	COIL	
L5604	G1C100MA0203	COIL	
L5605	J0JHC0000075	BEAD COIL	
L5606	G1C100MA0077	COIL	
L5690	J0JYC0000068	COIL	
L5691	J0JYC0000068	COIL	
L5692	J0JYC0000068	COIL	
L7000	G0C181K00003	COIL	
L7001	EXCELSA35T	BEAD CORE	
L7002	EXCELSA35T	BEAD CORE	
L7005	EXCELD35V	CORE	
L7007	EXCELD35V	CORE	
L7008	EXCELD35V	CORE	
L7010	EXCELD35V	CORE	
L7012	EXCELD35V	CORE	
L7013	EXCELD35V	CORE	
L7019	EXCELD35V	CORE	
L7029	TALL08T100KA	INDUCTION COIL	
L7031	TALL08T100KA	INDUCTION COIL	
L7032	TALL08T100KA	INDUCTION COIL	
L7033	TALL08T100KA	INDUCTION COIL	
L7601	J0JYC0000068	COIL	
L7602	J0JYC0000068	COIL	
L8001	J0JHC0000045	COIL	
L8002	J0JHC0000045	COIL	
L8003	J0JHC0000045	COIL	
L8004	J0JHC0000045	COIL	
L8005	J0JHC0000045	COIL	
L8007	J0JHC0000045	COIL	
L8008	J0JHC0000045	COIL	
L8009	J0JHC0000045	COIL	
L8010	J0JHC0000045	COIL	
L8551	J0JHC0000075	BEAD COIL	
L8621	J0JHC0000075	BEAD COIL	
L8801	J0JHC0000045	COIL	
	TRANSISTORS		
Q2001	2SD0601A0L	TRANSISTOR	
Q2020	2SD0601A0L	TRANSISTOR	
Q2021	2SD0601A0L	TRANSISTOR	
Q2022	2SB709ATX	TRANSISTOR	
Q2028	B1CBHD000002	TRANSISTOR	
Q2029	B1CBHD000002	TRANSISTOR	
Q2067	2SD0601A0L	TRANSISTOR	
Q2068	2SB709ATX	TRANSISTOR	
Q2069	2SD0601A0L	TRANSISTOR	
Q2070	2SB709ATX	TRANSISTOR	
Q2071	2SB709ATX	TRANSISTOR	

Ref. No.	Part No.	Part Name & Description	Remarks
Q2072	2SD0601A0L	TRANSISTOR	
Q2073	2SD0601A0L	TRANSISTOR	
Q2074	2SD0601A0L	TRANSISTOR	
Q2075	2SD0601A0L	TRANSISTOR	
Q2076	2SD0601A0L	TRANSISTOR	
Q2600	2SD0601A0L	TRANSISTOR	
Q2601	2SD0601A0L	TRANSISTOR	
Q2604	2SD0601A0L	TRANSISTOR	
Q3000	2SD0601A0L	TRANSISTOR	
Q3001	2SD0601A0L	TRANSISTOR	
Q4000	2SB709ATX	TRANSISTOR	
Q4001	2SB709ATX	TRANSISTOR	
Q4002	2SB709ATX	TRANSISTOR	
Q4200	2SB709ATX	TRANSISTOR	
Q4201	2SD0601A0L	TRANSISTOR	
Q4202	2SB709ATX	TRANSISTOR	
Q4203	2SD0601A0L	TRANSISTOR	
Q4204	2SC39380QL	TRANSISTOR	
Q4205	2SD0601A0L	TRANSISTOR	
Q4206	2SC39380QL	TRANSISTOR	
Q4207	2SD0601A0L	TRANSISTOR	
Q4500	2SD0601A0L	TRANSISTOR	
Q4501	2SD0601A0L	TRANSISTOR	
Q4503	2SD0601A0L	TRANSISTOR	
Q4514	2SB709ATX	TRANSISTOR	
Q4515	2SB709ATX	TRANSISTOR	
Q4516	2SB709ATX	TRANSISTOR	
Q4517	2SB709ATX	TRANSISTOR	
Q4519	2SB709ATX	TRANSISTOR	
Q4700	2SD0601A0L	TRANSISTOR	
Q4701	2SD0601A0L	TRANSISTOR	
Q4702	2SD0601A0L	TRANSISTOR	
Q4704	2SD0601A0L	TRANSISTOR	
Q5412	2SD0601A0L	TRANSISTOR	
Q5413	2SD0601A0L	TRANSISTOR	
Q5600	B1MBEDA00015	TRANSISTOR	
Q5601	B1MBDDA00003	TRANSISTOR	
Q5602	B1MBDDA00003	TRANSISTOR	
Q5603	2SD0601A0L	TRANSISTOR	
Q5604	2SD0601A0L	TRANSISTOR	
Q7000	2SB709ATX	TRANSISTOR	
Q7001	2SD0601A0L	TRANSISTOR	
Q7003	B1DHCD000023	TRANSISTOR	
Q7004	2SD0601A0L	TRANSISTOR	
Q7005	B1CERQ000041	TRANSISTOR	
Q7006	B1CEPU000003	TRANSISTOR	
Q7008	B1DHDD000028	TRANSISTOR	
Q7009	2SD0601A0L	TRANSISTOR	
Q7010	2SD0601A0L	TRANSISTOR	
Q7011	2SD0601A0L	TRANSISTOR	
Q7012	2SB709ATX	TRANSISTOR	
Q7022	2SB709ATX	TRANSISTOR	
Q7025	B1DHDD000028	TRANSISTOR	
Q7026	2SD0601A0L	TRANSISTOR	
Q7052	2SD0602ASL	TRANSISTOR	
Q8850	2SD0601A0L	TRANSISTOR	
Q8852	2SD0601A0L	TRANSISTOR	
Q8853	2SD0601A0L	TRANSISTOR	
	RESISTORS		
R0001	ERJ2GEJ680X	M 680HM, J, 1/16W	
R0002	EXB28V680JX	RESISTOR	
R0003	ERJ2GEJ103X	F 10KOHM, J, 1/10W	
R0004	ERJ2GEJ680X	M 680HM, J, 1/16W	
R0005	EXB28V680JX	RESISTOR	
R0006	ERJ2GEJ103X	F 10KOHM, J, 1/10W	
R0007	ERJ2GEJ103X	F 10KOHM, J, 1/10W	
R0008	ERJ2GEJ103X	F 10KOHM, J, 1/10W	
R0009	ERJ2GEJ103X	F 10KOHM, J, 1/10W	
R1002	D0GBR00Z0002	M 00HM, J, 1/10W	
R1003	ERJ2GEJ220X	F 220HM, J, 1/10W	
R1004	ERJ2GEJ220X	F 220HM, J, 1/10W	
R1005	ERJ2GEOR00X	F 00HM, J, 1/10W	
R1007	ERJ2GEJ473X	F 47KOHM, J, 1/10W	

Ref. No.	Part No.	Part Name & Description	Remarks
R1100	ERJ2GE0R00X	F 00HM ,J,1/10W	
R1101	ERJ2GE0R00X	F 00HM ,J,1/10W	
R1102	ERJ2GE0R00X	F 00HM ,J,1/10W	
R1103	ERJ2GE0R00X	F 00HM ,J,1/10W	
R1104	ERJ2GEJ473X	F 47KOHM ,J,1/10W	
R1105	ERJ2GE0R00X	F 00HM ,J,1/10W	
R1106	ERJ2GE0R00X	F 00HM ,J,1/10W	
R1107	ERJ2GE0R00X	F 00HM ,J,1/10W	
R1108	ERJ2GE0R00X	F 00HM ,J,1/10W	
R1109	ERJ2GE0R00X	F 00HM ,J,1/10W	
R1120	ERJ2GEJ473X	F 47KOHM ,J,1/10W	
R1134	ERJ2GE0R00X	F 00HM ,J,1/10W	
R1139	ERJ2GEJ473X	F 47KOHM ,J,1/10W	
R1146	ERJ2GE0R00X	F 00HM ,J,1/10W	
R1152	ERJ2GEJ473X	F 47KOHM ,J,1/10W	
R1153	ERJ2GEJ821X	M 820OHM ,J,1/10W	
R1162	ERJ2GE0R00X	F 00HM ,J,1/10W	
R1163	ERJ2GEJ105X	F 1MOHM ,J,1/10W	
R1164	ERJ2GEJ103X	F 10KOHM ,J,1/10W	
R1166	ERJ2GEJ104X	F 100KOHM ,J,1/10W	
R1170	ERJ2GEJ104X	F 100KOHM ,J,1/10W	
R1171	ERJ2GEJ683X	M 68KOHM ,J,1/10W	
R1172	ERJ2GEJ223X	M 22KOHM ,J,1/10W	
R1173	ERJ2GEJ331X	M 330OHM ,J,1/10W	
R1174	ERJ2GEJ220X	F 22OHM ,J,1/10W	
R1175	ERJ2GEJ220X	F 22OHM ,J,1/10W	
R1179	ERJ2GEJ220X	F 22OHM ,J,1/10W	
R1181	ERJ2GE0R00X	F 00HM ,J,1/10W	
R1182	ERJ2GEJ273X	M 27OHM ,J,1/10W	
R1183	ERJ2GE0R00X	F 00HM ,J,1/10W	
R1184	ERJ2GE0R00X	F 00HM ,J,1/10W	
R1194	ERJ2GEJ683X	M 68KOHM ,J,1/10W	
R1196	ERJ2GEJ473X	F 47KOHM ,J,1/10W	
R1200	ERJ2GEJ472X	M 4.7KOHM ,J,1/10W	
R1201	ERJ2GEJ472X	M 4.7KOHM ,J,1/10W	
R1203	ERJ2GEJ473X	F 47KOHM ,J,1/10W	
R1204	ERJ2GEJ220X	F 22OHM ,J,1/10W	
R1205	ERJ2GEJ220X	F 22OHM ,J,1/10W	
R1206	ERJ2GEJ220X	F 22OHM ,J,1/10W	
R1207	ERJ2GEJ182X	M 1.8KOHM ,J,1/10W	
R1208	ERJ2GEJ103X	F 10KOHM ,J,1/10W	
R1209	ERJ2GEJ473X	F 47KOHM ,J,1/10W	
R1210	ERJ2GEJ473X	F 47KOHM ,J,1/10W	
R1211	ERJ2GEJ473X	F 47KOHM ,J,1/10W	
R1212	ERJ2GEJ473X	F 47KOHM ,J,1/10W	
R1213	ERJ2GEJ473X	F 47KOHM ,J,1/10W	
R1214	ERJ2GEJ473X	F 47KOHM ,J,1/10W	
R1216	ERJ2GEJ103X	F 10KOHM ,J,1/10W	
R1217	ERJ2GEJ104X	F 100KOHM ,J,1/10W	
R1219	ERJ2GEJ103X	F 10KOHM ,J,1/10W	
R1220	ERJ2GEJ103X	F 10KOHM ,J,1/10W	
R1221	D1BB7151A055	F 10KOHM ,J,1/10W	
R1224	ERJ2GEJ473X	M 7.15KOHM ,J,1/10W	
R1225	ERJ2GEJ473X	F 47KOHM ,J,1/10W	
R1226	ERJ2GEJ473X	F 47KOHM ,J,1/10W	
R1227	ERJ2GEJ103X	F 47KOHM ,J,1/10W	
R1228	ERJ2GEJ103X	F 10KOHM ,J,1/10W	
R1229	ERJ2GE0R00X	F 10KOHM ,J,1/10W	
R1230	ERJ2GEJ473X	F 00HM ,J,1/10W	
R1231	ERJ2GEJ473X	F 47KOHM ,J,1/10W	
R1233	ERJ2GE0R00X	F 47KOHM ,J,1/10W	
R1234	ERJ2GEJ103X	F 00HM ,J,1/10W	
R1236	ERJ2GEJ473X	F 10KOHM ,J,1/10W	
R1237	ERJ2GEJ102X	F 47KOHM ,J,1/10W	
R1243	ERJ2GEJ473X	F 1KOHM ,J,1/10W	
R1250	ERJ2GEJ473X	F 47KOHM ,J,1/10W	
R1255	ERJ2GEJ102X	F 47KOHM ,J,1/10W	
R1500	ERJ2GEJ182X	F 1KOHM ,J,1/10W	
R2000	ERJ3GEYJ220	M 22OHM ,J,1/16W	
R2001	ERJ3GEYJ220	M 22OHM ,J,1/16W	
R2002	ERJ3GEYJ821	M 820OHM ,J,1/16W	
R2003	D0GB105JA041	M 1MOHM ,J,1/16W	
R2006	ERJ3GEYJ471	M 470OHM ,J,1/16W	

Ref. No.	Part No.	Part Name & Description	Remarks
R2007	ERJ3GEYJ221	M 220OHM ,J,1/16W	
R2008	ERJ3GEYJ471	M 470OHM ,J,1/16W	
R2015	D0GB103JA041	M 10KOHM ,J,1/16W	
R2016	D0GB103JA041	M 10KOHM ,J,1/16W	
R2017	D0GB103JA041	M 10KOHM ,J,1/16W	
R2018	D0GB103JA041	M 10KOHM ,J,1/16W	
R2019	D1BB2002A055	M 20KOHM ,J,1/10W	
R2020	D1BB2001A055	M 20KOHM ,J,1/10W	
R2023	D0GB103JA041	M 10KOHM ,J,1/10W	
R2024	D0GB101JA041	M 10KOHM ,J,1/10W	
R2026	D1BB1203A055	M 120KOHM ,J,1/10W	
R2027	D1BB7502A055	M 75KOHM ,J,1/10W	
R2029	D0GBR00Z0002	M 00HM ,J,1/10W	
R2030	D0GBR00Z0002	M 00HM ,J,1/10W	
R2047	D1BB2002A055	M 20KOHM ,J,1/10W	
R2048	D1BB2002A055	M 20KOHM ,J,1/10W	
R2050	D1BB2002A055	M 20KOHM ,J,1/10W	
R2051	D1BB2002A055	M 20KOHM ,J,1/10W	
R2057	D0GB102JA041	M 1KOHM ,J,1/10W	
R2058	D0GB103JA041	M 10KOHM ,J,1/10W	
R2063	D0GB101JA041	M 100OHM ,J,1/10W	
R2064	D0GB101JA041	M 100OHM ,J,1/10W	
R2065	ERJ3GEYJ823	M 82KOHM ,J,1/16W	
R2066	D0GBR00Z0002	M 00HM ,J,1/10W	
R2068	D0GBR00Z0002	M 00HM ,J,1/10W	
R2071	D0GB104JA041	M 100KOHM ,J,1/10W	
R2072	D0GB104JA041	M 100KOHM ,J,1/10W	
R2081	D0GB103JA041	M 100KOHM ,J,1/10W	
R2082	D0GB103JA041	M 100KOHM ,J,1/10W	
R2089	ERJ3GEYJ153	M 15KOHM ,J,1/16W	
R2090	ERJ3GEYJ153	M 15KOHM ,J,1/16W	
R2092	D0GB103JA041	M 10KOHM ,J,1/16W	
R2093	D0GB103JA041	M 10KOHM ,J,1/16W	
R2110	D0GBR00Z0002	M 00HM ,J,1/10W	
R2111	D0GB103JA041	M 10KOHM ,J,1/10W	
R2114	ERJ3GEYJ222	M 2.2KOHM ,J,1/16W	
R2115	ERJ3GEYJ222	M 2.2KOHM ,J,1/16W	
R2117	D0GBR00Z0002	M 00HM ,J,1/10W	
R2118	ERJ3GEYJ471	M 470OHM ,J,1/16W	
R2119	D0GBR00Z0002	M 00HM ,J,1/10W	
R2121	ERJ8GEYJ3R3	M 3.3OHM ,J,1/10W	
R2123	ERJ8GEYJ3R3	M 3.3OHM ,J,1/10W	
R2125	ERJ8GEYJ3R3	M 3.3OHM ,J,1/10W	
R2127	ERJ8GEYJ3R3	M 3.3OHM ,J,1/10W	
R2129	ERJ6GEYJ100	M 10OHM ,J,1/10W	
R2132	ERJ3GEYJ471	M 470OHM ,J,1/16W	
R2133	ERJ6GEYJ100	M 10OHM ,J,1/10W	
R2134	D0GBR00Z0002	M 00HM ,J,1/10W	
R2135	D0GB103JA041	M 10KOHM ,J,1/10W	
R2137	ERJ6GEYJ100	M 10OHM ,J,1/10W	
R2138	ERJ3GEYJ473	M 47KOHM ,J,1/16W	
R2140	D0GB104JA041	M 100KOHM ,J,1/10W	
R2141	D0GB102JA041	M 1KOHM ,J,1/16W	
R2142	ERJ3GEYJ222	M 2.2KOHM ,J,1/16W	
R2146	ERJ3GEYJ220	M 22OHM ,J,1/16W	
R2147	ERJ3GEYJ220	M 22OHM ,J,1/16W	
R2148	ERJ3GEYJ682	M 6.8KOHM ,J,1/16W	
R2149	ERJ3GEYJ682	M 6.8KOHM ,J,1/16W	
R2150	ERJ3GEYJ473	M 47KOHM ,J,1/16W	
R2151	D0GB104JA041	CHIP RESISTOR	
R2153	ERJ3GEYJ223	M 22KOHM ,J,1/16W	
R2154	D0GB104JA041	M 100KOHM ,J,1/10W	
R2155	D0GB104JA041	M 100KOHM ,J,1/10W	
R2156	D0GB103JA041	M 10KOHM ,J,1/10W	
R2157	D0GB103JA041	M 10KOHM ,J,1/10W	
R2158	ERJ3GEYJ563	M 56KOHM ,J,1/16W	
R2159	D0GB104JA041	M 100KOHM ,J,1/10W	
R2160	ERJ3GEYJ473	M 47KOHM ,J,1/16W	
R2162	ERJ3GEYJ222	M 2.2KOHM ,J,1/16W	
R2163	ERJ3GEYJ222	M 2.2KOHM ,J,1/16W	
R2164	ERJ3GEYJ222	M 2.2KOHM ,J,1/16W	
R2165	ERJ3GEYJ222	M 2.2KOHM ,J,1/16W	
R2166	D0GB100JA041	M 10OHM ,J,1/10W	

Ref. No.	Part No.	Part Name & Description	Remarks
R2169	ERJ3GEYJ102	M 1KOHM, J, 1/16W	
R2170	D0GB103JA041	M 10KOHM, J, 1/10W	
R2172	D0GB102JA041	M 1KOHM, J, 1/16W	
R2173	ERJ3GEYJ473	M 47KOHM, J, 1/16W	
R2174	ERJ3GEYJ102	M 1KOHM, J, 1/16W	
R2183	D0GBR00Z0002	M 0OHM, J, 1/10W	
R2271	EXB28V220JX	RESISTOR	
R2272	D0GB102JA041	M 1KOHM, J, 1/16W	
R2273	ERJ3GEYJ473	M 47KOHM, J, 1/16W	
R2500	ERJ3GEY0R00	M 0OHM, J, 1/16W	
R2501	ERJ3EKF1741	RESISTOR	
R2502	ERJ3EKF7151	M7.15KOHM, F, 1/16W	
R2503	ERJ3EKF6651	RESISTOR	
R2504	ERJ3EKF1432	RESISTOR	
R2600	D1BB2700A055	CHIP RESISTOR	
R2602	ERJ3GEYJ473	M 47KOHM, J, 1/16W	
R2604	ERJ3GEYJ223	M 22KOHM, J, 1/16W	
R2607	ERJ3GEYJ473	M 47KOHM, J, 1/16W	
R2608	D0GB103JA041	CHIP RESISTOR	
R2609	D1BB60400001	CHIP RESISTOR	
R2612	ERJ3GEYJ470	M 47OHM, J, 1/16W	
R2615	D1BB1402A055	CHIP RESISTOR	
R2616	D1BB3242A055	CHIP RESISTOR	
R2617	ERJ3GEYJ473	M 47KOHM, J, 1/16W	
R2618	D0GB104JA041	CHIP RESISTOR	
R2619	D0GB103JA041	CHIP RESISTOR	
R2901	D0GB103JA041	CHIP RESISTOR	
R2903	D0GBR00Z0002	CHIP RESISTOR	
R2905	ERJ2GE0R00X	F 0OHM, J, 1/10W	
R2909	ERJ2GEJ220X	F 22OHM, J, 1/10W	
R2910	ERJ2GEJ221X	M 220OHM, J, 1/10W	
R2912	D0GDR00Z0002	M 0OHM, J, 1/10W	
R2913	ERJ2GEJ220X	F 22OHM, J, 1/10W	
R2914	ERJ2GEJ220X	F 22OHM, J, 1/10W	
R2915	ERJ2GEJ221X	M 220OHM, J, 1/10W	
R2918	ERJ2GEJ103X	F 10OHM, J, 1/10W	
R2926	D0GB103JA041	CHIP RESISTOR	
R2927	ERJ2GE0R00X	M 0OHM, J, 1/10W	
R2931	D0GBR00Z0002	CHIP RESISTOR	
R3000	ERJ6GEYJ223	M 22KOHM, J, 1/10W	
R3001	ERJ6GEYJ223	M 22KOHM, J, 1/10W	
R3002	ERJ6GEYJ223	M 22KOHM, J, 1/10W	
R3003	ERJ6GEYJ223	M 22KOHM, J, 1/10W	
R3004	ERJ6GEYJ223	M 22KOHM, J, 1/10W	
R3005	ERJ6GEYJ223	M 22KOHM, J, 1/10W	
R3018	ERJ3GEYJ331	M 330OHM, J, 1/16W	
R3019	ERJ3GEYJ222	M 2.2KOHM, J, 1/16W	
R3020	ERJ3GEYJ331	M 330OHM, J, 1/16W	
R3021	ERJ3GEYJ222	M 2.2KOHM, J, 1/16W	
R3024	D0GB104JA041	M 100KOHM, J, 1/10W	
R3025	D0GB104JA041	M 100KOHM, J, 1/10W	
R3030	D0GBR00Z0002	M 0OHM, J, 1/10W	
R3033	ERJ3GEYJ221	M 220OHM, J, 1/16W	
R3034	ERJ3GEYJ221	M 220OHM, J, 1/16W	
R3037	ERJ3GEYJ221	M 220OHM, J, 1/16W	
R3038	ERJ3GEYJ221	M 220OHM, J, 1/16W	
R3043	ERJ3GEYJ221	M 220OHM, J, 1/16W	
R3045	ERJ3GEYJ221	M 220OHM, J, 1/16W	
R3047	ERJ3GEYJ221	M 220OHM, J, 1/16W	
R3048	ERJ3GEYJ221	M 220OHM, J, 1/16W	
R3049	ERJ3GEYJ221	M 220OHM, J, 1/16W	
R3050	ERJ3GEYJ221	M 220OHM, J, 1/16W	
R3051	ERJ3GEYJ221	M 220OHM, J, 1/16W	
R3052	ERJ3GEYJ221	M 220OHM, J, 1/16W	
R3057	D0GB104JA041	M 100KOHM, J, 1/10W	
R3058	D0GB104JA041	M 100KOHM, J, 1/10W	
R3072	ERJ6ENF1500	M 150OHM, 1/10W	
R3074	ERJ6ENF1500	M 150OHM, 1/10W	
R3075	ERJ6ENF1500	M 150OHM, 1/10W	
R3076	ERJ6ENF1500	M 150OHM, 1/10W	
R3077	ERJ6ENF1500	M 150OHM, 1/10W	
R3078	ERJ6ENF75R0	M 75OHM, 1/10W	
R3084	ERJ6ENF75R0	M 75OHM, 1/10W	

Ref. No.	Part No.	Part Name & Description	Remarks
R3085	ERJ6ENF75R0	M 75OHM, 1/10W	
R3086	ERJ6ENF75R0	M 75OHM, 1/10W	
R3097	ERJ6ENF1500	M 150OHM, 1/10W	
R3099	ERJ3GEYJ221	M 220OHM, J, 1/16W	
R3101	ERJ3GEYJ472	M 4.7KOHM, J, 1/16W	
R3102	ERJ6ENF1500	M 150OHM, 1/10W	
R3103	ERJ3GEYJ472	M 4.7KOHM, J, 1/16W	
R3105	D0GBR00Z0002	M 0OHM, J, 1/10W	
R3106	D0GBR00Z0002	M 0OHM, J, 1/10W	
R3107	D0GBR00Z0002	M 0OHM, J, 1/10W	
R3108	D0GBR00Z0002	M 0OHM, J, 1/10W	
R3109	D0GBR00Z0002	M 0OHM, J, 1/10W	
R3112	ERJ3GEYJ473	M 47KOHM, J, 1/16W	
R3113	ERJ3GEYJ473	M 47KOHM, J, 1/16W	
R3115	ERJ3GEYJ221	M 220OHM, J, 1/16W	
R3116	ERJ3GEYJ221	M 220OHM, J, 1/16W	
R3117	ERJ3GEYJ221	M 220OHM, J, 1/16W	
R3118	ERJ3GEYJ221	M 220OHM, J, 1/16W	
R3119	ERJ3GEYJ221	M 220OHM, J, 1/16W	
R3120	ERJ3GEYJ331	M 330OHM, J, 1/16W	
R3121	ERJ6ENF75R0	M 75OHM, 1/10W	
R3123	ERJ3GEYJ221	M 220OHM, J, 1/16W	
R3124	ERJ3GEYJ221	M 220OHM, J, 1/16W	
R3125	ERJ3GEYJ221	M 220OHM, J, 1/16W	
R3128	ERJ3GEYJ221	M 220OHM, J, 1/16W	
R3130	ERJ3GEYJ220	M 22OHM, J, 1/16W	
R3131	ERJ3GEYJ220	M 22OHM, J, 1/16W	
R3132	ERJ3GEYJ680	M 68OHM, J, 1/16W	
R3133	ERJ3GEYJ680	M 68OHM, J, 1/16W	
R3134	ERJ3GEYJ680	M 68OHM, J, 1/16W	
R3136	ERJ3GEYJ221	M 220OHM, J, 1/16W	
R3138	ERJ3GEYJ473	M 47KOHM, J, 1/16W	
R3139	ERJ3GEYJ221	M 220OHM, J, 1/16W	
R3140	ERJ3GEYJ221	M 220OHM, J, 1/16W	
R3141	D0GB102JA041	M 1KOHM, J, 1/10W	
R3142	ERJ3GEYJ220	M 22OHM, J, 1/16W	
R3145	D0GBR00Z0002	M 0OHM, J, 1/10W	
R3146	ERJ3GEYJ331	M 330OHM, J, 1/16W	
R3147	ERJ3GEYJ472	M 4.7KOHM, J, 1/16W	
R3148	ERJ6ENF75R0	M 75OHM, 1/10W	
R3149	ERJ6ENF75R0	M 75OHM, 1/10W	
R3150	D0GBR00Z0002	M 0OHM, J, 1/10W	
R3151	ERJ3GEYJ220	M 22OHM, J, 1/16W	
R3152	ERJ3GEYJ220	M 22OHM, J, 1/16W	
R3158	ERJ3GEYJ221	M 220OHM, J, 1/16W	
R3159	ERJ3GEYJ221	M 220OHM, J, 1/16W	
R3167	ERJ6ENF75R0	M 75OHM, 1/10W	
R3169	D0GB104JA041	M 100KOHM, 1/10W	
R3177	ERJ3GEYJ220	M 22OHM, J, 1/16W	
R3178	ERJ3GEYJ220	M 22OHM, J, 1/16W	
R3180	ERJ3GEYJ220	M 22OHM, J, 1/16W	
R3185	ERJ3GEYJ473	M 47KOHM, J, 1/16W	
R3186	ERJ6ENF1500	M 150OHM, 1/10W	
R3187	ERJ6ENF1500	M 150OHM, 1/10W	
R3188	ERJ6ENF1500	M 150OHM, 1/10W	
R3189	ERJ3GEYJ680	M 68OHM, J, 1/16W	
R3190	ERJ3GEYJ680	M 68OHM, J, 1/16W	
R3191	ERJ3GEYJ680	M 68OHM, J, 1/16W	
R3193	ERJ6ENF1500	M 150OHM, 1/10W	
R3197	ERJ3GEYJ221	M 220OHM, J, 1/16W	
R3198	ERJ6ENF1500	M 150OHM, 1/10W	
R3199	D0GBR00Z0002	M 0OHM, J, 1/10W	
R3201	D0GBR00Z0002	M 0OHM, J, 1/10W	
R3212	ERJ6ENF1500	M 150OHM, 1/10W	
R3213	ERJ6ENF1500	M 150OHM, 1/10W	
R3218	D0GBR00Z0002	M 0OHM, J, 1/10W	
R3221	D0GBR00Z0002	M 0OHM, J, 1/10W	
R3222	D0GDR00Z0002	M 0OHM, J, 1/10W	
R3223	D0GD101JA036	M 100OHM, J, 1/10W	
R3224	D0GDR00Z0002	M 0OHM, J, 1/10W	
R3225	D0GD101JA036	M 100OHM, J, 1/10W	
R3226	ERJ6GEYJ472	M 4.7KOHM, J, 1/10W	
R3227	ERJ6GEYJ472	M 4.7KOHM, J, 1/10W	

Ref. No.	Part No.	Part Name & Description	Remarks
R3228	D0GDR00Z0002	M 00HM, J, 1/10W	
R3229	D0GDR00Z0002	M 00HM, J, 1/10W	
R3230	ERJ6ENF75R0	M 750HM, 1/10W	
R3231	D0GDR00Z0002	M 00HM, J, 1/10W	
R3232	ERJ6ENF75R0	M 750HM, 1/10W	
R3233	D0GDR00Z0002	M 00HM, J, 1/10W	
R3234	ERJ6ENF75R0	M 750HM, 1/10W	
R3235	D0GDR00Z0002	M 00HM, J, 1/10W	
R3236	ERJ3GEYJ680	M 680HM, J, 1/16W	
R3237	ERJ3GEYJ680	M 680HM, J, 1/16W	
R3240	ERJ3GEYJ221	M 220OHM, J, 1/16W	
R3242	ERJ3GEYJ473	M 47KOHM, J, 1/16W	
R3243	ERJ3GEYJ473	M 47KOHM, J, 1/16W	
R3244	D0GBR00Z0002	M 00HM, J, 1/10W	
R3245	D0GBR00Z0002	M 00HM, J, 1/10W	
R3246	D0GBR00Z0002	M 00HM, J, 1/10W	
R3247	D0GBR00Z0002	M 00HM, J, 1/10W	
R3259	ERJ3GEYJ220	M 220HM, J, 1/16W	
R3260	ERJ3GEYJ220	M 220HM, J, 1/16W	
R3261	ERJ3GEYJ220	M 220HM, J, 1/16W	
R3262	ERJ3GEYJ560	M 560HM, J, 1/16W	
R3272	D0GBR00Z0002	M 00HM, J, 1/10W	
R3273	D0GBR00Z0002	M 00HM, J, 1/10W	
R3275	D0GBR00Z0002	M 00HM, J, 1/10W	
R3277	D0GBR00Z0002	M 00HM, J, 1/10W	
R3278	ERJ3GEYJ473	M 47KOHM, J, 1/16W	
R3279	ERJ3GEYJ473	M 47KOHM, J, 1/16W	
R3700	ERJ6GEYJ393	M 39KOHM, J, 1/10W	
R3701	ERJ6GEYJ393	M 39KOHM, J, 1/10W	
R3702	ERJ6GEYJ184	M 180KOHM, J, 1/10W	
R3703	ERJ6GEYJ184	M 180KOHM, J, 1/10W	
R3710	D0GD103JA036	M 10KOHM, J, 1/10W	
R4002	EXB2HV680JV	RESISTOR	
R4003	EXB2HV680JV	RESISTOR	
R4004	ERJ2GEJ680X	M 680HM, J, 1/10W	
R4005	ERJ2GEJ680X	M 680HM, J, 1/10W	
R4006	ERJ2GEJ220X	F 220HM, J, 1/10W	
R4007	D1BB6800A055	M 680OHM, J, 1/10W	
R4010	D1BB1101A055	M 1.1KOHM, J, 1/10W	
R4011	ERJ2GEJ220X	F 220HM, J, 1/10W	
R4012	ERJ2GEJ220X	F 220HM, J, 1/10W	
R4013	ERJ2GEJ681X	M 680OHM, J, 1/10W	
R4014	ERJ2GEJ102X	F 680OHM, J, 1/10W	
R4016	ERJ2GEJ681X	M 680HM, J, 1/10W	
R4017	ERJ2GEJ102X	F 1KOHM, J, 1/10W	
R4019	ERJ2GEJ102X	F 1KOHM, J, 1/10W	
R4025	ERJ3GEYJ202	M 2KOHM, J, 1/16W	
R4028	ERJ2GEJ101X	M 100OHM, J, 1/10W	
R4029	ERJ2GE0R00X	F 00HM, J, 1/10W	
R4035	ERJ2GEJ102X	F 1KOHM, J, 1/10W	
R4200	EXB2HV680JV	RESISTOR	
R4201	EXB2HV680JV	RESISTOR	
R4202	EXB2HV680JV	RESISTOR	
R4203	ERJ2GE0R00X	F 00HM, J, 1/10W	
R4204	ERJ2GEJ103X	F 10KOHM, J, 1/10W	
R4205	EXB28V473JX	RESISTOR	
R4206	ERJ2GEJ680X	M 680HM, J, 1/10W	
R4207	ERJ2GEJ680X	M 680HM, J, 1/10W	
R4208	ERJ2GEJ680X	M 680HM, J, 1/10W	
R4209	ERJ2GEJ680X	M 680HM, J, 1/10W	
R4211	EXB28V680JX	RESISTOR	
R4212	ERJ2GEJ680X	M 680HM, J, 1/10W	
R4213	ERJ2GEJ680X	M 680HM, J, 1/10W	
R4214	ERJ2GEJ680X	M 680HM, J, 1/10W	
R4215	ERJ2GEJ473X	F 47KOHM, J, 1/10W	
R4216	EXB2HV680JV	RESISTOR	
R4217	EXB2HV680JV	RESISTOR	
R4218	ERJ2GEJ680X	M 680HM, J, 1/10W	
R4219	ERJ2GEJ680X	M 680HM, J, 1/10W	
R4220	ERJ2GEJ680X	M 680HM, J, 1/10W	
R4223	ERJ2GEJ680X	M 680HM, J, 1/10W	
R4224	ERJ2GEJ680X	M 680HM, J, 1/10W	
R4225	ERJ2GEJ680X	M 680HM, J, 1/10W	

Ref. No.	Part No.	Part Name & Description	Remarks
R4226	ERJ2GEJ680X	M 680HM, J, 1/10W	
R4227	ERJ2GEJ680X	M 680HM, J, 1/10W	
R4228	ERJ2GEJ680X	M 680HM, J, 1/10W	
R4229	ERJ2GEJ680X	M 680HM, J, 1/10W	
R4230	ERJ2GEJ680X	M 680HM, J, 1/10W	
R4231	ERJ2GEJ680X	M 680HM, J, 1/10W	
R4232	ERJ2GEJ222X	M 2.2KOHM, J, 1/10W	
R4233	ERJ2GEJ680X	M 680HM, J, 1/10W	
R4234	ERJ2GEJ680X	M 680HM, J, 1/10W	
R4235	ERJ2GEJ680X	M 680HM, J, 1/10W	
R4236	ERJ2GEJ473X	F 47KOHM, J, 1/10W	
R4237	ERJ2GEJ682X	M 68KOHM, J, 1/10W	
R4238	ERJ2GEJ680X	M 680HM, J, 1/10W	
R4240	ERJ2GEJ680X	M 680HM, J, 1/10W	
R4241	ERJ2GEJ680X	M 680HM, J, 1/10W	
R4242	ERJ2GEJ220X	F 220HM, J, 1/10W	
R4243	ERJ2GEJ220X	F 220HM, J, 1/10W	
R4254	ERJ2GEJ103X	F 10KOHM, J, 1/10W	
R4255	ERJ2GE0R00X	F 0KOHM, J, 1/10W	
R4256	ERJ2GE0R00X	F 0KOHM, J, 1/10W	
R4257	ERJ2GEJ680X	M 680HM, J, 1/10W	
R4258	ERJ2GEJ680X	M 680HM, J, 1/10W	
R4260	ERJ2RKF4701X	M 4.7KOHM, J, 1/10W	
R4261	D1BA68R0A014	M 680HM, J, 1/10W	
R4262	ERJ2RKF2202X	M 22KOHM, J, 1/10W	
R4263	EXB2HV680JV	RESISTOR	
R4264	EXB2HV680JV	RESISTOR	
R4265	EXB2HV680JV	RESISTOR	
R4266	ERJ2GEJ101X	M 100OHM, J, 1/10W	
R4267	ERJ2GEJ334X	M 330KOHM, J, 1/10W	
R4268	ERJ2GEJ680X	M 680HM, J, 1/10W	
R4269	ERJ2GEJ680X	M 680HM, J, 1/10W	
R4270	ERJ2GEJ680X	M 680HM, J, 1/10W	
R4271	ERJ2GEJ680X	M 680HM, J, 1/10W	
R4272	ERJ2GEJ471X	M 470OHM, J, 1/10W	
R4276	EXB28V220JX	RESISTOR	
R4277	EXB28V220JX	RESISTOR	
R4278	EXB28V220JX	RESISTOR	
R4279	EXB28V220JX	RESISTOR	
R4280	EXB28V220JX	RESISTOR	
R4281	EXB28V220JX	RESISTOR	
R4282	EXB28V220JX	RESISTOR	
R4283	EXB28V220JX	RESISTOR	
R4284	ERJ2GEJ220X	F 220HM, J, 1/10W	
R4285	ERJ2GEJ220X	F 220HM, J, 1/10W	
R4286	ERJ2GEJ220X	F 220HM, J, 1/10W	
R4287	ERJ2GEJ220X	F 220HM, J, 1/10W	
R4288	EXB28V220JX	RESISTOR	
R4289	ERJ2GEJ220X	F 220HM, J, 1/10W	
R4290	ERJ2GEJ220X	F 220HM, J, 1/10W	
R4291	ERJ2GEJ220X	F 220HM, J, 1/10W	
R4292	ERJ2GEJ220X	F 220HM, J, 1/10W	
R4293	EXB28V220JX	RESISTOR	
R4294	EXB28V220JX	RESISTOR	
R4295	EXB28V220JX	RESISTOR	
R4296	ERJ2GEJ151X	M 500HM, J, 1/10W	
R4297	ERJ2RKF1001X	M 1KOHM, J, 1/10W	
R4298	ERJ2RKF1001X	M 1KOHM, J, 1/10W	
R4299	D1BB6802A055	M 68KOHM, J, 1/10W	
R4300	D1BB3002A055	M 30KOHM, J, 1/10W	
R4302	ERJ2GEJ473X	F 47KOHM, J, 1/10W	
R4303	ERJ2GEJ473X	F 47KOHM, J, 1/10W	
R4304	ERJ2GE0R00X	F 0KOHM, J, 1/10W	
R4305	ERJ2GE0R00X	F 0KOHM, J, 1/10W	
R4306	ERJ2GE0R00X	F 0KOHM, J, 1/10W	
R4307	ERJ2GE0R00X	F 0KOHM, J, 1/10W	
R4308	ERJ2GE0R00X	F 0KOHM, J, 1/10W	
R4309	ERJ2GEJ103X	F 10KOHM, J, 1/10W	
R4310	ERJ2GEJ102X	F 1KOHM, J, 1/10W	
R4311	ERJ2GEJ473X	F 47KOHM, J, 1/10W	
R4312	ERJ2GEJ302X	M 3KOHM, J, 1/10W	
R4315	ERJ2GEJ103X	F 10KOHM, J, 1/10W	
R4316	ERJ2GEJ473X	F 47KOHM, J, 1/10W	

Ref. No.	Part No.	Part Name & Description	Remarks
R4317	ERJ2GEJ103X	F 10KOHM, J, 1/10W	
R4318	ERJ2GEJ103X	F 10KOHM, J, 1/10W	
R4319	ERJ2GEJ473X	F 47KOHM, J, 1/10W	
R4320	ERJ2GEJ103X	F 10KOHM, J, 1/10W	
R4321	ERJ2GEJ102X	F 1KOHM, J, 1/10W	
R4322	ERJ2GEJ103X	F 10KOHM, J, 1/10W	
R4323	ERJ2GEJ473X	F 47KOHM, J, 1/10W	
R4324	ERJ2GEJ473X	F 47KOHM, J, 1/10W	
R4325	ERJ6ENF5111	F 5.11KOHM, J, 1/10W	
R4326	ERJ6ENF4871	M4.87KOHM, 1/10W	
R4327	ERJ2RKF3001X	M 3KOHM, 1/10W	
R4328	ERJ2GEJ102X	F 1KOHM, J, 1/10W	
R4329	ERJ2RKF3901X	M 3.9KOHM, 1/10W	
R4330	ERJ2GEJ100X	M 10OHM, 1/10W	
R4331	ERJ2GEJ103X	F 10KOHM, J, 1/10W	
R4332	ERJ2GEJ103X	F 10KOHM, J, 1/10W	
R4333	ERJ2GEJ103X	F 10KOHM, J, 1/10W	
R4335	ERJ2GEOR00X	F 0OHM, J, 1/10W	
R4336	ERJ2GEJ103X	F 10KOHM, J, 1/10W	
R4339	ERJ2GEOR00X	F 0OHM, J, 1/10W	
R4341	ERJ2GEOR00X	F 0OHM, J, 1/10W	
R4343	ERJ2GEOR00X	F 0OHM, J, 1/10W	
R4344	ERJ2GEJ223X	M 22KOHM, 1/10W	
R4346	ERJ2GEOR00X	F 0OHM, J, 1/10W	
R4347	ERJ2GEJ680X	M 68OHM, 1/10W	
R4348	ERJ2GEJ221X	M 220OHM, 1/10W	
R4349	ERJ2GEJ101X	M 100OHM, 1/10W	
R4350	ERJ2GEJ473X	F 47KOHM, J, 1/10W	
R4352	ERJ2GEJ473X	F 47KOHM, J, 1/10W	
R4357	ERJ2GEJ103X	F 10KOHM, J, 1/10W	
R4358	ERJ2GEOR00X	F 0OHM, J, 1/10W	
R4360	ERJ2GEOR00X	F 0OHM, J, 1/10W	
R4361	ERJ2GEOR00X	F 0OHM, J, 1/10W	
R4362	ERJ2GEOR00X	F 0OHM, J, 1/10W	
R4363	D1BB5602A055	M 56KOHM, 1/10W	
R4364	D1BB2001A055	M 2KOHM, 1/10W	
R4365	ERJ2GEOR00X	F 0OHM, J, 1/10W	
R4366	ERJ2GEOR00X	F 0OHM, J, 1/10W	
R4367	EXB2HV680JV	M 68OHM, 1/10W	
R4368	EXB2HV680JV	M 68OHM, 1/10W	
R4369	EXB2HV680JV	M 68OHM, 1/10W	
R4370	ERJ2GEOR00X	F 0OHM, J, 1/10W	
R4371	EXB2HV101JV	RESISTOR	
R4372	EXB2HV101JV	RESISTOR	
R4373	EXB2HV101JV	RESISTOR	
R4374	EXB2HV101JV	RESISTOR	
R4375	EXB2HV101JV	RESISTOR	
R4376	EXB2HV101JV	RESISTOR	
R4377	EXB2HV101JV	RESISTOR	
R4378	EXB2HV101JV	RESISTOR	
R4379	ERJ2GEJ680X	M 68OHM, 1/10W	
R4380	ERJ2GEJ680X	M 68OHM, 1/10W	
R4381	ERJ2GEJ680X	M 68OHM, 1/10W	
R4382	ERJ2GEJ680X	M 68OHM, 1/10W	
R4383	ERJ2GEJ680X	M 68OHM, 1/10W	
R4384	ERJ2GEJ680X	M 68OHM, 1/10W	
R4385	ERJ2GEJ182X	M 1.8KOHM, 1/10W	
R4386	ERJ2GEJ182X	M 1.8KOHM, 1/10W	
R4391	ERJ2GEJ680X	M 68OHM, 1/10W	
R4396	ERJ2GEJ103X	F 10KOHM, J, 1/10W	
R4398	ERJ2GEJ103X	F 10KOHM, J, 1/10W	
R4401	ERJ2GEJ473X	F 47KOHM, J, 1/10W	
R4402	ERJ2GEJ473X	F 47KOHM, J, 1/10W	
R4404	ERJ2GEJ473X	F 47KOHM, J, 1/10W	
R4405	ERJ2GEJ473X	F 47KOHM, J, 1/10W	
R4420	ERJ2GEJ680X	M 68OHM, 1/10W	
R4422	D1BB3002A055	M 30KOHM, 1/10W	
R4424	ERJ2GEOR00X	F 0OHM, J, 1/10W	
R4425	D1BB4702A055	M 47KOHM, 1/10W	
R4451	ERJ2GEOR00X	F 0OHM, J, 1/10W	
R4452	ERJ2GEOR00X	F 0OHM, J, 1/10W	
R4517	ERJ2GEJ220X	F 22OHM, J, 1/10W	
R4518	ERJ2GEJ220X	F 22OHM, J, 1/10W	

Ref. No.	Part No.	Part Name & Description	Remarks
R4527	ERJ2GEOR00X	F 0OHM, J, 1/10W	
R4530	ERJ2GEOR00X	F 0OHM, J, 1/10W	
R4532	ERJ2GEJ103X	F 10KOHM, J, 1/10W	
R4533	ERJ2GEJ103X	F 10KOHM, J, 1/10W	
R4534	ERJ2GEJ103X	F 10KOHM, J, 1/10W	
R4548	ERJ2GEJ103X	F 10KOHM, J, 1/10W	
R4549	ERJ2GEJ103X	F 10KOHM, J, 1/10W	
R4552	ERJ2GEJ220X	F 22OHM, J, 1/10W	
R4554	ERJ2GEJ560X	M 56OHM, 1/10W	
R4555	ERJ2GEJ473X	F 47KOHM, J, 1/10W	
R4556	D1BB4701A055	M 4.7KOHM, 1/10W	
R4557	ERJ2GEOR00X	F 0OHM, J, 1/10W	
R4558	ERJ2GEJ105X	F 1MOHM, J, 1/10W	
R4559	ERJ2GEJ105X	F 1MOHM, J, 1/10W	
R4560	ERJ2GEJ331X	M 330OHM, 1/10W	
R4562	ERJ2GEJ473X	F 47KOHM, J, 1/10W	
R4563	ERJ2GEJ473X	F 47KOHM, J, 1/10W	
R4564	ERJ2GEJ473X	F 47KOHM, J, 1/10W	
R4565	ERJ2GEJ473X	F 47KOHM, J, 1/10W	
R4566	ERJ2GEJ473X	F 47KOHM, J, 1/10W	
R4567	ERJ2GEJ473X	F 47KOHM, J, 1/10W	
R4568	ERJ2GEJ473X	F 47KOHM, J, 1/10W	
R4569	ERJ2GEJ473X	F 47KOHM, J, 1/10W	
R4570	ERJ2GEOR00X	F 0OHM, J, 1/10W	
R4571	ERJ2GEOR00X	F 0OHM, J, 1/10W	
R4572	ERJ2GEOR00X	F 0OHM, J, 1/10W	
R4573	ERJ2GEOR00X	F 0OHM, J, 1/10W	
R4587	D1BB1151A055	M 1.15KOHM, J, 1/10W	
R4588	D1BB4870A055	M 487OHM, J, 1/10W	
R4589	D1BB4870A055	M 487OHM, J, 1/10W	
R4592	D1BB4870A055	M 487OHM, J, 1/10W	
R4593	D1BB7870A055	M 787OHM, J, 1/10W	
R4596	ERJ6GEYJ102	M 1KOHM, J, 1/10W	
R4597	ERJ6GEYJ102	M 1KOHM, J, 1/10W	
R4598	ERJ6GEYJ102	M 1KOHM, J, 1/10W	
R4601	ERJ6GEYJ102	M 1KOHM, J, 1/10W	
R4604	ERJ2GEJ473X	F 47KOHM, J, 1/10W	
R4605	D1BB7870A055	M 787OHM, J, 1/10W	
R4606	D1BB9101A055	M 9.1KOHM, J, 1/10W	
R4608	ERJ6GEYJ102	M 1KOHM, J, 1/10W	
R4609	ERJ2GEJ103X	F 10KOHM, J, 1/10W	
R4610	ERJ2GEOR00X	F 0OHM, J, 1/10W	
R4611	D1BB5601A055	M 5.6KOHM, J, 1/10W	
R4614	ERJ2GEJ473X	F 47KOHM, J, 1/10W	
R4624	ERJ2GEJ102X	F 1KOHM, J, 1/10W	
R4625	ERJ2GEJ102X	F 1KOHM, J, 1/10W	
R4626	D1BB2000A055	M 200OHM, J, 1/10W	
R4627	D1BB2000A055	M 200OHM, J, 1/10W	
R4628	ERJ2GEOR00X	F 0OHM, J, 1/10W	
R4629	ERJ2GEOR00X	F 0OHM, J, 1/10W	
R4631	D1BB4990A055	M 200OHM, J, 1/10W	
R4634	D1BB2000A055	M 200OHM, J, 1/10W	
R4635	EXB28V680JX	F 0OHM, J, 1/10W	
R4636	ERJ2GEJ680X	F 0OHM, J, 1/10W	
R4637	ERJ2GEJ680X	M 499OHM, J, 1/10W	
R4638	ERJ2GEJ680X	M 200OHM, J, 1/10W	
R4639	EXB28V680JX	M 68OHM, 1/10W	
R4640	EXB28V680JX	M 68OHM, 1/10W	
R4644	ERJ2GEOR00X	M 68OHM, 1/10W	
R4645	ERJ2GEJ680X	M 68OHM, 1/10W	
R4646	ERJ2GEJ680X	M 68OHM, 1/10W	
R4647	ERJ2GEJ680X	M 68OHM, 1/10W	
R4648	EXB28V330JX	RESISTOR	
R4649	EXB28V680JX	M 68OHM, 1/10W	
R4650	ERJ2GEJ680X	M 68OHM, 1/10W	
R4651	ERJ2GEJ680X	M 68OHM, 1/10W	
R4652	ERJ2GEJ473X	F 47KOHM, J, 1/10W	
R4655	ERJ2GEJ472X	M 4.7KOHM, 1/10W	
R4656	ERJ2GEJ222X	M 2.2KOHM, 1/10W	
R4657	ERJ2GEOR00X	F 0OHM, J, 1/10W	
R4658	ERJ2GEOR00X	F 0OHM, J, 1/10W	
R4660	ERJ2GEJ472X	F 47KOHM, J, 1/10W	
R4664	D1BB1151A055	M 1.15KOHM, 1/10W	

Ref. No.	Part No.	Part Name & Description	Remarks
R4665	ERJ2GEJ473X	F 47KOHM, J, 1/10W	
R4666	ERJ2GEJ473X	F 47KOHM, J, 1/10W	
R4670	ERJ2GEJ680X	M 68OHM, 1/10W	
R4673	ERJ2GE0R00X	F 00HM, J, 1/10W	
R4677	ERJ2GE0R00X	F 00HM, J, 1/10W	
R4678	EXB28V680JX	M 68OHM, 1/10W	
R4679	EXB28V680JX	M 68OHM, 1/10W	
R4680	ERJ2GEJ680X	M 68OHM, 1/10W	
R4700	ERJ2GEJ103X	F 10KOHM, J, 1/10W	
R4701	ERJ2GEJ103X	F 10KOHM, J, 1/10W	
R4702	ERJ2GEJ103X	F 10KOHM, J, 1/10W	
R4703	ERJ2GEJ472X	F 47KOHM, J, 1/10W	
R4704	ERJ2GEJ472X	F 47KOHM, J, 1/10W	
R4705	ERJ2GEJ473X	F 47KOHM, J, 1/10W	
R4706	ERJ2GE0R00X	F 00HM, J, 1/10W	
R4707	ERJ2GE0R00X	F 00HM, J, 1/10W	
R4710	ERJ2GEJ103X	F 10KOHM, J, 1/10W	
R4711	ERJ2GEJ103X	F 10KOHM, J, 1/10W	
R4713	ERJ2GEJ103X	F 10KOHM, J, 1/10W	
R4714	ERJ2GE0R00X	F 00HM, J, 1/10W	
R4715	ERJ2GE0R00X	F 00HM, J, 1/10W	
R4716	ERJ2GEJ390X	M 39OHM, 1/10W	
R4717	ERJ2GEJ102X	F 1KOHM, J, 1/10W	
R4718	ERJ2GEJ473X	F 47KOHM, J, 1/10W	
R4719	ERJ2GEJ2R2X	M 2.2OHM, 1/10W	
R4720	ERJ2GEJ2R2X	M 2.2OHM, 1/10W	
R4721	ERJ2GEJ2R2X	M 2.2OHM, 1/10W	
R4722	ERJ2GEJ2R2X	M 2.2OHM, 1/10W	
R4723	ERJ2GEJ2R2X	M 2.2OHM, 1/10W	
R4724	ERJ2GEJ2R2X	M 2.2OHM, 1/10W	
R4725	ERJ2GEJ2R2X	M 2.2OHM, 1/10W	
R4726	ERJ2GEJ2R2X	M 2.2OHM, 1/10W	
R4729	ERJ3GEYJ560	M 56OHM, J, 1/16W	
R4730	ERJ3GEYJ560	M 56OHM, J, 1/16W	
R4731	ERJ2GE0R00X	F 00HM, J, 1/10W	
R4732	ERJ2GE0R00X	F 00HM, J, 1/10W	
R4733	ERJ2GE0R00X	F 00HM, J, 1/10W	
R4734	ERJ2GE0R00X	F 00HM, J, 1/10W	
R4741	ERJ2GEJ103X	F 10KOHM, J, 1/10W	
R4742	ERJ2GEJ103X	F 10KOHM, J, 1/10W	
R4743	ERJ2GEJ330X	M 33OHM, J, 1/10W	
R4744	ERJ2GEJ330X	M 33OHM, J, 1/10W	
R4749	ERJ2GEJ2R2X	M 2.2OHM, 1/10W	
R4750	ERJ2GEJ2R2X	M 2.2OHM, 1/10W	
R4751	ERJ2GEJ2R2X	M 2.2OHM, 1/10W	
R4752	ERJ2GEJ2R2X	M 2.2OHM, 1/10W	
R4753	ERJ2GEJ2R2X	M 2.2OHM, 1/10W	
R4754	ERJ2GEJ2R2X	M 2.2OHM, 1/10W	
R4755	ERJ2GEJ2R2X	M 2.2OHM, 1/10W	
R4756	ERJ2GEJ2R2X	M 2.2OHM, 1/10W	
R4757	ERJ2GEJ2R2X	M 2.2OHM, 1/10W	
R4758	ERJ2GEJ2R2X	M 2.2OHM, 1/10W	
R4759	ERJ2GEJ2R2X	M 2.2OHM, 1/10W	
R4760	ERJ2GEJ2R2X	M 2.2OHM, 1/10W	
R4761	ERJ2GEJ2R2X	M 2.2OHM, 1/10W	
R4762	ERJ2GEJ2R2X	M 2.2OHM, 1/10W	
R4763	ERJ2GEJ2R2X	M 2.2OHM, 1/10W	
R4764	ERJ2GEJ2R2X	M 2.2OHM, 1/10W	
R4767	ERJ2GEJ102X	F 1KOHM, J, 1/10W	
R4768	ERJ2GEJ102X	F 1KOHM, J, 1/10W	
R4769	ERJ2GEJ103X	F 10KOHM, J, 1/10W	
R4770	ERJ2GEJ103X	F 10KOHM, J, 1/10W	
R4781	ERJ2GEJ473X	F 47KOHM, J, 1/10W	
R4782	ERJ2GEJ473X	F 47KOHM, J, 1/10W	
R4798	ERJ2GEJ680X	M 68OHM, 1/10W	
R5400	ERJ2GEJ104X	F 100KOHM, J, 1/10W	
R5401	D1BB1002A055	M 10KOHM, 1/10W	
R5402	D1BB2612A055	M 26.1KOHM, 1/10W	
R5403	D1BB1002A055	M 10KOHM, 1/10W	
R5404	ERJ2GE0R00X	F 00HM, J, 1/10W	
R5405	ERJ2GEJ104X	F 100KOHM, J, 1/10W	
R5406	D1BB4021A055	M 4.02KOHM, 1/10W	
R5407	D1BB3301A055	M 3.3KOHM, 1/10W	

Ref. No.	Part No.	Part Name & Description	Remarks
R5408	D1BB1002A055	M 10KOHM, 1/10W	
R5409	ERJ2GE0R00X	F 00HM, J, 1/10W	
R5415	ERJ2GEJ473X	F 47KOHM, J, 1/10W	
R5416	ERJ2GEJ104X	F 100KOHM, J, 1/10W	
R5417	ERJ2GEJ104X	F 100KOHM, J, 1/10W	
R5418	ERJ2GEJ103X	F 10KOHM, J, 1/10W	
R5419	ERJ2GEJ473X	F 47KOHM, J, 1/10W	
R5420	D0GBR00Z0002	M 00HM, 1/10W	
R5422	D0GBR00Z0002	M 00HM, 1/10W	
R5600	ERJ2GEJ680X	M 68OHM, J, 1/10W	
R5601	D0GBR00Z0002	M 00HM, 1/10W	
R5602	ERJ2GE0R00X	F 00HM, J, 1/10W	
R5603	ERJ2GE0R00X	F 00HM, J, 1/10W	
R5604	D1BB4702A055	M 47KOHM, 1/10W	
R5605	D1BB1272A055	M 12.7KOHM, 1/10W	
R5606	ERJ2GE0R00X	F 00HM, J, 1/10W	
R5607	ERJ2GE0R00X	F 00HM, J, 1/10W	
R5610	ERJ2GEJ104X	F 100KOHM, J, 1/10W	
R5611	D1BB4702A055	M 47KOHM, 1/10W	
R5612	D1BB3602A055	M 36KOHM, 1/10W	
R5614	D0GBR00Z0002	M 00HM, Z, 1/10W	
R5616	ERJ2GE0R00X	F 00HM, J, 1/10W	
R5619	ERJ2GE0R00X	F 00HM, J, 1/10W	
R5620	ERJ2GEJ680X	M 68OHM, J, 1/10W	
R5621	D1BB2802A055	M 28KOHM, 1/10W	
R5622	ERJ2GEJ104X	F 100KOHM, J, 1/10W	
R5623	D1BB4702A055	M 47KOHM, 1/10W	
R5625	ERJ2GE0R00X	F 00HM, J, 1/10W	
R5626	ERJ2GE0R00X	F 00HM, J, 1/10W	
R5627	ERJ2GE0R00X	F 00HM, J, 1/10W	
R5628	ERJ2GE0R00X	F 00HM, J, 1/10W	
R5629	D1BB2802A055	M 28KOHM, 1/10W	
R5630	D1BB4752A055	M 47.5KOHM, 1/10W	
R5631	D1BB3602A055	M 36KOHM, 1/10W	
R5632	D1BB3002A055	M 30KOHM, 1/10W	
R5633	D1BB3602A055	M 36KOHM, 1/10W	
R5634	D1BB2802A055	M 28KOHM, 1/10W	
R5635	ERJ2GEJ223X	M 22KOHM, J, 1/10W	
R5636	ERJ2GEJ683X	M 68KOHM, J, 1/10W	
R5638	ERJ2GEJ103X	F 10KOHM, J, 1/10W	
R5641	ERJ2GEJ473X	F 47KOHM, J, 1/10W	
R5644	ERJ2GEJ222X	M 2.2KOHM, J, 1/10W	
R5646	ERJ2GEJ103X	F 10KOHM, J, 1/10W	
R5647	ERJ2GEJ473X	F 47KOHM, J, 1/10W	
R5660	ERJ2GEJ473X	F 47KOHM, J, 1/10W	
R5661	ERJ2GEJ103X	F 10KOHM, J, 1/10W	
R5662	ERJ2GEJ223X	M 22KOHM, J, 1/10W	
R5663	ERJ2GEJ101X	M 100OHM, J, 1/10W	
R5664	ERJ2GE0R00X	F 00HM, J, 1/10W	
R5698	ERJ2GE0R00X	F 00HM, J, 1/10W	
R5699	ERJ2GEJ473X	F 47KOHM, J, 1/10W	
R5702	ERJ2GEJ222X	M 2.2KOHM, J, 1/10W	
R5703	D0GDR00Z0002	M 00HM, J, 1/10W	
R5704	D0GDR00Z0002	M 00HM, J, 1/10W	
R5705	D0GDR00Z0002	M 00HM, J, 1/10W	
R7000	D0XB106J0003	M 10M, J, 1W	
R7001	ERC12ZGK105	S 1MOHM, K, 1/2W	
R7002	ERF2AJ100P	M 10OHM, 2W	
R7003	ERJ6GEYJ100	M 10OHM, J, 1/10W	
R7004	ERJ6GEYJ104	M 100KOHM, J, 1/10W	
R7005	ERJ6GEYJ104	M 100KOHM, J, 1/10W	
R7006	D0GD4R7JA059	M 100KOHM, J, 1/10W	
R7007	ERJ6GEYJ473	M 47KOHM, J, 1/10W	
R7008	ERJ6GEYJ221	M 220OHM, J, 1/10W	
R7009	ERJ6GEYJ332	M 3.3KOHM, J, 1/10W	
R7010	ERJ6GEYJ331	M 330OHM, J, 1/10W	
R7011	ERJ6ENF6801	M 6.8KOHM, 1/10W	
R7012	ERJ6ENF6801	M 6.8KOHM, 1/10W	
R7013	ERJ6GEYJ224	M 220KOHM, J, 1/10W	
R7014	ERJ6GEYJ224	M 220KOHM, J, 1/10W	
R7015	ER0S2CHF5603	M 560KOHM, J, 1/10W	
R7016	ER0S2CHF5603	M 560KOHM, J, 1/10W	
R7017	ER0S2CHF5603	M 560KOHM, J, 1/10W	

Ref. No.	Part No.	Part Name & Description	Remarks
R7018	D1BD1002A044	M 10KOHM, J, 1/10W	
R7019	ERJ6GEYJ473	M 47KOHM, J, 1/10W	
R7020	ERJ6GEYJ680	M 68OHM, J, 1/10W	
R7021	ERJ6GEYJ393	M 39KOHM, J, 1/10W	
R7022	ERJ6GEYJ221	M 220OHM, J, 1/10W	
R7023	ERJ6GEYJ223	M 22KOHM, J, 1/10W	
R7024	ERJ6GEYJ473	M 47KOHM, J, 1/10W	
R7025	ERJ6GEYJ220	M 22OHM, J, 1/10W	
R7026	ERJ6GEYJ473	M 47KOHM, J, 1/10W	
R7027	D0GD103JA036	M 10KOHM, J, 1/10W	
R7028	ERJ12YJ473U	M 47KOHM, J, 1/2W	
R7029	ERJ6GEYJ473	M 47KOHM, J, 1/10W	
R7032	ERJ6ENF5602	M 56KOHM, 1/10W	
R7033	ERJ6ENF5602	M 56KOHM, 1/10W	
R7034	ERJ6ENF5602	M 56KOHM, 1/10W	
R7035	ERJ6ENF3001	M 3KOHM, 1/10W	
R7036	ERJ6GEYJ104	M 100KOHM, J, 1/10W	
R7037	ERJ6GEYJ224	M 220KOHM, J, 1/10W	
R7038	ERJ12YJ470U	M 47OHM, J, 1/2W	
R7039	ERJ12YJ221U	M 220OHM, J, 1/2W	
R7040	D0GD4R7JA059	M 4.7OHM, J, 1/2W	
R7041	ERDS2TJ470	C 47OHM, J, 1/4W	
R7043	ERJ6GEYJ153	M 15KOHM, J, 1/10W	
R7044	D1BD1002A044	M 10KOHM, J, 1/10W	
R7046	D0GDR00Z0002	M 0OHM, J, 1/2W	
R7047	D0GD103JA036	M 10KOHM, J, 1/10W	
R7048	ERJ6GEYJ102	M 1KOHM, J, 1/10W	
R7049	ERJ6GEYJ471	M 470OHM, J, 1/10W	
R7050	ERJ6GEYJ100	M 10OHM, J, 1/10W	
R7052	ERJ6GEYJ222	M 2.2KOHM, J, 1/10W	
R7053	ERJ6ENF8451	M 8.45KOHM, J, 1/10W	
R7054	ERJ6ENF2201	M 2.2KOHM, 1/10W	
R7056	ERJ6ENF2703	M 270KOHM, 1/10W	
R7057	ERJ6ENF2703	M 270KOHM, 1/10W	
R7058	ERJ6ENF2703	M 270KOHM, 1/10W	
R7059	D0GD103JA036	M 10KOHM, 1/10W	
R7060	ERJ6GEYJ183	M 18KOHM, J, 1/10W	
R7061	ERJ6GEYJ473	M 47KOHM, J, 1/10W	
R7062	D0GD103JA036	M 10KOHM, 1/10W	
R7063	ERJ6ENF2703	M 270KOHM, 1/10W	
R7064	ERJ6ENF2703	M 270KOHM, 1/10W	
R7065	ERJ6ENF2703	M 270KOHM, 1/10W	
R7066	ERJ6ENF2703	M 270KOHM, 1/10W	
R7067	ERJ6ENF2703	M 270KOHM, 1/10W	
R7068	ERJ6ENF6802	M 68KOHM, 1/10W	
R7069	D1BD1002A044	M 10KOHM, J, 1/10W	
R7070	ERJ6GEYJ473	M 47KOHM, J, 1/10W	
R7071	ERJ6GEYJ224	M 220KOHM, J, 1/10W	
R7072	ERJ6GEYJ104	M 100KOHM, J, 1/10W	
R7073	ERJ6ENF1213	M 121KOHM, J, 1/10W	
R7074	ERJ6ENF5602	M 56KOHM, 1/10W	
R7075	ERJ6ENF5602	M 56KOHM, 1/10W	
R7076	ERJ6ENF5602	M 56KOHM, 1/10W	
R7077	ERJ6ENF5602	M 56KOHM, 1/10W	
R7078	ERJ6ENF5602	M 56KOHM, 1/10W	
R7089	ERJ6GEYJ222	M 2.2KOHM, J, 1/10W	
R7091	ERJ8GEYJ470	M 47OHM, J, 1/10W	
R7092	ERJ6GEYJ562	M 5.6KOHM, J, 1/10W	
R7094	ERJ6GEYJ562	M 5.6KOHM, J, 1/10W	
R7095	ERJ6GEYJ153	M 15KOHM, J, 1/10W	
R7096	ERJ6GEYJ473	M 47KOHM, J, 1/10W	
R7097	D0GD103JA036	M 10KOHM, 1/10W	
R7098	ERJ6GEYJ102	M 1KOHM, J, 1/10W	
R7099	ERJ6GEYJ562	M 5.6KOHM, J, 1/10W	
R7100	ERJ6GEYJ562	M 5.6KOHM, J, 1/10W	
R7101	ERX2SJ5R6P	M 5.6OHM, J, 2W	
R7110	D1BD1002A044	M 10KOHM, J, 1/10W	
R7111	ERJ6ENF6342	M 63.4KOHM, J, 1/10W	
R7113	ERJ6GEYJ473	M 47KOHM, J, 1/10W	
R7117	ERJ6GEYJ101	M 100OHM, J, 1/10W	
R7118	ERX1SJ1R8P	M 1.8OHM, J, 1W	
R7120	ERJ6GEYJ223	M 22KOHM, J, 1/10W	
R7121	ERJ6GEYJ333	M 33KOHM, J, 1/10W	

Ref. No.	Part No.	Part Name & Description	Remarks
R7122	D0GDR00Z0002	M 0OHM, J, 1/2W	
R7123	ERJ6GEYJ473	M 47KOHM, J, 1/10W	
R7125	D0GDR00Z0002	M 0OHM, J, 1/2W	
R7126	ERJ6ENF7151	M7.15KOHM, 1/10W	
R7127	ERJ6ENF3012	F 30.1KOHM, 1/10W	
R7128	D0GDR00Z0002	M 0OHM, J, 1/2W	
R7129	ERX1SJ1R5P	M 1.5OHM, J, 1W	
R7130	ERX2SJR22P	M 0.22OHM, J, 2W	
R7131	ERX2SJR33P	M 0.33OHM, J, 2W	
R7132	ERG2DJ154H	M 0.33OHM, J, 2W	
R7133	D0GDR00Z0002	M 10KOHM, J, 1/10W	
R7134	D0GDR00Z0002	M 10KOHM, J, 1/10W	
R7135	D0GD103JA036	M 0OHM, J, 1/2W	
R7136	D0GDR00Z0002	M 10KOHM, J, 1/10W	
R7137	ERJ6GEYJ223	M 0OHM, J, 1/2W	
R7138	ERJ6GEYJ153	M 15KOHM, J, 1/10W	
R7139	D0GDR00Z0002	M 0OHM, J, 1/2W	
R7145	ERJ12YJ473U	M 47KOHM, J, 1/2W	
R7146	ERJ12YJ473U	M 47KOHM, J, 1/2W	
R7147	ERJ12YJ473U	M 47KOHM, J, 1/2W	
R7152	ERJ12YJ471U	M 470OHM, J, 1/2W	
R7153	ERJ6GEYJ680	M 68OHM, J, 1/10W	
R7154	ERJ6ENF3742	M 37.4KOHM, J, 1/10W	
R7155	D1BD1002A044	M 10KOHM, J, 1/10W	
R7601	ERJ2GEJ563X	M 56KOHM, J, 1/10W	
R7602	ERJ2GEJ223X	M 22KOHM, J, 1/10W	
R7603	ERJ2GEOR00X	F 0OHM, J, 1/10W	
R7604	ERJ2GEOR00X	F 0OHM, J, 1/10W	
R7605	ERJ2GEOR00X	F 0OHM, J, 1/10W	
R7607	ERJ2GEJ104X	F 100KOHM, J, 1/10W	
R7609	ERJ2GEJ222X	M 2.2KOHM, J, 1/10W	
R8001	ERJ2GEJ221X	M 220OHM, J, 1/10W	
R8002	ERJ2GEJ560X	M 56OHM, J, 1/10W	
R8004	D1BB2402A055	M 24KOHM, J, 1/10W	
R8005	D1BB1002A055	M 10KOHM, J, 1/10W	
R8006	D1BB6801A055	M 6.8KOHM, J, 1/10W	
R8023	ERJ2GEOR00X	F 0OHM, J, 1/10W	
R8024	ERJ2GEOR00X	F 0OHM, J, 1/10W	
R8025	ERJ2GEOR00X	F 0OHM, J, 1/10W	
R8026	ERJ2GEOR00X	F 0OHM, J, 1/10W	
R8027	ERJ2GEOR00X	F 0OHM, J, 1/10W	
R8028	ERJ2GEOR00X	F 0OHM, J, 1/10W	
R8029	ERJ2GEOR00X	F 0OHM, J, 1/10W	
R8030	ERJ2GEJ101X	M 100OHM, J, 1/10W	
R8031	D1BB2700A055	M 270OHM, J, 1/10W	
R8032	D1BB2700A055	M 270OHM, J, 1/10W	
R8035	ERJ2GEOR00X	F 0OHM, J, 1/10W	
R8036	D0GBR00Z0002	M 0OHM, J, 1/10W	
R8039	ERJ2GEOR00X	F 0OHM, J, 1/10W	
R8056	ERJ2GEJ470X	M 47OHM, J, 1/10W	
R8057	ERJ2GEJ470X	M 47OHM, J, 1/10W	
R8058	ERJ2GEJ470X	M 47OHM, J, 1/10W	
R8059	ERJ2GEJ470X	M 47OHM, J, 1/10W	
R8060	ERJ2GEJ470X	M 47OHM, J, 1/10W	
R8061	ERJ2GEJ470X	M 47OHM, J, 1/10W	
R8062	ERJ2GEJ470X	M 47OHM, J, 1/10W	
R8063	ERJ2GEJ470X	M 47OHM, J, 1/10W	
R8064	ERJ2GEJ470X	M 47OHM, J, 1/10W	
R8065	ERJ2GEJ470X	M 47OHM, J, 1/10W	
R8066	ERJ2GEJ470X	M 47OHM, J, 1/10W	
R8067	ERJ2GEJ470X	M 47OHM, J, 1/10W	
R8068	ERJ2GEJ470X	M 47OHM, J, 1/10W	
R8069	ERJ2GEJ470X	M 47OHM, J, 1/10W	
R8070	ERJ2GEJ470X	M 47OHM, J, 1/10W	
R8071	ERJ2GEJ470X	M 47OHM, J, 1/10W	
R8072	ERJ2GEJ470X	M 47OHM, J, 1/10W	
R8073	ERJ2GEJ470X	M 47OHM, J, 1/10W	
R8074	ERJ2GEJ221X	M 220OHM, J, 1/10W	
R8075	ERJ2GEJ470X	M 47OHM, J, 1/10W	
R8076	ERJ2GEJ470X	M 47OHM, J, 1/10W	
R8077	ERJ2GEJ470X	M 47OHM, J, 1/10W	
R8078	ERJ2GEJ470X	M 47OHM, J, 1/10W	
R8079	ERJ2GEOR00X	F 0OHM, J, 1/10W	

Ref. No.	Part No.	Part Name & Description	Remarks
R8080	ERJ2GE0R00X	F 00HM, J, 1/10W	
R8081	ERJ2GEJ103X	F 10KOHM, J, 1/10W	
R8082	D1BA75R0A014	M 750HM, J, 1/10W	
R8083	ERJ2GEJ301X	M 300OHM, J, 1/10W	
R8084	ERJ2GE0R00X	F 00HM, J, 1/10W	
R8086	ERJ2GEJ104X	F100KOHM, J, 1/10W	
R8087	ERJ2GEJ103X	F 10KOHM, J, 1/10W	
R8090	ERJ2GEJ103X	F 10KOHM, J, 1/10W	
R8091	ERJ2GEJ101X	M 100OHM, J, 1/10W	
R8093	ERJ2GEJ470X	M 470HM, J, 1/10W	
R8095	ERJ2GEJ103X	F 10KOHM, J, 1/10W	
R8097	ERJ2GEJ221X	M 220HM, J, 1/10W	
R8098	ERJ2GEJ103X	F 10KOHM, J, 1/10W	
R8099	ERJ2GEJ103X	F 10KOHM, J, 1/10W	
R8100	ERJ2GEJ470X	M 470HM, J, 1/10W	
R8101	ERJ2GEJ103X	F 10KOHM, J, 1/10W	
R8106	ERJ2GEJ202X	M 2KOHM, J, 1/10W	
R8107	ERJ2GEJ101X	M 100OHM, J, 1/10W	
R8328	ERJ2GEJ103X	F 10KOHM, J, 1/10W	
R8471	ERJ2GEJ103X	F 10KOHM, J, 1/10W	
R8472	EXB2HV103JV	RESISTOR	
R8474	EXB28V103JX	RESISTOR	
R8475	EXB28V103JX	RESISTOR	
R8501	ERJ2GEJ101X	M 100OHM, J, 1/10W	
R8502	ERJ2GEJ331X	M 330OHM, J, 1/10W	
R8503	ERJ2GEJ331X	M 330OHM, J, 1/10W	
R8504	ERJ2GEJ331X	M 330OHM, J, 1/10W	
R8506	ERJ2GEJ331X	M 330OHM, J, 1/10W	
R8508	D1BB91R0A055	M 91OHM, J, 1/10W	
R8509	D1BB91R0A055	M 91OHM, J, 1/10W	
R8510	D1BB91R0A055	M 91OHM, J, 1/10W	
R8556	ERJ2GEJ103X	F 10KOHM, J, 1/10W	
R8564	ERJ2GEJ103X	F 10KOHM, J, 1/10W	
R8566	ERJ2GE0R00X	F 00HM, J, 1/10W	
R8601	ERJ2GEJ220X	F 220HM, J, 1/10W	
R8602	ERJ2GEJ220X	F 220HM, J, 1/10W	
R8603	ERJ2GEJ473X	F 47KOHM, J, 1/10W	
R8604	D0GDR00Z0002	M 00HM, J, 1/10W	
R8605	ERJ2GEJ680X	M 680HM, J, 1/10W	
R8621	ERJ2GEJ680X	M 680HM, J, 1/10W	
R8622	ERJ2GEJ680X	M 680HM, J, 1/10W	
R8623	ERJ2GEJ680X	M 680HM, J, 1/10W	
R8624	ERJ2GEJ680X	M 680HM, J, 1/10W	
R8625	ERJ2GEJ680X	M 680HM, J, 1/10W	
R8626	ERJ2GEJ680X	M 680HM, J, 1/10W	
R8627	ERJ2GEJ680X	M 680HM, J, 1/10W	
R8628	ERJ2GEJ680X	M 680HM, J, 1/10W	
R8629	ERJ2GEJ680X	M 680HM, J, 1/10W	
R8630	ERJ2GEJ680X	M 680HM, J, 1/10W	
R8631	ERJ2GEJ680X	M 680HM, J, 1/10W	
R8632	ERJ2GEJ680X	M 680HM, J, 1/10W	
R8633	ERJ2GEJ680X	M 680HM, J, 1/10W	
R8634	ERJ2GEJ680X	M 680HM, J, 1/10W	
R8635	ERJ2GEJ680X	M 680HM, J, 1/10W	
R8636	ERJ2GEJ680X	M 680HM, J, 1/10W	
R8657	ERJ2GEJ103X	F 10KOHM, J, 1/10W	
R8658	ERJ2GEJ220X	F 22KOHM, J, 1/10W	
R8710	ERJ2GEJ680X	M 680HM, J, 1/10W	
R8711	ERJ2GEJ103X	F 10KOHM, J, 1/10W	
R8712	ERJ2GEJ103X	F 10KOHM, J, 1/10W	
R8802	ERJ2GEJ103X	F 10KOHM, J, 1/10W	
R8803	ERJ2GEJ103X	F 10KOHM, J, 1/10W	
R8804	ERJ2GEJ103X	F 10KOHM, J, 1/10W	
R8805	ERJ2GEJ103X	F 10KOHM, J, 1/10W	
R8806	ERJ2GEJ103X	F 10KOHM, J, 1/10W	
R8807	ERJ2GEJ103X	F 10KOHM, J, 1/10W	
R8808	ERJ2GEJ103X	F 10KOHM, J, 1/10W	
R8809	ERJ2GEJ103X	F 10KOHM, J, 1/10W	
R8810	EXB28V330JX	RESISTOR	
R8811	ERJ2GEJ330X	M 330HM, J, 1/10W	
R8812	ERJ2GE0R00X	F 00HM, J, 1/10W	
R8813	EXB28V680JX	M 680HM, J, 1/10W	
R8814	ERJ2GEJ680X	M 680HM, J, 1/10W	

Ref. No.	Part No.	Part Name & Description	Remarks
R8815	ERJ2GEJ680X	M 680HM, J, 1/10W	
R8816	ERJ2GEJ680X	M 680HM, J, 1/10W	
R8817	ERJ2GEJ680X	M 680HM, J, 1/10W	
R8833	D0GBR00Z0002	M 00HM, J, 1/10W	
R8851	ERJ2GE0R00X	F 00HM, J, 1/10W	
R8852	ERJ2GE0R00X	F 00HM, J, 1/10W	
R8853	ERJ2GE0R00X	F 00HM, J, 1/10W	
R8861	ERJ2GEJ103X	F 10KOHM, J, 1/10W	
R8865	EXB2HV680JV	RESISTOR	
R8866	EXB2HV680JV	RESISTOR	
R8867	EXB2HV680JV	RESISTOR	
R8868	ERJ2GEJ680X	M 680HM, J, 1/10W	
R8871	ERJ2GEJ103X	F 10KOHM, J, 1/10W	
R8874	ERJ2GEJ103X	F 10KOHM, J, 1/10W	
R8875	ERJ2GEJ103X	F 10KOHM, J, 1/10W	
R8876	ERJ2GEJ103X	F 10KOHM, J, 1/10W	
R8877	ERJ2GEJ680X	M 680HM, J, 1/10W	
R8878	ERJ2GEJ680X	M 680HM, J, 1/10W	
R8879	ERJ2GEJ680X	M 680HM, J, 1/10W	
R8880	ERJ2GEJ680X	M 680HM, J, 1/10W	
R8882	ERJ2GEJ680X	M 680HM, J, 1/10W	
R8883	ERJ2GEJ680X	M 680HM, J, 1/10W	
R8884	ERJ2GEJ680X	M 680HM, J, 1/10W	
R8885	ERJ2GEJ680X	M 680HM, J, 1/10W	
R8886	ERJ2GEJ680X	M 680HM, J, 1/10W	
R8887	ERJ2GEJ680X	M 680HM, J, 1/10W	
R8888	ERJ2GEJ680X	M 680HM, J, 1/10W	
R8889	ERJ2GEJ680X	M 680HM, J, 1/10W	
R8891	ERJ2GEJ680X	M 680HM, J, 1/10W	
R8892	ERJ2GEJ680X	M 680HM, J, 1/10W	
R8894	ERJ2GEJ680X	M 680HM, J, 1/10W	
R8896	ERJ2GE0R00X	F 00HM, J, 1/10W	
R8897	ERJ2GE0R00X	F 00HM, J, 1/10W	
R8898	ERJ2GEJ103X	F 10KOHM, J, 1/10W	
R8900	ERJ2GEJ680X	M 680HM, J, 1/10W	
R8901	ERJ2GEJ680X	M 680HM, J, 1/10W	
R8904	ERJ2GEJ103X	F 10KOHM, J, 1/10W	
R8905	ERJ2GEJ103X	F 10KOHM, J, 1/10W	
R8906	ERJ2GEJ103X	F 10KOHM, J, 1/10W	
R8907	ERJ2GEJ103X	F 10KOHM, J, 1/10W	
R8908	ERJ2GEJ103X	F 10KOHM, J, 1/10W	
R8909	ERJ2GEJ103X	F 10KOHM, J, 1/10W	
R8910	ERJ2GEJ103X	F 10KOHM, J, 1/10W	
R8911	ERJ2GEJ680X	M 680HM, J, 1/10W	
R8912	ERJ2GEJ680X	M 680HM, J, 1/10W	
R8913	ERJ2GEJ680X	M 680HM, J, 1/10W	
R8914	ERJ2GEJ680X	M 680HM, J, 1/10W	
R8915	ERJ2GEJ680X	M 680HM, J, 1/10W	
R8916	ERJ2GEJ680X	M 680HM, J, 1/10W	
R8917	ERJ2GEJ680X	M 680HM, J, 1/10W	
R8918	ERJ2GEJ680X	M 680HM, J, 1/10W	
R8919	ERJ2GEJ472X	M 4.7KOHM, J, 1/10W	
R8920	ERJ2GEJ472X	M 4.7KOHM, J, 1/10W	
R8921	ERJ2GEJ472X	M 4.7KOHM, J, 1/10W	
R8922	ERJ2GEJ472X	M 4.7KOHM, J, 1/10W	
R8923	ERJ2GEJ472X	M 4.7KOHM, J, 1/10W	
R8924	ERJ2GEJ472X	M 4.7KOHM, J, 1/10W	
R8925	ERJ2GEJ472X	M 4.7KOHM, J, 1/10W	
R8926	ERJ2GEJ472X	M 4.7KOHM, J, 1/10W	
R8927	ERJ2GE0R00X	F 00HM, J, 1/10W	
R8929	EXB2HVR000V	RESISTOR	
R8935	ERJ2GEJ103X	F 10KOHM, J, 1/10W	
R8936	ERJ2GEJ103X	F 10KOHM, J, 1/10W	
R8937	ERJ2GEJ473X	F 47KOHM, J, 1/10W	
R8938	ERJ2GEJ103X	F 00HM, J, 1/10W	
R8942	ERJ2GEJ473X	F 47KOHM, J, 1/10W	
R8943	ERJ2GEJ473X	F 47KOHM, J, 1/10W	
R8944	ERJ2GEJ223X	M 22KOHM, J, 1/10W	
R8945	ERJ2GEJ103X	F 10KOHM, J, 1/10W	
R8946	ERJ2GE0R00X	F 00HM, J, 1/10W	
R8947	ERJ2GEJ680X	M 680HM, J, 1/10W	
R8950	ERJ2GE0R00X	F 00HM, J, 1/10W	
R8957	ERJ2GEJ103X	F 10KOHM, J, 1/10W	

Ref. No.	Part No.	Part Name & Description	Remarks
R8958	ERJ2GEJ103X	F 10KOHM, J, 1/10W	
R8959	ERJ2GEJ680X	M 68OHM, J, 1/10W	
R8960	ERJ2GEJ680X	M 68OHM, J, 1/10W	
R8963	ERJ2GEJ103X	F 10KOHM, J, 1/10W	
	TRANSFORMERS		
T7000	ETS15AB186AH	SWITCHING TRANS	⚠
T7001	G4D3A0000203	TRANS	⚠
T7002	G4D4A0000125	TRANS	⚠
	OTHERS		
CF7000	D4CAY8R0A010	COIL	
CN0100	K1KA08AA0714	CONNECTOR	
CN4200	K1KB51B00002	CONNECTOR	
CN4201	K1KA07AA0266	CONNECTOR	
DG1	K1KA14A00248	CONNECTOR	
DG10	K1KA02A00787	CONNECTOR	
DG12	K1KA20AA0009	CONNECTOR	
DG8	K1KB80AA0218	CONNECTOR	
DG9	K1KY23AA0607	CONNECTOR	
FL3013	J0HABB000003	EMI FILTER	
FL4201	J0JAD0000028	BEAD CORE	
FL4202	J0JAD0000028	BEAD CORE	
FL4203	J0JAD0000028	BEAD CORE	
FL4204	J0JAD0000028	BEAD CORE	
FL4205	J0JAD0000028	BEAD CORE	
FL4206	F1H0J4740004	CERAMIC CAPACITOR	
H12	K1KA20AA0009	CONNECTOR	
H2	K1KA05AA0190	CONNECTOR	
H6	K1KY23AA0607	CONNECTOR	
H7	K1KY23AA0607	CONNECTOR	
H8	K1KB80AA0218	CONNECTOR	
H9	K1KY23AA0606	CONNECTOR	
JK3001	K1FB315A0006	AV TERMINAL	
JK3100	K1U932A00002	AV TERMINAL	
JK3700	K4AK18B00004	AV TERMINAL	
JK4501	K1FY119D0003	HDMI TERMINAL	
JK4502	K1FY119D0003	HDMI TERMINAL	
JK4700	K1FA119E0013	HDMI TERMINAL	
JK8801	K1NA09E00080	CARD READER	
JS1102	ERJ2GE0R00X	FIXED RESISTOR	
JS1106	ERJ2GE0R00X	FIXED RESISTOR	
JS2054	D0GBR00Z0002	CHIP RESISTOR	
JS2055	D0GBR00Z0002	CHIP RESISTOR	
JS2056	D0GBR00Z0002	CHIP RESISTOR	
JS2057	D0GBR00Z0002	CHIP RESISTOR	
JS2058	D0GBR00Z0002	CHIP RESISTOR	
JS2059	D0GBR00Z0002	CHIP RESISTOR	
JS2060	D0GBR00Z0002	CHIP RESISTOR	
JS2061	D0GBR00Z0002	CHIP RESISTOR	
JS2062	D0GBR00Z0002	CHIP RESISTOR	
JS2063	D0GBR00Z0002	CHIP RESISTOR	
JS2073	D0GBR00Z0002	CHIP RESISTOR	
JS2074	D0GBR00Z0002	CHIP RESISTOR	
JS2076	D0GBR00Z0002	CHIP RESISTOR	
JS2078	D0GBR00Z0002	CHIP RESISTOR	
JS2079	D0GBR00Z0002	CHIP RESISTOR	
JS2080	D0GBR00Z0002	CHIP RESISTOR	
JS2083	D0GBR00Z0002	CHIP RESISTOR	
JS2084	D0GBR00Z0002	CHIP RESISTOR	
JS2104	D0GBR00Z0002	CHIP RESISTOR	
JS2105	D0GBR00Z0002	CHIP RESISTOR	
JS2106	D0GBR00Z0002	CHIP RESISTOR	
JS2107	D0GBR00Z0002	CHIP RESISTOR	
JS2311	D0GBR00Z0002	CHIP RESISTOR	
JS2313	D0GBR00Z0002	CHIP RESISTOR	
JS2316	D0GBR00Z0002	CHIP RESISTOR	
JS2317	D0GBR00Z0002	CHIP RESISTOR	
JS2318	D0GBR00Z0002	CHIP RESISTOR	
JS2320	D0GBR00Z0002	CHIP RESISTOR	
JS2600	D0GBR00Z0002	CHIP RESISTOR	
JS2904	D0GBR00Z0002	CHIP RESISTOR	
JS2905	D0GBR00Z0002	CHIP RESISTOR	
JS3007	D0GDR00Z0002	CHIP RESISTOR	
JS3008	D0GDR00Z0002	CHIP RESISTOR	

Ref. No.	Part No.	Part Name & Description	Remarks
JS3009	D0GDR00Z0002	CHIP RESISTOR	
JS3010	D0GDR00Z0002	CHIP RESISTOR	
JS3012	D0GDR00Z0002	CHIP RESISTOR	
JS3013	D0GDR00Z0002	CHIP RESISTOR	
JS3014	D0GDR00Z0002	CHIP RESISTOR	
JS3032	D0GBR00Z0002	CHIP RESISTOR	
JS3412	D0GBR00Z0002	CHIP RESISTOR	
JS4002	ERJ2GE0R00X	FIXED RESISTOR	
JS7002	D0GDR00Z0002	CHIP RESISTOR	
K1	K1KA02BA0061	CONNECTOR	
LF7001	G0B103H00002	LINE FILTER	⚠
LF7002	G0B103H00002	LINE FILTER	⚠
LF7003	G0B103H00002	LINE FILTER	⚠
P1	K1KA02B00295	CONNECTOR	
P2	K1KA08AA0190	CONNECTOR	
P5	K1KA02A00676	CONNECTOR	
P6	K1KY23AA0606	CONNECTOR	
P7	K1KY23AA0606	CONNECTOR	
PA7001	B1ZAZ0000016	TRANSISTOR	
PC7000	CNC1S171R	PHOTO COUPLER	⚠
PC7001	CNC1S171R	PHOTO COUPLER	⚠
RL7001	K6B1AGA00043	RELAY	⚠
RL7030	K6B2ADA00007	RELAY	⚠
RM2600	PNA4701M07TV	IC PHOTO DETECTOR	
S10	K1KA03BA0061	CONNECTOR	
SN2600	B3JB00000046	PHOTO DETECTOR	
SW2500	EVQ11G05R	SWITCH	
SW2501	EVQ11G05R	SWITCH	
SW2502	EVQ11G05R	SWITCH	
SW2503	EVQ11G05R	SWITCH	
SW2504	EVQ11G05R	SWITCH	
SW7980	K0F162B00002	PUSH SWITCH	⚠
TU2901A	ENG39E04GF	TUNER	⚠
V10	K1KA08BA0061	CONNECTOR	
X1100	H0J100500035	CRYSTAL OSC	
X2010	H0J245500089	CRYSTAL OSC	
X4200	H0J270500113	CRYSTAL OSC	
X4201	H0J480500035	CRYSTAL OSC	
X4500	H0J245500089	CRYSTAL OSC	
X8001	H0J270500061	CRYSTAL OSC	