


Service Manual


Telephone Equipment

Call Display Compatible


DECT
6.0



KX-TGA106CM
(Cordless Handset)



KX-TG1061CM
(Base Unit)



(Charger Unit)

Configuration for each model

Model No	Base Unit	Handset	Charger Unit	Expandable
KX-TG1062	1 (TG1061)	2 (TGA106)	2	Up to 6
KX-TG1063	1 (TG1061)	3 (TGA106)	3	Up to 6
KX-TGA106*		1 (TGA106)	1	

* KX-TGA106 is also an optional accessory, which contains a handset and a charger.

Model No. **KX-TG1062CM**
KX-TG1063CSK
KX-TGA106CM

**Expandable Digital Corded/Cordless
Answering System**

M: Metallic Grey Version
(for Canada)

 WARNING

This service information is designed for experienced repair technicians only and is not designed for use by the general public. It does not contain warnings or cautions to advise non-technical individuals of potential dangers in attempting to service a product. Products powered by electricity should be serviced or repaired only by experienced professional technicians. Any attempt to service or repair the product or products dealt with in this service information by anyone else could result in serious injury or death.

IMPORTANT SAFETY NOTICE

There are special components used in this equipment which are important for safety. These parts are marked by  in the Schematic Diagrams, Circuit Board Diagrams, Exploded Views and Replacement Parts List. It is essential that these critical parts should be replaced with manufacturer's specified parts to prevent shock, fire or other hazards. Do not modify the original design without permission of manufacturer.

IMPORTANT INFORMATION ABOUT LEAD FREE, (PbF), SOLDERING

If lead free solder was used in the manufacture of this product, the printed circuit boards will be marked PbF. Standard leaded, (Pb), solder can be used as usual on boards without the PbF mark.

When this mark does appear, please read and follow the special instructions described in this manual on the use of PbF and how it might be permissible to use Pb solder during service and repair work.

- When you note the serial number, write down all 11 digits. The serial number may be found on the bottom of the unit.
- The illustrations in this Service Manual may vary slightly from the actual product.

TABLE OF CONTENTS

	PAGE
1 Safety Precautions -----	4
1.1. For Service Technicians -----	4
2 Warning -----	4
2.1. Battery Caution-----	4
2.2. About Lead Free Solder (PbF: Pb free)-----	4
2.3. Discarding of P. C. Board-----	5
3 Specifications -----	6
4 Location of Controls and Components -----	7
5 Installation Instructions -----	7
6 Operating Instructions -----	7
7 Schematic Diagram -----	8
7.1. For Schematic Diagram-----	8
7.2. Schematic Diagram (Base Unit_Main)-----	10
7.3. Schematic Diagram (Base Unit_RF Part) -----	12
7.4. Schematic Diagram (Base Unit_Operation) -----	13
7.5. Schematic Diagram (Cordless Handset) -----	14
7.6. Schematic Diagram (Charger Unit) -----	16
8 Exploded View and Replacement Parts List -----	17

1 Safety Precautions

1.1. For Service Technicians

- **Repair service shall be provided in accordance with repair technology information such as service manual so as to prevent fires, injury or electric shock, which can be caused by improper repair work.**

1. When repair services are provided, neither the products nor their parts or members shall be remodeled.
2. If a lead wire assembly is supplied as a repair part, the lead wire assembly shall be replaced.
3. FASTON terminals shall be plugged straight in and unplugged straight out.

- **ICs and LSIs are vulnerable to static electricity.**

When repairing, the following precautions will help prevent recurring malfunctions.

1. Cover plastic parts boxes with aluminum foil.
2. Ground the soldering irons.
3. Use a conductive mat on worktable.
4. Do not grasp IC or LSI pins with bare fingers.

2 Warning

2.1. Battery Caution

Risk of explosion if battery is replaced by an incorrect type. Dispose of used batteries according to the instructions.

ATTENTION
IL Y A RISQUE D'EXPLOSION SI LA BATTERIE
EST REMPLACÉE PAR UNE BATERIE DE TYPE
INCORRECT.
MATTRE AU REBUT LES BATTERIES USAGÉES
CONFORMÉMENT AUX INSTRUCTIONS.

2.2. About Lead Free Solder (PbF: Pb free)

Note:


In the information below, Pb, the symbol for lead in the periodic table of elements, will refer to standard solder or solder that contains lead.

We will use PbF solder when discussing the lead free solder used in our manufacturing process which is made from Tin (Sn), Silver (Ag), and Copper (Cu).

This model, and others like it, manufactured using lead free solder will have PbF stamped on the PCB. For service and repair work we suggest using the same type of solder.

Caution




- PbF solder has a melting point that is 50 °F ~ 70 °F (30 °C ~ 40 °C) higher than Pb solder. Please use a soldering iron with temperature control and adjust it to 700 °F ± 20 °F (370 °C ± 10 °C).
- Exercise care while using higher temperature soldering irons.:
Do not heat the PCB for too long time in order to prevent solder splash or damage to the PCB.
- PbF solder will tend to splash if it is heated much higher than its melting point, approximately 1100 °F (600 °C).
- When applying PbF solder to double layered boards, please check the component side for excess which may flow onto the opposite side (See the figure below).

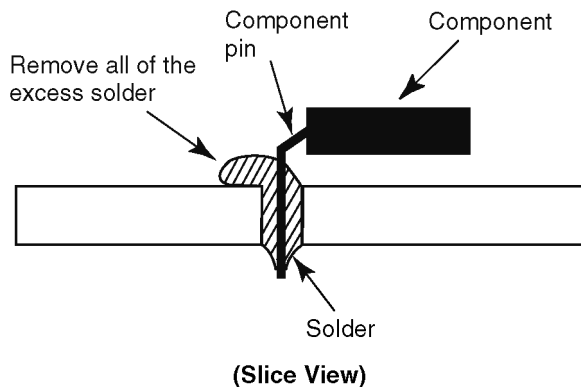

2.2.1. Suggested PbF Solder

There are several types of PbF solder available commercially. While this product is manufactured using Tin, Silver, and Copper (Sn+Ag+Cu), you can also use Tin and Copper (Sn+Cu), or Tin, Zinc, and Bismuth (Sn+Zn+Bi). Please check the manufacturer's specific instructions for the melting points of their products and any precautions for using their product with other materials.

The following lead free (PbF) solder wire sizes are recommended for service of this product: 0.3 mm, 0.6 mm and 1.0 mm.

0.3 mm X 100 g	0.6 mm X 100 g	1.0 mm X 100 g
		

2.3. Discarding of P. C. Board

When discarding P. C. Board, delete all personal information such as telephone directory and caller list or scrap P. C. Board.

3 Specifications

■ Standard:

DECT 6.0 (Digital Enhanced Cordless Telecommunications 6.0)

■ Number of channels:

60 Duplex Channels

■ Frequency range:

1.92 GHz to 1.93 GHz

■ Duplex procedure:

TDMA (Time Division Multiple Access)

■ Channel spacing:

1,728 kHz

■ Bit rate:

1,152 kbit/s

■ Modulation:

GFSK (Gaussian Frequency Shift Keying)

■ RF transmission power:

115 mW (max.)

■ Voice coding:

ADPCM 32 kbit/s

	Base Unit	Cordless Handset	Charger
Power source	AC Adaptor □ (PQLV219Z, 120 V AC, 60 Hz)	Rechargeable Ni-MH battery AAA (R03) size (1.2 V 550 mAh)	AC Adaptor (PQLV219Z, 120 V AC, 60 Hz)
Receiving Method	Super Heterodyne	Super Heterodyne	_____
Oscillation Method	PLL synthesizer	PLL synthesizer	_____
Detecting Method	Quadrature Discriminator	Quadrature Discriminator	_____
Modulation Method	Frequency Modulation	Frequency Modulation	_____
ID Code	40 bit□	40 bit	_____
Ringer Equivalence No. (REN)	0.1	_____	_____
Dialing Mode	Tone (DTMF)/Pulse	Tone (DTMF)/Pulse	_____
Redial	Up to 48 digits	Up to 48 digits	_____
Speed Dialer	Up to 24 digits (Phonebook)	Up to 24 digits (Phonebook)	_____
Power Consumption	Standby: Approx. 1.3 W Maximum: Approx. 2.0 W	11 days at Standby, 5 hours at Talk	_____
Operating Conditions	0 °C - 40 °C (32 °F - 104 °F) 20 % - 80 % relative air humidity (dry)	0 °C - 40 °C (32 °F - 104 °F) 20 % - 80 % relative air humidity (dry)	Standby: Approx. 0.1 W, Maximum: Approx. 3.3 W 0 °C - 40 °C (32 °F - 104 °F) 20 % - 80 % relative air humidity (dry)
Dimensions (H x W x D)	Approx. 68mm × 214 mm × 175 mm	Approx. 158 mm × 48 mm × 30 mm	Approx. 52 mm × 75 mm × 88 mm
Mass (Weight)	Approx. 450 g	Approx. 130 g	Approx. 60 g

Note:

- Design and specifications are subject to change without notice.

Note for service:

- Operation range: Up to 300 m outdoors, Up to 50 m indoors, depending on the condition.
- Optional headset: RP-TCA86, RP-TCA94, RP-TCA95

4 Location of Controls and Components

Refer to the Operating Instructions.

Note:

You can download and refer to the Operating Instructions (Instruction book) on TSN Server.

5 Installation Instructions

Refer to the Operating Instructions.

Note:

You can download and refer to the Operating Instructions (Instruction book) on TSN Server.

6 Operating Instructions

Refer to the Operating Instructions.

Note:

You can download and refer to the Operating Instructions (Instruction book) on TSN Server.

7 Schematic Diagram

7.1. For Schematic Diagram

7.1.1. Base Unit (Schematic Diagram (Base Unit_Main))

Notes:

1. DC voltage measurements are taken with voltmeter from the negative voltage line.

Important Safety Notice:

Components identified by ⚠ mark have special characteristics important for safety. When replacing any of these components, use only the manufacturer's specified parts.

2. The schematic diagrams may be modified at any time with the development of new technology.

7.1.2. Cordless Handset (Schematic Diagram (Cordless Handset))

Notes:

1. DC voltage measurements are taken with an oscilloscope or a tester with a ground.
2. The schematic diagrams may be modified at any time with the development of new technology.

7.1.3. Charger Unit (Schematic Diagram (Charger Unit))

Notes:

1. DC voltage measurements are taken with voltmeter from the negative voltage line.

Important Safety Notice:


Components identified by ⚠ mark have special characteristics important for safety. When replacing any of these components, use only the manufacturer's specified parts.


2. This schematic diagram may be modified at any time with the development of new technology.

Memo

A0449860

7.2. Schematic Diagram (Base Unit_Main)

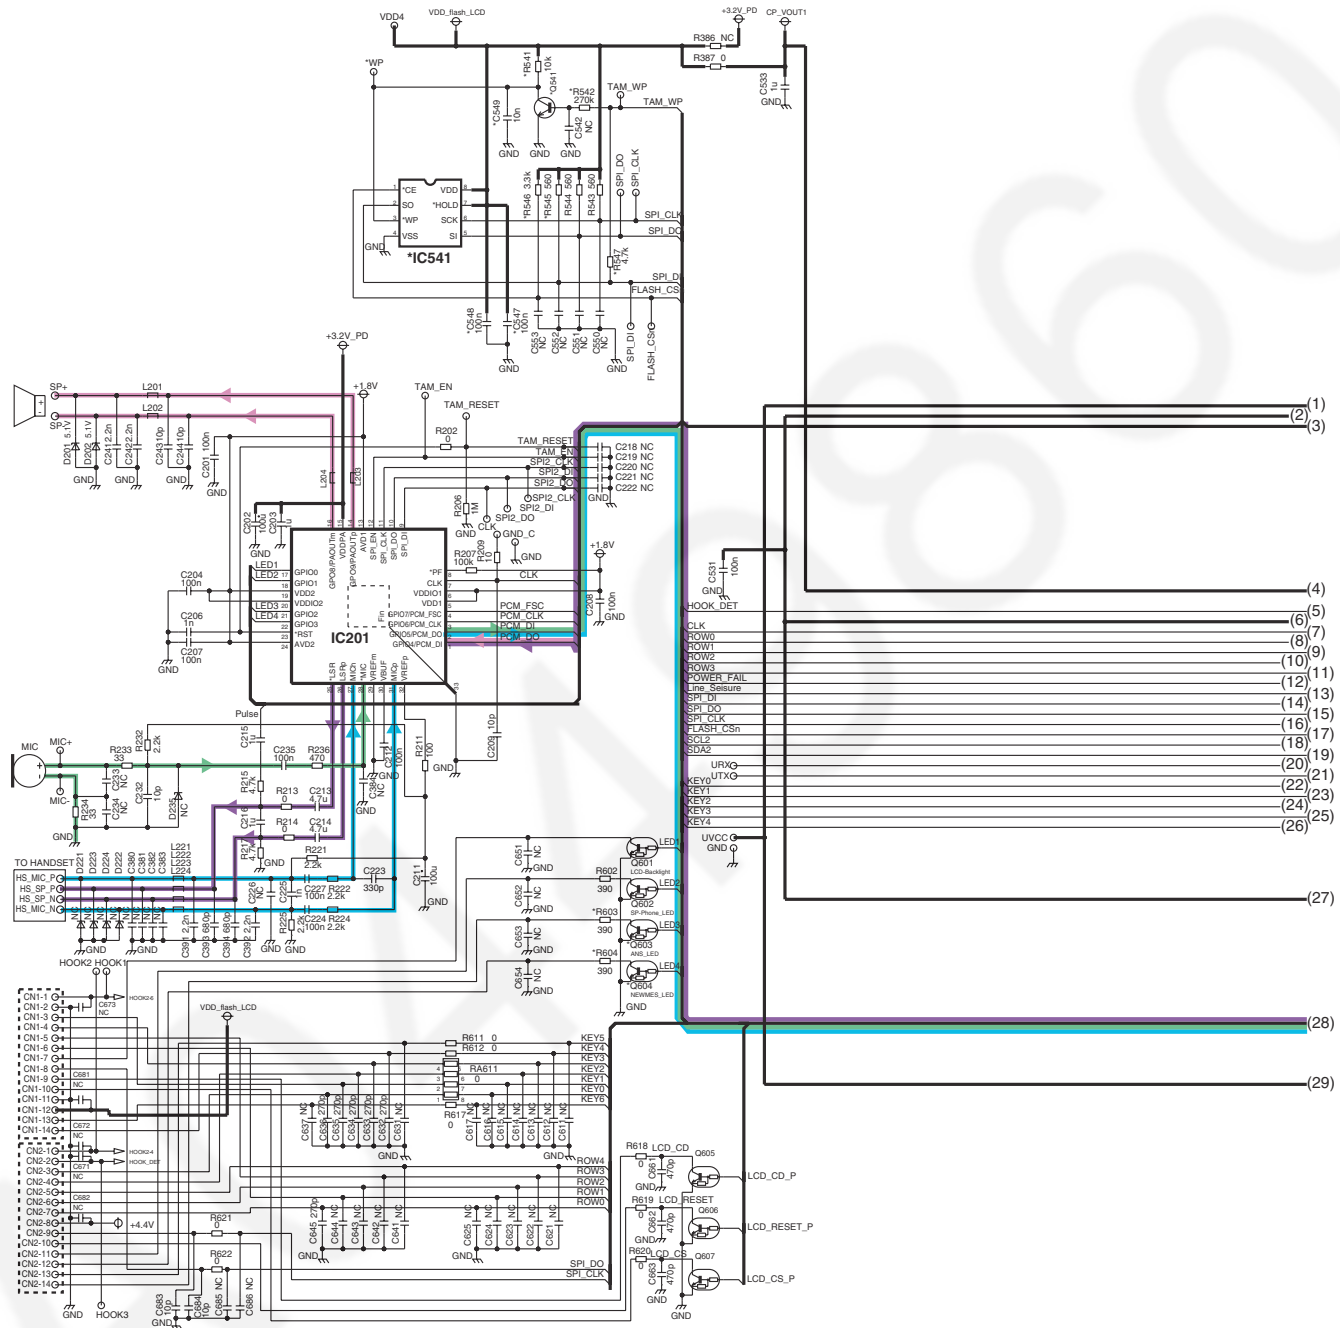

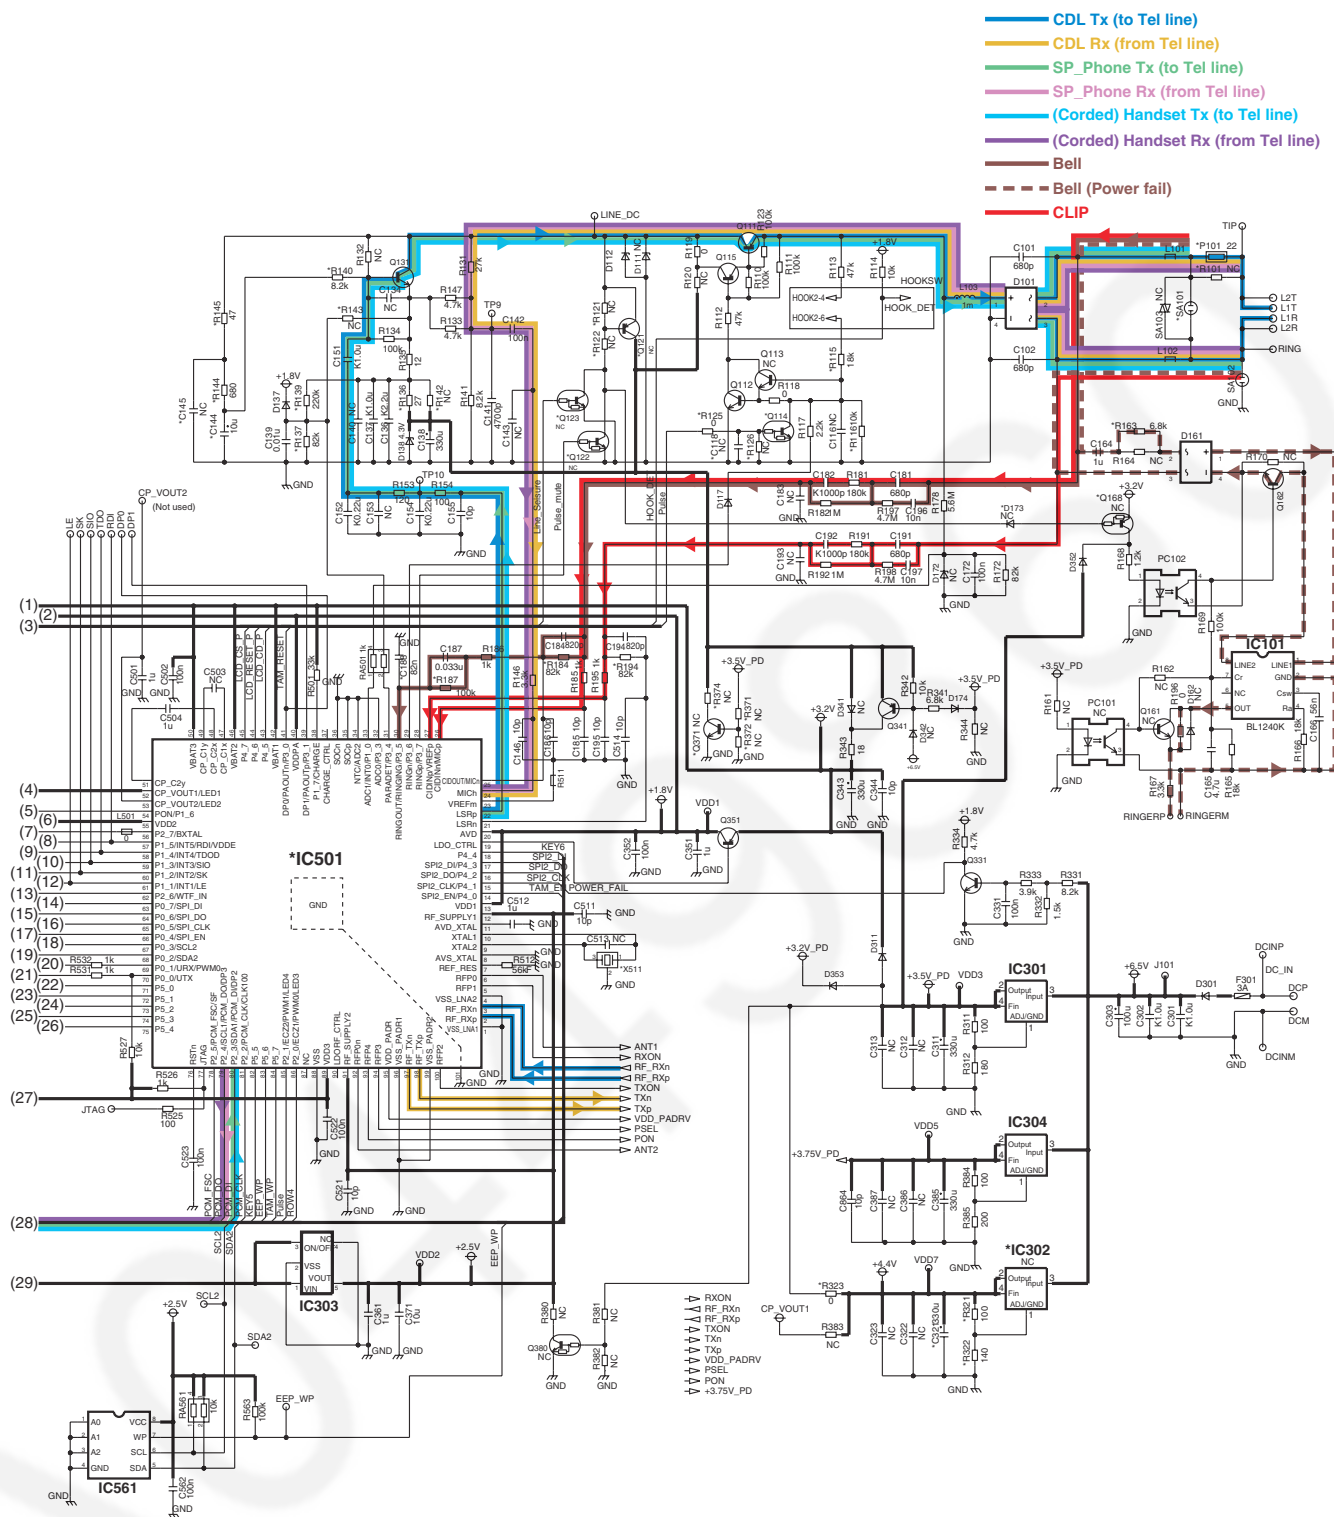


NC: No Components

KX-TG1062/1063C SCHEMATIC DIAGRAM (Base Unit_Main)




7.4. Schematic Diagram (Base Unit_Operation)

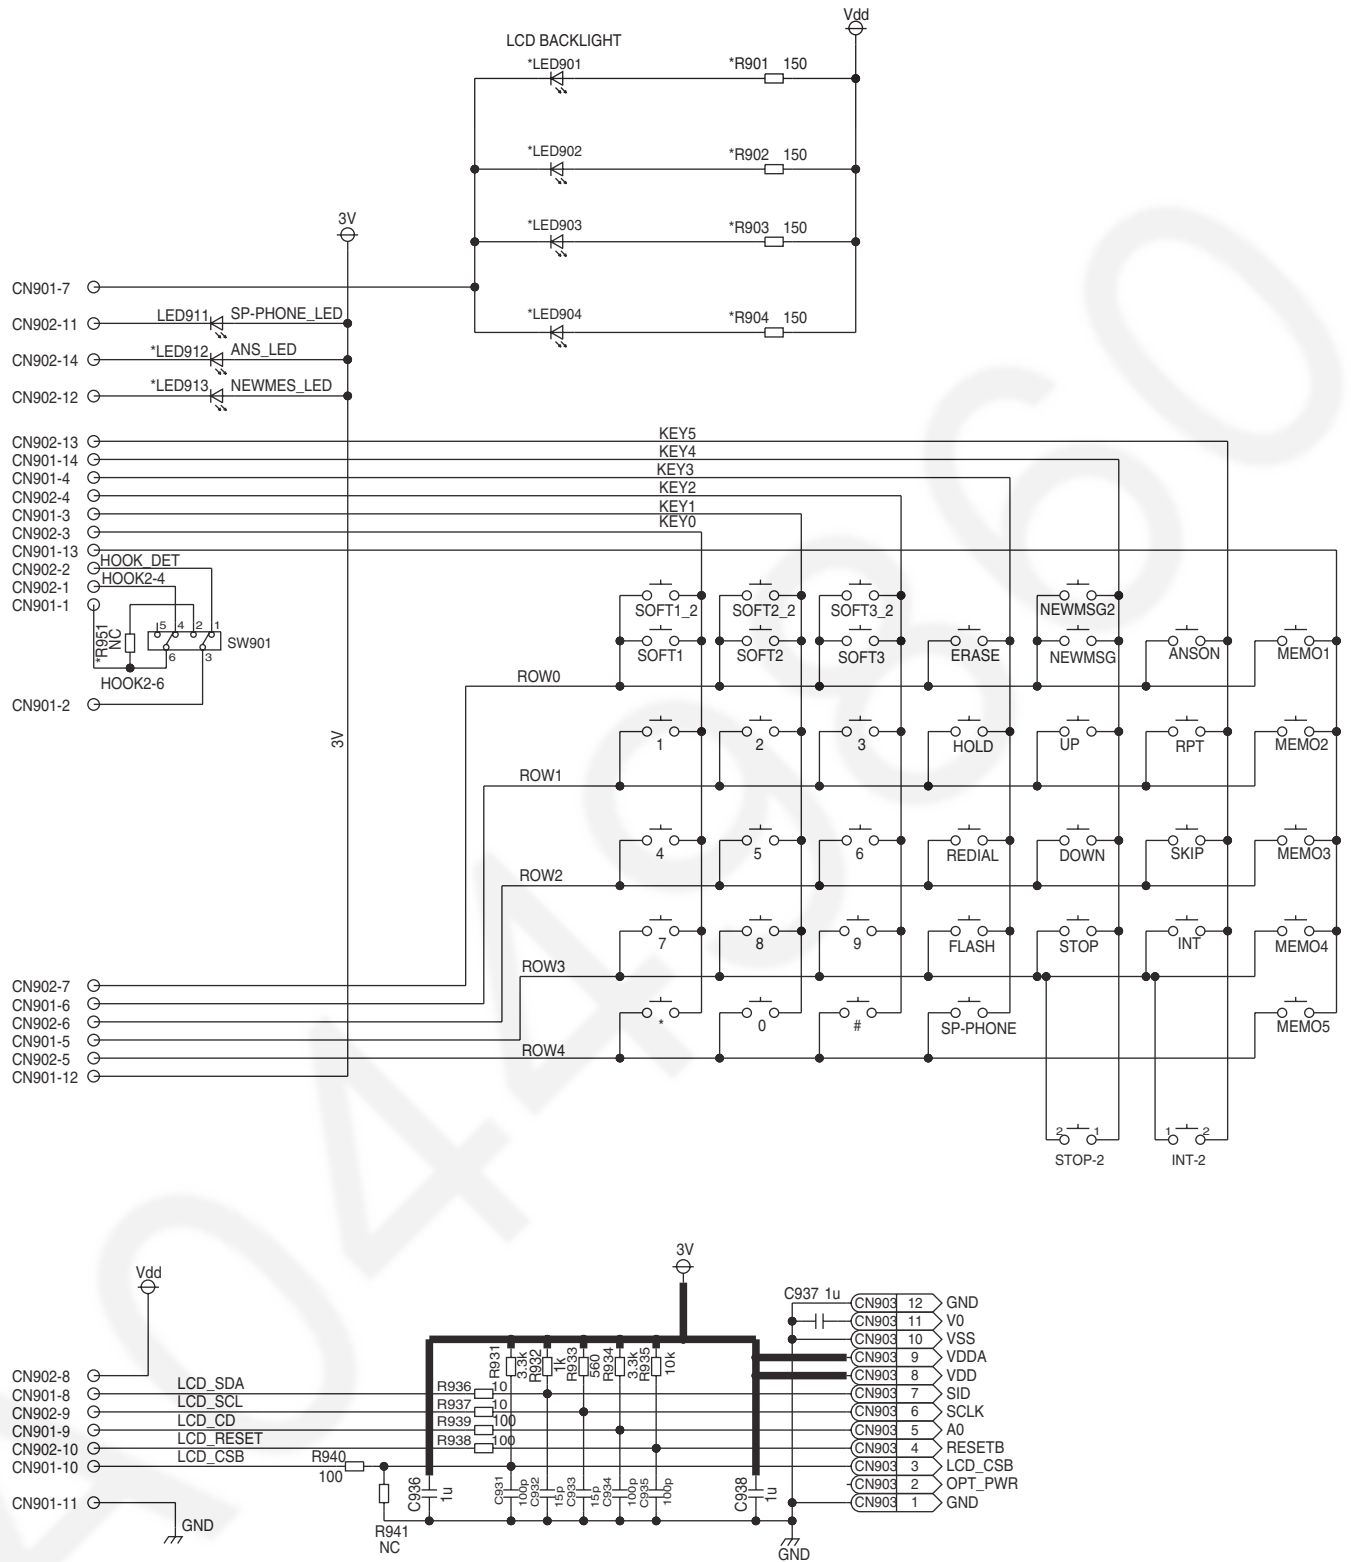


NC: No Components

KX-TG1062/1063 SCHEMATIC DIAGRAM (Base Unit_Operation)

7.5. Schematic Diagram (Cordless Handset)

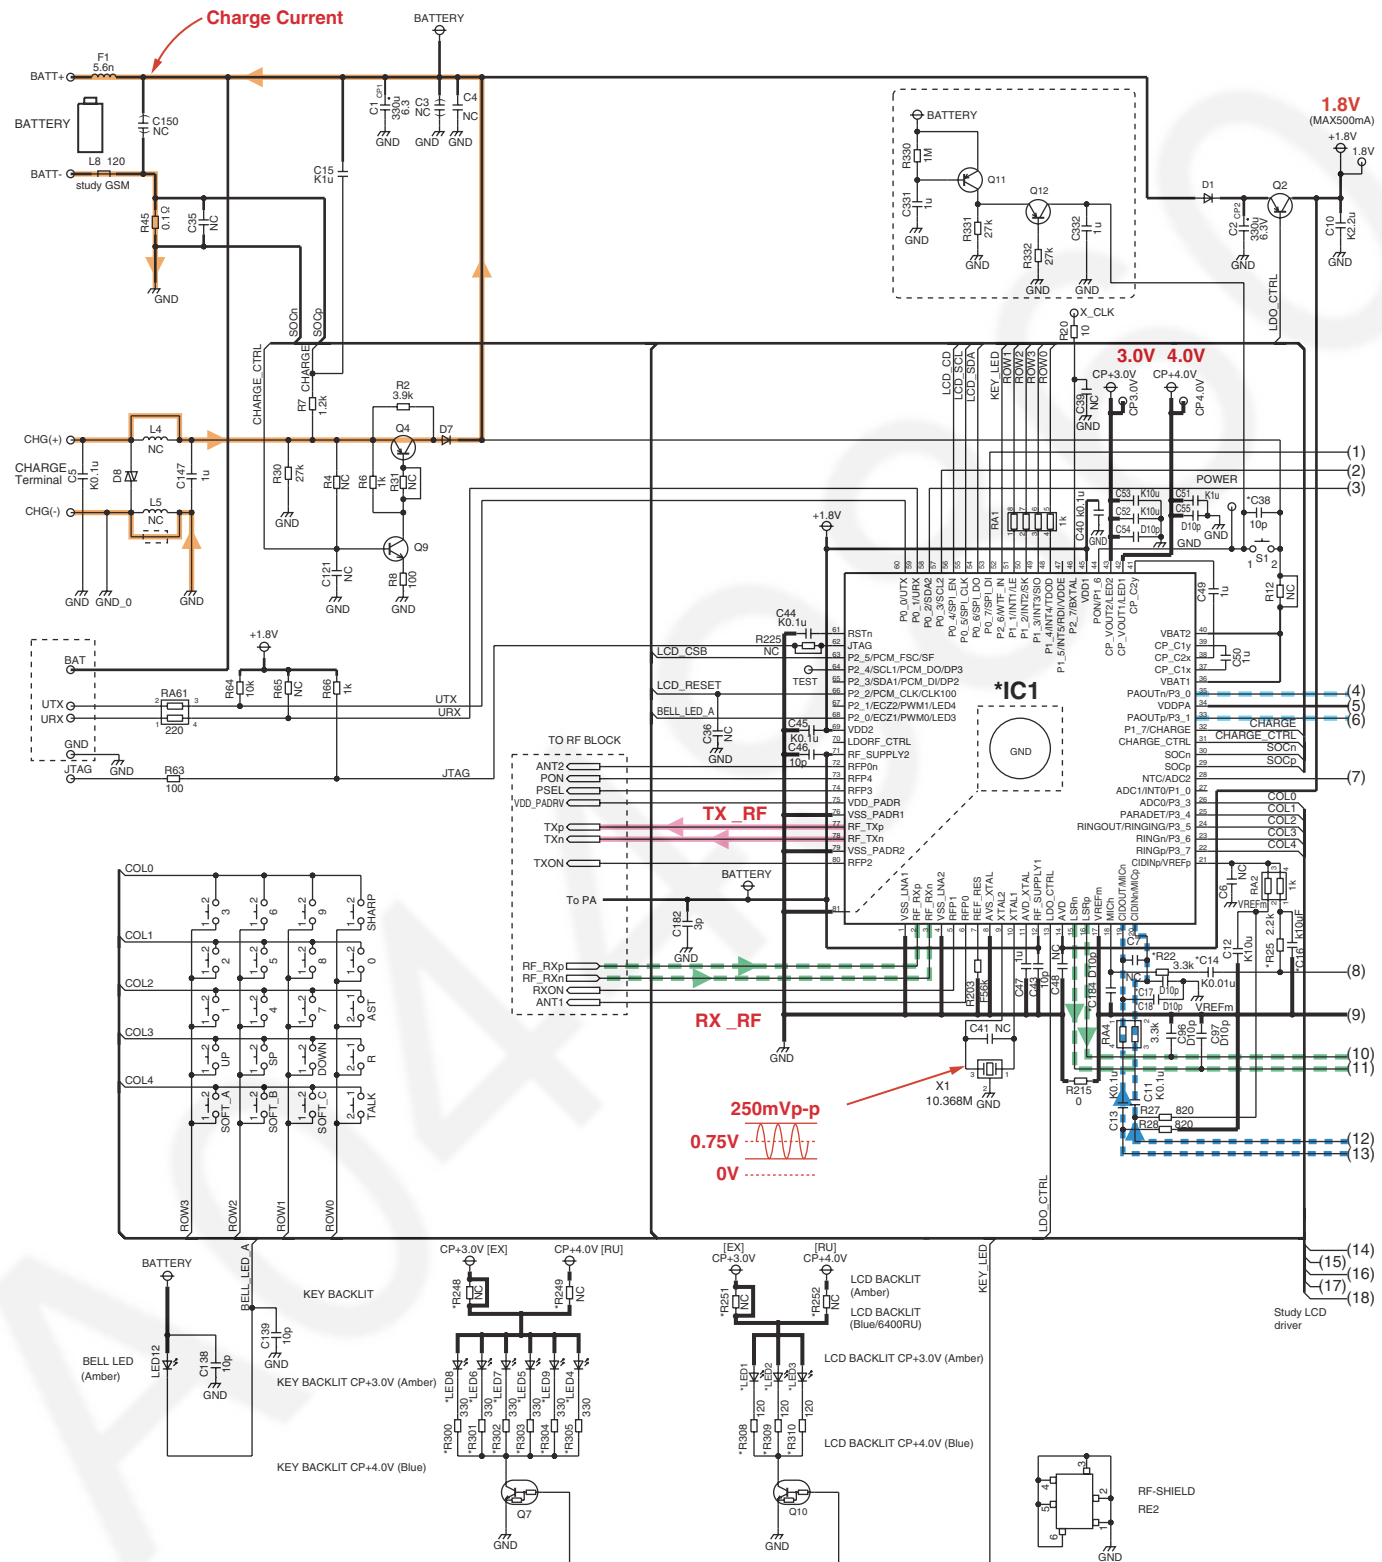


NC: No Components

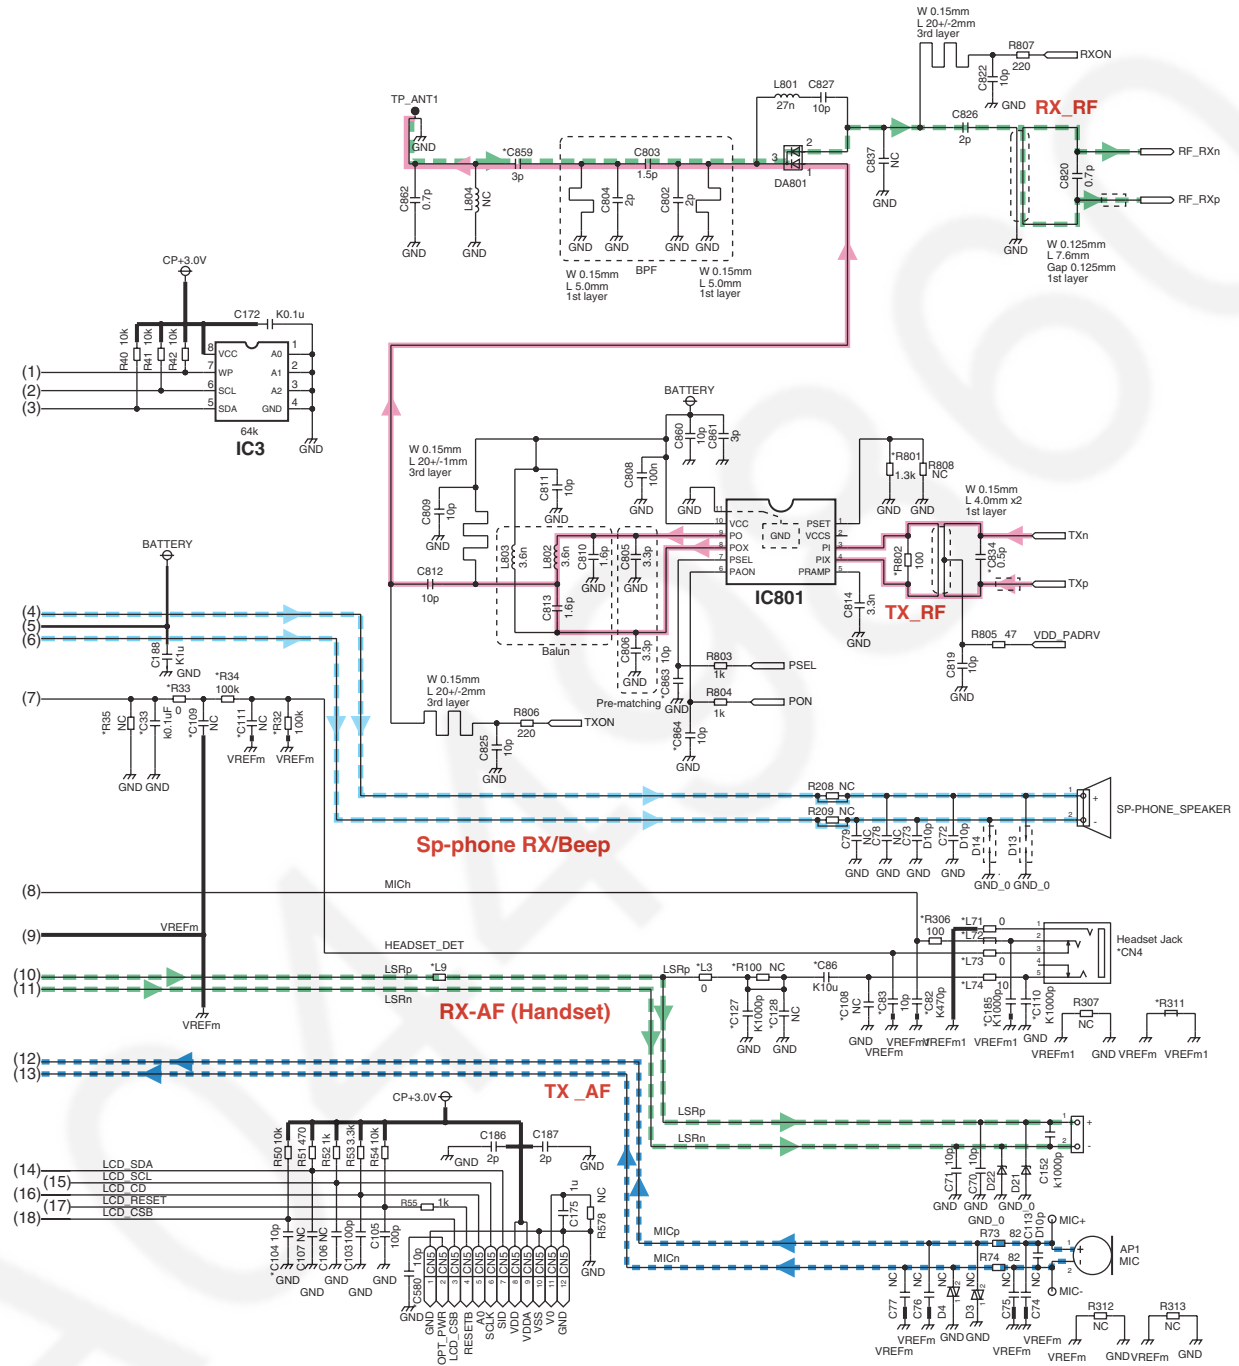

NC: No Components

KX-TGA106 SCHEMATIC DIAGRAM (Handset_Main)

7.6. Schematic Diagram (Charger Unit)

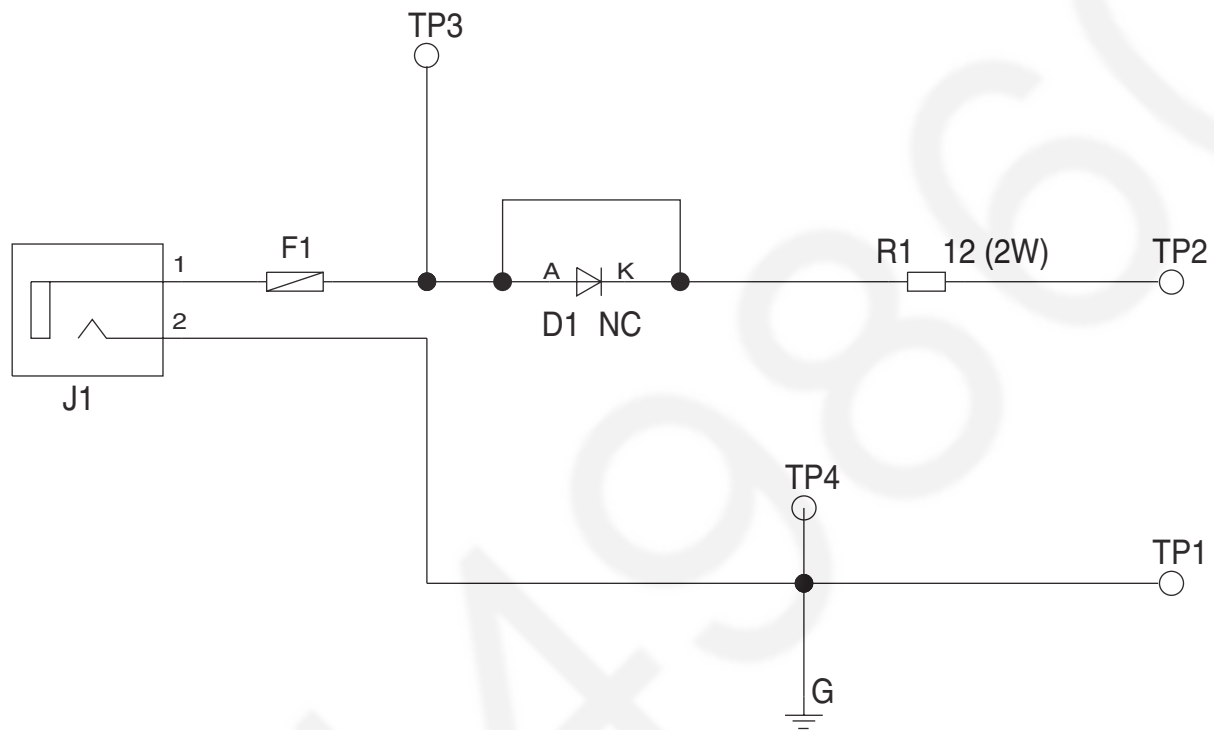

SCHEMATIC DIAGRAM (Charger Unit)

8 Exploded View and Replacement Parts List

1. RTL (Retention Time Limited)

Note:

The "RTL" marking indicates that its Retention Time is Limited.

When production is discontinued, this item will continue to be available only for a specific period of time.

This period of time depends on the type of item, and the local laws governing parts and product retention. At the end of this period, the item will no longer be available.

2. Important safety notice


Components identified by the $\triangle$ mark indicates special characteristics important for safety. When replacing any of these components, only use specified manufacture's parts.

3. ISO code (Example: ABS-94HB) of the remarks column shows quality of the material and a flame resisting grade about plastics.

Note:

(*1) You can download and refer to the Operating Instructions (Instruction book) on TSN Server.

Safety	Ref. No.	Part No.	Part Name & Description	Remarks
$\triangle$	A1	PQLV219Z	AC ADAPTOR	
	A2	PQJA10075Z	CORD, TELEPHONE (for KX-TG1062CM) (for KX-TG1063CSK)	
	A3	PQJA212V	CORD, CURLCORD (for KX-TG1062CM) (for KX-TG1063CSK)	
	A4	PNKE1029Z1	HANGER, BELT CLIP	ABS-HB
	A5	PNQX1869W	INSTRUCTION BOOK (for English) (for KX-TG1062CM) (for KX-TG1063CSK) (*1)	
	A5	PNQX1871Y	INSTRUCTION BOOK (for KX-TGA106CM) (*1)	
	A6	PNQX1870W	INSTRUCTION BOOK (for French) (for KX-TG1062CM) (for KX-TG1063CSK) (*1)	
	A7	PNLXP1006Z	HANDSET (for KX-TG1062CM) (for KX-TG1063CSK)	ABS-HB
	A8	PQKL10035Z1	STAND, WALLMOUNT (for KX-TG1062CM) (for KX-TG1063CSK)	ABS-HB
	A9	PNHS1079Z	SPACER, BATTERY COVER	
	A10	PNKK1027Z1	LID, BATTERY	
	A11	PNLC1008ZM	CHARGER UNIT ASS'Y (RTL)	

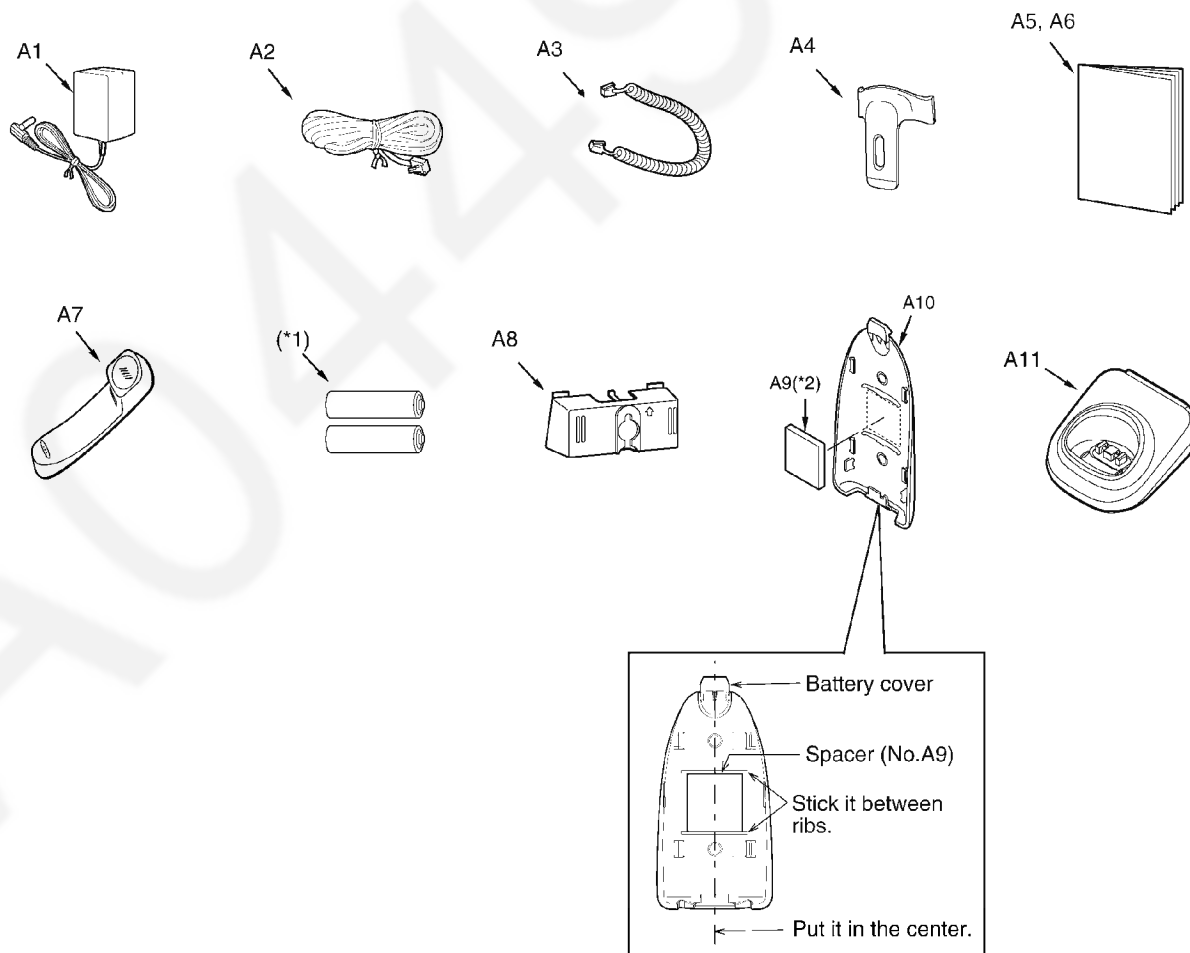

Note:

(*1) The rechargeable Ni-MH battery HHR-4DPA is available through sales route of Panasonic.

(*2) Attach the SPACER (A9) to the exact location described above.

A0449860

K.T
KXTG1062CM
KXTG1063CSK
KXTGA106CM