





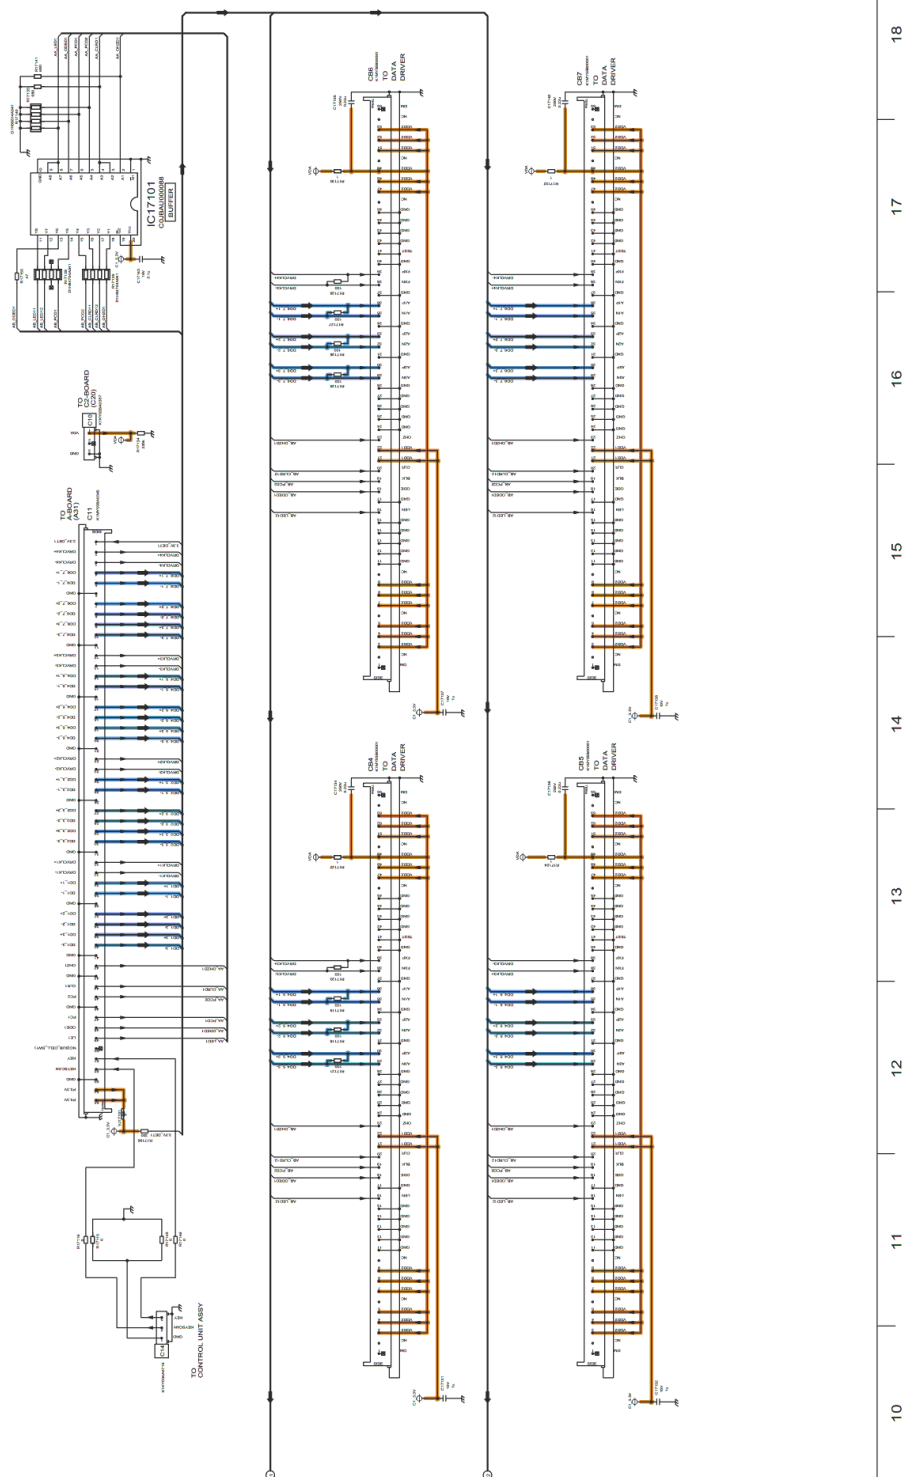


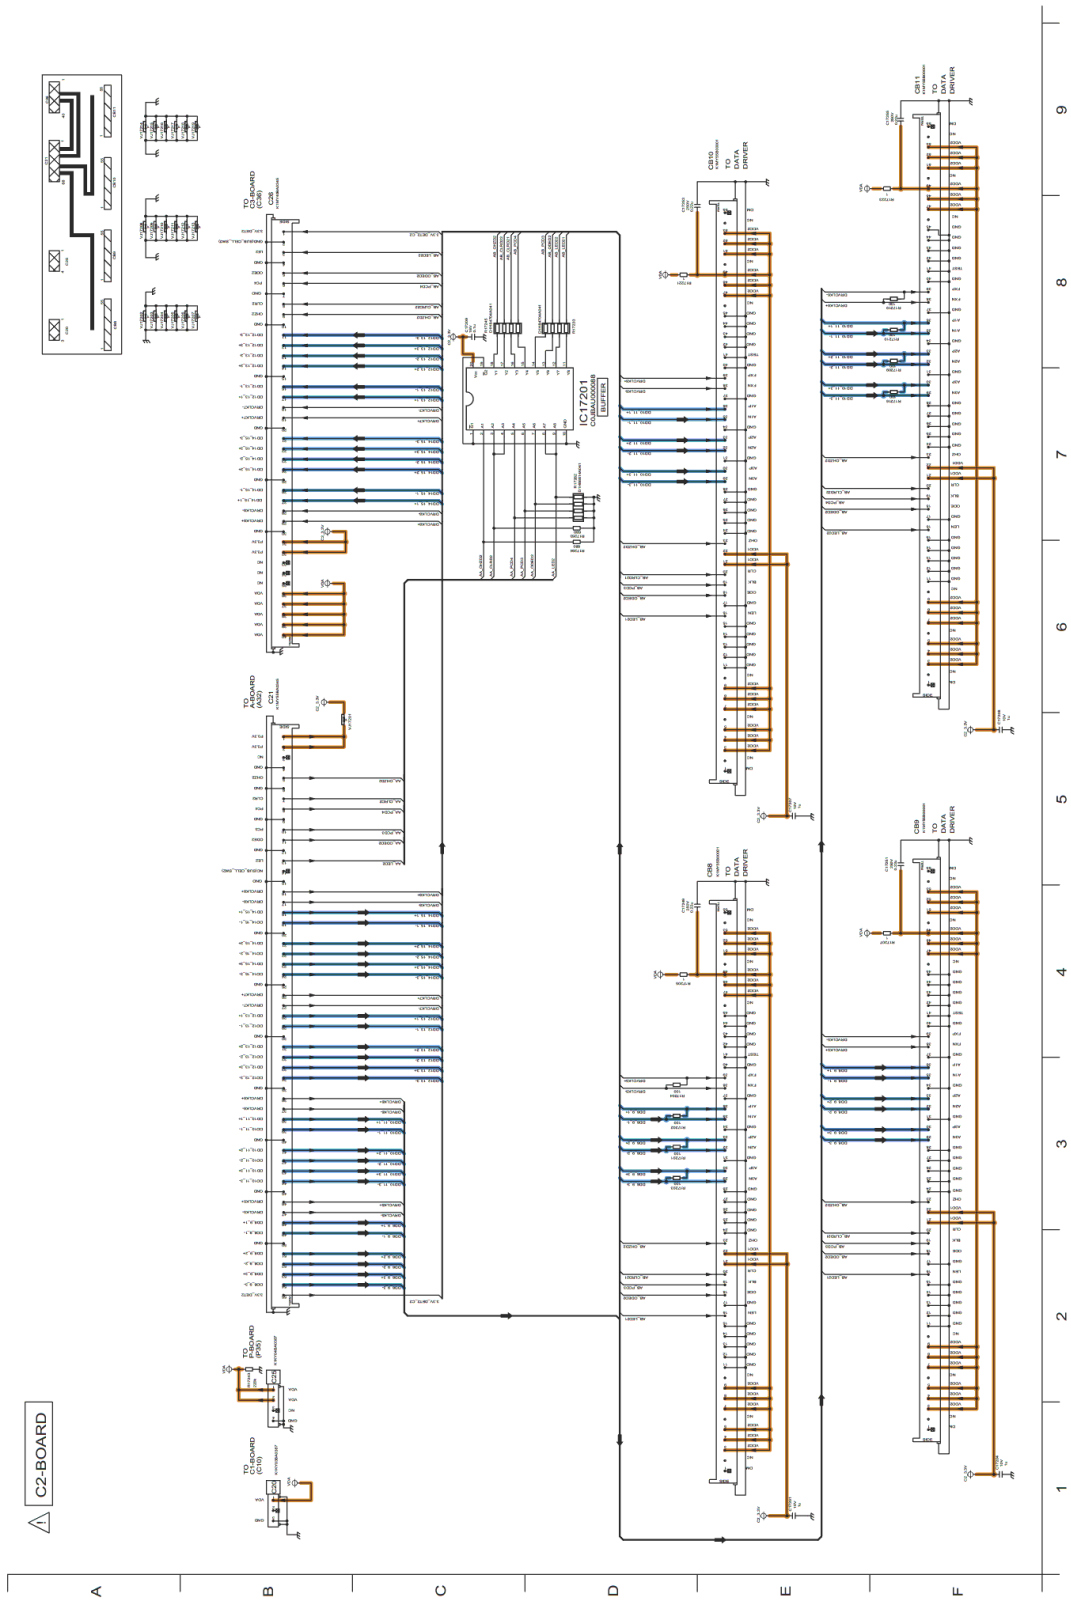


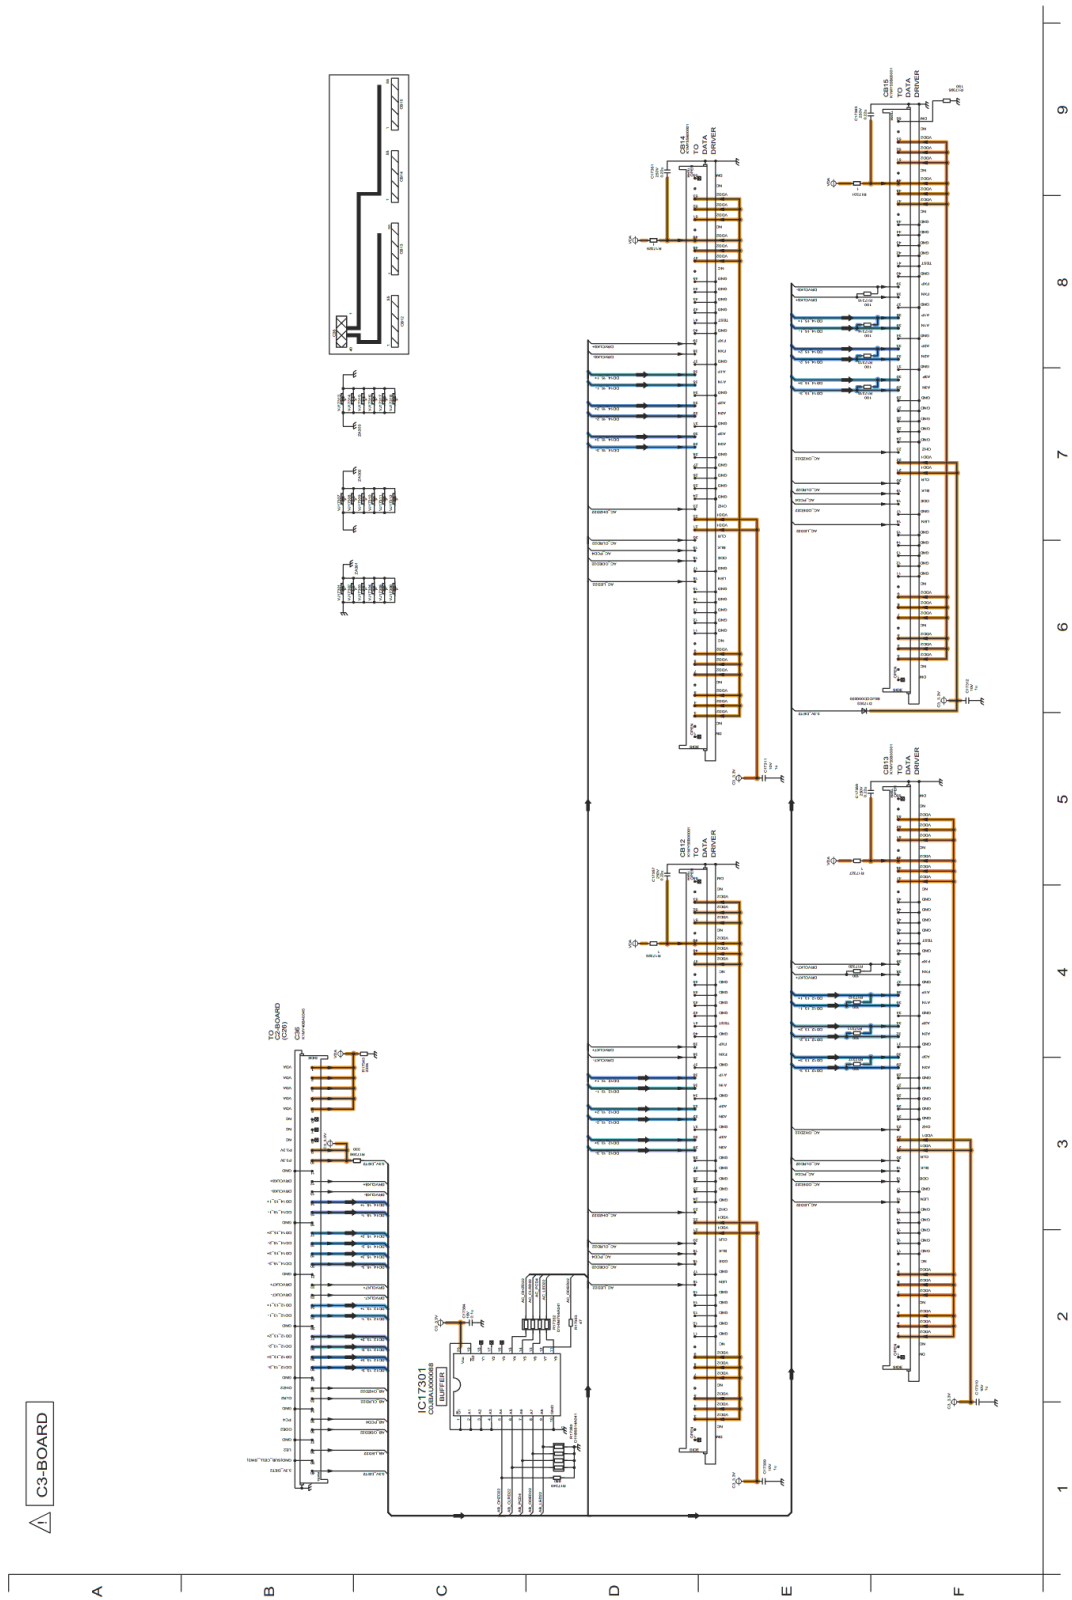


Model No. : TH-P50ST50A/D/G/K/M/P/S/T/V/Z SC-Board (1/3)

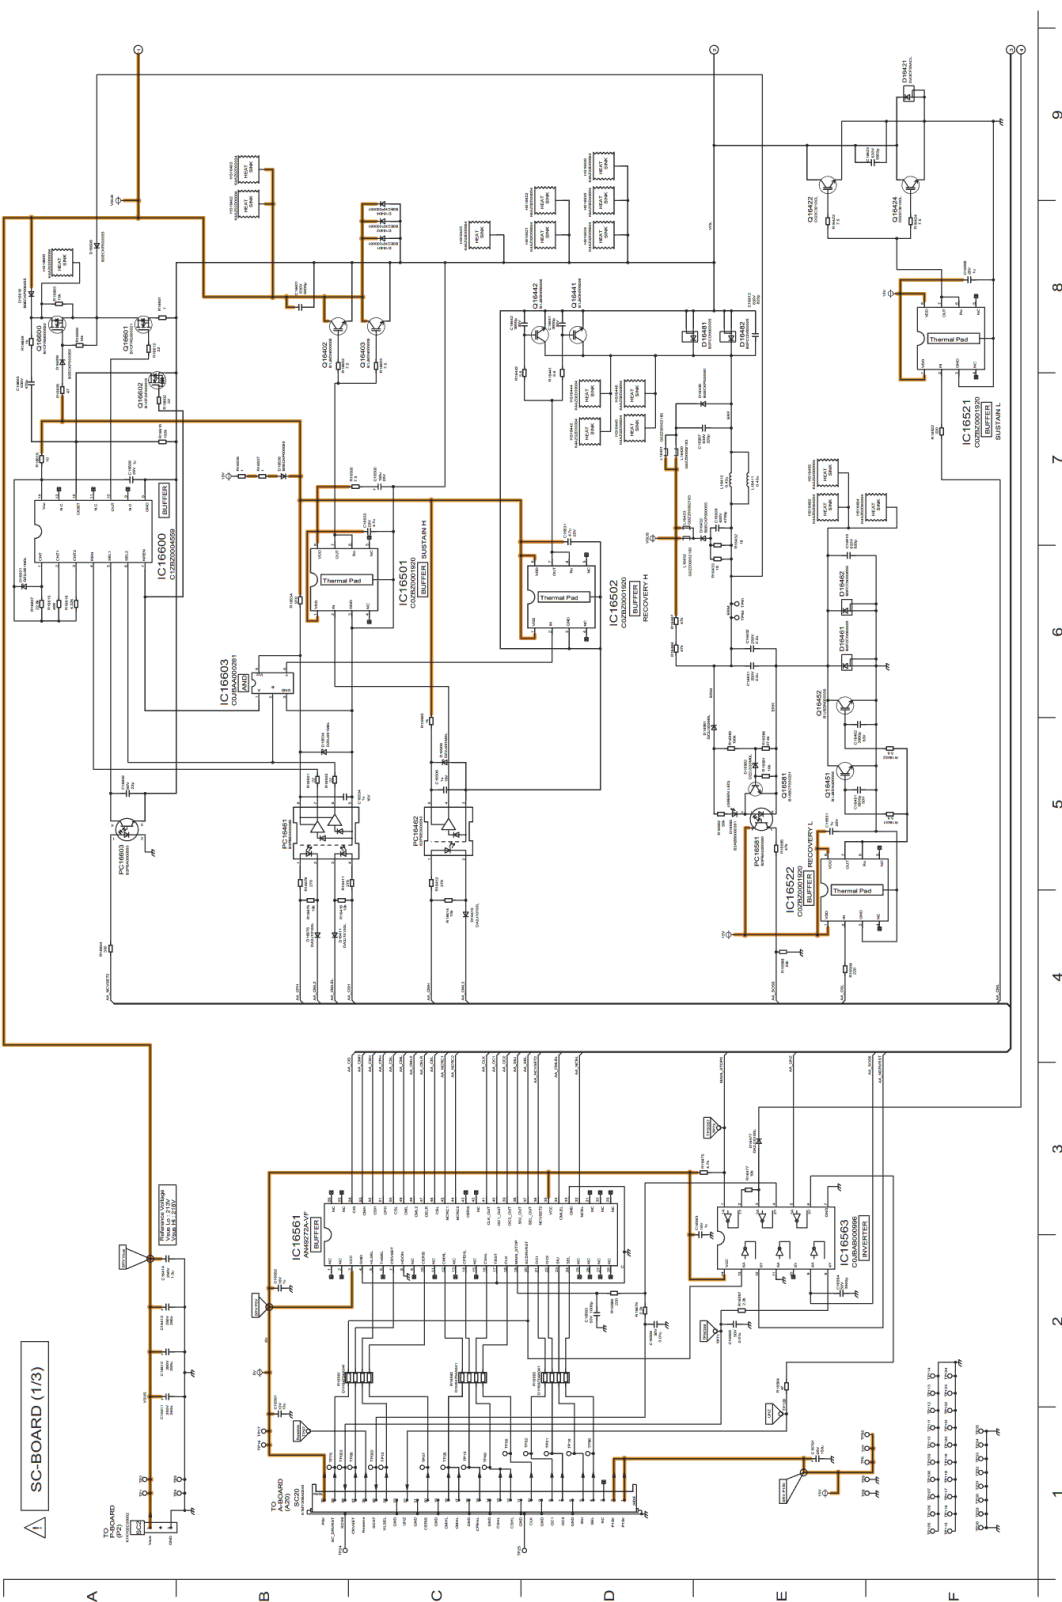


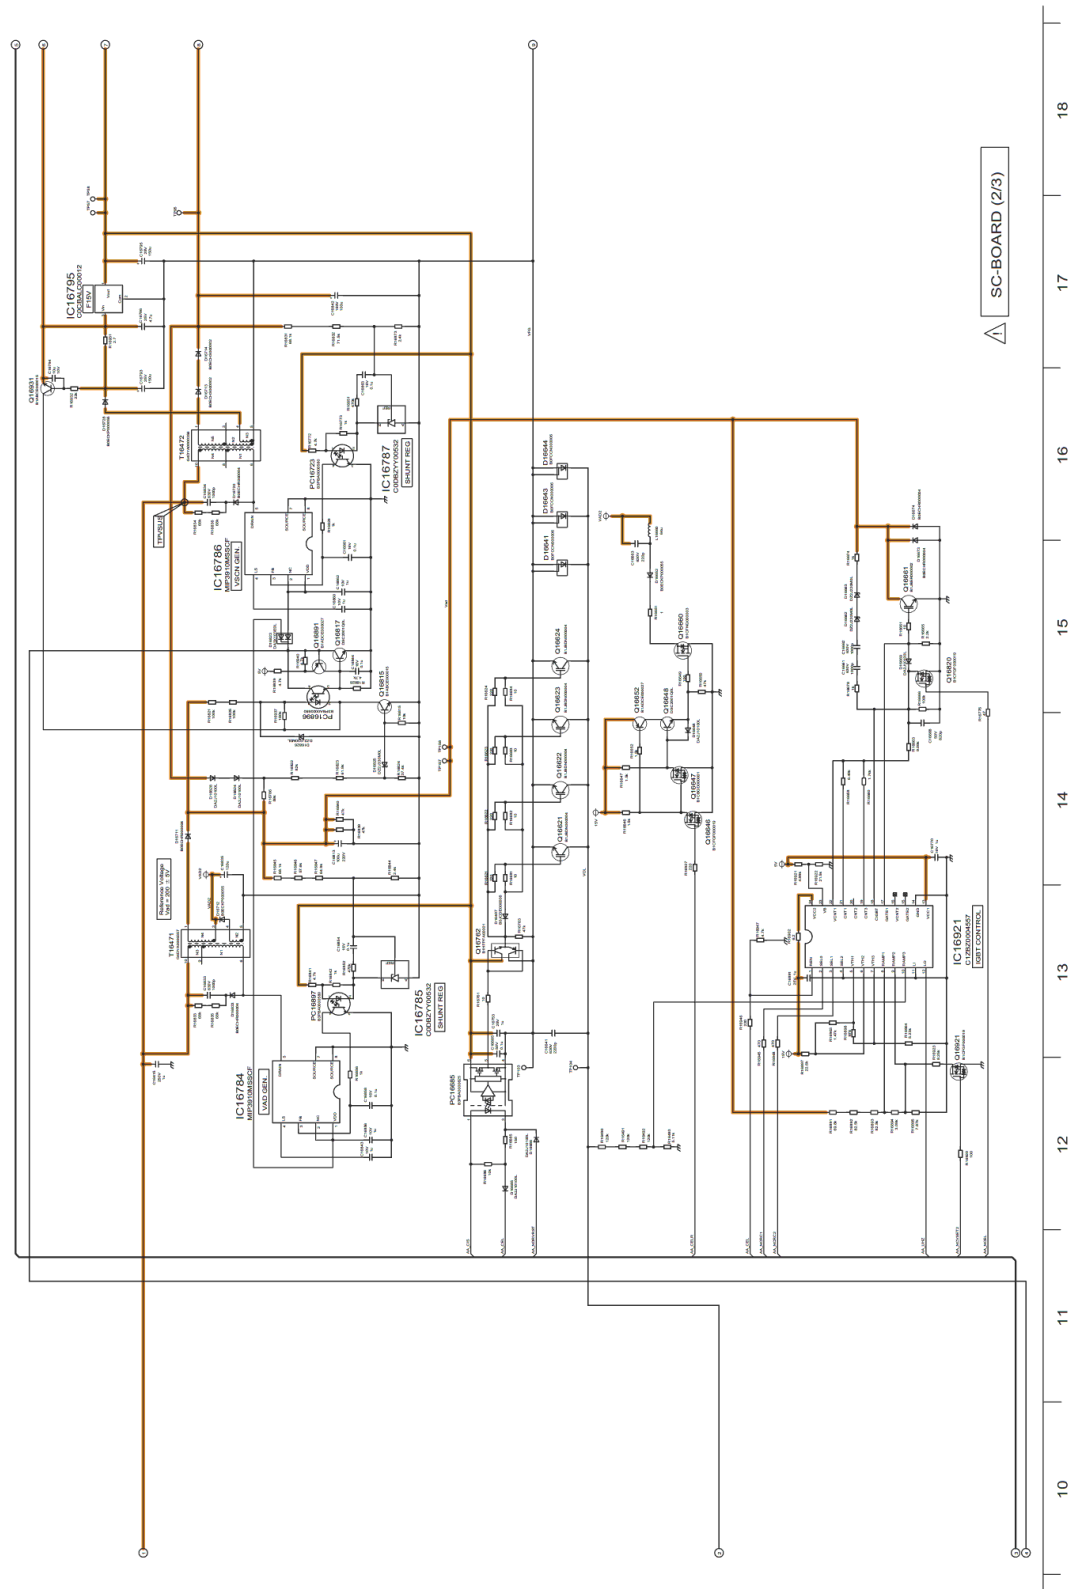


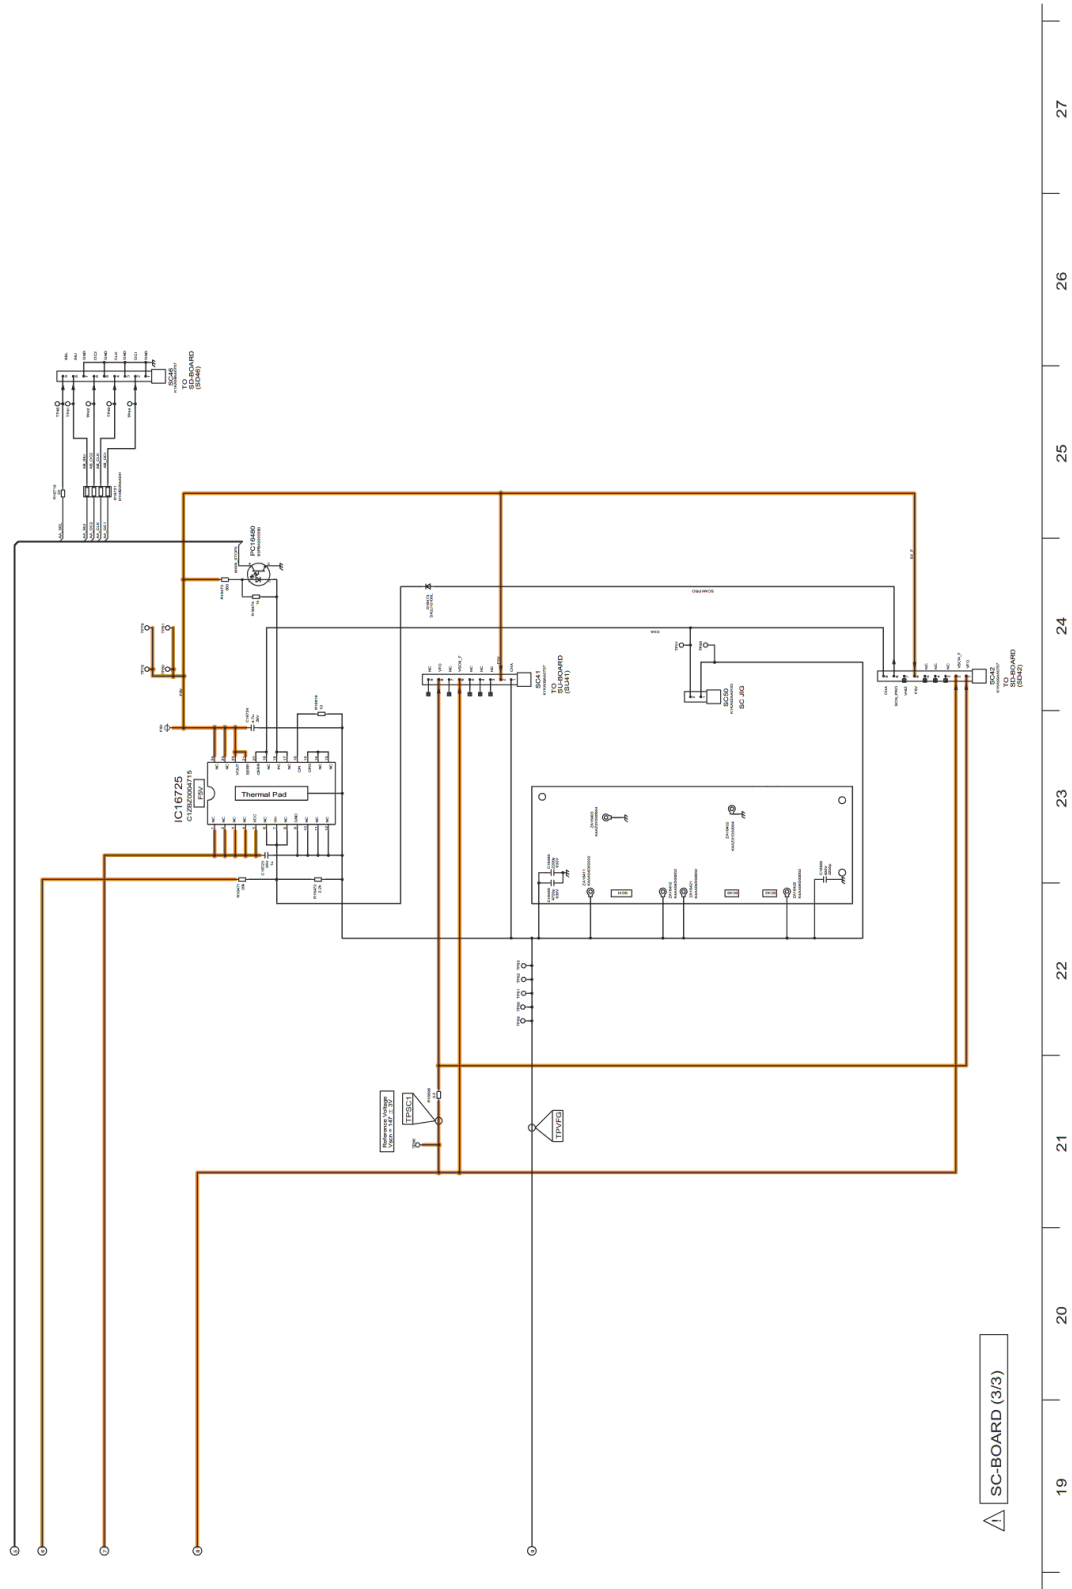



Model No. : TH-P50ST50A/D/G/K/M/P/S/T/V/Z SS-Board (1/2)

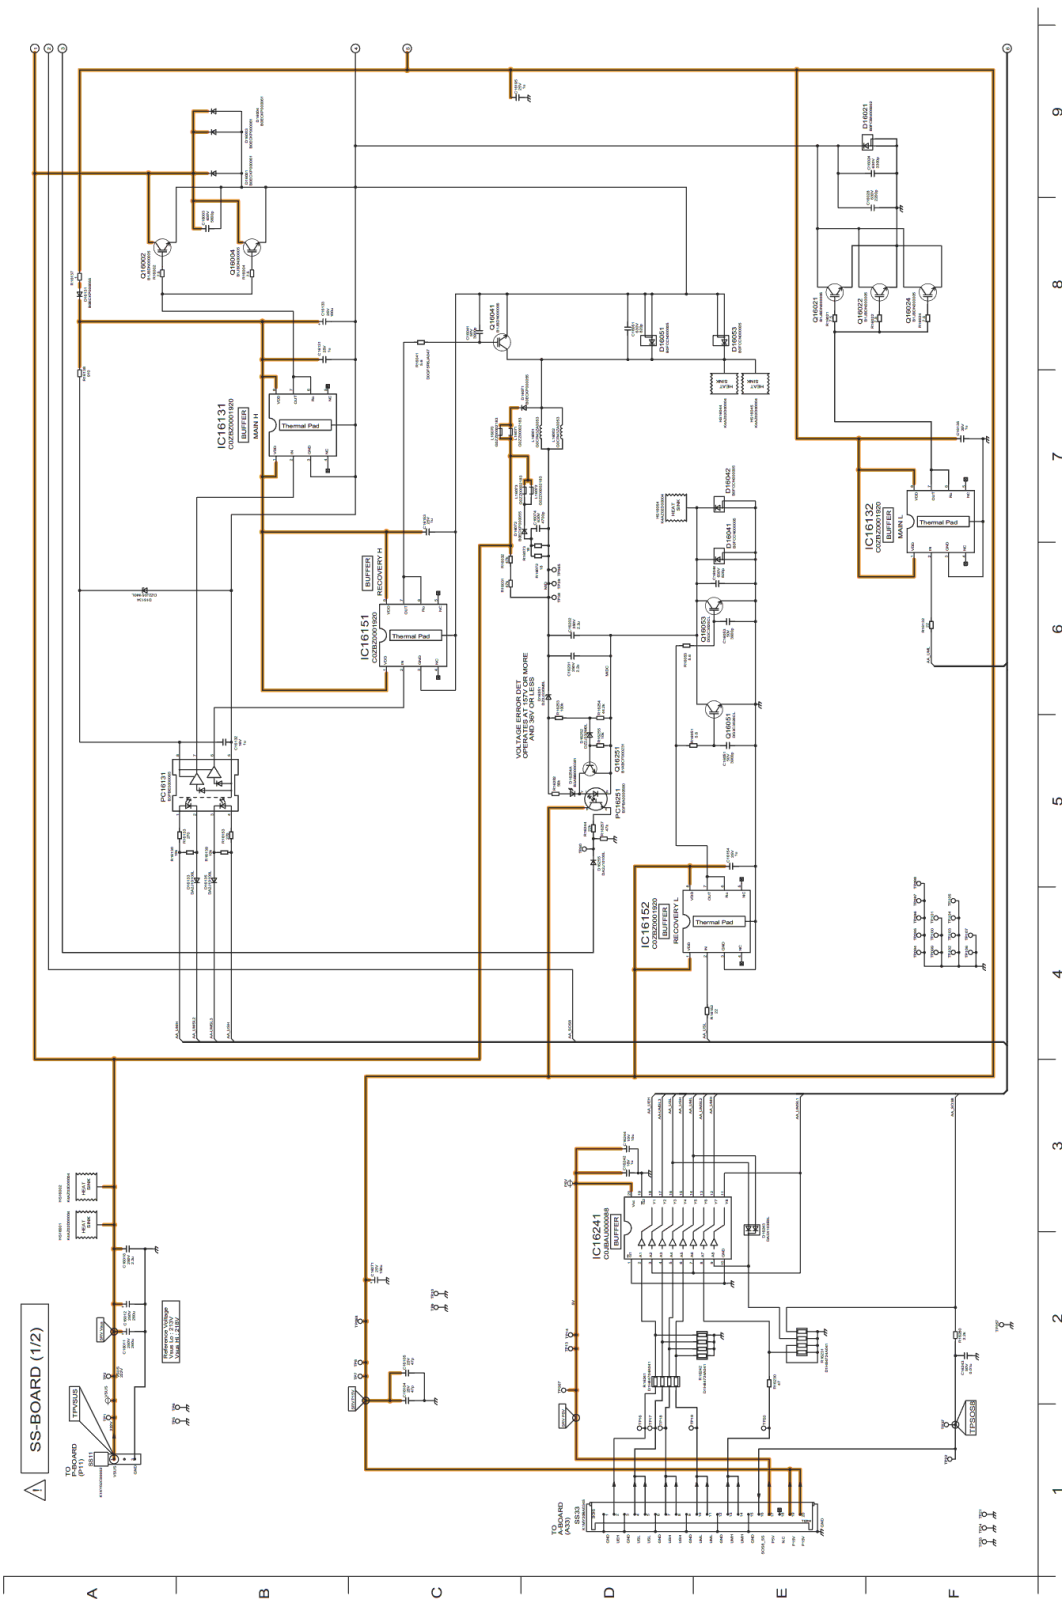


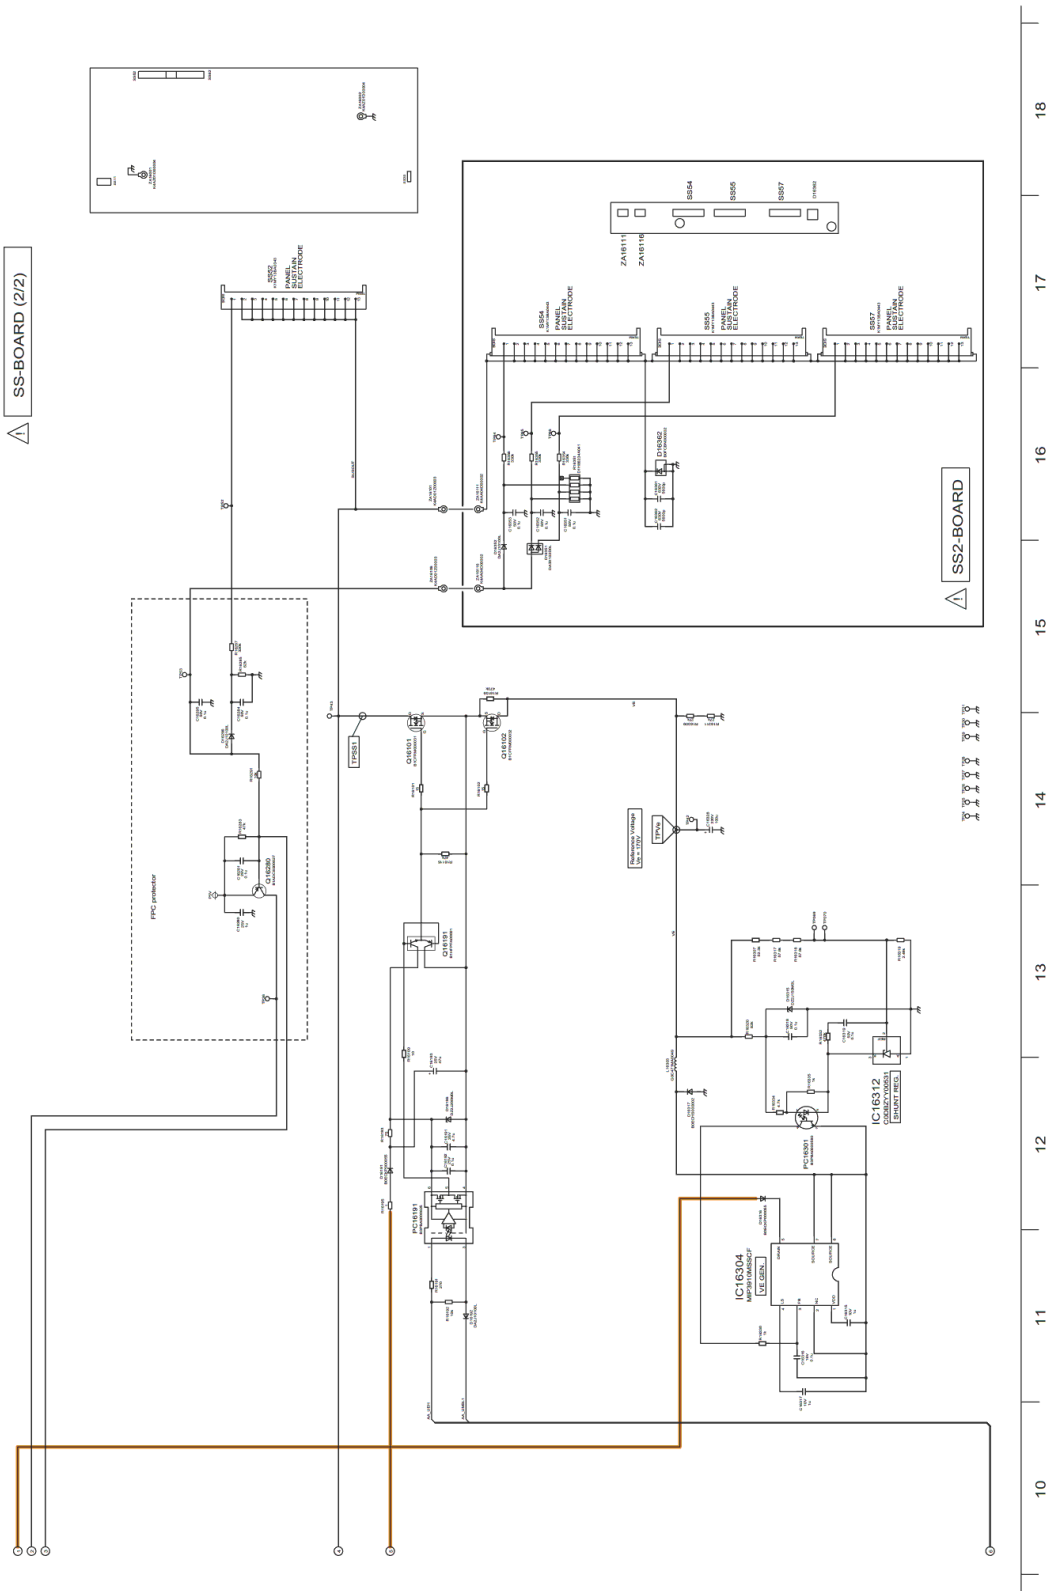


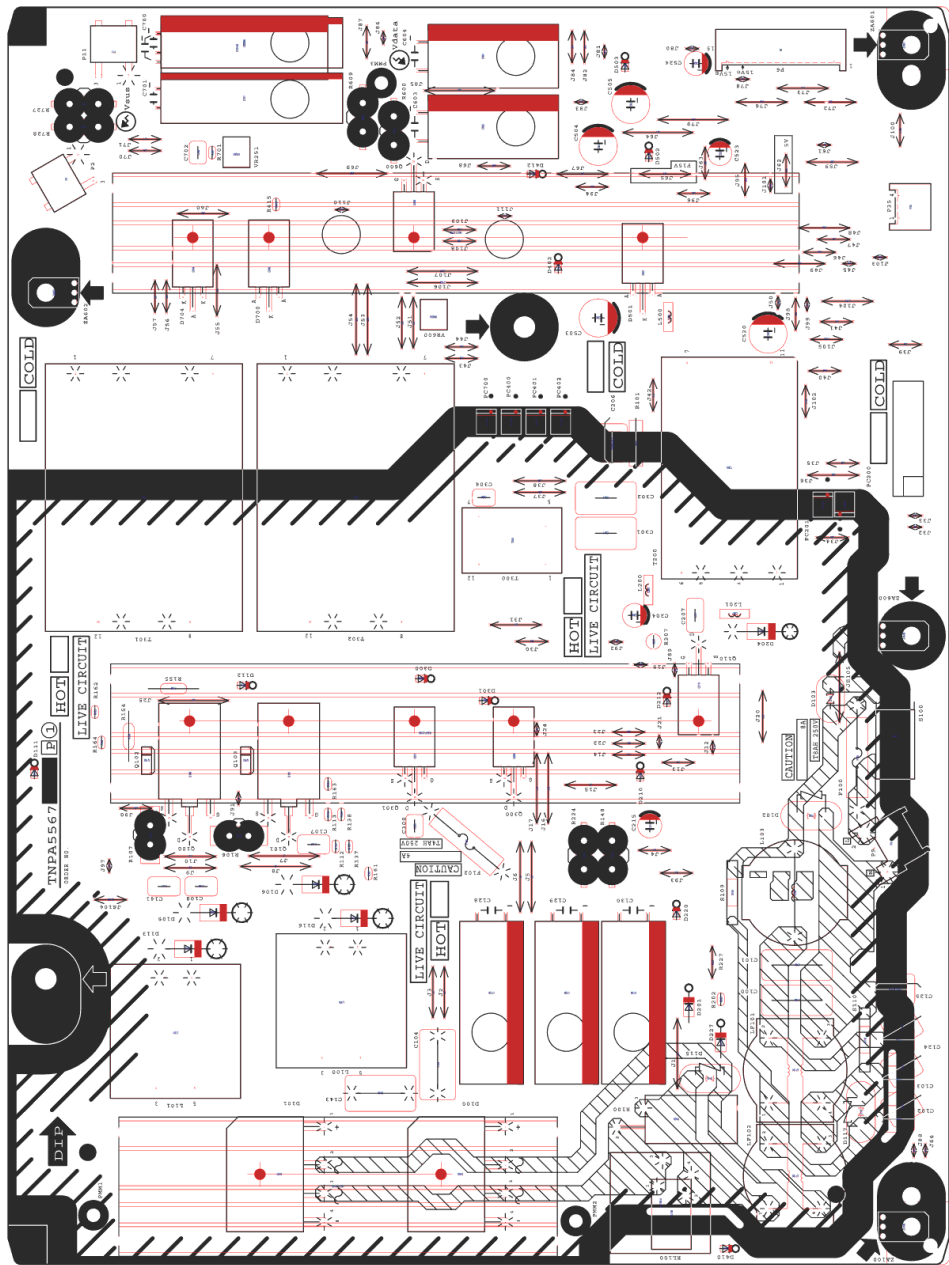


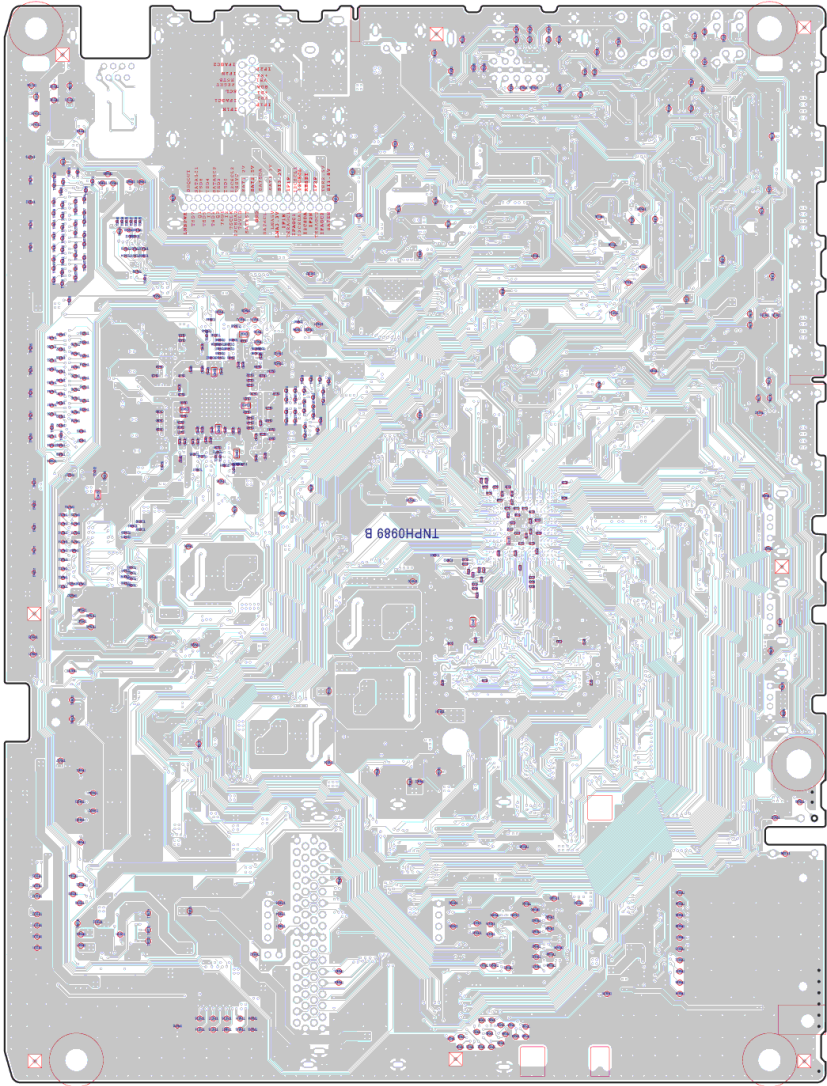


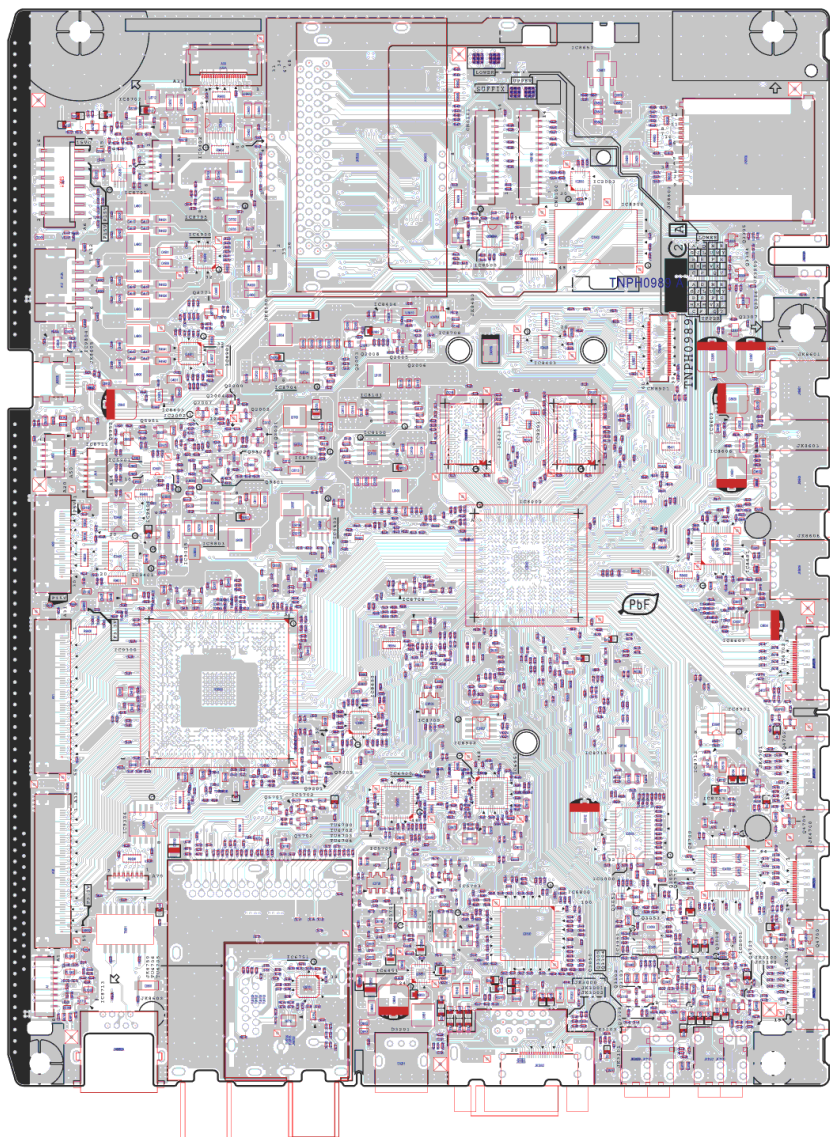


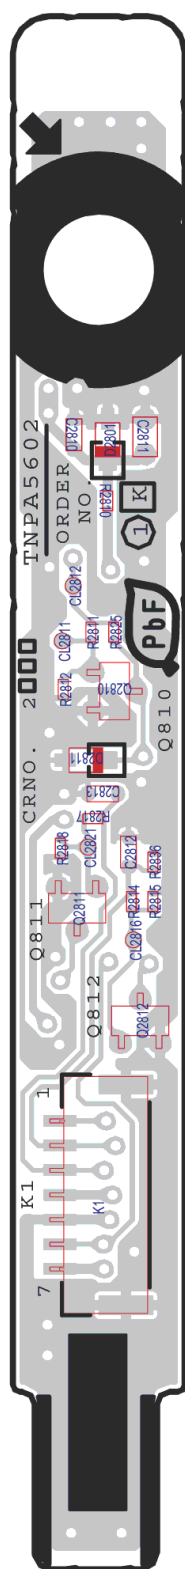


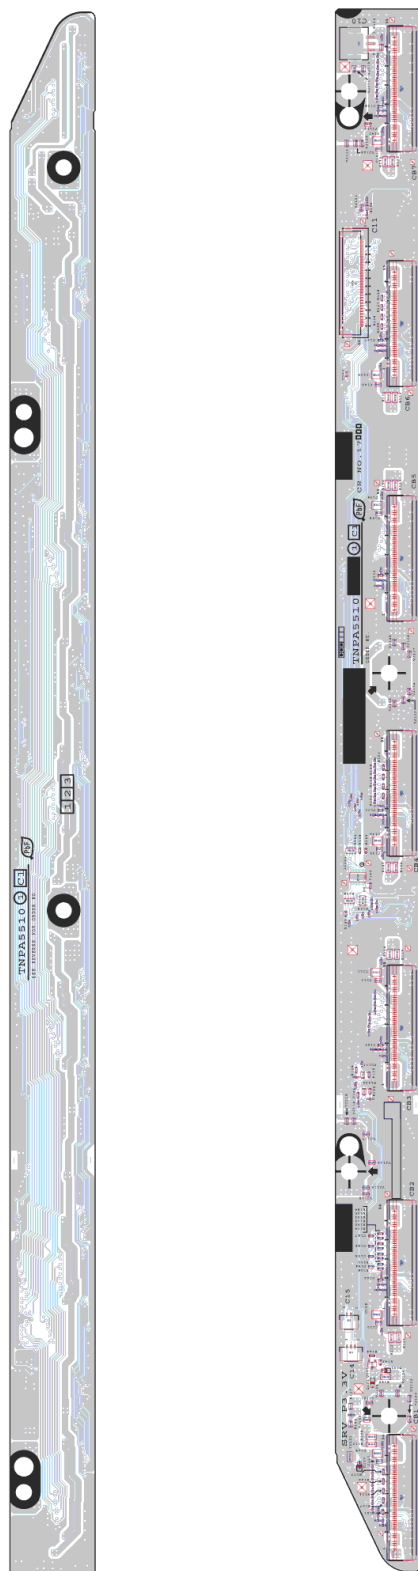


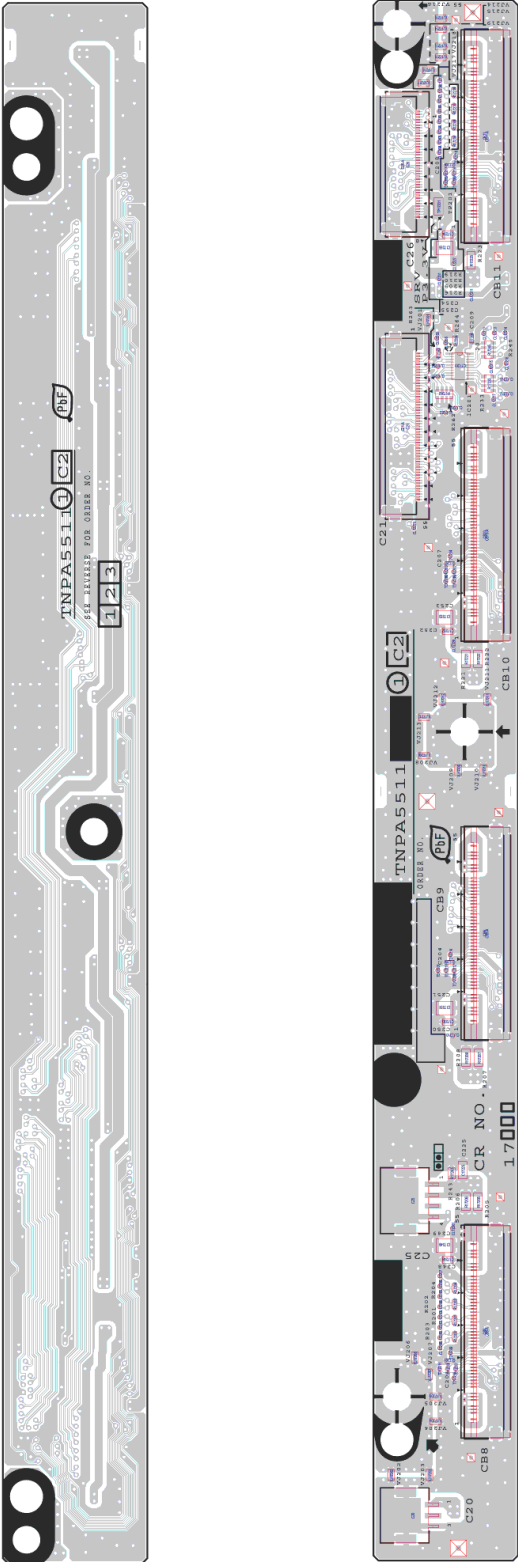


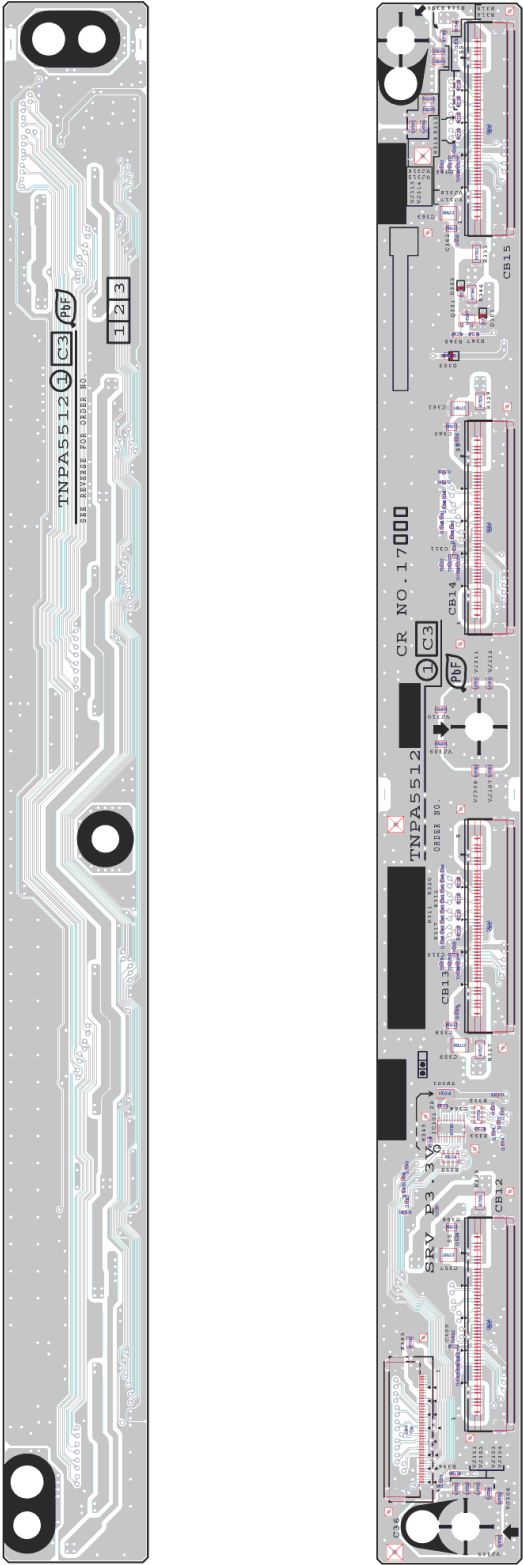


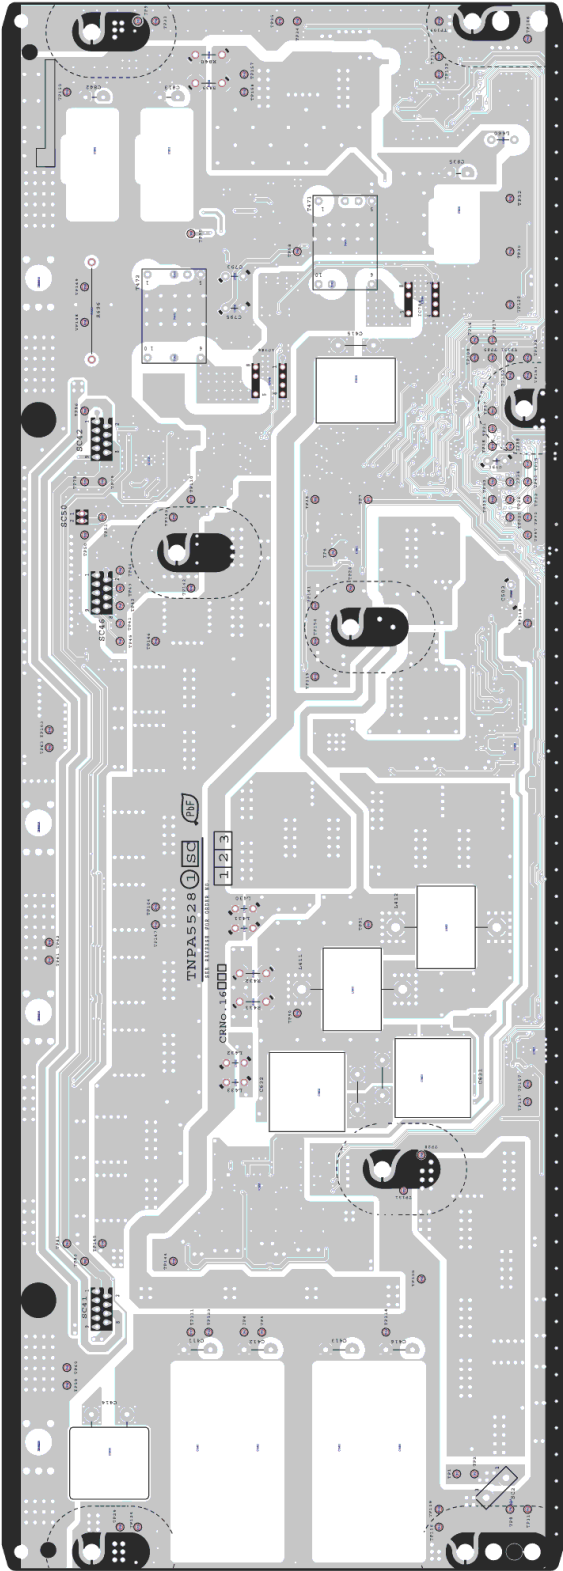

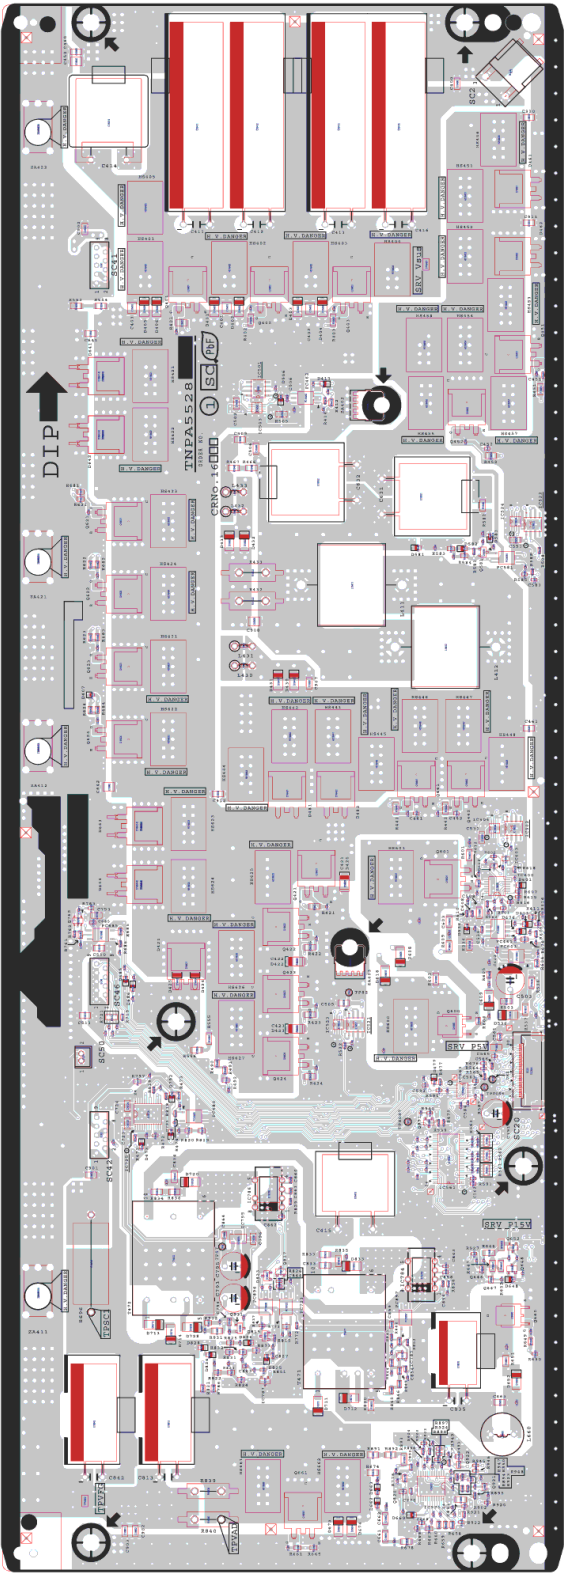

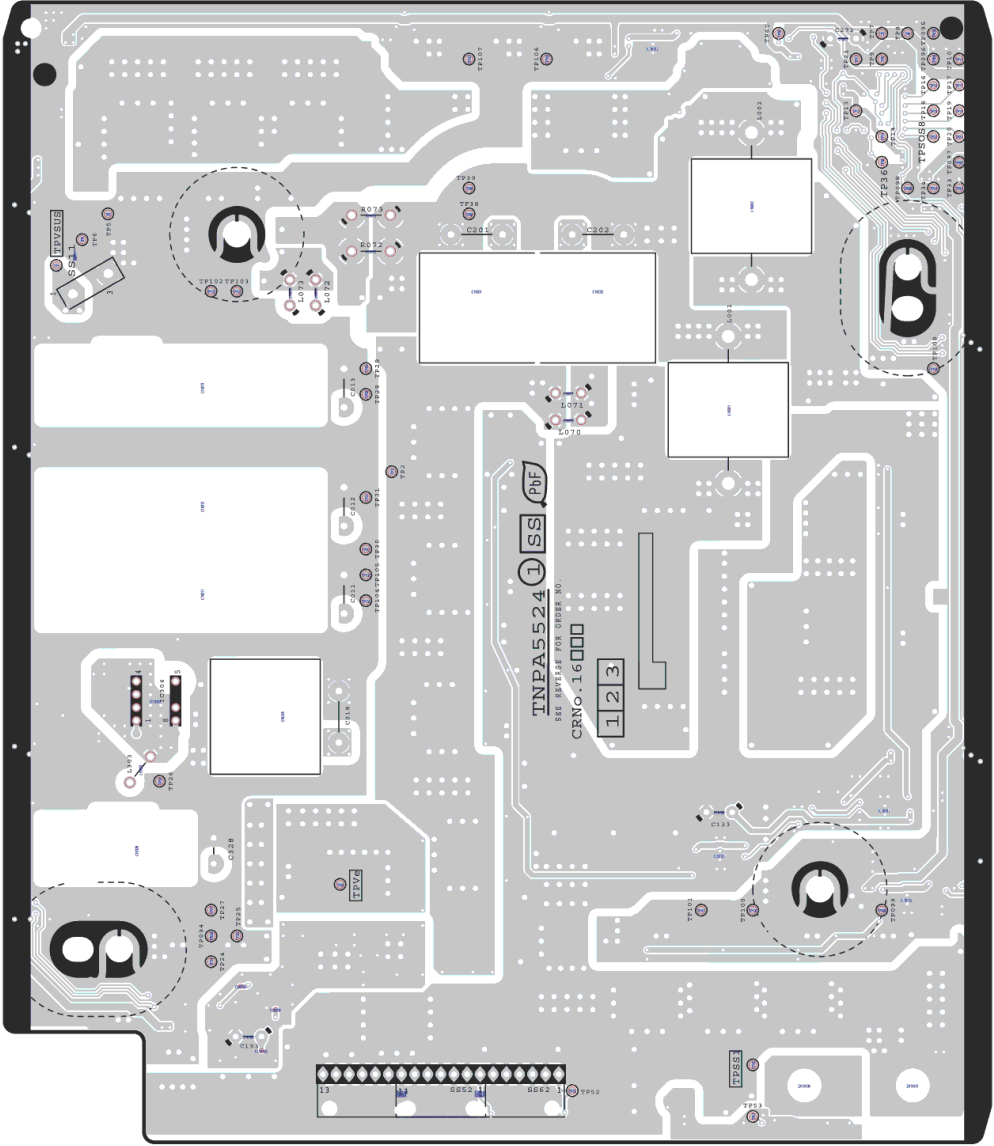

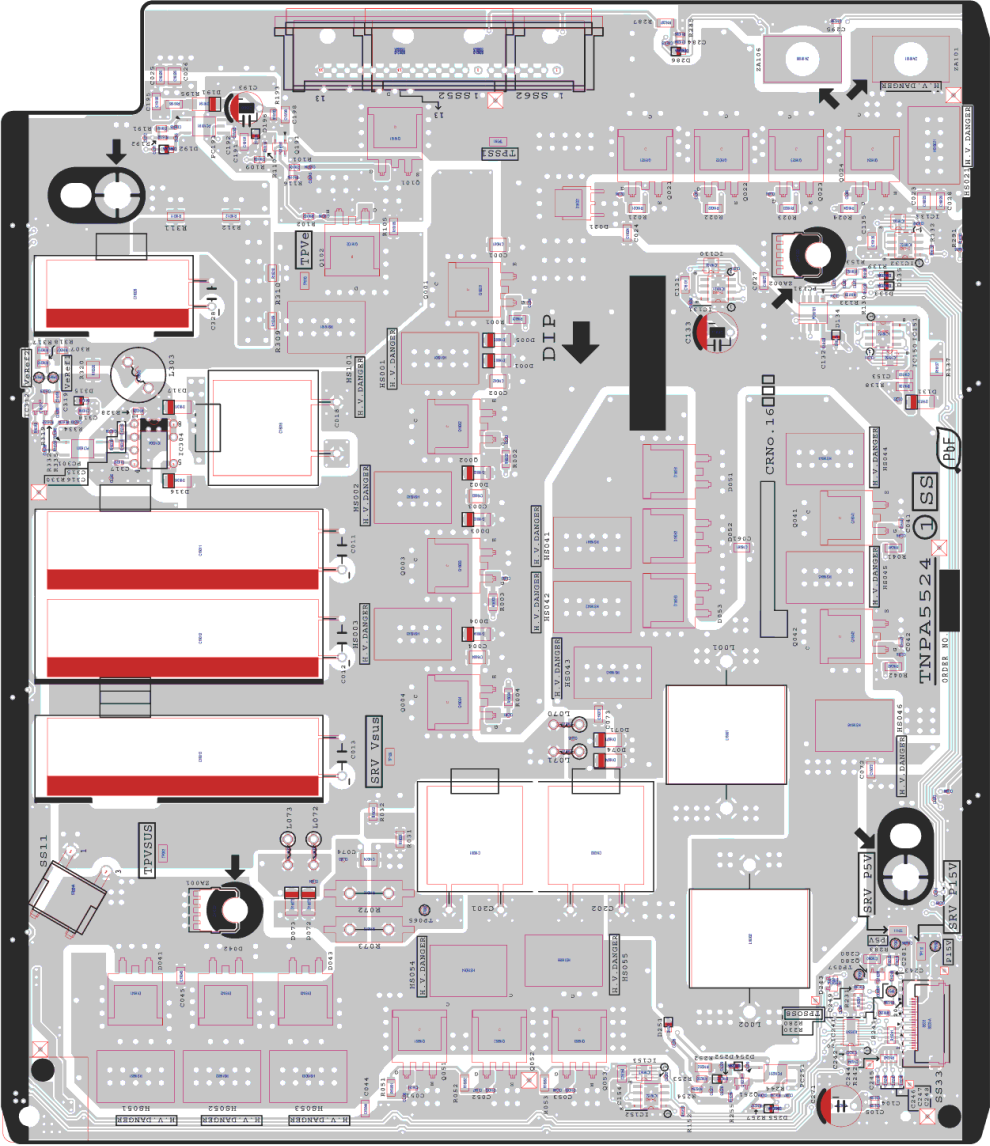

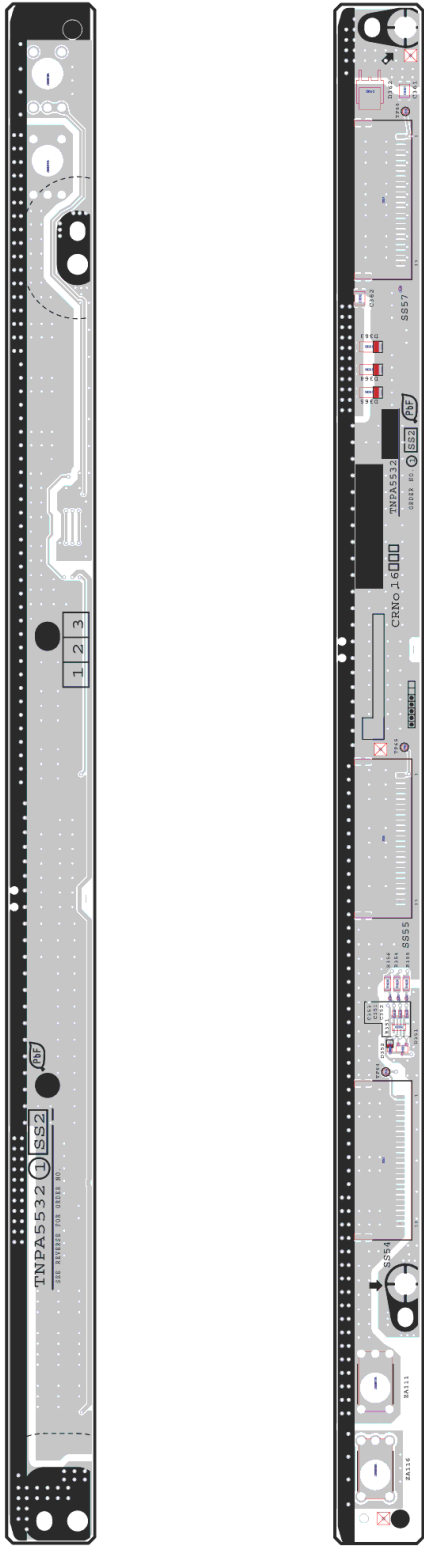

Model No. : TH-P50ST50A/D/G/K/M/P/S/T/V/Z Parts List

Safety	Ref. No.	Part No.	Part Name & Description	Q'ty	Remarks
	PCB	TZTNP01PHUA	A-PRINT COMPLETE	1	(A) (RTL) PAVCTH
	PCB	TZTNP01PCUD	A-PRINT COMPLETE	1	(D) (RTL) PAVCTH
	PCB	TZTNP01PGUG	A-PRINT COMPLETE	1	(G) (V) (RTL) PAVCTH
	PCB	TZTNP01NLUK	A-PRINT COMPLETE	1	(K) (RTL) PAVCTH
	PCB	TZTNP01NHUM	A-PRINT COMPLETE	1	(M) (T) (RTL) PAVCTH
	PCB	TZTNP01NXUP	A-PRINT COMPLETE	1	(P) (RTL) PAVCTH
	PCB	TZTNP01PBUS	A-PRINT COMPLETE	1	(S) (RTL) PAVCTH
	PCB	TZTNP01PAUZ	A-PRINT COMPLETE	1	(Z) (RTL) PAVCTH
	PCB	TXNC11RFUU	C1-PRINT COMPLETE	1	(RTL) PAVCTH
	PCB	TXNC21RFUU	C2-PRINT COMPLETE	1	(RTL) PAVCTH
	PCB	TXNC31RFUU	C3-PRINT COMPLETE	1	PAVCTH
	PCB	TZRN11STUE50	P-PRINT COMPLETE	1	(RTL) PAVCTH
	PCB	TXNSC1RFUU	SC-PRINT COMPLETE	1	(RTL) PAVCTH
	PCB	TXNSD1RFUU	SD-PRINT COMPLETE	1	PAVCTH
	PCB	TXNSS1RFUU	SS-PRINT COMPLETE	1	(RTL) PAVCTH
	PCB	TXNSS21RFUU	SS2-PRINT COMPLETE	1	(RTL) PAVCTH
	PCB	TXNSU1RFUU	SU-PRINT COMPLETE	1	PAVCTH
	PCB	TXN/K1SUUE	K-PRINT COMPLETE	1	(RTL) PAVCTH
	A1	K1KA08B00270	8P CONNECTOR	1	
	A6	K1KY16BA0394	16P CONNECTOR	1	PAVCTH
	A12	K1KY06BA0387	6P CONNECTOR	1	PAVCTH
	A20	K1MY30BA0345	30P CONNECTOR	1	
	A31	K1MY55BA0345	55P CONNECTOR	1	
	A32	K1MY55BA0345	55P CONNECTOR	1	
	A33	K1MN20BA0231	20P CONNECTOR	1	
	A50	K1KY05AA0719	5P CONNECTOR	1	
	C10	K1KY03BA0387	3P CONNECTOR	1	PAVCTH
	C11	K1MY55BA0345	55P CONNECTOR	1	
	C14	K1KY03AA0719	3P CONNECTOR	1	
	C20	K1KY03BA0387	3P CONNECTOR	1	PAVCTH
	C21	K1MY55BA0345	55P CONNECTOR	1	
	C25	K1KY04BA0387	4P CONNECTOR	1	PAVCTH
	C26	K1MY40BA0345	40P CONNECTOR	1	
	C36	K1MY40BA0345	40P CONNECTOR	1	
	C100	FOCAF334A105	C 0.33UF, 250V	1	PAVCTH
	C101	FOCAF334A105	C 0.33UF, 250V	1	PAVCTH
	C102	F1BAF471A088	C 470PF, 250V	1	PAVCTH
	C103	F1BAF471A088	C 470PF, 250V	1	PAVCTH
	C104	ECWF2W105KAC	C 1UF, 450V	1	PAVCTH
	C105	F1J1E334A272	C 0.33UF, 25V	1	PAVCTH
	C106	F1J1E105A287	C 1UF, 25V	1	PAVCTH
	C107	ECKD3A102KBP	C 1000PF, 1KV	1	
	C108	ECKD3A102KBP	C 1000PF, 1KV	1	
	C109	F1H1C105A179	C 1 uF 16 V	1	PAVCTH
	C110	F1H1H104B047	C 0.1UF, 50V	1	PAVCTH
	C111	F1H1H471B052	C 470PF, 50V	1	PAVCTH
	C112	F1H1H104B047	C 0.1UF, 50V	1	PAVCTH
	C113	F1J1E105A287	C 1UF, 25V	1	PAVCTH
	C115	F1J1H102A909	C 1000pF, 50V	1	PAVCTH
	C117	F1J1H102A909	C 1000pF, 50V	1	PAVCTH
	C118	F1H1H104B047	C 0.1UF, 50V	1	PAVCTH
	C120	F1J1H102A909	C 1000pF, 50V	1	PAVCTH
	C123	F1H1H103B047	C 0.01UF, 50V	1	PAVCTH
	C128	F2A2W101A248	E 100UF, 450V	1	PAVCTH
	C129	F2A2W101A248	E 100UF, 450V	1	PAVCTH
	C130	F2A2W101A248	E 100UF, 450V	1	PAVCTH
	C143	ECWF2W105KAC	C 1UF, 450V	1	PAVCTH
	C145	F1J1E105A287	C 1UF, 25V	1	PAVCTH
	C146	F1J1H103A900	C 0.01UF, 50V	1	PAVCTH

Model No. : TH-P50ST50A/D/G/K/M/P/S/T/V/Z Parts List

Safety	Ref. No.	Part No.	Part Name & Description	Q'ty	Remarks
	C200	F1H1H102B047	C 1000PF, 50V	1	PAVCTH
	C201	F1J1E105A287	C 1UF, 25V	1	PAVCTH
	C203	F1J1H222A911	C 2200pF, 50V	1	PAVCTH
	C204	F2A1V470A092	C 47UF 35V	1	
⚠	C206	F1BAF221A088	C 220PF, 250V	1	PAVCTH
	C210	F1H1H103B047	C 0.01UF, 50V	1	PAVCTH
	C211	F1H1H103B047	C 0.01UF, 50V	1	PAVCTH
	C212	F1H1H103B047	C 0.01UF, 50V	1	PAVCTH
	C213	F1H1H102B047	C 1000PF, 50V	1	PAVCTH
	C214	F1H1E105A153	C 1UF, 16V	1	PAVCTH
	C215	F2A1V470A092	C 47UF 35V	1	
	C216	F1H1H102B047	C 1000PF, 50V	1	PAVCTH
	C217	F1H1H104B047	C 0.1UF, 50V	1	PAVCTH
	C300	ECKD3A101KBP	C 100PF, 1KV	1	
	C301	ECWH8333RHA	C 0.033UF, 800V	1	PAVCTH
	C302	ECWH8333RHA	C 0.033UF, 800V	1	PAVCTH
	C304	ECKD3A221KBP	C 220PF, K, 1KV	1	
	C307	F1J1E105A287	C 1UF, 25V	1	PAVCTH
	C308	F1J1H102A909	C 1000pF, 50V	1	PAVCTH
	C309	F1J1H103A900	C 0.01UF, 50V	1	PAVCTH
	C312	F1J1E105A287	C 1UF, 25V	1	PAVCTH
	C313	F1H1H103B047	C 0.01UF, 50V	1	PAVCTH
	C403	F1H1H103B047	C 0.01UF, 50V	1	PAVCTH
	C404	F1H1H103B047	C 0.01UF, 50V	1	PAVCTH
	C405	F1H1H103B047	C 0.01UF, 50V	1	PAVCTH
	C407	F1H1H103B047	C 0.01UF, 50V	1	PAVCTH
	C411	F1H1H104B047	C 0.1UF, 50V	1	PAVCTH
	C412	F1H1H104B047	C 0.1UF, 50V	1	PAVCTH
	C415	F1H1H102B047	C 1000PF, 50V	1	PAVCTH
	C416	F1H1H104B047	C 0.1UF, 50V	1	PAVCTH
	C417	F1J1H102A909	C 1000pF, 50V	1	PAVCTH
	C419	F1J1H102A909	C 1000pF, 50V	1	PAVCTH
	C420	F1J1E105A287	C 1UF, 25V	1	PAVCTH
	C421	F1J1E105A287	C 1UF, 25V	1	PAVCTH
	C426	F1H1H104B047	C 0.1UF, 50V	1	PAVCTH
	C427	F1J1E105A287	C 1UF, 25V	1	PAVCTH
	C502	F1J1H104A902	C 0.1UF, 50V	1	PAVCTH
	C503	F2A1E471B730	E 470UF, 25V	1	PAVCTH
	C504	F2A1E471B730	E 470UF, 25V	1	PAVCTH
	C505	F2A1E471B730	E 470UF, 25V	1	PAVCTH
	C506	F1J2E1020002	C 1000PF, 250V	1	PAVCTH
	C507	F1H1H104B047	C 0.1UF, 50V	1	PAVCTH
	C509	F1H1H104B047	C 0.1UF, 50V	1	PAVCTH
	C510	F1H1H104B047	C 0.1UF, 50V	1	PAVCTH
	C511	F1H1H104B047	C 0.1UF, 50V	1	PAVCTH
	C512	F1J1H102A909	C 1000pF, 50V	1	PAVCTH
	C513	F1J1H102A909	C 1000pF, 50V	1	PAVCTH
	C518	F1J1E105A287	C 1UF, 25V	1	PAVCTH
	C519	F1J1E105A287	C 1UF, 25V	1	PAVCTH
	C520	F2A1E471B730	E 470UF, 25V	1	PAVCTH
	C525	F1J1H102A909	C 1000pF, 50V	1	PAVCTH
	C526	F1H1H104B047	C 0.1UF, 50V	1	PAVCTH
	C527	F1J1H104A902	C 0.1UF, 50V	1	PAVCTH
	C528	F1J1H104A902	C 0.1UF, 50V	1	PAVCTH
	C529	F1H1H104B047	C 0.1UF, 50V	1	PAVCTH
	C530	F1H1H104B047	C 0.1UF, 50V	1	PAVCTH
	C531	F1H1H104B047	C 0.1UF, 50V	1	PAVCTH
	C532	F1H1H104B047	C 0.1UF, 50V	1	PAVCTH
	C533	F1H1H104B047	C 0.1UF, 50V	1	PAVCTH
	C534	F1H1H104B047	C 0.1UF, 50V	1	PAVCTH
	C601	F1H1H391B052	C 390PF, 50V	1	PAVCTH
	C602	F1H1H104B047	C 0.1UF, 50V	1	PAVCTH

Model No. : TH-P50ST50A/D/G/K/M/P/S/T/V/Z Parts List

Safety	Ref. No.	Part No.	Part Name & Description	Q'ty	Remarks
	C603	F2AZZ821A034	E 820UF, 80V	1	PAVCTH
	C604	F2A1J1520008	E 1500UF, 63V	1	PAVCTH
	C700	F2A2E181A292	E 180UF, 250V	1	PAVCTH
	C701	F2A2E181A292	E 180UF, 250V	1	PAVCTH
	C703	FIJ1E334A272	C 0.33UF, 25V	1	PAVCTH
	C705	FIJ1E105A287	C 1UF, 25V	1	PAVCTH
	C707	FIH1H102B047	C 1000PF, 50V	1	PAVCTH
	C2000	FIJ1E1030005	C 0.01UF 25V	1	
	C2001	FIJ1A106A110	C 10UF, 10V	1	PAVCTH
	C2002	FIJ1E105A287	C 1UF, 25V	1	PAVCTH
	C2003	FIJ1E105A287	C 1UF, 25V	1	PAVCTH
	C2006	FIJ1C104A077	C 0.1UF 16V	1	
	C2007	FIJ1A105A047	C 1UF 10V	1	
	C2008	FIJ1A105A047	C 1UF 10V	1	
	C2009	FIJ1E1030005	C 0.01UF 25V	1	
	C2010	FIJ1A105A047	C 1UF 10V	1	
	C2013	FIJ1E1030005	C 0.01UF 25V	1	
	C2014	FIJ1E1030005	C 0.01UF 25V	1	
	C2018	FIJ1H1020008	C 1000PF 50V	1	
	C2019	FIJ1E1030005	C 0.01UF 25V	1	
	C2026	FIJ1C104A077	C 0.1UF 16V	1	
	C2032	FIH0J4750004	C 4.7UF, 16V	1	
	C2035	FIJ1A106A087	C 10UF, 10V	1	
	C2036	FIJ1A106A087	C 10UF, 10V	1	
	C2810	FIH1H103B047	C 0.01UF, 50V	1	PAVCTH
	C2811	FIJ1A106A087	C 10UF, 10V	1	
	C2815	FIH1H103B047	C 0.01UF, 50V	1	PAVCTH
	C2821	ECJ1XB1C104K	C 0.1UF, Z, 16V	1	
	C3040	FIJ1A106A110	C 10UF, 10V	1	PAVCTH
	C3042	FIJ1A106A110	C 10UF, 10V	1	PAVCTH
	C3045	FIJ1A106A110	C 10UF, 10V	1	PAVCTH
	C3046	FIJ1A105A047	C 1UF 10V	1	
	C3047	FIJ1A105A047	C 1UF 10V	1	
	C3050	FIK1E106A134	C 10UF, 25V	1	
	C3057	FIJ1A105A047	C 1UF 10V	1	
	C3058	FIJ1A105A047	C 1UF 10V	1	
	C3084	FIJ1A105A047	C 1UF 10V	1	
	C3085	FIJ1A105A047	C 1UF 10V	1	
	C3086	FIJ1A105A047	C 1UF 10V	1	
	C3105	FIJ1H471A834	C 470PF, 50V	1	PAVCTH
	C3106	FIJ1H471A834	C 470PF, 50V	1	PAVCTH
	C3108	FIJ1E333A059	C 0.033UF, 25V	1	PAVCTH
	C3109	FIJ1E333A059	C 0.033UF, 25V	1	PAVCTH
	C3137	FIJ1H471A834	C 470PF, 50V	1	PAVCTH
	C3138	FIJ1H471A834	C 470PF, 50V	1	PAVCTH
	C3141	FIJ1H471A834	C 470PF, 50V	1	PAVCTH
	C3142	FIJ1H471A834	C 470PF, 50V	1	PAVCTH
	C3151	FIJ1A105A047	C 1UF 10V	1	
	C3152	FIJ1A105A047	C 1UF 10V	1	
	C3182	FIJ1A105A047	C 1UF 10V	1	
	C3183	FIJ1A105A047	C 1UF 10V	1	
	C3184	FIJ1A105A047	C 1UF 10V	1	
	C3186	FIJ1A105A047	C 1UF 10V	1	
	C3202	FIJ1C104A077	C 0.1UF 16V	1	
	C3305	F2H1A101A040	C 100UF, 10V	1	
	C3307	F2H1A101A040	C 100UF, 10V	1	
	C4799	FIJ1A105A047	C 1UF 10V	1	
	C4900	FIK1V106A010	C 10UF, 25V	1	PAVCTH
	C4901	FIK1V106A010	C 10UF, 25V	1	PAVCTH
	C4902	FIJ1H1020008	C 1000PF 50V	1	
	C4903	FIJ1C104A077	C 0.1UF 16V	1	
	C4904	FIJ1C104A077	C 0.1UF 16V	1	

Model No. : TH-P50ST50A/D/G/K/M/P/S/T/V/Z Parts List

Safety	Ref. No.	Part No.	Part Name & Description	Q'ty	Remarks
	C4905	FlG1C104A077	C 0.1UF 16V	1	
	C4906	FlG1C104A077	C 0.1UF 16V	1	
	C4907	FlK1V106A010	C 10UF, 25V	1	PAVCTH
	C4908	FlG1H1020008	C 1000PF 50V	1	
	C4909	FlK1V106A010	C 10UF, 25V	1	PAVCTH
	C4921	FlJ1E105A287	C 1UF, 25V	1	PAVCTH
	C4922	FlJ1E105A287	C 1UF, 25V	1	PAVCTH
	C4923	FlJ1E105A287	C 1UF, 25V	1	PAVCTH
	C4924	FlJ1E105A287	C 1UF, 25V	1	PAVCTH
	C4931	FlK1V106A010	C 10UF, 25V	1	PAVCTH
	C4932	FlG1H1020008	C 1000PF 50V	1	
	C4933	FlG1C104A077	C 0.1UF 16V	1	
	C4934	FlG1C104A077	C 0.1UF 16V	1	
	C4935	FlG1C104A077	C 0.1UF 16V	1	
	C4936	FlG1C104A077	C 0.1UF 16V	1	
	C4937	FlK1V106A010	C 10UF, 25V	1	PAVCTH
	C4946	FlJ1E474A272	C 0.47UF, 25V	1	PAVCTH
	C4947	FlJ1E474A272	C 0.47UF, 25V	1	PAVCTH
	C5000	FlG1E1030005	C 0.01UF 25V	1	
	C5002	FlJZZ1060001	C 10UF, 20V	1	PAVCTH
	C5003	FlH1C105A145	C 1 uF 16 V	1	
	C5007	FlG1C104A077	C 0.1UF 16V	1	
	C5009	FlG1C104A077	C 0.1UF 16V	1	
	C5011	FlG1C104A077	C 0.1UF 16V	1	
	C5012	EEH1B1C101UF	C 100PF, J, 16V	1	
	C5013	FlG1A105A047	C 1UF 10V	1	
	C5014	FlG1A105A047	C 1UF 10V	1	
	C5015	FlG1A105A047	C 1UF 10V	1	
	C5016	FlG1A105A047	C 1UF 10V	1	
	C5017	FlG1A105A047	C 1UF 10V	1	
	C5018	FlG1C104A077	C 0.1UF 16V	1	
	C5020	FlG1E1030005	C 0.01UF 25V	1	
	C6704	FlJ1A106A110	C 10UF, 10V	1	PAVCTH
	C6707	FlG1C104A077	C 0.1UF 16V	1	
	C6708	FlJ1A106A110	C 10UF, 10V	1	PAVCTH
	C6710	FlG1C104A077	C 0.1UF 16V	1	
	C6719	FlG1H220A834	C 22PF, 50V	1	PAVCTH
	C6720	FlG1H220A834	C 22PF, 50V	1	PAVCTH
	C6721	FlG1H220A834	C 22PF, 50V	1	PAVCTH
	C6722	FlG1E472A144	C 4700pF 25V	1	PAVCTH
	C6723	FlG1H101A834	C 100PF 50V	1	PAVCTH
	C6724	FlG1H101A834	C 100PF 50V	1	PAVCTH
	C6725	FlG1H220A834	C 22PF, 50V	1	PAVCTH
	C6726	FlG1H470A834	C 47PF, 50V	1	PAVCTH
	C6727	FlG1H470A834	C 47PF, 50V	1	PAVCTH
	C6733	FlG1C104A077	C 0.1UF 16V	1	
	C6734	FlG1C104A077	C 0.1UF 16V	1	
	C6735	FlG1C104A077	C 0.1UF 16V	1	
	C6740	FlG1C104A077	C 0.1UF 16V	1	
	C6741	FlG1C104A077	C 0.1UF 16V	1	
	C6742	FlG1C104A077	C 0.1UF 16V	1	
	C6743	FlG1C104A077	C 0.1UF 16V	1	
	C6744	FlG1C104A077	C 0.1UF 16V	1	
	C8002	FlJ1A106A087	C 10UF, 10V	1	
	C8004	FlG1C104A077	C 0.1UF 16V	1	
	C8005	FlG1C104A077	C 0.1UF 16V	1	
	C8007	FlJ1A106A087	C 10UF, 10V	1	
	C8014	FlJ0G2260001	C 22 UF 4 V	1	
	C8017	FlG1C104A077	C 0.1UF 16V	1	
	C8019	FlG1C104A077	C 0.1UF 16V	1	
	C8020	FlG1C104A077	C 0.1UF 16V	1	
	C8022	FlG1C104A077	C 0.1UF 16V	1	

Model No. : TH-P50ST50A/D/G/K/M/P/S/T/V/Z Parts List

Safety	Ref. No.	Part No.	Part Name & Description	Q'ty	Remarks
	C8023	FlG1C104A077	C 0.1UF 16V	1	
	C8024	FlG1C104A077	C 0.1UF 16V	1	
	C8025	FlG1A105A047	C 1UF 10V	1	
	C8031	FlJ1A106A087	C 10UF, 10V	1	
	C8033	FlJ1A106A087	C 10UF, 10V	1	
	C8034	FlJ0G2260001	C 22 UF 4 V	1	
	C8035	FlG1C104A077	C 0.1UF 16V	1	
	C8036	FlG1A105A047	C 1UF 10V	1	
	C8038	FlJ0G2260001	C 22 UF 4 V	1	
	C8039	FlJ0G2260001	C 22 UF 4 V	1	
	C8100	FlG1C223A146	C 0.022UF, 16V	1	PAVCTH
	C8101	FlH1C105A145	C 1 uF 16 V	1	
	C8102	FlG1C104A077	C 0.1UF 16V	1	
	C8103	FlK1E106A134	C 10UF, 25V	1	
	C8105	FlJ0G2260001	C 22 UF 4 V	1	
	C8106	FlJ0G2260001	C 22 UF 4 V	1	
	C8108	ECJ1VB1E104K	C 0.1 UF, 25V	1	
	C8110	FlG1C223A146	C 0.022UF, 16V	1	PAVCTH
	C8111	FlH1C105A145	C 1 uF 16 V	1	
	C8112	FlG1C104A077	C 0.1UF 16V	1	
	C8113	FlK1E106A134	C 10UF, 25V	1	
	C8115	FlJ0G2260001	C 22 UF 4 V	1	
	C8116	FlJ0G2260001	C 22 UF 4 V	1	
	C8118	ECJ1VB1E104K	C 0.1 UF, 25V	1	
	C8203	FlG1C104A077	C 0.1UF 16V	1	
	C8204	FlG1C104A077	C 0.1UF 16V	1	
	C8205	FlG1C104A077	C 0.1UF 16V	1	
	C8206	FlG1C104A077	C 0.1UF 16V	1	
	C8207	FlJ1A106A087	C 10UF, 10V	1	
	C8208	FlG1C104A077	C 0.1UF 16V	1	
	C8210	FlG1C104A077	C 0.1UF 16V	1	
	C8212	FlG1C104A077	C 0.1UF 16V	1	
	C8215	FlG1C104A077	C 0.1UF 16V	1	
	C8216	FlJ1A106A087	C 10UF, 10V	1	
	C8218	FlG1C104A077	C 0.1UF 16V	1	
	C8220	FlG1C104A077	C 0.1UF 16V	1	
	C8221	FlG1C104A077	C 0.1UF 16V	1	
	C8224	FlG1C104A077	C 0.1UF 16V	1	
	C8229	FlG1A105A047	C 1UF 10V	1	
	C8230	FlG1C104A077	C 0.1UF 16V	1	
	C8231	FlG1C104A077	C 0.1UF 16V	1	
	C8232	FlG1C104A077	C 0.1UF 16V	1	
	C8300	FlG1H9R0A831	C 9 PF, 50V	1	PAVCTH
	C8301	FlG1H9R0A831	C 9 PF, 50V	1	PAVCTH
	C8304	FlG1A105A047	C 1UF 10V	1	
	C8305	FlG1A105A047	C 1UF 10V	1	
	C8306	FlG1A105A047	C 1UF 10V	1	
	C8307	FlG1A105A047	C 1UF 10V	1	
	C8308	FlG1A105A047	C 1UF 10V	1	
	C8309	FlG1A105A047	C 1UF 10V	1	
	C8310	FlG1A105A047	C 1UF 10V	1	
	C8311	FlG1A105A047	C 1UF 10V	1	
	C8312	FlG1A105A047	C 1UF 10V	1	
	C8602	FlG1H120A834	C 12PF, 50V	1	PAVCTH
	C8603	FlG1H120A834	C 12PF, 50V	1	PAVCTH
	C8604	FlG1C104A077	C 0.1UF 16V	1	
	C8605	FlG1C104A077	C 0.1UF 16V	1	
	C8607	FlG1C104A077	C 0.1UF 16V	1	
	C8608	FlG1C104A077	C 0.1UF 16V	1	
	C8609	FlH1C105A145	C 1 uF 16 V	1	
	C8610	FlH1C105A145	C 1 uF 16 V	1	
	C8611	FlG1C104A077	C 0.1UF 16V	1	

Model No. : TH-P50ST50A/D/G/K/M/P/S/T/V/Z Parts List

Safety	Ref. No.	Part No.	Part Name & Description	Q'ty	Remarks
	C8613	FLJ1A106A110	C 10UF, 10V	1	PAVCTH
	C8615	FLG1C104A077	C 0.1UF 16V	1	
	C8616	FLG1C104A077	C 0.1UF 16V	1	
	C8617	FLG1C1030008	C 0.01UF 16V	1	
	C8619	FLG1C104A077	C 0.1UF 16V	1	
	C8620	FLG1C104A077	C 0.1UF 16V	1	
	C8627	FLG1C104A077	C 0.1UF 16V	1	
	C8628	FLK0J226A049	C 22UF, 6.3V	1	
	C8629	FLK0J226A049	C 22UF, 6.3V	1	
	C8630	EEHBOJ221UP	E 220UF, 6.3V	1	
	C8631	EEHBOJ221UP	E 220UF, 6.3V	1	
	C8632	FLJ1A106A110	C 10UF, 10V	1	PAVCTH
	C8633	FLG1C104A077	C 0.1UF 16V	1	
	C8637	FLJ1A106A110	C 10UF, 10V	1	PAVCTH
	C8638	FLG1C104A077	C 0.1UF 16V	1	
	C8639	FLJ1A106A110	C 10UF, 10V	1	PAVCTH
	C8640	FLG1C104A077	C 0.1UF 16V	1	
	C8642	FLJ1A106A110	C 10UF, 10V	1	PAVCTH
	C8643	FLG1C104A077	C 0.1UF 16V	1	
	C8644	FLG1C1030008	C 0.01UF 16V	1	
	C8645	FLG1C104A077	C 0.1UF 16V	1	
	C8646	FLG1C104A077	C 0.1UF 16V	1	
	C8647	EEHBOJ221UP	E 220UF, 6.3V	1	
	C8648	FLG1C104A077	C 0.1UF 16V	1	
	C8649	FLG1C104A077	C 0.1UF 16V	1	
	C8652	FLG1C104A077	C 0.1UF 16V	1	
	C8653	FLG1H8R0A831	C 8 PF, 50V	1	PAVCTH
	C8654	FLG1H8R0A831	C 8 PF, 50V	1	PAVCTH
	C8655	FLG1C104A077	C 0.1UF 16V	1	
	C8658	FLJ1A106A110	C 10UF, 10V	1	PAVCTH
	C8659	FLG1C104A077	C 0.1UF 16V	1	
	C8674	FLG1C104A077	C 0.1UF 16V	1	
	C8675	FLG1C104A077	C 0.1UF 16V	1	
	C8676	FLG1C104A077	C 0.1UF 16V	1	
	C8721	FLK1E106A134	C 10UF, 25V	1	
	C8722	FLK1E106A134	C 10UF, 25V	1	
	C8723	ECJ1VB1E104K	C 0.1 UF, 25V	1	
	C8724	FLJ1A106A110	C 10UF, 10V	1	PAVCTH
	C8725	FLJ1A106A110	C 10UF, 10V	1	PAVCTH
	C8728	FLH1C105A145	C 1 uF 16 V	1	
	C8729	FLG1E472A086	C 4700pF 25V	1	
	C8730	FLG1C104A077	C 0.1UF 16V	1	
	C8731	FLG1E1030005	C 0.01UF 25V	1	
	C8732	FLK1V106A010	C 10UF, 25V	1	PAVCTH
	C8733	FLJ1A106A110	C 10UF, 10V	1	PAVCTH
	C8734	FLJ1A106A110	C 10UF, 10V	1	PAVCTH
	C8737	FLG1C104A077	C 0.1UF 16V	1	
	C8738	FLG1H222A830	C 2200PF, 50V	1	PAVCTH
	C8739	FLG1E1030005	C 0.01UF 25V	1	
	C8747	FLG1A105A047	C 1UF 10V	1	
	C8748	FLH0J4750004	C 4.7UF, 16V	1	
	C8749	FLG1A105A047	C 1UF 10V	1	
	C8750	FLG1A105A047	C 1UF 10V	1	
	C8757	FLJ1A106A110	C 10UF, 10V	1	PAVCTH
	C8758	FLJ1A106A110	C 10UF, 10V	1	PAVCTH
	C8771	FLG1C104A077	C 0.1UF 16V	1	
	C8772	FLG1C104A077	C 0.1UF 16V	1	
	C8773	FLG1C104A077	C 0.1UF 16V	1	
	C8790	FLJ1A106A110	C 10UF, 10V	1	PAVCTH
	C8791	FLJ1A106A110	C 10UF, 10V	1	PAVCTH
	C8900	FLG1C104A077	C 0.1UF 16V	1	
	C8901	FLG1C104A077	C 0.1UF 16V	1	

Model No. : TH-P50ST50A/D/G/K/M/P/S/T/V/Z Parts List

Safety	Ref. No.	Part No.	Part Name & Description	Q'ty	Remarks
	C8902	FlG1C104A077	C 0.1UF 16V	1	
	C0902	FlG1H101A834	C 100PF 50V	1	PAVCTH
	C0903	FlG1H101A834	C 100PF 50V	1	PAVCTH
	C9096	FlJ1A106A110	C 10UF, 10V	1	PAVCTH
	C9102	FlJZZ1060001	C 10UF, 20V	1	PAVCTH
	C9103	FlG1E1030005	C 0.01UF 25V	1	
	C9107	FlG1C104A077	C 0.1UF 16V	1	
	C9111	FlK1E106A134	C 10UF, 25V	1	
	C9116	FlG1C104A077	C 0.1UF 16V	1	
	C9119	ECJ1VB1E104K	C 0.1 UF, 25V	1	
	C9120	FlH1C105A145	C 1 uF 16 V	1	
	C9121	FlG1H1020008	C 1000PF 50V	1	
	C9122	FlG1A105A047	C 1UF 10V	1	
	C9123	FlG1A105A047	C 1UF 10V	1	
	C9222	FlK1E106A134	C 10UF, 25V	1	
	C9235	ECJ1VB1E104K	C 0.1 UF, 25V	1	
	C9237	FlK0J226A049	C 22UF, 6.3V	1	
	C9238	FlK0J226A049	C 22UF, 6.3V	1	
	C9300	FlG1C104A077	C 0.1UF 16V	1	
	C9301	FlG1H180A834	C 18PF, 50V	1	PAVCTH
	C9302	FlG1H180A834	C 18PF, 50V	1	PAVCTH
	C9308	FlG1C104A077	C 0.1UF 16V	1	
	C9309	FlG1A105A047	C 1UF 10V	1	
	C9311	FlG1C104A077	C 0.1UF 16V	1	
	C9312	FlJ1A106A110	C 10UF, 10V	1	PAVCTH
	C9317	FlG1A105A047	C 1UF 10V	1	
	C9318	FlG1A105A047	C 1UF 10V	1	
	C9319	FlG1A105A047	C 1UF 10V	1	
	C9320	FlG1A105A047	C 1UF 10V	1	
	C9321	FlG1A105A047	C 1UF 10V	1	
	C9322	FlG1A105A047	C 1UF 10V	1	
	C9323	FlG1A105A047	C 1UF 10V	1	
	C9324	FlG1A105A047	C 1UF 10V	1	
	C9325	FlG1A105A047	C 1UF 10V	1	
	C9326	FlG1A105A047	C 1UF 10V	1	
	C9335	FlJ1A106A110	C 10UF, 10V	1	PAVCTH
	C9336	FlJ1A106A110	C 10UF, 10V	1	PAVCTH
	C9337	FlJ1A106A110	C 10UF, 10V	1	PAVCTH
	C9346	FlG1A105A047	C 1UF 10V	1	
	C9347	FlG1A105A047	C 1UF 10V	1	
	C9354	FlG1A105A047	C 1UF 10V	1	
	C9355	FlJ1A106A110	C 10UF, 10V	1	PAVCTH
	C9356	FlJ1A106A110	C 10UF, 10V	1	PAVCTH
	C9357	FlJ1A106A110	C 10UF, 10V	1	PAVCTH
	C9366	FlG1A105A047	C 1UF 10V	1	
	C9367	FlG1A105A047	C 1UF 10V	1	
	C9368	FlG1A105A047	C 1UF 10V	1	
	C9371	FlJ1A106A110	C 10UF, 10V	1	PAVCTH
	C9375	FlG1C104A077	C 0.1UF 16V	1	
	C9376	FlG1A105A047	C 1UF 10V	1	
	C9378	FlG1C104A077	C 0.1UF 16V	1	
	C9379	FlG1C104A077	C 0.1UF 16V	1	
	C9380	FlG1C104A077	C 0.1UF 16V	1	
	C9381	FlG1C104A077	C 0.1UF 16V	1	
	C9382	FlG1C104A077	C 0.1UF 16V	1	
	C9383	FlG1C104A077	C 0.1UF 16V	1	
	C9384	FlG1C104A077	C 0.1UF 16V	1	
	C9385	FlG1C104A077	C 0.1UF 16V	1	
	C9386	FlG1A105A047	C 1UF 10V	1	
	C9387	FlG1A105A047	C 1UF 10V	1	
	C9388	FlG1A105A047	C 1UF 10V	1	
	C9391	FlJ1A106A110	C 10UF, 10V	1	PAVCTH

Model No. : TH-P50ST50A/D/G/K/M/P/S/T/V/Z Parts List

Safety	Ref. No.	Part No.	Part Name & Description	Q'ty	Remarks
	C9392	FLJ1A106A110	C 10UF, 10V	1	PAVCTH
	C9393	FLJ1A106A110	C 10UF, 10V	1	PAVCTH
	C9395	FLG1C104A077	C 0.1UF 16V	1	
	C9396	FLG1C104A077	C 0.1UF 16V	1	
	C9401	FLG1C104A077	C 0.1UF 16V	1	
	C9402	FLG1A105A047	C 1UF 10V	1	
	C9404	FLG1C104A077	C 0.1UF 16V	1	
	C9408	FLJ1A106A110	C 10UF, 10V	1	PAVCTH
	C9409	FLJ1A106A110	C 10UF, 10V	1	PAVCTH
	C9410	FLG1A105A047	C 1UF 10V	1	
	C9411	FLJ1A106A110	C 10UF, 10V	1	PAVCTH
	C9412	FLG1A105A047	C 1UF 10V	1	
	C9413	FLJ1A106A110	C 10UF, 10V	1	PAVCTH
	C9415	FLJ1A106A110	C 10UF, 10V	1	PAVCTH
	C9416	FLG1C104A077	C 0.1UF 16V	1	
	C9417	FLJ1A106A110	C 10UF, 10V	1	PAVCTH
	C9418	FLG1C104A077	C 0.1UF 16V	1	
	C9419	FLJ1A106A110	C 10UF, 10V	1	PAVCTH
	C9420	FLG1C104A077	C 0.1UF 16V	1	
	C9421	FLG1C104A077	C 0.1UF 16V	1	
	C9422	FLG1C104A077	C 0.1UF 16V	1	
	C9423	FLG1C104A077	C 0.1UF 16V	1	
	C9427	FLJ1A106A110	C 10UF, 10V	1	PAVCTH
	C9428	FLJ1A106A110	C 10UF, 10V	1	PAVCTH
	C9591	FLG1C104A077	C 0.1UF 16V	1	
	C9817	FLJ1A106A110	C 10UF, 10V	1	PAVCTH
	C9822	FLJ1A106A110	C 10UF, 10V	1	PAVCTH
	C9824	FLG1A105A047	C 1UF 10V	1	
	C9825	FLJ1A106A110	C 10UF, 10V	1	PAVCTH
	C9826	FLG1C104A077	C 0.1UF 16V	1	
	C16003	FL2J562A021	C 5600PF, 630V	1	PAVCTH
	C16011	F2A2E261A290	E 260UF, 250V	1	PAVCTH
	C16012	F2A2E261A290	E 260UF, 250V	1	PAVCTH
	C16018	FOC2E225A307	C 2.2UF, 250V	1	PAVCTH
	C16024	FLK2J332A024	C 3300PF, 630V	1	PAVCTH
	C16028	FLK2J222A024	C 2200PF, 630V	1	PAVCTH
	C16041	ECJ1VB1H392K	C 3900UF, 50V	1	
	C16044	FLK2J821A043	C 820PF, 630V	1	PAVCTH
	C16051	ECJ1VB1H392K	C 3900UF, 50V	1	
	C16053	ECJ1VB1H392K	C 3900UF, 50V	1	
	C16061	FLK2J821A043	C 820PF, 630V	1	PAVCTH
	C16074	FL2J472A021	C 4700PF, 630V	1	PAVCTH
	C16104	FLH1E470A130	C 47PF, 25V	1	
	C16105	FLH1E470A130	C 47PF, 25V	1	
	C16131	FLK1E105A029	C 1UF, 25V	1	
	C16132	FLH1C105A145	C 1 uF 16 V	1	
	C16133	F2A1E1010130	E 100UF, 25V	1	
	C16135	FLK1E105A029	C 1UF, 25V	1	
	C16153	FLK1E105A029	C 1UF, 25V	1	
	C16154	FLK1E105A029	C 1UF, 25V	1	
	C16191	FLK1E475A134	C 4.7UF 25V	1	
	C16192	ECJ1VB1E104K	C 0.1 UF, 25V	1	
	C16193	F2A1E4700094	E 47UF, 25V	1	
	C16195	FLK1E105A029	C 1UF, 25V	1	
	C16201	FOC2E225A307	C 2.2UF, 250V	1	PAVCTH
	C16202	FOC2E225A307	C 2.2UF, 250V	1	PAVCTH
	C16242	FLH1C105A145	C 1 uF 16 V	1	
	C16243	ECJ1VB1H103K	C 0.01UF, 50V	1	
	C16244	FLJ1A106A087	C 10UF, 10V	1	
	C16271	F2A1E151B705	E 150UF, 25V	1	
	C16280	FLK1E105A029	C 1UF, 25V	1	
	C16281	ECJ1VB1E104K	C 0.1 UF, 25V	1	

Model No. : TH-P50ST50A/D/G/K/M/P/S/T/V/Z Parts List

Safety	Ref. No.	Part No.	Part Name & Description	Q'ty	Remarks
	C16284	F1H1H104A913	C 0.1UF, K , 50V	1	
	C16295	F1H1H104A913	C 0.1UF, K , 50V	1	
	C16315	ECJ1VB1A105K	C 1UF, 10V	1	
	C16316	ECJ1XB1C104K	C 0.1UF, Z, 16V	1	
	C16317	ECJ1VB1A105K	C 1UF, 10V	1	
	C16318	F1J1H104A717	C 0.1UF, 50V	1	
	C16319	F1J1H104A717	C 0.1UF, 50V	1	
	C16328	F2A2T101A022	E 100UF, 220V	1	PAVCTH
	C16351	F1H1H104A970	C 0.1UF, , 50V	1	
	C16352	F1H1H104A970	C 0.1UF, , 50V	1	
	C16353	F1H1H104A970	C 0.1UF, , 50V	1	
	C16361	F1L2J562A021	C 5600PF, 630V	1	PAVCTH
	C16362	F1L2J562A021	C 5600PF, 630V	1	PAVCTH
	C16401	F1L2J562A021	C 5600PF, 630V	1	PAVCTH
	C16411	F2A2E261A290	E 260UF, 250V	1	PAVCTH
	C16412	F2A2E261A290	E 260UF, 250V	1	PAVCTH
	C16413	F2A2E261A290	E 260UF, 250V	1	PAVCTH
	C16414	F0C2E155A307	C 1.5UF, 250V	1	PAVCTH
	C16415	F0C2E105A307	C 1UF, 250V	1	PAVCTH
	C16423	F1L2J562A021	C 5600PF, 630V	1	PAVCTH
	C16441	ECJ1VB1H392K	C 3900UF, 50V	1	
	C16442	ECJ1VB1H392K	C 3900UF, 50V	1	
	C16450	F1L2J472A021	C 4700PF, 630V	1	PAVCTH
	C16451	ECJ1VB1H392K	C 3900UF, 50V	1	
	C16452	ECJ1VB1H392K	C 3900UF, 50V	1	
	C16460	F1K2J222A024	C 2200PF, 630V	1	PAVCTH
	C16502	F1K1E475A134	C 4.7UF 25V	1	
	C16503	F2A1E151B705	E 150UF, 25V	1	
	C16505	F1K1E105A029	C 1UF, 25V	1	
	C16506	F1H1C105A145	C 1 uF 16 V	1	
	C16508	F1K1E105A029	C 1UF, 25V	1	
	C16531	F1K1E475A134	C 4.7UF 25V	1	
	C16534	F1H1C105A145	C 1 uF 16 V	1	
	C16551	F1K1E105A029	C 1UF, 25V	1	
	C16561	F1J1A106A087	C 10UF, 10V	1	
	C16562	F1H1C105A145	C 1 uF 16 V	1	
	C16563	F1H1C105A145	C 1 uF 16 V	1	
	C16565	ECJ1VB1H103K	C 0.01UF, 50V	1	
	C16566	ECJ1VB1H103K	C 0.01UF, 50V	1	
	C16584	ECJ1VB1H392K	C 3900UF, 50V	1	
	C16593	F1H1H102A831	C 1000PF, 50V	1	PAVCTH
	C16602	F1H1H2200008	C 22PF, 50V	1	
	C16603	F1K2J471A042	C 470PF, 630V	1	PAVCTH
	C16631	F0C2E225A307	C 2.2UF, 250V	1	PAVCTH
	C16632	F0C2E225A307	C 2.2UF, 250V	1	PAVCTH
	C16641	F1K2J222A024	C 2200PF, 630V	1	PAVCTH
	C16661	F1K2J1020001	C 1000PF, 630V	1	PAVCTH
	C16662	F1K2J1020001	C 1000PF, 630V	1	PAVCTH
	C16663	F1K2J2210003	C 220PF, 630V	1	PAVCTH
	C16668	F1H1H821A831	C 820 PF, 50V	1	
	C16685	F1H1H104A913	C 0.1UF, K , 50V	1	
	C16723	F1K1E105A029	C 1UF, 25V	1	
	C16724	F1K1E475A134	C 4.7UF 25V	1	
	C16753	F1K1E105A029	C 1UF, 25V	1	
	C16770	F1H1C105A145	C 1 uF 16 V	1	
	C16791	F2A1E151B705	E 150UF, 25V	1	
	C16793	F2A1E151B705	E 150UF, 25V	1	
	C16794	F1J1A106A087	C 10UF, 10V	1	
	C16795	F2A1E151B705	E 150UF, 25V	1	
	C16796	F1K1E475A134	C 4.7UF 25V	1	
	C16813	F2A2T101A022	E 100UF, 220V	1	PAVCTH
	C16833	F1K2J1020001	C 1000PF, 630V	1	PAVCTH

Model No. : TH-P50ST50A/D/G/K/M/P/S/T/V/Z Parts List

Safety	Ref. No.	Part No.	Part Name & Description	Q'ty	Remarks
	C16834	F1K2J1020001	C 1000PF, 630V	1	PAVCTH
	C16835	F2AZZ121A032	E 120UF, 80V	1	PAVCTH
	C16842	F2A2C101A217	E 100UF, 160V	1	PAVCTH
	C16843	ECJ1VB1A105K	C 1UF, 10V	1	
	C16844	ECJ1XB1C104K	C 0.1UF, Z, 16V	1	
	C16854	ECJ1XB1C104K	C 0.1UF, Z, 16V	1	
	C16856	ECJ1VB1A105K	C 1UF, 10V	1	
	C16858	ECJ1XB1C104K	C 0.1UF, Z, 16V	1	
	C16860	ECJ1VB1A105K	C 1UF, 10V	1	
	C16861	ECJ1XB1C104K	C 0.1UF, Z, 16V	1	
	C16862	ECJ1VB1A105K	C 1UF, 10V	1	
	C16863	ECJ1XB1C104K	C 0.1UF, Z, 16V	1	
	C16891	F1K1E105A029	C 1UF, 25V	1	
	C16903	F1K2J222A024	C 2200PF, 630V	1	PAVCTH
	C16907	F1K2J2210003	C 220PF, 630V	1	PAVCTH
	C16908	F1L2J472A021	C 4700PF, 630V	1	PAVCTH
	C16910	F1K2J821A043	C 820PF, 630V	1	PAVCTH
	C16912	F1K2J821A043	C 820PF, 630V	1	PAVCTH
	C17101	F1H1A105A099	C 1UF, 10V	1	PAVCTH
	C17102	F1H1A105A099	C 1UF, 10V	1	PAVCTH
	C17103	F1H1A105A099	C 1UF, 10V	1	PAVCTH
	C17108	F1L2E224A028	C 0.22UF, 250V	1	
	C17109	F1L2E224A028	C 0.22UF, 250V	1	
	C17111	F1L2E224A028	C 0.22UF, 250V	1	
	C17131	F1H1A105A099	C 1UF, 10V	1	PAVCTH
	C17132	F1H1A105A099	C 1UF, 10V	1	PAVCTH
	C17134	F1L2E224A028	C 0.22UF, 250V	1	
	C17136	F1L2E224A028	C 0.22UF, 250V	1	
	C17137	F1H1A105A099	C 1UF, 10V	1	PAVCTH
	C17138	F1H1A105A099	C 1UF, 10V	1	PAVCTH
	C17139	F1L2E224A028	C 0.22UF, 250V	1	
	C17142	F1L2E224A028	C 0.22UF, 250V	1	
	C17143	ECJ1XB1C104K	C 0.1UF, Z, 16V	1	
	C17154	F1H1H102A831	C 1000PF, 50V	1	PAVCTH
	C17155	F1H1H102A831	C 1000PF, 50V	1	PAVCTH
	C17156	F1H1H102A831	C 1000PF, 50V	1	PAVCTH
	C17157	F1H1H102A831	C 1000PF, 50V	1	PAVCTH
	C17201	F1H1A105A099	C 1UF, 10V	1	PAVCTH
	C17204	F1H1A105A099	C 1UF, 10V	1	PAVCTH
	C17207	F1H1A105A099	C 1UF, 10V	1	PAVCTH
	C17208	F1H1A105A099	C 1UF, 10V	1	PAVCTH
	C17209	ECJ1XB1C104K	C 0.1UF, Z, 16V	1	
	C17249	F1L2E224A028	C 0.22UF, 250V	1	
	C17251	F1L2E224A028	C 0.22UF, 250V	1	
	C17253	F1L2E224A028	C 0.22UF, 250V	1	
	C17255	F1L2E224A028	C 0.22UF, 250V	1	
	C17309	F1H1A105A099	C 1UF, 10V	1	PAVCTH
	C17310	F1H1A105A099	C 1UF, 10V	1	PAVCTH
	C17311	F1H1A105A099	C 1UF, 10V	1	PAVCTH
	C17312	F1H1A105A099	C 1UF, 10V	1	PAVCTH
	C17357	F1L2E224A028	C 0.22UF, 250V	1	
	C17359	F1L2E224A028	C 0.22UF, 250V	1	
	C17361	F1L2E224A028	C 0.22UF, 250V	1	
	C17363	F1L2E224A028	C 0.22UF, 250V	1	
	C17364	ECJ1XB1C104K	C 0.1UF, Z, 16V	1	
	CB1	K1MY55B00001	55P CONNECTOR	1	
	CB2	K1MY55B00001	55P CONNECTOR	1	
	CB3	K1MY55B00001	55P CONNECTOR	1	
	CB4	K1MY55B00001	55P CONNECTOR	1	
	CB5	K1MY55B00001	55P CONNECTOR	1	
	CB6	K1MY55B00001	55P CONNECTOR	1	

Model No. : TH-P50ST50A/D/G/K/M/P/S/T/V/Z Parts List

Safety	Ref. No.	Part No.	Part Name & Description	Q'ty	Remarks
	CB7	K1MY55B00001	55P CONNECTOR	1	
	CB8	K1MY55B00001	55P CONNECTOR	1	
	CB9	K1MY55B00001	55P CONNECTOR	1	
	CB10	K1MY55B00001	55P CONNECTOR	1	
	CB11	K1MY55B00001	55P CONNECTOR	1	
	CB12	K1MY55B00001	55P CONNECTOR	1	
	CB13	K1MY55B00001	55P CONNECTOR	1	
	CB14	K1MY55B00001	55P CONNECTOR	1	
	CB15	K1MY55B00001	55P CONNECTOR	1	
	CN0100	K1KA14A00248	14P CONNECTOR	1	
	D100	B0FBBR000092	DIODE	1	PAVCTH
	D101	B0FBBR000092	DIODE	1	PAVCTH
	D102	ERZVGED621	VARISTOR	1	PAVCTH
	D104	DZ2J068M0L	ZENER DIODE	1	
	D105	B0HAPR000013	DIODE	1	
	D106	B0HAPR000013	DIODE	1	
	D107	B0ECKM000053	DIODE	1	
	D108	B0ECKM000053	DIODE	1	
	D109	B0JCDD000001	DIODE	1	
	D110	B0JCDD000001	DIODE	1	
	D111	B0AACK000004	DIODE	1	
	D112	B0AACK000004	DIODE	1	
	D113	B0HAPR000013	DIODE	1	
	D115	ERZVGED621	VARISTOR	1	PAVCTH
	D116	B0HAPR000013	DIODE	1	
	D117	ERZVGED621	VARISTOR	1	PAVCTH
	D118	B0ECKM000053	DIODE	1	
	D119	B0ECKM000053	DIODE	1	
	D201	B0AAMT000014	DIODE	1	PAVCTH
	D204	B0BB20000009	DIODE	1	PAVCTH
	D205	B0ECKM000053	DIODE	1	
	D206	B0ECKM000053	DIODE	1	
	D209	DZ2J150M0L	ZENER DIODE	1	
	D210	B0AACK000004	DIODE	1	
	D212	B0AACK000004	DIODE	1	
	D213	DZ2J270M0L	ZENER DIODE	1	PAVCTH
	D217	DZ2J150M0L	ZENER DIODE	1	
	D219	DZ2J300M0L	ZENER DIODE	1	
	D220	B0AACK000004	DIODE	1	
	D227	B0AAMT000014	DIODE	1	PAVCTH
	D228	B0JCDD000001	DIODE	1	
	D229	B0JCDD000001	DIODE	1	
	D231	B0JCDD000001	DIODE	1	
	D232	DZ2J200M0L	ZENER DIODE	1	
	D300	B0AACK000004	DIODE	1	
	D301	B0AACK000004	DIODE	1	
	D302	DA2J10100L	DIODE	1	
	D304	DA2J10100L	DIODE	1	
	D309	B0JCDD000001	DIODE	1	
	D310	B0JCDD000001	DIODE	1	
	D401	DA2J10100L	DIODE	1	
	D402	B0AACK000004	DIODE	1	
	D410	B0AACK000004	DIODE	1	
	D412	B0AACK000004	DIODE	1	
	D417	DZ2J068M0L	ZENER DIODE	1	
	D418	B0ECKM000053	DIODE	1	
	D419	DZ2J03300L	ZENER DIODE	1	PAVCTH
	D501	B0FBBM000025	DIODE	1	PAVCTH
	D502	B0AACK000004	DIODE	1	
	D503	B0AACK000004	DIODE	1	

Model No. : TH-P50ST50A/D/G/K/M/P/S/T/V/Z Parts List

Safety	Ref. No.	Part No.	Part Name & Description	Q'ty	Remarks
	D505	B0ECKM000053	DIODE	1	
	D506	DZ2J100M0L	ZENER DIODE	1	
	D509	DZ2J100M0L	ZENER DIODE	1	
	D600	B0FCAM000003	DIODE	1	PAVCTH
	D601	B0FCAM000003	DIODE	1	PAVCTH
	D602	DZ2J200M0L	ZENER DIODE	1	
	D603	DZ2J200M0L	ZENER DIODE	1	
	D604	DZ2J150M0L	ZENER DIODE	1	
	D605	B0BC018A0225	DIODE	1	PAVCTH
	D700	B0FBBP000008	DIODE	1	PAVCTH
	D701	DZ2J051M0L	ZENER DIODE	1	
	D702	B0ECKM000053	DIODE	1	
	D704	B0FBBP000007	DIODE	1	PAVCTH
	D705	DA2J10100L	DIODE	1	
	D706	DA2J10100L	DIODE	1	
	D2002	B0JCME000093	DIODE	1	
	D2820	B3AGB0000065	LED	1	
	D3009	DZ2J140M0L	ZENER DIODE	1	
	D3010	DZ2J140M0L	ZENER DIODE	1	
	D3021	DZ2J140M0L	ZENER DIODE	1	
	D3022	DZ2J140M0L	ZENER DIODE	1	
	D3023	DZ2J140M0L	ZENER DIODE	1	
	D3024	DZ2J140M0L	ZENER DIODE	1	
	D3025	DZ2J140M0L	ZENER DIODE	1	
	D3026	DZ2J140M0L	ZENER DIODE	1	
	D3201	K7AAAY000014	PHOTO LINK	1	PAVCTH
	D4703	DZ2J056M0L	ZENER DIODE	1	
	D4720	DZ2J056M0L	ZENER DIODE	1	
	D4771	DZ2J056M0L	ZENER DIODE	1	
	D4773	B0JCCE000021	DIODE	1	
	D8710	B0ECKM000053	DIODE	1	
	D8771	B0ADCK000001	DIODE	1	
	D8772	DZ2J068M0L	ZENER DIODE	1	
	D8773	DZ2J068M0L	ZENER DIODE	1	
	D9802	B0ADCK000001	DIODE	1	
	D16001	B0ECKP000061	DIODE	1	PAVCTH
	D16003	B0ECKP000061	DIODE	1	PAVCTH
	D16004	B0ECKP000061	DIODE	1	PAVCTH
	D16021	B0FCBN000002	DIODE	1	PAVCTH
	D16041	B0FCCN000005	DIODE	1	PAVCTH
	D16042	B0FCCN000005	DIODE	1	PAVCTH
	D16051	B0FCCN000005	DIODE	1	PAVCTH
	D16053	B0FCCN000005	DIODE	1	PAVCTH
	D16071	B0ECKP000055	DIODE	1	
	D16072	B0ECKP000055	DIODE	1	
	D16131	B0ECKP000055	DIODE	1	
	D16133	DA2J10100L	DIODE	1	
	D16134	DZ2J051M0L	ZENER DIODE	1	
	D16135	DA2J10100L	DIODE	1	
	D16191	B0ECKP000055	DIODE	1	
	D16192	DA2J10100L	DIODE	1	
	D16196	DZ2J200M0L	ZENER DIODE	1	
	D16243	DA3X103E0L	DIODE	1	PAVCTH
	D16251	DZ2J330M0L	ZENER DIODE	1	
	D16252	DZ2J330M0L	ZENER DIODE	1	
	D16254A	B3ABB0000381	LED	1	PAVCTH
	D16255	DA2J10100L	DIODE	1	
	D16286	DA2J10100L	DIODE	1	
	D16315	DZ2J150M0L	ZENER DIODE	1	
	D16316	B0ECKP000055	DIODE	1	
	D16317	B0ECHS000002	DIODE	1	
	D16351	DA3X102D0L	DIODE	1	PAVCTH

Model No. : TH-P50ST50A/D/G/K/M/P/S/T/V/Z Parts List

Safety	Ref. No.	Part No.	Part Name & Description	Q'ty	Remarks
	D16352	DA2J10100L	DIODE	1	
	D16362	B0FCBN000002	DIODE	1	PAVCTH
	D16401	B0ECKP000061	DIODE	1	PAVCTH
	D16402	B0ECKP000061	DIODE	1	PAVCTH
	D16404	B0ECKP000061	DIODE	1	PAVCTH
	D16407	B0JCDE000006	DIODE	1	
	D16411	DA2J10100L	DIODE	1	
	D16413	DA2J10100L	DIODE	1	
	D16421	DA3CF30ACL	ZENER DIODE	1	
	D16430	B0ECKP000061	DIODE	1	PAVCTH
	D16432	B0ECKP000055	DIODE	1	
	D16461	B0FCCN000005	DIODE	1	PAVCTH
	D16462	B0FCCN000005	DIODE	1	PAVCTH
	D16473	DA2J10100L	DIODE	1	
	D16477	DA2J10100L	DIODE	1	
	D16481	B0FCCN000005	DIODE	1	PAVCTH
	D16482	B0FCCN000005	DIODE	1	PAVCTH
	D16506	DZ2J051M0L	ZENER DIODE	1	
	D16534	DZ2J051M0L	ZENER DIODE	1	
	D16536	B0ECKP000055	DIODE	1	
	D16581	DZ2J330M0L	ZENER DIODE	1	
	D16582	DZ2J330M0L	ZENER DIODE	1	
	D16583	B3ABB0000381	LED	1	PAVCTH
	D16601	DZ2J051M0L	ZENER DIODE	1	
	D16608	B0ECKP000055	DIODE	1	
	D16609	B0ECKP000055	DIODE	1	
	D16618	B0ECKP000055	DIODE	1	
	D16641	B0FCCN000006	DIODE	1	PAVCTH
	D16643	B0FCCN000006	DIODE	1	PAVCTH
	D16644	B0FCCN000006	DIODE	1	PAVCTH
	D16648	DA2J10100L	DIODE	1	
	D16652	B0ECKP000055	DIODE	1	
	D16662	DZ2J220M0L	TRANSISTOR	1	
	D16663	DZ2J220M0L	TRANSISTOR	1	
	D16669	DA2J10100L	DIODE	1	
	D16673	B0ECHR000004	DIODE	1	
	D16674	B0ECHR000004	DIODE	1	
	D16676	DA2J10100L	DIODE	1	
	D16685	DA2J10100L	DIODE	1	
	D16686	DA2J10100L	DIODE	1	
	D16711	B0ECHR000004	DIODE	1	
	D16712	B0ECKP000055	DIODE	1	
	D16713	B0ECHS000002	DIODE	1	
	D16714	B0ECHS000002	DIODE	1	
	D16720	B0ECHR000004	DIODE	1	
	D16728	B0ECKP000055	DIODE	1	
	D16823	DA3X103E0L	DIODE	1	PAVCTH
	D16824	DA2J10100L	DIODE	1	
	D16825	DZ2J330M0L	ZENER DIODE	1	
	D16826	DZ2J330M0L	ZENER DIODE	1	
	D16828	DA2J10100L	DIODE	1	
	D16833	B0ECHR000004	DIODE	1	
	D17103	B0JCCD000020	DIODE	1	
	D17303	B0JCCD000020	DIODE	1	
	F100	K5E802YYA143	FUSE	1	PAVCTH
	F102	K5E402YYA142	FUSE	1	PAVCTH
	HS16001	K4AZ02D00004	TERMINAL	1	PAVCTH
	HS16002	K4AZ02D00004	TERMINAL	1	PAVCTH
	HS16044	K4AZ02D00004	TERMINAL	1	PAVCTH
	HS16045	K4AZ02D00004	TERMINAL	1	PAVCTH

Model No. : TH-P50ST50A/D/G/K/M/P/S/T/V/Z Parts List

Safety	Ref. No.	Part No.	Part Name & Description	Q'ty	Remarks
	HS16054	K4AZ02D00004	TERMINAL	1	PAVCTH
	HS16402	K4AZ02D00004	TERMINAL	1	PAVCTH
	HS16403	K4AZ02D00004	TERMINAL	1	PAVCTH
	HS16423	K4AZ02D00004	TERMINAL	1	PAVCTH
	HS16442	K4AZ02D00004	TERMINAL	1	PAVCTH
	HS16444	K4AZ02D00004	TERMINAL	1	PAVCTH
	HS16445	K4AZ02D00004	TERMINAL	1	PAVCTH
	HS16446	K4AZ02D00004	TERMINAL	1	PAVCTH
	HS16452	K4AZ02D00004	TERMINAL	1	PAVCTH
	HS16453	K4AZ02D00004	TERMINAL	1	PAVCTH
	HS16454	K4AZ02D00004	TERMINAL	1	PAVCTH
	HS16600	K4AZ02D00004	TERMINAL	1	PAVCTH
	HS16621	K4AZ02D00004	TERMINAL	1	PAVCTH
	HS16622	K4AZ02D00004	TERMINAL	1	PAVCTH
	HS16624	K4AZ02D00004	TERMINAL	1	PAVCTH
	HS16625	K4AZ02D00004	TERMINAL	1	PAVCTH
	HS16626	K4AZ02D00004	TERMINAL	1	PAVCTH
	IC100	C0DBBY00025	IC	1	PAVCTH
	IC200	C0DBBY00047	IC	1	PAVCTH
	IC300	C0DBBY00034	IC	1	PAVCTH
	IC400	C0DBZY00531	IC	1	PAVCTH
	IC501	C0DBGY02978	IC	1	PAVCTH
	IC502	C1ZBZ0004664	IC	1	PAVCTH
	IC503	C1ZBZ0004665	IC	1	PAVCTH
	IC600	C0DBZY00532	IC	1	PAVCTH
	IC700	C0DBZY00531	IC	1	PAVCTH
	IC2001	C1ZBZ0004368	IC	1	
	IC2002	C1ZBZ0004683	IC	1	PAVCTH
	IC3051	C0ABBB000179	IC	1	PAVCTH
	IC4900	C1AB00003871	IC	1	PAVCTH
	IC4901	C1AB00003871	IC	1	PAVCTH
	IC5000	AN34044AAVF	IC	1	
	IC8000	MN2WS0250E	IC	1	PAVCTH
	IC8100	C0DBAYY01283	IC	1	PAVCTH
	IC8101	C0DBAYY01285	IC	1	PAVCTH
	IC8200	C3ABUY000020	IC	1	PAVCTH
	IC8201	C3ABUY000020	IC	1	PAVCTH
	IC8601	C1CB00003747	IC	1	PAVCTH
	IC8602	C0DBZY00541	IC	1	PAVCTH
	IC8603	C0DBZY00541	IC	1	PAVCTH
	IC8606	C0DBZY00541	IC	1	PAVCTH
	IC8650	C1CB00003736	IC	1	PAVCTH
	IC8704	C0DBAYY01283	IC	1	PAVCTH
	IC8705	C0DBAYY01299	IC	1	PAVCTH
	IC8709	C0DBGY01682	IC	1	
	IC8714	C0DBEYY00102	IC	1	PAVCTH
	IC8715	C0DBGY00887	IC	1	
	IC8900	TVRS623AE	IC	1	PAVCTH
	IC8902	TVR***A	IC	1	(A) PAVCTH
	IC8902	TVR***D	IC	1	(D) PAVCTH
	IC8902	TVR***G	IC	1	(G) PAVCTH
	IC8902	TVR***K	IC	1	(K) PAVCTH
	IC8902	TVR***M	IC	1	(M) (T) PAVCTH
	IC8902	TVR***P	IC	1	(P) PAVCTH
	IC8902	TVR***S	IC	1	(S) PAVCTH
	IC8902	TVR***V	IC	1	(V) PAVCTH
	IC8902	TVR***Z	IC	1	(Z) PAVCTH
	IC9005	C0CBCAG00046	IC	1	
	IC9300	C1AB00003813	IC	1	PAVCTH
	IC9304	TVRS629AC	IC	1	PAVCTH
	IC9400	C0JBAZ001120	IC	1	

Model No. : TH-P50ST50A/D/G/K/M/P/S/T/V/Z Parts List

Safety	Ref. No.	Part No.	Part Name & Description	Q'ty	Remarks
	IC9401	C0JBAZ001120	IC	1	
	IC9402	C0JBAZ001120	IC	1	
	IC9803	C0DBAYY01283	IC	1	PAVCTH
	IC9804	C0DBZYY00541	IC	1	PAVCTH
	IC16131	C0ZBZ0001920	IC	1	PAVCTH
	IC16132	C0ZBZ0001920	IC	1	PAVCTH
	IC16151	C0ZBZ0001920	IC	1	PAVCTH
	IC16152	C0ZBZ0001920	IC	1	PAVCTH
	IC16241	C0JBAU000088	IC	1	
	IC16304	MIP3910MSSCF	IC	1	
	IC16312	C0DBZYY00531	IC	1	PAVCTH
	IC16501	C0ZBZ0001920	IC	1	PAVCTH
	IC16502	C0ZBZ0001920	IC	1	PAVCTH
	IC16521	C0ZBZ0001920	IC	1	PAVCTH
	IC16522	C0ZBZ0001920	IC	1	PAVCTH
	IC16561	AN49272A-VF	IC	1	PAVCTH
	IC16563	C0JBAB000996	IC	1	
	IC16600	C1ZBZ0004559	IC	1	PAVCTH
	IC16603	C0JBAA000344	IC	1	
	IC16725	C1ZBZ0004715	IC	1	PAVCTH
	IC16784	MIP3910MSSCF	IC	1	
	IC16785	C0DBZYY00532	IC	1	PAVCTH
	IC16786	MIP3910MSSCF	IC	1	
	IC16787	C0DBZYY00532	IC	1	PAVCTH
	IC16795	C0CBALC00012	IC	1	
	IC16921	C1ZBZ0004557	IC	1	PAVCTH
	IC17101	C0JBAU000088	IC	1	
	IC17201	C0JBAU000088	IC	1	
	IC17301	C0JBAU000088	IC	1	
	JA1	D0GBR00J0004	M 0 OHM J 1/10W	1	
	JA2	D0GBR00J0004	M 0 OHM J 1/10W	1	
	JA3	D0GBR00J0004	M 0 OHM J 1/10W	1	
	JA4	D0GBR00J0004	M 0 OHM J 1/10W	1	
	JA5	D0GBR00J0004	M 0 OHM J 1/10W	1	
	JA6	D0GBR00J0004	M 0 OHM J 1/10W	1	
	JA7	D0GBR00J0004	M 0 OHM J 1/10W	1	
	JA8	D0GBR00J0004	M 0 OHM J 1/10W	1	
	JA10	D0GBR00J0004	M 0 OHM J 1/10W	1	
	JA13	D0GBR00J0004	M 0 OHM J 1/10W	1	
	JA14	D0GBR00J0004	M 0 OHM J 1/10W	1	
	JA16	D0GBR00J0004	M 0 OHM J 1/10W	1	
	JA17	D0GBR00J0004	M 0 OHM J 1/10W	1	
	JK3001	K1FY315B0004	CONNECTOR	1	PAVCTH
	JK3100	K2HE2YYB0001	JACK	1	PAVCTH
	JK3101	K2HE2YYB0002	JACK	1	PAVCTH
	JK3202	K2HCL1YYB0081	JACK	1	PAVCTH
	JK4700B	K1FY119E0050	CONNECTOR	1	PAVCTH
	JK4701B	K1FY119E0050	CONNECTOR	1	PAVCTH
	JK4702B	K1FY119E0050	CONNECTOR	1	PAVCTH
	JK8600	K1NA12B00009	12P CONNECTOR	1	PAVCTH
	JK8601	K1FY104B0082	CONNECTOR	1	PAVCTH
	JK8602A	K2LC1YYE0002	JACK	1	PAVCTH
	JK8603	K1FY104B0082	CONNECTOR	1	PAVCTH
	JK8605	K1FY105E0017	CONNECTOR	1	PAVCTH
	JS104	EXCELSA35T	BEAD CHOKE	1	
	JS1050	D0GA360JA023	M 36 OHM, J, 1/16W	1	
	JS1051	D0GA360JA023	M 36 OHM, J, 1/16W	1	
	JS1052	D0GA360JA023	M 36 OHM, J, 1/16W	1	
	JS1053	D0GAR00J0005	M 0 OHM, 1/16W	1	

Model No. : TH-P50ST50A/D/G/K/M/P/S/T/V/Z Parts List

Safety	Ref. No.	Part No.	Part Name & Description	Q'ty	Remarks
	K1	K1KY07AA0719	7P CONNECTOR	1	
	L100	G4DYA0000354	SWITCHING TRANS	1	PAVCTH
	L101	G4DYA0000354	SWITCHING TRANS	1	PAVCTH
	L103	G0ZZ00002710	COIL	1	PAVCTH
	L200	EXCELDR25V	BEAD CHOKE	1	
	L201	EXCELDR25V	BEAD CHOKE	1	
	L500	EXCELDR25V	BEAD CHOKE	1	
	L2000	J0JYC0000464	FILTER	1	PAVCTH
	L4901	G1C100MA0533	INDUCTION COIL	1	PAVCTH
	L4902	G1C100MA0533	INDUCTION COIL	1	PAVCTH
	L4903	G1C100MA0533	INDUCTION COIL	1	PAVCTH
	L4904	G1C100MA0533	INDUCTION COIL	1	PAVCTH
	L4905	G1C150MA0533	INDUCTION COIL	1	PAVCTH
	L4906	G1C150MA0533	INDUCTION COIL	1	PAVCTH
	L6704	J0JYC0000464	FILTER	1	PAVCTH
	L6707	J0JYC0000464	FILTER	1	PAVCTH
	L8001	J0JCC0000287	CHIP INDUCTOR	1	
	L8002	J0JYC0000464	FILTER	1	PAVCTH
	L8003	J0JCK0000021	CHIP INDUCTOR	1	
	L8004	J0JCC0000287	CHIP INDUCTOR	1	
	L8005	J0JYC0000464	FILTER	1	PAVCTH
	L8100	G1C1R5ZA0311	INDUCTION COIL	1	PAVCTH
	L8101	G1C4R7ZA0311	INDUCTION COIL	1	PAVCTH
	L8600	J0ZZB0000142	FILTER	1	(A) (Z)
	L8601	J0ZZB0000142	FILTER	1	(A) (Z)
	L8602	J0ZZB0000142	FILTER	1	(A) (Z)
	L8603	J0ZZB0000142	FILTER	1	(A) (Z)
	L8604	J0JYC0000464	FILTER	1	PAVCTH
	L8605	J0JYC0000464	FILTER	1	PAVCTH
	L8606	J0JYC0000464	FILTER	1	PAVCTH
	L8607	J0JYC0000464	FILTER	1	PAVCTH
	L8608	J0JYC0000464	FILTER	1	PAVCTH
	L8704	G1C1R5ZA0311	INDUCTION COIL	1	PAVCTH
	L8705	G1C4R7ZA0311	INDUCTION COIL	1	PAVCTH
	L9006	G1C1R5ZA0311	INDUCTION COIL	1	PAVCTH
	L9008	J0JYC0000464	FILTER	1	PAVCTH
	L9300	J0JYC0000464	FILTER	1	PAVCTH
	L9303	J0JYC0000464	FILTER	1	PAVCTH
	L9305	J0JYC0000464	FILTER	1	PAVCTH
	L9306	J0JYC0000464	FILTER	1	PAVCTH
	L9307	J0JYC0000464	FILTER	1	PAVCTH
	L9308	J0JYC0000464	FILTER	1	PAVCTH
	L16001	G0CR43ZA0053	PEAKING COIL	1	PAVCTH
	L16002	G0CR43ZA0053	PEAKING COIL	1	PAVCTH
	L16070	G0ZZ00002183	PEAKING COIL	1	
	L16071	G0ZZ00002183	PEAKING COIL	1	
	L16072	G0ZZ00002183	PEAKING COIL	1	
	L16073	G0ZZ00002183	PEAKING COIL	1	
	L16303	G0C471MA0049	PEAKING COIL	1	
	L16411	G0CR43ZA0053	PEAKING COIL	1	PAVCTH
	L16412	G0CR43ZA0053	PEAKING COIL	1	PAVCTH
	L16430	G0ZZ00002183	PEAKING COIL	1	
	L16431	G0ZZ00002183	PEAKING COIL	1	
	L16432	G0ZZ00002183	PEAKING COIL	1	
	L16433	G0ZZ00002183	PEAKING COIL	1	
	L16660	G0C640Z00001	PEAKING COIL	1	PAVCTH
	LF101	G0B203J00004	CHOKE COIL	1	PAVCTH
	LF102	G0B203J00004	CHOKE COIL	1	PAVCTH

Model No. : TH-P50ST50A/D/G/K/M/P/S/T/V/Z Parts List

Safety	Ref. No.	Part No.	Part Name & Description	Q'ty	Remarks
	P2	K1KY02C00002	2P CONNECTOR	1	PAVCTH
	P6	K1KY15BA0386	15P CONNECTOR	1	PAVCTH
⚠	P9	K1KA02B00295	2P CONNECTOR	1	
	P11	K1KY02C00002	2P CONNECTOR	1	PAVCTH
	P35	K1KY04BA0385	4P CONNECTOR	1	PAVCTH
	PA2000	K5H4022A0031	FUSE	1	
	PA8704	K5H5022A0031	FUSE	1	
⚠	PC200	B3PAA0000629	IC	1	PAVCTH
⚠	PC201	B3PAA0000629	IC	1	PAVCTH
⚠	PC400	B3PAA0000629	IC	1	PAVCTH
⚠	PC401	B3PAA0000629	IC	1	PAVCTH
⚠	PC402	B3PAA0000629	IC	1	PAVCTH
⚠	PC700	B3PAA0000629	IC	1	PAVCTH
	PC16131	B3PBE0000065	IC	1	PAVCTH
	PC16191	B3PBA0000625	IC	1	PAVCTH
	PC16461	B3PBE0000065	IC	1	PAVCTH
	PC16462	B3PBE0000060	IC	1	
	PC16685	B3PBA0000625	IC	1	PAVCTH
	PC16301	B3PBA0000580	IC	1	
	PC16480	B3PBA0000580	IC	1	
	PC16581	B3PBA0000580	IC	1	
	PC16603	B3PBA0000580	IC	1	
	PC16723	B3PBA0000580	IC	1	
	PC16896	B3PBA0000580	IC	1	
	PC16897	B3PBA0000580	IC	1	
	PC16251	B3PBA0000580	IC	1	
⚠	Q100	B1CERR000060	FET	1	PAVCTH
⚠	Q101	B1CERR000060	FET	1	PAVCTH
	Q104	DSC5001R0L	TRANSISTOR	1	
	Q105	DSA5001R0L	TRANSISTOR	1	
	Q107	B1CHND000004	FET	1	
	Q110	B1CERT000010	FET	1	PAVCTH
	Q111	B1ABPF000011	TRANSISTOR	1	PAVCTH
	Q112	B1ABPF000011	TRANSISTOR	1	PAVCTH
	Q200	B1CBGD000001	FET	1	
	Q202	B1ABNE000003	TRANSISTOR	1	PAVCTH
	Q203	DSC500100L	TRANSISTOR	1	
	Q204	DSA5001R0L	TRANSISTOR	1	
	Q300	B1CERQ000093	FET	1	PAVCTH
	Q301	B1CERQ000093	FET	1	PAVCTH
	Q302	B1CHND000004	FET	1	
	Q303	B1CHND000004	FET	1	
	Q307	B1CHND000004	FET	1	
	Q404	DSC5001R0L	TRANSISTOR	1	
	Q405	DSC5001R0L	TRANSISTOR	1	
	Q407	DSC5001R0L	TRANSISTOR	1	
	Q408	DSC5001R0L	TRANSISTOR	1	
	Q409	DSA5001R0L	TRANSISTOR	1	
	Q412	DSC5001R0L	TRANSISTOR	1	
	Q415	DSC5001R0L	TRANSISTOR	1	
	Q416	DSC5001R0L	TRANSISTOR	1	
	Q419	DSC5001R0L	TRANSISTOR	1	
	Q421	DSC5001R0L	TRANSISTOR	1	
	Q422	DSC5001R0L	TRANSISTOR	1	
	Q500	B1CHRD000043	FET	1	PAVCTH
	Q502	B1CHRD000043	FET	1	PAVCTH
	Q503	DSA5001R0L	TRANSISTOR	1	
	Q504	DSC5001R0L	TRANSISTOR	1	
	Q505	DSC5001R0L	TRANSISTOR	1	

Model No. : TH-P50ST50A/D/G/K/M/P/S/T/V/Z Parts List

Safety	Ref. No.	Part No.	Part Name & Description	Q'ty	Remarks
	Q506	DSC5001R0L	TRANSISTOR	1	
	Q600	B1CERM000039	FET	1	PAVCTH
	Q700	DSA5001R0L	TRANSISTOR	1	
	Q701	DSC5001R0L	TRANSISTOR	1	
	Q702	DSC5001R0L	TRANSISTOR	1	
	Q703	DSA5001R0L	TRANSISTOR	1	
	Q2001	B1CHPC000005	FET	1	PAVCTH
	Q2002	B1ABCE000015	TRANSISTOR	1	
	Q2003	B1CBGD000001	FET	1	
	Q2004	B1ABCE000015	TRANSISTOR	1	
	Q2007	B1ABCE000015	TRANSISTOR	1	
	Q2008	B1CBGD000001	FET	1	
	Q2810	B1ABCE000015	TRANSISTOR	1	
	Q2811	B1ABCE000015	TRANSISTOR	1	
	Q2812	B1ABCE000015	TRANSISTOR	1	
	Q3008	B1ADCF000194	TRANSISTOR	1	
	Q3102	B1ABKE000001	TRANSISTOR	1	PAVCTH
	Q3103	B1ABKE000001	TRANSISTOR	1	PAVCTH
	Q3304	B1ADCF000194	TRANSISTOR	1	
	Q3305	B1ABKE000001	TRANSISTOR	1	PAVCTH
	Q3306	B1ABKE000001	TRANSISTOR	1	PAVCTH
	Q3307	B1ABBE000003	TRANSISTOR	1	
	Q4700	B1ABCF000231	TRANSISTOR	1	
	Q4702	B1ABCF000231	TRANSISTOR	1	
	Q4709	B1ABCF000231	TRANSISTOR	1	
	Q8771	B1HFCEA00001	TRANSISTOR	1	
	Q9201	B1HFCEA00001	TRANSISTOR	1	
	Q9202	B1ABCE000015	TRANSISTOR	1	
	Q16002	B1JBDN000005	TRANSISTOR	1	PAVCTH
	Q16004	B1JBDN000005	TRANSISTOR	1	PAVCTH
	Q16021	B1JBDN000005	TRANSISTOR	1	PAVCTH
	Q16022	B1JBDN000005	TRANSISTOR	1	PAVCTH
	Q16024	B1JBDN000005	TRANSISTOR	1	PAVCTH
	Q16041	B1JBDN000006	TRANSISTOR	1	PAVCTH
	Q16051	DG3C3020CL	TRANSISTOR	1	
	Q16053	DG3C3020CL	TRANSISTOR	1	
	Q16101	B1CFRM000031	FET	1	PAVCTH
	Q16102	B1CFRM000032	FET	1	PAVCTH
	Q16191	B1HFPPA00001	TRANSISTOR	1	
	Q16251	B1ABCF000231	TRANSISTOR	1	
	Q16280	B1ADCE000027	TRANSISTOR	1	
	Q16402	B1JBDN000005	TRANSISTOR	1	PAVCTH
	Q16403	B1JBDN000005	TRANSISTOR	1	PAVCTH
	Q16422	DG3C3010CL	TRANSISTOR	1	
	Q16424	DG3C3010CL	TRANSISTOR	1	
	Q16441	B1JBDN000006	TRANSISTOR	1	PAVCTH
	Q16442	B1JBDN000006	TRANSISTOR	1	PAVCTH
	Q16451	B1JBDN000006	TRANSISTOR	1	PAVCTH
	Q16452	B1JBDN000006	TRANSISTOR	1	PAVCTH
	Q16581	B1ABCF000231	TRANSISTOR	1	
	Q16600	B1CFRM000020	FET	1	
	Q16601	B1CFRQ000021	FET	1	
	Q16602	B1CFGF000019	FET	1	PAVCTH
	Q16621	B1JBDN000004	TRANSISTOR	1	
	Q16622	B1JBDN000004	TRANSISTOR	1	
	Q16623	B1JBDN000004	TRANSISTOR	1	
	Q16624	B1JBDN000004	TRANSISTOR	1	
	Q16646	B1CFGF000019	FET	1	PAVCTH
	Q16647	B1CBGD000001	FET	1	
	Q16648	DSC2001Q0L	TRANSISTOR	1	
	Q16652	B1ADCE000027	TRANSISTOR	1	
	Q16660	B1CFNQ000003	FET	1	PAVCTH

Model No. : TH-P50ST50A/D/G/K/M/P/S/T/V/Z Parts List

Safety	Ref. No.	Part No.	Part Name & Description	Q'ty	Remarks
	Q16661	B1JBER000002	TRANSISTOR	1	
	Q16762	B1HFFFA00001	TRANSISTOR	1	
	Q16815	B1ABCE000015	TRANSISTOR	1	
	Q16817	DSC2001Q0L	TRANSISTOR	1	
	Q16820	B1CFGF000019	FET	1	PAVCTH
	Q16891	B1ADCE000027	TRANSISTOR	1	
	Q16921	B1CFGF000019	FET	1	PAVCTH
	Q16931	B1ABCE000015	TRANSISTOR	1	
	R050	D0GAR00J0005	M 0 OHM, 1/16W	1	(A) (Z)
	R061	D0GAR00J0005	M 0 OHM, 1/16W	1	(D) (G) (K) (M) (P) (S) (V)
	R074	D0GAR00J0005	M 0 OHM, 1/16W	1	
	R100	D1FZ100YA004	F 10 OHM, J, 1.6W	1	PAVCTH
	R101	D0XB825J0001	M 8.2MOHM, J, 1W	1	PAVCTH
	R102	D0GB752JA072	M 7.5KOHM, J, 1/10W	1	PAVCTH
	R103	D0GB752JA072	M 7.5KOHM, J, 1/10W	1	PAVCTH
	R104	D0GB752JA072	M 7.5KOHM, J, 1/10W	1	PAVCTH
	R105	D0GB752JA072	M 7.5KOHM, J, 1/10W	1	PAVCTH
	R106	D0MA30MJA025	M 0.03 OHM, J, 2W	1	PAVCTH
	R107	D0MA30MJA025	M 0.03 OHM, J, 2W	1	PAVCTH
	R110	D0GB103JA072	M 10K OHM J 1/10W	1	PAVCTH
	R111	D0GB103JA072	M 10K OHM J 1/10W	1	PAVCTH
	R112	D1AB1204A023	M 1.2MOHM, F, 1/4W	1	PAVCTH
	R113	D1AB1204A023	M 1.2MOHM, F, 1/4W	1	PAVCTH
	R116	D0GB102JA071	M 1KOHM, J, 1/10W	1	PAVCTH
	R117	D0GB102JA071	M 1KOHM, J, 1/10W	1	PAVCTH
	R119	D0GB472JA072	M 4.7KOHM, J, 1/10W	1	PAVCTH
	R120	D0GB333ZA038	M 33KOHM, J, 1/10W	1	PAVCTH
	R121	D0GB153ZA038	M 15KOHM, J, 1/10W	1	PAVCTH
	R122	D0GB824JA068	M 820KOHM, J, 1/10W	1	PAVCTH
	R123	D0GB751JA069	M 750 OHM, J, 1/10W	1	PAVCTH
	R124	D0GD2R2JA035	M 2.2 OHM, J, 1/8W	1	PAVCTH
	R125	D0GB751JA069	M 750 OHM, J, 1/10W	1	PAVCTH
	R126	D0GB333JA070	M 33KOHM, J, 1/10W	1	PAVCTH
	R127	D0GB103JA072	M 10K OHM J 1/10W	1	PAVCTH
	R128	D0GB684JA065	M 680KOHM J 1/10W	1	PAVCTH
	R129	D0GB333ZA038	M 33KOHM, J, 1/10W	1	PAVCTH
	R131	D0GB683ZA038	M 68KOHM, J, 1/10W	1	PAVCTH
	R132	D1BD3303A066	M330KOHM.F.1/8W	1	PAVCTH
	R136	D1BB3302A073	M 33KOHM, J, 1/10W	1	PAVCTH
	R137	D1AB1604A023	M 1.6MOHM, F, 1/4W	1	PAVCTH
	R138	D1AB1604A023	M 1.6MOHM, F, 1/4W	1	PAVCTH
	R139	D1BD2203A066	M 220KOHM, F, 1/8W	1	
	R144	D0GB104JA068	M 100KOHM J 1/10W	1	PAVCTH
	R145	D0GB103JA072	M 10K OHM J 1/10W	1	PAVCTH
	R147	D0GD102JA052	M 1.0KOHM, J, 1/8W	1	
	R148	D0C2332JA134	M 3.3KOHM, J, 2W	1	PAVCTH
	R149	D0GF101JA048	M 100 OHM, J, 1/3W	1	PAVCTH
	R152	D0GD220JA052	M 22 OHM, J, 1/8W	1	
	R153	D0GD220JA052	M 22 OHM, J, 1/8W	1	
	R154	D0BF330JA051	M 33 OHM, J, 1/2W	1	PAVCTH
	R155	D0BF330JA051	M 33 OHM, J, 1/2W	1	PAVCTH
	R157	D0GB221JA069	M 220 OHM J 1/10W	1	PAVCTH
	R158	D0GB221JA069	M 220 OHM J 1/10W	1	PAVCTH
	R161	D1AB1204A023	M 1.2MOHM, F, 1/4W	1	PAVCTH
	R162	D1AB1604A023	M 1.6MOHM, F, 1/4W	1	PAVCTH
	R163	D1AB1204A023	M 1.2MOHM, F, 1/4W	1	PAVCTH
	R164	D1AB1604A023	M 1.6MOHM, F, 1/4W	1	PAVCTH
	R200	D1BD3303A066	M330KOHM.F.1/8W	1	PAVCTH
	R201	D1BD3303A066	M330KOHM.F.1/8W	1	PAVCTH
	R202	D1AB1604A023	M 1.6MOHM, F, 1/4W	1	PAVCTH
	R206	D0GB623ZA038	M 62KOHM, J, 1/10W	1	PAVCTH

Model No. : TH-P50ST50A/D/G/K/M/P/S/T/V/Z Parts List

Safety	Ref. No.	Part No.	Part Name & Description	Q'ty	Remarks
	R207	ERX2SJR30E	M 0.3HM, J, 2W	1	PAVCTH
	R209	D0GB100JA072	M 10 OHM J 1/10W	1	PAVCTH
	R214	D0GB102JA071	M 1KOHM, J, 1/10W	1	PAVCTH
	R215	D0GB222ZA038	M 2.2KOHM, J, 1/10W	1	PAVCTH
	R216	D0GB102JA071	M 1KOHM, J, 1/10W	1	PAVCTH
	R217	D0GB223JA070	M 22KOHM, J, 1/10W	1	PAVCTH
	R218	D0GB102JA071	M 1KOHM, J, 1/10W	1	PAVCTH
	R219	D0GB224JA068	M 220KOHM, J, 1/10W	1	PAVCTH
	R220	D0GB102JA071	M 1KOHM, J, 1/10W	1	PAVCTH
	R221	D0GB223ZA038	M 22KOHM, J, 1/10W	1	PAVCTH
	R222	D0GB224ZA041	M 220KOHM, J, 1/10W	1	PAVCTH
	R223	D0GB223ZA038	M 22KOHM, J, 1/10W	1	PAVCTH
	R224	D0B22R2JA032	M 2.2OHM, J, 2W	1	PAVCTH
	R225	D0GB103JA072	M 10K OHM J 1/10W	1	PAVCTH
	R226	D0GF220JA048	M 22 OHM. 1/4W	1	
	R228	D0GD221JA052	M 220 OHM, J 1/8W	1	
	R300	D0GZ181JA020	M 180 OHM, J, 1/2W	1	
	R301	D0GB103JA072	M 10K OHM J 1/10W	1	PAVCTH
	R302	D0GZ181JA020	M 180 OHM, J, 1/2W	1	
	R303	D0GB103JA072	M 10K OHM J 1/10W	1	PAVCTH
	R304	D0GD104JA052	M 100KOHM, J, 1/8W	1	
	R305	D0GD104JA052	M 100KOHM, J, 1/8W	1	
	R306	ERJ3GEYJ4R7	M 4.7HM, J, 1/10W	1	
	R307	ERJ3GEYJ4R7	M 4.7HM, J, 1/10W	1	
	R308	D0GB100JA072	M 10 OHM J 1/10W	1	PAVCTH
	R309	D0GB242ZA038	M 2.4KOHM, J, 1/10W	1	PAVCTH
	R310	D0GB123ZA038	M 12KOHM, J, 1/10W	1	PAVCTH
	R311	D0GB511J0002	M 510 OHM, J, 1/10W	1	PAVCTH
	R312	D0GB332JA072	M 3.3KOHM, J, 1/10W	1	PAVCTH
	R318	D0GB102JA071	M 1KOHM, J, 1/10W	1	PAVCTH
	R319	D0GB103JA072	M 10K OHM J 1/10W	1	PAVCTH
	R321	D0GD102JA052	M 1.0KOHM, J, 1/8W	1	
	R322	D0GB220JA072	M 22 OHM J 1/10W	1	PAVCTH
	R323	D0GB220JA072	M 22 OHM J 1/10W	1	PAVCTH
	R326	D0GZ220JA020	M 22 OHM, J, 1/2W	1	PAVCTH
	R327	D0GZ220JA020	M 22 OHM, J, 1/2W	1	PAVCTH
	R410	D0GB102JA071	M 1KOHM, J, 1/10W	1	PAVCTH
	R412	D0GB822ZA038	M 8.2KOHM, J, 1/10W	1	PAVCTH
	R414	D0GB473ZA038	M 47KOHM, J, 1/10W	1	PAVCTH
	R415	D1AB1803A023	M 180KOHM, F, 1/4W	1	PAVCTH
	R416	D0GB333JA070	M 33KOHM, J, 1/10W	1	PAVCTH
	R417	D0GB103JA072	M 10K OHM J 1/10W	1	PAVCTH
	R418	D0GB103JA072	M 10K OHM J 1/10W	1	PAVCTH
	R419	D0GB333JA070	M 33KOHM, J, 1/10W	1	PAVCTH
	R420	D0GD102JA052	M 1.0KOHM, J, 1/8W	1	
	R421	D0GB102JA071	M 1KOHM, J, 1/10W	1	PAVCTH
	R422	D0GD102JA052	M 1.0KOHM, J, 1/8W	1	
	R423	D0GB913ZA038	M 91KOHM, J, 1/10W	1	PAVCTH
	R424	D0GB103ZA038	M 10K OHM J 1/10W	1	PAVCTH
	R425	D0GB623ZA038	M 62KOHM, J, 1/10W	1	PAVCTH
	R426	D0GBR00J0004	M 0 OHM J 1/10W	1	
	R428	D0GB104JA068	M 100KOHM J 1/10W	1	PAVCTH
	R429	D0GB104JA068	M 100KOHM J 1/10W	1	PAVCTH
	R430	D0GB102JA071	M 1KOHM, J, 1/10W	1	PAVCTH
	R431	D0GB102JA071	M 1KOHM, J, 1/10W	1	PAVCTH
	R434	D0GB103JA072	M 10K OHM J 1/10W	1	PAVCTH
	R435	D0GB102JA071	M 1KOHM, J, 1/10W	1	PAVCTH
	R443	D1BB1542A073	M 15.4 KOHM, F, 1/10 W	1	PAVCTH
	R444	D0GB222JA072	M 2.2KOHM, J, 1/10W	1	PAVCTH
	R445	D0GB332JA072	M 3.3KOHM, J, 1/10W	1	PAVCTH
	R446	D0GB823ZA038	M 82KOHM, J, 1/10W	1	PAVCTH
	R447	D0GBR00J0004	M 0 OHM J 1/10W	1	

Model No. : TH-P50ST50A/D/G/K/M/P/S/T/V/Z Parts List

Safety	Ref. No.	Part No.	Part Name & Description	Q'ty	Remarks
	R448	D0GB102JA071	M 1KOHM,J,1/10W	1	PAVCTH
	R450	D0GB102JA071	M 1KOHM,J,1/10W	1	PAVCTH
	R451	D0GB103JA072	M 10K OHM J 1/10W	1	PAVCTH
	R452	D0GB103JA072	M 10K OHM J 1/10W	1	PAVCTH
	R457	D0GB223ZA038	M 22KOHM,J,1/10W	1	PAVCTH
	R458	D0GB333ZA038	M 33KOHM,J,1/10W	1	PAVCTH
	R460	D0GF391JA048	M 390 OHM. 1/3W	1	PAVCTH
	R462	D0GB102JA071	M 1KOHM,J,1/10W	1	PAVCTH
	R465	D0GB103JA072	M 10K OHM J 1/10W	1	PAVCTH
	R469	D0GFR22JA020	M 0.22OHM, J,1/4W	1	PAVCTH
	R470	D0GFR10JA020	M 1 OHM,J,1/3W	1	PAVCTH
	R471	D0GFR22JA020	M 0.22OHM, J,1/4W	1	PAVCTH
	R474	D0GB102JA071	M 1KOHM,J,1/10W	1	PAVCTH
	R476	D0GB102JA071	M 1KOHM,J,1/10W	1	PAVCTH
	R477	D0GB102JA071	M 1KOHM,J,1/10W	1	PAVCTH
	R478	D0GB103JA072	M 10K OHM J 1/10W	1	PAVCTH
	R479	D0GB102JA071	M 1KOHM,J,1/10W	1	PAVCTH
	R488	D0GB102JA071	M 1KOHM,J,1/10W	1	PAVCTH
	R489	D0GB473ZA038	M 47KOHM, J,1/10W	1	PAVCTH
	R500	D0GB512JA072	M 5.1KOHM, J,1/10W	1	PAVCTH
	R501	D0GB224JA068	M 22KOHM,J,1/10W	1	PAVCTH
	R503	D0GB102JA071	M 1KOHM,J,1/10W	1	PAVCTH
	R504	D0GB512JA072	M 5.1KOHM, J,1/10W	1	PAVCTH
	R505	D0GB224JA068	M 22KOHM,J,1/10W	1	PAVCTH
	R506	D0GB104JA068	M 100KOHM J 1/10W	1	PAVCTH
	R508	D0GD102JA052	M 1.0KOHM,J,1/8W	1	
	R512	D0GB223JA070	M 22KOHM,J,1/10W	1	PAVCTH
	R513	D0GB103JA072	M 10K OHM J 1/10W	1	PAVCTH
	R514	D0GB103JA072	M 10K OHM J 1/10W	1	PAVCTH
	R515	D0GB102JA071	M 1KOHM,J,1/10W	1	PAVCTH
	R517	D0GD101JA052	M 100 OHM,J,1/8W	1	
	R518	D0GFR47JA020	M 0.47OHM,J,1/4W	1	PAVCTH
	R519	D0GFR47JA020	M 0.47OHM,J,1/4W	1	PAVCTH
	R520	D0GFR47JA020	M 0.47OHM,J,1/4W	1	PAVCTH
	R521	D0GB102JA071	M 1KOHM,J,1/10W	1	PAVCTH
	R522	D0GB103JA072	M 10K OHM J 1/10W	1	PAVCTH
	R523	D0GB102JA071	M 1KOHM,J,1/10W	1	PAVCTH
	R524	D0GB103JA072	M 10K OHM J 1/10W	1	PAVCTH
	R525	D0GB102JA071	M 1KOHM,J,1/10W	1	PAVCTH
	R526	D0GB103JA072	M 10K OHM J 1/10W	1	PAVCTH
	R527	D0GB101JA069	M 100 OHM,J,1/10W	1	PAVCTH
	R528	D0GB104JA068	M 100KOHM J 1/10W	1	PAVCTH
	R531	D0GBR47JA073	M 0.47 OHM,J,1/10W	1	PAVCTH
	R600	D0B2R10JA032	M 0.1OHM,J,2W	1	PAVCTH
	R601	D0GF513JA048	M 51KOHM,J,1/4W	1	PAVCTH
	R602	D0GF513JA048	M 51KOHM,J,1/4W	1	PAVCTH
	R603	D0GF513JA048	M 51KOHM,J,1/4W	1	PAVCTH
	R604	D0GB333ZA038	M 33KOHM, J,1/10W	1	PAVCTH
	R605	D0GB273ZA038	M 27KOHM,J,1/10W	1	PAVCTH
	R606	D0GB272ZA038	M 2.7KOHM,J,1/10W	1	PAVCTH
	R608	D0GB103JA072	M 10K OHM J 1/10W	1	PAVCTH
	R609	D0B2R10JA032	M 0.1OHM,J,2W	1	PAVCTH
	R610	D0GF333JA048	M 33 KOHM. 1/3W	1	PAVCTH
	R611	D0GF333JA048	M 33 KOHM. 1/3W	1	PAVCTH
	R701	D1AB1803A023	M 180KOHM,F,1/4W	1	PAVCTH
	R702	D0GB363ZA038	M 36KOHM, J,1/10W	1	PAVCTH
	R706	D0GB511ZA037	M 510 OHM,J,1/10W	1	PAVCTH
	R707	D0GB272ZA038	M 2.7KOHM,J,1/10W	1	PAVCTH
	R710	D0GBR00J0004	M 0 OHM J 1/10W	1	
	R711	D0GB222JA072	M 2.2KOHM,J,1/10W	1	PAVCTH
	R712	D0GB102JA071	M 1KOHM,J,1/10W	1	PAVCTH
	R713	D0GB102JA071	M 1KOHM,J,1/10W	1	PAVCTH

Model No. : TH-P50ST50A/D/G/K/M/P/S/T/V/Z Parts List

Safety	Ref. No.	Part No.	Part Name & Description	Q'ty	Remarks
	R714	D0GB104JA068	M 100KOHM J 1/10W	1	PAVCTH
	R715	D0GD221JA052	M 220 OHM, J 1/8W	1	
	R716	D0GB751JA069	M 750 OHM, J, 1/10W	1	PAVCTH
	R717	D0GD102JA052	M 1.0KOHM, J, 1/8W	1	
	R718	D0GB223ZA038	M 22KOHM, J, 1/10W	1	PAVCTH
	R719	D0GB333ZA038	M 33KOHM, J, 1/10W	1	PAVCTH
	R720	D0GF391JA048	M 390 OHM. 1/3W	1	PAVCTH
	R721	D0GFR22JA020	M 0.22OHM, J, 1/4W	1	PAVCTH
	R722	D0GFR22JA020	M 0.22OHM, J, 1/4W	1	PAVCTH
	R723	D0GFR10JA020	M 1 OHM, J, 1/3W	1	PAVCTH
	R724	D0GB222JA072	M 2.2KOHM, J, 1/10W	1	PAVCTH
	R725	D0GB102JA071	M 1KOHM, J, 1/10W	1	PAVCTH
	R726	D0GD221JA052	M 220 OHM, J 1/8W	1	
	R727	D0C2473JA134	M 47KOHM, J, 2W	1	PAVCTH
	R728	D0C2473JA134	M 47KOHM, J, 2W	1	PAVCTH
	R751	D0GB511J0002	M 510 OHM, J, 1/10W	1	PAVCTH
	R0902	D0GA473JA023	M 47KOHM, J, 1/16W	1	
	R0903	D0GA272JA023	M 2.7KOHM, J.1/16W	1	
	R0904	D0GA272JA023	M 2.7KOHM, J.1/16W	1	
	R0905	D0GA272JA023	M 2.7KOHM, J.1/16W	1	
	R0906	D0GA272JA023	M 2.7KOHM, J.1/16W	1	
	R0909	D0GA272JA023	M 2.7KOHM, J.1/16W	1	
	R0910	D0GA272JA023	M 2.7KOHM, J.1/16W	1	
	R0911	D1HY3324A012	NETWORK RESISTER	1	PAVCTH
	R0912	D0GA101JA023	M 100 OHM, J, 1/16W	1	
	R0913	D0GA101JA023	M 100 OHM, J, 1/16W	1	
	R0936	D0GA360JA023	M 36 OHM, J, 1/16W	1	
	R0937	D0GA360JA023	M 36 OHM, J, 1/16W	1	
	R0941	D0GA360JA023	M 36 OHM, J, 1/16W	1	
	R0942	D0GA360JA023	M 36 OHM, J, 1/16W	1	
	R0943	D0GA360JA023	M 36 OHM, J, 1/16W	1	
	R0944	D0GA360JA023	M 36 OHM, J, 1/16W	1	
	R0945	D0GA360JA023	M 36 OHM, J, 1/16W	1	
	R0946	D0GA360JA023	M 36 OHM, J, 1/16W	1	
	R0949	D0GA360JA023	M 36 OHM, J, 1/16W	1	
	R0950	D0GA360JA023	M 36 OHM, J, 1/16W	1	
	R0952	D0GA102JA023	M1KOHM, J.1/16 W	1	
	R0953	D0GA101JA023	M 100 OHM, J, 1/16W	1	
	R0954	D0GA101JA023	M 100 OHM, J, 1/16W	1	
	R2001	D0GA103JA023	M10KOHM, J.1/16 W	1	
	R2004	D0GA103JA023	M10KOHM, J.1/16 W	1	
	R2005	D0GA101JA023	M 100 OHM, J, 1/16W	1	
	R2008	D0GA472JA023	M 4.7KOHM, J, 1/16W	1	
	R2012	D0GA103JA023	M10KOHM, J.1/16 W	1	
	R2015	D0GA104JA023	M 100KOHM, J.1/16 W	1	
	R2016	D0GA104JA023	M 100KOHM, J.1/16 W	1	
	R2017	D0GA102JA023	M1KOHM, J.1/16 W	1	
	R2018	D0GA102JA023	M1KOHM, J.1/16 W	1	
	R2023	D0GA472JA023	M 4.7KOHM, J, 1/16W	1	
	R2024	D0GA223JA023	M 22K OHM J 1/16W	1	
	R2025	D0GA103JA023	M10KOHM, J.1/16 W	1	
	R2033	D0GA103JA023	M10KOHM, J.1/16 W	1	
	R2035	D0GA223JA023	M 22K OHM J 1/16W	1	
	R2036	D0GA223JA023	M 22K OHM J 1/16W	1	
	R2038	D0GA162JA023	M 1.6KOHM, J, 1/16W	1	PAVCTH
	R2039	D0GA103JA023	M10KOHM, J.1/16 W	1	
	R2041	D0GA433JA023	M 43KOHM, J, 1/16W	1	PAVCTH
	R2042	D0GA102JA023	M1KOHM, J.1/16 W	1	
	R2045	D1BA7151A023	M 7.15KOHM, F 1/16 W	1	PAVCTH
	R2046	D0GA102JA023	M1KOHM, J.1/16 W	1	
	R2047	D0GAR00J0005	M 0 OHM, 1/16W	1	
	R2054	D0GA223JA023	M 22K OHM J 1/16W	1	

Model No. : TH-P50ST50A/D/G/K/M/P/S/T/V/Z Parts List

Safety	Ref. No.	Part No.	Part Name & Description	Q'ty	Remarks
	R2055	D0GA223JA023	M 22K OHM J 1/16W	1	
	R2057	D0GA103JA023	M10KOHM, J.1/16 W	1	
	R2058	D0GA104JA023	M 100KOHM, J.1/16 W	1	
	R2059	D0GA102JA023	M1KOHM, J.1/16 W	1	
	R2060	D0GA102JA023	M1KOHM, J.1/16 W	1	
	R2810	D0GA470JA023	M 47 OHM, J,1/16W	1	
	R2811	D0GA104JA023	M100KOHM, J.1/16 W	1	
	R2812	D0GA224JA023	M 220KOHM J 1/16W	1	
	R2813	D0GA223JA023	M 22K OHM J 1/16W	1	
	R2814	D0GA103JA023	M10KOHM, J.1/16 W	1	
	R2815	D0GA473JA023	M 47KOHM, J,1/16W	1	
	R2816	D1BA9530A014	M 953 OHM,F. 1/16 W	1	
	R2817	D0GA223JA023	M 22K OHM J 1/16W	1	
	R2818	D0GA473JA023	M 47KOHM, J,1/16W	1	
	R2819	D1BA2261A023	M 2.26 KOHM,F.1/16 W	1	PAVCTH
	R2834	D0GA122JA023	M 1.2KOHM, J,1/16W	1	
	R3001	D0GA103JA023	M10KOHM, J.1/16 W	1	
	R3002	D0GA103JA023	M10KOHM, J.1/16 W	1	
	R3003	D0GA103JA023	M10KOHM, J.1/16 W	1	
	R3004	D0GA103JA023	M10KOHM, J.1/16 W	1	
	R3008	D1BA1003A023	M 100KOHM,F,1/16W	1	PAVCTH
	R3009	D1BA1003A023	M 100KOHM,F,1/16W	1	PAVCTH
	R3010	D0GA203JA023	M 20K OHM J.1/16W	1	
	R3011	D0GA203JA023	M 20K OHM J.1/16W	1	
	R3106	D0GA333JA023	M 33KOHM,J,1/16W	1	
	R3107	D0GA333JA023	M 33KOHM,J,1/16W	1	
	R3142	D1BF75R0A073	M 75.0 OHM,F.1/4 W	1	PAVCTH
	R3167	D0GA333JA023	M 33KOHM,J,1/16W	1	
	R3168	D0GA333JA023	M 33KOHM,J,1/16W	1	
	R3171	D0GA272JA023	M 2.7KOHM, J.1/16W	1	
	R3172	D0GA272JA023	M 2.7KOHM, J.1/16W	1	
	R3173	D1BA1003A023	M 100KOHM,F,1/16W	1	PAVCTH
	R3181	D1BD75R0A066	M 75.0 OHM,F.1/8 W	1	
	R3182	D1BD75R0A066	M 75.0 OHM,F.1/8 W	1	
	R3183	D1BD75R0A066	M 75.0 OHM,F.1/8 W	1	
	R3188	D1BA1003A023	M 100KOHM,F,1/16W	1	PAVCTH
	R3192	D1HY2204A012	NETWORK RESISTER	1	PAVCTH
	R3199	D0GA104JA023	M100KOHM, J.1/16 W	1	
	R3200	D0GA104JA023	M100KOHM, J.1/16 W	1	
	R3201	D1BD75R0A066	M 75.0 OHM,F.1/8 W	1	
	R3203	D1BD75R0A066	M 75.0 OHM,F.1/8 W	1	
	R3207	D0GA472JA023	M 4.7KOHM, J,1/16W	1	
	R3209	D0GA472JA023	M 4.7KOHM, J,1/16W	1	
	R3210	D0GA220JA023	M22 OHM, J.1/16 W	1	
	R3213	D0GA220JA023	M22 OHM, J.1/16 W	1	
	R3214	D0GA473JA023	M 47KOHM, J,1/16W	1	
	R3216	D1BD75R0A066	M 75.0 OHM,F.1/8 W	1	
	R3220	D0GA101JA023	M 100 OHM, J,1/16W	1	
	R3221	D1HY2204A012	NETWORK RESISTER	1	PAVCTH
	R3225	D0GA220JA023	M22 OHM, J.1/16 W	1	
	R3226	D0GA220JA023	M22 OHM, J.1/16 W	1	
	R3227	D0GA220JA023	M22 OHM, J.1/16 W	1	
	R3290	D0GA473JA023	M 47KOHM, J,1/16W	1	
	R3291	D0GA473JA023	M 47KOHM, J,1/16W	1	
	R3312	D0GA103JA023	M10KOHM, J.1/16 W	1	
	R3314	D0GA103JA023	M10KOHM, J.1/16 W	1	
	R3315	D0GA101JA023	M 100 OHM, J,1/16W	1	
	R3316	D0GA473JA023	M 47KOHM, J,1/16W	1	
	R3317	D0GA103JA023	M10KOHM, J.1/16 W	1	
	R3319	D0GA101JA023	M 100 OHM, J,1/16W	1	
	R3320	D0GA101JA023	M 100 OHM, J,1/16W	1	
	R3322	D0GA473JA023	M 47KOHM, J,1/16W	1	

Model No. : TH-P50ST50A/D/G/K/M/P/S/T/V/Z Parts List

Safety	Ref. No.	Part No.	Part Name & Description	Q'ty	Remarks
	R3323	D0GA103JA023	M10KOHM, J.1/16 W	1	
	R3324	D0GA102JA023	M1KOHM, J.1/16 W	1	
	R3342	D0GA331JA023	M 330 OHM, J,1/16W	1	
	R3343	D0GA331JA023	M 330 OHM, J,1/16W	1	
	R3346	D0GAR00J0005	M 0 OHM, 1/16W	1	
	R3347	D0GAR00J0005	M 0 OHM, 1/16W	1	
	R4513	D1BA1600A023	M 160 OHM,F.1/16 W	1	PAVCTH
	R4514	D1BA82R0A014	M 82 OHM,F.1/16 W	1	PAVCTH
	R4702	D0GA103JA023	M10KOHM, J.1/16 W	1	
	R4708	D0GA103JA023	M10KOHM, J.1/16 W	1	
	R4709	D0GA103JA023	M10KOHM, J.1/16 W	1	
	R4711	D0GA102JA023	M1KOHM, J.1/16 W	1	
	R4712	D0GA473JA023	M 47KOHM, J,1/16W	1	
	R4713	D0GA473JA023	M 47KOHM, J,1/16W	1	
	R4714	D0GA473JA023	M 47KOHM, J,1/16W	1	
	R4715	D0GA103JA023	M10KOHM, J.1/16 W	1	
	R4716	D0GA473JA023	M 47KOHM, J,1/16W	1	
	R4717	D0GA473JA023	M 47KOHM, J,1/16W	1	
	R4718	D0GA473JA023	M 47KOHM, J,1/16W	1	
	R4721	D0GA103JA023	M10KOHM, J.1/16 W	1	
	R4722	D0GA103JA023	M10KOHM, J.1/16 W	1	
	R4724	D0GA102JA023	M1KOHM, J.1/16 W	1	
	R4728	D0GA103JA023	M10KOHM, J.1/16 W	1	
	R4733	D0GA473JA023	M 47KOHM, J,1/16W	1	
	R4734	D0GA473JA023	M 47KOHM, J,1/16W	1	
	R4735	D0GA473JA023	M 47KOHM, J,1/16W	1	
	R4748	D0GA680JA023	M 68 OHM, J,1/16W	1	
	R4749	D0GA680JA023	M 68 OHM, J,1/16W	1	
	R4750	D0GA680JA023	M 68 OHM, J,1/16W	1	
	R4751	D0GA680JA023	M 68 OHM, J,1/16W	1	
	R4779	D0GA360JA023	M 36 OHM, J,1/16W	1	
	R4781	D0GA680JA023	M 68 OHM, J,1/16W	1	
	R4785	D0GA680JA023	M 68 OHM, J,1/16W	1	
	R4788	D0GA103JA023	M10KOHM, J.1/16 W	1	
	R4794	D0GA103JA023	M10KOHM, J.1/16 W	1	
	R4795	D0GA103JA023	M10KOHM, J.1/16 W	1	
	R4797	D0GA102JA023	M1KOHM, J.1/16 W	1	
	R4798	D0GA273JA023	M 27K OHM J ,1/16W	1	
	R4900	D0GFR00J0005	M 0 OHM,J,1/3W	1	
	R4901	D1HY6804A012	NETWORK RESISTER	1	PAVCTH
	R4902	D0GA680JA023	M 68 OHM, J,1/16W	1	
	R4906	D0GA472JA023	M 4.7KOHM, J,1/16W	1	
	R4907	D0GA102JA023	M1KOHM, J.1/16 W	1	
	R4908	D0GA102JA023	M1KOHM, J.1/16 W	1	
	R4917	D0GA472JA023	M 4.7KOHM, J,1/16W	1	
	R4918	D0GA472JA023	M 4.7KOHM, J,1/16W	1	
	R4958	D0GA103JA023	M10KOHM, J.1/16 W	1	
	R4959	D0GA103JA023	M10KOHM, J.1/16 W	1	
	R5000	D0GA102JA023	M1KOHM, J.1/16 W	1	
	R5001	D0GA473JA023	M 47KOHM, J,1/16W	1	
	R5002	D0GA103JA023	M10KOHM, J.1/16 W	1	
	R5008	D0GA473JA023	M 47KOHM, J,1/16W	1	
	R5009	D0GA103JA023	M10KOHM, J.1/16 W	1	
	R5010	D0GA272JA023	M 2.7KOHM, J.1/16W	1	
	R5011	D0GA104JA023	M100KOHM, J.1/16 W	1	
	R5012	D0GA223JA023	M 22K OHM J 1/16W	1	
	R5013	D0GA103JA023	M10KOHM, J.1/16 W	1	
	R5014	D0GA103JA023	M10KOHM, J.1/16 W	1	
	R5932	D0GA103JA023	M10KOHM, J.1/16 W	1	
	R6726	D0GA681JA023	M680 OHM, J,1/16W	1	
	R6727	D0GA681JA023	M680 OHM, J,1/16W	1	
	R6731	D0GA103JA023	M10KOHM, J.1/16 W	1	

Model No. : TH-P50ST50A/D/G/K/M/P/S/T/V/Z Parts List

Safety	Ref. No.	Part No.	Part Name & Description	Q'ty	Remarks
	R6732	D0GA103JA023	M10KOHM, J.1/16 W	1	
	R8008	D0GA331JA023	M 330 OHM, J,1/16W	1	
	R8009	D0GA1R1JA023	M 1.1OHM, J,1/16W	1	PAVCTH
	R8100	D1BB2001A197	M 2 KOHM,F.1/10 W	1	PAVCTH
	R8101	D1BB1051A087	M 1.05 KOHM,F.1/10 W	1	PAVCTH
	R8111	D1BB2001A197	M 2 KOHM,F.1/10 W	1	PAVCTH
	R8112	D1BB1961A087	M 1.96 KOHM,F.1/10 W	1	PAVCTH
	R8200	D1BA2400A023	M 240 OHM,F.1/16 W	1	PAVCTH
	R8203	D1BA2700A023	M 270 OHM,F.1/16 W	1	PAVCTH
	R8204	D1BA2700A023	M 270 OHM,F.1/16 W	1	PAVCTH
	R8205	D1BA2700A023	M 270 OHM,F.1/16 W	1	PAVCTH
	R8206	D1BA2700A023	M 270 OHM,F.1/16 W	1	PAVCTH
	R8207	D1BA2700A023	M 270 OHM,F.1/16 W	1	PAVCTH
	R8208	D1BA2700A023	M 270 OHM,F.1/16 W	1	PAVCTH
	R8217	D0GA221JA023	M220 OHM, J.1/16 W	1	
	R8218	D0GA221JA023	M220 OHM, J.1/16 W	1	
	R8219	D1BA2400A023	M 240 OHM,F.1/16 W	1	PAVCTH
	R8220	D1BA2400A023	M 240 OHM,F.1/16 W	1	PAVCTH
	R8221	D0GA103JA023	M10KOHM, J.1/16 W	1	
	R8230	D1BA2700A023	M 270 OHM,F.1/16 W	1	PAVCTH
	R8231	D1BA2700A023	M 270 OHM,F.1/16 W	1	PAVCTH
	R8232	D1BA2700A023	M 270 OHM,F.1/16 W	1	PAVCTH
	R8233	D1BA2700A023	M 270 OHM,F.1/16 W	1	PAVCTH
	R8234	D0GA220JA023	M22 OHM, J.1/16 W	1	
	R8235	D0GA220JA023	M22 OHM, J.1/16 W	1	
	R8236	D0GA220JA023	M22 OHM, J.1/16 W	1	
	R8237	D0GA220JA023	M22 OHM, J.1/16 W	1	
	R8238	D0GA220JA023	M22 OHM, J.1/16 W	1	
	R8240	D1HY2208A012	NETWORK RESISTER	1	PAVCTH
	R8241	D1HY2204A012	NETWORK RESISTER	1	PAVCTH
	R8242	D1HY2204A012	NETWORK RESISTER	1	PAVCTH
	R8243	D1HY2204A012	NETWORK RESISTER	1	PAVCTH
	R8300	D0GA471JA023	M 470OHM, J,1/16W	1	
	R8301	D1BA6201A023	M 6.2 KOHM,F.1/16 W	1	PAVCTH
	R8302	D0GA360JA023	M 36 OHM, J,1/16W	1	
	R8303	D0GA360JA023	M 36 OHM, J,1/16W	1	
	R8304	D0GA360JA023	M 36 OHM, J,1/16W	1	
	R8305	D0GA360JA023	M 36 OHM, J,1/16W	1	
	R8418	D0GA103JA023	M10KOHM, J.1/16 W	1	
	R8441	D0GA103JA023	M10KOHM, J.1/16 W	1	
	R8444	D0GA103JA023	M10KOHM, J.1/16 W	1	
	R8502	D0GA103JA023	M10KOHM, J.1/16 W	1	
	R8600	D0GAR00J0005	M 0 OHM, 1/16W	1	
	R8601	D1BA75R0A023	M 75.0 OHM,F.1/16 W	1	PAVCTH
	R8602	D1BA75R0A023	M 75.0 OHM,F.1/16 W	1	PAVCTH
	R8603	D1BA75R0A023	M 75.0 OHM,F.1/16 W	1	PAVCTH
	R8604	D1BA75R0A023	M 75.0 OHM,F.1/16 W	1	PAVCTH
	R8606	D1BA6200A014	M 620 OHM,F.1/16 W	1	PAVCTH
	R8607	D0GA103JA023	M10KOHM, J.1/16 W	1	
	R8608	D0GA103JA023	M10KOHM, J.1/16 W	1	
	R8609	D0GA103JA023	M10KOHM, J.1/16 W	1	
	R8613	D0GA104JA023	M100KOHM, J.1/16 W	1	
	R8616	D0GA473JA023	M 47KOHM, J,1/16W	1	
	R8617	D0GA103JA023	M10KOHM, J.1/16 W	1	
	R8618	D0GA103JA023	M10KOHM, J.1/16 W	1	
	R8620	D0GA103JA023	M10KOHM, J.1/16 W	1	
	R8621	D0GA103JA023	M10KOHM, J.1/16 W	1	
	R8624	D0GA680JA023	M 68 OHM, J,1/16W	1	
	R8625	D0GA680JA023	M 68 OHM, J,1/16W	1	
	R8626	D0GA680JA023	M 68 OHM, J,1/16W	1	
	R8627	D0GA680JA023	M 68 OHM, J,1/16W	1	
	R8628	D0GA680JA023	M 68 OHM, J,1/16W	1	

Model No. : TH-P50ST50A/D/G/K/M/P/S/T/V/Z Parts List

Safety	Ref. No.	Part No.	Part Name & Description	Q'ty	Remarks
	R8629	D0GA680JA023	M 68 OHM, J,1/16W	1	
	R8630	D1HY1038A012	NETWORK RESISTER	1	PAVCTH
	R8632	D1HY6804A012	NETWORK RESISTER	1	PAVCTH
	R8634	D1HY6804A012	NETWORK RESISTER	1	PAVCTH
	R8636	D0GA360JA023	M 36 OHM, J,1/16W	1	
	R8637	D0GA272JA023	M 2.7KOHM, J,1/16W	1	
	R8638	D0GA272JA023	M 2.7KOHM, J,1/16W	1	
	R8639	D0GA103JA023	M10KOHM, J,1/16 W	1	
	R8640	D0GA103JA023	M10KOHM, J,1/16 W	1	
	R8641	D1HYR004A024	NETWORK RESISTER	1	(D) (G) (K) (M) (P) (S) (V) PAVCTH
	R8642	D1HYR004A024	NETWORK RESISTER	1	(D) (G) (K) (M) (P) (S) (V) PAVCTH
	R8643	D0GA272JA023	M 2.7KOHM, J,1/16W	1	
	R8647	D1HYR004A024	NETWORK RESISTER	1	(D) (G) (K) (M) (P) (S) (V) PAVCTH
	R8648	D1HYR004A024	NETWORK RESISTER	1	(D) (G) (K) (M) (P) (S) (V) PAVCTH
	R8649	D0GA104JA023	M100KOHM, J,1/16 W	1	
	R8650	D0GA472JA023	M 4.7KOHM, J,1/16W	1	
	R8651	D0GA152JA023	M 1.5KOHM, J,0.063W	1	
	R8654	D0GA680JA023	M 68 OHM, J,1/16W	1	
	R8655	D0GA680JA023	M 68 OHM, J,1/16W	1	
	R8656	D0GA680JA023	M 68 OHM, J,1/16W	1	
	R8657	D0GA680JA023	M 68 OHM, J,1/16W	1	
	R8658	D0GA680JA023	M 68 OHM, J,1/16W	1	
	R8659	D0GA680JA023	M 68 OHM, J,1/16W	1	
	R8660	D0GA680JA023	M 68 OHM, J,1/16W	1	
	R8661	D0GA680JA023	M 68 OHM, J,1/16W	1	
	R8662	D0GA680JA023	M 68 OHM, J,1/16W	1	
	R8663	D0GA680JA023	M 68 OHM, J,1/16W	1	
	R8664	D0GA680JA023	M 68 OHM, J,1/16W	1	
	R8665	D0GA680JA023	M 68 OHM, J,1/16W	1	
	R8666	D0GA472JA023	M 4.7KOHM, J,1/16W	1	
	R8668	D0GA472JA023	M 4.7KOHM, J,1/16W	1	
	R8670	D1BA2491A023	M 2.49KOHM,F,1/16W	1	PAVCTH
	R8681	D0GA472JA023	M 4.7KOHM, J,1/16W	1	
	R8683	D0GA472JA023	M 4.7KOHM, J,1/16W	1	
	R8686	D1BA30R0A014	M 30 OHM,J,1/16 W	1	PAVCTH
	R8689	D0GA104JA023	M100KOHM, J,1/16 W	1	
	R8692	D0GDR00J0004	M 0 OHM, 1/8W	1	
	R8694	D1BA1822A023	M 18.2KOHM,F,1/16 W	1	PAVCTH
	R8695	D1BA3742A023	M 37.4 KOHM,F,1/16 W	1	PAVCTH
	R8705	D0GA103JA023	M10KOHM, J,1/16 W	1	
	R8707	D0GBR00J0004	M 0 OHM J 1/10W	1	
	R8725	D0GA473JA023	M 47KOHM, J,1/16W	1	
	R8741	D0GA360JA023	M 36 OHM, J,1/16W	1	
	R8742	D0GA223JA023	M 22K OHM J 1/16W	1	
	R8745	D0GAR00J0005	M 0 OHM, 1/16W	1	
	R8746	D1BA6802A023	M 68 KOHM,F,1/16 W	1	PAVCTH
	R8747	D1BA2102A023	M 21KOHM,F,1/16W	1	PAVCTH
	R8751	D0GB563ZA038	M 56KOHM, J,1/10W	1	PAVCTH
	R8752	D1BA1002A023	M 10KOHM,F,1/16W	1	PAVCTH
	R8765	D0GBR00J0004	M 0 OHM J 1/10W	1	
	R8771	D0GA272JA023	M 2.7KOHM, J,1/16W	1	
	R8772	D0GA332JA023	M 3.3KOHM, J,1/16W	1	
	R8773	D0GA102JA023	M1KOHM, J,1/16 W	1	
	R8775	D0GA104JA023	M100KOHM, J,1/16 W	1	
	R8776	D0GA102JA023	M1KOHM, J,1/16 W	1	
	R8777	D0GA472JA023	M 4.7KOHM, J,1/16W	1	
	R8778	D0GA472JA023	M 4.7KOHM, J,1/16W	1	
	R8785	D0GA103JA023	M10KOHM, J,1/16 W	1	
	R8787	D0GA472JA023	M 4.7KOHM, J,1/16W	1	
	R8788	D0GA102JA023	M1KOHM, J,1/16 W	1	
	R8792	D0GA103JA023	M10KOHM, J,1/16 W	1	
	R8797	D1BA1200A023	M 120 OHM,F,1/16 W	1	PAVCTH

Model No. : TH-P50ST50A/D/G/K/M/P/S/T/V/Z Parts List

Safety	Ref. No.	Part No.	Part Name & Description	Q'ty	Remarks
	R8798	D1BA56R0A023	M 56 OHM, F.1/16 W	1	PAVCTH
	R8799	D1BA3742A023	M 37.4 KOHM, F.1/16 W	1	PAVCTH
	R8801	D0GA103JA023	M10KOHM, J.1/16 W	1	
	R8802	D0GA103JA023	M10KOHM, J.1/16 W	1	
	R8804	D0GA103JA023	M10KOHM, J.1/16 W	1	
	R8806	D0GA103JA023	M10KOHM, J.1/16 W	1	
	R8807	D0GA103JA023	M10KOHM, J.1/16 W	1	
	R8810	D0GA103JA023	M10KOHM, J.1/16 W	1	
	R8811	D0GA103JA023	M10KOHM, J.1/16 W	1	
	R8812	D0GA243JA023	M 24K OHM J 0.063W	1	
	R8815	D0GA103JA023	M10KOHM, J.1/16 W	1	
	R8817	D0GA103JA023	M10KOHM, J.1/16 W	1	
	R8824	D0GA103JA023	M10KOHM, J.1/16 W	1	
	R8826	D0GA103JA023	M10KOHM, J.1/16 W	1	
	R8827	D0GA103JA023	M10KOHM, J.1/16 W	1	
	R8833	D0GA103JA023	M10KOHM, J.1/16 W	1	
	R8848	D0GA103JA023	M10KOHM, J.1/16 W	1	
	R8850	D0GA103JA023	M10KOHM, J.1/16 W	1	
	R8851	D0GA103JA023	M10KOHM, J.1/16 W	1	
	R8853	D0GA103JA023	M10KOHM, J.1/16 W	1	
	R8903	D1HY6808A012	NETWORK RESISTER	1	PAVCTH
	R8906	D0GA472JA023	M 4.7KOHM, J,1/16W	1	
	R8909	D0GA272JA023	M 2.7KOHM, J.1/16W	1	
	R8910	D0GA103JA023	M10KOHM, J.1/16 W	1	
	R8914	D0GA472JA023	M 4.7KOHM, J,1/16W	1	
	R8917	D0GA103JA023	M10KOHM, J.1/16 W	1	
	R8918	D0GA103JA023	M10KOHM, J.1/16 W	1	
	R8919	D0GA103JA023	M10KOHM, J.1/16 W	1	
	R8920	D0GA103JA023	M10KOHM, J.1/16 W	1	
	R8921	D0GA223JA023	M 22K OHM J 1/16W	1	
	R8922	D0GA103JA023	M10KOHM, J.1/16 W	1	
	R8923	D0GA103JA023	M10KOHM, J.1/16 W	1	
	R8924	D0GA103JA023	M10KOHM, J.1/16 W	1	
	R9039	D0GA473JA023	M 47KOHM, J,1/16W	1	
	R9105	D0GA473JA023	M 47KOHM, J,1/16W	1	
	R9114	D0GA360JA023	M 36 OHM, J,1/16W	1	
	R9117	D0GB203ZA038	M 20KOHM J 1/10W	1	PAVCTH
	R9118	D0GB123ZA038	M 12KOHM, J.1/10W	1	PAVCTH
	R9126	D0GA101JA023	M 100 OHM, J,1/16W	1	
	R9160	D0GA103JA023	M10KOHM, J.1/16 W	1	
	R9163	D0GA103JA023	M10KOHM, J.1/16 W	1	
	R9164	D0GA103JA023	M10KOHM, J.1/16 W	1	
	R9165	D0GA472JA023	M 4.7KOHM, J,1/16W	1	
	R9168	D0GA472JA023	M 4.7KOHM, J,1/16W	1	
	R9170	D0GAR00J0005	M 0 OHM, 1/16W	1	
	R9198	D1HY1014A022	NETWORK RESISTER	1	PAVCTH
	R9199	D0GA473JA023	M 47KOHM, J,1/16W	1	
	R9205	D0GA122JA023	M 1.2KOHM, J,1/16W	1	
	R9206	D0GA472JA023	M 4.7KOHM, J,1/16W	1	
	R9208	D1HY6804A012	NETWORK RESISTER	1	PAVCTH
	R9209	D1HY6808A012	NETWORK RESISTER	1	PAVCTH
	R9231	D0GA101JA023	M 100 OHM, J,1/16W	1	
	R9232	D0GA101JA023	M 100 OHM, J,1/16W	1	
	R9246	D0GA104JA023	M100KOHM, J.1/16 W	1	
	R9247	D0GA680JA023	M 68 OHM, J,1/16W	1	
	R9248	D0GA473JA023	M 47KOHM, J,1/16W	1	
	R9249	D0GA472JA023	M 4.7KOHM, J,1/16W	1	
	R9250	D0GA472JA023	M 4.7KOHM, J,1/16W	1	
	R9252	D0GA360JA023	M 36 OHM, J,1/16W	1	
	R9255	D0GA360JA023	M 36 OHM, J,1/16W	1	
	R9256	D0GA272JA023	M 2.7KOHM, J.1/16W	1	
	R9320	D0GA182JA023	M 1.8KOHM, J,0.063W	1	

Model No. : TH-P50ST50A/D/G/K/M/P/S/T/V/Z Parts List

Safety	Ref. No.	Part No.	Part Name & Description	Q'ty	Remarks
	R9321	D0GA105JA023	M 1M OHM, J,1/16W	1	
	R9324	D0GA162JA023	M 1.6KOHM, J,1/16W	1	PAVCTH
	R9325	D0GA162JA023	M 1.6KOHM, J,1/16W	1	PAVCTH
	R9326	D0GA162JA023	M 1.6KOHM, J,1/16W	1	PAVCTH
	R9327	D0GA162JA023	M 1.6KOHM, J,1/16W	1	PAVCTH
	R9400	D1HY1038A012	NETWORK RESISTER	1	PAVCTH
	R9401	D1HY1038A012	NETWORK RESISTER	1	PAVCTH
	R9404	D1HY1038A012	NETWORK RESISTER	1	PAVCTH
	R9405	D1HY6808A012	NETWORK RESISTER	1	PAVCTH
	R9412	D0GAR00J0005	M 0 OHM, 1/16W	1	
	R9422	D0GAR00J0005	M 0 OHM, 1/16W	1	
	R9503	D0GA103JA023	M10KOHM, J.1/16 W	1	
	R9608	D1HY2208A012	NETWORK RESISTER	1	PAVCTH
	R9610	D1HY2208A012	NETWORK RESISTER	1	PAVCTH
	R9802	D1BA3742A023	M 37.4 KOHM,F.1/16 W	1	PAVCTH
	R9803	F1G1A105A047	C 1UF 10V	1	
	R9809	D0GDR00J0004	M 0 OHM, 1/8W	1	
	R9813	D0GA103JA023	M10KOHM, J.1/16 W	1	
	R9907	D0GA101JA023	M 100 OHM, J,1/16W	1	
	R9935	D0GA680JA023	M 68 OHM, J,1/16W	1	
	R9937	D0GA680JA023	M 68 OHM, J,1/16W	1	
	R9941	D0GA102JA023	M1KOHM, J.1/16 W	1	
	R9943	D0GA102JA023	M1KOHM, J.1/16 W	1	
	R9946	D0GA103JA023	M10KOHM, J.1/16 W	1	
	R16002	D0GF7R5JA047	M 7.5 OHM,J, 1/3W	1	
	R16004	D0GF7R5JA047	M 7.5 OHM,J, 1/3W	1	
	R16021	D0GF7R5JA047	M 7.5 OHM,J, 1/3W	1	
	R16022	D0GF7R5JA047	M 7.5 OHM,J, 1/3W	1	
	R16024	D0GF7R5JA047	M 7.5 OHM,J, 1/3W	1	
	R16031	D0GF473JA048	M 47KOHM,J,1/3W	1	
	R16032	D0GF473JA048	M 47KOHM,J,1/3W	1	
	R16041	D0GF5R6JA047	M 5.6 OHM,J, 1/3W	1	
	R16051	D0GF5R6JA047	M 5.6 OHM,J, 1/3W	1	
	R16053	D0GF5R6JA047	M 5.6 OHM,J, 1/3W	1	
	R16072	D0D2180JA038	W 18 OHM,J,2W	1	PAVCTH
	R16073	D0D2180JA038	W 18 OHM,J,2W	1	PAVCTH
	R16101	D0GD150JA059	M 15 OHM,J,1/4W	1	
	R16102	D0GD150JA059	M 15 OHM,J,1/4W	1	
	R16105	D0GF474JA048	M 470KOHM,J,1/3W	1	
	R16109	D0GD100JA059	M 10 OHM,J,1/4W	1	
	R16116	D0GB473JA065	M 47KOHM J. 1/10W	1	
	R16130	D0GB103JA065	M 10K OHM J 1/10W	1	
	R16132	D0GB220JA065	M 22 OHM J 1/10W	1	
	R16133	D1BD2700A066	M 270KOHM,F.1/8W	1	PAVCTH
	R16137	D0GZ1R0JA020	M 1 OHM, J,1/2W	1	
	R16138	D0GF911JA048	M 910 OHM,J,1/4W	1	PAVCTH
	R16139	D0GB103JA065	M 10K OHM J 1/10W	1	
	R16152	D0GB220JA065	M 22 OHM J 1/10W	1	
	R16153	D1BD2700A066	M 270KOHM,F.1/8W	1	PAVCTH
	R16191	D1BD2700A066	M 270KOHM,F.1/8W	1	PAVCTH
	R16192	D0GB103JA065	M 10K OHM J 1/10W	1	
	R16193	D0GD750JA052	M 75 OHM,J,1/8W	1	
	R16195	D0GF1R0JA047	M 1 OHM,J,1/3W	1	
	R16230	D0GD470JA052	M 47 OHM,J,1/8W	1	
	R16231	D1H84724A041	NETWORK RESISTER	1	PAVCTH
	R16241	D1H84704A041	NETWORK RESISTER	1	PAVCTH
	R16242	D1H84724A041	NETWORK RESISTER	1	PAVCTH
	R16244	D0GB223JA065	M 22KOHM,J,1/10W	1	
	R16252	D0GF563JA048	M 56 KOHM,J,1/3W	1	
	R16253	D1BD1003A066	M 100KOHM,F.1/8 W	1	
	R16254	D1BD4422A066	M 44.2KOHM,F.1/8W	1	PAVCTH
	R16255	D0GB103JA065	M 10K OHM J 1/10W	1	

Model No. : TH-P50ST50A/D/G/K/M/P/S/T/V/Z Parts List

Safety	Ref. No.	Part No.	Part Name & Description	Q'ty	Remarks
	R16257	D0GB473JA065	M 47KOHM J. 1/10W	1	
	R16280	D0GB222JA065	M 2.2KOHM,J,1/10W	1	
	R16283	D0GB473JA065	M 47KOHM J. 1/10W	1	
	R16285	D0GB623JA065	M 62KOHM, J,1/10W	1	PAVCTH
	R16287	D0GF334JA047	M 330KOHMJ,1/3W	1	
	R16291	D0GB103JA065	M 10K OHM J 1/10W	1	
	R16307	D1BD5232A147	M 52.3KOHM,F.1/8W	1	PAVCTH
	R16309	D0GF273JA054	M 27 KOHM. 1/2W	1	PAVCTH
	R16311	D0GF273JA054	M 27 KOHM. 1/2W	1	PAVCTH
	R16317	D1BD5762A147	M 57.6KOHM,F.1/8W	1	PAVCTH
	R16318	D1BD5762A147	M 57.6KOHM,F.1/8W	1	PAVCTH
	R16319	D1BD2491A147	M 2.49KOHM,F.1/8W	1	PAVCTH
	R16320	ERJ14YJ823U	M 82KOHM, J, 1/2W	1	PAVCTH
	R16330	D0GB102JA065	M 1KOHM,J,1/10W	1	
	R16332	D0GB474JA065	M 470KOHM,J,1/10W	1	
	R16334	D0GB472JA065	M 4.7KOHM, J,1/10W	1	
	R16335	D0GB102JA065	M 1KOHM,J,1/10W	1	
	R16351	D1H86234A041	NETWORK RESISTER	1	PAVCTH
	R16354	D0GF334JA047	M 330KOHMJ,1/3W	1	
	R16355	D0GF334JA047	M 330KOHMJ,1/3W	1	
	R16356	D0GF334JA047	M 330KOHMJ,1/3W	1	
	R16402	D0GF7R5JA047	M 7.5 OHM,J, 1/3W	1	
	R16403	D0GF7R5JA047	M 7.5 OHM,J, 1/3W	1	
	R16411	D1BD2700A066	M 270KOHM,F.1/8W	1	PAVCTH
	R16412	D1BD2700A066	M 270KOHM,F.1/8W	1	PAVCTH
	R16414	D0GB103JA065	M 10K OHM J 1/10W	1	
	R16416	D0GB103JA065	M 10K OHM J 1/10W	1	
	R16422	D0GF7R5JA047	M 7.5 OHM,J, 1/3W	1	
	R16424	D0GF7R5JA047	M 7.5 OHM,J, 1/3W	1	
	R16432	D0D2180JA038	W 18 OHM,J,2W	1	PAVCTH
	R16433	D0D2180JA038	W 18 OHM,J,2W	1	PAVCTH
	R16441	D0GF5R6JA047	M 5.6 OHM,J, 1/3W	1	
	R16442	D0GF5R6JA047	M 5.6 OHM,J, 1/3W	1	
	R16451	D0GF5R6JA047	M 5.6 OHM,J, 1/3W	1	
	R16452	D0GF5R6JA047	M 5.6 OHM,J, 1/3W	1	
	R16466	D0GF473JA048	M 47KOHM,J,1/3W	1	
	R16467	D0GF473JA048	M 47KOHM,J,1/3W	1	
	R16471	D0GB203JA065	M 20KOHM J 1/10W	1	
	R16472	D0GB222JA065	M 2.2KOHM,J,1/10W	1	
	R16473	D0GD561JA052	M 560 OHM,J,1/8W	1	
	R16474	D0GB102JA065	M 1KOHM,J,1/10W	1	
	R16475	D0GB472JA065	M 4.7KOHM, J,1/10W	1	
	R16476	D0GB222JA065	M 2.2KOHM,J,1/10W	1	
	R16477	D0GB103JA065	M 10K OHM J 1/10W	1	
	R16490	D1BD1203A147	M 120KOHM,F.1/8 W	1	PAVCTH
	R16491	D1BD1203A147	M 120KOHM,F.1/8 W	1	PAVCTH
	R16492	D1BD1203A147	M 120KOHM,F.1/8 W	1	PAVCTH
	R16493	D1BD5111A147	M 5.11KOHM,F.1/8W	1	PAVCTH
	R16501	D0GB220JA065	M 22 OHM J 1/10W	1	
	R16502	D0GB220JA065	M 22 OHM J 1/10W	1	
	R16503	D0GF7R5JA047	M 7.5 OHM,J, 1/3W	1	
	R16505	D0GF102JA048	M 1.0 KOHM,J,1/3W	1	
	R16508	D0GB221JA065	M 220 OHM J 1/10W	1	
	R16522	D0GB221JA065	M 220 OHM J 1/10W	1	
	R16534	D0GF911JA048	M 910 OHM,J,1/4W	1	PAVCTH
	R16536	D0GF1R0JA047	M 1 OHM,J,1/3W	1	
	R16537	D0GF1R0JA047	M 1 OHM,J,1/3W	1	
	R16561	D1H84704A041	NETWORK RESISTER	1	PAVCTH
	R16562	D1H84704A041	NETWORK RESISTER	1	PAVCTH
	R16563	D1H84704A041	NETWORK RESISTER	1	PAVCTH
	R16564	D0GB470JA065	M 47 OHM,J,1/10W	1	
	R16581	D0GB103JA065	M 10K OHM J 1/10W	1	

Model No. : TH-P50ST50A/D/G/K/M/P/S/T/V/Z Parts List

Safety	Ref. No.	Part No.	Part Name & Description	Q'ty	Remarks
	R16582	D0GF563JA048	M 56 KOHM, J, 1/3W	1	
	R16583	D1BD1003A066	M 100KOHM, F. 1/8 W	1	
	R16584	D1BD3742A066	M 37.4KOHM, F. 1/8W	1	PAVCTH
	R16585	D0GB473JA065	M 47KOHM J. 1/10W	1	
	R16587	D0GB222JA065	M 2.2KOHM, J, 1/10W	1	
	R16588	D0GB223JA065	M 22KOHM, J, 1/10W	1	
	R16590	D0GB221JA065	M 220 OHM J 1/10W	1	
	R16601	D0GF1R0JA047	M 1 OHM, J, 1/3W	1	
	R16602	D0GB220JA065	M 22 OHM J 1/10W	1	
	R16603	D0GF153JA047	M 15 KOHM, J1/3W	1	PAVCTH
	R16604	D0GD331JA052	M 330 OHM, J, 1/8W	1	
	R16605	D0GD470JA059	M 47 OHM, J, 1/4W	1	
	R16606	D0GD103JA052	M 10KOHM, J, 1/8W	1	
	R16607	D1BB2262A073	M 22.6KOHM, F. 1/10W	1	PAVCTH
	R16609	D0GF102JA047	M 1.0 KOHM, J, 1/3W	1	
	R16610	D0GB104JA065	M 100KOHM J 1/10W	1	
	R16612	D0GD220JA059	M 22 OHM, J, 1/4W	1	
	R16615	D1BB4990A073	M 499 OHM, F. 1/10W	1	PAVCTH
	R16616	D1BB4321A073	M 4.32KOHM, F. 1/10W	1	PAVCTH
	R16618	D0GB100JA065	M 10 OHM J 1/10W	1	
	R16621	D0GD221JA052	M 220 OHM, J 1/8W	1	
	R16622	D0GD221JA052	M 220 OHM, J 1/8W	1	
	R16623	D0GD221JA052	M 220 OHM, J 1/8W	1	
	R16624	D0GD221JA052	M 220 OHM, J 1/8W	1	
	R16646	D0GF152JA048	M 1.5 KOHM, J, 1/4W	1	PAVCTH
	R16647	D0GF152JA048	M 1.5 KOHM, J, 1/4W	1	PAVCTH
	R16649	D0GD101JA059	M 100 OHM, J, 1/4W	1	
	R16650	D0GB473JA065	M 47KOHM J. 1/10W	1	
	R16651	D0GF1R0JA047	M 1 OHM, J, 1/3W	1	
	R16652	D0GF152JA048	M 1.5 KOHM, J, 1/4W	1	PAVCTH
	R16658	D1BD6491A147	M 6.49KOHM, F. 1/8W	1	PAVCTH
	R16660	D1BD1741A066	M17.4KOHM, F. 1/8W	1	
	R16661	D0GD100JA059	M 10 OHM, J, 1/4W	1	
	R16663	D1BD9091A147	M 9.09KOHM, F. 1/8W	1	PAVCTH
	R16665	D0GD222JA052	M 2.2KOHM, J, 1/8W	1	
	R16666	D1BB1003A074	M 100 KOHM, F. 1/10 W	1	PAVCTH
	R16674	D0GF102JA047	M 1.0 KOHM, J, 1/3W	1	
	R16675	D0GB103JA065	M 10K OHM J 1/10W	1	
	R16676	D1BD2700A066	M 270KOHM, F. 1/8W	1	PAVCTH
	R16678	D0GF102JA047	M 1.0 KOHM, J, 1/3W	1	
	R16681	D0GD100JA059	M 10 OHM, J, 1/4W	1	
	R16682	D0GD100JA059	M 10 OHM, J, 1/4W	1	
	R16683	D0GD100JA059	M 10 OHM, J, 1/4W	1	
	R16684	D0GD100JA059	M 10 OHM, J, 1/4W	1	
	R16685	D1BD1500A066	M 150 OHM, F. 1/8 W	1	PAVCTH
	R16686	D0GB103JA065	M 10K OHM J 1/10W	1	
	R16696	D0D52R2KA038	W 2.2OHM, K, 5W	1	PAVCTH
	R16719	D0GB220JA065	M 22 OHM J 1/10W	1	
	R16721	D1H82204A041	NETWORK RESISTER	1	PAVCTH
	R16761	D0GD100JA059	M 10 OHM, J, 1/4W	1	
	R16763	D0GB473JA065	M 47KOHM J. 1/10W	1	
	R16772	D0GB472JA065	M 4.7KOHM, J, 1/10W	1	
	R16773	D0GD102JA052	M 1.0KOHM, J, 1/8W	1	
	R16776	D0GD470JA052	M 47 OHM, J, 1/8W	1	
	R16786	D1BD5902A066	M 59 KOHM, F. 1/8W	1	PAVCTH
	R16815	D0GB103JA065	M 10K OHM J 1/10W	1	
	R16821	D0GD104JA052	M 100KOHM, J, 1/8W	1	
	R16822	D1BD8202A066	M 750KOHM, F. 1/8W	1	PAVCTH
	R16823	D1BD6192A066	M 61.9KOHM, F. 1/8W	1	PAVCTH
	R16824	D1BD3742A066	M 37.4KOHM, F. 1/8W	1	PAVCTH
	R16825	D0GD104JA052	M 100KOHM, J, 1/8W	1	
	R16826	D0GB472JA065	M 4.7KOHM, J, 1/10W	1	

Model No. : TH-P50ST50A/D/G/K/M/P/S/T/V/Z Parts List

Safety	Ref. No.	Part No.	Part Name & Description	Q'ty	Remarks
	R16829	D0GB102JA065	M 1KOHM,J,1/10W	1	
	R16831	D1BD6812A147	M 68.1KOHM,F.1/8W	1	PAVCTH
	R16832	D1BD7152A147	M 71.5KOHM,F.1/8W	1	PAVCTH
	R16833	D0GF683JA048	M 68 KOHM,J,1/4W	1	PAVCTH
	R16834	D0GF683JA048	M 68 KOHM,J,1/4W	1	PAVCTH
	R16835	D0GF683JA048	M 68 KOHM,J,1/4W	1	PAVCTH
	R16836	D0GF683JA048	M 68 KOHM,J,1/4W	1	PAVCTH
	R16839	ERG2FJX473	M 47KOHM, J, 1W	1	
	R16840	ERG2FJX473	M 47KOHM, J, 1W	1	
	R16841	D0GB472JA065	M 4.7KOHM, J,1/10W	1	
	R16842	D0GD102JA052	M 1.0KOHM,J,1/8W	1	
	R16844	ERA6YEB242	M 2.4KOHM, B 1/10W	1	
	R16845	D1BD6812A147	M 68.1KOHM,F.1/8W	1	PAVCTH
	R16846	D1BD5762A147	M 57.6KOHM,F.1/8W	1	PAVCTH
	R16847	D1BD6492A147	M 64.9KOHM,F.1/8W	1	PAVCTH
	R16851	D0GB474JA065	M 470KOHM,J,1/10W	1	
	R16852	D0GB474JA065	M 470KOHM,J,1/10W	1	
	R16856	D0GB102JA065	M 1KOHM,J,1/10W	1	
	R16873	ERA6YEB242	M 2.4KOHM, B 1/10W	1	
	R16891	D1BF6982A098	M 69.8 KOHM,F.1/4W	1	PAVCTH
	R16892	D1BF8252A098	M 82.5 KOHM,F.1/4W	1	PAVCTH
	R16893	D1BF8252A098	M 82.5 KOHM,F.1/4W	1	PAVCTH
	R16894	D1BB3091A074	M 3.09KOHM,F.1/10W	1	PAVCTH
	R16895	D1BB7871A074	M 7.87 KOHM,F.1/10W	1	PAVCTH
	R16897	D1BB2262A073	M 22.6KOHM,F.1/10W	1	PAVCTH
	R16898	D1BB9760A073	M 976 OHM,F.1/10W	1	PAVCTH
	R16902	D0GB6R2JA065	M 6.2 OHM J 1/10W	1	
	R16903	D1BB1471A073	M 1.47 KOHM,F.1/10 W	1	PAVCTH
	R16904	D1BB5231A073	M 5.23 KOHM,F.1/10W	1	PAVCTH
	R16919	D0GB100JA065	M 10 OHM J 1/10W	1	
	R16920	D0GB101JA065	M 100 OHM,J,1/10W	1	
	R16921	D1BB4991A073	M 4.99 KOHM,F.1/10W	1	PAVCTH
	R16922	D1BB2152A073	M 21.5 KOHM,F.1/10 W	1	PAVCTH
	R16923	D1BB8251A073	M 8.25 KOHM,F.1/10W	1	PAVCTH
	R16927	D0GB221JA065	M 220 OHM J 1/10W	1	
	R16931	D1BF2R70A073	M 2.7 OHM,F.1/8W	1	PAVCTH
	R16932	D0GD223JA052	M 22KOHM, J,1/8W	1	
	R16937	D0GB184JA065	M 180KOHM J 1/10W	1	
	R16939	D0GB472JA065	M 4.7KOHM, J,1/10W	1	
	R16940	D0GB472JA065	M 4.7KOHM, J,1/10W	1	
	R16945	D0GB471JA065	M 470 OHM,J,1/10W	1	
	R16946	D0GB221JA065	M 220 OHM J 1/10W	1	
	R16947	D0GB472JA065	M 4.7KOHM, J,1/10W	1	
	R16948	D0GB471JA065	M 470 OHM,J,1/10W	1	
	R17101	D0GB101JA065	M 100 OHM,J,1/10W	1	
	R17102	D0GB101JA065	M 100 OHM,J,1/10W	1	
	R17103	D0GB101JA065	M 100 OHM,J,1/10W	1	
	R17104	D1BB49R9A073	M 49.9 OHM,F.1/10W	1	PAVCTH
	R17105	D1BB49R9A073	M 49.9 OHM,F.1/10W	1	PAVCTH
	R17106	D1BB49R9A073	M 49.9 OHM,F.1/10W	1	PAVCTH
	R17107	D0GB101JA065	M 100 OHM,J,1/10W	1	
	R17108	D1BB49R9A073	M 49.9 OHM,F.1/10W	1	PAVCTH
	R17109	D0GF1R0JA047	M 1 OHM,J,1/3W	1	
	R17111	D0GF1R0JA047	M 1 OHM,J,1/3W	1	
	R17113	D0GF1R0JA047	M 1 OHM,J,1/3W	1	
	R17115	D0GBR00J0004	M 0 OHM J 1/10W	1	
	R17116	D0GBR00J0004	M 0 OHM J 1/10W	1	
	R17118	D0GB101JA065	M 100 OHM,J,1/10W	1	
	R17119	D0GB101JA065	M 100 OHM,J,1/10W	1	
	R17120	D0GB101JA065	M 100 OHM,J,1/10W	1	
	R17121	D0GB101JA065	M 100 OHM,J,1/10W	1	
	R17122	D0GF1R0JA047	M 1 OHM,J,1/3W	1	


Model No. : TH-P50ST50A/D/G/K/M/P/S/T/V/Z Parts List

Safety	Ref. No.	Part No.	Part Name & Description	Q'ty	Remarks
	R17124	D0GF1R0JA047	M 1 OHM,J,1/3W	1	
	R17126	D0GB101JA065	M 100 OHM,J,1/10W	1	
	R17127	D0GB101JA065	M 100 OHM,J,1/10W	1	
	R17128	D0GB101JA065	M 100 OHM,J,1/10W	1	
	R17129	D0GB101JA065	M 100 OHM,J,1/10W	1	
	R17130	D0GF1R0JA047	M 1 OHM,J,1/3W	1	
	R17132	D0GF1R0JA047	M 1 OHM,J,1/3W	1	
	R17134	D0GD224JA052	M 220KOHM,J,1/8W	1	
	R17135	D0GB681JA065	M 680 OHM,J,1/10W	1	
	R17138	D1H84704A041	NETWORK RESISTER	1	PAVCTH
	R17139	D1H84704A041	NETWORK RESISTER	1	PAVCTH
	R17140	D1H86814A041	NETWORK RESISTER	1	PAVCTH
	R17141	D0GB681JA065	M 680 OHM,J,1/10W	1	
	R17145	D0GBR00J0004	M 0 OHM J 1/10W	1	
	R17146	D0GBR00J0004	M 0 OHM J 1/10W	1	
	R17151	D1BB49R9A073	M 49.9 OHM,F.1/10W	1	PAVCTH
	R17152	D1BB49R9A073	M 49.9 OHM,F.1/10W	1	PAVCTH
	R17153	D1BB49R9A073	M 49.9 OHM,F.1/10W	1	PAVCTH
	R17154	D1BB49R9A073	M 49.9 OHM,F.1/10W	1	PAVCTH
	R17155	D0GB470JA065	M 47 OHM,J,1/10W	1	
	R17196	D0GB331JA065	M330 OHM J 1/10W	1	
	R17199	D0GD151JA059	M 150 OHM,J,1/4W	1	
	R17201	D0GB101JA065	M 100 OHM,J,1/10W	1	
	R17202	D0GB101JA065	M 100 OHM,J,1/10W	1	
	R17203	D0GB101JA065	M 100 OHM,J,1/10W	1	
	R17204	D0GB101JA065	M 100 OHM,J,1/10W	1	
	R17205	D0GF1R0JA047	M 1 OHM,J,1/3W	1	
	R17207	D0GF1R0JA047	M 1 OHM,J,1/3W	1	
	R17209	D0GB101JA065	M 100 OHM,J,1/10W	1	
	R17210	D0GB101JA065	M 100 OHM,J,1/10W	1	
	R17216	D0GB101JA065	M 100 OHM,J,1/10W	1	
	R17219	D0GB101JA065	M 100 OHM,J,1/10W	1	
	R17221	D0GF1R0JA047	M 1 OHM,J,1/3W	1	
	R17223	D0GF1R0JA047	M 1 OHM,J,1/3W	1	
	R17233	D1H84704A041	NETWORK RESISTER	1	PAVCTH
	R17243	D0GD224JA052	M 220KOHM,J,1/8W	1	
	R17245	D1H84704A041	NETWORK RESISTER	1	PAVCTH
	R17262	D1H86814A041	NETWORK RESISTER	1	PAVCTH
	R17263	D0GB681JA065	M 680 OHM,J,1/10W	1	
	R17264	D0GB681JA065	M 680 OHM,J,1/10W	1	
	R17311	D0GB101JA065	M 100 OHM,J,1/10W	1	
	R17312	D0GB101JA065	M 100 OHM,J,1/10W	1	
	R17313	D0GB101JA065	M 100 OHM,J,1/10W	1	
	R17314	D0GB101JA065	M 100 OHM,J,1/10W	1	
	R17315	D0GB101JA065	M 100 OHM,J,1/10W	1	
	R17317	D0GB101JA065	M 100 OHM,J,1/10W	1	
	R17318	D0GB101JA065	M 100 OHM,J,1/10W	1	
	R17320	D0GB101JA065	M 100 OHM,J,1/10W	1	
	R17325	D0GF1R0JA047	M 1 OHM,J,1/3W	1	
	R17327	D0GF1R0JA047	M 1 OHM,J,1/3W	1	
	R17329	D0GF1R0JA047	M 1 OHM,J,1/3W	1	
	R17331	D0GF1R0JA047	M 1 OHM,J,1/3W	1	
	R17343	D0GD224JA052	M 220KOHM,J,1/8W	1	
	R17349	D0GB681JA065	M 680 OHM,J,1/10W	1	
	R17350	D1H86814A041	NETWORK RESISTER	1	PAVCTH
	R17352	D1H84704A041	NETWORK RESISTER	1	PAVCTH
	R17353	D0GB470JA065	M 47 OHM,J,1/10W	1	
	R17395	D0GD151JA059	M 150 OHM,J,1/4W	1	
	R17396	D0GB331JA065	M330 OHM J 1/10W	1	
	RL100	K6B1AYY00100	RELAY	1	PAVCTH

Model No. : TH-P50ST50A/D/G/K/M/P/S/T/V/Z Parts List

Safety	Ref. No.	Part No.	Part Name & Description	Q'ty	Remarks
	RM2810	B3RBB0000018	REMOTE SENSOR	1	
	S109	J0LY00000159	SERGE ABSORBER	1	PAVCTH
	SC2	K1KY02C000002	2P CONNECTOR	1	PAVCTH
	SC20	K1MY30BA0345	30P CONNECTOR	1	
	SC41	K1KA09AA0707	9P CONNECTOR	1	
	SC42	K1KA09AA0707	9P CONNECTOR	1	
	SC46	K1KA09AA0707	9P CONNECTOR	1	
	SC50	K1KA02AA0193	2P CONNECTOR	1	
	SN2810	B3JB00000116	IC	1	
	SS11	K1KY02C000002	2P CONNECTOR	1	PAVCTH
	SS33	K1MY20BA0345	20P CONNECTOR	1	
	SS52	K1MY13BA0343	13P CONNECTOR	1	
	SS54	K1MY13BA0443	13P CONNECTOR	1	
	SS55	K1MY13BA0443	13P CONNECTOR	1	
	SS57	K1MY13BA0443	13P CONNECTOR	1	
	T200	G4DYA0000387	SWITCHING TRANS	1	PAVCTH
	T300	G4DYA0000286	TRANS	1	PAVCTH
	T301	G4DYA0000386	SWITCHING TRANS	1	PAVCTH
	T302	G4DYA0000386	SWITCHING TRANS	1	PAVCTH
	T8601	G5BYC0000040	TRANS	1	PAVCTH
	T16471	G4DYA0000357	SWITCHING TRANS	1	PAVCTH
	T16472	G4DYA0000356	SWITCHING TRANS	1	PAVCTH
	TU6705	ENV59302D5F	TUNER	1	PAVCTH
	VR251	EVMAASA00B14	CONTROL 10KOHMB	1	
	X8300	H0J245500110	CRYSTAL	1	
	X8600	H0J120500062	CRYSTAL	1	
	X8651	H0J250500120	25MHz XTAL NDK	1	PAVCTH
	X9300	H0J200500091	CRYSTAL	1	
	ZA100	K4AD01A00002	TERMINAL	1	
	ZA600	K4AD01A00002	TERMINAL	1	
	ZA16001	K4AZ01D00004	TERMINAL	1	
	ZA16002	K4AZ01D00004	TERMINAL	1	
	ZA16101	K4AD01Z00003	TERMINAL	1	
	ZA16106	K4AD01Z00003	TERMINAL	1	
	ZA16111	K4AA04D00002	TERMINAL	1	
	ZA16116	K4AA04D00002	TERMINAL	1	
	ZA16402	K4AZ01D00004	TERMINAL	1	
	ZA16403	K4AZ01D00004	TERMINAL	1	
	ZA16411	K4AA04D00002	TERMINAL	1	
	ZA16412	K4AA04D00002	TERMINAL	1	
	ZA16421	K4AA04D00002	TERMINAL	1	
	ZA16422	K4AA04D00002	TERMINAL	1	

Model No. : TH-P50ST50A/D/G/K/M/P/S/T/V/Z Exploded View 1

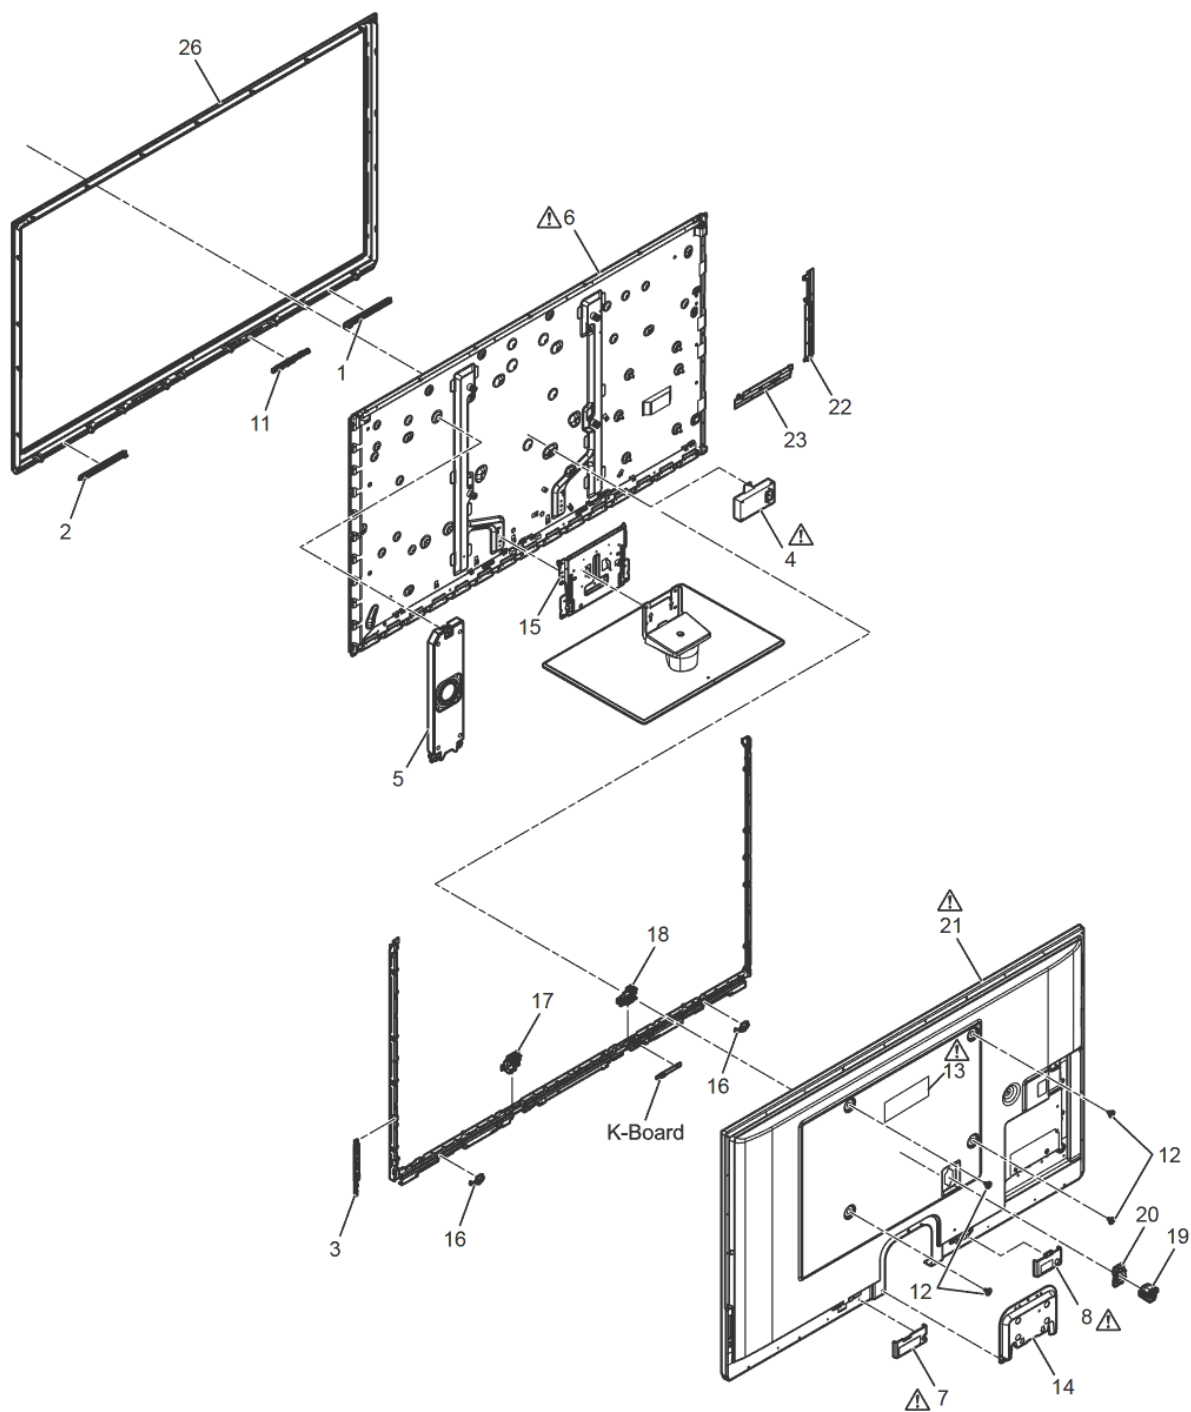

27 Assembly screw (5)
(black)



28 Assembly screw (7)
(silver)




9 Bracket



24 Cover





10 Base




25 Neck




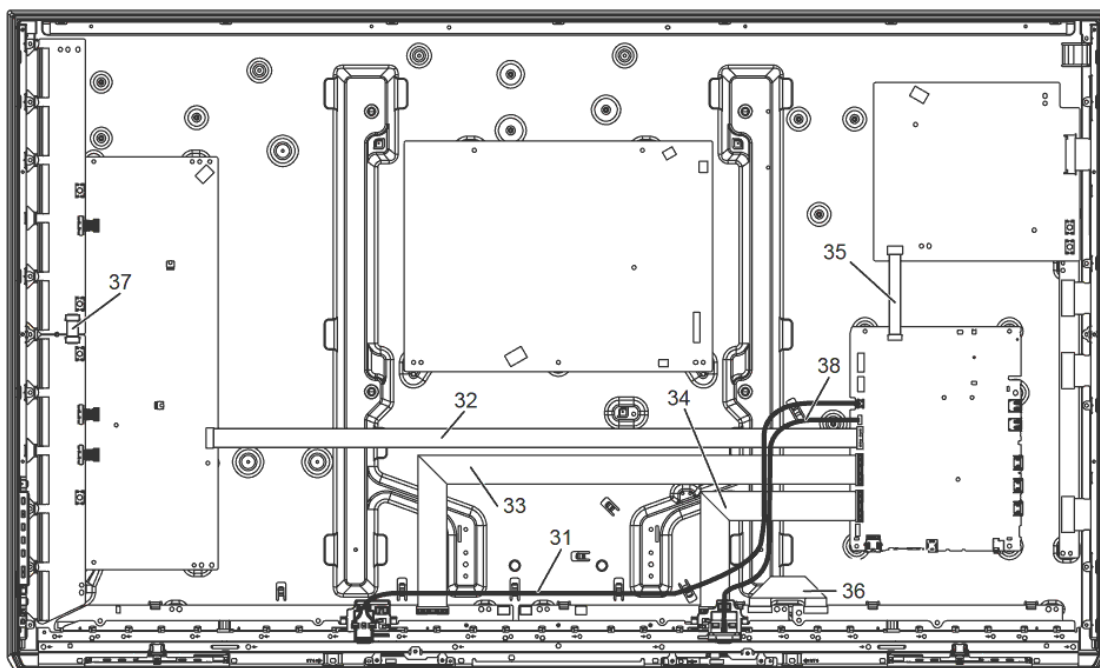

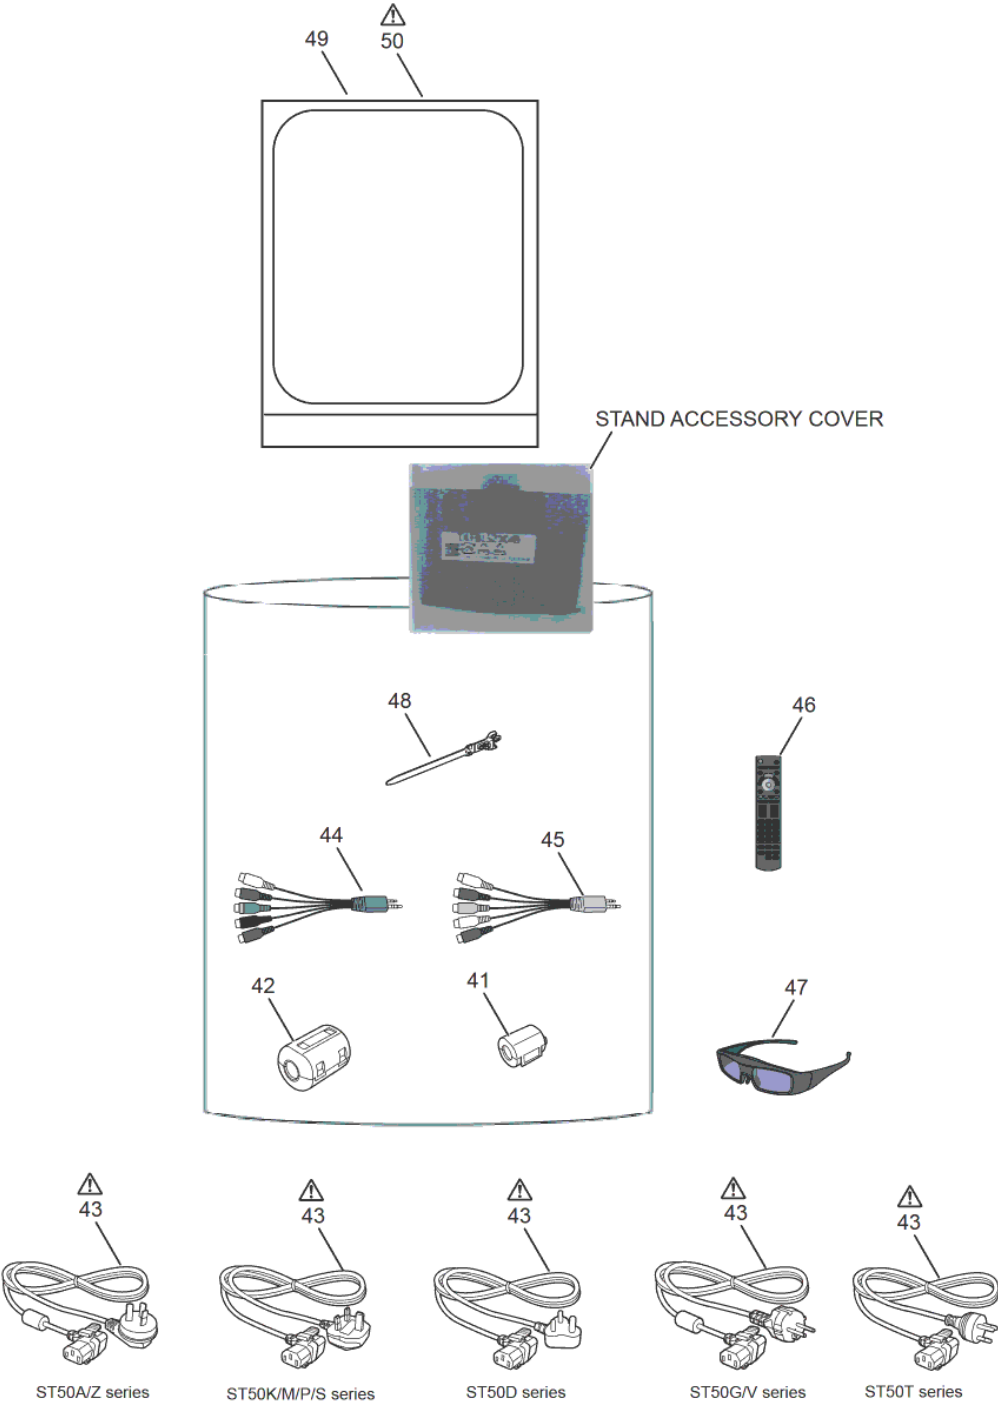

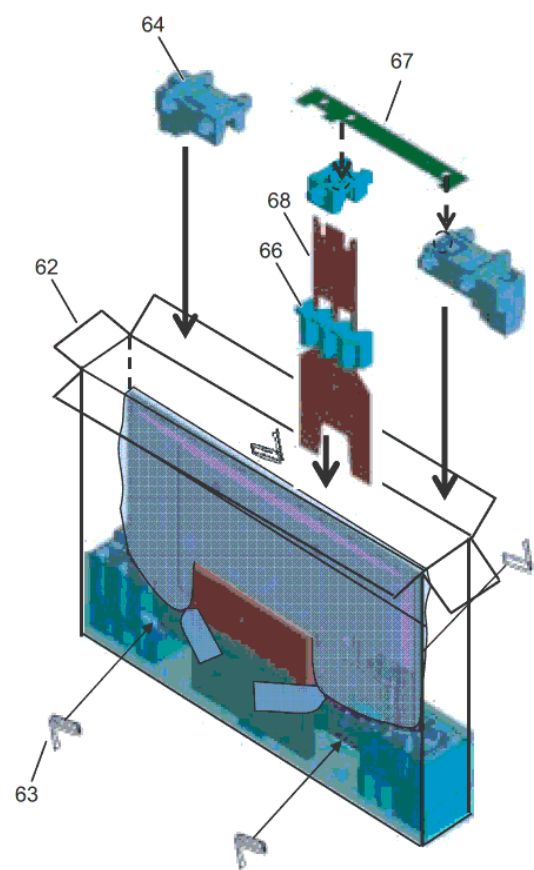

<REAR VIEW>

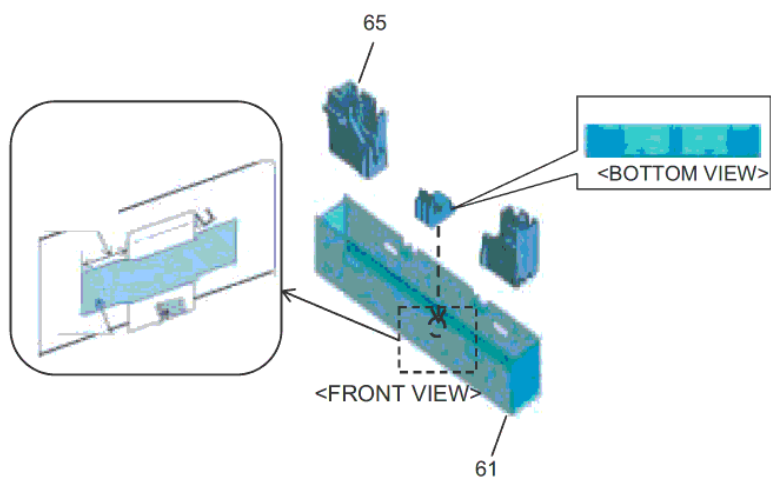

Model No. : TH-P50ST50A/D/G/K/M/P/S/T/V/Z Parts List

Safety	Ref. No.	Part No.	Part Name & Description	Q'ty	Remarks
	1	EAK1H04AL	SPEAKER_SC(L)	1	PAVCTH
	2	EAK1H04AR	SPEAKER_SC(R)	1	PAVCTH
	41	J0KG00000011	FERRITE CORE	1	(A) (Z)
	42	J0KG00000146	FERRITE CORE PACK FOR LAN CABLE	1	(A) (Z)
	3	K0RB00600028	CONTROL UNIT ASSY	1	PAVCTH
	31	K1HY05Y0030	USB CABLE(A-WIFI)	1	PAVCTH
	4	K2AHYH000052	AC-INLET WITH CABLE	1	PAVCTH
	43	K2CK3YY00061	AC CORD	1	(A) (Z) PAVCTH
	43	K2CN3YY00014	AC CORD	1	(G) (V) PAVCTH
	43	K2CT3YY00058	AC CORD	1	(K) (M) (S) PAVCTH
	43	K2CT3YY00059	AC CORD	1	(P) PAVCTH
	43	K2CZ3YY00041	AC CORD	1	(D) PAVCTH
	43	K2CZ3YY00040	AC CORD	1	(T) PAVCTH
	44	K2KYYYY00204	CABLE CONVERTER (COMPONENT)	1	PAVCTH
	45	K2KYYYY00205	CABLE CONVERTER (AV)	1	PAVCTH
	5	L0AZ08A00007	WOOFER BOX (FE)	1	PAVCTH
	6	MD50F15A5J	PLASMA DISPLAY PANEL	1	
	46	N2QAYB000746	REMOTE CONTROL	1	(A) (Z) (G) (S) (V) PAVCTH
	46	N2QAYB000749	REMOTE CONTROL	1	(D) (K) (M) (P) (T) PAVCTH
	7	N5HBZ0000062	WIFI DONGLE	1	(A) (Z) PAVCTH
	7	N5HBZ0000071	WIFI DONGLE	1	(D) (K) (P) (S) (M) (T) PAVCTH
	7	N5HBZ0000072	WIFI DONGLE	1	(G) PAVCTH
	7	N5HBZ0000087	WIFI DONGLE	1	(V) PAVCTH
	47	N5ZZ00000250	3D EYEWEAR	1	(A) (Z) PAVCTH
	47	N5ZZ00000250	3D EYEWEAR	1	(D) (P) (M) (K) (V) (T) PAVCTH
	47	N5ZZ00000252	3D EYEWEAR	1	(S) (G) PAVCTH
		T4FP1505Q	TAPE	1	PAVCTH
	9	TBL5ZA3157	STAND METAL	1	(A) (Z) PAVCTH
	10	TBL5ZX0311	PEDESTAL STAND	1	PAVCTH
	13	TBM4TC2621	NAME PLATE	1	(A) PAVCTH
	13	TBM4TC2631	NAME PLATE	1	(Z) PAVCTH
	13	TBM4TC2641	NAME PLATE	1	(S) PAVCTH
	13	TBM4TC2651	NAME PLATE	1	(G) PAVCTH
	13	TBM4TC2671	NAME PLATE	1	(K) PAVCTH
	13	TBM4TC2691	NAME PLATE	1	(V) PAVCTH
	13	TBM4TC2701	NAME PLATE	1	(D) PAVCTH
	13	TBM4TC2711	NAME PLATE	1	(M) PAVCTH
	13	TBM4TC2731	NAME PLATE	1	(P) PAVCTH
	13	TBM4TC2681	NAME PLATE	1	(T) PAVCTH
		THEC141J	SCREW (MODULE-CABINET:15)	15	
		THEC1509	SCREW (BC:6 PEDE_CO:4 DONGLE:2 TU_SH:8)	18	chap.8.2.6.(1)
		THEC164J	SCREW (WOOFER:3)	3	PAVCTH
		THEC1949	SCREW (BC:2)	2	PAVCTH
		THEJ036J	SCREW (CON_A-B:6 STD_BRA:2 K:1)	9	
		THEL0239	SCREW (TU:2 AC_BRA:2)	4	chap.8.2.6.(3)
		THTD030J	SCREW (BC:4 CONT_MET_B:5)	9	chap.8.2.6.(2)
	11	TKK5ZC50231	LED PANEL	1	PAVCTH
	12	TKKL5493	M8 CAP	4	chap.8.2.6.(4)
	14	TKP5ZA12801	STAND BRACKET COVER	1	PAVCTH
	15	TKZ5ZX50011B	STAND BRACKET PLATE	1	PAVCTH
		TMKK495	RUBBER (IC8000)	1	PAVCTH
		TMME268	CLAMPER	2	
	48	TMME289	CLAMPER	1	
		TMME415	SPACER	3	PAVCTH
	16	TMMX287	SPEAKER CLIP	2	PAVCTH
	17	TMX5ZJ0011	USB CLAMPER	1	PAVCTH
	18	TMX5ZJ0021	BT CONNECTOR CLAMPER	1	PAVCTH
	19	TMXX073	AC CORD CLAMPER A	1	PAVCTH
	20	TMXX074	AC CORD CLAMPER B	1	PAVCTH
		TPAKK38	DRY PACK	1	(V) PAVCTH
	61	TPC4TA09901	CARTON BOX BOTTOM	1	PAVCTH

Model No. : TH-P50ST50A/D/G/K/M/P/S/T/V/Z Parts List

Safety	Ref. No.	Part No.	Part Name & Description	Q'ty	Remarks
	62	TPC4TA10001	CARTON BOX TOP	1	PAVCTH
	63	TPD169487	JOINT	4	
	64	TPD4TA01221	TOP CUSHION	1	(A) (Z) (G) (K) (S) (V) (T) PAVCTH
	65	TPD4TA01231	BOTTOM CUSHION	1	(A) (Z) (G) (K) (S) (V) (T) PAVCTH
	66	TPD4TA01241	FRONT CUSHION	1	PAVCTH
	64	TPD4TA01661	TOP CUSHION	1	(D) (M) (P) PAVCTH
	65	TPD4TA01671	BOTTOM CUSHION	1	(D) (M) (P) PAVCTH
	67	TPD4TF00361	TOP PAD	1	PAVCTH
	68	TPD4TF00371	FRONT CUSHION PAD	1	PAVCTH
		TPE3DB022	BAG (PEDESTAL STAND)	1	PAVCTH
		TPE3DB023	BAG (STAND ACCESSORY NECK)	1	PAVCTH
		TPE3DB025	BAG (STAND METAL COVER)	1	PAVCTH
		TPE3DB031	BAG (STAND METAL)	1	PAVCTH
		TPE4TH002	SET BAG	1	(A) (Z) (D) (G) (K) (M) (P) (S) (T) PAVCTH
		TPE4TH038	SET BAG	1	(V) PAVCTH
	49	TPE4TP001	BAG (INSTRUCTION BOOK)	1	PAVCTH
		TPE4TP002	BAG FOR AC CORD	1	PAVCTH
	50	TQB4TC0184	INSTRUCTION BOOK(ENGLISH)	1	(G) (S) (V) PAVCTH
	50	TQB4TC0185	INSTRUCTION BOOK(S-CHINESE)	1	(S) PAVCTH
	50	TQB4TC0186	INSTRUCTION BOOK(INDONESIA)	1	(G) PAVCTH
	50	TQB4TC0187	INSTRUCTION BOOK(ENGLISH)	1	(D) (K) (M) (P) (T) PAVCTH
	50	TQB4TC0188	INSTRUCTION BOOK(S-CHINESE)	1	(K) PAVCTH
	50	TQB4TC0190	INSTRUCTION BOOK(VIETNAMESE)	1	(V) PAVCTH
	50	TQB4TC0191	INSTRUCTION BOOK(ARABIC)	1	(M) (P) PAVCTH
	50	TQB4TC0284	INSTRUCTION BOOK(ENGLISH)	1	(A) (Z) PAVCTH
	50	TQB4TC0189	INSTRUCTION BOOK(THAI)		(T) PAVCTH
		TQD4T19015	FLYER FOR PEDESTAL	1	PAVCTH
	32	TSCKZ0040009	CABLE(A20-SC20)	1	PAVCTH
	33	TSCKZ0040010	CABLE(A31-C11)	1	PAVCTH
	34	TSCKZ0040011	CABLE(A32-C21)	1	PAVCTH
	35	TSCKZ0040012	CABLE(A33-SS33)	1	PAVCTH
	36	TSCLZ0010003	CABLE(C26-C36)	1	PAVCTH
	37	TSXM217	CABLE(SU11-SD11)	1	
	21	TTU4TA0211	REAR COVER	1	(A) PAVCTH
	21	TTU4TA0263	REAR COVER	1	(Z) PAVCTH
	21	TTU4TA0264	REAR COVER	1	(S) PAVCTH
	21	TTU4TA0265	REAR COVER	1	(G) PAVCTH
	21	TTU4TA0267	REAR COVER	1	(K) PAVCTH
	21	TTU4TA0269	REAR COVER	1	(V) PAVCTH
	21	TTU4TA0270	REAR COVER	1	(D) PAVCTH
	21	TTU4TA0271	REAR COVER	1	(M) PAVCTH
	21	TTU4TA0273	REAR COVER	1	(P) PAVCTH
	21	TTU4TA0268	REAR COVER	1	(T) PAVCTH
	22	TUX5ZE0102	SIDE SHIELD METAL	1	PAVCTH
	23	TUX5ZE0112	BOTTOM SHIELD METAL	1	PAVCTH
	9	TXFBL5Z0048	STAND ACCESSORY METAL ASSY	1	(D) (G) (K) (M) (P) (S) (V) (T) PAVCTH
	24	TXFBL5Z0049	STAND ACCESSORY COVER ASSY	1	PAVCTH
	25	TXFBL5Z0063	STAND ACCESSORY NECK ASSY	1	PAVCTH
		TXFKL5Z0002	TIP-PREVENTION PARTS ASSY	1	(A) (Z) PAVCTH
	26	TXFKY5Z0227	CABINET ASSY	1	PAVCTH
		TXFQZ020NGUM	CARTON LABEL ASSY	1	(M) PAVCTH
		TXFQZ020NKUK	CARTON LABEL ASSY	1	(K) PAVCTH
		TXFQZ020NWUP	CARTON LABEL ASSY	1	(P) PAVCTH
		TXFQZ020NZUV	CARTON LABEL ASSY	1	(V) PAVCTH
		TXFQZ020NZUZ	CARTON LABEL ASSY	1	(Z) PAVCTH
		TXFQZ020PBUD	CARTON LABEL ASSY	1	(D) PAVCTH
		TXFQZ020PBUS	CARTON LABEL ASSY	1	(S) PAVCTH
		TXFQZ020PGUG	CARTON LABEL ASSY	1	(G) PAVCTH
		TXFQZ020PHUA	CARTON LABEL ASSY	1	(A) PAVCTH
		TXFQZ020NYUT	CARTON LABEL ASSY	1	(T) PAVCTH
		TXJA12RFUU	SPEAKER LEAD(A12-SPR/SPL/WOOFER)	1	PAVCTH

Model No. : TH-P50ST50A/D/G/K/M/P/S/T/V/Z Parts List

Safety	Ref. No.	Part No.	Part Name & Description	Q'ty	Remarks
	38	TXJA50RFUU	WIRE (BT-A50)	1	PAVCTH
	8	TXNBT1NGUM	BLUETOOTH ASSY	1	(D) (G) (K) (P) (S) (V) (M) (T) PAVCTH
	8	TXNBT1PAUZ	BLUETOOTH ASSY	1	(A) (Z) PAVCTH
		XYN3+J10FJK	SCREW	2	
		XYN4+E6FJ	SCREW (INLET:1)	1	
	27	XYN4+F10FNK	SCREW M4X10	5	(A) (Z) PAVCTH
		XYN4+F8FJ	SCREW (SC-SUSD:4 SS-SS2:2)	6	
	28	XYN5+F16FN	SCREW M5X16	7	(A) (Z) PAVCTH