


Service Manual

Microwave Oven

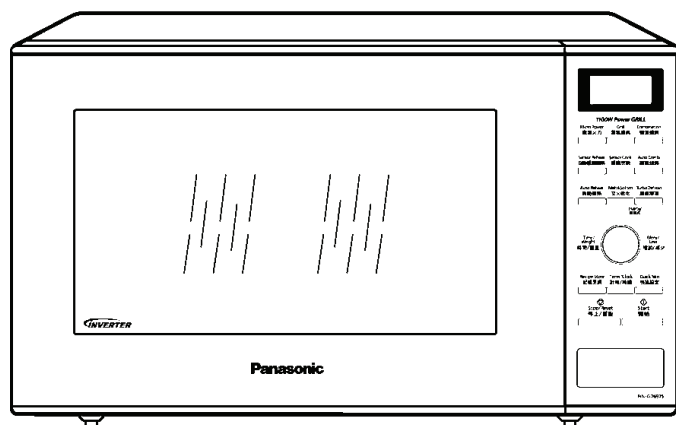

NN-GD692S
NN-GD692M

KTE (UAE)

PTE (Iran)

KPQ (Kuwait, Doha, Qatar, Oman, Bahrain, Pakistan)

STM (Saudi Arabia)

ZPE (CIS Countries)

Specifications:

Model:		NN-GD692S	NN-GD692M
Specifications:			
Power Source:		230V-240V AC Single Phase, 50Hz ----- for KPQ model 220V AC Single Phase, 50Hz ----- for KTE, PTE, ZPE models 220V AC Single Phase, 50Hz/60Hz ----- for STM model	
Power	Microwave:	1050W	1050W
Consumption:	Heater:	1160W	1160W
Output:	Microwave:	1000W	1000W
	Heater:	1100W	1100W
Microwave Frequency:		2450MHz	
Timer:		30 min. / Stage (HIGH Power) ~ 3 Stage Maximum 90 min. 00 sec / Stage (Other Power Levels) ~ 3 Stage Maximum	
Outside Dimensions:		525mm(W) x 414mm(D) x 310mm(H)	
Oven Cavity Dimensions:		359mm(W) x 362mm(D) x 247mm(H)	
Net Weight:		13.2kg	
PbF		This product with PbF	
Specifications subject to change without notice.			

WARNING

This service information is designed for experienced repair technicians only and is not designed for use by the general public. It does not contain warnings or cautions to advise non-technical individuals of potential dangers in attempting to service a product. Products powered by electricity should be serviced or repaired only by experienced professional technicians. Any attempt to service or repair the product or products dealt with in this service information by anyone else could result in serious injury or death.

WARNING

1. This product should be serviced only by trained, qualified personnel.
2. Check for radiation leakage before and after every servicing according to the "procedure for measuring radiation leakage."
3. If the unit cannot be repaired on site, advise the customer not to use until unit is repaired.
4. There are special components used in the microwave oven which are important for safety. These parts are marked with a  on the replacement parts list. It is essential that these critical parts be replaced only with the manufacture's specified parts to prevent microwave leakage, shock, fire, or other hazards. Do not modify the original design.

This service manual covers products for following markets.

When troubleshooting or replacing parts, please refer to the country/area identifications shown below for your applicable product specification.

KTE For UAE

PTE For Iran

KPQ For Kuwait, Doha, Qatar, Oman, Bahrain, Pakistan

STM For Saudi Arabia

ZPE For CIS Countries

CAUTION

About lead free solder (PbF)

Distinction of PbF PCB: PCBs (manufactured) using lead free solder will have a PbF stamp on the PCB.

Caution: ● Pb free solder has a higher melting point than standard solder; Typically the melting point is 30 - 40°C higher.

Please use a high temperature soldering iron. In case of the soldering iron with temperature control, please set it to 370 ± 10°C.

● Pb free solder will tend to splash when heated too high (about 600°C).

DANGER OF HIGH VOLTAGE AND HIGH TEMPERATURE (HOT/LIVE) OF THE INVERTER POWER SUPPLY (U)

⚠ WARNING

This Inverter board looks like a regular PCB. However, this PCB drives the magnetron tube with extremely high voltage and high current. Take cautionary measures when disassembling and troubleshooting the Inverter circuit. Improper handling can result in an electrical shock or burns, which might lead to injury or death.

IT HAS: 1. Very high voltage and high current circuits.


It functions the same as the high voltage transformer and high voltage capacitor in ordinary microwave ovens.

2. Aluminum heat sink that is energized with very high voltage and high heat energy.
3. Very high voltage which may remain in circuitry even when oven is off. High voltage charge may remain in the capacitors on the board.

DO NOT:

- * 1. Do not touch circuitry because it has very hot (high voltage) circuitry. Even when replacing board, extreme care should be taken to avoid possible electric shock hazards. High voltage charge may remain in circuits.
- * 2. Do not touch aluminum heat sink because it is energized with very high voltage and is also very hot in high heat energy.
- * 3. Do not try to adjust or tamper with preset control on the Inverter board because it is very dangerous to adjust without proper test equipment.
- * 4. Do not test oven while Inverter grounding plate or screws are loose. It is very dangerous to operate H.V. Inverter Circuit (U) with loose mounting screws or if improperly grounded.

INVERTER POWER SUPPLY

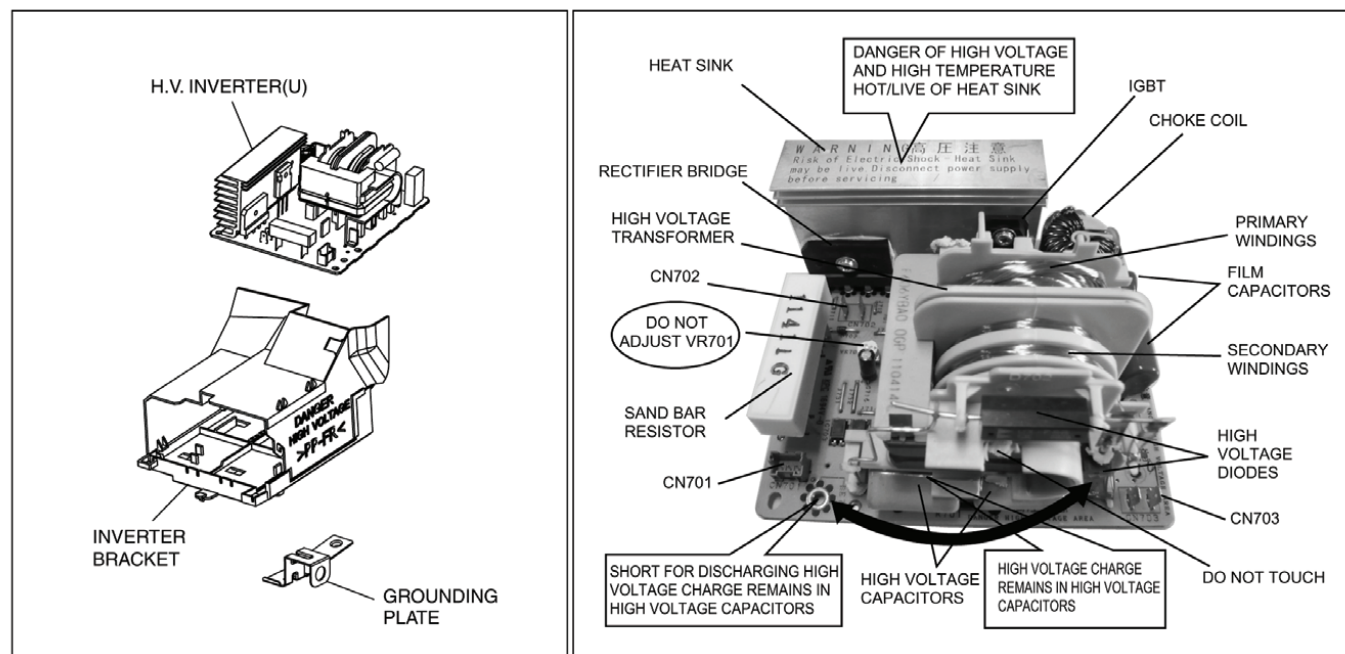

CONTENTS

Page


1 SCHEMATIC DIAGRAM	5
1.1. KTE, PTE, KPQ (WITHOUT VARISTOR)	5
1.2. STM, ZPE (WITHOUT VARISTOR)	6
1.3. KTE, PTE, KPQ (WITH VARISTOR)	7
1.4. STM, ZPE (WITH VARISTOR)	8
2 DESCRIPTION OF OPERATING SEQUENCE	9
2.1. Variable power cooking control	9
2.2. Inverter power supply circuit	9
2.3. Turbo defrost, Auto cook	9
2.4. Sensor cooking	9
2.5. Sensor reheat	10
2.6. Steam sensor and digital programmer circuit	10
3 CAUTIONS TO BE OBSERVED WHEN TROUBLESHOOTING	11
3.1. Check the grounding	11
3.2. Inverter warnings	11
3.3. Part replacement	12
3.4. When the 10A fuse is blown due to the malfunction of the short switch:	12
3.5. Avoid inserting nails, wire etc. through any holes in the unit during operation.	12
3.6. Verification after repair	12
3.7. Sharp edges	12
4 DISASSEMBLY AND PARTS REPLACEMENT PROCEDURE	13
4.1. Magnetron	13
4.2. Digital programmer circuit (D.P.C)	13
4.3. Low voltage transformer and/or power relays (RY1, RY2)	14
4.4. Fan motor	14
4.5. Door assembly	14
4.6. Turntable motor	16
4.7. Quartz heater	16

Page

4.8. Steam sensor	17
4.9. Inverter power supply	18
5 COMPONENT TEST PROCEDURE	19
5.1. Primary, Secondary Latch Switch interlocks & Power Relay RY1	19
5.2. Short Switch	19
5.3. Magnetron	19
5.4. Inverter power supply (U)	20
5.5. Temperature thermistor	20
6 MEASUREMENTS AND ADJUSTMENTS	21
6.1. Adjustment of primary latch switch, secondary latch switch and short switch.	21
6.2. Measurement of microwave output	21
7 TROUBLESHOOTING GUIDE	22
7.1. (Troubleshooting) Oven stops operation during cooking	22
7.2. (Troubleshooting) Other problems	23
7.3. Troubleshooting of inverter circuit (U) and magnetron	24
7.4. Trouble related to Digital Programmer Circuit	25
7.5. Simple way of H.V. Inverter/magnetron troubleshooting	26
7.6. How to check the semiconductors using an OHM meter	26
7.7. H.V. INVERTER MAIN PARTS LIST (F606YBA00QP)	27
8 EXPLODED VIEW AND PARTS LIST	28
8.1. EXPLODED VIEW	28
8.2. PARTS LIST	29
8.3. ESCUTCHEON BASE ASSEMBLY	31
8.4. DOOR ASSEMBLY	33
8.5. WIRING MATERIALS	34
8.6. PACKING AND ACCESSORIES	35
9 DIGITAL PROGRAMMER CIRCUIT	36
9.1. SCHEMATIC DIAGRAM	36
9.2. PARTS LIST	38


1 SCHEMATIC DIAGRAM

1.1. KTE, PTE, KPQ (WITHOUT VARISTOR)

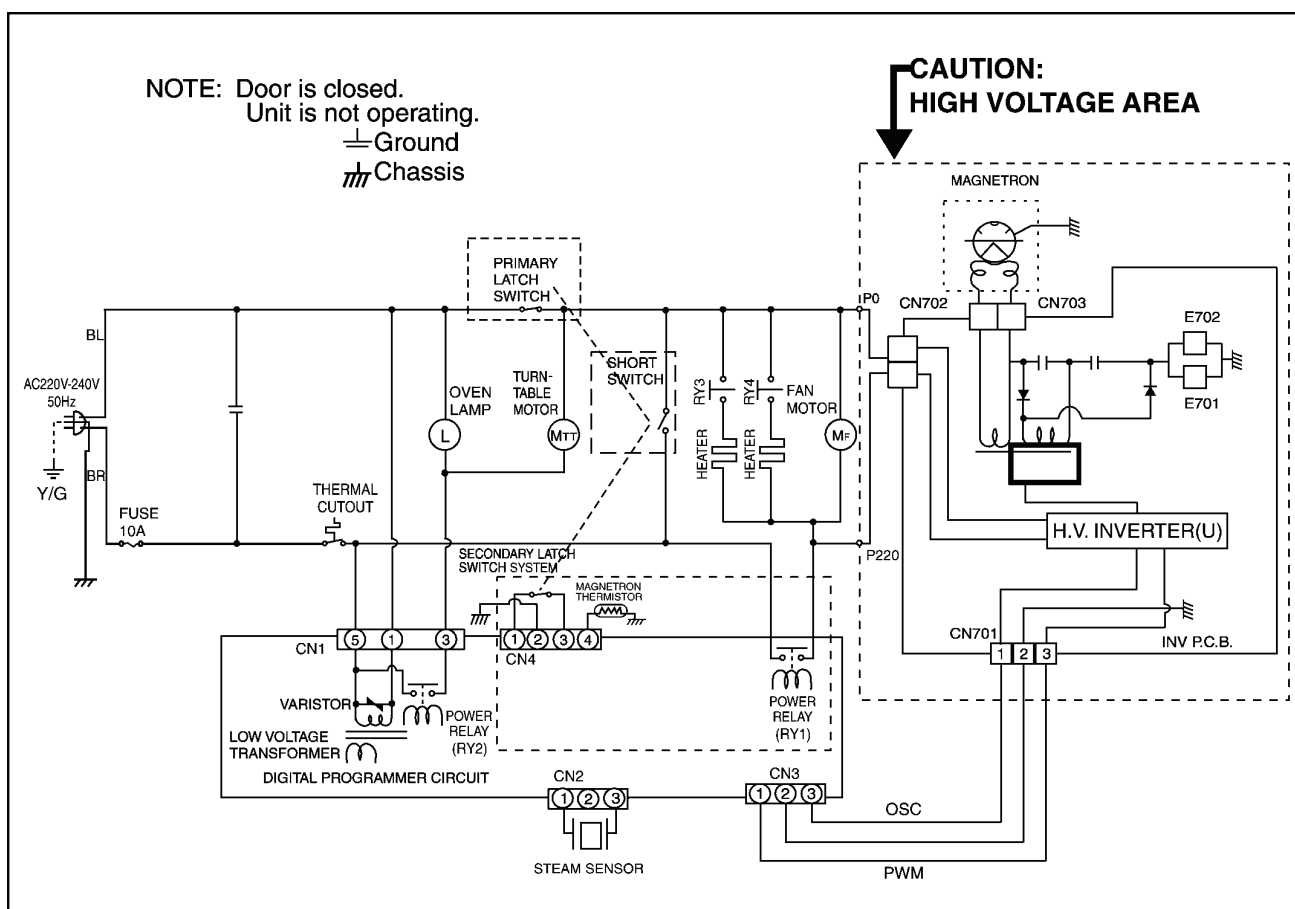


WIRING DIAGRAM


NOTE: * When replacing, check the lead wire color as shown.
* Colors shown by () indicate colors of lead wire connector housing.




SHORT SWITCH
TOP




PRIMARY
LATCH SWITCH
MIDDLE




SECONDARY
LATCH SWITCH
BOTTOM



POWER RELAY (RY1)



POWER RELAY (RY3)

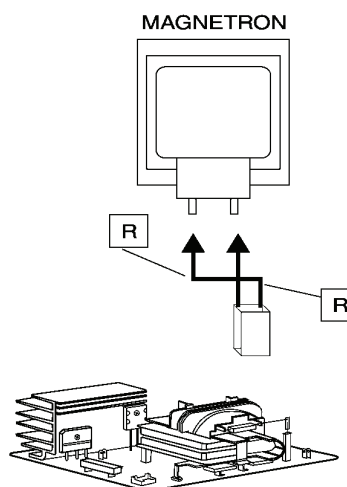

HIGH VOLTAGE INVERTER(U)




WARNING: H.V.

SYMBOL	COLOR
OR	ORANGE
BL	BLUE
BR	BROWN
W	WHITE
Y	YELLOW
R	RED
GR	GRAY
B	BLACK
N	NATURAL
G	GREEN


(S-9X9)

1.3. KTE, PTE, KPQ (WITH VARISTOR)

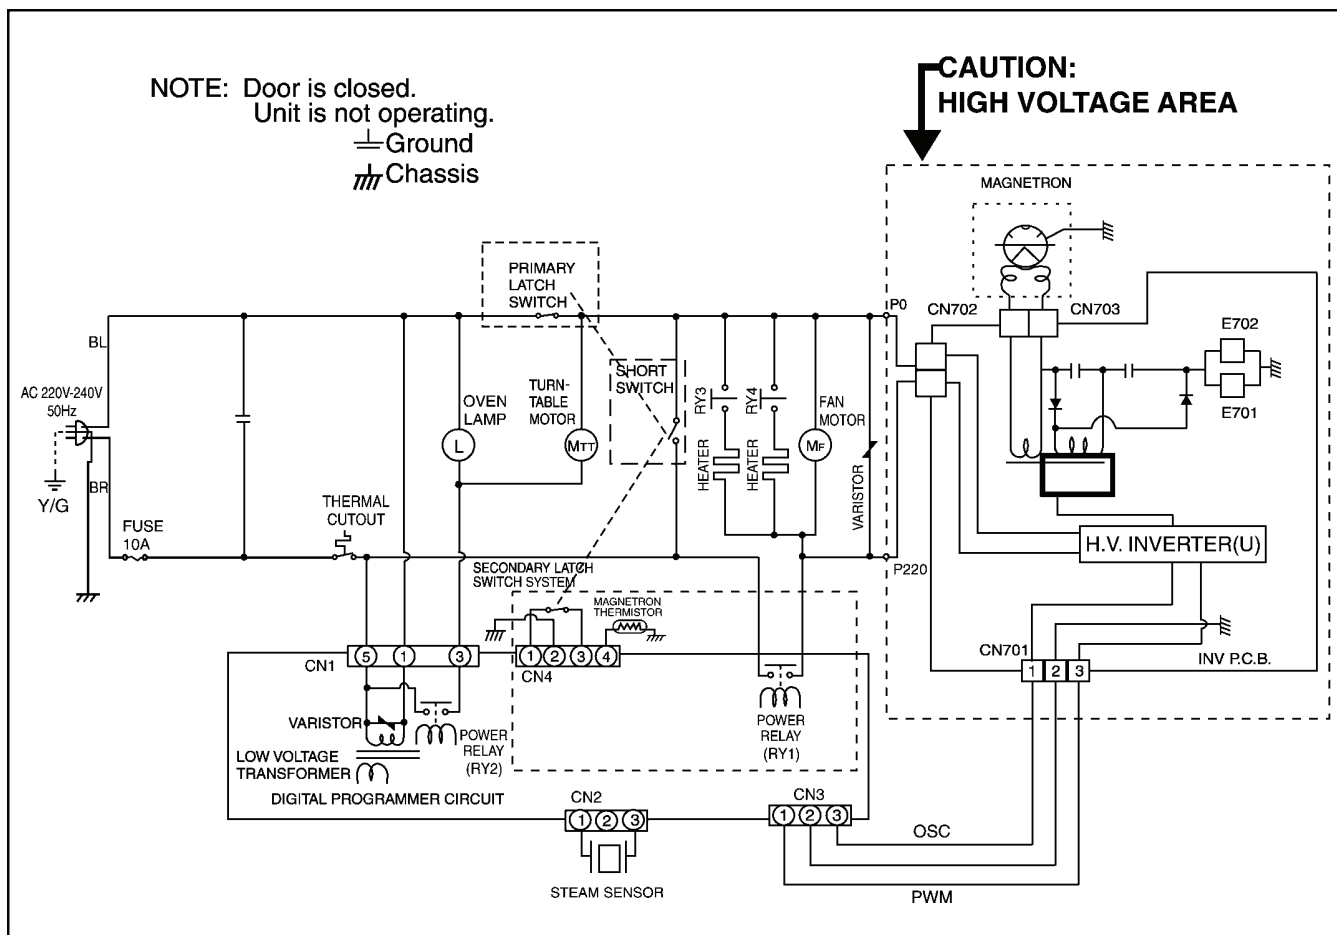


WIRING DIAGRAM


NOTE: * When replacing, check the lead wire color as shown.
*Colors shown by () indicate colors of lead wire connector housing.




SHORT SWITCH
TOP




PRIMARY
LATCH SWITCH
MIDDLE




SECONDARY
LATCH SWITCH
BOTTOM



POWER RELAY (RY1)



POWER RELAY (RY3)

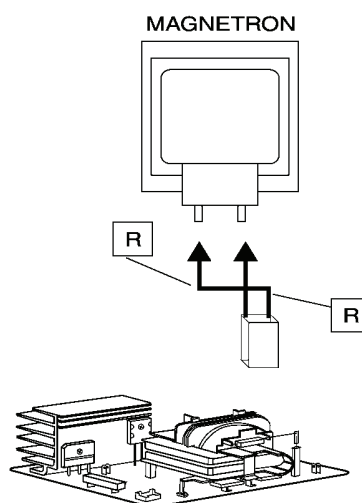

HIGH VOLTAGE INVERTER(U)



WARNING: H.V.


SYMBOL	COLOR
OR	ORANGE
BL	BLUE
BR	BROWN
W	WHITE
Y	YELLOW
R	RED
GR	GRAY
B	BLACK
N	NATURAL
G	GREEN

(S-9X9)

1.4. STM, ZPE (WITH VARISTOR)


NOTE: Door is closed.
Unit is not operating.
— Ground
— Chassis

CAUTION:
HIGH VOLTAGE AREA

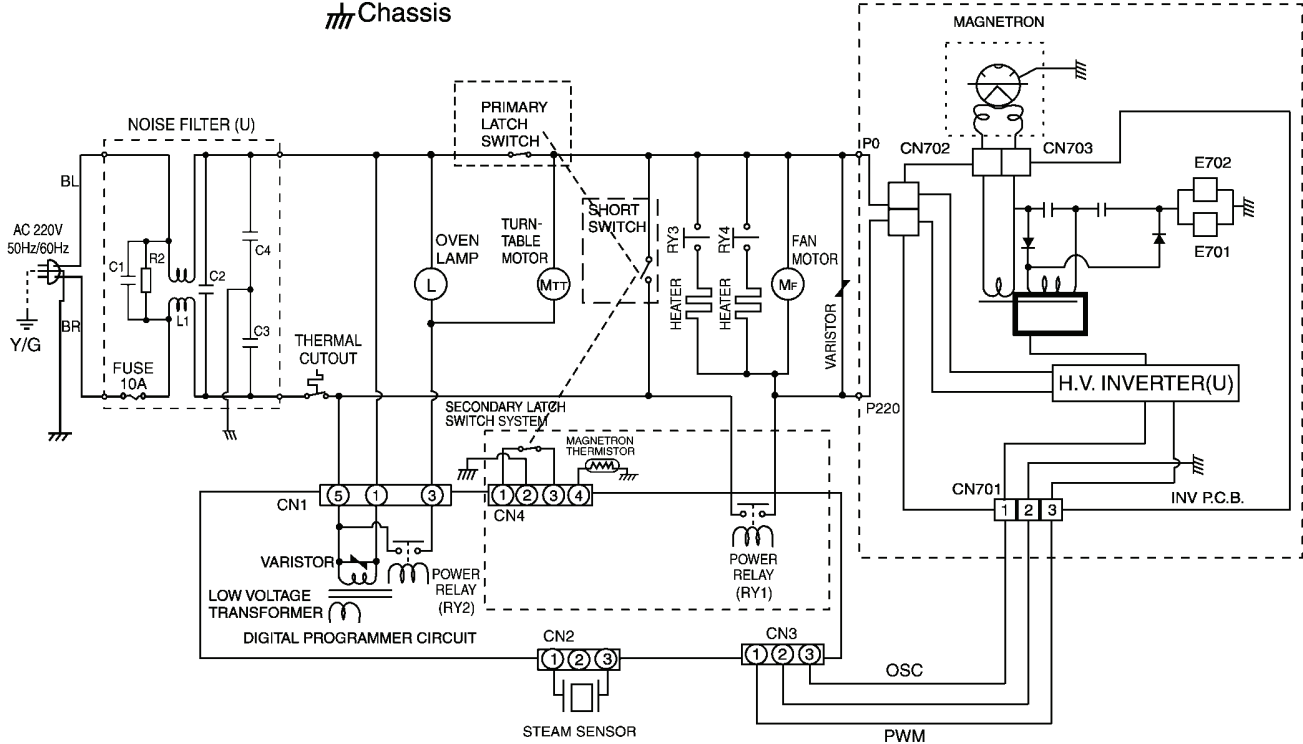


WIRING DIAGRAM


NOTE: * When replacing, check the lead wire color as shown.
* Colors shown by () indicate colors of lead wire connector housing.




SHORT SWITCH
TOP




PRIMARY
LATCH SWITCH
MIDDLE




SECONDARY
LATCH SWITCH
BOTTOM



POWER RELAY (RY1)



POWER RELAY (RY3)

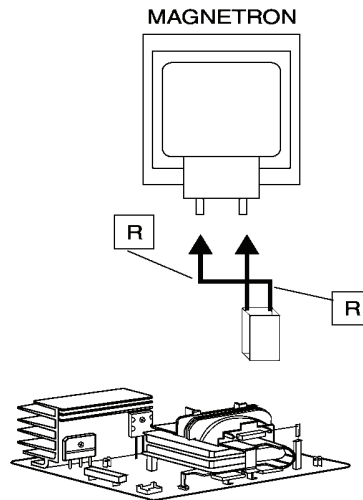

HIGH VOLTAGE INVERTER(U)



WARNING: H.V.

SYMBOL	COLOR
OR	ORANGE
BL	BLUE
BR	BROWN
W	WHITE
Y	YELLOW
R	RED
GR	GRAY
B	BLACK
N	NATURAL
G	GREEN

(S-9X7)
(S-9X9)

2 DESCRIPTION OF OPERATING SEQUENCE

2.1. Variable power cooking control

High Voltage Inverter Power Supply (U) controls output power by the signal from Digital Programmer Circuit (DPC). Power relay always stay on, but PWM (Pulse Width Modulation) signal controls microwave output power.

NOTE:

The ON/OFF time ratio does not correspond with the percentage of microwave power since approximately 2 seconds are required for heating of magnetron filament.

Variable Power Cooking

Variable Power Cooking				
POWER SETTING		OUTPUT POWER(%) APPROX.	MANUAL MICROWAVE DUTY	
			ON(SEC)	OFF(SEC)
HIGH	P10	100%	22	0
	P9	90%	22	0
	P8	80%	22	0
MEDIUM-HIGH	P7	70%	22	0
MEDIUM	P6	60%	22	0
	P5	50%	22	0
	P4	40%	22	0
MEDIUM-LOW	P3	30%	22	0
	P2	25%	18	4
	P1	10%	10	12

2.2. Inverter power supply circuit

The Inverter Power Supply circuit powered from the line voltage, 220-240V 50/60Hz AC input supplies 4,000V DC to the magnetron tube, and functions in place of the H.V. transformer, the H.V. capacitor and H.V. diode.

1. The AC input voltage 220-240V 50/60Hz is rectified to DC voltage immediately.
2. DC voltage will be supplied to the switching devices called IGBT. These devices are switched ON-OFF by the 20 to 40 kHz PWM (pulse width modulation) signal from the microcomputer in the DPC.
3. This drives the High voltage transformer to increase voltage up to 2,000V AC.
4. Then the half-wave doubler voltage rectifier circuit, consisting of the H.V. diodes and capacitors, generates the necessary 4,000V DC needed for the magnetron.
5. Output power of the magnetron tube is always monitored by the signal output from the current transformer built into the inverter circuit.
6. This signal is fed back to the microcomputer in the DPC to determine operating conditions and output necessary to control PWM signal to the Inverter Power Supply for control of the output power.

2.3. Turbo defrost, Auto cook

When the Auto Control feature is selected and the Start button is tapped:

1. The digital programmer circuit determines the power level and cooking time to complete cooking and indicates the operating state in the display window.
2. When cooking time in the display window has elapsed, the oven turns off automatically by a control signal from the digital programmer circuit.

Turbo Defrost

WEIGHT SELECTED	COOKING TIME
1.0KG	22min. 30sec.

2.4. Sensor cooking

Auto sensor cooking without setting a power level or selecting a time. All that is necessary is to select an Auto Sensor Program before starting to cook.


Understanding Auto Sensor Cooking

As the food cooks, a certain amount of steam is produced. If the food is covered, this steam builds up and eventually escapes from the container. In Auto Sensor Cooking, a carefully designed instrument, called the steam sensor element, senses this escape of steam. Then, based upon the Auto Sensor Program selected, the unit will automatically determine the correct power level and the proper length of time it will take to cook the food.

NOTE:

Auto Sensor Cooking is successful with the foods and recipes found in the Auto Sensor Cooking Guide. Because of the vast differences in food composition, items not mentioned in the Cooking Guide should be prepared in the microwave oven using power select and time features. Please consult Variable Power Microwave Cookbook for procedures.

AUTO SENSOR COOKING/REHEAT PROCESS

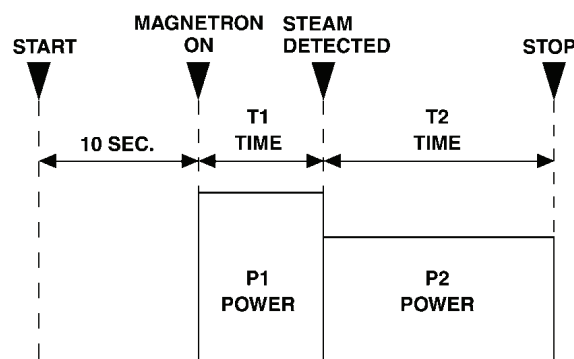

Explanation of the Auto Sensor Cooking process

1. During the first 10 second period there is no microwave activity. When calculating the T2 time by using the formula below make sure this 10 seconds is subtracted from the T1 time. In other words, T1 time starts at the end of the 10 second period.
2. **T1 time** The total amount of time it takes the microwave oven to switch to T2 time after the 10second period.
3. **T2 time** When the steam escapes from the cooking container placed in the oven, the steam sensor detects it and the microprocessor calculates the balance of cooking time. This T2 time is then shown in the display and begins counting down.

Balance of cooking time (T2 time)

The balance of cooking time which is called T2 time, can be calculated by the following formula.

T2 time (in sec.) = T1 time X K factor

NOTE:

Remember, the T1 time starts after the 10 second period. The coefficient K is programmed into the microprocessor memory and they are listed in the following tables along with the P1 and P2 powers.

NOTE:

When "More" or "Less" pad is selected, the K factor varies resulting in T2 time to be increased or decreased.

Example of calculating the T2 time

Example 1: If the T1 time is measured to be 2 minutes and 40 seconds after the 10 second period.

$$T2 = T1 \times K$$

$$= 2 \text{ min. and } 40 \text{ sec.} \times 0.1$$

$$= 160 \text{ sec.} \times 0.1$$

$$= 16 \text{ sec.}$$

Category	P1 Power	P2 Power	K Factor Standard
Vegetable	Power Level P7	Power Level P5	0.1

2.5. Sensor reheat

Auto Sensor Reheat is a quick and easy way to reheat refrigerated and room temperature foods.

Simply press the reheat pad. There is no need to select power level and cooking time.

NOTE:

The Auto Sensor Reheat process is similar as Auto Sensor Cooking process.

Balance of cooking time (T2 time)

The balance of cooking time which is called T2 time, can be calculated by the following formula.

T2 time (in sec.) = T1 time X K factor

NOTE:

Remember, the T1 time starts after the 10 second period. The coefficient K is programmed into the microprocessor memory and they are listed in the following tables along with the P1 and P2 powers.

NOTE:

When "More" or "Less" pad is selected, the K factor varies resulting in T2 time to be increased or decreased.

Example of calculating the T2 time

Example 1: If the T1 time is measured to be 2 minutes and 40 seconds after the 10 second period.

$$T2 = T1 \times K$$

$$= 2 \text{ min. and } 40 \text{ sec.} \times 0.1$$

$$= 160 \text{ sec.} \times 0.1$$

$$= 16 \text{ sec.}$$

Category	P1 Power	P2 Power	K Factor Standard
Sensor Reheat	Power Level P7	Power Level P6	0.5

2.6. Steam sensor and digital programmer circuit

In order to determine if the steam sensor function of the digital programmer circuit is working, do the following test.

1. Place a water load (100 cc) in the oven.
2. Tap Sensor Reheat pad.
3. Tap Start pad.
4. Steam Sensor detects steam about 1.5 to 2 minutes after the Start pad is tapped.
5. T1 time cooking automatically switches to remaining time for cooking (T2).
6. The remaining cooking time (T2) appears in display window. If the following cooking time appears, Steam Sensor function is normal.

T1 TIME	T2 TIME (Remaining cooking time)
50 Sec. ~ 2 Min.	0 Sec. ~ 24 Sec.

3 CAUTIONS TO BE OBSERVED WHEN TROUBLESHOOTING

Unlike many other appliances, the microwave oven is a high voltage, high current device. It is free from danger in ordinary use, though extreme care should be taken during repair.

⚠ CAUTION

Servicemen should remove their watches & rings whenever working close to or replacing the magnetron.

3.1. Check the grounding

Do not operate on a two wire extension cord. The microwave oven is designed to be grounded when used. It is imperative, therefore, to ensure the appliance is properly grounded before beginning repair work.


3.2. Inverter warnings

⚠ WARNING HIGH VOLTAGE AND HIGHTEMPERATURE (HOT/LIVE) OF THE INVERTERPOWER SUPPLY (U)

The High Voltage Inverter Power Supply generates very high voltage and current for the magnetron tube. Though it is free from danger in ordinary use, extreme care should be taken during repair.

The aluminum heat sink is also energized with high voltage (HOT), do not touch when the AC input terminals are energized. The power device Collector is directly connected to the aluminum heat sink.


The aluminum heat sink may be HOT due to heat energy, therefore, extreme care should be taken during servicing.

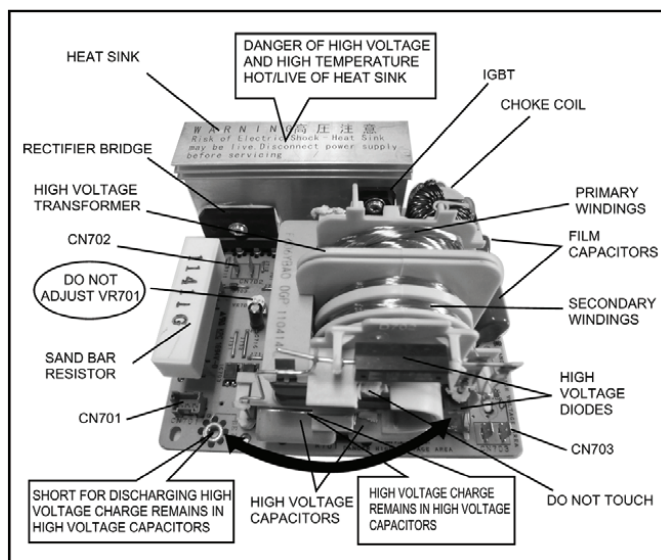

H.V. Inverter warning

⚠ WARNING FOR INVERTER POWER SUPPLY (U) GROUNDING

Check the High Voltage Inverter Power Supply circuit grounding. The high voltage inverter power supply circuit board must have a proper chassis ground. The inverter grounding plate must be connected to the chassis. If the inverter board is not grounded it will expose the user to very high voltages and cause extreme DANGER! Be sure that the inverter circuit is properly grounded via the inverter grounding plate.

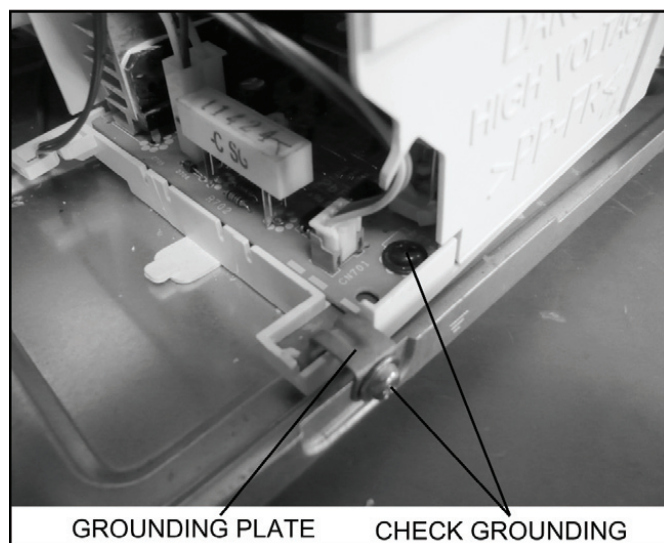


Grounding of the inverter circuit board

⚠ WARNING DISCHARGE THE HIGH VOLATGE CAPACITORS

For about 30 seconds after the oven is turned off, an electric charge remains in the high voltage capacitors of the Inverter Power Supply circuit board.

When replacing or checking parts, remove the power plug from the outlet and short the inverter output terminal of the magnetron filament terminals to the chassis ground with an insulated handle screwdriver to discharge. Please be sure to contact the chassis ground side first and then short to the output terminal.

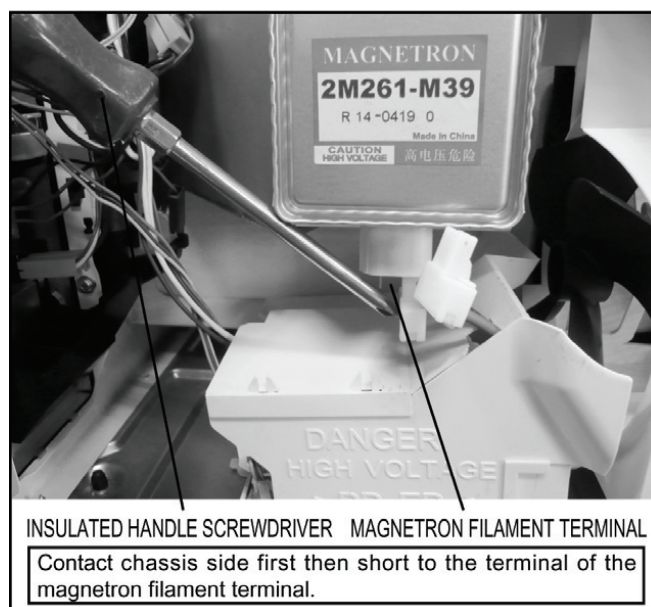

Discharging the high voltage capacitors

⚠ WARNING

There is high voltage present with high current capabilities in the circuits of the primary and secondary windings, choke coil and heat sink of the inverter. It is extremely dangerous to work on or near these circuits with the oven energized. DO NOT measure the voltage in the high voltage circuit including the filament voltage of the magnetron.

⚠ WARNING

Never touch any circuit wiring with your hand or with an insulated tool during operation.

3.3. Part replacement.

When troubleshooting any part or component is to be replaced, always ensure that the power cord is unplugged from the wall outlet.

3.4. When the 10A fuse is blown due to the malfunction of the short switch:

WARNING

When the 10A 250V fuse is blown due to the malfunction of the short switch, replace all of the components (primary latch switch, short switch and power relay RY1).

1. This is mandatory. Refer to "measurements and adjustments" for the location of these switches.
2. When replacing the fuse, confirm that it has the appropriate rating for these models.
3. When replacing faulty switches, be sure the mounting tabs are not bent, broken or deficient in their ability to hold the switches.

3.5. Avoid inserting nails, wire etc. through any holes in the unit during operation.

Never insert a wire, nail or any other metal object through the lamp holes on the cavity or any holes or gaps, because such objects may work as an antenna and cause microwave leakage.

3.6. Verification after repair

1. After repair or replacement of parts, make sure that the screws of the oven, etc. are neither loosen or missing. Microwave energy might leak if screws are not properly tightened.
2. Make sure that all electrical connections are tight before inserting the plug into the wall outlet.
3. Check for microwave energy leakage.

CAUTION OF MICROWAVE RADIATION LEAKAGE

USE CAUTION NOT TO BECOME EXPOSED TO RADIATION FROM THE MICROWAVE MAGNETRON OR OTHER PARTS CONDUCTING MICROWAVE ENERGY.

IMPORTANT NOTICE

1. The following components have potentials above 2000V while the appliance is operated.
 - Magnetron
 - High voltage transformer (Located on inverter (U))
 - High voltage diodes (Located on inverter (U))
 - High voltage capacitors (Located on inverter (U))

Pay special attention to these areas.

2. When the appliance is operated with the door hinges or magnetron installed incorrectly, the microwave leakage can exceed more than 5mW/cm². After repair or exchange, it is very important to check if the magnetron and the door hinges are correctly installed.

3.7. Sharp edges


⚠ CAUTION

Please use caution when disassembling or reassembling internal parts. Some exposed edges may be sharp to the touch and can cause injury if not handled with care.


4 DISASSEMBLY AND PARTS REPLACEMENT PROCEDURE

4.1. Magnetron



1. Discharge the high voltage capacitor.
2. Remove 1 screw holding air guide A on the magnetron.
3. Remove 1 screw holding air guide A on cavity top plate.
4. Remove 1 screws holding thermistor on the magnetron.

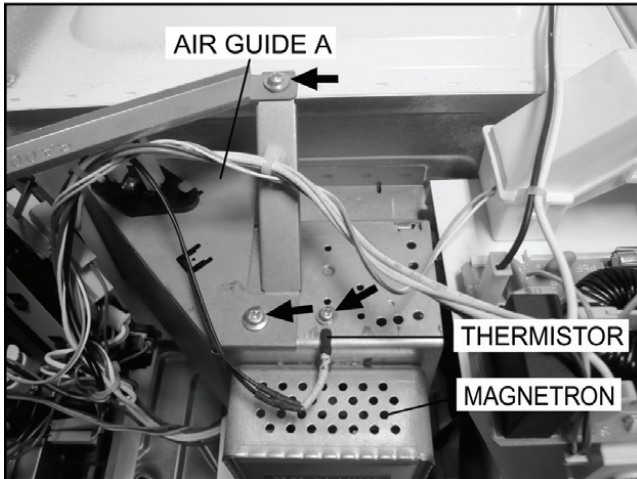

5. Remove 1 screw holding air guide A on the wave guide, then remove the air guide A.

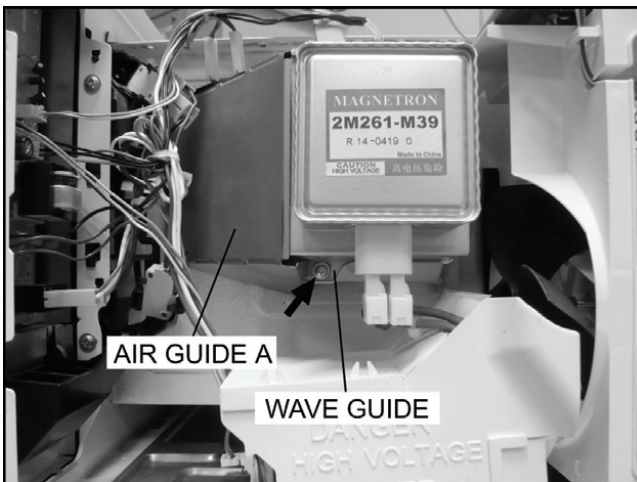

6. Remove 4 screws holding the magnetron.

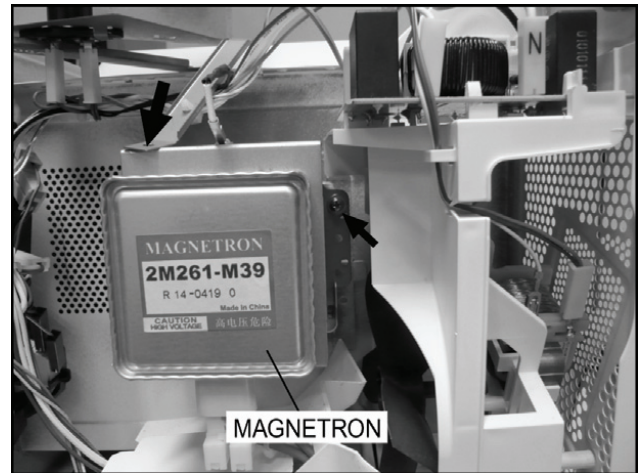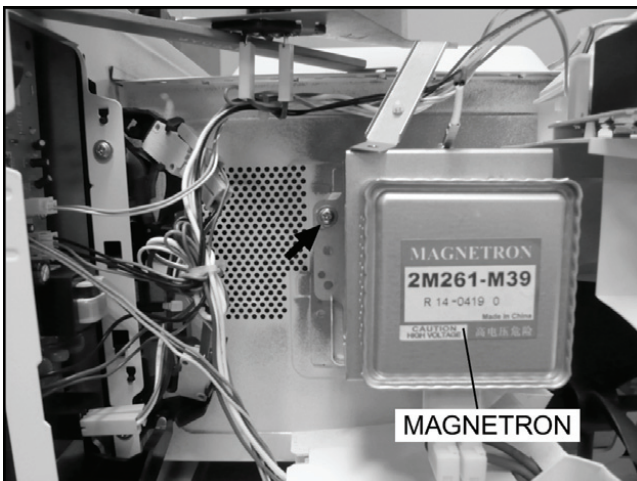

NOTE:

After replacement of the magnetron, tighten mounting screws properly, making sure there is no gap between the waveguide and the magnetron to prevent microwave leakage.

CAUTION

When replacing the magnetron, be sure the antenna gasket is in place.

4.2. Digital programmer circuit (D.P.C)

⚠ CAUTION:

Be sure to ground any static electric charge built up in your body before handling the DPC.


1. Disconnect connector CN701 on H.V. Inverter board.
2. Remove 1 screw holding escutcheon base and slide the escutcheon base upward slightly.
3. Remove all screws holding D.P.C. board on escutcheon base.
4. Separate D.P.C board from tabs on the escutcheon base and remove D.P.C board.

To replace membrane key board

5. Use tools such as knife etc. to lift the edge of escutcheon sheet and peel off escutcheon sheet & key board membrane completely from escutcheon base.

NOTE:

1. The membrane key board is attached to the escutcheon base with double faced adhesive tape. Therefore, applying hot air such as using a hair dryer is recommended for smoother removal.
2. When installing the new key board membrane, make sure that the surface of escutcheon base is clean to prevent a malfunction or shorted contacts.

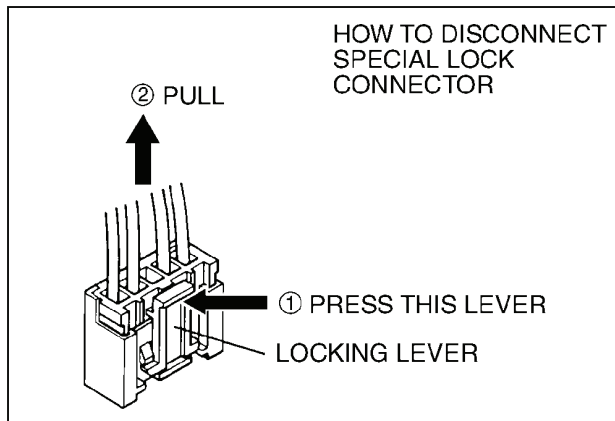

4.3. Low voltage transformer and/or power relays (RY1, RY2)

⚠ CAUTION:

Be sure to ground any static electric charge built up in your body before handling the DPC.

1. Replace D.P.C. board.

(A) Using solder wick or a desoldering tool and 30W soldering iron carefully remove all solder from the terminal pins of the low voltage transformer and/or power relays.


⚠ CAUTION:

Do not use a soldering iron or desoldering tool of more than 30 watts on D.P.C. contacts.

(B) With all the terminal pins cleaned and separated from D.P.C. contacts, remove the defective transformer/power relays, Replace components making sure all terminal pins are inserted completely resolder all terminal contacts carefully.


4.4. Fan motor

1. Disconnect 2 lead wires from fan motor terminals.
2. Remove 2 screws at location on oven attaching orifice assembly.
3. Remove orifice assembly from oven assembly.
4. Remove fan blade from the fan motor shaft by pulling it straight out.
5. Remove 2 screws holding fan motor to orifice.

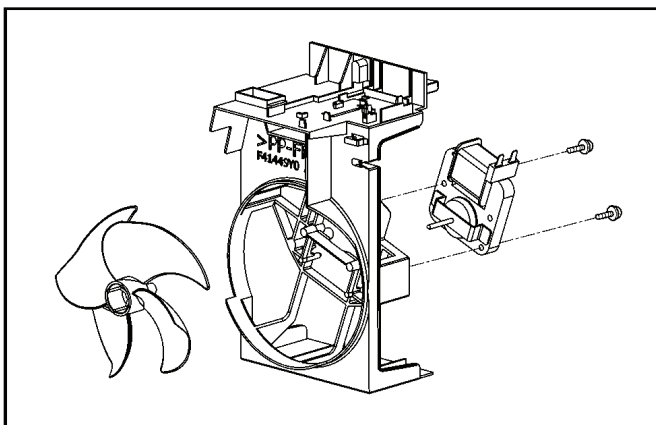

4.5. Door assembly

1. Support the door, remove 3 screws holding hinge A.

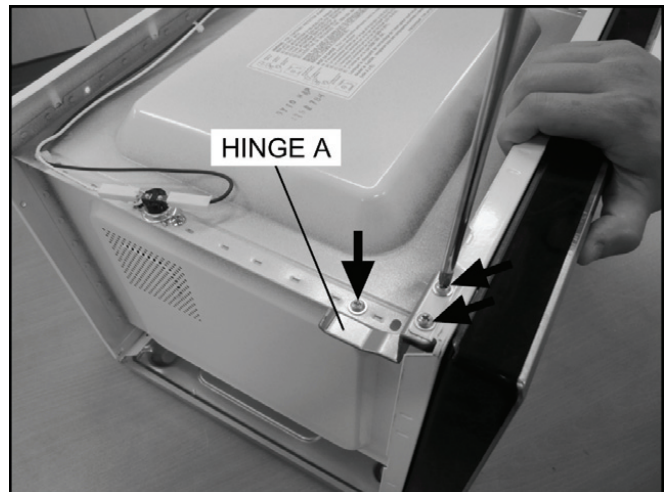

2. Open the door, remove door(U) and hinge A from cavity.

NOTE:

Support the door before opening.



3. Remove door C from door A (U) & door E by carefully pulling outward starting from upper right hand corner using a flat blade screwdriver.
4. Separate door E from tabs on door A (U) and remove door A (U).
5. Remove door key and door key spring from door E.


6. Replace other components.

To re-install components:


NOTE:

After replacement of the defective component parts of the door, reassemble it properly and adjustment so as to prevent an excessive microwave leakage. Adjustment of the door assembly (Refer page 21).

7. Place the hole of hinge A into the door's upper hinge pin.

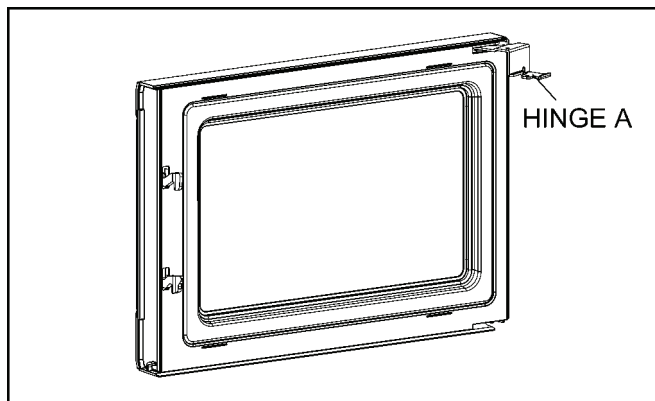

8. Use your left index finger to support the door's lower hinge pin while guiding the door's hinge A into the cavity slot. Then lower your finger to seat the door onto the hinge.

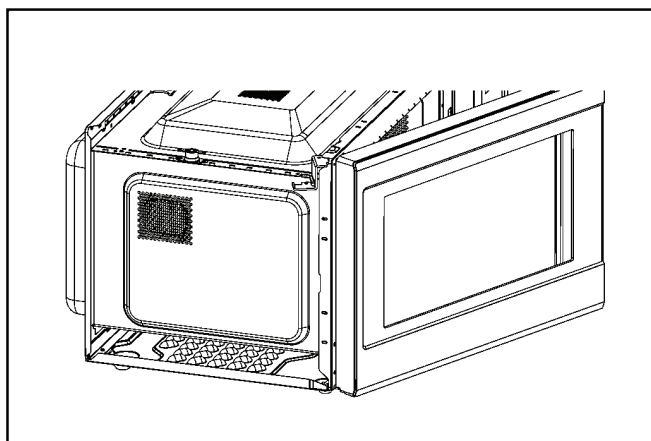


NOTE:

Door alignment is crucial. If door is misaligned, apply pressure until alignment is achieved.

NOTE:

Adjust so that the upper portion of the door will touch firmly to the oven cavity front plate, without pushing the door. If the door assembly is not mounted properly, microwave power may leak from the clearance between the door and oven.



9. Tighten 2 mounting screws.

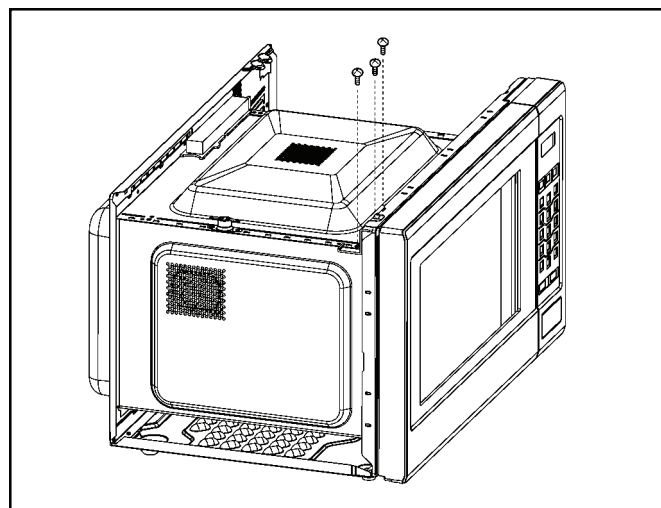

Be sure the gap between door E and cavity front plate will be 0.3~0.7mm.


NOTE:

Always perform the microwave leakage measurement test after installation and adjustment of door assembly.

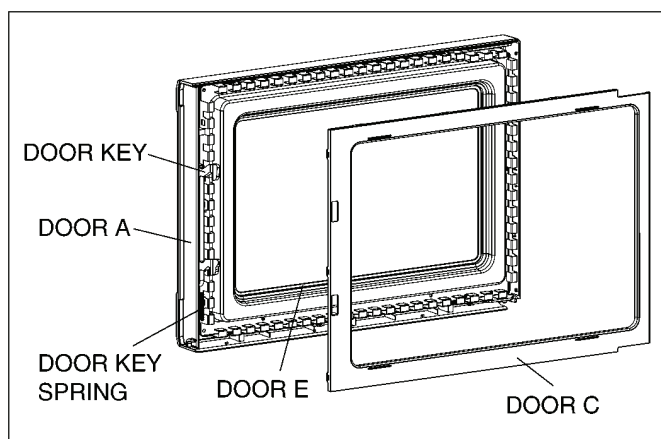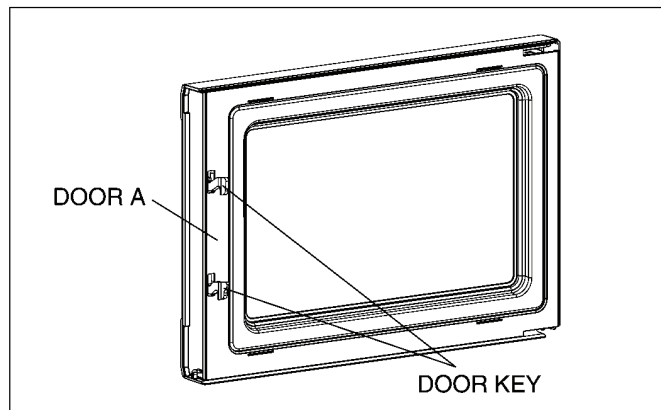

4.6. Turntable motor


1. Remove the motor cover by breaking off at the 8 spots indicated by arrows with a cutter or the like.

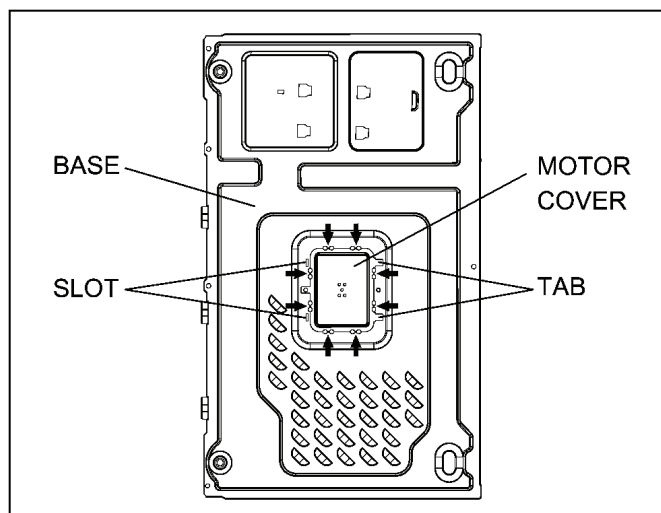

⚠ NOTE:

After removing the motor cover, be sure that cut portions are properly trimmed or bent to the inside so that no sharp edges will be exposed to outside.

2. Disconnect 2 lead wires connected to the turntable motor.
3. Remove the turntable motor by removing screw.

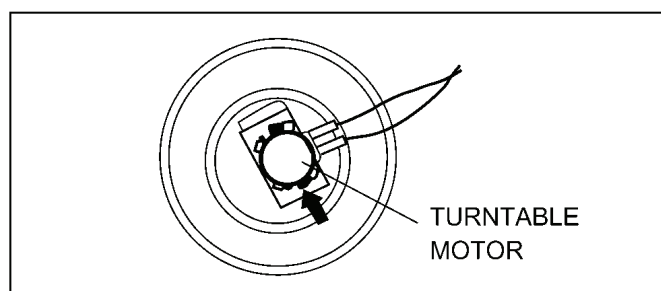


⚠ NOTE:


After reinstalling the new turntable motor and reconnecting the 2 lead wires, reinstall the motor cover by rotating it around 180, tucking the 2 tabs under the base in the 2 provided slots, then screw the single tab to the base using a 4mm × 6mm screw.

4.7. Quartz heater


1. Disconnect lead wires from both side of heater terminals.
2. Remove 2 screws holding upper heater panel to remove it.

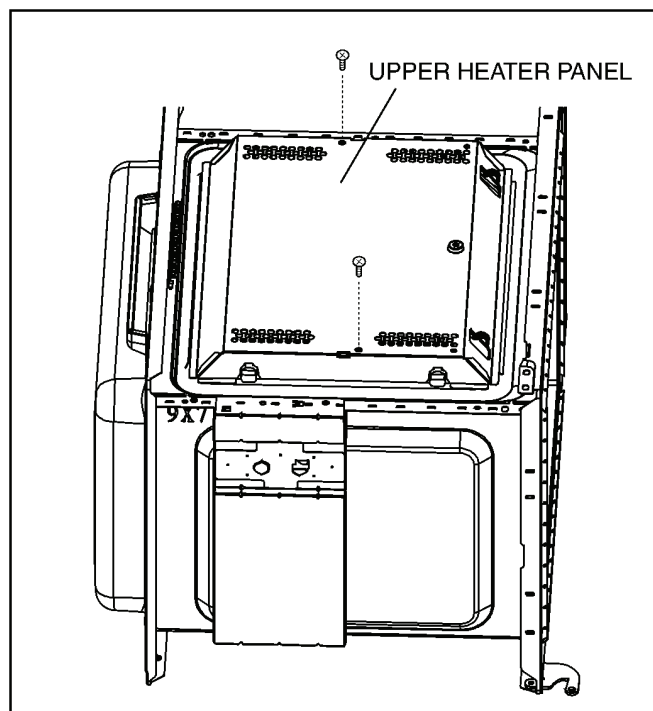

3. Remove 2 nuts holding heater mounting plate to remove it.

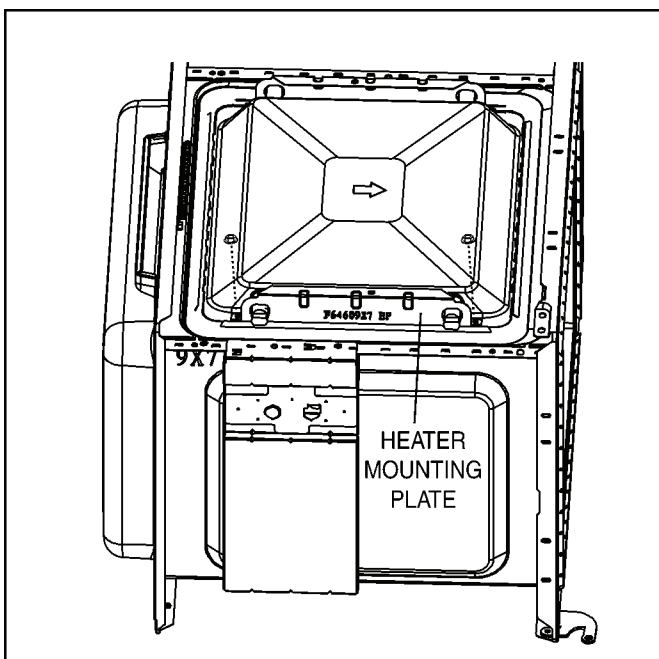


4. Remove the heater by pulling it out from the cavity left side.

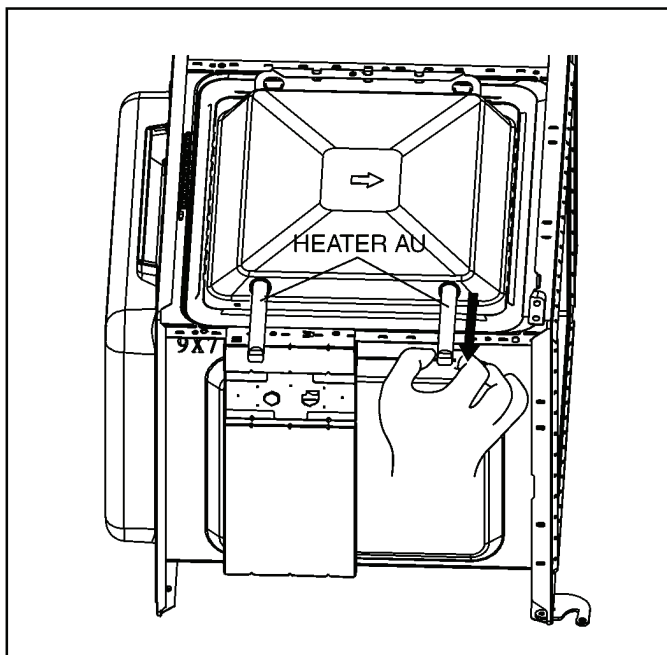

4.8. Steam sensor


1. Disconnect connector CN2 from digital programmer circuit board.
2. Disengage catch hooks on sensor cover C from orifice.

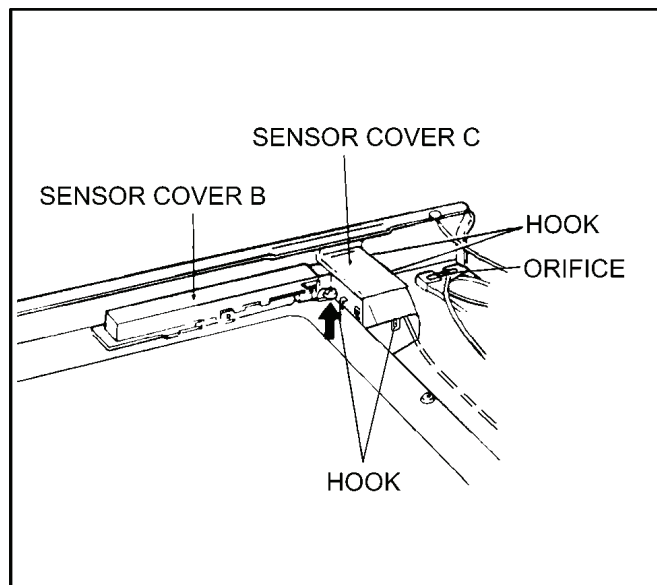

3. Remove steam sensor from orifice.

⚠ NOTE:

When installing the steam sensor, make sure that the direction of steam sensor is as shown in figure.

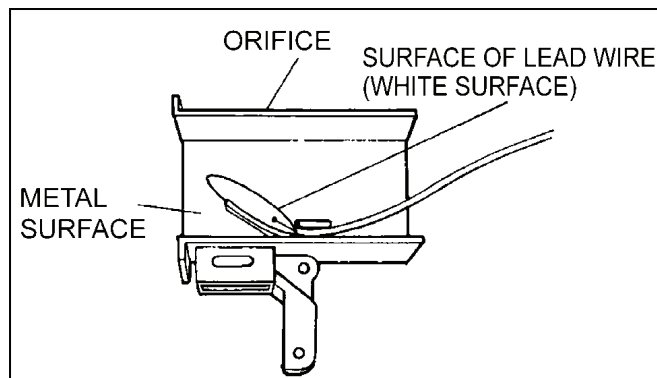


4.9. Inverter power supply


CAUTIONS

1. Always leave the grounding plate in place.
2. Always securely tighten the ground screw through the bottom of the chassis (base).
3. Securely connect 3 lead wire connectors.
4. Make sure the heat sink has enough space (gap) from the oven. Take special care not to dress any lead wire over the aluminum heat sink because it is hot.


1. Discharge high voltage charge.
2. Remove the H.V.lead wire from magnetron terminals.
3. Disconnect 2 connectors from CN701 & CN702 on H.V.Inverter(U).
4. Remove 1 screw holding grounding plate to the base.

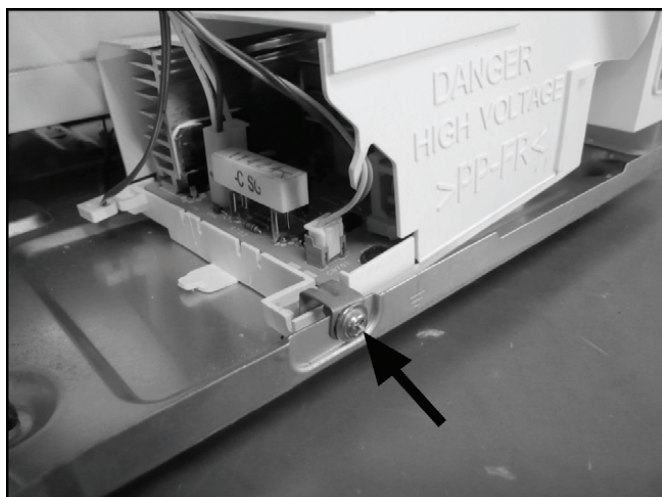


5. Press 1 encircled locking tab and then slide 4 locking tabs of Inverter bracket at the bottom of the base in direction of arrows.

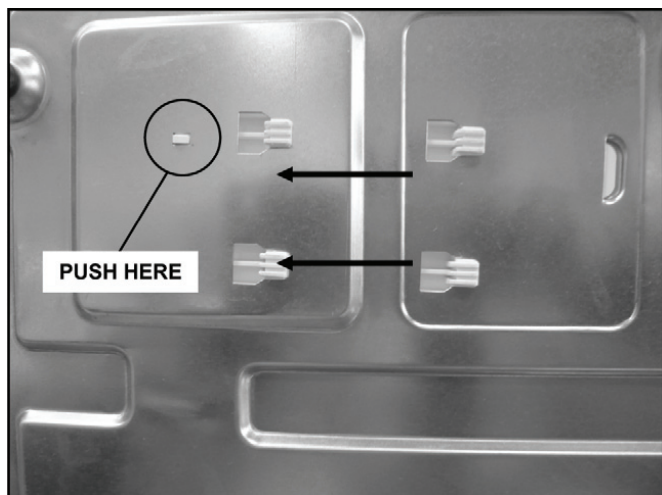

6. Remove 1 screw holding H.V.Inverter to Inverter bracket.

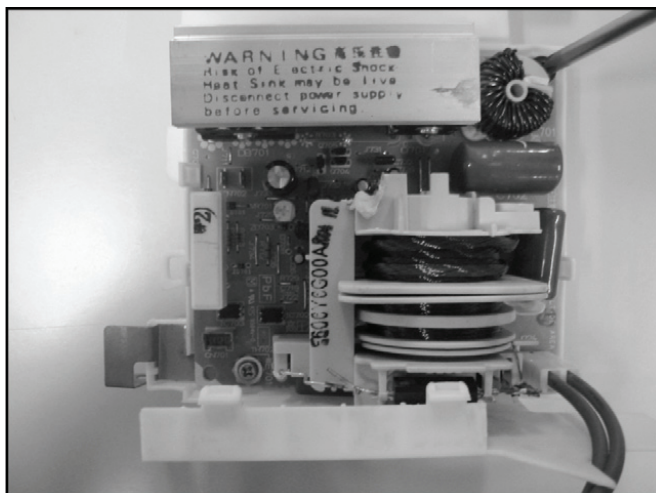

7. Remove 1 screw holding grounding plate to H.V. Inverter.

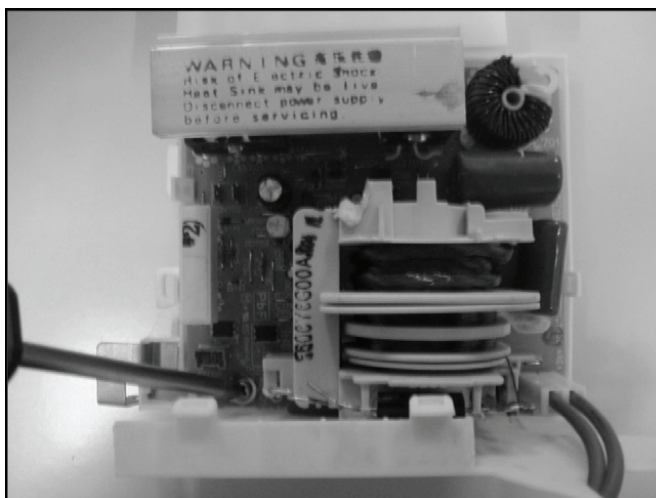

8. Separate H.V. Inverter from Inverter bracket by freeing 3 catch hooks on the Inverter bracket.

5 COMPONENT TEST PROCEDURE

⚠ WARNING

1. High voltage is present at the output terminals of the High Voltage Inverter (U) including aluminum heat sink during any cook cycle.
2. It is neither necessary nor advisable to attempt measurement of the high voltage.
3. Before touching any oven components, or wiring, always unplug the power cord and discharge the high voltage capacitors (see page 11).

5.1. Primary, Secondary Latch Switch interlocks & Power Relay RY1

1. Unplug lead connectors to Power Relay RY1 and verify open circuit of the Power Relay RY1 1-2 terminals.
2. Unplug lead connectors to Primary Latch Switch and Secondary Latch Switch.
3. Test the continuity of switches at door opened and closed positions with ohm meter (low scale).

Normal continuity readings should be as follows.

	Door Closed	Door Opened
Primary Latch Switch	0Ω (Close)	∞Ω (Open)
Secondary Latch Switch	0Ω (Close)	∞Ω (Open)
Power Relay RY1	∞Ω (Open)	∞Ω (Open)

5.2. Short Switch

1. Unplug lead wires from Inverter Power Supply (U) primary terminals.
2. Connect test probes of ohm meter to the disconnected leads that were connected to Inverter Power Supply (U).
3. Test the continuity of short switch with door opened and closed positions using lowest scale of the ohm meter.


Normal continuity readings should be as follows.

Door Opened	Door Closed
0Ω (Close)	∞Ω (Open)

5.3. Magnetron


Continuity checks can only indicate an open filament or a shorted magnetron. To diagnose for an open filament or shorted magnetron.

1. Isolate magnetron from the circuit by disconnecting the leads.
2. A continuity check across magnetron filament terminals should indicate one ohm or less.
3. A continuity check between each filament terminal and magnetron case should read open.

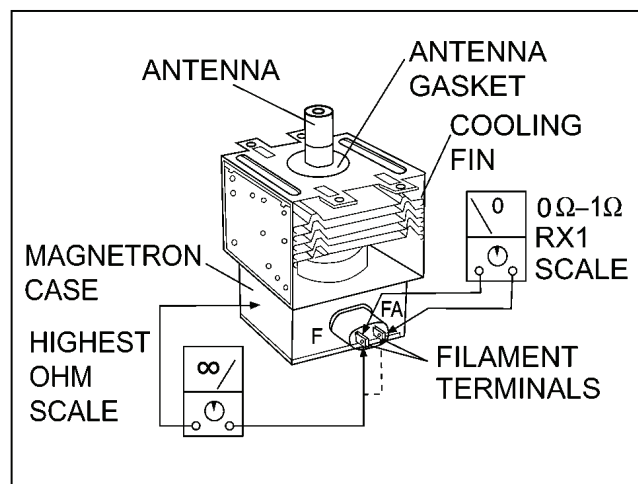

5.4. Inverter power supply (U)

DO NOT try to REPAIR H.V. Inverter power supply (U). Replace complete H.V. Inverter(U) Unit.

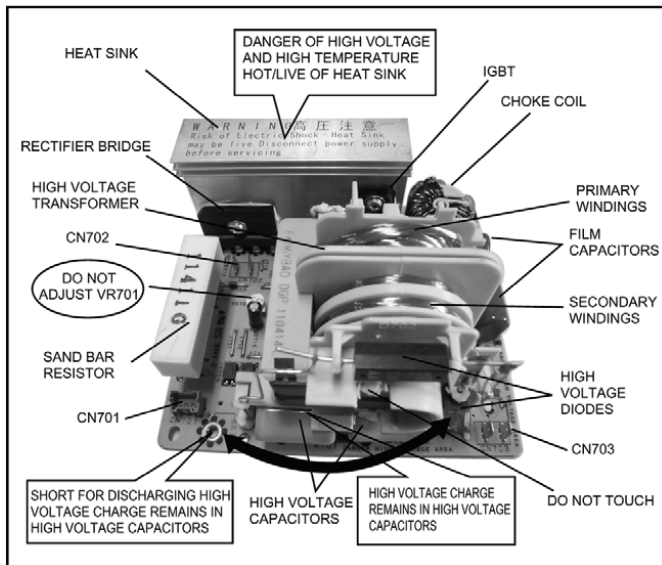

WARNING: HIGH VOLTAGE

Test if failure codes H95, H97 or H98 appear when performing the following procedure. It is recommended to use an AC line input current ammeter for testing.

Test 1

1. With the oven unit's AC power supply cord is unplugged from the wall outlet, unplug the 2 pin H.V. connector CN703 from the magnetron tube.
2. Place 1 liter of water load into oven cavity.
3. Plug in the oven's AC power supply cord into outlet.
4. Program DPC.
 - a. Press **Timer / Clock** button twice.
 - b. Press **Start** button once.
 - c. Press **Micro Power** button once.
5. Program oven at High power for 1 minute and press [Start] button.
 - a. After approximately 23 seconds, oven stops operating.
 - b. During oven operation, the input current is approximately 0.5 to 1A. If both a and b are OK, proceed to test 2.

	INPUT CURRENT	FAILURE CODE
Unplug CN703	0.5 to 1A	Oven stops in 23 seconds after started.

Test 2

Continued from Test 1

1. Unplug the oven's AC power supply cord from outlet.
2. Unplug 3 pin connector CN701. CN703 remains unplugged.
3. Plug in the oven's AC power supply cord into outlet.
4. Program DPC.
 - a. Press **Timer / Clock** button twice.
 - b. Press **Start** button once.
 - c. Press **Micro Power** button once.

5. Program oven at High power for 1 minute and press [Start] button.

- a. After approximately 3 seconds, oven stops operating.
- b. During oven operation, the input current is approximately 0.4A.

	INPUT CURRENT	FAILURE CODE
Unplug CN701	≈ 0.4A	Oven stops in 3 seconds after started.

If both a and b check OK, the Inverter Power Supply (U) can be determined to be OK.

5.5. Temperature thermistor

The thermistor that is attached to the magnetron detects the temperature of the magnetron and will stop magnetron operation when overheating is detected. A normal thermistor's resistance is 35KΩ to 110KΩ for an ambient temperature range of 10-30 degree C.

If the resistance reading is out of the range stated here, the thermistor is defective and must be replaced.

It is also possible to display thermistor level by taking the following steps.

1. Program the DPC into TEST MODE (Plug-in oven → press **Timer / Clock** button twice → press **Start** button once → press **Micro Power** button once).
2. Program oven at Standing Time for 1 minute and press [Start] button.
3. Press **Micro Power** once, the thermistor level reading will shown on the display.

The normal reading should be in the range of 16-240.

6 MEASUREMENTS AND ADJUSTMENTS


6.1. Adjustment of primary latch switch, secondary latch switch and short switch.

1. Mount the Primary latch switch, the Secondary latch switch and the Short switch to the door hook assembly as shown in illustration.

NOTE:

No specific individual adjustments during installation of the Primary latch switch, Secondary latch switch or Short switch to the door hook are required.

2. When mounting the door hook assembly to the oven assembly, adjust the door hook assembly by moving it in the direction of the arrows in the illustration so that the oven door will not have any play in it. Check for play in the door by pulling the door assembly. Make sure that the latch keys move smoothly after adjustment is completed. Completely tighten the screws holding the door hook assembly to the oven assembly.
3. Reconnect the short switch and check the continuity of the monitor circuit and all latch switches again by following the component test procedures.

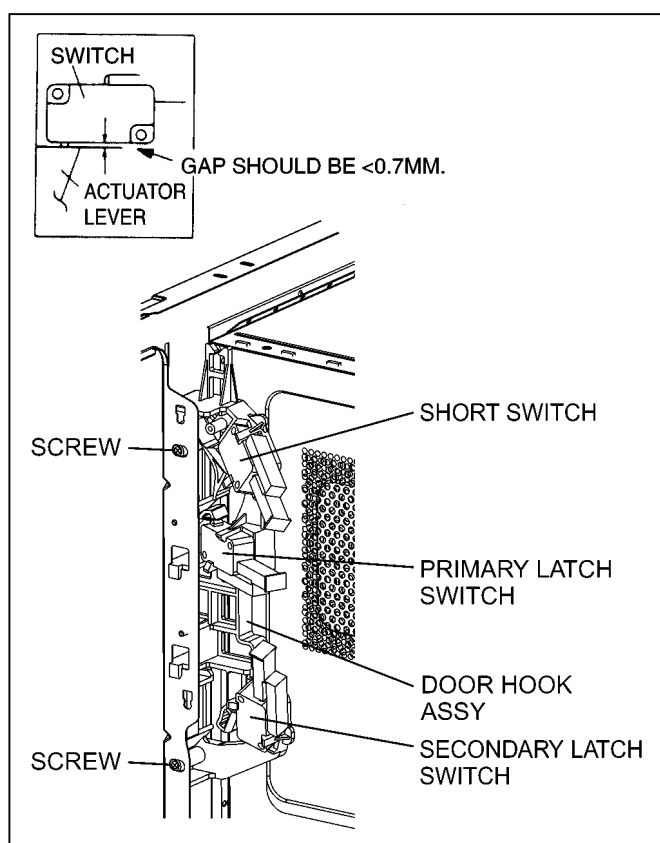

6.2. Measurement of microwave output

The output power of the magnetron can be determined by performing IEC standard test procedures. However, due to the complexity of IEC test procedures, it is recommended to test the magnetron using the simple method outlined below.

Necessary Equipment:

- 1 liter beaker
- Glass thermometer
- Wrist watch or stopwatch

NOTE:

Check the line voltage under load. Low voltage will lower the magnetron output. Take the temperature readings and heating time as accurately as possible.

1. Fill the beaker with exactly one liter of tap water. Stir the water using the thermometer and record the water's temperature. (recorded as T1).
2. Place the beaker on the center of glass tray.
Set the oven for High power and heat it for exactly one minute.
3. Stir the water again and read the temperature of the water. (recorded as T2).
4. The normal temperature rise at High power level for each model is as shown in table.

TABLE (1L-1min. test)

RATED OUTPUT	TEMPERATURE RISE
1000W	Min. 8.5°C

7 TROUBLESHOOTING GUIDE


DANGER: HIGH VOLTAGES ⚠

- DO NOT RE-ADJUST PRESET CONTROL on the H.V.Inverter (U).** It is very dangerous to repair or adjust without proper test equipment because this circuit generates very large current and high voltage. Operating a misaligned inverter circuit is dangerous.
- Ensure proper grounding before troubleshooting.
- Be careful of the high voltage circuitry, taking necessary precautions when troubleshooting.
- Discharge high voltage remaining in the H.V.Inverter (U).
- When checking the continuity of the switches or the H.V.Inverter, disconnect one lead wire from these parts and then check continuity with the AC plug removed. Doing otherwise may result in a false reading or damage to your meter. When disconnecting a plastic connector from a terminal, you must hold the plastic connector instead of the lead wire and then disconnect it, otherwise lead wire may be damaged or the connector cannot be removed.
- Do not touch any parts of the circuitry on the digital programmer circuit, since static electric discharge may damage this control panel. Always touch ground while working on this panel to discharge any static charge in your body.
- 220-240V AC is present on the digital programmer circuit (Terminals of power relay's and primary circuit of Digital Programmer Circuit). When troubleshooting, be cautious of possible electrical shock hazard.

Before troubleshooting, operate the microwave oven following the correct operating procedures in the instruction manual in order to find the exact cause of any trouble, since operator error may be mistaken for the oven's malfunction.

7.1. (Troubleshooting) Oven stops operation during cooking

	SYMPTOM	CAUSE	CORRECTIONS
1.	Oven stops in 3 seconds after pressing [Start] button.	No input AC is supplied to H.V.Inverter (U) CN702 terminals	1. Latch Switch 2. Power relay RY1 3. Loose lead wire connector CN701, CN702 4. H.V. Inverter (U)
	Oven stops in 23 seconds after pressing [Start] button.	H.V.Inverter (U) operates by the control signals from DPC but magnetron is not oscillating	1. Magnetron 2. Loose lead wire connector CN703 3. H.V. Inverter (U)
	Oven stops in 10 seconds after pressing [Start] button. (Auto sensor cooking)	Steam sensor circuit is not functioning	1. Steam sensor 2. DPC 3. Open or loose wiring of sensor terminal from connector CN2 on DPC
2.	No display and no operation at all. Fuse is blown.	Most probably loose connection of connectors, or door latch mechanism is not adjusted properly	1. Align door, Door Latch Switches 2. Loose wiring connectors

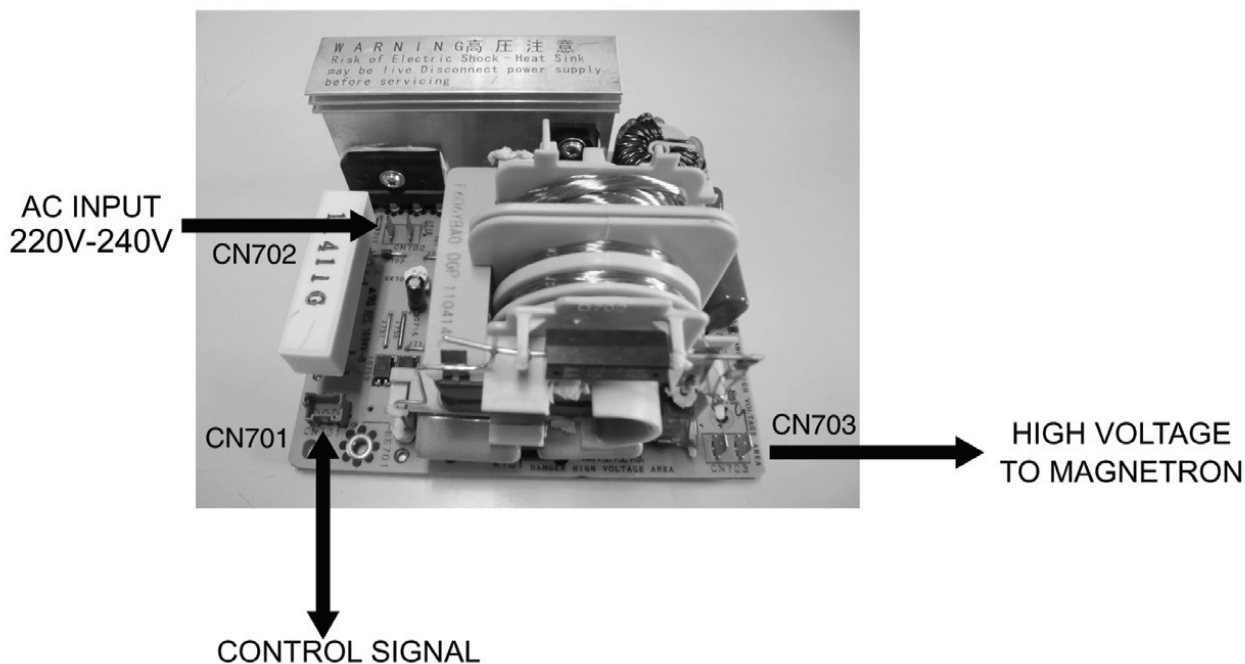


7.2. (Troubleshooting) Other problems

	SYMPTOM	CAUSE	CORRECTIONS
1.	Oven is dead. Fuse is OK. No display and no operation at all.	1. Open or loose lead wire harness 2. Open thermal cutout / thermistor 3. Open low voltage transformer 4. Defective DPC	Check thermal cutout is defective.
2.	No display and no operation at all. Fuse is blown.	1. Shorted lead wire harness 2. Defective primary latch switch (NOTE 1) 3. Defective short switch (NOTE 1) 4. Defective Inverter Power Supply (U) NOTE 1: All of these switches must be replaced at the same time. Check continuity of power relay RY1 contacts (between 1 and 2) and if it has continuity, replace power relay RY1 also.	Check adjustment of primary, secondary latch switch and short switch including door.
3.	Oven does not accept key input (Program)	1. Key input is not in proper sequence 2. Open or loose connection of flat cable to DPC 3. Defective touch switch 4. Defective DPC	Refer to operation procedure. Refer to DPC troubleshooting.
4.	Fan motor turns on when oven is plugged in with door closed.	1. Misadjustment or loose wiring of secondary latch switch 2. Defective secondary latch switch 3. Door switch CN4	Adjust door and latch switches.
5.	Timer starts count down but no microwave oscillation. (No heat while oven lamp and fan motor turn on)	1. Off-alignment of primary latch switch 2. Open or loose connection of high voltage circuit especially magnetron filament circuit NOTE: Large contact resistance will cause lower magnetron filament voltage and cause magnetron to have lower output and/or be intermittent. 3. Defective high voltage component H.V. Inverter Power Supply (U) Magnetron 4. Open or loose wiring of power relay RY1 5. Defective primary latch switch 6. Defective DPC or power relay RY1	Adjust door and latch switches. Check high voltage component according to component test procedure and replace if it is defective. Refer to DPC troubleshooting
6.	Oven can program but timer does not start countdown.	1. Open or loose wiring of secondary latch switch 2. Off-alignment of secondary latch switch 3. Defective secondary latch switch	
7.	Microwave output is low. Oven takes longer time to cook food.	1. Decrease in power source voltage 2. Open or loose wiring of magnetron filament circuit.(Intermittent oscillation) 3. Aging change of magnetron	Consult electrician
8.	Fan motor turns on and turntable motor rotates when door is opened.	1. Low voltage transformer on DPC.	
9.	Oven does not operate and return to plugged in mode as soon as [Start] button is pressed.	1. Defective DPC	Check grounding connector on escutcheon base.
10.	Loud buzzing noise can be heard.	1. Loose fan and fan motor	
11.	Heater does not turn on.	1. Open or loose wiring of heater 2. Defective heater 3. Defective power relay 4. Defective DPC	
12.	Oven stops operation during cooking.	1. Open or loose wiring of primary and secondary latch switch 2. Operation of thermal cutout	Adjust door and latch switches.

7.3. Troubleshooting of inverter circuit (U) and magnetron

This oven is programmed with a self diagnostics failure code system which will help for troubleshooting. H95, H97, H98 and H99 are the provided failure codes to indicate magnetron and inverter circuit problem areas. This section explains failure codes of H95, H97, H98 and H99. First, you must program the DPC into TEST MODE, press **Timer/Clock** button twice → Press **Start** button once → press **Micro Power** button once. Program unit for operation. H95, H97, H98, H99 appears in display window a short time after [Start] button is pressed and there is no microwave oscillation.

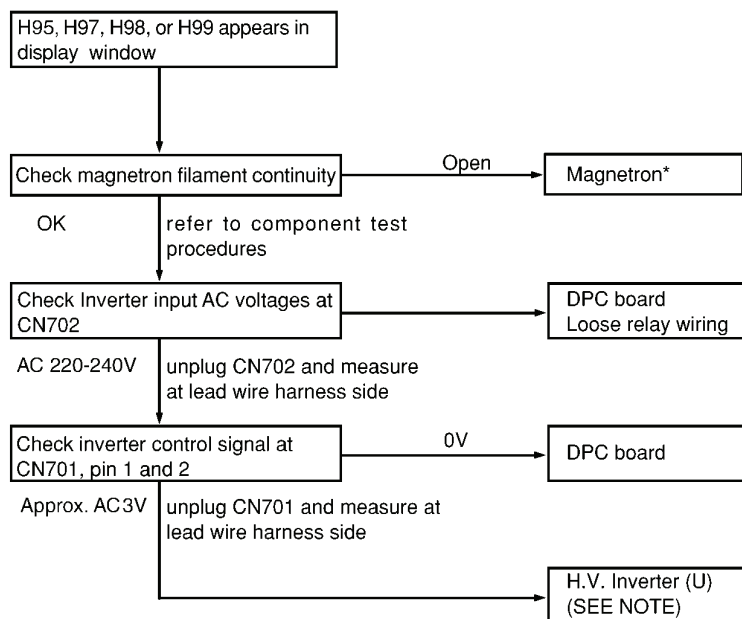


⚠ WARNING: DO NOT try to repair this Inverter Power Supply (U) and also DO NOT RE-ADJUST PRESET CONTROL on the board. It is very dangerous to repair or adjust without proper test equipment because this circuit generates very high voltage and very large current. Off alignment of inverter board operation is dangerous. Operating a misaligned Inverter circuit is dangerous due to the very high voltage and current that is produced by this board. Defective boards must be replaced with a new one.

* Check magnetron filament for open or short to case before proceeding to determine a good magnetron.

NOTE: After check, unplug unit to reset to normal operation mode.

Alternate way to troubleshoot oven with AC Ampere meter used

H95, H97, H98, H99 appears in display window a short time after [Start] button is pressed and no microwave oscillation with AC Ampere meter used for troubleshooting.

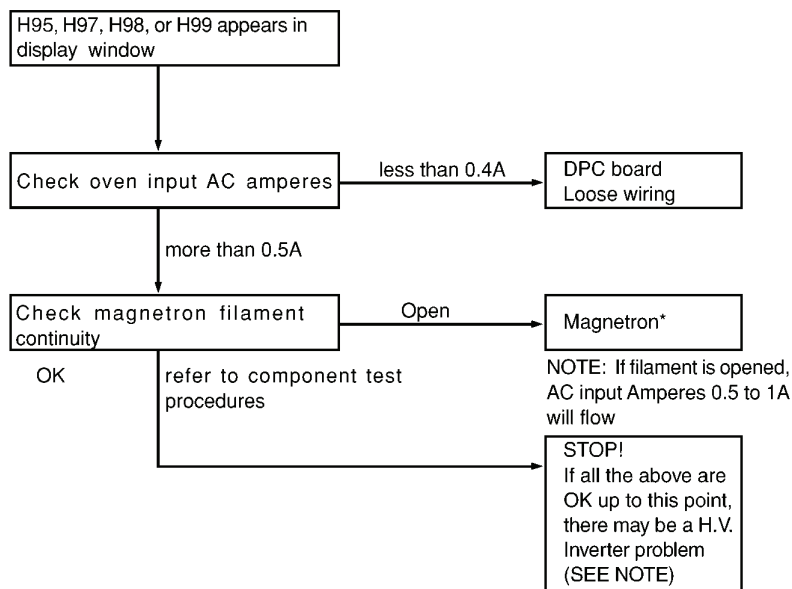

NOTE: If filament is opened, AC input Amperes 0.5 to 1A will flow

NOTE: After check, unplug unit to reset to normal operation mode.

7.4. Trouble related to Digital Programmer Circuit

SYMPTOM	STEP	CHECK	RESULT	CAUSE/CORRECTIONS
No display when oven is first plugged in	1	Fuse pattern of D.P.C.	Normal	→Step2
			Open	Replace D.P.C. or Fuse Pattern (PF2/PF3)
	2	Low voltage transform (L.V.T.) secondary voltage	Abnormal 0V	L.V.T.
	3	IC1 pin 13 voltage	Normal	→Step3
			Abnormal	Q10, ZD10
No key input	1	Touch switch continuity	Abnormal	IC1, Display
			Normal=5V	Touch switch
No beep sound	1	IC1 pin 1 voltage	Abnormal	IC1
			Normal=5V	BZ210, Q210
			Abnormal	IC1
Power relay RY2 does not turn on even though the program had been set and the Start pad is tapped	1	IC1 pin 28 voltage while operation	Abnormal	→Step2
			Normal=5V	IC1
	2	Collector of Q229 voltage	Abnormal	Q229
			Normal≈0.7V	RY2
No microwave oscillation at any power	1	IC1 pin 27 voltages while operation at high power	Abnormal	IC1
			Normal=5V	→Step2
	2	Collector of Q220 voltage	Abnormal	Q220 and/or Q221, Q222, Q225
			Normal≈0.7V	→Step3
	3	Short circuit between collector of Q220 and emitter of Q225	Still not turn on	RY1
Dark or unclear display	1	Replace display and check operation	RY1 turns on	Q220 and/or Q221, Q222, Q225
			Normal	Display
			Abnormal	IC1
Missing or lighting of unnecessary segment	1	Replace IC1 and check operation	Normal	IC1
			Abnormal	Display
H95/H97/H98 appears in window and oven stops operation. Program High power for 1 minute and conduct following test quickly, unless H95/H97/H98 appears and oven stops	1	Unplug CN702 (2 pin) connector and measure voltage between terminals	Abnormal=0V	1. Latch Switch 2. D.P.C. /Power Relay
			Normal=220~240V	→Step2
	2	Unplug CN701 (3 pin) connector and measure pin1 voltage of D. P. C. CN3	Abnormal=0V	D.P.C.
			Approx. AC 3V	Magnetron


7.5. Simple way of H.V. Inverter/magnetron troubleshooting

Purpose:

Simple way (3/23 seconds rule) of identifying whether it's Magnetron, Inverter, or others.

Set-up:

The unit under question is connected through the Ammeter as shown below.

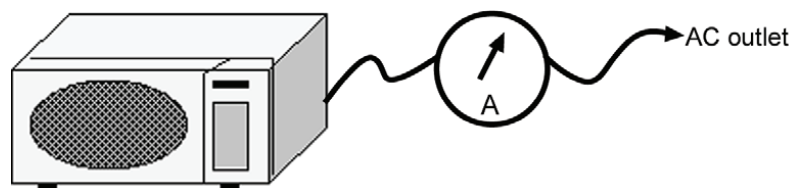

Procedure:

Follow the matrix table below to identify the problem source.


Note:

Do not replace both Inverter board and Magnetron simultaneously and automatically without going through this procedure.

Power will:	Ammeter reading is:	To do:	Remedy:
Shut off in 23 seconds after "Start".	1. Between 0.5A and 1.0A.	Check and repair open magnetron circuit	Open magnetron wiring between Inverter and magnetron terminal.
	2. Between 1.0A and 2.0A.	Check continuity of D702 in Inverter PCB.	
		↓	
		1. D702 shorted	Replace H.V.Inverter (F606YBA00QP)
		2. D702 is OK	Replace magnetron
Shut off in 3 seconds after "Start"	1. Less than 0.5A	Check open circuit: Latch Switch, DPC, Power Relay and CN701	Replace defective component(s), or correct switch, cables and connectors.

7.6. How to check the semiconductors using an OHM meter

Diode




	FORWARD	REVERSE
A-K	SMALL	∞

Transistor

NPN Transistor

2SC.....

2SD.....




	FORWARD	REVERSE
B-E	SMALL	∞
B-C	SMALL	∞
C-E	∞	∞

PNP Transistor

2SA.....


2SB.....



	FORWARD	REVERSE
B-E	SMALL	∞
C-B	SMALL	∞
C-E	∞	∞

Digital Transistor


PNP Transistor



	FORWARD	REVERSE
E-B	10kΩ ~ 30kΩ	10kΩ ~ 30kΩ
C-B	50kΩ ~ 90kΩ	∞
C-E	40kΩ ~ 80kΩ	∞

IGBT

(INSULATED GATE BIPOLAR TRANSISTOR)

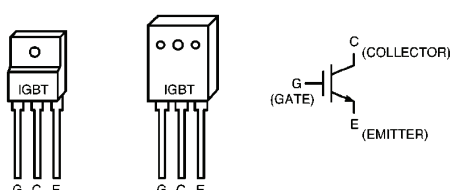

	FORWARD	REVERSE
E-C	SMALL	∞
E-G	∞	∞
C-G	∞	∞

7.7. H.V. INVERTER MAIN PARTS LIST (F606YBA00QP)

Ref. No.	Part No.	Part Name & Description	Pcs/Set	Remarks
Q701	B1JAEV000003	IGBT	1	
C701	ECWHC3B104JA	FILM CAPACITOR	1	0.1 μ F, 1000VDC
C702	ECWF4305N851	FILM CAPACITOR	1	3 μ F, 250VDC
DB701	B0FBBQ000006	RECTIFIER BRIDGE	1	
L701	F5020W100AP	CHOKE COIL	1	
R702	D0CM562JA002	SAND BAR RESISTOR	1	
T701	F609ABA00GP	TRANSFORMER	1	(INCLUDING D701,D702,C706,C707)
D701,D702	B0FBAZ000003	DIODE	2	
C706	F0C3F562A002	FILM CAPACITOR	1	5600PF/3KV
C707	F0C3F822A002	FILM CAPACITOR	1	8200PF/3KV

8.2. PARTS LIST

NOTE:

1. When ordering replacement part(s), please use part number(s) shown in this part list.

Do not use description of the part.

2. Important safety notice:

Components identified by $\triangle$ mark have special characteristics important for safety.


When replacing any of these components, use only manufacture's specified parts.

Ref. No.		Part No.	Part Name & Description	Pcs/Set	Remarks
1		F00066V00HP	CAUTION LABEL	1	KTE, PTE, KPQ, STM
1		F00066W10ZP	CAUTION LABEL	1	ZPE
4		F10019Y00AP	BASE	1	
5		F10089W40HPS	RUBBER FOOT	2	
6		F10099Y00SAP	CABINET BODY (U)	1	
7	$\triangle$	F200A9X70SEP	OVEN (U)	1	
8		F20559Y00AP	COVER	1	
9		F21319Y00AP	PULLY SHAFT	1	
11		F290D6W50XP	ROLLER RING (U)	1	
12	$\triangle$	F30209X70EP	DOOR HOOK	1	
13		F11619Y00AP	REINFORCEMENT BRACKET	1	
17		F400A9Y10HP	FAN MOTOR	1	KTE, PTE, ZPE
17		F400A9Y00QP	FAN MOTOR	1	KPQ
17		F400A9Y10ST	FAN MOTOR	1	STM
18		F40089Y00AP	FAN BLADE	1	
19		F40259Y00AP	AIR GUIDE A	1	
20		F41449Y10QP	ORIFICE	1	KTE, PTE, KPQ
20		F41449Y00AP	ORIFICE	1	STM, ZPE
21		J607S4T00AP	STEAM SENSOR	1	
22		F64499X70EP	SENSOR COVER A	1	
24		F64509X70EP	SENSOR COVER B	1	
25		F65439X70EP	SENSOR COVER C	1	
26	$\triangle$	F61425U30XN	MICRO SWITCH	1	(PRIMARY LATCH SWITCH)
27	$\triangle$	F61415U30XN	MICRO SWITCH	1	(SECONDARY LATCH SWITCH)
28	$\triangle$	F6145-1F90	THERMAL CUTOFF	1	
29		F612E9X70EP	INCANDESCENT LAMP (U)	1	
30	$\triangle$	F61785U30XN	MICRO SWITCH	1	(SHORT SWITCH)
31	$\triangle$	F606YBA00QP	H.V. INVERTER (U)	1	
32	$\triangle$	2M261-M39R	MAGNETRON	1	
33	$\triangle$	F62306V60BP	FUSE	1	STM, ZPE (10A)
33	$\triangle$	F62309W40HP	FUSE	1	KTE, PTE, KPQ (10A)
34		F62319V00XP	FUSE HOLDER	1	KTE, PTE, KPQ
35		F66629Y00AP	GROUNDING PLATE	1	
36		F63269P00HP	TURNTABLE MOTOR	1	
37	$\triangle$	F900C9Y10KT	AC CORD W/PLUG	1	KTE, KPQ
37	$\triangle$	F900C9Y10PT	AC CORD W/PLUG	1	PTE
37	$\triangle$	F900C9Y10ST	AC CORD W/PLUG	1	STM
37	$\triangle$	F900C9X70ZP	AC CORD W/PLUG	1	ZPE
38		F607X9J20QP	NOISE FILTER	1	STM, ZPE
40		F30069X70EP	HINGE A	1	
41		XTWFL4+12T	SCREW	4	FOR MAGNETRON
43		XTWFA4+12D	SCREW	4	FOR CABINET BODY
44		XTWFA4+12LR	SCREW	3	FOR HINGE A
45		F65859X70EP	INVERTER BRACKET	1	
47		F67359X70EP	HEATER PROTECTOR	1	
48		F630G9X70ZP	HEATER (AU)	2	KTE, PTE, STM, ZPE
48		F630G9X90QP	HEATER (AU)	2	KPQ
49		F64609X70EP	HEATER MOUNTING PLATE	2	
50		F40249X70EP	EXHAUST GUIDE A	1	
51		F203S9X70EP	LEFT HEATER PANEL (U)	1	
52		F22179X70EP	INSULATION PLATE	1	

Ref. No.		Part No.	Part Name & Description	Pcs/Set	Remarks
54		F01508G60HP	NO TOUCHING LABEL	1	
55		F31389X70EP	HOOK LEVER C	1	
56		F31369X70EP	HOOK LEVER A	1	
57		F31379X70EP	HOOK LEVER B	1	
58		F11409W00XP	STOPPER	2	
63		MKFX2335K	CAPACITOR	1	KTE,PTE,KPQ
65		F03349X90KT	MENU LABEL	1	KTE,PTE,KPQ,STM
65		F03349X70ZP	MENU LABEL	1	ZPE
66		F02395E20KN	AC CORD CAUTION LABEL	1	KTE,PTE,KPQ,STM


8.3. ESCUTCHEON BASE ASSEMBLY

8.3.1. NN-GD692S KTE/PTE/KPQ/STM

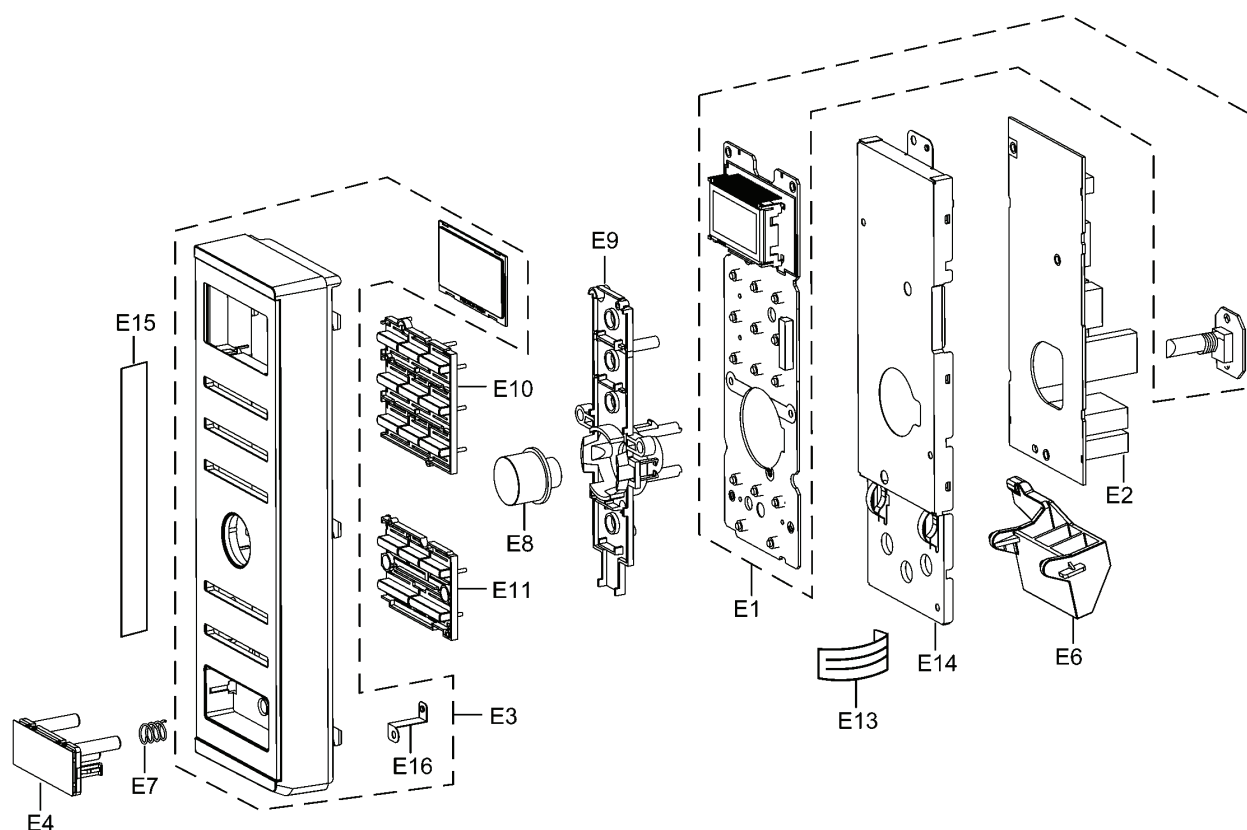


Ref. No.	Part No.	Part Name & Description	Pcs/Set	Remarks
E1	F603L9X90PT	D.P.CIRCUIT (AU)	1	KTE,PTE
E1	F603L9X90KP	D.P.CIRCUIT (AU)	1	KPQ
E1	F603L9X90ST	D.P.CIRCUIT (AU)	1	STM
E2	F603Y9X90QP	D.P.CIRCUIT (DU)	1	
E3	F800L9X90SHP	ESCUTCHEON BASE (U)	1	KTE,PTE,KPQ,STM
E4	F891P9Y40NAP	DOOR OPENING BUTTON (U)	1	KTE,PTE,KPQ,STM
E6	F82569Y00AP	DOOR OPENING LEVER	1	
E7	F80375K00AP	COOK BUTTON SPRING	1	
E8	F803G9X90SQP	POP-OUT DIAL (U)	1	KTE,PTE,KPQ,STM
E9	F80189Y40AP	DIAL SUPPORT	1	
E10	F82989Y40KAP	BUTTON	1	KTE,PTE,KPQ,STM
E11	F82989Y90KAP	BUTTON B	1	KTE,PTE,KPQ,STM
E13	F66167D00AP	FLAT CABLE	1	
E14	F81279Y40AP	BACK PANEL	1	
E15	F00079X90SKT	NAME PLATE	1	KTE
E15	F00079X90SPT	NAME PLATE	1	PTE
E15	F00079X90SKP	NAME PLATE	1	KPQ
E15	F00079X90SST	NAME PLATE	1	STM
E16	F33169Y40AP	GROUNDING METAL	1	KTE,PTE,KPQ,STM

8.3.2. NN-GD692M ZPE

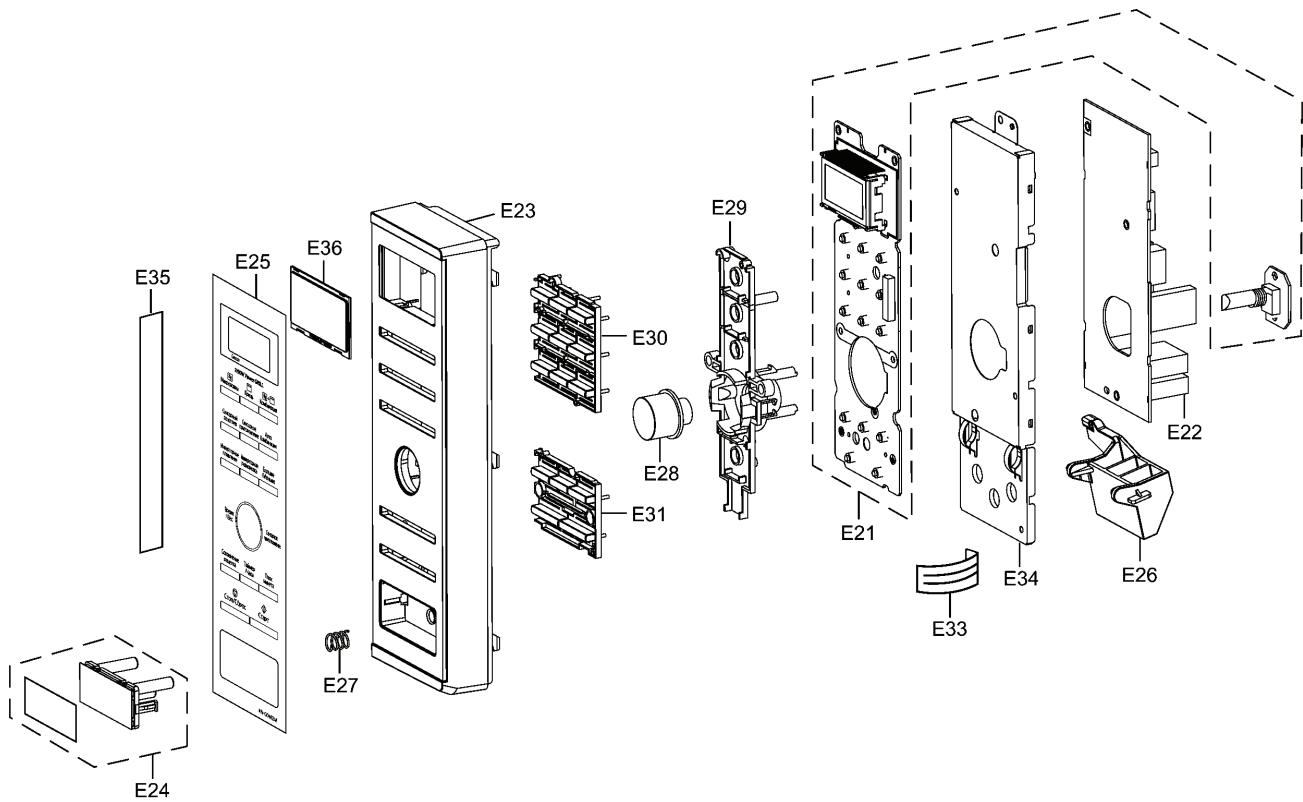


Ref. No.	Part No.	Part Name & Description	Pcs/Set	Remarks
E21	F603L9X70ZP	D.P.CIRCUIT (AU)	1	ZPE
E22	F603Y9X90QP	D.P.CIRCUIT (DU)	1	
E23	F80349X70SEP	ESCUTCHEON BASE	1	ZPE
E24	F8919Y60SBP	DOOR OPENING BUTTON (U)	1	ZPE
E25	F83379X70SZP	MEMBRANE SHEET	1	ZPE
E26	F82569Y00AP	DOOR OPENING LEVER	1	
E27	F80375K00AP	COOK BUTTON SPRING	1	
E28	F803G9M60SBP	POP-OUT DIAL (U)	1	ZPE
E29	F80189Y40AP	DIAL SUPPORT	1	
E30	F82989Y40SAP	BUTTON	1	ZPE
E31	F82989Y90SAP	BUTTON B	1	ZPE
E33	F66167D00AP	FLAT CABLE	1	
E34	F81279Y40AP	BACK PANEL	1	
E35	F00079X70SZP	NAME PLATE	1	ZPE
E36	F81269X70BZP	DISPLAY WINDOW	1	ZPE

8.4. DOOR ASSEMBLY

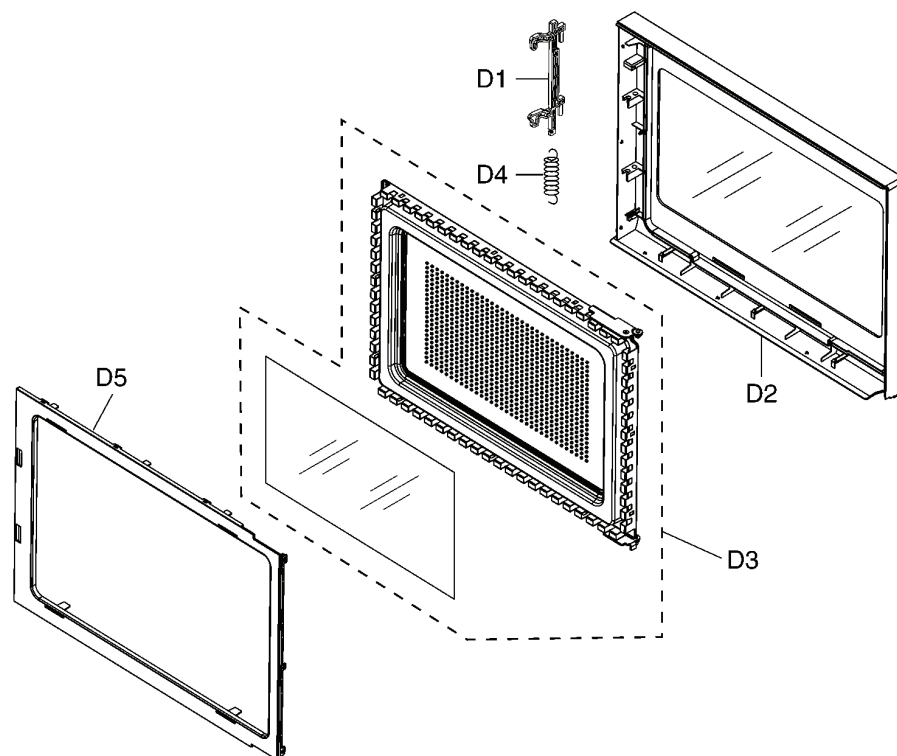


Ref. No.		Part No.	Part Name & Description	Pcs/Set	Remarks
D1		F30189Y00AP	DOOR KEY A	1	
D2	⚠	F302A9X90SQP	DOOR A (U)	1	KTE, PTE, KPQ, STM
D2	⚠	Z302A9X70SEP	DOOR A (U)	1	ZPE
D3	⚠	F301P9X70EP	DOOR E (U)	1	
D4		F30215G10XN	DOOR KEY SPRING	1	
D5	⚠	F30859Y00AP	DOOR C	1	

8.5. WIRING MATERIALS

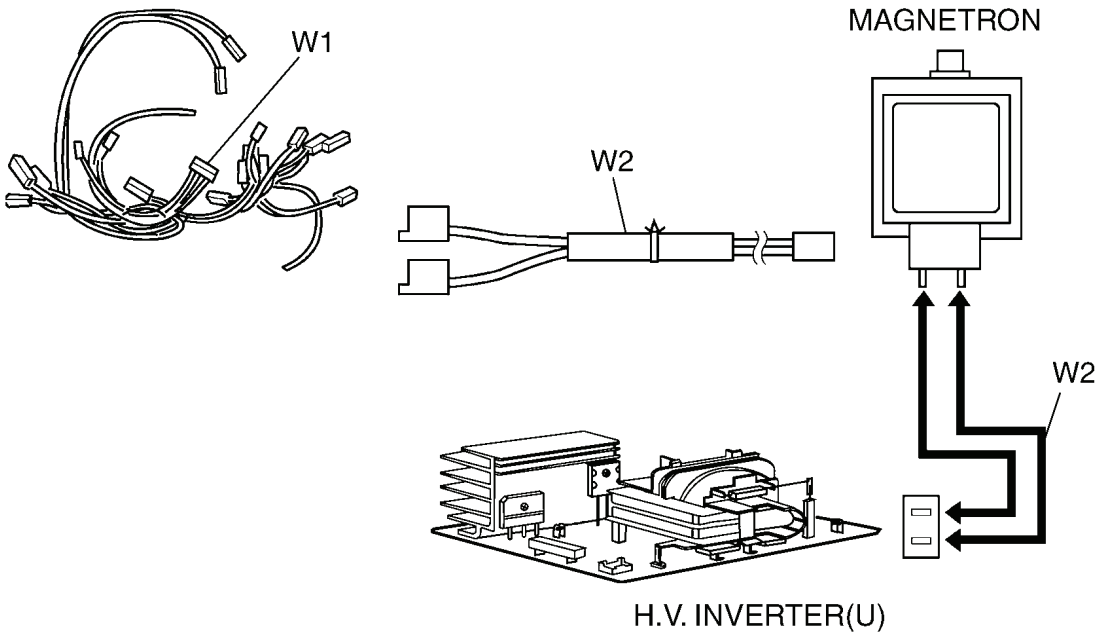

Ref. No.	Part No.	Part Name & Description	Pcs/Set	Remarks
W1	F030A9X90HP	LEAD WIRE HARNESS	1	KTE,PTE,KPQ (INCLUDING MAGNETRON THERMISTOR)
W1	F030A9X90QP	LEAD WIRE HARNESS	1	STM,ZPE (INCLUDING MAGNETRON THERMISTOR)
W2	F030E9Y10HP	H.V.LEAD WIRE	1	KTE,PTE,KPQ
W2	F030E9Y10QP	H.V.LEAD WIRE	1	STM,ZPE


8.6. PACKING AND ACCESSORIES

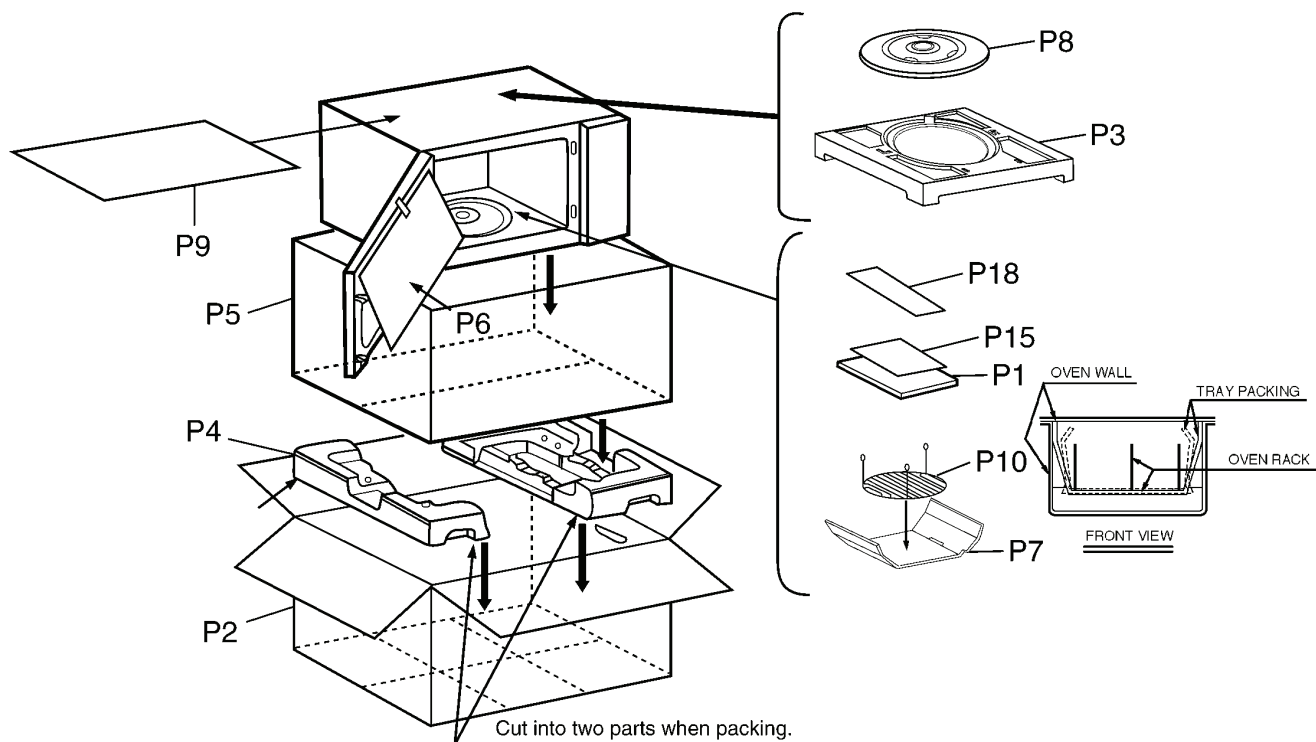


Ref. No.	Part No.	Part Name & Description	Pcs/Set	Remarks
P1	F00039X90KT	INSTRUCTION MANUAL	1	KTE, PTE, KPQ, STM
P1	F00039X70ZP	INSTRUCTION MANUAL	1	ZPE
P2	F01029X90SKT	PACKING CASE, PAPER	1	KTE, PTE, KPQ, STM
P2	F01029X70SZP	PACKING CASE, PAPER	1	ZPE
P3	F01049Y10ST	UPPER FILLER	1	KTE, PTE, KPQ, STM
P3	F01049Y00AP	UPPER FILLER	1	ZPE
P4	F01059Y10ST	LOWER FILLER	1	KTE, PTE, KPQ, STM
P4	F01059Y00AP	LOWER FILLER	1	ZPE
P5	F01068100XN	P. E. BAG	1	
P6	F01078J00XN	DOOR SHEET	1	
P7	F01089X90QP	RACK PACKING	1	
P8	E06014N30BP	COOKING TRAY	1	
P9	F01099Y00AP	SHEET	1	
P10	F060V9X70EP	OVEN RACK	1	
P15	F000B9X90KT	COOK BOOK	1	KTE, PTE, KPQ, STM
P15	F000B9X70ZP	COOK BOOK	1	ZPE
P18	F04459X90SKT	OVERLAY	1	KTE, PTE, KPQ, STM

9 DIGITAL PROGRAMMER CIRCUIT

9.1. SCHEMATIC DIAGRAM

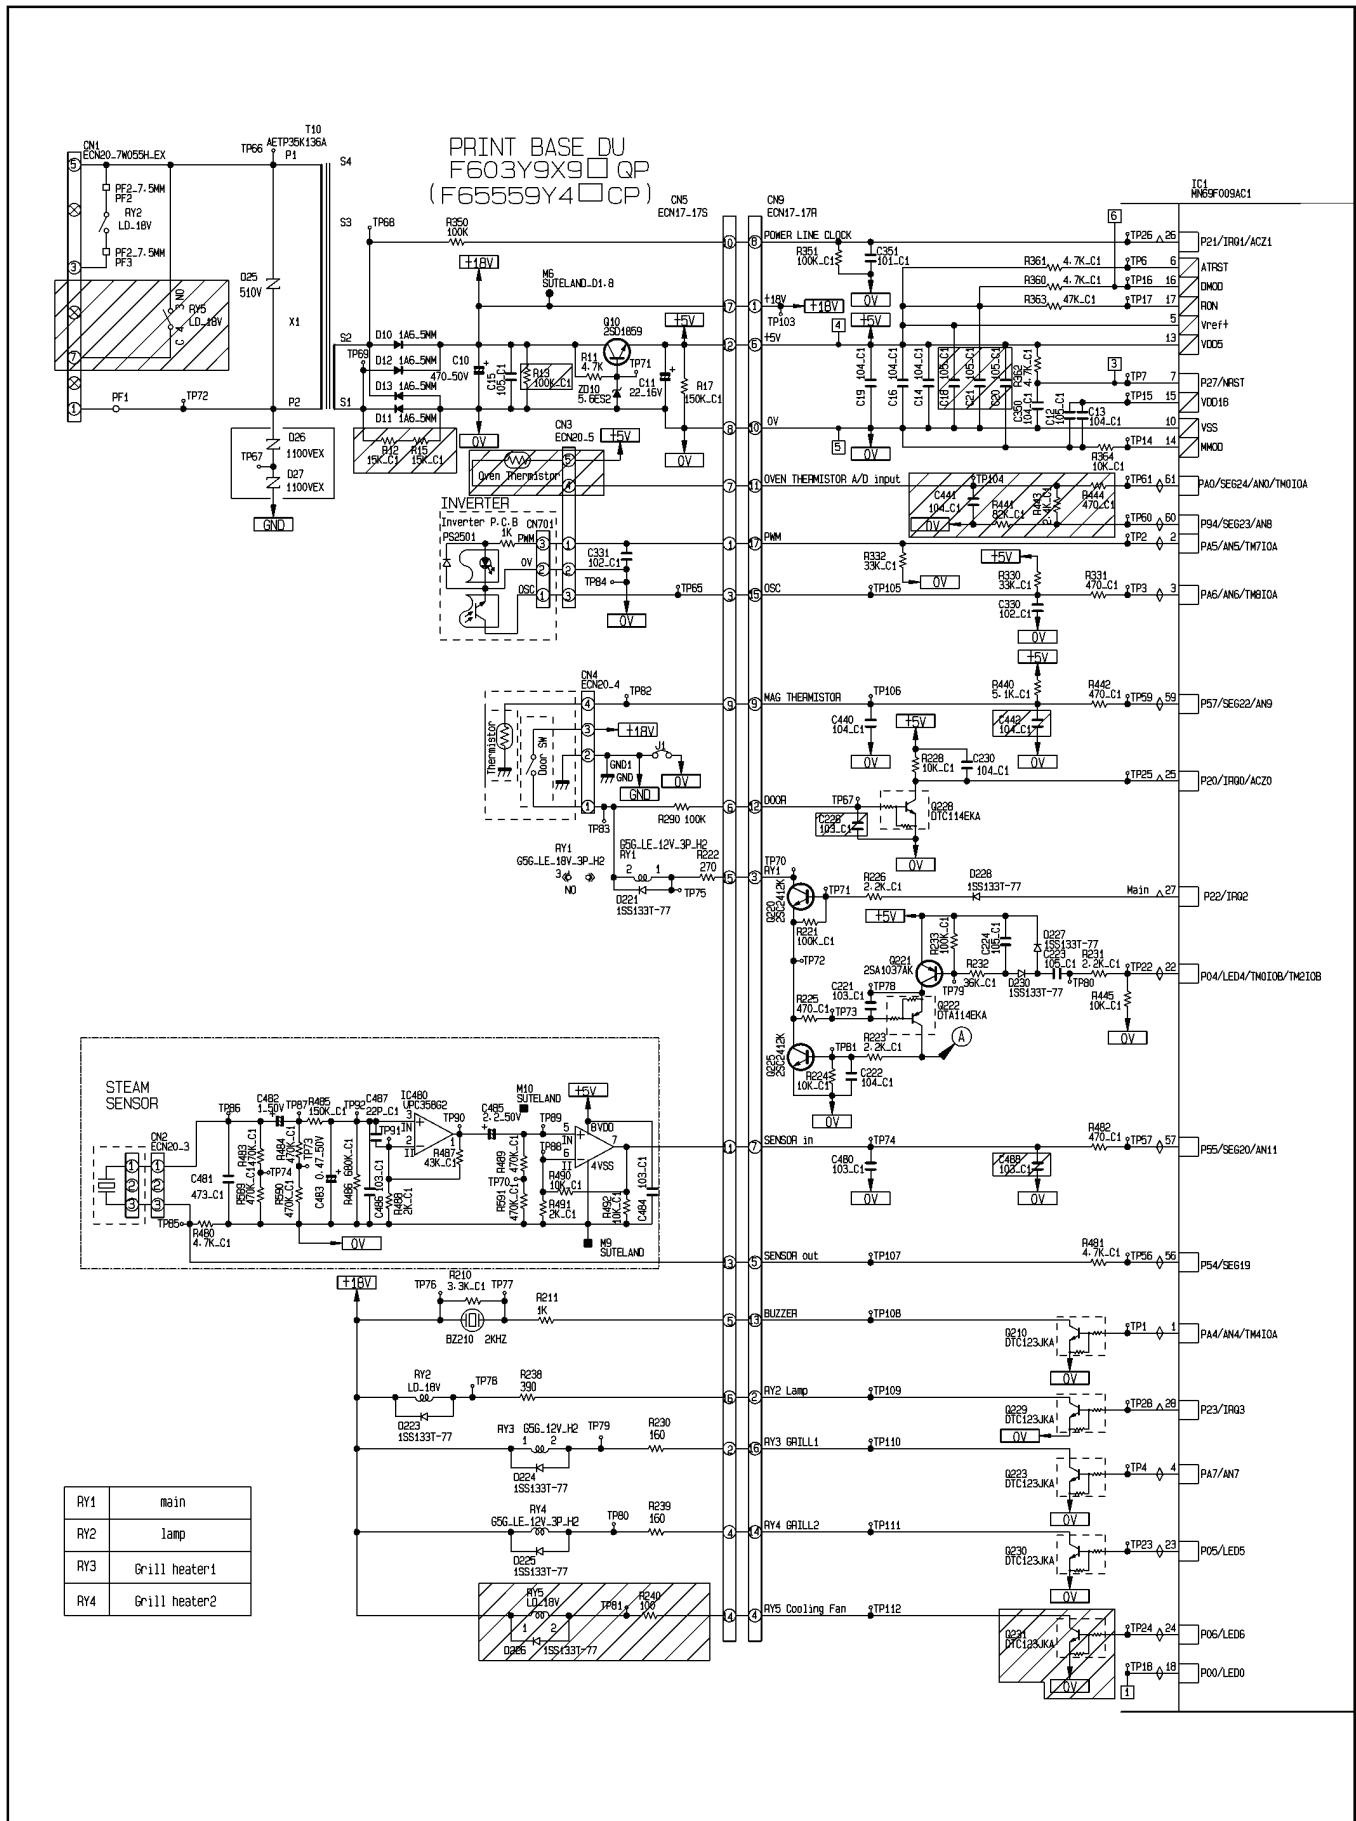

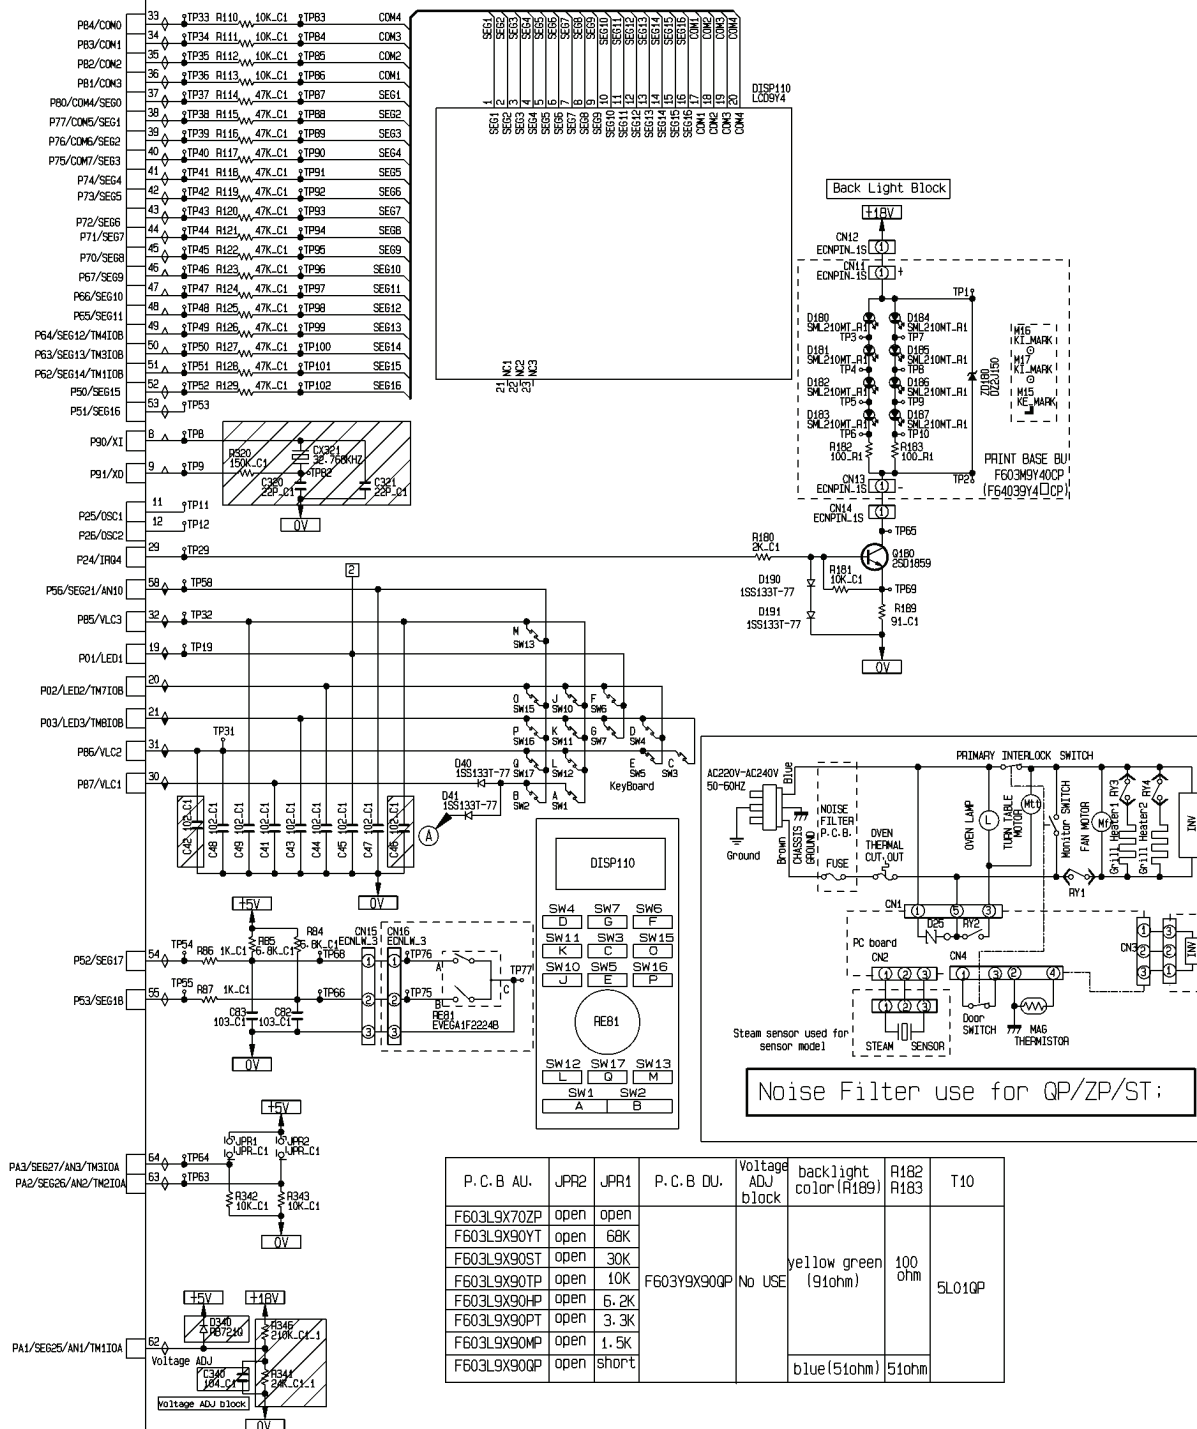

9.2. PARTS LIST

Ref. No.	Part No.	Part Name & Description	Pcs/Set	Remarks
BZ210	L0DDEA000014	BUZZER	1	2.0KHz
DISP110	L5AYAY00100	LCD	1	
DISP1 HOLDER	F66175W00AP	DISPLAY HOLDER	1	
	F67525E40XN	DIFFUSION SHEET	1	
D25	D4EAY511A148	VARISTOR	1	510V
D26,D27	DE4AY112A036	VARISTOR	2	1100V
IC1	MN69F009DA1	L.S.I.	1	
RY1,RY3,RY4	K6B1AYY00129	POWER RELAY	3	
RY2	K6B1AYY00085	POWER RELAY	1	
T10	G4C3AAH00008	LOW VOLTAGE TRANSFORMER	1	
RE81	EVEJ1HF2224M	REVOLVING ENCODER	1	
SW1-SW7,SW10-SW13,SW15-SW17	EVQ11L05R	TOUCH SWITCH	14	